


User intent enters through multiple channels

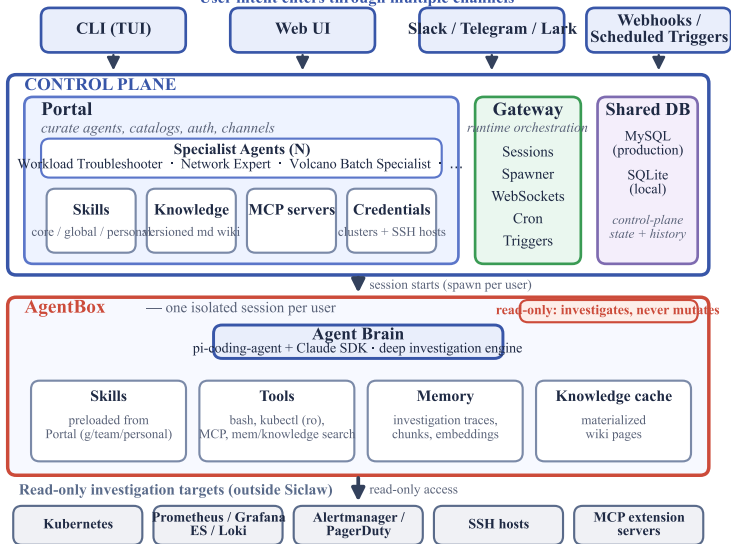

Deployment modes

- TUI standalone
- TUI + Local Portal
- Gateway + LocalSpawner
- Gateway + K8sSpawner

local: shared FS · prod: pod/user + mTLS

Security (6-layer)

- OS sandboxing (dual-user)
- setgid kubectrl
- command whitelisting
- output sanitization

TUI pairing

local Portal over loopback + dedicated secret becomes the read-only source of truth