



universität  
wien

# MASTERARBEIT / MASTER'S THESIS

Titel der Arbeit / Title of the Master's Thesis

Container Based Execution Stack for Neural Networks

verfasst von / submitted by

Benjamin Nussbaum, BSc

angestrebter akademischer Grad / in partial fulfilment of the requirements for the degree of

**Diplom-Ingenieur (Dipl.-Ing.)**

Wien, 2018 / Vienna, 2018

**Studienkennzahl lt. Studienblatt /**  
degree programme code as it appears on  
the student record sheet

926

**Studienrichtung lt. Studienblatt /**  
degree programme as it appears on  
the student record sheet

Masterstudium Wirtschaftsinformatik

**Betreut von / Supervisor**

Univ.-Prof. Dipl.-Ing. Dr. Erich Schikuta

# Erklärung / Declaration

Hiermit versichere ich, dass ich die vorliegende Arbeit selbstständig verfasst und keine anderen als die angegebenen Quellen und Hilfsmittel benutzt habe, dass alle Stellen der Arbeit, die wörtlich oder sinngemäß aus anderen Quellen übernommen wurden, als solche kenntlich gemacht und dass die Arbeit in gleicher oder ähnlicher Form noch keiner Prüfungsbehörde vorgelegt wurde.

I declare that I have authored this thesis independently, that I have not used other than the declared sources / resources, and that I have explicitly marked all material which has been quoted either literally or by content from the used sources.

Ort, Datum  
Date

Unterschrift  
Signature

# **Abstract / Zusammenfassung**

## **Abstract**

This thesis presents an execution stack for neural networks using the Kubernetes container orchestration and a Java based microservice architecture, which is exposed to users and other systems via RESTful webservices. The whole workflow including importing, training and evaluating a neural network model, becomes possible by using this service oriented approach. This work is influenced by N2Sky, a framework for the exchange of neural network specific knowledge and aims to support ViNNSL, the Vienna Neural Network Specification Language. The execution stack runs on many common cloud platforms. Furthermore it is scalable and each component is extensible and interchangeable.

## **Zusammenfassung**

Diese Masterarbeit beschreibt einen Ausführungs-Stack für neuronale Netze, der unter Verwendung der Kubernes Container-Orchestrierung und einer Java basierten Microservice-Architektur, für Benutzer und Systeme via RESTful Webservices zugänglich gemacht wird. Der gesamte Arbeitsfluss, der Import, Training und Auswertung eines neuronalen Netzwerk-Modells beinhaltet, wird durch diese service-basierte Architektur (SOA) unterstützt. Der Ausführungs-Stack läuft auf vielen namhaften Cloud-Umgebungen, ist skalierbar und jede einzelne Komponente ist einfach erweiterbar und austauschbar.

# Contents

1	Introduction	2
1.1	Motivation . . . . .	3
1.2	Structure . . . . .	4
1.3	Problem Statement . . . . .	4
2	State of the Art	5
2.1	Machine Learning . . . . .	5
2.1.1	Classification . . . . .	6
2.1.2	Neural Network Frameworks . . . . .	6
2.2	Container Orchestration . . . . .	6
2.2.1	Docker Containers . . . . .	6
2.2.2	Microservices . . . . .	7
2.2.3	Comparison of Container Orchestration Technologies . . . . .	7
2.2.4	Kubernetes . . . . .	7
2.2.5	Docker Swarm . . . . .	8
2.2.6	Kubernetes . . . . .	8
3	Requirements	9
3.1	Functional Requirements . . . . .	9
3.2	Non-Functional Requirements . . . . .	9
4	Specification	10
4.1	Neural Network Objects . . . . .	10
4.1.1	State of Neural Network Objects . . . . .	10

## Contents

5	Designing the API	11
5.1	REST API Documentation . . . . .	11
5.1.1	Base URL . . . . .	11
5.1.2	Import a new ViNNNSL XML Defintion . . . . .	11
5.1.3	List all Neural Networks . . . . .	14
5.1.4	Delete all Neural Networks . . . . .	16
5.1.5	Get Neural Network Object . . . . .	16
5.1.6	Remove Neural Network Object . . . . .	21
5.1.7	Add/Replace File of Neural Network . . . . .	22
5.1.8	Add/Replace ViNNNSL Definition of Neural Network . . . . .	23
5.1.9	Add/Replace ViNNNSL Instanceschema of Neural Network . . . . .	26
5.1.10	Add/Replace ViNNNSL Resultschema of Neural Network . . . . .	28
5.1.11	Add/Replace ViNNNSL Trainingresult of Neural Network . . . . .	29
5.1.12	Get Status of all Neural Networks . . . . .	30
5.1.13	Get Status of Neural Network . . . . .	31
5.1.14	Set Status of a Neural Network . . . . .	32
5.1.15	Get Deeplearning4J Transformation Object of Neural Network . . . . .	33
5.1.16	Put Deeplearning4J Transformation Object of Neural Network . . . . .	34
6	Implementation of a Prototype	35
6.1	User Interface . . . . .	35
7	Use Cases	37
8	Future Work	38
9	Conclusions	39
10	Acknowledgments	40
11	Dedication	41
12	Appendices	42
	Bibliography	43

# 1 Introduction

This thesis presents an execution stack for neural networks using the *Kubernetes*<sup>1</sup> container orchestration and a Java based microservice architecture, which is exposed to users and other systems via RESTful web services and a web frontend. The whole workflow including importing, training and evaluating a neural network model, becomes possible by using this service oriented approach (SOA). The presented stack runs on popular cloud platforms, like *Google Cloud Platform*<sup>2</sup>, *Amazon AWS*<sup>3</sup> and *Microsoft Azure*<sup>4</sup>. Furthermore it is scalable and each component is extensible and interchangeable. This work is influenced by N2Sky [SM13], a framework to exchange neural network specific knowledge and aims to support *ViNNsL*, the Vienna Neural Network Specification Language [Kop15] [BVS08].

**Objectives:** The first objective is to specify functional and non-functional requirements for the neural network system. This is followed by the characterisation of the API and the implementation of microservices that later define the neural network composition as a collection of loosely coupled services.

The next step is to setup a *Kubernetes* cluster to create the foundation of container orchestration.

Finally the microservices are deployed to containers and combined in a cluster.

**Non-Objectives:** The prototype does not fully implement the *ViNNsL 2.0*, as described in [Kop15] and provides limited data in-/output. This is described in section TODO.

---

1 <https://kubernetes.io>

2 <https://cloud.google.com/kubernetes-engine>

3 <https://aws.amazon.com/eks>


4 <https://azure.microsoft.com/services/container-service>

### 1.1 Motivation

Machine learning has become a highly discussed topic in information technology in the past years and the trend is further increasing. It has become an essential part of everyday life when using search engines or speech recognition systems, like personal assistants. Self-learning algorithms in applications learn from the input of their users and decide which news an individual should read next, which song to listen to or which social media post should appear first. Messages are being analyzed and possible answers automatically predicted.

A recent Californian study shows that 6.5 million developers worldwide are currently involved in projects that use artificial intelligence techniques and another 5.8 million developers expect to implement these in near future [Eva17].

Machine learning is not just a business area in the United States, survey results of 264 companies in the DACH region show, that 56 of them already use that kind of technology in production. In the near future 112 companies plan to do so or already have initial experiences (see figure 1.1). It is seen by a fifth of the decision-makers as a core area to improve the competitiveness and profitability of companies in future. [BB16]

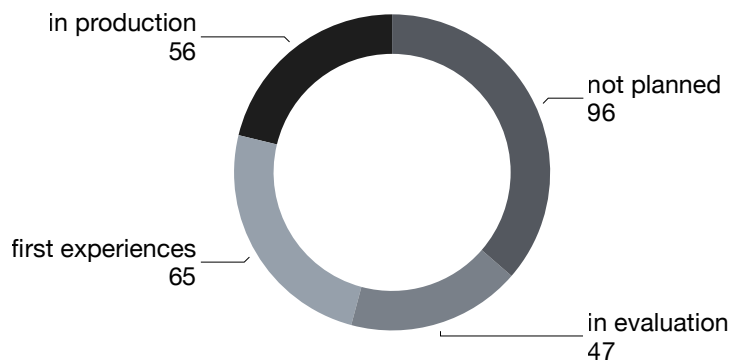

**Figure 1.1:** Distribution of machine learning of 264 companies in the DACH region [BB16]



## 1 Introduction

At the same time more and more companies shift their business logic from a monolithic design to microservices. Each service is dedicated to a single task that can be developed, deployed, replaced and scaled independently. Test results have shown that not only this architecture can help reduce infrastructure costs [VGO<sup>+</sup>16][VGC<sup>+</sup>15], but also reduces complexity of the code base and enables applications to dynamically adjust computing resources on demand [VGC<sup>+</sup>15].

The presented project combines these techniques and demonstrates a prototype that is open-source and is supported by common cloud providers. Developers can integrate their own solutions into the platform or exchange components ad libitum.

### 1.2 Structure

TODO

### 1.3 Problem Statement

TODO

- many different platforms
- complex field, hard to learn
- complex setup for many environments (design, training, auswertung, storage service, ...)

## 2 State of the Art

### 2.1 Machine Learning

*Machine learning—the process by which computers can get better at performing tasks through exposure to data, rather than through explicit programming—requires massive computational power, the kind usually found in clusters of energy-guzzling, cloud-based computer servers outfitted with specialized processors. But an emerging trend promises to bring the power of machine learning to mobile devices that may lack or have only intermittent online connectivity. This will give rise to machines that sense, perceive, learn from, and respond to their environment and their users, enabling the emergence of new product categories, reshaping how businesses engage with customers, and transforming how work gets done across industries.*(<https://www2.deloitte.com/insights/us/en/focus/signals-for-strategists/machine-learning-mobile-applications.html>) TODO CITATION

## 2 State of the Art



Figure 2.1: L<sup>A</sup>T<sub>E</sub>Xsymbol classification app

### 2.1.1 Classification

#### L<sup>A</sup>T<sub>E</sub>X Symbol classification application

### 2.1.2 Neural Network Frameworks

#### Tensorflow

#### Deeplearning4J

## 2.2 Container Orchestration

### 2.2.1 Docker Containers

Containers enable software developers to deploy applications that are portable and consistent across different environments and providers [Bai15] by running isolated on top of the operating system's kernel [BRBA17]. As an organisation, Docker<sup>1</sup> has seen an increase of popularity very quickly, mainly because of its advantages, which are speed, portability, scalability, rapid delivery, and density [BRBA17].

Building a Docker container is fast, because images do not include a guest operating system. The container format itself is standardized, which means that developers only

---

<sup>1</sup> <https://docker.com>

## 2 State of the Art

have to ensure that their application runs inside the container, which is then bundled into a single unit. The unit can be deployed on any Linux system as well as on various cloud environments and therefore easily be scaled. Not using a full operating system makes containers use less resources than virtual machines, which ensures higher workloads with greater density. [Joy15]

### 2.2.2 Microservices

TODO As we break down an application into very specific domains, we need a uniform way to communicate between all the various pieces and domains. Web services have served this purpose for years, but the added isolation and granular focus that containers bring have paved a way for what is being named microservices. [Bai15]

TODO In short, the microservice architectural style is an approach to developing a single application as a suite of small services, each running in its own process and communicating with lightweight mechanisms, often an HTTP resource API. These services are built around business capabilities and independently deployable by fully automated deployment machinery. There is a bare minimum of centralized management of these services, which may be written in different programming languages and use different data storage technologies. (deloitte)

### 2.2.3 Comparison of Container Orchestration Technologies

#### 2.2.4 Kubernetes

TODO Kubernetes is a system, developed by Google, for managing containerized applications across a cluster of nodes. The controlling services in a Kubernetes cluster are called the master components and have a number of unique services which are used to manage a cluster's workload and communications across the system[Ell16].

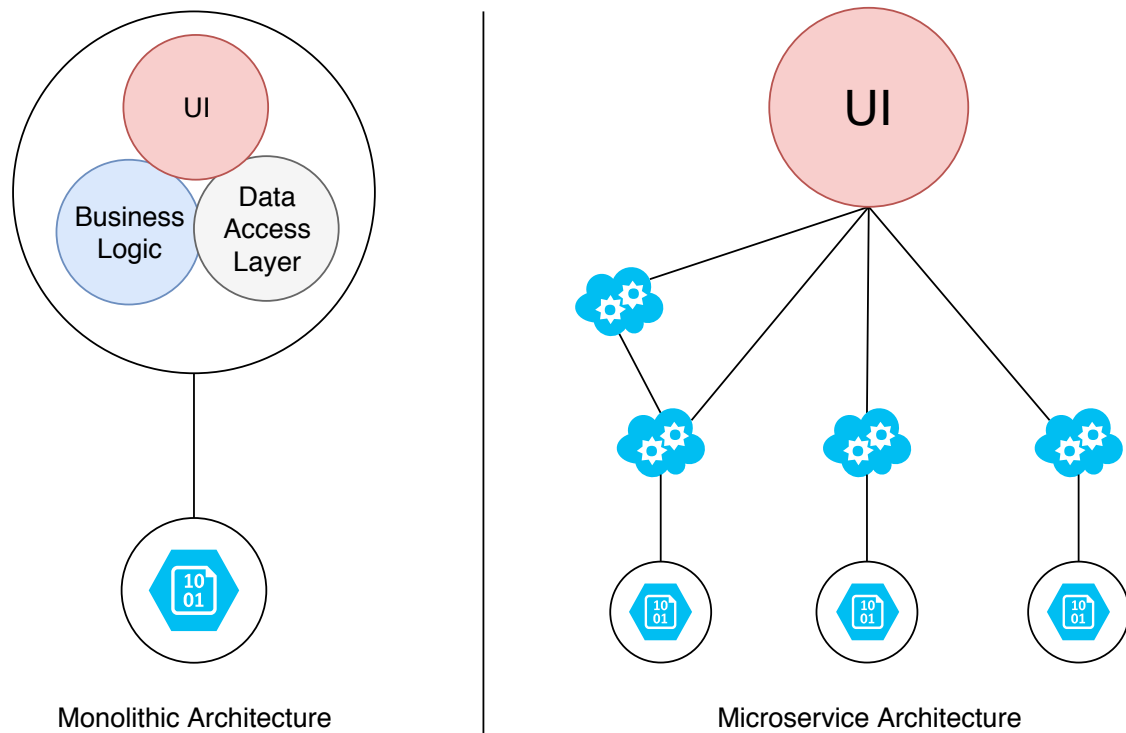


Figure 2.2: Monolithic Architecture vs. Microservice Architecture

## 2.2.5 Docker Swarm

## 2.2.6 Kubernetes

## **3 Requirements**


### **3.1 Functional Requirements**

### **3.2 Non-Functional Requirements**

# 4 Specification

## 4.1 Neural Network Objects

### 4.1.1 State of Neural Network Objects

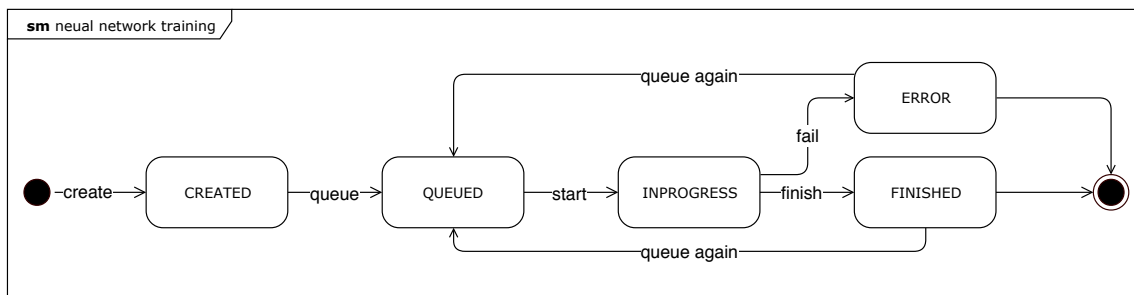

**Figure 4.1:** State Machine of a Neural Network

# 5 Designing the API

## 5.1 REST API Documentation

### 5.1.1 Base URL

`http[s]://<clusterip>`

### 5.1.2 Import a new ViNNSL XML Defintion

POST /vinns1

#### Parameters

Type	Name	Description	Schema
<b>Body</b>	<b>vinns1</b> <i>required</i>	vinns1	Vinns1

#### Responses

HTTP Code	Description	Schema
<b>201</b>	Created	No Content
<b>500</b>	Server Error	Error



## Consumes

- application/xml

## Produces

- \*/\*

## Tags

- vinnsl-service-controller

## Example HTTP request

### Header

Content-Type: application/xml

### Body

```
<vinnsl>
  <description>
    <identifier><!-- will be generated --></identifier>
    <metadata>
      <paradigm>classification</paradigm>
      <name>Backpropagation Classification</name>
      <description>Iris Classification Example</description>
      <version>
        <major>1</major>
        <minor>0</minor>
      </version>
    </metadata>
```

## 5 Designing the API

```
<creator>
  <name>Ronald Fisher</name>
  <contact>ronald.fisher@institution.com</contact>
</creator>
<problemDomain>
  <propagationType type="feedforward">
    <learningType>supervised</learningType>
  </propagationType>
  <applicationField>Classification</applicationField>
  <networkType>Backpropagation</networkType>
  <problemType>Classifiers</problemType>
</problemDomain>
<endpoints>
  <train>true</train>
  <retrain>true</retrain>
  <evaluate>true</evaluate>
</endpoints>
<structure>
  <input>
    <ID>Input1</ID>
    <size>
      <min>4</min>
      <max>4</max>
    </size>
  </input>
  <hidden>
    <ID>Hidden1</ID>
    <size>
      <min>3</min>
      <max>3</max>
    </size>
  </hidden>
  <hidden>
    <ID>Hidden2</ID>
    <size>
```

## 5 Designing the API

```
<min>3</min>
<max>3</max>
</size>
</hidden>
<output>
  <ID>Output1</ID>
  <size>
    <min>3</min>
    <max>3</max>
  </size>
</output>
</structure>
<parameters/>
<data>
  <description>iris txt file with 3 classifications, 4 input vars</description>
  <tabledescription>no input as table possible</tabledescription>
  <filedescription>CSV file</filedescription>
</data>
</description>
</vinns1>
```

### Example HTTP response

Statuscode: 201 CREATED

#### Header

Location: <https://<baseURL>/vinns1/5ade36bbd601800001206798>

### 5.1.3 List all Neural Networks

GET /vinns1

## Responses

HTTP Code	Description	Schema
<b>200</b>	OK	< VinnsI > array
<b>404</b>	Not Found	No Content
<b>500</b>	Server Error	Error

## Produces

- application/json

## Tags

- vinnsI-service-controller

## Example HTTP Response

```
[
  {
    "identifier": "5ab91658e8cc45946600ea11",
    "description": {},
    "definition": {},
    "data": {},
    "instance": {},
    "trainingresult": {},
    "result": {},
    "nncloud": {
      "status": "CREATED",
      "dl4jNetwork": "{}"
    }
  },
]
```

```
    ...  
]
```

### 5.1.4 Delete all Neural Networks

DELETE /vinns1/deleteall

#### Responses

HTTP Code	Description	Schema
200	OK	object
204	No Content	No Content
500	Server Error	Error

#### Produces

- application/json

#### Tags

- vinns1-service-controller

### 5.1.5 Get Neural Network Object

GET /vinns1/{id}

#### Parameters

## 5 Designing the API

Type	Name	Description	Schema
<b>Path</b>	<b>id</b> <i>required</i>	id	string

### Responses

HTTP Code	Description	Schema
<b>200</b>	OK	Vinnsl
<b>404</b>	Not Found	No Content

### Produces

- application/xml
- application/json

### Tags

- vinnsl-service-controller

### Example HTTP response

```
<?xml version="1.0" encoding="UTF-8" standalone="yes"?>
<vinnsl>
  <identifier>5ab91658e8cc45946600ea11</identifier>
  <description>
    <identifier></identifier>
    <metadata>
      <paradigm>classification</paradigm>
      <name>Backpropagation Classification</name>
      <description>Face Recognition Example</description>
```

## 5 Designing the API

```
<version>
  <major>1</major>
  <minor>5</minor>
</version>
</metadata>
<creator>
  <name>Autor 1</name>
  <contact>author1@institution.com</contact>
</creator>
<problemDomain>
  <propagationType type="feedforward">
    <learningType>supervised</learningType>
  </propagationType>
  <applicationField>EMS</applicationField>
  <applicationField>Operations</applicationField>
  <applicationField>FaceRecognition</applicationField>
  <networkType>Backpropagation</networkType>
  <problemType>Classifiers</problemType>
</problemDomain>
<endpoints>
  <train>true</train>
  <retrain>true</retrain>
  <evaluate>true</evaluate>
</endpoints>
<structure>
  <input>
    <ID>Input1</ID>
    <dimension>
      <min>1</min>
      <max>1</max>
    </dimension>
    <size>
      <min>960</min>
      <max>960</max>
    </size>
```

## 5 Designing the API

```
</input>
<hidden>
  <ID>Hidden1</ID>
  <dimension>
    <min>1</min>
    <max>1024</max>
  </dimension>
</hidden>
<output>
  <ID>Output1</ID>
  <dimension>
    <min>1</min>
    <max>1</max>
  </dimension>
  <size>
    <min>1</min>
    <max>1</max>
  </size>
</output>
</structure>
<parameters/>
<data>
  <description>Input are face images with 32x30 px</description>
  <tabledescription>no input as table possible</tabledescription>
  <filedescription>prepare the input as file by reading the image files</filedescription>
</data>
</description>
<definition>
  <identifier></identifier>
  <problemDomain>
    <propagationType type="feedforward">
      <learningType>supervised</learningType>
    </propagationType>
    <applicationField>EMS</applicationField>
    <applicationField>Operations</applicationField>
  </problemDomain>
</definition>
```



## 5 Designing the API

```
<applicationField>FaceRecognition</applicationField>
<networkType>Backpropagation</networkType>
<problemType>Classifiers</problemType>
</problemDomain>
<endpoints></endpoints>
<executionEnvironment>
  <serial>true</serial>
</executionEnvironment>
<structure>
  <input>
    <ID>Input1</ID>
    <dimension>1</dimension>
    <size>960</size>
  </input>
  <hidden>
    <ID>Hidden1</ID>
    <dimension>1</dimension>
    <size>1024</size>
  </hidden>
  <output>
    <ID>Output1</ID>
    <dimension>1</dimension>
    <size>1</size>
  </output>
  <connections/>
</structure>
<resultSchema>
  <instance>true</instance>
  <training>true</training>
</resultSchema>
<parameters>
  <valueparameter name="learningrate">0.4</valueparameter>
  <valueparameter name="biasInput">1</valueparameter>
  <valueparameter name="biasHidden">1</valueparameter>
  <valueparameter name="momentum">0.1</valueparameter>
```

## 5 Designing the API

```
<comboparameter name="activationfunction">sigmoid</comboparameter>
<valueparameter name="threshold">0.00001</valueparameter>
<comboparameter name="activationfunction">sigmoid</comboparameter>
</parameters>
<data>
  <description>Input are face images with 32x30 px</description>
  <dataSchemaID>iris.txt</dataSchemaID>
</data>
</definition>
<data>
  <identifier>5ab4e69c8f136a16bf81f093</identifier>
  <data>
    <file>5ab4e69c8f136a16bf81f093</file>
  </data>
</data>
</vinns1>
```

### 5.1.6 Remove Neural Network Object

DELETE /vinns1/{id}

#### Parameters

Type	Name	Description	Schema
<b>Path</b>	<b>id</b> <i>required</i>	id	string

#### Responses

HTTP Code	Description	Schema
<b>200</b>	OK	ResponseEntity
<b>204</b>	No Content	No Content

## 5 Designing the API

HTTP Code	Description	Schema
500	Server Error	No Content

### Produces

- \*/\*

### Tags

- vinns1-service-controller

### 5.1.7 Add/Replace File of Neural Network

PUT /vinns1/{id}/addfile

### Parameters

Type	Name	Description	Schema
<b>Path</b>	<b>id</b> <i>required</i>	id	string
<b>Query</b>	<b>fileId</b> <i>required</i>	fileId	string

### Responses

HTTP Code	Description	Schema
200	OK	Vinns1
404	Not Found	No Content
500	Server Error	Error

## Consumes

- application/json

## Produces

- application/xml
- application/json

## Tags

- vinnsl-service-controller

### 5.1.8 Add/Replace ViNNSL Definition of Neural Network

PUT /vinnsl/{id}/definition

## Parameters

Type	Name	Description	Schema
<b>Path</b>	<b>id</b> <i>required</i>	id	string
<b>Body</b>	<b>def</b> <i>required</i>	def	Definition

## Responses

HTTP Code	Description	Schema
<b>200</b>	OK	Vinnsl
<b>404</b>	Not Found	No Content

## 5 Designing the API

HTTP Code	Description	Schema
500	Server Error	Error

### Consumes

- application/xml
- application/json

### Produces

- \*/\*

### Tags

- vinns1-service-controller

### Example HTTP request

#### Request body

```
<definition>
<identifier><!-- will be generated --></identifier>
<metadata>
  <paradigm>classification</paradigm>
  <name>Backpropagation Classification</name>
  <description>Iris Classification Example</description>
  <version>
    <major>1</major>
    <minor>0</minor>
  </version>
</metadata>
```

## 5 *Designing the API*

```
<creator>
  <name>Ronald Fisher</name>
  <contact>ronald.fisher@institution.com</contact>
</creator>
<problemDomain>
  <propagationType type="feedforward">
    <learningType>supervised</learningType>
  </propagationType>
  <applicationField>Classification</applicationField>
  <networkType>Backpropagation</networkType>
  <problemType>Classifiers</problemType>
</problemDomain>
<endpoints>
  <train>true</train>
</endpoints>
<executionEnvironment>
  <serial>true</serial>
</executionEnvironment>
<structure>
  <input>
    <ID>Input1</ID>
    <size>4</size>
  </input>
  <hidden>
    <ID>Hidden1</ID>
    <size>3</size>
  </hidden>
  <hidden>
    <ID>Hidden2</ID>
    <size>3</size>
  </hidden>
  <output>
    <ID>Output1</ID>
    <size>3</size>
  </output>
```

## 5 Designing the API

```
<connections>
  <!--<fullconnected>
    <fromblock>Input1</fromblock>
    <toblock>Hidden1</toblock>
    <fromblock>Hidden1</fromblock>
    <toblock>Output1</toblock>
  </fullconnected>-->
</connections>
</structure>
<resultSchema>
  <instance>true</instance>
  <training>true</training>
</resultSchema>
<parameters>
  <valueparameter name="learningrate">0.1</valueparameter>
  <comboparameter name="activationfunction">tanh</comboparameter>
  <valueparameter name="iterations">500</valueparameter>
  <valueparameter name="seed">6</valueparameter>
</parameters>
<data>
  <description>iris txt file with 3 classifications, 4 input vars</description>
  <dataSchemaID>name/iris.txt</dataSchemaID>
</data>
</definition>
```

### 5.1.9 Add/Replace ViNNsL Instanceschema of Neural Network

PUT /vinns1/{id}/instanceschema

#### Parameters

Type	Name	Description	Schema
Path	id <i>required</i>	id	string

## 5 Designing the API

Type	Name	Description	Schema
<b>Body</b>	<b>instance</b> <i>required</i>	instance	Instanceschema

### Responses

HTTP Code	Description	Schema
<b>200</b>	OK	object
<b>404</b>	Not Found	No Content
<b>500</b>	Server Error	Error

### Consumes

- application/xml
- application/json

### Produces

- \*/\*

### Tags

- vinnsli-service-controller

### Example HTTP request

#### Request body

```
<instanceschema>  
</instanceschema>
```



### 5.1.10 Add/Replace ViNNsL Resultschema of Neural Network

PUT /vinns1/{id}/resultschema

#### Parameters

Type	Name	Description	Schema
<b>Path</b>	<b>id</b> <i>required</i>	id	string
<b>Body</b>	<b>resultSchema</b> <i>required</i>	resultSchema	Resultschema

#### Responses

HTTP Code	Description	Schema
<b>200</b>	OK	object
<b>404</b>	Not Found	No Content
<b>500</b>	Server Error	Error

#### Consumes

- application/xml
- application/json

#### Produces

- \*/\*

#### Tags

- vinns1-service-controller

## Example HTTP request

Request body

```
<resultschema>
</resultschema>
```

### 5.1.11 Add/Replace ViNNsL Trainingresult of Neural Network

PUT /vinns1/{id}/trainingresult

#### Parameters

Type	Name	Description	Schema
Path	<b>id</b> <i>required</i>	id	string
Body	<b>trainingresult</b> <i>required</i>	trainingresult	Trainingresultschema

#### Responses

HTTP Code	Description	Schema
<b>200</b>	OK	object
<b>404</b>	Not Found	No Content
<b>500</b>	Server Error	Error

#### Consumes

- application/xml
- application/json

## Produces

- \*/\*

## Tags

- vinnsl-service-controller

## Example HTTP request

### Request body

```
<trainingresult>
</trainingresult>
```

### 5.1.12 Get Status of all Neural Networks

GET /status

## Responses

HTTP Code	Description	Schema
200	OK	object
404	Not Found	No Content

## Produces

- application/json

## Tags

- nn-status-controller

## HTTP response example

```
{
  "5ab91658e8cc45946600ea11": "INPROGRESS"
}
```

### 5.1.13 Get Status of Neural Network

GET /status/{id}

## Parameters

Type	Name	Description	Schema
Path	<b>id</b> <i>required</i>	id	string

## Responses

HTTP Code	Description	Schema
<b>200</b>	OK	object
<b>404</b>	Not Found	No Content

## Produces

- application/json

## Tags

- nn-status-controller

### 5.1.14 Set Status of a Neural Network

PUT /status/{id}/{status}

## Parameters

Type	Name	Description	Schema
Path	<b>id</b> <i>required</i>	id	string
Path	<b>status</b> <i>required</i>	status	enum (CREATED, QUEUED, INPROGRESS, FINISHED, ERROR)

## Responses

HTTP Code	Description	Schema
<b>200</b>	OK	object
<b>404</b>	Not Found	No Content
<b>500</b>	Server Error	Error

## Consumes

- application/json

## Produces

- application/json

## Tags

- nn-status-controller

### 5.1.15 Get Deeplearning4J Transformation Object of Neural Network

GET /dl4j/{id}

## Parameters

Type	Name	Description	Schema
Path	<b>id</b> <i>required</i>	id	string

## Responses

HTTP Code	Description	Schema
<b>200</b>	OK	string
<b>404</b>	Not Found	No Content

## Produces

- application/json

## Tags

- dl4j-service-controller

### 5.1.16 Put Deeplearning4J Transformation Object of Neural Network

PUT /dl4j/{id}

#### Parameters

Type	Name	Description	Schema
<b>Path</b>	<b>id</b> <i>required</i>	id	string
<b>Body</b>	<b>dl4J</b> <i>required</i>	dl4J	string

#### Responses

HTTP Code	Description	Schema
<b>200</b>	OK	ResponseEntity
<b>404</b>	Not Found	No Content
<b>500</b>	Server Error	Error

#### Consumes

- application/json

#### Produces

- application/json

#### Tags

- dl-4j-service-controller

## **6 Implementation of a Prototype**

### **6.1 User Interface**



6 Implementation of a Prototype

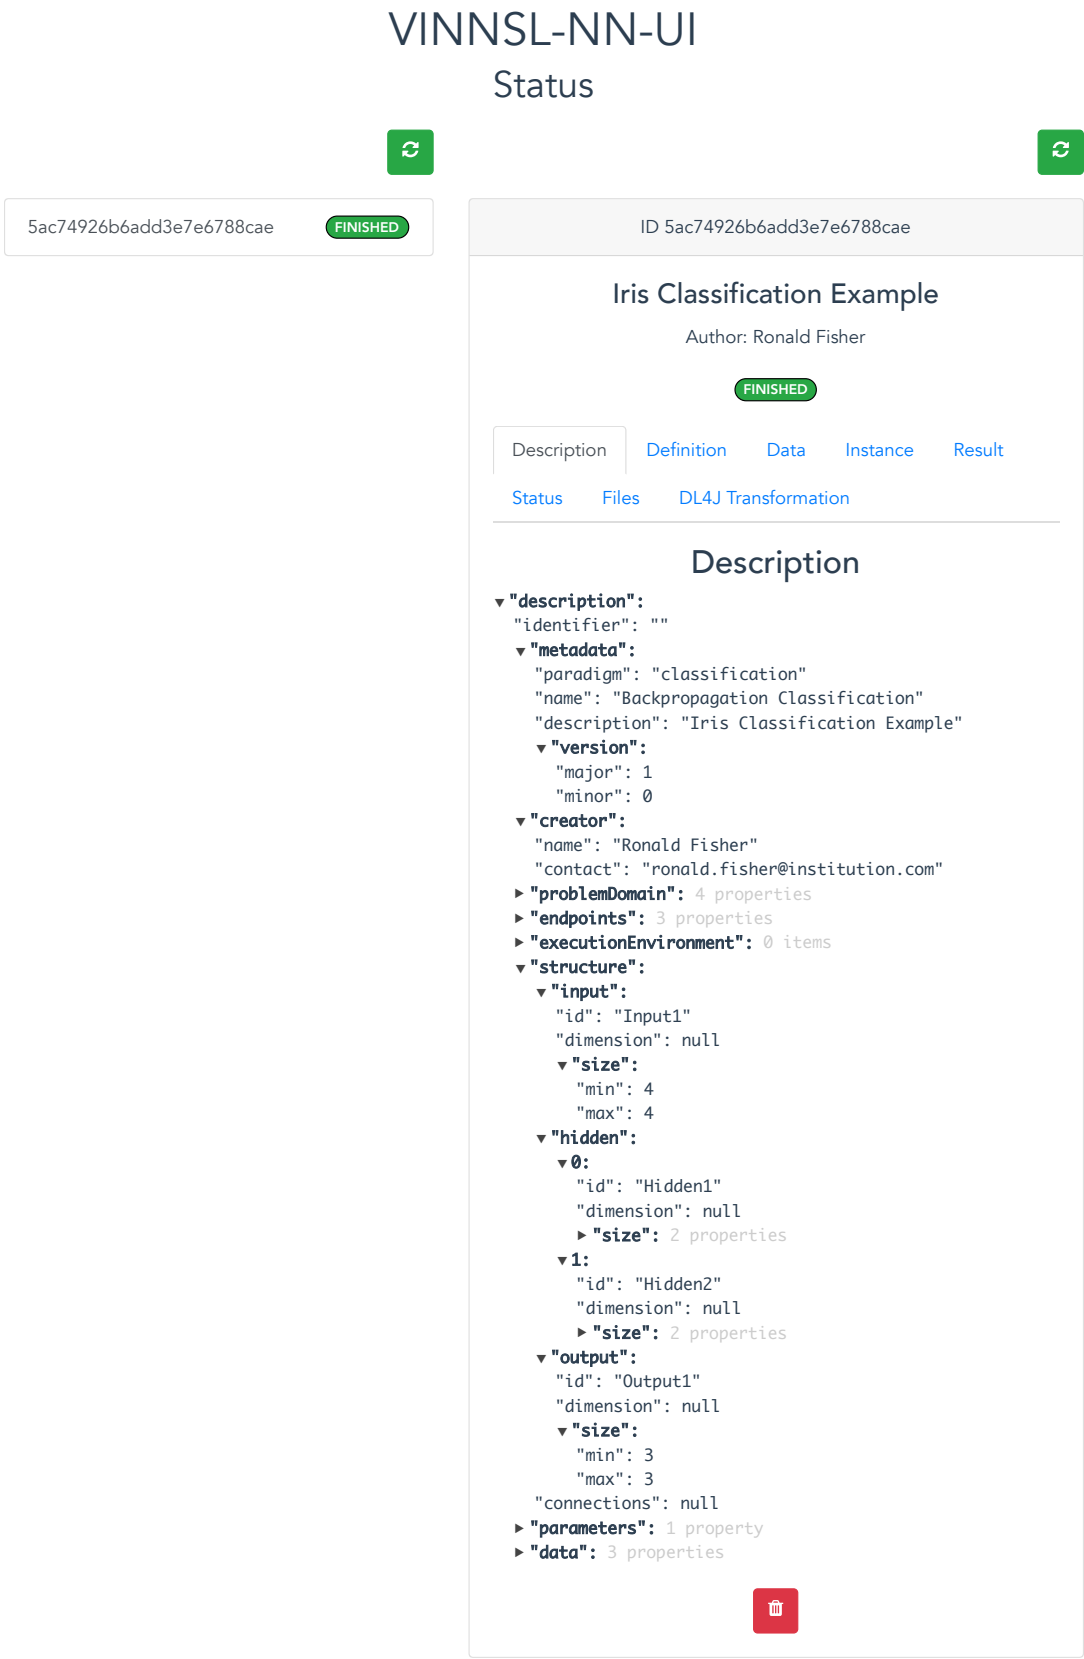


Figure 6.1: User Interface of Prototype

## 7 Use Cases

- 1) iris classification
- 2) MNIST?
- 3) hosted trained network

## 8 Future Work

TODO

- more function
- backend für tensorflow
- grafischer NN designer
- trainierte netzwerke als webservice veröffentlichen

## 9 Conclusions

## **10 Acknowledgments**

## **11 Dedication**

## 12 Appendices

# Bibliography

- [Bai15] Baier, Jonathan: *Getting Started with Kubernetes*. Packt Publishing, 2015
- [BB16] Björn Böttcher, Dr. Carlo V. Daniel Klemm K. Daniel Klemm: Machine Learning im Unternehmenseinsatz / Crisp Research AG. Version: 2016. <https://www.unbelievable-machine.com/downloads/studie-machine-learning.pdf>. 2016. – Forschungsbericht
- [BRBA17] Bashari Rad, Babak; Bhatti, Harrison; Ahmadi, Mohammad: An Introduction to Docker and Analysis of its Performance. In: *IJCSNS International Journal of Computer Science and Network Security* 17 (2017), 03, Nr. 3, S. 228–235
- [BVSW08] Beran, P. P.; Vinek, E.; Schikuta, E.; Weishaupl, T.: ViNNSL - the Vienna Neural Network Specification Language. In: *2008 IEEE International Joint Conference on Neural Networks (IEEE World Congress on Computational Intelligence)*, 2008. – ISSN 2161–4393, S. 1872–1879
- [Ell16] Ellingwood, Justin: *An Introduction to Kubernetes - DigitalOcean*. Version: 2016. <https://www.digitalocean.com/community/tutorials/an-introduction-to-kubernetes>
- [Eva17] Evans Data Corporation: *AI, ML, and Big Data Survey 2017, Vol. 2*. Version: 2017. <https://evansdata.com/reports/viewRelease.php?reportID=37>
- [Joy15] Joy, A. M.: Performance comparison between Linux containers and virtual machines. In: *2015 International Conference on Advances in Computer Engineering and Applications*, 2015, S. 342–346
- [Kop15] Kopica, Thomas: *Vienna Neural Network Specification Language 2.0*, Masterthesis, 2015



## Bibliography

- [SM13] Schikuta, Erich; Mann, Erwin: N2Sky - Neural networks as services in the clouds. In: *The 2013 International Joint Conference on Neural Networks (IJCNN)*, IEEE, aug 2013. – ISBN 978–1–4673–6129–3, 1-8
- [VGC<sup>+</sup>15] Villamizar, M.; Garcés, O.; Castro, H.; Verano, M.; Salamanca, L.; Casallas, R.; Gil, S.: Evaluating the monolithic and the microservice architecture pattern to deploy web applications in the cloud. In: *2015 10th Computing Colombian Conference (10CCC)*, 2015, S. 583–590
- [VGO<sup>+</sup>16] Villamizar, M.; Garcés, O.; Ochoa, L.; Castro, H.; Salamanca, L.; Verano, M.; Casallas, R.; Gil, S.; Valencia, C.; Zambrano, A.; Lang, M.: Infrastructure Cost Comparison of Running Web Applications in the Cloud Using AWS Lambda and Monolithic and Microservice Architectures. In: *2016 16th IEEE/ACM International Symposium on Cluster, Cloud and Grid Computing (CCGrid)*, 2016, S. 179–182