


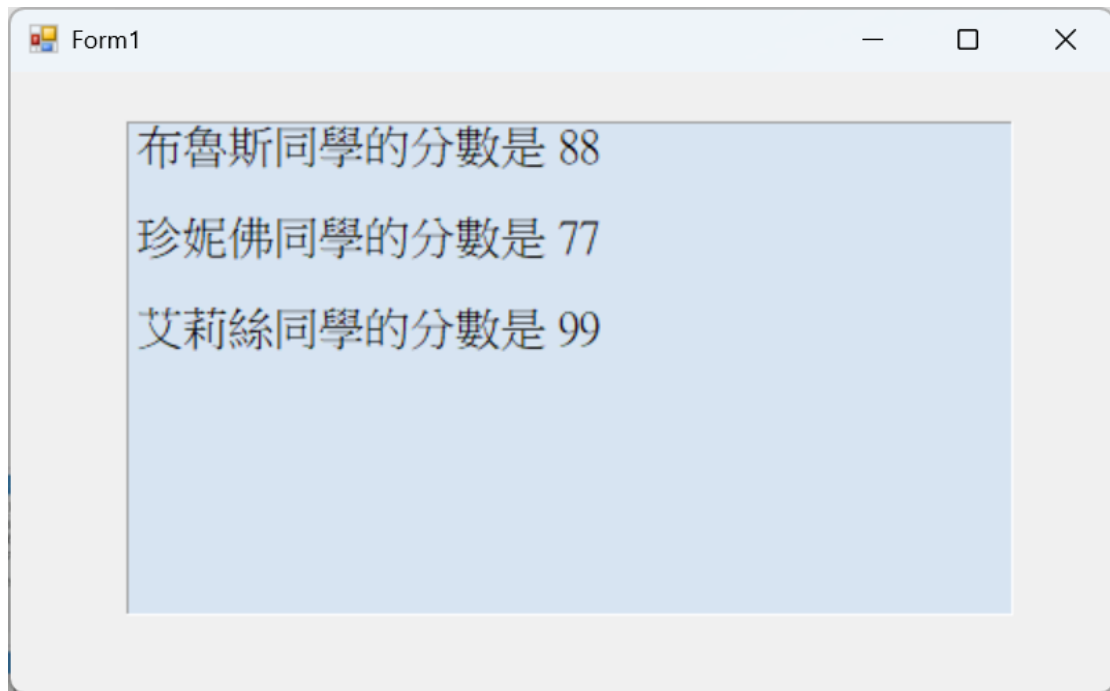

```
using System;
using System.Collections.Generic;
using System.ComponentModel;
using System.Data;
using System.Drawing;
using System.Linq;
using System.Text;
using System.Threading.Tasks;
using System.Windows.Forms;

namespace 建構式
{
    public partial class Form1 : Form
    {
        public Form1()
        {
            InitializeComponent();
        }

        private void Form1_Load(object sender, EventArgs e)
        {
            Student s1 = new Student(); // 無引數的建構式
        }
    }
}
```

```

        s1.Name = "布魯斯";
        s1.Score = 88;
        LblMsg.Text = s1.GetMsg() + "\n\n";

        Student s2 = new Student("珍妮佛"); //傳一個引數的建構式
        s2.Score = 77;
        LblMsg.Text += s2.GetMsg() + "\n\n";

        Student s3 = new Student("艾莉絲", 99); //傳兩個引數的建構式
        LblMsg.Text += s3.GetMsg();

    }
}

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.Threading.Tasks;

namespace 建構式
{
    public class Student
    {
        public string Name;           // Name姓名欄位宣告為public
        private int _score;           // _score成績欄位宣告為private
        public Student()               // 無參數的建構式1，不做任何事
        {
        }

        public Student(string _vName) // 可設定姓名的建構式2
        {
            Name = _vName;
        }

        public Student(string _vName, int _vScore) // 可設定姓名和分數的建構式3
        {
            Name = _vName;
            Score = _vScore;
        }
    }
}

```

```
}  
  
public int Score           // 建立Score屬性，此屬性限制在0~100  
{  
    get  
    {  
        return _score;  
    }  
    set  
    {  
        if (value >= 100) value = 100;    // Score屬性最大值為100  
        if (value <= 0) value = 0;        // Score屬性最小值為0  
        _score = value;  
    }  
}  
  
public string GetMsg()    // GetMsg傳回姓名與成績的方法  
{  
    return $"{Name}同學的分數是 {Score}";  
}  
  
}  
  
}
```

員工姓名：珍妮佛
實領薪水：30000

=====

經理姓名：艾莉絲
實領薪水：40000
實領獎金：20000
合計薪資：60000

```
using System;
using System.Collections.Generic;
using System.ComponentModel;
using System.Data;
using System.Drawing;
using System.Linq;
using System.Text;
using System.Threading.Tasks;
using System.Windows.Forms;
using static Inherits.Empolyee;

namespace Inherits
{
    public partial class Form1 : Form
    {
        public Form1()
        {
            InitializeComponent();
        }

        private void Form1_Load(object sender, EventArgs e)
        {
            Empolyee Jennifer = new Empolyee(); // Employee父類別
```

```

        Jennifer.Name = "珍妮佛";
        Jennifer.Salary = 30000;
        LblMsg.Text = $"員工姓名：{Jennifer.Name} \n實領薪水：{Jennifer.Salary}";
        LblMsg.Text += "\n===== \n";
        Manager Alice = new Manager();    // Manager子類別
        Alice.Name = "艾莉絲";
        Alice.Salary = 40000;
        Alice.Bonus = 20000;                // Manager子類別新增的Bonus屬性
        LblMsg.Text += Alice.GetTotal();    //Manager子類別新增的GetTotal()方法
    }
}

using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.Threading.Tasks;

namespace Inherits
{
    internal class Empolyee
    {
        public string Name;    // Name姓名欄位
        private int _salary;    // _salary薪水欄位
        public int Salary    // Salary薪水介於20000~40000之間
        {
            get
            {
                return _salary;
            }
            set
            {
                if (value <= 20000) value = 20000;    // 薪水最少20000
                if (value >= 40000) value = 40000;    // 薪水最多40000
                _salary = value;
            }
        }
    }
}


```

```

    }

    public class Manager : Employee
    {
        private int _bonus;    // 加入_bonus獎金欄位
        public int Bonus        // _bonus獎金介於10000~50000之間
        {
            get
            {
                return _bonus;
            }
            set
            {
                if (value <= 10000) value = 10000; // 獎金最少10000
                if (value >= 50000) value = 50000; // 獎金最多50000
                _bonus = value;
            }
        }
        public string GetTotal()    // 定義GetTotal()方法
        {
            return $"經理姓名：{Name}\n實領薪水：{Salary}\n實領獎金：{Bonus}\n合計
薪資：{Bonus + Salary}";
        }
    }
}

```

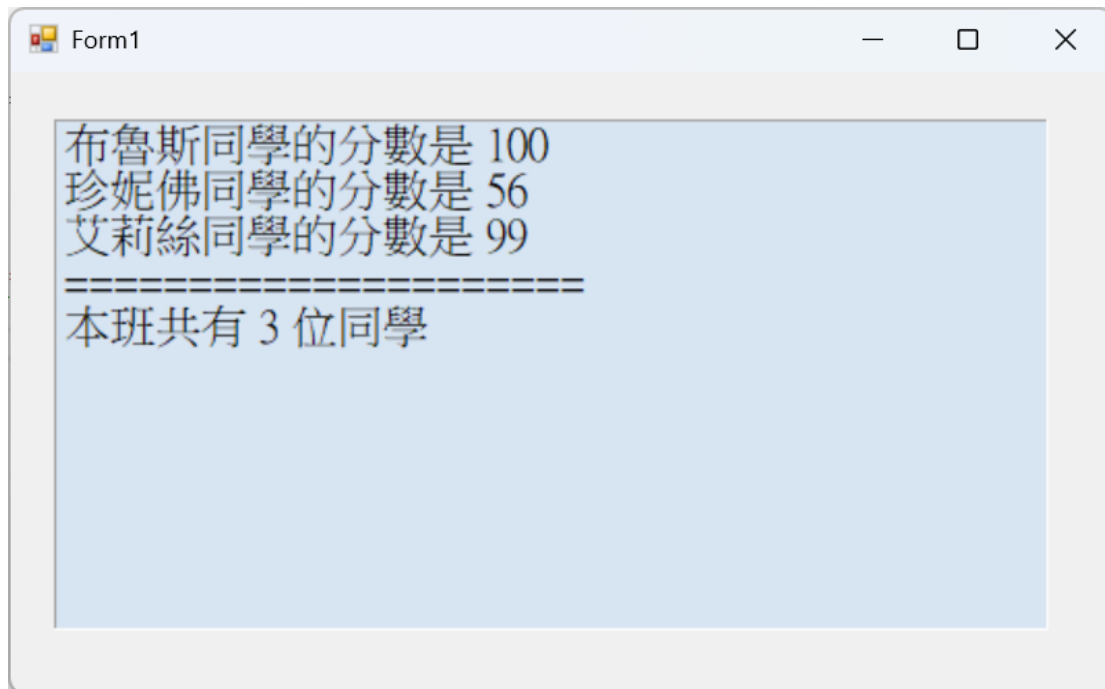

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.Threading.Tasks;

namespace StaticMember
{
    internal class Student
    {
        public string Name;           // Name姓名欄位宣告為public
        private static int _total = 0;
        private int _score;           // _score成績欄位宣告為private
        public int Score // 建立Score屬性，此屬性限制在0~100
        {
            get
            {
                return _score;
            }
            set
            {
                if (value >= 100) value = 100; // Score屬性最大值為100
            }
        }
    }
}
```

```

        if (value <= 0) value = 0;           // Score屬性最小值為0
        _score = value;
    }
}

public Student(string _vName, int _vScore) // 可設定姓名和分數的建構式3
{
    Name = _vName;
    Score = _vScore;
    _total++;           // _total++讓物件總數加1
}

public string GetMsg()           // GetMsg傳回姓名與成績的方法
{
    return $"{Name}同學的分數是 {Score}";
}

public static string GetTotalStudent() // 傳回共產生多少學生物件
{
    return $"本班共有 {_total} 位同學";
}
}

}

using System;
using System.Collections.Generic;
using System.ComponentModel;
using System.Data;
using System.Drawing;
using System.Linq;
using System.Text;
using System.Threading.Tasks;
using System.Windows.Forms;

namespace StaticMember
{
    public partial class Form1 : Form
    {
        public Form1()
        {

```



```

        InitializeComponent();
    }

    private void Form1_Load(object sender, EventArgs e)
    {
        Student Bruce = new Student("布魯斯", 100);
        Student Jennifer = new Student("珍妮佛", 56);
        Student Alice = new Student("艾莉絲", 99);
        label1.Text = Bruce.GetMsg() + "\n";
        label1.Text += Jennifer.GetMsg() + "\n";
        label1.Text += Alice.GetMsg() + "\n";
        label1.Text += "=====\n";
        //呼叫Student類別的GetTotalStudent靜態方法取得目前有多少位學生
        label1.Text += Student.GetTotalStudent();
    }
}

```