

Morph Channel

A Cell-Native Protocol Construction for Sponsored State Evidence and Local Channel Factories on CKB

Arthur Zhang

June 2026

Abstract

CKB's Cell model allows a channel to separate the object that holds value from the object that carries dispute evidence. Morph Channel uses this separation to keep the funding identity stable whilst unilateral disputes advance a State Cell containing signed state evidence. Publication transactions are met from sponsor-owned Cells, so channel reserve, business CKB, and xUDT balances remain outside the fee ledger.

The construction defines a State Header signing domain that binds chain context, channel identity, funding epoch, funding anchor, vault-set commitment, state number, asset registry, settlement descriptor, and challenge policy, whilst leaving sponsor coin selection unsigned. State Cell, vault-lock, and sponsor-budget validation are specified as script-level predicates for the conservative publication, supersession, finalisation, splice, cooperative-close, and materialisation branches. Partition conservation checks occupied capacity, State Cell carrier capacity, channel reserve, business CKB, and each xUDT type separately, with transaction fees charged only to the sponsor partition.

For bilateral channels, Morph begins with plaintext witnesses so force-close transactions remain auditable. For factories, authority is commitment-based: access manifests, local proofs, touched leaves, and an outer envelope define the admissible transition before proof bytes are interpreted. Under signature unforgeability, hash collision resistance, CKB single-spend enforcement, and a challenge window that covers detection, publication, confirmation, fee bumping, and reorganisation margin, newer valid state evidence supersedes older settling evidence before finalisation. The construction is limited to current CKB primitives: Cells, lock scripts, type scripts, witnesses, `cell_deps`, and `since`.

Keywords: CKB, Cell model, payment channels, channel factories, sponsored fees, partition conservation, xUDT, state evidence

Contents

1	Introduction and Motivation	3
1.1	Scope	3
1.2	Design Thesis	3
2	Problem Statement and Current Snapshot	4
2.1	The Funding-State Coupling Problem	4
2.2	The Fee-Boundary Problem	4
2.3	The Authority Object Problem	4
3	Research Contributions and Design Principles	5
3.1	Main Contributions	5
3.2	Design Principles	5
4	System Model and Threat Assumptions	6
4.1	Ledger Model	6
4.2	Actors	6
4.3	Adversarial Goals	6
5	Formal Objects	7
5.1	Channel Configuration	7
5.2	Stable Funding Bundle	8
5.3	Moving State Evidence	9
5.4	Sponsor Partition	10
6	Script-Level Validation Semantics	11
6.1	State Cell Type Semantics	12
6.2	Vault Lock Semantics	15
6.3	Bounded Sponsor Budget Semantics	16
7	Protocol State Machine	18
8	Transaction Semantics	19
8.1	FUND	19
8.2	OFFCHAIN_UPDATE	19
8.3	PUBLISH and SUPERSEDE	19
8.4	SPLICE	20
8.5	FINALIZE	20
8.6	COOPERATIVE_CLOSE	21
8.7	MATERIALIZE	21
9	Partition Conservation	22
9.1	Capacity-Aware Conservation Algorithm	22
10	Settlement Descriptor	26
11	Bilateral Witness Mode	28
12	Factory Proof Mode	29
13	Factory Acceptance Requirements	32

14 Challenge-Window Semantics	34
14.1 CKB since and Mempool Reality	34
15 Signature Domains and Authorisation Boundaries	36
16 Watchtower and Recovery Objects	37
17 Safety Properties	38
18 Evaluation Agenda	39
19 Related Work and Positioning	40
20 Limitations and Open Questions	41
21 Conclusion	42
A Audit Matrix	43

1 Introduction and Motivation

Payment channels and state channels keep frequent updates off-chain whilst preserving unilateral settlement on-chain when cooperation fails. The Lightning Network [1] is the canonical payment-channel construction, whilst eltoo [2] isolates a replacement-based rule: during a dispute, newer mutually signed state should defeat stale evidence. Channel factories [3] extend this idea to shared funding structures that support many off-chain relationships.

CKB exposes a different design point. A Cell has data, a lock script, an optional type script, capacity, and a stable outpoint [6, 7]. A CKB channel can therefore make scripts recognise two different objects: a stable value anchor and a moving state-evidence Cell. This gives the design question:

What protocol structure is required so that CKB can express a channel whose funding object remains stable, while disputes move only signed state evidence?

Morph Channel keeps channel value anchored in stable Cells, advances a distinct State Cell during disputes, and meets publication fees from sponsor-owned funds rather than channel-owned value. It uses the newer-state-wins principle, but implements it through CKB scripts, State Cells, relative since, and explicit value partitioning rather than Bitcoin-style output reshaping.

1.1 Scope

The paper focuses on script-level channel and factory architecture. It does not attempt to solve routing, liquidity discovery, gossip, privacy networks, watchtower markets, or factory governance. It also avoids any assumption of sub-second finality, DAG ordering, native channel transaction classes, or CKB node modification. All claims are bounded by existing CKB primitives.

The scope is the construction itself: threat model, object authority, transaction invariants, deployability, and benchmark obligations. The paper does not claim readiness for production deployment.

1.2 Design Thesis

The central thesis is:

A CKB channel becomes easier to audit when funding identity, state authority, and publication fee responsibility are separate protocol objects.

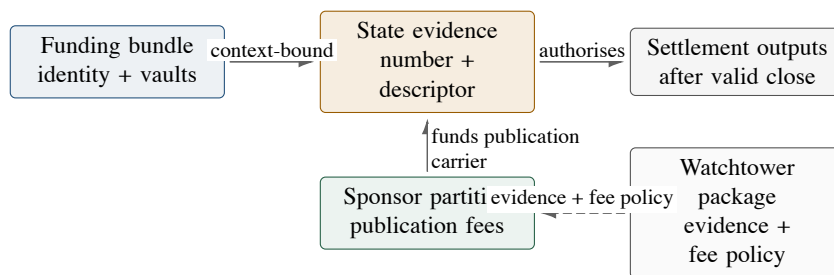


Figure 1: High-level decomposition. The channel value object, the moving dispute evidence, and the fee-paying sponsor funds are separate protocol objects. Solid arrows show state/value flow; the dashed arrow shows a dependency.

Morph treats the funding object, the signed state, and the fee-paying transaction inputs as separate authorities. The funding object identifies channel-owned value. The State Cell and participant signatures determine how that value may settle. Sponsor inputs fund publication without changing channel balances. This separation keeps unilateral exit independent of wallet coin selection and makes multi-asset conservation auditable.

2 Problem Statement and Current Snapshot

2.1 The Funding-State Coupling Problem

In many UTXO-oriented channel designs, settlement value and channel state are operationally coupled: a state update is represented by a new arrangement of future spend paths over the funding output. This coupling is natural in Bitcoin-like systems, but it is not inevitable on CKB. Since Cells can carry explicit typed state, a channel may maintain a stable funding anchor and move a separate state object.

If the value-holding object is also the state-update object, a force-close template can mix settlement authorisation, fee selection, and asset accounting in one place. Morph separates those checks: the vault protects channel value, the State Cell carries dispute evidence, and sponsor inputs fund the carrier transaction.

2.2 The Fee-Boundary Problem

A fee cap and a zero channel-paid fee policy are not equivalent. A fee cap says that channel value may be consumed up to a limit. A zero channel-paid fee invariant says that publication fees are not part of channel-owned value at all. CKB makes this distinction particularly important because capacity simultaneously represents storage resource, fee medium, and sometimes user-visible business value.

2.3 The Authority Object Problem

A channel protocol should not let scripts accept several competing authority sources. In a poorly separated design, authority may drift among:

- (1) the funding Cell;
- (2) a plaintext witness;
- (3) a local plaintext snapshot;
- (4) a root commitment;
- (5) a transaction body containing incidental sponsor inputs.

Morph Channel reduces authority to a signed state header plus the admissible witness or proof required by its mode. Transaction bodies remain reconstructible wrappers around that evidence.

3 Research Contributions and Design Principles

3.1 Main Contributions

This paper makes nine contributions.

- C1. **Stable funding and moving evidence.** It defines a dual-track Cell construction in which channel value remains in stable funding and vault Cells, while disputes move a State Cell.
- C2. **State-header-centric signing.** It specifies a canonical signing domain that binds identity and semantics while excluding sponsor coin-selection details.
- C3. **Sponsored publication.** It defines a sponsor-owned publication partition and requires unilateral publication to be fee-bumpable without counterparty re-signing.
- C4. **Partition conservation.** It replaces fee-cap reasoning with exact conservation of channel-owned value and fee extraction from sponsor-owned value.
- C5. **Splice-aware funding identity.** It distinguishes stable logical channel identity from the current funding epoch, funding anchor, and vault set, so resizing a channel does not make stale evidence reusable.
- C6. **Bilateral/factory witness separation.** It argues that bilateral channels should begin with plaintext witnesses, while factories require commitment-authoritative local proofs.
- C7. **Envelope-first factory authorisation.** It separates admission of a factory transition from interpretation of its proof body: a bounded outer claim names the transition family and commits to one evidence body.
- C8. **Challenge-window budgeting.** It derives the relative-since delay as a deployment parameter covering detection, polling, propagation, confirmation, fee volatility, and reorganisation margin.
- C9. **Factory non-interference.** It identifies non-interference as the condition required before a factory action can safely reduce its signing set below all participants.

3.2 Design Principles

The construction is organised around five design principles.

- P1. **Script-level deployability.** All mechanisms must be expressible by deployable CKB scripts.
- P2. **No hidden fee leakage.** Channel-owned capacity must not silently pay publication fees.
- P3. **Narrow descriptors.** Settlement descriptors authorise output derivation and should not become an application runtime.
- P4. **Envelope before factory body.** A factory proof body is admissible only after a bounded outer claim identifies the transition family and commits to that body.
- P5. **Splice freshness.** Watchtower and settlement evidence must be funding-epoch and vault-set aware, so a package from an earlier funding anchor cannot govern a later resized channel.

Lower-level safety obligations are stated as invariants and validation rules in the sections that use them: vault finalisation requires an authentic current State Cell; challenge maturity is a canonical relative-block CKB since condition; non-interference does not authorise value-bearing right increases; descriptor evolution is signed state semantics; value-bearing Cells must materialise exactly; state retirement must not orphan value; and unverifiable sponsor deadlines remain outside script-enforced policy.

4 System Model and Threat Assumptions

4.1 Ledger Model

Let $\mathcal{U}$ denote the set of live CKB Cells. A transaction consumes a finite input set $I \subseteq \mathcal{U}$, may reference read-only cells through `cell_deps`, and creates a finite output set O . CKB consensus verifies input availability, script validity, capacity constraints, and `since` maturity.

Assumption 1 (Base-layer correctness). *CKB consensus correctly enforces transaction validity, script execution, occupied-capacity checks, and `since` semantics.*

Assumption 2 (Cryptographic soundness). *The signature scheme is existentially unforgeable under chosen-message attacks, and the hash function used for state commitments is collision resistant.*

4.2 Actors

The protocol includes channel participants, optional watchtowers, standard wallets providing sponsor funds, and CKB miners/validators. A watchtower may observe chain events and publish newer state evidence, but it should not hold custody over channel-owned value.

4.3 Adversarial Goals

An adversary may attempt to:

- A1. publish a stale state and let it finalise;
- A2. replay a state signature across another channel or funding anchor;
- A3. reference a descriptor-shaped but non-authoritative funding Cell;
- A4. spend vault value without current state authorisation;
- A5. make channel-owned capacity pay publication fees;
- A6. confuse CKB reserve, CKB business balance, xUDT amounts, and sponsor change;
- A7. exploit factory locality to harm untouched participants.

5 Formal Objects

5.1 Channel Configuration

A Morph channel configuration is a tuple

$$\Gamma = (\text{chain}, \text{channel_id}, \text{participants}, \text{fund}, \text{assets}, \text{descriptor}, \text{challenge}, \text{version}).$$

Here `channel_id` is the immutable channel genesis identity created at `FUND`, `fund` identifies the current funding epoch, funding anchor, and vault-set commitment, `assets` commits to the asset registry, `descriptor` commits to the current settlement-output derivation, and `challenge` specifies the relative finalisation policy. The descriptor commitment is state semantics: descriptor instances may advance with newly signed state, while descriptor grammar, version boundaries, and authorisation rules remain protocol semantics.

Definition 1 (Channel Identity Fields). *The paper uses one canonical channel identity:*

$$\text{channel_id} = \text{channel_genesis_id}.$$

It is immutable for the lifetime of the channel. The `funding_anchor_identity` identifies the current funding epoch's anchor, and `funding_epoch` is the monotonic funding-context version advanced by splice. A valid State Header, sponsor policy, vault lock, and watchtower package must use the same `channel_id`.

Definition 2 (Funding Anchor Identity). *The funding anchor identity is a script-derivable canonical digest, not a display label and not necessarily the live output outpoint:*

$$\begin{aligned} \text{funding_anchor_identity} = & H(\text{"CKB_MORPH_FUNDING_ANCHOR_V1"} \\ & \parallel \text{channel_id} \parallel \text{funding_epoch} \\ & \parallel \text{fund_cell_type_hash} \parallel \text{fund_cell_type_args} \\ & \parallel \text{vault_set_commitment}). \end{aligned}$$

For a Fund Cell created in the same `FUND` transaction as the initial State Cell, the digest must be derived from script-verifiable creation material, such as Type-ID-style arguments, rather than from the newly created Fund Cell outpoint. Once confirmed, the Fund Cell outpoint may be recorded as an operational locator, but it is not the genesis signing identity unless the deployment creates the funding anchor in a prior transaction or otherwise avoids self-reference. A deployment may choose a different byte encoding only if the signed domain and all scripts use the same canonical derivation.

The current devnet implementation uses a Type-ID-style profile in which the signed funding anchor identity is derived from the first funding input and the State Cell output index:

$$\text{implementation_funding_anchor_identity} = H(\text{first_funding_input} \parallel \text{state_output_index}_{\text{ic}}).$$

The implementation field named `funding_anchor` denotes this signed identity. It is not an output locator.

Definition 3 (Funding Context Identity). *The minimal funding context for a live bilateral channel is the tuple*

$$\text{funding_context} = (\text{chain_id}, \text{channel_id}, \text{funding_anchor_identity}, \text{vault_set_commitment}).$$

For tooling, indexing, watchtower cursors, and audit reports, a deployment may derive

$$\begin{aligned} \text{funding_context_id} = & H(\text{"CKB_MORPH_FUNDING_CONTEXT"} \\ & \parallel \text{chain_id} \parallel \text{channel_id} \\ & \parallel \text{funding_anchor_identity} \parallel \text{vault_set_commitment}). \end{aligned}$$

This identifier is a derived integration key, not an additional consensus field and not a substitute for script validation. The current implementation keeps `funding_epoch` in the signed State Header as a monotonic generation label for funding-context evolution, but the replay boundary is the signed funding context accepted by the State Cell and vault scripts.

5.2 Stable Funding Bundle

Definition 4 (Funding Bundle). *The funding bundle $\mathcal{F}$ consists of a channel identity Cell and zero or more vault Cells:*

$$\mathcal{F} = (\text{Fund}, \text{Vault}_1, \dots, \text{Vault}_k).$$

The bundle carries channel identity and channel-owned value. It is stable during ordinary off-chain state progression. A splice may replace the current funding anchor and vault set, but only through an explicit signed transition from the old funding context to the new funding context while preserving the logical channel identity. The current implementation advances the signed funding epoch for this transition and may preserve the business state number when the resize itself does not change the channel's settlement state.

Definition 5 (Vault Authorisation). *A vault Cell is admissible only if its lock or type script rejects every spend that is not authorised by the authentic current live State Cell and the committed settlement descriptor. A Cell whose data merely decodes as a state header is not state authority unless its script identity also matches the channel construction.*

Definition 6 (Current State Pointer). *For a channel identifier `channel_id`, the current state pointer is the unique live State Cell that can be consumed by the next admitted on-chain branch: publication, supersession, splice, materialisation, cooperative close, or finalisation. The protocol does not require a global registry for this pointer; uniqueness follows from creating exactly one initial State Cell and requiring every successor-producing transition to consume the current one and create exactly one successor. Finalisation and cooperative close are explicit retirement branches: they consume the State Cell and create no successor State Cell unless a deployment defines a terminal receipt Cell.*

Definition 7 (Terminal Receipt). *A terminal receipt is finalisation evidence, not a successor State Cell:*

```
TerminalReceipt {  
  receipt_version  
  channel_id  
  operation  
  retired_state_header_commitment  
  settlement_descriptor_commitment  
  finalised_vault_set_commitment  
  remaining_vault_set_commitment_or_none  
  carrier_refund_output_commitment  
}
```

It cannot be superseded and cannot be used as the current state pointer. It is admissible only for descriptor-authorized remaining vault spends in profiles that explicitly allow non-atomic finalisation or cooperative terminal evidence.

The current state pointer is an on-chain pointer, not a claim about the highest state number ever signed off-chain. A participant or watchtower may hold a State Package with a higher state number than the live pointer and use it to supersede the live State Cell during the challenge window.

Definition 8 (Initial State Uniqueness). *A valid FUND transaction creates exactly one initial State Cell for the channel's funding anchor. The initial State Cell, the Fund Cell, and all vault locks must bind the same immutable channel genesis identity. A deployable instance expresses this binding in State Cell type arguments, using a Type-ID-style uniqueness rule or an equivalent script-level construction available on current CKB.*

This uniqueness condition is a construction requirement, not a global lookup assumption. The scripts do not need to scan the chain for competing state tracks. Instead, they must make every valid vault spend and every valid State Cell transition refer to the same genesis identity, so a descriptor-shaped but non-authoritative State Cell cannot control the vaults.

5.3 Moving State Evidence

Definition 9 (State Evidence). *State evidence is a signed object*

$$E_n = (\text{Header}_n, \text{Payload}_n, \Pi_n, \Sigma_n),$$

where Header_n is the canonical state header, Payload_n is plaintext or committed state material, Π_n is an optional proof package, and Σ_n is the participant authorisation set.

Definition 10 (Canonical State Header). *The canonical state header contains:*

```
StateHeader {
  protocol_version
  chain_id
  signature_scheme_id
  channel_id
  funding_epoch
  funding_anchor_identity
  vault_set_commitment
  state_number
  mode
  phase
  participants_commitment
  asset_registry_commitment
  settlement_descriptor_commitment
  descriptor_version
  payload_commitment
  challenge_policy_commitment
  state_layout_version
}
```

The phase field is on-chain carrier semantics, not conversational off-chain status. Off-chain updates sign publishable settlement evidence: for ordinary unilateral publication the signed header has `phase = settling`. A local implementation may record that the channel relationship is still active off-chain, but that local status is not part of the State Header signing domain. Splice uses a separate signed re-anchoring event rather than reinterpreting an active off-chain update as a settling header.

The mode field is a canonical enum:

$$\text{mode} \in \{\text{bilateral_plaintext}, \text{bilateral_commitment}, \text{factory_commitment}\}.$$

The current devnet profile implements the plaintext bilateral mode and the factory commitment/proof mode; the bilateral commitment mode is reserved for a future commitment-only bilateral representation profile. In that implementation, the host names are `BilateralPlain` and `FactoryProof`, with signing/wire mode bytes 1 and 2 respectively. These are the current implementation names for the paper's plaintext bilateral and factory commitment/proof profiles; they are not evidence that the reserved bilateral commitment profile is implemented. Ordinary `PUBLISH` and `SUPERSEDE` transitions must preserve mode. A mode change is admissible only through an explicit signed `SPLICE`, re-anchor, or deployment-upgrade profile that binds both the old and new representation rules.

The signed message is

$$m_n = H(\text{"CKB_MORPH_CHANNEL_STATE_V1"} \parallel \text{canonical}(\text{Header}_n)).$$

The version fields, funding epoch, funding anchor, and vault-set commitment are part of the signed domain. They prevent replay across channels and prevent an old signature from being reinterpreted by a later descriptor, funding anchor, vault set, signature scheme, or state-layout parser.

Definition 11 (State Header Representation Profile). *A deployment profile must choose exactly one State Header representation. In the persisted-header profile, every output State Cell stores the full canonical State Header in `output.data`; witnesses then carry participant signatures and any payload or proof bytes needed to match the committed header. In a commitment-only profile, `output.data` stores a canonical header commitment and the spending witness must replay the full header and prove that it hashes to the persisted commitment. The bilateral plaintext profile in this construction uses persisted headers.*

5.4 Sponsor Partition

Sponsor funds are not part of the channel-owned value partition. They are standard wallet Cells, watchtower-owned Cells, or pre-authorised fee budgets. The script-enforced budget boundary should include channel identity, state-number range, maximum fee, expected state type, and uncontaminated change destination. Expiry windows, allowed sponsor sources, publishing cadence, and webhook policy may also be enforced by an operator or watchtower layer. If a deployment lacks script-verifiable evidence for such a field, the field must not be silently treated as a script-enforced safety condition.

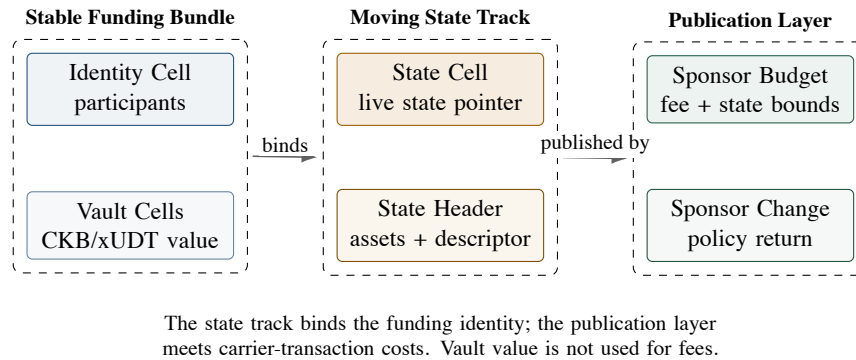


Figure 2: Protocol object map. The funding bundle holds channel identity and value; the state track carries authority; the publication layer meets the transaction fee.

6 Script-Level Validation Semantics

The following pseudo-code states the script checks required for an implementable construction. It is not byte-level CKB-VM code.

Definition 12 (Canonical Operation Classification). *On-chain validation uses one canonical operation tag:*


ChannelOperation = {FUND, PUBLISH, SUPERSEDE, FINALIZE,
COOPERATIVE_CLOSE, SPLICE, MATERIALIZE}.
OffchainEvent = {OFFCHAIN_UPDATE}.

Every on-chain transaction that touches a Morph State Cell, vault Cell, descriptor output, or sponsor budget must carry or imply exactly one ChannelOperation. The State Cell type script, vault lock, descriptor parser, and sponsor policy must derive the same operation tag. If a transaction admits two operation interpretations, it is invalid.

Definition 13 (Resolved State Context). *Header commitments are not the resolved protocol objects. A validator first resolves the committed objects from the witness:*

```
resolve_state_context(header, witness):  
    asset_registry =  
        parse_and_verify_asset_registry(  
            witness.asset_registry,  
            header.asset_registry_commitment)  
    descriptor =  
        parse_and_verify_descriptor(  
            witness.settlement_descriptor,  
            header.settlement_descriptor_commitment,  
            header.descriptor_version)  
    challenge_policy =  
        parse_and_verify_challenge_policy(  
            witness.challenge_policy,  
            header.challenge_policy_commitment)  
    payload =  
        parse_and_verify_payload_or_roots(  
            witness.payload_or_roots,  
            header.payload_commitment,  
            header.mode)  
    return ResolvedStateContext(  
        header, asset_registry, descriptor,  
        challenge_policy, payload)
```

All later validation rules use the resolved registry, descriptor, challenge policy, and payload rather than treating commitments as full objects.

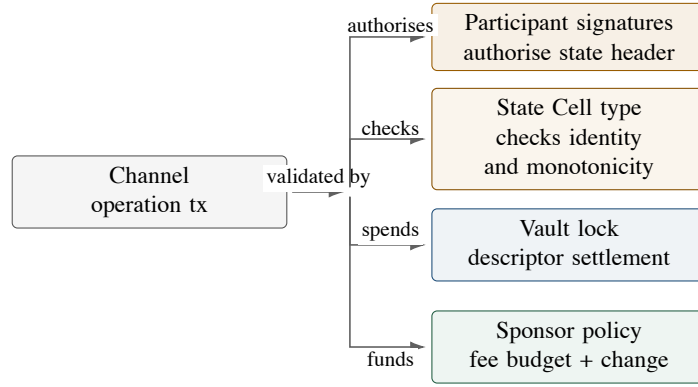

State evidence does not by itself spend value; sponsor authorisation does not by itself authorise channel value.

Figure 3: Authorisation boundaries for any value-touching channel operation. State signatures, vault spends, and sponsor fee authorisation are separate checks.

6.1 State Cell Type Semantics

The State Cell type script is the sole script-level predicate for advancing or retiring the live state track. It does not spend channel value; it verifies the identity, monotonicity, and retirement conditions of state evidence. Ordinary publication and supersession preserve the current funding epoch, funding anchor, and vault-set commitment. Finalisation retires a settling State Cell after the committed relative delay. A splice is a separate re-anchoring transition: it must prove both the old and new funding context, rather than silently changing these fields inside an ordinary state update.

Input phase	Output phase	Operation	Conservative rule
none	active	FUND	create the genesis state-track pointer
active	settling	PUBLISH	publish pre-signed settlement evidence
settling	settling	SUPERSEDE	newer valid evidence replaces older evidence
settling	none	FINALIZE	mature state retires atomically over vault set
active or settling	none	COOPERATIVE CLOSE	full close signatures; no challenge delay
active	active	SPLICE	signed re-anchor event updates funding context
factory-active	updated successor or retired	MATERIALIZE	resolved by the factory parent rule
settling	active	any	invalid

Table 1: State Header phase transition table. The MATERIALIZE row is resolved by the factory transition result.

```

verify_state_cell_type(tx):
  op = classify_channel_operation(tx)

  if op == FUND:
    require zero_input_state_cells(tx, channel_id)
    new = exactly_one_output_state_cell(tx, channel_id)
    new_header = parse_state_header(new.data)
    resolved = resolve_state_context(new_header, witness)
    require new_header.channel_id == derived_channel_id(tx)
    require new_header.state_number == 0
    require new_header.phase == active
    require funding_anchor_derivation_matches(new_header, tx)
    require initial_configuration_signatures_valid(
      new_header, resolved.descriptor,
      resolved.asset_registry, resolved.challenge_policy,
      participants)
    require output_state_capacity_sufficient(new)

  if op in {PUBLISH, SUPERSEDE}:
    old = exactly_one_input_state_cell(tx, channel_id)
    new = exactly_one_output_state_cell(tx, channel_id)
    old_header = parse_state_header(old.data)
    new_header = parse_state_header(new.data)
    resolved = resolve_state_context(new_header, witness)

    require same_context_except_progress(old_header, new_header)
    require phase_transition_allowed(op, old_header.phase,
      new_header.phase)
    require descriptor_transition_admissible(
      old_header.settlement_descriptor_commitment,
      new_header.settlement_descriptor_commitment,
      old_header.descriptor_version,
      new_header.descriptor_version,
      witness)
    require new_header.state_number > old_header.state_number
    require new_header.phase == settling
    require referenced_funding_anchor(tx.cell_deps)
      matches new_header.funding_anchor_identity
    require signatures_valid(new_header, witness.signatures)
    require partition_conservation_for_publication(
      tx, resolved, op)
    require output_state_capacity_sufficient(new)

  if op == FINALIZE:
    state = exactly_one_input_state_cell(tx, channel_id)
    require zero_output_state_cells(tx, channel_id)
    input_header = parse_state_header(state.data)
    resolved = resolve_state_context(input_header, witness)
    require input_header.phase == settling
    require state_input_relative_block_since_satisfies(
      resolved.challenge_policy)
    require all_committed_vaults_consumed_or_evidenced(
      tx, input_header.vault_set_commitment,
      resolved.descriptor)
    require vault_finalisation_outputs_match_descriptor(
      tx, resolved.descriptor)
    require state_carrier_refund_matches_policy(tx)

```

```

if op == COOPERATIVE_CLOSE:
    state = exactly_one_input_state_cell(tx, channel_id)
    require zero_output_state_cells(tx, channel_id)
        or exactly_one_terminal_receipt_cell(tx, channel_id)
    header = parse_state_header(state.data)
    resolved = resolve_state_context(header, witness)
    require header.phase in {active, settling}
    require cooperative_close_signatures_valid(tx, header)
    require cooperative_outputs_match_descriptor(
        tx, resolved.descriptor)
    require partition_conservation_for_close(
        tx, resolved, op)
    require state_carrier_refund_matches_policy(tx)

if op == SPLICE:
    old = exactly_one_input_state_cell(tx, channel_id)
    new = exactly_one_output_state_cell(tx, channel_id)
    old_header = parse_state_header(old.data)
    new_header = parse_state_header(new.data)
    event = parse_signed_reanchor_event(tx.witness)
    require event.channel_id == old_header.channel_id
        == new_header.channel_id
    require event.old_funding_epoch == old_header.funding_epoch
    require event.new_funding_epoch
        == old_header.funding_epoch + 1
    require new_header.funding_epoch == event.new_funding_epoch
    require new_header.funding_anchor_identity
        == event.new_funding_anchor_identity
    require new_header.vault_set_commitment
        == event.new_vault_set_commitment
    require realised_new_vault_set_matches(tx.outputs, event)
    require consumed_old_vaults_match(tx.inputs, old_header)
    require splice_partition_conservation(tx, event.asset_deltas)
    require signatures_valid(event, required_participants)

if op == MATERIALIZE:
    parent = exactly_one_input_state_cell(tx, channel_id)
    parent_header = parse_state_header(parent.data)
    factory = resolve_factory_context(parent_header, witness)
    require factory_materialisation_envelope_admissible(tx, factory)
    require local_proof_valid(tx, factory)
    require touched_rights_authorised(tx, factory)
    require non_interference_or_full_participant_signatures(
        tx, factory)
    require materialised_child_or_exit_outputs_match_descriptor(
        tx, factory)
    require factory.parent_state_rule
        in {updated_successor, retired}
    require parent_state_successor_rule_satisfied(tx, factory)
    require partition_conservation_for_materialisation(
        tx, factory, op)

```

The helper `same_context_except_progress` is deliberately narrow: protocol version, chain id, signature scheme, channel id, funding epoch, funding anchor identity, vault-set commitment, participant commitment, asset registry commitment, challenge-policy commitment, mode, and state-layout version must remain equal. Only the state number, the phase transition admitted by Table 1, the payload commitment, and an admissible descriptor commitment/version transition may change.

The descriptor transition predicate is narrow. It permits a new descriptor instance only when the new State Header is signed under the normal state-signing domain and the descriptor version and grammar remain within the protocol’s accepted boundary. The vault later settles only against the descriptor commitment in the authentic current live State Cell.

Splice validation is separate from ordinary monotonic publication. It must bind the old funding anchor, the new funding anchor, the old vault-set commitment, the new vault-set commitment, the base state number, the asset deltas, and the participant signatures in one signed re-anchoring event. This prevents a watchtower package or settlement descriptor from an earlier funding context from being replayed after the channel has been resized.

The “exactly one input, exactly one output” rule is the script-level expression of State Cell uniqueness for publication and supersession. Finalisation is the explicit retirement branch: it consumes the settling State Cell, checks maturity and vault materialisation, and creates no successor State Cell. Mempool races are resolved by the ordinary CKB single-spend rule: competing transactions may exist, but at most one can consume the current State Cell on-chain.

6.2 Vault Lock Semantics

Vault locks own channel value. They must not accept a transaction merely because the transaction references the correct channel. They accept only settlement or materialisation authorised by the current state evidence.

```
verify_vault_spend(tx):
  op = classify_channel_operation(tx)
  require op in {FINALIZE, COOPERATIVE_CLOSE, SPLICE, MATERIALIZE}

  state = exactly_one_authentic_input_state_cell(
    tx, channel_id, expected_state_type, expected_state_lock)
  header = parse_state_header(state.data)
  resolved = resolve_state_context(header, tx.witness)
  require header.funding_anchor_identity matches this_vault.channel
  require this_vault.membership_proof_matches(
    this_vault, tx.witness.vault_set,
    header.vault_set_commitment)

  if op == FINALIZE:
    require header.phase == settling
    require state_input_relative_block_since_satisfies(
      resolved.challenge_policy)
    require all_committed_vaults_consumed_or_evidenced(tx)

  if op == COOPERATIVE_CLOSE:
    require header.phase in {active, settling}
    require cooperative_close_signatures_valid(tx, header)
    require no_challenge_delay_required(tx)

  if op == SPLICE:
    require signed_reanchor_event(tx)
    require old_vault_consumed_according_to_old_vault_set(tx)
    require new_vault_outputs_match_signed_vault_set(tx)
    require signed_deltas_match_realised_cells(tx)

  if op == MATERIALIZE:
    require factory_materialisation_proof(tx)
    require parent_child_vault_descriptor_match(tx)
    require parent_state_successor_or_retirement_rule(tx)
```

```

expected_outputs =
    derive_outputs(resolved.descriptor, resolved.payload, op)
require canonical_outputs(tx.channel_outputs) == expected_outputs
require partition_conservation(tx, resolved, op)

```

This lock is the point at which the current live state becomes economically meaningful. A State Cell without vault enforcement is only evidence; it does not protect value.

6.3 Bounded Sponsor Budget Semantics

A sponsor budget may be implemented as a standard wallet signature, a watchtower-owned Cell, or a bounded policy Cell. The bounded policy form is the most delicate because it authorises another actor to spend capacity for publication.

```

verify_sponsor_budget_spend(tx):
    policy = parse_policy(this_budget_cell.data)
    op = classify_channel_operation(tx)
    header = parse_authoritative_operation_header(tx, op)

    require header.channel_id == policy.channel_id
    require relevant_state_cell_type_hash(tx, op)
        == policy.expected_state_type_hash
    require relevant_state_cell_lock_hash(tx, op)
        == policy.expected_state_lock_hash
    require policy.min_state_number <= header.state_number
    require header.state_number <= policy.max_state_number
    require tx_fee(tx) <= policy.max_fee_per_tx
    require policy.already_spent + tx_fee(tx)
        <= policy.max_total_fee
    require exactly_one_successor_budget_cell(tx)
    require successor.already_spent
        == policy.already_spent + tx_fee(tx)
    require sponsor_change_lock(tx) == policy.change_lock
    require no_channel_assets_in_sponsor_change(tx)
    require op in policy.allowed_operations

```

The authoritative operation header is the header that the State Cell branch will validate. In the persisted-header profile, it is parsed from the relevant input or output State Cell data according to the operation. In a commitment-only profile, the witness header must hash to the State Cell's persisted header commitment before the sponsor policy may inspect it. Sponsor budget logic must not approve one witness header while the State Cell type validates another.

A deployment may split sponsor budgets by fee-risk class. The conservative profile distinguishes publication budgets for PUBLISH/SUPERSEDE, settlement budgets for FINALIZE/MATERIALIZE, and re-anchor budgets for SPLICE. Each policy lists its allowed operations explicitly.

The current devnet implementation uses the narrowest sponsor profile: sponsor Cells pay only publication and supersession carrier fees for settling State Cell outputs. They do not sponsor FUND, FINALIZE, SPLICE, MATERIALIZE, or COOPERATIVE_CLOSE. The broader operation-scoped budget forms above are deployment profiles that require the sponsor script to resolve and check the authoritative operation context for each admitted branch.

The cumulative `max_total_fee` predicate is script-enforceable only for a stateful `SponsorBudget` Cell that is consumed exactly once and recreated with the updated spent total. A normal wallet signature can enforce only the current spend it signs. If no stateful budget Cell is present, total budget is watchtower or wallet policy, not a consensus predicate.

Expiry windows, allowed sponsor sources, scan cadence, and webhook policy remain operator or watchtower policy unless the deployment provides the script with verifiable evidence for those fields. A

bounded sponsor script rejects, or otherwise makes inadmissible, a finite script-level deadline for which it cannot verify the relevant chain evidence.

The policy is not an open wallet delegation. It is a bounded fee-spend right scoped to one channel, one state interval, and an explicit operation set.

7 Protocol State Machine

Let the channel phase be one of

Phase = {funding, active, settling, closed}.

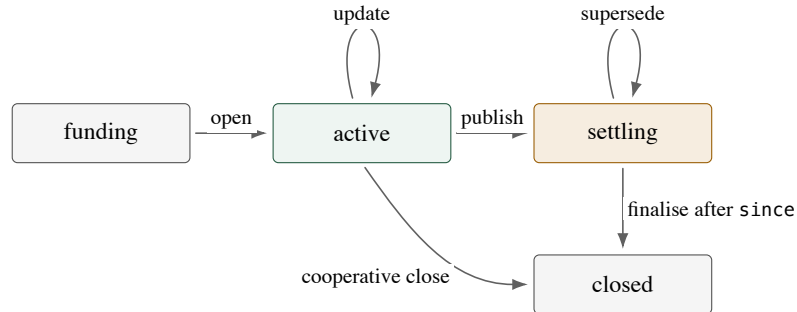


Figure 4: Ordinary bilateral Morph Channel lifecycle. Publishing moves an active channel into the settling phase; newer signed evidence supersedes older settling evidence before finalisation. Splice and factory materialisation are separate paths.

The ordinary bilateral lifecycle contains the off-chain update event and five on-chain branches:

OFFCHAIN_UPDATE;
FUND, PUBLISH, SUPERSEDE, FINALIZE, COOPERATIVE_CLOSE.

The full validation taxonomy additionally includes **SPLICE** and **MATERIALIZE**. These are separate on-chain operation branches, not ordinary bilateral state-machine arrows.

8 Transaction Semantics

8.1 FUND

FUND creates the stable funding bundle and the initial State Cell. The funding transaction may be funded by standard wallet inputs. After funding, channel-owned value enters the channel partition and should not be used for publication fees.

The initial State Cell is the only on-chain active pointer created by the channel. Its type arguments or equivalent identity mechanism must bind the same funding-anchor identity used by the Fund Cell and vault locks. A transaction that attempts to create two initial State Cells for the same channel genesis identity is invalid under the funding script profile.

FUND is outside unilateral dispute semantics. In the full protocol profile it is authorised by the funding participants' normal wallet signatures and by initial configuration signatures over the channel configuration, `Header0`, descriptor, asset registry, and challenge policy. The current devnet implementation script-enforces anchor derivation, active phase, state number zero, lock/type binding, and capacity shape; initial configuration approval is host, wallet, and package policy rather than a separate script-checked signature object. A stricter deployment may add explicit initial configuration signature evidence without changing the State Header signing domain. A sponsor may contribute fee-paying inputs, but that sponsorship does not authorise the initial State Header or the vault configuration.

The initial active State Cell is not participant dispute evidence. It is the genesis state-track pointer. Publishable off-chain updates use `phase = settling`; the conversational fact that the participants still consider the channel active is not part of the signed State Header.

8.2 OFFCHAIN_UPDATE

An off-chain update produces a new publishable settlement-evidence object with a strictly larger state number. It does not consume CKB Cells. Participants exchange signatures over the canonical State Header whose phase is `settling` for unilateral publication. Any local “active” status recorded by a wallet or watchtower is conversational state outside the State Header signing domain. State numbers are strictly monotonic, but not necessarily consecutive: a valid supersession may move from n to $n + k$ if the newer state is properly authorised and the sponsor policy admits that state interval.

Off-chain active updates do not create on-chain active State Cells. Once a unilateral publication reaches the chain, the channel is in the settling phase. Further on-chain progress is either supersession by a newer settling State Cell or finalisation after the relative challenge delay.

8.3 PUBLISH and SUPERSEDE

The same transaction pattern handles initial unilateral publication and challenge:

```
PUBLISH_STATE:
  inputs:
    StateCell(n, active_or_settling)
    SponsorCell*
  cell_deps:
    FundingAnchor
    VaultCell*
  outputs:
    StateCell(n', settling)
    SponsorChange*
  validity:
    n' > n
    output StateCell(n', settling) persists
      or commits Header(n')
    signatures over canonical Header(n') are valid
    payload/proof resolves all Header commitments
```

funding identity matches referenced anchor
channel partition is conserved

Participant signatures authorise the state header. The transaction body selects live inputs, sponsor inputs, and fee rate, so a challenger may rebuild it against the currently live State Cell under competing tx-pool spends.

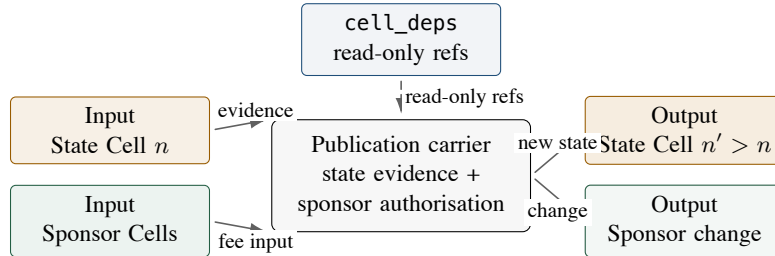


Figure 5: Publication and supersession transaction shape. The channel evidence can be reused while the sponsor inputs and fee choice are rebuilt.

8.4 SPLICE

SPLICE resizes a channel without closing its logical relationship. It is neither an ordinary off-chain update nor a final settlement. It is a signed re-anchoring transition that consumes the current active state and old vault authority, moves from the old funding context to a new funding context, and creates a new state and vault set for the same logical channel.

A splice-in increases the channel-controlled asset set by admitting external value. A splice-out releases value while preserving enough post-splice vault value to satisfy the latest signed settlement descriptor. In both cases, the signed transition must bind the old funding anchor, the new funding anchor, the old vault-set commitment, the new vault-set commitment, the base state number, and the per-asset deltas. The derived old and new funding context identifiers are useful package and watchtower keys, but they do not replace the underlying signed fields. CKB and xUDT lanes are checked by asset identity and amount, not by informal wallet labels.

The freshness consequence is material for recovery. A watchtower package saved before a splice is not automatically valid after the splice, even if it has a higher state number than some local record, because its signed funding context refers to a different enforceable value object. In the current implementation, ordinary state updates advance `state_number` while keeping the funding context fixed; `resize` advances the funding context and signed funding epoch without requiring the channel's business state number to change.

8.5 FINALIZE

FINALIZE consumes the current settling State Cell and the committed vault set after the relative `since` delay has matured. It creates the settlement outputs authorised by the committed settlement descriptor. Retiring the state track without finalising or otherwise leaving verifiable finalisation evidence is invalid, because it would orphan channel value.

In the bilateral conservative profile, **FINALIZE** is atomic over the entire committed vault set. Every live vault Cell committed by the current State Header's `vault_set_commitment` must be consumed in the finalisation transaction and materialised into descriptor-authorised outputs, unless the descriptor explicitly proves that a vault is irrelevant and creates a verifiable finalisation evidence object for any remaining value. Without such a profile, partial finalisation is invalid.

If a profile admits non-atomic finalisation, its evidence object must be a `TerminalReceipt`. The receipt binds the retired State Header, settlement descriptor, finalised vault-set commitment, any remaining vault-set commitment, and the carrier-refund output. The conservative bilateral profile does not rely

on this escape hatch: it consumes and materialises the entire committed vault set atomically. The current devnet implementation follows this conservative profile and does not implement terminal receipts.

8.6 COOPERATIVE_CLOSE

COOPERATIVE_CLOSE is a terminal on-chain branch with explicit close signatures from the required participants. It may consume an active or settling State Cell, requires no challenge delay, and must still satisfy descriptor materialisation, carrier-refund policy, and partition conservation. A cooperative close is not a wallet-only spend of vault value; it is a state-track retirement authorised by the channel participants. The current devnet implementation models the operation in the host taxonomy but does not implement a complete State type, vault contract, CLI, and devnet flow for this branch. It is therefore a protocol branch and future deployment profile rather than current executable evidence.

8.7 MATERIALIZE

MATERIALIZE is the factory-local branch that turns committed factory rights into child-channel or local-exit Cells. It must resolve the factory envelope, touched leaves, proof bundle, descriptor, asset registry, and challenge policy before any value Cell is accepted. The parent factory State Cell is consumed and either recreated with updated roots, retired, or paired with a profile-defined terminal receipt. A proof that only changes a local leaf is insufficient unless the rights-dependency schema proves that all relevant untouched rights are unchanged.

For value-bearing MATERIALIZE in the conservative profile, the resolved parent-state rule must be either `updated_successor` or `retired`. The `unchanged_reference` rule is admissible only for non-value-bearing proof queries or for a deployment profile whose vault lock defines an alternative authority proof that does not require the parent State Cell as an input. The current factory implementation uses the `updated_successor` path: factory exits and reduced materialisation consume and recreate the parent Factory State Cell with updated roots.

9 Partition Conservation

For every post-funding transaction, partition the transaction's values into channel-owned value C , State Cell carrier capacity K , and sponsor-owned value S . Read-only `cell_deps` do not participate in value accounting. The high-level rule is operation-specific:

PUBLISH/SUPERSEDE: $C_{\text{in}} = C_{\text{out}}$,

FINALIZE: $C_{\text{in}} \mapsto \text{descriptor_authorised_settlement_outputs}$,

SPLICE: $C_{\text{out}} = C_{\text{in}} + \Delta_{\text{in}} - \Delta_{\text{out}}$,

ALL: $K_{\text{in}} = K_{\text{state_successor_out}} + K_{\text{carrier_refund_out}}$, $S_{\text{in}} - S_{\text{out}} = \text{fee}$,
 $C \cap K = K \cap S = C \cap S = \emptyset$.

In the conservative profile, State Cell carrier capacity is conserved exactly. Finalisation may retire the State Cell only by creating a carrier-refund output classified in the same K lane. A deployment that wants sponsor-funded carrier top-ups or carrier-cost deductions must add a separate signed carrier rule; it must never charge the carrier delta to channel reserve or business CKB. Splice deltas are signed protocol objects; every delta must bind asset type, amount, capacity, Cell shape, and descriptor policy.

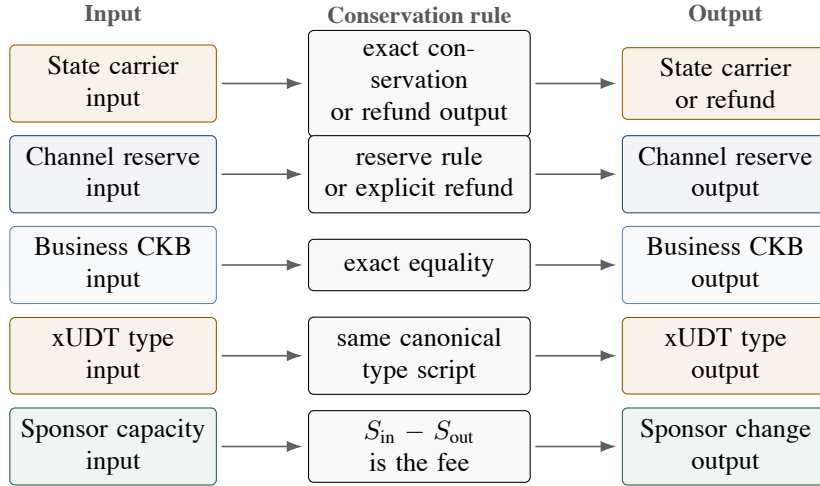


Figure 6: Partition conservation. State Cell carrier capacity, channel reserve, user-visible CKB, each xUDT type, and sponsor fees are checked as separate lanes.

Invariant 1 (Partition Conservation). *Channel-owned value is exactly conserved across publication and challenge transactions, exactly materialised during finalisation, and changed during splice only by signed splice deltas. State Cell carrier capacity is accounted for in its own lane. Any publication-fee deficit is borne exclusively by the sponsor partition.*

9.1 Capacity-Aware Conservation Algorithm

CKB capacity requires a finer rule than a single scalar balance. A channel-owned CKB Cell has two logically distinct components:

$$\text{capacity}(c) = \text{reserve}(c) + \text{business_ckb}(c), \quad \text{reserve}(c) \geq \text{occupied}(c).$$

The reserve component exists so the Cell can exist. The business component is user-visible CKB value. A valid transition must not silently convert reserve into fee, sponsor change, or business balance unless the descriptor explicitly authorises a reserve refund.

State Cell capacity is carrier capacity, not business value. The conservative profile conserves this lane exactly: ordinary publication carries it into the successor State Cell, and finalisation carries

it into a carrier-refund output. No State Cell carrier delta may be charged to CHANNEL_RESERVE or BUSINESS_CKB.

For xUDT accounting, an asset type is the canonical identity of the full type script, for example the hash of its canonical encoding. It is not a symbol, name, display metadata, or wallet-level asset label.

```

partition_conservation(tx, resolved, op):
    asset_registry = resolved.asset_registry
    descriptor = resolved.descriptor

    classify every input/output cell as:
        SPONSOR
        CHANNEL_RESERVE
        BUSINESS_CKB
        BUSINESS_XUDT(asset_type)
        STATE_CARRIER
        UNRELATED

    require UNRELATED cells are not loaded through script
        syscalls by State, vault, descriptor, sponsor,
        or xUDT checks
        and do not contribute to channel conservation
    require all channel output cells satisfy
        capacity(output) >= occupied_capacity(output)

    reserve_in = sum(channel_reserve_amount(input))
    reserve_out = sum(channel_reserve_amount(output))
    authorised_reserve_refund =
        sum(outputs with role == RESERVE_REFUND
            and lock/type/capacity match
            descriptor.reserve_refund_policy)
    require reserve_out + authorised_reserve_refund == reserve_in

    carrier_in = sum_capacity(state_carrier_inputs)
    carrier_out = sum_capacity(state_carrier_outputs)
    require carrier_out == carrier_in
    require carrier refund outputs are classified STATE_CARRIER
    require no carrier delta is charged to channel reserve
        or business CKB

    business_ckb_in = sum(business_ckb_amount(input))
    business_ckb_out = sum(business_ckb_amount(output))
    require business_ckb_out == business_ckb_in

    for each asset_type in asset_registry.xudt_types:
        type_script = asset_registry.type_script(asset_type)
        require asset_type == hash(canonical(type_script))
        require sum_xudt(input, type_script)
            == sum_xudt(output, type_script)
        require every xUDT output for asset_type
            carries type_script

    require sponsor inputs are not classified as channel reserve
    sponsor_in = sum_capacity(sponsor_inputs)
    sponsor_out = sum_capacity(sponsor_outputs)
    require sponsor_in - sponsor_out == tx_fee(tx)
    require sponsor_outputs carry no channel business assets
    require sponsor_outputs carry no registered xUDT type
    require sponsor_outputs do not use channel vault locks
    require sponsor_outputs have no descriptor output role

```

An output explicitly classified by the settlement descriptor is a channel or settlement output, not sponsor change. Sponsor change is sponsor-owned capacity only: it carries no channel vault lock, no

Partition	Source	Role	Fee payer
Sponsor capacity	standard wallet or budget Cells	transaction fees and change	yes
State carrier capacity	State Cell and committed carrier refund	storage capacity for the moving state track	no
Channel reserve	channel-owned CKB capacity	Cell occupancy and reserve refund	no
Business assets	CKB or xUDT balances	participant settlement value	no

Table 2: Value partitions in Morph Channel.

registered xUDT type, no channel business asset, and no descriptor output role.

The algorithm separates five questions that are otherwise readily conflated: whether the State Cell carrier has been preserved or refunded, whether channel reserve is conserved or refunded, whether CKB business value is conserved, whether each xUDT type is conserved under its own type script, and whether unrelated Cells are irrelevant. Unrelated Cells may appear only when they are irrelevant to channel script reads and irrelevant to conservation. They must not be loaded by State Cell type scripts, vault locks, descriptor parsers, sponsor policies, or xUDT composition checks as hidden witnesses for channel authority.

Proposition 1 (Zero Channel-Paid Publication Fees). *If partition conservation holds for a post-funding transaction, then publication fees cannot reduce channel-owned value.*

Proof. CKB transaction fees are represented by the difference between input capacity and output capacity. Since State Cell carrier capacity, channel reserve, business CKB, and each registered xUDT type are conserved under their own lanes, no fee deficit can be charged to channel-owned value. The only permitted fee deficit is $S_{\text{in}} - S_{\text{out}}$, the sponsor partition. $\square$

10 Settlement Descriptor

The settlement descriptor is a protocol object, not a general-purpose application language. It commits to the admissible output derivation rule for settlement and local materialisation. A minimal descriptor specifies:

- (1) participant destination policies;
- (2) per-asset allocation rules;
- (3) occupied-capacity requirements for outputs;
- (4) reserve refund rules;
- (5) required xUDT type scripts;
- (6) sponsor change classification;
- (7) descriptor version and upgrade boundary.

Definition 14 (Descriptor Grammar). *A descriptor instance is a canonical byte string under a versioned bounded grammar:*

```
SettlementDescriptor {
  descriptor_version
  operation_scope
  output_count
  output[0..MAX_DESCRIPTOR_OUTPUTS]
  reserve_refund_policy
  carrier_refund_policy
  sponsor_change_policy
}

DescriptorOutput {
  role
  allowed_operations
  lock_hash
  capacity
  asset_kind
  type_script_hash_or_none
  amount
  data_commitment
}
```

The grammar admits only fixed families selected by `descriptor_version`. It contains no loops, no dynamic script dispatch, and no unbounded witness program. The current bilateral profile uses fixed two-output CKB and CKB+xUDT families; broader descriptor families require a new version and fresh acceptance tests.

If `asset_kind == XUDT`, `amount` is the canonical decoded amount from output data under the registered xUDT data layout, and `data_commitment` commits either to the exact output data bytes or to the canonical amount encoding selected by `descriptor_version`. The descriptor must state which rule applies.

Invariant 2 (Descriptor Boundedness). *The descriptor must authorise settlement, splice, factory materialisation, and reserve refund. It must not introduce unbounded application execution into channel witnesses.*

Invariant 3 (Exact Materialisation). *A signed descriptor or vault delta is not only an accounting statement. For every value-bearing Cell it authorises, the realised Cell must match the committed lock identity, capacity, type-script identity, and data-encoded amount. A proof that only one asset lane changed is insufficient if the resulting Cell shape can drift in an untouched lane.*

11 Bilateral Witness Mode

For a two-party channel, the first witness format should remain plaintext. Bilateral state is typically small: balances, conditional payments, timeout information, and shutdown policies. Plaintext witnesses keep force-close transactions auditable and make early prototypes simpler to test. Privacy may later be improved by replacing the payload with committed state material once size and CKB-VM costs are measured.

Plaintext is not authority by itself. The authoritative object remains the signed state header and its payload commitment. A validator checks that the plaintext payload deterministically induces the committed payload hash and satisfies the descriptor and conservation rules.

The plaintext payload is a resolution object for `payload_commitment`, not an alternative source of channel authority.

12 Factory Proof Mode

Factories require a different authority model. A factory may contain many participants, balances, sub-channels, reserves, and local exit paths. Full plaintext disclosure on every local exit exposes unrelated participant data and may cause witness size and verification cost to grow with factory size. Factory authority should therefore be commitment-first.

Definition 15 (Factory State). *A factory state is a state header plus a set of roots:*

```
FactoryState {  
  state_header  
  balances_root  
  subchannels_root  
  membership_root  
  reserve_root  
}
```

Definition 16 (Factory Transition Envelope). *A factory transition is admissible only after a bounded outer claim identifies its transition family and commits to exactly one evidence body:*

```
FactoryEnvelope {  
  magic  
  version  
  kind  
  flags  
  body_len  
  body_commitment  
}
```

The envelope is not the local proof. It is the admission-control object that specifies which proof grammar is being invoked and which evidence body is committed. The body commitment binds the full envelope interpretation context:

$$\begin{aligned} \text{body_commitment} = & H(\text{"CKB_MORPH_FACTORY_BODY_V1"} \\ & \parallel \text{magic} \parallel \text{version} \parallel \text{kind} \parallel \text{flags} \\ & \parallel \text{body_len} \parallel \text{body_bytes}). \end{aligned}$$

The script checks `body_len` before parsing the body. A body that merely parses as some factory payload is not authority unless the outer claim admits that transition family and binds that body.

Definition 17 (Factory Body Bound). *body_len is the on-chain byte-length bound. A deployment profile must also specify the full body-bound profile used for acceptance testing:*

```
FactoryBodyBound {  
  max_body_bytes  
  max_touched_leaves  
  max_proof_nodes  
  max_cycles  
  proof_family  
}
```

The script must check magic, version, kind, flags, max_body_bytes, body_len, and the body commitment. The deployment may treat max_touched_leaves, max_proof_nodes, and max_cycles as acceptance criteria only if those bounds are not relied upon for authorisation safety. The proof family must be script-visible or committed by the admitted envelope kind.

Definition 18 (Factory Transition Result). *A factory transition resolves to an explicit parent-state rule:*

```

FactoryTransitionResult {
  parent_state_rule:
    { unchanged_reference, updated_successor, retired }
  new_roots
  materialised_child_outputs
  remaining_factory_vault_outputs
}

```

For reduced local materialisation, the conservative profile uses `updated_successor`: the parent State Cell is consumed and recreated with roots reflecting the removed or reduced local rights. For value-bearing materialisation, `unchanged_reference` is not a conservative authority rule; it is reserved for read-only proof checks or for a deployment profile with an explicit non-input vault-authority proof.

Definition 19 (Factory Witness). A factory witness contains an outer transition envelope, an access manifest, a proof bundle, touched leaf payloads, and the required signatures:

```

FactoryWitness {
  envelope
  state_header
  access_manifest
  proof_bundle
  touched_leaf_payloads
  signatures
}

```

Definition 20 (Transition Footprint). The transition footprint of a factory action is the set of leaves read, written, inserted, removed, or proven absent by that action.

Definition 21 (Factory Right). A factory right is any participant-relevant claim that may be changed by a local factory action:

FactoryRight = {balance, reserve_claim, membership, exit_path, sponsor_budget_claim}.

Definition 22 (Rights Dependency Schema). A reduced factory transition is checked against a versioned rights-dependency schema:

```

RightsDependencySchema {
  schema_version
  roots
  dependency_edges: FactoryRightId -> DependencySet
}

DependencySet {
  direct_right
  shared_reserve
  membership
  exit_path
  sponsor_budget
  factory_vault_descriptor
}

```

For every untouched participant right, the proof must show that each dependency named by the schema is unchanged or irrelevant to the admitted transition family. If the proof cannot establish that fact, the transition is global and requires full-participant authorisation.

Definition 23 (Non-Interference). A factory action is non-interfering with respect to untouched participants if the proof bundle establishes that all their factory rights are unchanged, including rights that depend on shared reserve, membership, exit path, or public sponsor-budget state.

A Merkle proof is insufficient unless the transition family also accounts for rights depending on reserve, membership, exit path, and sponsor-budget state. A touched balance leaf may also affect reserve liquidity, local exit eligibility, or sponsor-budget allocation. A proof of non-interference must either cover those dependencies or the action must fall back to full-participant authorisation. An envelope-first boundary prevents a reduced proof from being checked under a weaker authority rule.

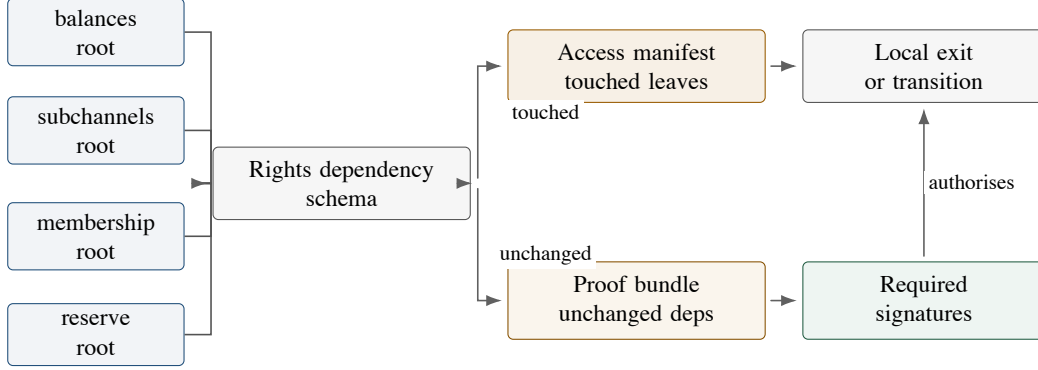


Figure 7: Factory proof mode. Roots feed the rights-dependency schema. The upper path exposes touched leaves for the local action; the lower path proves unchanged dependencies and admits the reduced signing set.

Proposition 2 (Conservative Factory Authorisation). *If a factory action cannot prove non-interference, then a conservative protocol profile should require signatures from all factory participants. If non-interference is proven, the signing set may be reduced to the affected participants only when the touched rights also satisfy participant authorisation, local validity, and value conservation.*

Proof. Without non-interference, untouched leaves may still depend on shared membership, reserve, or exit-right state. A local signature set would not authorise those possible effects. Full-participant signatures authorise global effects. A non-interference proof removes only the effects on untouched rights; it does not by itself authorise minting a balance, increasing a reserve claim, deleting membership, or releasing value from a vault. $\square$

Proposition 3 (Envelope-First Factory Admissibility). *If the factory transition family is not fixed and committed before the local proof body is interpreted, then reduced authorisation is unsafe.*

Proof. Different factory paths authorise different effects: a conservative update, a local exit, a single-right reduction, a sparse update, or a splice all have different admissible touched rights and value consequences. If the proof body determines its own authority class, an adversary may seek an alternative interpretation with weaker checks. A bounded outer claim fixes the transition family and commits to the body before local validity is evaluated, so the proof is checked under the intended authority rule only. $\square$

13 Factory Acceptance Requirements

A deployment is not accepted merely because one representative factory path succeeds. A candidate deployment must pass an end-to-end devnet acceptance matrix in which every value-bearing factory flow is exercised as a committed transition, and every attack-shaped factory rejection is checked against its intended error class. The matrix is stated at protocol level without prescribing a transaction builder, storage format, or proof encoding.

Factory flow family	Required positive acceptance evidence
Factory lifecycle	factory creation; all-participant state advance; local child-channel materialisation; child publication; child finalisation
Reduced rights	bounded right decrease; tight near-zero decrease; sparse single-right update
CKB reduced exit	reserve-claim release into a local child channel; asymmetric participant capacity distribution
Typed reduced exit	partial xUDT release with factory-vault change; full xUDT release; one-sided xUDT settlement
Conservative factory splice	CKB splice-in and splice-out; asymmetric CKB capacity variants; xUDT splice-in and splice-out; one-sided xUDT variants
Reduced factory splice	CKB reduced splice-in and splice-out; asymmetric CKB variants; xUDT reduced splice-in and splice-out; one-sided xUDT variants
Sponsored factory publication	stateful budget publication; insufficient-budget rejection; valid later publication after sponsor failure
Recovery continuity	a valid later factory or child-channel transition remains publishable after an expected rejection

Table 3: Positive factory acceptance families. Every row is a required devnet acceptance family for a candidate deployment of the factory protocol.

Factory rejection family	Required rejection evidence
Factory lifecycle authority	stale, duplicate, or unauthorised state authority must not become value authority
Reduced locality	a locality proof must not authorise value creation or unrelated-right mutation
CKB reduced exit materialisation	released CKB and remaining reserve must match the authorised descriptor exactly
Typed reduced exit materialisation	mismatched typed settlement output or factory-vault typed change must be rejected
Conservative factory splice materialisation	vault descriptors and per-asset deltas must bind the realised Cell shape, not merely the aggregate amount
Reduced factory splice family confusion	sparse locality evidence must be checked under the admitted transition family only
Sponsor contamination	factory-local proof must not route channel xUDT or vault-locked capacity into sponsor change
Negative recovery continuity	attack-shaped typed materialisation failures must reject without poisoning later progress

Table 4: Factory rejection families. Every row is a required negative-path evidence family for a candidate deployment of the factory protocol.

The acceptance rule is strict: every positive row in Table 3 must be represented by committed on-chain evidence, and every negative row in Table 4 must be represented by an exact rejection class. The non-interference proof must be accompanied by acceptance evidence showing that conservative paths, reduced paths, CKB paths, typed-asset paths, asymmetric value distributions, and one-sided typed distributions all preserve the same authority and conservation boundaries.

Committed on-chain evidence means a confirmed devnet transaction, or a rejected devnet transaction attempt, whose transaction hash or rejection trace, script error code, witness profile, envelope kind, and relevant State Header commitment are recorded in the acceptance report.

14 Challenge-Window Semantics

The challenge window is a deployment parameter derived from CKB confirmation behaviour and watchtower liveness.

Let Δ denote the finalisation delay encoded by relative `since`. A conservative policy should satisfy:

$$\Delta \geq \Delta_{\text{detect}} + \Delta_{\text{poll}} + \Delta_{\text{build}} + \Delta_{\text{confirm}} + \Delta_{\text{margin}}.$$

The terms respectively represent detection confirmations, watchtower polling interval, transaction construction and propagation, confirmation of the newer-state transaction, and a margin for fee bumping and reorganisation risk. The current conservative profile uses a canonical relative block-number `since`. A future deployment may choose epoch- or timestamp-based maturity only if the mode, metric, reserved bits, and value are canonicalised and tested against current CKB hardfork semantics [8, 9, 10]; raw integer comparison is not a valid challenge-window check.

Parameter	Deployment evidence	Audit question
Detection depth	chosen confirmation depth, for example 1, 3, or 6 confirmations	when does a watchtower treat stale evidence as actionable?
Polling interval	watchtower service objective	is there enough time between observation and finalisation?
Build and broadcast time	wallet, RPC, and network measurements	can a replacement carrier be assembled against the live State Cell?
Confirmation target	measured CKB confirmation behaviour	can the newer state confirm before the deadline?
Fee-bump margin	sponsor budget multiple	is there budget for conservative publication plus emergency rebuild?
Reorganisation margin	conservative deployment choice	does the delay tolerate expected reorg risk?

Table 5: Deployment profile required for selecting a challenge window.

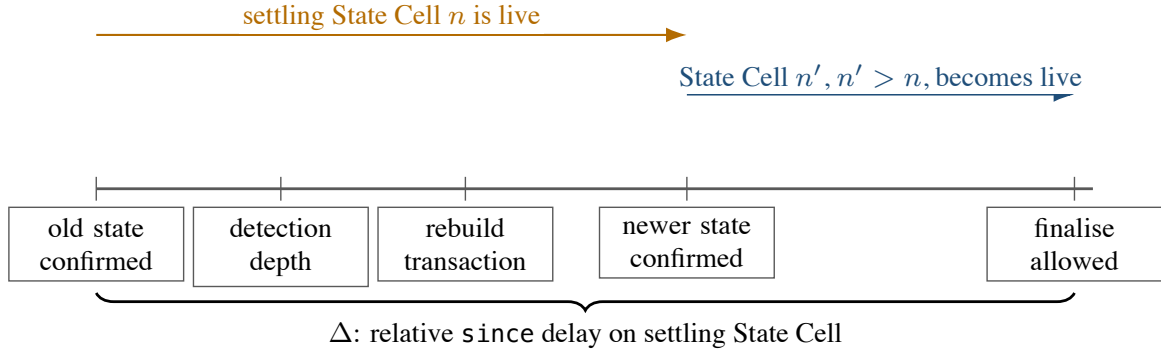


Figure 8: Challenge-window timeline. Safety depends on confirmed supersession before the relative finalisation delay matures, not on tx-pool visibility alone.

14.1 CKB `since` and Mempool Reality

In CKB, relative `since` is checked on transaction inputs. For Morph finalisation, the relevant input is the currently live settling State Cell. Therefore a finalisation transaction should set `since` on the State Cell input and the State type or vault lock should check that the value is an encoded relative-block condition matching the committed challenge policy. A naked numeric value is not equivalent to a relative delay. The finalisation deadline is computed from the confirmed block or epoch position of the live settling State Cell input according to the committed `since` metric, not from a watchtower's observation time.

The safety condition is confirmation before the deadline, not mempool presence. A challenger may observe an old state in the tx-pool, but the protocol need not respond until an old settling State Cell is actually confirmed or reaches the configured detection depth. If the old state confirms, the challenger rebuilds a newer-state transaction against the now-live settling State Cell. If a newer-state transaction remains unconfirmed, the watchtower must be able to rebuild it with different sponsor inputs or a higher fee, because the channel signature does not commit to sponsor coin selection.

Fee bumping does not rely on Bitcoin-style replace-by-fee semantics. It means reconstructing a fresh transaction body against the current live State Cell and current sponsor funds. Once a competing transaction consumes that State Cell, all stale transaction bodies become invalid and must be rebuilt.

```

watchtower_response_loop:
  observe chain tip and tx-pool
  if confirmed settling StateCell(n) reaches detection_depth:
    latest = local_state_package(channel_id)
    if latest.state_number > n:
      tx = build_publish_state_tx(
        input_state = live StateCell(n),
        state_package = latest,
        sponsor_policy = available_budget(),
        fee_rate = conservative_fee_rate())
      broadcast(tx)
      while tx not confirmed
        and blocks_until_deadline(live StateCell(n))
          > emergency_rebuild_margin:
        if fee market or sponsor set changes:
          tx = rebuild_against_live_state_cell()
          broadcast(tx)

```

The watchtower policy must reserve enough fee budget for at least one conservative publication and one emergency rebuild. If the deployment expects volatile fees, the budget should support additional rebuild attempts. This is an operational requirement.

Proposition 4 (Newer-State Supersession). *Suppose a settling State Cell at number n is live. If an honest party publishes and confirms valid evidence $E_{n'}$ with $n' > n$ before finalisation of E_n , then E_n cannot be the final settlement authority.*

Proof. The supersession transaction consumes the live settling State Cell at n and creates a new settling State Cell at n' . Once consumed, the n State Cell cannot be used as an input to finalisation. The finalisation rule applies only to the currently live settling State Cell after its own relative since delay matures. $\square$

15 Signature Domains and Authorisation Boundaries

Morph separates three authorisation domains:

- (1) state authorisation: participant signatures over the canonical State Header;
- (2) value authorisation: vault locks accepting only descriptor-authorised settlement or materialisation;
- (3) fee authorisation: sponsor signatures or bounded sponsor policies.

Lemma 1 (Domain-Separated Anti-Replay). *If protocol version, signature-scheme identity, chain identity, channel identity, funding epoch, funding anchor identity, vault-set commitment, mode, phase, participants commitment, asset registry, descriptor commitment, descriptor version, challenge policy, and state number are included in the signed State Header, then a valid state signature cannot be replayed as a valid state for another channel context, funding context, or later protocol interpretation.*

Proof. Any change to the protocol version, signature scheme, chain, channel, funding epoch, funding anchor, vault set, mode, phase, participants, asset registry, descriptor, descriptor version, challenge policy, or state number changes the canonical State Header and hence the signed message. Under signature unforgeability, the adversary cannot produce a valid participant signature for the modified context. $\square$

16 Watchtower and Recovery Objects

A watchtower stores the latest state package and publishes newer evidence when stale evidence appears on-chain; it never receives authority over channel-owned value. A state package contains more operational material than a bare root, but less disclosure than a permanent plaintext dump:

```
StatePackage {  
  header  
  payload_or_roots  
  proof_package  
  participant_signatures  
  resolved_descriptor_or_descriptor_bytes  
  resolved_asset_registry  
  resolved_challenge_policy  
  sponsor_policy_reference  
}
```

The package must resolve every commitment required by the selected State Header representation profile. A header and signatures alone are insufficient if the publication path also needs descriptor bytes, asset registry bytes, challenge policy bytes, or factory proof material. The current bilateral devnet package is narrower than this abstract object: it stores the signed header bytes, bilateral signature witness bytes, channel id, funding anchor, derived funding context id, state number, signing digest, source State outpoint, and descriptor commitment/version metadata. It validates the signatures and metadata for the plaintext bilateral profile. Broader packages that carry explicit generic asset-registry bytes, challenge-policy bytes, or commitment-only proof material remain representation-profile work.

The script-enforced sponsor boundary must be bounded by channel identity, state-number range, maximum fee, expected State Type, and change destination. Expiry windows, allowed sponsor sources, and publishing cadence are operator or watchtower policy in the conservative profile unless a deployment provides script-verifiable evidence for those fields; finite script-level deadlines without such evidence should be rejected rather than treated as consensus-enforced policy. The watchtower must not be able to redirect channel-owned value or drain arbitrary wallet funds.

After a splice, watchtower recovery must be funding-context aware. A stored package is publishable only if its signed funding context matches the currently live state track. Tooling should prefer the derived `funding_context_id` for package selection and cursor recovery, while retaining a funding-anchor fallback only for older package stores that predate the derived identifier. A package whose funding context does not match the live State Cell is merely historical evidence for an older funding context.

17 Safety Properties

Proposition 5 (Funding Context Uniqueness). *If the State Header binds the funding epoch, funding anchor identity, and vault-set commitment, and scripts verify that referenced `cell_deps` match that context, then a descriptor-shaped but non-authoritative Cell cannot serve as the channel's funding anchor or vault set.*

Proof. The script compares the referenced Cell identity and vault-set commitment with the context committed in the State Header. A different Cell, even with similar data, has a different outpoint, genesis identity, or vault-set commitment and is rejected. $\square$

Proposition 6 (Post-Splice Freshness). *If a splice advances the funding epoch and commits to a new vault set, then a state package from an earlier funding epoch cannot authorise settlement of the post-splice vaults.*

Proof. The earlier package signs a different funding epoch, funding anchor, or vault-set commitment. Since vault settlement requires the authentic current live State Cell and the descriptor bound to that funding context, the older package does not match the post-splice value object. $\square$

Proposition 7 (Vault Spend Safety). *If each vault lock accepts only settlement transactions, and materialisation transactions for deployment profiles that define the **MATERIALIZE** State Cell branch, authorised by an authentic current live State Cell and descriptor-admissible outputs, then channel-owned value cannot be spent through standard wallet paths or fake state-header bytes.*

Proof. Every spend of channel-owned value must satisfy the vault lock. By assumption, the lock rejects transactions lacking authentic current state evidence and descriptor-admissible outputs. Ordinary wallet signatures alone are insufficient, and a non-authoritative Cell that only imitates the State Header layout does not satisfy the state-evidence predicate. $\square$

Proposition 8 (Recoverable Unilateral Settlement). *If a participant or watchtower stores a valid State Package that resolves every commitment required by the selected representation profile, has access to sponsor funds within policy, and the challenge delay satisfies the response-budget inequality, then it can reconstruct a publication transaction without fresh counterparty cooperation.*

Proof. The channel signature excludes sponsor inputs and fee rate, so the publication transaction may be rebuilt using available sponsor funds. The State Package supplies the signed state evidence and required witness or proof. The response-budget inequality provides time for detection, construction, propagation, and confirmation. $\square$

18 Evaluation Agenda

Empirical closure requires the following benchmark evidence:

- E1. bilateral plaintext witness size under realistic payment states;
- E2. factory proof size under realistic touched-footprint distributions;
- E3. CKB-VM cycles for signature verification, hash verification, proof verification, and xUDT type-script composition;
- E4. challenge reliability under confirmation-depth, fee-volatility, and watchtower-polling parameters;
- E5. sponsor-policy failure cases, including insufficient budget, inadmissible finite script-level expiry, operator-level expiry, and wrong change destination;
- E6. State Cell uniqueness tests under concurrent publication and supersession attempts;
- E7. splice freshness tests showing that packages from earlier funding epochs cannot govern later vault sets;
- E8. vault-lock rejection tests for spends lacking current state evidence;
- E9. descriptor grammar tests for output-count bounds, version boundaries, carrier-refund policy, and forbidden dynamic dispatch;
- E10. State Cell carrier-capacity, reserve refund, occupied-capacity, business-CKB, and per-xUDT conservation edge cases;
- E11. factory envelope-admission tests for transition-family confusion, body-bound violations, and digest mismatch;
- E12. factory acceptance and rejection evidence for every lifecycle, reduced-rights, reduced-exit, conservative-splice, reduced-splice, asymmetric, and one-sided typed path in Tables 3 and 4;
- E13. executable negative tests corresponding to the audit matrix in Appendix A;
- E14. comparison between full plaintext factory disclosure and local proof verification.

19 Related Work and Positioning

Lightning [1] represents the penalty-based payment-channel family. Eltoo [2] provides the update-by-replacement intuition, but depends on Bitcoin sighash changes. Channel factories [3] motivate shared funding and local exit questions. State-channel frameworks such as Perun [4] show the broader adjudication pattern in which off-chain evidence is made enforceable by an on-chain dispute procedure. CKB community work on generic payment channels [5] is a nearer point of comparison, because it studies channel composability directly on the Cell model.

CKB’s Cell model [6] and transaction structure [7] provide explicit state objects and read-only dependency references. CKB’s `since` field [8, 9, 10] provides relative lock semantics needed for challenge windows. SUDT [11] and xUDT [12] motivate per-asset conservation rather than a single undifferentiated balance.

Work	Funding and state shape	Dispute rule	Fee model	Morph distinction
Lightning	funding output plus commitment transactions	stale states are penalised	fees are carried by commitment or closing transactions	separates State Cell evidence from vault value
eltoo	replacement-style update state over a funding output	newer state replaces older state	depends on transaction form and proposed sighash support	borrows the replacement intuition, not the Bitcoin mechanism
Channel factories	shared funding for many off-chain relationships	local exits depend on factory validity rules	not the central object	adds envelope-first local proof admission and non-interference tests
Perun	adjudicated state-channel framework	on-chain dispute procedure enforces off-chain evidence	framework-dependent	specialises the adjudication object to CKB Cells and vault locks
CKB generic channels	Cell-based channel composability	CKB script enforcement	CKB transaction fees	adds sponsor partitioning, splice freshness, and per-asset conservation

Table 6: Positioning against related channel constructions.

Morph occupies a narrower point in this design space: CKB can host a channel object whose funding identity, state evidence, fee publication, and factory-local proof objects are separated at the script level without changing base-layer consensus.

20 Limitations and Open Questions

The construction remains incomplete in several respects:

- O1. Factory coordination remains an off-chain protocol problem.
- O2. Proof mode may not be cheaper than plaintext until measured.
- O3. Mainnet challenge delays require empirical confirmation and fee data.
- O4. Descriptor versioning must balance upgrade flexibility against recoverability.
- O5. Different xUDT variants may impose different constraints.
- O6. The paper now specifies protocol-level validation semantics, but not every deployment-level encoding or operational procedure.
- O7. Factory non-interference still requires mechanised coverage of the rights-dependency schema before reduced signing sets are safe in broader transition families.
- O8. Factory envelope families and proof-size bounds require continued measurement under realistic transition mixes.
- O9. Typed reduced exits and typed factory vault changes are admissible only when asset type, amount, capacity, child or factory vault Cell shape, settlement descriptor, and factory-vault change are completely bound. Broader typed-asset compatibility remains future work.
- O10. Cooperative close, non-publication sponsor budgets, and any stricter script-checked FUND configuration signature profile require deployment-specific branch encodings before the construction is implementation-complete.
- O11. Commitment-only profiles require deployment-specific resolution rules for asset registries, descriptors, payloads, and challenge policies.

21 Conclusion

Morph Channel sets out how to separate funding identity, state evidence, sponsor fee responsibility, and factory-local proof admission using current CKB script objects. The construction keeps channel value in vault Cells, moves dispute authority through a State Cell, checks channel and sponsor value in separate partitions, and requires factory-local proofs to be admitted by a bounded transition envelope.

The remaining burden is empirical and operational. A deployable protocol requires benchmark evidence for witness size, CKB-VM cycles, challenge-window parameters, fee-budget policy, splice recovery, and factory proof costs. Until those measurements exist, Morph remains a script-level construction for CKB channels rather than a production channel network.

A Audit Matrix

This appendix states the construction audit target in testable form. The matrix is split by authority boundary so that each row remains reader-facing rather than an internal QA spreadsheet. Each row should become at least one positive test and one negative test in any candidate deployment.

ID	Invariant and enforcement	Positive case	Negative case
S1	One live State Cell controls the channel pointer; enforced by the State Cell type and CKB single-spend	supersede $n \rightarrow n + 1$ by consuming the current State Cell	transaction creates two successor State Cells
S2	Funding anchor identity is canonical; enforced by the State Header and <code>cell_deps</code> check	referenced anchor matches committed genesis identity	descriptor-shaped fake anchor is referenced
S3	State numbers are strictly monotonic; enforced by the State Cell type script	supersede $n \rightarrow n + k$ with valid signatures	publish lower or equal state number
S4	State retirement does not orphan value; enforced by State and vault authority coupling	retirement finalises value or leaves verifiable finalisation evidence	State Cell is consumed while matching vault value remains live without evidence
S5	Splice advances funding context without changing channel identity; enforced by signed old/new funding anchors, vault-set commitments, and funding epoch generation label	post-splice state binds new anchor and vault set	pre-splice package controls post-splice vaults

Table 7: State and funding audit matrix.

ID	Invariant and enforcement	Positive case	Negative case
V1	Vault value follows current state evidence; enforced by the vault lock and settlement descriptor	finalise after valid since delay	wallet-only spend of vault value
V2	Vault authority requires an authentic State Cell; enforced by State/Vault script identity checks	State Cell under expected scripts controls finalise	ordinary Cell carries decodable State Header bytes
V3	Descriptor evolution is signed state semantics; enforced by State signature and descriptor commitment	newer signed state commits to an admissible descriptor instance	finalise supplies an unsigned replacement descriptor
D1	Descriptor grammar is bounded and versioned; enforced by descriptor parser and version gate	fixed two-output CKB or CKB+xUDT descriptor parses under its version	descriptor body invokes dynamic dispatch or exceeds output bound

Table 8: Vault and descriptor audit matrix.

ID	Invariant and enforcement	Positive case	Negative case
P1	Channel-owned capacity never pays publication fees; enforced by partition conservation	sponsor capacity pays fee and receives change	reserve reduced by transaction fee
K1	State carrier capacity is conserved independently; enforced by the State carrier lane	State Cell capacity moves to successor or carrier-refund output	State Cell capacity is silently consumed as a fee
P2	Reserve and business CKB are not confused; enforced by reserve and business-CKB ledgers	authorised reserve refund is explicit	reserve becomes hidden business balance or fee
X1	xUDT value is conserved by canonical type script; enforced by asset registry and xUDT type check	same canonical type script and amount	same symbol or metadata with different type script
G1	Sponsor change is uncontaminated; enforced by sponsor policy and partition classifier	sponsor change contains only sponsor capacity	sponsor change carries registered xUDT or vault lock
G2	Unverifiable sponsor deadlines are not script policy; enforced by the sponsor-policy boundary	unbounded script policy or verifiable deadline evidence	finite deadline is accepted without chain-verifiable evidence
U1	Unrelated Cells cannot influence channel validity; enforced by script read set and conservation classifier	unrelated wallet input pays no channel role	helper Cell is read by channel scripts without classification

Table 9: Fee, capacity, and asset audit matrix.

ID	Invariant and enforcement	Positive case	Negative case
C1	Challenge safety is confirmation-based; enforced by deployment profile and since policy	newer state confirms before deadline	stale state finalises while newer transaction is only in mempool
C2	Challenge maturity is canonical relative block since; enforced by State/Vault since parser	encoded relative block delay matures	raw absolute integer is accepted as a delay

Table 10: Challenge-window audit matrix.

ID	Invariant and enforcement	Positive case	Negative case
F1	Factory locality preserves untouched rights; enforced by proof bundle and rights-dependency graph	touched leaves prove affected rights only	shared reserve or exit right changes without authorisation
F2	Factory locality is not mint authority; enforced by local validity and conservation predicates	value right decreases or vault-delta-bound increases	Merkle-only proof increases ReserveClaim or Balance
F3	Factory vault materialisation matches signed descriptors; enforced by descriptor and delta materialisation checks	FactoryVault capacity, type, and amount match the signed descriptor	xUDT token delta is correct but recreated FactoryVault capacity drifts
F4	Factory transition family is fixed before proof interpretation; enforced by bounded outer claim plus body commitment	admitted local proof is checked under its declared family	same proof body is reinterpreted as a weaker path

Table 11: Factory audit matrix.

References

- [1] Joseph Poon and Thaddeus Dryja. The Bitcoin Lightning Network: Scalable Off-Chain Instant Payments. <https://lightning.network/lightning-network-paper.pdf>.
- [2] Christian Decker, Rusty Russell, and Olaoluwa Osuntokun. eltoo: A Simple Layer2 Protocol for Bitcoin. <https://blockstream.com/eltoo.pdf>.
- [3] Conrad Burchert, Christian Decker, and Roger Wattenhofer. Scalable Funding of Bitcoin Micropayment Channel Networks. https://tik-old.ee.ethz.ch/file/49218d6b9325ddb4f18aef8830ec567b/1/scalable_funding.pdf.
- [4] Stefan Dziembowski, Lisa Ekey, Sebastian Faust, and Daniel Malinowski. Perun: Virtual Payment Hubs over Cryptocurrencies. Cryptology ePrint Archive, Report 2017/635. <https://eprint.iacr.org/2017/635>.
- [5] Nervos Talk. A Generic Payment Channel Construction and Its Composability. <https://talk.nervos.org/t/a-generic-payment-channel-construction-and-its-composability/4697>.
- [6] Nervos RFC 0002. CKB Cell Model. <https://nervosnetwork.github.io/rfcs/rfcs/0002-ckb/0002-ckb.html>.
- [7] Nervos RFC 0022. CKB Transaction Structure. <https://nervosnetwork.github.io/rfcs/rfcs/0022-transaction-structure/0022-transaction-structure.html>.
- [8] Nervos RFC 0017. Transaction valid since. <https://nervosnetwork.github.io/rfcs/rfcs/0017-tx-valid-since/0017-tx-valid-since.html>.
- [9] Nervos RFC 0028. Change since relative timestamp. <https://github.com/nervosnetwork/rfcs/blob/master/rfcs/0028-change-since-relative-timestamp/0028-change-since-relative-timestamp.md>.
- [10] Nervos RFC 0030. Ensure index is less than length in since. <https://github.com/nervosnetwork/rfcs/blob/master/rfcs/0030-ensure-index-less-than-length-in-since/0030-ensure-index-less-than-length-in-since.md>.
- [11] Nervos RFC 0025. Simple UDT. <https://nervosnetwork.github.io/rfcs/rfcs/0025-simple-udt/0025-simple-udt.html>.
- [12] Nervos Talk. RFC: Extensible UDT. <https://talk.nervos.org/t/rfc-extensible-udt/5337>.