


WEEK - 6 :- React

TASK -1

App.js

```
function App() {  
  return (  
    <div>  
      <h1>Welcome to the first session of React</h1>  
    </div>  
  );  
}
```

export default App;

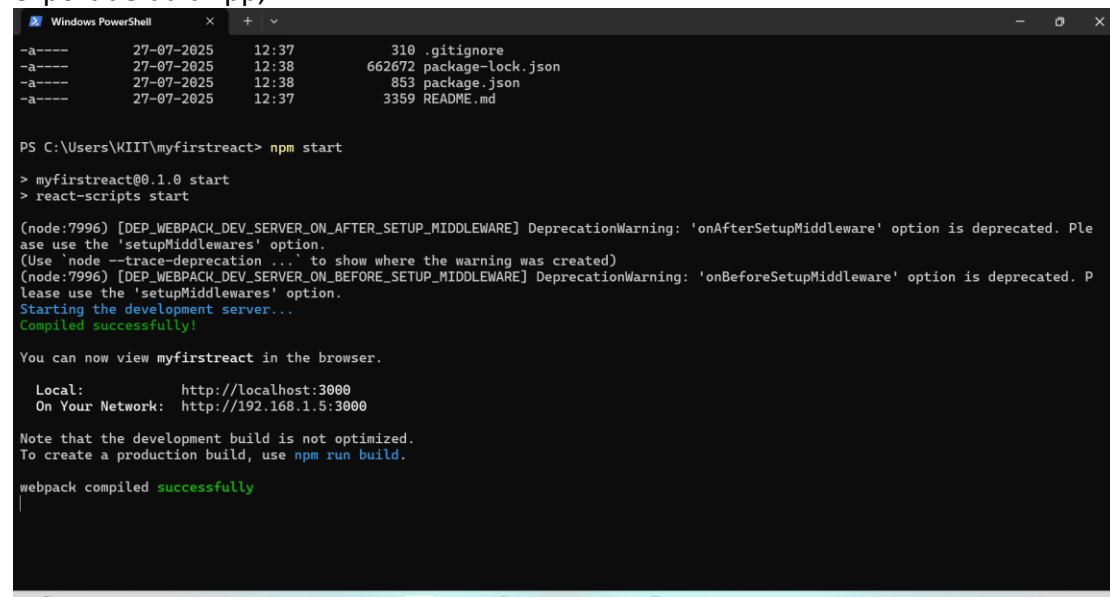

```
Windows PowerShell  
-a----- 27-07-2025 12:37 310 .gitignore  
-a----- 27-07-2025 12:38 662672 package-lock.json  
-a----- 27-07-2025 12:38 853 package.json  
-a----- 27-07-2025 12:37 3359 README.md  
  
PS C:\Users\MIIT\myfirstreact> npm start  
  
> myfirstreact@0.1.0 start  
> react-scripts start  
  
(node:7996) [DEP_WEBPACK_DEV_SERVER_ON_AFTER_SETUP_MIDDLEWARE] DeprecationWarning: 'onAfterSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.  
(Use 'node --trace-deprecation ...' to show where the warning was created)  
(node:7996) [DEP_WEBPACK_DEV_SERVER_ON_BEFORE_SETUP_MIDDLEWARE] DeprecationWarning: 'onBeforeSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.  
Starting the development server...  
Compiled successfully!  
  
You can now view myfirstreact in the browser.  
  
Local: http://localhost:3000  
On Your Network: http://192.168.1.5:3000  
  
Note that the development build is not optimized.  
To create a production build, use npm run build.  
  
webpack compiled successfully
```



Welcome to the first session of React

TASK-2

1. src/App.js

```
jsx
CopyEdit
import React from 'react'; import Home from './Components/Home'; import About from './Components/About'; import Contact from './Components/Contact';
function App() {
  return (
    <div>
      <Home />
      <About />
      <Contact />
    </div>
  );
}
export default App;
```

□ 2. src/Components/Home.js

```
jsx
CopyEdit
import React from 'react';
function Home() {
  return (
    <div>
      <h2>Welcome to the Home page of Student Management Portal</h2>
    </div>
  );
}
export default Home;
```

□ 3. src/Components/About.js

```
jsx
CopyEdit
import React from 'react';
function About() {
  return (
    <div>
      <h2>Welcome to the About page of Student Management Portal</h2>
    </div>
  );
}
export default About;
```

□ 4. src/Components/Contact.js

```
jsx
CopyEdit
import React from 'react';
function Contact() {
  return (
    <div>
      <h2>Welcome to the Contact page of Student Management Portal</h2>
    </div>
  );
}
export default Contact;
```

```
Windows PowerShell x Windows PowerShell + v
269 packages are looking for funding
  run 'npm fund' for details
9 vulnerabilities (3 moderate, 6 high)
To address all issues (including breaking changes), run:
  npm audit fix --force
Run 'npm audit' for details.
Created git commit.
Success! Created studentapp at C:\Users\KIIT\studentapp
Inside that directory, you can run several commands:

  npm start
    Starts the development server.

  npm run build
    Bundles the app into static files for production.

  npm test
    Starts the test runner.

  npm run eject
    Removes this tool and copies build dependencies, configuration files
    and scripts into the app directory. If you do this, you can't go back!

We suggest that you begin by typing:

  cd studentapp
  npm start

Happy hacking!
PS C:\Users\KIIT> |
```

```
Windows PowerShell x Windows PowerShell x npm install react react-dom re x + v
Compiled successfully!

You can now view studentapp in the browser.

  Local:            http://localhost:3001
  On Your Network:  http://192.168.1.5:3001

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
Compiling...
Compiled successfully!

You can now view studentapp in the browser.

  Local:            http://localhost:3001
  On Your Network:  http://192.168.1.5:3001

Note that the development build is not optimized.
To create a production build, use npm run build.


webpack compiled successfully
Compiling...
Compiled successfully!

You can now view studentapp in the browser.

  Local:            http://localhost:3001
  On Your Network:  http://192.168.1.5:3001

Note that the development build is not optimized.
To create a production build, use npm run build.


webpack compiled successfully
```



Welcome to the Home page of Student Management Portal

Welcome to the About page of Student Management Portal

Welcome to the Contact page of Student Management Portal

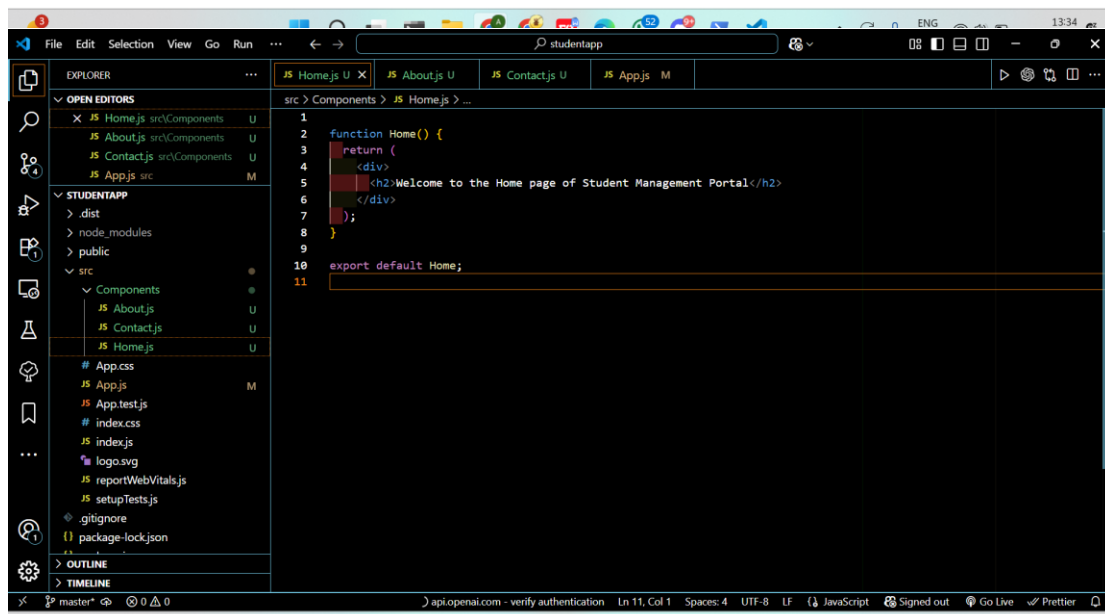

TASK-3

Folder Structure

```
css
CopyEdit
scorecalculatorapp/
├── src/
│   ├── App.js
│   ├── index.js
│   ├── Components/
│   │   └── CalculateScore.js
│   ├── Stylesheets/
│   │   └── mystyle.css
```

1. src/Components/CalculateScore.js

```
jsx
CopyEdit
import React, { useState } from 'react'; import '../Stylesheets/mystyle.css';
function CalculateScore() {
  const [name, setName] = useState("");
  const [school, setSchool] = useState("");
  const [total, setTotal] = useState("");
  const [goal, setGoal] = useState("");
  const [percentage, setPercentage] = useState(null);

  const calculate = () => {
    if (total && goal && parseFloat(goal) !== 0) {
      const percent = ((parseFloat(total) / parseFloat(goal)) * 100).toFixed(2);
      setPercentage(percent);
    } else {
      setPercentage("Invalid input");
    }
  };

  return (
    <div className="score-box">
      <h2>Student Score Calculator</h2>

      <input
        type="text"
        placeholder="Name"
        value={name}
        onChange={(e) => setName(e.target.value)}
      />
      <input
        type="text"
        placeholder="School"
        value={school}
        onChange={(e) => setSchool(e.target.value)}
      />
      <input
        type="number"
        placeholder="Total Marks"
        value={total}
        onChange={(e) => setTotal(e.target.value)}
      />
      <input
        type="number"
        placeholder="Goal Marks"
        value={goal}
        onChange={(e) => setGoal(e.target.value)}
      />
    </div>
  );
}
```

```
<buttononClick={calculate}>Calculate Percentage</button>
```

```
    {percentage && (  
<divclassName="result">  
  <p><strong>Name:</strong> {name}</p>  
  <p><strong>School:</strong> {school}</p>  
  <p><strong>Percentage:</strong> {percentage}%</p>  
</div>  
    )}  
</div>  
  );  
}  
exportdefaultCalculateScore;
```

2. src/Stylesheets/mystyle.css


```
css  
CopyEdit  
.score-box {  
width: 400px;  
margin: 40px auto;  
padding: 20px;  
border: 2px solid #ddd;  
border-radius: 10px;  
background-color: #f0f8ff;  
text-align: center;  
font-family: Arial, sans-serif;  
}  
.score-boxh2 {  
margin-bottom: 20px;  
color: #333;  
}  
.score-boxinput {  
display: block;  
width: 90%;  
padding: 8px;  
margin: 10px auto;  
border-radius: 6px;  
border: 1px solid #ccc;  
}  
.score-boxbutton {  
padding: 10px20px;  
border: none;  
border-radius: 6px;  
background-color: #4caf50;  
color: white;  
font-weight: bold;  
cursor: pointer;  
margin-top: 10px;
```




```
}  
.result {  
margin-top: 20px;  
background-color: #e8ffe8;  
padding: 10px;  
border-radius: 6px;  
}
```

3. src/App.js

```
jsx  
CopyEdit  
import React from 'react'; import CalculateScore from './Components/CalculateScore';  
function App() {  
  return (  
    <div>  
      <CalculateScore />  
    </div>  
  );  
}  
export default App;
```

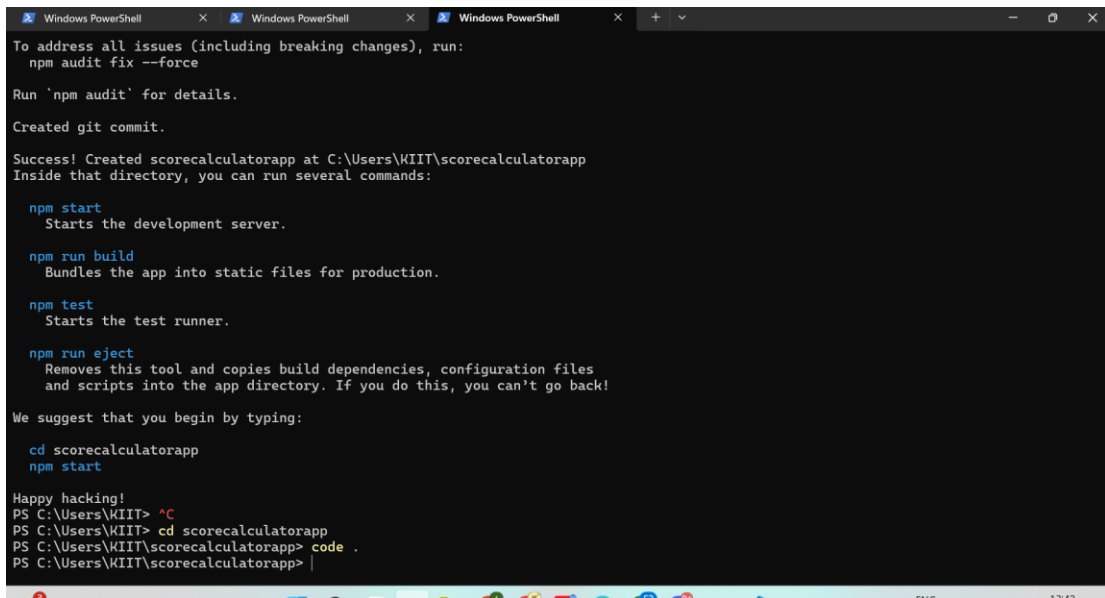

```
Windows PowerShell x Windows PowerShell x Windows PowerShell x + v  
To address all issues (including breaking changes), run:  
npm audit fix --force  
  
Run 'npm audit' for details.  
  
Created git commit.  
  
Success! Created scorecalculatorapp at C:\Users\WIIT\scorecalculatorapp  
Inside that directory, you can run several commands:  
  
npm start  
  Starts the development server.  
  
npm run build  
  Bundles the app into static files for production.  
  
npm test  
  Starts the test runner.  
  
npm run eject  
  Removes this tool and copies build dependencies, configuration files  
  and scripts into the app directory. If you do this, you can't go back!  
  
We suggest that you begin by typing:  
  
cd scorecalculatorapp  
npm start  
  
Happy hacking!  
PS C:\Users\WIIT> ^C  
PS C:\Users\WIIT> cd scorecalculatorapp  
PS C:\Users\WIIT\scorecalculatorapp> code .  
PS C:\Users\WIIT\scorecalculatorapp> |
```

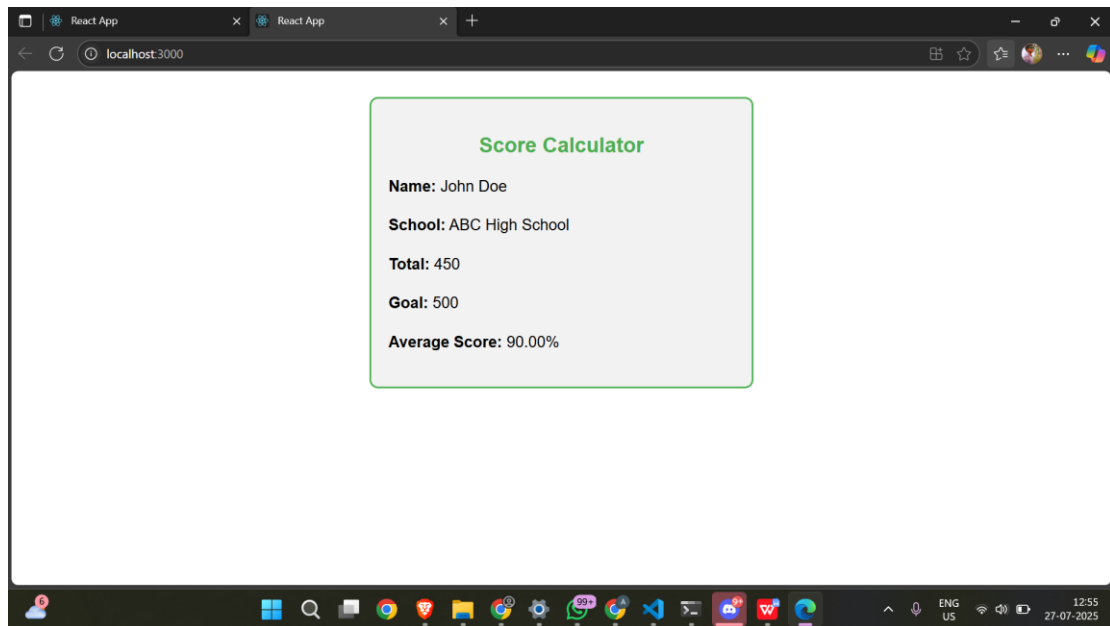

TASK 4

1. Folder Structure (inside src/)

```
css
CopyEdit
src/
├── App.js
├── Posts.js
└── Post.js
```

2. src/Post.js – (individual blog post)

```
jsx
CopyEdit
import React from 'react';
function Post({ title, body }) {
  return (
    <div style={{ border: '1px solid #ccc', margin: '10px', padding: '15px', borderRadius:
    '10px' }}>
      <h3>{title}</h3>
      <p>{body}</p>
    </div>
  );
}
export default Post;
```

3. src/Posts.js – (class component that fetches + renders)

```
jsx
CopyEdit
import React, { Component } from 'react'; import Post from './Post';
class PostsextendsComponent {
  constructor(props) {
    super(props);
    this.state = {
      posts: [],
      hasError: false
    };
  }

  componentDidMount() {
    this.loadPosts();
  }

  loadPosts() {
    fetch('https://jsonplaceholder.typicode.com/posts')
      .then((response) => response.json())
      .then((data) => {
        this.setState({ posts: data.slice(0, 5) }); // Limiting to 5 posts for simplicity
      })
      .catch((error) => {
        console.error('Error fetching posts:', error);
        this.setState({ hasError: true });
      });
  }

  componentDidCatch(error, info) {
    console.error('Component Error:', error, info);
    alert('Something went wrong while rendering posts.');
```

this.setState({ hasError: true });

```
  }

  render() {
    if (this.state.hasError) {
      return <h2 style={{ color: 'red' }}>Oops! Something went wrong while loading
posts.</h2>;
    }

    return (
      <div>
        <h2>Latest Blog Posts</h2>
        {this.state.posts.map((post) => (
          <Post key={post.id} title={post.title} body={post.body} />
        ))}
      </div>
    );
  }
}
```

```

</div>
  );
}
}
export default Posts;


```

4. src/App.js

```

jsx
CopyEdit
import React from 'react'; import Posts from './Posts';
function App() {
  return (
    <div style={{padding: '20px', fontFamily: 'Arial'}}>
      <h1>BlogApp – Powered by React Class Components</h1>
      <Posts />
    </div>
  );
}
export default App;

```

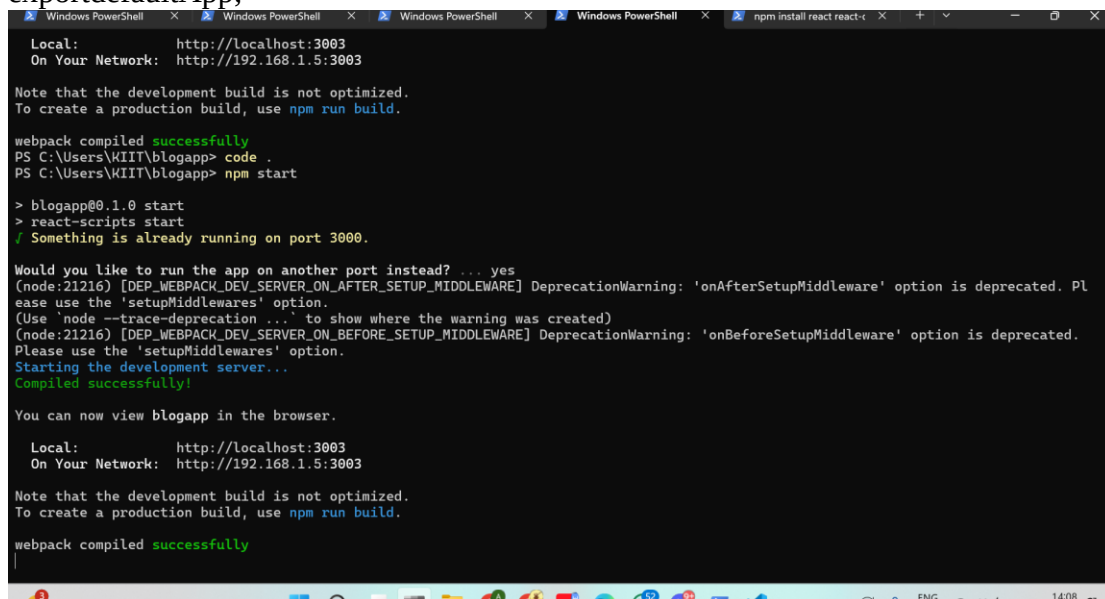

```

Windows PowerShell x Windows PowerShell x Windows PowerShell x Windows PowerShell x npm install react react-
Local: http://localhost:3003
On Your Network: http://192.168.1.5:3003

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully
PS C:\Users\KIIT\blogapp> code .
PS C:\Users\KIIT\blogapp> npm start

> blogapp@0.1.0 start
> react-scripts start
/ Something is already running on port 3000.

Would you like to run the app on another port instead? ... yes
(node:21216) [DEP_WEBPACK_DEV_SERVER_ON_AFTER_SETUP_MIDDLEWARE] DeprecationWarning: 'onAfterSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
(Use 'node --trace-deprecation ...' to show where the warning was created)
(node:21216) [DEP_WEBPACK_DEV_SERVER_ON_BEFORE_SETUP_MIDDLEWARE] DeprecationWarning: 'onBeforeSetupMiddleware' option is deprecated. Please use the 'setupMiddlewares' option.
Starting the development server...
Compiled successfully!


You can now view blogapp in the browser.

Local: http://localhost:3003
On Your Network: http://192.168.1.5:3003

Note that the development build is not optimized.
To create a production build, use npm run build.

webpack compiled successfully

```

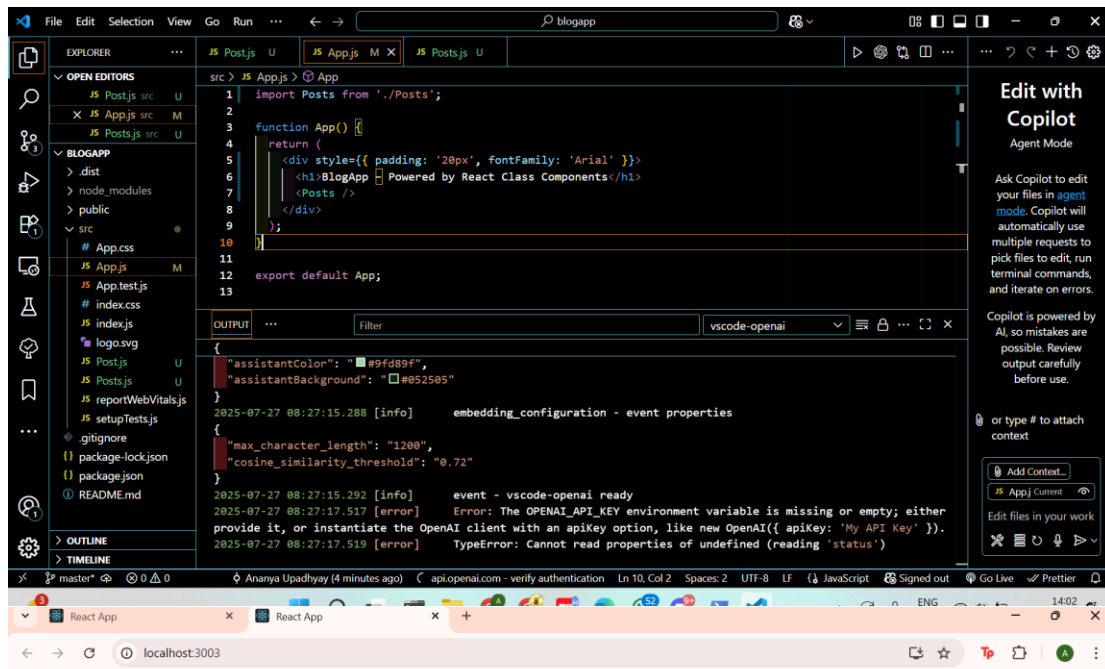

BlogApp – Powered by React Class Components

Latest Blog Posts

sunt aut facere repellat provident occaecati excepturi optio reprehenderit

quia et suscipit suscipit recusandae consequuntur expedita et cum reprehenderit molestiae ut ut quas totam nostrum rerum est autem sunt rem eveniet architecto

qui est esse

est rerum tempore vitae sequi sint nihil reprehenderit dolor beatae ea dolores neque fugiat blanditiis voluptate porro vel nihil molestiae ut reiciendis qui aperiam non debitis possimus qui neque nisi nulla

ea molestias quasi exercitationem repellat qui ipsa sit aut

et iusto sed quo iure voluptatem occaecati omnis eligendi aut ad voluptatem doloribus vel accusantium quis pariatur molestiae porro eius odio et labore et velit aut

TASK-5

Folder Structure:

```
cpp
CopyEdit
src/
├── App.js
├── Components/
│   └── CohortDetails.js
├── Styles/
│   └── CohortDetails.module.css
```

1. src/Components/CohortDetails.js

```

jsx
CopyEdit
import React from 'react'; import styles from '../Styles/CohortDetails.module.css';
function CohortDetails({ cohort }) {
  const { name, status, startDate, endDate } = cohort;

  const titleStyle = {
    color: status.toLowerCase() === 'ongoing' ? 'green' : 'blue',
  };

  return (
    <div className={styles.box}>
      <h3 style={titleStyle}>{name}</h3>
      <dl>
        <dt>Status:</dt>
        <dd>{status}</dd>
        <dt>Start Date:</dt>
        <dd>{startDate}</dd>
        <dt>End Date:</dt>
        <dd>{endDate}</dd>
      </dl>
    </div>
  );
}
export default CohortDetails;

```

2. src/Styles/CohortDetails.module.css

```

css
CopyEdit
.box {
  width: 300px;
  display: inline-block;
  margin: 10px;
  padding: 10px 20px;
  border: 1px solid black;
  border-radius: 10px;
  background-color: #f9f9f9;
  font-family: Arial, sans-serif;
}
dt {
  font-weight: 500;
}

```

3. src/App.js


```

jsx
CopyEdit

```

```
import React from 'react'; import CohortDetails from './Components/CohortDetails';
function App() {
  const cohorts = [
    {
      name: 'React Ninja Cohort',
      status: 'ongoing',
      startDate: '2025-06-01',
      endDate: '2025-09-30',
    },
    {
      name: 'Fullstack Jedi Cohort',
      status: 'completed',
      startDate: '2025-01-01',
      endDate: '2025-04-30',
    },
    {
      name: 'Cloud Witches Cohort',
      status: 'ongoing',
      startDate: '2025-07-01',
      endDate: '2025-10-31',
    },
  ];

  return (
    <div style={{ padding: '20px' }}>
      <h1>Cohort Dashboard</h1>
      {cohorts.map((cohort, index) => (
        <CohortDetails key={index} cohort={cohort} />
      ))}
    </div>
  );
}
export default App;
```

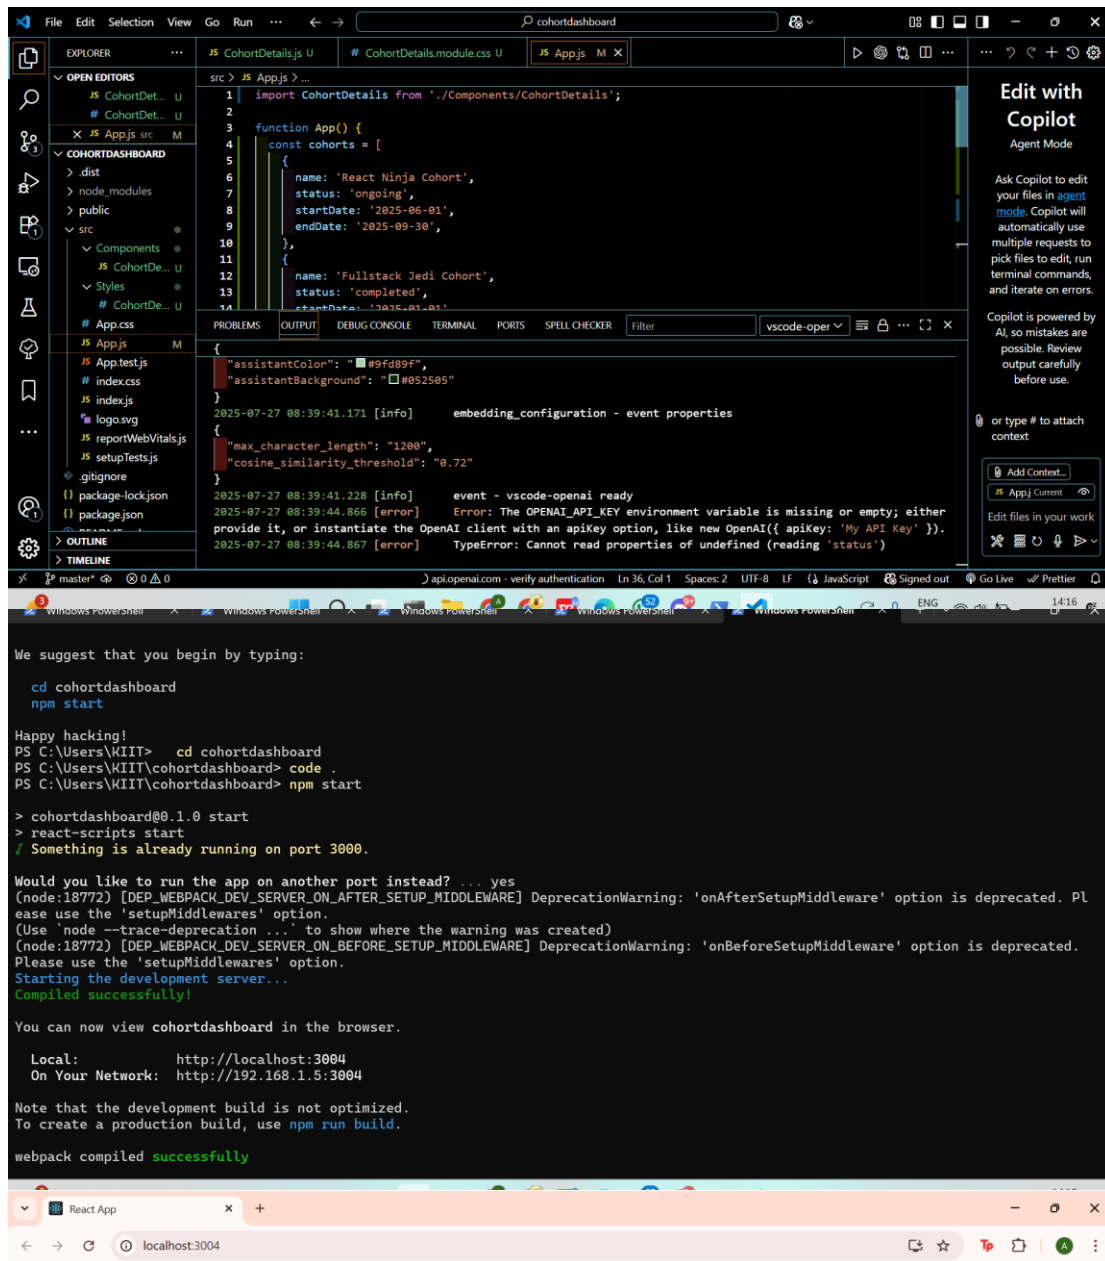

Cohort Dashboard

React Ninja Cohort

Status: ongoing
Start Date: 2025-06-01
End Date: 2025-09-30

Fullstack Jedi Cohort

Status: completed
Start Date: 2025-01-01
End Date: 2025-04-30

Cloud Witches Cohort

Status: ongoing
Start Date: 2025-07-01
End Date: 2025-10-31