

WEEK 7 - REACT (CONT.)

TASK - 9

src/Components/ListOfPlayers.js

```
import React from 'react';
function ListOfPlayers({ players }) {
  return (
    <div>
      <h2>All Cricket Players</h2>
      <ul>
        {players.map((player, index) => (
          <li key={index}>
            {player.name} - Score: {player.score}
          </li>
        ))}
      </ul>
    </div>
  );
}
export default ListOfPlayers;
```

src/Components/IndianPlayers.js

```
import React from 'react';
function IndianPlayers({ players }) {
  const filtered = players.filter(player => player.score < 70);
  return (
    <div>
      <h2>Indian Players (Score < 70)</h2>
      <ul>
        {filtered.map((player, index) => (
          <li key={index}>
            {player.name} - Score: {player.score}
          </li>
        ))}
      </ul>
    </div>
  );
}
```

```

</li>
    )))}
</ul>
</div>
    );
}
export default IndianPlayers;

```

src/App.js

```

import React from 'react'; import ListOfPlayers from './Components/ListOfPlayers';
import IndianPlayers from './Components/IndianPlayers';
function App() {
  const T20Players = [
    { name: 'Virat Kohli', score: 85 },
    { name: 'Rohit Sharma', score: 95 },
    { name: 'Hardik Pandya', score: 45 }
  ];

  const RanjiTrophyPlayers = [
    { name: 'Shubman Gill', score: 68 },
    { name: 'Ruturaj Gaikwad', score: 72 },
    { name: 'Sarfaraz Khan', score: 61 }
  ];

  // 1. Merge arrays
  const allPlayers = [...T20Players, ...RanjiTrophyPlayers];

  // 2. Add more to make it 11 players
  const extraPlayers = [
    { name: 'MS Dhoni', score: 70 },
    { name: 'R Ashwin', score: 30 },
    { name: 'Bumrah', score: 60 },
    { name: 'KL Rahul', score: 74 },
    { name: 'Ishan Kishan', score: 25 },
  ];

  const completeTeam = [...allPlayers, ...extraPlayers];

  // 3. Flag for conditional rendering
  const showAll = true;

  // 4. Destructuring example: odd vs even index players

```

```

const oddPlayers = completeTeam.filter((_, i) => i % 2 !== 0);
const evenPlayers = completeTeam.filter((_, i) => i % 2 === 0);

return (
  <div style={{padding: '20px', fontFamily: 'Arial' }}>
    <h1> Cricket Player App</h1>
    <hr />
    {showAll ? (
      <ListOfPlayers players={completeTeam} />
    ) : (
      <IndianPlayers players={completeTeam} />
    )}

    <hr />
    <h2>Players at Even Positions</h2>
    <ul>
      {evenPlayers.map((player, i) => (
        <li key={i}>{player.name}</li>
      ))}
    </ul>

    <h2>Players at Odd Positions</h2>
    <ul>
      {oddPlayers.map((player, i) => (
        <li key={i}>{player.name}</li>
      ))}
    </ul>
  </div>
);
}
export default App;

```

```
Windows PowerShell
Inside that directory, you can run several commands:

npm start
  Starts the development server.

npm run build
  Bundles the app into static files for production.



npm test
  Starts the test runner.


npm run eject
  Removes this tool and copies build dependencies, configuration files
  and scripts into the app directory. If you do this, you can't go back!

We suggest that you begin by typing:

cd cricketapp
npm start

Happy hacking!
npm notice
npm notice New major version of npm available! 10.9.2 -> 11.5.2
npm notice Changelog: https://github.com/npm/cli/releases/tag/v11.5.2
npm notice To update run: npm install -g npm@11.5.2
npm notice
PS C:\Users\KIIT> cd cricketapp
PS C:\Users\KIIT\cricketapp> code .
PS C:\Users\KIIT\cricketapp> |
```

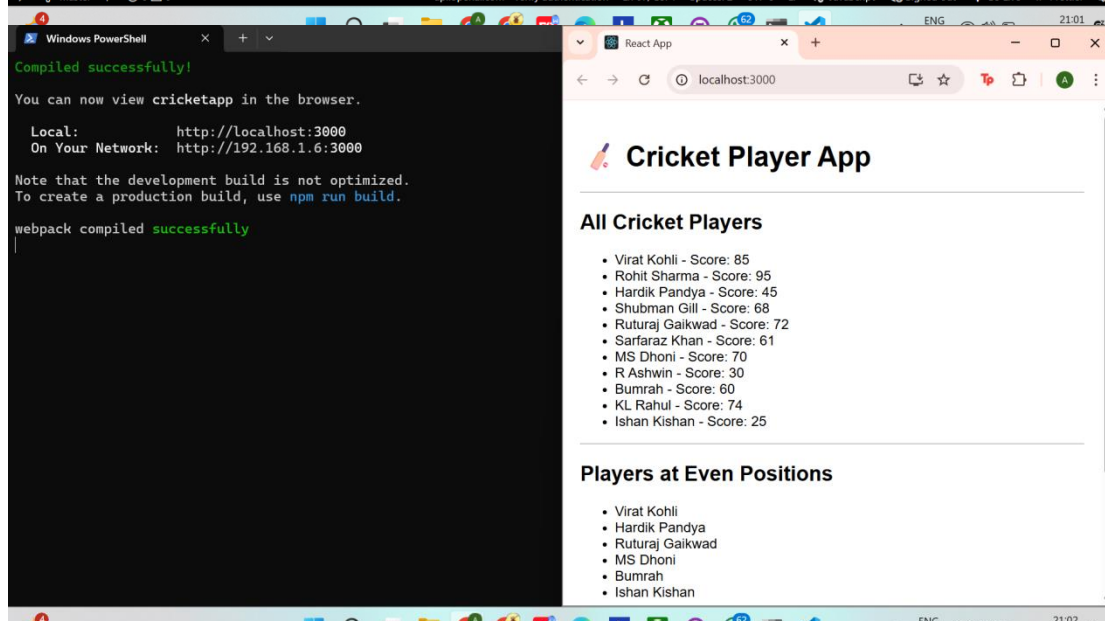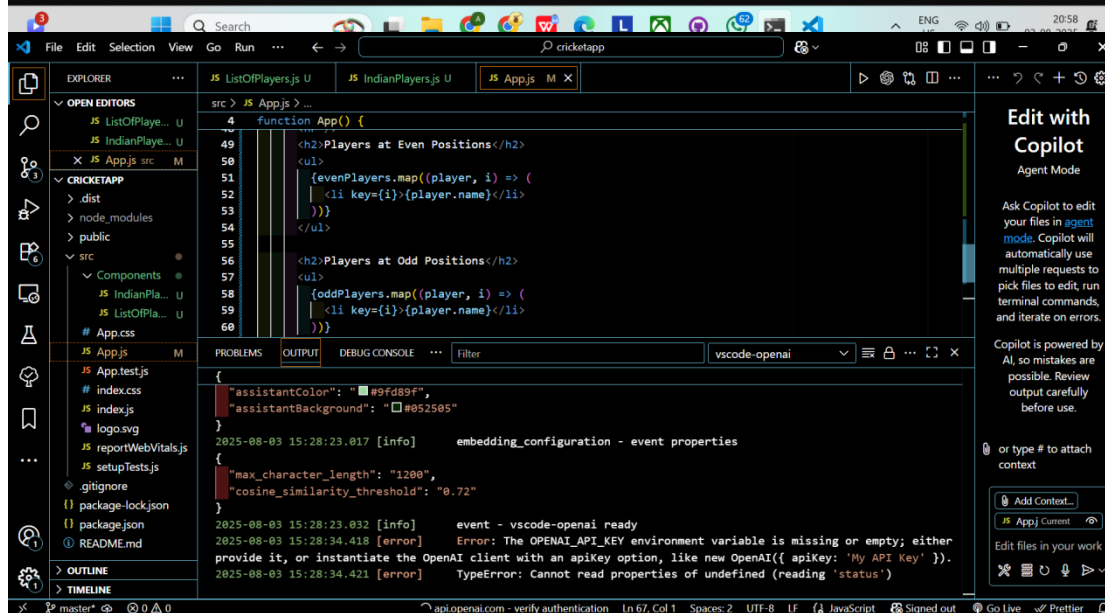

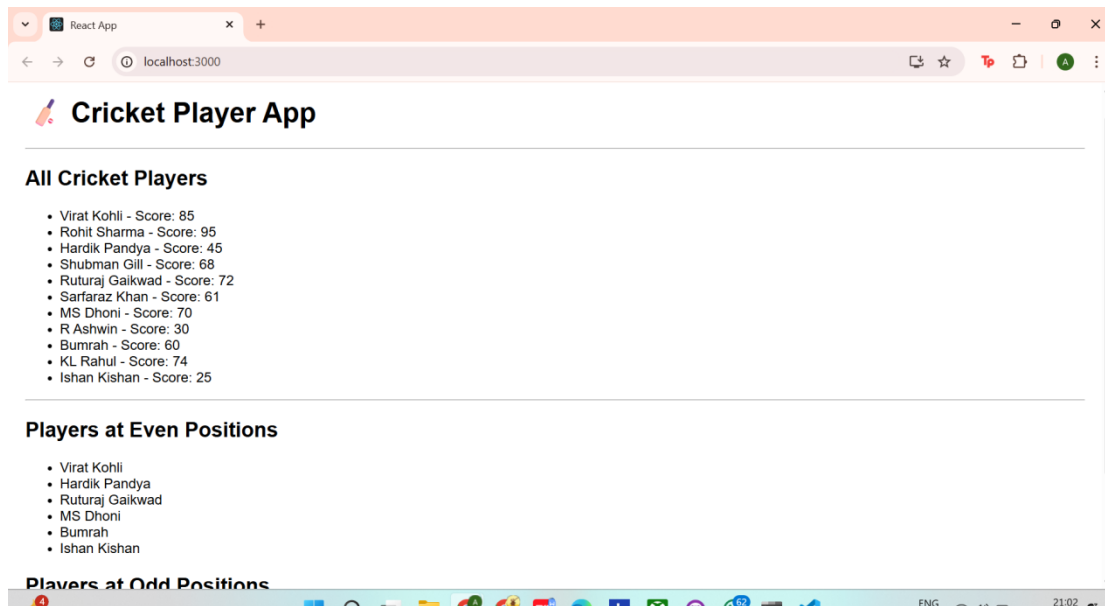

TASK - 10

src/Components/OfficeList.js

```
import React from 'react';
function OfficeList() {
  const officeSpaces = [
    { name: "WeWork", rent: 85000, address: "MG Road, Bangalore" },
    { name: "Innov8", rent: 55000, address: "Connaught Place, Delhi" },
    { name: "91Springboard", rent: 72000, address: "Baner, Pune" },
    { name: "SmartWorks", rent: 40000, address: "Gachibowli, Hyderabad" },
  ];

  return (
    <div style={{ fontFamily: "Arial", padding: "20px" }}>
      <h1> <strong>Office Space Rental App</strong></h1>
      <ul style={{ listStyle: "none", padding: 0 }}>
        {officeSpaces.map((office, index) => (
          <li key={index} style={{ marginBottom: "20px" }}>
```

```

    <h3>{office.name}</h3>
    <p><strong>Address:</strong> {office.address}</p>
    <p>
    <strong>Rent:</strong>{""}
    <span
    style={{
    color:office.rent>= 60000 ? "green" : "red",
    fontWeight: "bold"
    }}
    >
    ₹{office.rent}
    </span>
    </p>
    <hr />
    </li>
    )))}
  </ul>
</div>
  );
}
export default OfficeList;



```


src/App.js

```

import './App.css'; import OfficeList from './Components/OfficeList';
function App() {
  return (
    <div className="App">
    <OfficeList />
    </div>
    );
}
export default App;

```

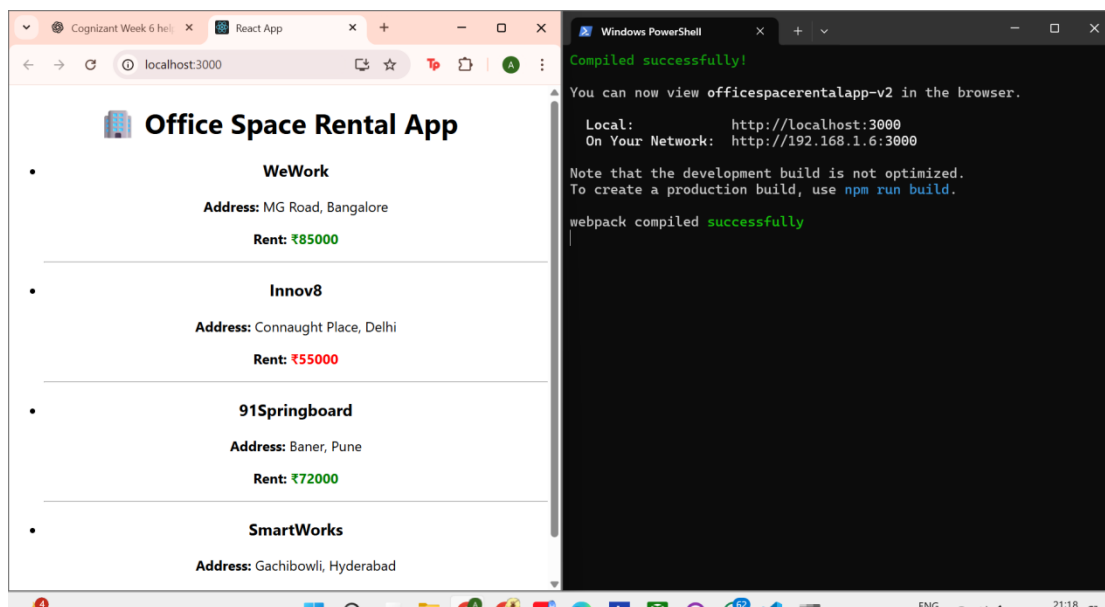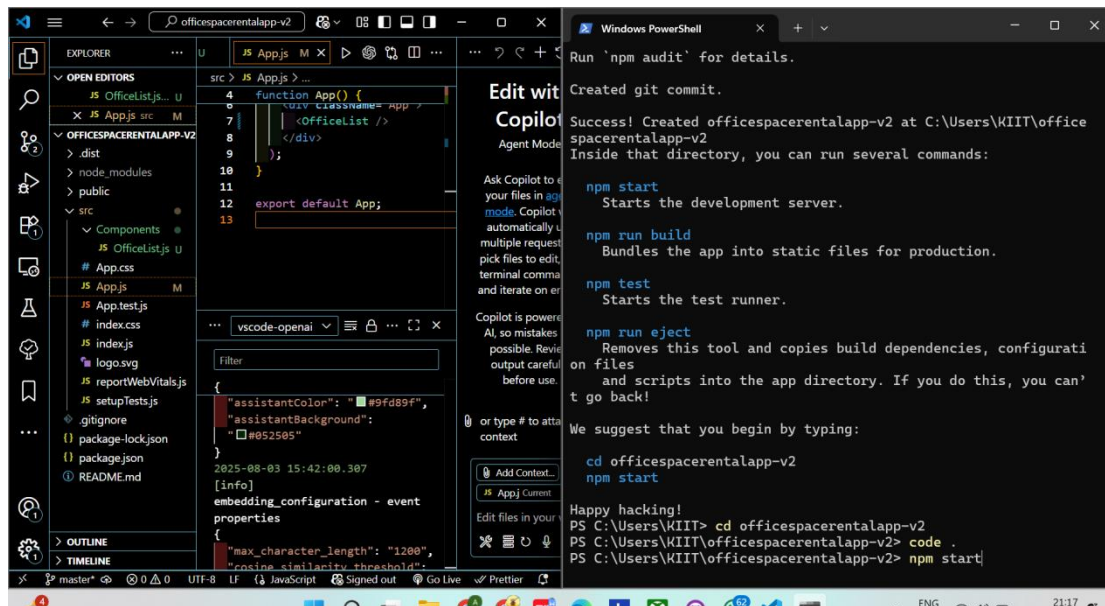

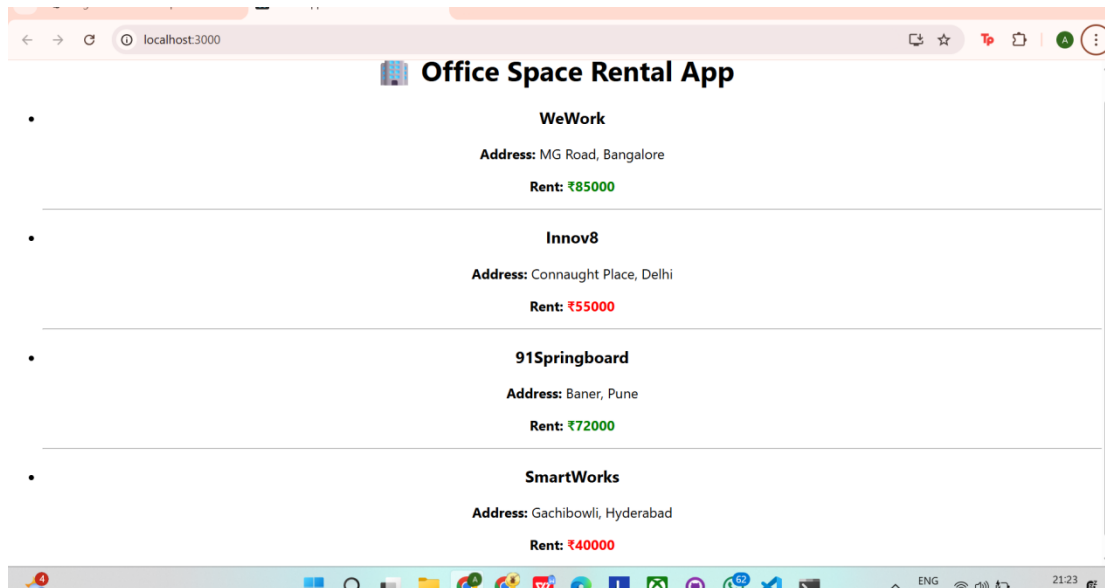

TASK - 11

src/Components/StudentForm.js

```
import React, { useState } from 'react';

function StudentForm() {
  const [name, setName] = useState('');
  const [school, setSchool] = useState('');
  const [totalMarks, setTotalMarks] = useState('');
  const [goalMarks, setGoalMarks] = useState('');
  const [percentage, setPercentage] = useState(null);

  const calculatePercentage = () => {
    if (totalMarks && goalMarks && !isNaN(totalMarks)
    && !isNaN(goalMarks)) {
      const result = (parseFloat(totalMarks) /
parseFloat(goalMarks)) * 100;
      setPercentage(result.toFixed(2));
    } else {
      setPercentage('Invalid Input');
    }
  }
}
```



```

<button  onClick={calculatePercentage}  style={{  margin:
'10px'  }}>
    Calculate Percentage
</button>

    {percentage && (
<div>
<p><strong>Name:</strong> {name}</p>
<p><strong>School:</strong> {school}</p>
<p><strong>Percentage:</strong> {percentage}%</p>
</div>
    )}
</div>
    );
}

export default StudentForm;

```

src/App.js


```

import './App.css';
import StudentForm from './Components/StudentForm';

function App() {
  return (
<div className="App">
<StudentForm />
</div>
  );
}

export default App;

```

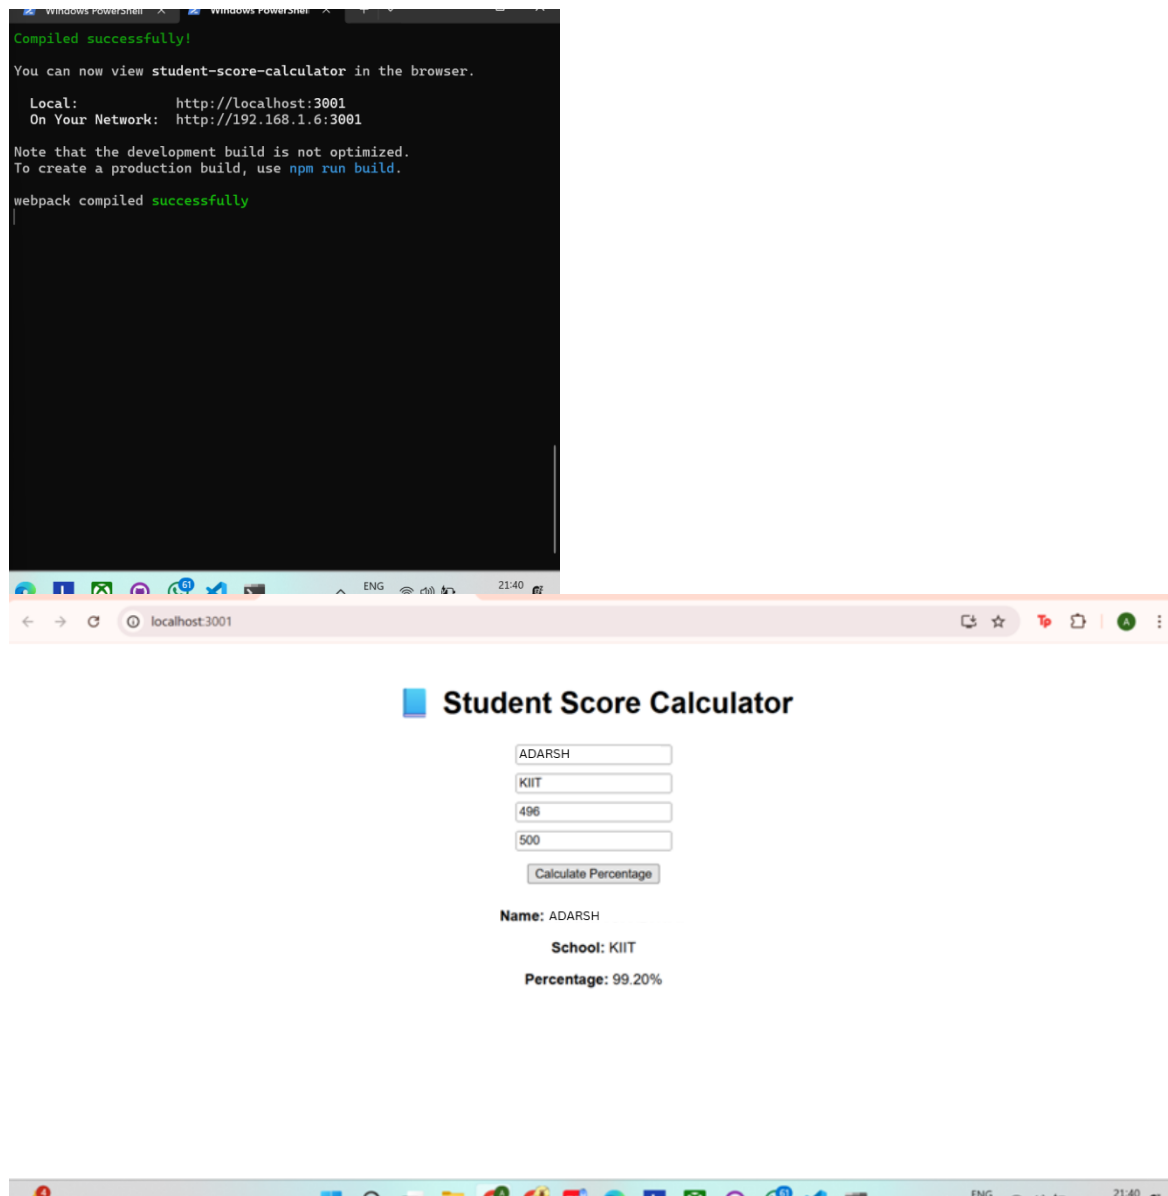

TASK - 12

App.js

```
import React, { useState }  
from 'react';  
import ProductList from './components/ProductList';  
import Cart from './components/Cart';  
import './App.css';  
function App() {  
  const [cartItems, setCartItems] = useState([]);
```

```

const handleAddToCart = (product) => {
  setCartItems([...cartItems, product]);
};

return (
  <div className="App">
    <h1> React Shopping Cart</h1>
    <h3>Total Items in Cart: {cartItems.length}</h3>
    <ProductList onAddToCart={handleAddToCart} />
    <Cart cartItems={cartItems} />
  </div>
);
}
export default App;

```

ProductList.js

```


import React from 'react';
const products = [
  { id: 1, name: 'Headphones', price: 1999 },
  { id: 2, name: 'Bluetooth Speaker', price: 2999 },
  { id: 3, name: 'Wireless Mouse', price: 799 },
];
function ProductList({ onAddToCart }) {
  return (
    <div>
      <h2> Available Products</h2>
      <ul>
        {products.map(product => (
          <li key={product.id} style={{marginBottom: '10px'}}>
            <strong>{product.name}</strong> - ₹{product.price}
            <button
              style={{marginLeft: '10px'}}
              onClick={() => onAddToCart(product)}
            >
              Add to Cart
            </button>
          </li>
        ))}
      </ul>
    </div>
  );
}



```

```
}
export default productList;
```

components/Cart.js

```
import React from 'react';
function Cart({ cartItems }) {
  return (
    <div>
      <h2> Items in Cart</h2>
      {cartItems.length === 0 ? (
        <p>No items yet </p>
      ) : (
        <ul>
          {cartItems.map((item, index) => (
            <li key={index}>
              {item.name} - ₹{item.price}
            </li>
          ))}
        </ul>
      )}
    </div>
  );
}
export default Cart;
```

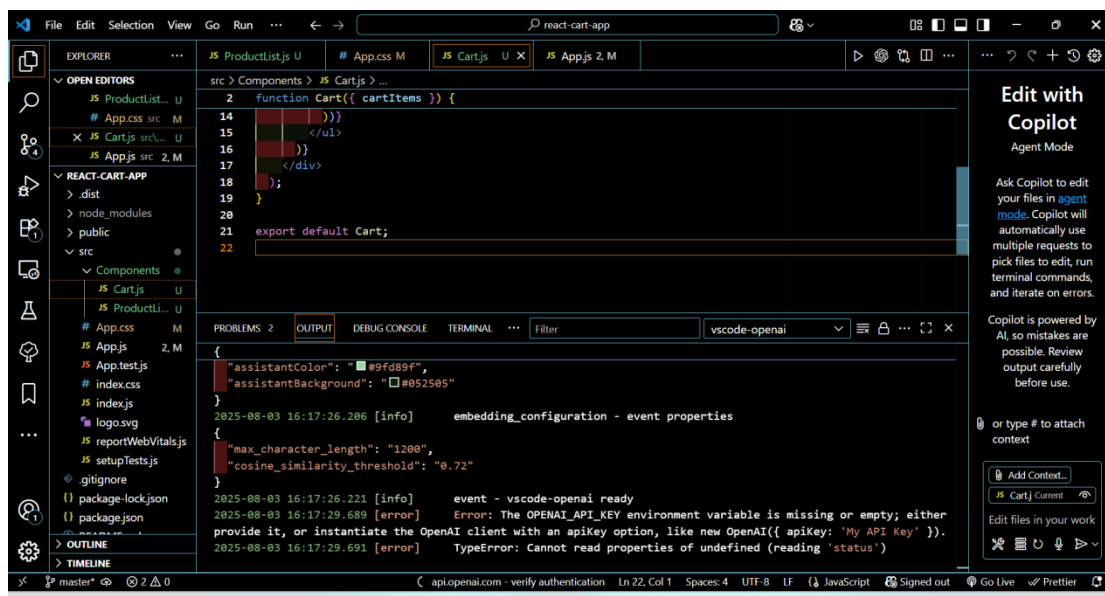

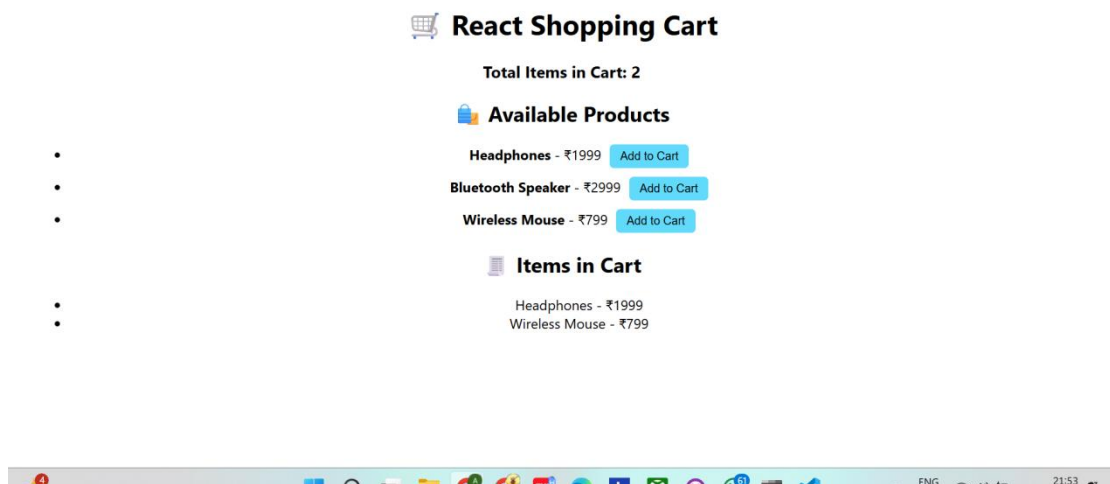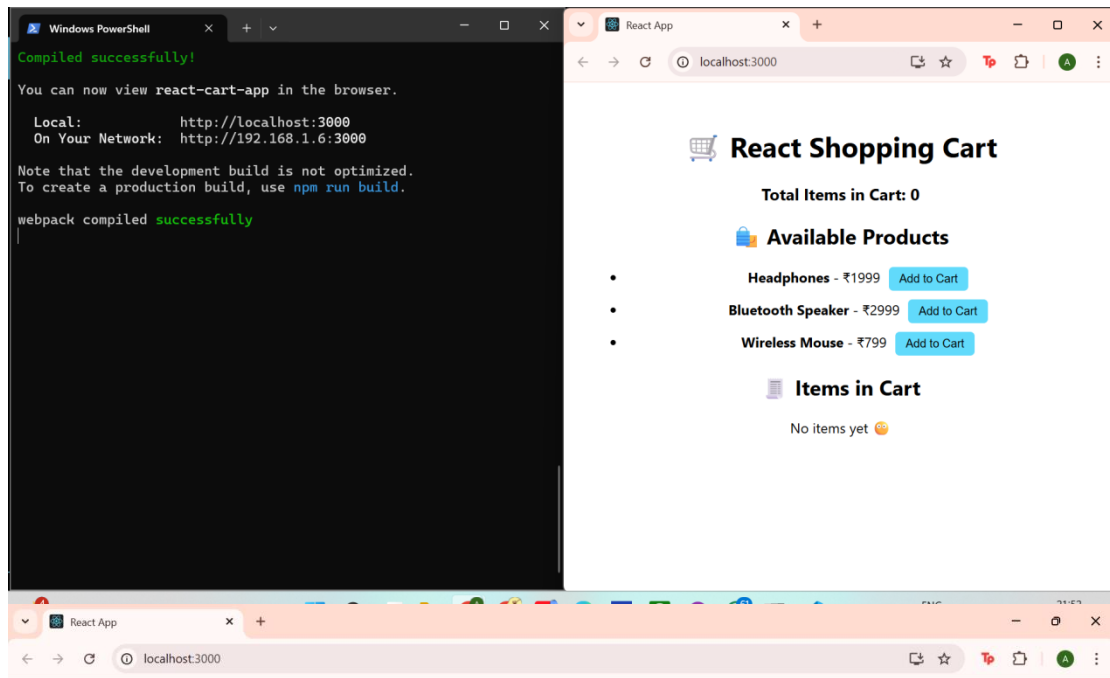

TASK - 13

App.js

```
import './App.css'; import StudentProfileForm from './components/StudentPr
ofileForm';
function App() {
  return (
```

```

<div className="App">
  <StudentProfileForm />
</div>
);
}
export default App;

```

StudentProfileForm.js

```

jsx
Copy code
import React, { useState } from 'react';
function StudentProfileForm() {
  const [name, setName] = useState('');
  const [age, setAge] = useState('');
  const [grade, setGrade] = useState('');
  const [city, setCity] = useState('');
  const [submitted, setSubmitted] = useState(false);

  const handleSubmit = (e) => {
    e.preventDefault();
    if (name && age && grade && city) {
      setSubmitted(true);
    } else {
      alert('Please fill in all fields');
    }
  };

  return (
    <div style={{ textAlign: 'center', padding: '20px', fontFamily:
    'Arial' }}>
      <h1> Student Profile App</h1>
      <form onSubmit={handleSubmit}>
        <input
          type="text"
          placeholder="Enter Name"
          value={name}
          onChange={(e) => setName(e.target.value)}
          style={{ margin: '5px' }}
        />
        <br />
        <input
          type="number"

```

```

placeholder="Enter Age"
value={age}
onChange={(e) => setAge(e.target.value)}
      style={{ margin: '5px' }}
    />
<br />
<input
  type="text"
  placeholder="Enter Grade"
  value={grade}
  onChange={(e) => setGrade(e.target.value)}
    style={{ margin: '5px' }}
  />
<br />
<input
  type="text"
  placeholder="Enter City"
  value={city}
  onChange={(e) => setCity(e.target.value)}
    style={{ margin: '5px' }}
  />
<br />
<button type="submit" style={{margin: '10px' }}>Submit</button>
</form>

    {submitted && (
      <div style={{marginTop: '20px' }}>
        <h3> Student Profile:</h3>
        <p><strong>Name:</strong> {name}</p>
        <p><strong>Age:</strong> {age}</p>
        <p><strong>Grade:</strong> {grade}</p>
        <p><strong>City:</strong> {city}</p>
      </div>
    )}
  </div>
  );
}
export default StudentProfileForm;

```



```
Windows PowerShell
Run 'npm audit' for details.

Created git commit.

Success! Created student-profile-app at C:\Users\KIIT\student-profile-app
Inside that directory, you can run several commands:

  npm start
    Starts the development server.

  npm run build
    Bundles the app into static files for production.

  npm test
    Starts the test runner.

  npm run eject
    Removes this tool and copies build dependencies, configuration files
    and scripts into the app directory. If you do this, you can't go back!

We suggest that you begin by typing:

  cd student-profile-app
  npm start

Happy hacking!
PS C:\Users\KIIT> cd student-profile-app
PS C:\Users\KIIT\student-profile-app> code .
PS C:\Users\KIIT\student-profile-app> |
```

EXPLORER

OPEN EDITORS

STUDENT-PROFILE-APP

PROBLEMS

OUTPUT

DEBUG CONSOLE

Filter

vscode-openai

src > JS App.js

2 | import StudentProfileForm from './components/StudentProfileForm';

3

4 function App() {

5 return (

6 <div className="App">

7 <StudentProfileForm />

8 </div>

9);

10 }

11

12 export default App;

13

2025-08-03 16:41:44.063 [info] embedding_configuration - event properties

{

"assistantColor": "#9fd89f",

"assistantBackground": "#052505"

}

2025-08-03 16:41:44.070 [info] event - vscode-openai ready

2025-08-03 16:41:47.076 [error] Error: The OPENAI_API_KEY environment variable is missing or empty; either

provide it, or instantiate the OpenAI client with an apiKey option, like new OpenAI({ apiKey: 'My API Key' }).

2025-08-03 16:41:47.079 [error] TypeError: Cannot read properties of undefined (reading 'status')

Edit with Copilot

Agent Mode

Ask Copilot to edit your files in agent mode. Copilot will automatically use multiple requests to pick files to edit, run terminal commands, and iterate on errors.

Copilot is powered by AI, so mistakes are possible. Review output carefully before use.

or type # to attach context

Add Context...

App.js Current

Edit files in your work

Compiled successfully!

You can now view student-profile-app in the browser.

Local: http://localhost:3000

On Your Network: http://192.168.1.6:3000

Note that the development build is not optimized.

To create a production build, use npm run build.

webpack compiled successfully

React App

localhost:3000

Student Profile App


Enter Name

Enter Age

Enter Grade

Enter City

Submit



Student Profile App

Student Profile:

Name: ADARSH
Age: 21
Grade: A
City: VARANASI