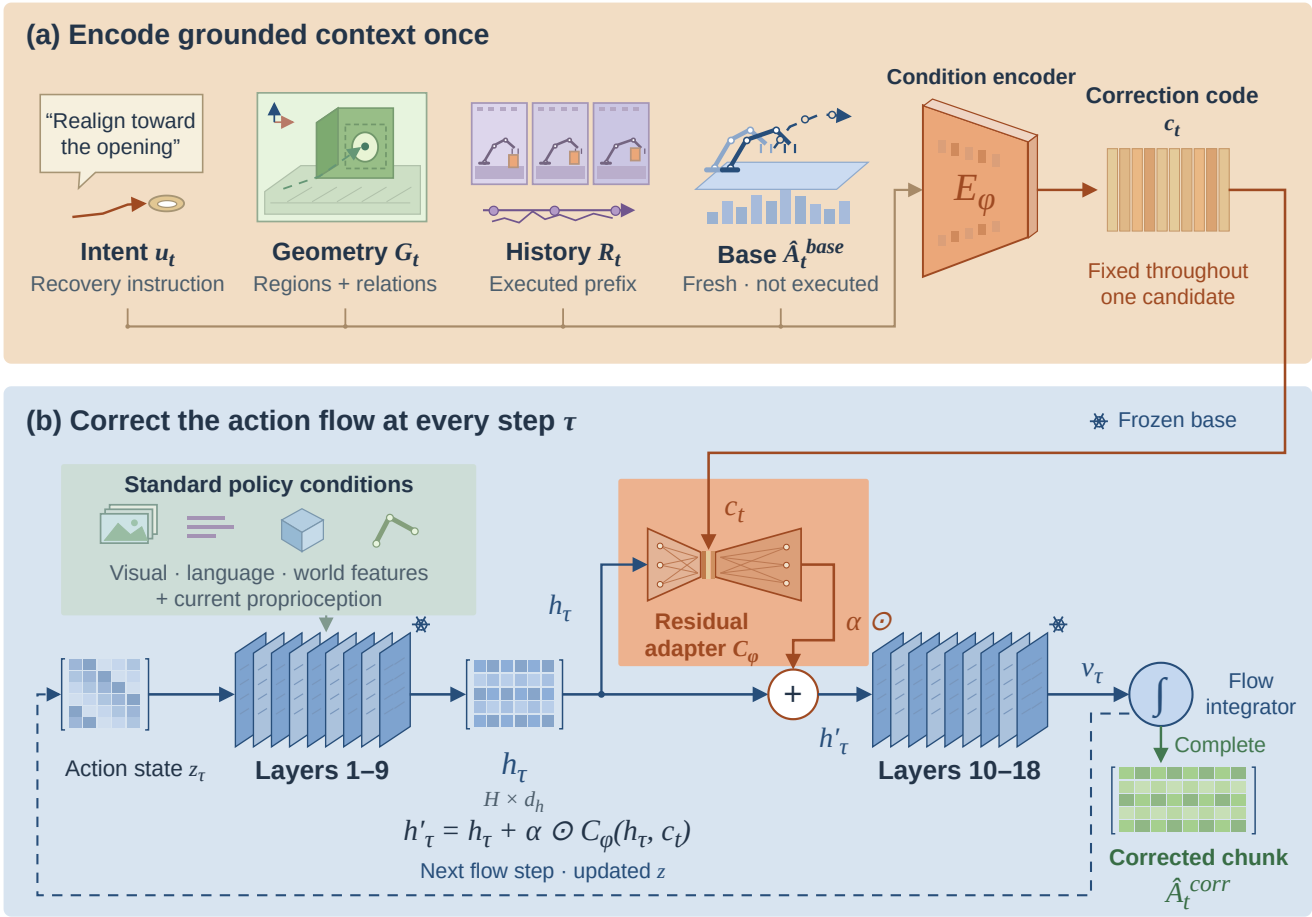

(a) Encode grounded context once
"Realign toward the opening"
Intent u_t
Recovery instruction
Geometry G_t
Regions + relations
History R_t
Executed prefix
Base $\hat{A}_t^{base}$
Fresh · not executed
Condition encoder
E_φ
Correction code c_t
Fixed throughout one candidate
(b) Correct the action flow at every step τ
Frozen base
Standard policy conditions
Visual · language · world features
+ current proprioception
c_t
Residual adapter C_φ
h_τ
$\alpha \odot$
Action state z_τ
Layers 1–9
h_τ
$H \times d_h$
h'_τ
Layers 10–18
v_τ
Flow integrator
Complete
Corrected chunk
$\hat{A}_t^{corr}$
$h'_\tau = h_\tau + \alpha \odot C_\varphi(h_\tau, c_t)$
Next flow step · updated z