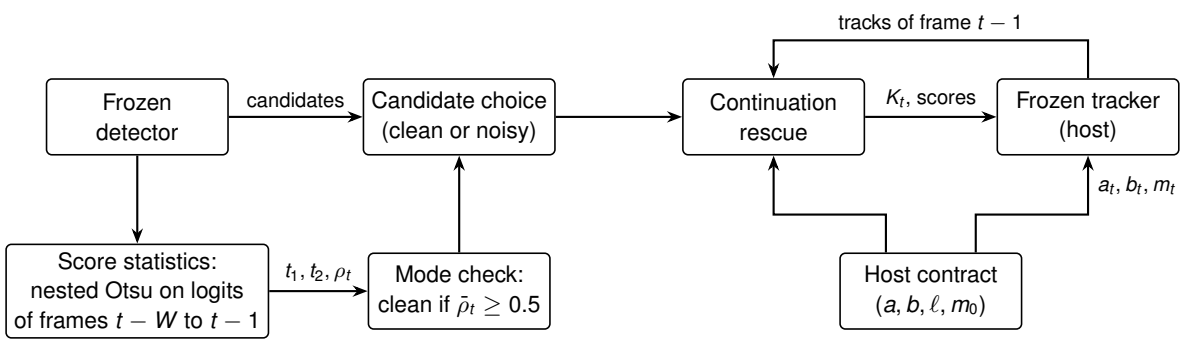
tracks of frame $t-1$
Frozen detector
candidates
Candidate choice (clean or noisy)
Continuation rescue
K_t, scores
Frozen tracker (host)
a_t, b_t, m_t
Score statistics: nested Otsu on logits of frames $t-W$ to $t-1$
t_1, t_2, ρ_t
Mode check: clean if $\bar{\rho}_t \geq 0.5$
Host contract (a, b, ℓ, m_0)