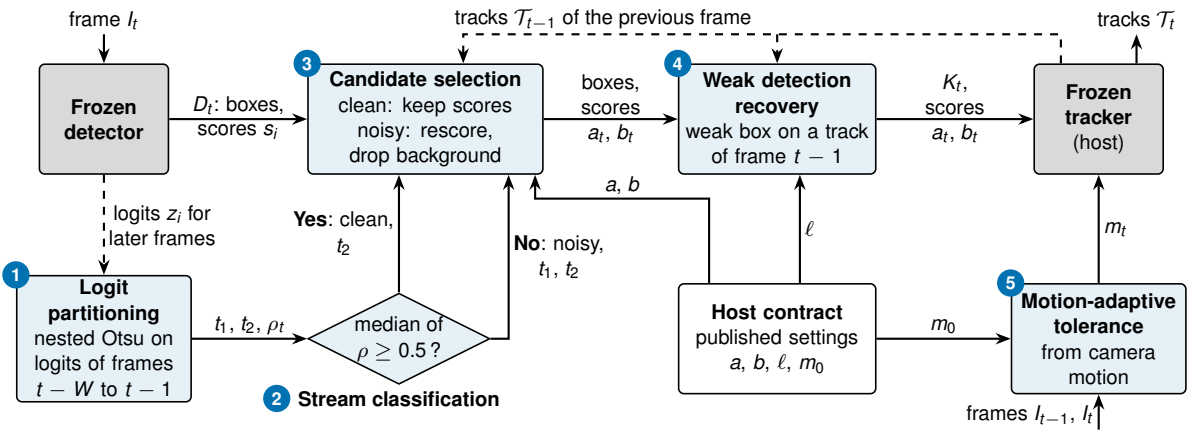
frame I_t
tracks $\mathcal{T}_{t-1}$ of the previous frame
tracks $\mathcal{T}_t$
Frozen detector
D_t: boxes, scores s_i
3 Candidate selection
clean: keep scores
noisy: rescore, drop background
boxes, scores a_t, b_t
4 Weak detection recovery
weak box on a track of frame $t-1$
K_t, scores a_t, b_t
Frozen tracker (host)
logits z_i for later frames
Yes: clean, t_2
No: noisy, t_1, t_2
a, b
ℓ
m_t
1 Logit partitioning
nested Otsu on logits of frames $t-W$ to $t-1$
t_1, t_2, ρ_t
median of $\rho \geq 0.5$?
2 Stream classification
Host contract
published settings
a, b, ℓ, m_0
m_0
5 Motion-adaptive tolerance
from camera motion
frames I_{t-1}, I_t