reference model : max jump post-processing rule
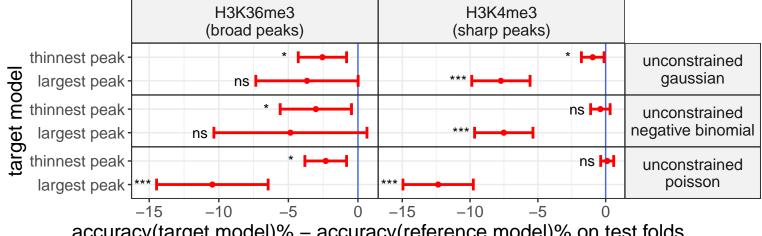
accuracy(target model)% − accuracy(reference model)% on test folds