Content-addressed run lineage

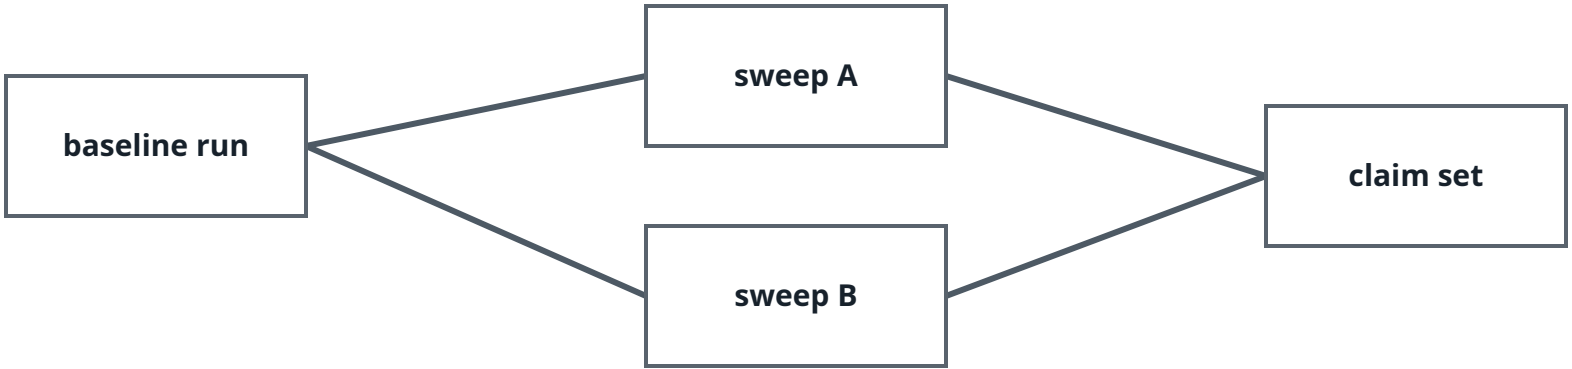

A run ID hashes canonical inputs, outputs, claims, and parent IDs.