

Mizar Evo

Readable, AI-Ready, Scalable Formal Mathematics

Eight problems, eight proposals

A discussion with the Bialystok Mizar team, September 2026

presenter notes edition

Mizar Evo project

September 2026

2026-07-15

Mizar Evo

Mizar Evo
Readable, AI-Ready, Scalable Formal Mathematics
Eight problems, eight proposals
A discussion with the Białystok Mizar team, September 2026
presenter notes edition

Mizar Evo project

September 2026

Presenter script:

- Begin with gratitude.
- State that this is a design review with the people best positioned to judge whether the project is still recognizably Mizar.
- Nothing here is frozen; the goal of the visit is to collect objections.

0.1 - A First Look

Legacy Mizar **exact MML excerpt**

```
definition
  struct (1-sorted) addMagma (# carrier -> set, addF -> BinOp of the carrier
    #);
end;
```

Mizar Evo **specification example**

```
definition
  struct AddMagma where
    field carrier -> set;
    field add -> BinOp of carrier;
  end;

  inherit AddMagma extends Magma where
    field carrier from carrier;
    field add from binop;      :: renamed view
  end;
end;
```

Mizar Evo

└ Part 0. Opening

└ 0.1 - A First Look

0.1 - A First Look

Legacy Mizar exact MML excerpts

```
definition
  struct (1-sorted) addMagma (# carrier -> set, addF -> BinOp of the carrier
#);
end;
```

Mizar Evo specification example

```
definition
  struct AddMagma where
    field carrier -> set;
    field add -> BinOp of carrier;
  end;

  inherit AddMagma extends Magma where
    field carrier from carrier;
    field add from binop;    :: renamed view
  end;
end;
```

Presenter script: Say:

- Source: current MML algstr_0.miz, lines 37-40.
- This is the whole talk in one slide: it still reads as Mizar, the mathematics is unchanged, and the things that used to be implicit - the parent link, the field mapping - are now visible, checkable source text.

0.2 - The Proposal In One Sentence

Key Phrase:

*Preserve Mizar's mathematical vernacular.
Modernize the compiler, verifier, artifact, and publication layers.*

What this talk does not claim:

- Full MML migration is not complete.
- The final language standard is not frozen.
- AI assistance is not a substitute for proof checking.
- The current Mizar system's achievements are the baseline, not the problem.

Mizar Evo

└ Part 0. Opening

└ 0.2 - The Proposal In One Sentence

0.2 - The Proposal In One Sentence

Key Phrase:

*Preserve Mizar's mathematical vernacular.
Modernize the compiler, verifier, artifact, and publication layers.*

What this talk does not claim:

- Full MML migration is not complete.
- The final language standard is not frozen.
- AI assistance is not a substitute for proof checking.
- The current Mizar system's achievements are the baseline, not the problem.

Presenter script: Read aloud:

- Full MML migration is not complete.
- The final language standard is not frozen.
- AI assistance is not a substitute for proof checking.

After the example, say which design obligation the syntax makes visible.

Every code example is labeled:

Label	Meaning
exact MML excerpt	verbatim current MML text, with article and line numbers
specification example	from the Mizar Evo language specification
sketch	illustrative; not yet fixed by the specification

Reading rule:

- No EBNF appears in this talk. The language is shown through examples only; `doc/spec/en/` remains the authority for grammar and edge cases.

Mizar Evo

└ Part 0. Opening

└ 0.3 - How To Read The Examples

deep dive

Every code example is labeled:

Label	Meaning
exact MML excerpt	verbatim current MML text, with article and line numbers
specification example	from the Mizar Evo language specification
sketch	illustrative; not yet fixed by the specification

Reading rule:

- No EBNF appears in this talk. The language is shown through examples only; doc/spec/en/ remains the authority for grammar and edge cases.

Presenter script: Read aloud:

- No EBNF appears in this talk. The language is shown through examples only; doc/spec/en/ remains the authority for grammar and edge cases.

For the table, read the row labels first, then the design reason.

0.4 - What We Need From This Visit

Key Points:

- identify compatibility constraints that are invisible from outside MML work;
- choose migration benchmark articles that are small but representative;
- review the trust boundary for ATP search and kernel checking;
- discuss how Formalized Mathematics should link to a package library;
- collect the objections we have not thought of.

Running question:

What must Mizar Evo preserve so that the Mizar community still recognizes it as Mizar?

Mizar Evo

└ Part 0. Opening

└ 0.4 - What We Need From This Visit

0.4 - What We Need From This Visit

Key Points:

- identify compatibility constraints that are invisible from outside MML work;
- choose migration benchmark articles that are small but representative;
- review the trust boundary for ATP search and kernel checking;
- discuss how Formalized Mathematics should link to a package library;
- collect the objections we have not thought of.

Running question:

What must Mizar Evo preserve so that the Mizar community still recognizes it as Mizar?

Presenter script: Read aloud:

- identify compatibility constraints that are invisible from outside MML work;
- choose migration benchmark articles that are small but representative;
- review the trust boundary for ATP search and kernel checking;

After the example, say which design obligation the syntax makes visible.

1.1 - What Mizar Got Right

Key Points:

- declarative proof text that reads as mathematics;
- soft types, modes, and adjective-rich vocabulary;
- attributes, registrations, and clusters as reusable automation;
- a mature curated library (MML 5.94.1493: 1493 articles);
- a publication culture around formal articles (Formalized Mathematics).

Message:

- These strengths are the design baseline. Every proposal in this talk is judged by whether it protects them.

Mizar Evo

└ Part 1. Why Now

└ 1.1 - What Mizar Got Right

1.1 - What Mizar Got Right

Key Points:

- declarative proof text that reads as mathematics;
- soft types, modes, and adjective-rich vocabulary;
- attributes, registrations, and clusters as reusable automation;
- a mature curated library (MML 5.94.1493: 1493 articles);
- a publication culture around formal articles (Formalized Mathematics).

Message:

- These strengths are the design baseline. Every proposal in this talk is judged by whether it protects them.

Presenter script: Say:

- Do not lecture the audience about their own system; this frame is one minute of shared ground, not a tutorial.

Read aloud:

- declarative proof text that reads as mathematics;
- soft types, modes, and adjective-rich vocabulary;
- attributes, registrations, and clusters as reusable automation;

1.2 - Pressure One: Scale

Key Points:

- MML has grown to roughly 1500 interdependent articles.
- The unit of dependency, review, and reuse is the whole article.
- Article environments are resolved by tooling, but the resolved dependency surface is not visible in the source a human reviews.
- Whole-library maintenance operations (renames, refactorings, revisions) carry risk that grows with library size.

Message:

- The problem is not that current Mizar is wrong. It is that article-level boundaries were designed for a smaller library.

Mizar Evo

└ Part 1. Why Now

└ 1.2 - Pressure One: Scale

1.2 - Pressure One: Scale

Key Points:

- MML has grown to roughly 1500 interdependent articles.
- The unit of dependency, review, and reuse is the whole article.
- Article environments are resolved by tooling, but the resolved dependency surface is not visible in the source a human reviews.
- Whole-library maintenance operations (renames, refactorings, revisions) carry risk that grows with library size.

Message:

- The problem is not that current Mizar is wrong. It is that article-level boundaries were designed for a smaller library.

Presenter script: Read aloud:

- MML has grown to roughly 1500 interdependent articles.
- The unit of dependency, review, and reuse is the whole article.
- Article environments are resolved by tooling, but the resolved dependency surface is not visible in the source a human reviews.
- Whole-library maintenance operations (renames, refactorings, revisions) carry risk that grows with library size.
- The problem is not that current Mizar is wrong. It is that article-level boundaries were designed for a smaller library.

1.3 - Pressure Two: Tooling Expectations

Key Points:

- Editors are expected to give instant, partial, resilient feedback.
- Builds are expected to be reproducible from a manifest and lockfile.
- Reuse is expected to work at package granularity with versioning.
- Documentation is expected to be generated, linked, and browsable.

Message:

- These expectations were set by mainstream language ecosystems; new users arrive with them, and formal libraries are judged against them.

Mizar Evo

└ Part 1. Why Now

└ 1.3 - Pressure Two: Tooling Expectations

1.3 - Pressure Two: Tooling Expectations

Key Points:

- Editors are expected to give instant, partial, resilient feedback.
- Builds are expected to be reproducible from a manifest and lockfile.
- Reuse is expected to work at package granularity with versioning.
- Documentation is expected to be generated, linked, and browsable.

Message:

- These expectations were set by mainstream language ecosystems; new users arrive with them, and formal libraries are judged against them.

Presenter script: Read aloud:

- Editors are expected to give instant, partial, resilient feedback.
- Builds are expected to be reproducible from a manifest and lockfile.
- Reuse is expected to work at package granularity with versioning.
- Documentation is expected to be generated, linked, and browsable.
- These expectations were set by mainstream language ecosystems; new users arrive with them, and formal libraries are judged against them.

1.4 - Pressure Three: AI

Key Points:

- AI agents are already useful for search, explanation, and repair.
- They need bounded, structured, source-anchored context - not a dump of the whole library.
- Their output must never define proof truth; verification must stay independent of the strength of the assistant.
- Readable source is an advantage here: stable local text patterns are what AI edits and retrieval work best on.

Message:

- Mizar's readability is not a nostalgic asset. It is exactly what makes safe AI assistance possible.

Mizar Evo

└ Part 1. Why Now

└ 1.4 - Pressure Three: AI

1.4 - Pressure Three: AI

Key Points:

- AI agents are already useful for search, explanation, and repair.
- They need bounded, structured, source-anchored context - not a dump of the whole library.
- Their output must never define proof truth; verification must stay independent of the strength of the assistant.
- Readable source is an advantage here: stable local text patterns are what AI edits and retrieval work best on.


Message:

- Mizar's readability is not a nostalgic asset. It is exactly what makes safe AI assistance possible.

Presenter script: Read aloud:

- AI agents are already useful for search, explanation, and repair.
- They need bounded, structured, source-anchored context - not a dump of the whole library.
- Their output must never define proof truth; verification must stay independent of the strength of the assistant.
- Readable source is an advantage here: stable local text patterns are what AI edits and retrieval work best on.
- Mizar's readability is not a nostalgic asset. It is exactly what makes safe AI assistance possible.

1.5 - Three Pressures, One Design

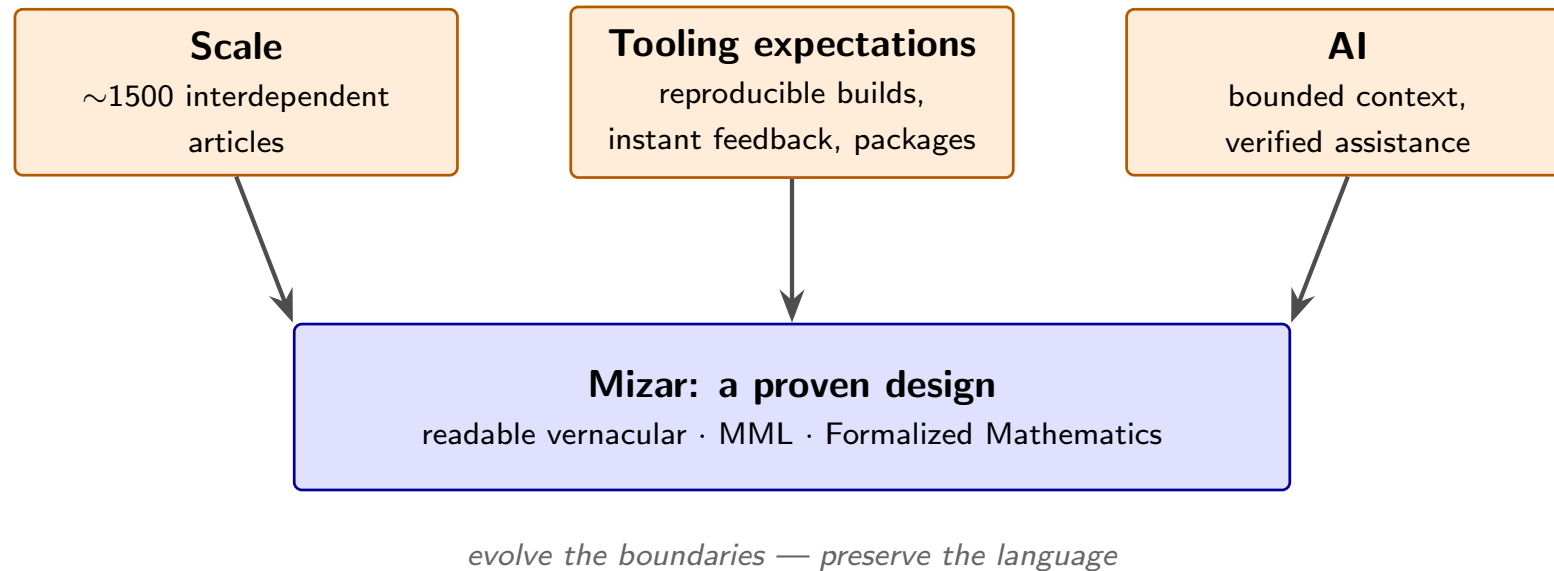

Message:

- None of the three pressures argues that Mizar's design was wrong. Together they argue for evolving its boundaries.


2026-07-15

Mizar Evo

└ Part 1. Why Now

└ 1.5 - Three Pressures, One Design

1.5 - Three Pressures, One Design

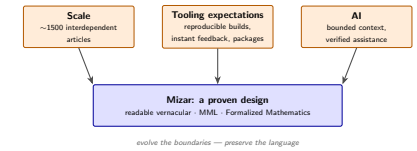

Message:

- None of the three pressures argues that Mizar's design was wrong. Together they argue for evolving its boundaries.

Presenter script: Read aloud:

- None of the three pressures argues that Mizar's design was wrong. Together they argue for evolving its boundaries.

1.6 - The Design Rule

Key Phrase:

*Do not trade away readability to gain automation.
Use automation to protect and extend readability.*

Three pillars, one test:

Pillar	Test for every feature
Readability	does proof text still read as mathematics?
AI-readiness	can a tool see bounded, auditable context?
Scalability	do boundaries stay stable as the library grows?

2026-07-15

Mizar Evo

└─Part 1. Why Now

└─1.6 - The Design Rule

1.6 - The Design Rule

Key Phrase:

*Do not trade away readability to gain automation.
Use automation to protect and extend readability.*

Three pillars, one test:

Pillar	Test for every feature
Readability	does proof text still read as mathematics?
AI-readiness	can a tool see bounded, auditable context?
Scalability	do boundaries stay stable as the library grows?

Presenter script: Say:

- The eight stories that follow each apply this rule to one concrete pain.

For the table, read the row labels first, then the design reason.

2.1 - The Pain

Legacy Mizar **exact MML excerpt**

`environ`

```
vocabularies XBOOLE_0, SUBSET_1, BINOP_1, ZFMISC_1, STRUCT_0, ARYTM_3,  
             FUNCT_1, FUNCT_5, SUPINF_2, ARYTM_1, RELAT_1, MESFUNC1, ALGSTR_0, CARD_1;  
notations TARSKI, XBOOLE_0, SUBSET_1, ZFMISC_1, BINOP_1, FUNCT_5, ORDINAL1,  
          CARD_1, STRUCT_0;  
constructors BINOP_1, STRUCT_0, ZFMISC_1, FUNCT_5;  
registrations ZFMISC_1, CARD_1, STRUCT_0;  
theorems STRUCT_0;
```

`begin :: Additive structures`

Mizar Evo

└ Part 2. Story 1: Dependencies You Can See

└ 2.1 - The Pain

2.1 - The Pain

Legacy Mizar exact MML excerpts

```
environ
vocabularies XBOOLE_0, SUBSET_1, BINOP_1, ZFMISC_1, STRUCT_0, ARYTM_3,
  FUNCT_1, FUNCT_5, SUPINF_2, ARYTM_1, RELAT_1, MESFUNC1, ALGSTR_0, CARD_1;
notations TARSKI, XBOOLE_0, SUBSET_1, ZFMISC_1, BINOP_1, FUNCT_5, ORDINAL1,
  CARD_1, STRUCT_0;
constructors BINOP_1, STRUCT_0, ZFMISC_1, FUNCT_5;
registrations ZFMISC_1, CARD_1, STRUCT_0;
theorems STRUCT_0;

begin :: Additive structures
```

Presenter script: Say:

- Source: current MML algstr_0.miz, lines 15-25.
- Everyone in the room has edited one of these blocks by trial and error.
- The point is not that environ is bad; it successfully drove decades of library growth. The point is what it costs at today's scale.

Key Points:

- One symbol's origin is spread over several role lists; a reviewer cannot see which article contributes which notation, constructor, or cluster.
- The Accommodator resolves the environment, but the resolved surface is not reviewable source text.
- Tools cannot cache or invalidate at a finer granularity than the article.
- Moving a theorem between articles risks breaking unknown dependents.

Message:

- Implicit dependency surfaces are a fixed cost on every edit, every review, and every tool, and the cost grows with the library.

Mizar Evo

└ Part 2. Story 1: Dependencies You Can See

└ 2.2 - Why It Hurts

deep dive

2.2 - Why It Hurts

deep dive

Key Points:

- One symbol's origin is spread over several role lists; a reviewer cannot see which article contributes which notation, constructor, or cluster.
- The Accommodator resolves the environment, but the resolved surface is not reviewable source text.
- Tools cannot cache or invalidate at a finer granularity than the article.
- Moving a theorem between articles risks breaking unknown dependents.

Message:

- Implicit dependency surfaces are a fixed cost on every edit, every review, and every tool, and the cost grows with the library.

Presenter script: Read aloud:

- One symbol's origin is spread over several role lists; a reviewer cannot see which article contributes which notation, constructor, or cluster.
- The Accommodator resolves the environment, but the resolved surface is not reviewable source text.
- Tools cannot cache or invalidate at a finer granularity than the article.
- Moving a theorem between articles risks breaking unknown dependents.
- Implicit dependency surfaces are a fixed cost on every edit, every review, and every tool, and the cost grows with the library.

2.3 - The Evo Answer: Import Prelude

Mizar Evo **specification example**

```
import .function;  
import mml.algebra.structure.sorted;  
  
definition  
  let S be 1-sorted;  
  mode BinOpDef: BinOp of S is  
    Function of [: S.carrier, S.carrier :], S.carrier;  
end;
```

Rules that make this deterministic:

- all imports appear before the first item; no mid-file environment changes;
- imports seed the active lexicon, and every symbol, notation, registration, and theorem is traceable to exactly one import;
- stable fully-qualified names are derived from package and module paths.

Mizar Evo

└ Part 2. Story 1: Dependencies You Can See

└ 2.3 - The Evo Answer: Import Prelude

2.3 - The Evo Answer: Import Prelude

```
Mizar Evo specification example
import .function;
import mml.algebra.structure.sorted;

definition
  let S be 1-sorted;
  mode BinOpDef: BinOp of S is
    Function of [: S.carrier, S.carrier :], S.carrier;
end;
```

Rules that make this deterministic:

- all imports appear before the first item; no mid-file environment changes;
- imports seed the active lexicon, and every symbol, notation, registration, and theorem is traceable to exactly one import;
- stable fully-qualified names are derived from package and module paths.

Presenter script: Read aloud:

- all imports appear before the first item; no mid-file environment changes;
- imports seed the active lexicon, and every symbol, notation, registration, and theorem is traceable to exactly one import;
- stable fully-qualified names are derived from package and module paths.

After the example, say which design obligation the syntax makes visible.

Mizar Evo **specification example**

```
[package]
name      = "algebra"
version   = "2.3.1"
edition   = "2025"

[dependencies]
mml_core  = "^1.0"
topology  = { version = "^0.9", features = ["metric"] }
```

Key Points:

- a manifest plus a lockfile makes every build reproducible;
- versioned reuse (SemVer) replaces ad hoc copying between article sets.

2026-07-15

Mizar Evo

└ Part 2. Story 1: Dependencies You Can See

└ 2.4 - The Evo Answer: Packages

deep dive

2.4 - The Evo Answer: Packages

deep dive

Mizar Evo **specification example**

```
[package]
name    = "algebra"
version = "2.3.1"
edition = "2025"

[dependencies]
mml_core = "~1.0"
topology = { version = "~0.9", features = ["metric"] }
```

Key Points:

- a manifest plus a lockfile makes every build reproducible;
- versioned reuse (SemVer) replaces ad hoc copying between article sets.


Presenter script: Read aloud:

- a manifest plus a lockfile makes every build reproducible;
- versioned reuse (SemVer) replaces ad hoc copying between article sets.

After the example, say which design obligation the syntax makes visible.

2.5 - Migrating The Environment

deep dive

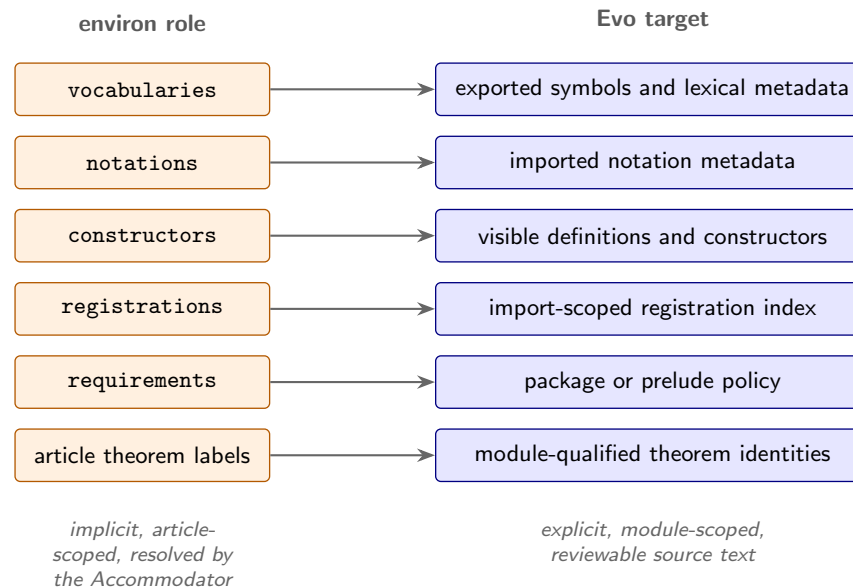

Message:

- this is not a mechanical rename: current environments mix semantic, syntactic, and automation-facing roles, and migration reports must explain what each imported module actually contributes.

2026-07-15

Mizar Evo


└ Part 2. Story 1: Dependencies You Can See

└ 2.5 - Migrating The Environment

deep dive

2.5 - Migrating The Environment

deep dive



Message:

- this is not a mechanical rename: current environments mix semantic, syntactic, and automation-facing roles, and migration reports must explain what each imported module actually contributes.

Presenter script: Read aloud:

- this is not a mechanical rename: current environments mix semantic, syntactic, and automation-facing roles, and migration reports must explain what each imported module actually contributes.

2.6 - What Is Preserved, What We Ask

Preserved:

- the mathematics and theorem identities are untouched;
- article-style authorship remains; a module is still a readable text;
- migration keeps origin metadata (story 8 returns to this).

Questions for Bialystok:

- Which `environ` roles must remain visually familiar during migration?
- Which current article dependencies are hardest to explain, and would make the best test cases for generated dependency reports?

Mizar Evo

└ Part 2. Story 1: Dependencies You Can See

└ 2.6 - What Is Preserved, What We Ask

2.6 - What Is Preserved, What We Ask

Preserved:

- the mathematics and theorem identities are untouched;
- article-style authorship remains; a module is still a readable text;
- migration keeps origin metadata (story 8 returns to this).

Questions for Bialystok:

- Which environ roles must remain visually familiar during migration?
- Which current article dependencies are hardest to explain, and would make the best test cases for generated dependency reports?

Presenter script: Read aloud:

- the mathematics and theorem identities are untouched;
- article-style authorship remains; a module is still a readable text;
- migration keeps origin metadata (story 8 returns to this).
- Which environ roles must remain visually familiar during migration?
- Which current article dependencies are hardest to explain, and would make the best test cases for generated dependency reports?

3.1 - The Pain

Legacy Mizar **exact MML excerpt**

```
definition
  struct (1-sorted) addMagma (# carrier -> set, addF -> BinOp of the carrier
    #);
end;
```

Key Points:

- parent link, fields, and selector layout are one compact declaration;
- with multiple parents, the merge of inherited fields is implicit;
- renamed views (additive vs multiplicative) rest on naming conventions;
- stored data and canonical values (a zero, a unit) are not distinguished.

Mizar Evo

└ Part 3. Story 2: Structures Without Hidden Merges

└ 3.1 - The Pain

3.1 - The Pain

Legacy Mizar exact MML excerpts

```
definition
  struct (1-sorted) addMagma (# carrier -> set, addF -> BinOp of the carrier
  #);
end;
```

Key Points:

- parent link, fields, and selector layout are one compact declaration;
- with multiple parents, the merge of inherited fields is implicit;
- renamed views (additive vs multiplicative) rest on naming conventions;
- stored data and canonical values (a zero, a unit) are not distinguished.

Presenter script: Say:

- Source: current MML algstr_0.miz, lines 37-40.
- Acknowledge that this compactness was a feature: structures stayed close to informal mathematical writing.

Read aloud:

- parent link, fields, and selector layout are one compact declaration;
- with multiple parents, the merge of inherited fields is implicit;
- renamed views (additive vs multiplicative) rest on naming conventions;

Key Points:

- Diamond inheritance (one structure reachable through two parent paths) is resolved by convention and declaration order, not by checkable source.
- A migration tool cannot ask "is this selector intrinsic data, a canonical value with obligations, or an inherited view?" - the syntax does not say.
- Errors surface far from their cause, as type mismatches in later articles.

Message:

- At MML scale, structure inheritance is a graph maintenance problem, and the graph deserves explicit, checkable edges.

Mizar Evo

└ Part 3. Story 2: Structures Without Hidden Merges

└ 3.2 - Why It Hurts

deep dive

3.2 - Why It Hurts

deep dive

Key Points:

- Diamond inheritance (one structure reachable through two parent paths) is resolved by convention and declaration order, not by checkable source.
- A migration tool cannot ask "is this selector intrinsic data, a canonical value with obligations, or an inherited view?" - the syntax does not say.
- Errors surface far from their cause, as type mismatches in later articles.

Message:

- At MML scale, structure inheritance is a graph maintenance problem, and the graph deserves explicit, checkable edges.

Presenter script: Read aloud:

- Diamond inheritance (one structure reachable through two parent paths) is resolved by convention and declaration order, not by checkable source.
- A migration tool cannot ask "is this selector intrinsic data, a canonical value with obligations, or an inherited view?" - the syntax does not say.
- Errors surface far from their cause, as type mismatches in later articles.
- At MML scale, structure inheritance is a graph maintenance problem, and the graph deserves explicit, checkable edges.

3.3 - The Evo Answer: Field, Property, Attribute

Mizar Evo **specification example**

```
definition
  struct AddLoopStr where
    field carrier -> set;
    field add -> BinOp of carrier;
    property zero -> Element of carrier;
  end;
end;
```

Three distinct concepts:

Concept	Meaning	Consequence
field	intrinsic data supplied by the value	constructor shape, equality
property	uniquely determined canonical value	existence/uniqueness obligations
attribute	predicate-style refinement	cluster propagation, not layout

Mizar Evo

└ Part 3. Story 2: Structures Without Hidden Merges

└ 3.3 - The Evo Answer: Field, Property, Attribute

3.3 - The Evo Answer: Field, Property, Attribute

Mizar Evo **specification example**

```
definition
  struct AddLoopStr where
    field carrier -> set;
    field add -> BinOp of carrier;
    property zero -> Element of carrier;
  end;
end;
```

Three distinct concepts:

Concept	Meaning	Consequence
field	intrinsic data supplied by the value	constructor shape, equality
property	uniquely determined canonical value	existence/uniqueness obligations
attribute	predicate-style refinement	cluster propagation, not layout

Presenter script: After the example, say which design obligation the syntax makes visible.

For the table, read the row labels first, then the design reason.

Use this as the transition: The Evo Answer: Field, Property, Attribute. Point to the visible example, question, or diagram before moving on.

3.4 - The Evo Answer: Explicit Inheritance

Mizar Evo **specification example**

```
definition
  struct AddMagma where
    field carrier -> set;
    field add -> BinOp of carrier;
  end;

  inherit AddMagma extends Magma where
    field carrier from carrier;
    field add from binop;      :: renamed
  end;
end;
```

Key Points:

- one inherit statement per parent; mapping and renaming are source text;
- narrowing and type conversions carry coherence proof obligations;
- the additive/multiplicative naming convention becomes a checked view.

Mizar Evo

└ Part 3. Story 2: Structures Without Hidden Merges

└ 3.4 - The Evo Answer: Explicit Inheritance

3.4 - The Evo Answer: Explicit Inheritance

Mizar Evo **specification example**

```
definition
  struct AddMagma where
    field carrier -> set;
    field add -> BinOp of carrier;
  end;

  inherit AddMagma extends Magma where
    field carrier from carrier;
    field add from binop;    :: renamed
  end;
end;
```

Key Points:

- one inherit statement per parent; mapping and renaming are source text;
- narrowing and type conversions carry coherence proof obligations;
- the additive/multiplicative naming convention becomes a checked view.

Presenter script: Read aloud:

- one inherit statement per parent; mapping and renaming are source text;
- narrowing and type conversions carry coherence proof obligations;
- the additive/multiplicative naming convention becomes a checked view.

After the example, say which design obligation the syntax makes visible.

3.5 - The Evo Answer: Diamonds Become Checkable (1/2)

Mizar Evo **specification example**

```
struct DoubleLoopStr where
  field carrier -> set;
  field add -> BinOp of carrier;
  field mul -> BinOp of carrier;
  property zero -> Element of carrier;
  property one -> Element of carrier;
end;

inherit DoubleLoopStr extends AddLoopStr;
inherit DoubleLoopStr extends MulLoopStr;
```

2026-07-15

Mizar Evo

└ Part 3. Story 2: Structures Without Hidden Merges

└ 3.5 - The Evo Answer: Diamonds Become Checkable (1/2)

3.5 - The Evo Answer: Diamonds Become Checkable (1/2)


Mizar Evo **specification example**

```
struct DoubleLoopStr where
  field carrier -> Set;
  field add -> BinOp of carrier;
  field mul -> BinOp of carrier;
  property zero -> Element of carrier;
  property one -> Element of carrier;
end;

inherit DoubleLoopStr extends AddLoopStr;
inherit DoubleLoopStr extends MulLoopStr;
```

Presenter script: After the example, say which design obligation the syntax makes visible. Use this as the transition: The Evo Answer: Diamonds Become Checkable (1/2). Point to the visible example, question, or diagram before moving on.

3.5 - The Evo Answer: Diamonds Become Checkable (2/2)

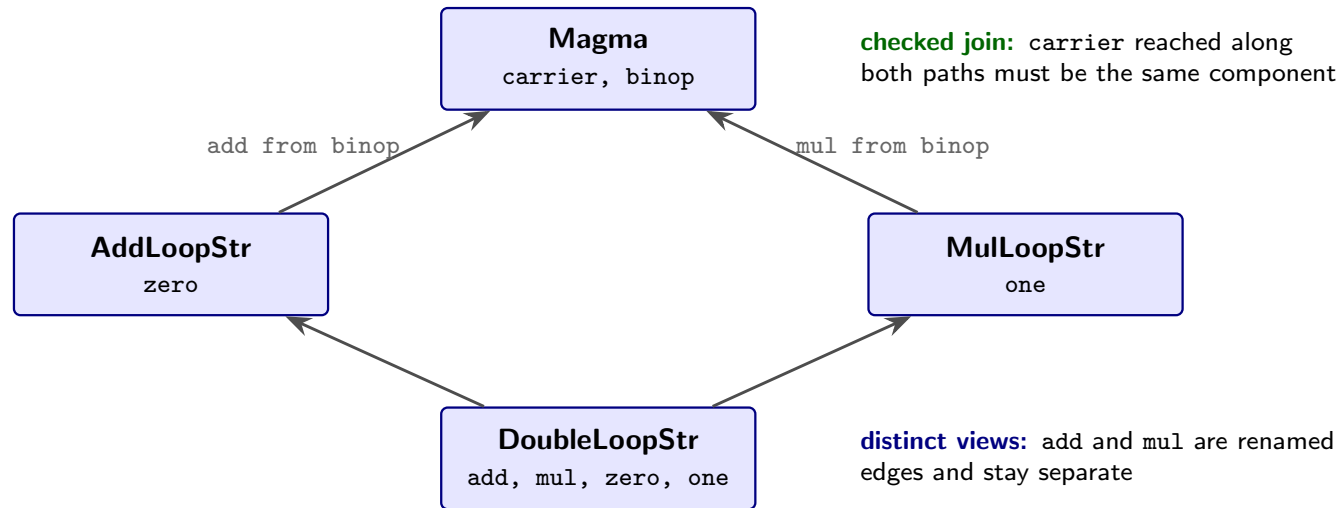

the verifier traces from chains to root declarations — disagreement is a diagnostic with source spans

Message:


- the verifier traces from chains to root declarations; both paths must introduce the same components (the shared carrier above);
- diamond inheritance becomes a diagnostic with source spans, not a silent merge decided by declaration order.

Mizar Evo

└ Part 3. Story 2: Structures Without Hidden Merges

└ 3.5 - The Evo Answer: Diamonds Become Checkable (2/2)

3.5 - The Evo Answer: Diamonds Become Checkable (2/2)

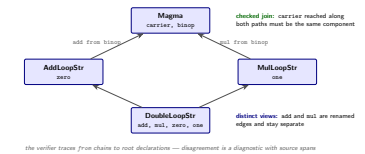

Message:

- the verifier traces from chains to root declarations; both paths must introduce the same components (the shared carrier above);
- diamond inheritance becomes a diagnostic with source spans, not a silent merge decided by declaration order.

Presenter script: Read aloud:

- the verifier traces from chains to root declarations; both paths must introduce the same components (the shared carrier above);
- diamond inheritance becomes a diagnostic with source spans, not a silent merge decided by declaration order.

3.6 - What Is Preserved, What We Ask

Preserved:

- structures remain Mizar structures: carriers, selectors, Element of;
- aggregate compactness is traded only where a hidden decision existed.

Questions for Bialystok:

- Is the field / property / attribute split readable in real algebraic articles, or does it over-annotate simple cases?
- Is one-parent-per-inherit acceptable for the inheritance-heavy parts of MML, such as the ALGSTR and topology hierarchies?
- Which MML structures would be the best diamond test cases?

Mizar Evo

└ Part 3. Story 2: Structures Without Hidden Merges

└ 3.6 - What Is Preserved, What We Ask

3.6 - What Is Preserved, What We Ask

Preserved:

- structures remain Mizar structures: carriers, selectors, Element of;
- aggregate compactness is traded only where a hidden decision existed.

Questions for Bialystok:

- Is the `field` / `property` / `attribute` split readable in real algebraic articles, or does it over-annotate simple cases?
- Is `one-parent-per-inherit` acceptable for the inheritance-heavy parts of MML, such as the ALGSTR and topology hierarchies?
- Which MML structures would be the best diamond test cases?

Presenter script: Read aloud:

- structures remain Mizar structures: carriers, selectors, Element of;
- aggregate compactness is traded only where a hidden decision existed.
- Is the `field` / `property` / `attribute` split readable in real algebraic articles, or does it over-annotate simple cases?
- Is `one-parent-per-inherit` acceptable for the inheritance-heavy parts of MML, such as the ALGSTR and topology hierarchies?
- Which MML structures would be the best diamond test cases?

4.1 - The Pain

Legacy Mizar **exact MML excerpt**

```
registration
  let M be addMagma;
  cluster right_add-cancelable left_add-cancelable -> add-cancelable for
Element
  of M;
  coherence;
end;
```

2026-07-15

Mizar Evo

└ Part 4. Story 3: Automation You Can Audit

└ 4.1 - The Pain

4.1 - The Pain

Legacy Mizar

exact MML excerpts

```
registration
  let M be addMagma;
  cluster right_add-cancelable left_add-cancelable -> add-cancelable for
  Element
    of M;
  coherence;
end;
```

Presenter script: Say:

- Source: current MML `algstr_0.miz`, lines 104-109.
- Registrations are one of Mizar's best ideas: adjectives propagate silently and proofs stay short. The pain is not the mechanism but its opacity.

Key Points:

- When a proof fails, "why does the checker not see that this is a Group?" has no local answer; the cause lives somewhere in the environment.
- Which registrations fired, in which order, is invisible; the automation is powerful, but its explanation does not scale with its power.
- For an AI assistant the situation is worse: it must guess the cluster state instead of reading it.

Message:

- Automation that cannot explain itself becomes a maintenance liability at library scale - even when it is sound.

Mizar Evo

└ Part 4. Story 3: Automation You Can Audit

└ 4.2 - Why It Hurts

deep dive

4.2 - Why It Hurts

deep dive

Key Points:

- When a proof fails, "why does the checker not see that this is a Group?" has no local answer; the cause lives somewhere in the environment.
- Which registrations fired, in which order, is invisible; the automation is powerful, but its explanation does not scale with its power.
- For an AI assistant the situation is worse: it must guess the cluster state instead of reading it.

Message:

- Automation that cannot explain itself becomes a maintenance liability at library scale – even when it is sound.

Presenter script: Read aloud:

- When a proof fails, "why does the checker not see that this is a Group?" has no local answer; the cause lives somewhere in the environment.
- Which registrations fired, in which order, is invisible; the automation is powerful, but its explanation does not scale with its power.
- For an AI assistant the situation is worse: it must guess the cluster state instead of reading it.
- Automation that cannot explain itself becomes a maintenance liability at library scale – even when it is sound.

4.3 - The Evo Answer: Labeled, Traceable Registrations

Mizar Evo **specification example**

```
registration
  cluster EmptyImpliesFinite: empty -> finite for set;
  coherence proof ... end;

  cluster FiniteImpliesCountable: finite -> countable for set;
  coherence proof ... end;
end;
```

Key Points:

- every registration item carries a required label: citable in by, reported in diagnostics, part of the module interface;
- the verifier stores an import-filtered cluster resolution graph;
- @show_resolution and explanation artifacts answer "why (not)?" with the actual chain, e.g. empty -> finite -> countable.

Mizar Evo

└ Part 4. Story 3: Automation You Can Audit

└ 4.3 - The Evo Answer: Labeled, Traceable Registrations

4.3 - The Evo Answer: Labeled, Traceable Registrations

Mizar Evo **specification example**

```
registration
  cluster EmptyImpliesFinite: empty -> finite for set;
  coherence proof ... end;

  cluster FiniteImpliesCountable: finite -> countable for set;
  coherence proof ... end;
end;
```

Key Points:

- every registration item carries a required label: citable in by, reported in diagnostics, part of the module interface;
- the verifier stores an import-filtered cluster resolution graph;
- @show_resolution and explanation artifacts answer "why (not)?" with the actual chain, e.g. empty -> finite -> countable.

Presenter script: Read aloud:

- every registration item carries a required label: citable in by, reported in diagnostics, part of the module interface;
- the verifier stores an import-filtered cluster resolution graph;
- @show_resolution and explanation artifacts answer "why (not)?" with the actual chain, e.g. empty -> finite -> countable.

After the example, say which design obligation the syntax makes visible.

Mizar Evo **specification example**

```
registration
  let n be Nat;
  reduce NatAddZero: n + 0 to n;
  reducibility
  proof
    let n be Nat;
    thus n + 0 = n by mml.number.natural.Nat_add_zero;
  end;
end;
```

Key Points:

- a reduction is an oriented simplification backed by an equality proof;
- the right side must be strictly smaller, so imported rules cannot loop, and rule selection is deterministic (pattern subsumption, then guard specificity, then FQN tie-break);
- unoriented identification idioms become auditable reduce items.

Mizar Evo

└ Part 4. Story 3: Automation You Can Audit

└ 4.4 - The Evo Answer: Oriented Reductions

deep dive

Mizar Evo **specification example**

```
registration
  let n be Nat;
  reduce NatAddZero: n + 0 to n;
  reducibility
  proof
    let n be Nat;
    thus n + 0 = n by mml.number.natural.Nat_add_zero;
  end;
end;
```

Key Points:

- a reduction is an oriented simplification backed by an equality proof;
- the right side must be strictly smaller, so imported rules cannot loop, and rule selection is deterministic (pattern subsumption, then guard specificity, then FQN tie-break);
- unoriented identification idioms become auditable reduce items.

Presenter script: Read aloud:

- a reduction is an oriented simplification backed by an equality proof;
- the right side must be strictly smaller, so imported rules cannot loop, and rule selection is deterministic (pattern subsumption, then guard specificity, then FQN tie-break);
- unoriented identification idioms become auditable reduce items.

After the example, say which design obligation the syntax makes visible.

4.5 - What Is Preserved, What We Ask

Preserved:

- registrations and clusters remain first-class; proofs stay short;
- no new proof text is required at use sites - only traces are added.

Questions for Bialystok:

- Which cluster explanations would most reduce daily friction: failure explanations, firing traces, or difference reports between environments?
- Which MML article families stress registrations hardest and should become migration benchmarks for the cluster graph?

Mizar Evo

└ Part 4. Story 3: Automation You Can Audit

└ 4.5 - What Is Preserved, What We Ask

4.5 - What Is Preserved, What We Ask

Preserved:

- registrations and clusters remain first-class; proofs stay short;
- no new proof text is required at use sites - only traces are added.

Questions for Bialystok:

- Which cluster explanations would most reduce daily friction: failure explanations, firing traces, or difference reports between environments?
- Which MML article families stress registrations hardest and should become migration benchmarks for the cluster graph?

Presenter script: Read aloud:

- registrations and clusters remain first-class; proofs stay short;
- no new proof text is required at use sites - only traces are added.
- Which cluster explanations would most reduce daily friction: failure explanations, firing traces, or difference reports between environments?
- Which MML article families stress registrations hardest and should become migration benchmarks for the cluster graph?

5.1 - The Pain

Key Points:

- Users want stronger automation: bigger by steps, hammer-style search.
- But in a monolithic verifier, every gain in search power grows the code that must be trusted.
- External provers (ATPs) are strong exactly where Mizar's core is first-order - and they are the least auditable component of all.
- MizAR and the MPTP line of work already showed that ATP search is powerful on MML premises; the open question is trust, not power.

Key Phrase:

*How do we get modern proof search
without trusting the searcher?*

Mizar Evo

└ Part 5. Story 4: Powerful Search, Small Trust

└ 5.1 - The Pain

5.1 - The Pain

Key Points:

- Users want stronger automation: bigger by steps, hammer-style search.
- But in a monolithic verifier, every gain in search power grows the code that must be trusted.
- External provers (ATPs) are strong exactly where Mizar's core is first-order - and they are the least auditable component of all.
- MizAR and the MPTP line of work already showed that ATP search is powerful on MML premises; the open question is trust, not power.

Key Phrase:

*How do we get modern proof search
without trusting the searcher?*


Presenter script: Say:

- Acknowledge MizAR, MPTP, and the hammer line of research explicitly: they demonstrated the search power on MML. Mizar Evo's contribution is the boundary that lets that power in without enlarging the trusted base.

Read aloud:

- Users want stronger automation: bigger by steps, hammer-style search.
- But in a monolithic verifier, every gain in search power grows the code that must be trusted.
- External provers (ATPs) are strong exactly where Mizar's core is first-order - and they are the least auditable component of all.

5.2 - The Evo Answer: A Reasoning Boundary

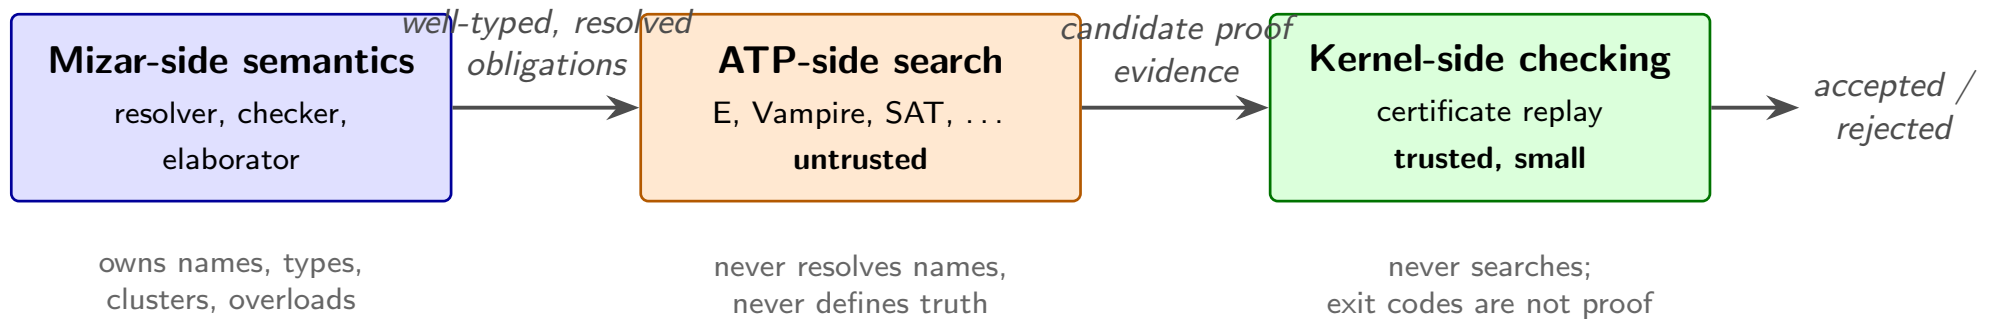

Key rules:


- ATPs never resolve names, infer types, expand clusters, or pick overloads;
- the kernel never searches for proofs;
- deterministic pre-ATP discharge needs replayable evidence too - nothing is accepted because an earlier phase said "done".

Mizar Evo

└ Part 5. Story 4: Powerful Search, Small Trust

└ 5.2 - The Evo Answer: A Reasoning Boundary

5.2 - The Evo Answer: A Reasoning Boundary




Key rules:

- ATPs never resolve names, infer types, expand clusters, or pick overloads;
- the kernel never searches for proofs;
- deterministic pre-ATP discharge needs replayable evidence too - nothing is accepted because an earlier phase said "done".

Presenter script: Read aloud:

- ATPs never resolve names, infer types, expand clusters, or pick overloads;
- the kernel never searches for proofs;
- deterministic pre-ATP discharge needs replayable evidence too - nothing is accepted because an earlier phase said "done".

5.3 - Certificates, Not Success Bits (1/2)

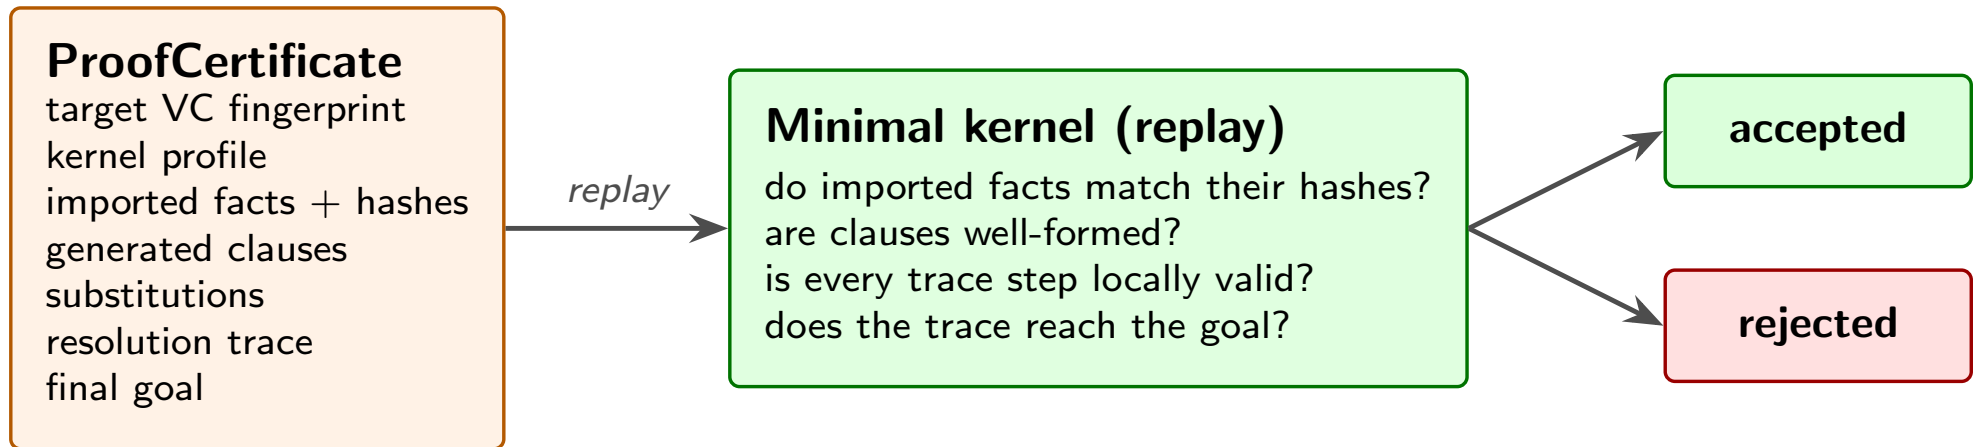

*solver exit codes never enter the decision —
hashes pin the proof to its dependency slice*


2026-07-15

Mizar Evo

└ Part 5. Story 4: Powerful Search, Small Trust

└ 5.3 - Certificates, Not Success Bits (1/2)

5.3 - Certificates, Not Success Bits (1/2)



Presenter script: Use this as the transition: Certificates, Not Success Bits (1/2). Point to the visible example, question, or diagram before moving on.

5.3 - Certificates, Not Success Bits (2/2)

Key Points:

- accepted evidence is normalized into replayable certificate data;
- the kernel checks imported facts, substitutions, clause well-formedness, and the resolution/SAT trace - it does not trust a solver's exit code, so unsoundness in search cannot become unsoundness in accepted results;
- a proof accepted under one dependency slice cannot silently migrate to another: the hashes pin it down.

Mizar Evo

└ Part 5. Story 4: Powerful Search, Small Trust

└ 5.3 - Certificates, Not Success Bits (2/2)

Key Points:

- accepted evidence is normalized into replayable certificate data;
- the kernel checks imported facts, substitutions, clause well-formedness, and the resolution/SAT trace - it does not trust a solver's exit code, so unsoundness in search cannot become unsoundness in accepted results;
- a proof accepted under one dependency slice cannot silently migrate to another: the hashes pin it down.

Presenter script: Read aloud:

- accepted evidence is normalized into replayable certificate data;
- the kernel checks imported facts, substitutions, clause well-formedness, and the resolution/SAT trace - it does not trust a solver's exit code, so unsoundness in search cannot become unsoundness in accepted results;
- a proof accepted under one dependency slice cannot silently migrate to another: the hashes pin it down.

5.4 - The Same Boundary Tames AI

Legacy Mizar **exact MML excerpt**

```
theorem
  for F being non degenerated ZeroOneStr holds 1.F in NonZero F
proof
  let F be non degenerated ZeroOneStr;
  not 1.F in {0.F} by TARSKI:def 1;
  hence thesis by XBOOLE_0:def 5;
end;
```

Message:

- Citation repair - proposing a missing or sharper by reference - is the canonical safe AI edit: source-local, meaning-preserving, and checked by the verifier like any human edit.

Mizar Evo

└ Part 5. Story 4: Powerful Search, Small Trust

└ 5.4 - The Same Boundary Tames AI

5.4 - The Same Boundary Tames AI

Legacy Mizar **exact MML excerpt**

```
theorem
  for F being non degenerated ZeroOneStr holds 1.F in NonZero F
proof
  let F be non degenerated ZeroOneStr;
  not 1.F in {0.F} by TARSKI:def 1;
  hence thesis by XBOOLE_0:def 5;
end;
```

Message:

- Citation repair - proposing a missing or sharper by reference - is the canonical safe AI edit: source-local, meaning-preserving, and checked by the verifier like any human edit.

Presenter script: Say:

- Source: current MML struct_0.miz, lines 637-643.
- The agent proposes; the verifier and kernel decide. The assistant's strength never enters the trusted base.

Read aloud:

- Citation repair - proposing a missing or sharper by reference - is the canonical safe AI edit: source-local, meaning-preserving, and checked by the verifier like any human edit.

5.5 - Edit Classes: Green, Yellow, Red

deep dive

Class	Examples	Policy
Green	add citation, insert qua, info annotation	auto-proposable, still verified
Yellow	add import, local lemma, registration	proposed with human review
Red	weaken theorem, change definition, add axiom	forbidden to ordinary agents

Forbidden repair **sketch**

```
theorem
  for x be Nat holds x + 0 = x or x = 0;
```

Message:

- Weakening a statement to make its proof easier is a Red edit; at most an agent may flag it for explicit human unsafe-edit review.

Mizar Evo

└ Part 5. Story 4: Powerful Search, Small Trust

└ 5.5 - Edit Classes: Green, Yellow, Red

deep dive

5.5 - Edit Classes: Green, Yellow, Red

deep dive

Class	Examples	Policy
Green	add citation, insert qua. info, a notation	auto-proposable, still verified
Yellow	add import, local lemma, registration	proposed with human review
Red	weaken theorem, change definition, add axiom	forbidden to ordinary agents

Forbidden repair sketch

```
theorem
  for x be Nat holds x + 0 = x or x = 0;
```

Message:

- Weakening a statement to make its proof easier is a Red edit; at most an agent may flag it for explicit human unsafe-edit review.

Presenter script: Read aloud:

- Weakening a statement to make its proof easier is a Red edit; at most an agent may flag it for explicit human unsafe-edit review.

After the example, say which design obligation the syntax makes visible.
For the table, read the row labels first, then the design reason.

5.6 - What Is Preserved, What We Ask

Preserved:

- the de Bruijn discipline: a small checker judges everything;
- proof text stays declarative and readable - automation maintains the argument, it does not replace it.

Questions for Bialystok:

- Is the SAT/resolution certificate story convincing for Mizar-style obligations, including clusters and definitional expansions?
- Which evidence format would the team be most willing to audit?

Mizar Evo

└ Part 5. Story 4: Powerful Search, Small Trust

└ 5.6 - What Is Preserved, What We Ask

5.6 - What Is Preserved, What We Ask

Preserved:

- the de Bruijn discipline: a small checker judges everything;
- proof text stays declarative and readable - automation maintains the argument, it does not replace it.

Questions for Białystok:

- Is the SAT/resolution certificate story convincing for Mizar-style obligations, including clusters and definitional expansions?
- Which evidence format would the team be most willing to audit?

Presenter script: Read aloud:

- the de Bruijn discipline: a small checker judges everything;
- proof text stays declarative and readable - automation maintains the argument, it does not replace it.
- Is the SAT/resolution certificate story convincing for Mizar-style obligations, including clusters and definitional expansions?
- Which evidence format would the team be most willing to audit?

6.1 - The Pain

Key Points:

- Verifying the whole MML is a batch operation measured in hours.
- The reuse boundary is the accepted article: a small change re-verifies more than it should.
- Memory follows the article environment, not the actually used interface.
- None of this is a defect of the current design - it is what article-level granularity implies once the library is large.

Mizar Evo

└ Part 6. Story 5: Verification That Scales

└ 6.1 - The Pain

6.1 - The Pain

Key Points:

- Verifying the whole MML is a batch operation measured in hours.
- The reuse boundary is the accepted article: a small change re-verifies more than it should.
- Memory follows the article environment, not the actually used interface.
- None of this is a defect of the current design - it is what article-level granularity implies once the library is large.

Presenter script: Read aloud:

- Verifying the whole MML is a batch operation measured in hours.
- The reuse boundary is the accepted article: a small change re-verifies more than it should.
- Memory follows the article environment, not the actually used interface.
- None of this is a defect of the current design - it is what article-level granularity implies once the library is large.

6.2 - The Evo Answer: Fingerprints And Incrementality (1/2)

Key Points:

- hash the source, the dependency interfaces, the generated obligations, and the proof witnesses;
- reuse a result only when fingerprints and verifier policy match;
- a proof-body-only change does not rebuild importers, because public statements and statuses are unchanged;
- independent modules, obligations, ATP runs, and kernel checks run in parallel; results are published in canonical order.

Mizar Evo

└ Part 6. Story 5: Verification That Scales

└ 6.2 - The Evo Answer: Fingerprints And Incrementality (1/2)

6.2 - The Evo Answer: Fingerprints And Incrementality (1/2)



Key Points:

- hash the source, the dependency interfaces, the generated obligations, and the proof witnesses;
- reuse a result only when fingerprints and verifier policy match;
- a proof-body-only change does not rebuild importers, because public statements and statuses are unchanged;
- independent modules, obligations, ATP runs, and kernel checks run in parallel; results are published in canonical order.

Presenter script: Read aloud:

- hash the source, the dependency interfaces, the generated obligations, and the proof witnesses;
- reuse a result only when fingerprints and verifier policy match;
- a proof-body-only change does not rebuild importers, because public statements and statuses are unchanged;
- independent modules, obligations, ATP runs, and kernel checks run in parallel; results are published in canonical order.

6.2 - The Evo Answer: Fingerprints And Incrementality (2/2)

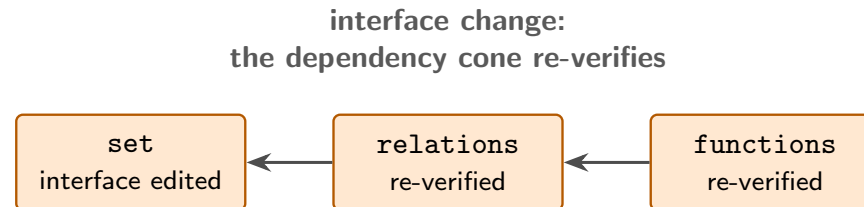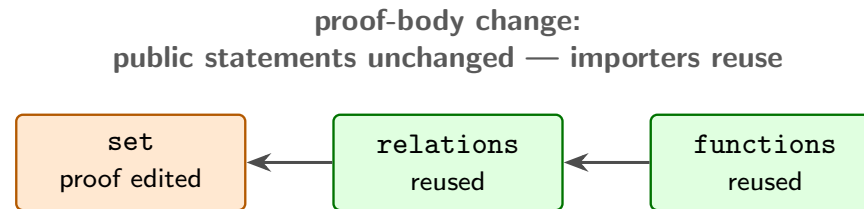

reuse requires matching fingerprints: source, dependency interfaces, obligations, proof witnesses — and a clean build must reproduce every acceptance

Rule:

*Cache reuse is never proof authority.
A clean build must always be able to reproduce every acceptance.*


2026-07-15

Mizar Evo

└ Part 6. Story 5: Verification That Scales

└ 6.2 - The Evo Answer: Fingerprints And Incrementality (2/2)

6.2 - The Evo Answer: Fingerprints And Incrementality (2/2)



Rule:

*Cache reuse is never proof authority.
A clean build must always be able to reproduce every acceptance.*

Presenter script: After the example, say which design obligation the syntax makes visible. Use this as the transition: The Evo Answer: Fingerprints And Incrementality (2/2). Point to the visible example, question, or diagram before moving on.

resident memory should scale with:

- active source
- imported public interfaces
- import-filtered indexes
- active module obligations

not with:

- imported proof bodies
- private lemmas outside the interface
- registration data outside the import closure

Message:

- Interfaces are loaded; proof bodies are not. This is what makes whole-MML editing sessions feasible on ordinary hardware.

Mizar Evo

└ Part 6. Story 5: Verification That Scales

└ 6.3 - The Evo Answer: A Memory Contract

deep dive

```
resident memory should scale with:  
  active source  
  imported public interfaces  
  import-filtered indexes  
  active module obligations  
  
not with:  
  imported proof bodies  
  private lemmas outside the interface  
  registration data outside the import closure
```

Message:

- Interfaces are loaded; proof bodies are not. This is what makes whole-MML editing sessions feasible on ordinary hardware.

Presenter script: Read aloud:

- Interfaces are loaded; proof bodies are not. This is what makes whole-MML editing sessions feasible on ordinary hardware.

After the example, say which design obligation the syntax makes visible.

6.4 - What Is Preserved, What We Ask

Preserved:

- clean-build semantics: caching and parallelism change speed, never truth;
- article-style review: what a human reads is still complete source text.

Questions for Bialystok:

- What clean-build equivalence tests would make incremental verification trustworthy to the team that maintains MML today?
- Which current maintenance operations (revisions, renamings) should we benchmark for incremental cost?

Mizar Evo

└ Part 6. Story 5: Verification That Scales

└ 6.4 - What Is Preserved, What We Ask

6.4 - What Is Preserved, What We Ask

Preserved:

- clean-build semantics: caching and parallelism change speed, never truth;
- article-style review: what a human reads is still complete source text.

Questions for Bialystok:

- What clean-build equivalence tests would make incremental verification trustworthy to the team that maintains MML today?
- Which current maintenance operations (revisions, renamings) should we benchmark for incremental cost?

Presenter script: Read aloud:

- clean-build semantics: caching and parallelism change speed, never truth;
- article-style review: what a human reads is still complete source text.
- What clean-build equivalence tests would make incremental verification trustworthy to the team that maintains MML today?
- Which current maintenance operations (revisions, renamings) should we benchmark for incremental cost?

7.1 - The Pain, Part One: Schemes Are Fenced Off

Legacy Mizar **exact MML excerpt**

```
scheme
  NatInd { P[Nat] } : for k being Nat holds P[k]
provided
A1: P[0] and
A2: for k be Nat st P[k] holds P[k + 1]
```

Key Points:

- schemes carry second-order patterns (induction, separation, replacement) and they work - but they are a separate mechanism with separate rules;
- schemes can parameterize theorems, but not structures, modes, or functors.

Mizar Evo

└ Part 7. Story 6: Templates For Generic Mathematics

└ 7.1 - The Pain, Part One: Schemes Are Fenced Off

7.1 - The Pain, Part One: Schemes Are Fenced Off

Legacy Mizar [exact MML excerpt](#)

```
scheme
  NatInd { P[Nat] } : for k being Nat holds P[k]
provided
  A1: P[0] and
  A2: for k be Nat at P[k] holds P[k + 1]
```

Key Points:

- schemes carry second-order patterns (induction, separation, replacement) and they work - but they are a separate mechanism with separate rules;
- schemes can parameterize theorems, but not structures, modes, or functors.

Presenter script: Say:

- Source: current MML `nat_1.miz`, near line 90 (checked July 2, 2026).

Read aloud:

- schemes carry second-order patterns (induction, separation, replacement) and they work - but they are a separate mechanism with separate rules;
- schemes can parameterize theorems, but not structures, modes, or functors.

7.2 - The Pain, Part Two: Copy-Paste Algebra

Key Points:

- `addMagma` and `multMagma` are the same mathematics twice, related only by naming convention (story 2 met this already);
- polynomial rings, vector spaces, and matrix theories are re-spelled per carrier because there is no parameterized construction;
- a theorem proved for one commutative operation is re-proved for `+` and `*` separately.

Message:

- The library pays for the missing generics mechanism in duplicated articles, and every duplicate is a maintenance obligation.

Mizar Evo

└ Part 7. Story 6: Templates For Generic Mathematics

└ 7.2 - The Pain, Part Two: Copy-Paste Algebra

7.2 - The Pain, Part Two: Copy-Paste Algebra

Key Points:

- addMagma and multMagma are the same mathematics twice, related only by naming convention (story 2 met this already);
- polynomial rings, vector spaces, and matrix theories are re-spelled per carrier because there is no parameterized construction;
- a theorem proved for one commutative operation is re-proved for $+$ and $*$ separately.

Message:

- The library pays for the missing generics mechanism in duplicated articles, and every duplicate is a maintenance obligation.

Presenter script: Read aloud:

- addMagma and multMagma are the same mathematics twice, related only by naming convention (story 2 met this already);
- polynomial rings, vector spaces, and matrix theories are re-spelled per carrier because there is no parameterized construction;
- a theorem proved for one commutative operation is re-proved for $+$ and $*$ separately.
- The library pays for the missing generics mechanism in duplicated articles, and every duplicate is a maintenance obligation.

7.3 - The Evo Answer: Templates

Mizar Evo **specification example**

```
definition
  let T be type;
  struct MagmaStr[T] where
    field carrier -> T;
    field binop -> BinOp of T;
  end;
end;
```

Key Points:

- a template is an ordinary definition block whose leading `let` binds parameters: types, values, predicates, or functors;
- one mechanism covers structures, modes, functors, predicates, theorems, registrations, and algorithms;
- readable shorthands survive: `Module over R` is an automatic synonym for `Module[R]`, `Subset of X` for `Subset[X]`.

Mizar Evo

└ Part 7. Story 6: Templates For Generic Mathematics

└ 7.3 - The Evo Answer: Templates

7.3 - The Evo Answer: Templates

Mizar Evo **specification example**

```
definition
  let T be type;
  struct MagmaStr(T) where
    field carrier -> T;
    field binop -> BinOp of T;
  end;
end;
```

Key Points:

- a template is an ordinary definition block whose leading let binds parameters: types, values, predicates, or functors;
- one mechanism covers structures, modes, functors, predicates, theorems, registrations, and algorithms;
- readable shorthands survive: `Module over R` is an automatic synonym for `Module[R]`, `Subset of X` for `Subset[X]`.

Presenter script: Read aloud:

- a template is an ordinary definition block whose leading let binds parameters: types, values, predicates, or functors;
- one mechanism covers structures, modes, functors, predicates, theorems, registrations, and algorithms;
- readable shorthands survive: `Module over R` is an automatic synonym for `Module[R]`, `Subset of X` for `Subset[X]`.

After the example, say which design obligation the syntax makes visible.

Mizar Evo **specification example**

```
definition
  let T be type extends commutative Magma;
  theorem PermProduct[T]:
    for s being FinSequence of T,
      p being Permutation of dom s
    holds Product[T](s) = Product[T](s * p)
  proof ... end;
end;
```

Message:

- type extends commutative Magma states what the parameter must provide before any proof search begins;
- the theorem is proved once, for every commutative operation.

Mizar Evo

└ Part 7. Story 6: Templates For Generic Mathematics

└ 7.4 - Bounded Parameters And Generic Theorems

deep dive

Mizar Evo **specification example**

```
definition
  let T be type extends commutative Magma;
  theorem PermProduct[T]:
    for s being FinSequence of T,
      p being Permutation of dom s
    holds Product[T](s) = Product[T](s * p)
  proof ... end;
end;
```

Message:

- type extends commutative Magma states what the parameter must provide before any proof search begins;
- the theorem is proved once, for every commutative operation.

Presenter script: Read aloud:

- type extends commutative Magma states what the parameter must provide before any proof search begins;
- the theorem is proved once, for every commutative operation.

After the example, say which design obligation the syntax makes visible.

Instantiation **specification example**

```
PermProduct[AddMagma]           :: additive form
PermProduct[commutative MulMagma] :: multiplicative form

let R be commutative Ring;
PermProduct[R qua AddMagma]      :: R's additive view
PermProduct[R qua MulMagma]     :: R's multiplicative view
```

Message:

- qua selects the intended view when a ring reaches Magma along two paths - and notation follows the view: the generic * displays as + under the additive instantiation.

Mizar Evo

└ Part 7. Story 6: Templates For Generic Mathematics

└ 7.5 - One Proof, Many Instantiations

deep dive

7.5 - One Proof, Many Instantiations

deep dive

Instantiation **specification example**

```

PerProduct [AddMagma]      :: additive form
PerProduct [commutative MulMagma] :: multiplicative form

let R be commutative Ring;
PerProduct [R qua AddMagma]  :: R's additive view
PerProduct [R qua MulMagma]  :: R's multiplicative view

```

Message:

- qua selects the intended view when a ring reaches Magma along two paths - and notation follows the view: the generic $*$ displays as $+$ under the additive instantiation.

Presenter script: Read aloud:

- qua selects the intended view when a ring reaches Magma along two paths - and notation follows the view: the generic $*$ displays as $+$ under the additive instantiation.

After the example, say which design obligation the syntax makes visible.

Mizar Evo **specification example**

```
definition
  let P be pred(Nat);
  theorem NatInduction[P]:
    P(0) & (for n being Nat st P(n) holds P(n+1))
    implies for n being Nat holds P(n)
  proof ... end;
end;
```

Key Points:

- predicate parameters follow the familiar defpred convention;
- legacy schemes have a direct, mechanical migration target;
- instantiation is explicit bracket syntax, so tools and artifacts see exactly which instance a proof uses.

Mizar Evo

└ Part 7. Story 6: Templates For Generic Mathematics

└ 7.6 - Schemes Become Ordinary Templates

deep dive

Mizar Evo **specification example**

```
definition
  let P be pred(Nat);
  theorem NatInduction[P]:
    P(0) & (for n being Nat st P(n) holds P(n+1))
    implies for n being Nat holds P(n)
  proof ... end;
end;
```

Key Points:

- predicate parameters follow the familiar defpred convention;
- legacy schemes have a direct, mechanical migration target;
- instantiation is explicit bracket syntax, so tools and artifacts see exactly which instance a proof uses.

Presenter script: Read aloud:

- predicate parameters follow the familiar defpred convention;
- legacy schemes have a direct, mechanical migration target;
- instantiation is explicit bracket syntax, so tools and artifacts see exactly which instance a proof uses.

After the example, say which design obligation the syntax makes visible.

7.7 - What Is Preserved, What We Ask

Preserved:

- scheme-style reasoning survives unchanged in power;
- of / over phrasing keeps mathematical prose readable;
- first-order discipline: templates are checked instantiation, not a new logic.

Questions for Bialystok:

- Which MML schemes should be the first migration targets?
- Are brackets acceptable as the canonical identity form, with of/over as display forms?
- The specification settles inference conservatively: a parameter is inferred only when the declared argument types determine it uniquely, and qua views are never inferred. Is that conservatism right for real MML idioms, or does it demand too many explicit [T]?

Mizar Evo

└ Part 7. Story 6: Templates For Generic Mathematics

└ 7.7 - What Is Preserved, What We Ask

7.7 - What Is Preserved, What We Ask

Preserved:

- scheme-style reasoning survives unchanged in power;
- of / over phrasing keeps mathematical prose readable;
- first-order discipline: templates are checked instantiation, not a new logic.

Questions for Bialystok:

- Which MML schemes should be the first migration targets?
- Are brackets acceptable as the canonical identity form, with of/over as display forms?
- The specification settles inference conservatively: a parameter is inferred only when the declared argument types determine it uniquely, and qua views are never inferred. Is that conservatism right for real MML idioms, or does it demand too many explicit [T]?

Presenter script: Read aloud:

- scheme-style reasoning survives unchanged in power;
- of / over phrasing keeps mathematical prose readable;
- first-order discipline: templates are checked instantiation, not a new logic.
- Which MML schemes should be the first migration targets?
- Are brackets acceptable as the canonical identity form, with of/over as display forms?

8.1 - The Pain

Key Points:

- Current Mizar can define Gcd and prove its theory - but cannot compute `gcd(48, 18)`; every numeric fact needs a hand-written proof chain.
- There is no checked connection between MML mathematics and executable code; verified-algorithm work must leave the system entirely.
- This is a boundary of the design, not a defect: Mizar chose to be a proof language. The question is whether that boundary still serves us.

Key Phrase:

*The library describes computation.
It cannot perform or export it.*

Mizar Evo

└ Part 8. Story 7: Verified Computation With Algorithms

└ 8.1 - The Pain

8.1 - The Pain

Key Points:

- Current Mizar can define Gcd and prove its theory - but cannot compute $\text{gcd}(48, 18)$; every numeric fact needs a hand-written proof chain.
- There is no checked connection between MML mathematics and executable code; verified-algorithm work must leave the system entirely.
- This is a boundary of the design, not a defect: Mizar chose to be a proof language. The question is whether that boundary still serves us.

Key Phrase:

*The library describes computation.
It cannot perform or export it.*

Presenter script: Read aloud:

- Current Mizar can define Gcd and prove its theory - but cannot compute $\text{gcd}(48, 18)$; every numeric fact needs a hand-written proof chain.
- There is no checked connection between MML mathematics and executable code; verified-algorithm work must leave the system entirely.
- This is a boundary of the design, not a defect: Mizar chose to be a proof language. The question is whether that boundary still serves us.

After the example, say which design obligation the syntax makes visible.

8.2 - The Evo Answer: Algorithms With Contracts

Mizar Evo **specification example** (condensed from spec section 20.12)

```
definition
  let a, b be Nat;
  terminating algorithm euclid_gcd(a, b) -> Nat
    requires a >= 1 & b >= 1
    ensures result = Gcd(a, b)
  do
    var x := a; var y := b;
    while y <> 0 do
      invariant x >= 1 & y >= 0 & Gcd(a, b) = Gcd(x, y);
      decreasing y;
      const r := x mod y; x := y; y := r;
    end;
    return x;
  end;
end;
```

Message:

- ensures and the invariant cite the mathematical Gcd: no circularity.

Mizar Evo

└ Part 8. Story 7: Verified Computation With Algorithms

└ 8.2 - The Evo Answer: Algorithms With Contracts

8.2 - The Evo Answer: Algorithms With Contracts

Mizar Evo **specification example** (condensed from spec section 20.12)

```
definition
  let a, b be Nat;
  terminating algorithm euclid_gcd(a, b) -> Nat
  requires a >= 1 & b >= 1
  ensures result = Gcd(a, b)
do
  var x := a; var y := b;
  while y <> 0 do
    invariant x >= 1 & y >= 0 & Gcd(a, b) = Gcd(x, y);
    decreasing y;
    const r := x mod y; x := y; y := r;
  end;
  return x;
end;
```

Message:

- ensures and the invariant cite the mathematical Gcd: no circularity.

Presenter script: Say:

- The contract speaks the mathematical language: the algorithm computes, while the library functor Gcd specifies. Termination comes from the decreasing measure on y.

Read aloud:

- ensures and the invariant cite the mathematical Gcd: no circularity.

8.3 - The Evo Answer: Proof By Computation

Mizar Evo **specification example**

```
theorem EuclidGcd12_8:  euclid_gcd(12, 8)  = 4  by computation;  
theorem EuclidGcd100_75: euclid_gcd(100, 75) = 25 by computation;  
  
theorem Fact10: factorial(10) = 3628800  
proof  
  thus thesis by computation(steps: 100000);  
end;
```

Key Points:

- the Mizar Virtual Machine (MVM) evaluates ground goals during verification, under explicit step, time, and depth budgets;
- only ground equalities and ground predicates qualify; everything else still requires a classical proof;
- imported algorithms are opaque: downstream proofs may use only their ensures contract, never their body.

Mizar Evo

└ Part 8. Story 7: Verified Computation With Algorithms

└ 8.3 - The Evo Answer: Proof By Computation

8.3 - The Evo Answer: Proof By Computation

```
Mizar Evo specification example
theorem Euclidgcd12_8: euclid_gcd(12, 8) = 4 by computation;
theorem Euclidgcd100_75: euclid_gcd(100, 75) = 25 by computation;

theorem Fact10: factorial(10) = 3628800
proof
  thus thesis by computation(steps: 100000);
end;
```

Key Points:

- the Mizar Virtual Machine (MVM) evaluates ground goals during verification, under explicit step, time, and depth budgets;
- only ground equalities and ground predicates qualify; everything else still requires a classical proof;
- imported algorithms are opaque: downstream proofs may use only their ensures contract, never their body.

Presenter script: Read aloud:

- the Mizar Virtual Machine (MVM) evaluates ground goals during verification, under explicit step, time, and depth budgets;
- only ground equalities and ground predicates qualify; everything else still requires a classical proof;
- imported algorithms are opaque: downstream proofs may use only their ensures contract, never their body.

After the example, say which design obligation the syntax makes visible.

Mizar Evo **specification example**

```
definition
  let n be Nat;
  terminating algorithm factorial(n) -> Nat
    decreasing n
  do
    if n = 0 do return 1; end;
    return n * factorial(n - 1);
  end;
end;
```

Key Points:

- ordinary func definitions are definitional extensions: never recursive;
- once its termination obligations are discharged, a terminating algorithm is promoted to a genuine functor, usable in any proof;
- this is the only door through which recursion enters the mathematical layer, and it is a proof-shaped door.

Mizar Evo

└ Part 8. Story 7: Verified Computation With Algorithms

└ 8.4 - The Evo Answer: Termination Buys Recursion

deep dive

Mizar Evo specification example

```
definition
  let n be Nat;
  terminating algorithm factorial(n) -> Nat
  decreasing n
  do
    if n = 0 do return 1; end;
    return n * factorial(n - 1);
  end;
end;
```

Key Points:

- ordinary func definitions are definitional extensions: never recursive;
- once its termination obligations are discharged, a terminating algorithm is promoted to a genuine functor, usable in any proof;
- this is the only door through which recursion enters the mathematical layer, and it is a proof-shaped door.

Presenter script: Read aloud:

- ordinary func definitions are definitional extensions: never recursive;
- once its termination obligations are discharged, a terminating algorithm is promoted to a genuine functor, usable in any proof;
- this is the only door through which recursion enters the mathematical layer, and it is a proof-shaped door.

After the example, say which design obligation the syntax makes visible.

Key Points:

- contracts, invariants, and termination measures generate verification conditions that pass through the same ATP-plus-kernel boundary as ordinary theorems (story 4);
- by computation is MVM replay under budgets, not solver trust;
- code extraction (to runtime targets) is strictly downstream of verified artifacts and can never feed back into acceptance.

Message:

- Algorithms widen what the library can express; they do not touch what it means for a theorem to be accepted.

Mizar Evo

└ Part 8. Story 7: Verified Computation With Algorithms

└ 8.5 - Computation Never Redefines Truth

deep dive

Key Points:

- contracts, invariants, and termination measures generate verification conditions that pass through the same ATP-plus-kernel boundary as ordinary theorems (story 4);
- by computation is MVM replay under budgets, not solver trust;
- code extraction (to runtime targets) is strictly downstream of verified artifacts and can never feed back into acceptance.

Message:

- Algorithms widen what the library can express; they do not touch what it means for a theorem to be accepted.

Presenter script: Read aloud:

- contracts, invariants, and termination measures generate verification conditions that pass through the same ATP-plus-kernel boundary as ordinary theorems (story 4);
- by computation is MVM replay under budgets, not solver trust;
- code extraction (to runtime targets) is strictly downstream of verified artifacts and can never feed back into acceptance.
- Algorithms widen what the library can express; they do not touch what it means for a theorem to be accepted.

8.6 - What Is Preserved, What We Ask

Preserved:

- the theorem language is unchanged; algorithms live in definition blocks and interact with proofs only through contracts and verified promotion;
- first-order set-theoretic foundations stay intact.

Questions for Bialystok:

- Which computational examples would demonstrate value to mathematicians without shifting the culture toward programming?
- Are there MML areas (number theory, combinatorics, finite structures) where by computation would immediately shorten real proofs?
- Which extraction targets matter first, if any?

Mizar Evo

└ Part 8. Story 7: Verified Computation With Algorithms

└ 8.6 - What Is Preserved, What We Ask

8.6 - What Is Preserved, What We Ask

Preserved:

- the theorem language is unchanged; algorithms live in definition blocks and interact with proofs only through contracts and verified promotion;
- first-order set-theoretic foundations stay intact.

Questions for Białystok:

- Which computational examples would demonstrate value to mathematicians without shifting the culture toward programming?
- Are there MML areas (number theory, combinatorics, finite structures) where by computation would immediately shorten real proofs?
- Which extraction targets matter first, if any?

Presenter script: Read aloud:

- the theorem language is unchanged; algorithms live in definition blocks and interact with proofs only through contracts and verified promotion;
- first-order set-theoretic foundations stay intact.
- Which computational examples would demonstrate value to mathematicians without shifting the culture toward programming?
- Are there MML areas (number theory, combinatorics, finite structures) where by computation would immediately shorten real proofs?
- Which extraction targets matter first, if any?

9.1 - The Pain

Key Points:

- Formalized Mathematics gives Mizar something rare: a scholarly, citable publication layer over a formal library.
- But article identity and library organization are tightly coupled: refactoring the library strains published article structure, and package reuse has no journal-facing identity at all.
- Exposition wants narrative order; reuse wants dependency order. One structure cannot optimize both.

Mizar Evo

└ Part 9. Story 8: A Library You Can Cite

└ 9.1 - The Pain

9.1 - The Pain


Key Points:

- Formalized Mathematics gives Mizar something rare: a scholarly, citable publication layer over a formal library.
- But article identity and library organization are tightly coupled: refactoring the library strains published article structure, and package reuse has no journal-facing identity at all.
- Exposition wants narrative order; reuse wants dependency order. One structure cannot optimize both.

Presenter script: Read aloud:

- Formalized Mathematics gives Mizar something rare: a scholarly, citable publication layer over a formal library.
- But article identity and library organization are tightly coupled: refactoring the library strains published article structure, and package reuse has no journal-facing identity at all.
- Exposition wants narrative order; reuse wants dependency order. One structure cannot optimize both.

9.2 - The Evo Answer: Linked, Not Merged

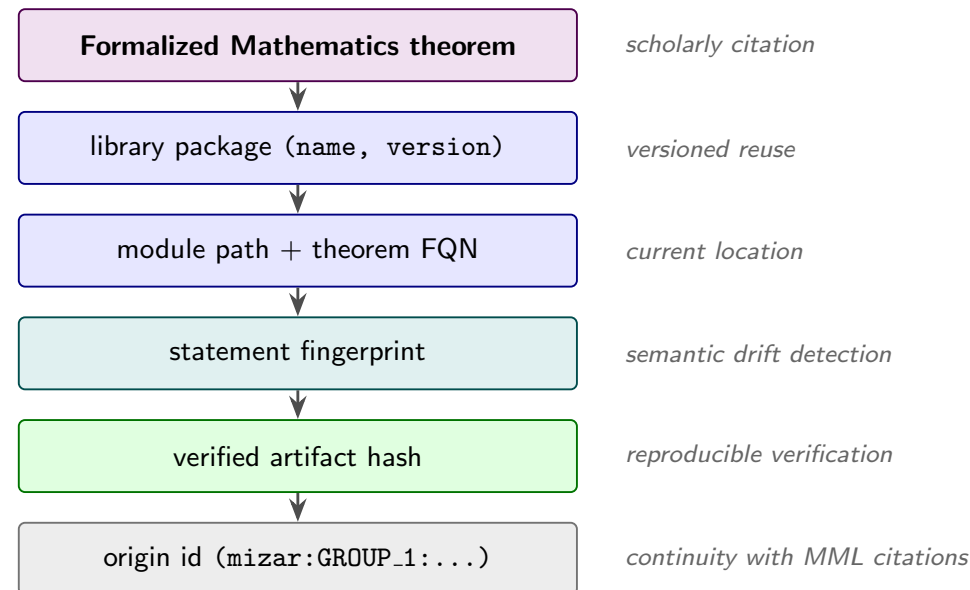

Message:

- each layer answers a different question: scholarly citation, current location, semantic drift detection, reproducible verification, and historical continuity with MML and past Formalized Mathematics volumes.


2026-07-15

Mizar Evo

└ Part 9. Story 8: A Library You Can Cite

└ 9.2 - The Evo Answer: Linked, Not Merged

9.2 - The Evo Answer: Linked, Not Merged



Message:

- each layer answers a different question: scholarly citation, current location, semantic drift detection, reproducible verification, and historical continuity with MML and past Formalized Mathematics volumes.

Presenter script: Read aloud:

- each layer answers a different question: scholarly citation, current location, semantic drift detection, reproducible verification, and historical continuity with MML and past Formalized Mathematics volumes.

Audience	Gain
readers	prose stays primary; formal source is one click away
maintainers	refactoring no longer rewrites published exposition
authors	articles cite stable identities, not file layouts
AI tools	prose for retrieval, fingerprints for exact context

2026-07-15

Mizar Evo

└ Part 9. Story 8: A Library You Can Cite

└ 9.3 - Who Gains What

deep dive

9.3 - Who Gains What	
	deep dive
Audience	Gain
readers	prose stays primary; formal source is one click away
mainainers	refactoring no longer rewrites published exposition
authors	articles cite stable identities, not file layouts
AI tools	prose for retrieval, fingerprints for exact context

Presenter script: For the table, read the row labels first, then the design reason.
Use this as the transition: Who Gains What. Point to the visible example, question, or diagram before moving on.

9.4 - What Is Preserved, What We Ask

Preserved:

- Formalized Mathematics remains a real journal with review and exposition;
- origin metadata keeps continuity with every existing MML citation.

Questions for Bialystok:

- Which identity should be primary in user-facing citations: article label, library FQN, or origin id?
- How should existing Formalized Mathematics articles link to migrated modules - retroactively, on revision, or not at all?

Mizar Evo

└ Part 9. Story 8: A Library You Can Cite

└ 9.4 - What Is Preserved, What We Ask

9.4 - What Is Preserved, What We Ask

Preserved:

- Formalized Mathematics remains a real journal with review and exposition;
- origin metadata keeps continuity with every existing MML citation.


Questions for Bialystok:

- Which identity should be primary in user-facing citations: article label, library FQN, or origin id?
- How should existing Formalized Mathematics articles link to migrated modules - retroactively, on revision, or not at all?

Presenter script: Read aloud:

- Formalized Mathematics remains a real journal with review and exposition;
- origin metadata keeps continuity with every existing MML citation.
- Which identity should be primary in user-facing citations: article label, library FQN, or origin id?
- How should existing Formalized Mathematics articles link to migrated modules - retroactively, on revision, or not at all?

10.1 - The Pipeline

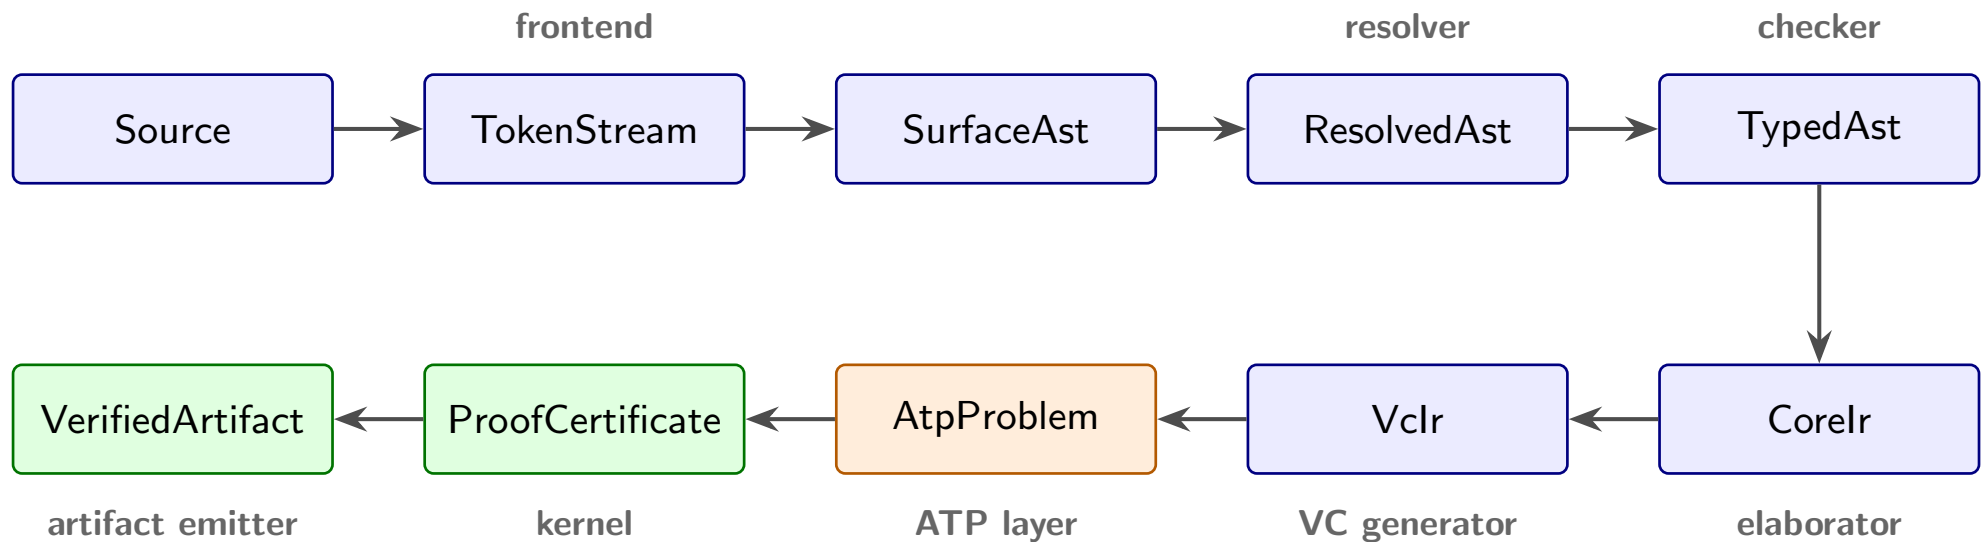

Message:

- every boundary states who owns a fact, which artifact records it, and what must be recomputed when it changes - that is the entire point.


2026-07-15

Mizar Evo

└ Part 10. Architecture In One Picture

└ 10.1 - The Pipeline

10.1 - The Pipeline



Message:

- every boundary states who owns a fact, which artifact records it, and what must be recomputed when it changes - that is the entire point.

Presenter script: Read aloud:

- every boundary states who owns a fact, which artifact records it, and what must be recomputed when it changes - that is the entire point.

10.2 - Responsibility Split

deep dive

Layer	Responsibility
frontend	lexing, parsing, recovery
resolver	imports, names, labels, namespaces
checker	soft types, clusters, registrations, overloads
elaborator	core logical representation
VC generator	proof and algorithm obligations
ATP layer plus kernel	untrusted search, then acceptance by checking
artifact emitter	stable outputs for tools and dependents

2026-07-15

Mizar Evo

└ Part 10. Architecture In One Picture

└ 10.2 - Responsibility Split

deep dive

10.2 - Responsibility Split	
Layer	Responsibility
frontend	lexing, parsing, recovery
resolver	imports, names, labels, namespaces
checker	soft types, clusters, registrations, overloads
elaborator	core logical representation
VC generator	proof and algorithm obligations
ATP layer plus kernel	untrusted search, then acceptance by checking
artifact emitter	stable outputs for tools and dependents

Presenter script: For the table, read the row labels first, then the design reason. Use this as the transition: Responsibility Split. Point to the visible example, question, or diagram before moving on.

10.3 - Where The Eight Stories Live

Story	Pipeline home
dependencies	resolver, package manager
structures and automation	checker (inheritance and cluster graphs, traces)
search vs trust	ATP layer, kernel, certificates
scale	artifacts, fingerprints, scheduler
templates	elaborator (checked instantiation)
algorithms	VC generator, MVM
publication	artifact emitter, doc generation

Message:

- the stories are not eight separate projects; they are one pipeline seen from eight user-visible pains.

Mizar Evo

└ Part 10. Architecture In One Picture

└ 10.3 - Where The Eight Stories Live

10.3 - Where The Eight Stories Live

Story	Pipeline home
dependencies	resolver, package manager
structures and automation	checker (inheritance and cluster graphs, traces)
search vs trust	ATP layer, kernel, certificates
scale	artifacts, fingerprints, scheduler
templates	elaborator (checked instantiation)
algorithms	VC generator, MVM
publication	artifact emitter, doc generation

Message:

- the stories are not eight separate projects; they are one pipeline seen from eight user-visible pains.

Presenter script: Read aloud:

- the stories are not eight separate projects; they are one pipeline seen from eight user-visible pains.

For the table, read the row labels first, then the design reason.

Key Phrase:

*Reject what must not pass
before
Accept everything that should pass*

Key Points:

- soundness bugs outrank parser gaps; kernel-adjacent tests emphasize malformed and failing evidence first;
- accepted-language coverage grows behind that shield.

Mizar Evo

└ Part 10. Architecture In One Picture

└ 10.4 - Testing The Trust Boundary

deep dive

Key Phrase:

*Reject what must not pass
before
Accept everything that should pass*

Key Points:

- soundness bugs outrank parser gaps; kernel-adjacent tests emphasize malformed and failing evidence first;
- accepted-language coverage grows behind that shield.

Presenter script: Read aloud:

- soundness bugs outrank parser gaps; kernel-adjacent tests emphasize malformed and failing evidence first;
- accepted-language coverage grows behind that shield.

After the example, say which design obligation the syntax makes visible.

11.1 - Where The Project Stands Today

Key Points:

- bilingual language specification: 24 chapters plus appendices, English canonical with Japanese companions (doc/spec/);
- architecture specification: 24 documents covering the pipeline, kernel, certificate format, and AI agent interface (doc/design/architecture/);
- a Rust workspace of 20 crates - lexer, parser, resolver, checker, VC generator, ATP bridge, kernel, build system - roughly 400k lines including tests;
- focused audits completed in 2026: kernel soundness, template logic encoding, SAT solver dependency;
- the roadmap is decomposed into small, independently verifiable tasks.

Message:

- The end-of-2026 alpha is a milestone on a running track, not a promise on an empty page.

Mizar Evo

└ Part 11. Roadmap And Collaboration

└ 11.1 - Where The Project Stands Today

11.1 - Where The Project Stands Today

Key Points:

- bilingual language specification: 24 chapters plus appendices, English canonical with Japanese companions (doc/spec/);
- architecture specification: 24 documents covering the pipeline, kernel, certificate format, and AI agent interface (doc/design/architecture/);
- a Rust workspace of 20 crates - lexer, parser, resolver, checker, VC generator, ATP bridge, kernel, build system - roughly 400k lines including tests;
- focused audits completed in 2026: kernel soundness, template logic encoding, SAT solver dependency;
- the roadmap is decomposed into small, independently verifiable tasks.


Message:

- The end-of-2026 alpha is a milestone on a running track, not a promise on an empty page.

Presenter script: Read aloud:

- bilingual language specification: 24 chapters plus appendices, English canonical with Japanese companions (doc/spec/);
- architecture specification: 24 documents covering the pipeline, kernel, certificate format, and AI agent interface (doc/design/architecture/);
- a Rust workspace of 20 crates - lexer, parser, resolver, checker, VC generator, ATP bridge, kernel, build system - roughly 400k lines including tests;
- focused audits completed in 2026: kernel soundness, template logic encoding, SAT solver dependency;
- the roadmap is decomposed into small, independently verifiable tasks.

11.2 - Migration Is A Research Program

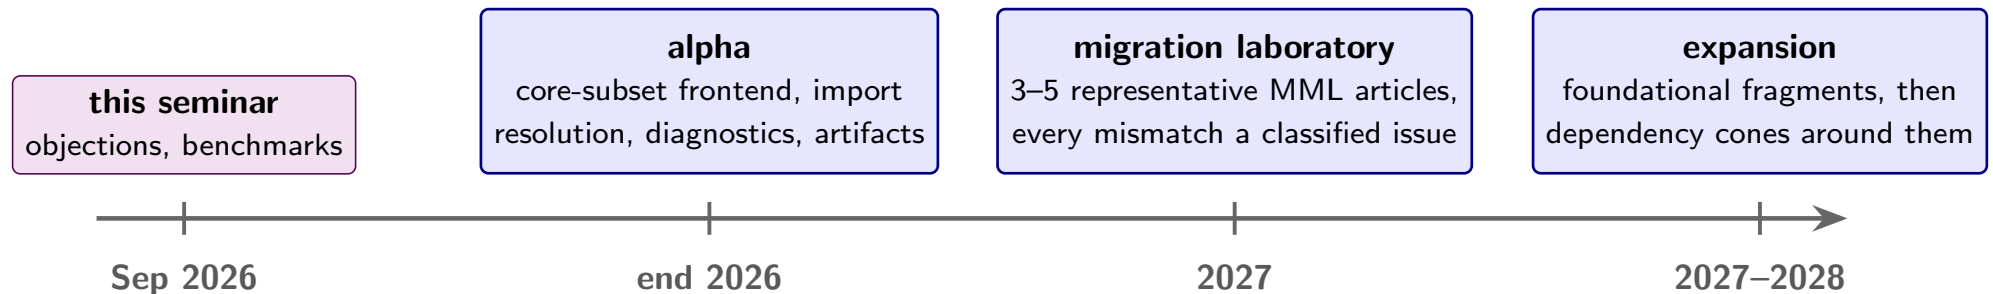

Phases:

- 1 End of 2026, alpha: frontend and parser for a core subset, import and module resolution prototype, structured diagnostics, early artifacts.
- 2 2027, migration laboratory: 3-5 representative MML articles translated by hand and by script; every mismatch recorded as a classified issue.
- 3 2027-2028, expansion: foundational set and relation fragments, then algebraic structures and dependency cones around successful fragments.

Non-goals for the alpha:

- full MML verification, final compatibility layer, stable AI protocol.

2026-07-15

Mizar Evo

└ Part 11. Roadmap And Collaboration

└ 11.2 - Migration Is A Research Program

11.2 - Migration Is A Research Program



Phases:

- End of 2026, alpha: frontend and parser for a core subset, import and module resolution prototype, structured diagnostics, early artifacts.
- 2027, migration laboratory: 3-5 representative MML articles translated by hand and by script; every mismatch recorded as a classified issue.
- 2027-2028, expansion: foundational set and relation fragments, then algebraic structures and dependency cones around successful fragments.

Non-goals for the alpha:

- full MML verification, final compatibility layer, stable AI protocol.

Presenter script: Read aloud:

- End of 2026, alpha: frontend and parser for a core subset, import and module resolution prototype, structured diagnostics, early artifacts.
- 2027, migration laboratory: 3-5 representative MML articles translated by hand and by script; every mismatch recorded as a classified issue.
- 2027-2028, expansion: foundational set and relation fragments, then algebraic structures and dependency cones around successful fragments.
- full MML verification, final compatibility layer, stable AI protocol.

Key Points:

- translated articles and lines; accepted parser subset;
- resolved imports versus unresolved dependencies;
- obligations closed deterministically versus by ATP-plus-certificate;
- memory and wall-clock per module, incremental versus clean;
- compatibility decisions that required human judgment.

Mizar Evo

└ Part 11. Roadmap And Collaboration

└ 11.3 - What We Will Measure

deep dive

Key Points:

- translated articles and lines; accepted parser subset;
- resolved imports versus unresolved dependencies;
- obligations closed deterministically versus by ATP-plus-certificate;
- memory and wall-clock per module, incremental versus clean;
- compatibility decisions that required human judgment.

Presenter script: Read aloud:

- translated articles and lines; accepted parser subset;
- resolved imports versus unresolved dependencies;
- obligations closed deterministically versus by ATP-plus-certificate;
- memory and wall-clock per module, incremental versus clean;
- compatibility decisions that required human judgment.

Policy:

- preserve theorem identity through origin metadata;
- keep compatibility aliases where they help migration;
- record every divergence from old behavior with a reason and a test.

Risk	Mitigation
compatibility work consumes the project	representative slices first, no big-bang translation
registrations behave differently	trace artifacts and comparison reports early
package layout breaks journal links	origin metadata, article-to-library identifiers
AI edits hide migration mistakes	Red edits stay forbidden; verifier artifacts required

Mizar Evo

└ Part 11. Roadmap And Collaboration

└ 11.4 - Compatibility Policy And Risks

deep dive

Policy:

- preserve theorem identity through origin metadata;
- keep compatibility aliases where they help migration;
- record every divergence from old behavior with a reason and a test.

Risk	Mitigation
compatibility work consumes the project	representative slices first, no big-bang translation
registrations behave differently	trace artifacts and comparison reports early
package layout breaks journal links	origin metadata, article-to-library identifiers
AI edits hide migration mistakes	Red edits stay forbidden; verifier artifacts required

Presenter script: Read aloud:

- preserve theorem identity through origin metadata;
- keep compatibility aliases where they help migration;
- record every divergence from old behavior with a reason and a test.

For the table, read the row labels first, then the design reason.

11.5 - What September 2026 Should Produce

Key Points:

- a prioritized list of migration benchmark articles;
- agreement on compatibility metadata needs;
- review notes on the eight stories, especially structures and clusters;
- a first paper outline;
- a shared list of objections and risks.

Mizar Evo

└ Part 11. Roadmap And Collaboration

└ 11.5 - What September 2026 Should Produce

11.5 - What September 2026 Should Produce

Key Points:

- a prioritized list of migration benchmark articles;
- agreement on compatibility metadata needs;
- review notes on the eight stories, especially structures and clusters;
- a first paper outline;
- a shared list of objections and risks.

Presenter script: Read aloud:

- a prioritized list of migration benchmark articles;
- agreement on compatibility metadata needs;
- review notes on the eight stories, especially structures and clusters;
- a first paper outline;
- a shared list of objections and risks.

11.6 - What We Ask Of You

Questions:

- Which MML articles are small but structurally representative?
- Which idioms are culturally essential, beyond technical convenience?
- Which of the eight stories is most wrong, and why?
- What migration result would convince the community that Evo is serious?

Mizar Evo

└ Part 11. Roadmap And Collaboration

└ 11.6 - What We Ask Of You

Questions:

- Which MML articles are small but structurally representative?
- Which idioms are culturally essential, beyond technical convenience?
- Which of the eight stories is most wrong, and why?
- What migration result would convince the community that Evo is serious?

Presenter script: Read aloud:

- Which MML articles are small but structurally representative?
- Which idioms are culturally essential, beyond technical convenience?
- Which of the eight stories is most wrong, and why?
- What migration result would convince the community that Evo is serious?

12.1 - The Running Question, Again

Slide question:

What must Mizar Evo preserve so that the Mizar community still recognizes it as Mizar?

2026-07-15

Mizar Evo

└ Part 12. Closing

└ 12.1 - The Running Question, Again

12.1 - The Running Question, Again

Slide question:

*What must Mizar Evo preserve so that the Mizar community
still recognizes it as Mizar?*

Presenter script: Say:

- Return to the opening example: the structure that still reads as Mizar.
- Invite disagreement story by story, not only in general terms.

12.2 - Closing

Final slide:

*Mizar Evo should be modern where scale demands it,
and conservative where Mizar's mathematical identity depends on it.*

2026-07-15

Mizar Evo

└ Part 12. Closing

└ 12.2 - Closing

12.2 - Closing

Final slide:

*Mizar Evo should be modern where scale demands it,
and conservative where Mizar's mathematical identity depends on it.*

Presenter script: After the example, say which design obligation the syntax makes visible. Use this as the transition: Closing. Point to the visible example, question, or diagram before moving on.

Backup A. Prepared Exact Examples (1/2)

Prepared short excerpts for Beamer conversion:

Purpose	Source	Lines	Used in
Structure definition	algstr_0.miz	37-40	Frames 0.2, 3.1
Article environment	algstr_0.miz	15-25	Frame 2.1
Registration/cluster	algstr_0.miz	104-109	Frame 4.1

Prepared short excerpts for Beamer conversion:

Purpose	Source	Lines	Used in
Proof citation	struct_0.miz	637-643	Frame 5.4
Induction scheme	nat_1.miz	near 90	Frame 7.1

Source URLs:

- ALGSTR_0: <https://mizar.uwb.edu.pl/version/current/mml/algstr_0.miz>
- STRUCT_0: <https://mizar.uwb.edu.pl/version/current/mml/struct_0.miz>
- NAT_1: <https://mizar.uwb.edu.pl/version/current/mml/nat_1.miz>

Mizar Evo

└ Backup A. Prepared Exact Examples

└ Backup A. Prepared Exact Examples (1/2)

Backup A. Prepared Exact Examples (1/2)

Prepared short excerpts for Beamer conversion:

Purpose	Source	Lines	Used in
Structure definition	algstr_0.miz	37-40	Frames 0.2, 3.1
Ankle environment	algstr_0.miz	15-25	Frame 2.1
Registration/cluster	algstr_0.miz	104-109	Frame 4.1

Prepared short excerpts for Beamer conversion:

Purpose	Source	Lines	Used in
Proof citation	struct_0.miz	637-643	Frame 5.4
Induction scheme	nat_1.miz	near 90	Frame 7.1

Source URLs:

- ALGSTR_0: <https://mizar.uwb.edu.pl/version/current/mml/algstr_0.miz>
- STRUCT_0: <https://mizar.uwb.edu.pl/version/current/mml/struct_0.miz>
- NAT_1: <https://mizar.uwb.edu.pl/version/current/mml/nat_1.miz>

Presenter script: Read aloud:

- ALGSTR_0: <https://mizar.uwb.edu.pl/version/current/mml/algstr_0.miz>
- STRUCT_0: <https://mizar.uwb.edu.pl/version/current/mml/struct_0.miz>
- NAT_1: <https://mizar.uwb.edu.pl/version/current/mml/nat_1.miz>

For the table, read the row labels first, then the design reason.

Backup A. Prepared Exact Examples (2/2)

Attribution note:

- MML plain-text files state GPL-3.0-or-later / CC-BY-SA-3.0-or-later terms; keep article attribution, URLs, and line numbers in speaker notes.

2026-07-15

Mizar Evo

└ Backup A. Prepared Exact Examples

└ Backup A. Prepared Exact Examples (2/2)

Backup A. Prepared Exact Examples (2/2)

Attribution note:

- MML plain-text files state GPL-3.0-or-later / CC-BY-SA-3.0-or-later terms; keep article attribution, URLs, and line numbers in speaker notes.

Presenter script: Read aloud:

- MML plain-text files state GPL-3.0-or-later / CC-BY-SA-3.0-or-later terms; keep article attribution, URLs, and line numbers in speaker notes.

Backup B. Specification Reference Map (1/2)

The slides show examples only. The authoritative grammar and semantics live in the specification; this map replaces the EBNF that earlier drafts put on slides.

Topic	Specification source (under doc/spec/en/)
Modules and imports	12.modules_and_namespaces.md
Structures and inheritance	05.structures.md
Attributes and modes	06.attributes.md, 07.modes.md
Registrations and reductions	17.clusters_and_registrations.md
Templates and schemes	18.templates.md
Algorithms and MVM	20.algorithm_and_verification.md
Packages and artifacts	23.package_management_and_build_system.md

Mizar Evo

└ Backup B. Specification Reference Map

└ Backup B. Specification Reference Map (1/2)

Backup B. Specification Reference Map (1/2)

The slides show examples only. The authoritative grammar and semantics live in the specification; this map replaces the EBNF that earlier drafts put on slides.

Topic	Specification source (under doc/spec/en/)
Modules and imports	12.modules_and_namespaces.md
Structures and inheritance	05.structures.md
Attributes and modes	06.attributes.md, 07.modes.md
Registrations and reductions	17.clusters_and_registrations.md
Templates and schemes	18.templates.md
Algorithms and MVM	20.algorithms_and_verification.md
Packages and artifacts	23.package_management_and_build_system.md

Presenter script: Read aloud:

- The slides show examples only. The authoritative grammar and semantics live
- in the specification; this map replaces the EBNF that earlier drafts put on
- slides.

For the table, read the row labels first, then the design reason.

Backup B. Specification Reference Map (2/2)

Topic	Specification source (under doc/spec/en/)
Cross-chapter grammar	<code>appendix_a.grammar_summary.md</code>
Worked library sketches	<code>sample_codes.md</code>

2026-07-15

Mizar Evo

└ Backup B. Specification Reference Map

└ Backup B. Specification Reference Map (2/2)

Backup B. Specification Reference Map (2/2)	
Topic	Specification source (<i>under doc/spec/es/</i>)
Cross-chapter grammar	appendix.a.grammar_summary.md
Worked library sketches	sample_codes.md

Presenter script: For the table, read the row labels first, then the design reason. Use this as the transition: Backup B. Specification Reference Map (2/2). Point to the visible example, question, or diagram before moving on.

Backup C. Diagram List (1/2)

Required diagrams for the final deck (figures/*.tex, TikZ standalone;
build each with pdflatex inside figures/):

- ① Three pressures on a proven design (Part 1). [done: figures/three_pressures.pdf, used in frame 1.5]
- ② Environment-to-import migration (story 1). [done: figures/envIRON_migration.pdf, used in frame 2.5]
- ③ Structure inheritance and diamond coherence (story 2). [done: figures/diamond_inheritance.pdf, used in frame 3.5]
- ④ Reasoning boundary: semantics / ATP search / kernel checking (story 4). [done: figures/reasoning_boundary.pdf, used in frame 5.2]
- ⑤ Certificate object and replay (story 4). [done: figures/certificate_replay.pdf, used in frame 5.3]

Mizar Evo

└ Backup C. Diagram List

└ Backup C. Diagram List (1/2)

Backup C. Diagram List (1/2)

Required diagrams for the final deck (figures/*.tex, TikZ standalone;
build each with pdflatex inside figures/):

- Three pressures on a proven design (Part 1). [done: figures/three_pressures.pdf, used in frame 1.5]
- Environment-to-import migration (story 1). [done: figures/envirion_migration.pdf, used in frame 2.5]
- Structure inheritance and diamond coherence (story 2). [done: figures/diamond_inheritance.pdf, used in frame 3.5]
- Reasoning boundary: semantics / ATP search / kernel checking (story 4). [done: figures/reasoning_boundary.pdf, used in frame 5.2]
- Certificate object and replay (story 4). [done: figures/certificate_replay.pdf, used in frame 5.3]

Presenter script: Read aloud:

- Required diagrams for the final deck (figures/*.tex, TikZ standalone;
- Three pressures on a proven design (Part 1). [done: figures/three_pressures.pdf, used in frame 1.5]
- Environment-to-import migration (story 1). [done: figures/envirion_migration.pdf, used in frame 2.5]
- Structure inheritance and diamond coherence (story 2). [done: figures/diamond_inheritance.pdf, used in frame 3.5]
- Reasoning boundary: semantics / ATP search / kernel checking (story 4). [done: figures/reasoning_boundary.pdf, used in frame 5.2]

Backup C. Diagram List (2/2)

build each with pdflatex inside figures/):

- ① Incremental fingerprint graph (story 5). [done: figures/fingerprint_graph.pdf, used in frame 6.2]
- ② Formalized Mathematics article-to-library link model (story 8). [done: figures/fm_links.pdf, used in frame 9.2]
- ③ Full pipeline with story overlay (Part 10). [done: figures/pipeline.pdf, used in frame 10.1]
- ④ Roadmap timeline (Part 11). [done: figures/roadmap_timeline.pdf, used in frame 11.1]

Mizar Evo

└ Backup C. Diagram List

└ Backup C. Diagram List (2/2)

Backup C. Diagram List (2/2)

build each with pdflatex inside figures/):

- Incremental fingerprint graph (story 5). [done: figures/fingerprint_graph.pdf, used in frame 6.2]
- Formalized Mathematics article-to-library link model (story 8). [done: figures/fm_links.pdf, used in frame 9.2]
- Full pipeline with story overlay (Part 10). [done: figures/pipeline.pdf, used in frame 10.1]
- Roadmap timeline (Part 11). [done: figures/roadmap_timeline.pdf, used in frame 11.1]

Presenter script: Read aloud:

- Incremental fingerprint graph (story 5). [done: figures/fingerprint_graph.pdf, used in frame 6.2]
- Formalized Mathematics article-to-library link model (story 8). [done: figures/fm_links.pdf, used in frame 9.2]
- Full pipeline with story overlay (Part 10). [done: figures/pipeline.pdf, used in frame 10.1]
- Roadmap timeline (Part 11). [done: figures/roadmap_timeline.pdf, used in frame 11.1]

Backup D. Paper Outline Seed (1/2)

Possible paper title:

Mizar Evo: Readable, AI-Ready, and Scalable Formal Mathematics

Possible sections:

- 1 Introduction: why Mizar needs evolution now.
- 2 Mizar as baseline: readability, MML, Formalized Mathematics.
- 3 Design principles and the three pillars.
- 4 Language evolution: dependencies, structures, registrations, templates.
- 5 Verifier architecture, certificates, and the small kernel.
- 6 Verified computation and the MVM.
- 7 AI-safe proof development.

2026-07-15

Mizar Evo

└ Backup D. Paper Outline Seed

└ Backup D. Paper Outline Seed (1/2)

Backup D. Paper Outline Seed (1/2)

Possible paper title:

Mizar Evo: Readable, AI-Ready, and Scalable Formal Mathematics

Possible sections:

- Introduction: why Mizar needs evolution now.
- Mizar as baseline: readability, MML, Formalized Mathematics.
- Design principles and the three pillars.
- Language evolution: dependencies, structures, registrations, templates.
- Verifier architecture, certificates, and the small kernel.
- Verified computation and the MVM.
- AI-safe proof development.

Presenter script: Read aloud:

- Introduction: why Mizar needs evolution now.
- Mizar as baseline: readability, MML, Formalized Mathematics.
- Design principles and the three pillars.

After the example, say which design obligation the syntax makes visible.

Backup D. Paper Outline Seed (2/2)

Possible sections:

- ① Package-based library and publication workflow.
- ② Migration plan and evaluation metrics.
- ③ Related work and collaboration agenda.

2026-07-15

Mizar Evo

└ Backup D. Paper Outline Seed

└ Backup D. Paper Outline Seed (2/2)

Backup D. Paper Outline Seed (2/2)

Possible sections:

- Package-based library and publication workflow.
- Migration plan and evaluation metrics.
- Related work and collaboration agenda.

Presenter script: Read aloud:

- Package-based library and publication workflow.
- Migration plan and evaluation metrics.
- Related work and collaboration agenda.

Backup E. Reviewer Checklist

Use this checklist before converting to Beamer:

- Does every story open with a real cost, not a feature announcement?
- Does every criticism acknowledge why the current practice was useful?
- Does every code example carry its status label (exact MML excerpt, specification example, or sketch)?
- Is every exact excerpt attributed with article and line numbers?
- Does every story end with questions the audience can actually answer?
- Are Red AI edits clearly forbidden?
- Are migration claims measurable?

Use this checklist before converting to Beamer:

- Is EBNF absent from all frames?

Mizar Evo

└ Backup E. Reviewer Checklist

└ Backup E. Reviewer Checklist

Backup E. Reviewer Checklist

Use this checklist before converting to Beamer:

- Does every story open with a real cost, not a feature announcement?
- Does every criticism acknowledge why the current practice was useful?
- Does every code example carry its status label (exact MML excerpt, specification example, or sketch)?
- Is every exact excerpt attributed with article and line numbers?
- Does every story end with questions the audience can actually answer?
- Are Red AI edits clearly forbidden?
- Are migration claims measurable?

Use this checklist before converting to Beamer:

- Is EBNF absent from all frames?

Presenter script: Read aloud:

- Does every story open with a real cost, not a feature announcement?
- Does every criticism acknowledge why the current practice was useful?
- Does every code example carry its status label (exact MML excerpt, specification example, or sketch)?
- Is every exact excerpt attributed with article and line numbers?
- Does every story end with questions the audience can actually answer?

Backup F. Anticipated Objections (1/2)

Prepared answers for objections the stories do not raise themselves:

Objection	Prepared answer
Why not improve current Mizar incrementally?	The pains are boundary-shaped: article granularity, monolithic trust, implicit environments. Boundaries cannot be moved incrementally, but everything above them is deliberately conservative.
What happens to authorship and credit of MML articles?	Origin metadata preserves article identity and authorship through migration; the <code>pub</code> namespace keeps published articles frozen and citable.
Is this a fork of the community?	It is a proposal to the community; this visit is its first review. The namespace governance model assumes the Mizar team governs the <code>mm1</code> root.

2026-07-15

Mizar Evo

└ Backup F. Anticipated Objections

└ Backup F. Anticipated Objections (1/2)

Presenter script: Say:

- Use these only if raised; do not present them proactively.

For the table, read the row labels first, then the design reason.

Backup F. Anticipated Objections (1/2)

Prepared answers for objections the stories do not raise themselves:

Objection	Prepared answer
Why not improve current Mizar incrementally?	The pains are boundary-shaped: article granularity, monolithic trust, implicit environments. Boundaries cannot be moved incrementally, but everything above them is deliberately conservative.
What happens to authorship and credit of MML articles?	Origin metadata preserves article identity and authorship through migration; the pub namespace keeps published articles frozen and citable.
Is this a fork of the community?	It is a proposal to the community; this visit is its first review. The namespace governance model assumes the Mizar team governs the mml root.

Backup F. Anticipated Objections (2/2)

Prepared answers for objections the stories do not raise themselves:

Objection	Prepared answer
What about GPL / CC-BY-SA obligations?	Migration preserves license and attribution of MML content; toolchain licensing is open for discussion.
Is the AI angle hype?	AI assistance is an optional layer that never enters the trusted base; every proposal stands without it.
Why a new kernel instead of the existing checker?	Certificate replay needs a small, auditable core. The existing checker's semantics remain the reference for obligation generation.

Mizar Evo

└ Backup F. Anticipated Objections

└ Backup F. Anticipated Objections (2/2)

Backup F. Anticipated Objections (2/2)

Prepared answers for objections the stories do not raise themselves:

Objection	Prepared answer
What about GPL / CC-BY-SA obligations?	Migration preserves license and attribution of MML content; toolchain licensing is open for discussion.
Is the AI a hype?	AI assistance is an optional layer that never enters the trusted base; every proposal stands without it.
Why a new kernel instead of the existing checker?	Certificate replay needs a small, auditable core. The existing checker's semantics remain the reference for obligation generation.

Presenter script: For the table, read the row labels first, then the design reason.

Use this as the transition: Backup F. Anticipated Objections (2/2). Point to the visible example, question, or diagram before moving on.