
Untrusted resolution log (sketch)

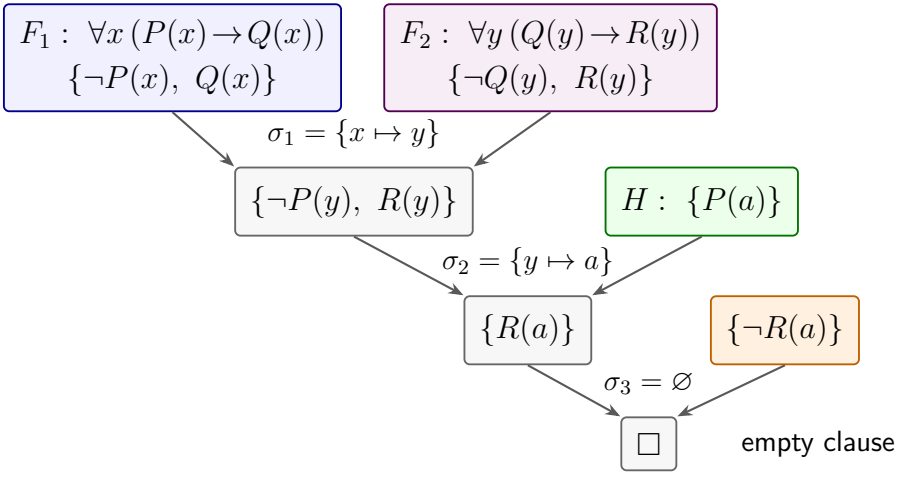

Extracted evidence

Compose substitutions along each source branch:

$F_1 :\ x \mapsto y \mapsto a$

$F_2 :\ y \mapsto a$

$\Longrightarrow\ F_1[x := a]$

$\Longrightarrow\ F_2[y := a]$

Retain F_1, F_2, H, bindings, context and goal $R(a)$.

The kernel checks evidence; it does not replay this tree.