

First Markdown

Hossein Noorazar

8/5/2018

New slide

some content

Slide without a title What goes on here. so the '***' starts a new slide without any title.

Title

Top level subheading

A second level subheading

what goes here is usual text

- ▶ *italicized text comes with one asteric on each end of the text, just like youtube bold-maker.*
- ▶ **Bold comes with two asetrix at each end.**
- ▶ Code comes with a (') at each end:

```
for i in len(range(x))
```

R-code slide having R code ran in it.

```
head(mtcars)
```

	mpg	cyl	disp	hp	drat	wt	qsec	vs	am
Mazda RX4	21.0	6	160	110	3.90	2.620	16.46	0	1
Mazda RX4 Wag	21.0	6	160	110	3.90	2.875	17.02	0	1
Datsun 710	22.8	4	108	93	3.85	2.320	18.61	1	1
Hornet 4 Drive	21.4	6	258	110	3.08	3.215	19.44	1	0
Hornet Sportabout	18.7	8	360	175	3.15	3.440	17.02	0	0
Valiant	18.1	6	225	105	2.76	3.460	20.22	1	0

Plot slide

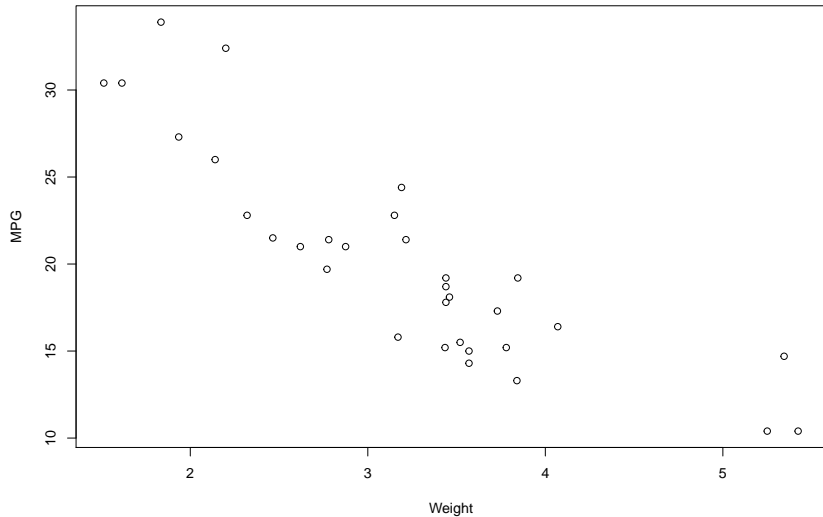


Figure 1: First Figure

R Markdown

This is an R Markdown presentation. Markdown is a simple formatting syntax for authoring HTML, PDF, and MS Word documents. For more details on using R Markdown see <http://rmarkdown.rstudio.com>.

When you click the **Knit** button a document will be generated that includes both content as well as the output of any embedded R code chunks within the document.

Slide with Bullets

- ▶ Bullet 1
- ▶ Bullet 2
- ▶ Bullet 3

Slide with R Output

```
summary(cars)
```

##	speed	dist
##	Min. : 4.0	Min. : 2.00
##	1st Qu.:12.0	1st Qu.: 26.00
##	Median :15.0	Median : 36.00
##	Mean :15.4	Mean : 42.98
##	3rd Qu.:19.0	3rd Qu.: 56.00
##	Max. :25.0	Max. :120.00

Slide with Plot

