

Adithya G – 18BCS102
Internet and Web Programming
Assignment 9 – JavaScript Debuggers

List various JavaScript debuggers and explain with suitable code.

- All modern browsers have built-in JS debuggers.
- The console.log () method is used to display JavaScript values in the browser.
- The debugger keyword stops the execution of JavaScript and calls the debugging function. This has the same function as setting a breakpoint in the debugger.

Source Code: [Click here!](#)


```
<script>
  var x = 12;
  var y = 13;
  var z = x * y;

  /* Using console.log() to display JS values in the browser */
  console.log("z:", z);

  /* setting breakpoint using the 'debugger' keyword */
  debugger;
  document.getElementById("result").innerHTML = z;
</script>
```

Output:

Console.log():

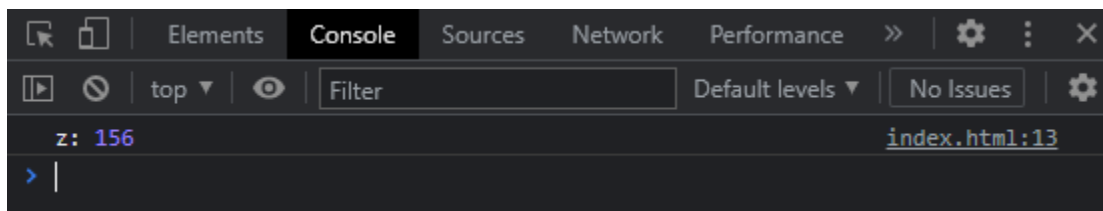

Breakpoint / debugger keyword:

