

Practical 2

Name: Rishabh Dwivedi


Roll No: MC250068CA

Aim: Perform the following:

- Creating a Database
- Viewing all databases,
- Creating Tables (With and Without Constraints)
- Viewing all Tables in a Database,
- Inserting/Updating/Deleting Records in a Table,
- Save point, Saving (Commit) and Undoing (rollback).


Source-Code & Output:

CREATE DATABASE RISHABH;

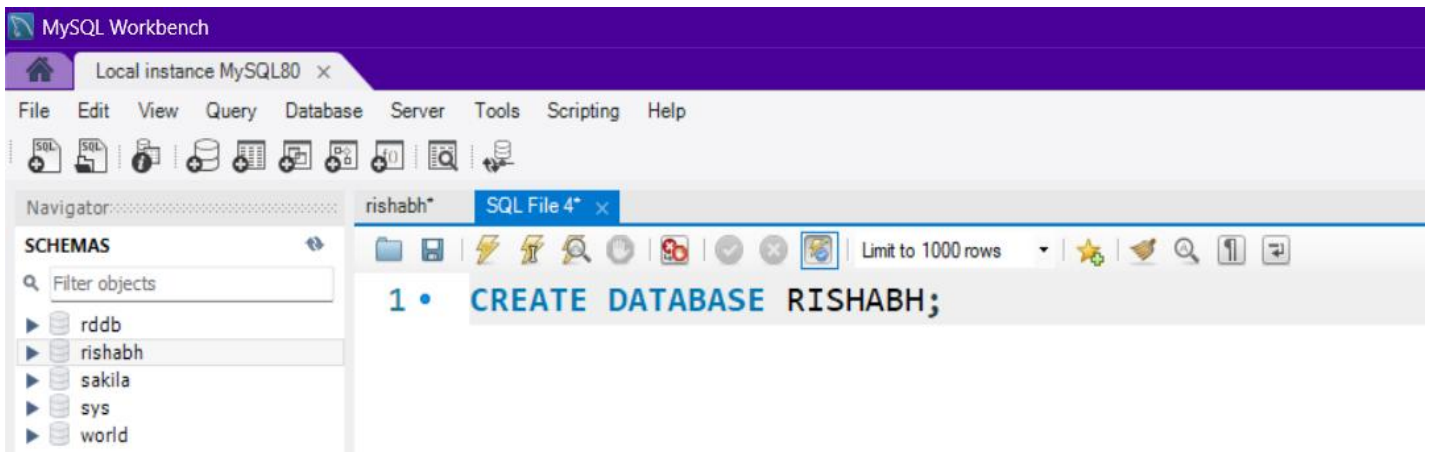

SHOW DATABASES;

use RISHABH;

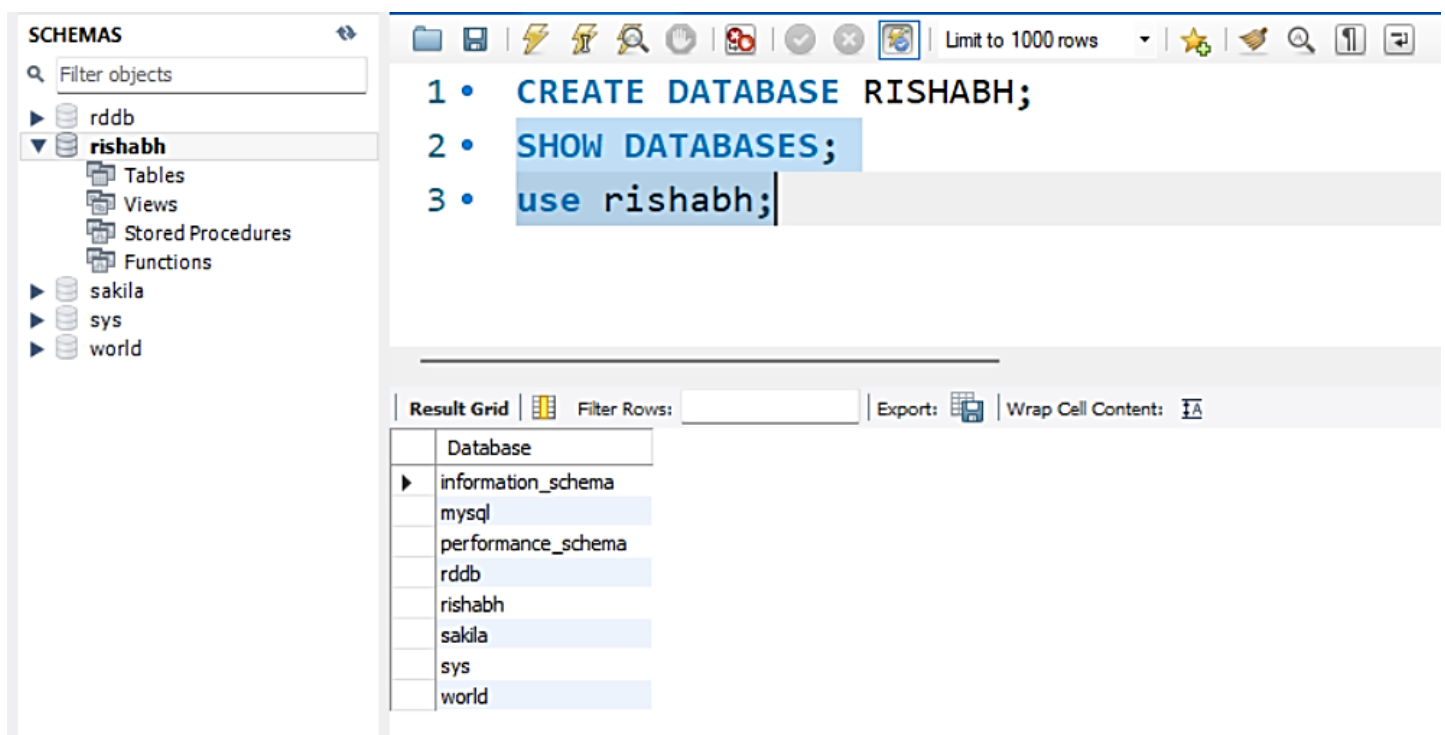

```
CREATE TABLE Student (
    SID INT,
    Sname VARCHAR(20),
    Branch VARCHAR(20),
    city VARCHAR(20)
);
DESC Student;
```

Result Grid


Filter Rows:

Export:


	Field	Type	Null	Key	Default	Extra
▶	SID	int	YES		NULL	
	Sname	varchar(20)	YES		NULL	
	Branch	varchar(20)	YES		NULL	
	city	varchar(20)	YES		NULL	

```
INSERT INTO Student VALUE(1,'Rishabh Dwivedi','MCA','Nagpur');
INSERT INTO Student VALUE(2,'Aman Singh','MCA','Nagpur');
INSERT INTO Student VALUE(3,'Vijay Thakur','MCA','Nagpur');
SELECT * FROM Student;
```

	SID	Sname	Branch	city
▶	1	Rishabh Dwivedi	MCA	Nagpur
	2	Aman Singh	MCA	Nagpur
	3	Vijay Thakur	MCA	Nagpur

```
UPDATE Student
SET city = 'Pune'
WHERE SID = 2;
SELECT * FROM Student;
```

	SID	Sname	Branch	city
▶	1	Rishabh Dwivedi	MCA	Nagpur
	2	Aman Singh	MCA	Pune
	3	Vijay Thakur	MCA	Nagpur

```
DELETE FROM Student
WHERE SID = 3;
SELECT * FROM Student;
```

	SID	Sname	Branch	city
▶	1	Rishabh Dwivedi	MCA	Nagpur
	2	Aman Singh	MCA	Pune

```
CREATE TABLE Student_Constrained (
    SID INT PRIMARY KEY,
    Sname VARCHAR(20) NOT NULL,
    Branch VARCHAR(20),
    city VARCHAR(20)
);
DESC Student_Constrained;
```

	Field	Type	Null	Key	Default	Extra
▶	SID	int	NO	PRI	NULL	
	Sname	varchar(20)	NO		NULL	
	Branch	varchar(20)	YES		NULL	
	city	varchar(20)	YES		NULL	

```
START TRANSACTION;
SAVEPOINT sp1;
INSERT INTO Student VALUES (5, 'Shubham Dwivedi', 'BCCA', 'Nagpur');
ROLLBACK TO sp1;
SELECT * FROM Student;
Commit
```

	SID	Sname	Branch	city
▶	1	Rishabh Dwivedi	MCA	Nagpur
	2	Aman Singh	MCA	Pune