

Practical 5

Name: Rishabh Dwivedi

Roll No: MC250068CA


Aim: Implementation of different types of operators in SQL.

Source-Code & Output:

Create table Employee


(Emp_ID INT, Emp_Name VARCHAR(20), Salary INT, Dept varchar(20), City varchar(20));

use rishabh;

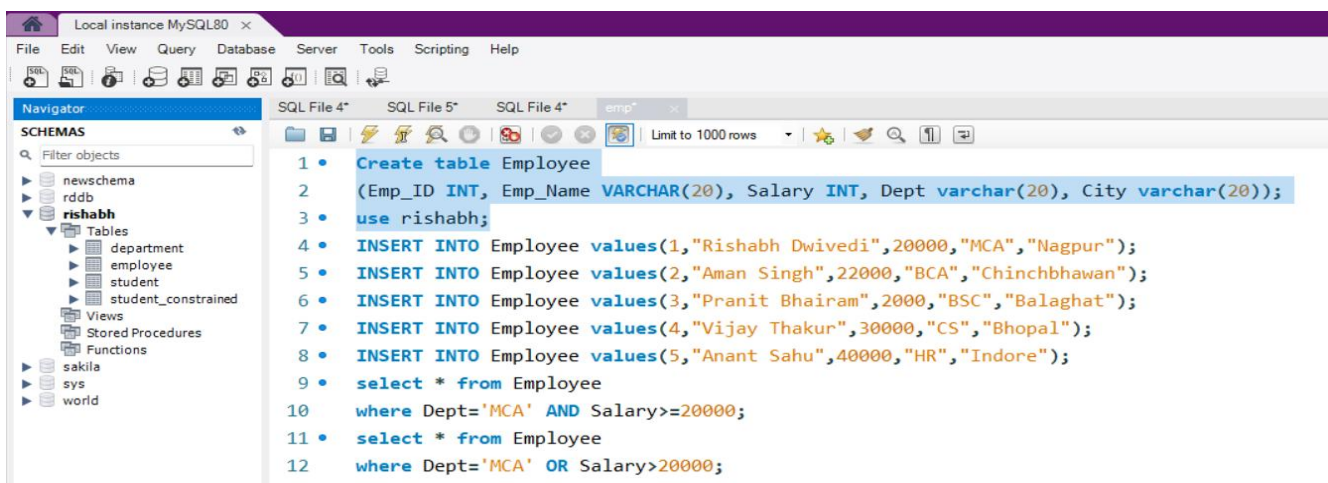

```
1 • Create table Employee
2 • (Emp_ID INT, Emp_Name VARCHAR(20), Salary INT, Dept varchar(20), City varchar(20));
3 • use rishabh;
4 • INSERT INTO Employee values(1,"Rishabh Dwivedi",20000,"MCA","Nagpur");
5 • INSERT INTO Employee values(2,"Aman Singh",22000,"BCA","Chinchbhawan");
6 • INSERT INTO Employee values(3,"Pranit Bhairam",2000,"BSC","Balaghat");
7 • INSERT INTO Employee values(4,"Vijay Thakur",30000,"CS","Bhopal");
8 • INSERT INTO Employee values(5,"Anant Sahu",40000,"HR","Indore");
9 • select * from Employee
10 where Dept='MCA' AND Salary>=20000;
11 • select * from Employee
12 where Dept='MCA' OR Salary>20000;
```

```
INSERT INTO Employee values(1,"Rishabh Dwivedi",20000,"MCA","Nagpur");
INSERT INTO Employee values(2,"Aman Singh",22000,"BCA","Chinchbhawan");
INSERT INTO Employee values(3,"Pranit Bhairam",2000,"BSC","Balaghat");
INSERT INTO Employee values(4,"Vijay Thakur",30000,"CS","Bhopal");
INSERT INTO Employee values(5,"Anant Sahu",40000,"HR","Indore");
select * from Employee;
```

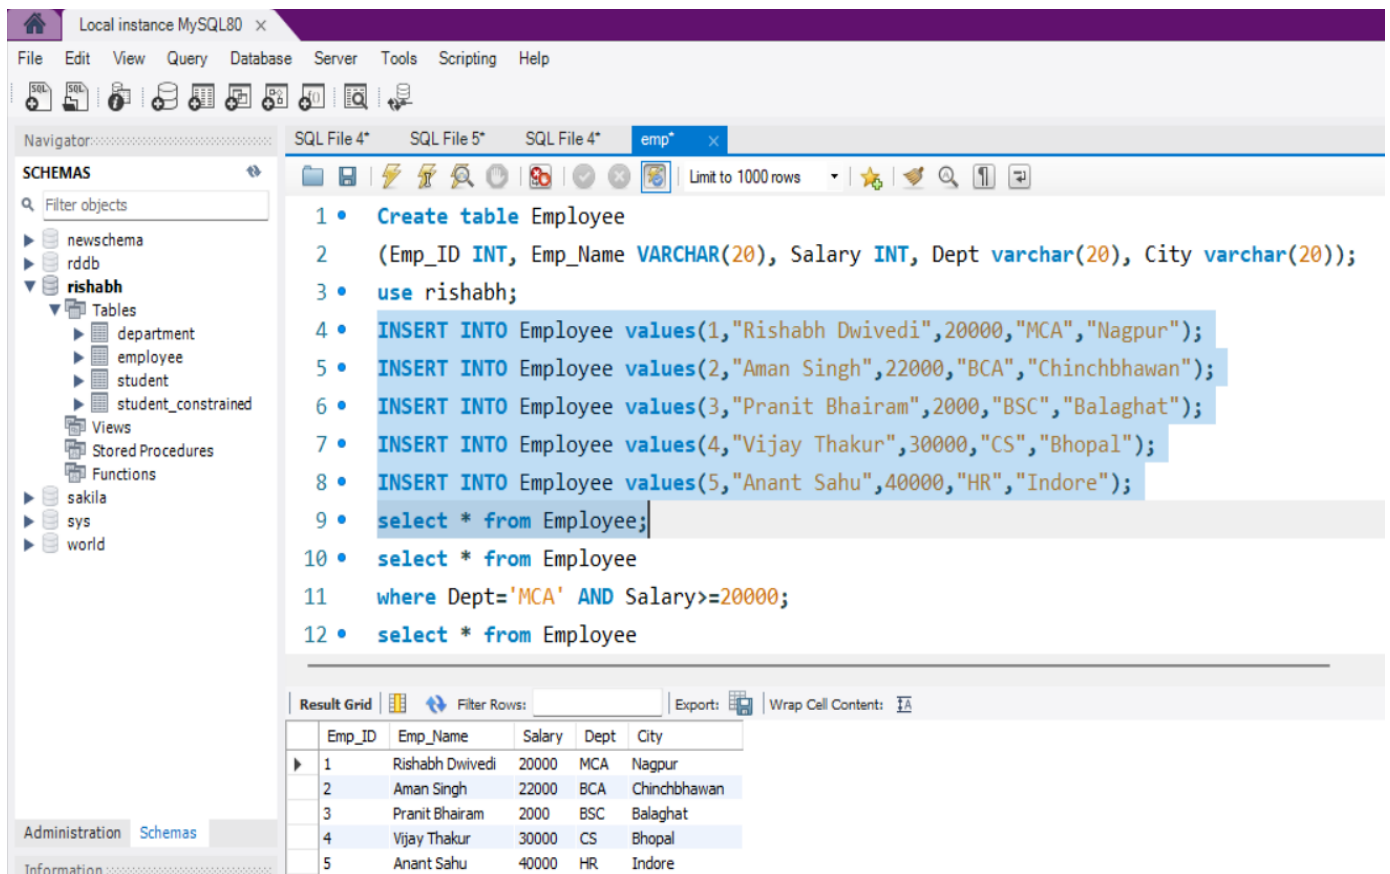

```
1 • Create table Employee
2 • (Emp_ID INT, Emp_Name VARCHAR(20), Salary INT, Dept varchar(20), City varchar(20));
3 • use rishabh;
4 • INSERT INTO Employee values(1,"Rishabh Dwivedi",20000,"MCA","Nagpur");
5 • INSERT INTO Employee values(2,"Aman Singh",22000,"BCA","Chinchbhawan");
6 • INSERT INTO Employee values(3,"Pranit Bhairam",2000,"BSC","Balaghat");
7 • INSERT INTO Employee values(4,"Vijay Thakur",30000,"CS","Bhopal");
8 • INSERT INTO Employee values(5,"Anant Sahu",40000,"HR","Indore");
9 • select * from Employee;
10 • select * from Employee
11 where Dept='MCA' AND Salary>=20000;
12 • select * from Employee
```

Emp_ID	Emp_Name	Salary	Dept	City
1	Rishabh Dwivedi	20000	MCA	Nagpur
2	Aman Singh	22000	BCA	Chinchbhawan
3	Pranit Bhairam	2000	BSC	Balaghat
4	Vijay Thakur	30000	CS	Bhopal
5	Anant Sahu	40000	HR	Indore

```
select * from Employee
where Dept='MCA' AND Salary>=20000;
```

The screenshot shows the MySQL Workbench interface. The left sidebar displays the 'SCHEMAS' tree with 'rishabh' selected. The main editor window shows a SQL script with the following queries:

```
3 • use rishabh;
4 • INSERT INTO Employee values(1,"Rishabh Dwivedi",20000,"MCA","Nagpur");
5 • INSERT INTO Employee values(2,"Aman Singh",22000,"BCA","Chinchbhawan");
6 • INSERT INTO Employee values(3,"Pranit Bhairam",2000,"BSC","Balaghat");
7 • INSERT INTO Employee values(4,"Vijay Thakur",30000,"CS","Bhopal");
8 • INSERT INTO Employee values(5,"Anant Sahu",40000,"HR","Indore");
9 • select * from Employee;
10 • select * from Employee
11 • where Dept='MCA' AND Salary>=20000;
12 • select * from Employee
13 • where Dept='MCA' OR Salary>20000;
14 • select * from Employee
```

The 'Result Grid' at the bottom shows the results of the first query (line 11):

Emp_ID	Emp_Name	Salary	Dept	City
1	Rishabh Dwivedi	20000	MCA	Nagpur

```
select * from Employee
where Dept='MCA' OR Salary>20000;
```

The screenshot shows the MySQL Workbench interface. The left sidebar displays the 'SCHEMAS' tree with 'rishabh' selected. The main editor window shows the same SQL script as the first screenshot. The 'Result Grid' at the bottom shows the results of the second query (line 13):

Emp_ID	Emp_Name	Salary	Dept	City
1	Rishabh Dwivedi	20000	MCA	Nagpur
2	Aman Singh	22000	BCA	Chinchbhawan
4	Vijay Thakur	30000	CS	Bhopal
5	Anant Sahu	40000	HR	Indore

```
select * from Employee
where NOT Dept='MCA';
```

```
14 • select * from Employee
15   where NOT Dept='MCA';
16 • select * from Employee
17   where Salary Between 25000 and 35000;
18 • select * from Employee
19   where Emp_Name like 'R%D%';
```

	Emp_ID	Emp_Name	Salary	Dept	City
▶	2	Aman Singh	22000	BCA	Chinchbhawan
	3	Pranit Bhairam	2000	BSC	Balaghat
	4	Vijay Thakur	30000	CS	Bhopal
	5	Anant Sahu	40000	HR	Indore

```
select * from Employee
where Salary Between 25000 and 35000;
```

```
16 • select * from Employee
17   where Salary Between 25000 and 35000;
18 • select * from Employee
19   where Emp_Name like 'R%D%';
```

	Emp_ID	Emp_Name	Salary	Dept	City
▶	4	Vijay Thakur	30000	CS	Bhopal

```
select * from Employee
where Emp_Name like 'R%D%';
```

```
18 • select * from Employee
19   where Emp_Name like 'R%D%';
```

	Emp_ID	Emp_Name	Salary	Dept	City
▶	1	Rishabh Dwivedi	20000	MCA	Nagpur

```
select * from Employee
where Salary<30000;
```

```
20 • select * from Employee
21 where Salary<30000;
```

Result Grid

Filter Rows:

Export:

Wrap Cell Content:

	Emp_ID	Emp_Name	Salary	Dept	City
▶	1	Rishabh Dwivedi	20000	MCA	Nagpur
	2	Aman Singh	22000	BCA	Chinchbhawan
	3	Pranit Bhairam	2000	BSC	Balaghat

select * from Employee
where Dept='BCA';

```
22 • select * from Employee
23 where Dept='BCA';
24 • select * from Employee
25 where Salary>30000;
```

Result Grid

Filter Rows:

Export:

Wrap Cell Content:

Emp_ID	Emp_Name	Salary	Dept	City
2	Aman Singh	22000	BCA	Chinchbhawan

select * from Employee
where Salary>30000;

```
24 • select * from Employee
25 where Salary>30000;
```

Result Grid




Filter Rows:

Export:



Wrap Cell Content:



	Emp_ID	Emp_Name	Salary	Dept	City
▶	5	Anant Sahu	40000	HR	Indore

select Emp_Name,Salary,Salary+5000 As Increased_Salary from Employee;

```
26 • select Emp_Name,Salary,Salary+5000 As Increased_Salary from Employee;
```

Result Grid

Filter Rows:

Export:

Wrap Cell Content:

	Emp_Name	Salary	Increased_Salary
▶	Rishabh Dwivedi	20000	25000
	Aman Singh	22000	27000
	Pranit Bhairam	2000	7000
	Vijay Thakur	30000	35000
	Anant Sahu	40000	45000

select Emp_Name,Salary,Salary-1000 As Decreased_Salary from Employee;

27 • `select Emp_Name,Salary,Salary-1000 As Decreased_Salary from Employee;`

Result Grid	Filter Rows:	Export:	Wrap Cell Content:
Emp_Name	Salary	Decreased_Salary	
Rishabh Dwivedi	20000	19000	
Aman Singh	22000	21000	
Pranit Bhairam	2000	1000	
Vijay Thakur	30000	29000	
Anant Sahu	40000	39000	

select Emp_Name,Salary,Salary*2 As Doubled_Salary from Employee;

28 • `select Emp_Name,Salary,Salary*2 As Doubled_Salary from Employee;`

Result Grid	Filter Rows:	Export:	Wrap Cell Content:
Emp_Name	Salary	Doubled_Salary	
Rishabh Dwivedi	20000	40000	
Aman Singh	22000	44000	
Pranit Bhairam	2000	4000	
Vijay Thakur	30000	60000	
Anant Sahu	40000	80000	

select Emp_Name,Salary,Salary/2 As Half_Salary from Employee;

29 • `select Emp_Name,Salary,Salary/2 As Half_Salary from Employee;`

Result Grid	Filter Rows:	Export:	Wrap Cell Content:
Emp_Name	Salary	Half_Salary	
Rishabh Dwivedi	20000	10000.0000	
Aman Singh	22000	11000.0000	
Pranit Bhairam	2000	1000.0000	
Vijay Thakur	30000	15000.0000	
Anant Sahu	40000	20000.0000	