

### ANDROID STATIC ANALYSIS REPORT



Migraine Buddy (76.0.1734084780)

File Name: com.healint.migraineapp\_1734084780.apk

Package Name: com.healint.migraineapp

Scan Date: Aug. 29, 2025, 11:37 p.m.

App Security Score: 47/100 (MEDIUM RISK)

B

Trackers Detection: 8/432



Grade:

#### FILE INFORMATION

**File Name:** com.healint.migraineapp\_1734084780.apk

Size: 124.07MB

MD5: 658b7a3572d59308b7ee8ee29617c6c8

**SHA1:** 6f23f0ea9a9693677852ab86b279ae7b04cd1504

**SHA256**: ea5cc0300b844efdcce4ef58ea950ee305177b25ba43be595e1d56fc05e58c06

#### **i** APP INFORMATION

**App Name:** Migraine Buddy

Package Name: com.healint.migraineapp

Main Activity: com.healint.migraineapp.view.activity.launcher.LauncherActivity

Target SDK: 34 Min SDK: 26 Max SDK:

Android Version Name: 76.0.1734084780 Android Version Code: 1734084780

#### **EXE** APP COMPONENTS

Activities: 64
Services: 19
Receivers: 36
Providers: 12

Exported Activities: 25
Exported Services: 2
Exported Receivers: 14
Exported Providers: 0



Binary is signed v1 signature: False v2 signature: True v3 signature: False v4 signature: False

X.509 Subject: ST=Singapore, L=Singapore, O=Healint, OU=R&D, CN=Saayan Choudhury

Signature Algorithm: rsassa\_pkcs1v15 Valid From: 2013-08-15 01:42:51+00:00 Valid To: 2043-08-08 01:42:51+00:00

Issuer: ST=Singapore, L=Singapore, O=Healint, OU=R&D, CN=Saayan Choudhury

Serial Number: 0x520c321b Hash Algorithm: sha1

md5: 14b1762a31128397e9f368f3579cc53e

sha1: 4fc94a59d6a81743b775d3448e430beb33c323d2

sha256: 0c9762b94fd985b99ec76afdb06975a813e56e25156570e233460f50673db687

PublicKey Algorithm: rsa

Bit Size: 1024

Fingerprint: 685f7a4c1024fd48c912df2d4a03f82c4aa6949818ea4eb80b657d309db15e41

Found 1 unique certificates

#### **EXAMPLICATION PERMISSIONS**

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.HIGH_SAMPLING_RATE_SENSORS	normal	Access higher sampling rate sensor data	Allows an app to access sensor data with a sampling rate greater than 200 Hz.
android.permission.RECEIVE_BOOT_COMPLETED	normal	automatically start at boot	Allows an application to start itself as soon as the system has finished booting. This can make it take longer to start the phone and allow the application to slow down the overall phone by always running.
android.permission.ACCESS_COARSE_LOCATION	dangerous	coarse (network-based) location	Access coarse location sources, such as the mobile network database, to determine an approximate phone location, where available. Malicious applications can use this to determine approximately where you are.
android.permission.ACCESS_FINE_LOCATION	dangerous	fine (GPS) location	Access fine location sources, such as the Global Positioning System on the phone, where available. Malicious applications can use this to determine where you are and may consume additional battery power.

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.REQUEST_COMPANION_RUN_IN_BACKGROUND	normal	allows a companion app to run in the background.	Allows a companion app to run in the background.
android.permission.BATTERY_STATS	signature	modify battery statistics	Allows the modification of collected battery statistics. Not for use by common applications.
android.permission.READ_SYNC_STATS	normal	read sync statistics	Allows an application to read the sync stats; e.g. the history of syncs that have occurred.
android.permission.READ_SYNC_SETTINGS	normal	read sync settings	Allows an application to read the sync settings, such as whether sync is enabled for Contacts.
android.permission.VIBRATE	normal	control vibrator	Allows the application to control the vibrator.
android.permission.WRITE_SYNC_SETTINGS	normal	write sync settings	Allows an application to modify the sync settings, such as whether sync is enabled for Contacts.
android.permission.AUTHENTICATE_ACCOUNTS	dangerous	act as an account authenticator	Allows an application to use the account authenticator capabilities of the Account Manager, including creating accounts as well as obtaining and setting their passwords.
android.permission.INTERNET	normal	full Internet access	Allows an application to create network sockets.
android.permission.ACCESS_NETWORK_STATE	normal	view network status	Allows an application to view the status of all networks.
android.permission.USE_CREDENTIALS	dangerous	use the authentication credentials of an account	Allows an application to request authentication tokens.
android.permission.READ_EXTERNAL_STORAGE	dangerous	read external storage contents	Allows an application to read from external storage.
android.permission.WRITE_EXTERNAL_STORAGE	dangerous	read/modify/delete external storage contents	Allows an application to write to external storage.
com.google.android.c2dm.permission.RECEIVE	normal	recieve push notifications	Allows an application to receive push notifications from cloud.

PERMISSION	CTATLIC	INFO	DESCRIPTION	
FERMISSION	STATUS	INIO	DESCRIPTION	

com.healint.migraineapp.permission.C2D_MESSAGE	unknown	Unknown permission	Unknown permission from android reference
android.permission.CAMERA	dangerous	take pictures and videos	Allows application to take pictures and videos with the camera. This allows the application to collect images that the camera is seeing at any time.
android.permission.FOREGROUND_SERVICE	normal	enables regular apps to use Service.startForeground.	Allows a regular application to use Service.startForeground.
android.permission.FOREGROUND_SERVICE_HEALTH	normal	enables foreground services with health- related functionality.	Allows a regular application to use Service.startForeground with the type "health".
android.permission.SYSTEM_ALERT_WINDOW	dangerous	display system-level alerts	Allows an application to show system-alert windows. Malicious applications can take over the entire screen of the phone.
android.permission.SCHEDULE_EXACT_ALARM	normal	permits exact alarm scheduling for background work.	Allows an app to use exact alarm scheduling APIs to perform timing sensitive background work.
android.permission.POST_NOTIFICATIONS	dangerous	allows an app to post notifications.	Allows an app to post notifications
com.google.android.gms.permission.AD_ID	normal	application shows advertisements	This app uses a Google advertising ID and can possibly serve advertisements.
android.permission.ACCESS_WIFI_STATE	normal	view Wi-Fi status	Allows an application to view the information about the status of Wi-Fi.
android.permission.DOWNLOAD_WITHOUT_NOTIFICATION	unknown	Unknown permission	Unknown permission from android reference

PERMISSION	STATUS	INFO	DESCRIPTION
android.permission.ACCESS_ADSERVICES_ATTRIBUTION	normal	allow applications to access advertising service attribution	This enables the app to retrieve information related to advertising attribution, which can be used for targeted advertising purposes.  App can gather data about how users interact with ads, such as clicks or impressions, to measure the effectiveness of advertising campaigns.
android.permission.ACCESS_ADSERVICES_AD_ID	normal	allow app to access the device's advertising ID.	This ID is a unique, user-resettable identifier provided by Google's advertising services, allowing apps to track user behavior for advertising purposes while maintaining user privacy.
com.android.vending.BILLING	normal	application has in-app purchases	Allows an application to make in-app purchases from Google Play.
com.google.android.finsky.permission.BIND_GET_INSTALL_REFERRER_SERVICE	normal	permission defined by google	A custom permission defined by Google.
com.healint.migraineapp.DYNAMIC_RECEIVER_NOT_EXPORTED_PERMISSION	unknown	Unknown permission	Unknown permission from android reference

## ক্ল APKID ANALYSIS

FILE	DETAILS	
	FINDINGS	DETAILS
classes.dex	Anti-VM Code	Build.FINGERPRINT check Build.MANUFACTURER check
	Compiler	r8 without marker (suspicious)

FILE	DETAILS		
	FINDINGS	DETAILS	
classes2.dex	Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check possible Build.SERIAL check possible VM check	
	Compiler	r8 without marker (suspicious)	
	FINDINGS	DETAILS	
classes3.dex	Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check Build.HARDWARE check Build.TAGS check possible VM check	
	Anti Debug Code	Debug.isDebuggerConnected() check	
	Compiler	r8 without marker (suspicious)	

FILE	DETAILS	
	FINDINGS	DETAILS
classes4.dex	Anti-VM Code	Build.FINGERPRINT check Build.MODEL check Build.MANUFACTURER check Build.PRODUCT check Build.HARDWARE check Build.BOARD check possible Build.SERIAL check network operator name check possible VM check
	Compiler	r8 without marker (suspicious)
classes5.dex	FINDINGS	DETAILS
Cidosess.uch	Compiler	r8 without marker (suspicious)

## **■** BROWSABLE ACTIVITIES

ACTIVITY	INTENT
com.healint.migraineapp.view.activity.launcher.LauncherActivity	Schemes: migraine://, migraine-buddy://, Hosts: open,

ACTIVITY	INTENT
com.facebook.CustomTabActivity	Schemes: fbconnect://, Hosts: cct.com.healint.migraineapp,

### **△** NETWORK SECURITY

NO	SCOPE	SEVERITY	DESCRIPTION

#### **CERTIFICATE ANALYSIS**

HIGH: 1 | WARNING: 0 | INFO: 1

TITLE	SEVERITY	DESCRIPTION
Signed Application	info	Application is signed with a code signing certificate
Certificate algorithm vulnerable to hash collision	high	Application is signed with SHA1withRSA. SHA1 hash algorithm is known to have collision issues.

## **Q** MANIFEST ANALYSIS

HIGH: 1 | WARNING: 44 | INFO: 0 | SUPPRESSED: 0

NO	ISSUE	SEVERITY	DESCRIPTION
1	App can be installed on a vulnerable Android version Android 8.0, minSdk=26]	warning	This application can be installed on an older version of android that has multiple vulnerabilities. Support an Android version => 10, API 29 to receive reasonable security updates.

NO	ISSUE	SEVERITY	DESCRIPTION
2	Clear text traffic is Enabled For App [android:usesCleartextTraffic=true]	high	The app intends to use cleartext network traffic, such as cleartext HTTP, FTP stacks, DownloadManager, and MediaPlayer. The default value for apps that target API level 27 or lower is "true". Apps that target API level 28 or higher default to "false". The key reason for avoiding cleartext traffic is the lack of confidentiality, authenticity, and protections against tampering; a network attacker can eavesdrop on transmitted data and also modify it without being detected.
3	Activity (com.healint.migraineapp.view.activity.ProfileActivity) is not Protected.  [android:exported=true]		An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
4	Activity (com.healint.migraineapp.view.activity.DailyTriggersActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
5	Activity (com.healint.migraineapp.view.activity.settings.SettingsActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
6	Activity (com.healint.migraineapp.view.activity.SleepEventRecordActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
7	Activity (com.healint.migraineapp.view.activity.NotificationActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
8	Activity (com.healint.migraineapp.view.activity.DoctorEventRecordActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
9	Activity (com.healint.migraineapp.view.activity.TreatmentManagerActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
10	Activity (com.healint.migraineapp.view.activity.PressureBuddyActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.

NO	ISSUE	SEVERITY	DESCRIPTION
11	Activity (com.healint.migraineapp.view.activity.MBInAppBrowserActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
12	Activity (com.healint.migraineapp.view.activity.MigraineRecordSettingsActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
13	Activity (com.healint.migraineapp.view.activity.WeatherForecastActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
14	Broadcast Receiver (com.healint.service.sleep.TimeChangeBroadcastReceiver) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
15	Broadcast Receiver (com.healint.service.sleep.SleepDetectionSensorsScheduleReceiver) is Protected by a permission, but the protection level of the permission should be checked.  Permission: android.permission.WAKE_LOCK [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.
16	Broadcast Receiver (com.healint.migraineapp.notifications.NotificationBroadcastReceiver) is Protected by a permission, but the protection level of the permission should be checked.  Permission: com.google.android.c2dm.permission.SEND  [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.

NO	ISSUE	SEVERITY	DESCRIPTION
17	Broadcast Receiver (com.healint.migraineapp.notifications.action.MigraineAppSimpleNotificationActionBroadcastReceiver) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
18	Broadcast Receiver (com.healint.service.sleep.listener.SleepNotDetectedAlarm) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
19	Broadcast Receiver (com.healint.migraineapp.notifications.action.TriggerReminderBroadcastReceiver) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
20	Broadcast Receiver (com.healint.migraineapp.notifications.PressureAlertNotifierImpl) is not Protected.  [android:exported=true]		A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
21	Broadcast Receiver (com.healint.migraineapp.notifications.AppBootFinishedNotifierImpl) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
22	Broadcast Receiver (com.healint.migraineapp.notifications.MedicationReminderNotifierImpl) is not Protected. [android:exported=true]		A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
23	Broadcast Receiver (com.healint.service.sleep.SleepServiceAlarmReceiver) is Protected by a permission, but the protection level of the permission should be checked.  Permission: android.permission.WAKE_LOCK [android:exported=true]		A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.
24	Broadcast Receiver (com.healint.migraineapp.notifications.SignupReminderNotifierImpl) is not Protected. [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.

NO	ISSUE	SEVERITY	DESCRIPTION
25	Activity (com.healint.migraineapp.view.activity.BuddyInvitationActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
26	Activity (com.healint.migraineapp.reactnative.ProgramDetailActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
27	Activity (com.healint.migraineapp.reactnative.ProgramChecklistActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
28	Activity (com.healint.migraineapp.auth.AuthRootActivity) is not Protected. [android:exported=true]		An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
29	Activity (com.healint.migraineapp.subscription.SubscriptionActivity) is not Protected. [android:exported=true]		An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
30	Activity (com.healint.migraineapp.view.wizard.RNMigraineSummaryActivity) is not Protected. [android:exported=true]		An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
31	Activity (com.healint.migraineapp.view.activity.main.MainScreenActivity) is not Protected. [android:exported=true]		An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
32	Activity (com.healint.migraineapp.view.activity.reactNative.AchievementActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
33	Activity (com.healint.migraineapp.view.activity.reactNative.Wearables) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
34	Activity (com.healint.migraineapp.view.activity.reactNative.ShareStatusActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.

NO	ISSUE	SEVERITY	DESCRIPTION
35	Activity (com.healint.migraineapp.view.activity.mainmenu.MainMenuActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
36	Activity (com.healint.migraineapp.view.activity.sharedoctor.ReportSharingActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
37	Activity (com.healint.migraineapp.view.activity.reactNative.RNMigraineReportActivity) is not Protected. [android:exported=true]	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
38	Activity (com.facebook.CustomTabActivity) is not Protected.  [android:exported=true]		An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device.
39	TaskAffinity is set for activity (com.braze.push.NotificationTrampolineActivity)		If taskAffinity is set, then other application could read the Intents sent to Activities belonging to another task. Always use the default setting keeping the affinity as the package name in order to prevent sensitive information inside sent or received Intents from being read by another application.
40	Broadcast Receiver (com.google.firebase.iid.FirebaseInstanceIdReceiver) is Protected by a permission, but the protection level of the permission should be checked.  Permission: com.google.android.c2dm.permission.SEND  [android:exported=true]		A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.

NO	ISSUE	SEVERITY	DESCRIPTION
41	Service (com.google.android.gms.auth.api.signin.RevocationBoundService) is Protected by a permission, but the protection level of the permission should be checked.  Permission: com.google.android.gms.auth.api.signin.permission.REVOCATION_NOTIFICATION [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.
42	Service (androidx.work.impl.background.systemjob.SystemJobService) is Protected by a permission, but the protection level of the permission should be checked.  Permission: android.permission.BIND_JOB_SERVICE [android:exported=true]	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.
43	Broadcast Receiver (androidx.work.impl.diagnostics.DiagnosticsReceiver) is Protected by a permission, but the protection level of the permission should be checked.  Permission: android.permission.DUMP  [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.
44	Broadcast Receiver (androidx.profileinstaller.ProfileInstallReceiver) is Protected by a permission, but the protection level of the permission should be checked.  Permission: android.permission.DUMP  [android:exported=true]	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. It is protected by a permission which is not defined in the analysed application. As a result, the protection level of the permission should be checked where it is defined. If it is set to normal or dangerous, a malicious application can request and obtain the permission and interact with the component. If it is set to signature, only applications signed with the same certificate can obtain the permission.

NO	ISSUE	SEVERITY	DESCRIPTION
45	High Intent Priority (500) - {1} Hit(s) [android:priority]	warning	By setting an intent priority higher than another intent, the app effectively overrides other requests.

# </> CODE ANALYSIS

HIGH: 2 | WARNING: 10 | INFO: 4 | SECURE: 1 | SUPPRESSED: 0

NO	ISSUE	SEVERITY	STANDARDS	FILES
				a4/C0625b.java bo/app/f5.java com/amazonaws/auth/CognitoCachingCredentialsProvid er.java com/amazonaws/auth/policy/conditions/ConditionFacto ry.java com/amazonaws/auth/policy/conditions/S3ConditionFact tory.java com/amazonaws/internal/keyvaluestore/AWSKeyValueSt ore.java com/amazonaws/services/s3/Headers.java com/amazonaws/services/s3/model/S3ObjectSummary.j ava com/braze/Constants.java com/braze/configuration/BrazeConfig.java com/braze/enums/CardKey.java com/braze/models/inappmessage/InAppMessageHtml.ja va com/braze/models/outgoing/AttributionData.java com/braze/push/BrazeNotificationUtils.java com/braze/push/BrazePushReceiver.java com/braze/ui/contentcards/ContentCardsFragment.java com/braze/ui/inappmessage/listeners/DefaultInAppMess ageWebViewClientListener.java com/bumptech/glide/load/engine/c.java com/bumptech/glide/load/engine/n.java com/bumptech/glide/load/engine/u.java com/bumptech/glide/load/engine/u.java com/healint/javax/ws/rs/MergeConflictException.java com/healint/javax/ws/rs/UnprocessableEntityException.java com/healint/javax/ws/rs/WebApplicationException.java

NO	ISSUE	SEVERITY	STANDARDS	com/healint/service/branchio/BranchiOConstants.java
1	Files may contain hardcoded sensitive information like usernames, passwords, keys etc.	warning	CWE: CWE-312: Cleartext Storage of Sensitive Information OWASP Top 10: M9: Reverse Engineering OWASP MASVS: MSTG-STORAGE-14	izableBaseDAO.java com/healint/service/migraine/impl/MigraineServiceImpl. java com/healint/service/migraine/impl/update_scripts/_1740 To1800.java com/healint/service/migraine/impl/update_scripts/_1740 To1800.java com/healint/service/migraine/impl/update_scripts/_1850 To1860.java com/healint/service/notification/Constants.java com/healint/service/notification/NotificationParsingExce ption.java com/healint/service/sendbird/SBConstants.java com/healint/service/sendbird/SBConstants.java com/healint/service/sendbird/SendBirdServiceImpl.java com/healint/service/sendbird/SendBirdServiceImpl.java com/lokalise/sdk/Lokalise.java com/lokalise/sdk/Lokalise.java com/sendbird/android/channel/o0.java com/sendbird/android/channel/o0.java com/sendbird/android/channel/yo.java com/sendbird/android/channel/yo.java com/sendbird/android/channel/yo.java com/sendbird/android/internal/network/connection/stat e/InternalDisconnectedState.java com/sendbird/android/internal/stats/NotificationStat.jav a com/sendbird/android/internal/stats/NotificationStat.jav a com/sendbird/android/message/b.java com/sendbird/android/message/b.java com/sendbird/android/message/y.java com/sendbird/android/messa

NO	ISSUE	SEVERITY	STANDARDS	EU-E-Sava
				A4/e.java
				C0/d.java
				C0/k.java
				E0/a.java
				G3/a.java
				X6/a.java
				Y2/a.java
				Y6/c.java
				a5/f.java
				a7/c.java
				cl/json/RNShareModule.java
				com/ReactNativeBlobUtil/ReactNativeBlobUtil.java
				com/airbnb/android/react/lottie/h.java
				com/amazonaws/logging/AndroidLog.java
				com/babisoft/ReactNativeLocalization/ReactNativeLoca
				ation.java
				com/bumptech/glide/b.java
				com/bumptech/glide/disklrucache/a.java
				com/bumptech/glide/load/data/j.java
				com/bumptech/glide/load/engine/DecodeJob.java
				com/bumptech/glide/load/engine/becodejob.java
				com/bumptech/glide/load/engine/bitmap_recycle/j.java
				com/bumptech/glide/load/engine/cache/e.java
				com/bumptech/glide/load/engine/cache/i.java
				com/bumptech/glide/load/engine/g.java
				com/bumptech/glide/load/engine/i.java
				com/bumptech/glide/load/engine/w.java
				com/bumptech/glide/load/model/s.java
				com/bumptech/glide/load/model/t.java
				com/bumptech/glide/load/resource/bitmap/A.java
				com/bumptech/glide/load/resource/bitmap/C0937c.jav
				com/bumptech/glide/load/resource/bitmap/DefaultIma
				eHeaderParser.java
				com/bumptech/glide/load/resource/bitmap/f.java
				com/bumptech/glide/load/resource/bitmap/o.java
				com/bumptech/glide/load/resource/bitmap/p.java
				com/bumptech/glide/load/resource/bitmap/t.java
				com/bumptech/glide/request/SingleRequest.java
				com/bumptech/glide/util/c.java
				com/fasterxml/jackson/databind/ext/DOMSerializer.jav
				com/fasterxml/jackson/databind/util/ClassUtil.java
				com/healint/service/sendbird/urlPreview/TextCrawler.ja
				va (D.:
				com/horcrux/svg/B.java
				com/horcrux/svg/Brush.java

NO	The App logs information. Sensitive	SEVERITY	SHFANDARDS OWASP MASVS: MSTG-STORAGE-3	com/horcrux/svg/C1323b.java
			OWASP MASVS: MSTG-STORAGE-3	com/horcrux/svg/VirtualView.java
				com/horcrux/svg/q.java
				com/horcrux/svg/s.java
				com/horcrux/svg/x.java
				com/j256/ormlite/android/AndroidLogBackend.java
				com/j256/ormlite/android/apptools/OrmLiteConfigUtil.ja
				va
				com/j256/ormlite/logger/ConsoleLogBackend.java
				com/j256/ormlite/logger/LocalLogBackend.java
				com/j256/ormlite/table/BaseSchemaUtils.java
				com/jakewharton/disklrucache/a.java
				com/learnium/RNDeviceInfo/RNDeviceModule.java
				com/learnium/RNDeviceInfo/d.java
				com/reactnativecommunity/asyncstorage/AsyncStorage
				Module.java
				com/reactnativecommunity/asyncstorage/f.java
				com/reactnativecommunity/asyntstorage/i.java
				com/reactnativecommunity/webview/e.java
				com/sendbird/android/SendbirdChat.java
				d6/c.java
				e0/AbstractC1548b.java
				io/invertase/firebase/common/ReactNativeFirebaseEvent
				Emitter.java
				io/realm/AbstractC1652a.java
				io/realm/C0.java
				io/realm/C1692k0.java
				io/realm/Croszko.java io/realm/RealmCache.java
				io/realm/nternal/OsRealmConfig.java
				io/realm/internal/OskeaiinCoring.java
				io/realm/internal/e.java
				io/realm/internal/e.java
				net/time4j/base/d.java
				net/time4j/i18n/h.java
				net/time4j/tz/spi/b.java
				org/conscrypt/ct/CTVerifier.java org/jsoup/examples/HtmlToPlainText.java
				org/jsoup/examples/Htmi10Plain1ext.java org/jsoup/examples/ListLinks.java
				org/slf4j/helpers/d.java
				q0/C2011d.java
				q0/C2012e.java
				r4/b.java
				retrofit/Platform.java
				services/common/HttpErrorReporter.java
				services/sensorstracking/LocationSensorDataAddressesP
				ersister.java
				t0/C2071e.java

NO	ISSUF	SFVFRITY	STANDARDS	v0/h.java <b>√M</b> d <b>∑\$</b> 98a java
3	IP Address disclosure	warning	CWE: CWE-200: Information Exposure OWASP MASVS: MSTG-CODE-2	org/conscrypt/CertificatePriorityComparator.java org/conscrypt/ChainStrengthAnalyzer.java org/conscrypt/EvpMdRef.java org/conscrypt/OAEPParameters.java org/conscrypt/OidData.java org/conscrypt/OpenSSLCipherRSA.java org/conscrypt/OpenSSLProvider.java org/conscrypt/OpenSSLSignature.java org/conscrypt/TrustManagerImpl.java org/conscrypt/CCTConstants.java
4	The App uses an insecure Random Number Generator.	warning	CWE: CWE-330: Use of Insufficiently Random Values OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-6	D4/d.java D4/h.java K5/a.java com/amazonaws/mobileconnectors/pinpoint/targeting/n otification/NotificationClientBase.java com/amazonaws/retry/PredefinedRetryPolicies.java com/braze/support/IntentUtils.java com/healint/migraineapp/notifications/q.java g6/C1593d.java g6/h.java java8/util/concurrent/ThreadLocalRandom.java org/jsoup/helper/DataUtil.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
5	App uses SQLite Database and execute raw SQL query. Untrusted user input in raw SQL queries can cause SQL Injection. Also sensitive information should be encrypted and written to the database.	warning	CWE: CWE-89: Improper Neutralization of Special Elements used in an SQL Command ('SQL Injection') OWASP Top 10: M7: Client Code Quality	com/amazonaws/mobileconnectors/pinpoint/internal/event/EventTable.java com/amazonaws/mobileconnectors/pinpoint/internal/event/PinpointDBBase.java com/amazonaws/mobileconnectors/pinpoint/internal/event/PinpointDatabaseHelper.java com/j256/ormlite/android/AndroidCompiledStatement.java com/j256/ormlite/android/AndroidDatabaseConnection.java com/j256/ormlite/android/compat/ApiCompatibility.java com/j256/ormlite/android/compat/BasicApiCompatibility.java com/j256/ormlite/android/compat/JellyBeanApiCompatibility.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
6	App can write to App Directory. Sensitive Information should be encrypted.	info	CWE: CWE-276: Incorrect Default Permissions OWASP MASVS: MSTG-STORAGE-14	bo/app/C0854j0.java bo/app/C0856k0.java bo/app/C0858l0.java bo/app/C0859m.java bo/app/C0873t0.java bo/app/SharedPreferencesC0843e.java bo/app/f6.java bo/app/f6.java bo/app/f6.java bo/app/m4.java bo/app/n6.java bo/app/q4.java bo/app/q5.java bo/app/q6.java com/braze/configuration/RuntimeAppConfigurationProvi der.java com/lokalise/sdk/shared_prefs/LokaliseInstallationInfo.ja va
7	App can read/write to External Storage. Any App can read data written to External Storage.	warning	CWE: CWE-276: Incorrect Default Permissions OWASP Top 10: M2: Insecure Data Storage OWASP MASVS: MSTG-STORAGE-2	a5/e.java com/ReactNativeBlobUtil/d.java com/github/mikephil/charting/charts/Chart.java com/github/mikephil/charting/utils/FileUtils.java com/healint/android/common/activity/InAppBrowserActi vity.java com/learnium/RNDeviceInfo/RNDeviceModule.java com/reactnativecommunity/webview/RNCWebViewMod uleImpl.java com/rnfs/RNFSManager.java g0/c.java io/invertase/firebase/utils/ReactNativeFirebaseUtilsModu le.java pl/aprilapps/easyphotopicker/c.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
8	Insecure WebView Implementation. Execution of user controlled code in WebView is a critical Security Hole.	warning	CWE: CWE-749: Exposed Dangerous Method or Function OWASP Top 10: M1: Improper Platform Usage OWASP MASVS: MSTG-PLATFORM-7	com/healint/android/common/activity/lnAppBrowserActi vity.java com/pierfrancescosoffritti/androidyoutubeplayer/core/pl ayer/views/WebViewYouTubePlayer.java
9	Ensure that user controlled URLs never reaches the Webview. Enabling file access from URLs in WebView can leak sensitive information from the file system.	warning	CWE: CWE-200: Information Exposure OWASP Top 10: M1: Improper Platform Usage OWASP MASVS: MSTG-PLATFORM-7	com/healint/android/common/activity/lnAppBrowserActi vity.java
10	Remote WebView debugging is enabled.	high	CWE: CWE-919: Weaknesses in Mobile Applications OWASP Top 10: M1: Improper Platform Usage OWASP MASVS: MSTG-RESILIENCE-2	com/healint/android/common/activity/lnAppBrowserActi vity.java
11	MD5 is a weak hash known to have hash collisions.	warning	CWE: CWE-327: Use of a Broken or Risky Cryptographic Algorithm OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-4	com/ReactNativeBlobUtil/h.java com/amazonaws/services/s3/internal/MD5DigestCalcula tingInputStream.java com/amazonaws/util/Md5Utils.java com/braze/support/StringUtils.java com/healint/android/common/c.java com/iainconnor/objectcache/c.java m0/f.java
12	SHA-1 is a weak hash known to have hash collisions.	warning	CWE: CWE-327: Use of a Broken or Risky Cryptographic Algorithm OWASP Top 10: M5: Insufficient Cryptography OWASP MASVS: MSTG-CRYPTO-4	com/amazonaws/mobileconnectors/cognitoidentityprovi der/CognitoUser.java com/amazonaws/mobileconnectors/cognitoidentityprovi der/util/CognitoDeviceHelper.java n1/C1931a.java
13	App creates temp file. Sensitive information should never be written into a temp file.	warning	CWE: CWE-276: Incorrect Default Permissions OWASP Top 10: M2: Insecure Data Storage OWASP MASVS: MSTG-STORAGE-2	com/ReactNativeBlobUtil/a.java com/reactnativecommunity/webview/RNCWebViewMod uleImpl.java pl/aprilapps/easyphotopicker/c.java

NO	ISSUE	SEVERITY	STANDARDS	FILES
14	This App uses SSL certificate pinning to detect or prevent MITM attacks in secure communication channel.	secure	OWASP MASVS: MSTG-NETWORK-4	c6/C0895c.java c6/d.java c6/g.java c6/h.java org/conscrypt/DefaultSSLContextImpl.java org/conscrypt/SSLParametersImpl.java org/jsoup/helper/HttpConnection.java z4/c.java z4/d.java z4/i.java
15	This App copies data to clipboard. Sensitive data should not be copied to clipboard as other applications can access it.	info	OWASP MASVS: MSTG-STORAGE-10	com/healint/migraineapp/util/Q0.java com/reactnativecommunity/clipboard/ClipboardModule. java io/branch/referral/ShareLinkManager.java
16	Insecure Implementation of SSL. Trusting all the certificates or accepting self signed certificates is a critical Security Hole. This application is vulnerable to MITM attacks	high	CWE: CWE-295: Improper Certificate Validation OWASP Top 10: M3: Insecure Communication OWASP MASVS: MSTG-NETWORK-3	org/conscrypt/Conscrypt.java services/migraine/rest/client/retrofit/DefaultRequestInter ceptor.java
17	This app listens to Clipboard changes. Some malware also listen to Clipboard changes.	info	OWASP MASVS: MSTG-PLATFORM-4	com/reactnativecommunity/clipboard/ClipboardModule. java

## ME SHARED LIBRARY BINARY ANALYSIS

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED	
----	---------------	----	-----	-----------------	-------	-------	---------	---------	---------------------	--

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
1	arm64-v8a/libnative-filters.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
2	arm64-v8a/libreact_featureflagsjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
3	arm64-v8a/libreact_render_debug.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
4	arm64-v8a/libfolly_runtime.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'memset_chk', 'vsnprintf_chk', 'memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
5	arm64-v8a/libjsinspector.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
6	arm64-v8a/libshinobicharts-android.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
7	arm64-v8a/libreact_codegen_rncore.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
8	arm64-v8a/libreact_utils.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
9	arm64-v8a/libreactnativejni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
10	arm64-v8a/libfabricjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
11	arm64-v8a/libhermes_executor.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
12	arm64-v8a/libhermesinstancejni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
13	arm64-v8a/libjsi.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
14	arm64-v8a/libworklets.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
15	arm64-v8a/libconscrypt_jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
16	arm64-v8a/libhermes.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['memcpy_chk', 'strlen_chk', 'vsnprintf_chk', 'strchr_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
17	arm64-v8a/libreact_render_mapbuffer.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
18	arm64-v8a/libturbomodulejsijni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
19	arm64-v8a/libc++_shared.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
20	arm64-v8a/libyoga.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
21	arm64-v8a/libmapbufferjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
22	arm64-v8a/libreact_debug.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
23	arm64-v8a/libreactperfloggerjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
24	arm64-v8a/libreact_render_graphics.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
25	arm64-v8a/libfbjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
26	arm64-v8a/libreact_featureflags.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
27	arm64-v8a/libreact_render_imagemanager.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
28	arm64-v8a/libreact_cxxreactpackage.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
29	arm64-v8a/libimagepipeline.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
30	arm64-v8a/libjsijniprofiler.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
31	arm64-v8a/librealm-jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_memcpy_chk', '_memmove_chk', '_strlen_chk', '_strchr_chk', '_vsprintf_chk', '_read_chk', '_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
32	arm64-v8a/librrc_view.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
33	arm64-v8a/libreact_devsupportjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
34	arm64-v8a/libreact_nativemodule_core.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
35	arm64-v8a/libreact_render_core.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
36	arm64-v8a/libglog.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'memcpy_chk', 'vsnprintf_chk', 'strncat_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
37	arm64-v8a/librnscreens.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
38	arm64-v8a/libreanimated.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
39	arm64-v8a/libnative-imagetranscoder.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['vsprintf_chk', 'strlen_chk', 'memmove_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
40	arm64- v8a/librrc_legacyviewmanagerinterop.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
41	arm64- v8a/libreact_render_componentregistry.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
42	arm64-v8a/libreact_newarchdefaults.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
43	arm64-v8a/libreactnativeblob.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
44	arm64-v8a/libruntimeexecutor.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
45	arm64-v8a/librninstance.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
46	arm64-v8a/libjscinstance.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
47	arm64-v8a/librrc_image.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
48	arm64-v8a/libuimanagerjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
49	x86_64/libnative-filters.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
50	x86_64/libreact_featureflagsjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
51	x86_64/libreact_render_debug.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
52	x86_64/libfolly_runtime.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'memset_chk', 'vsnprintf_chk', 'memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
53	x86_64/libjsinspector.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
54	x86_64/libshinobicharts-android.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
55	x86_64/libreact_codegen_rncore.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
56	x86_64/libreact_utils.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
57	x86_64/libreactnativejni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
58	x86_64/libfabricjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
59	x86_64/libhermes_executor.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
60	x86_64/libhermesinstancejni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
61	x86_64/libjsi.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
62	x86_64/libworklets.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
63	x86_64/libconscrypt_jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
64	x86_64/libhermes.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['memcpy_chk', 'strlen_chk', 'vsnprintf_chk', 'strchr_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
65	x86_64/libreact_render_mapbuffer.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
66	x86_64/libturbomodulejsijni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
67	x86_64/libc++_shared.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
68	x86_64/libyoga.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
69	x86_64/libmapbufferjni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
70	x86_64/libreact_debug.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
71	x86_64/libreactperfloggerjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
72	x86_64/libreact_render_graphics.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
73	x86_64/libfbjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
74	x86_64/libreact_featureflags.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
75	x86_64/libreact_render_imagemanager.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
76	x86_64/libreact_cxxreactpackage.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
77	x86_64/libimagepipeline.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
78	x86_64/libjsijniprofiler.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
79	x86_64/librealm-jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['memcpy_chk', 'memmove_chk', 'strlen_chk', 'strchr_chk', 'vsprintf_chk', 'read_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
80	x86_64/librrc_view.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
81	x86_64/libreact_devsupportjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
82	x86_64/libreact_nativemodule_core.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
83	x86_64/libreact_render_core.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
84	x86_64/libglog.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'memcpy_chk', 'vsnprintf_chk', 'strncat_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
85	x86_64/librnscreens.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
86	x86_64/libreanimated.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
87	x86_64/libnative-imagetranscoder.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['vsprintf_chk', 'strlen_chk', 'memmove_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
88	x86_64/librrc_legacyviewmanagerinterop.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
89	x86_64/libreact_render_componentregistry.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
90	x86_64/libreact_newarchdefaults.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
91	x86_64/libreactnativeblob.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
92	x86_64/libruntimeexecutor.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
93	x86_64/librninstance.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
94	x86_64/libjscinstance.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
95	x86_64/librrc_image.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
96	x86_64/libuimanagerjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
97	armeabi-v7a/libnative-filters.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
98	armeabi-v7a/libreact_featureflagsjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
99	armeabi-v7a/libreact_render_debug.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
100	armeabi-v7a/libfolly_runtime.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'memset_chk', 'vsnprintf_chk', 'memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
101	armeabi-v7a/libjsinspector.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
102	armeabi-v7a/libshinobicharts-android.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
103	armeabi-v7a/libreact_codegen_rncore.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
104	armeabi-v7a/libreact_utils.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
105	armeabi-v7a/libreactnativejni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['vsnprintf_chk', 'strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
106	armeabi-v7a/libfabricjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
107	armeabi-v7a/libhermes_executor.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
108	armeabi-v7a/libhermesinstancejni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
109	armeabi-v7a/libjsi.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
110	armeabi-v7a/libworklets.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
111	armeabi-v7a/libconscrypt_jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
112	armeabi-v7a/libhermes.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['memcpy_chk', 'strlen_chk', 'vsnprintf_chk', 'strchr_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
113	armeabi-v7a/libreact_render_mapbuffer.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
114	armeabi-v7a/libturbomodulejsijni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
115	armeabi-v7a/libc++_shared.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
116	armeabi-v7a/libyoga.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
117	armeabi-v7a/libmapbufferjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
118	armeabi-v7a/libreact_debug.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
119	armeabi-v7a/libreactperfloggerjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
120	armeabi-v7a/libreact_render_graphics.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
121	armeabi-v7a/libfbjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
122	armeabi-v7a/libreact_featureflags.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
123	armeabi- v7a/libreact_render_imagemanager.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
124	armeabi-v7a/libreact_cxxreactpackage.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
125	armeabi-v7a/libimagepipeline.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
126	armeabi-v7a/libjsijniprofiler.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
127	armeabi-v7a/librealm-jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
128	armeabi-v7a/librrc_view.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
129	armeabi-v7a/libreact_devsupportjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
130	armeabi-v7a/libreact_nativemodule_core.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
131	armeabi-v7a/libreact_render_core.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
132	armeabi-v7a/libglog.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'memcpy_chk', 'vsnprintf_chk', 'strncat_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
133	armeabi-v7a/librnscreens.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
134	armeabi-v7a/libreanimated.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
135	armeabi-v7a/libnative-imagetranscoder.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsprintf_chk', '_strlen_chk', '_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
136	armeabi- v7a/librrc_legacyviewmanagerinterop.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
137	armeabi- v7a/libreact_render_componentregistry.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
138	armeabi-v7a/libreact_newarchdefaults.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
139	armeabi-v7a/libreactnativeblob.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
140	armeabi-v7a/libruntimeexecutor.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
141	armeabi-v7a/librninstance.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
142	armeabi-v7a/libjscinstance.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
143	armeabi-v7a/librrc_image.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
144	armeabi-v7a/libuimanagerjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
145	armeabi/libshinobicharts-android.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
146	x86/libnative-filters.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
147	x86/libreact_featureflagsjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
148	x86/libreact_render_debug.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
149	x86/libfolly_runtime.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'memset_chk', 'vsnprintf_chk', '_memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
150	x86/libjsinspector.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
151	x86/libshinobicharts-android.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
152	x86/libreact_codegen_rncore.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
153	x86/libreact_utils.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
154	x86/libreactnativejni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
155	x86/libfabricjni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
156	x86/libhermes_executor.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
157	x86/libhermesinstancejni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
158	x86/libjsi.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
159	x86/libworklets.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
160	x86/libconscrypt_jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
161	x86/libhermes.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['memcpy_chk', 'strlen_chk', 'vsnprintf_chk', 'strchr_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
162	x86/libreact_render_mapbuffer.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
163	x86/libturbomodulejsijni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
164	x86/libc++_shared.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
165	x86/libyoga.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
166	x86/libmapbufferjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
167	x86/libreact_debug.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
168	x86/libreactperfloggerjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
169	x86/libreact_render_graphics.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
170	x86/libfbjni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
171	x86/libreact_featureflags.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
172	x86/libreact_render_imagemanager.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
173	x86/libreact_cxxreactpackage.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
174	x86/libimagepipeline.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
175	x86/libjsijniprofiler.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
176	x86/librealm-jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
177	x86/librrc_view.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
178	x86/libreact_devsupportjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
179	x86/libreact_nativemodule_core.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
180	x86/libreact_render_core.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
181	x86/libglog.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'memcpy_chk', 'vsnprintf_chk', 'strncat_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
182	x86/librnscreens.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
183	x86/libreanimated.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
184	x86/libnative-imagetranscoder.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['vsprintf_chk', 'strlen_chk', 'memmove_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
185	x86/librrc_legacyviewmanagerinterop.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
186	x86/libreact_render_componentregistry.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
187	x86/libreact_newarchdefaults.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
188	x86/libreactnativeblob.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
189	x86/libruntimeexecutor.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
190	x86/librninstance.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
191	x86/libjscinstance.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
192	x86/librrc_image.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
193	x86/libuimanagerjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
194	mips/libshinobicharts-android.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
195	mips64/libshinobicharts-android.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
196	arm64-v8a/libnative-filters.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
197	arm64-v8a/libreact_featureflagsjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
198	arm64-v8a/libreact_render_debug.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
199	arm64-v8a/libfolly_runtime.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'memset_chk', 'vsnprintf_chk', '_memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
200	arm64-v8a/libjsinspector.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
201	arm64-v8a/libshinobicharts-android.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
202	arm64-v8a/libreact_codegen_rncore.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
203	arm64-v8a/libreact_utils.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
204	arm64-v8a/libreactnativejni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
205	arm64-v8a/libfabricjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
206	arm64-v8a/libhermes_executor.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
207	arm64-v8a/libhermesinstancejni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
208	arm64-v8a/libjsi.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
209	arm64-v8a/libworklets.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
210	arm64-v8a/libconscrypt_jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
211	arm64-v8a/libhermes.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['memcpy_chk', 'strlen_chk', 'vsnprintf_chk', 'strchr_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
212	arm64-v8a/libreact_render_mapbuffer.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
213	arm64-v8a/libturbomodulejsijni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
214	arm64-v8a/libc++_shared.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
215	arm64-v8a/libyoga.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
216	arm64-v8a/libmapbufferjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
217	arm64-v8a/libreact_debug.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
218	arm64-v8a/libreactperfloggerjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
219	arm64-v8a/libreact_render_graphics.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
220	arm64-v8a/libfbjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
221	arm64-v8a/libreact_featureflags.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
222	arm64-v8a/libreact_render_imagemanager.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
223	arm64-v8a/libreact_cxxreactpackage.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
224	arm64-v8a/libimagepipeline.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
225	arm64-v8a/libjsijniprofiler.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
226	arm64-v8a/librealm-jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['memcpy_chk', 'memmove_chk', 'strlen_chk', 'strchr_chk', 'read_chk', 'read_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
227	arm64-v8a/librrc_view.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
228	arm64-v8a/libreact_devsupportjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
229	arm64-v8a/libreact_nativemodule_core.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
230	arm64-v8a/libreact_render_core.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
231	arm64-v8a/libglog.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'memcpy_chk', 'vsnprintf_chk', 'strncat_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
232	arm64-v8a/librnscreens.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
233	arm64-v8a/libreanimated.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
234	arm64-v8a/libnative-imagetranscoder.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['vsprintf_chk', 'strlen_chk', 'memmove_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
235	arm64- v8a/librrc_legacyviewmanagerinterop.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
236	arm64- v8a/libreact_render_componentregistry.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
237	arm64-v8a/libreact_newarchdefaults.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
238	arm64-v8a/libreactnativeblob.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
239	arm64-v8a/libruntimeexecutor.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
240	arm64-v8a/librninstance.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
241	arm64-v8a/libjscinstance.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
242	arm64-v8a/librrc_image.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
243	arm64-v8a/libuimanagerjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
244	x86_64/libnative-filters.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
245	x86_64/libreact_featureflagsjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
246	x86_64/libreact_render_debug.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
247	x86_64/libfolly_runtime.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk', '_memset_chk', '_vsnprintf_chk', '_memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
248	x86_64/libjsinspector.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
249	x86_64/libshinobicharts-android.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
250	x86_64/libreact_codegen_rncore.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
251	x86_64/libreact_utils.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
252	x86_64/libreactnativejni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
253	x86_64/libfabricjni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
254	x86_64/libhermes_executor.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
255	x86_64/libhermesinstancejni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
256	x86_64/libjsi.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
257	x86_64/libworklets.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
258	x86_64/libconscrypt_jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
259	x86_64/libhermes.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['memcpy_chk', 'strlen_chk', 'vsnprintf_chk', 'strchr_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
260	x86_64/libreact_render_mapbuffer.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
261	x86_64/libturbomodulejsijni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
262	x86_64/libc++_shared.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
263	x86_64/libyoga.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
264	x86_64/libmapbufferjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
265	x86_64/libreact_debug.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
266	x86_64/libreactperfloggerjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
267	x86_64/libreact_render_graphics.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
268	x86_64/libfbjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
269	x86_64/libreact_featureflags.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
270	x86_64/libreact_render_imagemanager.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
271	x86_64/libreact_cxxreactpackage.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
272	x86_64/libimagepipeline.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
273	x86_64/libjsijniprofiler.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
274	x86_64/librealm-jni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_memcpy_chk', '_memmove_chk', '_strlen_chk', '_strchr_chk', '_vsprintf_chk', '_read_chk', '_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
275	x86_64/librrc_view.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk', '_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
276	x86_64/libreact_devsupportjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
277	x86_64/libreact_nativemodule_core.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
278	x86_64/libreact_render_core.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
279	x86_64/libglog.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'memcpy_chk', 'vsnprintf_chk', 'strncat_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
280	x86_64/librnscreens.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
281	x86_64/libreanimated.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
282	x86_64/libnative-imagetranscoder.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['vsprintf_chk', 'strlen_chk', 'memmove_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
283	x86_64/librrc_legacyviewmanagerinterop.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
284	x86_64/libreact_render_componentregistry.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
285	x86_64/libreact_newarchdefaults.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
286	x86_64/libreactnativeblob.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
287	x86_64/libruntimeexecutor.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
288	x86_64/librninstance.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
289	x86_64/libjscinstance.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
290	x86_64/librrc_image.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
291	x86_64/libuimanagerjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
292	armeabi-v7a/libnative-filters.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
293	armeabi-v7a/libreact_featureflagsjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
294	armeabi-v7a/libreact_render_debug.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
295	armeabi-v7a/libfolly_runtime.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk', '_memset_chk', '_vsnprintf_chk', '_memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
296	armeabi-v7a/libjsinspector.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
297	armeabi-v7a/libshinobicharts-android.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
298	armeabi-v7a/libreact_codegen_rncore.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
299	armeabi-v7a/libreact_utils.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
300	armeabi-v7a/libreactnativejni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['vsnprintf_chk', 'strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
301	armeabi-v7a/libfabricjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
302	armeabi-v7a/libhermes_executor.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
303	armeabi-v7a/libhermesinstancejni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
304	armeabi-v7a/libjsi.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
305	armeabi-v7a/libworklets.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
306	armeabi-v7a/libconscrypt_jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
307	armeabi-v7a/libhermes.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['memcpy_chk', 'strlen_chk', 'vsnprintf_chk', 'strchr_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
308	armeabi-v7a/libreact_render_mapbuffer.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
309	armeabi-v7a/libturbomodulejsijni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
310	armeabi-v7a/libc++_shared.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
311	armeabi-v7a/libyoga.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
312	armeabi-v7a/libmapbufferjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
313	armeabi-v7a/libreact_debug.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
314	armeabi-v7a/libreactperfloggerjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
315	armeabi-v7a/libreact_render_graphics.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
316	armeabi-v7a/libfbjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
317	armeabi-v7a/libreact_featureflags.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
318	armeabi- v7a/libreact_render_imagemanager.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
319	armeabi-v7a/libreact_cxxreactpackage.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
320	armeabi-v7a/libimagepipeline.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
321	armeabi-v7a/libjsijniprofiler.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
322	armeabi-v7a/librealm-jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
323	armeabi-v7a/librrc_view.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
324	armeabi-v7a/libreact_devsupportjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
325	armeabi-v7a/libreact_nativemodule_core.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
326	armeabi-v7a/libreact_render_core.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
327	armeabi-v7a/libglog.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'memcpy_chk', 'vsnprintf_chk', 'strncat_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
328	armeabi-v7a/librnscreens.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
329	armeabi-v7a/libreanimated.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk', '_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
330	armeabi-v7a/libnative-imagetranscoder.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsprintf_chk', '_strlen_chk', '_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
331	armeabi- v7a/librrc_legacyviewmanagerinterop.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
332	armeabi- v7a/libreact_render_componentregistry.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
333	armeabi-v7a/libreact_newarchdefaults.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
334	armeabi-v7a/libreactnativeblob.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
335	armeabi-v7a/libruntimeexecutor.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
336	armeabi-v7a/librninstance.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
337	armeabi-v7a/libjscinstance.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
338	armeabi-v7a/librrc_image.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
339	armeabi-v7a/libuimanagerjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
340	armeabi/libshinobicharts-android.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
341	x86/libnative-filters.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
342	x86/libreact_featureflagsjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
343	x86/libreact_render_debug.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
344	x86/libfolly_runtime.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk', '_memset_chk', '_vsnprintf_chk', '_memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
345	x86/libjsinspector.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
346	x86/libshinobicharts-android.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
347	x86/libreact_codegen_rncore.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
348	x86/libreact_utils.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
349	x86/libreactnativejni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
350	x86/libfabricjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
351	x86/libhermes_executor.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
352	x86/libhermesinstancejni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
353	x86/libjsi.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
354	x86/libworklets.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
355	x86/libconscrypt_jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
356	x86/libhermes.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['memcpy_chk', 'strlen_chk', 'vsnprintf_chk', 'strchr_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
357	x86/libreact_render_mapbuffer.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
358	x86/libturbomodulejsijni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
359	x86/libc++_shared.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
360	x86/libyoga.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
361	x86/libmapbufferjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
362	x86/libreact_debug.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
363	x86/libreactperfloggerjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
364	x86/libreact_render_graphics.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
365	x86/libfbjni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
366	x86/libreact_featureflags.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
367	x86/libreact_render_imagemanager.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
368	x86/libreact_cxxreactpackage.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
369	x86/libimagepipeline.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
370	x86/libjsijniprofiler.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
371	x86/librealm-jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
372	x86/librrc_view.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk', '_vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
373	x86/libreact_devsupportjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
374	x86/libreact_nativemodule_core.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
375	x86/libreact_render_core.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
376	x86/libglog.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'memcpy_chk', 'vsnprintf_chk', 'strncat_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
377	x86/librnscreens.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
378	x86/libreanimated.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
379	x86/libnative-imagetranscoder.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['vsprintf_chk', 'strlen_chk', 'memmove_chk', 'vsnprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
380	x86/librrc_legacyviewmanagerinterop.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
381	x86/libreact_render_componentregistry.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
382	x86/libreact_newarchdefaults.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
383	x86/libreactnativeblob.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
384	x86/libruntimeexecutor.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
385	x86/librninstance.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
386	x86/libjscinstance.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
387	x86/librrc_image.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_strlen_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
388	x86/libuimanagerjni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
389	mips/libshinobicharts-android.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
390	mips64/libshinobicharts-android.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	False high This binary does not have a stack canary value added to the stack. Stack canaries are used to detect and prevent exploits from overwriting return address. Use the option - fstack- protector- all to enable stack canaries. Not applicable for Dart/Flutter libraries unless Dart FFI is used.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION

# **BEHAVIOUR ANALYSIS**

RULE ID	BEHAVIOUR	LABEL	FILES
00022	Open a file from given absolute path of the file	file	X/a,java bo/app/f6.java com/ReactNativeBlobUtil/ReactNativeBlobUtilReq.java com/ReactNativeBlobUtil/d.java com/airbnb/lottie/AbstractC0934z.java com/amazonaws/auth/PropertiesCredentials.java com/amazonaws/services/s3/internal/ServiceUtils.java com/braze/Braze.java com/braze/support/BrazeFileUtils.java com/braze/support/BrazeFileUtils.java com/braze/support/BrazeFileUtils.java com/braze/support/WebContentUtils.java com/braze/support/WebContentUtils.java com/fasterxml/jackson/databind/ser/std/FileSerializer.java com/getkeepsafe/relinker/c.java com/getkeepsafe/relinker/c.java com/getkeepsafe/relinker/c.java com/getkepsafe/relinker/c.java com/getkepsafe/relinker/c.java com/getkepsafe/relinker/c.java com/getkepsafe/relinker/c.java com/getkepsafe/relinker/c.java com/sendbird/mikephil/charting/charts/Chart.java com/getkepsafe/relinker/c.java com/sendbird/android/apptools/OrmLiteConfigUtil.java com/rsrNFSMnager.java com/rsendbird/android/internal/message/MessageManagerImpl.java com/sendbird/android/internal/wessage/MessageManagerImpl.java com/sendbird/android/internal/wessage/MessageManagerImpl.java com/sendbird/android/internal/wessage/MessageManagerImpl.java com/sendbird/android/internal/wessage/MessageManagerImpl.java com/sendbird/android/internal/wessage/MessageManagerImpl.java com/sendbird/android/internal/wessage/MessageManagerImpl.java com/sendbird/android/internal/wessage/MessageManagerImpl.java com/claye.java e0/d.java g0/c.java io/invertase/firebase/utils/ReactNativeFirebaseUtilsModule.java io/realm/internal/OSSharedRealm.java io/realm/internal/OSSharedRealm.java io/realm/internal/OSSharedRealm.java io/realm/internal/OSSharedRealm.java io/realm/internal/Jospanay retrofit/mime/TypedFile.java

RULE ID	BEHAVIOUR	LABEL	FILES
00005	Get absolute path of file and put it to JSON object	file	com/airbnb/lottie/AbstractC0934z.java
00024	Write file after Base64 decoding	reflection file	com/ReactNativeBlobUtil/ReactNativeBlobUtilReq.java com/ReactNativeBlobUtil/a.java com/airbnb/lottie/AbstractC0934z.java e0/C1549c.java e0/d.java
00004	Get filename and put it to JSON object	file collection	com/airbnb/lottie/AbstractC0934z.java

RULE ID	BEHAVIOUR	LABEL	FILES
00063	Implicit intent(view a web page, make a phone call, etc.)	control	cl/json/RNShareModule.java cl/json/social/g,java cl/json/social/g,java cl/json/social/n,java com/ReactNativeBlobUtil/ReactNativeBlobUtil.java com/ReactNativeBlobUtil/ReactNativeBlobUtilReq.java com/ReactNativeBlobUtil/ReactNativeBlobUtilReq.java com/braze/Braze.java com/braze/Braze.java com/braze/Jush/BrazeNotificationUtils.java com/braze/ui/inappmessage/views/lnAppMessageHtmlBaseView.java com/braze/ui/inappmessage/views/lnAppMessageHtmlBaseView.java com/braze/ui/support/UriUtils.java com/braze/ui/support/UriUtils.java com/healint/migraineapp/reactnative/nodule/RNExportReportHandler.java com/healint/migraineapp/reactnative/nodule/RNExportReportHandler.java com/healint/migraineapp/tacking/BrazeInAppNotificationReceiver.java com/healint/migraineapp/util/C1165d.java com/healint/migraineapp/util/C1165d.java com/healint/migraineapp/util/Q0.java com/healint/migraineapp/util/A2.java com/healint/migraineapp/view/activity/NotificationActivity.java com/healint/migraineapp/view/activity/NotificationActivity.java com/healint/migraineapp/view/activity/WeatherForecastActivity.java com/healint/migraineapp/view/activity/WeatherForecastActivity.java com/healint/migraineapp/view/activity/mainmenu/MainMenuViewModel\$fetchSubscriptionStatus\$ 1.java com/healint/migraineapp/view/activity/sharedoctor/ReportSharingActivity.java com/healint/migraineapp/view/activity/sharedoctor/ReportSharingActivity.java com/healint/rigraineapp/view/activity/sharedoctor/ReportSharingActivity.java com/healint/regraineapp/view/activity/sharedoctor/ReportSharingActivity.java com/healint/regraineapp/view/activity/sharedoctor/ReportSharingActivity.java com/healint/regraineapp/view/activity/sharedoctor/ReportSharingActivity.java com/healint/regraineapp/view/activity/sharedoctor/ReportSharingActivity.java com/healint/service/buddy/CustomBuddyBotBuddy.java io/branch/referral/Branch.java io/branch/referral/Branch.java io/branch/referral/Branch.java io/branch/referral/Sharoch_granch_granch_granch_granch_granch_granch_granch_granch_granch_granch_granch_granch_gran
00051	Implicit intent(view a web page, make a phone call, etc.) via setData	control	cl/json/social/g.java com/ReactNativeBlobUtil/ReactNativeBlobUtilReq.java com/namazonaws/mobileconnectors/pinpoint/targeting/notification/NotificationClientBase.java com/healint/migraineapp/util/E1.java com/healint/migraineapp/util/R0.java io/branch/referral/Branch.java t2/AbstractViewOnClickListenerC2088n.java t2/C2074A.java

RULE ID	BEHAVIOUR	LABEL	FILES
00115	Get last known location of the device	collection location	com/healint/migraineapp/util/C1164c1.java

RULE ID	BEHAVIOUR	LABEL	FILES			
00013	Read file and put it into a stream	file	TO/i,java a5/e,java bo/app/C0860m0,java com/ReactNativeBlobUtil/ReactNativeBlobUtilMediaCollection.java com/ReactNativeBlobUtil/a,java com/ReactNativeBlobUtil/a,java com/ReactNativeBlobUtil/a,java com/aeatNativeBlobUtil/a,java com/amazonaws/auth/PropertiesCredentials.java com/amazonaws/internal/ReleasableInputStream.java com/amazonaws/internal/ResettableInputStream.java com/amazonaws/mobileconnectors/kinesis/kinesisrecorder/FileManager.java com/amazonaws/mobileconnectors/kinesis/kinesisrecorder/FileRecordStore.java com/amazonaws/regionSr/RegionUtils.java com/amazonaws/srevices/S3/internal/RepeatableFileInputStream.java com/amazonaws/services/S3/internal/ServiceUtils.java com/amazonaws/services/S3/internal/ServiceUtils.java com/braze/support/BrazeImageUtils.java com/saterxml/jackson/core/TokenStreamFactory.java com/fasterxml/jackson/core/TokenStreamFactory.java com/fasterxml/jackson/core/TokenStreamFactory.java com/fasterxml/jackson/core/TokenStreamFactory.java com/fasterxml/jackson/core/TokenStreamFactory.java com/fasterxml/jackson/core/TokenStreamFactory.java com/fasterxml/jackson/core/TokenStreamFactory.java com/fasterxml/jackson/core/TokenStream-java com/fasterxml/jackson/core/TokenStream-java com/fasterxml/jackson/core/TokenStream-java com/sendstream-java com/sendstream-java com/sendstream-java com/sendstream-java com/sendstream-java com/sendstream-java com/sendstream-java com/sendstream-java co			

RULE ID	BEHAVIOUR	LABEL	FILES	
00016	Get location info of the device and put it to JSON object	location collection	com/braze/models/outgoing/BrazeLocation.java	
00112	Get the date of the calendar event	collection calendar	com/fasterxml/jackson/databind/ser/std/StdKeySerializers.java com/fasterxml/jackson/databind/util/StdDateFormat.java com/healint/calendar/HealintCalendarFragment.java com/healint/migraineapp/reactnative/module/RNExportReportHandler.java com/healint/migraineapp/view/activity/HealthEventRecordActivity.java com/healint/migraineapp/view/activity/ProfileActivity.java com/healint/migraineapp/view/activity/SleepEventRecordActivity.java com/healint/service/migraine/impl/MigraineServiceImpl.java	
00091	Retrieve data from broadcast	collection	com/ReactNativeBlobUtil/ReactNativeBlobUtilReq.java com/braze/push/BrazeNotificationUtils.java com/healint/migraineapp/notifications/NotificationBroadcastReceiver.java com/healint/migraineapp/notifications/silent/BrazeSilentPushEventsHandler.java com/healint/migraineapp/tracking/BrazeInAppNotificationReceiver.java com/healint/migraineapp/view/activity/DoctorEventRecordActivity.java com/healint/migraineapp/view/activity/NotificationActivity.java com/healint/migraineapp/view/fragment/main/discover/DiscoverFragment.java com/healint/migraineapp/view/fragment/main/discover/DiscoverFragment.java com/healint/service/notification/AbstractNotificationBroadcastReceiver.java io/branch/referral/Branch.java t2/C2074A.java	
00036	Get resource file from res/raw directory	reflection	com/amazonaws/mobileconnectors/pinpoint/internal/event/PinpointDBBase.java com/amazonaws/mobileconnectors/pinpoint/targeting/notification/NotificationClientBase.java com/braze/push/BrazeNotificationUtils.java com/braze/ui/support/UriUtils.java com/dylanvann/fastimage/e.java com/healint/migraineapp/util/C1165d.java com/healint/migraineapp/util/E1.java com/healint/migraineapp/util/Q0.java com/healint/migraineapp/util/fastimage/f.java e0/AbstractC1548b.java io/branch/referral/Branch.java io/invertase/firebase/common/SharedUtils.java t2/C2074A.java	
00175	Get notification manager and cancel notifications	notification	com/healint/migraineapp/util/logout/steps/ClearLocalDataLogoutStep\$execute\$2.java	

RULE ID	BEHAVIOUR	LABEL	FILES	
00163	Create new Socket and connecting to it	socket	c6/C0894b.java c6/h.java org/conscrypt/AbstractConscryptSocket.java org/conscrypt/KitKatPlatformOpenSSLSocketImplAdapter.java org/conscrypt/PreKitKatPlatformOpenSSLSocketImplAdapter.java services/migraine/rest/client/retrofit/NoSSLv3SSLSocketFactory.java z4/C2231b.java z4/j.java	
00003	Put the compressed bitmap data into JSON object	camera	io/branch/referral/network/BranchRemoteInterfaceUrlConnection.java	
00123	Save the response to JSON after connecting to the remote server	network command	bo/app/u1.java bo/app/v0.java	
00089	Connect to a URL and receive input stream from the server	command network	bo/app/v0.java com/amazonaws/http/UrlHttpClient.java com/amazonaws/util/HttpUtils.java com/bumptech/glide/load/data/j.java com/rnfs/c.java com/rnfs/h.java com/rollbar/notifier/sender/SyncSender.java org/jsoup/helper/HttpConnection.java retrofit/client/UrlConnectionClient.java	
00030	Connect to the remote server through the given URL	network	bo/app/v0.java com/bumptech/glide/load/data/j.java com/rnfs/c.java com/rnfs/h.java m0/C1917b.java org/jsoup/helper/HttpConnection.java	

RULE ID	BEHAVIOUR	LABEL	FILES
00109	Connect to a URL and get the response code	network command	bo/app/v0.java com/amazonaws/http/UrlHttpClient.java com/amazonaws/util/HttpUtils.java com/bumptech/glide/load/data/j.java com/rnfs/c.java com/rnfs/h.java com/rollbar/notifier/sender/SyncSender.java org/jsoup/helper/HttpConnection.java retrofit/client/UrlConnectionClient.java
00162	Create InetSocketAddress object and connecting to it	socket	c6/C0894b.java c6/h.java org/conscrypt/AbstractConscryptSocket.java z4/C2231b.java z4/j.java
00191	Get messages in the SMS inbox	sms	com/ReactNativeBlobUtil/ReactNativeBlobUtilReq.java g0/c.java io/branch/coroutines/InstallReferrersKt.java
00077	Read sensitive data(SMS, CALLLOG, etc)	collection sms calllog calendar	g0/c.java t0/C2069c.java
00094	Connect to a URL and read data from it	command network	c1/C0886a.java com/amazonaws/http/UrlHttpClient.java net/time4j/tz/spi/a.java
00062	Query WiFi information and WiFi Mac Address	wifi collection	com/learnium/RNDeviceInfo/RNDeviceModule.java
00078	Get the network operator name	collection telephony	bo/app/C0856k0.java com/amazonaws/mobileconnectors/pinpoint/internal/core/system/AndroidSystem.java com/learnium/RNDevicelnfo/RNDeviceModule.java io/branch/referral/SystemObserver.java
00038	Query the phone number	collection	com/learnium/RNDeviceInfo/RNDeviceModule.java
00130	Get the current WIFI information	wifi collection	com/learnium/RNDeviceInfo/RNDeviceModule.java

RULE ID	BEHAVIOUR	LABEL	FILES	
00134	Get the current WiFi IP address	wifi collection	com/learnium/RNDeviceInfo/RNDeviceModule.java	
00082	Get the current WiFi MAC address	collection wifi	com/learnium/RNDeviceInfo/RNDeviceModule.java	
00096	Connect to a URL and set request method	command network	com/amazonaws/http/UrlHttpClient.java com/rnfs/h.java com/rollbar/notifier/sender/SyncSender.java m0/C1917b.java org/jsoup/helper/HttpConnection.java retrofit/client/UrlConnectionClient.java	
00183	Get current camera parameters and change the setting.	camera	com/healint/migraineapp/util/n2.java me/dm7/barcodescanner/core/a.java me/dm7/barcodescanner/core/c.java	
00108	Read the input stream from given URL	network command	com/amazonaws/http/UrlHttpClient.java	
00192	Get messages in the SMS inbox	sms	a5/e.java com/rnfs/RNFSManager.java e0/AbstractC1548b.java g0/c.java	
00009	Put data in cursor to JSON object	file	com/amazonaws/mobileconnectors/pinpoint/internal/event/EventRecorder.java com/reactnativecommunity/asyncstorage/a.java	
00189	Get the content of a SMS message	sms	g0/c.java	
00188	Get the address of a SMS message	sms	g0/c.java	
00011	Query data from URI (SMS, CALLLOGS)	sms calllog collection	g0/c.java	
00200	Query data from the contact list	collection contact	g0/c.java	
00201	Query data from the call log	collection calllog	g0/c.java	
00125	Check if the given file path exist	file	com/ReactNativeBlobUtil/ReactNativeBlobUtilReq.java	

RULE ID	BEHAVIOUR	LABEL	FILES	
00012	Read data and put it into a buffer stream	file	com/amazonaws/util/Md5Utils.java com/rnfs/h.java org/conscrypt/DefaultSSLContextImpl.java	
00028	Read file from assets directory	file	com/rnfs/RNFSManager.java	
00043	Calculate WiFi signal strength	collection wifi	g3/e.java	
00159	Use accessibility service to perform action getting node info by text	accessibility service	com/henninghall/date_picker/generated/c.java	
00023	Start another application from current application	reflection control	com/amazonaws/mobileconnectors/pinpoint/targeting/notification/NotificationClientBase.java	
00072	Write HTTP input stream into a file	command network file	com/rnfs/c.java	

## FIREBASE DATABASES ANALYSIS

TITLE	SEVERITY	DESCRIPTION
App talks to a Firebase database	info	The app talks to Firebase database at https://migrainebuddy-beta.firebaseio.com
Firebase Remote Config enabled	warning	The Firebase Remote Config at https://firebaseremoteconfig.googleapis.com/v1/projects/720672967625/namespaces/firebase:fetch?  key=AlzaSyB2r63WBKn5DJqjZXuOjlN0kTy-wS3Cb54 is enabled. Ensure that the configurations are not sensitive. This is indicated by the response: {'entries':  {'advance_reports_langs': '["en","fr","ja"]', 'ask_feedback_migraine_interval': '5', 'ask_feedback_minimum_migraines': '3', 'ask_feedback_minimum_migraines_by_lang':  '{"en":3,"es":1,"pt":1,"pl":1,"de":5,"ja":5}', 'ask_feedback_times_maximum': '4', 'ask_feedback_variant': '1', 'careers_langs': '["en"]', 'estimated_end_time_langs':  '["en","fr"]', 'external_product_card_langs': '["en","fr","ja"]', 'feature_card_langs': '["en","fr"]', 'insights_langs': '["en","fr","es","de","it","pt"]', 'mbplus_langs':  '["en","fr","ja"]', 'menstruation_langs': '["en","fr"]', 'npc_suggestion_langs': '["en","fr"]', 'pressure_variation_langs': '["en","fr","ja"]', 'program_langs': '["en"]',  'report_advanced_popup_version': 'legacy', 'report_migraine_listing_popup_version': 'legacy', 'show_new_migraine_summary': 'false', 'suggest_improvements_langs':  '["en"]', 'user_group': 'default_US', 'weather_forecast_langs': '["en","fr","ja"]'}, 'state': 'UPDATE', 'templateVersion': '74'}

### **\*: ::** ABUSED PERMISSIONS

TYPE	MATCHES	PERMISSIONS
Malware Permissions	11/25	android.permission.RECEIVE_BOOT_COMPLETED, android.permission.ACCESS_COARSE_LOCATION, android.permission.ACCESS_FINE_LOCATION, android.permission.VIBRATE, android.permission.INTERNET, android.permission.ACCESS_NETWORK_STATE, android.permission.READ_EXTERNAL_STORAGE, android.permission.WRITE_EXTERNAL_STORAGE, android.permission.CAMERA, android.permission.SYSTEM_ALERT_WINDOW, android.permission.ACCESS_WIFI_STATE
Other Common Permissions	6/44	android.permission.BATTERY_STATS, android.permission.AUTHENTICATE_ACCOUNTS, com.google.android.c2dm.permission.RECEIVE, android.permission.FOREGROUND_SERVICE, com.google.android.gms.permission.AD_ID, com.google.android.finsky.permission.BIND_GET_INSTALL_REFERRER_SERVICE

#### **Malware Permissions:**

Top permissions that are widely abused by known malware.

#### **Other Common Permissions:**

Permissions that are commonly abused by known malware.

## ! OFAC SANCTIONED COUNTRIES

This app may communicate with the following OFAC sanctioned list of countries.

DOMAIN COUNTRY/REGION
-----------------------

### **Q DOMAIN MALWARE CHECK**

DOMAIN	STATUS	GEOLOCATION
--------	--------	-------------

DOMAIN	STATUS	GEOLOCATION
pinterest.com	ok	IP: 151.101.128.84  Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
help.branch.io	ok	IP: 104.18.21.218 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
www.risktabsprev10pxrise25pxblueding300ballfordearnwildbox.fairlackverspairjunetechifpickevil	ok	No Geolocation information available.
www.wencodeuricomponent	ok	No Geolocation information available.
WWW.CSS	ok	No Geolocation information available.
www.interpretation	ok	No Geolocation information available.
s3-us-west-1.amazonaws.com	ok	IP: 52.219.112.72 Country: United States of America Region: California City: San Francisco Latitude: 37.774929 Longitude: -122.419418 View: Google Map
apache.org	ok	IP: 151.101.2.132 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

DOMAIN	STATUS	GEOLOCATION
sdk.iad-01.braze.com	ok	IP: 104.18.39.68 Country: United States of America Region: Texas City: Dallas Latitude: 32.783058 Longitude: -96.806671 View: Google Map
api.rollbar.com	ok	IP: 35.201.81.77 Country: United States of America Region: Missouri City: Kansas City Latitude: 39.099731 Longitude: -94.578568 View: Google Map
plus.google.com	ok	IP: 64.233.185.138 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
issuetracker.google.com	ok	IP: 64.233.177.139 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
healint.typeform.com	ok	IP: 98.86.8.99 Country: United States of America Region: Washington City: Seattle Latitude: 47.606209 Longitude: -122.332069 View: Google Map

DOMAIN	STATUS	GEOLOCATION
ota.lokalise.co	ok	IP: 18.156.169.107 Country: Germany Region: Hessen City: Frankfurt am Main Latitude: 50.115520 Longitude: 8.684170 View: Google Map
dns.google	ok	IP: 8.8.4.4 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
play.google.com	ok	IP: 172.253.124.100 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
www.world	ok	IP: 99.83.155.228 Country: United States of America Region: Washington City: Seattle Latitude: 47.606209 Longitude: -122.332069 View: Google Map
www.w3.org	ok	IP: 104.18.23.19 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map

DOMAIN	STATUS	GEOLOCATION
github.com	ok	IP: 140.82.113.3  Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
www.years	ok	No Geolocation information available.
.css	ok	No Geolocation information available.
twitter.com	ok	IP: 172.66.0.227  Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
d1c1i3z5xghcrr.cloudfront.net	ok	IP: 18.238.92.67 Country: United States of America Region: Washington City: Seattle Latitude: 47.627499 Longitude: -122.346199 View: Google Map
10.0.2.2	ok	IP: 10.0.2.2  Country: - Region: - City: - Latitude: 0.000000 Longitude: 0.000000 View: Google Map

DOMAIN	STATUS	GEOLOCATION
android.googlesource.com	ok	IP: 74.125.138.82  Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
www.slf4j.org	ok	IP: 31.97.181.89 Country: United Kingdom of Great Britain and Northern Ireland Region: England City: Bowness-on-Windermere Latitude: 54.363312 Longitude: -2.918590 View: Google Map
docs.swmansion.com	ok	IP: 104.21.27.136 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
www.braze.com	ok	IP: 104.17.228.60 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
www.hortcut	ok	No Geolocation information available.

DOMAIN	STATUS	GEOLOCATION
reports.migrainebuddy.com	ok	IP: 52.52.192.191 Country: United States of America Region: California City: San Francisco Latitude: 37.774929 Longitude: -122.419418 View: Google Map
131xmm.nolt.io	ok	IP: 104.26.8.5  Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
www.a	ok	No Geolocation information available.
sondheim.braze.com	ok	IP: 104.18.43.4 Country: United States of America Region: Texas City: Dallas Latitude: 32.783058 Longitude: -96.806671 View: Google Map
www.manifestations	ok	No Geolocation information available.
branch.app.link	ok	IP: 18.238.109.123 Country: United States of America Region: Washington City: Seattle Latitude: 47.627499 Longitude: -122.346199 View: Google Map

DOMAIN	STATUS	GEOLOCATION
www.youtube.com	ok	IP: 172.253.124.190 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
suggestions.migrainebuddy.com	ok	IP: 172.67.70.236 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
www.googleorganizationautocompleterequirementsconservative	ok	No Geolocation information available.
api3-eu.branch.io	ok	IP: 18.155.173.33 Country: United States of America Region: Washington City: Seattle Latitude: 47.627499 Longitude: -122.346199 View: Google Map
www.in	ok	No Geolocation information available.
www.gooddaysprogram.com	ok	IP: 76.223.54.146 Country: United States of America Region: Washington City: Seattle Latitude: 47.606209 Longitude: -122.332069 View: Google Map

DOMAIN	STATUS	GEOLOCATION
reactnative.dev	ok	IP: 52.52.192.191 Country: United States of America Region: California City: San Francisco Latitude: 37.774929 Longitude: -122.419418 View: Google Map
api.branch.io	ok	IP: 18.238.109.43 Country: United States of America Region: Washington City: Seattle Latitude: 47.627499 Longitude: -122.346199 View: Google Map
www.ngs.ac.uk	ok	IP: 130.246.140.235 Country: United Kingdom of Great Britain and Northern Ireland Region: England City: Appleton Latitude: 51.709511 Longitude: -1.361360 View: Google Map
javax.xml.xmlconstants	ok	No Geolocation information available.
api.ipify.org	ok	IP: 104.26.13.205 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
www.language	ok	No Geolocation information available.

DOMAIN	STATUS	GEOLOCATION
bnc.lt	ok	IP: 18.238.109.50 Country: United States of America Region: Washington City: Seattle Latitude: 47.627499 Longitude: -122.346199 View: Google Map
onelink.to	ok	IP: 178.128.140.200 Country: Netherlands Region: Noord-Holland City: Amsterdam Latitude: 52.374031 Longitude: 4.889690 View: Google Map
migrainebuddy.com	ok	IP: 35.213.179.38 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map
www.recent	ok	No Geolocation information available.
cdn.branch.io	ok	IP: 18.238.109.61 Country: United States of America Region: Washington City: Seattle Latitude: 47.627499 Longitude: -122.346199 View: Google Map

DOMAIN	STATUS	GEOLOCATION
aerp.migrainebuddy.com	ok	IP: 76.76.21.142 Country: United States of America Region: California City: Walnut Latitude: 34.015400 Longitude: -117.858223 View: Google Map
dust.k8s.test-001.d-usw-2.braze.com	ok	No Geolocation information available.
s3.amazonaws.com	ok	IP: 3.5.12.170 Country: United States of America Region: Virginia City: Ashburn Latitude: 39.043720 Longitude: -77.487488 View: Google Map
migrainebuddy-beta.firebaseio.com	ok	IP: 35.201.97.85 Country: United States of America Region: Missouri City: Kansas City Latitude: 39.099731 Longitude: -94.578568 View: Google Map
www.icon	ok	No Geolocation information available.
www.coaching.migrainebuddy.com	ok	IP: 76.223.54.146 Country: United States of America Region: Washington City: Seattle Latitude: 47.606209 Longitude: -122.332069 View: Google Map
www.c	ok	No Geolocation information available.

DOMAIN	STATUS	GEOLOCATION
docs.mongodb.com	ok	IP: 3.33.186.135 Country: United States of America Region: Washington City: Seattle Latitude: 47.627499 Longitude: -122.346199 View: Google Map
schemas.android.com	ok	No Geolocation information available.
www.style	ok	IP: 75.2.38.108 Country: United States of America Region: Washington City: Seattle Latitude: 47.606209 Longitude: -122.332069 View: Google Map
migrainebuddystore.com	ok	No Geolocation information available.
.jpg	ok	No Geolocation information available.
acs.amazonaws.com	ok	No Geolocation information available.
realm.io	ok	IP: 13.224.53.10 Country: United States of America Region: Arizona City: Phoenix Latitude: 33.448380 Longitude: -112.074043 View: Google Map
www.migrainebuddy.com	ok	IP: 35.213.179.38 Country: Singapore Region: Singapore City: Singapore Latitude: 1.289670 Longitude: 103.850067 View: Google Map

DOMAIN	STATUS	GEOLOCATION
api2.branch.io	ok	IP: 18.238.109.16 Country: United States of America Region: Washington City: Seattle Latitude: 47.627499 Longitude: -122.346199 View: Google Map
www.amazon.com	ok	IP: 18.238.90.46 Country: United States of America Region: Washington City: Seattle Latitude: 47.627499 Longitude: -122.346199 View: Google Map
www.facebook.com	ok	IP: 31.13.70.36 Country: United States of America Region: California City: Los Angeles Latitude: 34.052231 Longitude: -118.243683 View: Google Map
console.firebase.google.com	ok	IP: 64.233.176.113 Country: United States of America Region: California City: Mountain View Latitude: 37.405991 Longitude: -122.078514 View: Google Map
www.text-decoration	ok	No Geolocation information available.



EMAIL	FILE
email@esempio.com email@beispiel.de jenny@migrainebuddy.com@@@@@@ jenny@migrainebuddy.com@@@@@@ jenny@migrainebuddy.com@@@@@@ jenny@migrainebuddy.com@@@@@@ jenny@migrainebuddy.com@@@@@@ jenny@migrainebuddy.com@@@@@@ jenny@migrainebuddy.com@@@@@@ jenny@migrainebuddy.com@@@@@@ jenny@migrainebuddy.com jenny@migrainebuddy.com jenny@migrainebuddy.com johndoe@gmail.com @@@@exemplo.com genny@migrainebuddy.com@@@@@@ email@exemplo.com @email@example.com @@@@@aileeuddy.com@@@@@@ email@example.com @@@@@aileeuddy.com@@@@@@ email@exemple.com @@@@@@aileeuddy.com@@@@@@ jenny@migrainebuddy.com@@@@@@ jenny@migrainebuddy.com@@@@@@ jenny@migrainebuddy.com@@@@@@ jenny@migrainebuddy.com@@@@@@ jenny@migrainebuddy.com@@@@@@ jenny@migrainebuddy.com@@@@@@ jenny@migrainebuddy.com@@@@@ jenny@migrainebuddy.com@@@@@ jenny@migrainebuddy.com@@@@@@ genny@migrainebuddy.com@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@@	Android String Resource
appro@openssl.org	lib/arm64-v8a/libconscrypt_jni.so
appro@openssl.org	apktool_out/lib/arm64-v8a/libconscrypt_jni.so


# # TRACKERS

TRACKER	CATEGORIES	URL
Amazon Analytics (Amazon insights)	Analytics	https://reports.exodus-privacy.eu.org/trackers/95
Branch	Analytics	https://reports.exodus-privacy.eu.org/trackers/167
Facebook Analytics	Analytics	https://reports.exodus-privacy.eu.org/trackers/66

TRACKER	CATEGORIES	URL
Facebook Login	Identification	https://reports.exodus-privacy.eu.org/trackers/67
Facebook Share		https://reports.exodus-privacy.eu.org/trackers/70
Google CrashLytics	Crash reporting	https://reports.exodus-privacy.eu.org/trackers/27
Google Firebase Analytics	Analytics	https://reports.exodus-privacy.eu.org/trackers/49
Rollbar	Crash reporting	https://reports.exodus-privacy.eu.org/trackers/432

# **₽** HARDCODED SECRETS

POSSIBLE SECRETS
"com_facebook_device_auth_instructions" : " <b>facebook.com/device</b> DDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDD
"aws_analytics_attr_screen_name" : "DDDDDD"
"aws_analytics_attr_category" : "kategoria"
"aws_analytics_attr_category" : "categoría"
"aws_analytics_attr_screen_name" : "screen_name"
"aws_analytics_attr_screen_name" : "scherm_naam"
"aws_analytics_attr_category" : "Kategorie"
"aws_analytics_attr_value" : "waarde"
"aws_analytics_attr_value" : "D"
"aws_analytics_attr_label" : "label"

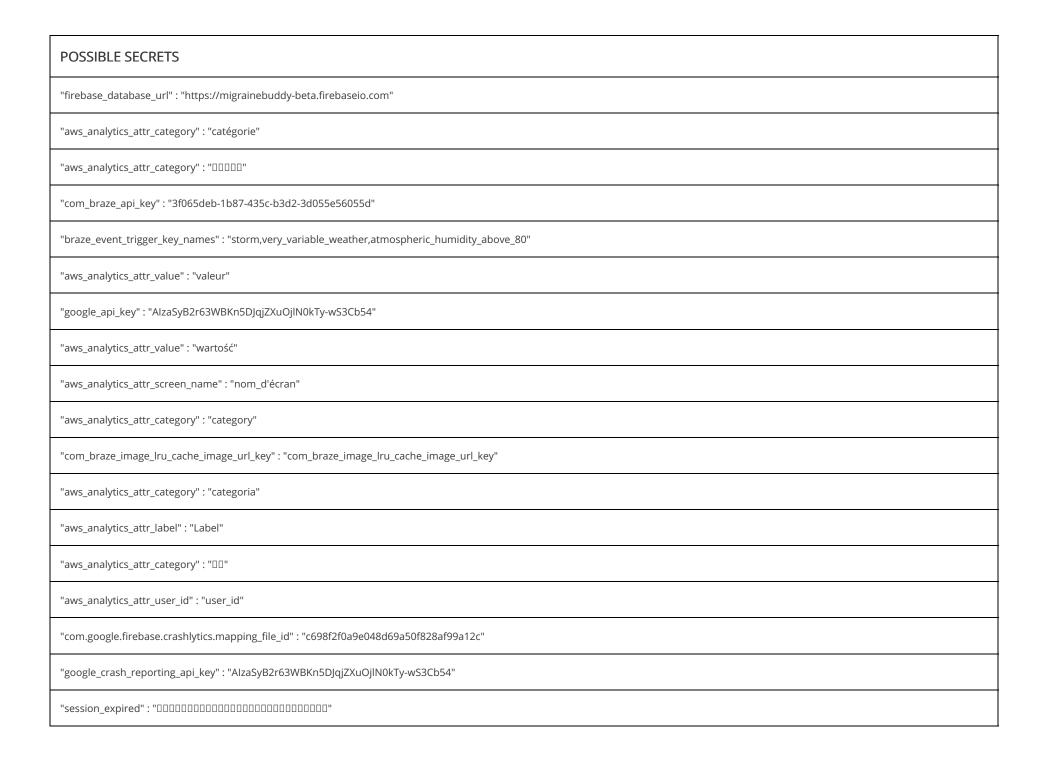

POSSIBLE SECRETS
"facebook_client_token" : "6d544918eee3a09f203e8dde36a03b6e"
"aws_analytics_attr_value" : "D"
"aws_analytics_attr_category" : "categorie"
"aws_analytics_attr_label" : "etykieta"
"com_braze_image_resize_tag_key" : "com_appboy_image_resize_tag_key"
"aws_analytics_attr_label" : "□□"
"aws_analytics_attr_value" : "Wert"
"aws_analytics_attr_label" : "étiquette"
"aws_analytics_attr_label" : "DDD"
"aws_analytics_attr_value" : "valor"
"aws_analytics_attr_label" : "etiqueta"
"com_braze_image_is_read_tag_key" : "com_appboy_image_is_read_tag_key"
"aws_analytics_attr_screen_name" : "nazwa_ekranu"
"aws_analytics_attr_screen_name" : "Bildschirm_Name"
"aws_analytics_attr_value" : "value"
11839296a789a3bc0045c8a5fb42c7d1bd998f544449579b446817afbd17273e662c97ee72995ef42640c550b9013fad0761353c7086a272c24088be94769fd16650
FFFFFFFFFFFFFFC90FDAA22168C234C4C6628B80DC1CD129024E088A67CC74020BBEA63B139B22514A08798E3404DDEF9519B3CD3A431B302B0A6DF25F14374FE1356D6D51C245E485B576625 E7EC6F44C42E9A637ED6B0BFF5CB6F406B7EDEE386BFB5A899FA5AE9F24117C4B1FE649286651ECE45B3DC2007CB8A163BF0598DA48361C55D39A69163FA8FD24CF5F83655D23DCA3AD961C62F 356208552BB9ED529077096966D670C354E4ABC9804F1746C08CA18217C32905E462E36CE3BE39E772C180E86039B2783A2EC07A28FB5C55DF06F4C52C9DE2BCBF6955817183995497CEA956AE5 15D2261898FA051015728E5A8AAAC42DAD33170D04507A33A85521ABDF1CBA64ECFB850458DBEF0A8AEA71575D060C7DB3970F85A6E1E4C7ABF5AE8CDB0933D71E8C94E04A25619DCEE3D2261

POSSIBLE SECRETS
258EAFA5-E914-47DA-95CA-C5AB0DC85B11
470fa2b4ae81cd56ecbcda9735803434cec591fa
515d6767-01b7-49e5-8273-c8d11b0f331d
4fe342e2fe1a7f9b8ee7eb4a7c0f9e162bce33576b315ececbb6406837bf51f5
a4b7452e2ed8f5f191058ca7bbfd26b0d3214bfc
bd376388b5f723fb4c22dfe6cd4375a05a07476444d5819985007e34
ChNjb20uYW5kcm9pZC52ZW5kaW5nCiBjb20uZ29vZ2xlLmFuZHJvaWQuYXBwcy5tZWV0aW5ncwohY29tLmdvb2dsZS5hbmRyb2lkLmFwcHMubWVzc2FnaW5n
c56fb7d591ba6704df047fd98f535372fea00211
b4050a850c04b3abf54132565044b0b7d7bfd8ba270b39432355ffb4
8a3c4b262d721acd49a4bf97d5213199c86fa2b9
37a6259cc0c1dae299a7866489dff0bd
5ac635d8aa3a93e7b3ebbd55769886bc651d06b0cc53b0f63bce3c3e27d2604b
c6858e06b70404e9cd9e3ecb662395b4429c648139053fb521f828af606b4d3dbaa14b5e77efe75928fe1dc127a2ffa8de3348b3c1856a429bf97e7e31c2e5bd66
9b8f518b086098de3d77736f9458a3d2f6f95a37
3617de4a96262c6f5d9e98bf9292dc29f8f41dbd289a147ce9da3113b5f0b8c00a60b1ce1d7e819d7a431d7c90ea0e5f
b70e0cbd6bb4bf7f321390b94a03c1d356c21122343280d6115c1d21
cf95dc53f383f9a836fd749f3ef439cd
b3312fa7e23ee7e4988e056be3f82d19181d9c6efe8141120314088f5013875ac656398d8a2ed19d2a85c8edd3ec2aef

#### POSSIBLE SECRETS

2438bce1ddb7bd026d5ff89f598b3b5e5bb824b3

aa87ca22be8b05378eb1c71ef320ad746e1d3b628ba79b9859f741e082542a385502f25dbf55296c3a545e3872760ab7

cc2751449a350f668590264ed76692694a80308a

3071c8717539de5d5353f4c8cd59a032

7d73d21f1bd82c9e5268b6dcf9fde2cb

51953eb9618e1c9a1f929a21a0b68540eea2da725b99b315f3b8b489918ef109e156193951ec7e937b1652c0bd3bb1bf073573df883d2c34f1ef451fd46b503f00

e43df9b5a46b755ea8f1b4dd08265544

df6b721c8b4d3b6eb44c861d4415007e5a35fc95

6b17d1f2e12c4247f8bce6e563a440f277037d812deb33a0f4a13945d898c296

## > PLAYSTORE INFORMATION

Title: Migraine Buddy: Track Headache

Score: 4.8489327 Installs: 1,000,000+ Price: 0 Android Version Support: Category: Medical Play Store URL: com.healint.migraineapp

Developer Details: Aptar Digital Health, 7859545075142278757, None, http://www.migrainebuddy.com, jenny@migrainebuddy.com,

Release Date: Jul 8, 2014 Privacy Policy: Privacy link

#### **Description:**

Curious about why 3.5 million migraine sufferers trust Migraine Buddy? Migraine Buddy is your ultimate companion to: - Pinpoint and decipher patterns quicker than ever before - Describe efficiently and without stress what you are feeling with reports crafted with top specialists - Share experiences, gain insights, and even chat with fellow users in our thriving community - [Premium] Personalized coaching plans developed by experts to ensure progress at your pace Discover Migraine Buddy's Features: Customizable Attack Recording How does it assist you? Glean insights from shared triggers. Customize the tool to record your unique experience. Exports of reports for care-takers, doctors, and anybody you need to explain your experience and symptoms to: - Diary export: Comprehensive reports for a deeper understanding of your headache patterns. - MIR export: Collaborate with your neurologist and headache specialist and be ready to show them your . Al features 7 days Weather Forecast: Pressure and temperature fluctuations. While you can't control the weather, you may want to anticipate changes impacting you. Stay informed about impending pressure changes to help ward off attacks. Migraine Insights & News In-app updates with the latest information and research on migraines. Stay informed about the latest developments in the migraine world. Participate in questionnaires and gain insights from other users' experiences. An Active Community of 3.5 million users who are there to offer support, share experiences, and provide advice. Automatic Sleep Recording Uncover potential links between your sleep patterns and the onset of migraines. Why is this crucial? Migraines can feel isolating. Receiving support from those who understand and sharing

unique experiences can provide new perspectives on your journey. Want more? Upgrade to MBplus, Migraine Buddy's premium suite. Take your migraine management to the next level with the world's most advanced tools at your fingertips. With MBplus, gain access to: - Advanced Features - Detailed Reports - Actionable Programs Disclaimer: Migraine Buddy is a self-management tool and should not replace professional medical advice; always consult a healthcare provider for diagnosis and treatment. Migraine Buddy Terms of Use: https://migrainebuddy.com/terms-of-use/

### **⋮**≡ SCAN LOGS

Timestamp	Event	Error
2025-08-29 23:37:40	Generating Hashes	ОК
2025-08-29 23:37:41	Extracting APK	ОК
2025-08-29 23:37:41	Unzipping	ОК
2025-08-29 23:37:42	Parsing APK with androguard	ОК
2025-08-29 23:37:43	Extracting APK features using aapt/aapt2	ОК
2025-08-29 23:37:43	Getting Hardcoded Certificates/Keystores	ОК
2025-08-29 23:37:47	Parsing AndroidManifest.xml	ОК
2025-08-29 23:37:47	Extracting Manifest Data	ОК
2025-08-29 23:37:47	Manifest Analysis Started	ОК
2025-08-29 23:37:47	Performing Static Analysis on: Migraine Buddy (com.healint.migraineapp)	ОК

2025-08-29 23:37:48	Fetching Details from Play Store: com.healint.migraineapp	ОК
2025-08-29 23:37:48	Checking for Malware Permissions	ОК
2025-08-29 23:37:48	Fetching icon path	ОК
2025-08-29 23:37:48	Library Binary Analysis Started	ОК
2025-08-29 23:37:48	Analyzing lib/arm64-v8a/libnative-filters.so	ОК
2025-08-29 23:37:48	Analyzing lib/arm64-v8a/libreact_featureflagsjni.so	ОК
2025-08-29 23:37:48	Analyzing lib/arm64-v8a/libreact_render_debug.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libfolly_runtime.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libjsinspector.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libshinobicharts-android.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreact_codegen_rncore.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreact_utils.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreactnativejni.so	ОК

2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libfabricjni.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libhermes_executor.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libhermesinstancejni.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libjsi.so	OK
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libworklets.so	OK
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libconscrypt_jni.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libhermes.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreact_render_mapbuffer.so	OK
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libturbomodulejsijni.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libc++_shared.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libyoga.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libmapbufferjni.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreact_debug.so	ОК

2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreactperfloggerjni.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreact_render_graphics.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libfbjni.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreact_featureflags.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreact_render_imagemanager.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreact_cxxreactpackage.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libimagepipeline.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libjsijniprofiler.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/librealm-jni.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/librrc_view.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreact_devsupportjni.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreact_nativemodule_core.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreact_render_core.so	ОК

2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libglog.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/librnscreens.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreanimated.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libnative-imagetranscoder.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/librrc_legacyviewmanagerinterop.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreact_render_componentregistry.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreact_newarchdefaults.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libreactnativeblob.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libruntimeexecutor.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/librninstance.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libjscinstance.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/librrc_image.so	ОК
2025-08-29 23:37:49	Analyzing lib/arm64-v8a/libuimanagerjni.so	ОК

2025-08-29 23:37:49	Analyzing lib/x86_64/libnative-filters.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreact_featureflagsjni.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreact_render_debug.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libfolly_runtime.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libjsinspector.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libshinobicharts-android.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreact_codegen_rncore.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreact_utils.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreactnativejni.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libfabricjni.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libhermes_executor.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libhermesinstancejni.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libjsi.so	ОК

2025-08-29 23:37:49	Analyzing lib/x86_64/libworklets.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libconscrypt_jni.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libhermes.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreact_render_mapbuffer.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libturbomodulejsijni.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libc++_shared.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libyoga.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libmapbufferjni.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreact_debug.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreactperfloggerjni.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreact_render_graphics.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libfbjni.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreact_featureflags.so	ОК

2025-08-29 23:37:49	Analyzing lib/x86_64/libreact_render_imagemanager.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreact_cxxreactpackage.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libimagepipeline.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libjsijniprofiler.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/librealm-jni.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/librrc_view.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreact_devsupportjni.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreact_nativemodule_core.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreact_render_core.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libglog.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/librnscreens.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreanimated.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libnative-imagetranscoder.so	ОК

2025-08-29 23:37:49	Analyzing lib/x86_64/librrc_legacyviewmanagerinterop.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreact_render_componentregistry.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreact_newarchdefaults.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libreactnativeblob.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libruntimeexecutor.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/librninstance.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libjscinstance.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/librrc_image.so	ОК
2025-08-29 23:37:49	Analyzing lib/x86_64/libuimanagerjni.so	ОК
2025-08-29 23:37:49	Analyzing lib/armeabi-v7a/libnative-filters.so	ОК
2025-08-29 23:37:49	Analyzing lib/armeabi-v7a/libreact_featureflagsjni.so	ОК
2025-08-29 23:37:49	Analyzing lib/armeabi-v7a/libreact_render_debug.so	ОК
2025-08-29 23:37:49	Analyzing lib/armeabi-v7a/libfolly_runtime.so	ОК

2025-08-29 23:37:49	Analyzing lib/armeabi-v7a/libjsinspector.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libshinobicharts-android.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreact_codegen_rncore.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreact_utils.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreactnativejni.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libfabricjni.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libhermes_executor.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libhermesinstancejni.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libjsi.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libworklets.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libconscrypt_jni.so	OK
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libhermes.so	ОК

2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreact_render_mapbuffer.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libturbomodulejsijni.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libc++_shared.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libyoga.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libmapbufferjni.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreact_debug.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreactperfloggerjni.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreact_render_graphics.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libfbjni.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreact_featureflags.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreact_render_imagemanager.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreact_cxxreactpackage.so	ОК

2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libimagepipeline.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libjsijniprofiler.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/librealm-jni.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/librrc_view.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreact_devsupportjni.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreact_nativemodule_core.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreact_render_core.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libglog.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/librnscreens.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreanimated.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libnative-imagetranscoder.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/librrc_legacyviewmanagerinterop.so	ОК

2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreact_render_componentregistry.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreact_newarchdefaults.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libreactnativeblob.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libruntimeexecutor.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/librninstance.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libjscinstance.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/librrc_image.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi-v7a/libuimanagerjni.so	ОК
2025-08-29 23:37:50	Analyzing lib/armeabi/libshinobicharts-android.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libnative-filters.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libreact_featureflagsjni.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libreact_render_debug.so	ОК

2025-08-29 23:37:50	Analyzing lib/x86/libfolly_runtime.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libjsinspector.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libshinobicharts-android.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libreact_codegen_rncore.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libreact_utils.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libreactnativejni.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libfabricjni.so	OK
2025-08-29 23:37:50	Analyzing lib/x86/libhermes_executor.so	OK
2025-08-29 23:37:50	Analyzing lib/x86/libhermesinstancejni.so	OK
2025-08-29 23:37:50	Analyzing lib/x86/libjsi.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libworklets.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libconscrypt_jni.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libhermes.so	ОК

2025-08-29 23:37:50	Analyzing lib/x86/libreact_render_mapbuffer.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libturbomodulejsijni.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libc++_shared.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libyoga.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libmapbufferjni.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libreact_debug.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libreactperfloggerjni.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libreact_render_graphics.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libfbjni.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libreact_featureflags.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libreact_render_imagemanager.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libreact_cxxreactpackage.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libimagepipeline.so	ОК

2025-08-29 23:37:50	Analyzing lib/x86/libjsijniprofiler.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/librealm-jni.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/librrc_view.so	OK
2025-08-29 23:37:50	Analyzing lib/x86/libreact_devsupportjni.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libreact_nativemodule_core.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libreact_render_core.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libglog.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/librnscreens.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libreanimated.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libnative-imagetranscoder.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/librrc_legacyviewmanagerinterop.so	ОК
2025-08-29 23:37:50	Analyzing lib/x86/libreact_render_componentregistry.so	ОК
2025-08-29 23:37:51	Analyzing lib/x86/libreact_newarchdefaults.so	ОК

2025-08-29 23:37:51	Analyzing lib/x86/libreactnativeblob.so	ОК
2025-08-29 23:37:51	Analyzing lib/x86/libruntimeexecutor.so	ОК
2025-08-29 23:37:51	Analyzing lib/x86/librninstance.so	ОК
2025-08-29 23:37:51	Analyzing lib/x86/libjscinstance.so	ОК
2025-08-29 23:37:51	Analyzing lib/x86/librrc_image.so	ОК
2025-08-29 23:37:51	Analyzing lib/x86/libuimanagerjni.so	OK
2025-08-29 23:37:51	Analyzing lib/mips/libshinobicharts-android.so	ОК
2025-08-29 23:37:51	Analyzing lib/mips64/libshinobicharts-android.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libnative-filters.so	OK
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreact_featureflagsjni.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreact_render_debug.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libfolly_runtime.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libjsinspector.so	ОК

2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libshinobicharts-android.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreact_codegen_rncore.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreact_utils.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreactnativejni.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libfabricjni.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libhermes_executor.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libhermesinstancejni.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libjsi.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libworklets.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libconscrypt_jni.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libhermes.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreact_render_mapbuffer.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libturbomodulejsijni.so	ОК

2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libc++_shared.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libyoga.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libmapbufferjni.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreact_debug.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreactperfloggerjni.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreact_render_graphics.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libfbjni.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreact_featureflags.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreact_render_imagemanager.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreact_cxxreactpackage.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libimagepipeline.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libjsijniprofiler.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/librealm-jni.so	ОК

2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/librrc_view.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreact_devsupportjni.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreact_nativemodule_core.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreact_render_core.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libglog.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/librnscreens.so	OK
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreanimated.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libnative-imagetranscoder.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/librrc_legacyviewmanagerinterop.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreact_render_componentregistry.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreact_newarchdefaults.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libreactnativeblob.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libruntimeexecutor.so	ОК

2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/librninstance.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libjscinstance.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/librrc_image.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/arm64-v8a/libuimanagerjni.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libnative-filters.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libreact_featureflagsjni.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libreact_render_debug.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libfolly_runtime.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libjsinspector.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libshinobicharts-android.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libreact_codegen_rncore.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libreact_utils.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libreactnativejni.so	ОК

2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libfabricjni.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libhermes_executor.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libhermesinstancejni.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libjsi.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libworklets.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libconscrypt_jni.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libhermes.so	ОК
2025-08-29 23:37:51	Analyzing apktool_out/lib/x86_64/libreact_render_mapbuffer.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libturbomodulejsijni.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libc++_shared.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libyoga.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libmapbufferjni.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libreact_debug.so	ОК

2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libreactperfloggerjni.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libreact_render_graphics.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libfbjni.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libreact_featureflags.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libreact_render_imagemanager.so	OK
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libreact_cxxreactpackage.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libimagepipeline.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libjsijniprofiler.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/librealm-jni.so	OK
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/librrc_view.so	OK
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libreact_devsupportjni.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libreact_nativemodule_core.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libreact_render_core.so	ОК

2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libglog.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/librnscreens.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libreanimated.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libnative-imagetranscoder.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/librrc_legacyviewmanagerinterop.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libreact_render_componentregistry.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libreact_newarchdefaults.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libreactnativeblob.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libruntimeexecutor.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/librninstance.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libjscinstance.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/librrc_image.so	ОК

2025-08-29 23:37:52	Analyzing apktool_out/lib/x86_64/libuimanagerjni.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libnative-filters.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libreact_featureflagsjni.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libreact_render_debug.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libfolly_runtime.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libjsinspector.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libshinobicharts-android.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libreact_codegen_rncore.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libreact_utils.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libreactnativejni.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libfabricjni.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libhermes_executor.so	ОК

2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libhermesinstancejni.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libjsi.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libworklets.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libconscrypt_jni.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libhermes.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libreact_render_mapbuffer.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libturbomodulejsijni.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libc++_shared.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libyoga.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libmapbufferjni.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libreact_debug.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libreactperfloggerjni.so	ОК

2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libreact_render_graphics.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libfbjni.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libreact_featureflags.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libreact_render_imagemanager.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libreact_cxxreactpackage.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libimagepipeline.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libjsijniprofiler.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/librealm-jni.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/librrc_view.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libreact_devsupportjni.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libreact_nativemodule_core.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libreact_render_core.so	ОК

2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libglog.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/librnscreens.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libreanimated.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/libnative-imagetranscoder.so	ОК
2025-08-29 23:37:52	Analyzing apktool_out/lib/armeabi-v7a/librrc_legacyviewmanagerinterop.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/armeabi-v7a/libreact_render_componentregistry.so	OK
2025-08-29 23:37:53	Analyzing apktool_out/lib/armeabi-v7a/libreact_newarchdefaults.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/armeabi-v7a/libreactnativeblob.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/armeabi-v7a/libruntimeexecutor.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/armeabi-v7a/librninstance.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/armeabi-v7a/libjscinstance.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/armeabi-v7a/librrc_image.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/armeabi-v7a/libuimanagerjni.so	ОК

2025-08-29 23:37:53	Analyzing apktool_out/lib/armeabi/libshinobicharts-android.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libnative-filters.so	OK
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreact_featureflagsjni.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreact_render_debug.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libfolly_runtime.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libjsinspector.so	OK
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libshinobicharts-android.so	OK
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreact_codegen_rncore.so	OK
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreact_utils.so	OK
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreactnativejni.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libfabricjni.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libhermes_executor.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libhermesinstancejni.so	ОК

2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libjsi.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libworklets.so	OK
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libconscrypt_jni.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libhermes.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreact_render_mapbuffer.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libturbomodulejsijni.so	OK
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libc++_shared.so	OK
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libyoga.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libmapbufferjni.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreact_debug.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreactperfloggerjni.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreact_render_graphics.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libfbjni.so	ОК

2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreact_featureflags.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreact_render_imagemanager.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreact_cxxreactpackage.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libimagepipeline.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libjsijniprofiler.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/librealm-jni.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/librrc_view.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreact_devsupportjni.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreact_nativemodule_core.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreact_render_core.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libglog.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/librnscreens.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreanimated.so	ОК

2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libnative-imagetranscoder.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/librrc_legacyviewmanagerinterop.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreact_render_componentregistry.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreact_newarchdefaults.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libreactnativeblob.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libruntimeexecutor.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/librninstance.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libjscinstance.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/librrc_image.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/x86/libuimanagerjni.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/mips/libshinobicharts-android.so	ОК
2025-08-29 23:37:53	Analyzing apktool_out/lib/mips64/libshinobicharts-android.so	OK
2025-08-29 23:37:53	Reading Code Signing Certificate	ОК

2025-08-29 23:37:54	Running APKiD 2.1.5	ОК
2025-08-29 23:38:04	Detecting Trackers	ОК
2025-08-29 23:38:09	Decompiling APK to Java with JADX	ОК
2025-08-29 23:38:36	Converting DEX to Smali	ОК
2025-08-29 23:38:36	Code Analysis Started on - java_source	ОК
2025-08-29 23:38:44	Android SBOM Analysis Completed	ОК
2025-08-29 23:38:57	Android SAST Completed	ОК
2025-08-29 23:38:58	Android API Analysis Started	OK
2025-08-29 23:39:10	Android API Analysis Completed	ОК
2025-08-29 23:39:11	Android Permission Mapping Started	ОК
2025-08-29 23:39:21	Android Permission Mapping Completed	ОК
2025-08-29 23:39:21	Android Behaviour Analysis Started	ОК
2025-08-29 23:39:36	Android Behaviour Analysis Completed	ОК

2025-08-29 23:39:36	Extracting Emails and URLs from Source Code	ОК
2025-08-29 23:39:43	Email and URL Extraction Completed	ОК
2025-08-29 23:39:43	Extracting String data from APK	ОК
2025-08-29 23:39:44	Extracting String data from SO	ОК
2025-08-29 23:39:45	Extracting String data from Code	ОК
2025-08-29 23:39:45	Extracting String values and entropies from Code	ОК
2025-08-29 23:39:50	Performing Malware check on extracted domains	ОК
2025-08-29 23:39:59	Saving to Database	ОК

### Report Generated by - MobSF v4.4.0

Mobile Security Framework (MobSF) is an automated, all-in-one mobile application (Android/iOS/Windows) pen-testing, malware analysis and security assessment framework capable of performing static and dynamic analysis.

© 2025 Mobile Security Framework - MobSF | Ajin Abraham | OpenSecurity.