

ANDROID STATIC ANALYSIS REPORT





File Name:

com.yc.gloryfit_237.apk

Package Name: com.yc.gloryfit

Scan Date: Sept. 1, 2025, 12:42 p.m.

App Security Score: 57/100 (MEDIUM RISK)

Grade:





File Name: com.yc.gloryfit_237.apk

Size: 78.78MB

MD5: ba671ac2c178fd0a622a64e22459c0b3

SHA1: 60cf5e26b64e86433caf1a3c3e9f0bfd8029f0ba

SHA256: 782ec62c62418f7e9d82ba9f6b58e7c6c4ad918f78838db504d7d9137a4abd36

i APP INFORMATION

App Name: GloryFit

Package Name: com.yc.gloryfit

Main Activity: com.yc.pedometer.SplashActivity

Target SDK: 34 Min SDK: Max SDK:

Android Version Name: Android Version Code:

APP COMPONENTS

Activities: 185 Services: 15 Receivers: 4 Providers: 4

Exported Activities: 6 Exported Services: 3 Exported Receivers: 4 Exported Providers: 0

***** CERTIFICATE INFORMATION

Binary is signed v1 signature: True v2 signature: True v3 signature: False v4 signature: False

X.509 Subject: C=CH, ST=00, L=00, O=00, OU=00, CN=000

Signature Algorithm: rsassa_pkcs1v15 Valid From: 2015-01-08 03:30:33+00:00 Valid To: 2124-07-15 03:30:33+00:00

Issuer: C=CH, ST=00, L=00, O=00, OU=00, CN=000

Serial Number: 0x54adf9d9 Hash Algorithm: sha1

md5: 634985073506d89e5d84a1d44cae39e8

sha1: 8155bd144956b3414bc1ceba1b76d26597b8b421

sha256: f90cbd89621b70e6dee4caca3bc71483ccf17163c6e3313285535cca91f43108

sha512: f9f80c589b8ee72f544af63dd47e68eee3dae3e9b36b908003205ee1b2dccd30974b936f8b703e72d4453f2192654fa6a7588a7d757c5969a2bcd46d65a7c69c

PublicKey Algorithm: rsa

Bit Size: 1024

Fingerprint: ae691a87c431d29a85b62017405b7430469f5b900066e8c3c3eb4186c25bde15

Found 1 unique certificates

EXAMPLICATION PERMISSIONS

PERMISSION	STATUS	INFO	DESCRIPTION
	unknown	Unknown permission	Unknown permission from android reference

命 APKID ANALYSIS

FILE	DETAILS
------	---------

FILE	DETAILS	
	FINDINGS	DETAILS
ba671ac2c178fd0a622a64e22459c0b3.apk	Packer Found	Jiagu
assets/libjiagu.so	FINDINGS	DETAILS
assets/iibjiagu.su	Packer Found	Jiagu
assets/libjiagu_a64.so	FINDINGS	DETAILS
	Packer Found	Jiagu
assets/libjiagu_x64.so	FINDINGS	DETAILS
	Packer Found	Jiagu
assets/libjiagu_x86.so	FINDINGS	DETAILS
	Packer Found	Jiagu
classes.dex	FINDINGS	DETAILS
Classes, acx	Compiler	dexlib 2.x

FILE	DETAILS				
o/arm64-v8a/libJni_wgs2gcj.so o/arm64-v8a/libumeng-spy.so	FINDINGS	DETAI	LS		
lib/arm64-v8a/libJni_wgs2gcj.so	Obfuscator	Obfusca	Obfuscator-LLVM version 3.6.1		
lib/arm64-v8a/libumeng-spy.so	FINDINGS		DETAILS		
installing spyrise	Anti-VM Code		emulator file check		
	FINIDINGS	DETAI	DETAILS		
lib/armeabi-v7a/libJni_wgs2gcj.so	FINDINGS DE		DETAILS		
	Obfuscator	Obfusca	Obfuscator-LLVM version 3.6.1		
lib/armeabi/libJni_wgs2gcj.so	FINDINGS	DETAI	DETAILS		
	Obfuscator	Obfusca	Obfuscator-LLVM version 3.6.1		

△ NETWORK SECURITY

NO SCOPE SEVERITY DESCRIPTION

CERTIFICATE ANALYSIS

TITLE	SEVERITY	DESCRIPTION
Signed Application	info	Application is signed with a code signing certificate
Certificate algorithm might be vulnerable to hash collision	warning	Application is signed with SHA1withRSA. SHA1 hash algorithm is known to have collision issues. The manifest file indicates SHA256withRSA is in use.

Q MANIFEST ANALYSIS

HIGH: 0 | WARNING: 14 | INFO: 0 | SUPPRESSED: 0

NO	ISSUE	SEVERITY	DESCRIPTION
1	Application Data can be Backed up [android:allowBackup] flag is missing.	warning	The flag [android:allowBackup] should be set to false. By default it is set to true and allows anyone to backup your application data via adb. It allows users who have enabled USB debugging to copy application data off of the device.
2	Activity () is not Protected. An intent-filter exists.	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Activity is explicitly exported.
3	Activity () is not Protected. An intent-filter exists.	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Activity is explicitly exported.
4	Service () is not Protected. An intent-filter exists.	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Service is explicitly exported.
5	Service () is not Protected. An intent-filter exists.	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Service is explicitly exported.
6	Activity () is not Protected. An intent-filter exists.	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Activity is explicitly exported.

NO	ISSUE	SEVERITY	DESCRIPTION
7	Activity () is not Protected. An intent-filter exists.	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Activity is explicitly exported.
8	Activity-Alias () is not Protected. An intent-filter exists.	warning	An Activity-Alias is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Activity-Alias is explicitly exported.
9	Activity () is not Protected. An intent-filter exists.	warning	An Activity is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Activity is explicitly exported.
10	Broadcast Receiver () is not Protected. An intent-filter exists.	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Broadcast Receiver is explicitly exported.
11	Service () is not Protected. An intent-filter exists.	warning	A Service is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Service is explicitly exported.
12	Broadcast Receiver () is not Protected. An intent-filter exists.	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Broadcast Receiver is explicitly exported.
13	Broadcast Receiver () is not Protected. An intent-filter exists.	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Broadcast Receiver is explicitly exported.
14	Broadcast Receiver () is not Protected. An intent-filter exists.	warning	A Broadcast Receiver is found to be shared with other apps on the device therefore leaving it accessible to any other application on the device. The presence of intent-filter indicates that the Broadcast Receiver is explicitly exported.

</> CODE ANALYSIS

NO ISSUE SEVERITY STANDARDS FILES

► SHARED LIBRARY BINARY ANALYSIS

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
1	assets/libjiagu_x64.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['read_chk', 'strlen_chk', 'FD_SET_chk', 'snprintf_chk', 'sprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
2	assets/libjiagu_x86.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
3	assets/libjiagu_a64.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', '_snprintf_chk', 'FD_SET_chk', 'read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
4	assets/libjiagu.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
5	arm64-v8a/libRtkAesJni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
6	arm64-v8a/libmmkv.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
7	arm64-v8a/libapssdk.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
8	arm64- v8a/libimage_processing_util_jni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
9	arm64- v8a/libAMapSDK_MAP_v10_0_700.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'memcpy_chk', 'vsnprintf_chk', 'strcat_chk', 'strrcpy_chk', 'umask_chk', 'memmove_chk', 'vsprintf_chk', 'strcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
10	arm64-v8a/libcrashsdk.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
11	arm64-v8a/libumeng-spy.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
12	arm64-v8a/libJni_wgs2gcj.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
13	armeabi-v7a/libRtkAesJni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
14	armeabi-v7a/libmmkv.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
15	armeabi-v7a/libapssdk.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
16	armeabi- v7a/libimage_processing_util_jni.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
17	armeabi- v7a/libAMapSDK_MAP_v10_0_700.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['memcpy_chk', 'memset_chk', 'vsnprintf_chk', 'vsprintf_chk', 'strlen_chk', 'strcpy_chk', 'strcpy_chk', 'memmove_chk', 'mead_chk', 'read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
18	armeabi-v7a/libcrashsdk.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
19	armeabi-v7a/libumeng-spy.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
20	armeabi-v7a/libJni_wgs2gcj.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
21	armeabi/libRtkAesJni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
22	armeabi/libmmkv.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
23	armeabi/libapssdk.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
24	armeabi/libAMapSDK_MAP_v10_0_700.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['memcpy_chk', 'memset_chk', 'vsprintf_chk', 'strlen_chk', 'strcpy_chk', 'strcpy_chk', 'strcat_chk', 'memmove_chk', 'nead_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
25	armeabi/libcrashsdk.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
26	armeabi/libumeng-spy.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
27	armeabi/libJni_wgs2gcj.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
28	assets/libjiagu_x64.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['read_chk', 'strlen_chk', 'FD_SET_chk', 'snprintf_chk', 'sprintf_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
29	assets/libjiagu_x86.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
30	assets/libjiagu_a64.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'snprintf_chk', 'FD_SET_chk', 'read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
31	assets/libjiagu.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
32	arm64-v8a/libRtkAesJni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
33	arm64-v8a/libmmkv.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
34	arm64-v8a/libapssdk.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
35	arm64- v8a/libimage_processing_util_jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_memcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
36	arm64- v8a/libAMapSDK_MAP_v10_0_700.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['strlen_chk', 'memcpy_chk', 'vsnprintf_chk', 'strcat_chk', 'strncpy_chk', 'umask_chk', 'memmove_chk', 'vsprintf_chk', 'strcpy_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
37	arm64-v8a/libcrashsdk.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
38	arm64-v8a/libumeng-spy.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
39	arm64-v8a/libJni_wgs2gcj.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
40	armeabi-v7a/libRtkAesJni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
41	armeabi-v7a/libmmkv.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
42	armeabi-v7a/libapssdk.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
43	armeabi- v7a/libimage_processing_util_jni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
44	armeabi- v7a/libAMapSDK_MAP_v10_0_700.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['memcpy_chk', 'memset_chk', 'vsnprintf_chk', 'vsprintf_chk', 'strlen_chk', 'strcpy_chk', 'strcpy_chk', 'memmove_chk', 'mead_chk', 'read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
45	armeabi-v7a/libcrashsdk.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
46	armeabi-v7a/libumeng-spy.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
47	armeabi-v7a/libJni_wgs2gcj.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
48	armeabi/libRtkAesJni.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
49	armeabi/libmmkv.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
50	armeabi/libapssdk.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
51	armeabi/libAMapSDK_MAP_v10_0_700.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	True info The binary has the following fortified functions: ['_memcpy_chk', '_memset_chk', '_vsnprintf_chk', '_strlen_chk', '_strcpy_chk', '_strcat_chk', '_memmove_chk', '_meammove_chk', '_read_chk']	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
52	armeabi/libcrashsdk.so	True info The binary has NX bit set. This marks a memory page non-executable making attacker injected shellcode non-executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
53	armeabi/libumeng-spy.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

NO	SHARED OBJECT	NX	PIE	STACK CANARY	RELRO	RPATH	RUNPATH	FORTIFY	SYMBOLS STRIPPED
54	armeabi/libJni_wgs2gcj.so	True info The binary has NX bit set. This marks a memory page non- executable making attacker injected shellcode non- executable.	Dynamic Shared Object (DSO) info The shared object is build with - fPIC flag which enables Position independent code. This makes Return Oriented Programming (ROP) attacks much more difficult to execute reliably.	True info This binary has a stack canary value added to the stack so that it will be overwritten by a stack buffer that overflows the return address. This allows detection of overflows by verifying the integrity of the canary before function return.	Full RELRO info This shared object has full RELRO enabled. RELRO ensures that the GOT cannot be overwritten in vulnerable ELF binaries. In Full RELRO, the entire GOT (.got and .got.plt both) is marked as read-only.	None info The binary does not have run-time search path or RPATH set.	None info The binary does not have RUNPATH set.	False warning The binary does not have any fortified functions. Fortified functions provides buffer overflow checks against glibc's commons insecure functions like strcpy, gets etc. Use the compiler option - D_FORTIFY_SOURCE=2 to fortify functions. This check is not applicable for Dart/Flutter libraries.	True info Symbols are stripped.

■ NIAP ANALYSIS v1.3

NO	IDENTIFIER	REQUIREMENT	FEATURE	DESCRIPTION
----	------------	-------------	---------	-------------

BEHAVIOUR ANALYSIS

RULE ID	BEHAVIOUR	LABEL	FILES
00013	Read file and put it into a stream	file	com/tianyu/util/a.java
00012	Read data and put it into a buffer stream	file	com/tianyu/util/a.java
00022	Open a file from given absolute path of the file	file	com/stub/StubApp.java

FIREBASE DATABASES ANALYSIS

TITLE	SEVERITY	DESCRIPTION	
Firebase Remote Config disabled	secure	Firebase Remote Config is disabled for https://firebaseremoteconfig.googleapis.com/v1/projects/209494975698/namespaces/firebase:fetch? key=AlzaSyA1LRD_8dPmLXV4c5olZVhQtVu9HW0DIMg. This is indicated by the response: {'state': 'NO_TEMPLATE'}	

***: ::** ABUSED PERMISSIONS

TYPE	MATCHES	PERMISSIONS
Malware Permissions	0/25	
Other Common Permissions	0/44	

Malware Permissions:

Top permissions that are widely abused by known malware.

Other Common Permissions:

Permissions that are commonly abused by known malware.

• OFAC SANCTIONED COUNTRIES

This app may communicate with the following OFAC sanctioned list of countries.

DOMAIN	COUNTRY/REGION
maps.testing.amap.com	IP: 59.82.57.204 Country: China Region: Zhejiang City: Hangzhou
mps.amap.com	IP: 47.246.165.171 Country: Hong Kong Region: Hong Kong City: Hong Kong
c.appjiagu.com	IP: 123.125.81.24 Country: China Region: Beijing City: Beijing
mpsapi.amap.com	IP: 47.246.165.171 Country: Hong Kong Region: Hong Kong City: Hong Kong
m5.amap.com	IP: 47.246.165.172 Country: Hong Kong Region: Hong Kong City: Hong Kong
faas-image.amap.com	IP: 101.226.27.74 Country: China Region: Shanghai City: Shanghai

Q DOMAIN MALWARE CHECK

DOMAIN	STATUS	GEOLOCATION
maps.testing.amap.com	ok	IP: 59.82.57.204 Country: China Region: Zhejiang City: Hangzhou Latitude: 30.293650 Longitude: 120.161423 View: Google Map
twitter.com	ok	IP: 172.66.0.227 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map
mps.amap.com	ok	IP: 47.246.165.171 Country: Hong Kong Region: Hong Kong City: Hong Kong Latitude: 22.285521 Longitude: 114.157692 View: Google Map
img.alicdn.com	ok	IP: 47.246.23.187 Country: United States of America Region: California City: San Jose Latitude: 37.339390 Longitude: -121.894958 View: Google Map
c.appjiagu.com	ok	IP: 123.125.81.24 Country: China Region: Beijing City: Beijing Latitude: 39.907501 Longitude: 116.397232 View: Google Map

DOMAIN	STATUS	GEOLOCATION
mpsapi.amap.com	ok	IP: 47.246.165.171 Country: Hong Kong Region: Hong Kong City: Hong Kong Latitude: 22.285521 Longitude: 114.157692 View: Google Map
m5.amap.com	ok	IP: 47.246.165.172 Country: Hong Kong Region: Hong Kong City: Hong Kong Latitude: 22.285521 Longitude: 114.157692 View: Google Map
faas-image.amap.com	ok	IP: 101.226.27.74 Country: China Region: Shanghai City: Shanghai Latitude: 31.222219 Longitude: 121.458061 View: Google Map
github.com	ok	IP: 140.82.113.3 Country: United States of America Region: California City: San Francisco Latitude: 37.775700 Longitude: -122.395203 View: Google Map



EMAIL	FILE
j2@2.vd	assets/libjiagu.so
j2@2.vd	apktool_out/assets/libjiagu.so


HARDCODED SECRETS

POSSIBLE SECRETS
"com_facebook_device_auth_instructions" : "DD facebook.com/device DDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDDD
"bracelet_interface_hockey" : "□□"
"iw_hockey" : "הוקי"
"nl_hockey" : "Hockey"
"bracelet_interface_hockey" : "Hokey"
"bracelet_interface_hockey" : "Hokej"
"one_key_take_picture" : "
"switch_user" : "Kapcsolószámla"
"it_hockey" : "Hockey"
"one_key_end_call" : "DDDDDD"
"bracelet_interface_hockey" : " """""""""""""""""""""""""""""""""
"sport_ice_hockey" : " " " " " " " " " " " " " " " " " "







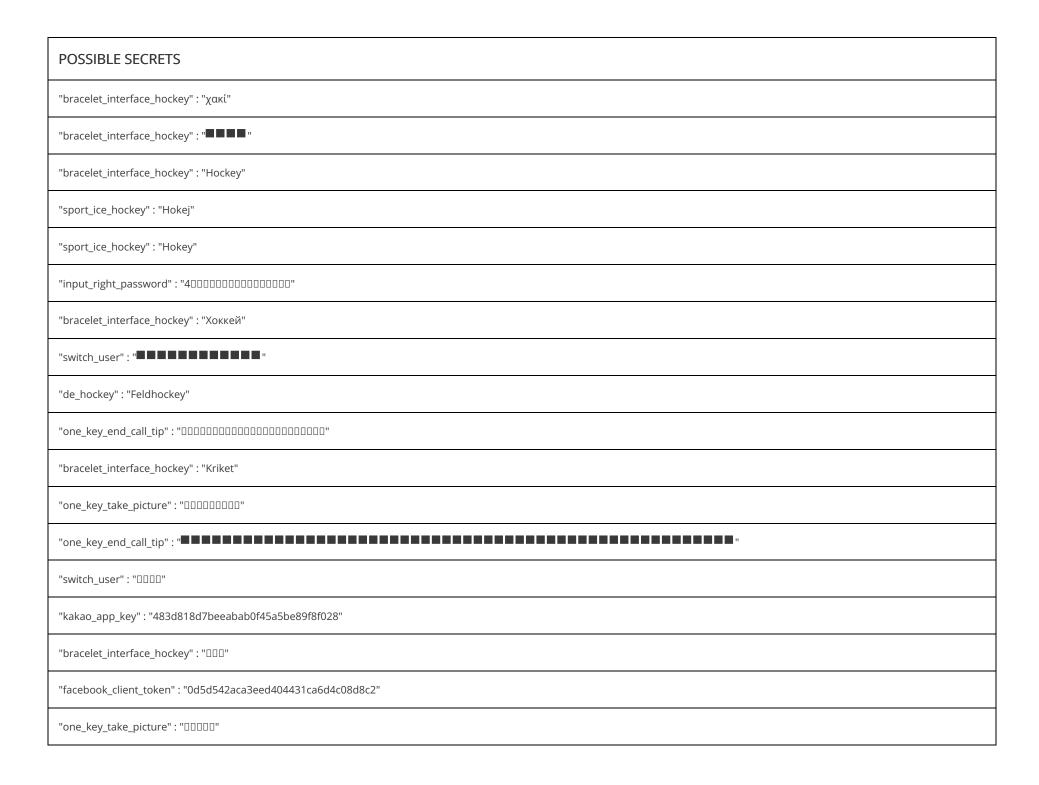

> PLAYSTORE INFORMATION

Title: Glory Fit

Score: 3.5705347 Installs: 10,000,000+ Price: 0 Android Version Support: Category: Health & Fitness Play Store URL: com.yc.gloryfit

Developer Details: Smart Wear, Smart+Wear, None, https://ute-tech.com.cn/, jc.huang@ute-tech.com.cn,

Release Date: May 18, 2017 Privacy Policy: Privacy link

Description:

GloryFit is a companion app for the smart watch Q18. This app works with the smart watch Q18 to record your exercise details, such as step counting, sleep, heart rate, etc. In addition, GloryFit also supports SMS reminder, call reminder, SMS quick reply, APP reminder and other functions. Obtain accessibility services to assist the App message reminder function, and push messages from other apps to the smart watch Q18.

∷ SCAN LOGS

Timestamp	Event	Error
2025-09-01 12:42:16	Generating Hashes	ОК
2025-09-01 12:42:16	Extracting APK	ОК

2025-09-01 12:42:16	Unzipping	OK
2025-09-01 12:42:17	Parsing APK with androguard	OK
2025-09-01 12:42:19	Extracting APK features using aapt/aapt2	OK
2025-09-01 12:42:19	Getting Hardcoded Certificates/Keystores	OK
2025-09-01 12:42:24	Parsing AndroidManifest.xml	OK
2025-09-01 12:42:24	Extracting Manifest Data	OK
2025-09-01 12:42:24	Manifest Analysis Started	OK
2025-09-01 12:42:24	Performing Static Analysis on: GloryFit (com.yc.gloryfit)	OK
2025-09-01 12:42:26	Fetching Details from Play Store: com.yc.gloryfit	OK
2025-09-01 12:42:27	Checking for Malware Permissions	OK
2025-09-01 12:42:27	Fetching icon path	OK
2025-09-01 12:42:27	Library Binary Analysis Started	OK

2025-09-01 12:42:27	Analyzing assets/libjiagu_x64.so	ОК
2025-09-01 12:42:27	Analyzing assets/libjiagu_x86.so	ОК
2025-09-01 12:42:27	Analyzing assets/libjiagu_a64.so	OK
2025-09-01 12:42:27	Analyzing assets/libjiagu.so	ОК
2025-09-01 12:42:28	Analyzing lib/arm64-v8a/libRtkAesJni.so	ОК
2025-09-01 12:42:28	Analyzing lib/arm64-v8a/libmmkv.so	ОК
2025-09-01 12:42:28	Analyzing lib/arm64-v8a/libapssdk.so	ОК
2025-09-01 12:42:28	Analyzing lib/arm64-v8a/libimage_processing_util_jni.so	ОК
2025-09-01 12:42:28	Analyzing lib/arm64-v8a/libAMapSDK_MAP_v10_0_700.so	ОК
2025-09-01 12:42:28	Analyzing lib/arm64-v8a/libcrashsdk.so	ОК
2025-09-01 12:42:28	Analyzing lib/arm64-v8a/libumeng-spy.so	ОК
2025-09-01 12:42:28	Analyzing lib/arm64-v8a/libJni_wgs2gcj.so	ОК

2025-09-01 12:42:28	Analyzing lib/armeabi-v7a/libRtkAesJni.so	ОК
2025-09-01 12:42:28	Analyzing lib/armeabi-v7a/libmmkv.so	ОК
2025-09-01 12:42:28	Analyzing lib/armeabi-v7a/libapssdk.so	ОК
2025-09-01 12:42:28	Analyzing lib/armeabi-v7a/libimage_processing_util_jni.so	ОК
2025-09-01 12:42:28	Analyzing lib/armeabi-v7a/libAMapSDK_MAP_v10_0_700.so	ОК
2025-09-01 12:42:28	Analyzing lib/armeabi-v7a/libcrashsdk.so	ОК
2025-09-01 12:42:28	Analyzing lib/armeabi-v7a/libumeng-spy.so	ОК
2025-09-01 12:42:28	Analyzing lib/armeabi-v7a/libJni_wgs2gcj.so	ОК
2025-09-01 12:42:28	Analyzing lib/armeabi/libRtkAesJni.so	ОК
2025-09-01 12:42:28	Analyzing lib/armeabi/libmmkv.so	ОК
2025-09-01 12:42:28	Analyzing lib/armeabi/libapssdk.so	ОК
2025-09-01 12:42:28	Analyzing lib/armeabi/libAMapSDK_MAP_v10_0_700.so	ОК

2025-09-01 12:42:28	Analyzing lib/armeabi/libcrashsdk.so	OK
2025-09-01 12:42:28	Analyzing lib/armeabi/libumeng-spy.so	OK
2025-09-01 12:42:28	Analyzing lib/armeabi/libJni_wgs2gcj.so	ОК
2025-09-01 12:42:28	Analyzing apktool_out/assets/libjiagu_x64.so	ОК
2025-09-01 12:42:28	Analyzing apktool_out/assets/libjiagu_x86.so	ОК
2025-09-01 12:42:28	Analyzing apktool_out/assets/libjiagu_a64.so	ОК
2025-09-01 12:42:28	Analyzing apktool_out/assets/libjiagu.so	ОК
2025-09-01 12:42:28	Analyzing apktool_out/lib/arm64-v8a/libRtkAesJni.so	ОК
2025-09-01 12:42:28	Analyzing apktool_out/lib/arm64-v8a/libmmkv.so	ОК
2025-09-01 12:42:28	Analyzing apktool_out/lib/arm64-v8a/libapssdk.so	ОК
2025-09-01 12:42:28	Analyzing apktool_out/lib/arm64-v8a/libimage_processing_util_jni.so	ОК
2025-09-01 12:42:28	Analyzing apktool_out/lib/arm64-v8a/libAMapSDK_MAP_v10_0_700.so	ОК

2025-09-01 12:42:29	Analyzing apktool_out/lib/arm64-v8a/libcrashsdk.so	ОК
2025-09-01 12:42:29	Analyzing apktool_out/lib/arm64-v8a/libumeng-spy.so	ОК
2025-09-01 12:42:29	Analyzing apktool_out/lib/arm64-v8a/libJni_wgs2gcj.so	ОК
2025-09-01 12:42:29	Analyzing apktool_out/lib/armeabi-v7a/libRtkAesJni.so	ОК
2025-09-01 12:42:29	Analyzing apktool_out/lib/armeabi-v7a/libmmkv.so	ОК
2025-09-01 12:42:29	Analyzing apktool_out/lib/armeabi-v7a/libapssdk.so	ОК
2025-09-01 12:42:29	Analyzing apktool_out/lib/armeabi-v7a/libimage_processing_util_jni.so	ОК
2025-09-01 12:42:29	Analyzing apktool_out/lib/armeabi-v7a/libAMapSDK_MAP_v10_0_700.so	ОК
2025-09-01 12:42:29	Analyzing apktool_out/lib/armeabi-v7a/libcrashsdk.so	ОК
2025-09-01 12:42:29	Analyzing apktool_out/lib/armeabi-v7a/libumeng-spy.so	ОК
2025-09-01 12:42:29	Analyzing apktool_out/lib/armeabi-v7a/libJni_wgs2gcj.so	ОК
2025-09-01 12:42:29	Analyzing apktool_out/lib/armeabi/libRtkAesJni.so	ОК

2025-09-01 12:42:29	Analyzing apktool_out/lib/armeabi/libmmkv.so	ОК
2025-09-01 12:42:29	Analyzing apktool_out/lib/armeabi/libapssdk.so	ОК
2025-09-01 12:42:29	Analyzing apktool_out/lib/armeabi/libAMapSDK_MAP_v10_0_700.so	ОК
2025-09-01 12:42:29	Analyzing apktool_out/lib/armeabi/libcrashsdk.so	ОК
2025-09-01 12:42:29	Analyzing apktool_out/lib/armeabi/libumeng-spy.so	ОК
2025-09-01 12:42:29	Analyzing apktool_out/lib/armeabi/libJni_wgs2gcj.so	ОК
2025-09-01 12:42:29	Reading Code Signing Certificate	OK
2025-09-01 12:42:30	Running APKiD 2.1.5	OK
2025-09-01 12:42:35	Updating Trackers Database	OK
2025-09-01 12:42:35	Detecting Trackers	ОК
2025-09-01 12:42:35	Decompiling APK to Java with JADX	ОК
2025-09-01 12:42:40	Converting DEX to Smali	ОК

2025-09-01 12:42:40	Code Analysis Started on - java_source	ОК
2025-09-01 12:42:40	Android SBOM Analysis Completed	ОК
2025-09-01 12:42:41	Android SAST Completed	ОК
2025-09-01 12:42:41	Android API Analysis Started	OK
2025-09-01 12:42:42	Android API Analysis Completed	ОК
2025-09-01 12:42:42	Android Permission Mapping Started	ОК
2025-09-01 12:42:42	Android Permission Mapping Completed	ОК
2025-09-01 12:42:43	Android Behaviour Analysis Started	ОК
2025-09-01 12:42:43	Android Behaviour Analysis Completed	ОК
2025-09-01 12:42:43	Extracting Emails and URLs from Source Code	ОК
2025-09-01 12:42:43	Email and URL Extraction Completed	ОК
2025-09-01 12:42:43	Extracting String data from APK	ОК

2025-09-01 12:42:45	Extracting String data from SO	ОК
2025-09-01 12:42:46	Extracting String data from Code	ОК
2025-09-01 12:42:46	Extracting String values and entropies from Code	ОК
2025-09-01 12:42:47	Performing Malware check on extracted domains	ОК
2025-09-01 12:42:49	Saving to Database	ОК

Report Generated by - MobSF v4.4.0

Mobile Security Framework (MobSF) is an automated, all-in-one mobile application (Android/iOS/Windows) pen-testing, malware analysis and security assessment framework capable of performing static and dynamic analysis.

© 2025 Mobile Security Framework - MobSF | Ajin Abraham | OpenSecurity.