

The Goose *SDK.*

BUILD ON THE AGENT, NOT AROUND IT

Goose is a single compiled binary — agent runtime, model access, tool execution, extensions, sessions — all included.

The SDK lets you embed it, connect to it, and extend it. Build your experience; let Goose handle the hard parts.

Months of plumbing, *or* a single import.

Most teams spend a quarter wiring up infrastructure before they ship a single agent feature. The SDK shortens that to an afternoon.

WITHOUT IT

The long road

- Wire up LLM providers — auth, streaming, retries, fallbacks
- Build session management, context windows, compaction
- Implement tool execution, sandboxing, permissions, security
- Write your own extension and plugin system
- Handle model switching, cost tracking, cancellation


WITH THE SDK

The short one

- *All providers* — Anthropic, OpenAI, Bedrock, Databricks, xAI, Groq, Ollama, llama.cpp...
- *Security* — prompt injection detection, tool permissions, malware checks
- *Context management* — auto-compaction, token counting, cost tracking
- *Extensions* — MCP + rMCP, Skills, Recipes, lifecycle hooks
- *Sub-agents, scheduling, sandboxed execution*

One compiled binary. `brew`, `npm`, `apt`, `rpm`, Docker, or a single download.

What is *inside* the binary.

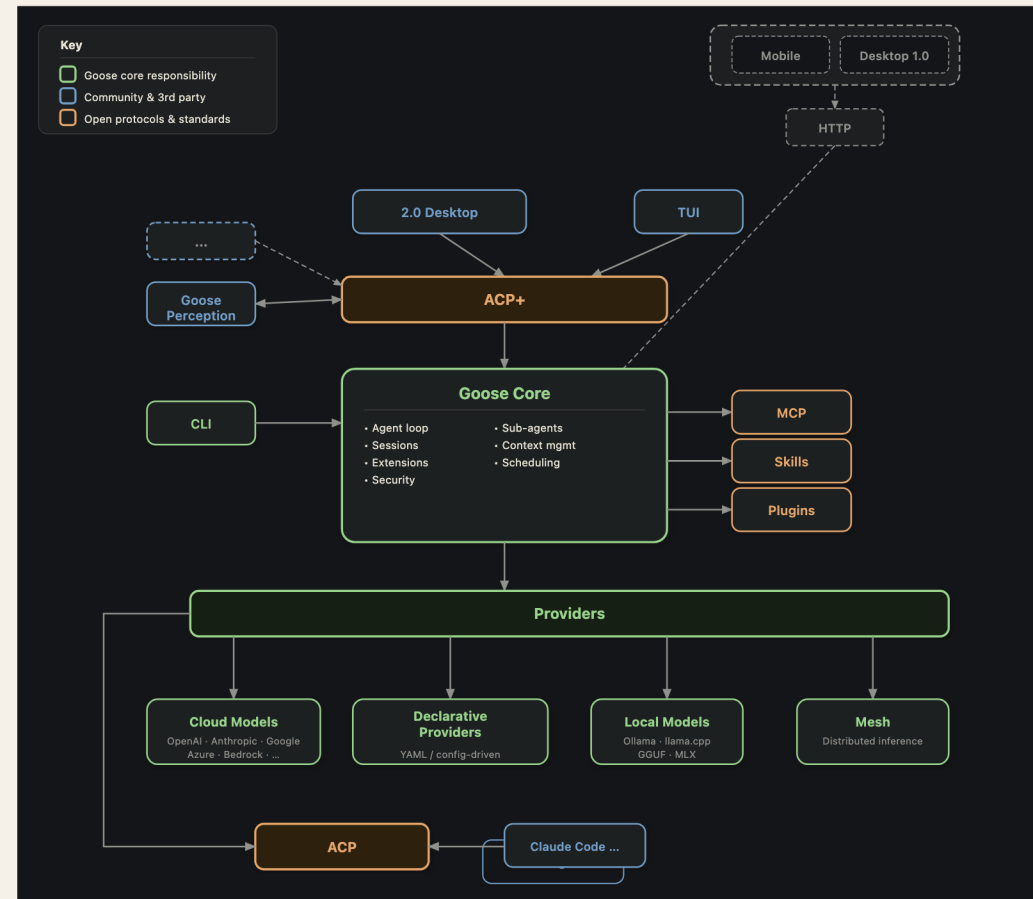

— Frontends connect via ACP+. Everything below the protocol is handled for you. —

The motion of the machine.



— Inference, tool call, execute, respond — repeat. The application layer intercepts at every stage. —

How it *works*.

I. DISTRIBUTION

A single binary

Compiled Rust. Acquire it however you prefer:

- `brew install block-goose-cli`
- `npm install @aaif/goose-sdk`
- `apt` / `rpm` / `.deb` / `.flatpak`
- Docker, MSI, NSIS, curl script
- Built-in `goose update`

II. TRANSPORT

One protocol, three pipes

- *Stdio* — spawn `goose acp`, pipe JSON
- *WebSocket* — connect to a running server
- *HTTP + SSE* — for web services


Daemon, child process, or CLI tool — your app connects and sends prompts.

III. PROTOCOL — ACP+

JSON-RPC, refined

The "+" denotes Goose's extensions to the open ACP standard:

- Provider & model management
- Extension hot-loading
- Config & secrets
- Session export & import



A full agent, in *twenty lines*.

```
import { spawn } from "node:child_process";
import { Readable, Writable } from "node:stream";
import { ndJsonStream, PROTOCOL_VERSION } from "@agentclientprotocol/sdk";
import { GooseClient } from "@aaif/goose-sdk";
import { resolveGooseBinary } from "@aaif/goose-sdk/node";

// 1. Spawn the goose binary
const proc = spawn(resolveGooseBinary(), ["acp"], { stdio: ["pipe", "pipe", "ignore"] });
const stream = ndJsonStream(Writable.toWeb(proc.stdin!), Readable.toWeb(proc.stdout!));

// 2. Create the client
const client = new GooseClient(() => ({
  sessionUpdate: async (p) => {
    if (p.update.sessionUpdate === "agent_message_chunk" && p.update.content.type === "text")
      process.stdout.write(p.update.content.text); // stream text to your UI
  },
  requestPermission: async (p) => ({
    outcome: { outcome: "selected", optionId: p.options[0].optionId }
  }),
}), stream);

// 3. Initialize, create session, prompt
await client.initialize({ protocolVersion: PROTOCOL_VERSION, clientInfo: { name: "my-app", version: "1.0" }, clientCapabilities: {} });
```

A full agent — tool use, streaming, sessions, any LLM provider.

Already proven, *thrice*.

The same `GooseClient` + `@aaif/goose-sdk` powers all three surfaces below.

№ I — DESKTOP

Reference Desktop

Tauri + *React*. Connects via WebSocket.

- Singleton connection with auto-reconnect
- Zustand stores for chat state
- Replay & live streaming modes
- Full session management UI

№ II — TERMINAL

Text TUI

React Ink. Connects via stdio.

- Spawns `goose acp` as child process
- Interactive TUI & one-shot mode
- Provider onboarding flow
- ~30 lines for a minimal client

№ III — HEADLESS

goose_perception

Node.js daemon. Watches screen → updates wiki.

- Multi-model: fast OCR + smart synthesis
- Sends images via ContentBlock
- Fresh sessions per task batch
- Token usage tracking

A complete *agent runtime*, included.

SECURITY

Defence in depth

- *Prompt-injection detection* — pattern + ML
- *Tool permissions* — Auto, Approve, SmartApprove, Chat
- *Malware checks* — OSV before installing
- *Egress / exfiltration detection*
- *Extension sandboxing*

EXTENSIONS & SKILLS

A garden, not a fortress

- *MCP + rMCP* — local & remote tool servers, hot-loadable
- *Skills* — discoverable `SKILL.md` files, project & global
- *Recipes* — declarative YAML agents, shareable, deeplink-able
- *Lifecycle hooks* — shell & HTTP at every stage (*in progress*)

CONTEXT & SESSIONS

Memory, kept

- *Auto-compaction* at 80% window
- *Token counting* — tiktoken BPE
- *Cost tracking* — per-provider, cache-aware
- *Session persistence* — create, resume, fork, export
- *Chat recall* across sessions

AGENT CAPABILITIES

Beyond a single loop

- *Sub-agents* — parallel, isolated context
- *Scheduling* — background & recurring tasks
- *Sandboxed code execution* — Docker
- *Tool-loop detection*
- *Retry with backoff*

MODEL ACCESS

Every model, one surface

- *Cloud* — Anthropic, OpenAI, Bedrock, Databricks, xAI, Groq...
- *Local* — Ollama, llama.cpp, Candle
- *Mesh* — distributed model routing
- *Claude Code* — as a provider via ACP
- *OpenAI Assistants* — as a provider via ACP

Extension *points.*

I. MCP + rMCP

Tools, on demand

Add tools at runtime via local or remote MCP servers. Goose manages the lifecycle — hot-loadable, no restart.

```
await client.extMethod(
  "_goose/extensions/add", {
    sessionId,
    name: "my-tool-server",
    uri: "http://localhost:8080",
  }
);
```

III. SKILLS

Procedural knowledge

Discoverable `SKILL.md` files with frontmatter. Project-scoped (`.goose/skills/`) or global (`~/.agents/skills/`). Loaded by the agent on demand.

II. LIFECYCLE HOOKS (*WIP*)

Policy, declared

Shell commands or HTTP calls at key lifecycle points — configured in YAML, no code changes.

- *before_tool_call* — block dangerous actions
- *after_tool_call* — audit, log, react
- *post_compact* — re-inject context
- *on_session_start / end* — setup & teardown

IV. RECIPES & SUB-AGENTS

Configurable agency

Recipes: declarative YAML — prompt, extensions, model, parameters. Shareable, deeplinkable, schedulable.

Sub-agents: child agents with isolated contexts for parallel workstreams.

A participant, *not a walled garden.*

Goose does not replace your existing stack — it consumes it. Any agent that speaks ACP becomes a tool Goose can orchestrate.



CONSUME

Bring your tools along

- *Claude Code* — available as a provider via ACP
- *Any ACP-compatible agent* — Goose can talk to it
- *MCP servers* — any language, any framework
- *rMCP* — remote tool servers over the network

BE CONSUMED

Yours to embed

- *Goose itself speaks ACP* — any ACP client can drive it
- *Embeddable* — stdio, WebSocket, or HTTP
- *CLI-friendly* — pipe in, pipe out, script it
- *Open protocol* — no vendor lock-in

The *LSP* *playbook* — one protocol, many clients.

ACP is already open. Goose's extensions (`_goose/*`) follow a deliberate path to standardisation.



TODAY — SHARED INFRASTRUCTURE

- `@agentclientprotocol/sdk` — TypeScript SDK (npm)
- `sacp` — Rust crate (symposium-acp)
- `agent-client-protocol-schema` — shared types (crates.io)
- JSON Schema definitions for every request & response

NEXT — TO BE STANDARDISED

- Provider discovery & model listing
- Extension management — add, remove, toggle
- Config & secret management
- Session export & import
- Lifecycle hooks

Battle-tested across 3+ clients before any proposal.

Build for `GooseClient` today → works with any ACP agent tomorrow.

Pattern: a *desktop* client.

```
// Singleton connection with auto-reconnect
let client: GooseClient | null = null;

export async function getClient() {
  if (client) return client;

  const wsUrl = await invoke("get_goose_serve_url");
  const stream = createWebSocketStream(wsUrl);

  client = new GooseClient(() => ({
    sessionUpdate: async (n) => {
      notificationHandler.handle(n);
    },
    requestPermission: async (p) => ({
      outcome: { outcome: "selected",
        optionId: p.options[0].optionId },
    })),
  stream);

  await client.initialize({ /* ... */ });
  client.closed.then(() => { client = null; });
  return client;
}

export const prompt = (sid, blocks) =>
  getClient().then(c =>
```

WHAT THIS GETS YOU

- *Lazy connection* — connects on first use
- *Auto-reconnect* — clears on close, next call reconnects
- *State in Zustand* — notifications route to stores
- *Session replay* — `loadSession()` replays history

NOTIFICATION → UI

```
switch (update.sessionUpdate) {
  case "agent_message_chunk":
    chatStore.append(sid, update.content); break;
  case "tool_call":
    chatStore.addTool(sid, update); break;
  case "usage_update":
    chatStore.updateUsage(sid, update); break;
}
```

Pattern: a *headless* service.

```
// Multi-model: cheap for OCR, expensive for synthesis
async function createSession(kind: "fast"|"smart") {
  const provider = kind === "fast"
    ? config.fastProvider : config.smartProvider;
  const model = kind === "fast"
    ? config.fastModel : config.smartModel;

  const s = await client.newSession({
    cwd: wikiDir, mcpServers: [],
    _meta: { provider },
  });

  if (model) await client.goose
    .GooseSessionProviderUpdate({
      sessionId: s.sessionId, provider, model,
    });
  return s.sessionId;
}

// Send screenshot for transcription
const sid = await createSession("fast");
await client.prompt({ sessionId: sid, prompt: [
  { type: "text", text: "Transcribe this screen" },
  { type: "image", data: screenshot.base64,
    mimeType: "image/png" },
] });
```

KEY PATTERNS

- *Session-per-task* — fresh batch, no context buildup
- *Multi-model* — different sessions, different providers
- *Stream buffer* — accumulate chunks, read on complete
- *Images as ContentBlock* — base64 alongside text


QUERY PROVIDERS AT RUNTIME

```
const providers = await client.goose
  .GooseProvidersDetails({});

providers.providers
  .filter(p => p.isConfigured)
  .forEach(p => console.log(p.name));

const models = await client.goose
  .GooseProvidersModels({
    providerName: "anthropic"
  });
```

The SDK, *evolved*.

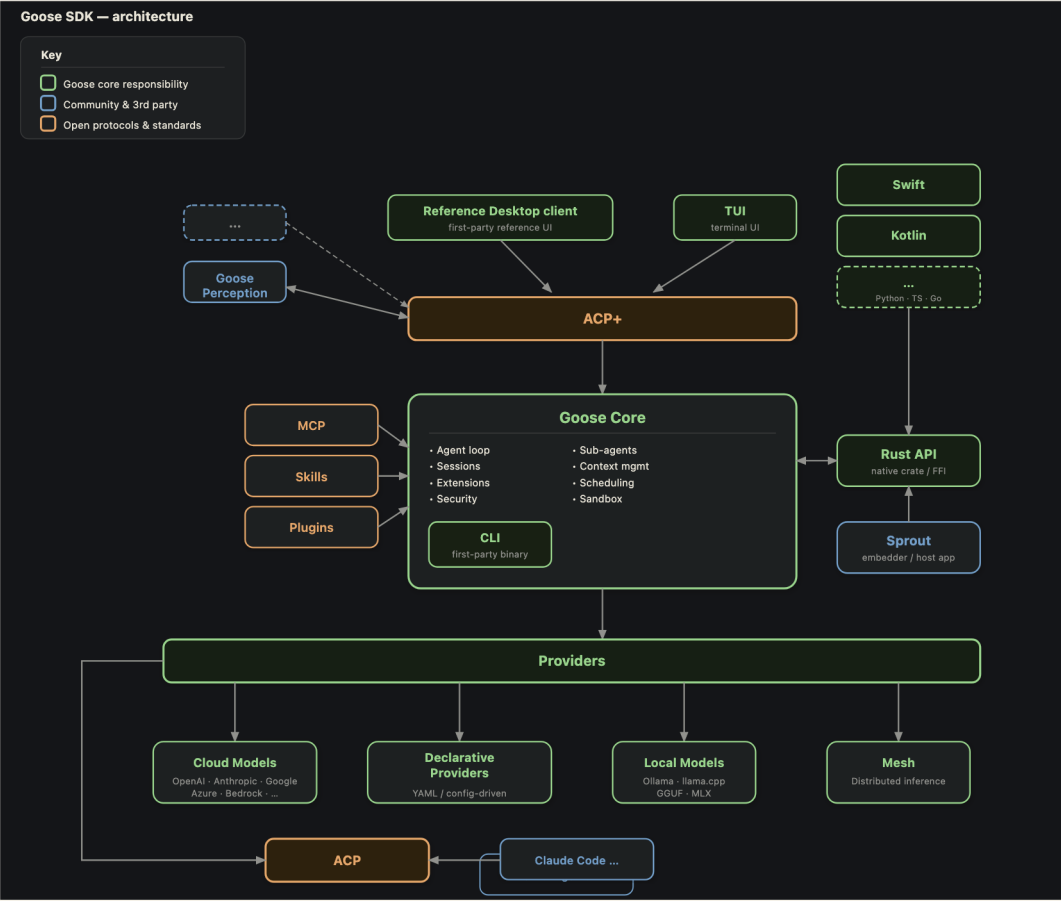

— A Rust API and language bindings open the kernel of the agent. Sprout shows what a third-party app looks like on top. —

Three *levels* of access.

Pick the altitude that fits your app. All three sit on the same Goose Core — same agent loop, same providers, same security model.

I. PROTOCOL

ACP — talk to a daemon

Run Goose as a long-lived process and speak ACP over a socket. Language-agnostic. Best for editors, IDEs, and other agents that want to *connect* rather than embed.

- Any language, any runtime
- Process isolation, swap versions
- Used by Claude Code & friends

II. IN-PROCESS

Rust API · FFI · bindings

Embed the kernel of the agent directly. The **Rust API** is the source of truth; **Swift**, **Kotlin**, and other bindings call into it via FFI. Lowest latency, full control.

- No daemon, no socket, no IPC
- Same crate the CLI ships with
- Mobile & desktop SDKs ride on this

III. APPS

Sit on top of either

Build an experience. The **Reference Desktop client** and **TUI** are first-party examples; **Sprout** is a third-party app embedding the Rust API as a crate.

- Pick ACP *or* in-process
- Ship your own UX, keep the engine
- Goose Perception → headless apps

*New in this evolution: **Rust API**, **language bindings**, and **Sprout** as the first third-party crate consumer.*

Build on the agent, *not around it.*

Three clients prove it works. Yours could be the fourth.

I. ONE BINARY, RUNS ANYWHERE

Compiled Rust. Brew, npm, apt, rpm, Docker, Windows MSI, curl. Daemon, child process, or CLI.

II. SECURITY, BUILT IN

Prompt-injection detection, tool-permission modes, malware checks, egress monitoring, sandboxed execution.

III. EXTEND, DON'T FORK

MCP + rMCP for tools. Skills for knowledge. Recipes for config. Hooks for policy. Sub-agents for parallelism.

IV. OPEN PROTOCOL

ACP is the standard. Goose's ACP+ extensions prove out in production, then get standardised.

Reference Desktop · *desktop*

Text TUI · *terminal*

goose_perception · *headless*

`brew install block-goose-cli` — or `npm`, `apt`, `docker`, `curl`...