SFA Mobile & DMS

Manager walkthrough
Process, business logic and code architecture

Prepared from your local project handbook. Covers the employee app, distributor portal, backend, Salesforce classes, triggers and their relationships.

Start with this document for your demonstration. The complete companion PDF includes every numbered code explanation from the handbook: 1048 files and 34,517 source lines.

This is documentation of the 26 October 2026 snapshot, not a new deployment or a guarantee that every runtime path is tested. The verification chapter distinguishes checks that passed from remaining limitations.

Internal project documentation. Do not publish source/configuration publicly.

Reading map

1. Start here: what this project actually is

2. Folder map and reading order

3. SFA: authentication, day planning and outlets

4. SFA: GPS, visit actions, order saving and checkout

5. DMS: login, session and refresh

6. DMS: primary order and scheme algorithm

7. DMS: receipt → inventory, and why approval is not stock

8. Secondary orders, returns, tickets and allocation

9. Reports, offline behavior and deployment boundaries

10. Salesforce standards applied and remaining review work

11. Manager questions: short answers to practise

12. Verification and change boundaries

Use the PDF bookmarks panel to jump directly to a topic. For a manager meeting, explain the process first; open the complete reference only when asked about a particular file or statement.

Start here: what this project actually is

This is one Salesforce data model used by two external clients: the **SFA employee mobile app** and the **DMS distributor portal/mobile client**. They share a Node/Express backend codebase. The Lightning components inside Salesforce are management screens; they are not the React Native mobile application.

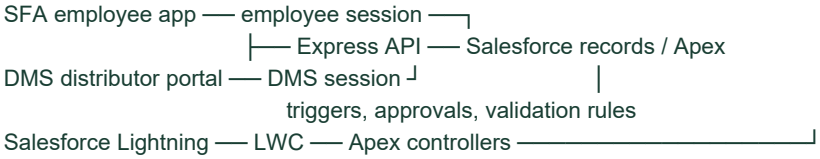

Manager introduction: “The employee app records field activity. Salesforce is the central record system. The distributor portal reads the distributor’s related transactions and sends validated commands back through the backend. Primary transactions are case-based; secondary orders are usually piece-based. Approval, receipt and inventory posting are different steps.”

Use the file explorer for a numbered explanation beside every included source line. The line notes explain syntax and local operations; these chapters explain the business flow. They are not a claim that every possible runtime path was tested. Source hashes and the coverage manifest identify the exact local snapshot.

Included: first-party Apex, triggers, LWC, backend, both client source trees, Salesforce XML metadata, tests, configuration and operational scripts. Excluded: dependencies, compiled bundles, APKs, images/binaries, .env credentials, caches, diagnostics, old backups, generated data exports, lockfiles and earlier documentation. Those are not additional application logic.

Folder map and reading order

Folder	Responsibility
force-app/main/default/classes	Apex controllers, trigger services, REST commands and unit tests.
force-app/main/default/triggers	Salesforce save-event dispatchers. Before events validate/change incoming values; after events handle relationships and totals.
force-app/main/default/lwc	Three Lightning bundles: beat outlet selection, monthly PJP planning and employee picture upload.
force-app/main/default/objects	Object/field definitions, formula fields, picklists, validation rules, list views, sharing reasons and relationships.
sales-rep-mobile/backend/src	HTTP endpoints, identity checks, Salesforce transport, documents, reports and mock/test dependencies.
sales-rep-mobile/mobile/src	Employee screens, reusable fields, local drafts, sessions and offline queues.
dms-mobile/src	DMS login, desktop portal shell, orders, returns, receipts, stock, reports and sync.
scripts and launcher files	Local operation, seed/backfill and deployment utilities. Reading these is safe; running seed/reset scripts changes data.

Read in this order: SFA App.tsx → LoginScreen → api/client → backend app.ts → SalesforceService; then StoreGateScreen → VisitScreen → checkout. For DMS: App.tsx → DmsApp → api.ts → dms/router.ts → transport.ts → DmsPortalApi. Finish with triggers, handlers, metadata and tests.

Naming trap: the older `Distributor__c` is used as an SFA sales-representative record. The actual DMS distributor is `DMS_Distributor__c`. `Retailer__c` is the outlet. Labels can differ from API names; do not rename API names just to make terminology look nicer.

SFA: authentication, day planning and outlets

1. App.tsx registers the navigation screens and starts queue flushing when connectivity returns. Login is the initial screen.

2. LoginScreen collects an email, requests a code and exchanges a valid code for an employee session. The HTTP client attaches its bearer token to protected requests.

3. backend app.ts exposes login before the employee-authentication middleware. The DMS router has its own authentication and is mounted separately. Do not treat a DMS token as an employee token.

4. findEmployee resolves an active employee. The backend supplies the actor identity; clients must not be allowed to select an arbitrary employee ID to impersonate.

5. Day and attendance endpoints record start/end activity. Beats/outlets are limited by allocations. A cached list is not a fresh Salesforce read.

6. BeatsScreen and StoresScreen navigate to StoreGateScreen with the selected outlet; StoreGate refreshes the outlet so old coordinates are not the only source.

PJP flow: pjpMonthlyPlanner calls SfaPhaseOnePjpController. currentEmployee finds the logged-in Salesforce user’s employee mapping. saveDraft validates dates and authorized beats, writes a draft PJP and its PJP_Selected_Beat junction records. submitPjp checks the reporting manager and prevents self-approval. decidePjp requires the configured approver and records decision audit fields.

After approval, PjpApproverTrigger invokes SfaPjpAllocationService. It collects all selected beats, falls back to the legacy single Beat lookup when needed, locks employees, finds active outlets and creates/reactivates employee-outlet allocations. The pair key prevents repeated creation in its lookup logic. Allocation failure is not silently ignored: it can roll back the approval transaction.

BeatOutletSelectorController loads active outlets from the beat’s geography, enforces a maximum of ten selections, removes deselected assignments and assigns selected outlets. OutletGeographyTrigger copies geography and refreshes the affected old/new beat counts. PJP approval is not the same as a product-order approval.

SFA: GPS, visit actions, order saving and checkout

1. StoreGateScreen requests foreground GPS permission on the native phone and obtains the current position. In the **web preview**, the code deliberately uses the outlet's Salesforce coordinates. A successful web preview does not verify real mobile GPS.

2. The backend validates distance against the configured allowed radius. The distance helper uses the Haversine formula: convert degrees to radians, compute angular distance on a sphere and multiply by Earth's radius in metres.

3. VisitScreen starts/restores a visit and loads products. It stores form state separately from saved visit data. useMemo derives product filters and order totals; useRef retains stable request IDs across renders.

4. Brand, sub-brand and alias are derived from the selected product. Changing the selected product/filter clears dependent selection state to avoid showing another product's scheme.

5. Save action for an order first writes a local draft, then stores the draft on the visit in Salesforce. **A draft is not a submitted Sales Order.** On recovery, submitted order items take precedence over an old draft.

6. Other actions map to Product_Return, Competitor_Activity, SFA_Ticket, Stock_Check and Asset_Survey records. The backend verifies the visit belongs to the employee. Some endpoints have different retry guarantees; do not assume all writes are equally idempotent.

7. Complete Visit submits order details and checks out. The backend checks for a previously saved order and restores it rather than blindly creating another one. Salesforce composite requests request all-or-none handling and inspect individual subresponses, not just the outer HTTP 200.

8. Document services build PDF/Excel summaries. Sharing/download/email is separate from saving the order. A document-generation error does not itself prove the order was not saved.

Order header: Sales_Order__c. Product details: Order_Item__c. Parent Product__c stores the primary product for normal layouts; it is not a replacement for child lines. Product configuration minimums, selected schemes, GST and server-side product data affect the final saved amount.

Important existing limitation: the /api/store/revisit route currently returns a synthetic result; it does not persist a Salesforce revisit. The generic /api/orders/:orderId/items response also needs implementation review. These are documented as gaps, not working features.

DMS: login, session and refresh

1. DmsApp reads the stored session and the snapshot/queue keyed by distributor ID. The desktop PortalFrame and mobile navigation display the same underlying state.

2. Request-code validates/normalizes the email. The backend requires exactly one active distributor match. It uses cryptographic random six-digit codes, stores only a digest, expires them after ten minutes and limits verification attempts.

3. Resend is limited to prevent abuse. The previous challenge is replaced only after the mail send action is accepted. The generic response avoids revealing whether an email exists.

4. Verify-code compares digests with timingSafeEqual, removes the accepted challenge and rechecks the active distributor before issuing an eight-hour DMS JWT.

5. Protected DMS routes verify the token’s audience and recheck the distributor record. The body’s distributor identity is not trusted as the actor.

6. sync sends queued commands, retains failures and then fetches overview/report data. A 400 validation error requires correction; a timeout/unreachable backend leaves the saved request for retry.

7. Foreground refresh is periodic (20 seconds); reports are refreshed less frequently (about one minute unless requested). This is polling, not an instantaneous streaming subscription.

8. Logout invalidates the local session and uses generation checks so an older in-flight response cannot repopulate the next account’s screen. Pending work remains scoped to the original distributor.

Email delivery distinction: emailSimple success means Salesforce accepted the action. It does not prove Gmail delivered the message. This project previously encountered Gmail DKIM rejection; code formatting does not solve sender-domain authentication. Request-code, verify-code and email delivery are three separate checkpoints.

The OTP/rate-limit maps are process memory. Restarting the backend invalidates outstanding codes. Production multi-instance hosting needs a shared expiring store and a correctly authenticated mail sender.

DMS: primary order and scheme algorithm

1. PrimaryOrderForm loads the product catalogue, positive case prices and product-specific pieces-per-case conversions. Missing setup must not be invented by the UI.

2. The distributor selects whole cases and an applicable Primary scheme. Review is a confirmation step, not a saved order.

3. The distributor router sends distributorPrimaryOrder. The SFA employee route sends primaryOrder and derives both employee and assigned distributor from the authenticated employee session.

4. DmsTransport posts to `/services/apexrest/dms/portal/`. DmsPortalApi requires the DMS_Trusted_Backend custom permission and locks the active distributor before dispatch.

5. DmsEmployeeTransactions validates 1-50 distinct lines, positive whole quantities and stable request keys. A payload hash distinguishes a retry from reuse of the same key for different details.

6. It reads product prices/conversions from Salesforce, creates a Draft header, inserts lines and submits the configured Salesforce approval process. The assigned company Distributor Officer is the approver; the client does not choose an arbitrary approver.

7. DmsPrimaryWorkflow checks submission prerequisites, snapshots conversions/prices and makes submitted lines immutable. DmsOfficerSharing maintains read shares for the assigned officer.

Scheme qualification: active, Sales_Channel = Primary, within date limits, linked to the selected product directly or through Scheme_Product, no outlet-only restriction, and matching/unrestricted distributor geography. “No scheme” can be correct configuration behavior.

```
complete buy blocks = floor(ordered cases / minimum cases)
discount = round(cases × case price × percent / 100 + blocks × fixed discount, 2)
free cases = blocks × scheme free cases
gift quantity = blocks × configured gift quantity
```

The discount cannot exceed the paid line value. Free cases can reference another active product and must use that product’s case conversion. The server validates this again; displaying a scheme on the screen is not authorization to apply it.

Illustration only: 3 cases at ₹918 gives ₹2,754 before tax. At 5% GST and no discount, the total is ₹2,891.70. If a case contains 72 pieces, 3 cases means 216 pieces. These numbers are not universal product settings.

DMS: receipt → inventory, and why approval is not stock

Draft order → Submitted → Officer Approved
↓ actual delivery
Review goods receipt → confirm → Salesforce atomic command
↓
Receipt header + line + inventory change → Received → refreshed portal snapshot

DmsPortalApi.receiveGoods first checks whether the request key has already saved this exact receipt. If so it returns the original ID. If the same key describes different details, it rejects it. It then validates paid/free kind, whole cases, batch and expiry.

The order line must belong to this distributor and an Approved order. The server sums earlier received quantities, compares them with the paid/free entitlement and rejects over-receipt. It locks matching inventory for the distributor/product/batch and requires the existing batch expiry to match.

In one transaction it inserts a Draft receipt, inserts its line, adds `received cases × pieces per case` to stock, and marks the receipt Received. The outer savepoint rolls back partial changes on failure. Paid receipt case cost subtracts the allocated discount per case; free goods have zero purchase cost.

The app keeps the queued command until the API returns a valid saved ID/status. It reloads overview and stock; “pending” is not a saved receipt. A disabled receive button can indicate an exhausted approved quantity, a busy sync or invalid input. Read the actual condition beside the button in DmsApp before diagnosing it.

Directly creating arbitrary receipt records through the Salesforce UI is not automatically equivalent to calling this posting service. The inventory update shown here belongs to receiveGoods. Do not claim an inventory trigger handles every possible manual edit.

Secondary orders, returns, tickets and allocation

Secondary orders: employees save outlet Sales_Order records through SFA. DmsSecondaryRouting derives DMS_Distributor from the outlet and rejects an inconsistent/inactive supplier. Newly routed Sales_Order records receive Approved status, decision notes and timestamp automatically. Returns remain Pending. The portal no longer presents order approval/rejection controls, but older server decision methods remain in the codebase; hiding buttons is not endpoint retirement.

Auto-approval is not an invoice, physical shipment or automatic inventory deduction. Read invoice/stock-posting code and metadata separately before claiming dispatch is automated.

Primary returns: employee entry references a received goods-receipt line. The server locks receipts, sums non-rejected returns, checks remaining received cases and validates Damaged/Expired/Delayed Delivery/No Demand/Other. Other requires notes. It snapshots original receipt values and submits the company-officer return approval process. Primary and secondary return views are distinct in DMS.

Secondary returns: Product_Return records originate from outlet visits, normally in pieces. The outlet-to-distributor relationship routes them into DMS for the distributor's decision. Do not confuse an employee return with the distributor's own company-level return.

Tickets: DMS_Support_Ticket is distributor support, separate from outlet SFA_Ticket. DmsTicketRules stamps Open/Officer/Owner on creation. Open → In Progress or Rejected; In Progress → Closed or Rejected. Terminal decisions need resolution text. Only the assigned officer or DMS_Manage_Tickets permission can change the status.

Round-robin: DmsEmployeeAllocator selects active distributors ordered by Allocation_Order, locks the persistent allocation-state record, assigns each unassigned employee to the next distributor and wraps to the first. The cursor and employee changes commit together. Missing state is a configuration error; no active pool leaves allocation unchanged. Existing employee assignments are not randomly overwritten.

Discontinued: the lifecycle handler forces Active false when Discontinued is selected. Clearing the checkbox does not silently reactivate the login. History remains.

Reports, offline behavior and deployment boundaries

dashboard.ts collects distributor-scoped activity. reports.ts queries the full paginated record sets and calculates periods in Asia/Kolkata. Booked secondary sales are Submitted/Fulfilled orders excluding distributor rejection; this is not invoiced revenue or sales net of returns. Product breakdown uses line values while headers may include tax.

- Sales achievement = booked sales / configured target. Missing target is represented as unavailable, not a false 0% achievement. Web DMS hides sales-vs-target; native rendering retains the relevant report branch.

- Beat productivity distinguishes planned, visited and productive outlets. A productive outlet has a qualifying visit linked to an order.

- Outlet coverage counts active buyers against active assigned outlets. A visit alone is not necessarily a buyer.

- Stock metrics distinguish on-hand, available, low stock, expiry and no recent movement.

- Purchased-vs-sold uses posted receipt/invoice data; an approved purchase order alone is not purchased stock.

DMS session tokens use SecureStore on native and AsyncStorage on web. Snapshot and queue keys include distributor ID. SFA has a generic queue and a separate primary queue; the generic queue key is global and should receive an account-isolation/concurrency review. Offline support is limited to cached information and implemented queued actions. Authentication and uncached data still need a connection.

DMS local web is normally port 8082, DMS backend 4001 via its launcher, and SFA commonly 8081/4000. DMS api.ts has a web fallback of 4000, so the launcher/build environment must set the DMS URL correctly. On a phone, localhost means the phone, not the computer.

Start-DmsLocal builds/starts local services; Keep-DmsLocalRunning checks the ports and restarts missing processes; Open-DmsPortal launches the page; Install-DmsAutoStart installs per-user shortcuts. These do not make a laptop into permanent cloud hosting. Sleep/shutdown, expired Salesforce authorization, unavailable internet or email-provider rejection still affect the service.

Salesforce standards applied and remaining review work

This pass improves maintainability, not provenance: readable names, formatting and comments do not make AI-assisted code “human-authored.” No artificial mistakes or authorship claims were added.

- Consistent four-space Apex formatting and a pinned formatter with debug-check.

- Three thin triggers now delegate lifecycle, survey and target-key rules to named handlers with descriptive variables.

- Handler sharing choices explicitly preserve system-trigger behavior; the survey still checks the actual assigned officer.

- Added focused handler tests for a 200-row batch, one-query survey validation and historical-officer preservation.

- Repaired local missing semicolon/closing braces. Repaired legacy REST compilation issues without changing its JSON envelope: Exception suffix, void response serialization and an approval variable that shadowed the Approval type.

- Formatted first-party TypeScript/TSX and LWC without changing API names or intended logic. One test file was deliberately excluded because the formatter reported an unstable layout.

Not a complete security certification. Remaining review items:

- Employee__c still has two triggers (allocation and invitation). Salesforce does not promise their relative execution order. Consolidation requires a separately reviewed deployment; merely deleting a local trigger would not delete it from the org.

- with sharing governs record visibility, not CRUD/FLS. Older Aura controllers and system-mode paths need endpoint-by-endpoint permission review before production.

- The current portal API has a trusted-backend permission guard; the legacy DmsTransactionApi does not use that same guard. Do not expose the legacy endpoint to distributor users.

- Older PjpPlannerController.decidePlan does not contain the explicit assigned-approver check found in SfaPhaseOnePjpController.decidePjp. The retained LWC imports the latter; review access to the legacy controller separately.

- Invitation email results use partial-success sending without fully reporting all results; SfaSalesRepresentativeInvitationService escapes quotes, not full HTML. Localhost and pinned APK invitation URLs need environment configuration.

- Generic SFA queue dependency/concurrency behavior, broad CORS, remaining any types and large controller files merit focused follow-up work with tests.

- Deployment tests, object permissions, integration-user least privilege, sender authentication and device testing are separate checks. See the verification section for what actually ran.

References: Salesforce bulk trigger guidance; Salesforce Apex security; Apex formatter and debug-check. The local standards document is also retained.

Manager questions: short answers to practise

Why use a backend instead of putting Salesforce credentials in the APK?

The backend holds the integration credentials and applies employee/distributor scope. The phone receives an application session, not the org credential.

Why are there primary and secondary orders?

Primary is company-to-distributor in cases with company-officer approval. Secondary is distributor-to-outlet, generally in pieces, captured by employees and automatically approved under the current routing rule.

Why use Map and Set in Apex?

Set collects unique IDs; Map looks up related records without querying for each row. The handler queries the batch once and processes it in memory.

Why FOR UPDATE?

It locks records during decisions that must be serialized, such as allocation cursors, receipt quantities and inventory posting. It prevents two concurrent requests using the same old balance.

What is idempotency?

Retrying the same stable request returns the saved result rather than creating a duplicate. The payload must match; a new business operation needs a new key.

Why is a record visible in Salesforce but not in DMS?

Check the signed-in distributor, lookup relationships, status/query filters, permissions and last successful snapshot refresh. Do not immediately create another record.

Why not add stock when the officer approves?

Approval authorizes the purchase. Stock represents goods actually received; receiveGoods posts the receipt and pieces together.

Why does a scheme not appear?

Check Primary channel, active flag, dates, product linkage, geography, outlet-only restriction and case minimum. A secondary scheme is not automatically a valid primary scheme.

Does HTTP 200 mean everything saved?

No. Inspect the success envelope and Salesforce composite subresponses. The transport rejects invalid IDs/statuses and returned errors.

What is before versus after trigger?

Before changes the incoming record or adds validation errors without separate DML on it. After has saved IDs for related records, shares and totals.

Does with sharing enforce field security?

No. CRUD/FLS needs separate enforcement or a deliberate, documented trusted-system design.

Can I promise zero errors or always-online localhost?

No. Explain tested paths and dependencies. Local services need the computer; production needs suitable hosting, persistent state, monitoring, authenticated email and permissions.

Demo order: show distributor/employee/outlet relationships in Salesforce → sign into the correct client → show fresh catalogue and stock → place/review a primary order → show Salesforce header and product lines → officer decision → receive an approved line → show saved receipt and refreshed stock → show SFA secondary activity in DMS → show a return/ticket → explain sync status. Do not approve or create real transactions only to illustrate the guide.

Verification and change boundaries

Check	Observed result on 26 October 2026
Salesforce check-only deployment	0AfjV000004xhxuSAA · Succeeded · 50 tests completed, 0 failures. Classes and triggers validated against sfaNewOrg. Check-only: no deployed code change.
Backend	39 tests passed; 8 skipped; TypeScript build passed. Local fixtures/mocks, not end-to-end email delivery.
SFA mobile	26 tests passed; TypeScript check passed.
DMS	UI, desktop/native navigation, logout, account-isolation and rejected-receipt correction scripts passed; TypeScript check passed. No real network calls in UI scripts.
Formatter	Apex debug-check passed before write. TS/LWC debug-check passed except visitRecovery.test.ts (formatter layout instability); that test was left unchanged.

Backups: backups/code-readability-20261026. No actual metadata deployment, record creation, approval, email sending, APK release or Git push was performed for this explanation task. Newly added handler classes/trigger dispatch changes must be deployed together after review.

Runtime code changes were limited to extracting three existing trigger rules and repairing the identified Apex compilation errors. Other changes are formatting. No wholesale claim of production/security compliance is made.

Complete numbered code reference

All included first-party source and metadata from the existing handbook. Use the bookmarks panel to select an area and file. Each source row retains its original local line number. Long code lines wrap inside the source column; wrapping does not create a new source line.

How to read: Code is on the left; the reading note is on the right. Multi-line statements must be read together. Generated line notes explain syntax/local operations; the preceding manager chapters explain business intent. They are not a separate manual correctness proof for every line.

Excluded from the original snapshot: credentials, installed dependencies, compiled output/APKs, binaries, old backups and generated data exports. These PDFs do not change or deploy any application code.

Source coverage: 1048 files / 34,517 lines. The appended pages use landscape orientation for code readability.

Apex classes & tests

74 files. Expand this area in the PDF bookmarks to jump to an individual file.

force-app/main/default/classes/BeatOutletSelectorController.cls

Loads active geography-matching outlets and saves a maximum of ten beat assignments, clearing removed selections. Called by beatOutletSelector LWC.

135 numbered source lines | SHA-256 8eff30c2a09c14f62bafda85c3e513e9ebd4b480b1d94cfe4442c62d86e34407

Line	Source code	Explanation / reading note
1	`public with sharing class BeatOutletSelectorController {`	Declares a class/type: public with sharing class BeatOutletSelectorController {. Uses record sharing, which does not alone enforce field/object permissions.
2	`    public class OutletOption {`	Declares a class/type: public class OutletOption {. Members below hold behavior and/or state.
3	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
4	`        public Id value { get; set; }`	Continues the surrounding declaration/expression or text: public Id value { get; set; }. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
5	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
6	`        public String label { get; set; }`	Continues the surrounding declaration/expression or text: public String label { get; set; }. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
7		Blank line separating logical sections; no executable operation.
8	`        public OutletOption(Retailer__c outlet) {`	Declares a callable function/method: public OutletOption(Retailer__c outlet) {. Parameters supply its inputs; the following block implements the operation.
9	`            value = outlet.Id;`	Assigns the right-hand expression to the named variable/property: value = outlet.Id;. This is in-memory unless it is later persisted by an explicit call.
10	`            label = outlet.Name;`	Assigns the right-hand expression to the named variable/property: label = outlet.Name;. This is in-memory unless it is later persisted by an explicit call.
11	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
12	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
13		Blank line separating logical sections; no executable operation.
14	`public class SelectorData {`	Declares a class/type: public class SelectorData {. Members below hold behavior and/or state.
15	`@AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
16	`public String beatName { get; set; }`	Continues the surrounding declaration/expression or text: public String beatName { get; set; }. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
17	`@AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
18	`public String geographyName { get; set; }`	Continues the surrounding declaration/expression or text: public String geographyName { get; set; }. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
19	`@AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
20	`public List<OutletOption> options { get; set; }`	Continues the surrounding declaration/expression or text: public List<OutletOption> options { get; set; }. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
21	`@AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
22	`public List<Id> selectedOutletIds { get; set; }`	Continues the surrounding declaration/expression or text: public List<Id> selectedOutletIds { get; set; }. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
23	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24		Blank line separating logical sections; no executable operation.
25	`@AuraEnabled(cacheable=true)`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.

Line	Source code	Explanation / reading note
26	`    public static SelectorData getSelectorData(Id beatId) {`	Declares a callable function/method: public static SelectorData getSelectorData(Id beatId) {. Parameters supply its inputs; the following block implements the operation.
27	`        if (beatId == null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (beatId == null) {.
28	`            throw new AuraHandledException('A Beat record is required.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('A Beat record is required.');. The caller/catch block decides how it is reported.
29	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30		Blank line separating logical sections; no executable operation.
31	`        Beat__c beat = [`	Assigns the right-hand expression to the named variable/property: Beat__c beat = [. This is in-memory unless it is later persisted by an explicit call.
32	`            SELECT Name, Geography__c, Geography__r.Name`	Selects these Salesforce fields/aggregates: Name, Geography__c, Geography__r.Name. Query results are used in the surrounding assignment or loop.
33	`            FROM Beat__c`	Chooses the Salesforce object/subquery source: FROM Beat__c.
34	`            WHERE Id = :beatId`	Adds a query/filter condition: WHERE Id = :beatId. The complete condition determines which records are included.
35	`            LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
36	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
37	`        if (beat.Geography__c == null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (beat.Geography__c == null) {.
38	`            throw new AuraHandledException(`	Stops this execution path with a validation/error exception: throw new AuraHandledException(. The caller/catch block decides how it is reported.
39	`                'Select a geography on the Beat before choosing outlets.'`	Continues the surrounding declaration/expression or text: 'Select a geography on the Beat before choosing outlets.'. Read it with the preceding opening statement (throw new AuraHandledException(); it is not a standalone business operation.
40	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
41	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42		Blank line separating logical sections; no executable operation.
43	`List<Retailer__c> availableOutlets = [`	Declares/initializes local data used by the surrounding operation: List<Retailer__c> availableOutlets = [. Collection contents and assignments below determine its purpose.
44	`SELECT Id, Name, Beat__c`	Selects these Salesforce fields/aggregates: Id, Name, Beat__c. Query results are used in the surrounding assignment or loop.
45	`FROM Retailer__c`	Chooses the Salesforce object/subquery source: FROM Retailer__c.
46	`WHERE Geography__c = :beat.Geography__c AND Active__c = TRUE`	Adds a query/filter condition: WHERE Geography__c = :beat.Geography__c AND Active__c = TRUE. The complete condition determines which records are included.
47	`ORDER BY Name`	Controls query sorting, grouping or result count: ORDER BY Name.
48	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49		Blank line separating logical sections; no executable operation.
50	`SelectorData result = new SelectorData();`	Assigns the right-hand expression to the named variable/property: SelectorData result = new SelectorData();. This is in-memory unless it is later persisted by an explicit call.
51	`result.beatName = beat.Name;`	Assigns the right-hand expression to the named variable/property: result.beatName = beat.Name;. This is in-memory unless it is later persisted by an explicit call.
52	`result.geographyName = beat.Geography__r.Name;`	Assigns the right-hand expression to the named variable/property: result.geographyName = beat.Geography__r.Name;. This is in-memory unless it is later persisted by an explicit call.
53	`result.options = new List<OutletOption>();`	Assigns the right-hand expression to the named variable/property: result.options = new List<OutletOption>();. This is in-memory unless it is later persisted by an explicit call.
54	`result.selectedOutletIds = new List<Id>();`	Assigns the right-hand expression to the named variable/property: result.selectedOutletIds = new List<Id>();. This is in-memory unless it is later persisted by an explicit call.
55		Blank line separating logical sections; no executable operation.
56	`for (Retailer__c outlet : availableOutlets) {`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c outlet : availableOutlets) {. Check where queries/writes occur relative to the loop.

Line	Source code	Explanation / reading note
57	`            result.options.add(new OutletOption(outlet));`	Calls the named method: result.options.add(new OutletOption(outlet));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
58	`            if (outlet.Beat__c == beatId) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (outlet.Beat__c == beatId) {.
59	`                result.selectedOutletIds.add(outlet.Id);`	Calls the named method: result.selectedOutletIds.add(outlet.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
60	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
61	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
62	`        return result;`	Returns result to the caller (or begins returned UI markup) and ends this execution path.
63	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
64		Blank line separating logical sections; no executable operation.
65	`    @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
66	`    public static Integer saveSelection(Id beatId, List<Id> selectedOutletIds) {`	Declares a callable function/method: public static Integer saveSelection(Id beatId, List<Id> selectedOutletIds) {. Parameters supply its inputs; the following block implements the operation.
67	`        if (beatId == null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (beatId == null) {.
68	`            throw new AuraHandledException('A Beat record is required.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('A Beat record is required.');. The caller/catch block decides how it is reported.
69	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
70		Blank line separating logical sections; no executable operation.
71	`        Set<Id> selectedIds = selectedOutletIds == null`	Declares/initializes local data used by the surrounding operation: Set<Id> selectedIds = selectedOutletIds == null. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
72	`? new Set<Id>()`	Continues the surrounding declaration/expression or text: ? new Set<Id>(). Read it with the preceding opening statement (Set<Id> selectedIds = selectedOutletIds == null); it is not a standalone business operation.
73	`: new Set<Id>(selectedOutletIds);`	Continues the surrounding declaration/expression or text: : new Set<Id>(selectedOutletIds);. Read it with the preceding opening statement (? new Set<Id>()); it is not a standalone business operation.
74	`if (selectedIds.size() > 10) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (selectedIds.size() > 10) {.
75	`throw new AuraHandledException('A Beat can contain a maximum of 10 outlets.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('A Beat can contain a maximum of 10 outlets.');. The caller/catch block decides how it is reported.
76	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
77		Blank line separating logical sections; no executable operation.
78	`Beat__c beat = [`	Assigns the right-hand expression to the named variable/property: Beat__c beat = [. This is in-memory unless it is later persisted by an explicit call.
79	`SELECT Geography__c`	Selects these Salesforce fields/aggregates: Geography__c. Query results are used in the surrounding assignment or loop.
80	`FROM Beat__c`	Chooses the Salesforce object/subquery source: FROM Beat__c.
81	`WHERE Id = :beatId`	Adds a query/filter condition: WHERE Id = :beatId. The complete condition determines which records are included.
82	`LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
83	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
84	`if (beat.Geography__c == null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (beat.Geography__c == null) {.
85	`throw new AuraHandledException(`	Stops this execution path with a validation/error exception: throw new AuraHandledException(. The caller/catch block decides how it is reported.

Line	Source code	Explanation / reading note
86	`'Select a geography on the Beat before choosing outlets.'`	Continues the surrounding declaration/expression or text: 'Select a geography on the Beat before choosing outlets.'. Read it with the preceding opening statement (throw new AuraHandledException(); it is not a standalone business operation.
87	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
88	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
89		Blank line separating logical sections; no executable operation.
90	`Map<Id, Retailer__c> selectedOutlets = new Map<Id, Retailer__c>();`	Declares/initializes local data used by the surrounding operation: Map<Id, Retailer__c> selectedOutlets = new Map<Id, Retailer__c>();. Collection contents and assignments below determine its purpose.
91	`if (!selectedIds.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!selectedIds.isEmpty()) {.
92	`selectedOutlets = new Map<Id, Retailer__c>(`	Assigns the right-hand expression to the named variable/property: selectedOutlets = new Map<Id, Retailer__c>(. This is in-memory unless it is later persisted by an explicit call.
93	`[`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (selectedOutlets = new Map<Id, Retailer__c>(); it is not a standalone business operation.
94	`SELECT Id, Geography__c, Active__c, Beat__c`	Selects these Salesforce fields/aggregates: Id, Geography__c, Active__c, Beat__c. Query results are used in the surrounding assignment or loop.
95	`FROM Retailer__c`	Chooses the Salesforce object/subquery source: FROM Retailer__c.
96	`WHERE Id IN :selectedIds`	Adds a query/filter condition: WHERE Id IN :selectedIds. The complete condition determines which records are included.
97	`]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
98	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
99	`if (selectedOutlets.size() != selectedIds.size()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (selectedOutlets.size() != selectedIds.size()) {.

Line	Source code	Explanation / reading note
100	`throw new AuraHandledException('One or more selected outlets could not be found.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('One or more selected outlets could not be found.');. The caller/catch block decides how it is reported.
101	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
102	`for (Retailer__c outlet : selectedOutlets.values()) {`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c outlet : selectedOutlets.values()) {. Check where queries/writes occur relative to the loop.
103	`if (!outlet.Active__c || outlet.Geography__c != beat.Geography__c) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!outlet.Active__c || outlet.Geography__c != beat.Geography__c) {.
104	`throw new AuraHandledException(`	Stops this execution path with a validation/error exception: throw new AuraHandledException(. The caller/catch block decides how it is reported.
105	`'Only active outlets from the Beat geography can be selected.'`	Continues the surrounding declaration/expression or text: 'Only active outlets from the Beat geography can be selected.'. Read it with the preceding opening statement (throw new AuraHandledException(); it is not a standalone business operation.
106	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
107	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
108	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
109	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
110		Blank line separating logical sections; no executable operation.
111	`Map<Id, Retailer__c> recordsToUpdate = new Map<Id, Retailer__c>();`	Declares/initializes local data used by the surrounding operation: Map<Id, Retailer__c> recordsToUpdate = new Map<Id, Retailer__c>();. Collection contents and assignments below determine its purpose.
112	`for (Retailer__c currentOutlet : [`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c currentOutlet : [. Check where queries/writes occur relative to the loop.

Line	Source code	Explanation / reading note
113	`            SELECT Id, Beat__c`	Selects these Salesforce fields/aggregates: Id, Beat__c. Query results are used in the surrounding assignment or loop.
114	`            FROM Retailer__c`	Chooses the Salesforce object/subquery source: FROM Retailer__c.
115	`            WHERE Beat__c = :beatId`	Adds a query/filter condition: WHERE Beat__c = :beatId. The complete condition determines which records are included.
116	`        ]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (WHERE Beat__c = :beatId); it is not a standalone business operation.
117	`            if (!selectedIds.contains(currentOutlet.Id)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!selectedIds.contains(currentOutlet.Id)) {.
118	`                currentOutlet.Beat__c = null;`	Assigns the right-hand expression to the named variable/property: currentOutlet.Beat__c = null;. This is in-memory unless it is later persisted by an explicit call.
119	`                recordsToUpdate.put(currentOutlet.Id, currentOutlet);`	Calls the named method: recordsToUpdate.put(currentOutlet.Id, currentOutlet);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
120	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
121	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
122		Blank line separating logical sections; no executable operation.
123	`        for (Retailer__c selectedOutlet : selectedOutlets.values()) {`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c selectedOutlet : selectedOutlets.values()) {. Check where queries/writes occur relative to the loop.
124	`            if (selectedOutlet.Beat__c != beatId) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (selectedOutlet.Beat__c != beatId) {.
125	`                selectedOutlet.Beat__c = beatId;`	Assigns the right-hand expression to the named variable/property: selectedOutlet.Beat__c = beatId;. This is in-memory unless it is later persisted by an explicit call.
126	`                recordsToUpdate.put(selectedOutlet.Id, selectedOutlet);`	Calls the named method: recordsToUpdate.put(selectedOutlet.Id, selectedOutlet);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
127	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
128	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
129		Blank line separating logical sections; no executable operation.
130	`        if (!recordsToUpdate.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!recordsToUpdate.isEmpty()) {.
131	`            update recordsToUpdate.values();`	Performs Salesforce DML: update recordsToUpdate.values();. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
132	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
133	`        return selectedIds.size();`	Returns selectedIds.size() to the caller (or begins returned UI markup) and ends this execution path.
134	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
135	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/BeatOutletSelectorController.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 991f1ca647a6d030b8f1828ad18737c5e94ecbe63a944a972fd685c6ab98f84a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexClass block; child elements specify its configuration.
3	`    <apiVersion>65.0</apiVersion>`	Sets Salesforce API version used for this component to 65.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexClass>`	Closes the ApexClass configuration block.

force-app/main/default/classes/BeatOutletSelectorControllerTest.cls

Regression tests for BeatOutletSelectorController. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

94 numbered source lines | SHA-256 658a4edc61e4cf55e0f987bbe2fe2456d9c42a1f818304859e880938c106ac54

Line	Source code	Explanation / reading note
1	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
2	`private class BeatOutletSelectorControllerTest {`	Declares a class/type: private class BeatOutletSelectorControllerTest {. Members below hold behavior and/or state.
3	`    @TestSetup`	Continues the surrounding declaration/expression or text: @TestSetup. Read it with the preceding opening statement (private class BeatOutletSelectorControllerTest {); it is not a standalone business operation.
4	`    static void createData() {`	Continues the surrounding declaration/expression or text: static void createData() {. Read it with the preceding opening statement (@TestSetup); it is not a standalone business operation.
5	`        Geography__c mgRoad = new Geography__c(`	Assigns the right-hand expression to the named variable/property: Geography__c mgRoad = new Geography__c(. This is in-memory unless it is later persisted by an explicit call.
6	`            Name = 'MG Road Geography',`	Assigns the right-hand expression to the named variable/property: Name = 'MG Road Geography',. This is in-memory unless it is later persisted by an explicit call.
7	`            Nation__c = 'India',`	Assigns the right-hand expression to the named variable/property: Nation__c = 'India',. This is in-memory unless it is later persisted by an explicit call.
8	`            State__c = 'Karnataka',`	Assigns the right-hand expression to the named variable/property: State__c = 'Karnataka',. This is in-memory unless it is later persisted by an explicit call.
9	`            District__c = 'Bengaluru Urban'`	Assigns the right-hand expression to the named variable/property: District__c = 'Bengaluru Urban'. This is in-memory unless it is later persisted by an explicit call.
10	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
11	`        Geography__c whitefield = new Geography__c(`	Assigns the right-hand expression to the named variable/property: Geography__c whitefield = new Geography__c(. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
12	`Name = 'Whitefield Geography',`	Assigns the right-hand expression to the named variable/property: Name = 'Whitefield Geography',. This is in-memory unless it is later persisted by an explicit call.
13	`Nation__c = 'India',`	Assigns the right-hand expression to the named variable/property: Nation__c = 'India',. This is in-memory unless it is later persisted by an explicit call.
14	`State__c = 'Karnataka',`	Assigns the right-hand expression to the named variable/property: State__c = 'Karnataka',. This is in-memory unless it is later persisted by an explicit call.
15	`District__c = 'Bengaluru Urban'`	Assigns the right-hand expression to the named variable/property: District__c = 'Bengaluru Urban'. This is in-memory unless it is later persisted by an explicit call.
16	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`insert new List<Geography__c>{ mgRoad, whitefield };`	Performs Salesforce DML: insert new List<Geography__c>{ mgRoad, whitefield };. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
18		Blank line separating logical sections; no executable operation.
19	`Beat__c beat = new Beat__c(`	Assigns the right-hand expression to the named variable/property: Beat__c beat = new Beat__c(. This is in-memory unless it is later persisted by an explicit call.
20	`Name = 'MG Road Test Beat',`	Assigns the right-hand expression to the named variable/property: Name = 'MG Road Test Beat',. This is in-memory unless it is later persisted by an explicit call.
21	`Geography__c = mgRoad.Id,`	Assigns the right-hand expression to the named variable/property: Geography__c = mgRoad.Id,. This is in-memory unless it is later persisted by an explicit call.
22	`Active__c = false`	Assigns the right-hand expression to the named variable/property: Active__c = false. This is in-memory unless it is later persisted by an explicit call.
23	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24	`insert beat;`	Performs Salesforce DML: insert beat;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
25		Blank line separating logical sections; no executable operation.
26	`List<Retailer__c> outlets = new List<Retailer__c>();`	Declares/initializes local data used by the surrounding operation: List<Retailer__c> outlets = new List<Retailer__c>();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
27	`        for (Integer index = 1; index <= 11; index++) {`	Repeats work over the specified records/items or while this condition holds: for (Integer index = 1; index <= 11; index++) {. Check where queries/writes occur relative to the loop.
28	`            outlets.add(`	Calls the named method: outlets.add(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
29	`                new Retailer__c(`	Continues the surrounding declaration/expression or text: new Retailer__c(. Read it with the preceding opening statement (outlets.add(); it is not a standalone business operation.
30	`                    Name = 'MG Outlet ' + index,`	Assigns the right-hand expression to the named variable/property: Name = 'MG Outlet ' + index,. This is in-memory unless it is later persisted by an explicit call.
31	`                    Geography__c = mgRoad.Id,`	Assigns the right-hand expression to the named variable/property: Geography__c = mgRoad.Id,. This is in-memory unless it is later persisted by an explicit call.
32	`                    Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.
33	`                )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
36	`        outlets.add(`	Calls the named method: outlets.add(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
37	`            new Retailer__c(`	Continues the surrounding declaration/expression or text: new Retailer__c(. Read it with the preceding opening statement (outlets.add(); it is not a standalone business operation.
38	`                Name = 'Whitefield Outlet',`	Assigns the right-hand expression to the named variable/property: Name = 'Whitefield Outlet',. This is in-memory unless it is later persisted by an explicit call.
39	`                Geography__c = whitefield.Id,`	Assigns the right-hand expression to the named variable/property: Geography__c = whitefield.Id,. This is in-memory unless it is later persisted by an explicit call.
40	`                Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
41	`            )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43	`        insert outlets;`	Performs Salesforce DML: insert outlets;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
44	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
45		Blank line separating logical sections; no executable operation.
46	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
47	`    static void filtersByGeographyAndMaintainsTheCount() {`	Continues the surrounding declaration/expression or text: static void filtersByGeographyAndMaintainsTheCount() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
48	`        Beat__c beat = [SELECT Id FROM Beat__c WHERE Name = 'MG Road Test Beat'];`	Assigns the right-hand expression to the named variable/property: Beat__c beat = [SELECT Id FROM Beat__c WHERE Name = 'MG Road Test Beat']; . This is in-memory unless it is later persisted by an explicit call.
49	`        List<Retailer__c> mgOutlets = [`	Declares/initializes local data used by the surrounding operation: List<Retailer__c> mgOutlets = [. Collection contents and assignments below determine its purpose.
50	`            SELECT Id`	Selects these Salesforce fields/aggregates: Id. Query results are used in the surrounding assignment or loop.
51	`            FROM Retailer__c`	Chooses the Salesforce object/subquery source: FROM Retailer__c.
52	`            WHERE Geography__r.Name = 'MG Road Geography'`	Adds a query/filter condition: WHERE Geography__r.Name = 'MG Road Geography'. The complete condition determines which records are included.
53	`            ORDER BY Name`	Controls query sorting, grouping or result count: ORDER BY Name.
54	`            LIMIT 10`	Controls query sorting, grouping or result count: LIMIT 10.
55	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
56	`        List<Id> outletIds = new List<Id>();`	Declares/initializes local data used by the surrounding operation: List<Id> outletIds = new List<Id>();. Collection contents and assignments below determine its purpose.
57	`        for (Retailer__c outlet : mgOutlets)`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c outlet : mgOutlets). Check where queries/writes occur relative to the loop.
58	`            outletIds.add(outlet.Id);`	Calls the named method: outletIds.add(outlet.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
59		Blank line separating logical sections; no executable operation.
60	`        Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
61	`        BeatOutletSelectorController.SelectorData data = BeatOutletSelectorController.getSelectorData(`	Calls the named method: BeatOutletSelectorController.SelectorData data = BeatOutletSelectorController.getSelectorData(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
62	`            beat.Id`	Continues the surrounding declaration/expression or text: beat.Id. Read it with the preceding opening statement (BeatOutletSelectorController.SelectorData data = BeatOutletSelectorController.getSelectorData(); it is not a standalone business operation.
63	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
64	`        Integer savedCount = BeatOutletSelectorController.saveSelection(beat.Id, outletIds);`	Declares/initializes local data used by the surrounding operation: Integer savedCount = BeatOutletSelectorController.saveSelection(beat.Id, outletIds);. Collection contents and assignments below determine its purpose.
65	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
66		Blank line separating logical sections; no executable operation.
67	`        System.assertEquals(11, data.options.size(), 'Only MG Road outlets should be available.');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(11, data.options.size(), 'Only MG Road outlets should be available.');. A mismatch fails the test.
68	`        System.assertEquals(10, savedCount);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(10, savedCount);. A mismatch fails the test.

Line	Source code	Explanation / reading note
69	`Beat__c refreshedBeat = [SELECT Outlet_Count__c FROM Beat__c WHERE Id = :beat.Id];`	Assigns the right-hand expression to the named variable/property: Beat__c refreshedBeat = [SELECT Outlet_Count__c FROM Beat__c WHERE Id = :beat.Id];. This is in-memory unless it is later persisted by an explicit call.
70	`System.assertEquals(10, refreshedBeat.Outlet_Count__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(10, refreshedBeat.Outlet_Count__c);. A mismatch fails the test.
71	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
72		Blank line separating logical sections; no executable operation.
73	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
74	`static void rejectsMoreThanTenOutlets() {`	Continues the surrounding declaration/expression or text: static void rejectsMoreThanTenOutlets() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
75	`Beat__c beat = [SELECT Id FROM Beat__c WHERE Name = 'MG Road Test Beat'];`	Assigns the right-hand expression to the named variable/property: Beat__c beat = [SELECT Id FROM Beat__c WHERE Name = 'MG Road Test Beat'];. This is in-memory unless it is later persisted by an explicit call.
76	`List<Id> outletIds = new List<Id>();`	Declares/initializes local data used by the surrounding operation: List<Id> outletIds = new List<Id>();. Collection contents and assignments below determine its purpose.
77	`for (Retailer__c outlet : [`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c outlet : [. Check where queries/writes occur relative to the loop.
78	`SELECT Id`	Selects these Salesforce fields/aggregates: Id. Query results are used in the surrounding assignment or loop.
79	`FROM Retailer__c`	Chooses the Salesforce object/subquery source: FROM Retailer__c.
80	`WHERE Geography__r.Name = 'MG Road Geography'`	Adds a query/filter condition: WHERE Geography__r.Name = 'MG Road Geography'. The complete condition determines which records are included.
81	`])`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
82	`outletIds.add(outlet.Id);`	Calls the named method: outletIds.add(outlet.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
83		Blank line separating logical sections; no executable operation.
84	`        Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
85	`        Boolean limitWasEnforced = false;`	Declares/initializes local data used by the surrounding operation: Boolean limitWasEnforced = false;. Collection contents and assignments below determine its purpose.
86	`        try {`	Starts operations whose failure is handled by the following catch/finally blocks.
87	`            BeatOutletSelectorController.saveSelection(beat.Id, outletIds);`	Calls the named method: BeatOutletSelectorController.saveSelection(beat.Id, outletIds);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
88	`        } catch (AuraHandledException expected) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
89	`            limitWasEnforced = true;`	Assigns the right-hand expression to the named variable/property: limitWasEnforced = true;. This is in-memory unless it is later persisted by an explicit call.
90	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
91	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
92	`        System.assert(limitWasEnforced, 'Expected the maximum outlet validation.');`	Test assertion comparing an expected outcome to actual behavior: System.assert(limitWasEnforced, 'Expected the maximum outlet validation.');. A mismatch fails the test.
93	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
94	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/BeatOutletSelectorControllerTest.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 991f1ca647a6d030b8f1828ad18737c5e94ecbe63a944a972fd685c6ab98f84a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexClass block; child elements specify its configuration.
3	`    <apiVersion>65.0</apiVersion>`	Sets Salesforce API version used for this component to 65.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexClass>`	Closes the ApexClass configuration block.

force-app/main/default/classes/DmsDistributorLifecycleHandler.cls

Before-save handler forces discontinued distributors inactive without deleting history or automatically reactivating them.

14 numbered source lines | SHA-256 3e3978166d8df71a35e67d0c9c4f1b3b89d0888abe391aea33bc3283cba67dc6

Line	Source code	Explanation / reading note
1	`/**`	Developer comment/documentation: It is not executed.
2	`* Applies lifecycle rules before saving, including bulk imports.`	Developer comment/documentation: Applies lifecycle rules before saving, including bulk imports. It is not executed.
3	`* System context matches the original trigger; this is internal automation.`	Developer comment/documentation: System context matches the original trigger; this is internal automation. It is not executed.
4	`* Clearing Discontinued never automatically reactivates an account.`	Developer comment/documentation: Clearing Discontinued never automatically reactivates an account. It is not executed.
5	`*/`	Developer comment/documentation: It is not executed.
6	`public without sharing class DmsDistributorLifecycleHandler {`	Declares a class/type: public without sharing class DmsDistributorLifecycleHandler {. Runs without record-sharing enforcement; see the documented internal authorization boundary.
7	`public static void applyDiscontinuation(List<DMS_Distributor__c> distributors) {`	Declares a callable function/method: public static void applyDiscontinuation(List<DMS_Distributor__c> distributors) {. Parameters supply its inputs; the following block implements the operation.
8	`for (DMS_Distributor__c distributor : distributors) {`	Repeats work over the specified records/items or while this condition holds: for (DMS_Distributor__c distributor : distributors) {. Check where queries/writes occur relative to the loop.
9	`if (distributor.Discontinued__c) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (distributor.Discontinued__c) {.
10	`distributor.Active__c = false;`	Assigns the right-hand expression to the named variable/property: distributor.Active__c = false;. This is in-memory unless it is later persisted by an explicit call.
11	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
12	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
13	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
14	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsDistributorLifecycleHandler.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsDistributorLifecycleTest.cls

Regression tests for DmsDistributorLifecycle. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

78 numbered source lines | SHA-256 dcdc9cdc349147b2f15198d8384251054ea8d4266dd744cb0cc9029845bef405

Line	Source code	Explanation / reading note
1	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
2	`private class DmsDistributorLifecycleTest {`	Declares a class/type: private class DmsDistributorLifecycleTest {. Members below hold behavior and/or state.
3	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
4	`    static void discontinuesAndRequiresExplicitReactivation() {`	Continues the surrounding declaration/expression or text: static void discontinuesAndRequiresExplicitReactivation() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
5	`        DMS_Distributor__c row = new DMS_Distributor__c(Name = 'Lifecycle test', Active__c = true);`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c row = new DMS_Distributor__c(Name = 'Lifecycle test', Active__c = true);. This is in-memory unless it is later persisted by an explicit call.
6	`        insert row;`	Performs Salesforce DML: insert row;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
7	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
8	`            'Active',`	Continues the surrounding declaration/expression or text: 'Active',. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
9	`            [SELECT Distributor_Status__c FROM DMS_Distributor__c WHERE Id = :row.Id]`	Assigns the right-hand expression to the named variable/property: [SELECT Distributor_Status__c FROM DMS_Distributor__c WHERE Id = :row.Id]. This is in-memory unless it is later persisted by an explicit call.
10	`            .Distributor_Status__c`	Continues the surrounding declaration/expression or text: .Distributor_Status__c. Read it with the preceding opening statement ([SELECT Distributor_Status__c FROM DMS_Distributor__c WHERE Id = :row.Id]); it is not a standalone business operation.

Line	Source code	Explanation / reading note
11	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
12	`row.Discontinued__c = true;`	Assigns the right-hand expression to the named variable/property: row.Discontinued__c = true;. This is in-memory unless it is later persisted by an explicit call.
13	`update row;`	Performs Salesforce DML: update row;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
14	`row = [`	Assigns the right-hand expression to the named variable/property: row = [. This is in-memory unless it is later persisted by an explicit call.
15	`SELECT Name, Active__c, Discontinued__c, Distributor_Status__c`	Selects these Salesforce fields/aggregates: Name, Active__c, Discontinued__c, Distributor_Status__c. Query results are used in the surrounding assignment or loop.
16	`FROM DMS_Distributor__c`	Chooses the Salesforce object/subquery source: FROM DMS_Distributor__c.
17	`WHERE Id = :row.Id`	Adds a query/filter condition: WHERE Id = :row.Id. The complete condition determines which records are included.
18	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`System.assertEquals(false, row.Active__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, row.Active__c);. A mismatch fails the test.
20	`System.assertEquals('Distributor is discontinued', row.Distributor_Status__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Distributor is discontinued', row.Distributor_Status__c);. A mismatch fails the test.
21	`System.assertEquals('Lifecycle test', row.Name);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Lifecycle test', row.Name);. A mismatch fails the test.
22	`row.Active__c = true;`	Assigns the right-hand expression to the named variable/property: row.Active__c = true;. This is in-memory unless it is later persisted by an explicit call.
23	`update row;`	Performs Salesforce DML: update row;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
24	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.

Line	Source code	Explanation / reading note
25	`false,`	Continues the surrounding declaration/expression or text: false,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
26	`[SELECT Active__c FROM DMS_Distributor__c WHERE Id = :row.Id].Active__c`	Assigns the right-hand expression to the named variable/property: [SELECT Active__c FROM DMS_Distributor__c WHERE Id = :row.Id].Active__c. This is in-memory unless it is later persisted by an explicit call.
27	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
28	`row.Active__c = false;`	Assigns the right-hand expression to the named variable/property: row.Active__c = false;. This is in-memory unless it is later persisted by an explicit call.
29	`row.Discontinued__c = false;`	Assigns the right-hand expression to the named variable/property: row.Discontinued__c = false;. This is in-memory unless it is later persisted by an explicit call.
30	`update row;`	Performs Salesforce DML: update row;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
31	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
32	`'Inactive',`	Continues the surrounding declaration/expression or text: 'Inactive',. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
33	`[SELECT Distributor_Status__c FROM DMS_Distributor__c WHERE Id = : row.Id]`	Assigns the right-hand expression to the named variable/property: [SELECT Distributor_Status__c FROM DMS_Distributor__c WHERE Id = :row.Id]. This is in-memory unless it is later persisted by an explicit call.
34	`.Distributor_Status__c`	Continues the surrounding declaration/expression or text: .Distributor_Status__c. Read it with the preceding opening statement ([SELECT Distributor_Status__c FROM DMS_Distributor__c WHERE Id = :row.Id]); it is not a standalone business operation.
35	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
36	`row.Active__c = true;`	Assigns the right-hand expression to the named variable/property: row.Active__c = true;. This is in-memory unless it is later persisted by an explicit call.
37	`update row;`	Performs Salesforce DML: update row;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
38	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
39	`            'Active',`	Continues the surrounding declaration/expression or text: 'Active',. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
40	`            [SELECT Distributor_Status__c FROM DMS_Distributor__c WHERE Id = :row.Id]`	Assigns the right-hand expression to the named variable/property: [SELECT Distributor_Status__c FROM DMS_Distributor__c WHERE Id = :row.Id]. This is in-memory unless it is later persisted by an explicit call.
41	`            .Distributor_Status__c`	Continues the surrounding declaration/expression or text: .Distributor_Status__c. Read it with the preceding opening statement ([SELECT Distributor_Status__c FROM DMS_Distributor__c WHERE Id = :row.Id]); it is not a standalone business operation.
42	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
45	`    static void bulkInsertAndUpdatePreserveOtherDistributors() {`	Continues the surrounding declaration/expression or text: static void bulkInsertAndUpdatePreserveOtherDistributors() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
46	`        List<DMS_Distributor__c> records = new List<DMS_Distributor__c>();`	Declares/initializes local data used by the surrounding operation: List<DMS_Distributor__c> records = new List<DMS_Distributor__c>();. Collection contents and assignments below determine its purpose.
47	`        for (Integer i = 0; i < 200; i++)`	Repeats work over the specified records/items or while this condition holds: for (Integer i = 0; i < 200; i++). Check where queries/writes occur relative to the loop.
48	`            records.add(`	Calls the named method: records.add(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
49	`                new DMS_Distributor__c(`	Continues the surrounding declaration/expression or text: new DMS_Distributor__c(. Read it with the preceding opening statement (records.add(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
50	`Name = 'Lifecycle ' + i,`	Assigns the right-hand expression to the named variable/property: Name = 'Lifecycle ' + i,. This is in-memory unless it is later persisted by an explicit call.
51	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
52	`Discontinued__c = Math.mod(i, 2) == 0`	Calls the named method: Discontinued__c = Math.mod(i, 2) == 0. Its implementation defines the side effect/result; use the symbol/file index to follow it.
53	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
54	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
55	`Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
56	`insert records;`	Performs Salesforce DML: insert records;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
57	`Set<Id> ids = new Map<Id, DMS_Distributor__c>(records).keySet();`	Declares/initializes local data used by the surrounding operation: Set<Id> ids = new Map<Id, DMS_Distributor__c>(records).keySet();. Collection contents and assignments below determine its purpose.
58	`for (DMS_Distributor__c row : [`	Repeats work over the specified records/items or while this condition holds: for (DMS_Distributor__c row : [. Check where queries/writes occur relative to the loop.
59	`SELECT Active__c, Discontinued__c, Distributor_Status__c`	Selects these Salesforce fields/aggregates: Active__c, Discontinued__c, Distributor_Status__c. Query results are used in the surrounding assignment or loop.
60	`FROM DMS_Distributor__c`	Chooses the Salesforce object/subquery source: FROM DMS_Distributor__c.
61	`WHERE Id IN :ids`	Adds a query/filter condition: WHERE Id IN :ids. The complete condition determines which records are included.
62	`]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (WHERE Id IN :ids); it is not a standalone business operation.
63	`System.assertEquals(!row.Discontinued__c, row.Active__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(!row.Discontinued__c, row.Active__c);. A mismatch fails the test.

Line	Source code	Explanation / reading note
64	`            System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
65	`                row.Discontinued__c ? 'Distributor is discontinued' : 'Active',`	Continues the surrounding declaration/expression or text: row.Discontinued__c ? 'Distributor is discontinued' : 'Active',. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
66	`                row.Distributor_Status__c`	Continues the surrounding declaration/expression or text: row.Distributor_Status__c. Read it with the preceding opening statement (row.Discontinued__c ? 'Distributor is discontinued' : 'Active',); it is not a standalone business operation.
67	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
68	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
69	`        for (DMS_Distributor__c row : records)`	Repeats work over the specified records/items or while this condition holds: for (DMS_Distributor__c row : records). Check where queries/writes occur relative to the loop.
70	`            row.Discontinued__c = true;`	Assigns the right-hand expression to the named variable/property: row.Discontinued__c = true;. This is in-memory unless it is later persisted by an explicit call.
71	`        update records;`	Performs Salesforce DML: update records;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
72	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
73	`            0,`	Continues the surrounding declaration/expression or text: 0,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
74	`            [SELECT COUNT() FROM DMS_Distributor__c WHERE Id IN :ids AND Active__c = TRUE]`	Assigns the right-hand expression to the named variable/property: [SELECT COUNT() FROM DMS_Distributor__c WHERE Id IN :ids AND Active__c = TRUE]. This is in-memory unless it is later persisted by an explicit call.
75	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
76	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.

Line	Source code	Explanation / reading note
77	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
78	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsDistributorLifecycleTest.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsDistributorOrderTest.cls

Regression tests for DmsDistributorOrder. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

158 numbered source lines | SHA-256 9b79214caf2d204e733c7b2bcce6384c6b6a800110d8515fa25744e1f9fcb393

Line	Source code	Explanation / reading note
1	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
2	`private class DmsDistributorOrderTest {`	Declares a class/type: private class DmsDistributorOrderTest {. Members below hold behavior and/or state.
3	`    @TestSetup`	Continues the surrounding declaration/expression or text: @TestSetup. Read it with the preceding opening statement (private class DmsDistributorOrderTest {); it is not a standalone business operation.
4	`    static void permissions() {`	Continues the surrounding declaration/expression or text: static void permissions() {. Read it with the preceding opening statement (@TestSetup); it is not a standalone business operation.
5	`        Id permissionId = [SELECT Id FROM PermissionSet WHERE Name = 'DMS_Backend_Transactions'].Id;`	Declares/initializes local data used by the surrounding operation: Id permissionId = [SELECT Id FROM PermissionSet WHERE Name = 'DMS_Backend_Transactions'].Id;. Collection contents and assignments below determine its purpose.
6	`        if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
7	`            [`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (if (); it is not a standalone business operation.
8	`                SELECT COUNT()`	Selects these Salesforce fields/aggregates: COUNT(). Query results are used in the surrounding assignment or loop.
9	`                FROM PermissionSetAssignment`	Chooses the Salesforce object/subquery source: FROM PermissionSetAssignment.
10	`                WHERE AssigneeId = :UserInfo.getUserId() AND PermissionSetId = :permissionId`	Adds a query/filter condition: WHERE AssigneeId = :UserInfo.getUserId() AND PermissionSetId = :permissionId. The complete condition determines which records are included.

Line	Source code	Explanation / reading note
11	`            ] == 0`	Continues the surrounding declaration/expression or text:] == 0. Read it with the preceding opening statement (WHERE AssigneeId = :UserInfo.getUserId() AND PermissionSetId = :permissionId); it is not a standalone business operation.
12	`        )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13	`            insert new PermissionSetAssignment(`	Performs Salesforce DML: insert new PermissionSetAssignment(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
14	`                AssigneeId = UserInfo.getUserId(),`	Calls the named method: AssigneeId = UserInfo.getUserId(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
15	`                PermissionSetId = permissionId`	Assigns the right-hand expression to the named variable/property: PermissionSetId = permissionId. This is in-memory unless it is later persisted by an explicit call.
16	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`    private static DmsPortalApi.Command fixture() {`	Declares a callable function/method: private static DmsPortalApi.Command fixture() {. Parameters supply its inputs; the following block implements the operation.
19	`        DMS_Distributor__c distributor = new DMS_Distributor__c(`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c distributor = new DMS_Distributor__c(. This is in-memory unless it is later persisted by an explicit call.
20	`            Name = 'Self service test',`	Assigns the right-hand expression to the named variable/property: Name = 'Self service test',. This is in-memory unless it is later persisted by an explicit call.
21	`            Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
22	`            Officer__c = UserInfo.getUserId()`	Calls the named method: Officer__c = UserInfo.getUserId(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
23	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
24	`insert distributor;`	Performs Salesforce DML: insert distributor;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
25	`Product__c product = new Product__c(`	Assigns the right-hand expression to the named variable/property: Product__c product = new Product__c(. This is in-memory unless it is later persisted by an explicit call.
26	`Name = 'Test cases',`	Assigns the right-hand expression to the named variable/property: Name = 'Test cases',. This is in-memory unless it is later persisted by an explicit call.
27	`Product_Code__c = 'SELF-TEST',`	Assigns the right-hand expression to the named variable/property: Product_Code__c = 'SELF-TEST',. This is in-memory unless it is later persisted by an explicit call.
28	`MRP__c = 20,`	Assigns the right-hand expression to the named variable/property: MRP__c = 20,. This is in-memory unless it is later persisted by an explicit call.
29	`Retailer_Base_Price__c = 15,`	Assigns the right-hand expression to the named variable/property: Retailer_Base_Price__c = 15,. This is in-memory unless it is later persisted by an explicit call.
30	`Units_Per_Case__c = 10,`	Assigns the right-hand expression to the named variable/property: Units_Per_Case__c = 10,. This is in-memory unless it is later persisted by an explicit call.
31	`DMS_Case_Price__c = 100,`	Assigns the right-hand expression to the named variable/property: DMS_Case_Price__c = 100,. This is in-memory unless it is later persisted by an explicit call.
32	`GST_Percent__c = 5,`	Assigns the right-hand expression to the named variable/property: GST_Percent__c = 5,. This is in-memory unless it is later persisted by an explicit call.
33	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
34	`Sellable__c = true`	Assigns the right-hand expression to the named variable/property: Sellable__c = true. This is in-memory unless it is later persisted by an explicit call.
35	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
36	`insert product;`	Performs Salesforce DML: insert product;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
37	`Scheme__c scheme = new Scheme__c(`	Assigns the right-hand expression to the named variable/property: Scheme__c scheme = new Scheme__c(. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
38	`Name = 'Primary test offer',`	Assigns the right-hand expression to the named variable/property: Name = 'Primary test offer',. This is in-memory unless it is later persisted by an explicit call.
39	`Scheme_Code__c = 'SELF-OFFER',`	Assigns the right-hand expression to the named variable/property: Scheme_Code__c = 'SELF-OFFER',. This is in-memory unless it is later persisted by an explicit call.
40	`Start_Date__c = Date.today(),`	Calls the named method: Start_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
41	`End_Date__c = Date.today().addDays(5),`	Calls the named method: End_Date__c = Date.today().addDays(5),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
42	`Scheme_Type__c = 'Same Product Free',`	Assigns the right-hand expression to the named variable/property: Scheme_Type__c = 'Same Product Free',. This is in-memory unless it is later persisted by an explicit call.
43	`Sales_Channel__c = 'Primary',`	Assigns the right-hand expression to the named variable/property: Sales_Channel__c = 'Primary',. This is in-memory unless it is later persisted by an explicit call.
44	`Product__c = product.Id,`	Assigns the right-hand expression to the named variable/property: Product__c = product.Id,. This is in-memory unless it is later persisted by an explicit call.
45	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
46	`Minimum_Cases__c = 2,`	Assigns the right-hand expression to the named variable/property: Minimum_Cases__c = 2,. This is in-memory unless it is later persisted by an explicit call.
47	`Free_Cases__c = 1,`	Assigns the right-hand expression to the named variable/property: Free_Cases__c = 1,. This is in-memory unless it is later persisted by an explicit call.
48	`Discount_Percent__c = 10`	Assigns the right-hand expression to the named variable/property: Discount_Percent__c = 10. This is in-memory unless it is later persisted by an explicit call.
49	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
50	`insert scheme;`	Performs Salesforce DML: insert scheme;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
51	`DmsPortalApi.Command cmd = new DmsPortalApi.Command();`	Calls the named method: DmsPortalApi.Command cmd = new DmsPortalApi.Command();. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
52	`cmd.action = 'distributorPrimaryOrder';`	Assigns the right-hand expression to the named variable/property: cmd.action = 'distributorPrimaryOrder';. This is in-memory unless it is later persisted by an explicit call.
53	`cmd.distributorId = distributor.Id;`	Assigns the right-hand expression to the named variable/property: cmd.distributorId = distributor.Id;. This is in-memory unless it is later persisted by an explicit call.
54	`cmd.requestKey = 'distributor-order-123456';`	Assigns the right-hand expression to the named variable/property: cmd.requestKey = 'distributor-order-123456';. This is in-memory unless it is later persisted by an explicit call.
55	`DmsEmployeeTransactions.LineInput line = new DmsEmployeeTransactions.LineInput();`	Calls the named method: DmsEmployeeTransactions.LineInput line = new DmsEmployeeTransactions.LineInput();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
56	`line.productId = product.Id;`	Assigns the right-hand expression to the named variable/property: line.productId = product.Id;. This is in-memory unless it is later persisted by an explicit call.
57	`line.cases = 4;`	Assigns the right-hand expression to the named variable/property: line.cases = 4;. This is in-memory unless it is later persisted by an explicit call.
58	`line.schemeId = scheme.Id;`	Assigns the right-hand expression to the named variable/property: line.schemeId = scheme.Id;. This is in-memory unless it is later persisted by an explicit call.
59	`cmd.lines = new List<DmsEmployeeTransactions.LineInput>{ line };`	Assigns the right-hand expression to the named variable/property: cmd.lines = new List<DmsEmployeeTransactions.LineInput>{ line };. This is in-memory unless it is later persisted by an explicit call.
60	`return cmd;`	Returns cmd to the caller (or begins returned UI markup) and ends this execution path.
61	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
62	`private static Map<String, Object> call(DmsPortalApi.Command cmd) {`	Declares a callable function/method: private static Map<String, Object> call(DmsPortalApi.Command cmd) {. Parameters supply its inputs; the following block implements the operation.
63	`RestContext.request = new RestRequest();`	Assigns the right-hand expression to the named variable/property: RestContext.request = new RestRequest();. This is in-memory unless it is later persisted by an explicit call.
64	`RestContext.response = new RestResponse();`	Assigns the right-hand expression to the named variable/property: RestContext.response = new RestResponse();. This is in-memory unless it is later persisted by an explicit call.
65	`RestContext.request.requestBody = Blob.valueOf(JSON.serialize(cmd));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.

Line	Source code	Explanation / reading note
66	`        System.runAs(new User(Id = UserInfo.getUserId())) {`	Calls the named method: System.runAs(new User(Id = UserInfo.getUserId())) {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
67	`            DmsPortalApi.execute();`	Calls the named method: DmsPortalApi.execute();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
68	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
69	`        return (Map<String, Object>) JSON.deserializeUntyped(`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
70	`            RestContext.response.responseBody.toString()`	Calls the named method: RestContext.response.responseBody.toString(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
71	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
72	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
73	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
74	`    static void distributorOrderSchemesApprovalAndReplay() {`	Continues the surrounding declaration/expression or text: static void distributorOrderSchemesApprovalAndReplay() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
75	`        DmsPortalApi.Command cmd = fixture();`	Assigns the right-hand expression to the named variable/property: DmsPortalApi.Command cmd = fixture();. This is in-memory unless it is later persisted by an explicit call.
76	`        Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
77	`        Map<String, Object> result = call(cmd);`	Declares/initializes local data used by the surrounding operation: Map<String, Object> result = call(cmd);. Collection contents and assignments below determine its purpose.
78	`        System.assertNotEquals(null, result.get('id'), JSON.serialize(result));`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(null, result.get('id'), JSON.serialize(result));. A mismatch fails the test.

Line	Source code	Explanation / reading note
79	`System.assertEquals('Submitted', result.get('status'));`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Submitted', result.get('status'));. A mismatch fails the test.
80	`Id orderId = (Id) result.get('id');`	Declares/initializes local data used by the surrounding operation: Id orderId = (Id) result.get('id');. Collection contents and assignments below determine its purpose.
81	`DMS_Primary_Order__c order = [`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order__c order = [. This is in-memory unless it is later persisted by an explicit call.
82	`SELECT Employee__c, Order_Source__c, Officer__c, Total_Amount__c`	Selects these Salesforce fields/aggregates: Employee__c, Order_Source__c, Officer__c, Total_Amount__c. Query results are used in the surrounding assignment or loop.
83	`FROM DMS_Primary_Order__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Order__c.
84	`WHERE Id = :orderId`	Adds a query/filter condition: WHERE Id = :orderId. The complete condition determines which records are included.
85	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
86	`System.assertEquals(null, order.Employee__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(null, order.Employee__c);. A mismatch fails the test.
87	`System.assertEquals('Distributor DMS', order.Order_Source__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Distributor DMS', order.Order_Source__c);. A mismatch fails the test.
88	`System.assertEquals(378, order.Total_Amount__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(378, order.Total_Amount__c);. A mismatch fails the test.
89	`System.assertEquals(UserInfo.getUserId(), order.Officer__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(UserInfo.getUserId(), order.Officer__c);. A mismatch fails the test.
90	`DMS_Primary_Order_Line__c line = [`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order_Line__c line = [. This is in-memory unless it is later persisted by an explicit call.
91	`SELECT Free_Cases__c, Discount_Amount__c, Scheme__c`	Selects these Salesforce fields/aggregates: Free_Cases__c, Discount_Amount__c, Scheme__c. Query results are used in the surrounding assignment or loop.
92	`FROM DMS_Primary_Order_Line__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Order_Line__c.
93	`WHERE Order__c = :orderId`	Adds a query/filter condition: WHERE Order__c = :orderId. The complete condition determines which records are included.

Line	Source code	Explanation / reading note
94	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
95	`System.assertEquals(2, line.Free_Cases__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(2, line.Free_Cases__c);. A mismatch fails the test.
96	`System.assertEquals(40, line.Discount_Amount__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(40, line.Discount_Amount__c);. A mismatch fails the test.
97	`ProcessInstanceWorkitem work = [`	Assigns the right-hand expression to the named variable/property: ProcessInstanceWorkitem work = [. This is in-memory unless it is later persisted by an explicit call.
98	`SELECT Id, ActorId`	Selects these Salesforce fields/aggregates: Id, ActorId. Query results are used in the surrounding assignment or loop.
99	`FROM ProcessInstanceWorkitem`	Chooses the Salesforce object/subquery source: FROM ProcessInstanceWorkitem.
100	`WHERE ProcessInstance.TargetObjectId = :orderId`	Adds a query/filter condition: WHERE ProcessInstance.TargetObjectId = :orderId. The complete condition determines which records are included.
101	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
102	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
103	`order.Officer__c,`	Continues the surrounding declaration/expression or text: order.Officer__c,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
104	`work.ActorId,`	Continues the surrounding declaration/expression or text: work.ActorId,. Read it with the preceding opening statement (order.Officer__c,); it is not a standalone business operation.
105	`'Uses the assigned company officer, not the distributor.'`	Continues the surrounding declaration/expression or text: 'Uses the assigned company officer, not the distributor.'. Read it with the preceding opening statement (work.ActorId,); it is not a standalone business operation.
106	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
107	`System.assertEquals(orderId, call(cmd).get('id'));`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(orderId, call(cmd).get('id'));. A mismatch fails the test.

Line	Source code	Explanation / reading note
108	`cmd.notes = 'Changed payload';`	Assigns the right-hand expression to the named variable/property: cmd.notes = 'Changed payload';. This is in-memory unless it is later persisted by an explicit call.
109	`System.assert(call(cmd).containsKey('error'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'));. A mismatch fails the test.
110	`cmd.notes = null;`	Assigns the right-hand expression to the named variable/property: cmd.notes = null;. This is in-memory unless it is later persisted by an explicit call.
111	`Approval.ProcessWorkitemRequest decision = new Approval.ProcessWorkitemRequest();`	Calls the named method: Approval.ProcessWorkitemRequest decision = new Approval.ProcessWorkitemRequest();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
112	`decision.setWorkitemId(work.Id);`	Calls the named method: decision.setWorkitemId(work.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
113	`decision.setAction('Approve');`	Calls the named method: decision.setAction('Approve');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
114	`System.assert(Approval.process(decision).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assert(Approval.process(decision).isSuccess());. A mismatch fails the test.
115	`System.assertEquals('Approved', call(cmd).get('status'));`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Approved', call(cmd).get('status'));. A mismatch fails the test.
116	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
117	`false,`	Continues the surrounding declaration/expression or text: false,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
118	`Database.update(`	Performs Salesforce DML: Database.update(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
119	`new DMS_Primary_Order__c(Id = orderId, Order_Source__c = 'Employee SFA'),`	Assigns the right-hand expression to the named variable/property: new DMS_Primary_Order__c(Id = orderId, Order_Source__c = 'Employee SFA'),. This is in-memory unless it is later persisted by an explicit call.
120	`false`	Continues the surrounding declaration/expression or text: false. Read it with the preceding opening statement (new DMS_Primary_Order__c(Id = orderId, Order_Source__c = 'Employee SFA'),); it is not a standalone business operation.

Line	Source code	Explanation / reading note
121	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
122	`.isSuccess()`	Continues the surrounding declaration/expression or text: .isSuccess(). Read it with the preceding opening statement ( )); it is not a standalone business operation.
123	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
124	`Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
125	`System.assertEquals(1, [SELECT COUNT() FROM DMS_Primary_Order__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1, [SELECT COUNT() FROM DMS_Primary_Order__c]);. A mismatch fails the test.
126	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
127	`0,`	Continues the surrounding declaration/expression or text: 0,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
128	`[SELECT COUNT() FROM DMS_Inventory__c],`	Continues the surrounding declaration/expression or text: [SELECT COUNT() FROM DMS_Inventory__c],. Read it with the preceding opening statement (0,); it is not a standalone business operation.
129	`'Approval is not a goods receipt.'`	Continues the surrounding declaration/expression or text: 'Approval is not a goods receipt.'. Read it with the preceding opening statement ([SELECT COUNT() FROM DMS_Inventory__c],); it is not a standalone business operation.
130	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
131	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
132	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
133	`static void rejectsInvalidAndKeepsEmployeeIdentityRequired() {`	Continues the surrounding declaration/expression or text: static void rejectsInvalidAndKeepsEmployeeIdentityRequired() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.

Line	Source code	Explanation / reading note
134	`DmsPortalApi.Command cmd = fixture();`	Assigns the right-hand expression to the named variable/property: DmsPortalApi.Command cmd = fixture();. This is in-memory unless it is later persisted by an explicit call.
135	`cmd.lines[0].cases = 1;`	Assigns the right-hand expression to the named variable/property: cmd.lines[0].cases = 1;. This is in-memory unless it is later persisted by an explicit call.
136	`System.assert(call(cmd).containsKey('error'), 'Below scheme minimum');`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'), 'Below scheme minimum');. A mismatch fails the test.
137	`System.assertEquals(0, [SELECT COUNT() FROM DMS_Primary_Order__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(0, [SELECT COUNT() FROM DMS_Primary_Order__c]);. A mismatch fails the test.
138	`System.assertEquals(0, [SELECT COUNT() FROM DMS_Primary_Order_Line__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(0, [SELECT COUNT() FROM DMS_Primary_Order_Line__c]);. A mismatch fails the test.
139	`cmd.lines[0].cases = 2;`	Assigns the right-hand expression to the named variable/property: cmd.lines[0].cases = 2;. This is in-memory unless it is later persisted by an explicit call.
140	`cmd.action = 'primaryOrder';`	Assigns the right-hand expression to the named variable/property: cmd.action = 'primaryOrder';. This is in-memory unless it is later persisted by an explicit call.
141	`System.assert(call(cmd).containsKey('error'), 'SFA still requires an employee');`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'), 'SFA still requires an employee');. A mismatch fails the test.
142	`cmd.action = 'distributorPrimaryOrder';`	Assigns the right-hand expression to the named variable/property: cmd.action = 'distributorPrimaryOrder';. This is in-memory unless it is later persisted by an explicit call.
143	`Employee__c employee = new Employee__c(`	Assigns the right-hand expression to the named variable/property: Employee__c employee = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
144	`Name = 'Test employee',`	Assigns the right-hand expression to the named variable/property: Name = 'Test employee',. This is in-memory unless it is later persisted by an explicit call.
145	`Phone__c = '9000000000',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000000',. This is in-memory unless it is later persisted by an explicit call.
146	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
147	`            DMS_Distributor__c = cmd.distributorId`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c = cmd.distributorId. This is in-memory unless it is later persisted by an explicit call.
148	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
149	`        insert employee;`	Performs Salesforce DML: insert employee;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
150	`        cmd.employeeId = employee.Id;`	Assigns the right-hand expression to the named variable/property: cmd.employeeId = employee.Id;. This is in-memory unless it is later persisted by an explicit call.
151	`        System.assert(call(cmd).containsKey('error'), 'No impersonation');`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'), 'No impersonation');. A mismatch fails the test.
152	`        cmd.employeeId = null;`	Assigns the right-hand expression to the named variable/property: cmd.employeeId = null;. This is in-memory unless it is later persisted by an explicit call.
153	`        update new DMS_Distributor__c(Id = cmd.distributorId, Officer__c = null);`	Performs Salesforce DML: update new DMS_Distributor__c(Id = cmd.distributorId, Officer__c = null);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
154	`        System.assert(call(cmd).containsKey('error'), 'No unassigned approvals');`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'), 'No unassigned approvals');. A mismatch fails the test.
155	`        System.assertEquals(0, [SELECT COUNT() FROM DMS_Primary_Order__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(0, [SELECT COUNT() FROM DMS_Primary_Order__c]);. A mismatch fails the test.
156	`        System.assertEquals(0, [SELECT COUNT() FROM DMS_Primary_Order_Line__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(0, [SELECT COUNT() FROM DMS_Primary_Order_Line__c]);. A mismatch fails the test.
157	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
158	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsDistributorOrderTest.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 17e31f2473b0c9f7048b434edab7d12261a9b8a0b9ede833cb9c3141eeeccb7b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>67.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>67.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsDistributorSurveyHandler.cls

Bulk before-save officer authorization for surveys; one query for distributor references and preservation of the original survey author on update.

36 numbered source lines | SHA-256 e6275d9eaf5f64e72e9a1e3197810881f9abeb6957292b4905390ac04332e3cd

Line	Source code	Explanation / reading note
1	`/**`	Developer comment/documentation: It is not executed.
2	`* Validates company-officer ownership of surveys in one bulk query.`	Developer comment/documentation: Validates company-officer ownership of surveys in one bulk query. It is not executed.
3	`* System context preserves the original trigger's visibility. Authorization is`	Developer comment/documentation: System context preserves the original trigger's visibility. Authorization is It is not executed.
4	`* checked explicitly against the distributor's assigned officer for every row.`	Developer comment/documentation: checked explicitly against the distributor's assigned officer for every row. It is not executed.
5	`*/`	Developer comment/documentation: It is not executed.
6	`public without sharing class DmsDistributorSurveyHandler {`	Declares a class/type: public without sharing class DmsDistributorSurveyHandler {. Runs without record-sharing enforcement; see the documented internal authorization boundary.
7	`    public static void validateOfficer(`	Declares a callable function/method: public static void validateOfficer(. Parameters supply its inputs; the following block implements the operation.
8	`        List<DMS_Distributor_Survey__c> surveys,`	Declares/initializes local data used by the surrounding operation: List<DMS_Distributor_Survey__c> surveys,. Collection contents and assignments below determine its purpose.
9	`        Map<Id, DMS_Distributor_Survey__c> previousSurveys`	Declares/initializes local data used by the surrounding operation: Map<Id, DMS_Distributor_Survey__c> previousSurveys. Collection contents and assignments below determine its purpose.
10	`    ) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (Map<Id, DMS_Distributor_Survey__c> previousSurveys); it is not a standalone business operation.
11	`        Set<Id> distributorIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> distributorIds = new Set<Id>();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
12	`for (DMS_Distributor_Survey__c survey : surveys) {`	Repeats work over the specified records/items or while this condition holds: for (DMS_Distributor_Survey__c survey : surveys) {. Check where queries/writes occur relative to the loop.
13	`distributorIds.add(survey.Distributor__c);`	Calls the named method: distributorIds.add(survey.Distributor__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
14	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
15	`Map<Id, DMS_Distributor__c> distributorsById = new Map<Id, DMS_Distributor__c>(`	Declares/initializes local data used by the surrounding operation: Map<Id, DMS_Distributor__c> distributorsById = new Map<Id, DMS_Distributor__c>(. Collection contents and assignments below determine its purpose.
16	`[SELECT Id, Officer__c, Active__c FROM DMS_Distributor__c WHERE Id IN : distributorIds]`	Continues the surrounding declaration/expression or text: [SELECT Id, Officer__c, Active__c FROM DMS_Distributor__c WHERE Id IN :distributorIds]. Read it with the preceding opening statement (Map<Id, DMS_Distributor__c> distributorsById = new Map<Id, DMS_Distributor__c>(); it is not a standalone business operation.
17	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`Id currentOfficerId = UserInfo.getUserId();`	Declares/initializes local data used by the surrounding operation: Id currentOfficerId = UserInfo.getUserId();. Collection contents and assignments below determine its purpose.
19	`for (DMS_Distributor_Survey__c survey : surveys) {`	Repeats work over the specified records/items or while this condition holds: for (DMS_Distributor_Survey__c survey : surveys) {. Check where queries/writes occur relative to the loop.
20	`DMS_Distributor__c distributor = distributorsById.get(survey.Distributor__c);`	Calls the named method: DMS_Distributor__c distributor = distributorsById.get(survey.Distributor__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
21	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
22	`distributor == null ||`	Continues the surrounding declaration/expression or text: distributor == null ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
23	`!distributor.Active__c ||`	Continues the surrounding declaration/expression or text: !distributor.Active__c ||. Read it with the preceding opening statement (distributor == null ||); it is not a standalone business operation.

Line	Source code	Explanation / reading note
24	`distributor.Officer__c != currentOfficerId`	Continues the surrounding declaration/expression or text: distributor.Officer__c != currentOfficerId. Read it with the preceding opening statement (!distributor.Active__c ||); it is not a standalone business operation.
25	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (distributor.Officer__c != currentOfficerId); it is not a standalone business operation.
26	`survey.addError(`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
27	`'Only the assigned company Distributor Officer can record or edit this distributor survey.'`	Continues the surrounding declaration/expression or text: 'Only the assigned company Distributor Officer can record or edit this distributor survey.'. Read it with the preceding opening statement (survey.addError(); it is not a standalone business operation.
28	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`// Keep the original author when an existing survey is edited.`	Developer comment/documentation: Keep the original author when an existing survey is edited. It is not executed.
31	`survey.Officer__c = previousSurveys == null`	Assigns the right-hand expression to the named variable/property: survey.Officer__c = previousSurveys == null. This is in-memory unless it is later persisted by an explicit call.
32	`? currentOfficerId`	Continues the surrounding declaration/expression or text: ? currentOfficerId. Read it with the preceding opening statement (survey.Officer__c = previousSurveys == null); it is not a standalone business operation.
33	`: previousSurveys.get(survey.Id).Officer__c;`	Calls the named method: : previousSurveys.get(survey.Id).Officer__c;. Its implementation defines the side effect/result; use the symbol/file index to follow it.
34	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
36	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsDistributorSurveyHandler.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsEmployeeAllocator.cls

Persistent round-robin allocation of newly inserted unassigned employees across active ordered distributors, with a locked cursor and atomic updates.

65 numbered source lines | SHA-256 eb64a088c25e6a17e84c8963393210e80098e1cb562d3184513828b74ae85cd0

Line	Source code	Explanation / reading note
1	`/**`	Developer comment/documentation: It is not executed.
2	`* Internal automation, not an end-user API. System sharing is intentional:`	Developer comment/documentation: Internal automation, not an end-user API. System sharing is intentional: It is not executed.
3	`* all employee creators must use the same distributor pool and locked cursor.`	Developer comment/documentation: all employee creators must use the same distributor pool and locked cursor. It is not executed.
4	`*/`	Developer comment/documentation: It is not executed.
5	`public without sharing class DmsEmployeeAllocator {`	Declares a class/type: public without sharing class DmsEmployeeAllocator {. Runs without record-sharing enforcement; see the documented internal authorization boundary.
6	`public class ConfigurationException extends Exception {`	Declares a class/type: public class ConfigurationException extends Exception {. Members below hold behavior and/or state.
7	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
8		Blank line separating logical sections; no executable operation.
9	`public static void allocate(Set<Id> employeeIds) {`	Declares a callable function/method: public static void allocate(Set<Id> employeeIds) {. Parameters supply its inputs; the following block implements the operation.
10	`if (employeeIds == null || employeeIds.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (employeeIds == null || employeeIds.isEmpty()) {.
11	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
12	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13	`List<DMS_Distributor__c> pool = [`	Declares/initializes local data used by the surrounding operation: List<DMS_Distributor__c> pool = [. Collection contents and assignments below determine its purpose.
14	`SELECT Id, Employee_Allocation_Order__c`	Selects these Salesforce fields/aggregates: Id, Employee_Allocation_Order__c. Query results are used in the surrounding assignment or loop.

Line	Source code	Explanation / reading note
15	`FROM DMS_Distributor__c`	Chooses the Salesforce object/subquery source: FROM DMS_Distributor__c.
16	`WHERE Active__c = TRUE AND Employee_Allocation_Order__c > 0`	Adds a query/filter condition: WHERE Active__c = TRUE AND Employee_Allocation_Order__c > 0. The complete condition determines which records are included.
17	`ORDER BY Employee_Allocation_Order__c`	Controls query sorting, grouping or result count: ORDER BY Employee_Allocation_Order__c.
18	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`// No configured pool: normal Employee creation remains available.`	Developer comment/documentation: No configured pool: normal Employee creation remains available. It is not executed.
20	`if (pool.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (pool.isEmpty()) {.
21	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
22	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
23	`// Serialize concurrent transactions. Initialization is a separate admin`	Developer comment/documentation: Serialize concurrent transactions. Initialization is a separate admin It is not executed.
24	`// step, preventing competing first-time transactions creating cursors.`	Developer comment/documentation: step, preventing competing first-time transactions creating cursors. It is not executed.
25	`List<DMS_Allocation_State__c> states = [`	Declares/initializes local data used by the surrounding operation: List<DMS_Allocation_State__c> states = [. Collection contents and assignments below determine its purpose.
26	`SELECT Id, Last_Allocated_Order__c`	Selects these Salesforce fields/aggregates: Id, Last_Allocated_Order__c. Query results are used in the surrounding assignment or loop.
27	`FROM DMS_Allocation_State__c`	Chooses the Salesforce object/subquery source: FROM DMS_Allocation_State__c.
28	`WHERE Allocation_Key__c = 'EmployeeDistributor'`	Adds a query/filter condition: WHERE Allocation_Key__c = 'EmployeeDistributor'. The complete condition determines which records are included.
29	`LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.

Line	Source code	Explanation / reading note
30	`            FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
31	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`        if (states.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (states.isEmpty()) {.
33	`            throw new ConfigurationException(`	Stops this execution path with a validation/error exception: throw new ConfigurationException(. The caller/catch block decides how it is reported.
34	`                'Employee allocation is not initialized. Ask your administrator to initialize the DMS allocation state.'`	Continues the surrounding declaration/expression or text: 'Employee allocation is not initialized. Ask your administrator to initialize the DMS allocation state.'. Read it with the preceding opening statement (throw new ConfigurationException(); it is not a standalone business operation.
35	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
36	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
37	`        DMS_Allocation_State__c state = states[0];`	Assigns the right-hand expression to the named variable/property: DMS_Allocation_State__c state = states[0];. This is in-memory unless it is later persisted by an explicit call.
38	`        Decimal lastOrder = state.Last_Allocated_Order__c;`	Declares/initializes local data used by the surrounding operation: Decimal lastOrder = state.Last_Allocated_Order__c;. Collection contents and assignments below determine its purpose.
39	`        List<Employee__c> changes = new List<Employee__c>();`	Declares/initializes local data used by the surrounding operation: List<Employee__c> changes = new List<Employee__c>();. Collection contents and assignments below determine its purpose.
40	`        // Read after the lock. Retries skip assigned rows; Id breaks timestamp ties.`	Developer comment/documentation: Read after the lock. Retries skip assigned rows; Id breaks timestamp ties. It is not executed.
41	`        for (Employee__c employee : [`	Repeats work over the specified records/items or while this condition holds: for (Employee__c employee : [. Check where queries/writes occur relative to the loop.
42	`            SELECT Id, DMS_Distributor__c`	Selects these Salesforce fields/aggregates: Id, DMS_Distributor__c. Query results are used in the surrounding assignment or loop.

Line	Source code	Explanation / reading note
43	`            FROM Employee__c`	Chooses the Salesforce object/subquery source: FROM Employee__c.
44	`            WHERE Id IN :employeeIds AND DMS_Distributor__c = NULL`	Adds a query/filter condition: WHERE Id IN :employeeIds AND DMS_Distributor__c = NULL. The complete condition determines which records are included.
45	`            ORDER BY CreatedDate, Id`	Controls query sorting, grouping or result count: ORDER BY CreatedDate, Id.
46	`        ]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (ORDER BY CreatedDate, Id); it is not a standalone business operation.
47	`            DMS_Distributor__c nextDistributor = pool[0];`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c nextDistributor = pool[0];. This is in-memory unless it is later persisted by an explicit call.
48	`            for (DMS_Distributor__c candidate : pool) {`	Repeats work over the specified records/items or while this condition holds: for (DMS_Distributor__c candidate : pool) {. Check where queries/writes occur relative to the loop.
49	`                if (candidate.Employee_Allocation_Order__c > lastOrder) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (candidate.Employee_Allocation_Order__c > lastOrder) {.
50	`                    nextDistributor = candidate;`	Assigns the right-hand expression to the named variable/property: nextDistributor = candidate;. This is in-memory unless it is later persisted by an explicit call.
51	`                    break;`	Exits the current loop/switch. For sync, this can deliberately leave a failed request pending.
52	`                }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
53	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
54	`            changes.add(new Employee__c(Id = employee.Id, DMS_Distributor__c = nextDistributor.Id));`	Calls the named method: changes.add(new Employee__c(Id = employee.Id, DMS_Distributor__c = nextDistributor.Id));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
55	`            lastOrder = nextDistributor.Employee_Allocation_Order__c;`	Assigns the right-hand expression to the named variable/property: lastOrder = nextDistributor.Employee_Allocation_Order__c;. This is in-memory unless it is later persisted by an explicit call.
56	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
57	`        if (!changes.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!changes.isEmpty()) {.
58	`            // Both writes belong to the employee transaction. Any failure must`	Developer comment/documentation: Both writes belong to the employee transaction. Any failure must It is not executed.
59	`            // roll back both records and cursor; never swallow a save failure.`	Developer comment/documentation: roll back both records and cursor; never swallow a save failure. It is not executed.
60	`            state.Last_Allocated_Order__c = lastOrder;`	Assigns the right-hand expression to the named variable/property: state.Last_Allocated_Order__c = lastOrder;. This is in-memory unless it is later persisted by an explicit call.
61	`            update state;`	Performs Salesforce DML: update state;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
62	`            update changes;`	Performs Salesforce DML: update changes;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
63	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
64	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
65	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsEmployeeAllocator.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsEmployeeAllocatorTest.cls

Regression tests for DmsEmployeeAllocator. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

149 numbered source lines | SHA-256 5d9aefddc4bd94311e9a96a5a78d50706d568aaaebb408314b1d1880c30b6767

Line	Source code	Explanation / reading note
1	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
2	`private class DmsEmployeeAllocatorTest {`	Declares a class/type: private class DmsEmployeeAllocatorTest {. Members below hold behavior and/or state.
3	`    private static List<DMS_Distributor__c> configurePool() {`	Declares a callable function/method: private static List<DMS_Distributor__c> configurePool() {. Parameters supply its inputs; the following block implements the operation.
4	`        insert new DMS_Allocation_State__c(`	Performs Salesforce DML: insert new DMS_Allocation_State__c(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
5	`            Name = 'Employee distributor allocation',`	Assigns the right-hand expression to the named variable/property: Name = 'Employee distributor allocation',. This is in-memory unless it is later persisted by an explicit call.
6	`            Allocation_Key__c = 'EmployeeDistributor',`	Assigns the right-hand expression to the named variable/property: Allocation_Key__c = 'EmployeeDistributor',. This is in-memory unless it is later persisted by an explicit call.
7	`            Last_Allocated_Order__c = 0`	Assigns the right-hand expression to the named variable/property: Last_Allocated_Order__c = 0. This is in-memory unless it is later persisted by an explicit call.
8	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
9	`        List<DMS_Distributor__c> pool = new List<DMS_Distributor__c>();`	Declares/initializes local data used by the surrounding operation: List<DMS_Distributor__c> pool = new List<DMS_Distributor__c>();. Collection contents and assignments below determine its purpose.
10	`        for (Integer i = 1; i <= 3; i++) {`	Repeats work over the specified records/items or while this condition holds: for (Integer i = 1; i <= 3; i++) {. Check where queries/writes occur relative to the loop.
11	`            pool.add(`	Calls the named method: pool.add(. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
12	`new DMS_Distributor__c(`	Continues the surrounding declaration/expression or text: new DMS_Distributor__c(. Read it with the preceding opening statement (pool.add(); it is not a standalone business operation.
13	`Name = 'Distributor ' + i,`	Assigns the right-hand expression to the named variable/property: Name = 'Distributor ' + i,. This is in-memory unless it is later persisted by an explicit call.
14	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
15	`Employee_Allocation_Order__c = i,`	Assigns the right-hand expression to the named variable/property: Employee_Allocation_Order__c = i,. This is in-memory unless it is later persisted by an explicit call.
16	`Partner_Type__c = 'Distributor'`	Assigns the right-hand expression to the named variable/property: Partner_Type__c = 'Distributor'. This is in-memory unless it is later persisted by an explicit call.
17	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20	`insert pool;`	Performs Salesforce DML: insert pool;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
21	`return pool;`	Returns pool to the caller (or begins returned UI markup) and ends this execution path.
22	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
23	`private static List<Employee__c> employees(Integer count) {`	Declares a callable function/method: private static List<Employee__c> employees(Integer count) {. Parameters supply its inputs; the following block implements the operation.
24	`List<Employee__c> records = new List<Employee__c>();`	Declares/initializes local data used by the surrounding operation: List<Employee__c> records = new List<Employee__c>();. Collection contents and assignments below determine its purpose.
25	`for (Integer i = 0; i < count; i++) {`	Repeats work over the specified records/items or while this condition holds: for (Integer i = 0; i < count; i++) {. Check where queries/writes occur relative to the loop.

Line	Source code	Explanation / reading note
26	`            records.add(`	Calls the named method: records.add(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
27	`                new Employee__c(`	Continues the surrounding declaration/expression or text: new Employee__c(. Read it with the preceding opening statement (records.add(); it is not a standalone business operation.
28	`                    Name = 'Allocation employee ' + i,`	Assigns the right-hand expression to the named variable/property: Name = 'Allocation employee ' + i,. This is in-memory unless it is later persisted by an explicit call.
29	`                    Phone__c = '9000000000',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000000',. This is in-memory unless it is later persisted by an explicit call.
30	`                    Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.
31	`                )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`        return records;`	Returns records to the caller (or begins returned UI markup) and ends this execution path.
35	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
36	`    private static Decimal cursor() {`	Declares a callable function/method: private static Decimal cursor() {. Parameters supply its inputs; the following block implements the operation.
37	`        return [`	Returns [to the caller (or begins returned UI markup) and ends this execution path.
38	`            SELECT Last_Allocated_Order__c`	Selects these Salesforce fields/aggregates: Last_Allocated_Order__c. Query results are used in the surrounding assignment or loop.
39	`            FROM DMS_Allocation_State__c`	Chooses the Salesforce object/subquery source: FROM DMS_Allocation_State__c.
40	`            WHERE Allocation_Key__c = 'EmployeeDistributor'`	Adds a query/filter condition: WHERE Allocation_Key__c = 'EmployeeDistributor'. The complete condition determines which records are included.

Line	Source code	Explanation / reading note
41	`        ]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42	`        .Last_Allocated_Order__c;`	Continues the surrounding declaration/expression or text: .Last_Allocated_Order__c;. Read it with the preceding opening statement ( ]); it is not a standalone business operation.
43	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
45	`    static void rotatesAndContinuesWithoutReassigning() {`	Continues the surrounding declaration/expression or text: static void rotatesAndContinuesWithoutReassigning() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
46	`        List<DMS_Distributor__c> pool = configurePool();`	Declares/initializes local data used by the surrounding operation: List<DMS_Distributor__c> pool = configurePool();. Collection contents and assignments below determine its purpose.
47	`        Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
48	`        List<Employee__c> records = employees(7);`	Declares/initializes local data used by the surrounding operation: List<Employee__c> records = employees(7);. Collection contents and assignments below determine its purpose.
49	`        insert records;`	Performs Salesforce DML: insert records;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
50	`        List<Employee__c> saved = [`	Declares/initializes local data used by the surrounding operation: List<Employee__c> saved = [. Collection contents and assignments below determine its purpose.
51	`            SELECT Id, DMS_Distributor__c`	Selects these Salesforce fields/aggregates: Id, DMS_Distributor__c. Query results are used in the surrounding assignment or loop.
52	`            FROM Employee__c`	Chooses the Salesforce object/subquery source: FROM Employee__c.
53	`            ORDER BY CreatedDate, Id`	Controls query sorting, grouping or result count: ORDER BY CreatedDate, Id.
54	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
55	`        for (Integer i = 0; i < 7; i++) {`	Repeats work over the specified records/items or while this condition holds: for (Integer i = 0; i < 7; i++) {. Check where queries/writes occur relative to the loop.

Line	Source code	Explanation / reading note
56	`System.assertEquals(pool[Math.mod(i, 3)].Id, saved[i].DMS_Distributor__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(pool[Math.mod(i, 3)].Id, saved[i].DMS_Distributor__c);. A mismatch fails the test.
57	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
58	`DmsEmployeeAllocator.allocate(new Map<Id, Employee__c>(saved).keySet());`	Calls the named method: DmsEmployeeAllocator.allocate(new Map<Id, Employee__c>(saved).keySet());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
59	`System.assertEquals(1, cursor(), 'Retry must not consume another turn.');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1, cursor(), 'Retry must not consume another turn.');. A mismatch fails the test.
60	`List<Employee__c> next = employees(1);`	Declares/initializes local data used by the surrounding operation: List<Employee__c> next = employees(1);. Collection contents and assignments below determine its purpose.
61	`insert next;`	Performs Salesforce DML: insert next;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
62	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
63	`pool[1].Id,`	Continues the surrounding declaration/expression or text: pool[1].Id,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
64	`[SELECT DMS_Distributor__c FROM Employee__c WHERE Id = :next[0].Id].DMS_Distributor__c`	Assigns the right-hand expression to the named variable/property: [SELECT DMS_Distributor__c FROM Employee__c WHERE Id = :next[0].Id].DMS_Distributor__c. This is in-memory unless it is later persisted by an explicit call.
65	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
66	`saved[0].Name = 'Edited employee';`	Assigns the right-hand expression to the named variable/property: saved[0].Name = 'Edited employee';. This is in-memory unless it is later persisted by an explicit call.
67	`update saved[0];`	Performs Salesforce DML: update saved[0];. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
68	`System.assertEquals(2, cursor(), 'Normal edits do not reallocate.');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(2, cursor(), 'Normal edits do not reallocate.');. A mismatch fails the test.

Line	Source code	Explanation / reading note
69	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
70	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
71	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
72	`    static void supportsBulkAndPreservesManualAssignment() {`	Continues the surrounding declaration/expression or text: static void supportsBulkAndPreservesManualAssignment() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
73	`        List<DMS_Distributor__c> pool = configurePool();`	Declares/initializes local data used by the surrounding operation: List<DMS_Distributor__c> pool = configurePool();. Collection contents and assignments below determine its purpose.
74	`        List<Employee__c> records = employees(200);`	Declares/initializes local data used by the surrounding operation: List<Employee__c> records = employees(200);. Collection contents and assignments below determine its purpose.
75	`        records[0].DMS_Distributor__c = pool[2].Id;`	Assigns the right-hand expression to the named variable/property: records[0].DMS_Distributor__c = pool[2].Id;. This is in-memory unless it is later persisted by an explicit call.
76	`        Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
77	`        insert records;`	Performs Salesforce DML: insert records;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
78	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
79	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
80	`            200,`	Continues the surrounding declaration/expression or text: 200,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
81	`            [SELECT COUNT() FROM Employee__c WHERE DMS_Distributor__c != NULL]`	Continues the surrounding declaration/expression or text: [SELECT COUNT() FROM Employee__c WHERE DMS_Distributor__c != NULL]. Read it with the preceding opening statement (200,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
82	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
83	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
84	`            pool[2].Id,`	Continues the surrounding declaration/expression or text: pool[2].Id,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
85	`            [SELECT DMS_Distributor__c FROM Employee__c WHERE Id = :records[0].Id]`	Assigns the right-hand expression to the named variable/property: [SELECT DMS_Distributor__c FROM Employee__c WHERE Id = :records[0].Id]. This is in-memory unless it is later persisted by an explicit call.
86	`            .DMS_Distributor__c`	Continues the surrounding declaration/expression or text: .DMS_Distributor__c. Read it with the preceding opening statement ([SELECT DMS_Distributor__c FROM Employee__c WHERE Id = :records[0].Id]); it is not a standalone business operation.
87	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
88	`        System.assertEquals(1, cursor(), 'Only 199 automatic assignments consume turns.');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1, cursor(), 'Only 199 automatic assignments consume turns.');. A mismatch fails the test.
89	`        List<Employee__c> automatic = [`	Declares/initializes local data used by the surrounding operation: List<Employee__c> automatic = [. Collection contents and assignments below determine its purpose.
90	`            SELECT DMS_Distributor__c`	Selects these Salesforce fields/aggregates: DMS_Distributor__c. Query results are used in the surrounding assignment or loop.
91	`            FROM Employee__c`	Chooses the Salesforce object/subquery source: FROM Employee__c.
92	`            WHERE Id != :records[0].Id`	Adds a query/filter condition: WHERE Id != :records[0].Id. The complete condition determines which records are included.
93	`            ORDER BY CreatedDate, Id`	Controls query sorting, grouping or result count: ORDER BY CreatedDate, Id.
94	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
95	`        for (Integer i = 0; i < automatic.size(); i++) {`	Repeats work over the specified records/items or while this condition holds: for (Integer i = 0; i < automatic.size(); i++) {. Check where queries/writes occur relative to the loop.

Line	Source code	Explanation / reading note
96	`System.assertEquals(pool[Math.mod(i, 3)].Id, automatic[i].DMS_Distributor__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(pool[Math.mod(i, 3)].Id, automatic[i].DMS_Distributor__c);. A mismatch fails the test.
97	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
98	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
99	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
100	`static void skipsInactiveAndUnconfiguredDistributors() {`	Continues the surrounding declaration/expression or text: static void skipsInactiveAndUnconfiguredDistributors() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
101	`List<DMS_Distributor__c> pool = configurePool();`	Declares/initializes local data used by the surrounding operation: List<DMS_Distributor__c> pool = configurePool();. Collection contents and assignments below determine its purpose.
102	`pool[1].Active__c = false;`	Assigns the right-hand expression to the named variable/property: pool[1].Active__c = false;. This is in-memory unless it is later persisted by an explicit call.
103	`update pool[1];`	Performs Salesforce DML: update pool[1];. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
104	`insert new DMS_Distributor__c(Name = 'Not in pool', Active__c = true);`	Performs Salesforce DML: insert new DMS_Distributor__c(Name = 'Not in pool', Active__c = true);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
105	`insert employees(4);`	Performs Salesforce DML: insert employees(4);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
106	`List<Employee__c> saved = [`	Declares/initializes local data used by the surrounding operation: List<Employee__c> saved = [. Collection contents and assignments below determine its purpose.
107	`SELECT DMS_Distributor__c`	Selects these Salesforce fields/aggregates: DMS_Distributor__c. Query results are used in the surrounding assignment or loop.
108	`FROM Employee__c`	Chooses the Salesforce object/subquery source: FROM Employee__c.
109	`ORDER BY CreatedDate, Id`	Controls query sorting, grouping or result count: ORDER BY CreatedDate, Id.

Line	Source code	Explanation / reading note
110	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
111	`        for (Integer i = 0; i < 4; i++) {`	Repeats work over the specified records/items or while this condition holds: for (Integer i = 0; i < 4; i++) {. Check where queries/writes occur relative to the loop.
112	`            System.assertEquals(pool[Math.mod(i, 2) == 0 ? 0 : 2].Id, saved[i].DMS_Distributor__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(pool[Math.mod(i, 2) == 0 ? 0 : 2].Id, saved[i].DMS_Distributor__c);. A mismatch fails the test.
113	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
114	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
115	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
116	`    static void backfillsAndRollsBackCursor() {`	Continues the surrounding declaration/expression or text: static void backfillsAndRollsBackCursor() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
117	`        List<Employee__c> records = employees(4);`	Declares/initializes local data used by the surrounding operation: List<Employee__c> records = employees(4);. Collection contents and assignments below determine its purpose.
118	`        insert records;`	Performs Salesforce DML: insert records;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
119	`        configurePool();`	Continues the surrounding declaration/expression or text: configurePool();. Read it with the preceding opening statement (insert records;); it is not a standalone business operation.
120	`        Set<Id> ids = new Map<Id, Employee__c>(records).keySet();`	Declares/initializes local data used by the surrounding operation: Set<Id> ids = new Map<Id, Employee__c>(records).keySet();. Collection contents and assignments below determine its purpose.
121	`        Savepoint beforeAllocation = Database.setSavepoint();`	Creates a transaction checkpoint so later failure can roll back all command changes.
122	`        DmsEmployeeAllocator.allocate(ids);`	Calls the named method: DmsEmployeeAllocator.allocate(ids);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
123	`System.assertEquals(1, cursor());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1, cursor());. A mismatch fails the test.
124	`Database.rollback(beforeAllocation);`	Rolls Salesforce writes back to the saved checkpoint; prevents partial command results.
125	`System.assertEquals(0, cursor());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(0, cursor());. A mismatch fails the test.
126	`System.assertEquals(0, [SELECT COUNT() FROM Employee__c WHERE DMS_Distributor__c != NULL]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(0, [SELECT COUNT() FROM Employee__c WHERE DMS_Distributor__c != NULL]);. A mismatch fails the test.
127	`DmsEmployeeAllocator.allocate(ids);`	Calls the named method: DmsEmployeeAllocator.allocate(ids);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
128	`System.assertEquals(4, [SELECT COUNT() FROM Employee__c WHERE DMS_Distributor__c != NULL]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(4, [SELECT COUNT() FROM Employee__c WHERE DMS_Distributor__c != NULL]);. A mismatch fails the test.
129	`DmsEmployeeAllocator.allocate(null);`	Calls the named method: DmsEmployeeAllocator.allocate(null);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
130	`DmsEmployeeAllocator.allocate(new Set<Id>());`	Calls the named method: DmsEmployeeAllocator.allocate(new Set<Id>());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
131	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
132	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
133	`static void reportsMissingStateAndRejectsDuplicateSlots() {`	Continues the surrounding declaration/expression or text: static void reportsMissingStateAndRejectsDuplicateSlots() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
134	`configurePool();`	Continues the surrounding declaration/expression or text: configurePool();. Read it with the preceding opening statement (static void reportsMissingStateAndRejectsDuplicateSlots() {); it is not a standalone business operation.
135	`Database.SaveResult duplicate = Database.insert(`	Performs Salesforce DML: Database.SaveResult duplicate = Database.insert(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
136	`new DMS_Distributor__c(`	Continues the surrounding declaration/expression or text: new DMS_Distributor__c(. Read it with the preceding opening statement (Database.SaveResult duplicate = Database.insert(); it is not a standalone business operation.
137	`Name = 'Duplicate slot',`	Assigns the right-hand expression to the named variable/property: Name = 'Duplicate slot',. This is in-memory unless it is later persisted by an explicit call.
138	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
139	`Employee_Allocation_Order__c = 1`	Assigns the right-hand expression to the named variable/property: Employee_Allocation_Order__c = 1. This is in-memory unless it is later persisted by an explicit call.
140	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
141	`false`	Continues the surrounding declaration/expression or text: false. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
142	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
143	`System.assertEquals(false, duplicate.isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, duplicate.isSuccess());. A mismatch fails the test.
144	`delete [SELECT Id FROM DMS_Allocation_State__c];`	Performs Salesforce DML: delete [SELECT Id FROM DMS_Allocation_State__c];. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
145	`Database.SaveResult result = Database.insert(employees(1)[0], false);`	Performs Salesforce DML: Database.SaveResult result = Database.insert(employees(1)[0], false);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
146	`System.assertEquals(false, result.isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, result.isSuccess());. A mismatch fails the test.
147	`System.assert(result.getErrors()[0].getMessage().contains('not initialized'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(result.getErrors()[0].getMessage().contains('not initialized'));. A mismatch fails the test.
148	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
149	}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsEmployeeAllocatorTest.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsEmployeeTransactions.cls

Shared employee/distributor primary command service. Validates actor allocation and request fingerprint, reads trusted prices, creates header/lines, and submits the appropriate officer approval process.

250 numbered source lines | SHA-256 cc52b4ee8c39f0d8fba915f241305bf979d0d1978571eb665c7321c727f05ddf

Line	Source code	Explanation / reading note
1	`/** Shared primary entry. The authenticated backend supplies the actor identity.`	Developer comment/documentation: Shared primary entry. The authenticated backend supplies the actor identity. It is not executed.
2	`* Prices and conversions are read from Salesforce, never accepted from the phone.`	Developer comment/documentation: Prices and conversions are read from Salesforce, never accepted from the phone. It is not executed.
3	`*/`	Developer comment/documentation: It is not executed.
4	`public with sharing class DmsEmployeeTransactions {`	Declares a class/type: public with sharing class DmsEmployeeTransactions {. Uses record sharing, which does not alone enforce field/object permissions.
5	`public class LineInput {`	Declares a class/type: public class LineInput {. Members below hold behavior and/or state.
6	`public Id productId, receiptLineId, schemeId;`	Continues the surrounding declaration/expression or text: public Id productId, receiptLineId, schemeId;. Read it with the preceding opening statement (public class LineInput {); it is not a standalone business operation.
7	`public Decimal cases;`	Continues the surrounding declaration/expression or text: public Decimal cases;. Read it with the preceding opening statement (public Id productId, receiptLineId, schemeId;); it is not a standalone business operation.
8	`public String reason, notes;`	Continues the surrounding declaration/expression or text: public String reason, notes;. Read it with the preceding opening statement (public Decimal cases;); it is not a standalone business operation.
9	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`public static Map<String, Object> save(DmsPortalApi.Command cmd) {`	Declares a callable function/method: public static Map<String, Object> save(DmsPortalApi.Command cmd) {. Parameters supply its inputs; the following block implements the operation.
11	`Boolean isReturn = cmd.action == 'primaryReturn';`	Declares/initializes local data used by the surrounding operation: Boolean isReturn = cmd.action == 'primaryReturn';. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
12	`Boolean distributorEntry = cmd.action == 'distributorPrimaryOrder';`	Declares/initializes local data used by the surrounding operation: Boolean distributorEntry = cmd.action == 'distributorPrimaryOrder';. Collection contents and assignments below determine its purpose.
13	`if (distributorEntry && cmd.employeeId != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (distributorEntry && cmd.employeeId != null).
14	`throw new DmsPortalApi.InputException(`	Stops this execution path with a validation/error exception: throw new DmsPortalApi.InputException(. The caller/catch block decides how it is reported.
15	`'Distributor orders cannot impersonate an employee.'`	Continues the surrounding declaration/expression or text: 'Distributor orders cannot impersonate an employee.'. Read it with the preceding opening statement (throw new DmsPortalApi.InputException(); it is not a standalone business operation.
16	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`if (!distributorEntry) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!distributorEntry) {.
18	`List<Employee__c> employees = [`	Declares/initializes local data used by the surrounding operation: List<Employee__c> employees = [. Collection contents and assignments below determine its purpose.
19	`SELECT Id, DMS_Distributor__c`	Selects these Salesforce fields/aggregates: Id, DMS_Distributor__c. Query results are used in the surrounding assignment or loop.
20	`FROM Employee__c`	Chooses the Salesforce object/subquery source: FROM Employee__c.
21	`WHERE Id = :cmd.employeeId AND Active__c = TRUE`	Adds a query/filter condition: WHERE Id = :cmd.employeeId AND Active__c = TRUE. The complete condition determines which records are included.
22	`FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
23	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24	`if (employees.isEmpty() || employees[0].DMS_Distributor__c != cmd.distributorId)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (employees.isEmpty() || employees[0].DMS_Distributor__c != cmd.distributorId).

Line	Source code	Explanation / reading note
25	`                throw new DmsPortalApi.InputException(`	Stops this execution path with a validation/error exception: throw new DmsPortalApi.InputException(. The caller/catch block decides how it is reported.
26	`                    'Choose the distributor allocated to this active employee.'`	Continues the surrounding declaration/expression or text: 'Choose the distributor allocated to this active employee.'. Read it with the preceding opening statement (throw new DmsPortalApi.InputException(); it is not a standalone business operation.
27	`                );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
28	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`        if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
30	`            String.isBlank(cmd.requestKey) ||`	Declares/initializes local data used by the surrounding operation: String.isBlank(cmd.requestKey) ||. Collection contents and assignments below determine its purpose.
31	`            !Pattern.matches('[A-Za-z0-9-]{16,50}', cmd.requestKey)`	Calls the named method: !Pattern.matches('[A-Za-z0-9-]{16,50}', cmd.requestKey). Its implementation defines the side effect/result; use the symbol/file index to follow it.
32	`        )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`            throw new DmsPortalApi.InputException('A stable request key is required.');`	Stops this execution path with a validation/error exception: throw new DmsPortalApi.InputException('A stable request key is required.');. The caller/catch block decides how it is reported.
34	`        String key =`	Declares/initializes local data used by the surrounding operation: String key =. Collection contents and assignments below determine its purpose.
35	`            String.valueOf(distributorEntry ? cmd.distributorId : cmd.employeeId) +`	Declares/initializes local data used by the surrounding operation: String.valueOf(distributorEntry ? cmd.distributorId : cmd.employeeId) +. Collection contents and assignments below determine its purpose.
36	`            ':' +`	Continues the surrounding declaration/expression or text: ':' +. Read it with the preceding opening statement (String.valueOf(distributorEntry ? cmd.distributorId : cmd.employeeId) +); it is not a standalone business operation.

Line	Source code	Explanation / reading note
37	`            cmd.requestKey;`	Continues the surrounding declaration/expression or text: cmd.requestKey;. Read it with the preceding opening statement (':' +); it is not a standalone business operation.
38	`        String fingerprint = EncodingUtil.convertToHex(`	Declares/initializes local data used by the surrounding operation: String fingerprint = EncodingUtil.convertToHex(. Collection contents and assignments below determine its purpose.
39	`            Crypto.generateDigest('SHA-256', Blob.valueOf(JSON.serialize(cmd)))`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
40	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
41	`        List<SObject> existing = isReturn`	Declares/initializes local data used by the surrounding operation: List<SObject> existing = isReturn. Collection contents and assignments below determine its purpose.
42	`            ? (List<SObject>) [`	Continues the surrounding declaration/expression or text: ? (List<SObject>) [. Read it with the preceding opening statement (List<SObject> existing = isReturn); it is not a standalone business operation.
43	`                SELECT Id, Status__c, Request_Hash__c`	Selects these Salesforce fields/aggregates: Id, Status__c, Request_Hash__c. Query results are used in the surrounding assignment or loop.
44	`                FROM DMS_Primary_Return__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Return__c.
45	`                WHERE Request_Key__c = :key`	Adds a query/filter condition: WHERE Request_Key__c = :key. The complete condition determines which records are included.
46	`              ]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`            : (List<SObject>) [`	Continues the surrounding declaration/expression or text: : (List<SObject>) [. Read it with the preceding opening statement ( ]); it is not a standalone business operation.
48	`                SELECT Id, Status__c, Request_Hash__c`	Selects these Salesforce fields/aggregates: Id, Status__c, Request_Hash__c. Query results are used in the surrounding assignment or loop.
49	`                FROM DMS_Primary_Order__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Order__c.
50	`                WHERE Request_Key__c = :key`	Adds a query/filter condition: WHERE Request_Key__c = :key. The complete condition determines which records are included.
51	`              ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
52	`if (!existing.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!existing.isEmpty()) {.
53	`if (existing[0].get('Request_Hash__c') != fingerprint)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (existing[0].get('Request_Hash__c') != fingerprint).
54	`throw new DmsPortalApi.InputException(`	Stops this execution path with a validation/error exception: throw new DmsPortalApi.InputException(. The caller/catch block decides how it is reported.
55	`'This request was already used with different details.'`	Continues the surrounding declaration/expression or text: 'This request was already used with different details.'. Read it with the preceding opening statement (throw new DmsPortalApi.InputException(); it is not a standalone business operation.
56	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`return new Map<String, Object>{`	Returns new Map<String, Object>{ to the caller (or begins returned UI markup) and ends this execution path.
58	`'id' => existing[0].Id,`	Continues the surrounding declaration/expression or text: 'id' => existing[0].Id,. Read it with the preceding opening statement (return new Map<String, Object>{); it is not a standalone business operation.
59	`'status' => existing[0].get('Status__c')`	Continues the surrounding declaration/expression or text: 'status' => existing[0].get('Status__c'). Read it with the preceding opening statement ('id' => existing[0].Id,); it is not a standalone business operation.
60	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
61	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
62	`// Check only for new requests. Replays must still return a saved order`	Developer comment/documentation: Check only for new requests. Replays must still return a saved order It is not executed.
63	`// even if the company's officer assignment later changes.`	Developer comment/documentation: even if the company's officer assignment later changes. It is not executed.
64	`if (distributorEntry) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (distributorEntry) {.

Line	Source code	Explanation / reading note
65	`List<DMS_Distributor__c> suppliers = [`	Declares/initializes local data used by the surrounding operation: List<DMS_Distributor__c> suppliers = [. Collection contents and assignments below determine its purpose.
66	`SELECT Officer__c, Officer__r.IsActive`	Selects these Salesforce fields/aggregates: Officer__c, Officer__r.IsActive. Query results are used in the surrounding assignment or loop.
67	`FROM DMS_Distributor__c`	Chooses the Salesforce object/subquery source: FROM DMS_Distributor__c.
68	`WHERE Id = :cmd.distributorId AND Active__c = TRUE`	Adds a query/filter condition: WHERE Id = :cmd.distributorId AND Active__c = TRUE. The complete condition determines which records are included.
69	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
70	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
71	`suppliers.isEmpty() ||`	Calls the named method: suppliers.isEmpty() ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
72	`suppliers[0].Officer__c == null ||`	Continues the surrounding declaration/expression or text: suppliers[0].Officer__c == null ||. Read it with the preceding opening statement (suppliers.isEmpty() ||); it is not a standalone business operation.
73	`!suppliers[0].Officer__r.IsActive`	Continues the surrounding declaration/expression or text: !suppliers[0].Officer__r.IsActive. Read it with the preceding opening statement (suppliers[0].Officer__c == null ||); it is not a standalone business operation.
74	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
75	`throw new DmsPortalApi.InputException(`	Stops this execution path with a validation/error exception: throw new DmsPortalApi.InputException(. The caller/catch block decides how it is reported.
76	`'Assign an active company Distributor Officer before ordering.'`	Continues the surrounding declaration/expression or text: 'Assign an active company Distributor Officer before ordering.'. Read it with the preceding opening statement (throw new DmsPortalApi.InputException(); it is not a standalone business operation.
77	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
78	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
79	`        if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
80	`            cmd.lines == null ||`	Continues the surrounding declaration/expression or text: cmd.lines == null ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
81	`            cmd.lines.isEmpty() ||`	Calls the named method: cmd.lines.isEmpty() ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
82	`            cmd.lines.size() > 50 ||`	Calls the named method: cmd.lines.size() > 50 ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
83	`            (cmd.notes != null &&`	Continues the surrounding declaration/expression or text: (cmd.notes != null &&. Read it with the preceding opening statement (cmd.lines.size() > 50 ||); it is not a standalone business operation.
84	`            cmd.notes.length() > 1000)`	Calls the named method: cmd.notes.length() > 1000). Its implementation defines the side effect/result; use the symbol/file index to follow it.
85	`        )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
86	`            throw new DmsPortalApi.InputException(`	Stops this execution path with a validation/error exception: throw new DmsPortalApi.InputException(. The caller/catch block decides how it is reported.
87	`                'Add 1–50 lines and keep notes below 1000 characters.'`	Continues the surrounding declaration/expression or text: 'Add 1-50 lines and keep notes below 1000 characters.'. Read it with the preceding opening statement (throw new DmsPortalApi.InputException(); it is not a standalone business operation.
88	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
89	`        Set<Id> productIds = new Set<Id>(), receiptIds = new Set<Id>(), seen = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> productIds = new Set<Id>(), receiptIds = new Set<Id>(), seen = new Set<Id>();. Collection contents and assignments below determine its purpose.
90	`        for (LineInput line : cmd.lines) {`	Repeats work over the specified records/items or while this condition holds: for (LineInput line : cmd.lines) {. Check where queries/writes occur relative to the loop.

Line	Source code	Explanation / reading note
91	`            Id identifier = isReturn ? line.receiptLineId : line.productId;`	Declares/initializes local data used by the surrounding operation: Id identifier = isReturn ? line.receiptLineId : line.productId;. Collection contents and assignments below determine its purpose.
92	`            if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
93	`                identifier == null ||`	Continues the surrounding declaration/expression or text: identifier == null ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
94	`                seen.contains(identifier) ||`	Calls the named method: seen.contains(identifier) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
95	`                line.cases == null ||`	Continues the surrounding declaration/expression or text: line.cases == null ||. Read it with the preceding opening statement (seen.contains(identifier) ||); it is not a standalone business operation.
96	`                line.cases <= 0 ||`	Continues the surrounding declaration/expression or text: line.cases <= 0 ||. Read it with the preceding opening statement (line.cases == null ||); it is not a standalone business operation.
97	`                line.cases > 100000 ||`	Continues the surrounding declaration/expression or text: line.cases > 100000 ||. Read it with the preceding opening statement (line.cases <= 0 ||); it is not a standalone business operation.
98	`                line.cases != line.cases.setScale(0)`	Calls the named method: line.cases != line.cases.setScale(0). Its implementation defines the side effect/result; use the symbol/file index to follow it.
99	`            )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
100	`                throw new DmsPortalApi.InputException(`	Stops this execution path with a validation/error exception: throw new DmsPortalApi.InputException(. The caller/catch block decides how it is reported.
101	`                    'Use distinct products/receipts and positive whole cases.'`	Continues the surrounding declaration/expression or text: 'Use distinct products/receipts and positive whole cases.'. Read it with the preceding opening statement (throw new DmsPortalApi.InputException(); it is not a standalone business operation.
102	`                );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
103	`            seen.add(identifier);`	Calls the named method: seen.add(identifier);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
104	`productIds.add(line.productId);`	Calls the named method: productIds.add(line.productId);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
105	`receiptIds.add(line.receiptLineId);`	Calls the named method: receiptIds.add(line.receiptLineId);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
106	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
107	`Id parentId;`	Declares/initializes local data used by the surrounding operation: Id parentId;. Collection contents and assignments below determine its purpose.
108	`if (!isReturn) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!isReturn) {.
109	`Map<Id, Product__c> products = new Map<Id, Product__c>(`	Declares/initializes local data used by the surrounding operation: Map<Id, Product__c> products = new Map<Id, Product__c>(. Collection contents and assignments below determine its purpose.
110	`[`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (Map<Id, Product__c> products = new Map<Id, Product__c>(); it is not a standalone business operation.
111	`SELECT Id, Units_Per_Case__c, DMS_Case_Price__c, GST_Percent__c`	Selects these Salesforce fields/aggregates: Id, Units_Per_Case__c, DMS_Case_Price__c, GST_Percent__c. Query results are used in the surrounding assignment or loop.
112	`FROM Product__c`	Chooses the Salesforce object/subquery source: FROM Product__c.
113	`WHERE Id IN :productIds AND Active__c = TRUE AND Sellable__c = TRUE`	Adds a query/filter condition: WHERE Id IN :productIds AND Active__c = TRUE AND Sellable__c = TRUE. The complete condition determines which records are included.
114	`]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
115	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
116	`List<DMS_Primary_Order_Line__c> lines = new List<DMS_Primary_Order_Line__c>();`	Declares/initializes local data used by the surrounding operation: List<DMS_Primary_Order_Line__c> lines = new List<DMS_Primary_Order_Line__c>();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
117	`            for (LineInput input : cmd.lines) {`	Repeats work over the specified records/items or while this condition holds: for (LineInput input : cmd.lines) {. Check where queries/writes occur relative to the loop.
118	`                Product__c product = products.get(input.productId);`	Calls the named method: Product__c product = products.get(input.productId);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
119	`                if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
120	`                    product == null ||`	Continues the surrounding declaration/expression or text: product == null ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
121	`                    product.Units_Per_Case__c == null ||`	Continues the surrounding declaration/expression or text: product.Units_Per_Case__c == null ||. Read it with the preceding opening statement (product == null ||); it is not a standalone business operation.
122	`                    product.Units_Per_Case__c <= 0 ||`	Continues the surrounding declaration/expression or text: product.Units_Per_Case__c <= 0 ||. Read it with the preceding opening statement (product.Units_Per_Case__c == null ||); it is not a standalone business operation.
123	`                    product.Units_Per_Case__c != product.Units_Per_Case__c.setScale(0) ||`	Calls the named method: product.Units_Per_Case__c != product.Units_Per_Case__c.setScale(0) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
124	`                    product.DMS_Case_Price__c == null ||`	Continues the surrounding declaration/expression or text: product.DMS_Case_Price__c == null ||. Read it with the preceding opening statement (product.Units_Per_Case__c != product.Units_Per_Case__c.setScale(0) ||); it is not a standalone business operation.
125	`                    product.DMS_Case_Price__c <= 0`	Continues the surrounding declaration/expression or text: product.DMS_Case_Price__c <= 0. Read it with the preceding opening statement (product.DMS_Case_Price__c == null ||); it is not a standalone business operation.
126	`                )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
127	`                    throw new DmsPortalApi.InputException(`	Stops this execution path with a validation/error exception: throw new DmsPortalApi.InputException(. The caller/catch block decides how it is reported.
128	`                        'Configure positive Primary Case Price and whole Units Per Case for every product first.'`	Continues the surrounding declaration/expression or text: 'Configure positive Primary Case Price and whole Units Per Case for every product first.'. Read it with the preceding opening statement (throw new DmsPortalApi.InputException(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
129	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
130	`lines.add(`	Calls the named method: lines.add(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
131	`new DMS_Primary_Order_Line__c(`	Continues the surrounding declaration/expression or text: new DMS_Primary_Order_Line__c(. Read it with the preceding opening statement (lines.add(); it is not a standalone business operation.
132	`Product__c = product.Id,`	Assigns the right-hand expression to the named variable/property: Product__c = product.Id,. This is in-memory unless it is later persisted by an explicit call.
133	`Cases__c = input.cases,`	Assigns the right-hand expression to the named variable/property: Cases__c = input.cases,. This is in-memory unless it is later persisted by an explicit call.
134	`Scheme__c = input.schemeId,`	Assigns the right-hand expression to the named variable/property: Scheme__c = input.schemeId,. This is in-memory unless it is later persisted by an explicit call.
135	`Pieces_Per_Case__c = product.Units_Per_Case__c,`	Assigns the right-hand expression to the named variable/property: Pieces_Per_Case__c = product.Units_Per_Case__c,. This is in-memory unless it is later persisted by an explicit call.
136	`Case_Price__c = product.DMS_Case_Price__c,`	Assigns the right-hand expression to the named variable/property: Case_Price__c = product.DMS_Case_Price__c,. This is in-memory unless it is later persisted by an explicit call.
137	`Tax_Percent__c = product.GST_Percent__c == null ? 0 : product.GST_Percent__c`	Assigns the right-hand expression to the named variable/property: Tax_Percent__c = product.GST_Percent__c == null ? 0 : product.GST_Percent__c. This is in-memory unless it is later persisted by an explicit call.
138	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
139	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
140	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
141	`DMS_Primary_Order__c order = new DMS_Primary_Order__c(`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order__c order = new DMS_Primary_Order__c(. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
142	`Employee__c = cmd.employeeId,`	Assigns the right-hand expression to the named variable/property: Employee__c = cmd.employeeId,. This is in-memory unless it is later persisted by an explicit call.
143	`Distributor__c = cmd.distributorId,`	Assigns the right-hand expression to the named variable/property: Distributor__c = cmd.distributorId,. This is in-memory unless it is later persisted by an explicit call.
144	`Order_Source__c = distributorEntry ? 'Distributor DMS' : 'Employee SFA',`	Assigns the right-hand expression to the named variable/property: Order_Source__c = distributorEntry ? 'Distributor DMS' : 'Employee SFA',. This is in-memory unless it is later persisted by an explicit call.
145	`Status__c = 'Draft',`	Assigns the right-hand expression to the named variable/property: Status__c = 'Draft',. This is in-memory unless it is later persisted by an explicit call.
146	`Notes__c = cmd.notes,`	Assigns the right-hand expression to the named variable/property: Notes__c = cmd.notes,. This is in-memory unless it is later persisted by an explicit call.
147	`Request_Key__c = key,`	Assigns the right-hand expression to the named variable/property: Request_Key__c = key,. This is in-memory unless it is later persisted by an explicit call.
148	`Request_Hash__c = fingerprint`	Assigns the right-hand expression to the named variable/property: Request_Hash__c = fingerprint. This is in-memory unless it is later persisted by an explicit call.
149	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
150	`insert order;`	Performs Salesforce DML: insert order;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
151	`parentId = order.Id;`	Assigns the right-hand expression to the named variable/property: parentId = order.Id;. This is in-memory unless it is later persisted by an explicit call.
152	`for (DMS_Primary_Order_Line__c line : lines)`	Repeats work over the specified records/items or while this condition holds: for (DMS_Primary_Order_Line__c line : lines). Check where queries/writes occur relative to the loop.
153	`line.Order__c = parentId;`	Assigns the right-hand expression to the named variable/property: line.Order__c = parentId;. This is in-memory unless it is later persisted by an explicit call.
154	`insert lines;`	Performs Salesforce DML: insert lines;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
155	`} else {`	Alternative branch taken when the preceding condition is false.

Line	Source code	Explanation / reading note
156	`Map<Id, DMS_Goods_Receipt_Line__c> receipts = new Map<Id, DMS_Goods_Receipt_Line__c>(`	Declares/initializes local data used by the surrounding operation: Map<Id, DMS_Goods_Receipt_Line__c> receipts = new Map<Id, DMS_Goods_Receipt_Line__c>(. Collection contents and assignments below determine its purpose.
157	`[`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (Map<Id, DMS_Goods_Receipt_Line__c> receipts = new Map<Id, DMS_Goods_Receipt_Line__c>(); it is not a standalone business operation.
158	`SELECT`	Selects these Salesforce fields/aggregates: SELECT. Query results are used in the surrounding assignment or loop.
159	`Id,`	Declares/initializes local data used by the surrounding operation: Id,. Collection contents and assignments below determine its purpose.
160	`Product__c,`	Continues the surrounding declaration/expression or text: Product__c,. Read it with the preceding opening statement (Id,); it is not a standalone business operation.
161	`Received_Cases__c,`	Continues the surrounding declaration/expression or text: Received_Cases__c,. Read it with the preceding opening statement (Product__c,); it is not a standalone business operation.
162	`Free_Cases__c,`	Continues the surrounding declaration/expression or text: Free_Cases__c,. Read it with the preceding opening statement (Received_Cases__c,); it is not a standalone business operation.
163	`Case_Cost__c,`	Continues the surrounding declaration/expression or text: Case_Cost__c,. Read it with the preceding opening statement (Free_Cases__c,); it is not a standalone business operation.
164	`Pieces_Per_Case__c,`	Continues the surrounding declaration/expression or text: Pieces_Per_Case__c,. Read it with the preceding opening statement (Case_Cost__c,); it is not a standalone business operation.
165	`Batch_Number__c,`	Continues the surrounding declaration/expression or text: Batch_Number__c,. Read it with the preceding opening statement (Pieces_Per_Case__c,); it is not a standalone business operation.
166	`Expiry_Date__c`	Continues the surrounding declaration/expression or text: Expiry_Date__c. Read it with the preceding opening statement (Batch_Number__c,); it is not a standalone business operation.
167	`FROM DMS_Goods_Receipt_Line__c`	Chooses the Salesforce object/subquery source: FROM DMS_Goods_Receipt_Line__c.

Line	Source code	Explanation / reading note
168	`WHERE`	Adds a query/filter condition: WHERE. The complete condition determines which records are included.
169	`Id IN :receiptIds`	Declares/initializes local data used by the surrounding operation: Id IN :receiptIds. Collection contents and assignments below determine its purpose.
170	`AND Goods_Receipt__r.Distributor__c = :cmd.distributorId`	Adds a query/filter condition: AND Goods_Receipt__r.Distributor__c = :cmd.distributorId. The complete condition determines which records are included.
171	`AND Goods_Receipt__r.Status__c = 'Received'`	Adds a query/filter condition: AND Goods_Receipt__r.Status__c = 'Received'. The complete condition determines which records are included.
172	`FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
173	`]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
174	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
175	`Map<Id, Decimal> alreadyReturned = new Map<Id, Decimal>();`	Declares/initializes local data used by the surrounding operation: Map<Id, Decimal> alreadyReturned = new Map<Id, Decimal>();. Collection contents and assignments below determine its purpose.
176	`for (AggregateResult aggregate : [`	Repeats work over the specified records/items or while this condition holds: for (AggregateResult aggregate : [. Check where queries/writes occur relative to the loop.
177	`SELECT Receipt_Line__c receipt, SUM(Cases__c) amount`	Selects these Salesforce fields/aggregates: Receipt_Line__c receipt, SUM(Cases__c) amount. Query results are used in the surrounding assignment or loop.
178	`FROM DMS_Primary_Return_Line__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Return_Line__c.
179	`WHERE Receipt_Line__c IN :receiptIds AND Primary_Return__r.Status__c != 'Rejected'`	Adds a query/filter condition: WHERE Receipt_Line__c IN :receiptIds AND Primary_Return__r.Status__c != 'Rejected'. The complete condition determines which records are included.
180	`GROUP BY Receipt_Line__c`	Controls query sorting, grouping or result count: GROUP BY Receipt_Line__c.
181	`])`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
182	`alreadyReturned.put(`	Calls the named method: alreadyReturned.put(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
183	`(Id) aggregate.get('receipt'),`	Calls the named method: (Id) aggregate.get('receipt'),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
184	`(Decimal) aggregate.get('amount')`	Calls the named method: (Decimal) aggregate.get('amount'). Its implementation defines the side effect/result; use the symbol/file index to follow it.
185	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
186	`List<DMS_Primary_Return_Line__c> lines = new List<DMS_Primary_Return_Line__c>();`	Declares/initializes local data used by the surrounding operation: List<DMS_Primary_Return_Line__c> lines = new List<DMS_Primary_Return_Line__c>();. Collection contents and assignments below determine its purpose.
187	`for (LineInput input : cmd.lines) {`	Repeats work over the specified records/items or while this condition holds: for (LineInput input : cmd.lines) {. Check where queries/writes occur relative to the loop.
188	`DMS_Goods_Receipt_Line__c receipt = receipts.get(input.receiptLineId);`	Calls the named method: DMS_Goods_Receipt_Line__c receipt = receipts.get(input.receiptLineId);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
189	`Decimal previous = alreadyReturned.containsKey(input.receiptLineId)`	Declares/initializes local data used by the surrounding operation: Decimal previous = alreadyReturned.containsKey(input.receiptLineId). Collection contents and assignments below determine its purpose.
190	`? alreadyReturned.get(input.receiptLineId)`	Calls the named method: ? alreadyReturned.get(input.receiptLineId). Its implementation defines the side effect/result; use the symbol/file index to follow it.
191	`: 0;`	Continues the surrounding declaration/expression or text: : 0;. Read it with the preceding opening statement (? alreadyReturned.get(input.receiptLineId)); it is not a standalone business operation.
192	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
193	`receipt == null ||`	Continues the surrounding declaration/expression or text: receipt == null ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.

Line	Source code	Explanation / reading note
194	`previous + input.cases >`	Continues the surrounding declaration/expression or text: previous + input.cases >. Read it with the preceding opening statement (receipt == null ||); it is not a standalone business operation.
195	`receipt.Received_Cases__c +`	Continues the surrounding declaration/expression or text: receipt.Received_Cases__c +. Read it with the preceding opening statement (previous + input.cases >); it is not a standalone business operation.
196	`(receipt.Free_Cases__c == null ? 0 : receipt.Free_Cases__c)`	Continues the surrounding declaration/expression or text: (receipt.Free_Cases__c == null ? 0 : receipt.Free_Cases__c). Read it with the preceding opening statement (receipt.Received_Cases__c +); it is not a standalone business operation.
197	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
198	`throw new DmsPortalApi.InputException(`	Stops this execution path with a validation/error exception: throw new DmsPortalApi.InputException(. The caller/catch block decides how it is reported.
199	`'Return cases exceed the unreturned received cases for this distributor.'`	Continues the surrounding declaration/expression or text: 'Return cases exceed the unreturned received cases for this distributor.'. Read it with the preceding opening statement (throw new DmsPortalApi.InputException(); it is not a standalone business operation.
200	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
201	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
202	`!new Set<String>{`	Continues the surrounding declaration/expression or text: !new Set<String>{. Read it with the preceding opening statement (if (); it is not a standalone business operation.
203	`'Damaged',`	Continues the surrounding declaration/expression or text: 'Damaged',. Read it with the preceding opening statement (!new Set<String>{); it is not a standalone business operation.
204	`'Expired',`	Continues the surrounding declaration/expression or text: 'Expired',. Read it with the preceding opening statement ('Damaged',); it is not a standalone business operation.
205	`'Delayed Delivery',`	Continues the surrounding declaration/expression or text: 'Delayed Delivery',. Read it with the preceding opening statement ('Expired',); it is not a standalone business operation.
206	`'No Demand',`	Continues the surrounding declaration/expression or text: 'No Demand',. Read it with the preceding opening statement ('Delayed Delivery',); it is not a standalone business operation.

Line	Source code	Explanation / reading note
207	`'Other'`	Continues the surrounding declaration/expression or text: 'Other'. Read it with the preceding opening statement ('No Demand',); it is not a standalone business operation.
208	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
209	`.contains(input.reason) ||`	Continues the surrounding declaration/expression or text: .contains(input.reason) ||. Read it with the preceding opening statement (}); it is not a standalone business operation.
210	`(input.reason == 'Other' && String.isBlank(input.notes))`	Calls the named method: (input.reason == 'Other' && String.isBlank(input.notes)). Its implementation defines the side effect/result; use the symbol/file index to follow it.
211	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
212	`throw new DmsPortalApi.InputException('Choose a return reason; explain Other.');`	Stops this execution path with a validation/error exception: throw new DmsPortalApi.InputException('Choose a return reason; explain Other.');. The caller/catch block decides how it is reported.
213	`lines.add(`	Calls the named method: lines.add(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
214	`new DMS_Primary_Return_Line__c(`	Continues the surrounding declaration/expression or text: new DMS_Primary_Return_Line__c(. Read it with the preceding opening statement (lines.add(); it is not a standalone business operation.
215	`Product__c = receipt.Product__c,`	Assigns the right-hand expression to the named variable/property: Product__c = receipt.Product__c,. This is in-memory unless it is later persisted by an explicit call.
216	`Receipt_Line__c = receipt.Id,`	Assigns the right-hand expression to the named variable/property: Receipt_Line__c = receipt.Id,. This is in-memory unless it is later persisted by an explicit call.
217	`Cases__c = input.cases,`	Assigns the right-hand expression to the named variable/property: Cases__c = input.cases,. This is in-memory unless it is later persisted by an explicit call.
218	`Case_Value__c = receipt.Case_Cost__c,`	Assigns the right-hand expression to the named variable/property: Case_Value__c = receipt.Case_Cost__c,. This is in-memory unless it is later persisted by an explicit call.
219	`Pieces_Per_Case__c = receipt.Pieces_Per_Case__c,`	Assigns the right-hand expression to the named variable/property: Pieces_Per_Case__c = receipt.Pieces_Per_Case__c,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
220	`Batch_Number__c = receipt.Batch_Number__c,`	Assigns the right-hand expression to the named variable/property: Batch_Number__c = receipt.Batch_Number__c,. This is in-memory unless it is later persisted by an explicit call.
221	`Expiry_Date__c = receipt.Expiry_Date__c,`	Assigns the right-hand expression to the named variable/property: Expiry_Date__c = receipt.Expiry_Date__c,. This is in-memory unless it is later persisted by an explicit call.
222	`Reason__c = input.reason,`	Assigns the right-hand expression to the named variable/property: Reason__c = input.reason,. This is in-memory unless it is later persisted by an explicit call.
223	`Notes__c = input.notes`	Assigns the right-hand expression to the named variable/property: Notes__c = input.notes. This is in-memory unless it is later persisted by an explicit call.
224	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
225	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
226	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
227	`DMS_Primary_Return__c returned = new DMS_Primary_Return__c(`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Return__c returned = new DMS_Primary_Return__c(. This is in-memory unless it is later persisted by an explicit call.
228	`Employee__c = cmd.employeeId,`	Assigns the right-hand expression to the named variable/property: Employee__c = cmd.employeeId,. This is in-memory unless it is later persisted by an explicit call.
229	`Distributor__c = cmd.distributorId,`	Assigns the right-hand expression to the named variable/property: Distributor__c = cmd.distributorId,. This is in-memory unless it is later persisted by an explicit call.
230	`Status__c = 'Draft',`	Assigns the right-hand expression to the named variable/property: Status__c = 'Draft',. This is in-memory unless it is later persisted by an explicit call.
231	`Notes__c = cmd.notes,`	Assigns the right-hand expression to the named variable/property: Notes__c = cmd.notes,. This is in-memory unless it is later persisted by an explicit call.
232	`Request_Key__c = key,`	Assigns the right-hand expression to the named variable/property: Request_Key__c = key,. This is in-memory unless it is later persisted by an explicit call.
233	`Request_Hash__c = fingerprint`	Assigns the right-hand expression to the named variable/property: Request_Hash__c = fingerprint. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
234	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
235	`            insert returned;`	Performs Salesforce DML: insert returned;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
236	`            parentId = returned.Id;`	Assigns the right-hand expression to the named variable/property: parentId = returned.Id;. This is in-memory unless it is later persisted by an explicit call.
237	`            for (DMS_Primary_Return_Line__c line : lines)`	Repeats work over the specified records/items or while this condition holds: for (DMS_Primary_Return_Line__c line : lines). Check where queries/writes occur relative to the loop.
238	`                line.Primary_Return__c = parentId;`	Assigns the right-hand expression to the named variable/property: line.Primary_Return__c = parentId;. This is in-memory unless it is later persisted by an explicit call.
239	`            insert lines;`	Performs Salesforce DML: insert lines;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
240	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
241	`        Approval.ProcessSubmitRequest submission = new Approval.ProcessSubmitRequest();`	Calls the named method: Approval.ProcessSubmitRequest submission = new Approval.ProcessSubmitRequest();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
242	`        submission.setObjectId(parentId);`	Calls the named method: submission.setObjectId(parentId);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
243	`        submission.setProcessDefinitionNameOrId(`	Calls the named method: submission.setProcessDefinitionNameOrId(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
244	`            isReturn ? 'Company_Officer_Return_Approval' : 'Company_Officer_Approval'`	Continues the surrounding declaration/expression or text: isReturn ? 'Company_Officer_Return_Approval' : 'Company_Officer_Approval'. Read it with the preceding opening statement (submission.setProcessDefinitionNameOrId(); it is not a standalone business operation.
245	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
246	`        if (!Approval.process(submission).isSuccess())`	Submits the configured Salesforce approval request. Inspect the returned result before claiming submission succeeded.

Line	Source code	Explanation / reading note
247	`throw new DmsPortalApi.InputException('Unable to submit to the company officer.');`	Stops this execution path with a validation/error exception: throw new DmsPortalApi.InputException('Unable to submit to the company officer.');. The caller/catch block decides how it is reported.
248	`return new Map<String, Object>{ 'id' => parentId, 'status' => 'Submitted' };`	Returns new Map<String, Object>{ 'id' => parentId, 'status' => 'Submitted' } to the caller (or begins returned UI markup) and ends this execution path.
249	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
250	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsEmployeeTransactions.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsOfficerSharing.cls

Maintains only the custom Officer_Access read shares for primary headers/lines/returns; removes obsolete officer shares without deleting unrelated sharing reasons.

78 numbered source lines | SHA-256 36153faac84db751b3a624d1c2b6933d71f76a38c7061e15b3a9bcdb686c1286

Line	Source code	Explanation / reading note
1	`/**`	Developer comment/documentation: It is not executed.
2	`* Gives only the designated company officer read access to primary records.`	Developer comment/documentation: Gives only the designated company officer read access to primary records. It is not executed.
3	`* Custom sharing reasons preserve other manual shares and survive owner changes.`	Developer comment/documentation: Custom sharing reasons preserve other manual shares and survive owner changes. It is not executed.
4	`*/`	Developer comment/documentation: It is not executed.
5	`public without sharing class DmsOfficerSharing {`	Declares a class/type: public without sharing class DmsOfficerSharing {. Runs without record-sharing enforcement; see the documented internal authorization boundary.
6	`public static void synchronize(String objectName, Set<Id> recordIds) {`	Declares a callable function/method: public static void synchronize(String objectName, Set<Id> recordIds) {. Parameters supply its inputs; the following block implements the operation.
7	`if (recordIds == null || recordIds.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (recordIds == null || recordIds.isEmpty()).
8	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
9	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
10	`!new Set<String>{`	Continues the surrounding declaration/expression or text: !new Set<String>{. Read it with the preceding opening statement (if (); it is not a standalone business operation.
11	`'DMS_Primary_Order__c',`	Continues the surrounding declaration/expression or text: 'DMS_Primary_Order__c',. Read it with the preceding opening statement (!new Set<String>{); it is not a standalone business operation.
12	`'DMS_Primary_Order_Line__c',`	Continues the surrounding declaration/expression or text: 'DMS_Primary_Order_Line__c',. Read it with the preceding opening statement ('DMS_Primary_Order__c',); it is not a standalone business operation.

Line	Source code	Explanation / reading note
13	`'DMS_Primary_Return__c'`	Continues the surrounding declaration/expression or text: 'DMS_Primary_Return__c'. Read it with the preceding opening statement ('DMS_Primary_Order_Line__c',); it is not a standalone business operation.
14	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
15	`.contains(objectName)`	Continues the surrounding declaration/expression or text: .contains(objectName). Read it with the preceding opening statement (}); it is not a standalone business operation.
16	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`throw new SharingConfigurationException('Unsupported DMS sharing object.');`	Stops this execution path with a validation/error exception: throw new SharingConfigurationException('Unsupported DMS sharing object.');. The caller/catch block decides how it is reported.
18	`String officerPath = objectName == 'DMS_Primary_Order_Line__c'`	Declares/initializes local data used by the surrounding operation: String officerPath = objectName == 'DMS_Primary_Order_Line__c'. Collection contents and assignments below determine its purpose.
19	`? 'Order__r.Officer__c'`	Continues the surrounding declaration/expression or text: ? 'Order__r.Officer__c'. Read it with the preceding opening statement (String officerPath = objectName == 'DMS_Primary_Order_Line__c'); it is not a standalone business operation.
20	`: 'Officer__c';`	Continues the surrounding declaration/expression or text: : 'Officer__c';. Read it with the preceding opening statement (? 'Order__r.Officer__c'); it is not a standalone business operation.
21	`Map<Id, Id> desired = new Map<Id, Id>();`	Declares/initializes local data used by the surrounding operation: Map<Id, Id> desired = new Map<Id, Id>();. Collection contents and assignments below determine its purpose.
22	`for (`	Repeats work over the specified records/items or while this condition holds: for (. Check where queries/writes occur relative to the loop.
23	`SObject record : Database.query(`	Calls the named method: SObject record : Database.query(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
24	`'SELECT Id,OwnerId,' +`	Continues the surrounding declaration/expression or text: 'SELECT Id,OwnerId,' +. Read it with the preceding opening statement (SObject record : Database.query(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
25	`officerPath +`	Continues the surrounding declaration/expression or text: officerPath +. Read it with the preceding opening statement ('SELECT Id,OwnerId,' +); it is not a standalone business operation.
26	`' FROM ' +`	Continues the surrounding declaration/expression or text: ' FROM ' +. Read it with the preceding opening statement (officerPath +); it is not a standalone business operation.
27	`objectName +`	Continues the surrounding declaration/expression or text: objectName +. Read it with the preceding opening statement (' FROM ' +); it is not a standalone business operation.
28	`' WHERE Id IN :recordIds'`	Continues the surrounding declaration/expression or text: ' WHERE Id IN :recordIds'. Read it with the preceding opening statement (objectName +); it is not a standalone business operation.
29	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement ( )); it is not a standalone business operation.
31	`SObject parent = objectName == 'DMS_Primary_Order_Line__c'`	Assigns the right-hand expression to the named variable/property: SObject parent = objectName == 'DMS_Primary_Order_Line__c'. This is in-memory unless it is later persisted by an explicit call.
32	`? record.getSObject('Order__r')`	Calls the named method: ? record.getSObject('Order__r'). Its implementation defines the side effect/result; use the symbol/file index to follow it.
33	`: record;`	Continues the surrounding declaration/expression or text: : record;. Read it with the preceding opening statement (? record.getSObject('Order__r')); it is not a standalone business operation.
34	`Id officer = parent == null ? null : (Id) parent.get('Officer__c');`	Declares/initializes local data used by the surrounding operation: Id officer = parent == null ? null : (Id) parent.get('Officer__c');. Collection contents and assignments below determine its purpose.
35	`if (officer != null && officer != record.get('OwnerId'))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (officer != null && officer != record.get('OwnerId')).
36	`desired.put(record.Id, officer);`	Calls the named method: desired.put(record.Id, officer);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
37	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`        String shareName = objectName.substringBeforeLast('__c') + '__Share';`	Declares/initializes local data used by the surrounding operation: String shareName = objectName.substringBeforeLast('__c') + '__Share';. Collection contents and assignments below determine its purpose.
39	`        List<SObject> obsolete = new List<SObject>();`	Declares/initializes local data used by the surrounding operation: List<SObject> obsolete = new List<SObject>();. Collection contents and assignments below determine its purpose.
40	`        for (`	Repeats work over the specified records/items or while this condition holds: for (. Check where queries/writes occur relative to the loop.
41	`            SObject share : Database.query(`	Calls the named method: SObject share : Database.query(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
42	`                'SELECT Id,ParentId,UserOrGroupId FROM ' +`	Continues the surrounding declaration/expression or text: 'SELECT Id,ParentId,UserOrGroupId FROM ' +. Read it with the preceding opening statement (SObject share : Database.query(); it is not a standalone business operation.
43	`                    shareName +`	Continues the surrounding declaration/expression or text: shareName +. Read it with the preceding opening statement ('SELECT Id,ParentId,UserOrGroupId FROM ' +); it is not a standalone business operation.
44	`                    ' WHERE ParentId IN :recordIds AND RowCause = \'Officer_Access__c\''`	Assigns the right-hand expression to the named variable/property: ' WHERE ParentId IN :recordIds AND RowCause = \'Officer_Access__c\''. This is in-memory unless it is later persisted by an explicit call.
45	`            )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
46	`        ) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement ( )); it is not a standalone business operation.
47	`            Id parentId = (Id) share.get('ParentId');`	Declares/initializes local data used by the surrounding operation: Id parentId = (Id) share.get('ParentId');. Collection contents and assignments below determine its purpose.
48	`            if (desired.get(parentId) == share.get('UserOrGroupId'))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (desired.get(parentId) == share.get('UserOrGroupId')).
49	`                desired.remove(parentId);`	Calls the named method: desired.remove(parentId);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
50	`else`	Alternative branch taken when the preceding condition is false.
51	`obsolete.add(share);`	Calls the named method: obsolete.add(share);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
52	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
53	`if (!obsolete.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!obsolete.isEmpty()).
54	`delete obsolete;`	Performs Salesforce DML: delete obsolete;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
55	`List<SObject> additions = new List<SObject>();`	Declares/initializes local data used by the surrounding operation: List<SObject> additions = new List<SObject>();. Collection contents and assignments below determine its purpose.
56	`Schema.SObjectType shareType = Schema.getGlobalDescribe().get(shareName);`	Calls the named method: Schema.SObjectType shareType = Schema.getGlobalDescribe().get(shareName);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
57	`for (Id parentId : desired.keySet()) {`	Repeats work over the specified records/items or while this condition holds: for (Id parentId : desired.keySet()) {. Check where queries/writes occur relative to the loop.
58	`SObject share = shareType.newSObject();`	Calls the named method: SObject share = shareType.newSObject();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
59	`share.put('ParentId', parentId);`	Calls the named method: share.put('ParentId', parentId);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
60	`share.put('UserOrGroupId', desired.get(parentId));`	Calls the named method: share.put('UserOrGroupId', desired.get(parentId));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
61	`share.put('AccessLevel', 'Read');`	Calls the named method: share.put('AccessLevel', 'Read');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
62	`share.put('RowCause', 'Officer_Access__c');`	Calls the named method: share.put('RowCause', 'Officer_Access__c');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
63	`additions.add(share);`	Calls the named method: additions.add(share);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
64	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
65	`        if (!additions.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!additions.isEmpty()).
66	`            insert additions;`	Performs Salesforce DML: insert additions;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
67	`        // Order approver changes must also update existing private order lines.`	Developer comment/documentation: Order approver changes must also update existing private order lines. It is not executed.
68	`        if (objectName == 'DMS_Primary_Order__c') {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (objectName == 'DMS_Primary_Order__c') {.
69	`            Set<Id> lineIds = new Map<Id, DMS_Primary_Order_Line__c>(`	Declares/initializes local data used by the surrounding operation: Set<Id> lineIds = new Map<Id, DMS_Primary_Order_Line__c>(. Collection contents and assignments below determine its purpose.
70	`                    [SELECT Id FROM DMS_Primary_Order_Line__c WHERE Order__c IN : recordIds]`	Continues the surrounding declaration/expression or text: [SELECT Id FROM DMS_Primary_Order_Line__c WHERE Order__c IN :recordIds]. Read it with the preceding opening statement (Set<Id> lineIds = new Map<Id, DMS_Primary_Order_Line__c>(); it is not a standalone business operation.
71	`                )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
72	`                .keySet();`	Continues the surrounding declaration/expression or text: .keySet();. Read it with the preceding opening statement ( )); it is not a standalone business operation.
73	`            synchronize('DMS_Primary_Order_Line__c', lineIds);`	Continues the surrounding declaration/expression or text: synchronize('DMS_Primary_Order_Line__c', lineIds);. Read it with the preceding opening statement (.keySet();); it is not a standalone business operation.
74	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
75	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
76	`    public class SharingConfigurationException extends Exception {`	Declares a class/type: public class SharingConfigurationException extends Exception {. Members below hold behavior and/or state.

Line	Source code	Explanation / reading note
77	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
78	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsOfficerSharing.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsPortalApi.cls

Current trusted-backend Apex REST boundary: permission gate, distributor lock, savepoint/rollback, primary commands, tickets, secondary decisions and atomic goods receipt/inventory posting.

309 numbered source lines | SHA-256 50874e4c111ce016615f10e952cb977e2621a998266df5130da98c17bcbb41dd

Line	Source code	Explanation / reading note
1	`/**`	Developer comment/documentation: It is not executed.
2	`* Atomic DMS commands from the authenticated backend only.`	Developer comment/documentation: Atomic DMS commands from the authenticated backend only. It is not executed.
3	`* The backend derives employee/distributor IDs from verified sessions. Mobile`	Developer comment/documentation: The backend derives employee/distributor IDs from verified sessions. Mobile It is not executed.
4	`* clients never receive Salesforce credentials or the integration permission.`	Developer comment/documentation: clients never receive Salesforce credentials or the integration permission. It is not executed.
5	`*/`	Developer comment/documentation: It is not executed.
6	`@RestResource(urlMapping='/dms/portal/*')`	Registers the Apex REST URL mapping; authentication/authorization must still be enforced.
7	`global with sharing class DmsPortalApi {`	Declares a class/type: global with sharing class DmsPortalApi {. Uses record sharing, which does not alone enforce field/object permissions.
8	`public class InputException extends Exception {`	Declares a class/type: public class InputException extends Exception {. Members below hold behavior and/or state.
9	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`public class Command {`	Declares a class/type: public class Command {. Members below hold behavior and/or state.
11	`public String action,`	Continues the surrounding declaration/expression or text: public String action,. Read it with the preceding opening statement (public class Command {); it is not a standalone business operation.
12	`requestKey,`	Continues the surrounding declaration/expression or text: requestKey,. Read it with the preceding opening statement (public String action,); it is not a standalone business operation.
13	`subject,`	Continues the surrounding declaration/expression or text: subject,. Read it with the preceding opening statement (requestKey,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
14	`category,`	Continues the surrounding declaration/expression or text: category,. Read it with the preceding opening statement (subject,); it is not a standalone business operation.
15	`description,`	Continues the surrounding declaration/expression or text: description,. Read it with the preceding opening statement (category,); it is not a standalone business operation.
16	`decision,`	Continues the surrounding declaration/expression or text: decision,. Read it with the preceding opening statement (description,); it is not a standalone business operation.
17	`notes,`	Continues the surrounding declaration/expression or text: notes,. Read it with the preceding opening statement (decision,); it is not a standalone business operation.
18	`batch,`	Continues the surrounding declaration/expression or text: batch,. Read it with the preceding opening statement (notes,); it is not a standalone business operation.
19	`receiptKind;`	Continues the surrounding declaration/expression or text: receiptKind;. Read it with the preceding opening statement (batch,); it is not a standalone business operation.
20	`public Id distributorId, recordId, employeeId;`	Continues the surrounding declaration/expression or text: public Id distributorId, recordId, employeeId;. Read it with the preceding opening statement (receiptKind;); it is not a standalone business operation.
21	`public Decimal cases;`	Continues the surrounding declaration/expression or text: public Decimal cases;. Read it with the preceding opening statement (public Id distributorId, recordId, employeeId;); it is not a standalone business operation.
22	`public Date expiry;`	Continues the surrounding declaration/expression or text: public Date expiry;. Read it with the preceding opening statement (public Decimal cases;); it is not a standalone business operation.
23	`public List<DmsEmployeeTransactions.LineInput> lines;`	Continues the surrounding declaration/expression or text: public List<DmsEmployeeTransactions.LineInput> lines;. Read it with the preceding opening statement (public Date expiry;); it is not a standalone business operation.
24	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
25	`@HttpPost`	Associates the following Apex method with the indicated HTTP verb.
26	`global static void execute() {`	Declares a callable function/method: global static void execute() {. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
27	`        RestContext.response.addHeader('Content-Type', 'application/json');`	Calls the named method: RestContext.response.addHeader('Content-Type', 'application/json');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
28	`        RestContext.response.responseBody = Blob.valueOf(JSON.serialize(handle()));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
29	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`    private static Map<String, Object> handle() {`	Declares a callable function/method: private static Map<String, Object> handle() {. Parameters supply its inputs; the following block implements the operation.
31	`        if (!FeatureManagement.checkPermission('DMS_Trusted_Backend')) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!FeatureManagement.checkPermission('DMS_Trusted_Backend')) {.
32	`            RestContext.response.statusCode = 403;`	Assigns the right-hand expression to the named variable/property: RestContext.response.statusCode = 403;. This is in-memory unless it is later persisted by an explicit call.
33	`            return new Map<String, Object>{ 'error' => 'Trusted backend access is required.' };`	Returns new Map<String, Object>{ 'error' => 'Trusted backend access is required.' } to the caller (or begins returned UI markup) and ends this execution path.
34	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`        Savepoint checkpoint = Database.setSavepoint();`	Creates a transaction checkpoint so later failure can roll back all command changes.
36	`        try {`	Starts operations whose failure is handled by the following catch/finally blocks.
37	`            Command cmd = (Command) JSON.deserialize(`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
38	`                RestContext.request.requestBody.toString(),`	Calls the named method: RestContext.request.requestBody.toString(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
39	`                Command.class`	Continues the surrounding declaration/expression or text: Command.class. Read it with the preceding opening statement (RestContext.request.requestBody.toString(),); it is not a standalone business operation.
40	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
41	`// A distributor lock serializes replay detection and inventory updates.`	Developer comment/documentation: A distributor lock serializes replay detection and inventory updates. It is not executed.
42	`List<DMS_Distributor__c> distributors = [`	Declares/initializes local data used by the surrounding operation: List<DMS_Distributor__c> distributors = [. Collection contents and assignments below determine its purpose.
43	`SELECT Id, Officer__c`	Selects these Salesforce fields/aggregates: Id, Officer__c. Query results are used in the surrounding assignment or loop.
44	`FROM DMS_Distributor__c`	Chooses the Salesforce object/subquery source: FROM DMS_Distributor__c.
45	`WHERE Id = :cmd.distributorId AND Active__c = TRUE`	Adds a query/filter condition: WHERE Id = :cmd.distributorId AND Active__c = TRUE. The complete condition determines which records are included.
46	`FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
47	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48	`if (distributors.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (distributors.isEmpty()).
49	`throw new InputException('Distributor is not active.');`	Stops this execution path with a validation/error exception: throw new InputException('Distributor is not active.');. The caller/catch block decides how it is reported.
50	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
51	`cmd.action == 'primaryOrder' ||`	Continues the surrounding declaration/expression or text: cmd.action == 'primaryOrder' ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
52	`cmd.action == 'primaryReturn' ||`	Continues the surrounding declaration/expression or text: cmd.action == 'primaryReturn' ||. Read it with the preceding opening statement (cmd.action == 'primaryOrder' ||); it is not a standalone business operation.
53	`cmd.action == 'distributorPrimaryOrder'`	Continues the surrounding declaration/expression or text: cmd.action == 'distributorPrimaryOrder'. Read it with the preceding opening statement (cmd.action == 'primaryReturn' ||); it is not a standalone business operation.
54	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
55	`return DmsEmployeeTransactions.save(cmd);`	Returns DmsEmployeeTransactions.save(cmd) to the caller (or begins returned UI markup) and ends this execution path.
56	`if (cmd.action == 'ticket')`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (cmd.action == 'ticket').
57	`return ticket(cmd);`	Returns ticket(cmd) to the caller (or begins returned UI markup) and ends this execution path.
58	`if (cmd.action == 'secondaryDecision')`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (cmd.action == 'secondaryDecision').
59	`return decision(cmd, false);`	Returns decision(cmd, false) to the caller (or begins returned UI markup) and ends this execution path.
60	`if (cmd.action == 'returnDecision')`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (cmd.action == 'returnDecision').
61	`return decision(cmd, true);`	Returns decision(cmd, true) to the caller (or begins returned UI markup) and ends this execution path.
62	`if (cmd.action == 'receiveGoods')`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (cmd.action == 'receiveGoods').
63	`return receiveGoods(cmd);`	Returns receiveGoods(cmd) to the caller (or begins returned UI markup) and ends this execution path.
64	`throw new InputException('Unsupported transaction.');`	Stops this execution path with a validation/error exception: throw new InputException('Unsupported transaction.');. The caller/catch block decides how it is reported.
65	`} catch (Exception error) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
66	`Database.rollback(checkpoint);`	Rolls Salesforce writes back to the saved checkpoint; prevents partial command results.
67	`if (error instanceof DmlException) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (error instanceof DmlException) {.
68	`DmlException validation = (DmlException) error;`	Assigns the right-hand expression to the named variable/property: DmlException validation = (DmlException) error;. This is in-memory unless it is later persisted by an explicit call.
69	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.

Line	Source code	Explanation / reading note
70	`validation.getNumDml() > 0 &&`	Calls the named method: validation.getNumDml() > 0 &&. Its implementation defines the side effect/result; use the symbol/file index to follow it.
71	`(validation.getDmlStatusCode(0) == 'FIELD_CUSTOM_VALIDATION_EXCEPTION' ||`	Calls the named method: (validation.getDmlStatusCode(0) == 'FIELD_CUSTOM_VALIDATION_EXCEPTION' ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
72	`validation.getDmlStatusCode(0) == 'REQUIRED_FIELD_MISSING')`	Calls the named method: validation.getDmlStatusCode(0) == 'REQUIRED_FIELD_MISSING'). Its implementation defines the side effect/result; use the symbol/file index to follow it.
73	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (validation.getDmlStatusCode(0) == 'REQUIRED_FIELD_MISSING')); it is not a standalone business operation.
74	`RestContext.response.statusCode = 400;`	Assigns the right-hand expression to the named variable/property: RestContext.response.statusCode = 400;. This is in-memory unless it is later persisted by an explicit call.
75	`return new Map<String, Object>{ 'error' => validation.getDmlMessage(0) };`	Returns new Map<String, Object>{ 'error' => validation.getDmlMessage(0) } to the caller (or begins returned UI markup) and ends this execution path.
76	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
77	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
78	`RestContext.response.statusCode = error instanceof InputException ? 400 : 500;`	Assigns the right-hand expression to the named variable/property: RestContext.response.statusCode = error instanceof InputException ? 400 : 500;. This is in-memory unless it is later persisted by an explicit call.
79	`return new Map<String, Object>{`	Returns new Map<String, Object>{ to the caller (or begins returned UI markup) and ends this execution path.
80	`'error' => error instanceof InputException`	Continues the surrounding declaration/expression or text: 'error' => error instanceof InputException. Read it with the preceding opening statement (return new Map<String, Object>{); it is not a standalone business operation.
81	`? error.getMessage()`	Calls the named method: ? error.getMessage(). Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
82	`: 'Salesforce could not save this transaction. No partial changes were saved.'`	Continues the surrounding declaration/expression or text: : 'Salesforce could not save this transaction. No partial changes were saved.'. Read it with the preceding opening statement (? error.getMessage()); it is not a standalone business operation.
83	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
84	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
85	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
86	`private static String key(Command cmd) {`	Declares a callable function/method: private static String key(Command cmd) {. Parameters supply its inputs; the following block implements the operation.
87	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
88	`String.isBlank(cmd.requestKey) ||`	Declares/initializes local data used by the surrounding operation: String.isBlank(cmd.requestKey) ||. Collection contents and assignments below determine its purpose.
89	`!Pattern.matches('[A-Za-z0-9-]{16,64}', cmd.requestKey)`	Calls the named method: !Pattern.matches('[A-Za-z0-9-]{16,64}', cmd.requestKey). Its implementation defines the side effect/result; use the symbol/file index to follow it.
90	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
91	`throw new InputException('A stable request key is required.');`	Stops this execution path with a validation/error exception: throw new InputException('A stable request key is required.');. The caller/catch block decides how it is reported.
92	`return String.valueOf(cmd.distributorId) + ':' + cmd.requestKey;`	Returns String.valueOf(cmd.distributorId) + ':' + cmd.requestKey to the caller (or begins returned UI markup) and ends this execution path.
93	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
94	`private static Map<String, Object> result(Id id, String status) {`	Declares a callable function/method: private static Map<String, Object> result(Id id, String status) {. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
95	`return new Map<String, Object>{ 'id' => id, 'status' => status };`	Returns new Map<String, Object>{ 'id' => id, 'status' => status } to the caller (or begins returned UI markup) and ends this execution path.
96	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
97	`private static Map<String, Object> ticket(Command cmd) {`	Declares a callable function/method: private static Map<String, Object> ticket(Command cmd) {. Parameters supply its inputs; the following block implements the operation.
98	`String requestKey = key(cmd);`	Declares/initializes local data used by the surrounding operation: String requestKey = key(cmd);. Collection contents and assignments below determine its purpose.
99	`List<DMS_Support_Ticket__c> existing = [`	Declares/initializes local data used by the surrounding operation: List<DMS_Support_Ticket__c> existing = [. Collection contents and assignments below determine its purpose.
100	`SELECT Id, Status__c, Subject__c, Category__c, Description__c`	Selects these Salesforce fields/aggregates: Id, Status__c, Subject__c, Category__c, Description__c. Query results are used in the surrounding assignment or loop.
101	`FROM DMS_Support_Ticket__c`	Chooses the Salesforce object/subquery source: FROM DMS_Support_Ticket__c.
102	`WHERE Request_Key__c = :requestKey`	Adds a query/filter condition: WHERE Request_Key__c = :requestKey. The complete condition determines which records are included.
103	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
104	`if (!existing.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!existing.isEmpty()) {.
105	`DMS_Support_Ticket__c saved = existing[0];`	Assigns the right-hand expression to the named variable/property: DMS_Support_Ticket__c saved = existing[0];. This is in-memory unless it is later persisted by an explicit call.
106	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
107	`saved.Subject__c != cmd.subject ||`	Continues the surrounding declaration/expression or text: saved.Subject__c != cmd.subject ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.

Line	Source code	Explanation / reading note
108	`saved.Category__c != cmd.category ||`	Continues the surrounding declaration/expression or text: saved.Category__c != cmd.category ||. Read it with the preceding opening statement (saved.Subject__c != cmd.subject ||); it is not a standalone business operation.
109	`saved.Description__c != cmd.description`	Continues the surrounding declaration/expression or text: saved.Description__c != cmd.description. Read it with the preceding opening statement (saved.Category__c != cmd.category ||); it is not a standalone business operation.
110	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
111	`throw new InputException(`	Stops this execution path with a validation/error exception: throw new InputException(. The caller/catch block decides how it is reported.
112	`'This request key was already used for different ticket details.'`	Continues the surrounding declaration/expression or text: 'This request key was already used for different ticket details.'. Read it with the preceding opening statement (throw new InputException(); it is not a standalone business operation.
113	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
114	`return result(saved.Id, saved.Status__c);`	Returns result(saved.Id, saved.Status__c) to the caller (or begins returned UI markup) and ends this execution path.
115	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
116	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
117	`String.isBlank(cmd.subject) ||`	Declares/initializes local data used by the surrounding operation: String.isBlank(cmd.subject) ||. Collection contents and assignments below determine its purpose.
118	`cmd.subject.length() > 180 ||`	Calls the named method: cmd.subject.length() > 180 ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
119	`String.isBlank(cmd.description) ||`	Declares/initializes local data used by the surrounding operation: String.isBlank(cmd.description) ||. Collection contents and assignments below determine its purpose.
120	`cmd.description.length() > 32000 ||`	Calls the named method: cmd.description.length() > 32000 ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
121	`!new Set<String>{ 'Product', 'Portal', 'Delivery' }.contains(cmd.category)`	Continues the surrounding declaration/expression or text: !new Set<String>{ 'Product', 'Portal', 'Delivery' }.contains(cmd.category). Read it with the preceding opening statement (cmd.description.length() > 32000 ||); it is not a standalone business operation.
122	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
123	`throw new InputException('Enter a subject, description and valid issue category.');`	Stops this execution path with a validation/error exception: throw new InputException('Enter a subject, description and valid issue category.');. The caller/catch block decides how it is reported.
124	`DMS_Support_Ticket__c row = new DMS_Support_Ticket__c(`	Assigns the right-hand expression to the named variable/property: DMS_Support_Ticket__c row = new DMS_Support_Ticket__c(. This is in-memory unless it is later persisted by an explicit call.
125	`Distributor__c = cmd.distributorId,`	Assigns the right-hand expression to the named variable/property: Distributor__c = cmd.distributorId,. This is in-memory unless it is later persisted by an explicit call.
126	`Subject__c = cmd.subject,`	Assigns the right-hand expression to the named variable/property: Subject__c = cmd.subject,. This is in-memory unless it is later persisted by an explicit call.
127	`Category__c = cmd.category,`	Assigns the right-hand expression to the named variable/property: Category__c = cmd.category,. This is in-memory unless it is later persisted by an explicit call.
128	`Description__c = cmd.description,`	Assigns the right-hand expression to the named variable/property: Description__c = cmd.description,. This is in-memory unless it is later persisted by an explicit call.
129	`Request_Key__c = requestKey`	Assigns the right-hand expression to the named variable/property: Request_Key__c = requestKey. This is in-memory unless it is later persisted by an explicit call.
130	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
131	`insert row;`	Performs Salesforce DML: insert row;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
132	`return result(row.Id, 'Open');`	Returns result(row.Id, 'Open') to the caller (or begins returned UI markup) and ends this execution path.
133	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
134	`    private static Map<String, Object> decision(Command cmd, Boolean isReturn) {`	Declares a callable function/method: private static Map<String, Object> decision(Command cmd, Boolean isReturn) {. Parameters supply its inputs; the following block implements the operation.
135	`        if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
136	`            !new Set<String>{ 'Approved', 'Rejected' }.contains(cmd.decision) ||`	Continues the surrounding declaration/expression or text: !new Set<String>{ 'Approved', 'Rejected' }.contains(cmd.decision) ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
137	`            (cmd.decision == 'Rejected' && String.isBlank(cmd.notes)) ||`	Calls the named method: (cmd.decision == 'Rejected' && String.isBlank(cmd.notes)) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
138	`            (cmd.notes != null &&`	Continues the surrounding declaration/expression or text: (cmd.notes != null &&. Read it with the preceding opening statement ((cmd.decision == 'Rejected' && String.isBlank(cmd.notes)) ||); it is not a standalone business operation.
139	`            cmd.notes.length() > 255)`	Calls the named method: cmd.notes.length() > 255). Its implementation defines the side effect/result; use the symbol/file index to follow it.
140	`        )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
141	`            throw new InputException(`	Stops this execution path with a validation/error exception: throw new InputException(. The caller/catch block decides how it is reported.
142	`                'Choose a decision and enter a rejection reason when rejecting.'`	Continues the surrounding declaration/expression or text: 'Choose a decision and enter a rejection reason when rejecting.'. Read it with the preceding opening statement (throw new InputException(); it is not a standalone business operation.
143	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
144	`        List<SObject> rows = isReturn`	Declares/initializes local data used by the surrounding operation: List<SObject> rows = isReturn. Collection contents and assignments below determine its purpose.
145	`            ? (List<SObject>) [`	Continues the surrounding declaration/expression or text: ? (List<SObject>) [. Read it with the preceding opening statement (List<SObject> rows = isReturn); it is not a standalone business operation.

Line	Source code	Explanation / reading note
146	`SELECT Id, DMS_Status__c`	Selects these Salesforce fields/aggregates: Id, DMS_Status__c. Query results are used in the surrounding assignment or loop.
147	`FROM Product_Return__c`	Chooses the Salesforce object/subquery source: FROM Product_Return__c.
148	`WHERE Id = :cmd.recordId AND DMS_Distributor__c = : cmd.distributorId`	Adds a query/filter condition: WHERE Id = :cmd.recordId AND DMS_Distributor__c = :cmd.distributorId. The complete condition determines which records are included.
149	`FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
150	`]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
151	`: (List<SObject>) [`	Continues the surrounding declaration/expression or text: : (List<SObject>) [. Read it with the preceding opening statement ( ]); it is not a standalone business operation.
152	`SELECT Id, DMS_Status__c`	Selects these Salesforce fields/aggregates: Id, DMS_Status__c. Query results are used in the surrounding assignment or loop.
153	`FROM Sales_Order__c`	Chooses the Salesforce object/subquery source: FROM Sales_Order__c.
154	`WHERE Id = :cmd.recordId AND DMS_Distributor__c = : cmd.distributorId`	Adds a query/filter condition: WHERE Id = :cmd.recordId AND DMS_Distributor__c = :cmd.distributorId. The complete condition determines which records are included.
155	`FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
156	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
157	`if (rows.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (rows.isEmpty()).
158	`throw new InputException('Record does not belong to this distributor.');`	Stops this execution path with a validation/error exception: throw new InputException('Record does not belong to this distributor.');. The caller/catch block decides how it is reported.
159	`SObject row = rows[0];`	Assigns the right-hand expression to the named variable/property: SObject row = rows[0];. This is in-memory unless it is later persisted by an explicit call.
160	`String status = (String) row.get('DMS_Status__c');`	Declares/initializes local data used by the surrounding operation: String status = (String) row.get('DMS_Status__c');. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
161	`        if (status == cmd.decision)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (status == cmd.decision).
162	`            return result(row.Id, status);`	Returns result(row.Id, status) to the caller (or begins returned UI markup) and ends this execution path.
163	`        if (status != null && status != 'Pending')`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (status != null && status != 'Pending').
164	`            throw new InputException('This record was already decided. Refresh before continuing.');`	Stops this execution path with a validation/error exception: throw new InputException('This record was already decided. Refresh before continuing.');. The caller/catch block decides how it is reported.
165	`        row.put('DMS_Status__c', cmd.decision);`	Calls the named method: row.put('DMS_Status__c', cmd.decision);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
166	`        row.put('DMS_Decision_Notes__c', cmd.notes);`	Calls the named method: row.put('DMS_Decision_Notes__c', cmd.notes);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
167	`        if (!isReturn)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!isReturn).
168	`            row.put('DMS_Decided_At__c', System.now());`	Calls the named method: row.put('DMS_Decided_At__c', System.now());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
169	`        update row;`	Performs Salesforce DML: update row;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
170	`        return result(row.Id, cmd.decision);`	Returns result(row.Id, cmd.decision) to the caller (or begins returned UI markup) and ends this execution path.
171	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
172	`    private static Map<String, Object> receiveGoods(Command cmd) {`	Declares a callable function/method: private static Map<String, Object> receiveGoods(Command cmd) {. Parameters supply its inputs; the following block implements the operation.
173	`        if (cmd.receiptKind != null && !new Set<String>{ 'Paid', 'Free' }.contains(cmd.receiptKind))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (cmd.receiptKind != null && !new Set<String>{ 'Paid', 'Free' }.contains(cmd.receiptKind)).

Line	Source code	Explanation / reading note
174	`throw new InputException('Choose Paid or Free goods.');`	Stops this execution path with a validation/error exception: throw new InputException('Choose Paid or Free goods.');. The caller/catch block decides how it is reported.
175	`Boolean freeGoods = cmd.receiptKind == 'Free';`	Declares/initializes local data used by the surrounding operation: Boolean freeGoods = cmd.receiptKind == 'Free';. Collection contents and assignments below determine its purpose.
176	`String requestKey = key(cmd);`	Declares/initializes local data used by the surrounding operation: String requestKey = key(cmd);. Collection contents and assignments below determine its purpose.
177	`List<DMS_Goods_Receipt__c> existing = [`	Declares/initializes local data used by the surrounding operation: List<DMS_Goods_Receipt__c> existing = [. Collection contents and assignments below determine its purpose.
178	`SELECT Id, Status__c`	Selects these Salesforce fields/aggregates: Id, Status__c. Query results are used in the surrounding assignment or loop.
179	`FROM DMS_Goods_Receipt__c`	Chooses the Salesforce object/subquery source: FROM DMS_Goods_Receipt__c.
180	`WHERE Request_Key__c = :requestKey`	Adds a query/filter condition: WHERE Request_Key__c = :requestKey. The complete condition determines which records are included.
181	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
182	`if (!existing.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!existing.isEmpty()) {.
183	`List<DMS_Goods_Receipt_Line__c> saved = [`	Declares/initializes local data used by the surrounding operation: List<DMS_Goods_Receipt_Line__c> saved = [. Collection contents and assignments below determine its purpose.
184	`SELECT`	Selects these Salesforce fields/aggregates: SELECT. Query results are used in the surrounding assignment or loop.
185	`Primary_Order_Line__c,`	Continues the surrounding declaration/expression or text: Primary_Order_Line__c,. Read it with the preceding opening statement (SELECT); it is not a standalone business operation.
186	`Received_Cases__c,`	Continues the surrounding declaration/expression or text: Received_Cases__c,. Read it with the preceding opening statement (Primary_Order_Line__c,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
187	`Free_Cases__c,`	Continues the surrounding declaration/expression or text: Free_Cases__c,. Read it with the preceding opening statement (Received_Cases__c,); it is not a standalone business operation.
188	`Batch_Number__c,`	Continues the surrounding declaration/expression or text: Batch_Number__c,. Read it with the preceding opening statement (Free_Cases__c,); it is not a standalone business operation.
189	`Expiry_Date__c`	Continues the surrounding declaration/expression or text: Expiry_Date__c. Read it with the preceding opening statement (Batch_Number__c,); it is not a standalone business operation.
190	`FROM DMS_Goods_Receipt_Line__c`	Chooses the Salesforce object/subquery source: FROM DMS_Goods_Receipt_Line__c.
191	`WHERE Goods_Receipt__c = :existing[0].Id`	Adds a query/filter condition: WHERE Goods_Receipt__c = :existing[0].Id. The complete condition determines which records are included.
192	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
193	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
194	`saved.size() != 1 ||`	Calls the named method: saved.size() != 1 ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
195	`saved[0].Primary_Order_Line__c != cmd.recordId ||`	Continues the surrounding declaration/expression or text: saved[0].Primary_Order_Line__c != cmd.recordId ||. Read it with the preceding opening statement (saved.size() != 1 ||); it is not a standalone business operation.
196	`(freeGoods ? saved[0].Free_Cases__c : saved[0].Received_Cases__c) != cmd.cases ||`	Continues the surrounding declaration/expression or text: (freeGoods ? saved[0].Free_Cases__c : saved[0].Received_Cases__c) != cmd.cases ||. Read it with the preceding opening statement (saved[0].Primary_Order_Line__c != cmd.recordId ||); it is not a standalone business operation.
197	`saved[0].Batch_Number__c != cmd.batch ||`	Continues the surrounding declaration/expression or text: saved[0].Batch_Number__c != cmd.batch ||. Read it with the preceding opening statement ((freeGoods ? saved[0].Free_Cases__c : saved[0].Received_Cases__c) != cmd.cases ||); it is not a standalone business operation.

Line	Source code	Explanation / reading note
198	`saved[0].Expiry_Date__c != cmd.expiry`	Continues the surrounding declaration/expression or text: saved[0].Expiry_Date__c != cmd.expiry. Read it with the preceding opening statement (saved[0].Batch_Number__c != cmd.batch ||); it is not a standalone business operation.
199	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
200	`throw new InputException(`	Stops this execution path with a validation/error exception: throw new InputException(. The caller/catch block decides how it is reported.
201	`'This receipt key was already used with different details.'`	Continues the surrounding declaration/expression or text: 'This receipt key was already used with different details.'. Read it with the preceding opening statement (throw new InputException(); it is not a standalone business operation.
202	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
203	`return result(existing[0].Id, existing[0].Status__c);`	Returns result(existing[0].Id, existing[0].Status__c) to the caller (or begins returned UI markup) and ends this execution path.
204	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
205	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
206	`cmd.cases == null ||`	Continues the surrounding declaration/expression or text: cmd.cases == null ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
207	`cmd.cases <= 0 ||`	Continues the surrounding declaration/expression or text: cmd.cases <= 0 ||. Read it with the preceding opening statement (cmd.cases == null ||); it is not a standalone business operation.
208	`cmd.cases > 100000 ||`	Continues the surrounding declaration/expression or text: cmd.cases > 100000 ||. Read it with the preceding opening statement (cmd.cases <= 0 ||); it is not a standalone business operation.
209	`cmd.cases != cmd.cases.setScale(0) ||`	Calls the named method: cmd.cases != cmd.cases.setScale(0) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
210	`String.isBlank(cmd.batch) ||`	Declares/initializes local data used by the surrounding operation: String.isBlank(cmd.batch) ||. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
211	`cmd.batch.length() > 80 ||`	Calls the named method: cmd.batch.length() > 80 ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
212	`cmd.expiry == null ||`	Continues the surrounding declaration/expression or text: cmd.expiry == null ||. Read it with the preceding opening statement (cmd.batch.length() > 80 ||); it is not a standalone business operation.
213	`cmd.expiry < Date.today()`	Calls the named method: cmd.expiry < Date.today(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
214	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
215	`throw new InputException(`	Stops this execution path with a validation/error exception: throw new InputException(. The caller/catch block decides how it is reported.
216	`'Enter positive whole cases, batch number and an unexpired expiry date.'`	Continues the surrounding declaration/expression or text: 'Enter positive whole cases, batch number and an unexpired expiry date.'. Read it with the preceding opening statement (throw new InputException(); it is not a standalone business operation.
217	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
218	`List<DMS_Primary_Order_Line__c> lines = [`	Declares/initializes local data used by the surrounding operation: List<DMS_Primary_Order_Line__c> lines = [. Collection contents and assignments below determine its purpose.
219	`SELECT`	Selects these Salesforce fields/aggregates: SELECT. Query results are used in the surrounding assignment or loop.
220	`Id,`	Declares/initializes local data used by the surrounding operation: Id,. Collection contents and assignments below determine its purpose.
221	`Order__c,`	Continues the surrounding declaration/expression or text: Order__c,. Read it with the preceding opening statement (Id,); it is not a standalone business operation.
222	`Product__c,`	Continues the surrounding declaration/expression or text: Product__c,. Read it with the preceding opening statement (Order__c,); it is not a standalone business operation.
223	`Cases__c,`	Continues the surrounding declaration/expression or text: Cases__c,. Read it with the preceding opening statement (Product__c,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
224	`Pieces_Per_Case__c,`	Continues the surrounding declaration/expression or text: Pieces_Per_Case__c,. Read it with the preceding opening statement (Cases__c,); it is not a standalone business operation.
225	`Case_Price__c,`	Continues the surrounding declaration/expression or text: Case_Price__c,. Read it with the preceding opening statement (Pieces_Per_Case__c,); it is not a standalone business operation.
226	`Discount_Amount__c,`	Continues the surrounding declaration/expression or text: Discount_Amount__c,. Read it with the preceding opening statement (Case_Price__c,); it is not a standalone business operation.
227	`Free_Cases__c,`	Continues the surrounding declaration/expression or text: Free_Cases__c,. Read it with the preceding opening statement (Discount_Amount__c,); it is not a standalone business operation.
228	`Free_Product__c,`	Continues the surrounding declaration/expression or text: Free_Product__c,. Read it with the preceding opening statement (Free_Cases__c,); it is not a standalone business operation.
229	`Free_Pieces_Per_Case__c`	Continues the surrounding declaration/expression or text: Free_Pieces_Per_Case__c. Read it with the preceding opening statement (Free_Product__c,); it is not a standalone business operation.
230	`FROM DMS_Primary_Order_Line__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Order_Line__c.
231	`WHERE`	Adds a query/filter condition: WHERE. The complete condition determines which records are included.
232	`Id = :cmd.recordId`	Declares/initializes local data used by the surrounding operation: Id = :cmd.recordId. Collection contents and assignments below determine its purpose.
233	`AND Order__r.Distributor__c = :cmd.distributorId`	Adds a query/filter condition: AND Order__r.Distributor__c = :cmd.distributorId. The complete condition determines which records are included.
234	`AND Order__r.Status__c = 'Approved'`	Adds a query/filter condition: AND Order__r.Status__c = 'Approved'. The complete condition determines which records are included.
235	`FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
236	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
237	`if (lines.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (lines.isEmpty()).
238	`throw new InputException('Select a line from your approved primary order.');`	Stops this execution path with a validation/error exception: throw new InputException('Select a line from your approved primary order.');. The caller/catch block decides how it is reported.
239	`DMS_Primary_Order_Line__c line = lines[0];`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order_Line__c line = lines[0];. This is in-memory unless it is later persisted by an explicit call.
240	`Decimal received = 0;`	Declares/initializes local data used by the surrounding operation: Decimal received = 0;. Collection contents and assignments below determine its purpose.
241	`for (AggregateResult row : [`	Repeats work over the specified records/items or while this condition holds: for (AggregateResult row : [. Check where queries/writes occur relative to the loop.
242	`SELECT SUM(Received_Cases__c) amount, SUM(Free_Cases__c) bonus`	Selects these Salesforce fields/aggregates: SUM(Received_Cases__c) amount, SUM(Free_Cases__c) bonus. Query results are used in the surrounding assignment or loop.
243	`FROM DMS_Goods_Receipt_Line__c`	Chooses the Salesforce object/subquery source: FROM DMS_Goods_Receipt_Line__c.
244	`WHERE Primary_Order_Line__c = :line.Id AND Goods_Receipt__r.Status__c = 'Received'`	Adds a query/filter condition: WHERE Primary_Order_Line__c = :line.Id AND Goods_Receipt__r.Status__c = 'Received'. The complete condition determines which records are included.
245	`])`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
246	`if (row.get(freeGoods ? 'bonus' : 'amount') != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (row.get(freeGoods ? 'bonus' : 'amount') != null).
247	`received = (Decimal) row.get(freeGoods ? 'bonus' : 'amount');`	Calls the named method: received = (Decimal) row.get(freeGoods ? 'bonus' : 'amount');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
248	`Decimal entitlement = freeGoods ? line.Free_Cases__c : line.Cases__c;`	Declares/initializes local data used by the surrounding operation: Decimal entitlement = freeGoods ? line.Free_Cases__c : line.Cases__c;. Collection contents and assignments below determine its purpose.
249	`if (entitlement == null || received + cmd.cases > entitlement)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (entitlement == null || received + cmd.cases > entitlement).

Line	Source code	Explanation / reading note
250	`throw new InputException('Received cases exceed the remaining approved quantity.');`	Stops this execution path with a validation/error exception: throw new InputException('Received cases exceed the remaining approved quantity.');. The caller/catch block decides how it is reported.
251	`Id productId = freeGoods ? line.Free_Product__c : line.Product__c;`	Declares/initializes local data used by the surrounding operation: Id productId = freeGoods ? line.Free_Product__c : line.Product__c;. Collection contents and assignments below determine its purpose.
252	`Decimal conversion = freeGoods ? line.Free_Pieces_Per_Case__c : line.Pieces_Per_Case__c;`	Declares/initializes local data used by the surrounding operation: Decimal conversion = freeGoods ? line.Free_Pieces_Per_Case__c : line.Pieces_Per_Case__c;. Collection contents and assignments below determine its purpose.
253	`if (productId == null || conversion == null || conversion <= 0)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (productId == null || conversion == null || conversion <= 0).
254	`throw new InputException('The order has no valid product or case conversion.');`	Stops this execution path with a validation/error exception: throw new InputException('The order has no valid product or case conversion.');. The caller/catch block decides how it is reported.
255	`List<DMS_Inventory__c> matches = [`	Declares/initializes local data used by the surrounding operation: List<DMS_Inventory__c> matches = [. Collection contents and assignments below determine its purpose.
256	`SELECT Id, On_Hand_Pieces__c, Expiry_Date__c`	Selects these Salesforce fields/aggregates: Id, On_Hand_Pieces__c, Expiry_Date__c. Query results are used in the surrounding assignment or loop.
257	`FROM DMS_Inventory__c`	Chooses the Salesforce object/subquery source: FROM DMS_Inventory__c.
258	`WHERE`	Adds a query/filter condition: WHERE. The complete condition determines which records are included.
259	`Distributor__c = :cmd.distributorId`	Assigns the right-hand expression to the named variable/property: Distributor__c = :cmd.distributorId. This is in-memory unless it is later persisted by an explicit call.
260	`AND Product__c = :productId`	Adds a query/filter condition: AND Product__c = :productId. The complete condition determines which records are included.
261	`AND Batch_Number__c = :cmd.batch`	Adds a query/filter condition: AND Batch_Number__c = :cmd.batch. The complete condition determines which records are included.
262	`FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.

Line	Source code	Explanation / reading note
263	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
264	`        if (matches.size() > 1)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (matches.size() > 1).
265	`            throw new InputException('Duplicate inventory batches need administrator review.');`	Stops this execution path with a validation/error exception: throw new InputException('Duplicate inventory batches need administrator review.');. The caller/catch block decides how it is reported.
266	`        DMS_Inventory__c stock = matches.isEmpty()`	Calls the named method: DMS_Inventory__c stock = matches.isEmpty(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
267	`            ? new DMS_Inventory__c(`	Continues the surrounding declaration/expression or text: ? new DMS_Inventory__c(. Read it with the preceding opening statement (DMS_Inventory__c stock = matches.isEmpty()); it is not a standalone business operation.
268	`                Distributor__c = cmd.distributorId,`	Assigns the right-hand expression to the named variable/property: Distributor__c = cmd.distributorId,. This is in-memory unless it is later persisted by an explicit call.
269	`                Product__c = productId,`	Assigns the right-hand expression to the named variable/property: Product__c = productId,. This is in-memory unless it is later persisted by an explicit call.
270	`                Batch_Number__c = cmd.batch,`	Assigns the right-hand expression to the named variable/property: Batch_Number__c = cmd.batch,. This is in-memory unless it is later persisted by an explicit call.
271	`                Expiry_Date__c = cmd.expiry,`	Assigns the right-hand expression to the named variable/property: Expiry_Date__c = cmd.expiry,. This is in-memory unless it is later persisted by an explicit call.
272	`                On_Hand_Pieces__c = 0`	Assigns the right-hand expression to the named variable/property: On_Hand_Pieces__c = 0. This is in-memory unless it is later persisted by an explicit call.
273	`              )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
274	`            : matches[0];`	Continues the surrounding declaration/expression or text: : matches[0];. Read it with the preceding opening statement ( )); it is not a standalone business operation.
275	`        if (stock.Expiry_Date__c != cmd.expiry)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (stock.Expiry_Date__c != cmd.expiry).

Line	Source code	Explanation / reading note
276	`throw new InputException('Expiry must match the existing batch.');`	Stops this execution path with a validation/error exception: throw new InputException('Expiry must match the existing batch.');. The caller/catch block decides how it is reported.
277	`DMS_Goods_Receipt__c receipt = new DMS_Goods_Receipt__c(`	Assigns the right-hand expression to the named variable/property: DMS_Goods_Receipt__c receipt = new DMS_Goods_Receipt__c(. This is in-memory unless it is later persisted by an explicit call.
278	`Distributor__c = cmd.distributorId,`	Assigns the right-hand expression to the named variable/property: Distributor__c = cmd.distributorId,. This is in-memory unless it is later persisted by an explicit call.
279	`Primary_Order__c = line.Order__c,`	Assigns the right-hand expression to the named variable/property: Primary_Order__c = line.Order__c,. This is in-memory unless it is later persisted by an explicit call.
280	`Received_Date__c = Date.today(),`	Calls the named method: Received_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
281	`Received_By__c = UserInfo.getUserId(),`	Calls the named method: Received_By__c = UserInfo.getUserId(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
282	`Status__c = 'Draft',`	Assigns the right-hand expression to the named variable/property: Status__c = 'Draft',. This is in-memory unless it is later persisted by an explicit call.
283	`Request_Key__c = requestKey`	Assigns the right-hand expression to the named variable/property: Request_Key__c = requestKey. This is in-memory unless it is later persisted by an explicit call.
284	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
285	`insert receipt;`	Performs Salesforce DML: insert receipt;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
286	`insert new DMS_Goods_Receipt_Line__c(`	Performs Salesforce DML: insert new DMS_Goods_Receipt_Line__c(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
287	`Goods_Receipt__c = receipt.Id,`	Assigns the right-hand expression to the named variable/property: Goods_Receipt__c = receipt.Id,. This is in-memory unless it is later persisted by an explicit call.
288	`Primary_Order_Line__c = line.Id,`	Assigns the right-hand expression to the named variable/property: Primary_Order_Line__c = line.Id,. This is in-memory unless it is later persisted by an explicit call.
289	`Product__c = productId,`	Assigns the right-hand expression to the named variable/property: Product__c = productId,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
290	`Received_Cases__c = freeGoods ? 0 : cmd.cases,`	Assigns the right-hand expression to the named variable/property: Received_Cases__c = freeGoods ? 0 : cmd.cases,. This is in-memory unless it is later persisted by an explicit call.
291	`Free_Cases__c = freeGoods ? cmd.cases : 0,`	Assigns the right-hand expression to the named variable/property: Free_Cases__c = freeGoods ? cmd.cases : 0,. This is in-memory unless it is later persisted by an explicit call.
292	`Pieces_Per_Case__c = conversion,`	Assigns the right-hand expression to the named variable/property: Pieces_Per_Case__c = conversion,. This is in-memory unless it is later persisted by an explicit call.
293	`Case_Cost__c = freeGoods`	Assigns the right-hand expression to the named variable/property: Case_Cost__c = freeGoods. This is in-memory unless it is later persisted by an explicit call.
294	`? 0`	Continues the surrounding declaration/expression or text: ? 0. Read it with the preceding opening statement (Case_Cost__c = freeGoods); it is not a standalone business operation.
295	`: (line.Case_Price__c -`	Continues the surrounding declaration/expression or text: : (line.Case_Price__c -. Read it with the preceding opening statement (? 0); it is not a standalone business operation.
296	`(line.Discount_Amount__c == null ? 0 : line.Discount_Amount__c) / line.Cases__c),`	Continues the surrounding declaration/expression or text: (line.Discount_Amount__c == null ? 0 : line.Discount_Amount__c) / line.Cases__c),. Read it with the preceding opening statement (: (line.Case_Price__c -); it is not a standalone business operation.
297	`Batch_Number__c = cmd.batch,`	Assigns the right-hand expression to the named variable/property: Batch_Number__c = cmd.batch,. This is in-memory unless it is later persisted by an explicit call.
298	`Expiry_Date__c = cmd.expiry`	Assigns the right-hand expression to the named variable/property: Expiry_Date__c = cmd.expiry. This is in-memory unless it is later persisted by an explicit call.
299	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
300	`stock.On_Hand_Pieces__c =`	Continues the surrounding declaration/expression or text: stock.On_Hand_Pieces__c =. Read it with the preceding opening statement ( );); it is not a standalone business operation.
301	`(stock.On_Hand_Pieces__c == null ? 0 : stock.On_Hand_Pieces__c) +`	Continues the surrounding declaration/expression or text: (stock.On_Hand_Pieces__c == null ? 0 : stock.On_Hand_Pieces__c) +. Read it with the preceding opening statement (stock.On_Hand_Pieces__c =); it is not a standalone business operation.
302	`cmd.cases * conversion;`	Continues the surrounding declaration/expression or text: cmd.cases * conversion;. Read it with the preceding opening statement ((stock.On_Hand_Pieces__c == null ? 0 : stock.On_Hand_Pieces__c) +); it is not a standalone business operation.

Line	Source code	Explanation / reading note
303	`stock.Last_Stock_Update__c = System.now();`	Calls the named method: stock.Last_Stock_Update__c = System.now();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
304	`upsert stock;`	Performs Salesforce DML: upsert stock;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
305	`receipt.Status__c = 'Received';`	Assigns the right-hand expression to the named variable/property: receipt.Status__c = 'Received';. This is in-memory unless it is later persisted by an explicit call.
306	`update receipt;`	Performs Salesforce DML: update receipt;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
307	`return result(receipt.Id, 'Received');`	Returns result(receipt.Id, 'Received') to the caller (or begins returned UI markup) and ends this execution path.
308	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
309	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsPortalApi.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsPortalApiTest.cls

Regression tests for DmsPortalApi. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

531 numbered source lines | SHA-256 0a6e1589cf96043a3a7cf22c822e0949c040a796432c271a61fbd429f5167fe5

Line	Source code	Explanation / reading note
1	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
2	`private class DmsPortalApiTest {`	Declares a class/type: private class DmsPortalApiTest {. Members below hold behavior and/or state.
3	`    @TestSetup`	Continues the surrounding declaration/expression or text: @TestSetup. Read it with the preceding opening statement (private class DmsPortalApiTest {); it is not a standalone business operation.
4	`    static void permission() {`	Continues the surrounding declaration/expression or text: static void permission() {. Read it with the preceding opening statement (@TestSetup); it is not a standalone business operation.
5	`        Id permissionId = [SELECT Id FROM PermissionSet WHERE Name = 'DMS_Backend_Transactions'].Id;`	Declares/initializes local data used by the surrounding operation: Id permissionId = [SELECT Id FROM PermissionSet WHERE Name = 'DMS_Backend_Transactions'].Id;. Collection contents and assignments below determine its purpose.
6	`        if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
7	`            [`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (if (); it is not a standalone business operation.
8	`                SELECT COUNT()`	Selects these Salesforce fields/aggregates: COUNT(). Query results are used in the surrounding assignment or loop.
9	`                FROM PermissionSetAssignment`	Chooses the Salesforce object/subquery source: FROM PermissionSetAssignment.
10	`                WHERE AssigneeId = :UserInfo.getUserId() AND PermissionSetId = :permissionId`	Adds a query/filter condition: WHERE AssigneeId = :UserInfo.getUserId() AND PermissionSetId = :permissionId. The complete condition determines which records are included.

Line	Source code	Explanation / reading note
11	`            ] == 0`	Continues the surrounding declaration/expression or text:] == 0. Read it with the preceding opening statement (WHERE AssigneeId = :UserInfo.getUserId() AND PermissionSetId = :permissionId); it is not a standalone business operation.
12	`        )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13	`            insert new PermissionSetAssignment(`	Performs Salesforce DML: insert new PermissionSetAssignment(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
14	`                AssigneeId = UserInfo.getUserId(),`	Calls the named method: AssigneeId = UserInfo.getUserId(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
15	`                PermissionSetId = permissionId`	Assigns the right-hand expression to the named variable/property: PermissionSetId = permissionId. This is in-memory unless it is later persisted by an explicit call.
16	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`    private static DMS_Distributor__c distributor() {`	Declares a callable function/method: private static DMS_Distributor__c distributor() {. Parameters supply its inputs; the following block implements the operation.
19	`        DMS_Distributor__c row = new DMS_Distributor__c(`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c row = new DMS_Distributor__c(. This is in-memory unless it is later persisted by an explicit call.
20	`            Name = 'Portal test',`	Assigns the right-hand expression to the named variable/property: Name = 'Portal test',. This is in-memory unless it is later persisted by an explicit call.
21	`            Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
22	`            Officer__c = UserInfo.getUserId()`	Calls the named method: Officer__c = UserInfo.getUserId(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
23	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24	`        insert row;`	Performs Salesforce DML: insert row;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
25	`        return row;`	Returns row to the caller (or begins returned UI markup) and ends this execution path.
26	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
27	`    private static Map<String, Object> call(DmsPortalApi.Command cmd) {`	Declares a callable function/method: private static Map<String, Object> call(DmsPortalApi.Command cmd) {. Parameters supply its inputs; the following block implements the operation.
28	`        RestContext.request = new RestRequest();`	Assigns the right-hand expression to the named variable/property: RestContext.request = new RestRequest();. This is in-memory unless it is later persisted by an explicit call.
29	`        RestContext.response = new RestResponse();`	Assigns the right-hand expression to the named variable/property: RestContext.response = new RestResponse();. This is in-memory unless it is later persisted by an explicit call.
30	`        RestContext.request.requestBody = Blob.valueOf(JSON.serialize(cmd));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
31	`        System.runAs(new User(Id = UserInfo.getUserId())) {`	Calls the named method: System.runAs(new User(Id = UserInfo.getUserId())) {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
32	`            DmsPortalApi.execute();`	Calls the named method: DmsPortalApi.execute();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
33	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`        return (Map<String, Object>) JSON.deserializeUntyped(`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
35	`            RestContext.response.responseBody.toString()`	Calls the named method: RestContext.response.responseBody.toString(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
36	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
37	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`    private static DmsPortalApi.Command ticket(Id distributorId) {`	Declares a callable function/method: private static DmsPortalApi.Command ticket(Id distributorId) {. Parameters supply its inputs; the following block implements the operation.
39	`        DmsPortalApi.Command cmd = new DmsPortalApi.Command();`	Calls the named method: DmsPortalApi.Command cmd = new DmsPortalApi.Command();. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
40	`cmd.action = 'ticket';`	Assigns the right-hand expression to the named variable/property: cmd.action = 'ticket';. This is in-memory unless it is later persisted by an explicit call.
41	`cmd.distributorId = distributorId;`	Assigns the right-hand expression to the named variable/property: cmd.distributorId = distributorId;. This is in-memory unless it is later persisted by an explicit call.
42	`cmd.requestKey = 'ticket-1234567890';`	Assigns the right-hand expression to the named variable/property: cmd.requestKey = 'ticket-1234567890';. This is in-memory unless it is later persisted by an explicit call.
43	`cmd.subject = 'Delivery issue';`	Assigns the right-hand expression to the named variable/property: cmd.subject = 'Delivery issue';. This is in-memory unless it is later persisted by an explicit call.
44	`cmd.category = 'Delivery';`	Assigns the right-hand expression to the named variable/property: cmd.category = 'Delivery';. This is in-memory unless it is later persisted by an explicit call.
45	`cmd.description = 'Shipment arrived late.';`	Assigns the right-hand expression to the named variable/property: cmd.description = 'Shipment arrived late.';. This is in-memory unless it is later persisted by an explicit call.
46	`return cmd;`	Returns cmd to the caller (or begins returned UI markup) and ends this execution path.
47	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
49	`static void ticketLifecycleAndReplay() {`	Continues the surrounding declaration/expression or text: static void ticketLifecycleAndReplay() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
50	`DmsPortalApi.Command cmd = ticket(distributor().Id);`	Assigns the right-hand expression to the named variable/property: DmsPortalApi.Command cmd = ticket(distributor().Id);. This is in-memory unless it is later persisted by an explicit call.
51	`Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
52	`Map<String, Object> created = call(cmd);`	Declares/initializes local data used by the surrounding operation: Map<String, Object> created = call(cmd);. Collection contents and assignments below determine its purpose.
53	`System.assertNotEquals(null, created.get('id'), JSON.serialize(created));`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(null, created.get('id'), JSON.serialize(created));. A mismatch fails the test.

Line	Source code	Explanation / reading note
54	`System.assertEquals(created.get('id'), call(cmd).get('id'));`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(created.get('id'), call(cmd).get('id'));. A mismatch fails the test.
55	`DMS_Support_Ticket__c row = [SELECT Id, Status__c, Officer__c FROM DMS_Support_Ticket__c];`	Assigns the right-hand expression to the named variable/property: DMS_Support_Ticket__c row = [SELECT Id, Status__c, Officer__c FROM DMS_Support_Ticket__c];. This is in-memory unless it is later persisted by an explicit call.
56	`System.assertEquals('Open', row.Status__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Open', row.Status__c);. A mismatch fails the test.
57	`System.assertEquals(UserInfo.getUserId(), row.Officer__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(UserInfo.getUserId(), row.Officer__c);. A mismatch fails the test.
58	`row.Status__c = 'Closed';`	Assigns the right-hand expression to the named variable/property: row.Status__c = 'Closed';. This is in-memory unless it is later persisted by an explicit call.
59	`System.assertEquals(false, Database.update(row, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.update(row, false).isSuccess());. A mismatch fails the test.
60	`row.Status__c = 'In Progress';`	Assigns the right-hand expression to the named variable/property: row.Status__c = 'In Progress';. This is in-memory unless it is later persisted by an explicit call.
61	`update row;`	Performs Salesforce DML: update row;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
62	`row.Status__c = 'Closed';`	Assigns the right-hand expression to the named variable/property: row.Status__c = 'Closed';. This is in-memory unless it is later persisted by an explicit call.
63	`System.assertEquals(false, Database.update(row, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.update(row, false).isSuccess());. A mismatch fails the test.
64	`row.Resolution__c = 'Replacement delivered';`	Assigns the right-hand expression to the named variable/property: row.Resolution__c = 'Replacement delivered';. This is in-memory unless it is later persisted by an explicit call.
65	`update row;`	Performs Salesforce DML: update row;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
66	`System.assertEquals('Closed', call(cmd).get('status'));`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Closed', call(cmd).get('status'));. A mismatch fails the test.

Line	Source code	Explanation / reading note
67	`cmd.subject = 'Changed';`	Assigns the right-hand expression to the named variable/property: cmd.subject = 'Changed';. This is in-memory unless it is later persisted by an explicit call.
68	`System.assert(call(cmd).containsKey('error'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'));. A mismatch fails the test.
69	`Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
70	`System.assertEquals(1, [SELECT COUNT() FROM DMS_Support_Ticket__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1, [SELECT COUNT() FROM DMS_Support_Ticket__c]);. A mismatch fails the test.
71	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
72	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
73	`static void badInputsAreAtomic() {`	Continues the surrounding declaration/expression or text: static void badInputsAreAtomic() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
74	`DmsPortalApi.Command cmd = ticket(distributor().Id);`	Assigns the right-hand expression to the named variable/property: DmsPortalApi.Command cmd = ticket(distributor().Id);. This is in-memory unless it is later persisted by an explicit call.
75	`cmd.category = 'Invalid';`	Assigns the right-hand expression to the named variable/property: cmd.category = 'Invalid';. This is in-memory unless it is later persisted by an explicit call.
76	`System.assert(call(cmd).containsKey('error'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'));. A mismatch fails the test.
77	`cmd.category = 'Product';`	Assigns the right-hand expression to the named variable/property: cmd.category = 'Product';. This is in-memory unless it is later persisted by an explicit call.
78	`cmd.requestKey = 'bad';`	Assigns the right-hand expression to the named variable/property: cmd.requestKey = 'bad';. This is in-memory unless it is later persisted by an explicit call.
79	`System.assert(call(cmd).containsKey('error'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'));. A mismatch fails the test.
80	`cmd.action = 'unknown';`	Assigns the right-hand expression to the named variable/property: cmd.action = 'unknown';. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
81	`System.assert(call(cmd).containsKey('error'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'));. A mismatch fails the test.
82	`System.assertEquals(0, [SELECT COUNT() FROM DMS_Support_Ticket__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(0, [SELECT COUNT() FROM DMS_Support_Ticket__c]);. A mismatch fails the test.
83	`cmd.action = 'secondaryDecision';`	Assigns the right-hand expression to the named variable/property: cmd.action = 'secondaryDecision';. This is in-memory unless it is later persisted by an explicit call.
84	`cmd.decision = 'Rejected';`	Assigns the right-hand expression to the named variable/property: cmd.decision = 'Rejected';. This is in-memory unless it is later persisted by an explicit call.
85	`cmd.notes = null;`	Assigns the right-hand expression to the named variable/property: cmd.notes = null;. This is in-memory unless it is later persisted by an explicit call.
86	`System.assert(call(cmd).containsKey('error'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'));. A mismatch fails the test.
87	`cmd.notes = 'Not needed';`	Assigns the right-hand expression to the named variable/property: cmd.notes = 'Not needed';. This is in-memory unless it is later persisted by an explicit call.
88	`System.assert(call(cmd).containsKey('error'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'));. A mismatch fails the test.
89	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
90	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
91	`static void receivesApprovedGoodsOnceWithoutOverReceiving() {`	Continues the surrounding declaration/expression or text: static void receivesApprovedGoodsOnceWithoutOverReceiving() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
92	`DMS_Distributor__c supplier = distributor();`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c supplier = distributor();. This is in-memory unless it is later persisted by an explicit call.
93	`Employee__c employee = new Employee__c(`	Assigns the right-hand expression to the named variable/property: Employee__c employee = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
94	`Name = 'Portal employee',`	Assigns the right-hand expression to the named variable/property: Name = 'Portal employee',. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
95	`Phone__c = '9000000000',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000000',. This is in-memory unless it is later persisted by an explicit call.
96	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
97	`DMS_Distributor__c = supplier.Id`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c = supplier.Id. This is in-memory unless it is later persisted by an explicit call.
98	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
99	`insert employee;`	Performs Salesforce DML: insert employee;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
100	`Product__c product = new Product__c(`	Assigns the right-hand expression to the named variable/property: Product__c product = new Product__c(. This is in-memory unless it is later persisted by an explicit call.
101	`Name = 'Portal product',`	Assigns the right-hand expression to the named variable/property: Name = 'Portal product',. This is in-memory unless it is later persisted by an explicit call.
102	`Product_Code__c = 'PORTAL-1',`	Assigns the right-hand expression to the named variable/property: Product_Code__c = 'PORTAL-1',. This is in-memory unless it is later persisted by an explicit call.
103	`MRP__c = 20,`	Assigns the right-hand expression to the named variable/property: MRP__c = 20,. This is in-memory unless it is later persisted by an explicit call.
104	`Retailer_Base_Price__c = 15,`	Assigns the right-hand expression to the named variable/property: Retailer_Base_Price__c = 15,. This is in-memory unless it is later persisted by an explicit call.
105	`Units_Per_Case__c = 10,`	Assigns the right-hand expression to the named variable/property: Units_Per_Case__c = 10,. This is in-memory unless it is later persisted by an explicit call.
106	`DMS_Case_Price__c = 100,`	Assigns the right-hand expression to the named variable/property: DMS_Case_Price__c = 100,. This is in-memory unless it is later persisted by an explicit call.
107	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
108	`Sellable__c = true`	Assigns the right-hand expression to the named variable/property: Sellable__c = true. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
109	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
110	`insert product;`	Performs Salesforce DML: insert product;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
111	`DMS_Primary_Order__c order = new DMS_Primary_Order__c(`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order__c order = new DMS_Primary_Order__c(. This is in-memory unless it is later persisted by an explicit call.
112	`Distributor__c = supplier.Id,`	Assigns the right-hand expression to the named variable/property: Distributor__c = supplier.Id,. This is in-memory unless it is later persisted by an explicit call.
113	`Employee__c = employee.Id`	Assigns the right-hand expression to the named variable/property: Employee__c = employee.Id. This is in-memory unless it is later persisted by an explicit call.
114	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
115	`insert order;`	Performs Salesforce DML: insert order;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
116	`DMS_Primary_Order_Line__c line = new DMS_Primary_Order_Line__c(`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order_Line__c line = new DMS_Primary_Order_Line__c(. This is in-memory unless it is later persisted by an explicit call.
117	`Order__c = order.Id,`	Assigns the right-hand expression to the named variable/property: Order__c = order.Id,. This is in-memory unless it is later persisted by an explicit call.
118	`Product__c = product.Id,`	Assigns the right-hand expression to the named variable/property: Product__c = product.Id,. This is in-memory unless it is later persisted by an explicit call.
119	`Cases__c = 3`	Assigns the right-hand expression to the named variable/property: Cases__c = 3. This is in-memory unless it is later persisted by an explicit call.
120	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
121	`insert line;`	Performs Salesforce DML: insert line;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
122	`DmsPortalApi.Command cmd = new DmsPortalApi.Command();`	Calls the named method: DmsPortalApi.Command cmd = new DmsPortalApi.Command();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
123	`cmd.action = 'receiveGoods';`	Assigns the right-hand expression to the named variable/property: cmd.action = 'receiveGoods';. This is in-memory unless it is later persisted by an explicit call.
124	`cmd.distributorId = supplier.Id;`	Assigns the right-hand expression to the named variable/property: cmd.distributorId = supplier.Id;. This is in-memory unless it is later persisted by an explicit call.
125	`cmd.recordId = line.Id;`	Assigns the right-hand expression to the named variable/property: cmd.recordId = line.Id;. This is in-memory unless it is later persisted by an explicit call.
126	`cmd.cases = 2;`	Assigns the right-hand expression to the named variable/property: cmd.cases = 2;. This is in-memory unless it is later persisted by an explicit call.
127	`cmd.batch = 'BATCH-1';`	Assigns the right-hand expression to the named variable/property: cmd.batch = 'BATCH-1';. This is in-memory unless it is later persisted by an explicit call.
128	`cmd.expiry = Date.today().addDays(90);`	Calls the named method: cmd.expiry = Date.today().addDays(90);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
129	`cmd.requestKey = 'receipt-1234567890';`	Assigns the right-hand expression to the named variable/property: cmd.requestKey = 'receipt-1234567890';. This is in-memory unless it is later persisted by an explicit call.
130	`System.assert(call(cmd).containsKey('error'), 'Draft orders must not create stock.');`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'), 'Draft orders must not create stock.');. A mismatch fails the test.
131	`Approval.ProcessSubmitRequest submit = new Approval.ProcessSubmitRequest();`	Calls the named method: Approval.ProcessSubmitRequest submit = new Approval.ProcessSubmitRequest();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
132	`submit.setObjectId(order.Id);`	Calls the named method: submit.setObjectId(order.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
133	`submit.setProcessDefinitionNameOrId('Company_Officer_Approval');`	Calls the named method: submit.setProcessDefinitionNameOrId('Company_Officer_Approval');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
134	`Approval.ProcessResult submission = Approval.process(submit);`	Submits the configured Salesforce approval request. Inspect the returned result before claiming submission succeeded.

Line	Source code	Explanation / reading note
135	`Approval.ProcessWorkitemRequest approve = new Approval.ProcessWorkitemRequest();`	Calls the named method: Approval.ProcessWorkitemRequest approve = new Approval.ProcessWorkitemRequest();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
136	`approve.setWorkitemId(submission.getNewWorkitemIds()[0]);`	Calls the named method: approve.setWorkitemId(submission.getNewWorkitemIds()[0]);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
137	`approve.setAction('Approve');`	Calls the named method: approve.setAction('Approve');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
138	`Approval.process(approve);`	Submits the configured Salesforce approval request. Inspect the returned result before claiming submission succeeded.
139	`Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
140	`Map<String, Object> receipt = call(cmd);`	Declares/initializes local data used by the surrounding operation: Map<String, Object> receipt = call(cmd);. Collection contents and assignments below determine its purpose.
141	`System.assertNotEquals(null, receipt.get('id'), JSON.serialize(receipt));`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(null, receipt.get('id'), JSON.serialize(receipt));. A mismatch fails the test.
142	`System.assertEquals(receipt.get('id'), call(cmd).get('id'));`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(receipt.get('id'), call(cmd).get('id'));. A mismatch fails the test.
143	`System.assertEquals(20, [SELECT On_Hand_Pieces__c FROM DMS_Inventory__c].On_Hand_Pieces__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(20, [SELECT On_Hand_Pieces__c FROM DMS_Inventory__c].On_Hand_Pieces__c);. A mismatch fails the test.
144	`cmd.cases = 1;`	Assigns the right-hand expression to the named variable/property: cmd.cases = 1;. This is in-memory unless it is later persisted by an explicit call.
145	`System.assert(call(cmd).containsKey('error'), 'Key reuse must not change payload.');`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'), 'Key reuse must not change payload.');. A mismatch fails the test.
146	`cmd.requestKey = 'receipt-abcdefghij';`	Assigns the right-hand expression to the named variable/property: cmd.requestKey = 'receipt-abcdefghij';. This is in-memory unless it is later persisted by an explicit call.
147	`cmd.cases = 2;`	Assigns the right-hand expression to the named variable/property: cmd.cases = 2;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
148	`System.assert(call(cmd).containsKey('error'), 'No over receipt.');`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'), 'No over receipt.');. A mismatch fails the test.
149	`cmd.cases = 1;`	Assigns the right-hand expression to the named variable/property: cmd.cases = 1;. This is in-memory unless it is later persisted by an explicit call.
150	`System.assertNotEquals(null, call(cmd).get('id'));`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(null, call(cmd).get('id'));. A mismatch fails the test.
151	`Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
152	`System.assertEquals(30, [SELECT On_Hand_Pieces__c FROM DMS_Inventory__c].On_Hand_Pieces__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(30, [SELECT On_Hand_Pieces__c FROM DMS_Inventory__c].On_Hand_Pieces__c);. A mismatch fails the test.
153	`System.assertEquals(2, [SELECT COUNT() FROM DMS_Goods_Receipt__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(2, [SELECT COUNT() FROM DMS_Goods_Receipt__c]);. A mismatch fails the test.
154	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
155	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
156	`static void returnDecisionIsScopedAndRepeatable() {`	Continues the surrounding declaration/expression or text: static void returnDecisionIsScopedAndRepeatable() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
157	`DMS_Distributor__c supplier = distributor();`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c supplier = distributor();. This is in-memory unless it is later persisted by an explicit call.
158	`DMS_Distributor__c other = distributor();`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c other = distributor();. This is in-memory unless it is later persisted by an explicit call.
159	`Retailer__c outlet = new Retailer__c(`	Assigns the right-hand expression to the named variable/property: Retailer__c outlet = new Retailer__c(. This is in-memory unless it is later persisted by an explicit call.
160	`Name = 'Portal outlet',`	Assigns the right-hand expression to the named variable/property: Name = 'Portal outlet',. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
161	`            Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
162	`            DMS_Distributor__c = supplier.Id`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c = supplier.Id. This is in-memory unless it is later persisted by an explicit call.
163	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
164	`        insert outlet;`	Performs Salesforce DML: insert outlet;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
165	`        Product__c product = new Product__c(`	Assigns the right-hand expression to the named variable/property: Product__c product = new Product__c(. This is in-memory unless it is later persisted by an explicit call.
166	`            Name = 'Return product',`	Assigns the right-hand expression to the named variable/property: Name = 'Return product',. This is in-memory unless it is later persisted by an explicit call.
167	`            Product_Code__c = 'PORTAL-R',`	Assigns the right-hand expression to the named variable/property: Product_Code__c = 'PORTAL-R',. This is in-memory unless it is later persisted by an explicit call.
168	`            MRP__c = 20,`	Assigns the right-hand expression to the named variable/property: MRP__c = 20,. This is in-memory unless it is later persisted by an explicit call.
169	`            Retailer_Base_Price__c = 15,`	Assigns the right-hand expression to the named variable/property: Retailer_Base_Price__c = 15,. This is in-memory unless it is later persisted by an explicit call.
170	`            Units_Per_Case__c = 10`	Assigns the right-hand expression to the named variable/property: Units_Per_Case__c = 10. This is in-memory unless it is later persisted by an explicit call.
171	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
172	`        insert product;`	Performs Salesforce DML: insert product;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
173	`        Product_Return__c returned = new Product_Return__c(`	Assigns the right-hand expression to the named variable/property: Product_Return__c returned = new Product_Return__c(. This is in-memory unless it is later persisted by an explicit call.
174	`            Outlet__c = outlet.Id,`	Assigns the right-hand expression to the named variable/property: Outlet__c = outlet.Id,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
175	`Product__c = product.Id,`	Assigns the right-hand expression to the named variable/property: Product__c = product.Id,. This is in-memory unless it is later persisted by an explicit call.
176	`Quantity__c = 2,`	Assigns the right-hand expression to the named variable/property: Quantity__c = 2,. This is in-memory unless it is later persisted by an explicit call.
177	`Return_Reason__c = 'Damaged'`	Assigns the right-hand expression to the named variable/property: Return_Reason__c = 'Damaged'. This is in-memory unless it is later persisted by an explicit call.
178	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
179	`insert returned;`	Performs Salesforce DML: insert returned;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
180	`DmsPortalApi.Command cmd = new DmsPortalApi.Command();`	Calls the named method: DmsPortalApi.Command cmd = new DmsPortalApi.Command();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
181	`cmd.action = 'returnDecision';`	Assigns the right-hand expression to the named variable/property: cmd.action = 'returnDecision';. This is in-memory unless it is later persisted by an explicit call.
182	`cmd.recordId = returned.Id;`	Assigns the right-hand expression to the named variable/property: cmd.recordId = returned.Id;. This is in-memory unless it is later persisted by an explicit call.
183	`cmd.distributorId = other.Id;`	Assigns the right-hand expression to the named variable/property: cmd.distributorId = other.Id;. This is in-memory unless it is later persisted by an explicit call.
184	`cmd.decision = 'Approved';`	Assigns the right-hand expression to the named variable/property: cmd.decision = 'Approved';. This is in-memory unless it is later persisted by an explicit call.
185	`System.assert(call(cmd).containsKey('error'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'));. A mismatch fails the test.
186	`cmd.distributorId = supplier.Id;`	Assigns the right-hand expression to the named variable/property: cmd.distributorId = supplier.Id;. This is in-memory unless it is later persisted by an explicit call.
187	`System.assertEquals('Approved', call(cmd).get('status'));`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Approved', call(cmd).get('status'));. A mismatch fails the test.
188	`System.assertEquals('Approved', call(cmd).get('status'));`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Approved', call(cmd).get('status'));. A mismatch fails the test.

Line	Source code	Explanation / reading note
189	`        cmd.decision = 'Rejected';`	Assigns the right-hand expression to the named variable/property: cmd.decision = 'Rejected';. This is in-memory unless it is later persisted by an explicit call.
190	`        cmd.notes = 'Changed';`	Assigns the right-hand expression to the named variable/property: cmd.notes = 'Changed';. This is in-memory unless it is later persisted by an explicit call.
191	`        System.assert(call(cmd).containsKey('error'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'));. A mismatch fails the test.
192	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
193	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
194	`    static void employeeOrderUsesSalesforcePricesAndIsIdempotent() {`	Continues the surrounding declaration/expression or text: static void employeeOrderUsesSalesforcePricesAndIsIdempotent() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
195	`        DMS_Distributor__c supplier = distributor();`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c supplier = distributor();. This is in-memory unless it is later persisted by an explicit call.
196	`        Employee__c employee = new Employee__c(`	Assigns the right-hand expression to the named variable/property: Employee__c employee = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
197	`            Name = 'Primary employee',`	Assigns the right-hand expression to the named variable/property: Name = 'Primary employee',. This is in-memory unless it is later persisted by an explicit call.
198	`            Phone__c = '9000000000',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000000',. This is in-memory unless it is later persisted by an explicit call.
199	`            Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
200	`            DMS_Distributor__c = supplier.Id`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c = supplier.Id. This is in-memory unless it is later persisted by an explicit call.
201	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
202	`        insert employee;`	Performs Salesforce DML: insert employee;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
203	`Product__c product = new Product__c(`	Assigns the right-hand expression to the named variable/property: Product__c product = new Product__c(. This is in-memory unless it is later persisted by an explicit call.
204	`Name = 'Primary product',`	Assigns the right-hand expression to the named variable/property: Name = 'Primary product',. This is in-memory unless it is later persisted by an explicit call.
205	`Product_Code__c = 'PRIMARY-1',`	Assigns the right-hand expression to the named variable/property: Product_Code__c = 'PRIMARY-1',. This is in-memory unless it is later persisted by an explicit call.
206	`MRP__c = 20,`	Assigns the right-hand expression to the named variable/property: MRP__c = 20,. This is in-memory unless it is later persisted by an explicit call.
207	`Retailer_Base_Price__c = 15,`	Assigns the right-hand expression to the named variable/property: Retailer_Base_Price__c = 15,. This is in-memory unless it is later persisted by an explicit call.
208	`Units_Per_Case__c = 10,`	Assigns the right-hand expression to the named variable/property: Units_Per_Case__c = 10,. This is in-memory unless it is later persisted by an explicit call.
209	`DMS_Case_Price__c = 100,`	Assigns the right-hand expression to the named variable/property: DMS_Case_Price__c = 100,. This is in-memory unless it is later persisted by an explicit call.
210	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
211	`Sellable__c = true`	Assigns the right-hand expression to the named variable/property: Sellable__c = true. This is in-memory unless it is later persisted by an explicit call.
212	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
213	`insert product;`	Performs Salesforce DML: insert product;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
214	`DmsPortalApi.Command cmd = new DmsPortalApi.Command();`	Calls the named method: DmsPortalApi.Command cmd = new DmsPortalApi.Command();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
215	`cmd.action = 'primaryOrder';`	Assigns the right-hand expression to the named variable/property: cmd.action = 'primaryOrder';. This is in-memory unless it is later persisted by an explicit call.
216	`cmd.distributorId = supplier.Id;`	Assigns the right-hand expression to the named variable/property: cmd.distributorId = supplier.Id;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
217	`cmd.employeeId = employee.Id;`	Assigns the right-hand expression to the named variable/property: cmd.employeeId = employee.Id;. This is in-memory unless it is later persisted by an explicit call.
218	`cmd.requestKey = 'primary-1234567890';`	Assigns the right-hand expression to the named variable/property: cmd.requestKey = 'primary-1234567890';. This is in-memory unless it is later persisted by an explicit call.
219	`DmsEmployeeTransactions.LineInput input = new DmsEmployeeTransactions.LineInput();`	Calls the named method: DmsEmployeeTransactions.LineInput input = new DmsEmployeeTransactions.LineInput();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
220	`input.productId = product.Id;`	Assigns the right-hand expression to the named variable/property: input.productId = product.Id;. This is in-memory unless it is later persisted by an explicit call.
221	`input.cases = 2;`	Assigns the right-hand expression to the named variable/property: input.cases = 2;. This is in-memory unless it is later persisted by an explicit call.
222	`cmd.lines = new List<DmsEmployeeTransactions.LineInput>{ input };`	Assigns the right-hand expression to the named variable/property: cmd.lines = new List<DmsEmployeeTransactions.LineInput>{ input };. This is in-memory unless it is later persisted by an explicit call.
223	`Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
224	`Map<String, Object> order = call(cmd);`	Declares/initializes local data used by the surrounding operation: Map<String, Object> order = call(cmd);. Collection contents and assignments below determine its purpose.
225	`System.assertNotEquals(null, order.get('id'), JSON.serialize(order));`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(null, order.get('id'), JSON.serialize(order));. A mismatch fails the test.
226	`System.assertEquals('Submitted', order.get('status'));`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Submitted', order.get('status'));. A mismatch fails the test.
227	`System.assertEquals(order.get('id'), call(cmd).get('id'));`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(order.get('id'), call(cmd).get('id'));. A mismatch fails the test.
228	`input.cases = 3;`	Assigns the right-hand expression to the named variable/property: input.cases = 3;. This is in-memory unless it is later persisted by an explicit call.
229	`System.assert(call(cmd).containsKey('error'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'));. A mismatch fails the test.

Line	Source code	Explanation / reading note
230	`Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
231	`System.assertEquals(1, [SELECT COUNT() FROM DMS_Primary_Order__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1, [SELECT COUNT() FROM DMS_Primary_Order__c]);. A mismatch fails the test.
232	`DMS_Primary_Order_Line__c line = [`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order_Line__c line = [. This is in-memory unless it is later persisted by an explicit call.
233	`SELECT Case_Price__c, Pieces_Per_Case__c, Cases__c`	Selects these Salesforce fields/aggregates: Case_Price__c, Pieces_Per_Case__c, Cases__c. Query results are used in the surrounding assignment or loop.
234	`FROM DMS_Primary_Order_Line__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Order_Line__c.
235	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
236	`System.assertEquals(100, line.Case_Price__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(100, line.Case_Price__c);. A mismatch fails the test.
237	`System.assertEquals(10, line.Pieces_Per_Case__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(10, line.Pieces_Per_Case__c);. A mismatch fails the test.
238	`System.assertEquals(2, line.Cases__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(2, line.Cases__c);. A mismatch fails the test.
239	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
240	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
241	`static void employeeReturnUsesReceiptAndCannotExceedReceipt() {`	Continues the surrounding declaration/expression or text: static void employeeReturnUsesReceiptAndCannotExceedReceipt() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
242	`DMS_Distributor__c supplier = distributor();`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c supplier = distributor();. This is in-memory unless it is later persisted by an explicit call.
243	`Employee__c employee = new Employee__c(`	Assigns the right-hand expression to the named variable/property: Employee__c employee = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
244	`Name = 'Return employee',`	Assigns the right-hand expression to the named variable/property: Name = 'Return employee',. This is in-memory unless it is later persisted by an explicit call.
245	`Phone__c = '9000000000',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000000',. This is in-memory unless it is later persisted by an explicit call.
246	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
247	`DMS_Distributor__c = supplier.Id`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c = supplier.Id. This is in-memory unless it is later persisted by an explicit call.
248	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
249	`insert employee;`	Performs Salesforce DML: insert employee;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
250	`Product__c product = new Product__c(`	Assigns the right-hand expression to the named variable/property: Product__c product = new Product__c(. This is in-memory unless it is later persisted by an explicit call.
251	`Name = 'Received product',`	Assigns the right-hand expression to the named variable/property: Name = 'Received product',. This is in-memory unless it is later persisted by an explicit call.
252	`Product_Code__c = 'PRIMARY-R',`	Assigns the right-hand expression to the named variable/property: Product_Code__c = 'PRIMARY-R',. This is in-memory unless it is later persisted by an explicit call.
253	`MRP__c = 20,`	Assigns the right-hand expression to the named variable/property: MRP__c = 20,. This is in-memory unless it is later persisted by an explicit call.
254	`Retailer_Base_Price__c = 15,`	Assigns the right-hand expression to the named variable/property: Retailer_Base_Price__c = 15,. This is in-memory unless it is later persisted by an explicit call.
255	`Units_Per_Case__c = 10,`	Assigns the right-hand expression to the named variable/property: Units_Per_Case__c = 10,. This is in-memory unless it is later persisted by an explicit call.
256	`DMS_Case_Price__c = 100,`	Assigns the right-hand expression to the named variable/property: DMS_Case_Price__c = 100,. This is in-memory unless it is later persisted by an explicit call.
257	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
258	`            Sellable__c = true`	Assigns the right-hand expression to the named variable/property: Sellable__c = true. This is in-memory unless it is later persisted by an explicit call.
259	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
260	`        insert product;`	Performs Salesforce DML: insert product;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
261	`        DMS_Primary_Order__c original = new DMS_Primary_Order__c(`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order__c original = new DMS_Primary_Order__c(. This is in-memory unless it is later persisted by an explicit call.
262	`            Distributor__c = supplier.Id,`	Assigns the right-hand expression to the named variable/property: Distributor__c = supplier.Id,. This is in-memory unless it is later persisted by an explicit call.
263	`            Employee__c = employee.Id`	Assigns the right-hand expression to the named variable/property: Employee__c = employee.Id. This is in-memory unless it is later persisted by an explicit call.
264	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
265	`        insert original;`	Performs Salesforce DML: insert original;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
266	`        DMS_Goods_Receipt__c receipt = new DMS_Goods_Receipt__c(`	Assigns the right-hand expression to the named variable/property: DMS_Goods_Receipt__c receipt = new DMS_Goods_Receipt__c(. This is in-memory unless it is later persisted by an explicit call.
267	`            Distributor__c = supplier.Id,`	Assigns the right-hand expression to the named variable/property: Distributor__c = supplier.Id,. This is in-memory unless it is later persisted by an explicit call.
268	`            Primary_Order__c = original.Id,`	Assigns the right-hand expression to the named variable/property: Primary_Order__c = original.Id,. This is in-memory unless it is later persisted by an explicit call.
269	`            Status__c = 'Received',`	Assigns the right-hand expression to the named variable/property: Status__c = 'Received',. This is in-memory unless it is later persisted by an explicit call.
270	`            Received_Date__c = Date.today()`	Calls the named method: Received_Date__c = Date.today(). Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
271	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
272	`insert receipt;`	Performs Salesforce DML: insert receipt;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
273	`DMS_Goods_Receipt_Line__c received = new DMS_Goods_Receipt_Line__c(`	Assigns the right-hand expression to the named variable/property: DMS_Goods_Receipt_Line__c received = new DMS_Goods_Receipt_Line__c(. This is in-memory unless it is later persisted by an explicit call.
274	`Goods_Receipt__c = receipt.Id,`	Assigns the right-hand expression to the named variable/property: Goods_Receipt__c = receipt.Id,. This is in-memory unless it is later persisted by an explicit call.
275	`Product__c = product.Id,`	Assigns the right-hand expression to the named variable/property: Product__c = product.Id,. This is in-memory unless it is later persisted by an explicit call.
276	`Received_Cases__c = 3,`	Assigns the right-hand expression to the named variable/property: Received_Cases__c = 3,. This is in-memory unless it is later persisted by an explicit call.
277	`Pieces_Per_Case__c = 10,`	Assigns the right-hand expression to the named variable/property: Pieces_Per_Case__c = 10,. This is in-memory unless it is later persisted by an explicit call.
278	`Case_Cost__c = 100,`	Assigns the right-hand expression to the named variable/property: Case_Cost__c = 100,. This is in-memory unless it is later persisted by an explicit call.
279	`Batch_Number__c = 'R1'`	Assigns the right-hand expression to the named variable/property: Batch_Number__c = 'R1'. This is in-memory unless it is later persisted by an explicit call.
280	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
281	`insert received;`	Performs Salesforce DML: insert received;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
282	`DmsPortalApi.Command cmd = new DmsPortalApi.Command();`	Calls the named method: DmsPortalApi.Command cmd = new DmsPortalApi.Command();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
283	`cmd.action = 'primaryReturn';`	Assigns the right-hand expression to the named variable/property: cmd.action = 'primaryReturn';. This is in-memory unless it is later persisted by an explicit call.
284	`cmd.distributorId = supplier.Id;`	Assigns the right-hand expression to the named variable/property: cmd.distributorId = supplier.Id;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
285	`cmd.employeeId = employee.Id;`	Assigns the right-hand expression to the named variable/property: cmd.employeeId = employee.Id;. This is in-memory unless it is later persisted by an explicit call.
286	`cmd.requestKey = 'return-1234567890';`	Assigns the right-hand expression to the named variable/property: cmd.requestKey = 'return-1234567890';. This is in-memory unless it is later persisted by an explicit call.
287	`DmsEmployeeTransactions.LineInput input = new DmsEmployeeTransactions.LineInput();`	Calls the named method: DmsEmployeeTransactions.LineInput input = new DmsEmployeeTransactions.LineInput();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
288	`input.receiptLineId = received.Id;`	Assigns the right-hand expression to the named variable/property: input.receiptLineId = received.Id;. This is in-memory unless it is later persisted by an explicit call.
289	`input.cases = 2;`	Assigns the right-hand expression to the named variable/property: input.cases = 2;. This is in-memory unless it is later persisted by an explicit call.
290	`input.reason = 'Damaged';`	Assigns the right-hand expression to the named variable/property: input.reason = 'Damaged';. This is in-memory unless it is later persisted by an explicit call.
291	`cmd.lines = new List<DmsEmployeeTransactions.LineInput>{ input };`	Assigns the right-hand expression to the named variable/property: cmd.lines = new List<DmsEmployeeTransactions.LineInput>{ input };. This is in-memory unless it is later persisted by an explicit call.
292	`Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
293	`Map<String, Object> returned = call(cmd);`	Declares/initializes local data used by the surrounding operation: Map<String, Object> returned = call(cmd);. Collection contents and assignments below determine its purpose.
294	`System.assertNotEquals(null, returned.get('id'), JSON.serialize(returned));`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(null, returned.get('id'), JSON.serialize(returned));. A mismatch fails the test.
295	`System.assertEquals(returned.get('id'), call(cmd).get('id'));`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(returned.get('id'), call(cmd).get('id'));. A mismatch fails the test.
296	`cmd.requestKey = 'return-abcdefghij';`	Assigns the right-hand expression to the named variable/property: cmd.requestKey = 'return-abcdefghij';. This is in-memory unless it is later persisted by an explicit call.
297	`System.assert(call(cmd).containsKey('error'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'));. A mismatch fails the test.

Line	Source code	Explanation / reading note
298	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
299	`        System.assertEquals(1, [SELECT COUNT() FROM DMS_Primary_Return__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1, [SELECT COUNT() FROM DMS_Primary_Return__c]);. A mismatch fails the test.
300	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
301	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
302	`    static void employeeCannotOrderForAnotherDistributor() {`	Continues the surrounding declaration/expression or text: static void employeeCannotOrderForAnotherDistributor() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
303	`        DMS_Distributor__c supplier = distributor(), other = distributor();`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c supplier = distributor(), other = distributor();. This is in-memory unless it is later persisted by an explicit call.
304	`        Employee__c employee = new Employee__c(`	Assigns the right-hand expression to the named variable/property: Employee__c employee = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
305	`            Name = 'Scoped employee',`	Assigns the right-hand expression to the named variable/property: Name = 'Scoped employee',. This is in-memory unless it is later persisted by an explicit call.
306	`            Phone__c = '9000000000',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000000',. This is in-memory unless it is later persisted by an explicit call.
307	`            Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
308	`            DMS_Distributor__c = supplier.Id`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c = supplier.Id. This is in-memory unless it is later persisted by an explicit call.
309	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
310	`        insert employee;`	Performs Salesforce DML: insert employee;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
311	`DmsPortalApi.Command cmd = new DmsPortalApi.Command();`	Calls the named method: DmsPortalApi.Command cmd = new DmsPortalApi.Command();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
312	`cmd.action = 'primaryOrder';`	Assigns the right-hand expression to the named variable/property: cmd.action = 'primaryOrder';. This is in-memory unless it is later persisted by an explicit call.
313	`cmd.employeeId = employee.Id;`	Assigns the right-hand expression to the named variable/property: cmd.employeeId = employee.Id;. This is in-memory unless it is later persisted by an explicit call.
314	`cmd.distributorId = other.Id;`	Assigns the right-hand expression to the named variable/property: cmd.distributorId = other.Id;. This is in-memory unless it is later persisted by an explicit call.
315	`System.assert(call(cmd).containsKey('error'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'));. A mismatch fails the test.
316	`System.assertEquals(0, [SELECT COUNT() FROM DMS_Primary_Order__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(0, [SELECT COUNT() FROM DMS_Primary_Order__c]);. A mismatch fails the test.
317	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
318	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
319	`static void primarySchemesAndFreeReceipts() {`	Continues the surrounding declaration/expression or text: static void primarySchemesAndFreeReceipts() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
320	`DMS_Distributor__c supplier = distributor();`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c supplier = distributor();. This is in-memory unless it is later persisted by an explicit call.
321	`Employee__c employee = new Employee__c(`	Assigns the right-hand expression to the named variable/property: Employee__c employee = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
322	`Name = 'Scheme employee',`	Assigns the right-hand expression to the named variable/property: Name = 'Scheme employee',. This is in-memory unless it is later persisted by an explicit call.
323	`Phone__c = '9000000000',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000000',. This is in-memory unless it is later persisted by an explicit call.
324	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
325	`DMS_Distributor__c = supplier.Id`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c = supplier.Id. This is in-memory unless it is later persisted by an explicit call.
326	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
327	`insert employee;`	Performs Salesforce DML: insert employee;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
328	`Product__c paid = new Product__c(`	Assigns the right-hand expression to the named variable/property: Product__c paid = new Product__c(. This is in-memory unless it is later persisted by an explicit call.
329	`Name = 'Paid',`	Assigns the right-hand expression to the named variable/property: Name = 'Paid',. This is in-memory unless it is later persisted by an explicit call.
330	`Product_Code__c = 'PROMO-P',`	Assigns the right-hand expression to the named variable/property: Product_Code__c = 'PROMO-P',. This is in-memory unless it is later persisted by an explicit call.
331	`MRP__c = 20,`	Assigns the right-hand expression to the named variable/property: MRP__c = 20,. This is in-memory unless it is later persisted by an explicit call.
332	`Retailer_Base_Price__c = 15,`	Assigns the right-hand expression to the named variable/property: Retailer_Base_Price__c = 15,. This is in-memory unless it is later persisted by an explicit call.
333	`Units_Per_Case__c = 10,`	Assigns the right-hand expression to the named variable/property: Units_Per_Case__c = 10,. This is in-memory unless it is later persisted by an explicit call.
334	`DMS_Case_Price__c = 2000,`	Assigns the right-hand expression to the named variable/property: DMS_Case_Price__c = 2000,. This is in-memory unless it is later persisted by an explicit call.
335	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
336	`Sellable__c = true`	Assigns the right-hand expression to the named variable/property: Sellable__c = true. This is in-memory unless it is later persisted by an explicit call.
337	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
338	`Product__c bonus = new Product__c(`	Assigns the right-hand expression to the named variable/property: Product__c bonus = new Product__c(. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
339	`Name = 'Bonus',`	Assigns the right-hand expression to the named variable/property: Name = 'Bonus',. This is in-memory unless it is later persisted by an explicit call.
340	`Product_Code__c = 'PROMO-F',`	Assigns the right-hand expression to the named variable/property: Product_Code__c = 'PROMO-F',. This is in-memory unless it is later persisted by an explicit call.
341	`MRP__c = 10,`	Assigns the right-hand expression to the named variable/property: MRP__c = 10,. This is in-memory unless it is later persisted by an explicit call.
342	`Retailer_Base_Price__c = 8,`	Assigns the right-hand expression to the named variable/property: Retailer_Base_Price__c = 8,. This is in-memory unless it is later persisted by an explicit call.
343	`Units_Per_Case__c = 20,`	Assigns the right-hand expression to the named variable/property: Units_Per_Case__c = 20,. This is in-memory unless it is later persisted by an explicit call.
344	`DMS_Case_Price__c = 100,`	Assigns the right-hand expression to the named variable/property: DMS_Case_Price__c = 100,. This is in-memory unless it is later persisted by an explicit call.
345	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
346	`Sellable__c = true`	Assigns the right-hand expression to the named variable/property: Sellable__c = true. This is in-memory unless it is later persisted by an explicit call.
347	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
348	`insert new List<Product__c>{ paid, bonus };`	Performs Salesforce DML: insert new List<Product__c>{ paid, bonus };. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
349	`Scheme__c scheme = new Scheme__c(`	Assigns the right-hand expression to the named variable/property: Scheme__c scheme = new Scheme__c(. This is in-memory unless it is later persisted by an explicit call.
350	`Name = 'Buy one get two',`	Assigns the right-hand expression to the named variable/property: Name = 'Buy one get two',. This is in-memory unless it is later persisted by an explicit call.
351	`Scheme_Type__c = 'Different Listed Product Free',`	Assigns the right-hand expression to the named variable/property: Scheme_Type__c = 'Different Listed Product Free',. This is in-memory unless it is later persisted by an explicit call.
352	`Sales_Channel__c = 'Primary',`	Assigns the right-hand expression to the named variable/property: Sales_Channel__c = 'Primary',. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
353	`            Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
354	`            Minimum_Cases__c = 1,`	Assigns the right-hand expression to the named variable/property: Minimum_Cases__c = 1,. This is in-memory unless it is later persisted by an explicit call.
355	`            Free_Cases__c = 2,`	Assigns the right-hand expression to the named variable/property: Free_Cases__c = 2,. This is in-memory unless it is later persisted by an explicit call.
356	`            Free_Product__c = bonus.Id,`	Assigns the right-hand expression to the named variable/property: Free_Product__c = bonus.Id,. This is in-memory unless it is later persisted by an explicit call.
357	`            Discount_Percent__c = 10`	Assigns the right-hand expression to the named variable/property: Discount_Percent__c = 10. This is in-memory unless it is later persisted by an explicit call.
358	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
359	`        scheme.Scheme_Code__c = 'PRIMARY-FREE';`	Assigns the right-hand expression to the named variable/property: scheme.Scheme_Code__c = 'PRIMARY-FREE';. This is in-memory unless it is later persisted by an explicit call.
360	`        scheme.Start_Date__c = Date.today().addDays(-30);`	Calls the named method: scheme.Start_Date__c = Date.today().addDays(-30);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
361	`        scheme.End_Date__c = Date.today().addDays(30);`	Calls the named method: scheme.End_Date__c = Date.today().addDays(30);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
362	`        insert scheme;`	Performs Salesforce DML: insert scheme;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
363	`        insert new Scheme_Product__c(Scheme__c = scheme.Id, Product__c = paid.Id, Active__c = true);`	Performs Salesforce DML: insert new Scheme_Product__c(Scheme__c = scheme.Id, Product__c = paid.Id, Active__c = true);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
364	`        DMS_Primary_Order__c order = new DMS_Primary_Order__c(`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order__c order = new DMS_Primary_Order__c(. This is in-memory unless it is later persisted by an explicit call.
365	`            Distributor__c = supplier.Id,`	Assigns the right-hand expression to the named variable/property: Distributor__c = supplier.Id,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
366	`Employee__c = employee.Id`	Assigns the right-hand expression to the named variable/property: Employee__c = employee.Id. This is in-memory unless it is later persisted by an explicit call.
367	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
368	`insert order;`	Performs Salesforce DML: insert order;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
369	`DMS_Primary_Order_Line__c line = new DMS_Primary_Order_Line__c(`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order_Line__c line = new DMS_Primary_Order_Line__c(. This is in-memory unless it is later persisted by an explicit call.
370	`Order__c = order.Id,`	Assigns the right-hand expression to the named variable/property: Order__c = order.Id,. This is in-memory unless it is later persisted by an explicit call.
371	`Product__c = paid.Id,`	Assigns the right-hand expression to the named variable/property: Product__c = paid.Id,. This is in-memory unless it is later persisted by an explicit call.
372	`Cases__c = 3,`	Assigns the right-hand expression to the named variable/property: Cases__c = 3,. This is in-memory unless it is later persisted by an explicit call.
373	`Scheme__c = scheme.Id`	Assigns the right-hand expression to the named variable/property: Scheme__c = scheme.Id. This is in-memory unless it is later persisted by an explicit call.
374	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
375	`insert line;`	Performs Salesforce DML: insert line;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
376	`line = [`	Assigns the right-hand expression to the named variable/property: line = [. This is in-memory unless it is later persisted by an explicit call.
377	`SELECT`	Selects these Salesforce fields/aggregates: SELECT. Query results are used in the surrounding assignment or loop.
378	`Id,`	Declares/initializes local data used by the surrounding operation: Id,. Collection contents and assignments below determine its purpose.
379	`Free_Cases__c,`	Continues the surrounding declaration/expression or text: Free_Cases__c,. Read it with the preceding opening statement (Id,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
380	`Free_Product__c,`	Continues the surrounding declaration/expression or text: Free_Product__c,. Read it with the preceding opening statement (Free_Cases__c,); it is not a standalone business operation.
381	`Free_Pieces_Per_Case__c,`	Continues the surrounding declaration/expression or text: Free_Pieces_Per_Case__c,. Read it with the preceding opening statement (Free_Product__c,); it is not a standalone business operation.
382	`Discount_Amount__c,`	Continues the surrounding declaration/expression or text: Discount_Amount__c,. Read it with the preceding opening statement (Free_Pieces_Per_Case__c,); it is not a standalone business operation.
383	`Total_Pieces__c`	Continues the surrounding declaration/expression or text: Total_Pieces__c. Read it with the preceding opening statement (Discount_Amount__c,); it is not a standalone business operation.
384	`FROM DMS_Primary_Order_Line__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Order_Line__c.
385	`WHERE Id = :line.Id`	Adds a query/filter condition: WHERE Id = :line.Id. The complete condition determines which records are included.
386	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
387	`System.assertEquals(6, line.Free_Cases__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(6, line.Free_Cases__c);. A mismatch fails the test.
388	`System.assertEquals(bonus.Id, line.Free_Product__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(bonus.Id, line.Free_Product__c);. A mismatch fails the test.
389	`System.assertEquals(20, line.Free_Pieces_Per_Case__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(20, line.Free_Pieces_Per_Case__c);. A mismatch fails the test.
390	`System.assertEquals(600, line.Discount_Amount__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(600, line.Discount_Amount__c);. A mismatch fails the test.
391	`System.assertEquals(150, line.Total_Pieces__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(150, line.Total_Pieces__c);. A mismatch fails the test.
392	`Approval.ProcessSubmitRequest submit = new Approval.ProcessSubmitRequest();`	Calls the named method: Approval.ProcessSubmitRequest submit = new Approval.ProcessSubmitRequest();. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
393	`submit.setObjectId(order.Id);`	Calls the named method: submit.setObjectId(order.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
394	`submit.setProcessDefinitionNameOrId('Company_Officer_Approval');`	Calls the named method: submit.setProcessDefinitionNameOrId('Company_Officer_Approval');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
395	`Approval.ProcessResult submission = Approval.process(submit);`	Submits the configured Salesforce approval request. Inspect the returned result before claiming submission succeeded.
396	`Approval.ProcessWorkitemRequest approve = new Approval.ProcessWorkitemRequest();`	Calls the named method: Approval.ProcessWorkitemRequest approve = new Approval.ProcessWorkitemRequest();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
397	`approve.setWorkitemId(submission.getNewWorkitemIds()[0]);`	Calls the named method: approve.setWorkitemId(submission.getNewWorkitemIds()[0]);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
398	`approve.setAction('Approve');`	Calls the named method: approve.setAction('Approve');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
399	`Approval.process(approve);`	Submits the configured Salesforce approval request. Inspect the returned result before claiming submission succeeded.
400	`DmsPortalApi.Command cmd = new DmsPortalApi.Command();`	Calls the named method: DmsPortalApi.Command cmd = new DmsPortalApi.Command();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
401	`cmd.action = 'receiveGoods';`	Assigns the right-hand expression to the named variable/property: cmd.action = 'receiveGoods';. This is in-memory unless it is later persisted by an explicit call.
402	`cmd.distributorId = supplier.Id;`	Assigns the right-hand expression to the named variable/property: cmd.distributorId = supplier.Id;. This is in-memory unless it is later persisted by an explicit call.
403	`cmd.recordId = line.Id;`	Assigns the right-hand expression to the named variable/property: cmd.recordId = line.Id;. This is in-memory unless it is later persisted by an explicit call.
404	`cmd.receiptKind = 'Free';`	Assigns the right-hand expression to the named variable/property: cmd.receiptKind = 'Free';. This is in-memory unless it is later persisted by an explicit call.
405	`cmd.cases = 6;`	Assigns the right-hand expression to the named variable/property: cmd.cases = 6;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
406	`cmd.batch = 'FREE1';`	Assigns the right-hand expression to the named variable/property: cmd.batch = 'FREE1';. This is in-memory unless it is later persisted by an explicit call.
407	`cmd.expiry = Date.today().addMonths(6);`	Calls the named method: cmd.expiry = Date.today().addMonths(6);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
408	`cmd.requestKey = 'free-receipt-123456';`	Assigns the right-hand expression to the named variable/property: cmd.requestKey = 'free-receipt-123456';. This is in-memory unless it is later persisted by an explicit call.
409	`Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
410	`Map<String, Object> result = call(cmd);`	Declares/initializes local data used by the surrounding operation: Map<String, Object> result = call(cmd);. Collection contents and assignments below determine its purpose.
411	`System.assertNotEquals(null, result.get('id'), JSON.serialize(result));`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(null, result.get('id'), JSON.serialize(result));. A mismatch fails the test.
412	`System.assertEquals(result.get('id'), call(cmd).get('id'));`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(result.get('id'), call(cmd).get('id'));. A mismatch fails the test.
413	`cmd.requestKey = 'free-receipt-654321';`	Assigns the right-hand expression to the named variable/property: cmd.requestKey = 'free-receipt-654321';. This is in-memory unless it is later persisted by an explicit call.
414	`cmd.cases = 1;`	Assigns the right-hand expression to the named variable/property: cmd.cases = 1;. This is in-memory unless it is later persisted by an explicit call.
415	`System.assert(call(cmd).containsKey('error'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(cmd).containsKey('error'));. A mismatch fails the test.
416	`Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
417	`DMS_Inventory__c stock = [SELECT Product__c, On_Hand_Pieces__c FROM DMS_Inventory__c];`	Assigns the right-hand expression to the named variable/property: DMS_Inventory__c stock = [SELECT Product__c, On_Hand_Pieces__c FROM DMS_Inventory__c];. This is in-memory unless it is later persisted by an explicit call.
418	`System.assertEquals(bonus.Id, stock.Product__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(bonus.Id, stock.Product__c);. A mismatch fails the test.

Line	Source code	Explanation / reading note
419	`System.assertEquals(120, stock.On_Hand_Pieces__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(120, stock.On_Hand_Pieces__c);. A mismatch fails the test.
420	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
421	`0,`	Continues the surrounding declaration/expression or text: 0,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
422	`[SELECT Received_Value__c FROM DMS_Goods_Receipt_Line__c].Received_Value__c`	Continues the surrounding declaration/expression or text: [SELECT Received_Value__c FROM DMS_Goods_Receipt_Line__c].Received_Value__c. Read it with the preceding opening statement (0,); it is not a standalone business operation.
423	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
424	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
425	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
426	`static void invalidSchemesAndSurveyOwnership() {`	Continues the surrounding declaration/expression or text: static void invalidSchemesAndSurveyOwnership() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
427	`DMS_Distributor__c supplier = distributor();`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c supplier = distributor();. This is in-memory unless it is later persisted by an explicit call.
428	`Product__c product = new Product__c(`	Assigns the right-hand expression to the named variable/property: Product__c product = new Product__c(. This is in-memory unless it is later persisted by an explicit call.
429	`Name = 'Scheme check',`	Assigns the right-hand expression to the named variable/property: Name = 'Scheme check',. This is in-memory unless it is later persisted by an explicit call.
430	`Product_Code__c = 'SCHEME-CHECK',`	Assigns the right-hand expression to the named variable/property: Product_Code__c = 'SCHEME-CHECK',. This is in-memory unless it is later persisted by an explicit call.
431	`MRP__c = 20,`	Assigns the right-hand expression to the named variable/property: MRP__c = 20,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
432	`Retailer_Base_Price__c = 15,`	Assigns the right-hand expression to the named variable/property: Retailer_Base_Price__c = 15,. This is in-memory unless it is later persisted by an explicit call.
433	`Units_Per_Case__c = 10,`	Assigns the right-hand expression to the named variable/property: Units_Per_Case__c = 10,. This is in-memory unless it is later persisted by an explicit call.
434	`DMS_Case_Price__c = 100,`	Assigns the right-hand expression to the named variable/property: DMS_Case_Price__c = 100,. This is in-memory unless it is later persisted by an explicit call.
435	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
436	`Sellable__c = true`	Assigns the right-hand expression to the named variable/property: Sellable__c = true. This is in-memory unless it is later persisted by an explicit call.
437	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
438	`insert product;`	Performs Salesforce DML: insert product;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
439	`DMS_Primary_Order__c order = new DMS_Primary_Order__c(Distributor__c = supplier.Id);`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order__c order = new DMS_Primary_Order__c(Distributor__c = supplier.Id);. This is in-memory unless it is later persisted by an explicit call.
440	`insert order;`	Performs Salesforce DML: insert order;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
441	`Scheme__c scheme = new Scheme__c(`	Assigns the right-hand expression to the named variable/property: Scheme__c scheme = new Scheme__c(. This is in-memory unless it is later persisted by an explicit call.
442	`Name = 'Minimum two',`	Assigns the right-hand expression to the named variable/property: Name = 'Minimum two',. This is in-memory unless it is later persisted by an explicit call.
443	`Scheme_Code__c = 'PRIMARY-MIN',`	Assigns the right-hand expression to the named variable/property: Scheme_Code__c = 'PRIMARY-MIN',. This is in-memory unless it is later persisted by an explicit call.
444	`Start_Date__c = Date.today().addDays(-30),`	Calls the named method: Start_Date__c = Date.today().addDays(-30),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
445	`End_Date__c = Date.today().addDays(30),`	Calls the named method: End_Date__c = Date.today().addDays(30),. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
446	`Scheme_Type__c = 'Same Product Free',`	Assigns the right-hand expression to the named variable/property: Scheme_Type__c = 'Same Product Free',. This is in-memory unless it is later persisted by an explicit call.
447	`Sales_Channel__c = 'Primary',`	Assigns the right-hand expression to the named variable/property: Sales_Channel__c = 'Primary',. This is in-memory unless it is later persisted by an explicit call.
448	`Product__c = product.Id,`	Assigns the right-hand expression to the named variable/property: Product__c = product.Id,. This is in-memory unless it is later persisted by an explicit call.
449	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
450	`Minimum_Cases__c = 2,`	Assigns the right-hand expression to the named variable/property: Minimum_Cases__c = 2,. This is in-memory unless it is later persisted by an explicit call.
451	`Free_Cases__c = 1,`	Assigns the right-hand expression to the named variable/property: Free_Cases__c = 1,. This is in-memory unless it is later persisted by an explicit call.
452	`Discount_Amount__c = 5,`	Assigns the right-hand expression to the named variable/property: Discount_Amount__c = 5,. This is in-memory unless it is later persisted by an explicit call.
453	`Free_Gift__c = 'Display',`	Assigns the right-hand expression to the named variable/property: Free_Gift__c = 'Display',. This is in-memory unless it is later persisted by an explicit call.
454	`Gift_Quantity__c = 1`	Assigns the right-hand expression to the named variable/property: Gift_Quantity__c = 1. This is in-memory unless it is later persisted by an explicit call.
455	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
456	`insert scheme;`	Performs Salesforce DML: insert scheme;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
457	`DMS_Primary_Order_Line__c line = new DMS_Primary_Order_Line__c(`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order_Line__c line = new DMS_Primary_Order_Line__c(. This is in-memory unless it is later persisted by an explicit call.
458	`Order__c = order.Id,`	Assigns the right-hand expression to the named variable/property: Order__c = order.Id,. This is in-memory unless it is later persisted by an explicit call.
459	`Product__c = product.Id,`	Assigns the right-hand expression to the named variable/property: Product__c = product.Id,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
460	`Cases__c = 1,`	Assigns the right-hand expression to the named variable/property: Cases__c = 1,. This is in-memory unless it is later persisted by an explicit call.
461	`Scheme__c = scheme.Id`	Assigns the right-hand expression to the named variable/property: Scheme__c = scheme.Id. This is in-memory unless it is later persisted by an explicit call.
462	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
463	`System.assertEquals(false, Database.insert(line, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.insert(line, false).isSuccess());. A mismatch fails the test.
464	`line.Cases__c = 5;`	Assigns the right-hand expression to the named variable/property: line.Cases__c = 5;. This is in-memory unless it is later persisted by an explicit call.
465	`insert line;`	Performs Salesforce DML: insert line;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
466	`line = [`	Assigns the right-hand expression to the named variable/property: line = [. This is in-memory unless it is later persisted by an explicit call.
467	`SELECT Id, Free_Cases__c, Gift_Quantity__c, Discount_Amount__c, Scheme__c`	Selects these Salesforce fields/aggregates: Id, Free_Cases__c, Gift_Quantity__c, Discount_Amount__c, Scheme__c. Query results are used in the surrounding assignment or loop.
468	`FROM DMS_Primary_Order_Line__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Order_Line__c.
469	`WHERE Id = :line.Id`	Adds a query/filter condition: WHERE Id = :line.Id. The complete condition determines which records are included.
470	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
471	`System.assertEquals(2, line.Free_Cases__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(2, line.Free_Cases__c);. A mismatch fails the test.
472	`System.assertEquals(10, line.Discount_Amount__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(10, line.Discount_Amount__c);. A mismatch fails the test.
473	`System.assertEquals(2, line.Gift_Quantity__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(2, line.Gift_Quantity__c);. A mismatch fails the test.

Line	Source code	Explanation / reading note
474	`line.Scheme__c = null;`	Assigns the right-hand expression to the named variable/property: line.Scheme__c = null;. This is in-memory unless it is later persisted by an explicit call.
475	`update line;`	Performs Salesforce DML: update line;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
476	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
477	`0,`	Continues the surrounding declaration/expression or text: 0,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
478	`[SELECT Free_Cases__c FROM DMS_Primary_Order_Line__c WHERE Id = :line.Id].Free_Cases__c`	Assigns the right-hand expression to the named variable/property: [SELECT Free_Cases__c FROM DMS_Primary_Order_Line__c WHERE Id = :line.Id].Free_Cases__c. This is in-memory unless it is later persisted by an explicit call.
479	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
480	`scheme.Active__c = false;`	Assigns the right-hand expression to the named variable/property: scheme.Active__c = false;. This is in-memory unless it is later persisted by an explicit call.
481	`update scheme;`	Performs Salesforce DML: update scheme;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
482	`line.Scheme__c = scheme.Id;`	Assigns the right-hand expression to the named variable/property: line.Scheme__c = scheme.Id;. This is in-memory unless it is later persisted by an explicit call.
483	`System.assertEquals(false, Database.update(line, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.update(line, false).isSuccess());. A mismatch fails the test.
484	`scheme.Active__c = true;`	Assigns the right-hand expression to the named variable/property: scheme.Active__c = true;. This is in-memory unless it is later persisted by an explicit call.
485	`scheme.End_Date__c = Date.today().addDays(-1);`	Calls the named method: scheme.End_Date__c = Date.today().addDays(-1);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
486	`update scheme;`	Performs Salesforce DML: update scheme;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
487	`System.assertEquals(false, Database.update(line, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.update(line, false).isSuccess());. A mismatch fails the test.
488	`scheme.End_Date__c = Date.today().addDays(30);`	Calls the named method: scheme.End_Date__c = Date.today().addDays(30);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
489	`scheme.Discount_Percent__c = 100;`	Assigns the right-hand expression to the named variable/property: scheme.Discount_Percent__c = 100;. This is in-memory unless it is later persisted by an explicit call.
490	`scheme.Discount_Amount__c = 50;`	Assigns the right-hand expression to the named variable/property: scheme.Discount_Amount__c = 50;. This is in-memory unless it is later persisted by an explicit call.
491	`update scheme;`	Performs Salesforce DML: update scheme;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
492	`System.assertEquals(false, Database.update(line, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.update(line, false).isSuccess());. A mismatch fails the test.
493	`DMS_Distributor_Survey__c survey = new DMS_Distributor_Survey__c(`	Assigns the right-hand expression to the named variable/property: DMS_Distributor_Survey__c survey = new DMS_Distributor_Survey__c(. This is in-memory unless it is later persisted by an explicit call.
494	`Distributor__c = supplier.Id,`	Assigns the right-hand expression to the named variable/property: Distributor__c = supplier.Id,. This is in-memory unless it is later persisted by an explicit call.
495	`Product__c = product.Id,`	Assigns the right-hand expression to the named variable/property: Product__c = product.Id,. This is in-memory unless it is later persisted by an explicit call.
496	`Visit_Date__c = Date.today(),`	Calls the named method: Visit_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
497	`Stock_Cases__c = 5,`	Assigns the right-hand expression to the named variable/property: Stock_Cases__c = 5,. This is in-memory unless it is later persisted by an explicit call.
498	`Movement__c = 'Slow Moving',`	Assigns the right-hand expression to the named variable/property: Movement__c = 'Slow Moving',. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
499	`Demand_Notes__c = 'Review demand next month.'`	Assigns the right-hand expression to the named variable/property: Demand_Notes__c = 'Review demand next month.'. This is in-memory unless it is later persisted by an explicit call.
500	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
501	`insert survey;`	Performs Salesforce DML: insert survey;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
502	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
503	`UserInfo.getUserId(),`	Calls the named method: UserInfo.getUserId(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
504	`[SELECT Officer__c FROM DMS_Distributor_Survey__c WHERE Id = :survey.Id].Officer__c`	Assigns the right-hand expression to the named variable/property: [SELECT Officer__c FROM DMS_Distributor_Survey__c WHERE Id = :survey.Id].Officer__c. This is in-memory unless it is later persisted by an explicit call.
505	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
506	`supplier.Officer__c = null;`	Assigns the right-hand expression to the named variable/property: supplier.Officer__c = null;. This is in-memory unless it is later persisted by an explicit call.
507	`update supplier;`	Performs Salesforce DML: update supplier;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
508	`survey.Stock_Cases__c = 6;`	Assigns the right-hand expression to the named variable/property: survey.Stock_Cases__c = 6;. This is in-memory unless it is later persisted by an explicit call.
509	`System.assertEquals(false, Database.update(survey, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.update(survey, false).isSuccess());. A mismatch fails the test.
510	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
511	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.

Line	Source code	Explanation / reading note
512	`    static void deniesUntrustedUser() {`	Continues the surrounding declaration/expression or text: static void deniesUntrustedUser() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
513	`        User user = new User(`	Assigns the right-hand expression to the named variable/property: User user = new User(. This is in-memory unless it is later persisted by an explicit call.
514	`            Alias = 'notrust',`	Assigns the right-hand expression to the named variable/property: Alias = 'notrust',. This is in-memory unless it is later persisted by an explicit call.
515	`            Email = 'no@example.invalid',`	Assigns the right-hand expression to the named variable/property: Email = 'no@example.invalid',. This is in-memory unless it is later persisted by an explicit call.
516	`            EmailEncodingKey = 'UTF-8',`	Assigns the right-hand expression to the named variable/property: EmailEncodingKey = 'UTF-8',. This is in-memory unless it is later persisted by an explicit call.
517	`            LastName = 'No API Access',`	Assigns the right-hand expression to the named variable/property: LastName = 'No API Access',. This is in-memory unless it is later persisted by an explicit call.
518	`            LanguageLocaleKey = 'en_US',`	Assigns the right-hand expression to the named variable/property: LanguageLocaleKey = 'en_US',. This is in-memory unless it is later persisted by an explicit call.
519	`            LocaleSidKey = 'en_US',`	Assigns the right-hand expression to the named variable/property: LocaleSidKey = 'en_US',. This is in-memory unless it is later persisted by an explicit call.
520	`            TimeZoneSidKey = 'Asia/Kolkata',`	Assigns the right-hand expression to the named variable/property: TimeZoneSidKey = 'Asia/Kolkata',. This is in-memory unless it is later persisted by an explicit call.
521	`            ProfileId = [SELECT Id FROM Profile WHERE Name = 'Standard Platform User' LIMIT 1]`	Assigns the right-hand expression to the named variable/property: ProfileId = [SELECT Id FROM Profile WHERE Name = 'Standard Platform User' LIMIT 1]. This is in-memory unless it is later persisted by an explicit call.
522	`            .Id,`	Continues the surrounding declaration/expression or text: .Id,. Read it with the preceding opening statement (ProfileId = [SELECT Id FROM Profile WHERE Name = 'Standard Platform User' LIMIT 1]); it is not a standalone business operation.
523	`            Username = 'no-dms-' + System.now().getTime() + '@example.invalid'`	Calls the named method: Username = 'no-dms-' + System.now().getTime() + '@example.invalid'. Its implementation defines the side effect/result; use the symbol/file index to follow it.
524	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
525	`insert user;`	Performs Salesforce DML: insert user;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
526	`System.runAs(user) {`	Calls the named method: System.runAs(user) {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
527	`System.assert(call(new DmsPortalApi.Command()).containsKey('error'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(call(new DmsPortalApi.Command()).containsKey('error'));. A mismatch fails the test.
528	`System.assertEquals(403, RestContext.response.statusCode);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(403, RestContext.response.statusCode);. A mismatch fails the test.
529	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
530	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
531	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsPortalApiTest.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsPrimarySchemes.cls

Server-owned Primary scheme eligibility and benefit calculation. Applies whole-case minimums, buy-block repetition, discounts, free product conversion and gifts.

140 numbered source lines | SHA-256 8d4cf70ae50b7cac191201191330ee4dd0612307d8ed3f0eaa0417b36cee4a1f

Line	Source code	Explanation / reading note
1	`/** Server-owned pricing. One Primary scheme per paid line; free cases and`	Developer comment/documentation: Server-owned pricing. One Primary scheme per paid line; free cases and It is not executed.
2	`* fixed discounts repeat per complete buy block. Submitted lines are immutable.`	Developer comment/documentation: fixed discounts repeat per complete buy block. Submitted lines are immutable. It is not executed.
3	`*/`	Developer comment/documentation: It is not executed.
4	`public with sharing class DmsPrimarySchemes {`	Declares a class/type: public with sharing class DmsPrimarySchemes {. Uses record sharing, which does not alone enforce field/object permissions.
5	`public static void apply(List<SObject> lines) {`	Declares a callable function/method: public static void apply(List<SObject> lines) {. Parameters supply its inputs; the following block implements the operation.
6	`Set<Id> ids = new Set<Id>(), parents = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> ids = new Set<Id>(), parents = new Set<Id>();. Collection contents and assignments below determine its purpose.
7	`for (SObject line : lines) {`	Repeats work over the specified records/items or while this condition holds: for (SObject line : lines) {. Check where queries/writes occur relative to the loop.
8	`ids.add((Id) line.get('Scheme__c'));`	Calls the named method: ids.add((Id) line.get('Scheme__c'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
9	`parents.add((Id) line.get('Order__c'));`	Calls the named method: parents.add((Id) line.get('Order__c'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
10	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
11	`ids.remove(null);`	Calls the named method: ids.remove(null);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
12	`if (ids.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (ids.isEmpty()).
13	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
14	`Map<Id, DMS_Primary_Order__c> orders = new Map<Id, DMS_Primary_Order__c>(`	Declares/initializes local data used by the surrounding operation: Map<Id, DMS_Primary_Order__c> orders = new Map<Id, DMS_Primary_Order__c>(. Collection contents and assignments below determine its purpose.
15	`[`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (Map<Id, DMS_Primary_Order__c> orders = new Map<Id, DMS_Primary_Order__c>(); it is not a standalone business operation.
16	`SELECT Id, Distributor__r.Geography__r.Name`	Selects these Salesforce fields/aggregates: Id, Distributor__r.Geography__r.Name. Query results are used in the surrounding assignment or loop.
17	`FROM DMS_Primary_Order__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Order__c.
18	`WHERE Id IN :parents`	Adds a query/filter condition: WHERE Id IN :parents. The complete condition determines which records are included.
19	`]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21	`Map<Id, Scheme__c> schemes = new Map<Id, Scheme__c>(`	Declares/initializes local data used by the surrounding operation: Map<Id, Scheme__c> schemes = new Map<Id, Scheme__c>(. Collection contents and assignments below determine its purpose.
22	`[`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (Map<Id, Scheme__c> schemes = new Map<Id, Scheme__c>(); it is not a standalone business operation.
23	`SELECT`	Selects these Salesforce fields/aggregates: SELECT. Query results are used in the surrounding assignment or loop.
24	`Id,`	Declares/initializes local data used by the surrounding operation: Id,. Collection contents and assignments below determine its purpose.
25	`Active__c,`	Continues the surrounding declaration/expression or text: Active__c,. Read it with the preceding opening statement (Id,); it is not a standalone business operation.
26	`Sales_Channel__c,`	Continues the surrounding declaration/expression or text: Sales_Channel__c,. Read it with the preceding opening statement (Active__c,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
27	`Start_Date__c,`	Continues the surrounding declaration/expression or text: Start_Date__c,. Read it with the preceding opening statement (Sales_Channel__c,); it is not a standalone business operation.
28	`End_Date__c,`	Continues the surrounding declaration/expression or text: End_Date__c,. Read it with the preceding opening statement (Start_Date__c,); it is not a standalone business operation.
29	`Region__c,`	Continues the surrounding declaration/expression or text: Region__c,. Read it with the preceding opening statement (End_Date__c,); it is not a standalone business operation.
30	`Outlet_Type__c,`	Continues the surrounding declaration/expression or text: Outlet_Type__c,. Read it with the preceding opening statement (Region__c,); it is not a standalone business operation.
31	`Product__c,`	Continues the surrounding declaration/expression or text: Product__c,. Read it with the preceding opening statement (Outlet_Type__c,); it is not a standalone business operation.
32	`Minimum_Cases__c,`	Continues the surrounding declaration/expression or text: Minimum_Cases__c,. Read it with the preceding opening statement (Product__c,); it is not a standalone business operation.
33	`Free_Cases__c,`	Continues the surrounding declaration/expression or text: Free_Cases__c,. Read it with the preceding opening statement (Minimum_Cases__c,); it is not a standalone business operation.
34	`Free_Product__c,`	Continues the surrounding declaration/expression or text: Free_Product__c,. Read it with the preceding opening statement (Free_Cases__c,); it is not a standalone business operation.
35	`Free_Product__r.Units_Per_Case__c,`	Continues the surrounding declaration/expression or text: Free_Product__r.Units_Per_Case__c,. Read it with the preceding opening statement (Free_Product__c,); it is not a standalone business operation.
36	`Free_Product__r.Active__c,`	Continues the surrounding declaration/expression or text: Free_Product__r.Active__c,. Read it with the preceding opening statement (Free_Product__r.Units_Per_Case__c,); it is not a standalone business operation.
37	`Discount_Percent__c,`	Continues the surrounding declaration/expression or text: Discount_Percent__c,. Read it with the preceding opening statement (Free_Product__r.Active__c,); it is not a standalone business operation.
38	`Discount_Amount__c,`	Continues the surrounding declaration/expression or text: Discount_Amount__c,. Read it with the preceding opening statement (Discount_Percent__c,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
39	`Free_Gift__c,`	Continues the surrounding declaration/expression or text: Free_Gift__c,. Read it with the preceding opening statement (Discount_Amount__c,); it is not a standalone business operation.
40	`Gift_Quantity__c`	Continues the surrounding declaration/expression or text: Gift_Quantity__c. Read it with the preceding opening statement (Free_Gift__c,); it is not a standalone business operation.
41	`FROM Scheme__c`	Chooses the Salesforce object/subquery source: FROM Scheme__c.
42	`WHERE Id IN :ids`	Adds a query/filter condition: WHERE Id IN :ids. The complete condition determines which records are included.
43	`]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
45	`Map<Id, Set<Id>> linked = new Map<Id, Set<Id>>();`	Declares/initializes local data used by the surrounding operation: Map<Id, Set<Id>> linked = new Map<Id, Set<Id>>();. Collection contents and assignments below determine its purpose.
46	`for (Scheme_Product__c link : [`	Repeats work over the specified records/items or while this condition holds: for (Scheme_Product__c link : [. Check where queries/writes occur relative to the loop.
47	`SELECT Scheme__c, Product__c`	Selects these Salesforce fields/aggregates: Scheme__c, Product__c. Query results are used in the surrounding assignment or loop.
48	`FROM Scheme_Product__c`	Chooses the Salesforce object/subquery source: FROM Scheme_Product__c.
49	`WHERE Scheme__c IN :ids AND Active__c = TRUE`	Adds a query/filter condition: WHERE Scheme__c IN :ids AND Active__c = TRUE. The complete condition determines which records are included.
50	`]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (WHERE Scheme__c IN :ids AND Active__c = TRUE); it is not a standalone business operation.
51	`if (!linked.containsKey(link.Scheme__c))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!linked.containsKey(link.Scheme__c)).
52	`linked.put(link.Scheme__c, new Set<Id>());`	Calls the named method: linked.put(link.Scheme__c, new Set<Id>());. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
53	`            linked.get(link.Scheme__c).add(link.Product__c);`	Calls the named method: linked.get(link.Scheme__c).add(link.Product__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
54	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
55	`        for (SObject line : lines) {`	Repeats work over the specified records/items or while this condition holds: for (SObject line : lines) {. Check where queries/writes occur relative to the loop.
56	`            if (line.get('Scheme__c') == null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (line.get('Scheme__c') == null).
57	`                continue;`	Skips the remainder of the current loop iteration and moves to the next item.
58	`            Scheme__c scheme = schemes.get((Id) line.get('Scheme__c'));`	Calls the named method: Scheme__c scheme = schemes.get((Id) line.get('Scheme__c'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
59	`            Id productId = (Id) line.get('Product__c');`	Declares/initializes local data used by the surrounding operation: Id productId = (Id) line.get('Product__c');. Collection contents and assignments below determine its purpose.
60	`            DMS_Primary_Order__c order = orders.get((Id) line.get('Order__c'));`	Calls the named method: DMS_Primary_Order__c order = orders.get((Id) line.get('Order__c'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
61	`            if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
62	`                scheme == null ||`	Continues the surrounding declaration/expression or text: scheme == null ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
63	`                !scheme.Active__c ||`	Continues the surrounding declaration/expression or text: !scheme.Active__c ||. Read it with the preceding opening statement (scheme == null ||); it is not a standalone business operation.
64	`                scheme.Sales_Channel__c != 'Primary' ||`	Continues the surrounding declaration/expression or text: scheme.Sales_Channel__c != 'Primary' ||. Read it with the preceding opening statement (!scheme.Active__c ||); it is not a standalone business operation.
65	`                (scheme.Start_Date__c != null &&`	Continues the surrounding declaration/expression or text: (scheme.Start_Date__c != null &&. Read it with the preceding opening statement (scheme.Sales_Channel__c != 'Primary' ||); it is not a standalone business operation.

Line	Source code	Explanation / reading note
66	`scheme.Start_Date__c > Date.today()) ||`	Calls the named method: scheme.Start_Date__c > Date.today()) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
67	`(scheme.End_Date__c != null &&`	Continues the surrounding declaration/expression or text: (scheme.End_Date__c != null &&. Read it with the preceding opening statement (scheme.Start_Date__c > Date.today()) ||); it is not a standalone business operation.
68	`scheme.End_Date__c < Date.today()) ||`	Calls the named method: scheme.End_Date__c < Date.today()) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
69	`(scheme.Product__c != productId &&`	Continues the surrounding declaration/expression or text: (scheme.Product__c != productId &&. Read it with the preceding opening statement (scheme.End_Date__c < Date.today()) ||); it is not a standalone business operation.
70	`(!linked.containsKey(scheme.Id) || !linked.get(scheme.Id).contains(productId))) ||`	Calls the named method: (!linked.containsKey(scheme.Id) || !linked.get(scheme.Id).contains(productId))) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
71	`!String.isBlank(scheme.Outlet_Type__c) ||`	Calls the named method: !String.isBlank(scheme.Outlet_Type__c) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
72	`(!String.isBlank(scheme.Region__c) &&`	Calls the named method: (!String.isBlank(scheme.Region__c) &&. Its implementation defines the side effect/result; use the symbol/file index to follow it.
73	`scheme.Region__c != order?.Distributor__r?.Geography__r?.Name)`	Continues the surrounding declaration/expression or text: scheme.Region__c != order?.Distributor__r?.Geography__r?.Name). Read it with the preceding opening statement ((!String.isBlank(scheme.Region__c) &&); it is not a standalone business operation.
74	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (scheme.Region__c != order?.Distributor__r?.Geography__r?.Name)); it is not a standalone business operation.
75	`line.addError(`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
76	`'Select an active Primary scheme linked to this product and distributor geography, within its dates. Outlet-only schemes cannot be used.'`	Continues the surrounding declaration/expression or text: 'Select an active Primary scheme linked to this product and distributor geography, within its dates. Outlet-only schemes cannot be used.'. Read it with the preceding opening statement (line.addError(); it is not a standalone business operation.
77	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
78	`continue;`	Skips the remainder of the current loop iteration and moves to the next item.
79	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
80	`Decimal cases = (Decimal) line.get('Cases__c'),`	Declares/initializes local data used by the surrounding operation: Decimal cases = (Decimal) line.get('Cases__c'),. Collection contents and assignments below determine its purpose.
81	`price = (Decimal) line.get('Case_Price__c');`	Calls the named method: price = (Decimal) line.get('Case_Price__c');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
82	`Decimal minimum = scheme.Minimum_Cases__c,`	Declares/initializes local data used by the surrounding operation: Decimal minimum = scheme.Minimum_Cases__c,. Collection contents and assignments below determine its purpose.
83	`free = zero(scheme.Free_Cases__c),`	Assigns the right-hand expression to the named variable/property: free = zero(scheme.Free_Cases__c),. This is in-memory unless it is later persisted by an explicit call.
84	`gifts = zero(scheme.Gift_Quantity__c);`	Assigns the right-hand expression to the named variable/property: gifts = zero(scheme.Gift_Quantity__c);. This is in-memory unless it is later persisted by an explicit call.
85	`Decimal percent = zero(scheme.Discount_Percent__c),`	Declares/initializes local data used by the surrounding operation: Decimal percent = zero(scheme.Discount_Percent__c),. Collection contents and assignments below determine its purpose.
86	`fixed = zero(scheme.Discount_Amount__c);`	Assigns the right-hand expression to the named variable/property: fixed = zero(scheme.Discount_Amount__c);. This is in-memory unless it is later persisted by an explicit call.
87	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
88	`cases == null ||`	Continues the surrounding declaration/expression or text: cases == null ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
89	`price == null ||`	Continues the surrounding declaration/expression or text: price == null ||. Read it with the preceding opening statement (cases == null ||); it is not a standalone business operation.
90	`minimum == null ||`	Continues the surrounding declaration/expression or text: minimum == null ||. Read it with the preceding opening statement (price == null ||); it is not a standalone business operation.

Line	Source code	Explanation / reading note
91	`minimum <= 0 ||`	Continues the surrounding declaration/expression or text: minimum <= 0 ||. Read it with the preceding opening statement (minimum == null ||); it is not a standalone business operation.
92	`minimum != minimum.setScale(0) ||`	Calls the named method: minimum != minimum.setScale(0) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
93	`cases < minimum ||`	Continues the surrounding declaration/expression or text: cases < minimum ||. Read it with the preceding opening statement (minimum != minimum.setScale(0) ||); it is not a standalone business operation.
94	`free < 0 ||`	Continues the surrounding declaration/expression or text: free < 0 ||. Read it with the preceding opening statement (cases < minimum ||); it is not a standalone business operation.
95	`free != free.setScale(0) ||`	Calls the named method: free != free.setScale(0) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
96	`gifts < 0 ||`	Continues the surrounding declaration/expression or text: gifts < 0 ||. Read it with the preceding opening statement (free != free.setScale(0) ||); it is not a standalone business operation.
97	`gifts != gifts.setScale(0) ||`	Calls the named method: gifts != gifts.setScale(0) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
98	`percent < 0 ||`	Continues the surrounding declaration/expression or text: percent < 0 ||. Read it with the preceding opening statement (gifts != gifts.setScale(0) ||); it is not a standalone business operation.
99	`percent > 100 ||`	Continues the surrounding declaration/expression or text: percent > 100 ||. Read it with the preceding opening statement (percent < 0 ||); it is not a standalone business operation.
100	`fixed < 0`	Continues the surrounding declaration/expression or text: fixed < 0. Read it with the preceding opening statement (percent > 100 ||); it is not a standalone business operation.
101	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (fixed < 0); it is not a standalone business operation.
102	`line.addError(`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.

Line	Source code	Explanation / reading note
103	`'Configure whole buy/free cases and meet Minimum Cases; discount must be valid.'`	Continues the surrounding declaration/expression or text: 'Configure whole buy/free cases and meet Minimum Cases; discount must be valid.'. Read it with the preceding opening statement (line.addError(); it is not a standalone business operation.
104	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
105	`continue;`	Skips the remainder of the current loop iteration and moves to the next item.
106	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
107	`Decimal blocks = (cases / minimum).round(System.RoundingMode.FLOOR);`	Declares/initializes local data used by the surrounding operation: Decimal blocks = (cases / minimum).round(System.RoundingMode.FLOOR);. Collection contents and assignments below determine its purpose.
108	`Decimal discount = (cases * price * percent / 100 + blocks * fixed).setScale(2);`	Declares/initializes local data used by the surrounding operation: Decimal discount = (cases * price * percent / 100 + blocks * fixed).setScale(2);. Collection contents and assignments below determine its purpose.
109	`if (discount > cases * price) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (discount > cases * price) {.
110	`line.addError('Scheme discount exceeds the paid line value.');`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
111	`continue;`	Skips the remainder of the current loop iteration and moves to the next item.
112	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
113	`Decimal conversion = (Decimal) line.get('Pieces_Per_Case__c');`	Declares/initializes local data used by the surrounding operation: Decimal conversion = (Decimal) line.get('Pieces_Per_Case__c');. Collection contents and assignments below determine its purpose.
114	`Id freeProduct = scheme.Free_Product__c == null ? productId : scheme.Free_Product__c;`	Declares/initializes local data used by the surrounding operation: Id freeProduct = scheme.Free_Product__c == null ? productId : scheme.Free_Product__c;. Collection contents and assignments below determine its purpose.
115	`if (free > 0 && scheme.Free_Product__c != null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (free > 0 && scheme.Free_Product__c != null) {.

Line	Source code	Explanation / reading note
116	`conversion = scheme.Free_Product__r.Units_Per_Case__c;`	Assigns the right-hand expression to the named variable/property: conversion = scheme.Free_Product__r.Units_Per_Case__c;. This is in-memory unless it is later persisted by an explicit call.
117	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
118	`!scheme.Free_Product__r.Active__c ||`	Continues the surrounding declaration/expression or text: !scheme.Free_Product__r.Active__c ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
119	`conversion == null ||`	Continues the surrounding declaration/expression or text: conversion == null ||. Read it with the preceding opening statement (!scheme.Free_Product__r.Active__c ||); it is not a standalone business operation.
120	`conversion <= 0 ||`	Continues the surrounding declaration/expression or text: conversion <= 0 ||. Read it with the preceding opening statement (conversion == null ||); it is not a standalone business operation.
121	`conversion != conversion.setScale(0)`	Calls the named method: conversion != conversion.setScale(0). Its implementation defines the side effect/result; use the symbol/file index to follow it.
122	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (conversion != conversion.setScale(0)); it is not a standalone business operation.
123	`line.addError(`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
124	`'Free product must be active with a positive whole case conversion.'`	Continues the surrounding declaration/expression or text: 'Free product must be active with a positive whole case conversion.'. Read it with the preceding opening statement (line.addError(); it is not a standalone business operation.
125	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
126	`continue;`	Skips the remainder of the current loop iteration and moves to the next item.
127	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
128	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
129	`            line.put('Discount_Amount__c', discount);`	Calls the named method: line.put('Discount_Amount__c', discount);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
130	`            line.put('Free_Cases__c', blocks * free);`	Calls the named method: line.put('Free_Cases__c', blocks * free);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
131	`            line.put('Free_Product__c', free > 0 ? freeProduct : null);`	Calls the named method: line.put('Free_Product__c', free > 0 ? freeProduct : null);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
132	`            line.put('Free_Pieces_Per_Case__c', free > 0 ? conversion : null);`	Calls the named method: line.put('Free_Pieces_Per_Case__c', free > 0 ? conversion : null);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
133	`            line.put('Free_Gift__c', scheme.Free_Gift__c);`	Calls the named method: line.put('Free_Gift__c', scheme.Free_Gift__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
134	`            line.put('Gift_Quantity__c', blocks * gifts);`	Calls the named method: line.put('Gift_Quantity__c', blocks * gifts);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
135	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
136	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
137	`    private static Decimal zero(Decimal amount) {`	Declares a callable function/method: private static Decimal zero(Decimal amount) {. Parameters supply its inputs; the following block implements the operation.
138	`        return amount == null ? 0 : amount;`	Returns amount == null ? 0 : amount to the caller (or begins returned UI markup) and ends this execution path.
139	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
140	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsPrimarySchemes.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsPrimaryWorkflow.cls

Trigger-only primary header/line rules. Locks parents, prevents edits after Draft, snapshots product economics, requires valid submission relationships and aggregates totals.

277 numbered source lines | SHA-256 9c81ebdbe826371d8b163f347f54c6353b145c1291a485de20503dfc0fc70d7d

Line	Source code	Explanation / reading note
1	`/**`	Developer comment/documentation: It is not executed.
2	`* Shared Salesforce-side rules for primary orders and returns.`	Developer comment/documentation: Shared Salesforce-side rules for primary orders and returns. It is not executed.
3	`* This is trigger-only system automation, not an externally callable API.`	Developer comment/documentation: This is trigger-only system automation, not an externally callable API. It is not executed.
4	`*/`	Developer comment/documentation: It is not executed.
5	`public without sharing class DmsPrimaryWorkflow {`	Declares a class/type: public without sharing class DmsPrimaryWorkflow {. Runs without record-sharing enforcement; see the documented internal authorization boundary.
6	`public static void prepareHeaders(`	Declares a callable function/method: public static void prepareHeaders(. Parameters supply its inputs; the following block implements the operation.
7	`List<SObject> records,`	Declares/initializes local data used by the surrounding operation: List<SObject> records,. Collection contents and assignments below determine its purpose.
8	`Map<Id, SObject> previous,`	Declares/initializes local data used by the surrounding operation: Map<Id, SObject> previous,. Collection contents and assignments below determine its purpose.
9	`Boolean isReturn`	Declares/initializes local data used by the surrounding operation: Boolean isReturn. Collection contents and assignments below determine its purpose.
10	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (Boolean isReturn); it is not a standalone business operation.
11	`Set<Id> distributorIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> distributorIds = new Set<Id>();. Collection contents and assignments below determine its purpose.
12	`Set<Id> employeeIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> employeeIds = new Set<Id>();. Collection contents and assignments below determine its purpose.
13	`Set<Id> submittingIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> submittingIds = new Set<Id>();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
14	`for (SObject row : records) {`	Repeats work over the specified records/items or while this condition holds: for (SObject row : records) {. Check where queries/writes occur relative to the loop.
15	`distributorIds.add((Id) row.get('Distributor__c'));`	Calls the named method: distributorIds.add((Id) row.get('Distributor__c'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
16	`employeeIds.add((Id) row.get('Employee__c'));`	Calls the named method: employeeIds.add((Id) row.get('Employee__c'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
17	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
18	`row.get('Status__c') == 'Submitted' &&`	Calls the named method: row.get('Status__c') == 'Submitted' &&. Its implementation defines the side effect/result; use the symbol/file index to follow it.
19	`(previous == null ||`	Continues the surrounding declaration/expression or text: (previous == null ||. Read it with the preceding opening statement (row.get('Status__c') == 'Submitted' &&); it is not a standalone business operation.
20	`previous.get(row.Id).get('Status__c') != 'Submitted')`	Calls the named method: previous.get(row.Id).get('Status__c') != 'Submitted'). Its implementation defines the side effect/result; use the symbol/file index to follow it.
21	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (previous.get(row.Id).get('Status__c') != 'Submitted')); it is not a standalone business operation.
22	`submittingIds.add(row.Id);`	Calls the named method: submittingIds.add(row.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
23	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
25	`Map<Id, DMS_Distributor__c> distributors = new Map<Id, DMS_Distributor__c>(`	Declares/initializes local data used by the surrounding operation: Map<Id, DMS_Distributor__c> distributors = new Map<Id, DMS_Distributor__c>(. Collection contents and assignments below determine its purpose.
26	`[`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (Map<Id, DMS_Distributor__c> distributors = new Map<Id, DMS_Distributor__c>(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
27	`SELECT Id, Active__c, Officer__c, Officer__r.IsActive`	Selects these Salesforce fields/aggregates: Id, Active__c, Officer__c, Officer__r.IsActive. Query results are used in the surrounding assignment or loop.
28	`FROM DMS_Distributor__c`	Chooses the Salesforce object/subquery source: FROM DMS_Distributor__c.
29	`WHERE Id IN :distributorIds`	Adds a query/filter condition: WHERE Id IN :distributorIds. The complete condition determines which records are included.
30	`]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`Map<Id, Employee__c> employees = new Map<Id, Employee__c>(`	Declares/initializes local data used by the surrounding operation: Map<Id, Employee__c> employees = new Map<Id, Employee__c>(. Collection contents and assignments below determine its purpose.
33	`[SELECT Id, Active__c, DMS_Distributor__c FROM Employee__c WHERE Id IN : employeeIds]`	Continues the surrounding declaration/expression or text: [SELECT Id, Active__c, DMS_Distributor__c FROM Employee__c WHERE Id IN :employeeIds]. Read it with the preceding opening statement (Map<Id, Employee__c> employees = new Map<Id, Employee__c>(); it is not a standalone business operation.
34	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`Set<Id> withLines = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> withLines = new Set<Id>();. Collection contents and assignments below determine its purpose.
36	`if (!submittingIds.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!submittingIds.isEmpty()) {.
37	`if (isReturn) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (isReturn) {.
38	`for (AggregateResult line : [`	Repeats work over the specified records/items or while this condition holds: for (AggregateResult line : [. Check where queries/writes occur relative to the loop.
39	`SELECT Primary_Return__c parent`	Selects these Salesforce fields/aggregates: Primary_Return__c parent. Query results are used in the surrounding assignment or loop.
40	`FROM DMS_Primary_Return_Line__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Return_Line__c.

Line	Source code	Explanation / reading note
41	`                    WHERE Primary_Return__c IN :submittingIds`	Adds a query/filter condition: WHERE Primary_Return__c IN :submittingIds. The complete condition determines which records are included.
42	`                    GROUP BY Primary_Return__c`	Controls query sorting, grouping or result count: GROUP BY Primary_Return__c.
43	`                ]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (GROUP BY Primary_Return__c); it is not a standalone business operation.
44	`                    withLines.add((Id) line.get('parent'));`	Calls the named method: withLines.add((Id) line.get('parent'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
45	`                }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
46	`            } else {`	Alternative branch taken when the preceding condition is false.
47	`                for (AggregateResult line : [`	Repeats work over the specified records/items or while this condition holds: for (AggregateResult line : [. Check where queries/writes occur relative to the loop.
48	`                    SELECT Order__c parent`	Selects these Salesforce fields/aggregates: Order__c parent. Query results are used in the surrounding assignment or loop.
49	`                    FROM DMS_Primary_Order_Line__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Order_Line__c.
50	`                    WHERE Order__c IN :submittingIds`	Adds a query/filter condition: WHERE Order__c IN :submittingIds. The complete condition determines which records are included.
51	`                    GROUP BY Order__c`	Controls query sorting, grouping or result count: GROUP BY Order__c.
52	`                ]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (GROUP BY Order__c); it is not a standalone business operation.
53	`                    withLines.add((Id) line.get('parent'));`	Calls the named method: withLines.add((Id) line.get('parent'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
54	`                }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
55	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
56	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`        for (SObject row : records) {`	Repeats work over the specified records/items or while this condition holds: for (SObject row : records) {. Check where queries/writes occur relative to the loop.
58	`            SObject old = previous == null ? null : previous.get(row.Id);`	Calls the named method: SObject old = previous == null ? null : previous.get(row.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
59	`            Boolean draft = old == null || old.get('Status__c') == 'Draft';`	Declares/initializes local data used by the surrounding operation: Boolean draft = old == null || old.get('Status__c') == 'Draft';. Collection contents and assignments below determine its purpose.
60	`            if (!draft) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!draft) {.
61	`                if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
62	`                    row.get('Distributor__c') != old.get('Distributor__c') ||`	Calls the named method: row.get('Distributor__c') != old.get('Distributor__c') ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
63	`                    row.get('Employee__c') != old.get('Employee__c') ||`	Calls the named method: row.get('Employee__c') != old.get('Employee__c') ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
64	`                    row.get('Officer__c') != old.get('Officer__c')`	Calls the named method: row.get('Officer__c') != old.get('Officer__c'). Its implementation defines the side effect/result; use the symbol/file index to follow it.
65	`                ) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (row.get('Officer__c') != old.get('Officer__c')); it is not a standalone business operation.
66	`                    row.addError(`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
67	`                        'Distributor, employee and approver cannot change after submission.'`	Continues the surrounding declaration/expression or text: 'Distributor, employee and approver cannot change after submission.'. Read it with the preceding opening statement (row.addError(); it is not a standalone business operation.
68	`                    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
69	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
70	`if (!isReturn && row.get('Order_Source__c') != old.get('Order_Source__c'))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!isReturn && row.get('Order_Source__c') != old.get('Order_Source__c')).
71	`row.addError('Order source cannot change after submission.');`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
72	`continue;`	Skips the remainder of the current loop iteration and moves to the next item.
73	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
74	`DMS_Distributor__c distributor = distributors.get((Id) row.get('Distributor__c'));`	Calls the named method: DMS_Distributor__c distributor = distributors.get((Id) row.get('Distributor__c'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
75	`Employee__c employee = employees.get((Id) row.get('Employee__c'));`	Calls the named method: Employee__c employee = employees.get((Id) row.get('Employee__c'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
76	`// Drafts may be incomplete, but approval requires all relationships.`	Developer comment/documentation: Drafts may be incomplete, but approval requires all relationships. It is not executed.
77	`if (distributor != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (distributor != null).
78	`row.put('Officer__c', distributor.Officer__c);`	Calls the named method: row.put('Officer__c', distributor.Officer__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
79	`String dateField = isReturn ? 'Return_Date__c' : 'Order_Date__c';`	Declares/initializes local data used by the surrounding operation: String dateField = isReturn ? 'Return_Date__c' : 'Order_Date__c';. Collection contents and assignments below determine its purpose.
80	`if (row.get(dateField) == null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (row.get(dateField) == null).
81	`row.put(dateField, Date.today());`	Calls the named method: row.put(dateField, Date.today());. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
82	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
83	`employee != null &&`	Continues the surrounding declaration/expression or text: employee != null &&. Read it with the preceding opening statement (if (); it is not a standalone business operation.
84	`employee.DMS_Distributor__c != null &&`	Continues the surrounding declaration/expression or text: employee.DMS_Distributor__c != null &&. Read it with the preceding opening statement (employee != null &&); it is not a standalone business operation.
85	`row.get('Distributor__c') != null &&`	Calls the named method: row.get('Distributor__c') != null &&. Its implementation defines the side effect/result; use the symbol/file index to follow it.
86	`employee.DMS_Distributor__c != row.get('Distributor__c')`	Calls the named method: employee.DMS_Distributor__c != row.get('Distributor__c'). Its implementation defines the side effect/result; use the symbol/file index to follow it.
87	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (employee.DMS_Distributor__c != row.get('Distributor__c')); it is not a standalone business operation.
88	`row.addError('Choose the distributor allocated to this employee.');`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
89	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
90	`if (submittingIds.contains(row.Id)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (submittingIds.contains(row.Id)) {.
91	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
92	`distributor == null ||`	Continues the surrounding declaration/expression or text: distributor == null ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
93	`!distributor.Active__c ||`	Continues the surrounding declaration/expression or text: !distributor.Active__c ||. Read it with the preceding opening statement (distributor == null ||); it is not a standalone business operation.
94	`distributor.Officer__c == null ||`	Continues the surrounding declaration/expression or text: distributor.Officer__c == null ||. Read it with the preceding opening statement (!distributor.Active__c ||); it is not a standalone business operation.

Line	Source code	Explanation / reading note
95	`!distributor.Officer__r.IsActive`	Continues the surrounding declaration/expression or text: !distributor.Officer__r.IsActive. Read it with the preceding opening statement (distributor.Officer__c == null ||); it is not a standalone business operation.
96	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (!distributor.Officer__r.IsActive); it is not a standalone business operation.
97	`row.addError(`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
98	`'Select an active distributor with an active company Distributor Officer.'`	Continues the surrounding declaration/expression or text: 'Select an active distributor with an active company Distributor Officer.'. Read it with the preceding opening statement (row.addError(); it is not a standalone business operation.
99	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
100	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
101	`Boolean distributorEntry =`	Declares/initializes local data used by the surrounding operation: Boolean distributorEntry =. Collection contents and assignments below determine its purpose.
102	`!isReturn && row.get('Order_Source__c') == 'Distributor DMS';`	Calls the named method: !isReturn && row.get('Order_Source__c') == 'Distributor DMS';. Its implementation defines the side effect/result; use the symbol/file index to follow it.
103	`if (distributorEntry) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (distributorEntry) {.
104	`if (row.get('Employee__c') != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (row.get('Employee__c') != null).
105	`row.addError('Distributor orders must not be attributed to an employee.');`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
106	`} else if (employee == null || !employee.Active__c)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: } else if (employee == null || !employee.Active__c).
107	`row.addError('Select an active employee.');`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.

Line	Source code	Explanation / reading note
108	`if (!withLines.contains(row.Id))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!withLines.contains(row.Id)).
109	`row.addError('Add at least one product line before submitting for approval.');`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
110	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
111	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
112	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
113		Blank line separating logical sections; no executable operation.
114	`public static void prepareLines(`	Declares a callable function/method: public static void prepareLines(. Parameters supply its inputs; the following block implements the operation.
115	`List<SObject> records,`	Declares/initializes local data used by the surrounding operation: List<SObject> records,. Collection contents and assignments below determine its purpose.
116	`Map<Id, SObject> previous,`	Declares/initializes local data used by the surrounding operation: Map<Id, SObject> previous,. Collection contents and assignments below determine its purpose.
117	`Boolean isReturn,`	Declares/initializes local data used by the surrounding operation: Boolean isReturn,. Collection contents and assignments below determine its purpose.
118	`Boolean deleting`	Declares/initializes local data used by the surrounding operation: Boolean deleting. Collection contents and assignments below determine its purpose.
119	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (Boolean deleting); it is not a standalone business operation.
120	`String parentField = isReturn ? 'Primary_Return__c' : 'Order__c';`	Declares/initializes local data used by the surrounding operation: String parentField = isReturn ? 'Primary_Return__c' : 'Order__c';. Collection contents and assignments below determine its purpose.
121	`Set<Id> parentIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> parentIds = new Set<Id>();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
122	`Set<Id> productIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> productIds = new Set<Id>();. Collection contents and assignments below determine its purpose.
123	`for (SObject row : records) {`	Repeats work over the specified records/items or while this condition holds: for (SObject row : records) {. Check where queries/writes occur relative to the loop.
124	`parentIds.add((Id) row.get(parentField));`	Calls the named method: parentIds.add((Id) row.get(parentField));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
125	`productIds.add((Id) row.get('Product__c'));`	Calls the named method: productIds.add((Id) row.get('Product__c'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
126	`if (previous != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (previous != null).
127	`parentIds.add((Id) previous.get(row.Id).get(parentField));`	Calls the named method: parentIds.add((Id) previous.get(row.Id).get(parentField));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
128	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
129	`Map<Id, String> statuses = new Map<Id, String>();`	Declares/initializes local data used by the surrounding operation: Map<Id, String> statuses = new Map<Id, String>();. Collection contents and assignments below determine its purpose.
130	`// Lock parents before totals are read/written, protecting concurrent line saves.`	Developer comment/documentation: Lock parents before totals are read/written, protecting concurrent line saves. It is not executed.
131	`if (isReturn) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (isReturn) {.
132	`for (DMS_Primary_Return__c parent : [`	Repeats work over the specified records/items or while this condition holds: for (DMS_Primary_Return__c parent : [. Check where queries/writes occur relative to the loop.
133	`SELECT Id, Status__c`	Selects these Salesforce fields/aggregates: Id, Status__c. Query results are used in the surrounding assignment or loop.
134	`FROM DMS_Primary_Return__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Return__c.
135	`WHERE Id IN :parentIds`	Adds a query/filter condition: WHERE Id IN :parentIds. The complete condition determines which records are included.
136	`FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.

Line	Source code	Explanation / reading note
137	`            ])`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
138	`                statuses.put(parent.Id, parent.Status__c);`	Calls the named method: statuses.put(parent.Id, parent.Status__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
139	`        } else {`	Alternative branch taken when the preceding condition is false.
140	`            for (DMS_Primary_Order__c parent : [`	Repeats work over the specified records/items or while this condition holds: for (DMS_Primary_Order__c parent : [. Check where queries/writes occur relative to the loop.
141	`                SELECT Id, Status__c`	Selects these Salesforce fields/aggregates: Id, Status__c. Query results are used in the surrounding assignment or loop.
142	`                FROM DMS_Primary_Order__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Order__c.
143	`                WHERE Id IN :parentIds`	Adds a query/filter condition: WHERE Id IN :parentIds. The complete condition determines which records are included.
144	`                FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
145	`            ])`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
146	`                statuses.put(parent.Id, parent.Status__c);`	Calls the named method: statuses.put(parent.Id, parent.Status__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
147	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
148	`        Map<Id, Product__c> products = new Map<Id, Product__c>(`	Declares/initializes local data used by the surrounding operation: Map<Id, Product__c> products = new Map<Id, Product__c>(. Collection contents and assignments below determine its purpose.
149	`            [`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (Map<Id, Product__c> products = new Map<Id, Product__c>(); it is not a standalone business operation.
150	`                SELECT`	Selects these Salesforce fields/aggregates: SELECT. Query results are used in the surrounding assignment or loop.

Line	Source code	Explanation / reading note
151	`                    Id,`	Declares/initializes local data used by the surrounding operation: Id,. Collection contents and assignments below determine its purpose.
152	`                    Active__c,`	Continues the surrounding declaration/expression or text: Active__c,. Read it with the preceding opening statement (Id,); it is not a standalone business operation.
153	`                    Sellable__c,`	Continues the surrounding declaration/expression or text: Sellable__c,. Read it with the preceding opening statement (Active__c,); it is not a standalone business operation.
154	`                    Units_Per_Case__c,`	Continues the surrounding declaration/expression or text: Units_Per_Case__c,. Read it with the preceding opening statement (Sellable__c,); it is not a standalone business operation.
155	`                    DMS_Case_Price__c,`	Continues the surrounding declaration/expression or text: DMS_Case_Price__c,. Read it with the preceding opening statement (Units_Per_Case__c,); it is not a standalone business operation.
156	`                    GST_Percent__c`	Continues the surrounding declaration/expression or text: GST_Percent__c. Read it with the preceding opening statement (DMS_Case_Price__c,); it is not a standalone business operation.
157	`                FROM Product__c`	Chooses the Salesforce object/subquery source: FROM Product__c.
158	`                WHERE Id IN :productIds`	Adds a query/filter condition: WHERE Id IN :productIds. The complete condition determines which records are included.
159	`            ]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
160	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
161	`        for (SObject row : records) {`	Repeats work over the specified records/items or while this condition holds: for (SObject row : records) {. Check where queries/writes occur relative to the loop.
162	`            Id parentId = (Id) row.get(parentField);`	Declares/initializes local data used by the surrounding operation: Id parentId = (Id) row.get(parentField);. Collection contents and assignments below determine its purpose.
163	`            Id oldParent = previous == null ? parentId : (Id) previous.get(row.Id).get(parentField);`	Declares/initializes local data used by the surrounding operation: Id oldParent = previous == null ? parentId : (Id) previous.get(row.Id).get(parentField);. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
164	`            if (parentId == null || !statuses.containsKey(parentId)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (parentId == null || !statuses.containsKey(parentId)) {.
165	`                row.addError('Select the parent primary transaction.');`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
166	`                continue;`	Skips the remainder of the current loop iteration and moves to the next item.
167	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
168	`            if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
169	`                statuses.get(parentId) != 'Draft' ||`	Calls the named method: statuses.get(parentId) != 'Draft' ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
170	`                (oldParent != null &&`	Continues the surrounding declaration/expression or text: (oldParent != null &&. Read it with the preceding opening statement (statuses.get(parentId) != 'Draft' ||); it is not a standalone business operation.
171	`                statuses.get(oldParent) != 'Draft')`	Calls the named method: statuses.get(oldParent) != 'Draft'). Its implementation defines the side effect/result; use the symbol/file index to follow it.
172	`            ) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (statuses.get(oldParent) != 'Draft')); it is not a standalone business operation.
173	`                row.addError(`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
174	`                    'Product lines can only be changed while the primary transaction is Draft.'`	Continues the surrounding declaration/expression or text: 'Product lines can only be changed while the primary transaction is Draft.'. Read it with the preceding opening statement (row.addError(); it is not a standalone business operation.
175	`                );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
176	`                continue;`	Skips the remainder of the current loop iteration and moves to the next item.
177	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
178	`            if (deleting)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (deleting).
179	`                continue;`	Skips the remainder of the current loop iteration and moves to the next item.
180	`            if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
181	`                !isReturn &&`	Continues the surrounding declaration/expression or text: !isReturn &&. Read it with the preceding opening statement (if (); it is not a standalone business operation.
182	`                previous != null &&`	Continues the surrounding declaration/expression or text: previous != null &&. Read it with the preceding opening statement (!isReturn &&); it is not a standalone business operation.
183	`                previous.get(row.Id).get('Scheme__c') != null &&`	Calls the named method: previous.get(row.Id).get('Scheme__c') != null &&. Its implementation defines the side effect/result; use the symbol/file index to follow it.
184	`                row.get('Scheme__c') == null`	Calls the named method: row.get('Scheme__c') == null. Its implementation defines the side effect/result; use the symbol/file index to follow it.
185	`            ) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (row.get('Scheme__c') == null); it is not a standalone business operation.
186	`                row.put('Discount_Amount__c', 0);`	Calls the named method: row.put('Discount_Amount__c', 0);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
187	`                row.put('Free_Cases__c', 0);`	Calls the named method: row.put('Free_Cases__c', 0);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
188	`                row.put('Free_Product__c', null);`	Calls the named method: row.put('Free_Product__c', null);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
189	`                row.put('Free_Pieces_Per_Case__c', null);`	Calls the named method: row.put('Free_Pieces_Per_Case__c', null);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
190	`                row.put('Free_Gift__c', null);`	Calls the named method: row.put('Free_Gift__c', null);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
191	`                row.put('Gift_Quantity__c', 0);`	Calls the named method: row.put('Gift_Quantity__c', 0);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
192	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
193	`Product__c product = products.get((Id) row.get('Product__c'));`	Calls the named method: Product__c product = products.get((Id) row.get('Product__c'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
194	`if (product == null || (!isReturn && (!product.Active__c || !product.Sellable__c))) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (product == null || (!isReturn && (!product.Active__c || !product.Sellable__c))) {.
195	`row.addError(`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
196	`'Select a valid product; new orders require an active, sellable product.'`	Continues the surrounding declaration/expression or text: 'Select a valid product; new orders require an active, sellable product.'. Read it with the preceding opening statement (row.addError(); it is not a standalone business operation.
197	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
198	`continue;`	Skips the remainder of the current loop iteration and moves to the next item.
199	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
200	`Boolean changedProduct =`	Declares/initializes local data used by the surrounding operation: Boolean changedProduct =. Collection contents and assignments below determine its purpose.
201	`previous != null &&`	Continues the surrounding declaration/expression or text: previous != null &&. Read it with the preceding opening statement (Boolean changedProduct =); it is not a standalone business operation.
202	`previous.get(row.Id).get('Product__c') != row.get('Product__c');`	Calls the named method: previous.get(row.Id).get('Product__c') != row.get('Product__c');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
203	`// Snapshot conversion and prices: later catalogue edits must not`	Developer comment/documentation: Snapshot conversion and prices: later catalogue edits must not It is not executed.
204	`// alter historical orders. Returns may retain the original receipt value.`	Developer comment/documentation: alter historical orders. Returns may retain the original receipt value. It is not executed.
205	`if (row.get('Pieces_Per_Case__c') == null || changedProduct)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (row.get('Pieces_Per_Case__c') == null || changedProduct).

Line	Source code	Explanation / reading note
206	`row.put('Pieces_Per_Case__c', product.Units_Per_Case__c);`	Calls the named method: row.put('Pieces_Per_Case__c', product.Units_Per_Case__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
207	`String priceField = isReturn ? 'Case_Value__c' : 'Case_Price__c';`	Declares/initializes local data used by the surrounding operation: String priceField = isReturn ? 'Case_Value__c' : 'Case_Price__c';. Collection contents and assignments below determine its purpose.
208	`if (row.get(priceField) == null || changedProduct)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (row.get(priceField) == null || changedProduct).
209	`row.put(priceField, product.DMS_Case_Price__c);`	Calls the named method: row.put(priceField, product.DMS_Case_Price__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
210	`if (!isReturn && (row.get('Tax_Percent__c') == null || changedProduct))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!isReturn && (row.get('Tax_Percent__c') == null || changedProduct)).
211	`row.put(`	Calls the named method: row.put(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
212	`'Tax_Percent__c',`	Continues the surrounding declaration/expression or text: 'Tax_Percent__c',. Read it with the preceding opening statement (row.put(); it is not a standalone business operation.
213	`product.GST_Percent__c == null ? 0 : product.GST_Percent__c`	Continues the surrounding declaration/expression or text: product.GST_Percent__c == null ? 0 : product.GST_Percent__c. Read it with the preceding opening statement ('Tax_Percent__c',); it is not a standalone business operation.
214	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
215	`Decimal cases = (Decimal) row.get('Cases__c');`	Declares/initializes local data used by the surrounding operation: Decimal cases = (Decimal) row.get('Cases__c');. Collection contents and assignments below determine its purpose.
216	`Decimal pieces = (Decimal) row.get('Pieces_Per_Case__c');`	Declares/initializes local data used by the surrounding operation: Decimal pieces = (Decimal) row.get('Pieces_Per_Case__c');. Collection contents and assignments below determine its purpose.
217	`Decimal price = (Decimal) row.get(priceField);`	Declares/initializes local data used by the surrounding operation: Decimal price = (Decimal) row.get(priceField);. Collection contents and assignments below determine its purpose.
218	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.

Line	Source code	Explanation / reading note
219	`cases == null ||`	Continues the surrounding declaration/expression or text: cases == null ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
220	`cases <= 0 ||`	Continues the surrounding declaration/expression or text: cases <= 0 ||. Read it with the preceding opening statement (cases == null ||); it is not a standalone business operation.
221	`cases != cases.setScale(0) ||`	Calls the named method: cases != cases.setScale(0) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
222	`pieces == null ||`	Continues the surrounding declaration/expression or text: pieces == null ||. Read it with the preceding opening statement (cases != cases.setScale(0) ||); it is not a standalone business operation.
223	`pieces <= 0 ||`	Continues the surrounding declaration/expression or text: pieces <= 0 ||. Read it with the preceding opening statement (pieces == null ||); it is not a standalone business operation.
224	`pieces != pieces.setScale(0) ||`	Calls the named method: pieces != pieces.setScale(0) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
225	`price == null ||`	Continues the surrounding declaration/expression or text: price == null ||. Read it with the preceding opening statement (pieces != pieces.setScale(0) ||); it is not a standalone business operation.
226	`price < 0 ||`	Continues the surrounding declaration/expression or text: price < 0 ||. Read it with the preceding opening statement (price == null ||); it is not a standalone business operation.
227	`(!isReturn && price == 0)`	Continues the surrounding declaration/expression or text: (!isReturn && price == 0). Read it with the preceding opening statement (price < 0 ||); it is not a standalone business operation.
228	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement ((!isReturn && price == 0)); it is not a standalone business operation.
229	`row.addError(`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
230	`'Enter positive whole cases and pieces per case, and a valid case price. Order case price must be greater than zero.'`	Continues the surrounding declaration/expression or text: 'Enter positive whole cases and pieces per case, and a valid case price. Order case price must be greater than zero.'. Read it with the preceding opening statement (row.addError(); it is not a standalone business operation.
231	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
232	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
233	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
234	`        if (!isReturn && !deleting)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!isReturn && !deleting).
235	`            DmsPrimarySchemes.apply(records);`	Calls the named method: DmsPrimarySchemes.apply(records);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
236	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
237		Blank line separating logical sections; no executable operation.
238	`    public static void updateOrderTotals(`	Declares a callable function/method: public static void updateOrderTotals(. Parameters supply its inputs; the following block implements the operation.
239	`        List<DMS_Primary_Order_Line__c> records,`	Declares/initializes local data used by the surrounding operation: List<DMS_Primary_Order_Line__c> records,. Collection contents and assignments below determine its purpose.
240	`        Map<Id, DMS_Primary_Order_Line__c> previous`	Declares/initializes local data used by the surrounding operation: Map<Id, DMS_Primary_Order_Line__c> previous. Collection contents and assignments below determine its purpose.
241	`    ) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (Map<Id, DMS_Primary_Order_Line__c> previous); it is not a standalone business operation.
242	`        Set<Id> ids = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> ids = new Set<Id>();. Collection contents and assignments below determine its purpose.
243	`        for (DMS_Primary_Order_Line__c line : records) {`	Repeats work over the specified records/items or while this condition holds: for (DMS_Primary_Order_Line__c line : records) {. Check where queries/writes occur relative to the loop.
244	`            ids.add(line.Order__c);`	Calls the named method: ids.add(line.Order__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
245	`            if (previous != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (previous != null).
246	`                ids.add(previous.get(line.Id).Order__c);`	Calls the named method: ids.add(previous.get(line.Id).Order__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
247	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
248	`        List<DMS_Primary_Order__c> parents = [`	Declares/initializes local data used by the surrounding operation: List<DMS_Primary_Order__c> parents = [. Collection contents and assignments below determine its purpose.
249	`            SELECT Id, Status__c, Total_Amount__c`	Selects these Salesforce fields/aggregates: Id, Status__c, Total_Amount__c. Query results are used in the surrounding assignment or loop.
250	`            FROM DMS_Primary_Order__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Order__c.
251	`            WHERE Id IN :ids`	Adds a query/filter condition: WHERE Id IN :ids. The complete condition determines which records are included.
252	`            FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
253	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
254	`        Map<Id, Decimal> totals = new Map<Id, Decimal>();`	Declares/initializes local data used by the surrounding operation: Map<Id, Decimal> totals = new Map<Id, Decimal>();. Collection contents and assignments below determine its purpose.
255	`        for (AggregateResult result : [`	Repeats work over the specified records/items or while this condition holds: for (AggregateResult result : [. Check where queries/writes occur relative to the loop.
256	`            SELECT Order__c parent, SUM(Net_Amount__c) amount`	Selects these Salesforce fields/aggregates: Order__c parent, SUM(Net_Amount__c) amount. Query results are used in the surrounding assignment or loop.
257	`            FROM DMS_Primary_Order_Line__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Order_Line__c.
258	`            WHERE Order__c IN :ids`	Adds a query/filter condition: WHERE Order__c IN :ids. The complete condition determines which records are included.
259	`            GROUP BY Order__c`	Controls query sorting, grouping or result count: GROUP BY Order__c.

Line	Source code	Explanation / reading note
260	`        ]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (GROUP BY Order__c); it is not a standalone business operation.
261	`            totals.put((Id) result.get('parent'), (Decimal) result.get('amount'));`	Calls the named method: totals.put((Id) result.get('parent'), (Decimal) result.get('amount'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
262	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
263	`        for (DMS_Primary_Order__c parent : parents) {`	Repeats work over the specified records/items or while this condition holds: for (DMS_Primary_Order__c parent : parents) {. Check where queries/writes occur relative to the loop.
264	`            // Also blocks undeleting lines into a submitted/decided transaction.`	Developer comment/documentation: Also blocks undeleting lines into a submitted/decided transaction. It is not executed.
265	`            if (parent.Status__c != 'Draft') {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (parent.Status__c != 'Draft') {.
266	`                throw new DmsPrimaryException(`	Stops this execution path with a validation/error exception: throw new DmsPrimaryException(. The caller/catch block decides how it is reported.
267	`                    'Product lines can only be restored while the primary order is Draft.'`	Continues the surrounding declaration/expression or text: 'Product lines can only be restored while the primary order is Draft.'. Read it with the preceding opening statement (throw new DmsPrimaryException(); it is not a standalone business operation.
268	`                );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
269	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
270	`            parent.Total_Amount__c = totals.containsKey(parent.Id) ? totals.get(parent.Id) : 0;`	Calls the named method: parent.Total_Amount__c = totals.containsKey(parent.Id) ? totals.get(parent.Id) : 0;. Its implementation defines the side effect/result; use the symbol/file index to follow it.
271	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
272	`        if (!parents.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!parents.isEmpty()).

Line	Source code	Explanation / reading note
273	`            update parents;`	Performs Salesforce DML: update parents;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
274	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
275	`    public class DmsPrimaryException extends Exception {`	Declares a class/type: public class DmsPrimaryException extends Exception {. Members below hold behavior and/or state.
276	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
277	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsPrimaryWorkflow.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsPrimaryWorkflowTest.cls

Regression tests for DmsPrimaryWorkflow. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

357 numbered source lines | SHA-256 22c6ffa17eec038fea53ce960cb90ee425c3d148e8ecfd9fa2fb961b561da01b

Line	Source code	Explanation / reading note
1	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
2	`private class DmsPrimaryWorkflowTest {`	Declares a class/type: private class DmsPrimaryWorkflowTest {. Members below hold behavior and/or state.
3	`    @TestSetup`	Continues the surrounding declaration/expression or text: @TestSetup. Read it with the preceding opening statement (private class DmsPrimaryWorkflowTest {); it is not a standalone business operation.
4	`    static void setupData() {`	Continues the surrounding declaration/expression or text: static void setupData() {. Read it with the preceding opening statement (@TestSetup); it is not a standalone business operation.
5	`        DMS_Distributor__c distributor = new DMS_Distributor__c(`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c distributor = new DMS_Distributor__c(. This is in-memory unless it is later persisted by an explicit call.
6	`            Name = 'Workflow test distributor',`	Assigns the right-hand expression to the named variable/property: Name = 'Workflow test distributor',. This is in-memory unless it is later persisted by an explicit call.
7	`            Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
8	`            Officer__c = UserInfo.getUserId()`	Calls the named method: Officer__c = UserInfo.getUserId(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
9	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`        insert distributor;`	Performs Salesforce DML: insert distributor;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
11	`        insert new Employee__c(`	Performs Salesforce DML: insert new Employee__c(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
12	`Name = 'Workflow test employee',`	Assigns the right-hand expression to the named variable/property: Name = 'Workflow test employee',. This is in-memory unless it is later persisted by an explicit call.
13	`Phone__c = '9000000000',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000000',. This is in-memory unless it is later persisted by an explicit call.
14	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
15	`DMS_Distributor__c = distributor.Id`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c = distributor.Id. This is in-memory unless it is later persisted by an explicit call.
16	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`insert new Product__c(`	Performs Salesforce DML: insert new Product__c(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
18	`Name = 'Workflow test product',`	Assigns the right-hand expression to the named variable/property: Name = 'Workflow test product',. This is in-memory unless it is later persisted by an explicit call.
19	`Product_Code__c = 'DMS-WF-TEST',`	Assigns the right-hand expression to the named variable/property: Product_Code__c = 'DMS-WF-TEST',. This is in-memory unless it is later persisted by an explicit call.
20	`MRP__c = 20,`	Assigns the right-hand expression to the named variable/property: MRP__c = 20,. This is in-memory unless it is later persisted by an explicit call.
21	`Retailer_Base_Price__c = 15,`	Assigns the right-hand expression to the named variable/property: Retailer_Base_Price__c = 15,. This is in-memory unless it is later persisted by an explicit call.
22	`Units_Per_Case__c = 20,`	Assigns the right-hand expression to the named variable/property: Units_Per_Case__c = 20,. This is in-memory unless it is later persisted by an explicit call.
23	`DMS_Case_Price__c = 100,`	Assigns the right-hand expression to the named variable/property: DMS_Case_Price__c = 100,. This is in-memory unless it is later persisted by an explicit call.
24	`GST_Percent__c = 5,`	Assigns the right-hand expression to the named variable/property: GST_Percent__c = 5,. This is in-memory unless it is later persisted by an explicit call.
25	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
26	`            Sellable__c = true`	Assigns the right-hand expression to the named variable/property: Sellable__c = true. This is in-memory unless it is later persisted by an explicit call.
27	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
28	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`    private static DMS_Primary_Order__c order() {`	Declares a callable function/method: private static DMS_Primary_Order__c order() {. Parameters supply its inputs; the following block implements the operation.
30	`        DMS_Primary_Order__c record = new DMS_Primary_Order__c(`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order__c record = new DMS_Primary_Order__c(. This is in-memory unless it is later persisted by an explicit call.
31	`            Distributor__c = [SELECT Id FROM DMS_Distributor__c LIMIT 1]`	Assigns the right-hand expression to the named variable/property: Distributor__c = [SELECT Id FROM DMS_Distributor__c LIMIT 1]. This is in-memory unless it is later persisted by an explicit call.
32	`            .Id,`	Continues the surrounding declaration/expression or text: .Id,. Read it with the preceding opening statement (Distributor__c = [SELECT Id FROM DMS_Distributor__c LIMIT 1]); it is not a standalone business operation.
33	`            Employee__c = [SELECT Id FROM Employee__c LIMIT 1]`	Assigns the right-hand expression to the named variable/property: Employee__c = [SELECT Id FROM Employee__c LIMIT 1]. This is in-memory unless it is later persisted by an explicit call.
34	`            .Id`	Continues the surrounding declaration/expression or text: .Id. Read it with the preceding opening statement (Employee__c = [SELECT Id FROM Employee__c LIMIT 1]); it is not a standalone business operation.
35	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
36	`        insert record;`	Performs Salesforce DML: insert record;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
37	`        return record;`	Returns record to the caller (or begins returned UI markup) and ends this execution path.
38	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
39	`    private static DMS_Primary_Order_Line__c orderLine(Id parent) {`	Declares a callable function/method: private static DMS_Primary_Order_Line__c orderLine(Id parent) {. Parameters supply its inputs; the following block implements the operation.
40	`        DMS_Primary_Order_Line__c line = new DMS_Primary_Order_Line__c(`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order_Line__c line = new DMS_Primary_Order_Line__c(. This is in-memory unless it is later persisted by an explicit call.
41	`            Order__c = parent,`	Assigns the right-hand expression to the named variable/property: Order__c = parent,. This is in-memory unless it is later persisted by an explicit call.
42	`            Product__c = [SELECT Id FROM Product__c LIMIT 1]`	Assigns the right-hand expression to the named variable/property: Product__c = [SELECT Id FROM Product__c LIMIT 1]. This is in-memory unless it is later persisted by an explicit call.
43	`            .Id,`	Continues the surrounding declaration/expression or text: .Id,. Read it with the preceding opening statement (Product__c = [SELECT Id FROM Product__c LIMIT 1]); it is not a standalone business operation.
44	`            Cases__c = 2,`	Assigns the right-hand expression to the named variable/property: Cases__c = 2,. This is in-memory unless it is later persisted by an explicit call.
45	`            Free_Cases__c = 1,`	Assigns the right-hand expression to the named variable/property: Free_Cases__c = 1,. This is in-memory unless it is later persisted by an explicit call.
46	`            Discount_Amount__c = 10`	Assigns the right-hand expression to the named variable/property: Discount_Amount__c = 10. This is in-memory unless it is later persisted by an explicit call.
47	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48	`        insert line;`	Performs Salesforce DML: insert line;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
49	`        return line;`	Returns line to the caller (or begins returned UI markup) and ends this execution path.
50	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
51	`    private static DMS_Primary_Return__c returnRecord() {`	Declares a callable function/method: private static DMS_Primary_Return__c returnRecord() {. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
52	`DMS_Primary_Return__c record = new DMS_Primary_Return__c(`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Return__c record = new DMS_Primary_Return__c(. This is in-memory unless it is later persisted by an explicit call.
53	`Distributor__c = [SELECT Id FROM DMS_Distributor__c LIMIT 1]`	Assigns the right-hand expression to the named variable/property: Distributor__c = [SELECT Id FROM DMS_Distributor__c LIMIT 1]. This is in-memory unless it is later persisted by an explicit call.
54	`.Id,`	Continues the surrounding declaration/expression or text: .Id,. Read it with the preceding opening statement (Distributor__c = [SELECT Id FROM DMS_Distributor__c LIMIT 1]); it is not a standalone business operation.
55	`Employee__c = [SELECT Id FROM Employee__c LIMIT 1]`	Assigns the right-hand expression to the named variable/property: Employee__c = [SELECT Id FROM Employee__c LIMIT 1]. This is in-memory unless it is later persisted by an explicit call.
56	`.Id`	Continues the surrounding declaration/expression or text: .Id. Read it with the preceding opening statement (Employee__c = [SELECT Id FROM Employee__c LIMIT 1]); it is not a standalone business operation.
57	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
58	`insert record;`	Performs Salesforce DML: insert record;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
59	`insert new DMS_Primary_Return_Line__c(`	Performs Salesforce DML: insert new DMS_Primary_Return_Line__c(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
60	`Primary_Return__c = record.Id,`	Assigns the right-hand expression to the named variable/property: Primary_Return__c = record.Id,. This is in-memory unless it is later persisted by an explicit call.
61	`Product__c = [SELECT Id FROM Product__c LIMIT 1]`	Assigns the right-hand expression to the named variable/property: Product__c = [SELECT Id FROM Product__c LIMIT 1]. This is in-memory unless it is later persisted by an explicit call.
62	`.Id,`	Continues the surrounding declaration/expression or text: .Id,. Read it with the preceding opening statement (Product__c = [SELECT Id FROM Product__c LIMIT 1]); it is not a standalone business operation.
63	`Cases__c = 1,`	Assigns the right-hand expression to the named variable/property: Cases__c = 1,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
64	`            Reason__c = 'Damaged'`	Assigns the right-hand expression to the named variable/property: Reason__c = 'Damaged'. This is in-memory unless it is later persisted by an explicit call.
65	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
66	`        return record;`	Returns record to the caller (or begins returned UI markup) and ends this execution path.
67	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
68	`    private static Approval.ProcessResult submit(Id recordId, String process) {`	Declares a callable function/method: private static Approval.ProcessResult submit(Id recordId, String process) {. Parameters supply its inputs; the following block implements the operation.
69	`        Approval.ProcessSubmitRequest request = new Approval.ProcessSubmitRequest();`	Calls the named method: Approval.ProcessSubmitRequest request = new Approval.ProcessSubmitRequest();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
70	`        request.setObjectId(recordId);`	Calls the named method: request.setObjectId(recordId);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
71	`        request.setProcessDefinitionNameOrId(process);`	Calls the named method: request.setProcessDefinitionNameOrId(process);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
72	`        Approval.ProcessResult result = Approval.process(request);`	Submits the configured Salesforce approval request. Inspect the returned result before claiming submission succeeded.
73	`        System.assert(result.isSuccess(), 'Approval submission must succeed.');`	Test assertion comparing an expected outcome to actual behavior: System.assert(result.isSuccess(), 'Approval submission must succeed.');. A mismatch fails the test.
74	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
75	`            UserInfo.getUserId(),`	Calls the named method: UserInfo.getUserId(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
76	`            [SELECT ActorId FROM ProcessInstanceWorkitem WHERE Id = : result.getNewWorkitemIds()[0]]`	Calls the named method: [SELECT ActorId FROM ProcessInstanceWorkitem WHERE Id = :result.getNewWorkitemIds()[0]]. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
77	`.ActorId,`	Continues the surrounding declaration/expression or text: .ActorId,. Read it with the preceding opening statement ([SELECT ActorId FROM ProcessInstanceWorkitem WHERE Id = :result.getNewWorkitemIds()[0]]); it is not a standalone business operation.
78	`'Route to the distributor company officer.'`	Continues the surrounding declaration/expression or text: 'Route to the distributor company officer.'. Read it with the preceding opening statement (.ActorId,); it is not a standalone business operation.
79	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
80	`return result;`	Returns result to the caller (or begins returned UI markup) and ends this execution path.
81	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
82	`private static void decide(Approval.ProcessResult submitted, String action) {`	Declares a callable function/method: private static void decide(Approval.ProcessResult submitted, String action) {. Parameters supply its inputs; the following block implements the operation.
83	`Approval.ProcessWorkitemRequest request = new Approval.ProcessWorkitemRequest();`	Calls the named method: Approval.ProcessWorkitemRequest request = new Approval.ProcessWorkitemRequest();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
84	`request.setWorkitemId(submitted.getNewWorkitemIds()[0]);`	Calls the named method: request.setWorkitemId(submitted.getNewWorkitemIds()[0]);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
85	`request.setAction(action);`	Calls the named method: request.setAction(action);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
86	`request.setComments('Workflow verification decision');`	Calls the named method: request.setComments('Workflow verification decision');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
87	`System.assert(Approval.process(request).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assert(Approval.process(request).isSuccess());. A mismatch fails the test.
88	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
89	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.

Line	Source code	Explanation / reading note
90	`    static void snapshotsAndRecalculatesDiscountedTotals() {`	Continues the surrounding declaration/expression or text: static void snapshotsAndRecalculatesDiscountedTotals() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
91	`        DMS_Primary_Order__c parent = order();`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order__c parent = order();. This is in-memory unless it is later persisted by an explicit call.
92	`        DMS_Primary_Order_Line__c line = orderLine(parent.Id);`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order_Line__c line = orderLine(parent.Id);. This is in-memory unless it is later persisted by an explicit call.
93	`        DMS_Primary_Order_Line__c saved = [`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order_Line__c saved = [. This is in-memory unless it is later persisted by an explicit call.
94	`            SELECT Pieces_Per_Case__c, Case_Price__c, Tax_Percent__c, Total_Pieces__c`	Selects these Salesforce fields/aggregates: Pieces_Per_Case__c, Case_Price__c, Tax_Percent__c, Total_Pieces__c. Query results are used in the surrounding assignment or loop.
95	`            FROM DMS_Primary_Order_Line__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Order_Line__c.
96	`            WHERE Id = :line.Id`	Adds a query/filter condition: WHERE Id = :line.Id. The complete condition determines which records are included.
97	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
98	`        System.assertEquals(20, saved.Pieces_Per_Case__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(20, saved.Pieces_Per_Case__c);. A mismatch fails the test.
99	`        System.assertEquals(100, saved.Case_Price__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(100, saved.Case_Price__c);. A mismatch fails the test.
100	`        System.assertEquals(5, saved.Tax_Percent__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(5, saved.Tax_Percent__c);. A mismatch fails the test.
101	`        System.assertEquals(60, saved.Total_Pieces__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(60, saved.Total_Pieces__c);. A mismatch fails the test.
102	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.

Line	Source code	Explanation / reading note
103	`            199.50,`	Continues the surrounding declaration/expression or text: 199.50,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
104	`            [SELECT Total_Amount__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Total_Amount__c`	Assigns the right-hand expression to the named variable/property: [SELECT Total_Amount__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Total_Amount__c. This is in-memory unless it is later persisted by an explicit call.
105	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
106	`        Product__c product = [SELECT Id FROM Product__c LIMIT 1];`	Assigns the right-hand expression to the named variable/property: Product__c product = [SELECT Id FROM Product__c LIMIT 1];. This is in-memory unless it is later persisted by an explicit call.
107	`        product.DMS_Case_Price__c = 200;`	Assigns the right-hand expression to the named variable/property: product.DMS_Case_Price__c = 200;. This is in-memory unless it is later persisted by an explicit call.
108	`        product.Units_Per_Case__c = 30;`	Assigns the right-hand expression to the named variable/property: product.Units_Per_Case__c = 30;. This is in-memory unless it is later persisted by an explicit call.
109	`        update product;`	Performs Salesforce DML: update product;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
110	`        update new DMS_Primary_Order_Line__c(Id = line.Id, Cases__c = 3);`	Performs Salesforce DML: update new DMS_Primary_Order_Line__c(Id = line.Id, Cases__c = 3);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
111	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
112	`            304.50,`	Continues the surrounding declaration/expression or text: 304.50,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
113	`            [SELECT Total_Amount__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Total_Amount__c`	Assigns the right-hand expression to the named variable/property: [SELECT Total_Amount__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Total_Amount__c. This is in-memory unless it is later persisted by an explicit call.
114	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
115	`        delete line;`	Performs Salesforce DML: delete line;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
116	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
117	`            0,`	Continues the surrounding declaration/expression or text: 0,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
118	`            [SELECT Total_Amount__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Total_Amount__c`	Assigns the right-hand expression to the named variable/property: [SELECT Total_Amount__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Total_Amount__c. This is in-memory unless it is later persisted by an explicit call.
119	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
120	`        undelete line;`	Performs Salesforce DML: undelete line;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
121	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
122	`            304.50,`	Continues the surrounding declaration/expression or text: 304.50,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
123	`            [SELECT Total_Amount__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Total_Amount__c`	Assigns the right-hand expression to the named variable/property: [SELECT Total_Amount__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Total_Amount__c. This is in-memory unless it is later persisted by an explicit call.
124	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
125	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
126	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
127	`    static void approvesPrimaryOrderAndProtectsLines() {`	Continues the surrounding declaration/expression or text: static void approvesPrimaryOrderAndProtectsLines() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.

Line	Source code	Explanation / reading note
128	`        DMS_Primary_Order__c parent = order();`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order__c parent = order();. This is in-memory unless it is later persisted by an explicit call.
129	`        DMS_Primary_Order_Line__c line = orderLine(parent.Id);`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order_Line__c line = orderLine(parent.Id);. This is in-memory unless it is later persisted by an explicit call.
130	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
131	`            UserInfo.getUserId(),`	Calls the named method: UserInfo.getUserId(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
132	`            [SELECT Officer__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Officer__c`	Assigns the right-hand expression to the named variable/property: [SELECT Officer__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Officer__c. This is in-memory unless it is later persisted by an explicit call.
133	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
134	`        Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
135	`        Approval.ProcessResult result = submit(parent.Id, 'Company_Officer_Approval');`	Assigns the right-hand expression to the named variable/property: Approval.ProcessResult result = submit(parent.Id, 'Company_Officer_Approval');. This is in-memory unless it is later persisted by an explicit call.
136	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
137	`            'Submitted',`	Continues the surrounding declaration/expression or text: 'Submitted',. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
138	`            [SELECT Status__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Status__c`	Assigns the right-hand expression to the named variable/property: [SELECT Status__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Status__c. This is in-memory unless it is later persisted by an explicit call.
139	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
140	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
141	`            false,`	Continues the surrounding declaration/expression or text: false,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
142	`            Database.update(new DMS_Primary_Order_Line__c(Id = line.Id, Cases__c = 3), false)`	Performs Salesforce DML: Database.update(new DMS_Primary_Order_Line__c(Id = line.Id, Cases__c = 3), false). It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
143	`                .isSuccess()`	Continues the surrounding declaration/expression or text: .isSuccess(). Read it with the preceding opening statement (Database.update(new DMS_Primary_Order_Line__c(Id = line.Id, Cases__c = 3), false)); it is not a standalone business operation.
144	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
145	`        decide(result, 'Approve');`	Continues the surrounding declaration/expression or text: decide(result, 'Approve');. Read it with the preceding opening statement ( );); it is not a standalone business operation.
146	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
147	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
148	`            'Approved',`	Continues the surrounding declaration/expression or text: 'Approved',. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
149	`            [SELECT Status__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Status__c`	Assigns the right-hand expression to the named variable/property: [SELECT Status__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Status__c. This is in-memory unless it is later persisted by an explicit call.
150	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
151	`        System.assertEquals(false, Database.delete(line, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.delete(line, false).isSuccess());. A mismatch fails the test.

Line	Source code	Explanation / reading note
152	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
153	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
154	`    static void rejectsPrimaryOrder() {`	Continues the surrounding declaration/expression or text: static void rejectsPrimaryOrder() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
155	`        DMS_Primary_Order__c parent = order();`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order__c parent = order();. This is in-memory unless it is later persisted by an explicit call.
156	`        orderLine(parent.Id);`	Continues the surrounding declaration/expression or text: orderLine(parent.Id);. Read it with the preceding opening statement (DMS_Primary_Order__c parent = order();); it is not a standalone business operation.
157	`        decide(submit(parent.Id, 'Company_Officer_Approval'), 'Reject');`	Continues the surrounding declaration/expression or text: decide(submit(parent.Id, 'Company_Officer_Approval'), 'Reject');. Read it with the preceding opening statement (orderLine(parent.Id);); it is not a standalone business operation.
158	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
159	`            'Rejected',`	Continues the surrounding declaration/expression or text: 'Rejected',. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
160	`            [SELECT Status__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Status__c`	Assigns the right-hand expression to the named variable/property: [SELECT Status__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Status__c. This is in-memory unless it is later persisted by an explicit call.
161	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
162	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
163	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.

Line	Source code	Explanation / reading note
164	`    static void approvesAndRejectsPrimaryReturns() {`	Continues the surrounding declaration/expression or text: static void approvesAndRejectsPrimaryReturns() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
165	`        DMS_Primary_Return__c approved = returnRecord();`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Return__c approved = returnRecord();. This is in-memory unless it is later persisted by an explicit call.
166	`        DMS_Primary_Return__c rejected = returnRecord();`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Return__c rejected = returnRecord();. This is in-memory unless it is later persisted by an explicit call.
167	`        // Standard approval comments are stored in approval history; reject`	Developer comment/documentation: Standard approval comments are stored in approval history; reject It is not executed.
168	`        // must work without editing a locked record's Rejection Reason first.`	Developer comment/documentation: must work without editing a locked record's Rejection Reason first. It is not executed.
169	`        Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
170	`        decide(submit(approved.Id, 'Company_Officer_Return_Approval'), 'Approve');`	Continues the surrounding declaration/expression or text: decide(submit(approved.Id, 'Company_Officer_Return_Approval'), 'Approve');. Read it with the preceding opening statement (Test.startTest();); it is not a standalone business operation.
171	`        decide(submit(rejected.Id, 'Company_Officer_Return_Approval'), 'Reject');`	Continues the surrounding declaration/expression or text: decide(submit(rejected.Id, 'Company_Officer_Return_Approval'), 'Reject');. Read it with the preceding opening statement (decide(submit(approved.Id, 'Company_Officer_Return_Approval'), 'Approve');); it is not a standalone business operation.
172	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
173	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
174	`            'Approved',`	Continues the surrounding declaration/expression or text: 'Approved',. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
175	`            [SELECT Status__c FROM DMS_Primary_Return__c WHERE Id = : approved.Id].Status__c`	Assigns the right-hand expression to the named variable/property: [SELECT Status__c FROM DMS_Primary_Return__c WHERE Id = :approved.Id].Status__c. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
176	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
177	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
178	`            'Rejected',`	Continues the surrounding declaration/expression or text: 'Rejected',. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
179	`            [SELECT Status__c FROM DMS_Primary_Return__c WHERE Id = :rejected.Id].Status__c`	Assigns the right-hand expression to the named variable/property: [SELECT Status__c FROM DMS_Primary_Return__c WHERE Id = :rejected.Id].Status__c. This is in-memory unless it is later persisted by an explicit call.
180	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
181	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
182	`            100,`	Continues the surrounding declaration/expression or text: 100,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
183	`            [SELECT Total_Amount__c FROM DMS_Primary_Return__c WHERE Id = :approved.Id]`	Assigns the right-hand expression to the named variable/property: [SELECT Total_Amount__c FROM DMS_Primary_Return__c WHERE Id = :approved.Id]. This is in-memory unless it is later persisted by an explicit call.
184	`            .Total_Amount__c`	Continues the surrounding declaration/expression or text: .Total_Amount__c. Read it with the preceding opening statement ([SELECT Total_Amount__c FROM DMS_Primary_Return__c WHERE Id = :approved.Id]); it is not a standalone business operation.
185	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
186	`        DMS_Primary_Return_Line__c line = [`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Return_Line__c line = [. This is in-memory unless it is later persisted by an explicit call.
187	`            SELECT Id`	Selects these Salesforce fields/aggregates: Id. Query results are used in the surrounding assignment or loop.
188	`            FROM DMS_Primary_Return_Line__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Return_Line__c.

Line	Source code	Explanation / reading note
189	`            WHERE Primary_Return__c = :approved.Id`	Adds a query/filter condition: WHERE Primary_Return__c = :approved.Id. The complete condition determines which records are included.
190	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
191	`        System.assertEquals(false, Database.delete(line, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.delete(line, false).isSuccess());. A mismatch fails the test.
192	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
193	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
194	`    static void preventsEmptyOrMismatchedSubmission() {`	Continues the surrounding declaration/expression or text: static void preventsEmptyOrMismatchedSubmission() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
195	`        DMS_Primary_Order__c empty = order();`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order__c empty = order();. This is in-memory unless it is later persisted by an explicit call.
196	`        Approval.ProcessSubmitRequest emptyRequest = new Approval.ProcessSubmitRequest();`	Calls the named method: Approval.ProcessSubmitRequest emptyRequest = new Approval.ProcessSubmitRequest();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
197	`        emptyRequest.setObjectId(empty.Id);`	Calls the named method: emptyRequest.setObjectId(empty.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
198	`        emptyRequest.setProcessDefinitionNameOrId('Company_Officer_Approval');`	Calls the named method: emptyRequest.setProcessDefinitionNameOrId('Company_Officer_Approval');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
199	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
200	`            false,`	Continues the surrounding declaration/expression or text: false,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
201	`            Approval.process(emptyRequest, false).isSuccess(),`	Submits the configured Salesforce approval request. Inspect the returned result before claiming submission succeeded.

Line	Source code	Explanation / reading note
202	`'Actual approval submission must reject orders without products.'`	Continues the surrounding declaration/expression or text: 'Actual approval submission must reject orders without products.'. Read it with the preceding opening statement (Approval.process(emptyRequest, false).isSuccess(),); it is not a standalone business operation.
203	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
204	`empty.Status__c = 'Submitted';`	Assigns the right-hand expression to the named variable/property: empty.Status__c = 'Submitted';. This is in-memory unless it is later persisted by an explicit call.
205	`System.assertEquals(false, Database.update(empty, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.update(empty, false).isSuccess());. A mismatch fails the test.
206	`DMS_Distributor__c other = new DMS_Distributor__c(`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c other = new DMS_Distributor__c(. This is in-memory unless it is later persisted by an explicit call.
207	`Name = 'Other distributor',`	Assigns the right-hand expression to the named variable/property: Name = 'Other distributor',. This is in-memory unless it is later persisted by an explicit call.
208	`Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.
209	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
210	`insert other;`	Performs Salesforce DML: insert other;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
211	`empty.Status__c = 'Draft';`	Assigns the right-hand expression to the named variable/property: empty.Status__c = 'Draft';. This is in-memory unless it is later persisted by an explicit call.
212	`empty.Distributor__c = other.Id;`	Assigns the right-hand expression to the named variable/property: empty.Distributor__c = other.Id;. This is in-memory unless it is later persisted by an explicit call.
213	`System.assertEquals(false, Database.update(empty, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.update(empty, false).isSuccess());. A mismatch fails the test.
214	`DMS_Primary_Order__c parent = order();`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order__c parent = order();. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
215	`DMS_Primary_Order_Line__c bad = new DMS_Primary_Order_Line__c(`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order_Line__c bad = new DMS_Primary_Order_Line__c(. This is in-memory unless it is later persisted by an explicit call.
216	`Order__c = parent.Id,`	Assigns the right-hand expression to the named variable/property: Order__c = parent.Id,. This is in-memory unless it is later persisted by an explicit call.
217	`Product__c = [SELECT Id FROM Product__c LIMIT 1]`	Assigns the right-hand expression to the named variable/property: Product__c = [SELECT Id FROM Product__c LIMIT 1]. This is in-memory unless it is later persisted by an explicit call.
218	`.Id,`	Continues the surrounding declaration/expression or text: .Id,. Read it with the preceding opening statement (Product__c = [SELECT Id FROM Product__c LIMIT 1]); it is not a standalone business operation.
219	`Cases__c = 0`	Assigns the right-hand expression to the named variable/property: Cases__c = 0. This is in-memory unless it is later persisted by an explicit call.
220	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
221	`System.assertEquals(false, Database.insert(bad, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.insert(bad, false).isSuccess());. A mismatch fails the test.
222	`bad.Cases__c = 1;`	Assigns the right-hand expression to the named variable/property: bad.Cases__c = 1;. This is in-memory unless it is later persisted by an explicit call.
223	`bad.Order__c = null;`	Assigns the right-hand expression to the named variable/property: bad.Order__c = null;. This is in-memory unless it is later persisted by an explicit call.
224	`System.assertEquals(false, Database.insert(bad, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.insert(bad, false).isSuccess());. A mismatch fails the test.
225	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
226	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.

Line	Source code	Explanation / reading note
227	`    static void handlesBulkLinesAndReparenting() {`	Continues the surrounding declaration/expression or text: static void handlesBulkLinesAndReparenting() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
228	`        DMS_Primary_Order__c first = order(), second = order();`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order__c first = order(), second = order();. This is in-memory unless it is later persisted by an explicit call.
229	`        Id productId = [SELECT Id FROM Product__c LIMIT 1].Id;`	Declares/initializes local data used by the surrounding operation: Id productId = [SELECT Id FROM Product__c LIMIT 1].Id;. Collection contents and assignments below determine its purpose.
230	`        List<DMS_Primary_Order_Line__c> lines = new List<DMS_Primary_Order_Line__c>();`	Declares/initializes local data used by the surrounding operation: List<DMS_Primary_Order_Line__c> lines = new List<DMS_Primary_Order_Line__c>();. Collection contents and assignments below determine its purpose.
231	`        for (Integer i = 0; i < 200; i++)`	Repeats work over the specified records/items or while this condition holds: for (Integer i = 0; i < 200; i++). Check where queries/writes occur relative to the loop.
232	`            lines.add(`	Calls the named method: lines.add(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
233	`                new DMS_Primary_Order_Line__c(`	Continues the surrounding declaration/expression or text: new DMS_Primary_Order_Line__c(. Read it with the preceding opening statement (lines.add(); it is not a standalone business operation.
234	`                    Order__c = first.Id,`	Assigns the right-hand expression to the named variable/property: Order__c = first.Id,. This is in-memory unless it is later persisted by an explicit call.
235	`                    Product__c = productId,`	Assigns the right-hand expression to the named variable/property: Product__c = productId,. This is in-memory unless it is later persisted by an explicit call.
236	`                    Cases__c = 1`	Assigns the right-hand expression to the named variable/property: Cases__c = 1. This is in-memory unless it is later persisted by an explicit call.
237	`                )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
238	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
239	`Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
240	`insert lines;`	Performs Salesforce DML: insert lines;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
241	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
242	`21000,`	Continues the surrounding declaration/expression or text: 21000,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
243	`[SELECT Total_Amount__c FROM DMS_Primary_Order__c WHERE Id = :first.Id].Total_Amount__c`	Assigns the right-hand expression to the named variable/property: [SELECT Total_Amount__c FROM DMS_Primary_Order__c WHERE Id = :first.Id].Total_Amount__c. This is in-memory unless it is later persisted by an explicit call.
244	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
245	`lines[0].Order__c = second.Id;`	Assigns the right-hand expression to the named variable/property: lines[0].Order__c = second.Id;. This is in-memory unless it is later persisted by an explicit call.
246	`update lines[0];`	Performs Salesforce DML: update lines[0];. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
247	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
248	`20895,`	Continues the surrounding declaration/expression or text: 20895,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
249	`[SELECT Total_Amount__c FROM DMS_Primary_Order__c WHERE Id = :first.Id].Total_Amount__c`	Assigns the right-hand expression to the named variable/property: [SELECT Total_Amount__c FROM DMS_Primary_Order__c WHERE Id = :first.Id].Total_Amount__c. This is in-memory unless it is later persisted by an explicit call.
250	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
251	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.

Line	Source code	Explanation / reading note
252	`            105,`	Continues the surrounding declaration/expression or text: 105,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
253	`            [SELECT Total_Amount__c FROM DMS_Primary_Order__c WHERE Id = :second.Id].Total_Amount__c`	Assigns the right-hand expression to the named variable/property: [SELECT Total_Amount__c FROM DMS_Primary_Order__c WHERE Id = :second.Id].Total_Amount__c. This is in-memory unless it is later persisted by an explicit call.
254	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
255	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
256	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
257	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
258	`    static void sharesOnlyWithDesignatedOfficer() {`	Continues the surrounding declaration/expression or text: static void sharesOnlyWithDesignatedOfficer() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
259	`        User officer = new User(`	Assigns the right-hand expression to the named variable/property: User officer = new User(. This is in-memory unless it is later persisted by an explicit call.
260	`            LastName = 'DMS Test Officer',`	Assigns the right-hand expression to the named variable/property: LastName = 'DMS Test Officer',. This is in-memory unless it is later persisted by an explicit call.
261	`            Alias = 'dmstesto',`	Assigns the right-hand expression to the named variable/property: Alias = 'dmstesto',. This is in-memory unless it is later persisted by an explicit call.
262	`            Email = 'dms-officer@example.invalid',`	Assigns the right-hand expression to the named variable/property: Email = 'dms-officer@example.invalid',. This is in-memory unless it is later persisted by an explicit call.
263	`            Username = 'dms.officer.' +`	Assigns the right-hand expression to the named variable/property: Username = 'dms.officer.' +. This is in-memory unless it is later persisted by an explicit call.
264	`                UserInfo.getOrganizationId() +`	Calls the named method: UserInfo.getOrganizationId() +. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
265	`'.' +`	Continues the surrounding declaration/expression or text: '.' +. Read it with the preceding opening statement (UserInfo.getOrganizationId() +); it is not a standalone business operation.
266	`System.now().getTime() +`	Calls the named method: System.now().getTime() +. Its implementation defines the side effect/result; use the symbol/file index to follow it.
267	`'@example.invalid',`	Continues the surrounding declaration/expression or text: '@example.invalid',. Read it with the preceding opening statement (System.now().getTime() +); it is not a standalone business operation.
268	`TimeZoneSidKey = 'Asia/Kolkata',`	Assigns the right-hand expression to the named variable/property: TimeZoneSidKey = 'Asia/Kolkata',. This is in-memory unless it is later persisted by an explicit call.
269	`LocaleSidKey = 'en_US',`	Assigns the right-hand expression to the named variable/property: LocaleSidKey = 'en_US',. This is in-memory unless it is later persisted by an explicit call.
270	`EmailEncodingKey = 'UTF-8',`	Assigns the right-hand expression to the named variable/property: EmailEncodingKey = 'UTF-8',. This is in-memory unless it is later persisted by an explicit call.
271	`LanguageLocaleKey = 'en_US',`	Assigns the right-hand expression to the named variable/property: LanguageLocaleKey = 'en_US',. This is in-memory unless it is later persisted by an explicit call.
272	`ProfileId = [SELECT Id FROM Profile WHERE Name = 'Standard Platform User' LIMIT 1]`	Assigns the right-hand expression to the named variable/property: ProfileId = [SELECT Id FROM Profile WHERE Name = 'Standard Platform User' LIMIT 1]. This is in-memory unless it is later persisted by an explicit call.
273	`.Id`	Continues the surrounding declaration/expression or text: .Id. Read it with the preceding opening statement (ProfileId = [SELECT Id FROM Profile WHERE Name = 'Standard Platform User' LIMIT 1]); it is not a standalone business operation.
274	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
275	`System.runAs(new User(Id = UserInfo.getUserId())) {`	Calls the named method: System.runAs(new User(Id = UserInfo.getUserId())) {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
276	`insert officer;`	Performs Salesforce DML: insert officer;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
277	`insert new PermissionSetAssignment(`	Performs Salesforce DML: insert new PermissionSetAssignment(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
278	`AssigneeId = officer.Id,`	Assigns the right-hand expression to the named variable/property: AssigneeId = officer.Id,. This is in-memory unless it is later persisted by an explicit call.
279	`PermissionSetId = [`	Assigns the right-hand expression to the named variable/property: PermissionSetId = [. This is in-memory unless it is later persisted by an explicit call.
280	`SELECT Id`	Selects these Salesforce fields/aggregates: Id. Query results are used in the surrounding assignment or loop.
281	`FROM PermissionSet`	Chooses the Salesforce object/subquery source: FROM PermissionSet.
282	`WHERE Name = 'DMS_Distributor_Officer'`	Adds a query/filter condition: WHERE Name = 'DMS_Distributor_Officer'. The complete condition determines which records are included.
283	`]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
284	`.Id`	Continues the surrounding declaration/expression or text: .Id. Read it with the preceding opening statement ( ]); it is not a standalone business operation.
285	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
286	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
287	`DMS_Distributor__c distributor = [SELECT Id, Officer__c FROM DMS_Distributor__c LIMIT 1];`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c distributor = [SELECT Id, Officer__c FROM DMS_Distributor__c LIMIT 1];. This is in-memory unless it is later persisted by an explicit call.
288	`distributor.Officer__c = officer.Id;`	Assigns the right-hand expression to the named variable/property: distributor.Officer__c = officer.Id;. This is in-memory unless it is later persisted by an explicit call.
289	`update distributor;`	Performs Salesforce DML: update distributor;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
290	`DMS_Primary_Order__c parent = order();`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order__c parent = order();. This is in-memory unless it is later persisted by an explicit call.
291	`DMS_Primary_Order_Line__c line = orderLine(parent.Id);`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order_Line__c line = orderLine(parent.Id);. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
292	`DMS_Primary_Return__c returned = returnRecord();`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Return__c returned = returnRecord();. This is in-memory unless it is later persisted by an explicit call.
293	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
294	`1,`	Continues the surrounding declaration/expression or text: 1,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
295	`[`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (1,); it is not a standalone business operation.
296	`SELECT COUNT()`	Selects these Salesforce fields/aggregates: COUNT(). Query results are used in the surrounding assignment or loop.
297	`FROM DMS_Primary_Order__Share`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Order__Share.
298	`WHERE`	Adds a query/filter condition: WHERE. The complete condition determines which records are included.
299	`ParentId = :parent.Id`	Assigns the right-hand expression to the named variable/property: ParentId = :parent.Id. This is in-memory unless it is later persisted by an explicit call.
300	`AND UserOrGroupId = :officer.Id`	Adds a query/filter condition: AND UserOrGroupId = :officer.Id. The complete condition determines which records are included.
301	`AND RowCause = 'Officer_Access__c'`	Adds a query/filter condition: AND RowCause = 'Officer_Access__c'. The complete condition determines which records are included.
302	`]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
303	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
304	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
305	`1,`	Continues the surrounding declaration/expression or text: 1,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
306	`[`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (1,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
307	`SELECT COUNT()`	Selects these Salesforce fields/aggregates: COUNT(). Query results are used in the surrounding assignment or loop.
308	`FROM DMS_Primary_Order_Line__Share`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Order_Line__Share.
309	`WHERE`	Adds a query/filter condition: WHERE. The complete condition determines which records are included.
310	`ParentId = :line.Id`	Assigns the right-hand expression to the named variable/property: ParentId = :line.Id. This is in-memory unless it is later persisted by an explicit call.
311	`AND UserOrGroupId = :officer.Id`	Adds a query/filter condition: AND UserOrGroupId = :officer.Id. The complete condition determines which records are included.
312	`AND RowCause = 'Officer_Access__c'`	Adds a query/filter condition: AND RowCause = 'Officer_Access__c'. The complete condition determines which records are included.
313	`]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
314	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
315	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
316	`1,`	Continues the surrounding declaration/expression or text: 1,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
317	`[`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (1,); it is not a standalone business operation.
318	`SELECT COUNT()`	Selects these Salesforce fields/aggregates: COUNT(). Query results are used in the surrounding assignment or loop.
319	`FROM DMS_Primary_Return__Share`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Return__Share.
320	`WHERE`	Adds a query/filter condition: WHERE. The complete condition determines which records are included.
321	`ParentId = :returned.Id`	Assigns the right-hand expression to the named variable/property: ParentId = :returned.Id. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
322	`AND UserOrGroupId = :officer.Id`	Adds a query/filter condition: AND UserOrGroupId = :officer.Id. The complete condition determines which records are included.
323	`AND RowCause = 'Officer_Access__c'`	Adds a query/filter condition: AND RowCause = 'Officer_Access__c'. The complete condition determines which records are included.
324	`]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
325	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
326	`// A real non-admin, licensed officer must be able to approve the routed work item.`	Developer comment/documentation: A real non-admin, licensed officer must be able to approve the routed work item. It is not executed.
327	`Approval.ProcessSubmitRequest request = new Approval.ProcessSubmitRequest();`	Calls the named method: Approval.ProcessSubmitRequest request = new Approval.ProcessSubmitRequest();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
328	`request.setObjectId(parent.Id);`	Calls the named method: request.setObjectId(parent.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
329	`request.setProcessDefinitionNameOrId('Company_Officer_Approval');`	Calls the named method: request.setProcessDefinitionNameOrId('Company_Officer_Approval');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
330	`Approval.ProcessResult submitted = Approval.process(request);`	Submits the configured Salesforce approval request. Inspect the returned result before claiming submission succeeded.
331	`System.runAs(officer) {`	Calls the named method: System.runAs(officer) {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
332	`decide(submitted, 'Approve');`	Continues the surrounding declaration/expression or text: decide(submitted, 'Approve');. Read it with the preceding opening statement (System.runAs(officer) {); it is not a standalone business operation.
333	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
334	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.

Line	Source code	Explanation / reading note
335	`'Approved',`	Continues the surrounding declaration/expression or text: 'Approved',. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
336	`[SELECT Status__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Status__c`	Assigns the right-hand expression to the named variable/property: [SELECT Status__c FROM DMS_Primary_Order__c WHERE Id = :parent.Id].Status__c. This is in-memory unless it is later persisted by an explicit call.
337	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
338	`// Draft reassignment removes only our managed shares, not other manual grants.`	Developer comment/documentation: Draft reassignment removes only our managed shares, not other manual grants. It is not executed.
339	`distributor.Officer__c = UserInfo.getUserId();`	Calls the named method: distributor.Officer__c = UserInfo.getUserId();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
340	`update distributor;`	Performs Salesforce DML: update distributor;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
341	`update new DMS_Primary_Return__c(Id = returned.Id, Notes__c = 'Refresh draft approver');`	Performs Salesforce DML: update new DMS_Primary_Return__c(Id = returned.Id, Notes__c = 'Refresh draft approver');. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
342	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
343	`0,`	Continues the surrounding declaration/expression or text: 0,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
344	`[`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (0,); it is not a standalone business operation.
345	`SELECT COUNT()`	Selects these Salesforce fields/aggregates: COUNT(). Query results are used in the surrounding assignment or loop.
346	`FROM DMS_Primary_Return__Share`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Return__Share.
347	`WHERE ParentId = :returned.Id AND RowCause = 'Officer_Access__c'`	Adds a query/filter condition: WHERE ParentId = :returned.Id AND RowCause = 'Officer_Access__c'. The complete condition determines which records are included.

Line	Source code	Explanation / reading note
348	`            ]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
349	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
350	`        DmsOfficerSharing.synchronize('DMS_Primary_Order__c', new Set<Id>());`	Calls the named method: DmsOfficerSharing.synchronize('DMS_Primary_Order__c', new Set<Id>());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
351	`        try {`	Starts operations whose failure is handled by the following catch/finally blocks.
352	`            DmsOfficerSharing.synchronize('Employee__c', new Set<Id>{ parent.Id });`	Calls the named method: DmsOfficerSharing.synchronize('Employee__c', new Set<Id>{ parent.Id });. Its implementation defines the side effect/result; use the symbol/file index to follow it.
353	`            System.assert(false, 'Unsupported objects must be rejected.');`	Test assertion comparing an expected outcome to actual behavior: System.assert(false, 'Unsupported objects must be rejected.');. A mismatch fails the test.
354	`        } catch (DmsOfficerSharing.SharingConfigurationException expected) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
355	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
356	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
357	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsPrimaryWorkflowTest.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsReportConfigurationTest.cls

Regression tests for DmsReportConfiguration. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

88 numbered source lines | SHA-256 46b6b372d91023e37436d11f600160da4d7b758772ae160ef09ec6c8ee3d0533

Line	Source code	Explanation / reading note
1	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
2	`private class DmsReportConfigurationTest {`	Declares a class/type: private class DmsReportConfigurationTest {. Members below hold behavior and/or state.
3	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
4	`    static void targetScopesAreUniqueAndValid() {`	Continues the surrounding declaration/expression or text: static void targetScopesAreUniqueAndValid() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
5	`        DMS_Distributor__c distributor = new DMS_Distributor__c(`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c distributor = new DMS_Distributor__c(. This is in-memory unless it is later persisted by an explicit call.
6	`            Name = 'Report fixture',`	Assigns the right-hand expression to the named variable/property: Name = 'Report fixture',. This is in-memory unless it is later persisted by an explicit call.
7	`            Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
8	`            Officer__c = UserInfo.getUserId()`	Calls the named method: Officer__c = UserInfo.getUserId(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
9	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`        insert distributor;`	Performs Salesforce DML: insert distributor;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
11	`        Date month = Date.today().toStartOfMonth();`	Declares/initializes local data used by the surrounding operation: Date month = Date.today().toStartOfMonth();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
12	`DMS_Sales_Target__c target = new DMS_Sales_Target__c(`	Assigns the right-hand expression to the named variable/property: DMS_Sales_Target__c target = new DMS_Sales_Target__c(. This is in-memory unless it is later persisted by an explicit call.
13	`Distributor__c = distributor.Id,`	Assigns the right-hand expression to the named variable/property: Distributor__c = distributor.Id,. This is in-memory unless it is later persisted by an explicit call.
14	`Month__c = month,`	Assigns the right-hand expression to the named variable/property: Month__c = month,. This is in-memory unless it is later persisted by an explicit call.
15	`Target_Amount__c = 10000`	Assigns the right-hand expression to the named variable/property: Target_Amount__c = 10000. This is in-memory unless it is later persisted by an explicit call.
16	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`insert target;`	Performs Salesforce DML: insert target;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
18	`System.assertNotEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(. A mismatch fails the test.
19	`null,`	Continues the surrounding declaration/expression or text: null,. Read it with the preceding opening statement (System.assertNotEquals(); it is not a standalone business operation.
20	`[SELECT Unique_Key__c FROM DMS_Sales_Target__c WHERE Id = :target.Id].Unique_Key__c`	Assigns the right-hand expression to the named variable/property: [SELECT Unique_Key__c FROM DMS_Sales_Target__c WHERE Id = :target.Id].Unique_Key__c. This is in-memory unless it is later persisted by an explicit call.
21	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
22	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
23	`false,`	Continues the surrounding declaration/expression or text: false,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
24	`Database.insert(`	Performs Salesforce DML: Database.insert(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
25	`new DMS_Sales_Target__c(`	Continues the surrounding declaration/expression or text: new DMS_Sales_Target__c(. Read it with the preceding opening statement (Database.insert(); it is not a standalone business operation.
26	`Distributor__c = distributor.Id,`	Assigns the right-hand expression to the named variable/property: Distributor__c = distributor.Id,. This is in-memory unless it is later persisted by an explicit call.
27	`Month__c = month,`	Assigns the right-hand expression to the named variable/property: Month__c = month,. This is in-memory unless it is later persisted by an explicit call.
28	`Target_Amount__c = 20000`	Assigns the right-hand expression to the named variable/property: Target_Amount__c = 20000. This is in-memory unless it is later persisted by an explicit call.
29	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`false`	Continues the surrounding declaration/expression or text: false. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
31	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`.isSuccess()`	Continues the surrounding declaration/expression or text: .isSuccess(). Read it with the preceding opening statement ( )); it is not a standalone business operation.
33	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`target.Month__c = month.addDays(1);`	Calls the named method: target.Month__c = month.addDays(1);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
35	`System.assertEquals(false, Database.update(target, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.update(target, false).isSuccess());. A mismatch fails the test.
36	`target.Month__c = month;`	Assigns the right-hand expression to the named variable/property: target.Month__c = month;. This is in-memory unless it is later persisted by an explicit call.
37	`target.Target_Amount__c = 0;`	Assigns the right-hand expression to the named variable/property: target.Target_Amount__c = 0;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
38	`System.assertEquals(false, Database.update(target, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.update(target, false).isSuccess());. A mismatch fails the test.
39	`target.Target_Amount__c = 5000;`	Assigns the right-hand expression to the named variable/property: target.Target_Amount__c = 5000;. This is in-memory unless it is later persisted by an explicit call.
40	`update target;`	Performs Salesforce DML: update target;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
41	`System.assertEquals(1, [SELECT COUNT() FROM DMS_Sales_Target__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1, [SELECT COUNT() FROM DMS_Sales_Target__c]);. A mismatch fails the test.
42	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
44	`static void ticketLifecycleAndOwnership() {`	Continues the surrounding declaration/expression or text: static void ticketLifecycleAndOwnership() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
45	`DMS_Distributor__c distributor = new DMS_Distributor__c(`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c distributor = new DMS_Distributor__c(. This is in-memory unless it is later persisted by an explicit call.
46	`Name = 'Support fixture',`	Assigns the right-hand expression to the named variable/property: Name = 'Support fixture',. This is in-memory unless it is later persisted by an explicit call.
47	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
48	`Officer__c = UserInfo.getUserId()`	Calls the named method: Officer__c = UserInfo.getUserId(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
49	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
50	`insert distributor;`	Performs Salesforce DML: insert distributor;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
51	`DMS_Support_Ticket__c ticket = new DMS_Support_Ticket__c(`	Assigns the right-hand expression to the named variable/property: DMS_Support_Ticket__c ticket = new DMS_Support_Ticket__c(. This is in-memory unless it is later persisted by an explicit call.
52	`Distributor__c = distributor.Id,`	Assigns the right-hand expression to the named variable/property: Distributor__c = distributor.Id,. This is in-memory unless it is later persisted by an explicit call.
53	`Subject__c = 'Missing shipment',`	Assigns the right-hand expression to the named variable/property: Subject__c = 'Missing shipment',. This is in-memory unless it is later persisted by an explicit call.
54	`Category__c = 'Delivery',`	Assigns the right-hand expression to the named variable/property: Category__c = 'Delivery',. This is in-memory unless it is later persisted by an explicit call.
55	`Description__c = 'One box missing'`	Assigns the right-hand expression to the named variable/property: Description__c = 'One box missing'. This is in-memory unless it is later persisted by an explicit call.
56	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`insert ticket;`	Performs Salesforce DML: insert ticket;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
58	`ticket = [`	Assigns the right-hand expression to the named variable/property: ticket = [. This is in-memory unless it is later persisted by an explicit call.
59	`SELECT Id, Status__c, Officer__c`	Selects these Salesforce fields/aggregates: Id, Status__c, Officer__c. Query results are used in the surrounding assignment or loop.
60	`FROM DMS_Support_Ticket__c`	Chooses the Salesforce object/subquery source: FROM DMS_Support_Ticket__c.
61	`WHERE Id = :ticket.Id`	Adds a query/filter condition: WHERE Id = :ticket.Id. The complete condition determines which records are included.
62	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
63	`System.assertEquals('Open', ticket.Status__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Open', ticket.Status__c);. A mismatch fails the test.
64	`System.assertEquals(UserInfo.getUserId(), ticket.Officer__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(UserInfo.getUserId(), ticket.Officer__c);. A mismatch fails the test.

Line	Source code	Explanation / reading note
65	`ticket.Status__c = 'Closed';`	Assigns the right-hand expression to the named variable/property: ticket.Status__c = 'Closed';. This is in-memory unless it is later persisted by an explicit call.
66	`ticket.Resolution__c = 'Done';`	Assigns the right-hand expression to the named variable/property: ticket.Resolution__c = 'Done';. This is in-memory unless it is later persisted by an explicit call.
67	`System.assertEquals(false, Database.update(ticket, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.update(ticket, false).isSuccess());. A mismatch fails the test.
68	`ticket.Status__c = 'In Progress';`	Assigns the right-hand expression to the named variable/property: ticket.Status__c = 'In Progress';. This is in-memory unless it is later persisted by an explicit call.
69	`update ticket;`	Performs Salesforce DML: update ticket;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
70	`ticket.Status__c = 'Closed';`	Assigns the right-hand expression to the named variable/property: ticket.Status__c = 'Closed';. This is in-memory unless it is later persisted by an explicit call.
71	`ticket.Resolution__c = null;`	Assigns the right-hand expression to the named variable/property: ticket.Resolution__c = null;. This is in-memory unless it is later persisted by an explicit call.
72	`System.assertEquals(false, Database.update(ticket, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.update(ticket, false).isSuccess());. A mismatch fails the test.
73	`ticket.Resolution__c = 'Replacement confirmed';`	Assigns the right-hand expression to the named variable/property: ticket.Resolution__c = 'Replacement confirmed';. This is in-memory unless it is later persisted by an explicit call.
74	`update ticket;`	Performs Salesforce DML: update ticket;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
75	`ticket.Status__c = 'Open';`	Assigns the right-hand expression to the named variable/property: ticket.Status__c = 'Open';. This is in-memory unless it is later persisted by an explicit call.
76	`System.assertEquals(false, Database.update(ticket, false).isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, Database.update(ticket, false).isSuccess());. A mismatch fails the test.
77	`ticket = new DMS_Support_Ticket__c(`	Assigns the right-hand expression to the named variable/property: ticket = new DMS_Support_Ticket__c(. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
78	`Distributor__c = distributor.Id,`	Assigns the right-hand expression to the named variable/property: Distributor__c = distributor.Id,. This is in-memory unless it is later persisted by an explicit call.
79	`Subject__c = 'Product issue',`	Assigns the right-hand expression to the named variable/property: Subject__c = 'Product issue',. This is in-memory unless it is later persisted by an explicit call.
80	`Category__c = 'Product',`	Assigns the right-hand expression to the named variable/property: Category__c = 'Product',. This is in-memory unless it is later persisted by an explicit call.
81	`Description__c = 'Check batch'`	Assigns the right-hand expression to the named variable/property: Description__c = 'Check batch'. This is in-memory unless it is later persisted by an explicit call.
82	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
83	`insert ticket;`	Performs Salesforce DML: insert ticket;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
84	`ticket.Status__c = 'Rejected';`	Assigns the right-hand expression to the named variable/property: ticket.Status__c = 'Rejected';. This is in-memory unless it is later persisted by an explicit call.
85	`ticket.Resolution__c = 'Outside support scope';`	Assigns the right-hand expression to the named variable/property: ticket.Resolution__c = 'Outside support scope';. This is in-memory unless it is later persisted by an explicit call.
86	`update ticket;`	Performs Salesforce DML: update ticket;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
87	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
88	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsReportConfigurationTest.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsSalesTargetHandler.cls

Builds the original distributor/month/employee/geography/product uniqueness key; no queries or DML. Null scope values remain part of the existing key representation.

21 numbered source lines | SHA-256 62f1ae8465d37fd43c567e4e221aa8b370482b4e7016ad25a6e36933a7b8ffda

Line	Source code	Explanation / reading note
1	`/**`	Developer comment/documentation: It is not executed.
2	`* Builds the uniqueness key for a monthly target scope before saving.`	Developer comment/documentation: Builds the uniqueness key for a monthly target scope before saving. It is not executed.
3	`* Internal automation; no queries, DML, or record access is needed.`	Developer comment/documentation: Internal automation; no queries, DML, or record access is needed. It is not executed.
4	`* Preserve the existing delimiter and String.valueOf(null) representation.`	Developer comment/documentation: Preserve the existing delimiter and String.valueOf(null) representation. It is not executed.
5	`*/`	Developer comment/documentation: It is not executed.
6	`public without sharing class DmsSalesTargetHandler {`	Declares a class/type: public without sharing class DmsSalesTargetHandler {. Runs without record-sharing enforcement; see the documented internal authorization boundary.
7	`public static void populateScopeKeys(List<DMS_Sales_Target__c> targets) {`	Declares a callable function/method: public static void populateScopeKeys(List<DMS_Sales_Target__c> targets) {. Parameters supply its inputs; the following block implements the operation.
8	`for (DMS_Sales_Target__c target : targets) {`	Repeats work over the specified records/items or while this condition holds: for (DMS_Sales_Target__c target : targets) {. Check where queries/writes occur relative to the loop.
9	`target.Unique_Key__c =`	Continues the surrounding declaration/expression or text: target.Unique_Key__c =. Read it with the preceding opening statement (for (DMS_Sales_Target__c target : targets) {); it is not a standalone business operation.
10	`String.valueOf(target.Distributor__c) +`	Declares/initializes local data used by the surrounding operation: String.valueOf(target.Distributor__c) +. Collection contents and assignments below determine its purpose.
11	`':' +`	Continues the surrounding declaration/expression or text: ':' +. Read it with the preceding opening statement (String.valueOf(target.Distributor__c) +); it is not a standalone business operation.

Line	Source code	Explanation / reading note
12	`String.valueOf(target.Month__c) +`	Declares/initializes local data used by the surrounding operation: String.valueOf(target.Month__c) +. Collection contents and assignments below determine its purpose.
13	`':' +`	Continues the surrounding declaration/expression or text: ':' +. Read it with the preceding opening statement (String.valueOf(target.Month__c) +); it is not a standalone business operation.
14	`String.valueOf(target.Employee__c) +`	Declares/initializes local data used by the surrounding operation: String.valueOf(target.Employee__c) +. Collection contents and assignments below determine its purpose.
15	`':' +`	Continues the surrounding declaration/expression or text: ':' +. Read it with the preceding opening statement (String.valueOf(target.Employee__c) +); it is not a standalone business operation.
16	`String.valueOf(target.Geography__c) +`	Declares/initializes local data used by the surrounding operation: String.valueOf(target.Geography__c) +. Collection contents and assignments below determine its purpose.
17	`':' +`	Continues the surrounding declaration/expression or text: ':' +. Read it with the preceding opening statement (String.valueOf(target.Geography__c) +); it is not a standalone business operation.
18	`String.valueOf(target.Product__c);`	Declares/initializes local data used by the surrounding operation: String.valueOf(target.Product__c);. Collection contents and assignments below determine its purpose.
19	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsSalesTargetHandler.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsSecondaryRouting.cls

Derives distributor from outlet, rejects inactive/mismatched suppliers, auto-approves new routed secondary orders and leaves secondary returns Pending.

50 numbered source lines | SHA-256 5707f3b7cbc4316ef47b05d2569a0334e367cebd9406ee768f080456f0d7e4f2

Line	Source code	Explanation / reading note
1	`/**`	Developer comment/documentation: It is not executed.
2	`* Routes new secondary transactions using the outlet's supplier relationship.`	Developer comment/documentation: Routes new secondary transactions using the outlet's supplier relationship. It is not executed.
3	`* Employee allocation is not used here: a shared outlet still has one supplier.`	Developer comment/documentation: Employee allocation is not used here: a shared outlet still has one supplier. It is not executed.
4	`* Unmapped outlets retain the existing SFA save behavior until configured.`	Developer comment/documentation: Unmapped outlets retain the existing SFA save behavior until configured. It is not executed.
5	`*/`	Developer comment/documentation: It is not executed.
6	`public without sharing class DmsSecondaryRouting {`	Declares a class/type: public without sharing class DmsSecondaryRouting {. Runs without record-sharing enforcement; see the documented internal authorization boundary.
7	`    public static void route(List<SObject> records, String outletField) {`	Declares a callable function/method: public static void route(List<SObject> records, String outletField) {. Parameters supply its inputs; the following block implements the operation.
8	`        Set<Id> outletIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> outletIds = new Set<Id>();. Collection contents and assignments below determine its purpose.
9	`        for (SObject record : records)`	Repeats work over the specified records/items or while this condition holds: for (SObject record : records). Check where queries/writes occur relative to the loop.
10	`            outletIds.add((Id) record.get(outletField));`	Calls the named method: outletIds.add((Id) record.get(outletField));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
11	`        Map<Id, Retailer__c> outlets = new Map<Id, Retailer__c>(`	Declares/initializes local data used by the surrounding operation: Map<Id, Retailer__c> outlets = new Map<Id, Retailer__c>(. Collection contents and assignments below determine its purpose.
12	`            [`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (Map<Id, Retailer__c> outlets = new Map<Id, Retailer__c>(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
13	`SELECT Id, DMS_Distributor__c, DMS_Distributor__r.Active__c`	Selects these Salesforce fields/aggregates: Id, DMS_Distributor__c, DMS_Distributor__r.Active__c. Query results are used in the surrounding assignment or loop.
14	`FROM Retailer__c`	Chooses the Salesforce object/subquery source: FROM Retailer__c.
15	`WHERE Id IN :outletIds`	Adds a query/filter condition: WHERE Id IN :outletIds. The complete condition determines which records are included.
16	`]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`for (SObject record : records) {`	Repeats work over the specified records/items or while this condition holds: for (SObject record : records) {. Check where queries/writes occur relative to the loop.
19	`Retailer__c outlet = outlets.get((Id) record.get(outletField));`	Calls the named method: Retailer__c outlet = outlets.get((Id) record.get(outletField));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
20	`if (outlet == null || outlet.DMS_Distributor__c == null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (outlet == null || outlet.DMS_Distributor__c == null) {.
21	`if (record.get('DMS_Distributor__c') != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (record.get('DMS_Distributor__c') != null).
22	`record.addError(`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
23	`'Configure the outlet DMS Distributor before routing this transaction.'`	Continues the surrounding declaration/expression or text: 'Configure the outlet DMS Distributor before routing this transaction.'. Read it with the preceding opening statement (record.addError(); it is not a standalone business operation.
24	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
25	`continue;`	Skips the remainder of the current loop iteration and moves to the next item.
26	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
27	`if (!outlet.DMS_Distributor__r.Active__c) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!outlet.DMS_Distributor__r.Active__c) {.
28	`record.addError(`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
29	`'The outlet distributor is inactive. Ask the administrator to update the outlet mapping.'`	Continues the surrounding declaration/expression or text: 'The outlet distributor is inactive. Ask the administrator to update the outlet mapping.'. Read it with the preceding opening statement (record.addError(); it is not a standalone business operation.
30	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31	`continue;`	Skips the remainder of the current loop iteration and moves to the next item.
32	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`Id supplied = (Id) record.get('DMS_Distributor__c');`	Declares/initializes local data used by the surrounding operation: Id supplied = (Id) record.get('DMS_Distributor__c');. Collection contents and assignments below determine its purpose.
34	`if (supplied != null && supplied != outlet.DMS_Distributor__c) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (supplied != null && supplied != outlet.DMS_Distributor__c) {.
35	`record.addError('The distributor must match the outlet DMS Distributor.');`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
36	`continue;`	Skips the remainder of the current loop iteration and moves to the next item.
37	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`record.put('DMS_Distributor__c', outlet.DMS_Distributor__c);`	Calls the named method: record.put('DMS_Distributor__c', outlet.DMS_Distributor__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
39	`// Only secondary sales orders are automatic. Returns keep their`	Developer comment/documentation: Only secondary sales orders are automatic. Returns keep their It is not executed.
40	`// existing distributor decision workflow; primary orders are separate.`	Developer comment/documentation: existing distributor decision workflow; primary orders are separate. It is not executed.

Line	Source code	Explanation / reading note
41	`            if (record.getSObjectType() == Sales_Order__c.SObjectType) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (record.getSObjectType() == Sales_Order__c.SObjectType) {.
42	`                record.put('DMS_Status__c', 'Approved');`	Calls the named method: record.put('DMS_Status__c', 'Approved');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
43	`                record.put('DMS_Decision_Notes__c', 'Automatically approved secondary order.');`	Calls the named method: record.put('DMS_Decision_Notes__c', 'Automatically approved secondary order.');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
44	`                record.put('DMS_Decided_At__c', System.now());`	Calls the named method: record.put('DMS_Decided_At__c', System.now());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
45	`            } else {`	Alternative branch taken when the preceding condition is false.
46	`                record.put('DMS_Status__c', 'Pending');`	Calls the named method: record.put('DMS_Status__c', 'Pending');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
47	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
50	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsSecondaryRouting.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsSecondaryRoutingTest.cls

Regression tests for DmsSecondaryRouting. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

152 numbered source lines | SHA-256 d37f9e4b27f017a09f8bc66ea1bc4bdd1ac7475727a2f969cea87a1d2b307327

Line	Source code	Explanation / reading note
1	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
2	`private class DmsSecondaryRoutingTest {`	Declares a class/type: private class DmsSecondaryRoutingTest {. Members below hold behavior and/or state.
3	`    @TestSetup`	Continues the surrounding declaration/expression or text: @TestSetup. Read it with the preceding opening statement (private class DmsSecondaryRoutingTest {); it is not a standalone business operation.
4	`    static void data() {`	Continues the surrounding declaration/expression or text: static void data() {. Read it with the preceding opening statement (@TestSetup); it is not a standalone business operation.
5	`        DMS_Distributor__c distributor = new DMS_Distributor__c(`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c distributor = new DMS_Distributor__c(. This is in-memory unless it is later persisted by an explicit call.
6	`            Name = 'Supplier',`	Assigns the right-hand expression to the named variable/property: Name = 'Supplier',. This is in-memory unless it is later persisted by an explicit call.
7	`            Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.
8	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
9	`        insert distributor;`	Performs Salesforce DML: insert distributor;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
10	`        insert new List<Retailer__c>{`	Performs Salesforce DML: insert new List<Retailer__c>{. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
11	`            new Retailer__c(`	Continues the surrounding declaration/expression or text: new Retailer__c(. Read it with the preceding opening statement (insert new List<Retailer__c>{); it is not a standalone business operation.

Line	Source code	Explanation / reading note
12	`Name = 'Mapped outlet',`	Assigns the right-hand expression to the named variable/property: Name = 'Mapped outlet',. This is in-memory unless it is later persisted by an explicit call.
13	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
14	`DMS_Distributor__c = distributor.Id`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c = distributor.Id. This is in-memory unless it is later persisted by an explicit call.
15	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
16	`new Retailer__c(Name = 'Unmapped outlet', Active__c = true)`	Assigns the right-hand expression to the named variable/property: new Retailer__c(Name = 'Unmapped outlet', Active__c = true). This is in-memory unless it is later persisted by an explicit call.
17	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`Employee__c employee = new Employee__c(`	Assigns the right-hand expression to the named variable/property: Employee__c employee = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
19	`Name = 'Routing employee',`	Assigns the right-hand expression to the named variable/property: Name = 'Routing employee',. This is in-memory unless it is later persisted by an explicit call.
20	`Phone__c = '9000000000',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000000',. This is in-memory unless it is later persisted by an explicit call.
21	`Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.
22	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
23	`insert employee;`	Performs Salesforce DML: insert employee;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
24	`Beat__c beat = new Beat__c(`	Assigns the right-hand expression to the named variable/property: Beat__c beat = new Beat__c(. This is in-memory unless it is later persisted by an explicit call.
25	`Name = 'Routing test beat',`	Assigns the right-hand expression to the named variable/property: Name = 'Routing test beat',. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
26	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
27	`Assigned_Employee__c = employee.Id`	Assigns the right-hand expression to the named variable/property: Assigned_Employee__c = employee.Id. This is in-memory unless it is later persisted by an explicit call.
28	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`insert beat;`	Performs Salesforce DML: insert beat;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
30	`Permanent_Journey_Plan__c plan = new Permanent_Journey_Plan__c(`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c plan = new Permanent_Journey_Plan__c(. This is in-memory unless it is later persisted by an explicit call.
31	`Name = 'Routing test plan',`	Assigns the right-hand expression to the named variable/property: Name = 'Routing test plan',. This is in-memory unless it is later persisted by an explicit call.
32	`Beat__c = beat.Id,`	Assigns the right-hand expression to the named variable/property: Beat__c = beat.Id,. This is in-memory unless it is later persisted by an explicit call.
33	`Planned_Date__c = Date.today(),`	Calls the named method: Planned_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
34	`Status__c = 'Draft'`	Assigns the right-hand expression to the named variable/property: Status__c = 'Draft'. This is in-memory unless it is later persisted by an explicit call.
35	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
36	`insert plan;`	Performs Salesforce DML: insert plan;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
37	`List<Visit__c> visits = new List<Visit__c>();`	Declares/initializes local data used by the surrounding operation: List<Visit__c> visits = new List<Visit__c>();. Collection contents and assignments below determine its purpose.
38	`for (Retailer__c outlet : [SELECT Id, Name FROM Retailer__c]) {`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c outlet : [SELECT Id, Name FROM Retailer__c]) {. Check where queries/writes occur relative to the loop.

Line	Source code	Explanation / reading note
39	`            visits.add(`	Calls the named method: visits.add(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
40	`                new Visit__c(`	Continues the surrounding declaration/expression or text: new Visit__c(. Read it with the preceding opening statement (visits.add(); it is not a standalone business operation.
41	`                    Name = outlet.Name + ' visit',`	Assigns the right-hand expression to the named variable/property: Name = outlet.Name + ' visit',. This is in-memory unless it is later persisted by an explicit call.
42	`                    Retailer__c = outlet.Id,`	Assigns the right-hand expression to the named variable/property: Retailer__c = outlet.Id,. This is in-memory unless it is later persisted by an explicit call.
43	`                    Permanent_Journey_Plan__c = plan.Id,`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c = plan.Id,. This is in-memory unless it is later persisted by an explicit call.
44	`                    Visit_Date__c = Date.today(),`	Calls the named method: Visit_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
45	`                    Status__c = 'Checked In'`	Assigns the right-hand expression to the named variable/property: Status__c = 'Checked In'. This is in-memory unless it is later persisted by an explicit call.
46	`                )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49	`        insert visits;`	Performs Salesforce DML: insert visits;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
50	`        insert new Product__c(`	Performs Salesforce DML: insert new Product__c(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
51	`            Name = 'Routing product',`	Assigns the right-hand expression to the named variable/property: Name = 'Routing product',. This is in-memory unless it is later persisted by an explicit call.
52	`            Product_Code__c = 'DMS-ROUTE',`	Assigns the right-hand expression to the named variable/property: Product_Code__c = 'DMS-ROUTE',. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
53	`            MRP__c = 20,`	Assigns the right-hand expression to the named variable/property: MRP__c = 20,. This is in-memory unless it is later persisted by an explicit call.
54	`            Retailer_Base_Price__c = 15,`	Assigns the right-hand expression to the named variable/property: Retailer_Base_Price__c = 15,. This is in-memory unless it is later persisted by an explicit call.
55	`            Units_Per_Case__c = 20`	Assigns the right-hand expression to the named variable/property: Units_Per_Case__c = 20. This is in-memory unless it is later persisted by an explicit call.
56	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
58	`    private static Map<Id, Id> visitByOutlet;`	Continues the surrounding declaration/expression or text: private static Map<Id, Id> visitByOutlet;. Read it with the preceding opening statement (}); it is not a standalone business operation.
59	`    private static Sales_Order__c orderFor(Id outlet, Id distributor) {`	Declares a callable function/method: private static Sales_Order__c orderFor(Id outlet, Id distributor) {. Parameters supply its inputs; the following block implements the operation.
60	`        if (visitByOutlet == null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visitByOutlet == null) {.
61	`            visitByOutlet = new Map<Id, Id>();`	Assigns the right-hand expression to the named variable/property: visitByOutlet = new Map<Id, Id>();. This is in-memory unless it is later persisted by an explicit call.
62	`            for (Visit__c visit : [SELECT Id, Retailer__c FROM Visit__c])`	Repeats work over the specified records/items or while this condition holds: for (Visit__c visit : [SELECT Id, Retailer__c FROM Visit__c]). Check where queries/writes occur relative to the loop.
63	`                visitByOutlet.put(visit.Retailer__c, visit.Id);`	Calls the named method: visitByOutlet.put(visit.Retailer__c, visit.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
64	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
65	`        return new Sales_Order__c(`	Returns new Sales_Order__c(to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
66	`            Retailer__c = outlet,`	Assigns the right-hand expression to the named variable/property: Retailer__c = outlet,. This is in-memory unless it is later persisted by an explicit call.
67	`            Visit__c = visitByOutlet.get(outlet),`	Calls the named method: Visit__c = visitByOutlet.get(outlet),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
68	`            Order_Date__c = Date.today(),`	Calls the named method: Order_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
69	`            DMS_Distributor__c = distributor`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c = distributor. This is in-memory unless it is later persisted by an explicit call.
70	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
71	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
72	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
73	`    static void routesOrdersAndReturns() {`	Continues the surrounding declaration/expression or text: static void routesOrdersAndReturns() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
74	`        Id outlet = [SELECT Id FROM Retailer__c WHERE Name = 'Mapped outlet'].Id;`	Declares/initializes local data used by the surrounding operation: Id outlet = [SELECT Id FROM Retailer__c WHERE Name = 'Mapped outlet'].Id;. Collection contents and assignments below determine its purpose.
75	`        Id distributor = [SELECT Id FROM DMS_Distributor__c LIMIT 1].Id;`	Declares/initializes local data used by the surrounding operation: Id distributor = [SELECT Id FROM DMS_Distributor__c LIMIT 1].Id;. Collection contents and assignments below determine its purpose.
76	`        List<Sales_Order__c> orders = new List<Sales_Order__c>();`	Declares/initializes local data used by the surrounding operation: List<Sales_Order__c> orders = new List<Sales_Order__c>();. Collection contents and assignments below determine its purpose.
77	`        for (Integer i = 0; i < 200; i++)`	Repeats work over the specified records/items or while this condition holds: for (Integer i = 0; i < 200; i++). Check where queries/writes occur relative to the loop.
78	`            orders.add(orderFor(outlet, null));`	Calls the named method: orders.add(orderFor(outlet, null));. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
79	`Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
80	`insert orders;`	Performs Salesforce DML: insert orders;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
81	`Product_Return__c returned = new Product_Return__c(`	Assigns the right-hand expression to the named variable/property: Product_Return__c returned = new Product_Return__c(. This is in-memory unless it is later persisted by an explicit call.
82	`Outlet__c = outlet,`	Assigns the right-hand expression to the named variable/property: Outlet__c = outlet,. This is in-memory unless it is later persisted by an explicit call.
83	`Product__c = [SELECT Id FROM Product__c LIMIT 1]`	Assigns the right-hand expression to the named variable/property: Product__c = [SELECT Id FROM Product__c LIMIT 1]. This is in-memory unless it is later persisted by an explicit call.
84	`.Id,`	Continues the surrounding declaration/expression or text: .Id,. Read it with the preceding opening statement (Product__c = [SELECT Id FROM Product__c LIMIT 1]); it is not a standalone business operation.
85	`Quantity__c = 2,`	Assigns the right-hand expression to the named variable/property: Quantity__c = 2,. This is in-memory unless it is later persisted by an explicit call.
86	`Return_Reason__c = 'Damaged'`	Assigns the right-hand expression to the named variable/property: Return_Reason__c = 'Damaged'. This is in-memory unless it is later persisted by an explicit call.
87	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
88	`insert returned;`	Performs Salesforce DML: insert returned;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
89	`Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
90	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
91	`200,`	Continues the surrounding declaration/expression or text: 200,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
92	`[`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (200,); it is not a standalone business operation.
93	`SELECT COUNT()`	Selects these Salesforce fields/aggregates: COUNT(). Query results are used in the surrounding assignment or loop.
94	`FROM Sales_Order__c`	Chooses the Salesforce object/subquery source: FROM Sales_Order__c.
95	`WHERE`	Adds a query/filter condition: WHERE. The complete condition determines which records are included.
96	`DMS_Distributor__c = :distributor`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c = :distributor. This is in-memory unless it is later persisted by an explicit call.
97	`AND DMS_Status__c = 'Approved'`	Adds a query/filter condition: AND DMS_Status__c = 'Approved'. The complete condition determines which records are included.
98	`AND DMS_Decided_At__c != NULL`	Adds a query/filter condition: AND DMS_Decided_At__c != NULL. The complete condition determines which records are included.
99	`]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
100	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
101	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
102	`'Automatically approved secondary order.',`	Continues the surrounding declaration/expression or text: 'Automatically approved secondary order.',. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
103	`[SELECT DMS_Decision_Notes__c FROM Sales_Order__c LIMIT 1].DMS_Decision_Notes__c`	Continues the surrounding declaration/expression or text: [SELECT DMS_Decision_Notes__c FROM Sales_Order__c LIMIT 1].DMS_Decision_Notes__c. Read it with the preceding opening statement ('Automatically approved secondary order.',); it is not a standalone business operation.
104	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
105	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
106	`            distributor,`	Continues the surrounding declaration/expression or text: distributor,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
107	`            [SELECT DMS_Distributor__c FROM Product_Return__c WHERE Id = :returned.Id]`	Assigns the right-hand expression to the named variable/property: [SELECT DMS_Distributor__c FROM Product_Return__c WHERE Id = :returned.Id]. This is in-memory unless it is later persisted by an explicit call.
108	`            .DMS_Distributor__c`	Continues the surrounding declaration/expression or text: .DMS_Distributor__c. Read it with the preceding opening statement ([SELECT DMS_Distributor__c FROM Product_Return__c WHERE Id = :returned.Id]); it is not a standalone business operation.
109	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
110	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
111	`            'Pending',`	Continues the surrounding declaration/expression or text: 'Pending',. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
112	`            [SELECT DMS_Status__c FROM Product_Return__c WHERE Id = :returned.Id].DMS_Status__c`	Assigns the right-hand expression to the named variable/property: [SELECT DMS_Status__c FROM Product_Return__c WHERE Id = :returned.Id].DMS_Status__c. This is in-memory unless it is later persisted by an explicit call.
113	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
114	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
115	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
116	`    static void keepsUnmappedSfaRecordsAndRejectsWrongSupplier() {`	Continues the surrounding declaration/expression or text: static void keepsUnmappedSfaRecordsAndRejectsWrongSupplier() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.

Line	Source code	Explanation / reading note
117	`Id unmapped = [SELECT Id FROM Retailer__c WHERE Name = 'Unmapped outlet'].Id;`	Declares/initializes local data used by the surrounding operation: Id unmapped = [SELECT Id FROM Retailer__c WHERE Name = 'Unmapped outlet'].Id;. Collection contents and assignments below determine its purpose.
118	`Sales_Order__c legacy = orderFor(unmapped, null);`	Assigns the right-hand expression to the named variable/property: Sales_Order__c legacy = orderFor(unmapped, null);. This is in-memory unless it is later persisted by an explicit call.
119	`insert legacy;`	Performs Salesforce DML: insert legacy;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
120	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
121	`null,`	Continues the surrounding declaration/expression or text: null,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
122	`[SELECT DMS_Distributor__c FROM Sales_Order__c WHERE Id = :legacy.Id].DMS_Distributor__c`	Assigns the right-hand expression to the named variable/property: [SELECT DMS_Distributor__c FROM Sales_Order__c WHERE Id = :legacy.Id].DMS_Distributor__c. This is in-memory unless it is later persisted by an explicit call.
123	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
124	`System.assertNotEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(. A mismatch fails the test.
125	`'Approved',`	Continues the surrounding declaration/expression or text: 'Approved',. Read it with the preceding opening statement (System.assertNotEquals(); it is not a standalone business operation.
126	`[SELECT DMS_Status__c FROM Sales_Order__c WHERE Id = :legacy.Id].DMS_Status__c`	Assigns the right-hand expression to the named variable/property: [SELECT DMS_Status__c FROM Sales_Order__c WHERE Id = :legacy.Id].DMS_Status__c. This is in-memory unless it is later persisted by an explicit call.
127	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
128	`Id supplier = [SELECT Id FROM DMS_Distributor__c LIMIT 1].Id;`	Declares/initializes local data used by the surrounding operation: Id supplier = [SELECT Id FROM DMS_Distributor__c LIMIT 1].Id;. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
129	`Database.SaveResult missingMapping = Database.insert(orderFor(unmapped, supplier), false);`	Performs Salesforce DML: Database.SaveResult missingMapping = Database.insert(orderFor(unmapped, supplier), false);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
130	`System.assertEquals(false, missingMapping.isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, missingMapping.isSuccess());. A mismatch fails the test.
131	`System.assert(missingMapping.getErrors()[0].getMessage().contains('Configure the outlet'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(missingMapping.getErrors()[0].getMessage().contains('Configure the outlet'));. A mismatch fails the test.
132	`DMS_Distributor__c other = new DMS_Distributor__c(`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c other = new DMS_Distributor__c(. This is in-memory unless it is later persisted by an explicit call.
133	`Name = 'Wrong supplier',`	Assigns the right-hand expression to the named variable/property: Name = 'Wrong supplier',. This is in-memory unless it is later persisted by an explicit call.
134	`Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.
135	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
136	`insert other;`	Performs Salesforce DML: insert other;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
137	`Id mapped = [SELECT Id FROM Retailer__c WHERE Name = 'Mapped outlet'].Id;`	Declares/initializes local data used by the surrounding operation: Id mapped = [SELECT Id FROM Retailer__c WHERE Name = 'Mapped outlet'].Id;. Collection contents and assignments below determine its purpose.
138	`Database.SaveResult wrongSupplier = Database.insert(orderFor(mapped, other.Id), false);`	Performs Salesforce DML: Database.SaveResult wrongSupplier = Database.insert(orderFor(mapped, other.Id), false);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
139	`System.assertEquals(false, wrongSupplier.isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, wrongSupplier.isSuccess());. A mismatch fails the test.
140	`System.assert(wrongSupplier.getErrors()[0].getMessage().contains('must match'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(wrongSupplier.getErrors()[0].getMessage().contains('must match'));. A mismatch fails the test.

Line	Source code	Explanation / reading note
141	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
142	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
143	`    static void rejectsInactiveSupplier() {`	Continues the surrounding declaration/expression or text: static void rejectsInactiveSupplier() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
144	`        DMS_Distributor__c supplier = [SELECT Id FROM DMS_Distributor__c LIMIT 1];`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c supplier = [SELECT Id FROM DMS_Distributor__c LIMIT 1];. This is in-memory unless it is later persisted by an explicit call.
145	`        supplier.Active__c = false;`	Assigns the right-hand expression to the named variable/property: supplier.Active__c = false;. This is in-memory unless it is later persisted by an explicit call.
146	`        update supplier;`	Performs Salesforce DML: update supplier;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
147	`        Id outlet = [SELECT Id FROM Retailer__c WHERE Name = 'Mapped outlet'].Id;`	Declares/initializes local data used by the surrounding operation: Id outlet = [SELECT Id FROM Retailer__c WHERE Name = 'Mapped outlet'].Id;. Collection contents and assignments below determine its purpose.
148	`        Database.SaveResult inactive = Database.insert(orderFor(outlet, null), false);`	Performs Salesforce DML: Database.SaveResult inactive = Database.insert(orderFor(outlet, null), false);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
149	`        System.assertEquals(false, inactive.isSuccess());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, inactive.isSuccess());. A mismatch fails the test.
150	`        System.assert(inactive.getErrors()[0].getMessage().contains('inactive'));`	Test assertion comparing an expected outcome to actual behavior: System.assert(inactive.getErrors()[0].getMessage().contains('inactive'));. A mismatch fails the test.
151	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
152	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsSecondaryRoutingTest.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsTicketRules.cls

Validates distributor support tickets, assigns officer/owner, enforces legal status transitions and requires resolution for terminal states.

59 numbered source lines | SHA-256 096f424c2f568dbef34f5e034f248e645bbbfe9f94d86603b142621a865b2c4e

Line	Source code	Explanation / reading note
1	`/** Ticket lifecycle is enforced in Salesforce, including edits made in the UI. */`	Developer comment/documentation: Ticket lifecycle is enforced in Salesforce, including edits made in the UI. */ It is not executed.
2	`public with sharing class DmsTicketRules {`	Declares a class/type: public with sharing class DmsTicketRules {. Uses record sharing, which does not alone enforce field/object permissions.
3	`    public static void validate(`	Declares a callable function/method: public static void validate(. Parameters supply its inputs; the following block implements the operation.
4	`        List<DMS_Support_Ticket__c> tickets,`	Declares/initializes local data used by the surrounding operation: List<DMS_Support_Ticket__c> tickets,. Collection contents and assignments below determine its purpose.
5	`        Map<Id, DMS_Support_Ticket__c> oldRows`	Declares/initializes local data used by the surrounding operation: Map<Id, DMS_Support_Ticket__c> oldRows. Collection contents and assignments below determine its purpose.
6	`    ) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (Map<Id, DMS_Support_Ticket__c> oldRows); it is not a standalone business operation.
7	`        Set<Id> ids = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> ids = new Set<Id>();. Collection contents and assignments below determine its purpose.
8	`        for (DMS_Support_Ticket__c row : tickets)`	Repeats work over the specified records/items or while this condition holds: for (DMS_Support_Ticket__c row : tickets). Check where queries/writes occur relative to the loop.
9	`            ids.add(row.Distributor__c);`	Calls the named method: ids.add(row.Distributor__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
10	`        Map<Id, DMS_Distributor__c> distributors = new Map<Id, DMS_Distributor__c>(`	Declares/initializes local data used by the surrounding operation: Map<Id, DMS_Distributor__c> distributors = new Map<Id, DMS_Distributor__c>(. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
11	`[SELECT Id, Active__c, Officer__c FROM DMS_Distributor__c WHERE Id IN :ids]`	Continues the surrounding declaration/expression or text: [SELECT Id, Active__c, Officer__c FROM DMS_Distributor__c WHERE Id IN :ids]. Read it with the preceding opening statement (Map<Id, DMS_Distributor__c> distributors = new Map<Id, DMS_Distributor__c>(); it is not a standalone business operation.
12	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13	`for (DMS_Support_Ticket__c row : tickets) {`	Repeats work over the specified records/items or while this condition holds: for (DMS_Support_Ticket__c row : tickets) {. Check where queries/writes occur relative to the loop.
14	`DMS_Distributor__c distributor = distributors.get(row.Distributor__c);`	Calls the named method: DMS_Distributor__c distributor = distributors.get(row.Distributor__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
15	`if (distributor == null || !distributor.Active__c) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (distributor == null || !distributor.Active__c) {.
16	`row.addError('Choose an active distributor.');`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
17	`continue;`	Skips the remainder of the current loop iteration and moves to the next item.
18	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`if (oldRows == null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (oldRows == null) {.
20	`row.Status__c = 'Open';`	Assigns the right-hand expression to the named variable/property: row.Status__c = 'Open';. This is in-memory unless it is later persisted by an explicit call.
21	`row.Officer__c = distributor.Officer__c;`	Assigns the right-hand expression to the named variable/property: row.Officer__c = distributor.Officer__c;. This is in-memory unless it is later persisted by an explicit call.
22	`if (row.Officer__c != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (row.Officer__c != null).
23	`row.OwnerId = row.Officer__c;`	Assigns the right-hand expression to the named variable/property: row.OwnerId = row.Officer__c;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
24	`} else {`	Alternative branch taken when the preceding condition is false.
25	`DMS_Support_Ticket__c previous = oldRows.get(row.Id);`	Calls the named method: DMS_Support_Ticket__c previous = oldRows.get(row.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
26	`if (previous.Distributor__c != row.Distributor__c)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (previous.Distributor__c != row.Distributor__c).
27	`row.addError('The ticket distributor cannot be changed.');`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
28	`if (previous.Status__c != row.Status__c) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (previous.Status__c != row.Status__c) {.
29	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
30	`UserInfo.getUserId() != previous.Officer__c &&`	Calls the named method: UserInfo.getUserId() != previous.Officer__c &&. Its implementation defines the side effect/result; use the symbol/file index to follow it.
31	`!FeatureManagement.checkPermission('DMS_Manage_Tickets')`	Calls the named method: !FeatureManagement.checkPermission('DMS_Manage_Tickets'). Its implementation defines the side effect/result; use the symbol/file index to follow it.
32	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`row.addError(`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
34	`'Only the assigned company officer or an authorised support administrator can change ticket status.'`	Continues the surrounding declaration/expression or text: 'Only the assigned company officer or an authorised support administrator can change ticket status.'. Read it with the preceding opening statement (row.addError(); it is not a standalone business operation.
35	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
36	`Boolean allowed =`	Declares/initializes local data used by the surrounding operation: Boolean allowed =. Collection contents and assignments below determine its purpose.
37	`(previous.Status__c == 'Open' &&`	Continues the surrounding declaration/expression or text: (previous.Status__c == 'Open' &&. Read it with the preceding opening statement (Boolean allowed =); it is not a standalone business operation.

Line	Source code	Explanation / reading note
38	`new Set<String>{ 'In Progress', 'Rejected' }.contains(row.Status__c)) ||`	Continues the surrounding declaration/expression or text: new Set<String>{ 'In Progress', 'Rejected' }.contains(row.Status__c)) ||. Read it with the preceding opening statement ((previous.Status__c == 'Open' &&); it is not a standalone business operation.
39	`(previous.Status__c == 'In Progress' &&`	Continues the surrounding declaration/expression or text: (previous.Status__c == 'In Progress' &&. Read it with the preceding opening statement (new Set<String>{ 'In Progress', 'Rejected' }.contains(row.Status__c)) ||); it is not a standalone business operation.
40	`new Set<String>{ 'Closed', 'Rejected' }.contains(row.Status__c));`	Continues the surrounding declaration/expression or text: new Set<String>{ 'Closed', 'Rejected' }.contains(row.Status__c));. Read it with the preceding opening statement ((previous.Status__c == 'In Progress' &&); it is not a standalone business operation.
41	`if (!allowed)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!allowed).
42	`row.addError(`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
43	`'Use Open, then In Progress, then Closed; reject only an open or in-progress ticket.'`	Continues the surrounding declaration/expression or text: 'Use Open, then In Progress, then Closed; reject only an open or in-progress ticket.'. Read it with the preceding opening statement (row.addError(); it is not a standalone business operation.
44	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
45	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
46	`new Set<String>{ 'Closed', 'Rejected' }.contains(row.Status__c) &&`	Continues the surrounding declaration/expression or text: new Set<String>{ 'Closed', 'Rejected' }.contains(row.Status__c) &&. Read it with the preceding opening statement (if (); it is not a standalone business operation.
47	`String.isBlank(row.Resolution__c)`	Declares/initializes local data used by the surrounding operation: String.isBlank(row.Resolution__c). Collection contents and assignments below determine its purpose.
48	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49	`row.addError('Enter a resolution or rejection reason.');`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.

Line	Source code	Explanation / reading note
50	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
51	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
52	`new Set<String>{ 'Closed', 'Rejected' }.contains(row.Status__c) &&`	Continues the surrounding declaration/expression or text: new Set<String>{ 'Closed', 'Rejected' }.contains(row.Status__c) &&. Read it with the preceding opening statement (if (); it is not a standalone business operation.
53	`String.isBlank(row.Resolution__c)`	Declares/initializes local data used by the surrounding operation: String.isBlank(row.Resolution__c). Collection contents and assignments below determine its purpose.
54	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
55	`row.addError('Keep a resolution or rejection reason on completed tickets.');`	Marks the incoming Salesforce record invalid with this message; its save fails rather than silently accepting the bad state.
56	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
58	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
59	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsTicketRules.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsTransactionApi.cls

Older separate Apex REST endpoint for primary orders and secondary decisions. Current DmsTransport uses DmsPortalApi instead. Compile repairs do not remove its remaining security/test review needs.

205 numbered source lines | SHA-256 bda3ae15b43733c200ca5aca971290590a686d6adbeaaf255bbe5017eba92087

Line	Source code	Explanation / reading note
1	`/** Transaction boundary for the trusted backend. No inventory writes occur here. */`	Developer comment/documentation: Transaction boundary for the trusted backend. No inventory writes occur here. */ It is not executed.
2	`@RestResource(urlMapping='/dms/transactions/*')`	Registers the Apex REST URL mapping; authentication/authorization must still be enforced.
3	`global with sharing class DmsTransactionApi {`	Declares a class/type: global with sharing class DmsTransactionApi {. Uses record sharing, which does not alone enforce field/object permissions.
4	`    public class InputException extends Exception {`	Declares a class/type: public class InputException extends Exception {. Members below hold behavior and/or state.
5	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
6	`    public class LineInput {`	Declares a class/type: public class LineInput {. Members below hold behavior and/or state.
7	`        public Id productId;`	Continues the surrounding declaration/expression or text: public Id productId;. Read it with the preceding opening statement (public class LineInput {); it is not a standalone business operation.
8	`        public Decimal cases;`	Continues the surrounding declaration/expression or text: public Decimal cases;. Read it with the preceding opening statement (public Id productId;); it is not a standalone business operation.
9	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`    public class RequestBody {`	Declares a class/type: public class RequestBody {. Members below hold behavior and/or state.
11	`        public String action;`	Continues the surrounding declaration/expression or text: public String action;. Read it with the preceding opening statement (public class RequestBody {); it is not a standalone business operation.

Line	Source code	Explanation / reading note
12	`public Id employeeId;`	Continues the surrounding declaration/expression or text: public Id employeeId;. Read it with the preceding opening statement (public String action;); it is not a standalone business operation.
13	`public Id distributorId;`	Continues the surrounding declaration/expression or text: public Id distributorId;. Read it with the preceding opening statement (public Id employeeId;); it is not a standalone business operation.
14	`public Id orderId;`	Continues the surrounding declaration/expression or text: public Id orderId;. Read it with the preceding opening statement (public Id distributorId;); it is not a standalone business operation.
15	`public String requestKey;`	Continues the surrounding declaration/expression or text: public String requestKey;. Read it with the preceding opening statement (public Id orderId;); it is not a standalone business operation.
16	`public String decision;`	Continues the surrounding declaration/expression or text: public String decision;. Read it with the preceding opening statement (public String requestKey;); it is not a standalone business operation.
17	`public String notes;`	Continues the surrounding declaration/expression or text: public String notes;. Read it with the preceding opening statement (public String decision;); it is not a standalone business operation.
18	`public List<LineInput> lines;`	Continues the surrounding declaration/expression or text: public List<LineInput> lines;. Read it with the preceding opening statement (public String notes;); it is not a standalone business operation.
19	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20	`@HttpPost`	Associates the following Apex method with the indicated HTTP verb.
21	`global static void execute() {`	Declares a callable function/method: global static void execute() {. Parameters supply its inputs; the following block implements the operation.
22	`RestContext.response.addHeader('Content-Type', 'application/json');`	Calls the named method: RestContext.response.addHeader('Content-Type', 'application/json');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
23	`RestContext.response.responseBody = Blob.valueOf(JSON.serialize(handle()));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.

Line	Source code	Explanation / reading note
24	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
25		Blank line separating logical sections; no executable operation.
26	`    // Keep the existing JSON success/error envelope while using a valid Apex REST signature.`	Developer comment/documentation: Keep the existing JSON success/error envelope while using a valid Apex REST signature. It is not executed.
27	`    private static Map<String, Object> handle() {`	Declares a callable function/method: private static Map<String, Object> handle() {. Parameters supply its inputs; the following block implements the operation.
28	`        Savepoint checkpoint = Database.setSavepoint();`	Creates a transaction checkpoint so later failure can roll back all command changes.
29	`        try {`	Starts operations whose failure is handled by the following catch/finally blocks.
30	`            RequestBody request = (RequestBody) JSON.deserialize(`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
31	`                RestContext.request.requestBody.toString(),`	Calls the named method: RestContext.request.requestBody.toString(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
32	`                RequestBody.class`	Continues the surrounding declaration/expression or text: RequestBody.class. Read it with the preceding opening statement (RestContext.request.requestBody.toString(),); it is not a standalone business operation.
33	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`            if (request.action == 'primaryOrder')`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (request.action == 'primaryOrder').
35	`                return createPrimary(request);`	Returns createPrimary(request) to the caller (or begins returned UI markup) and ends this execution path.
36	`            if (request.action == 'secondaryDecision')`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (request.action == 'secondaryDecision').
37	`                return decideSecondary(request);`	Returns decideSecondary(request) to the caller (or begins returned UI markup) and ends this execution path.
38	`            throw new InputException('Unknown transaction.');`	Stops this execution path with a validation/error exception: throw new InputException('Unknown transaction.');. The caller/catch block decides how it is reported.

Line	Source code	Explanation / reading note
39	`        } catch (Exception error) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
40	`            Database.rollback(checkpoint);`	Rolls Salesforce writes back to the saved checkpoint; prevents partial command results.
41	`            RestContext.response.statusCode = 400;`	Assigns the right-hand expression to the named variable/property: RestContext.response.statusCode = 400;. This is in-memory unless it is later persisted by an explicit call.
42	`            return new Map<String, Object>{`	Returns new Map<String, Object>{ to the caller (or begins returned UI markup) and ends this execution path.
43	`                'error' => error instanceof InputException`	Continues the surrounding declaration/expression or text: 'error' => error instanceof InputException. Read it with the preceding opening statement (return new Map<String, Object>{); it is not a standalone business operation.
44	`                    ? error.getMessage()`	Calls the named method: ? error.getMessage(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
45	`                    : 'The Salesforce transaction could not be completed. Ask the administrator to check configuration and access.'`	Continues the surrounding declaration/expression or text: : 'The Salesforce transaction could not be completed. Ask the administrator to check configuration and access.'. Read it with the preceding opening statement (? error.getMessage()); it is not a standalone business operation.
46	`            };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49	`    public static Map<String, Object> createPrimary(RequestBody request) {`	Declares a callable function/method: public static Map<String, Object> createPrimary(RequestBody request) {. Parameters supply its inputs; the following block implements the operation.
50	`        if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.

Line	Source code	Explanation / reading note
51	`String.isBlank(request.requestKey) ||`	Declares/initializes local data used by the surrounding operation: String.isBlank(request.requestKey) ||. Collection contents and assignments below determine its purpose.
52	`!Pattern.matches('[A-Za-z0-9-]{16,80}', request.requestKey)`	Calls the named method: !Pattern.matches('[A-Za-z0-9-]{16,80}', request.requestKey). Its implementation defines the side effect/result; use the symbol/file index to follow it.
53	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
54	`throw new InputException('A valid request key is required.');`	Stops this execution path with a validation/error exception: throw new InputException('A valid request key is required.');. The caller/catch block decides how it is reported.
55	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
56	`[SELECT COUNT() FROM Employee__c WHERE Id = :request.employeeId AND Active__c = TRUE] !=`	Assigns the right-hand expression to the named variable/property: [SELECT COUNT() FROM Employee__c WHERE Id = :request.employeeId AND Active__c = TRUE] !=. This is in-memory unless it is later persisted by an explicit call.
57	`1`	Continues the surrounding declaration/expression or text: 1. Read it with the preceding opening statement ([SELECT COUNT() FROM Employee__c WHERE Id = :request.employeeId AND Active__c = TRUE] !=); it is not a standalone business operation.
58	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
59	`throw new InputException('Employee is not active.');`	Stops this execution path with a validation/error exception: throw new InputException('Employee is not active.');. The caller/catch block decides how it is reported.
60	`List<DMS_Primary_Order__c> existing = [`	Declares/initializes local data used by the surrounding operation: List<DMS_Primary_Order__c> existing = [. Collection contents and assignments below determine its purpose.
61	`SELECT Id, Status__c, Employee__c`	Selects these Salesforce fields/aggregates: Id, Status__c, Employee__c. Query results are used in the surrounding assignment or loop.
62	`FROM DMS_Primary_Order__c`	Chooses the Salesforce object/subquery source: FROM DMS_Primary_Order__c.
63	`WHERE Request_Key__c = :request.requestKey`	Adds a query/filter condition: WHERE Request_Key__c = :request.requestKey. The complete condition determines which records are included.

Line	Source code	Explanation / reading note
64	`            LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
65	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
66	`        if (!existing.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!existing.isEmpty()) {.
67	`            if (existing[0].Employee__c != request.employeeId)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (existing[0].Employee__c != request.employeeId).
68	`                throw new InputException('Request key belongs to another employee.');`	Stops this execution path with a validation/error exception: throw new InputException('Request key belongs to another employee.');. The caller/catch block decides how it is reported.
69	`            return new Map<String, Object>{`	Returns new Map<String, Object>{ to the caller (or begins returned UI markup) and ends this execution path.
70	`                'id' => existing[0].Id,`	Continues the surrounding declaration/expression or text: 'id' => existing[0].Id,. Read it with the preceding opening statement (return new Map<String, Object>{); it is not a standalone business operation.
71	`                'status' => existing[0].Status__c`	Continues the surrounding declaration/expression or text: 'status' => existing[0].Status__c. Read it with the preceding opening statement ('id' => existing[0].Id,); it is not a standalone business operation.
72	`            };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
73	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
74	`        List<DMS_Distributor__c> distributors = [`	Declares/initializes local data used by the surrounding operation: List<DMS_Distributor__c> distributors = [. Collection contents and assignments below determine its purpose.
75	`            SELECT Id, Officer__c, Officer__r.IsActive`	Selects these Salesforce fields/aggregates: Id, Officer__c, Officer__r.IsActive. Query results are used in the surrounding assignment or loop.
76	`            FROM DMS_Distributor__c`	Chooses the Salesforce object/subquery source: FROM DMS_Distributor__c.
77	`            WHERE Id = :request.distributorId AND Active__c = TRUE`	Adds a query/filter condition: WHERE Id = :request.distributorId AND Active__c = TRUE. The complete condition determines which records are included.

Line	Source code	Explanation / reading note
78	`            LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
79	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
80	`        if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
81	`            distributors.isEmpty() ||`	Calls the named method: distributors.isEmpty() ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
82	`            distributors[0].Officer__c == null ||`	Continues the surrounding declaration/expression or text: distributors[0].Officer__c == null ||. Read it with the preceding opening statement (distributors.isEmpty() ||); it is not a standalone business operation.
83	`            !distributors[0].Officer__r.IsActive`	Continues the surrounding declaration/expression or text: !distributors[0].Officer__r.IsActive. Read it with the preceding opening statement (distributors[0].Officer__c == null ||); it is not a standalone business operation.
84	`        )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
85	`            throw new InputException('The distributor needs an active company officer.');`	Stops this execution path with a validation/error exception: throw new InputException('The distributor needs an active company officer.');. The caller/catch block decides how it is reported.
86	`        Set<Id> outlets = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> outlets = new Set<Id>();. Collection contents and assignments below determine its purpose.
87	`        for (Distributor_Outlet_Allocation__c allocation : [`	Repeats work over the specified records/items or while this condition holds: for (Distributor_Outlet_Allocation__c allocation : [. Check where queries/writes occur relative to the loop.
88	`            SELECT Outlet__c`	Selects these Salesforce fields/aggregates: Outlet__c. Query results are used in the surrounding assignment or loop.
89	`            FROM Distributor_Outlet_Allocation__c`	Chooses the Salesforce object/subquery source: FROM Distributor_Outlet_Allocation__c.
90	`            WHERE Employee__c = :request.employeeId AND Allocation_Status__c = 'Active'`	Adds a query/filter condition: WHERE Employee__c = :request.employeeId AND Allocation_Status__c = 'Active'. The complete condition determines which records are included.

Line	Source code	Explanation / reading note
91	`        ])`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
92	`            outlets.add(allocation.Outlet__c);`	Calls the named method: outlets.add(allocation.Outlet__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
93	`        if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
94	`            [`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (if (); it is not a standalone business operation.
95	`                SELECT COUNT()`	Selects these Salesforce fields/aggregates: COUNT(). Query results are used in the surrounding assignment or loop.
96	`                FROM Retailer__c`	Chooses the Salesforce object/subquery source: FROM Retailer__c.
97	`                WHERE Id IN :outlets AND DMS_Distributor__c = :request.distributorId`	Adds a query/filter condition: WHERE Id IN :outlets AND DMS_Distributor__c = :request.distributorId. The complete condition determines which records are included.
98	`            ] == 0`	Continues the surrounding declaration/expression or text:] == 0. Read it with the preceding opening statement (WHERE Id IN :outlets AND DMS_Distributor__c = :request.distributorId); it is not a standalone business operation.
99	`        )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
100	`            throw new InputException('This distributor is not linked to your allocated outlets.');`	Stops this execution path with a validation/error exception: throw new InputException('This distributor is not linked to your allocated outlets.');. The caller/catch block decides how it is reported.
101	`        if (request.lines == null || request.lines.isEmpty() || request.lines.size() > 50)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (request.lines == null || request.lines.isEmpty() || request.lines.size() > 50).
102	`            throw new InputException('Add between 1 and 50 products.');`	Stops this execution path with a validation/error exception: throw new InputException('Add between 1 and 50 products.');. The caller/catch block decides how it is reported.
103	`        Set<Id> productIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> productIds = new Set<Id>();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
104	`        for (LineInput line : request.lines) {`	Repeats work over the specified records/items or while this condition holds: for (LineInput line : request.lines) {. Check where queries/writes occur relative to the loop.
105	`            if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
106	`                line.productId == null ||`	Continues the surrounding declaration/expression or text: line.productId == null ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
107	`                line.cases == null ||`	Continues the surrounding declaration/expression or text: line.cases == null ||. Read it with the preceding opening statement (line.productId == null ||); it is not a standalone business operation.
108	`                line.cases <= 0 ||`	Continues the surrounding declaration/expression or text: line.cases <= 0 ||. Read it with the preceding opening statement (line.cases == null ||); it is not a standalone business operation.
109	`                line.cases > 100000 ||`	Continues the surrounding declaration/expression or text: line.cases > 100000 ||. Read it with the preceding opening statement (line.cases <= 0 ||); it is not a standalone business operation.
110	`                line.cases != line.cases.setScale(0)`	Calls the named method: line.cases != line.cases.setScale(0). Its implementation defines the side effect/result; use the symbol/file index to follow it.
111	`            )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
112	`                throw new InputException('Cases must be positive whole numbers, up to 100000.');`	Stops this execution path with a validation/error exception: throw new InputException('Cases must be positive whole numbers, up to 100000.');. The caller/catch block decides how it is reported.
113	`            if (productIds.contains(line.productId))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (productIds.contains(line.productId)).
114	`                throw new InputException('Combine repeated products into one line.');`	Stops this execution path with a validation/error exception: throw new InputException('Combine repeated products into one line.');. The caller/catch block decides how it is reported.
115	`            productIds.add(line.productId);`	Calls the named method: productIds.add(line.productId);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
116	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
117	`        Map<Id, Product__c> products = new Map<Id, Product__c>(`	Declares/initializes local data used by the surrounding operation: Map<Id, Product__c> products = new Map<Id, Product__c>(. Collection contents and assignments below determine its purpose.
118	`            [`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (Map<Id, Product__c> products = new Map<Id, Product__c>(); it is not a standalone business operation.
119	`                SELECT Id, Name, DMS_Case_Price__c, Units_Per_Case__c, GST_Percent__c`	Selects these Salesforce fields/aggregates: Id, Name, DMS_Case_Price__c, Units_Per_Case__c, GST_Percent__c. Query results are used in the surrounding assignment or loop.
120	`                FROM Product__c`	Chooses the Salesforce object/subquery source: FROM Product__c.
121	`                WHERE Id IN :productIds AND Active__c = TRUE AND Sellable__c = TRUE`	Adds a query/filter condition: WHERE Id IN :productIds AND Active__c = TRUE AND Sellable__c = TRUE. The complete condition determines which records are included.
122	`            ]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
123	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
124	`        List<DMS_Primary_Order_Line__c> lines = new List<DMS_Primary_Order_Line__c>();`	Declares/initializes local data used by the surrounding operation: List<DMS_Primary_Order_Line__c> lines = new List<DMS_Primary_Order_Line__c>();. Collection contents and assignments below determine its purpose.
125	`        Decimal total = 0;`	Declares/initializes local data used by the surrounding operation: Decimal total = 0;. Collection contents and assignments below determine its purpose.
126	`        for (LineInput input : request.lines) {`	Repeats work over the specified records/items or while this condition holds: for (LineInput input : request.lines) {. Check where queries/writes occur relative to the loop.
127	`            Product__c product = products.get(input.productId);`	Calls the named method: Product__c product = products.get(input.productId);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
128	`            if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
129	`                product == null ||`	Continues the surrounding declaration/expression or text: product == null ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.

Line	Source code	Explanation / reading note
130	`product.DMS_Case_Price__c == null ||`	Continues the surrounding declaration/expression or text: product.DMS_Case_Price__c == null ||. Read it with the preceding opening statement (product == null ||); it is not a standalone business operation.
131	`product.DMS_Case_Price__c <= 0 ||`	Continues the surrounding declaration/expression or text: product.DMS_Case_Price__c <= 0 ||. Read it with the preceding opening statement (product.DMS_Case_Price__c == null ||); it is not a standalone business operation.
132	`product.Units_Per_Case__c == null ||`	Continues the surrounding declaration/expression or text: product.Units_Per_Case__c == null ||. Read it with the preceding opening statement (product.DMS_Case_Price__c <= 0 ||); it is not a standalone business operation.
133	`product.Units_Per_Case__c <= 0 ||`	Continues the surrounding declaration/expression or text: product.Units_Per_Case__c <= 0 ||. Read it with the preceding opening statement (product.Units_Per_Case__c == null ||); it is not a standalone business operation.
134	`product.Units_Per_Case__c != product.Units_Per_Case__c.setScale(0)`	Calls the named method: product.Units_Per_Case__c != product.Units_Per_Case__c.setScale(0). Its implementation defines the side effect/result; use the symbol/file index to follow it.
135	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
136	`throw new InputException(`	Stops this execution path with a validation/error exception: throw new InputException(. The caller/catch block decides how it is reported.
137	`'Each product needs a positive Primary Case Price and whole Units Per Case in Salesforce.'`	Continues the surrounding declaration/expression or text: 'Each product needs a positive Primary Case Price and whole Units Per Case in Salesforce.'. Read it with the preceding opening statement (throw new InputException(); it is not a standalone business operation.
138	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
139	`Decimal tax = product.GST_Percent__c == null ? 0 : product.GST_Percent__c;`	Declares/initializes local data used by the surrounding operation: Decimal tax = product.GST_Percent__c == null ? 0 : product.GST_Percent__c;. Collection contents and assignments below determine its purpose.
140	`total += (input.cases * product.DMS_Case_Price__c * (1 + tax / 100)).setScale(2);`	Assigns the right-hand expression to the named variable/property: total += (input.cases * product.DMS_Case_Price__c * (1 + tax / 100)).setScale(2);. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
141	`lines.add(`	Calls the named method: lines.add(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
142	`new DMS_Primary_Order_Line__c(`	Continues the surrounding declaration/expression or text: new DMS_Primary_Order_Line__c(. Read it with the preceding opening statement (lines.add(); it is not a standalone business operation.
143	`Product__c = product.Id,`	Assigns the right-hand expression to the named variable/property: Product__c = product.Id,. This is in-memory unless it is later persisted by an explicit call.
144	`Cases__c = input.cases,`	Assigns the right-hand expression to the named variable/property: Cases__c = input.cases,. This is in-memory unless it is later persisted by an explicit call.
145	`Pieces_Per_Case__c = product.Units_Per_Case__c,`	Assigns the right-hand expression to the named variable/property: Pieces_Per_Case__c = product.Units_Per_Case__c,. This is in-memory unless it is later persisted by an explicit call.
146	`Case_Price__c = product.DMS_Case_Price__c,`	Assigns the right-hand expression to the named variable/property: Case_Price__c = product.DMS_Case_Price__c,. This is in-memory unless it is later persisted by an explicit call.
147	`Tax_Percent__c = tax`	Assigns the right-hand expression to the named variable/property: Tax_Percent__c = tax. This is in-memory unless it is later persisted by an explicit call.
148	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
149	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
150	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
151	`DMS_Primary_Order__c order = new DMS_Primary_Order__c(`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order__c order = new DMS_Primary_Order__c(. This is in-memory unless it is later persisted by an explicit call.
152	`Distributor__c = request.distributorId,`	Assigns the right-hand expression to the named variable/property: Distributor__c = request.distributorId,. This is in-memory unless it is later persisted by an explicit call.
153	`Employee__c = request.employeeId,`	Assigns the right-hand expression to the named variable/property: Employee__c = request.employeeId,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
154	`Officer__c = distributors[0].Officer__c,`	Assigns the right-hand expression to the named variable/property: Officer__c = distributors[0].Officer__c,. This is in-memory unless it is later persisted by an explicit call.
155	`Request_Key__c = request.requestKey,`	Assigns the right-hand expression to the named variable/property: Request_Key__c = request.requestKey,. This is in-memory unless it is later persisted by an explicit call.
156	`Notes__c = request.notes,`	Assigns the right-hand expression to the named variable/property: Notes__c = request.notes,. This is in-memory unless it is later persisted by an explicit call.
157	`Status__c = 'Draft',`	Assigns the right-hand expression to the named variable/property: Status__c = 'Draft',. This is in-memory unless it is later persisted by an explicit call.
158	`Total_Amount__c = total`	Assigns the right-hand expression to the named variable/property: Total_Amount__c = total. This is in-memory unless it is later persisted by an explicit call.
159	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
160	`insert order;`	Performs Salesforce DML: insert order;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
161	`for (DMS_Primary_Order_Line__c line : lines)`	Repeats work over the specified records/items or while this condition holds: for (DMS_Primary_Order_Line__c line : lines). Check where queries/writes occur relative to the loop.
162	`line.Order__c = order.Id;`	Assigns the right-hand expression to the named variable/property: line.Order__c = order.Id;. This is in-memory unless it is later persisted by an explicit call.
163	`insert lines;`	Performs Salesforce DML: insert lines;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
164	`Approval.ProcessSubmitRequest approvalRequest = new Approval.ProcessSubmitRequest();`	Calls the named method: Approval.ProcessSubmitRequest approvalRequest = new Approval.ProcessSubmitRequest();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
165	`approvalRequest.setObjectId(order.Id);`	Calls the named method: approvalRequest.setObjectId(order.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
166	`approvalRequest.setProcessDefinitionNameOrId('Company_Officer_Approval');`	Calls the named method: approvalRequest.setProcessDefinitionNameOrId('Company_Officer_Approval');. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
167	`        Approval.ProcessResult result = Approval.process(approvalRequest);`	Submits the configured Salesforce approval request. Inspect the returned result before claiming submission succeeded.
168	`        if (!result.isSuccess())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!result.isSuccess()).
169	`            throw new InputException('Unable to submit to the company officer.');`	Stops this execution path with a validation/error exception: throw new InputException('Unable to submit to the company officer.');. The caller/catch block decides how it is reported.
170	`        return new Map<String, Object>{ 'id' => order.Id, 'status' => 'Submitted' };`	Returns new Map<String, Object>{ 'id' => order.Id, 'status' => 'Submitted' } to the caller (or begins returned UI markup) and ends this execution path.
171	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
172	`    public static Map<String, Object> decideSecondary(RequestBody request) {`	Declares a callable function/method: public static Map<String, Object> decideSecondary(RequestBody request) {. Parameters supply its inputs; the following block implements the operation.
173	`        if (!new Set<String>{ 'Approved', 'Rejected' }.contains(request.decision))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!new Set<String>{ 'Approved', 'Rejected' }.contains(request.decision)).
174	`            throw new InputException('Choose Approve or Reject.');`	Stops this execution path with a validation/error exception: throw new InputException('Choose Approve or Reject.');. The caller/catch block decides how it is reported.
175	`        if (request.decision == 'Rejected' && String.isBlank(request.notes))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (request.decision == 'Rejected' && String.isBlank(request.notes)).
176	`            throw new InputException('Enter a rejection reason.');`	Stops this execution path with a validation/error exception: throw new InputException('Enter a rejection reason.');. The caller/catch block decides how it is reported.
177	`        if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
178	`            [`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (if (); it is not a standalone business operation.
179	`                SELECT COUNT()`	Selects these Salesforce fields/aggregates: COUNT(). Query results are used in the surrounding assignment or loop.

Line	Source code	Explanation / reading note
180	`                FROM DMS_Distributor__c`	Chooses the Salesforce object/subquery source: FROM DMS_Distributor__c.
181	`                WHERE Id = :request.distributorId AND Active__c = TRUE`	Adds a query/filter condition: WHERE Id = :request.distributorId AND Active__c = TRUE. The complete condition determines which records are included.
182	`            ] != 1`	Continues the surrounding declaration/expression or text:] != 1. Read it with the preceding opening statement (WHERE Id = :request.distributorId AND Active__c = TRUE); it is not a standalone business operation.
183	`        )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
184	`            throw new InputException('Distributor is inactive.');`	Stops this execution path with a validation/error exception: throw new InputException('Distributor is inactive.');. The caller/catch block decides how it is reported.
185	`        List<Sales_Order__c> orders = [`	Declares/initializes local data used by the surrounding operation: List<Sales_Order__c> orders = [. Collection contents and assignments below determine its purpose.
186	`            SELECT Id, DMS_Status__c`	Selects these Salesforce fields/aggregates: Id, DMS_Status__c. Query results are used in the surrounding assignment or loop.
187	`            FROM Sales_Order__c`	Chooses the Salesforce object/subquery source: FROM Sales_Order__c.
188	`            WHERE Id = :request.orderId AND DMS_Distributor__c = : request.distributorId`	Adds a query/filter condition: WHERE Id = :request.orderId AND DMS_Distributor__c = :request.distributorId. The complete condition determines which records are included.
189	`            LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
190	`            FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
191	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
192	`        if (orders.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (orders.isEmpty()).
193	`            throw new InputException('Order is not assigned to this distributor.');`	Stops this execution path with a validation/error exception: throw new InputException('Order is not assigned to this distributor.');. The caller/catch block decides how it is reported.
194	`        Sales_Order__c order = orders[0];`	Assigns the right-hand expression to the named variable/property: Sales_Order__c order = orders[0];. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
195	`        if (order.DMS_Status__c == request.decision)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (order.DMS_Status__c == request.decision).
196	`            return new Map<String, Object>{ 'id' => order.Id, 'status' => order.DMS_Status__c };`	Returns new Map<String, Object>{ 'id' => order.Id, 'status' => order.DMS_Status__c } to the caller (or begins returned UI markup) and ends this execution path.
197	`        if (order.DMS_Status__c != null && order.DMS_Status__c != 'Pending')`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (order.DMS_Status__c != null && order.DMS_Status__c != 'Pending').
198	`            throw new InputException('This order has already been decided.');`	Stops this execution path with a validation/error exception: throw new InputException('This order has already been decided.');. The caller/catch block decides how it is reported.
199	`        order.DMS_Status__c = request.decision;`	Assigns the right-hand expression to the named variable/property: order.DMS_Status__c = request.decision;. This is in-memory unless it is later persisted by an explicit call.
200	`        order.DMS_Decision_Notes__c = request.notes;`	Assigns the right-hand expression to the named variable/property: order.DMS_Decision_Notes__c = request.notes;. This is in-memory unless it is later persisted by an explicit call.
201	`        order.DMS_Decided_At__c = System.now();`	Calls the named method: order.DMS_Decided_At__c = System.now();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
202	`        update order;`	Performs Salesforce DML: update order;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
203	`        return new Map<String, Object>{ 'id' => order.Id, 'status' => order.DMS_Status__c };`	Returns new Map<String, Object>{ 'id' => order.Id, 'status' => order.DMS_Status__c } to the caller (or begins returned UI markup) and ends this execution path.
204	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
205	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsTransactionApi.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/DmsTriggerHandlersTest.cls

Focused tests for extracted handlers: 200 targets, 200 surveys with valid/invalid ownership, query count and historical officer preservation.

94 numbered source lines | SHA-256 8dda866aa5ab60c437cae990d69ecf3b506d638d1a1ce007c901aa639ce8cc2a

Line	Source code	Explanation / reading note
1	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
2	`private class DmsTriggerHandlersTest {`	Declares a class/type: private class DmsTriggerHandlersTest {. Members below hold behavior and/or state.
3	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
4	`    static void targetKeysPreserveNullScopesInBulk() {`	Continues the surrounding declaration/expression or text: static void targetKeysPreserveNullScopesInBulk() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
5	`        List<DMS_Sales_Target__c> targets = new List<DMS_Sales_Target__c>();`	Declares/initializes local data used by the surrounding operation: List<DMS_Sales_Target__c> targets = new List<DMS_Sales_Target__c>();. Collection contents and assignments below determine its purpose.
6	`        for (Integer index = 0; index < 200; index++) {`	Repeats work over the specified records/items or while this condition holds: for (Integer index = 0; index < 200; index++) {. Check where queries/writes occur relative to the loop.
7	`            targets.add(new DMS_Sales_Target__c(Month__c = Date.newInstance(2026, 10, 1)));`	Calls the named method: targets.add(new DMS_Sales_Target__c(Month__c = Date.newInstance(2026, 10, 1)));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
8	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
9	`        Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
10	`        DmsSalesTargetHandler.populateScopeKeys(targets);`	Calls the named method: DmsSalesTargetHandler.populateScopeKeys(targets);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
11	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.

Line	Source code	Explanation / reading note
12	`        for (DMS_Sales_Target__c target : targets) {`	Repeats work over the specified records/items or while this condition holds: for (DMS_Sales_Target__c target : targets) {. Check where queries/writes occur relative to the loop.
13	`            System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
14	`                'null:2026-10-01:null:null:null',`	Continues the surrounding declaration/expression or text: 'null:2026-10-01:null:null:null',. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
15	`                target.Unique_Key__c,`	Continues the surrounding declaration/expression or text: target.Unique_Key__c,. Read it with the preceding opening statement ('null:2026-10-01:null:null:null',); it is not a standalone business operation.
16	`                'Preserve the stored key format, including absent scope values.'`	Continues the surrounding declaration/expression or text: 'Preserve the stored key format, including absent scope values.'. Read it with the preceding opening statement (target.Unique_Key__c,); it is not a standalone business operation.
17	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20		Blank line separating logical sections; no executable operation.
21	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
22	`    static void surveysValidateEachRowWithOneQuery() {`	Continues the surrounding declaration/expression or text: static void surveysValidateEachRowWithOneQuery() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
23	`        DMS_Distributor__c assigned = new DMS_Distributor__c(`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c assigned = new DMS_Distributor__c(. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
24	`Name = 'Survey assigned fixture',`	Assigns the right-hand expression to the named variable/property: Name = 'Survey assigned fixture',. This is in-memory unless it is later persisted by an explicit call.
25	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
26	`Officer__c = UserInfo.getUserId()`	Calls the named method: Officer__c = UserInfo.getUserId(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
27	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
28	`DMS_Distributor__c inactive = new DMS_Distributor__c(`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c inactive = new DMS_Distributor__c(. This is in-memory unless it is later persisted by an explicit call.
29	`Name = 'Survey inactive fixture',`	Assigns the right-hand expression to the named variable/property: Name = 'Survey inactive fixture',. This is in-memory unless it is later persisted by an explicit call.
30	`Active__c = false,`	Assigns the right-hand expression to the named variable/property: Active__c = false,. This is in-memory unless it is later persisted by an explicit call.
31	`Officer__c = UserInfo.getUserId()`	Calls the named method: Officer__c = UserInfo.getUserId(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
32	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`DMS_Distributor__c unassigned = new DMS_Distributor__c(`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c unassigned = new DMS_Distributor__c(. This is in-memory unless it is later persisted by an explicit call.
34	`Name = 'Survey unassigned fixture',`	Assigns the right-hand expression to the named variable/property: Name = 'Survey unassigned fixture',. This is in-memory unless it is later persisted by an explicit call.
35	`Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.
36	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
37	`insert new List<DMS_Distributor__c>{ assigned, inactive, unassigned };`	Performs Salesforce DML: insert new List<DMS_Distributor__c>{ assigned, inactive, unassigned };. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
38	`List<DMS_Distributor_Survey__c> surveys = new List<DMS_Distributor_Survey__c>();`	Declares/initializes local data used by the surrounding operation: List<DMS_Distributor_Survey__c> surveys = new List<DMS_Distributor_Survey__c>();. Collection contents and assignments below determine its purpose.
39	`for (Integer index = 0; index < 200; index++) {`	Repeats work over the specified records/items or while this condition holds: for (Integer index = 0; index < 200; index++) {. Check where queries/writes occur relative to the loop.
40	`surveys.add(new DMS_Distributor_Survey__c(Distributor__c = assigned.Id));`	Calls the named method: surveys.add(new DMS_Distributor_Survey__c(Distributor__c = assigned.Id));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
41	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42	`surveys[197].Distributor__c = inactive.Id;`	Assigns the right-hand expression to the named variable/property: surveys[197].Distributor__c = inactive.Id;. This is in-memory unless it is later persisted by an explicit call.
43	`surveys[198].Distributor__c = unassigned.Id;`	Assigns the right-hand expression to the named variable/property: surveys[198].Distributor__c = unassigned.Id;. This is in-memory unless it is later persisted by an explicit call.
44	`surveys[199].Distributor__c = null;`	Assigns the right-hand expression to the named variable/property: surveys[199].Distributor__c = null;. This is in-memory unless it is later persisted by an explicit call.
45	`Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
46	`Integer queriesBefore = Limits.getQueries();`	Declares/initializes local data used by the surrounding operation: Integer queriesBefore = Limits.getQueries();. Collection contents and assignments below determine its purpose.
47	`DmsDistributorSurveyHandler.validateOfficer(surveys, null);`	Calls the named method: DmsDistributorSurveyHandler.validateOfficer(surveys, null);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
48	`System.assertEquals(1, Limits.getQueries() - queriesBefore, 'Query once for the batch.');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1, Limits.getQueries() - queriesBefore, 'Query once for the batch.');. A mismatch fails the test.

Line	Source code	Explanation / reading note
49	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
50	`        for (Integer index = 0; index < surveys.size(); index++) {`	Repeats work over the specified records/items or while this condition holds: for (Integer index = 0; index < surveys.size(); index++) {. Check where queries/writes occur relative to the loop.
51	`            System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
52	`                index >= 197,`	Continues the surrounding declaration/expression or text: index >= 197,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
53	`                surveys[index].hasErrors(),`	Continues the surrounding declaration/expression or text: surveys[index].hasErrors(),. Read it with the preceding opening statement (index >= 197,); it is not a standalone business operation.
54	`                'Validate every distributor.'`	Continues the surrounding declaration/expression or text: 'Validate every distributor.'. Read it with the preceding opening statement (surveys[index].hasErrors(),); it is not a standalone business operation.
55	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
56	`            System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
57	`                UserInfo.getUserId(),`	Calls the named method: UserInfo.getUserId(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
58	`                surveys[index].Officer__c,`	Continues the surrounding declaration/expression or text: surveys[index].Officer__c,. Read it with the preceding opening statement (UserInfo.getUserId(),); it is not a standalone business operation.
59	`                'Stamp the author.'`	Continues the surrounding declaration/expression or text: 'Stamp the author.'. Read it with the preceding opening statement (surveys[index].Officer__c,); it is not a standalone business operation.
60	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
61	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
62	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
63		Blank line separating logical sections; no executable operation.
64	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
65	`    static void editingSurveyPreservesOriginalOfficer() {`	Continues the surrounding declaration/expression or text: static void editingSurveyPreservesOriginalOfficer() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
66	`        DMS_Distributor__c distributor = new DMS_Distributor__c(`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c distributor = new DMS_Distributor__c(. This is in-memory unless it is later persisted by an explicit call.
67	`            Name = 'Survey edit fixture',`	Assigns the right-hand expression to the named variable/property: Name = 'Survey edit fixture',. This is in-memory unless it is later persisted by an explicit call.
68	`            Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
69	`            Officer__c = UserInfo.getUserId()`	Calls the named method: Officer__c = UserInfo.getUserId(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
70	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
71	`        insert distributor;`	Performs Salesforce DML: insert distributor;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
72	`        // Exercise the update branch without creating a real survey or sending mail.`	Developer comment/documentation: Exercise the update branch without creating a real survey or sending mail. It is not executed.
73	`        Id surveyId = (Id) (DMS_Distributor_Survey__c.SObjectType.getDescribe().getKeyPrefix() +`	Declares/initializes local data used by the surrounding operation: Id surveyId = (Id) (DMS_Distributor_Survey__c.SObjectType.getDescribe().getKeyPrefix() +. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
74	`'000000000001');`	Continues the surrounding declaration/expression or text: '000000000001');. Read it with the preceding opening statement (Id surveyId = (Id) (DMS_Distributor_Survey__c.SObjectType.getDescribe().getKeyPrefix() +); it is not a standalone business operation.
75	`DMS_Distributor_Survey__c previous = new DMS_Distributor_Survey__c(`	Assigns the right-hand expression to the named variable/property: DMS_Distributor_Survey__c previous = new DMS_Distributor_Survey__c(. This is in-memory unless it is later persisted by an explicit call.
76	`Id = surveyId,`	Declares/initializes local data used by the surrounding operation: Id = surveyId,. Collection contents and assignments below determine its purpose.
77	`Distributor__c = distributor.Id,`	Assigns the right-hand expression to the named variable/property: Distributor__c = distributor.Id,. This is in-memory unless it is later persisted by an explicit call.
78	`Officer__c = null`	Assigns the right-hand expression to the named variable/property: Officer__c = null. This is in-memory unless it is later persisted by an explicit call.
79	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
80	`DMS_Distributor_Survey__c edited = new DMS_Distributor_Survey__c(`	Assigns the right-hand expression to the named variable/property: DMS_Distributor_Survey__c edited = new DMS_Distributor_Survey__c(. This is in-memory unless it is later persisted by an explicit call.
81	`Id = surveyId,`	Declares/initializes local data used by the surrounding operation: Id = surveyId,. Collection contents and assignments below determine its purpose.
82	`Distributor__c = distributor.Id,`	Assigns the right-hand expression to the named variable/property: Distributor__c = distributor.Id,. This is in-memory unless it is later persisted by an explicit call.
83	`Officer__c = UserInfo.getUserId()`	Calls the named method: Officer__c = UserInfo.getUserId(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
84	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
85	`Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
86	`DmsDistributorSurveyHandler.validateOfficer(`	Calls the named method: DmsDistributorSurveyHandler.validateOfficer(. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
87	`            new List<DMS_Distributor_Survey__c>{ edited },`	Continues the surrounding declaration/expression or text: new List<DMS_Distributor_Survey__c>{ edited },. Read it with the preceding opening statement (DmsDistributorSurveyHandler.validateOfficer(); it is not a standalone business operation.
88	`            new Map<Id, DMS_Distributor_Survey__c>{ surveyId => previous }`	Continues the surrounding declaration/expression or text: new Map<Id, DMS_Distributor_Survey__c>{ surveyId => previous }. Read it with the preceding opening statement (new List<DMS_Distributor_Survey__c>{ edited },); it is not a standalone business operation.
89	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
90	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
91	`        System.assertEquals(false, edited.hasErrors(), 'The assigned officer may edit.');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, edited.hasErrors(), 'The assigned officer may edit.');. A mismatch fails the test.
92	`        System.assertEquals(null, edited.Officer__c, 'Preserve the historical author value.');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(null, edited.Officer__c, 'Preserve the historical author value.');. A mismatch fails the test.
93	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
94	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/DmsTriggerHandlersTest.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0347267b36e4cd542616bb80997ae7c7634cf64ed063b5bd68dd2493c8fca3ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/classes/PjpPlannerController.cls

Older daily/monthly PJP controller using Pending status. Retained for compatibility; the current monthly LWC calls SfaPhaseOnePjpController instead. Its authorization differs and needs review.

171 numbered source lines | SHA-256 49f4da6e18a1dfd273799044a0ecc7f8a064f6c1cbd4b06f3b4d256883210c99

Line	Source code	Explanation / reading note
1	`public with sharing class PjpPlannerController {`	Declares a class/type: public with sharing class PjpPlannerController {. Uses record sharing, which does not alone enforce field/object permissions.
2	`    public class PlanRow {`	Declares a class/type: public class PlanRow {. Members below hold behavior and/or state.
3	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
4	`        public Id id;`	Continues the surrounding declaration/expression or text: public Id id;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
5	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
6	`        public Date planDate;`	Continues the surrounding declaration/expression or text: public Date planDate;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
7	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
8	`        public Id employeeId;`	Continues the surrounding declaration/expression or text: public Id employeeId;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
9	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
10	`        public Id beatId;`	Continues the surrounding declaration/expression or text: public Id beatId;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
11	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
12	`        public String beatName;`	Continues the surrounding declaration/expression or text: public String beatName;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.

Line	Source code	Explanation / reading note
13	`@AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
14	`public String status;`	Continues the surrounding declaration/expression or text: public String status;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
15	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
16		Blank line separating logical sections; no executable operation.
17	`@AuraEnabled(cacheable=true)`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
18	`public static List<Beat__c> getBeats() {`	Declares a callable function/method: public static List<Beat__c> getBeats() {. Parameters supply its inputs; the following block implements the operation.
19	`return [SELECT Id, Name FROM Beat__c WHERE Active__c = TRUE ORDER BY Name];`	Returns [SELECT Id, Name FROM Beat__c WHERE Active__c = TRUE ORDER BY Name] to the caller (or begins returned UI markup) and ends this execution path.
20	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21		Blank line separating logical sections; no executable operation.
22	`@AuraEnabled(cacheable=true)`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
23	`public static List<PlanRow> getMonthPlans(Id employeeId, Date monthStart) {`	Declares a callable function/method: public static List<PlanRow> getMonthPlans(Id employeeId, Date monthStart) {. Parameters supply its inputs; the following block implements the operation.
24	`List<PlanRow> result = new List<PlanRow>();`	Declares/initializes local data used by the surrounding operation: List<PlanRow> result = new List<PlanRow>();. Collection contents and assignments below determine its purpose.
25	`if (employeeId == null || monthStart == null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (employeeId == null || monthStart == null).
26	`return result;`	Returns result to the caller (or begins returned UI markup) and ends this execution path.
27	`Date firstDay = Date.newInstance(monthStart.year(), monthStart.month(), 1);`	Declares/initializes local data used by the surrounding operation: Date firstDay = Date.newInstance(monthStart.year(), monthStart.month(), 1);. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
28	`        Date nextMonth = firstDay.addMonths(1);`	Declares/initializes local data used by the surrounding operation: Date nextMonth = firstDay.addMonths(1);. Collection contents and assignments below determine its purpose.
29	`        for (Permanent_Journey_Plan__c plan : [`	Repeats work over the specified records/items or while this condition holds: for (Permanent_Journey_Plan__c plan : [. Check where queries/writes occur relative to the loop.
30	`            SELECT Id, Plan_Date__c, Employee__c, Beat__c, Beat__r.Name, Status__c`	Selects these Salesforce fields/aggregates: Id, Plan_Date__c, Employee__c, Beat__c, Beat__r.Name, Status__c. Query results are used in the surrounding assignment or loop.
31	`            FROM Permanent_Journey_Plan__c`	Chooses the Salesforce object/subquery source: FROM Permanent_Journey_Plan__c.
32	`            WHERE`	Adds a query/filter condition: WHERE. The complete condition determines which records are included.
33	`                Employee__c = :employeeId`	Assigns the right-hand expression to the named variable/property: Employee__c = :employeeId. This is in-memory unless it is later persisted by an explicit call.
34	`                AND Plan_Date__c >= :firstDay`	Adds a query/filter condition: AND Plan_Date__c >= :firstDay. The complete condition determines which records are included.
35	`                AND Plan_Date__c < :nextMonth`	Adds a query/filter condition: AND Plan_Date__c < :nextMonth. The complete condition determines which records are included.
36	`            ORDER BY Plan_Date__c`	Controls query sorting, grouping or result count: ORDER BY Plan_Date__c.
37	`        ]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (ORDER BY Plan_Date__c); it is not a standalone business operation.
38	`            PlanRow row = new PlanRow();`	Assigns the right-hand expression to the named variable/property: PlanRow row = new PlanRow();. This is in-memory unless it is later persisted by an explicit call.
39	`            row.id = plan.Id;`	Assigns the right-hand expression to the named variable/property: row.id = plan.Id;. This is in-memory unless it is later persisted by an explicit call.
40	`            row.planDate = plan.Plan_Date__c;`	Assigns the right-hand expression to the named variable/property: row.planDate = plan.Plan_Date__c;. This is in-memory unless it is later persisted by an explicit call.
41	`            row.employeeId = plan.Employee__c;`	Assigns the right-hand expression to the named variable/property: row.employeeId = plan.Employee__c;. This is in-memory unless it is later persisted by an explicit call.
42	`            row.beatId = plan.Beat__c;`	Assigns the right-hand expression to the named variable/property: row.beatId = plan.Beat__c;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
43	`            row.beatName = plan.Beat__r.Name;`	Assigns the right-hand expression to the named variable/property: row.beatName = plan.Beat__r.Name;. This is in-memory unless it is later persisted by an explicit call.
44	`            row.status = plan.Status__c;`	Assigns the right-hand expression to the named variable/property: row.status = plan.Status__c;. This is in-memory unless it is later persisted by an explicit call.
45	`            result.add(row);`	Calls the named method: result.add(row);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
46	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`        return result;`	Returns result to the caller (or begins returned UI markup) and ends this execution path.
48	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49		Blank line separating logical sections; no executable operation.
50	`    @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
51	`    public static Id saveDay(Id employeeId, Id beatId, Date planDate) {`	Declares a callable function/method: public static Id saveDay(Id employeeId, Id beatId, Date planDate) {. Parameters supply its inputs; the following block implements the operation.
52	`        if (employeeId == null || beatId == null || planDate == null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (employeeId == null || beatId == null || planDate == null) {.
53	`            throw new AuraHandledException('Employee, beat and date are required.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('Employee, beat and date are required.');. The caller/catch block decides how it is reported.
54	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
55	`        List<Permanent_Journey_Plan__c> existing = [`	Declares/initializes local data used by the surrounding operation: List<Permanent_Journey_Plan__c> existing = [. Collection contents and assignments below determine its purpose.
56	`            SELECT Id, Status__c`	Selects these Salesforce fields/aggregates: Id, Status__c. Query results are used in the surrounding assignment or loop.
57	`            FROM Permanent_Journey_Plan__c`	Chooses the Salesforce object/subquery source: FROM Permanent_Journey_Plan__c.

Line	Source code	Explanation / reading note
58	`            WHERE Employee__c = :employeeId AND Plan_Date__c = :planDate`	Adds a query/filter condition: WHERE Employee__c = :employeeId AND Plan_Date__c = :planDate. The complete condition determines which records are included.
59	`            LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
60	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
61	`        Permanent_Journey_Plan__c plan = existing.isEmpty()`	Calls the named method: Permanent_Journey_Plan__c plan = existing.isEmpty(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
62	`            ? new Permanent_Journey_Plan__c(`	Continues the surrounding declaration/expression or text: ? new Permanent_Journey_Plan__c(. Read it with the preceding opening statement (Permanent_Journey_Plan__c plan = existing.isEmpty()); it is not a standalone business operation.
63	`                Name = 'PJP ' + String.valueOf(planDate),`	Calls the named method: Name = 'PJP ' + String.valueOf(planDate),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
64	`                Employee__c = employeeId,`	Assigns the right-hand expression to the named variable/property: Employee__c = employeeId,. This is in-memory unless it is later persisted by an explicit call.
65	`                Plan_Date__c = planDate,`	Assigns the right-hand expression to the named variable/property: Plan_Date__c = planDate,. This is in-memory unless it is later persisted by an explicit call.
66	`                Planned_Date__c = planDate,`	Assigns the right-hand expression to the named variable/property: Planned_Date__c = planDate,. This is in-memory unless it is later persisted by an explicit call.
67	`                Status__c = 'Draft'`	Assigns the right-hand expression to the named variable/property: Status__c = 'Draft'. This is in-memory unless it is later persisted by an explicit call.
68	`              )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
69	`            : existing[0];`	Continues the surrounding declaration/expression or text: : existing[0];. Read it with the preceding opening statement ( )); it is not a standalone business operation.
70	`        if (plan.Status__c != 'Draft' && plan.Status__c != 'Rejected') {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plan.Status__c != 'Draft' && plan.Status__c != 'Rejected') {.

Line	Source code	Explanation / reading note
71	`throw new AuraHandledException('Only Draft or Rejected plans can be changed.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('Only Draft or Rejected plans can be changed.');. The caller/catch block decides how it is reported.
72	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
73	`plan.Beat__c = beatId;`	Assigns the right-hand expression to the named variable/property: plan.Beat__c = beatId;. This is in-memory unless it is later persisted by an explicit call.
74	`plan.Status__c = 'Draft';`	Assigns the right-hand expression to the named variable/property: plan.Status__c = 'Draft';. This is in-memory unless it is later persisted by an explicit call.
75	`upsert plan;`	Performs Salesforce DML: upsert plan;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
76	`return plan.Id;`	Returns plan.Id to the caller (or begins returned UI markup) and ends this execution path.
77	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
78		Blank line separating logical sections; no executable operation.
79	`@AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
80	`public static Integer submitMonth(Id employeeId, Date monthStart) {`	Declares a callable function/method: public static Integer submitMonth(Id employeeId, Date monthStart) {. Parameters supply its inputs; the following block implements the operation.
81	`if (employeeId == null || monthStart == null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (employeeId == null || monthStart == null) {.
82	`throw new AuraHandledException('Select an employee and month first.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('Select an employee and month first.');. The caller/catch block decides how it is reported.
83	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
84	`Date firstDay = Date.newInstance(monthStart.year(), monthStart.month(), 1);`	Declares/initializes local data used by the surrounding operation: Date firstDay = Date.newInstance(monthStart.year(), monthStart.month(), 1);. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
85	`Date nextMonth = firstDay.addMonths(1);`	Declares/initializes local data used by the surrounding operation: Date nextMonth = firstDay.addMonths(1);. Collection contents and assignments below determine its purpose.
86	`List<Permanent_Journey_Plan__c> plans = [`	Declares/initializes local data used by the surrounding operation: List<Permanent_Journey_Plan__c> plans = [. Collection contents and assignments below determine its purpose.
87	`SELECT Id, Status__c, Approver__c, Approver__r.Salesforce_User__c`	Selects these Salesforce fields/aggregates: Id, Status__c, Approver__c, Approver__r.Salesforce_User__c. Query results are used in the surrounding assignment or loop.
88	`FROM Permanent_Journey_Plan__c`	Chooses the Salesforce object/subquery source: FROM Permanent_Journey_Plan__c.
89	`WHERE`	Adds a query/filter condition: WHERE. The complete condition determines which records are included.
90	`Employee__c = :employeeId`	Assigns the right-hand expression to the named variable/property: Employee__c = :employeeId. This is in-memory unless it is later persisted by an explicit call.
91	`AND Plan_Date__c >= :firstDay`	Adds a query/filter condition: AND Plan_Date__c >= :firstDay. The complete condition determines which records are included.
92	`AND Plan_Date__c < :nextMonth`	Adds a query/filter condition: AND Plan_Date__c < :nextMonth. The complete condition determines which records are included.
93	`AND Status__c IN ('Draft', 'Rejected')`	Adds a query/filter condition: AND Status__c IN ('Draft', 'Rejected'). The complete condition determines which records are included.
94	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
95	`if (plans.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plans.isEmpty()).
96	`throw new AuraHandledException('Add at least one beat before submitting.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('Add at least one beat before submitting.');. The caller/catch block decides how it is reported.
97	`for (Permanent_Journey_Plan__c plan : plans) {`	Repeats work over the specified records/items or while this condition holds: for (Permanent_Journey_Plan__c plan : plans) {. Check where queries/writes occur relative to the loop.

Line	Source code	Explanation / reading note
98	`            if (plan.Approver__c == null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plan.Approver__c == null).
99	`                throw new AuraHandledException('The employee does not have a reporting manager.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('The employee does not have a reporting manager.');. The caller/catch block decides how it is reported.
100	`            plan.Status__c = 'Pending';`	Assigns the right-hand expression to the named variable/property: plan.Status__c = 'Pending';. This is in-memory unless it is later persisted by an explicit call.
101	`            plan.Rejection_Reason__c = null;`	Assigns the right-hand expression to the named variable/property: plan.Rejection_Reason__c = null;. This is in-memory unless it is later persisted by an explicit call.
102	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
103	`        update plans;`	Performs Salesforce DML: update plans;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
104	`        sendManagerNotification(plans, employeeId, firstDay);`	Continues the surrounding declaration/expression or text: sendManagerNotification(plans, employeeId, firstDay);. Read it with the preceding opening statement (update plans;); it is not a standalone business operation.
105	`        return plans.size();`	Returns plans.size() to the caller (or begins returned UI markup) and ends this execution path.
106	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
107		Blank line separating logical sections; no executable operation.
108	`    @AuraEnabled(cacheable=true)`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
109	`    public static List<Permanent_Journey_Plan__c> getPendingApprovals() {`	Declares a callable function/method: public static List<Permanent_Journey_Plan__c> getPendingApprovals() {. Parameters supply its inputs; the following block implements the operation.
110	`        List<Employee__c> managers = [`	Declares/initializes local data used by the surrounding operation: List<Employee__c> managers = [. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
111	`            SELECT Id`	Selects these Salesforce fields/aggregates: Id. Query results are used in the surrounding assignment or loop.
112	`            FROM Employee__c`	Chooses the Salesforce object/subquery source: FROM Employee__c.
113	`            WHERE Salesforce_User__c = :UserInfo.getUserId()`	Adds a query/filter condition: WHERE Salesforce_User__c = :UserInfo.getUserId(). The complete condition determines which records are included.
114	`            LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
115	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
116	`        if (managers.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (managers.isEmpty()).
117	`            return new List<Permanent_Journey_Plan__c>();`	Returns new List<Permanent_Journey_Plan__c>() to the caller (or begins returned UI markup) and ends this execution path.
118	`        return [`	Returns [to the caller (or begins returned UI markup) and ends this execution path.
119	`            SELECT Id, Name, Plan_Date__c, Employee__r.Name, Beat__r.Name, Status__c`	Selects these Salesforce fields/aggregates: Id, Name, Plan_Date__c, Employee__r.Name, Beat__r.Name, Status__c. Query results are used in the surrounding assignment or loop.
120	`            FROM Permanent_Journey_Plan__c`	Chooses the Salesforce object/subquery source: FROM Permanent_Journey_Plan__c.
121	`            WHERE Approver__c = :managers[0].Id AND Status__c = 'Pending'`	Adds a query/filter condition: WHERE Approver__c = :managers[0].Id AND Status__c = 'Pending'. The complete condition determines which records are included.
122	`            ORDER BY Plan_Date__c`	Controls query sorting, grouping or result count: ORDER BY Plan_Date__c.
123	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
124	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
125		Blank line separating logical sections; no executable operation.
126	`    @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.

Line	Source code	Explanation / reading note
127	`    public static void decidePlan(Id planId, Boolean approve, String rejectionReason) {`	Declares a callable function/method: public static void decidePlan(Id planId, Boolean approve, String rejectionReason) {. Parameters supply its inputs; the following block implements the operation.
128	`        Permanent_Journey_Plan__c plan = [`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c plan = [. This is in-memory unless it is later persisted by an explicit call.
129	`            SELECT Id, Status__c`	Selects these Salesforce fields/aggregates: Id, Status__c. Query results are used in the surrounding assignment or loop.
130	`            FROM Permanent_Journey_Plan__c`	Chooses the Salesforce object/subquery source: FROM Permanent_Journey_Plan__c.
131	`            WHERE Id = :planId`	Adds a query/filter condition: WHERE Id = :planId. The complete condition determines which records are included.
132	`            LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
133	`            FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
134	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
135	`        if (plan.Status__c != 'Pending')`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plan.Status__c != 'Pending').
136	`            throw new AuraHandledException('This plan is no longer pending approval.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('This plan is no longer pending approval.');. The caller/catch block decides how it is reported.
137	`        if (!approve && String.isBlank(rejectionReason))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!approve && String.isBlank(rejectionReason)).
138	`            throw new AuraHandledException('Enter a rejection reason.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('Enter a rejection reason.');. The caller/catch block decides how it is reported.
139	`        plan.Status__c = approve ? 'Approved' : 'Rejected';`	Assigns the right-hand expression to the named variable/property: plan.Status__c = approve ? 'Approved' : 'Rejected';. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
140	`plan.Rejection_Reason__c = approve ? null : rejectionReason.trim();`	Calls the named method: plan.Rejection_Reason__c = approve ? null : rejectionReason.trim();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
141	`update plan;`	Performs Salesforce DML: update plan;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
142	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
143		Blank line separating logical sections; no executable operation.
144	`private static void sendManagerNotification(`	Declares a callable function/method: private static void sendManagerNotification(. Parameters supply its inputs; the following block implements the operation.
145	`List<Permanent_Journey_Plan__c> plans,`	Declares/initializes local data used by the surrounding operation: List<Permanent_Journey_Plan__c> plans,. Collection contents and assignments below determine its purpose.
146	`Id employeeId,`	Declares/initializes local data used by the surrounding operation: Id employeeId,. Collection contents and assignments below determine its purpose.
147	`Date monthStart`	Declares/initializes local data used by the surrounding operation: Date monthStart. Collection contents and assignments below determine its purpose.
148	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (Date monthStart); it is not a standalone business operation.
149	`Set<String> recipients = new Set<String>();`	Declares/initializes local data used by the surrounding operation: Set<String> recipients = new Set<String>();. Collection contents and assignments below determine its purpose.
150	`for (Permanent_Journey_Plan__c plan : plans) {`	Repeats work over the specified records/items or while this condition holds: for (Permanent_Journey_Plan__c plan : plans) {. Check where queries/writes occur relative to the loop.
151	`if (plan.Approver__r.Salesforce_User__c != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plan.Approver__r.Salesforce_User__c != null).
152	`recipients.add(String.valueOf(plan.Approver__r.Salesforce_User__c));`	Calls the named method: recipients.add(String.valueOf(plan.Approver__r.Salesforce_User__c));. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
153	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
154	`if (recipients.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (recipients.isEmpty()).
155	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
156	`List<CustomNotificationType> types = [`	Declares/initializes local data used by the surrounding operation: List<CustomNotificationType> types = [. Collection contents and assignments below determine its purpose.
157	`SELECT Id`	Selects these Salesforce fields/aggregates: Id. Query results are used in the surrounding assignment or loop.
158	`FROM CustomNotificationType`	Chooses the Salesforce object/subquery source: FROM CustomNotificationType.
159	`WHERE DeveloperName = 'PJP_Approval_Notification'`	Adds a query/filter condition: WHERE DeveloperName = 'PJP_Approval_Notification'. The complete condition determines which records are included.
160	`LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
161	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
162	`if (types.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (types.isEmpty()).
163	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
164	`Messaging.CustomNotification notice = new Messaging.CustomNotification();`	Calls the named method: Messaging.CustomNotification notice = new Messaging.CustomNotification();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
165	`notice.setNotificationTypeId(types[0].Id);`	Calls the named method: notice.setNotificationTypeId(types[0].Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
166	`notice.setTitle('PJP approval required');`	Calls the named method: notice.setTitle('PJP approval required');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
167	`notice.setBody('A monthly journey plan has been submitted for approval.');`	Calls the named method: notice.setBody('A monthly journey plan has been submitted for approval.');. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
168	`notice.setTargetId(plans[0].Id);`	Calls the named method: notice.setTargetId(plans[0].Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
169	`notice.send(recipients);`	Calls the named method: notice.send(recipients);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
170	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
171	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/PjpPlannerController.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 991f1ca647a6d030b8f1828ad18737c5e94ecbe63a944a972fd685c6ab98f84a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexClass block; child elements specify its configuration.
3	`    <apiVersion>65.0</apiVersion>`	Sets Salesforce API version used for this component to 65.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexClass>`	Closes the ApexClass configuration block.

force-app/main/default/classes/PjpPlannerControllerTest.cls

Regression tests for PjpPlannerController. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

84 numbered source lines | SHA-256 de2d755c29b9babdceece45d6c6ea0897f87288bcc8d3a9708daabbf55810bd3

Line	Source code	Explanation / reading note
1	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
2	`private class PjpPlannerControllerTest {`	Declares a class/type: private class PjpPlannerControllerTest {. Members below hold behavior and/or state.
3	`    @TestSetup`	Continues the surrounding declaration/expression or text: @TestSetup. Read it with the preceding opening statement (private class PjpPlannerControllerTest {); it is not a standalone business operation.
4	`    static void setupData() {`	Continues the surrounding declaration/expression or text: static void setupData() {. Read it with the preceding opening statement (@TestSetup); it is not a standalone business operation.
5	`        Geography__c geography = new Geography__c(`	Assigns the right-hand expression to the named variable/property: Geography__c geography = new Geography__c(. This is in-memory unless it is later persisted by an explicit call.
6	`            Name = 'MG Road',`	Assigns the right-hand expression to the named variable/property: Name = 'MG Road',. This is in-memory unless it is later persisted by an explicit call.
7	`            Nation__c = 'India',`	Assigns the right-hand expression to the named variable/property: Nation__c = 'India',. This is in-memory unless it is later persisted by an explicit call.
8	`            State__c = 'Karnataka',`	Assigns the right-hand expression to the named variable/property: State__c = 'Karnataka',. This is in-memory unless it is later persisted by an explicit call.
9	`            District__c = 'Bengaluru Urban',`	Assigns the right-hand expression to the named variable/property: District__c = 'Bengaluru Urban',. This is in-memory unless it is later persisted by an explicit call.
10	`            Town__c = 'MG Road'`	Assigns the right-hand expression to the named variable/property: Town__c = 'MG Road'. This is in-memory unless it is later persisted by an explicit call.
11	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
12	`insert geography;`	Performs Salesforce DML: insert geography;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
13	`Employee__c manager = new Employee__c(`	Assigns the right-hand expression to the named variable/property: Employee__c manager = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
14	`Name = 'Dinesh',`	Assigns the right-hand expression to the named variable/property: Name = 'Dinesh',. This is in-memory unless it is later persisted by an explicit call.
15	`Aadhaar_Number__c = '123456789001',`	Assigns the right-hand expression to the named variable/property: Aadhaar_Number__c = '123456789001',. This is in-memory unless it is later persisted by an explicit call.
16	`PAN_Number__c = 'DINAA0001A',`	Assigns the right-hand expression to the named variable/property: PAN_Number__c = 'DINAA0001A',. This is in-memory unless it is later persisted by an explicit call.
17	`Phone__c = '9000000001',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000001',. This is in-memory unless it is later persisted by an explicit call.
18	`Emergency_Contact__c = '9000000011',`	Assigns the right-hand expression to the named variable/property: Emergency_Contact__c = '9000000011',. This is in-memory unless it is later persisted by an explicit call.
19	`Geography__c = geography.Id,`	Assigns the right-hand expression to the named variable/property: Geography__c = geography.Id,. This is in-memory unless it is later persisted by an explicit call.
20	`Hierarchy_Level__c = 'L2'`	Assigns the right-hand expression to the named variable/property: Hierarchy_Level__c = 'L2'. This is in-memory unless it is later persisted by an explicit call.
21	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
22	`insert manager;`	Performs Salesforce DML: insert manager;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
23	`Employee__c representative = new Employee__c(`	Assigns the right-hand expression to the named variable/property: Employee__c representative = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
24	`Name = 'Dhanush',`	Assigns the right-hand expression to the named variable/property: Name = 'Dhanush',. This is in-memory unless it is later persisted by an explicit call.
25	`Aadhaar_Number__c = '123456789002',`	Assigns the right-hand expression to the named variable/property: Aadhaar_Number__c = '123456789002',. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
26	`PAN_Number__c = 'DHANU0002A',`	Assigns the right-hand expression to the named variable/property: PAN_Number__c = 'DHANU0002A',. This is in-memory unless it is later persisted by an explicit call.
27	`Phone__c = '9000000002',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000002',. This is in-memory unless it is later persisted by an explicit call.
28	`Emergency_Contact__c = '9000000012',`	Assigns the right-hand expression to the named variable/property: Emergency_Contact__c = '9000000012',. This is in-memory unless it is later persisted by an explicit call.
29	`Geography__c = geography.Id,`	Assigns the right-hand expression to the named variable/property: Geography__c = geography.Id,. This is in-memory unless it is later persisted by an explicit call.
30	`Reporting_Manager__c = manager.Id,`	Assigns the right-hand expression to the named variable/property: Reporting_Manager__c = manager.Id,. This is in-memory unless it is later persisted by an explicit call.
31	`Hierarchy_Level__c = 'L1'`	Assigns the right-hand expression to the named variable/property: Hierarchy_Level__c = 'L1'. This is in-memory unless it is later persisted by an explicit call.
32	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`insert representative;`	Performs Salesforce DML: insert representative;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
34	`insert new Beat__c(`	Performs Salesforce DML: insert new Beat__c(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
35	`Name = 'MG Road Beat',`	Assigns the right-hand expression to the named variable/property: Name = 'MG Road Beat',. This is in-memory unless it is later persisted by an explicit call.
36	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
37	`Geography__c = geography.Id,`	Assigns the right-hand expression to the named variable/property: Geography__c = geography.Id,. This is in-memory unless it is later persisted by an explicit call.
38	`Assigned_Employee__c = representative.Id`	Assigns the right-hand expression to the named variable/property: Assigned_Employee__c = representative.Id. This is in-memory unless it is later persisted by an explicit call.
39	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
40	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
41		Blank line separating logical sections; no executable operation.
42	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
43	`    static void savesSubmitsAndApprovesPlan() {`	Continues the surrounding declaration/expression or text: static void savesSubmitsAndApprovesPlan() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
44	`        Employee__c representative = [SELECT Id FROM Employee__c WHERE Name = 'Dhanush'];`	Assigns the right-hand expression to the named variable/property: Employee__c representative = [SELECT Id FROM Employee__c WHERE Name = 'Dhanush'];. This is in-memory unless it is later persisted by an explicit call.
45	`        Beat__c beat = [SELECT Id FROM Beat__c LIMIT 1];`	Assigns the right-hand expression to the named variable/property: Beat__c beat = [SELECT Id FROM Beat__c LIMIT 1];. This is in-memory unless it is later persisted by an explicit call.
46	`        Date planDate = Date.newInstance(2026, 10, 6);`	Declares/initializes local data used by the surrounding operation: Date planDate = Date.newInstance(2026, 10, 6);. Collection contents and assignments below determine its purpose.
47	`        Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
48	`        Id planId = PjpPlannerController.saveDay(representative.Id, beat.Id, planDate);`	Declares/initializes local data used by the surrounding operation: Id planId = PjpPlannerController.saveDay(representative.Id, beat.Id, planDate);. Collection contents and assignments below determine its purpose.
49	`        Integer submitted = PjpPlannerController.submitMonth(`	Declares/initializes local data used by the surrounding operation: Integer submitted = PjpPlannerController.submitMonth(. Collection contents and assignments below determine its purpose.
50	`            representative.Id,`	Continues the surrounding declaration/expression or text: representative.Id,. Read it with the preceding opening statement (Integer submitted = PjpPlannerController.submitMonth(); it is not a standalone business operation.
51	`            Date.newInstance(2026, 10, 1)`	Declares/initializes local data used by the surrounding operation: Date.newInstance(2026, 10, 1). Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
52	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
53	`PjpPlannerController.decidePlan(planId, true, null);`	Calls the named method: PjpPlannerController.decidePlan(planId, true, null);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
54	`Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
55	`Permanent_Journey_Plan__c plan = [`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c plan = [. This is in-memory unless it is later persisted by an explicit call.
56	`SELECT Status__c, Approver__c`	Selects these Salesforce fields/aggregates: Status__c, Approver__c. Query results are used in the surrounding assignment or loop.
57	`FROM Permanent_Journey_Plan__c`	Chooses the Salesforce object/subquery source: FROM Permanent_Journey_Plan__c.
58	`WHERE Id = :planId`	Adds a query/filter condition: WHERE Id = :planId. The complete condition determines which records are included.
59	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
60	`System.assertEquals(1, submitted);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1, submitted);. A mismatch fails the test.
61	`System.assertEquals('Approved', plan.Status__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Approved', plan.Status__c);. A mismatch fails the test.
62	`System.assertNotEquals(null, plan.Approver__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(null, plan.Approver__c);. A mismatch fails the test.
63	`System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
64	`1,`	Continues the surrounding declaration/expression or text: 1,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
65	`PjpPlannerController.getMonthPlans(representative.Id, Date.newInstance(2026, 10, 1))`	Calls the named method: PjpPlannerController.getMonthPlans(representative.Id, Date.newInstance(2026, 10, 1)). Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
66	`.size()`	Continues the surrounding declaration/expression or text: .size(). Read it with the preceding opening statement (PjpPlannerController.getMonthPlans(representative.Id, Date.newInstance(2026, 10, 1))); it is not a standalone business operation.
67	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
68	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
69		Blank line separating logical sections; no executable operation.
70	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
71	`static void copiesBeatGeographyToOutlet() {`	Continues the surrounding declaration/expression or text: static void copiesBeatGeographyToOutlet() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
72	`Beat__c beat = [SELECT Id, Geography__c FROM Beat__c LIMIT 1];`	Assigns the right-hand expression to the named variable/property: Beat__c beat = [SELECT Id, Geography__c FROM Beat__c LIMIT 1];. This is in-memory unless it is later persisted by an explicit call.
73	`Retailer__c outlet = new Retailer__c(`	Assigns the right-hand expression to the named variable/property: Retailer__c outlet = new Retailer__c(. This is in-memory unless it is later persisted by an explicit call.
74	`Name = 'Balaji Stores',`	Assigns the right-hand expression to the named variable/property: Name = 'Balaji Stores',. This is in-memory unless it is later persisted by an explicit call.
75	`Beat__c = beat.Id,`	Assigns the right-hand expression to the named variable/property: Beat__c = beat.Id,. This is in-memory unless it is later persisted by an explicit call.
76	`Phone__c = '9111111111',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9111111111',. This is in-memory unless it is later persisted by an explicit call.
77	`Aadhaar_Number__c = '223456789001',`	Assigns the right-hand expression to the named variable/property: Aadhaar_Number__c = '223456789001',. This is in-memory unless it is later persisted by an explicit call.
78	`PAN_Number__c = 'BALAJ0001A'`	Assigns the right-hand expression to the named variable/property: PAN_Number__c = 'BALAJ0001A'. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
79	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
80	`        insert outlet;`	Performs Salesforce DML: insert outlet;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
81	`        outlet = [SELECT Geography__c FROM Retailer__c WHERE Id = :outlet.Id];`	Assigns the right-hand expression to the named variable/property: outlet = [SELECT Geography__c FROM Retailer__c WHERE Id = :outlet.Id];. This is in-memory unless it is later persisted by an explicit call.
82	`        System.assertEquals(beat.Geography__c, outlet.Geography__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(beat.Geography__c, outlet.Geography__c);. A mismatch fails the test.
83	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
84	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/PjpPlannerControllerTest.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 991f1ca647a6d030b8f1828ad18737c5e94ecbe63a944a972fd685c6ab98f84a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexClass block; child elements specify its configuration.
3	`    <apiVersion>65.0</apiVersion>`	Sets Salesforce API version used for this component to 65.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexClass>`	Closes the ApexClass configuration block.

force-app/main/default/classes/SfaAllocationEmployeeService.cls

Resolves an allocation’s legacy sales representative to Salesforce User and then Employee, without overwriting an already populated employee lookup.

53 numbered source lines | SHA-256 169e43cecb9780e2b2c5c2f3b0ac6b213bbffbe49f9b86c49865532d324601eb

Line	Source code	Explanation / reading note
1	`public with sharing class SfaAllocationEmployeeService {`	Declares a class/type: public with sharing class SfaAllocationEmployeeService {. Uses record sharing, which does not alone enforce field/object permissions.
2	`    /**`	Developer comment/documentation: It is not executed.
3	`     * Links an outlet allocation to the Employee that uses the same Salesforce`	Developer comment/documentation: Links an outlet allocation to the Employee that uses the same Salesforce It is not executed.
4	`     * user as the selected Sales Representative.`	Developer comment/documentation: user as the selected Sales Representative. It is not executed.
5	`     */`	Developer comment/documentation: It is not executed.
6	`    public static void populateEmployee(List<Distributor_Outlet_Allocation__c> allocations) {`	Declares a callable function/method: public static void populateEmployee(List<Distributor_Outlet_Allocation__c> allocations) {. Parameters supply its inputs; the following block implements the operation.
7	`        Set<Id> representativeIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> representativeIds = new Set<Id>();. Collection contents and assignments below determine its purpose.
8	`        for (Distributor_Outlet_Allocation__c allocation : allocations) {`	Repeats work over the specified records/items or while this condition holds: for (Distributor_Outlet_Allocation__c allocation : allocations) {. Check where queries/writes occur relative to the loop.
9	`            if (allocation.Distributor__c != null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (allocation.Distributor__c != null) {.
10	`                representativeIds.add(allocation.Distributor__c);`	Calls the named method: representativeIds.add(allocation.Distributor__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
11	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
12	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
14	`if (representativeIds.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (representativeIds.isEmpty()) {.
15	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
16	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17		Blank line separating logical sections; no executable operation.
18	`Map<Id, Id> representativeToUser = new Map<Id, Id>();`	Declares/initializes local data used by the surrounding operation: Map<Id, Id> representativeToUser = new Map<Id, Id>();. Collection contents and assignments below determine its purpose.
19	`Set<Id> userIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> userIds = new Set<Id>();. Collection contents and assignments below determine its purpose.
20	`for (Distributor__c representative : [`	Repeats work over the specified records/items or while this condition holds: for (Distributor__c representative : [. Check where queries/writes occur relative to the loop.
21	`SELECT Id, User__c`	Selects these Salesforce fields/aggregates: Id, User__c. Query results are used in the surrounding assignment or loop.
22	`FROM Distributor__c`	Chooses the Salesforce object/subquery source: FROM Distributor__c.
23	`WHERE Id IN :representativeIds`	Adds a query/filter condition: WHERE Id IN :representativeIds. The complete condition determines which records are included.
24	`]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (WHERE Id IN :representativeIds); it is not a standalone business operation.
25	`representativeToUser.put(representative.Id, representative.User__c);`	Calls the named method: representativeToUser.put(representative.Id, representative.User__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
26	`if (representative.User__c != null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (representative.User__c != null) {.
27	`userIds.add(representative.User__c);`	Calls the named method: userIds.add(representative.User__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
28	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30		Blank line separating logical sections; no executable operation.
31	`        Map<Id, Id> userToEmployee = new Map<Id, Id>();`	Declares/initializes local data used by the surrounding operation: Map<Id, Id> userToEmployee = new Map<Id, Id>();. Collection contents and assignments below determine its purpose.
32	`        if (!userIds.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!userIds.isEmpty()) {.
33	`            for (Employee__c employee : [`	Repeats work over the specified records/items or while this condition holds: for (Employee__c employee : [. Check where queries/writes occur relative to the loop.
34	`                SELECT Id, Salesforce_User__c`	Selects these Salesforce fields/aggregates: Id, Salesforce_User__c. Query results are used in the surrounding assignment or loop.
35	`                FROM Employee__c`	Chooses the Salesforce object/subquery source: FROM Employee__c.
36	`                WHERE Salesforce_User__c IN :userIds`	Adds a query/filter condition: WHERE Salesforce_User__c IN :userIds. The complete condition determines which records are included.
37	`                ORDER BY Employee_Code__c NULLS LAST, CreatedDate ASC`	Controls query sorting, grouping or result count: ORDER BY Employee_Code__c NULLS LAST, CreatedDate ASC.
38	`            ]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (ORDER BY Employee_Code__c NULLS LAST, CreatedDate ASC); it is not a standalone business operation.
39	`                if (!userToEmployee.containsKey(employee.Salesforce_User__c)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!userToEmployee.containsKey(employee.Salesforce_User__c)) {.
40	`                    userToEmployee.put(employee.Salesforce_User__c, employee.Id);`	Calls the named method: userToEmployee.put(employee.Salesforce_User__c, employee.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
41	`                }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44		Blank line separating logical sections; no executable operation.
45	`        for (Distributor_Outlet_Allocation__c allocation : allocations) {`	Repeats work over the specified records/items or while this condition holds: for (Distributor_Outlet_Allocation__c allocation : allocations) {. Check where queries/writes occur relative to the loop.
46	`            if (allocation.Employee__c != null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (allocation.Employee__c != null) {.
47	`                continue;`	Skips the remainder of the current loop iteration and moves to the next item.
48	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49	`            Id userId = representativeToUser.get(allocation.Distributor__c);`	Declares/initializes local data used by the surrounding operation: Id userId = representativeToUser.get(allocation.Distributor__c);. Collection contents and assignments below determine its purpose.
50	`            allocation.Employee__c = userToEmployee.get(userId);`	Calls the named method: allocation.Employee__c = userToEmployee.get(userId);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
51	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
52	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
53	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/SfaAllocationEmployeeService.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 356db61093648679fc9b3a801e41d51c94fa51e993380eac65b0bb076a20b6b0

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexClass block; child elements specify its configuration.
3	`    <apiVersion>65.0</apiVersion>`	Sets Salesforce API version used for this component to 65.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexClass>`	Closes the ApexClass configuration block.

force-app/main/default/classes/SfaAllocationEmployeeServiceTest.cls

Regression tests for SfaAllocationEmployeeService. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

71 numbered source lines | SHA-256 da175c1a3b416be645bef133c9d8b2bb145033357200a5ebbff65ce981803d54

Line	Source code	Explanation / reading note
1	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
2	`private class SfaAllocationEmployeeServiceTest {`	Declares a class/type: private class SfaAllocationEmployeeServiceTest {. Members below hold behavior and/or state.
3	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
4	`    static void linksAllocationToEmployeeUsingSalesforceUser() {`	Continues the surrounding declaration/expression or text: static void linksAllocationToEmployeeUsingSalesforceUser() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
5	`        Geography__c geography = new Geography__c(`	Assigns the right-hand expression to the named variable/property: Geography__c geography = new Geography__c(. This is in-memory unless it is later persisted by an explicit call.
6	`            Name = 'Employee Allocation Test Geography',`	Assigns the right-hand expression to the named variable/property: Name = 'Employee Allocation Test Geography',. This is in-memory unless it is later persisted by an explicit call.
7	`            Nation__c = 'India',`	Assigns the right-hand expression to the named variable/property: Nation__c = 'India',. This is in-memory unless it is later persisted by an explicit call.
8	`            State__c = 'Karnataka',`	Assigns the right-hand expression to the named variable/property: State__c = 'Karnataka',. This is in-memory unless it is later persisted by an explicit call.
9	`            District__c = 'Bengaluru Urban'`	Assigns the right-hand expression to the named variable/property: District__c = 'Bengaluru Urban'. This is in-memory unless it is later persisted by an explicit call.
10	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
11	`        insert geography;`	Performs Salesforce DML: insert geography;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
12		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
13	`Beat__c beat = new Beat__c(`	Assigns the right-hand expression to the named variable/property: Beat__c beat = new Beat__c(. This is in-memory unless it is later persisted by an explicit call.
14	`Name = 'Employee Allocation Test Beat',`	Assigns the right-hand expression to the named variable/property: Name = 'Employee Allocation Test Beat',. This is in-memory unless it is later persisted by an explicit call.
15	`Geography__c = geography.Id,`	Assigns the right-hand expression to the named variable/property: Geography__c = geography.Id,. This is in-memory unless it is later persisted by an explicit call.
16	`Active__c = false`	Assigns the right-hand expression to the named variable/property: Active__c = false. This is in-memory unless it is later persisted by an explicit call.
17	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`insert beat;`	Performs Salesforce DML: insert beat;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
19		Blank line separating logical sections; no executable operation.
20	`Employee__c employee = new Employee__c(`	Assigns the right-hand expression to the named variable/property: Employee__c employee = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
21	`Name = 'Test Employee',`	Assigns the right-hand expression to the named variable/property: Name = 'Test Employee',. This is in-memory unless it is later persisted by an explicit call.
22	`Employee_Code__c = 'EMP-ALLOC-TEST',`	Assigns the right-hand expression to the named variable/property: Employee_Code__c = 'EMP-ALLOC-TEST',. This is in-memory unless it is later persisted by an explicit call.
23	`Phone__c = '9000000001',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000001',. This is in-memory unless it is later persisted by an explicit call.
24	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
25	`Geography__c = geography.Id,`	Assigns the right-hand expression to the named variable/property: Geography__c = geography.Id,. This is in-memory unless it is later persisted by an explicit call.
26	`Beat__c = beat.Id,`	Assigns the right-hand expression to the named variable/property: Beat__c = beat.Id,. This is in-memory unless it is later persisted by an explicit call.
27	`Salesforce_User__c = UserInfo.getUserId()`	Calls the named method: Salesforce_User__c = UserInfo.getUserId(). Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
28	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`insert employee;`	Performs Salesforce DML: insert employee;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
30		Blank line separating logical sections; no executable operation.
31	`beat.Assigned_Employee__c = employee.Id;`	Assigns the right-hand expression to the named variable/property: beat.Assigned_Employee__c = employee.Id;. This is in-memory unless it is later persisted by an explicit call.
32	`beat.Active__c = true;`	Assigns the right-hand expression to the named variable/property: beat.Active__c = true;. This is in-memory unless it is later persisted by an explicit call.
33	`update beat;`	Performs Salesforce DML: update beat;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
34		Blank line separating logical sections; no executable operation.
35	`Distributor__c representative = new Distributor__c(`	Assigns the right-hand expression to the named variable/property: Distributor__c representative = new Distributor__c(. This is in-memory unless it is later persisted by an explicit call.
36	`Name = 'Test Sales Representative',`	Assigns the right-hand expression to the named variable/property: Name = 'Test Sales Representative',. This is in-memory unless it is later persisted by an explicit call.
37	`Beat__c = beat.Id,`	Assigns the right-hand expression to the named variable/property: Beat__c = beat.Id,. This is in-memory unless it is later persisted by an explicit call.
38	`Status__c = 'Active',`	Assigns the right-hand expression to the named variable/property: Status__c = 'Active',. This is in-memory unless it is later persisted by an explicit call.
39	`User__c = UserInfo.getUserId()`	Calls the named method: User__c = UserInfo.getUserId(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
40	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
41	`insert representative;`	Performs Salesforce DML: insert representative;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
42		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
43	`        Retailer__c outlet = new Retailer__c(`	Assigns the right-hand expression to the named variable/property: Retailer__c outlet = new Retailer__c(. This is in-memory unless it is later persisted by an explicit call.
44	`            Name = 'Test Outlet',`	Assigns the right-hand expression to the named variable/property: Name = 'Test Outlet',. This is in-memory unless it is later persisted by an explicit call.
45	`            Geography__c = geography.Id,`	Assigns the right-hand expression to the named variable/property: Geography__c = geography.Id,. This is in-memory unless it is later persisted by an explicit call.
46	`            Beat__c = beat.Id,`	Assigns the right-hand expression to the named variable/property: Beat__c = beat.Id,. This is in-memory unless it is later persisted by an explicit call.
47	`            Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.
48	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49	`        insert outlet;`	Performs Salesforce DML: insert outlet;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
50		Blank line separating logical sections; no executable operation.
51	`        Distributor_Outlet_Allocation__c allocation = new Distributor_Outlet_Allocation__c(`	Assigns the right-hand expression to the named variable/property: Distributor_Outlet_Allocation__c allocation = new Distributor_Outlet_Allocation__c(. This is in-memory unless it is later persisted by an explicit call.
52	`            Distributor__c = representative.Id,`	Assigns the right-hand expression to the named variable/property: Distributor__c = representative.Id,. This is in-memory unless it is later persisted by an explicit call.
53	`            Employee__c = null,`	Assigns the right-hand expression to the named variable/property: Employee__c = null,. This is in-memory unless it is later persisted by an explicit call.
54	`            Outlet__c = outlet.Id,`	Assigns the right-hand expression to the named variable/property: Outlet__c = outlet.Id,. This is in-memory unless it is later persisted by an explicit call.
55	`            Beat__c = beat.Id,`	Assigns the right-hand expression to the named variable/property: Beat__c = beat.Id,. This is in-memory unless it is later persisted by an explicit call.
56	`            Allocation_Status__c = 'Active',`	Assigns the right-hand expression to the named variable/property: Allocation_Status__c = 'Active',. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
57	`            Allocation_Date__c = Date.today()`	Calls the named method: Allocation_Date__c = Date.today(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
58	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
59		Blank line separating logical sections; no executable operation.
60	`        Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
61	`        insert allocation;`	Performs Salesforce DML: insert allocation;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
62	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
63		Blank line separating logical sections; no executable operation.
64	`        Distributor_Outlet_Allocation__c savedAllocation = [`	Assigns the right-hand expression to the named variable/property: Distributor_Outlet_Allocation__c savedAllocation = [. This is in-memory unless it is later persisted by an explicit call.
65	`            SELECT Employee__c`	Selects these Salesforce fields/aggregates: Employee__c. Query results are used in the surrounding assignment or loop.
66	`            FROM Distributor_Outlet_Allocation__c`	Chooses the Salesforce object/subquery source: FROM Distributor_Outlet_Allocation__c.
67	`            WHERE Id = :allocation.Id`	Adds a query/filter condition: WHERE Id = :allocation.Id. The complete condition determines which records are included.
68	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
69	`        System.assertEquals(employee.Id, savedAllocation.Employee__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(employee.Id, savedAllocation.Employee__c);. A mismatch fails the test.
70	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
71	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/SfaAllocationEmployeeServiceTest.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 356db61093648679fc9b3a801e41d51c94fa51e993380eac65b0bb076a20b6b0

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexClass block; child elements specify its configuration.
3	`    <apiVersion>65.0</apiVersion>`	Sets Salesforce API version used for this component to 65.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexClass>`	Closes the ApexClass configuration block.

force-app/main/default/classes/SfaDemoDataFactory.cls

Creates demonstration fixtures for Salesforce scenarios. Not a production transaction handler; do not execute to read documentation.

100 numbered source lines | SHA-256 977aed8514c7995d162766e74482eacfc9ccd07b4161b1ff3a9c733fef7353af

Line	Source code	Explanation / reading note
1	`public without sharing class SfaDemoDataFactory {`	Declares a class/type: public without sharing class SfaDemoDataFactory {. Runs without record-sharing enforcement; see the documented internal authorization boundary.
2	`    public static void seed() {`	Declares a callable function/method: public static void seed() {. Parameters supply its inputs; the following block implements the operation.
3	`        Beat__c beat;`	Continues the surrounding declaration/expression or text: Beat__c beat;. Read it with the preceding opening statement (public static void seed() {); it is not a standalone business operation.
4	`        List<Beat__c> beats = [`	Declares/initializes local data used by the surrounding operation: List<Beat__c> beats = [. Collection contents and assignments below determine its purpose.
5	`            SELECT Id, Name`	Selects these Salesforce fields/aggregates: Id, Name. Query results are used in the surrounding assignment or loop.
6	`            FROM Beat__c`	Chooses the Salesforce object/subquery source: FROM Beat__c.
7	`            WHERE Name = 'Central Market Beat'`	Adds a query/filter condition: WHERE Name = 'Central Market Beat'. The complete condition determines which records are included.
8	`            LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
9	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`        if (beats.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (beats.isEmpty()) {.
11	`            // The general demo factory has no employee context. Keep this legacy`	Developer comment/documentation: The general demo factory has no employee context. Keep this legacy It is not executed.
12	`            // beat inactive; active beats must be owned by an employee.`	Developer comment/documentation: beat inactive; active beats must be owned by an employee. It is not executed.

Line	Source code	Explanation / reading note
13	`beat = new Beat__c(Name = 'Central Market Beat', Active__c = false);`	Assigns the right-hand expression to the named variable/property: beat = new Beat__c(Name = 'Central Market Beat', Active__c = false);. This is in-memory unless it is later persisted by an explicit call.
14	`insert beat;`	Performs Salesforce DML: insert beat;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
15	`} else {`	Alternative branch taken when the preceding condition is false.
16	`beat = beats[0];`	Assigns the right-hand expression to the named variable/property: beat = beats[0];. This is in-memory unless it is later persisted by an explicit call.
17	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18		Blank line separating logical sections; no executable operation.
19	`Retailer__c retailer;`	Continues the surrounding declaration/expression or text: Retailer__c retailer;. Read it with the preceding opening statement; it is not a standalone business operation.
20	`List<Retailer__c> retailers = [`	Declares/initializes local data used by the surrounding operation: List<Retailer__c> retailers = [. Collection contents and assignments below determine its purpose.
21	`SELECT Id, Name`	Selects these Salesforce fields/aggregates: Id, Name. Query results are used in the surrounding assignment or loop.
22	`FROM Retailer__c`	Chooses the Salesforce object/subquery source: FROM Retailer__c.
23	`WHERE Name = 'Lakshmi Stores Demo'`	Adds a query/filter condition: WHERE Name = 'Lakshmi Stores Demo'. The complete condition determines which records are included.
24	`LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
25	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
26	`if (retailers.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (retailers.isEmpty()) {.
27	`retailer = new Retailer__c(`	Assigns the right-hand expression to the named variable/property: retailer = new Retailer__c(. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
28	`Name = 'Lakshmi Stores Demo',`	Assigns the right-hand expression to the named variable/property: Name = 'Lakshmi Stores Demo',. This is in-memory unless it is later persisted by an explicit call.
29	`Address__c = 'MG Road, Bengaluru',`	Assigns the right-hand expression to the named variable/property: Address__c = 'MG Road, Bengaluru',. This is in-memory unless it is later persisted by an explicit call.
30	`Beat__c = beat.Id`	Assigns the right-hand expression to the named variable/property: Beat__c = beat.Id. This is in-memory unless it is later persisted by an explicit call.
31	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`insert retailer;`	Performs Salesforce DML: insert retailer;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
33	`} else {`	Alternative branch taken when the preceding condition is false.
34	`retailer = retailers[0];`	Assigns the right-hand expression to the named variable/property: retailer = retailers[0];. This is in-memory unless it is later persisted by an explicit call.
35	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
36		Blank line separating logical sections; no executable operation.
37	`Permanent_Journey_Plan__c plan;`	Continues the surrounding declaration/expression or text: Permanent_Journey_Plan__c plan;. Read it with the preceding opening statement; it is not a standalone business operation.
38	`List<Permanent_Journey_Plan__c> plans = [`	Declares/initializes local data used by the surrounding operation: List<Permanent_Journey_Plan__c> plans = [. Collection contents and assignments below determine its purpose.
39	`SELECT Id`	Selects these Salesforce fields/aggregates: Id. Query results are used in the surrounding assignment or loop.
40	`FROM Permanent_Journey_Plan__c`	Chooses the Salesforce object/subquery source: FROM Permanent_Journey_Plan__c.
41	`WHERE Name = 'Today SFA Demo Plan' AND Plan_Date__c = :Date.today()`	Adds a query/filter condition: WHERE Name = 'Today SFA Demo Plan' AND Plan_Date__c = :Date.today(). The complete condition determines which records are included.
42	`LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.

Line	Source code	Explanation / reading note
43	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44	`if (plans.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plans.isEmpty()) {.
45	`plan = new Permanent_Journey_Plan__c(`	Assigns the right-hand expression to the named variable/property: plan = new Permanent_Journey_Plan__c(. This is in-memory unless it is later persisted by an explicit call.
46	`Name = 'Today SFA Demo Plan',`	Assigns the right-hand expression to the named variable/property: Name = 'Today SFA Demo Plan',. This is in-memory unless it is later persisted by an explicit call.
47	`Plan_Date__c = Date.today(),`	Calls the named method: Plan_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
48	`Planned_Date__c = Date.today(),`	Calls the named method: Planned_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
49	`Sales_Representative__c = UserInfo.getUserId(),`	Calls the named method: Sales_Representative__c = UserInfo.getUserId(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
50	`Beat__c = beat.Id`	Assigns the right-hand expression to the named variable/property: Beat__c = beat.Id. This is in-memory unless it is later persisted by an explicit call.
51	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
52	`insert plan;`	Performs Salesforce DML: insert plan;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
53	`} else {`	Alternative branch taken when the preceding condition is false.
54	`plan = plans[0];`	Assigns the right-hand expression to the named variable/property: plan = plans[0];. This is in-memory unless it is later persisted by an explicit call.
55	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
56		Blank line separating logical sections; no executable operation.
57	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.

Line	Source code	Explanation / reading note
58	`            [`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (if (); it is not a standalone business operation.
59	`                SELECT COUNT()`	Selects these Salesforce fields/aggregates: COUNT(). Query results are used in the surrounding assignment or loop.
60	`                FROM Visit__c`	Chooses the Salesforce object/subquery source: FROM Visit__c.
61	`                WHERE Permanent_Journey_Plan__c = :plan.Id AND Retailer__c = : retailer.Id`	Adds a query/filter condition: WHERE Permanent_Journey_Plan__c = :plan.Id AND Retailer__c = :retailer.Id. The complete condition determines which records are included.
62	`            ] == 0`	Continues the surrounding declaration/expression or text:] == 0. Read it with the preceding opening statement (WHERE Permanent_Journey_Plan__c = :plan.Id AND Retailer__c = :retailer.Id); it is not a standalone business operation.
63	`        ) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement ( ] == 0); it is not a standalone business operation.
64	`            insert new Visit__c(`	Performs Salesforce DML: insert new Visit__c(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
65	`                Name = 'Lakshmi Stores Visit',`	Assigns the right-hand expression to the named variable/property: Name = 'Lakshmi Stores Visit',. This is in-memory unless it is later persisted by an explicit call.
66	`                Visit_Date__c = Date.today(),`	Calls the named method: Visit_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
67	`                Permanent_Journey_Plan__c = plan.Id,`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c = plan.Id,. This is in-memory unless it is later persisted by an explicit call.
68	`                Retailer__c = retailer.Id,`	Assigns the right-hand expression to the named variable/property: Retailer__c = retailer.Id,. This is in-memory unless it is later persisted by an explicit call.
69	`                Status__c = 'Planned'`	Assigns the right-hand expression to the named variable/property: Status__c = 'Planned'. This is in-memory unless it is later persisted by an explicit call.
70	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
71	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
72		Blank line separating logical sections; no executable operation.
73	`if ([SELECT COUNT() FROM Product__c WHERE Product_Code__c = 'PG-DEMO-001'] == 0) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ([SELECT COUNT() FROM Product__c WHERE Product_Code__c = 'PG-DEMO-001'] == 0) {.
74	`insert new Product__c(`	Performs Salesforce DML: insert new Product__c(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
75	`Name = 'Parle-G Demo Pack',`	Assigns the right-hand expression to the named variable/property: Name = 'Parle-G Demo Pack',. This is in-memory unless it is later persisted by an explicit call.
76	`Product_Code__c = 'PG-DEMO-001',`	Assigns the right-hand expression to the named variable/property: Product_Code__c = 'PG-DEMO-001',. This is in-memory unless it is later persisted by an explicit call.
77	`Brand__c = 'Parle',`	Assigns the right-hand expression to the named variable/property: Brand__c = 'Parle',. This is in-memory unless it is later persisted by an explicit call.
78	`MRP__c = 10,`	Assigns the right-hand expression to the named variable/property: MRP__c = 10,. This is in-memory unless it is later persisted by an explicit call.
79	`Retailer_Base_Price__c = 8.5,`	Assigns the right-hand expression to the named variable/property: Retailer_Base_Price__c = 8.5,. This is in-memory unless it is later persisted by an explicit call.
80	`Selling_Price__c = 9,`	Assigns the right-hand expression to the named variable/property: Selling_Price__c = 9,. This is in-memory unless it is later persisted by an explicit call.
81	`Available_Stock__c = 500,`	Assigns the right-hand expression to the named variable/property: Available_Stock__c = 500,. This is in-memory unless it is later persisted by an explicit call.
82	`Units_Per_Case__c = 50,`	Assigns the right-hand expression to the named variable/property: Units_Per_Case__c = 50,. This is in-memory unless it is later persisted by an explicit call.
83	`Sellable__c = true,`	Assigns the right-hand expression to the named variable/property: Sellable__c = true,. This is in-memory unless it is later persisted by an explicit call.
84	`Returnable__c = true`	Assigns the right-hand expression to the named variable/property: Returnable__c = true. This is in-memory unless it is later persisted by an explicit call.
85	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
86	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
87		Blank line separating logical sections; no executable operation.
88	`        if ([SELECT COUNT() FROM Scheme__c WHERE Scheme_Code__c = 'B2G1-DEMO'] == 0) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ([SELECT COUNT() FROM Scheme__c WHERE Scheme_Code__c = 'B2G1-DEMO'] == 0) {.
89	`            insert new Scheme__c(`	Performs Salesforce DML: insert new Scheme__c(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
90	`                Name = 'Buy 2 Get 1 Demo',`	Assigns the right-hand expression to the named variable/property: Name = 'Buy 2 Get 1 Demo',. This is in-memory unless it is later persisted by an explicit call.
91	`                Scheme_Code__c = 'B2G1-DEMO',`	Assigns the right-hand expression to the named variable/property: Scheme_Code__c = 'B2G1-DEMO',. This is in-memory unless it is later persisted by an explicit call.
92	`                Scheme_Type__c = 'Same Product Free',`	Assigns the right-hand expression to the named variable/property: Scheme_Type__c = 'Same Product Free',. This is in-memory unless it is later persisted by an explicit call.
93	`                Description__c = 'Buy two cases and receive one case free.',`	Assigns the right-hand expression to the named variable/property: Description__c = 'Buy two cases and receive one case free.',. This is in-memory unless it is later persisted by an explicit call.
94	`                Start_Date__c = Date.today(),`	Calls the named method: Start_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
95	`                End_Date__c = Date.today().addDays(7),`	Calls the named method: End_Date__c = Date.today().addDays(7),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
96	`                Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.
97	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
98	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
99	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
100	}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/SfaDemoDataFactory.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 991f1ca647a6d030b8f1828ad18737c5e94ecbe63a944a972fd685c6ab98f84a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexClass block; child elements specify its configuration.
3	`    <apiVersion>65.0</apiVersion>`	Sets Salesforce API version used for this component to 65.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexClass>`	Closes the ApexClass configuration block.

force-app/main/default/classes/SfaEmployeeInvitationService.cls

Sends application links when an employee is created or its access email changes. This is an invitation, not the DMS OTP sender. URL is currently localhost.

85 numbered source lines | SHA-256 cdc53785cffc086b0b9a351ad78ffc0705b8a05d00b4c9ff84ef45ef0b7f6475

Line	Source code	Explanation / reading note
1	`public with sharing class SfaEmployeeInvitationService {`	Declares a class/type: public with sharing class SfaEmployeeInvitationService {. Uses record sharing, which does not alone enforce field/object permissions.
2	`    @TestVisible`	Allows tests to inspect this otherwise private member without making it a public application API.
3	`    private static final String APPLICATION_URL = 'http://localhost:8081/';`	Assigns the right-hand expression to the named variable/property: private static final String APPLICATION_URL = 'http://localhost:8081/';. This is in-memory unless it is later persisted by an explicit call.
4		Blank line separating logical sections; no executable operation.
5	`    public static void emailApplicationLinks(`	Declares a callable function/method: public static void emailApplicationLinks(. Parameters supply its inputs; the following block implements the operation.
6	`        List<Employee__c> employees,`	Declares/initializes local data used by the surrounding operation: List<Employee__c> employees,. Collection contents and assignments below determine its purpose.
7	`        Map<Id, Employee__c> previousRecords`	Declares/initializes local data used by the surrounding operation: Map<Id, Employee__c> previousRecords. Collection contents and assignments below determine its purpose.
8	`    ) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (Map<Id, Employee__c> previousRecords); it is not a standalone business operation.
9	`        List<Messaging.SingleEmailMessage> messages = new List<Messaging.SingleEmailMessage>();`	Declares/initializes local data used by the surrounding operation: List<Messaging.SingleEmailMessage> messages = new List<Messaging.SingleEmailMessage>();. Collection contents and assignments below determine its purpose.
10		Blank line separating logical sections; no executable operation.
11	`        for (Employee__c employee : employees) {`	Repeats work over the specified records/items or while this condition holds: for (Employee__c employee : employees) {. Check where queries/writes occur relative to the loop.

Line	Source code	Explanation / reading note
12	`String accessEmail = String.isNotBlank(employee.Application_Access_Email__c)`	Declares/initializes local data used by the surrounding operation: String accessEmail = String.isNotBlank(employee.Application_Access_Email__c). Collection contents and assignments below determine its purpose.
13	`? employee.Application_Access_Email__c`	Continues the surrounding declaration/expression or text: ? employee.Application_Access_Email__c. Read it with the preceding opening statement (String accessEmail = String.isNotBlank(employee.Application_Access_Email__c)); it is not a standalone business operation.
14	`: employee.Email__c;`	Continues the surrounding declaration/expression or text: : employee.Email__c;. Read it with the preceding opening statement (? employee.Application_Access_Email__c); it is not a standalone business operation.
15	`if (String.isBlank(accessEmail)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (String.isBlank(accessEmail)) {.
16	`continue;`	Skips the remainder of the current loop iteration and moves to the next item.
17	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18		Blank line separating logical sections; no executable operation.
19	`Employee__c previousRecord = previousRecords == null`	Assigns the right-hand expression to the named variable/property: Employee__c previousRecord = previousRecords == null. This is in-memory unless it is later persisted by an explicit call.
20	`? null`	Continues the surrounding declaration/expression or text: ? null. Read it with the preceding opening statement (Employee__c previousRecord = previousRecords == null); it is not a standalone business operation.
21	`: previousRecords.get(employee.Id);`	Calls the named method: : previousRecords.get(employee.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
22	`Boolean isNewEmployee = previousRecord == null;`	Declares/initializes local data used by the surrounding operation: Boolean isNewEmployee = previousRecord == null;. Collection contents and assignments below determine its purpose.
23	`Boolean emailChanged =`	Declares/initializes local data used by the surrounding operation: Boolean emailChanged =. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
24	`previousRecord != null &&`	Continues the surrounding declaration/expression or text: previousRecord != null &&. Read it with the preceding opening statement (Boolean emailChanged =); it is not a standalone business operation.
25	`(employee.Email__c != previousRecord.Email__c ||`	Continues the surrounding declaration/expression or text: (employee.Email__c != previousRecord.Email__c ||. Read it with the preceding opening statement (previousRecord != null &&); it is not a standalone business operation.
26	`employee.Application_Access_Email__c != previousRecord.Application_Access_Email__c);`	Continues the surrounding declaration/expression or text: employee.Application_Access_Email__c != previousRecord.Application_Access_Email__c);. Read it with the preceding opening statement ((employee.Email__c != previousRecord.Email__c ||); it is not a standalone business operation.
27		Blank line separating logical sections; no executable operation.
28	`if (!isNewEmployee && !emailChanged) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!isNewEmployee && !emailChanged) {.
29	`continue;`	Skips the remainder of the current loop iteration and moves to the next item.
30	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31		Blank line separating logical sections; no executable operation.
32	`String recipient = accessEmail.trim().toLowerCase();`	Declares/initializes local data used by the surrounding operation: String recipient = accessEmail.trim().toLowerCase();. Collection contents and assignments below determine its purpose.
33	`Messaging.SingleEmailMessage message = new Messaging.SingleEmailMessage();`	Calls the named method: Messaging.SingleEmailMessage message = new Messaging.SingleEmailMessage();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
34	`message.setToAddresses(new List<String>{ recipient });`	Calls the named method: message.setToAddresses(new List<String>{ recipient });. Its implementation defines the side effect/result; use the symbol/file index to follow it.
35	`message.setSubject('Your SFA Mobile application access');`	Calls the named method: message.setSubject('Your SFA Mobile application access');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
36	`message.setPlainTextBody(buildPlainTextBody(employee.Name, recipient));`	Calls the named method: message.setPlainTextBody(buildPlainTextBody(employee.Name, recipient));. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
37	`            message.setHtmlBody(buildHtmlBody(employee.Name, recipient));`	Calls the named method: message.setHtmlBody(buildHtmlBody(employee.Name, recipient));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
38	`            messages.add(message);`	Calls the named method: messages.add(message);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
39	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
40		Blank line separating logical sections; no executable operation.
41	`        if (!messages.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!messages.isEmpty()) {.
42	`            Messaging.sendEmail(messages, false);`	Asks Salesforce to send the collected emails. Provider acceptance/delivery and partial failures are separate from record saving.
43	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
45		Blank line separating logical sections; no executable operation.
46	`    private static String buildPlainTextBody(String employeeName, String emailAddress) {`	Declares a callable function/method: private static String buildPlainTextBody(String employeeName, String emailAddress) {. Parameters supply its inputs; the following block implements the operation.
47	`        return 'Hello ' +`	Returns 'Hello ' + to the caller (or begins returned UI markup) and ends this execution path.
48	`            employeeName +`	Continues the surrounding declaration/expression or text: employeeName +. Read it with the preceding opening statement (return 'Hello ' +); it is not a standalone business operation.
49	`            ',\n\n' +`	Continues the surrounding declaration/expression or text: ',\n\n' +. Read it with the preceding opening statement (employeeName +); it is not a standalone business operation.
50	`            'Your SFA Mobile application access is ready.\n\n' +`	Continues the surrounding declaration/expression or text: 'Your SFA Mobile application access is ready.\n\n' +. Read it with the preceding opening statement (',\n\n' +); it is not a standalone business operation.

Line	Source code	Explanation / reading note
51	`            'Open the application: ' +`	Continues the surrounding declaration/expression or text: 'Open the application: ' +. Read it with the preceding opening statement ('Your SFA Mobile application access is ready.\n\n' +); it is not a standalone business operation.
52	`            APPLICATION_URL +`	Continues the surrounding declaration/expression or text: APPLICATION_URL +. Read it with the preceding opening statement ('Open the application: ' +); it is not a standalone business operation.
53	`            '\n\n' +`	Continues the surrounding declaration/expression or text: '\n\n' +. Read it with the preceding opening statement (APPLICATION_URL +); it is not a standalone business operation.
54	`            'Use this email address to sign in: ' +`	Continues the surrounding declaration/expression or text: 'Use this email address to sign in: ' +. Read it with the preceding opening statement ('\n\n' +); it is not a standalone business operation.
55	`            emailAddress +`	Continues the surrounding declaration/expression or text: emailAddress +. Read it with the preceding opening statement ('Use this email address to sign in: ' +); it is not a standalone business operation.
56	`            '\n\n' +`	Continues the surrounding declaration/expression or text: '\n\n' +. Read it with the preceding opening statement (emailAddress +); it is not a standalone business operation.
57	`            'A verification code will be sent to this inbox when you request it.';`	Continues the surrounding declaration/expression or text: 'A verification code will be sent to this inbox when you request it.';. Read it with the preceding opening statement ('\n\n' +); it is not a standalone business operation.
58	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
59		Blank line separating logical sections; no executable operation.
60	`    private static String buildHtmlBody(String employeeName, String emailAddress) {`	Declares a callable function/method: private static String buildHtmlBody(String employeeName, String emailAddress) {. Parameters supply its inputs; the following block implements the operation.
61	`        return '<p>Hello ' +`	Returns '<p>Hello ' + to the caller (or begins returned UI markup) and ends this execution path.
62	`            escapeHtml(employeeName) +`	Continues the surrounding declaration/expression or text: escapeHtml(employeeName) +. Read it with the preceding opening statement (return '<p>Hello ' +); it is not a standalone business operation.

Line	Source code	Explanation / reading note
63	`',</p>' +`	Continues the surrounding declaration/expression or text: ', ' +. Read it with the preceding opening statement (escapeHtml(employeeName) +); it is not a standalone business operation.
64	`'<p>Your SFA Mobile application access is ready.</p>' +`	Continues the surrounding declaration/expression or text: ' Your SFA Mobile application access is ready. ' +. Read it with the preceding opening statement (', ' +); it is not a standalone business operation.
65	`'<p><a href="' +`	Assigns the right-hand expression to the named variable/property: ' <a href="' +. This is in-memory unless it is later persisted by an explicit call.
66	`APPLICATION_URL +`	Continues the surrounding declaration/expression or text: APPLICATION_URL +. Read it with the preceding opening statement (' <a href="' +); it is not a standalone business operation.
67	`'" style="display:inline-block;padding:12px 20px;background:#16877d;color:#ffffff;text-decoration:none;border-radius:6px;font-weight:bold">Open SFA Mobile</a></p>' +`	Assigns the right-hand expression to the named variable/property: '" style="display:inline-block;padding:12px 20px;background:#16877d;color:#ffffff;text-decoration:none;border-radius:6px;font-weight:bold">Open SFA Mobile ' +. This is in-memory unless it is later persisted by an explicit call.
68	`'<p>Use <strong>' +`	Continues the surrounding declaration/expression or text: ' Use ' +. Read it with the preceding opening statement ('" style="display:inline-block;padding:12px 20px;background:#16877d;color:#ffffff;text-decoration:none;border-radius:6px;font-weight:bold">Open SFA Mobile ' +); it is not a standalone business operation.
69	`escapeHtml(emailAddress) +`	Continues the surrounding declaration/expression or text: escapeHtml(emailAddress) +. Read it with the preceding opening statement (' Use ' +); it is not a standalone business operation.
70	`'</strong> to sign in.</p>' +`	Continues the surrounding declaration/expression or text: ' to sign in. ' +. Read it with the preceding opening statement (escapeHtml(emailAddress) +); it is not a standalone business operation.
71	`'<p>A verification code will be sent to this inbox when you request it.</p>';`	Continues the surrounding declaration/expression or text: ' A verification code will be sent to this inbox when you request it. ';. Read it with the preceding opening statement (' to sign in. ' +); it is not a standalone business operation.
72	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
73		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
74	`    private static String escapeHtml(String value) {`	Declares a callable function/method: private static String escapeHtml(String value) {. Parameters supply its inputs; the following block implements the operation.
75	`        if (value == null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (value == null) {.
76	`            return '';`	Returns '' to the caller (or begins returned UI markup) and ends this execution path.
77	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
78	`        return value`	Returns value to the caller (or begins returned UI markup) and ends this execution path.
79	`            .replace('&', '&')`	Continues the surrounding declaration/expression or text: .replace('&', '&'). Read it with the preceding opening statement (return value); it is not a standalone business operation.
80	`            .replace('<', '<')`	Continues the surrounding declaration/expression or text: .replace('<', '<'). Read it with the preceding opening statement (.replace('&', '&')); it is not a standalone business operation.
81	`            .replace('>', '>')`	Continues the surrounding declaration/expression or text: .replace('>', '>'). Read it with the preceding opening statement (.replace('<', '<')); it is not a standalone business operation.
82	`            .replace('"', '"')`	Continues the surrounding declaration/expression or text: .replace('"', '"'). Read it with the preceding opening statement (.replace('>', '>')); it is not a standalone business operation.
83	`            .replace('\'', ''');`	Continues the surrounding declaration/expression or text: .replace('\'', ''');. Read it with the preceding opening statement (.replace('"', '"')); it is not a standalone business operation.
84	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
85	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/SfaEmployeeInvitationService.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 a242f6e22b472afffbd726be71165de394e417355cdf1edd81b5601278ddea32

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexClass block; child elements specify its configuration.
3	`    <apiVersion>67.0</apiVersion>`	Sets Salesforce API version used for this component to 67.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexClass>`	Closes the ApexClass configuration block.

force-app/main/default/classes/SfaEmployeeInvitationServiceTest.cls

Regression tests for SfaEmployeeInvitationService. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

64 numbered source lines | SHA-256 283541f387fc1cfb659a39473e5b4863497687775ae3b43897d57dd3e156a48e

Line	Source code	Explanation / reading note
1	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
2	`private class SfaEmployeeInvitationServiceTest {`	Declares a class/type: private class SfaEmployeeInvitationServiceTest {. Members below hold behavior and/or state.
3	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
4	`    static void sendsInvitationWhenEmployeeIsCreatedWithEmail() {`	Continues the surrounding declaration/expression or text: static void sendsInvitationWhenEmployeeIsCreatedWithEmail() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
5	`        Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
6	`        insert new Employee__c(`	Performs Salesforce DML: insert new Employee__c(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
7	`            Name = 'New Employee',`	Assigns the right-hand expression to the named variable/property: Name = 'New Employee',. This is in-memory unless it is later persisted by an explicit call.
8	`            Employee_Code__c = 'EMP-INV-001',`	Assigns the right-hand expression to the named variable/property: Employee_Code__c = 'EMP-INV-001',. This is in-memory unless it is later persisted by an explicit call.
9	`            Email__c = 'new.employee@example.com',`	Assigns the right-hand expression to the named variable/property: Email__c = 'new.employee@example.com',. This is in-memory unless it is later persisted by an explicit call.
10	`            Phone__c = '9000001001',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000001001',. This is in-memory unless it is later persisted by an explicit call.
11	`            Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
12	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13	`        Integer emailInvocations = Limits.getEmailInvocations();`	Declares/initializes local data used by the surrounding operation: Integer emailInvocations = Limits.getEmailInvocations();. Collection contents and assignments below determine its purpose.
14	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
15		Blank line separating logical sections; no executable operation.
16	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
17	`            1,`	Continues the surrounding declaration/expression or text: 1,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
18	`            emailInvocations,`	Continues the surrounding declaration/expression or text: emailInvocations,. Read it with the preceding opening statement (1,); it is not a standalone business operation.
19	`            'A new employee should receive one invitation email.'`	Continues the surrounding declaration/expression or text: 'A new employee should receive one invitation email.'. Read it with the preceding opening statement (emailInvocations,); it is not a standalone business operation.
20	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
22		Blank line separating logical sections; no executable operation.
23	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
24	`    static void skipsInvitationWhenEmailIsMissing() {`	Continues the surrounding declaration/expression or text: static void skipsInvitationWhenEmailIsMissing() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
25	`        Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.

Line	Source code	Explanation / reading note
26	`        insert new Employee__c(`	Performs Salesforce DML: insert new Employee__c(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
27	`            Name = 'Employee Without Email',`	Assigns the right-hand expression to the named variable/property: Name = 'Employee Without Email',. This is in-memory unless it is later persisted by an explicit call.
28	`            Employee_Code__c = 'EMP-INV-002',`	Assigns the right-hand expression to the named variable/property: Employee_Code__c = 'EMP-INV-002',. This is in-memory unless it is later persisted by an explicit call.
29	`            Phone__c = '9000001002',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000001002',. This is in-memory unless it is later persisted by an explicit call.
30	`            Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.
31	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`        Integer emailInvocations = Limits.getEmailInvocations();`	Declares/initializes local data used by the surrounding operation: Integer emailInvocations = Limits.getEmailInvocations();. Collection contents and assignments below determine its purpose.
33	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
34		Blank line separating logical sections; no executable operation.
35	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
36	`            0,`	Continues the surrounding declaration/expression or text: 0,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
37	`            emailInvocations,`	Continues the surrounding declaration/expression or text: emailInvocations,. Read it with the preceding opening statement (0,); it is not a standalone business operation.
38	`            'No email should be sent without an email address.'`	Continues the surrounding declaration/expression or text: 'No email should be sent without an email address.'. Read it with the preceding opening statement (emailInvocations,); it is not a standalone business operation.
39	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
40	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
41		Blank line separating logical sections; no executable operation.
42	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
43	`    static void sendsInvitationWhenEmployeeEmailChanges() {`	Continues the surrounding declaration/expression or text: static void sendsInvitationWhenEmployeeEmailChanges() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
44	`        Employee__c employee = new Employee__c(`	Assigns the right-hand expression to the named variable/property: Employee__c employee = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
45	`            Name = 'Existing Employee',`	Assigns the right-hand expression to the named variable/property: Name = 'Existing Employee',. This is in-memory unless it is later persisted by an explicit call.
46	`            Employee_Code__c = 'EMP-INV-003',`	Assigns the right-hand expression to the named variable/property: Employee_Code__c = 'EMP-INV-003',. This is in-memory unless it is later persisted by an explicit call.
47	`            Phone__c = '9000001003',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000001003',. This is in-memory unless it is later persisted by an explicit call.
48	`            Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.
49	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
50	`        insert employee;`	Performs Salesforce DML: insert employee;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
51		Blank line separating logical sections; no executable operation.
52	`        Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
53	`        employee.Email__c = 'updated.employee@example.com';`	Assigns the right-hand expression to the named variable/property: employee.Email__c = 'updated.employee@example.com';. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
54	`        update employee;`	Performs Salesforce DML: update employee;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
55	`        Integer emailInvocations = Limits.getEmailInvocations();`	Declares/initializes local data used by the surrounding operation: Integer emailInvocations = Limits.getEmailInvocations();. Collection contents and assignments below determine its purpose.
56	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
57		Blank line separating logical sections; no executable operation.
58	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
59	`            1,`	Continues the surrounding declaration/expression or text: 1,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
60	`            emailInvocations,`	Continues the surrounding declaration/expression or text: emailInvocations,. Read it with the preceding opening statement (1,); it is not a standalone business operation.
61	`            'Changing the employee email should send the access email.'`	Continues the surrounding declaration/expression or text: 'Changing the employee email should send the access email.'. Read it with the preceding opening statement (emailInvocations,); it is not a standalone business operation.
62	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
63	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
64	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/SfaEmployeeInvitationServiceTest.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 a242f6e22b472afffbd726be71165de394e417355cdf1edd81b5601278ddea32

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexClass block; child elements specify its configuration.
3	`    <apiVersion>67.0</apiVersion>`	Sets Salesforce API version used for this component to 67.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexClass>`	Closes the ApexClass configuration block.

force-app/main/default/classes/SfaPhaseOnePjpController.cls

Current multi-beat PJP workflow: authenticated employee context, assigned beats, draft/junction save, manager submission, explicit approver decision and audit fields.

386 numbered source lines | SHA-256 5f8ab0961e765583cb045f7e923c27cac4c2f6031f4adfaaaec939ec21231af5

Line	Source code	Explanation / reading note
1	`public with sharing class SfaPhaseOnePjpController {`	Declares a class/type: public with sharing class SfaPhaseOnePjpController {. Uses record sharing, which does not alone enforce field/object permissions.
2	`    public class ContextRow {`	Declares a class/type: public class ContextRow {. Members below hold behavior and/or state.
3	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
4	`        public Id employeeId;`	Continues the surrounding declaration/expression or text: public Id employeeId;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
5	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
6	`        public String employeeName;`	Continues the surrounding declaration/expression or text: public String employeeName;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
7	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
8	`        public Boolean active;`	Continues the surrounding declaration/expression or text: public Boolean active;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
9	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
10	`        public Id managerId;`	Continues the surrounding declaration/expression or text: public Id managerId;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
11	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
12	`        public String managerName;`	Continues the surrounding declaration/expression or text: public String managerName;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.

Line	Source code	Explanation / reading note
13	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
14		Blank line separating logical sections; no executable operation.
15	`    public class PjpRow {`	Declares a class/type: public class PjpRow {. Members below hold behavior and/or state.
16	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
17	`        public Id id;`	Continues the surrounding declaration/expression or text: public Id id;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
18	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
19	`        public String name;`	Continues the surrounding declaration/expression or text: public String name;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
20	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
21	`        public String employeeName;`	Continues the surrounding declaration/expression or text: public String employeeName;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
22	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
23	`        public Date startDate;`	Continues the surrounding declaration/expression or text: public Date startDate;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
24	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
25	`        public Date endDate;`	Continues the surrounding declaration/expression or text: public Date endDate;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
26	`        @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
27	`        public String status;`	Continues the surrounding declaration/expression or text: public String status;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.

Line	Source code	Explanation / reading note
28	`@AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
29	`public String approverName;`	Continues the surrounding declaration/expression or text: public String approverName;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
30	`@AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
31	`public Datetime submittedDate;`	Continues the surrounding declaration/expression or text: public Datetime submittedDate;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
32	`@AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
33	`public Datetime approvedDate;`	Continues the surrounding declaration/expression or text: public Datetime approvedDate;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
34	`@AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
35	`public Datetime rejectedDate;`	Continues the surrounding declaration/expression or text: public Datetime rejectedDate;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
36	`@AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
37	`public String rejectionReason;`	Continues the surrounding declaration/expression or text: public String rejectionReason;. Read it with the preceding opening statement (@AuraEnabled); it is not a standalone business operation.
38	`@AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
39	`public List<Id> beatIds = new List<Id>();`	Declares a callable function/method: public List<Id> beatIds = new List<Id>();. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
40	`@AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
41	`public List<String> beatNames = new List<String>();`	Declares a callable function/method: public List<String> beatNames = new List<String>();. Parameters supply its inputs; the following block implements the operation.
42	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43		Blank line separating logical sections; no executable operation.
44	`@AuraEnabled(cacheable=true)`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
45	`public static ContextRow getMyContext() {`	Declares a callable function/method: public static ContextRow getMyContext() {. Parameters supply its inputs; the following block implements the operation.
46	`Employee__c employee = currentEmployee();`	Assigns the right-hand expression to the named variable/property: Employee__c employee = currentEmployee();. This is in-memory unless it is later persisted by an explicit call.
47	`ContextRow row = new ContextRow();`	Assigns the right-hand expression to the named variable/property: ContextRow row = new ContextRow();. This is in-memory unless it is later persisted by an explicit call.
48	`row.employeeId = employee.Id;`	Assigns the right-hand expression to the named variable/property: row.employeeId = employee.Id;. This is in-memory unless it is later persisted by an explicit call.
49	`row.employeeName = employee.Name;`	Assigns the right-hand expression to the named variable/property: row.employeeName = employee.Name;. This is in-memory unless it is later persisted by an explicit call.
50	`row.active = employee.Active__c;`	Assigns the right-hand expression to the named variable/property: row.active = employee.Active__c;. This is in-memory unless it is later persisted by an explicit call.
51	`row.managerId = employee.Reporting_Manager__c;`	Assigns the right-hand expression to the named variable/property: row.managerId = employee.Reporting_Manager__c;. This is in-memory unless it is later persisted by an explicit call.
52	`row.managerName = employee.Reporting_Manager__r == null`	Assigns the right-hand expression to the named variable/property: row.managerName = employee.Reporting_Manager__r == null. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
53	`? null`	Continues the surrounding declaration/expression or text: ? null. Read it with the preceding opening statement (row.managerName = employee.Reporting_Manager__r == null); it is not a standalone business operation.
54	`: employee.Reporting_Manager__r.Name;`	Continues the surrounding declaration/expression or text: : employee.Reporting_Manager__r.Name;. Read it with the preceding opening statement (? null); it is not a standalone business operation.
55	`return row;`	Returns row to the caller (or begins returned UI markup) and ends this execution path.
56	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57		Blank line separating logical sections; no executable operation.
58	`@AuraEnabled(cacheable=true)`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
59	`public static List<Beat__c> getMyBeats() {`	Declares a callable function/method: public static List<Beat__c> getMyBeats() {. Parameters supply its inputs; the following block implements the operation.
60	`Employee__c employee = currentEmployee();`	Assigns the right-hand expression to the named variable/property: Employee__c employee = currentEmployee();. This is in-memory unless it is later persisted by an explicit call.
61	`return [`	Returns [to the caller (or begins returned UI markup) and ends this execution path.
62	`SELECT Id, Name, Beat_ID__c, Geography__r.Name`	Selects these Salesforce fields/aggregates: Id, Name, Beat_ID__c, Geography__r.Name. Query results are used in the surrounding assignment or loop.
63	`FROM Beat__c`	Chooses the Salesforce object/subquery source: FROM Beat__c.
64	`WHERE Assigned_Employee__c = :employee.Id AND Active__c = TRUE`	Adds a query/filter condition: WHERE Assigned_Employee__c = :employee.Id AND Active__c = TRUE. The complete condition determines which records are included.
65	`ORDER BY Name`	Controls query sorting, grouping or result count: ORDER BY Name.
66	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
67	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
68		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
69	`    @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
70	`    public static List<PjpRow> getMyPjps() {`	Declares a callable function/method: public static List<PjpRow> getMyPjps() {. Parameters supply its inputs; the following block implements the operation.
71	`        Employee__c employee = currentEmployee();`	Assigns the right-hand expression to the named variable/property: Employee__c employee = currentEmployee();. This is in-memory unless it is later persisted by an explicit call.
72	`        Id employeeId = employee.Id;`	Declares/initializes local data used by the surrounding operation: Id employeeId = employee.Id;. Collection contents and assignments below determine its purpose.
73	`        return toRows(`	Returns toRows(to the caller (or begins returned UI markup) and ends this execution path.
74	`            Database.query(`	Calls the named method: Database.query(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
75	`                'SELECT Id, Name, Employee__r.Name, Planning_Start_Date__c, Planning_End_Date__c, ' +`	Continues the surrounding declaration/expression or text: 'SELECT Id, Name, Employee__r.Name, Planning_Start_Date__c, Planning_End_Date__c, ' +. Read it with the preceding opening statement (Database.query(); it is not a standalone business operation.
76	`                    'Status__c, Approver__r.Name, Submitted_Date__c, Approved_Date__c, ' +`	Continues the surrounding declaration/expression or text: 'Status__c, Approver__r.Name, Submitted_Date__c, Approved_Date__c, ' +. Read it with the preceding opening statement ('SELECT Id, Name, Employee__r.Name, Planning_Start_Date__c, Planning_End_Date__c, ' +); it is not a standalone business operation.
77	`                    'Rejected_Date__c, Rejection_Reason__c, ' +`	Continues the surrounding declaration/expression or text: 'Rejected_Date__c, Rejection_Reason__c, ' +. Read it with the preceding opening statement ('Status__c, Approver__r.Name, Submitted_Date__c, Approved_Date__c, ' +); it is not a standalone business operation.
78	`                    '(SELECT Beat__c, Beat__r.Name FROM Selected_Beats__r ORDER BY Beat__r.Name) ' +`	Continues the surrounding declaration/expression or text: '(SELECT Beat__c, Beat__r.Name FROM Selected_Beats__r ORDER BY Beat__r.Name) ' +. Read it with the preceding opening statement ('Rejected_Date__c, Rejection_Reason__c, ' +); it is not a standalone business operation.
79	`                    'FROM Permanent_Journey_Plan__c ' +`	Continues the surrounding declaration/expression or text: 'FROM Permanent_Journey_Plan__c ' +. Read it with the preceding opening statement ('(SELECT Beat__c, Beat__r.Name FROM Selected_Beats__r ORDER BY Beat__r.Name) ' +); it is not a standalone business operation.

Line	Source code	Explanation / reading note
80	`'WHERE Employee__c = :employeeId AND Planning_Start_Date__c != null ' +`	Assigns the right-hand expression to the named variable/property: 'WHERE Employee__c = :employeeId AND Planning_Start_Date__c != null ' +. This is in-memory unless it is later persisted by an explicit call.
81	`'ORDER BY CreatedDate DESC',`	Continues the surrounding declaration/expression or text: 'ORDER BY CreatedDate DESC',. Read it with the preceding opening statement ('WHERE Employee__c = :employeeId AND Planning_Start_Date__c != null ' +); it is not a standalone business operation.
82	`AccessLevel.SYSTEM_MODE`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
83	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
84	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
85	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
86		Blank line separating logical sections; no executable operation.
87	`@AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
88	`public static List<PjpRow> getMyApprovals() {`	Declares a callable function/method: public static List<PjpRow> getMyApprovals() {. Parameters supply its inputs; the following block implements the operation.
89	`Id currentUserId = UserInfo.getUserId();`	Declares/initializes local data used by the surrounding operation: Id currentUserId = UserInfo.getUserId();. Collection contents and assignments below determine its purpose.
90	`return toRows(`	Returns toRows(to the caller (or begins returned UI markup) and ends this execution path.
91	`Database.query(`	Calls the named method: Database.query(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
92	`'SELECT Id, Name, Employee__r.Name, Planning_Start_Date__c, Planning_End_Date__c, ' +`	Continues the surrounding declaration/expression or text: 'SELECT Id, Name, Employee__r.Name, Planning_Start_Date__c, Planning_End_Date__c, ' +. Read it with the preceding opening statement (Database.query(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
93	`'Status__c, Approver__r.Name, Submitted_Date__c, Approved_Date__c, ' +`	Continues the surrounding declaration/expression or text: 'Status__c, Approver__r.Name, Submitted_Date__c, Approved_Date__c, ' +. Read it with the preceding opening statement ('SELECT Id, Name, Employee__r.Name, Planning_Start_Date__c, Planning_End_Date__c, ' +); it is not a standalone business operation.
94	`'Rejected_Date__c, Rejection_Reason__c, ' +`	Continues the surrounding declaration/expression or text: 'Rejected_Date__c, Rejection_Reason__c, ' +. Read it with the preceding opening statement ('Status__c, Approver__r.Name, Submitted_Date__c, Approved_Date__c, ' +); it is not a standalone business operation.
95	`'(SELECT Beat__c, Beat__r.Name FROM Selected_Beats__r ORDER BY Beat__r.Name) ' +`	Continues the surrounding declaration/expression or text: '(SELECT Beat__c, Beat__r.Name FROM Selected_Beats__r ORDER BY Beat__r.Name) ' +. Read it with the preceding opening statement ('Rejected_Date__c, Rejection_Reason__c, ' +); it is not a standalone business operation.
96	`'FROM Permanent_Journey_Plan__c ' +`	Continues the surrounding declaration/expression or text: 'FROM Permanent_Journey_Plan__c ' +. Read it with the preceding opening statement ('(SELECT Beat__c, Beat__r.Name FROM Selected_Beats__r ORDER BY Beat__r.Name) ' +); it is not a standalone business operation.
97	`'WHERE Approver__r.Salesforce_User__c = :currentUserId AND Status__c = \'Submitted\' ' +`	Assigns the right-hand expression to the named variable/property: 'WHERE Approver__r.Salesforce_User__c = :currentUserId AND Status__c = \'Submitted\' ' +. This is in-memory unless it is later persisted by an explicit call.
98	`'ORDER BY Submitted_Date__c',`	Continues the surrounding declaration/expression or text: 'ORDER BY Submitted_Date__c',. Read it with the preceding opening statement ('WHERE Approver__r.Salesforce_User__c = :currentUserId AND Status__c = \'Submitted\' ' +); it is not a standalone business operation.
99	`AccessLevel.SYSTEM_MODE`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
100	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
101	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
102	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
103		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
104	`    @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
105	`    public static Id saveDraft(Id pjpId, Date startDate, Date endDate, List<Id> beatIds) {`	Declares a callable function/method: public static Id saveDraft(Id pjpId, Date startDate, Date endDate, List<Id> beatIds) {. Parameters supply its inputs; the following block implements the operation.
106	`        Employee__c employee = currentEmployee();`	Assigns the right-hand expression to the named variable/property: Employee__c employee = currentEmployee();. This is in-memory unless it is later persisted by an explicit call.
107	`        validateEmployeeAndDates(employee, startDate, endDate);`	Continues the surrounding declaration/expression or text: validateEmployeeAndDates(employee, startDate, endDate);. Read it with the preceding opening statement (Employee__c employee = currentEmployee();); it is not a standalone business operation.
108	`        Set<Id> requestedBeatIds = new Set<Id>(beatIds == null ? new List<Id>() : beatIds);`	Declares/initializes local data used by the surrounding operation: Set<Id> requestedBeatIds = new Set<Id>(beatIds == null ? new List<Id>() : beatIds);. Collection contents and assignments below determine its purpose.
109	`        if (requestedBeatIds.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (requestedBeatIds.isEmpty()) {.
110	`            throw new AuraHandledException('Select at least one Beat.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('Select at least one Beat.');. The caller/catch block decides how it is reported.
111	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
112		Blank line separating logical sections; no executable operation.
113	`        Id employeeId = employee.Id;`	Declares/initializes local data used by the surrounding operation: Id employeeId = employee.Id;. Collection contents and assignments below determine its purpose.
114	`        List<Beat__c> authorizedBeats = Database.query(`	Declares/initializes local data used by the surrounding operation: List<Beat__c> authorizedBeats = Database.query(. Collection contents and assignments below determine its purpose.
115	`            'SELECT Id FROM Beat__c WHERE Id IN :requestedBeatIds ' +`	Continues the surrounding declaration/expression or text: 'SELECT Id FROM Beat__c WHERE Id IN :requestedBeatIds ' +. Read it with the preceding opening statement (List<Beat__c> authorizedBeats = Database.query(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
116	`'AND Assigned_Employee__c = :employeeId AND Active__c = true',`	Assigns the right-hand expression to the named variable/property: 'AND Assigned_Employee__c = :employeeId AND Active__c = true',. This is in-memory unless it is later persisted by an explicit call.
117	`AccessLevel.SYSTEM_MODE`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
118	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
119	`if (authorizedBeats.size() != requestedBeatIds.size()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (authorizedBeats.size() != requestedBeatIds.size()) {.
120	`throw new AuraHandledException(`	Stops this execution path with a validation/error exception: throw new AuraHandledException(. The caller/catch block decides how it is reported.
121	`'Only active Beats assigned to the logged-in employee can be selected.'`	Continues the surrounding declaration/expression or text: 'Only active Beats assigned to the logged-in employee can be selected.'. Read it with the preceding opening statement (throw new AuraHandledException(); it is not a standalone business operation.
122	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
123	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
124		Blank line separating logical sections; no executable operation.
125	`Permanent_Journey_Plan__c plan;`	Continues the surrounding declaration/expression or text: Permanent_Journey_Plan__c plan;. Read it with the preceding opening statement; it is not a standalone business operation.
126	`if (pjpId == null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (pjpId == null) {.
127	`plan = new Permanent_Journey_Plan__c(Employee__c = employee.Id);`	Assigns the right-hand expression to the named variable/property: plan = new Permanent_Journey_Plan__c(Employee__c = employee.Id);. This is in-memory unless it is later persisted by an explicit call.
128	`} else {`	Alternative branch taken when the preceding condition is false.

Line	Source code	Explanation / reading note
129	`plan = [`	Assigns the right-hand expression to the named variable/property: plan = [. This is in-memory unless it is later persisted by an explicit call.
130	`SELECT Id, Employee__c, Status__c`	Selects these Salesforce fields/aggregates: Id, Employee__c, Status__c. Query results are used in the surrounding assignment or loop.
131	`FROM Permanent_Journey_Plan__c`	Chooses the Salesforce object/subquery source: FROM Permanent_Journey_Plan__c.
132	`WHERE Id = :pjpId AND Employee__c = :employee.Id`	Adds a query/filter condition: WHERE Id = :pjpId AND Employee__c = :employee.Id. The complete condition determines which records are included.
133	`LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
134	`FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
135	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
136	`if (plan.Status__c != 'Draft' && plan.Status__c != 'Rejected') {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plan.Status__c != 'Draft' && plan.Status__c != 'Rejected') {.
137	`throw new AuraHandledException('Only Draft or Rejected PJPs can be edited.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('Only Draft or Rejected PJPs can be edited.');. The caller/catch block decides how it is reported.
138	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
139	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
140		Blank line separating logical sections; no executable operation.
141	`plan.Name = employee.Name + ' ' + monthName(startDate.month()) + ' PJP';`	Calls the named method: plan.Name = employee.Name + ' ' + monthName(startDate.month()) + ' PJP';. Its implementation defines the side effect/result; use the symbol/file index to follow it.
142	`plan.Planning_Start_Date__c = startDate;`	Assigns the right-hand expression to the named variable/property: plan.Planning_Start_Date__c = startDate;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
143	`plan.Planning_End_Date__c = endDate;`	Assigns the right-hand expression to the named variable/property: plan.Planning_End_Date__c = endDate;. This is in-memory unless it is later persisted by an explicit call.
144	`plan.Plan_Date__c = startDate;`	Assigns the right-hand expression to the named variable/property: plan.Plan_Date__c = startDate;. This is in-memory unless it is later persisted by an explicit call.
145	`plan.Planned_Date__c = startDate;`	Assigns the right-hand expression to the named variable/property: plan.Planned_Date__c = startDate;. This is in-memory unless it is later persisted by an explicit call.
146	`plan.Employee__c = employee.Id;`	Assigns the right-hand expression to the named variable/property: plan.Employee__c = employee.Id;. This is in-memory unless it is later persisted by an explicit call.
147	`// Keep the original required Beat lookup populated for compatibility.`	Developer comment/documentation: Keep the original required Beat lookup populated for compatibility. It is not executed.
148	`// The complete multi-beat selection is stored in PJP_Selected_Beat__c.`	Developer comment/documentation: The complete multi-beat selection is stored in PJP_Selected_Beat__c. It is not executed.
149	`plan.Beat__c = authorizedBeats[0].Id;`	Assigns the right-hand expression to the named variable/property: plan.Beat__c = authorizedBeats[0].Id;. This is in-memory unless it is later persisted by an explicit call.
150	`plan.Approver__c = employee.Reporting_Manager__c;`	Assigns the right-hand expression to the named variable/property: plan.Approver__c = employee.Reporting_Manager__c;. This is in-memory unless it is later persisted by an explicit call.
151	`plan.Status__c = 'Draft';`	Assigns the right-hand expression to the named variable/property: plan.Status__c = 'Draft';. This is in-memory unless it is later persisted by an explicit call.
152	`plan.Rejection_Reason__c = null;`	Assigns the right-hand expression to the named variable/property: plan.Rejection_Reason__c = null;. This is in-memory unless it is later persisted by an explicit call.
153	`upsert plan;`	Performs Salesforce DML: upsert plan;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
154		Blank line separating logical sections; no executable operation.
155	`Id savedPlanId = plan.Id;`	Declares/initializes local data used by the surrounding operation: Id savedPlanId = plan.Id;. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
156	`        List<PJP_Selected_Beat__c> previousSelections = Database.query(`	Declares/initializes local data used by the surrounding operation: List<PJP_Selected_Beat__c> previousSelections = Database.query(. Collection contents and assignments below determine its purpose.
157	`            'SELECT Id FROM PJP_Selected_Beat__c WHERE PJP__c = :savedPlanId',`	Assigns the right-hand expression to the named variable/property: 'SELECT Id FROM PJP_Selected_Beat__c WHERE PJP__c = :savedPlanId',. This is in-memory unless it is later persisted by an explicit call.
158	`            AccessLevel.SYSTEM_MODE`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
159	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
160	`        if (!previousSelections.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!previousSelections.isEmpty()) {.
161	`            Database.delete(previousSelections, AccessLevel.SYSTEM_MODE);`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
162	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
163	`        List<PJP_Selected_Beat__c> selections = new List<PJP_Selected_Beat__c>();`	Declares/initializes local data used by the surrounding operation: List<PJP_Selected_Beat__c> selections = new List<PJP_Selected_Beat__c>();. Collection contents and assignments below determine its purpose.
164	`        for (Id beatId : requestedBeatIds) {`	Repeats work over the specified records/items or while this condition holds: for (Id beatId : requestedBeatIds) {. Check where queries/writes occur relative to the loop.
165	`            selections.add(`	Calls the named method: selections.add(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
166	`                new PJP_Selected_Beat__c(`	Continues the surrounding declaration/expression or text: new PJP_Selected_Beat__c(. Read it with the preceding opening statement (selections.add(); it is not a standalone business operation.
167	`                    PJP__c = plan.Id,`	Assigns the right-hand expression to the named variable/property: PJP__c = plan.Id,. This is in-memory unless it is later persisted by an explicit call.
168	`                    Beat__c = beatId,`	Assigns the right-hand expression to the named variable/property: Beat__c = beatId,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
169	`Unique_Key__c = String.valueOf(plan.Id) + '-' + String.valueOf(beatId)`	Calls the named method: Unique_Key__c = String.valueOf(plan.Id) + '-' + String.valueOf(beatId). Its implementation defines the side effect/result; use the symbol/file index to follow it.
170	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
171	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
172	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
173	`// The required junction fields do not expose separate field permissions.`	Developer comment/documentation: The required junction fields do not expose separate field permissions. It is not executed.
174	`// Authorization was already enforced above, so write the child records in`	Developer comment/documentation: Authorization was already enforced above, so write the child records in It is not executed.
175	`// system mode while the controller continues to run with sharing.`	Developer comment/documentation: system mode while the controller continues to run with sharing. It is not executed.
176	`Database.insert(selections, AccessLevel.SYSTEM_MODE);`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
177	`return plan.Id;`	Returns plan.Id to the caller (or begins returned UI markup) and ends this execution path.
178	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
179		Blank line separating logical sections; no executable operation.
180	`@AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
181	`public static void submitPjp(Id pjpId) {`	Declares a callable function/method: public static void submitPjp(Id pjpId) {. Parameters supply its inputs; the following block implements the operation.
182	`Employee__c employee = currentEmployee();`	Assigns the right-hand expression to the named variable/property: Employee__c employee = currentEmployee();. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
183	`Permanent_Journey_Plan__c plan = [`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c plan = [. This is in-memory unless it is later persisted by an explicit call.
184	`SELECT`	Selects these Salesforce fields/aggregates: SELECT. Query results are used in the surrounding assignment or loop.
185	`Id,`	Declares/initializes local data used by the surrounding operation: Id,. Collection contents and assignments below determine its purpose.
186	`Name,`	Continues the surrounding declaration/expression or text: Name,. Read it with the preceding opening statement (Id,); it is not a standalone business operation.
187	`Employee__c,`	Continues the surrounding declaration/expression or text: Employee__c,. Read it with the preceding opening statement (Name,); it is not a standalone business operation.
188	`Employee__r.Name,`	Continues the surrounding declaration/expression or text: Employee__r.Name,. Read it with the preceding opening statement (Employee__c,); it is not a standalone business operation.
189	`Employee__r.Active__c,`	Continues the surrounding declaration/expression or text: Employee__r.Active__c,. Read it with the preceding opening statement (Employee__r.Name,); it is not a standalone business operation.
190	`Planning_Start_Date__c,`	Continues the surrounding declaration/expression or text: Planning_Start_Date__c,. Read it with the preceding opening statement (Employee__r.Active__c,); it is not a standalone business operation.
191	`Planning_End_Date__c,`	Continues the surrounding declaration/expression or text: Planning_End_Date__c,. Read it with the preceding opening statement (Planning_Start_Date__c,); it is not a standalone business operation.
192	`Status__c,`	Continues the surrounding declaration/expression or text: Status__c,. Read it with the preceding opening statement (Planning_End_Date__c,); it is not a standalone business operation.
193	`Approver__c,`	Continues the surrounding declaration/expression or text: Approver__c,. Read it with the preceding opening statement (Status__c,); it is not a standalone business operation.
194	`Approver__r.Salesforce_User__c,`	Continues the surrounding declaration/expression or text: Approver__r.Salesforce_User__c,. Read it with the preceding opening statement (Approver__c,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
195	`(SELECT Id FROM Selected_Beats__r)`	Continues the surrounding declaration/expression or text: (SELECT Id FROM Selected_Beats__r). Read it with the preceding opening statement (Approver__r.Salesforce_User__c,); it is not a standalone business operation.
196	`FROM Permanent_Journey_Plan__c`	Chooses the Salesforce object/subquery source: FROM Permanent_Journey_Plan__c.
197	`WHERE Id = :pjpId AND Employee__c = :employee.Id`	Adds a query/filter condition: WHERE Id = :pjpId AND Employee__c = :employee.Id. The complete condition determines which records are included.
198	`LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
199	`FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
200	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
201	`validateEmployeeAndDates(employee, plan.Planning_Start_Date__c, plan.Planning_End_Date__c);`	Continues the surrounding declaration/expression or text: validateEmployeeAndDates(employee, plan.Planning_Start_Date__c, plan.Planning_End_Date__c);. Read it with the preceding opening statement ( ];); it is not a standalone business operation.
202	`if (plan.Status__c != 'Draft' && plan.Status__c != 'Rejected') {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plan.Status__c != 'Draft' && plan.Status__c != 'Rejected') {.
203	`throw new AuraHandledException('Only a Draft or Rejected PJP can be submitted.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('Only a Draft or Rejected PJP can be submitted.');. The caller/catch block decides how it is reported.
204	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
205	`if (plan.Selected_Beats__r.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plan.Selected_Beats__r.isEmpty()).
206	`throw new AuraHandledException('Select at least one Beat.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('Select at least one Beat.');. The caller/catch block decides how it is reported.
207	`if (plan.Approver__c == null || plan.Approver__r.Salesforce_User__c == null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plan.Approver__c == null || plan.Approver__r.Salesforce_User__c == null) {.

Line	Source code	Explanation / reading note
208	`throw new AuraHandledException(`	Stops this execution path with a validation/error exception: throw new AuraHandledException(. The caller/catch block decides how it is reported.
209	`'The employee must have a reporting manager linked to a Salesforce user.'`	Continues the surrounding declaration/expression or text: 'The employee must have a reporting manager linked to a Salesforce user.'. Read it with the preceding opening statement (throw new AuraHandledException(); it is not a standalone business operation.
210	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
211	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
212	`if (plan.Approver__r.Salesforce_User__c == UserInfo.getUserId()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plan.Approver__r.Salesforce_User__c == UserInfo.getUserId()) {.
213	`throw new AuraHandledException('An employee cannot approve their own PJP.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('An employee cannot approve their own PJP.');. The caller/catch block decides how it is reported.
214	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
215	`plan.Status__c = 'Submitted';`	Assigns the right-hand expression to the named variable/property: plan.Status__c = 'Submitted';. This is in-memory unless it is later persisted by an explicit call.
216	`plan.Submitted_Date__c = System.now();`	Calls the named method: plan.Submitted_Date__c = System.now();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
217	`plan.Submitted_By__c = UserInfo.getUserId();`	Calls the named method: plan.Submitted_By__c = UserInfo.getUserId();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
218	`plan.Approved_By__c = null;`	Assigns the right-hand expression to the named variable/property: plan.Approved_By__c = null;. This is in-memory unless it is later persisted by an explicit call.
219	`plan.Approved_Date__c = null;`	Assigns the right-hand expression to the named variable/property: plan.Approved_Date__c = null;. This is in-memory unless it is later persisted by an explicit call.
220	`plan.Rejected_By__c = null;`	Assigns the right-hand expression to the named variable/property: plan.Rejected_By__c = null;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
221	`plan.Rejected_Date__c = null;`	Assigns the right-hand expression to the named variable/property: plan.Rejected_Date__c = null;. This is in-memory unless it is later persisted by an explicit call.
222	`// Audit fields are intentionally read-only to mobile users. Only this`	Developer comment/documentation: Audit fields are intentionally read-only to mobile users. Only this It is not executed.
223	`// validated server transition writes them.`	Developer comment/documentation: validated server transition writes them. It is not executed.
224	`Database.update(plan, AccessLevel.SYSTEM_MODE);`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
225	`notifyManager(plan, plan.Selected_Beats__r.size());`	Calls the named method: notifyManager(plan, plan.Selected_Beats__r.size());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
226	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
227		Blank line separating logical sections; no executable operation.
228	`@AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
229	`public static void decidePjp(Id pjpId, Boolean approve, String rejectionReason) {`	Declares a callable function/method: public static void decidePjp(Id pjpId, Boolean approve, String rejectionReason) {. Parameters supply its inputs; the following block implements the operation.
230	`Id currentUserId = UserInfo.getUserId();`	Declares/initializes local data used by the surrounding operation: Id currentUserId = UserInfo.getUserId();. Collection contents and assignments below determine its purpose.
231	`Permanent_Journey_Plan__c plan = Database.query(`	Calls the named method: Permanent_Journey_Plan__c plan = Database.query(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
232	`'SELECT Id, Employee__c, Employee__r.Salesforce_User__c, Approver__c, ' +`	Continues the surrounding declaration/expression or text: 'SELECT Id, Employee__c, Employee__r.Salesforce_User__c, Approver__c, ' +. Read it with the preceding opening statement (Permanent_Journey_Plan__c plan = Database.query(); it is not a standalone business operation.
233	`'Approver__r.Salesforce_User__c, Status__c, ' +`	Continues the surrounding declaration/expression or text: 'Approver__r.Salesforce_User__c, Status__c, ' +. Read it with the preceding opening statement ('SELECT Id, Employee__c, Employee__r.Salesforce_User__c, Approver__c, ' +); it is not a standalone business operation.

Line	Source code	Explanation / reading note
234	`'(SELECT Beat__c FROM Selected_Beats__r) FROM Permanent_Journey_Plan__c ' +`	Continues the surrounding declaration/expression or text: '(SELECT Beat__c FROM Selected_Beats__r) FROM Permanent_Journey_Plan__c ' +. Read it with the preceding opening statement ('Approver__r.Salesforce_User__c, Status__c, ' +); it is not a standalone business operation.
235	`'WHERE Id = :pjpId LIMIT 1 FOR UPDATE',`	Requests record locks for this query so concurrent commands cannot both use the same old state.
236	`AccessLevel.SYSTEM_MODE`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
237	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
238	`if (plan.Status__c != 'Submitted')`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plan.Status__c != 'Submitted').
239	`throw new AuraHandledException('This PJP is no longer Submitted.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('This PJP is no longer Submitted.');. The caller/catch block decides how it is reported.
240	`if (plan.Approver__r.Salesforce_User__c != currentUserId)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plan.Approver__r.Salesforce_User__c != currentUserId).
241	`throw new AuraHandledException('Only the configured approver can decide this PJP.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('Only the configured approver can decide this PJP.');. The caller/catch block decides how it is reported.
242	`if (plan.Employee__r.Salesforce_User__c == currentUserId) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plan.Employee__r.Salesforce_User__c == currentUserId) {.
243	`throw new AuraHandledException('An employee cannot approve their own PJP.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('An employee cannot approve their own PJP.');. The caller/catch block decides how it is reported.
244	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
245	`if (!approve && String.isBlank(rejectionReason))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!approve && String.isBlank(rejectionReason)).

Line	Source code	Explanation / reading note
246	`throw new AuraHandledException('Rejection reason is required.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('Rejection reason is required.');. The caller/catch block decides how it is reported.
247		Blank line separating logical sections; no executable operation.
248	`if (approve) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (approve) {.
249	`plan.Status__c = 'Approved';`	Assigns the right-hand expression to the named variable/property: plan.Status__c = 'Approved';. This is in-memory unless it is later persisted by an explicit call.
250	`plan.Approved_By__c = UserInfo.getUserId();`	Calls the named method: plan.Approved_By__c = UserInfo.getUserId();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
251	`plan.Approved_Date__c = System.now();`	Calls the named method: plan.Approved_Date__c = System.now();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
252	`plan.Approved_Outlet_Names__c = approvedOutletNames(plan.Selected_Beats__r);`	Assigns the right-hand expression to the named variable/property: plan.Approved_Outlet_Names__c = approvedOutletNames(plan.Selected_Beats__r);. This is in-memory unless it is later persisted by an explicit call.
253	`plan.Rejection_Reason__c = null;`	Assigns the right-hand expression to the named variable/property: plan.Rejection_Reason__c = null;. This is in-memory unless it is later persisted by an explicit call.
254	`} else {`	Alternative branch taken when the preceding condition is false.
255	`plan.Status__c = 'Rejected';`	Assigns the right-hand expression to the named variable/property: plan.Status__c = 'Rejected';. This is in-memory unless it is later persisted by an explicit call.
256	`plan.Rejected_By__c = UserInfo.getUserId();`	Calls the named method: plan.Rejected_By__c = UserInfo.getUserId();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
257	`plan.Rejected_Date__c = System.now();`	Calls the named method: plan.Rejected_Date__c = System.now();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
258	`plan.Rejection_Reason__c = rejectionReason.trim();`	Calls the named method: plan.Rejection_Reason__c = rejectionReason.trim();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
259	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
260	`        // Approval audit fields are protected from direct user edits.`	Developer comment/documentation: Approval audit fields are protected from direct user edits. It is not executed.
261	`        Database.update(plan, AccessLevel.SYSTEM_MODE);`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
262	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
263		Blank line separating logical sections; no executable operation.
264	`    private static Employee__c currentEmployee() {`	Declares a callable function/method: private static Employee__c currentEmployee() {. Parameters supply its inputs; the following block implements the operation.
265	`        // Run this identity lookup in system mode. Access is still constrained by`	Developer comment/documentation: Run this identity lookup in system mode. Access is still constrained by It is not executed.
266	`        // the current user's Employee mapping and all returned business records`	Developer comment/documentation: the current user's Employee mapping and all returned business records It is not executed.
267	`        // are filtered by that Employee id.`	Developer comment/documentation: are filtered by that Employee id. It is not executed.
268	`        Id currentUserId = UserInfo.getUserId();`	Declares/initializes local data used by the surrounding operation: Id currentUserId = UserInfo.getUserId();. Collection contents and assignments below determine its purpose.
269	`        List<Employee__c> employees = Database.query(`	Declares/initializes local data used by the surrounding operation: List<Employee__c> employees = Database.query(. Collection contents and assignments below determine its purpose.
270	`            'SELECT Id, Name, Active__c, Reporting_Manager__c, Reporting_Manager__r.Name, ' +`	Continues the surrounding declaration/expression or text: 'SELECT Id, Name, Active__c, Reporting_Manager__c, Reporting_Manager__r.Name, ' +. Read it with the preceding opening statement (List<Employee__c> employees = Database.query(); it is not a standalone business operation.
271	`                'Reporting_Manager__r.Salesforce_User__c FROM Employee__c ' +`	Continues the surrounding declaration/expression or text: 'Reporting_Manager__r.Salesforce_User__c FROM Employee__c ' +. Read it with the preceding opening statement ('SELECT Id, Name, Active__c, Reporting_Manager__c, Reporting_Manager__r.Name, ' +); it is not a standalone business operation.
272	`                'WHERE Salesforce_User__c = :currentUserId AND Active__c = true ' +`	Assigns the right-hand expression to the named variable/property: 'WHERE Salesforce_User__c = :currentUserId AND Active__c = true ' +. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
273	`'ORDER BY CreatedDate ASC LIMIT 1',`	Continues the surrounding declaration/expression or text: 'ORDER BY CreatedDate ASC LIMIT 1',. Read it with the preceding opening statement ('WHERE Salesforce_User__c = :currentUserId AND Active__c = true ' +); it is not a standalone business operation.
274	`AccessLevel.SYSTEM_MODE`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
275	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
276	`if (employees.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (employees.isEmpty()).
277	`throw new AuraHandledException(`	Stops this execution path with a validation/error exception: throw new AuraHandledException(. The caller/catch block decides how it is reported.
278	`'The logged-in user is not linked to an Employee record.'`	Continues the surrounding declaration/expression or text: 'The logged-in user is not linked to an Employee record.'. Read it with the preceding opening statement (throw new AuraHandledException(); it is not a standalone business operation.
279	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
280	`return employees[0];`	Returns employees[0] to the caller (or begins returned UI markup) and ends this execution path.
281	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
282		Blank line separating logical sections; no executable operation.
283	`private static void validateEmployeeAndDates(`	Declares a callable function/method: private static void validateEmployeeAndDates(. Parameters supply its inputs; the following block implements the operation.
284	`Employee__c employee,`	Continues the surrounding declaration/expression or text: Employee__c employee,. Read it with the preceding opening statement (private static void validateEmployeeAndDates(); it is not a standalone business operation.
285	`Date startDate,`	Declares/initializes local data used by the surrounding operation: Date startDate,. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
286	`        Date endDate`	Declares/initializes local data used by the surrounding operation: Date endDate. Collection contents and assignments below determine its purpose.
287	`    ) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (Date endDate); it is not a standalone business operation.
288	`        if (employee.Active__c != true)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (employee.Active__c != true).
289	`            throw new AuraHandledException('The employee is inactive.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('The employee is inactive.');. The caller/catch block decides how it is reported.
290	`        if (startDate == null || endDate == null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (startDate == null || endDate == null).
291	`            throw new AuraHandledException('Planning Start Date and End Date are required.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('Planning Start Date and End Date are required.');. The caller/catch block decides how it is reported.
292	`        if (endDate < startDate)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (endDate < startDate).
293	`            throw new AuraHandledException('Planning End Date cannot be before Start Date.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('Planning End Date cannot be before Start Date.');. The caller/catch block decides how it is reported.
294	`        if (employee.Reporting_Manager__c == null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (employee.Reporting_Manager__c == null).
295	`            throw new AuraHandledException('A reporting manager is required.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('A reporting manager is required.');. The caller/catch block decides how it is reported.
296	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
297		Blank line separating logical sections; no executable operation.
298	`    private static List<PjpRow> toRows(List<Permanent_Journey_Plan__c> plans) {`	Declares a callable function/method: private static List<PjpRow> toRows(List<Permanent_Journey_Plan__c> plans) {. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
299	`List<PjpRow> rows = new List<PjpRow>();`	Declares/initializes local data used by the surrounding operation: List<PjpRow> rows = new List<PjpRow>();. Collection contents and assignments below determine its purpose.
300	`for (Permanent_Journey_Plan__c plan : plans) {`	Repeats work over the specified records/items or while this condition holds: for (Permanent_Journey_Plan__c plan : plans) {. Check where queries/writes occur relative to the loop.
301	`PjpRow row = new PjpRow();`	Assigns the right-hand expression to the named variable/property: PjpRow row = new PjpRow();. This is in-memory unless it is later persisted by an explicit call.
302	`row.id = plan.Id;`	Assigns the right-hand expression to the named variable/property: row.id = plan.Id;. This is in-memory unless it is later persisted by an explicit call.
303	`row.name = plan.Name;`	Assigns the right-hand expression to the named variable/property: row.name = plan.Name;. This is in-memory unless it is later persisted by an explicit call.
304	`row.employeeName = plan.Employee__r.Name;`	Assigns the right-hand expression to the named variable/property: row.employeeName = plan.Employee__r.Name;. This is in-memory unless it is later persisted by an explicit call.
305	`row.startDate = plan.Planning_Start_Date__c;`	Assigns the right-hand expression to the named variable/property: row.startDate = plan.Planning_Start_Date__c;. This is in-memory unless it is later persisted by an explicit call.
306	`row.endDate = plan.Planning_End_Date__c;`	Assigns the right-hand expression to the named variable/property: row.endDate = plan.Planning_End_Date__c;. This is in-memory unless it is later persisted by an explicit call.
307	`row.status = plan.Status__c;`	Assigns the right-hand expression to the named variable/property: row.status = plan.Status__c;. This is in-memory unless it is later persisted by an explicit call.
308	`row.approverName = plan.Approver__r == null ? null : plan.Approver__r.Name;`	Assigns the right-hand expression to the named variable/property: row.approverName = plan.Approver__r == null ? null : plan.Approver__r.Name;. This is in-memory unless it is later persisted by an explicit call.
309	`row.submittedDate = plan.Submitted_Date__c;`	Assigns the right-hand expression to the named variable/property: row.submittedDate = plan.Submitted_Date__c;. This is in-memory unless it is later persisted by an explicit call.
310	`row.approvedDate = plan.Approved_Date__c;`	Assigns the right-hand expression to the named variable/property: row.approvedDate = plan.Approved_Date__c;. This is in-memory unless it is later persisted by an explicit call.
311	`row.rejectedDate = plan.Rejected_Date__c;`	Assigns the right-hand expression to the named variable/property: row.rejectedDate = plan.Rejected_Date__c;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
312	`            row.rejectionReason = plan.Rejection_Reason__c;`	Assigns the right-hand expression to the named variable/property: row.rejectionReason = plan.Rejection_Reason__c;. This is in-memory unless it is later persisted by an explicit call.
313	`            for (PJP_Selected_Beat__c selection : plan.Selected_Beats__r) {`	Repeats work over the specified records/items or while this condition holds: for (PJP_Selected_Beat__c selection : plan.Selected_Beats__r) {. Check where queries/writes occur relative to the loop.
314	`                row.beatIds.add(selection.Beat__c);`	Calls the named method: row.beatIds.add(selection.Beat__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
315	`                row.beatNames.add(selection.Beat__r.Name);`	Calls the named method: row.beatNames.add(selection.Beat__r.Name);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
316	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
317	`            rows.add(row);`	Calls the named method: rows.add(row);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
318	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
319	`        return rows;`	Returns rows to the caller (or begins returned UI markup) and ends this execution path.
320	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
321		Blank line separating logical sections; no executable operation.
322	`    private static void notifyManager(Permanent_Journey_Plan__c plan, Integer beatCount) {`	Declares a callable function/method: private static void notifyManager(Permanent_Journey_Plan__c plan, Integer beatCount) {. Parameters supply its inputs; the following block implements the operation.
323	`        List<CustomNotificationType> types = [`	Declares/initializes local data used by the surrounding operation: List<CustomNotificationType> types = [. Collection contents and assignments below determine its purpose.
324	`            SELECT Id`	Selects these Salesforce fields/aggregates: Id. Query results are used in the surrounding assignment or loop.
325	`            FROM CustomNotificationType`	Chooses the Salesforce object/subquery source: FROM CustomNotificationType.

Line	Source code	Explanation / reading note
326	`WHERE DeveloperName = 'PJP_Approval_Notification'`	Adds a query/filter condition: WHERE DeveloperName = 'PJP_Approval_Notification'. The complete condition determines which records are included.
327	`LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
328	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
329	`if (types.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (types.isEmpty()).
330	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
331	`Messaging.CustomNotification notification = new Messaging.CustomNotification();`	Calls the named method: Messaging.CustomNotification notification = new Messaging.CustomNotification();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
332	`notification.setNotificationTypeId(types[0].Id);`	Calls the named method: notification.setNotificationTypeId(types[0].Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
333	`notification.setTitle('PJP Approval Required');`	Calls the named method: notification.setTitle('PJP Approval Required');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
334	`notification.setBody(`	Calls the named method: notification.setBody(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
335	`plan.Employee__r.Name +`	Continues the surrounding declaration/expression or text: plan.Employee__r.Name +. Read it with the preceding opening statement (notification.setBody(); it is not a standalone business operation.
336	`' submitted a PJP for ' +`	Continues the surrounding declaration/expression or text: ' submitted a PJP for ' +. Read it with the preceding opening statement (plan.Employee__r.Name +); it is not a standalone business operation.
337	`plan.Planning_Start_Date__c.format() +`	Calls the named method: plan.Planning_Start_Date__c.format() +. Its implementation defines the side effect/result; use the symbol/file index to follow it.
338	`' to ' +`	Continues the surrounding declaration/expression or text: ' to ' +. Read it with the preceding opening statement (plan.Planning_Start_Date__c.format() +); it is not a standalone business operation.

Line	Source code	Explanation / reading note
339	`plan.Planning_End_Date__c.format() +`	Calls the named method: plan.Planning_End_Date__c.format() +. Its implementation defines the side effect/result; use the symbol/file index to follow it.
340	`' with ' +`	Continues the surrounding declaration/expression or text: ' with ' +. Read it with the preceding opening statement (plan.Planning_End_Date__c.format() +); it is not a standalone business operation.
341	`beatCount +`	Continues the surrounding declaration/expression or text: beatCount +. Read it with the preceding opening statement (' with ' +); it is not a standalone business operation.
342	`' selected Beat(s).'`	Continues the surrounding declaration/expression or text: ' selected Beat(s).'. Read it with the preceding opening statement (beatCount +); it is not a standalone business operation.
343	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
344	`notification.setTargetId(plan.Id);`	Calls the named method: notification.setTargetId(plan.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
345	`notification.send(new Set<String>{ String.valueOf(plan.Approver__r.Salesforce_User__c) });`	Calls the named method: notification.send(new Set<String>{ String.valueOf(plan.Approver__r.Salesforce_User__c) });. Its implementation defines the side effect/result; use the symbol/file index to follow it.
346	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
347		Blank line separating logical sections; no executable operation.
348	`private static String monthName(Integer monthNumber) {`	Declares a callable function/method: private static String monthName(Integer monthNumber) {. Parameters supply its inputs; the following block implements the operation.
349	`return new List<String>{`	Returns new List<String>{ to the caller (or begins returned UI markup) and ends this execution path.
350	`'January',`	Continues the surrounding declaration/expression or text: 'January',. Read it with the preceding opening statement (return new List<String>{); it is not a standalone business operation.
351	`'February',`	Continues the surrounding declaration/expression or text: 'February',. Read it with the preceding opening statement ('January',); it is not a standalone business operation.

Line	Source code	Explanation / reading note
352	`'March',`	Continues the surrounding declaration/expression or text: 'March',. Read it with the preceding opening statement ('February',); it is not a standalone business operation.
353	`'April',`	Continues the surrounding declaration/expression or text: 'April',. Read it with the preceding opening statement ('March',); it is not a standalone business operation.
354	`'May',`	Continues the surrounding declaration/expression or text: 'May',. Read it with the preceding opening statement ('April',); it is not a standalone business operation.
355	`'June',`	Continues the surrounding declaration/expression or text: 'June',. Read it with the preceding opening statement ('May',); it is not a standalone business operation.
356	`'July',`	Continues the surrounding declaration/expression or text: 'July',. Read it with the preceding opening statement ('June',); it is not a standalone business operation.
357	`'August',`	Continues the surrounding declaration/expression or text: 'August',. Read it with the preceding opening statement ('July',); it is not a standalone business operation.
358	`'September',`	Continues the surrounding declaration/expression or text: 'September',. Read it with the preceding opening statement ('August',); it is not a standalone business operation.
359	`'October',`	Continues the surrounding declaration/expression or text: 'October',. Read it with the preceding opening statement ('September',); it is not a standalone business operation.
360	`'November',`	Continues the surrounding declaration/expression or text: 'November',. Read it with the preceding opening statement ('October',); it is not a standalone business operation.
361	`'December'`	Continues the surrounding declaration/expression or text: 'December'. Read it with the preceding opening statement ('November',); it is not a standalone business operation.
362	`}[monthNumber - 1];`	Continues the surrounding declaration/expression or text: }[monthNumber - 1];. Read it with the preceding opening statement ('December'); it is not a standalone business operation.
363	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
364		Blank line separating logical sections; no executable operation.
365	`private static String approvedOutletNames(List<PJP_Selected_Beat__c> selectedBeats) {`	Declares a callable function/method: private static String approvedOutletNames(List<PJP_Selected_Beat__c> selectedBeats) {. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
366	`        Set<Id> beatIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> beatIds = new Set<Id>();. Collection contents and assignments below determine its purpose.
367	`        for (PJP_Selected_Beat__c selection : selectedBeats) {`	Repeats work over the specified records/items or while this condition holds: for (PJP_Selected_Beat__c selection : selectedBeats) {. Check where queries/writes occur relative to the loop.
368	`            if (selection.Beat__c != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (selection.Beat__c != null).
369	`                beatIds.add(selection.Beat__c);`	Calls the named method: beatIds.add(selection.Beat__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
370	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
371	`        if (beatIds.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (beatIds.isEmpty()).
372	`            return null;`	Returns null to the caller (or begins returned UI markup) and ends this execution path.
373		Blank line separating logical sections; no executable operation.
374	`        List<String> outletNames = new List<String>();`	Declares/initializes local data used by the surrounding operation: List<String> outletNames = new List<String>();. Collection contents and assignments below determine its purpose.
375	`        for (Retailer__c outlet : [`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c outlet : [. Check where queries/writes occur relative to the loop.
376	`            SELECT Name`	Selects these Salesforce fields/aggregates: Name. Query results are used in the surrounding assignment or loop.
377	`            FROM Retailer__c`	Chooses the Salesforce object/subquery source: FROM Retailer__c.
378	`            WHERE Beat__c IN :beatIds AND Active__c = TRUE`	Adds a query/filter condition: WHERE Beat__c IN :beatIds AND Active__c = TRUE. The complete condition determines which records are included.
379	`            ORDER BY Name`	Controls query sorting, grouping or result count: ORDER BY Name.
380	`        ]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (ORDER BY Name); it is not a standalone business operation.

Line	Source code	Explanation / reading note
381	`outletNames.add(outlet.Name);`	Calls the named method: outletNames.add(outlet.Name);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
382	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
383	`String joinedNames = String.join(outletNames, ', ');`	Declares/initializes local data used by the surrounding operation: String joinedNames = String.join(outletNames, ', ');. Collection contents and assignments below determine its purpose.
384	`return joinedNames.length() > 255 ? joinedNames.substring(0, 252) + '...' : joinedNames;`	Returns joinedNames.length() > 255 ? joinedNames.substring(0, 252) + '...' : joinedNames to the caller (or begins returned UI markup) and ends this execution path.
385	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
386	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/SfaPhaseOnePjpController.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 bfb7de2eaac5ccd928c618e8c0abe32579acfa7321aac1bdff53945e52d84a41

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexClass block; child elements specify its configuration.
3	`    <apiVersion>67.0</apiVersion>`	Sets Salesforce API version used for this component to 67.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexClass>`	Closes the ApexClass configuration block.

force-app/main/default/classes/SfaPhaseOnePjpControllerTest.cls

Regression tests for SfaPhaseOnePjpController. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

179 numbered source lines | SHA-256 b50684c21b9ae9b4194c9fc91fb9653dc21ed3500425a568938c9efdac4d12fe

Line	Source code	Explanation / reading note
1	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
2	`private class SfaPhaseOnePjpControllerTest {`	Declares a class/type: private class SfaPhaseOnePjpControllerTest {. Members below hold behavior and/or state.
3	`    private static User makeUser(String label) {`	Declares a callable function/method: private static User makeUser(String label) {. Parameters supply its inputs; the following block implements the operation.
4	`        Profile profile = [SELECT Id FROM Profile WHERE Id = :UserInfo.getProfileId()];`	Calls the named method: Profile profile = [SELECT Id FROM Profile WHERE Id = :UserInfo.getProfileId()];. Its implementation defines the side effect/result; use the symbol/file index to follow it.
5	`        String unique = label + '.' + System.now().getTime() + '@example.test';`	Declares/initializes local data used by the surrounding operation: String unique = label + '.' + System.now().getTime() + '@example.test';. Collection contents and assignments below determine its purpose.
6	`        return new User(`	Returns new User(to the caller (or begins returned UI markup) and ends this execution path.
7	`            FirstName = label,`	Assigns the right-hand expression to the named variable/property: FirstName = label,. This is in-memory unless it is later persisted by an explicit call.
8	`            LastName = 'SFA',`	Assigns the right-hand expression to the named variable/property: LastName = 'SFA',. This is in-memory unless it is later persisted by an explicit call.
9	`            Alias = label.left(5),`	Calls the named method: Alias = label.left(5),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
10	`            Email = unique,`	Assigns the right-hand expression to the named variable/property: Email = unique,. This is in-memory unless it is later persisted by an explicit call.
11	`            Username = unique,`	Assigns the right-hand expression to the named variable/property: Username = unique,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
12	`CommunityNickname = label + System.now().getTime(),`	Calls the named method: CommunityNickname = label + System.now().getTime(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
13	`TimeZoneSidKey = 'Asia/Kolkata',`	Assigns the right-hand expression to the named variable/property: TimeZoneSidKey = 'Asia/Kolkata',. This is in-memory unless it is later persisted by an explicit call.
14	`LocaleSidKey = 'en_IN',`	Assigns the right-hand expression to the named variable/property: LocaleSidKey = 'en_IN',. This is in-memory unless it is later persisted by an explicit call.
15	`EmailEncodingKey = 'UTF-8',`	Assigns the right-hand expression to the named variable/property: EmailEncodingKey = 'UTF-8',. This is in-memory unless it is later persisted by an explicit call.
16	`LanguageLocaleKey = 'en_US',`	Assigns the right-hand expression to the named variable/property: LanguageLocaleKey = 'en_US',. This is in-memory unless it is later persisted by an explicit call.
17	`ProfileId = profile.Id`	Assigns the right-hand expression to the named variable/property: ProfileId = profile.Id. This is in-memory unless it is later persisted by an explicit call.
18	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20		Blank line separating logical sections; no executable operation.
21	`private static void assignSfaAccess(List<User> users) {`	Declares a callable function/method: private static void assignSfaAccess(List<User> users) {. Parameters supply its inputs; the following block implements the operation.
22	`Id permissionSetId = [SELECT Id FROM PermissionSet WHERE Name = 'SFA_Mobile_User' LIMIT 1]`	Declares/initializes local data used by the surrounding operation: Id permissionSetId = [SELECT Id FROM PermissionSet WHERE Name = 'SFA_Mobile_User' LIMIT 1]. Collection contents and assignments below determine its purpose.
23	`.Id;`	Continues the surrounding declaration/expression or text: .Id;. Read it with the preceding opening statement (Id permissionSetId = [SELECT Id FROM PermissionSet WHERE Name = 'SFA_Mobile_User' LIMIT 1]); it is not a standalone business operation.
24	`List<PermissionSetAssignment> assignments = new List<PermissionSetAssignment>();`	Declares/initializes local data used by the surrounding operation: List<PermissionSetAssignment> assignments = new List<PermissionSetAssignment>();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
25	`        for (User userRecord : users) {`	Repeats work over the specified records/items or while this condition holds: for (User userRecord : users) {. Check where queries/writes occur relative to the loop.
26	`            assignments.add(`	Calls the named method: assignments.add(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
27	`                new PermissionSetAssignment(`	Continues the surrounding declaration/expression or text: new PermissionSetAssignment(. Read it with the preceding opening statement (assignments.add(); it is not a standalone business operation.
28	`                    AssigneeId = userRecord.Id,`	Assigns the right-hand expression to the named variable/property: AssigneeId = userRecord.Id,. This is in-memory unless it is later persisted by an explicit call.
29	`                    PermissionSetId = permissionSetId`	Assigns the right-hand expression to the named variable/property: PermissionSetId = permissionSetId. This is in-memory unless it is later persisted by an explicit call.
30	`                )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`        insert assignments;`	Performs Salesforce DML: insert assignments;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
34	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35		Blank line separating logical sections; no executable operation.
36	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
37	`    static void employeeSubmitsAndManagerApproves() {`	Continues the surrounding declaration/expression or text: static void employeeSubmitsAndManagerApproves() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
38	`        User employeeUser = makeUser('Dhanush');`	Assigns the right-hand expression to the named variable/property: User employeeUser = makeUser('Dhanush');. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
39	`User managerUser = makeUser('Dinesh');`	Assigns the right-hand expression to the named variable/property: User managerUser = makeUser('Dinesh');. This is in-memory unless it is later persisted by an explicit call.
40	`insert new List<User>{ employeeUser, managerUser };`	Performs Salesforce DML: insert new List<User>{ employeeUser, managerUser };. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
41	`assignSfaAccess(new List<User>{ employeeUser, managerUser });`	Continues the surrounding declaration/expression or text: assignSfaAccess(new List<User>{ employeeUser, managerUser });. Read it with the preceding opening statement (insert new List<User>{ employeeUser, managerUser };); it is not a standalone business operation.
42		Blank line separating logical sections; no executable operation.
43	`Geography__c geography;`	Continues the surrounding declaration/expression or text: Geography__c geography;. Read it with the preceding opening statement; it is not a standalone business operation.
44	`Employee__c manager;`	Continues the surrounding declaration/expression or text: Employee__c manager;. Read it with the preceding opening statement (Geography__c geography;); it is not a standalone business operation.
45	`Employee__c employee;`	Continues the surrounding declaration/expression or text: Employee__c employee;. Read it with the preceding opening statement (Employee__c manager;); it is not a standalone business operation.
46	`Beat__c firstBeat;`	Continues the surrounding declaration/expression or text: Beat__c firstBeat;. Read it with the preceding opening statement (Employee__c employee;); it is not a standalone business operation.
47	`Beat__c secondBeat;`	Continues the surrounding declaration/expression or text: Beat__c secondBeat;. Read it with the preceding opening statement (Beat__c firstBeat;); it is not a standalone business operation.
48	`System.runAs(employeeUser) {`	Calls the named method: System.runAs(employeeUser) {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
49	`    geography = new Geography__c(`	Assigns the right-hand expression to the named variable/property: geography = new Geography__c(. This is in-memory unless it is later persisted by an explicit call.
50	`        Name = 'MG Road Geography',`	Assigns the right-hand expression to the named variable/property: Name = 'MG Road Geography',. This is in-memory unless it is later persisted by an explicit call.
51	`        Nation__c = 'India',`	Assigns the right-hand expression to the named variable/property: Nation__c = 'India',. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
52	`State__c = 'Karnataka',`	Assigns the right-hand expression to the named variable/property: State__c = 'Karnataka',. This is in-memory unless it is later persisted by an explicit call.
53	`District__c = 'Bengaluru Urban',`	Assigns the right-hand expression to the named variable/property: District__c = 'Bengaluru Urban',. This is in-memory unless it is later persisted by an explicit call.
54	`Town__c = 'MG Road'`	Assigns the right-hand expression to the named variable/property: Town__c = 'MG Road'. This is in-memory unless it is later persisted by an explicit call.
55	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
56	`insert geography;`	Performs Salesforce DML: insert geography;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
57	`manager = new Employee__c(`	Assigns the right-hand expression to the named variable/property: manager = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
58	`Name = 'Dinesh',`	Assigns the right-hand expression to the named variable/property: Name = 'Dinesh',. This is in-memory unless it is later persisted by an explicit call.
59	`Salesforce_User__c = managerUser.Id,`	Assigns the right-hand expression to the named variable/property: Salesforce_User__c = managerUser.Id,. This is in-memory unless it is later persisted by an explicit call.
60	`Phone__c = '9000000101',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000101',. This is in-memory unless it is later persisted by an explicit call.
61	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
62	`Geography__c = geography.Id,`	Assigns the right-hand expression to the named variable/property: Geography__c = geography.Id,. This is in-memory unless it is later persisted by an explicit call.
63	`PAN_Number__c = 'TESTM0001A'`	Assigns the right-hand expression to the named variable/property: PAN_Number__c = 'TESTM0001A'. This is in-memory unless it is later persisted by an explicit call.
64	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
65	`Database.insert(manager, AccessLevel.SYSTEM_MODE);`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.

Line	Source code	Explanation / reading note
66	`employee = new Employee__c(`	Assigns the right-hand expression to the named variable/property: employee = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
67	`Name = 'Dhanush',`	Assigns the right-hand expression to the named variable/property: Name = 'Dhanush',. This is in-memory unless it is later persisted by an explicit call.
68	`Salesforce_User__c = employeeUser.Id,`	Assigns the right-hand expression to the named variable/property: Salesforce_User__c = employeeUser.Id,. This is in-memory unless it is later persisted by an explicit call.
69	`Phone__c = '9000000102',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000102',. This is in-memory unless it is later persisted by an explicit call.
70	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
71	`Geography__c = geography.Id,`	Assigns the right-hand expression to the named variable/property: Geography__c = geography.Id,. This is in-memory unless it is later persisted by an explicit call.
72	`Reporting_Manager__c = manager.Id,`	Assigns the right-hand expression to the named variable/property: Reporting_Manager__c = manager.Id,. This is in-memory unless it is later persisted by an explicit call.
73	`PAN_Number__c = 'TESTR0002A'`	Assigns the right-hand expression to the named variable/property: PAN_Number__c = 'TESTR0002A'. This is in-memory unless it is later persisted by an explicit call.
74	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
75	`Database.insert(employee, AccessLevel.SYSTEM_MODE);`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
76	`firstBeat = new Beat__c(`	Assigns the right-hand expression to the named variable/property: firstBeat = new Beat__c(. This is in-memory unless it is later persisted by an explicit call.
77	`Name = 'MG Road Beat',`	Assigns the right-hand expression to the named variable/property: Name = 'MG Road Beat',. This is in-memory unless it is later persisted by an explicit call.
78	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
79	`Assigned_Employee__c = employee.Id,`	Assigns the right-hand expression to the named variable/property: Assigned_Employee__c = employee.Id,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
80	`Geography__c = geography.Id`	Assigns the right-hand expression to the named variable/property: Geography__c = geography.Id. This is in-memory unless it is later persisted by an explicit call.
81	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
82	`secondBeat = new Beat__c(`	Assigns the right-hand expression to the named variable/property: secondBeat = new Beat__c(. This is in-memory unless it is later persisted by an explicit call.
83	`Name = 'Indiranagar Beat',`	Assigns the right-hand expression to the named variable/property: Name = 'Indiranagar Beat',. This is in-memory unless it is later persisted by an explicit call.
84	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
85	`Assigned_Employee__c = employee.Id,`	Assigns the right-hand expression to the named variable/property: Assigned_Employee__c = employee.Id,. This is in-memory unless it is later persisted by an explicit call.
86	`Geography__c = geography.Id`	Assigns the right-hand expression to the named variable/property: Geography__c = geography.Id. This is in-memory unless it is later persisted by an explicit call.
87	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
88	`insert new List<Beat__c>{ firstBeat, secondBeat };`	Performs Salesforce DML: insert new List<Beat__c>{ firstBeat, secondBeat };. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
89	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
90		Blank line separating logical sections; no executable operation.
91	`Id pjpId;`	Declares/initializes local data used by the surrounding operation: Id pjpId;. Collection contents and assignments below determine its purpose.
92	`System.runAs(employeeUser) {`	Calls the named method: System.runAs(employeeUser) {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
93	`pjpId = SfaPhaseOnePjpController.saveDraft(`	Calls the named method: pjpId = SfaPhaseOnePjpController.saveDraft(. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
94	`null,`	Continues the surrounding declaration/expression or text: null,. Read it with the preceding opening statement (pjpId = SfaPhaseOnePjpController.saveDraft(); it is not a standalone business operation.
95	`Date.newInstance(2026, 10, 1),`	Declares/initializes local data used by the surrounding operation: Date.newInstance(2026, 10, 1),. Collection contents and assignments below determine its purpose.
96	`Date.newInstance(2026, 10, 30),`	Declares/initializes local data used by the surrounding operation: Date.newInstance(2026, 10, 30),. Collection contents and assignments below determine its purpose.
97	`new List<Id>{ firstBeat.Id, secondBeat.Id }`	Continues the surrounding declaration/expression or text: new List<Id>{ firstBeat.Id, secondBeat.Id }. Read it with the preceding opening statement (Date.newInstance(2026, 10, 30),); it is not a standalone business operation.
98	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
99	`SfaPhaseOnePjpController.submitPjp(pjpId);`	Calls the named method: SfaPhaseOnePjpController.submitPjp(pjpId);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
100	`System.assertEquals(1, SfaPhaseOnePjpController.getMyPjps().size());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1, SfaPhaseOnePjpController.getMyPjps().size());. A mismatch fails the test.
101	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
102		Blank line separating logical sections; no executable operation.
103	`Permanent_Journey_Plan__c submitted = [`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c submitted = [. This is in-memory unless it is later persisted by an explicit call.
104	`SELECT`	Selects these Salesforce fields/aggregates: SELECT. Query results are used in the surrounding assignment or loop.
105	`Status__c,`	Continues the surrounding declaration/expression or text: Status__c,. Read it with the preceding opening statement (SELECT); it is not a standalone business operation.
106	`Approver__c,`	Continues the surrounding declaration/expression or text: Approver__c,. Read it with the preceding opening statement (Status__c,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
107	`Submitted_By__c,`	Continues the surrounding declaration/expression or text: Submitted_By__c,. Read it with the preceding opening statement (Approver__c,); it is not a standalone business operation.
108	`Submitted_Date__c,`	Continues the surrounding declaration/expression or text: Submitted_Date__c,. Read it with the preceding opening statement (Submitted_By__c,); it is not a standalone business operation.
109	`(SELECT Id FROM Selected_Beats__r)`	Continues the surrounding declaration/expression or text: (SELECT Id FROM Selected_Beats__r). Read it with the preceding opening statement (Submitted_Date__c,); it is not a standalone business operation.
110	`FROM Permanent_Journey_Plan__c`	Chooses the Salesforce object/subquery source: FROM Permanent_Journey_Plan__c.
111	`WHERE Id = :pjpId`	Adds a query/filter condition: WHERE Id = :pjpId. The complete condition determines which records are included.
112	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
113	`System.assertEquals('Submitted', submitted.Status__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Submitted', submitted.Status__c);. A mismatch fails the test.
114	`System.assertEquals(manager.Id, submitted.Approver__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(manager.Id, submitted.Approver__c);. A mismatch fails the test.
115	`System.assertEquals(2, submitted.Selected_Beats__r.size());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(2, submitted.Selected_Beats__r.size());. A mismatch fails the test.
116		Blank line separating logical sections; no executable operation.
117	`System.runAs(managerUser) {`	Calls the named method: System.runAs(managerUser) {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
118	`System.assertEquals(1, SfaPhaseOnePjpController.getMyApprovals().size());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1, SfaPhaseOnePjpController.getMyApprovals().size());. A mismatch fails the test.
119	`SfaPhaseOnePjpController.decidePjp(pjpId, true, null);`	Calls the named method: SfaPhaseOnePjpController.decidePjp(pjpId, true, null);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
120	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
121	`        Permanent_Journey_Plan__c approved = [`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c approved = [. This is in-memory unless it is later persisted by an explicit call.
122	`            SELECT Status__c, Approved_By__c, Approved_Date__c`	Selects these Salesforce fields/aggregates: Status__c, Approved_By__c, Approved_Date__c. Query results are used in the surrounding assignment or loop.
123	`            FROM Permanent_Journey_Plan__c`	Chooses the Salesforce object/subquery source: FROM Permanent_Journey_Plan__c.
124	`            WHERE Id = :pjpId`	Adds a query/filter condition: WHERE Id = :pjpId. The complete condition determines which records are included.
125	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
126	`        System.assertEquals('Approved', approved.Status__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Approved', approved.Status__c);. A mismatch fails the test.
127	`        System.assertEquals(managerUser.Id, approved.Approved_By__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(managerUser.Id, approved.Approved_By__c);. A mismatch fails the test.
128	`        System.assertNotEquals(null, approved.Approved_Date__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(null, approved.Approved_Date__c);. A mismatch fails the test.
129	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
130		Blank line separating logical sections; no executable operation.
131	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
132	`    static void rejectsInvalidDateRange() {`	Continues the surrounding declaration/expression or text: static void rejectsInvalidDateRange() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
133	`        User employeeUser = makeUser('Aish');`	Assigns the right-hand expression to the named variable/property: User employeeUser = makeUser('Aish');. This is in-memory unless it is later persisted by an explicit call.
134	`        insert employeeUser;`	Performs Salesforce DML: insert employeeUser;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
135	`assignSfaAccess(new List<User>{ employeeUser });`	Continues the surrounding declaration/expression or text: assignSfaAccess(new List<User>{ employeeUser });. Read it with the preceding opening statement (insert employeeUser;); it is not a standalone business operation.
136	`System.runAs(employeeUser) {`	Calls the named method: System.runAs(employeeUser) {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
137	`Geography__c geography = new Geography__c(`	Assigns the right-hand expression to the named variable/property: Geography__c geography = new Geography__c(. This is in-memory unless it is later persisted by an explicit call.
138	`Name = 'Test Geo',`	Assigns the right-hand expression to the named variable/property: Name = 'Test Geo',. This is in-memory unless it is later persisted by an explicit call.
139	`Nation__c = 'India',`	Assigns the right-hand expression to the named variable/property: Nation__c = 'India',. This is in-memory unless it is later persisted by an explicit call.
140	`State__c = 'Karnataka',`	Assigns the right-hand expression to the named variable/property: State__c = 'Karnataka',. This is in-memory unless it is later persisted by an explicit call.
141	`District__c = 'Bengaluru Urban',`	Assigns the right-hand expression to the named variable/property: District__c = 'Bengaluru Urban',. This is in-memory unless it is later persisted by an explicit call.
142	`Town__c = 'MG Road'`	Assigns the right-hand expression to the named variable/property: Town__c = 'MG Road'. This is in-memory unless it is later persisted by an explicit call.
143	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
144	`insert geography;`	Performs Salesforce DML: insert geography;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
145	`Employee__c manager = new Employee__c(`	Assigns the right-hand expression to the named variable/property: Employee__c manager = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
146	`Name = 'Manager',`	Assigns the right-hand expression to the named variable/property: Name = 'Manager',. This is in-memory unless it is later persisted by an explicit call.
147	`Phone__c = '9000000201',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000201',. This is in-memory unless it is later persisted by an explicit call.
148	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
149	`Geography__c = geography.Id`	Assigns the right-hand expression to the named variable/property: Geography__c = geography.Id. This is in-memory unless it is later persisted by an explicit call.
150	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
151	`Database.insert(manager, AccessLevel.SYSTEM_MODE);`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
152	`Database.insert(`	Performs Salesforce DML: Database.insert(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
153	`new Employee__c(`	Continues the surrounding declaration/expression or text: new Employee__c(. Read it with the preceding opening statement (Database.insert(); it is not a standalone business operation.
154	`Name = 'Aishwarya',`	Assigns the right-hand expression to the named variable/property: Name = 'Aishwarya',. This is in-memory unless it is later persisted by an explicit call.
155	`Phone__c = '9000000202',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000202',. This is in-memory unless it is later persisted by an explicit call.
156	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
157	`Geography__c = geography.Id,`	Assigns the right-hand expression to the named variable/property: Geography__c = geography.Id,. This is in-memory unless it is later persisted by an explicit call.
158	`Salesforce_User__c = employeeUser.Id,`	Assigns the right-hand expression to the named variable/property: Salesforce_User__c = employeeUser.Id,. This is in-memory unless it is later persisted by an explicit call.
159	`Reporting_Manager__c = manager.Id`	Assigns the right-hand expression to the named variable/property: Reporting_Manager__c = manager.Id. This is in-memory unless it is later persisted by an explicit call.
160	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
161	`AccessLevel.SYSTEM_MODE`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
162	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
163	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
164	`        System.runAs(employeeUser) {`	Calls the named method: System.runAs(employeeUser) {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
165	`            Boolean validationRaised = false;`	Declares/initializes local data used by the surrounding operation: Boolean validationRaised = false;. Collection contents and assignments below determine its purpose.
166	`            try {`	Starts operations whose failure is handled by the following catch/finally blocks.
167	`                SfaPhaseOnePjpController.saveDraft(`	Calls the named method: SfaPhaseOnePjpController.saveDraft(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
168	`                    null,`	Continues the surrounding declaration/expression or text: null,. Read it with the preceding opening statement (SfaPhaseOnePjpController.saveDraft(); it is not a standalone business operation.
169	`                    Date.newInstance(2026, 10, 30),`	Declares/initializes local data used by the surrounding operation: Date.newInstance(2026, 10, 30),. Collection contents and assignments below determine its purpose.
170	`                    Date.newInstance(2026, 10, 1),`	Declares/initializes local data used by the surrounding operation: Date.newInstance(2026, 10, 1),. Collection contents and assignments below determine its purpose.
171	`                    new List<Id>()`	Continues the surrounding declaration/expression or text: new List<Id>(). Read it with the preceding opening statement (Date.newInstance(2026, 10, 1),); it is not a standalone business operation.
172	`                );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
173	`            } catch (AuraHandledException expected) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
174	`                validationRaised = true;`	Assigns the right-hand expression to the named variable/property: validationRaised = true;. This is in-memory unless it is later persisted by an explicit call.
175	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
176	`            System.assert(validationRaised, 'Invalid dates must fail.');`	Test assertion comparing an expected outcome to actual behavior: System.assert(validationRaised, 'Invalid dates must fail.');. A mismatch fails the test.

Line	Source code	Explanation / reading note
177	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
178	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
179	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/SfaPhaseOnePjpControllerTest.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 bfb7de2eaac5ccd928c618e8c0abe32579acfa7321aac1bdff53945e52d84a41

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexClass block; child elements specify its configuration.
3	`    <apiVersion>67.0</apiVersion>`	Sets Salesforce API version used for this component to 67.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexClass>`	Closes the ApexClass configuration block.

force-app/main/default/classes/SfaPjpAllocationService.cls

Materializes approved PJP beats into active employee-outlet allocations. Locks employees, reuses existing pairs and bulk-writes changes; does not silently swallow failures.

128 numbered source lines | SHA-256 7b4c747ba6426aff5cf1d40814ab23c5e427901c207cb8e568a5eb7bd6a96916

Line	Source code	Explanation / reading note
1	`/** Materializes approved PJP beats into the allocations consumed by the mobile API. */`	Developer comment/documentation: Materializes approved PJP beats into the allocations consumed by the mobile API. */ It is not executed.
2	`public without sharing class SfaPjpAllocationService {`	Declares a class/type: public without sharing class SfaPjpAllocationService {. Runs without record-sharing enforcement; see the documented internal authorization boundary.
3	`    public static void afterSave(`	Declares a callable function/method: public static void afterSave(. Parameters supply its inputs; the following block implements the operation.
4	`        List<Permanent_Journey_Plan__c> plans,`	Declares/initializes local data used by the surrounding operation: List<Permanent_Journey_Plan__c> plans,. Collection contents and assignments below determine its purpose.
5	`        Map<Id, Permanent_Journey_Plan__c> oldPlans`	Declares/initializes local data used by the surrounding operation: Map<Id, Permanent_Journey_Plan__c> oldPlans. Collection contents and assignments below determine its purpose.
6	`    ) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (Map<Id, Permanent_Journey_Plan__c> oldPlans); it is not a standalone business operation.
7	`        Set<Id> approvedIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> approvedIds = new Set<Id>();. Collection contents and assignments below determine its purpose.
8	`        for (Permanent_Journey_Plan__c plan : plans) {`	Repeats work over the specified records/items or while this condition holds: for (Permanent_Journey_Plan__c plan : plans) {. Check where queries/writes occur relative to the loop.
9	`            Permanent_Journey_Plan__c previous = oldPlans == null ? null : oldPlans.get(plan.Id);`	Calls the named method: Permanent_Journey_Plan__c previous = oldPlans == null ? null : oldPlans.get(plan.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
10	`            if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.

Line	Source code	Explanation / reading note
11	`plan.Status__c == 'Approved' &&`	Continues the surrounding declaration/expression or text: plan.Status__c == 'Approved' &&. Read it with the preceding opening statement (if (); it is not a standalone business operation.
12	`plan.Employee__c != null &&`	Continues the surrounding declaration/expression or text: plan.Employee__c != null &&. Read it with the preceding opening statement (plan.Status__c == 'Approved' &&); it is not a standalone business operation.
13	`(previous == null ||`	Continues the surrounding declaration/expression or text: (previous == null ||. Read it with the preceding opening statement (plan.Employee__c != null &&); it is not a standalone business operation.
14	`previous.Status__c != 'Approved' ||`	Continues the surrounding declaration/expression or text: previous.Status__c != 'Approved' ||. Read it with the preceding opening statement ((previous == null ||); it is not a standalone business operation.
15	`previous.Employee__c != plan.Employee__c ||`	Continues the surrounding declaration/expression or text: previous.Employee__c != plan.Employee__c ||. Read it with the preceding opening statement (previous.Status__c != 'Approved' ||); it is not a standalone business operation.
16	`previous.Beat__c != plan.Beat__c)`	Continues the surrounding declaration/expression or text: previous.Beat__c != plan.Beat__c). Read it with the preceding opening statement (previous.Employee__c != plan.Employee__c ||); it is not a standalone business operation.
17	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (previous.Beat__c != plan.Beat__c)); it is not a standalone business operation.
18	`approvedIds.add(plan.Id);`	Calls the named method: approvedIds.add(plan.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
19	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21	`syncApprovedPlans(approvedIds);`	Continues the surrounding declaration/expression or text: syncApprovedPlans(approvedIds);. Read it with the preceding opening statement (}); it is not a standalone business operation.
22	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
23		Blank line separating logical sections; no executable operation.
24	`    // Also used by the one-time backfill. No approval state is changed here.`	Developer comment/documentation: Also used by the one-time backfill. No approval state is changed here. It is not executed.
25	`    // This is trigger-only system work, not an Aura/REST entry point.`	Developer comment/documentation: This is trigger-only system work, not an Aura/REST entry point. It is not executed.
26	`    public static void syncApprovedPlans(Set<Id> planIds) {`	Declares a callable function/method: public static void syncApprovedPlans(Set<Id> planIds) {. Parameters supply its inputs; the following block implements the operation.
27	`        if (planIds == null || planIds.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (planIds == null || planIds.isEmpty()).
28	`            return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
29	`        List<Permanent_Journey_Plan__c> plans = [`	Declares/initializes local data used by the surrounding operation: List<Permanent_Journey_Plan__c> plans = [. Collection contents and assignments below determine its purpose.
30	`            SELECT Id, Name, Employee__c, Beat__c, (SELECT Beat__c FROM Selected_Beats__r)`	Selects these Salesforce fields/aggregates: Id, Name, Employee__c, Beat__c, (SELECT Beat__c FROM Selected_Beats__r). Query results are used in the surrounding assignment or loop.
31	`            FROM Permanent_Journey_Plan__c`	Chooses the Salesforce object/subquery source: FROM Permanent_Journey_Plan__c.
32	`            WHERE`	Adds a query/filter condition: WHERE. The complete condition determines which records are included.
33	`                Id IN :planIds`	Declares/initializes local data used by the surrounding operation: Id IN :planIds. Collection contents and assignments below determine its purpose.
34	`                AND Status__c = 'Approved'`	Adds a query/filter condition: AND Status__c = 'Approved'. The complete condition determines which records are included.
35	`                AND Employee__c != NULL`	Adds a query/filter condition: AND Employee__c != NULL. The complete condition determines which records are included.
36	`                AND Employee__r.Active__c = TRUE`	Adds a query/filter condition: AND Employee__r.Active__c = TRUE. The complete condition determines which records are included.
37	`            WITH SYSTEM_MODE`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.

Line	Source code	Explanation / reading note
38	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	`Map<Id, Set<Id>> employeesByBeat = new Map<Id, Set<Id>>();`	Declares/initializes local data used by the surrounding operation: Map<Id, Set<Id>> employeesByBeat = new Map<Id, Set<Id>>();. Collection contents and assignments below determine its purpose.
40	`Set<Id> employeeIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> employeeIds = new Set<Id>();. Collection contents and assignments below determine its purpose.
41	`for (Permanent_Journey_Plan__c plan : plans) {`	Repeats work over the specified records/items or while this condition holds: for (Permanent_Journey_Plan__c plan : plans) {. Check where queries/writes occur relative to the loop.
42	`employeeIds.add(plan.Employee__c);`	Calls the named method: employeeIds.add(plan.Employee__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
43	`Set<Id> selectedBeats = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> selectedBeats = new Set<Id>();. Collection contents and assignments below determine its purpose.
44	`for (PJP_Selected_Beat__c selection : plan.Selected_Beats__r) {`	Repeats work over the specified records/items or while this condition holds: for (PJP_Selected_Beat__c selection : plan.Selected_Beats__r) {. Check where queries/writes occur relative to the loop.
45	`if (selection.Beat__c != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (selection.Beat__c != null).
46	`selectedBeats.add(selection.Beat__c);`	Calls the named method: selectedBeats.add(selection.Beat__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
47	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48	`// Older single-beat plans do not have junction records.`	Developer comment/documentation: Older single-beat plans do not have junction records. It is not executed.
49	`if (selectedBeats.isEmpty() && plan.Beat__c != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (selectedBeats.isEmpty() && plan.Beat__c != null).
50	`selectedBeats.add(plan.Beat__c);`	Calls the named method: selectedBeats.add(plan.Beat__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
51	`for (Id beatId : selectedBeats) {`	Repeats work over the specified records/items or while this condition holds: for (Id beatId : selectedBeats) {. Check where queries/writes occur relative to the loop.
52	`if (!employeesByBeat.containsKey(beatId))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!employeesByBeat.containsKey(beatId)).
53	`employeesByBeat.put(beatId, new Set<Id>());`	Calls the named method: employeesByBeat.put(beatId, new Set<Id>());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
54	`employeesByBeat.get(beatId).add(plan.Employee__c);`	Calls the named method: employeesByBeat.get(beatId).add(plan.Employee__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
55	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
56	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`if (employeesByBeat.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (employeesByBeat.isEmpty()).
58	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
59		Blank line separating logical sections; no executable operation.
60	`// Serialize overlapping approvals for the same employee before looking up`	Developer comment/documentation: Serialize overlapping approvals for the same employee before looking up It is not executed.
61	`// existing allocations, so concurrent approvals cannot insert duplicates.`	Developer comment/documentation: existing allocations, so concurrent approvals cannot insert duplicates. It is not executed.
62	`List<Employee__c> lockedEmployees = [`	Declares/initializes local data used by the surrounding operation: List<Employee__c> lockedEmployees = [. Collection contents and assignments below determine its purpose.
63	`SELECT Id`	Selects these Salesforce fields/aggregates: Id. Query results are used in the surrounding assignment or loop.
64	`FROM Employee__c`	Chooses the Salesforce object/subquery source: FROM Employee__c.
65	`WHERE Id IN :employeeIds`	Adds a query/filter condition: WHERE Id IN :employeeIds. The complete condition determines which records are included.

Line	Source code	Explanation / reading note
66	`            WITH SYSTEM_MODE`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
67	`            FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
68	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
69	`        Set<Id> beatIds = employeesByBeat.keySet();`	Declares/initializes local data used by the surrounding operation: Set<Id> beatIds = employeesByBeat.keySet();. Collection contents and assignments below determine its purpose.
70	`        List<Retailer__c> outlets = [`	Declares/initializes local data used by the surrounding operation: List<Retailer__c> outlets = [. Collection contents and assignments below determine its purpose.
71	`            SELECT Id, Beat__c`	Selects these Salesforce fields/aggregates: Id, Beat__c. Query results are used in the surrounding assignment or loop.
72	`            FROM Retailer__c`	Chooses the Salesforce object/subquery source: FROM Retailer__c.
73	`            WHERE Beat__c IN :beatIds AND Active__c = TRUE`	Adds a query/filter condition: WHERE Beat__c IN :beatIds AND Active__c = TRUE. The complete condition determines which records are included.
74	`            WITH SYSTEM_MODE`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
75	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
76	`        Map<String, Distributor_Outlet_Allocation__c> existingByPair = new Map<String, Distributor_Outlet_Allocation__c>();`	Declares/initializes local data used by the surrounding operation: Map<String, Distributor_Outlet_Allocation__c> existingByPair = new Map<String, Distributor_Outlet_Allocation__c>();. Collection contents and assignments below determine its purpose.
77	`        Set<Id> outletIds = new Map<Id, Retailer__c>(outlets).keySet();`	Declares/initializes local data used by the surrounding operation: Set<Id> outletIds = new Map<Id, Retailer__c>(outlets).keySet();. Collection contents and assignments below determine its purpose.
78	`        for (Distributor_Outlet_Allocation__c allocation : [`	Repeats work over the specified records/items or while this condition holds: for (Distributor_Outlet_Allocation__c allocation : [. Check where queries/writes occur relative to the loop.

Line	Source code	Explanation / reading note
79	`SELECT Id, Employee__c, Outlet__c, Beat__c, Allocation_Status__c`	Selects these Salesforce fields/aggregates: Id, Employee__c, Outlet__c, Beat__c, Allocation_Status__c. Query results are used in the surrounding assignment or loop.
80	`FROM Distributor_Outlet_Allocation__c`	Chooses the Salesforce object/subquery source: FROM Distributor_Outlet_Allocation__c.
81	`WHERE Employee__c IN :employeeIds AND Outlet__c IN :outletIds`	Adds a query/filter condition: WHERE Employee__c IN :employeeIds AND Outlet__c IN :outletIds. The complete condition determines which records are included.
82	`WITH SYSTEM_MODE`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
83	`ORDER BY CreatedDate`	Controls query sorting, grouping or result count: ORDER BY CreatedDate.
84	`]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (ORDER BY CreatedDate); it is not a standalone business operation.
85	`String key = pairKey(allocation.Employee__c, allocation.Outlet__c);`	Declares/initializes local data used by the surrounding operation: String key = pairKey(allocation.Employee__c, allocation.Outlet__c);. Collection contents and assignments below determine its purpose.
86	`if (!existingByPair.containsKey(key) || allocation.Allocation_Status__c == 'Active') {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!existingByPair.containsKey(key) || allocation.Allocation_Status__c == 'Active') {.
87	`existingByPair.put(key, allocation);`	Calls the named method: existingByPair.put(key, allocation);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
88	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
89	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
90	`List<Distributor_Outlet_Allocation__c> inserts = new List<Distributor_Outlet_Allocation__c>();`	Declares/initializes local data used by the surrounding operation: List<Distributor_Outlet_Allocation__c> inserts = new List<Distributor_Outlet_Allocation__c>();. Collection contents and assignments below determine its purpose.
91	`List<Distributor_Outlet_Allocation__c> updates = new List<Distributor_Outlet_Allocation__c>();`	Declares/initializes local data used by the surrounding operation: List<Distributor_Outlet_Allocation__c> updates = new List<Distributor_Outlet_Allocation__c>();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
92	`for (Retailer__c outlet : outlets) {`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c outlet : outlets) {. Check where queries/writes occur relative to the loop.
93	`for (Id employeeId : employeesByBeat.get(outlet.Beat__c)) {`	Repeats work over the specified records/items or while this condition holds: for (Id employeeId : employeesByBeat.get(outlet.Beat__c)) {. Check where queries/writes occur relative to the loop.
94	`String key = pairKey(employeeId, outlet.Id);`	Declares/initializes local data used by the surrounding operation: String key = pairKey(employeeId, outlet.Id);. Collection contents and assignments below determine its purpose.
95	`Distributor_Outlet_Allocation__c existing = existingByPair.get(key);`	Calls the named method: Distributor_Outlet_Allocation__c existing = existingByPair.get(key);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
96	`if (existing == null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (existing == null) {.
97	`inserts.add(`	Calls the named method: inserts.add(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
98	`new Distributor_Outlet_Allocation__c(`	Continues the surrounding declaration/expression or text: new Distributor_Outlet_Allocation__c(. Read it with the preceding opening statement (inserts.add(); it is not a standalone business operation.
99	`Employee__c = employeeId,`	Assigns the right-hand expression to the named variable/property: Employee__c = employeeId,. This is in-memory unless it is later persisted by an explicit call.
100	`Outlet__c = outlet.Id,`	Assigns the right-hand expression to the named variable/property: Outlet__c = outlet.Id,. This is in-memory unless it is later persisted by an explicit call.
101	`Beat__c = outlet.Beat__c,`	Assigns the right-hand expression to the named variable/property: Beat__c = outlet.Beat__c,. This is in-memory unless it is later persisted by an explicit call.
102	`Allocation_Status__c = 'Active',`	Assigns the right-hand expression to the named variable/property: Allocation_Status__c = 'Active',. This is in-memory unless it is later persisted by an explicit call.
103	`Allocation_Date__c = Date.today(),`	Calls the named method: Allocation_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
104	`Remarks__c = 'Automatically allocated from an approved Permanent Journey Plan.'`	Assigns the right-hand expression to the named variable/property: Remarks__c = 'Automatically allocated from an approved Permanent Journey Plan.'. This is in-memory unless it is later persisted by an explicit call.
105	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
106	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
107	`} else if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: } else if (.
108	`existing.Allocation_Status__c != 'Active' ||`	Continues the surrounding declaration/expression or text: existing.Allocation_Status__c != 'Active' ||. Read it with the preceding opening statement (} else if (); it is not a standalone business operation.
109	`existing.Beat__c != outlet.Beat__c`	Continues the surrounding declaration/expression or text: existing.Beat__c != outlet.Beat__c. Read it with the preceding opening statement (existing.Allocation_Status__c != 'Active' ||); it is not a standalone business operation.
110	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (existing.Beat__c != outlet.Beat__c); it is not a standalone business operation.
111	`existing.Allocation_Status__c = 'Active';`	Assigns the right-hand expression to the named variable/property: existing.Allocation_Status__c = 'Active';. This is in-memory unless it is later persisted by an explicit call.
112	`existing.Beat__c = outlet.Beat__c;`	Assigns the right-hand expression to the named variable/property: existing.Beat__c = outlet.Beat__c;. This is in-memory unless it is later persisted by an explicit call.
113	`updates.add(existing);`	Calls the named method: updates.add(existing);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
114	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
115	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
116	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
117	`        // Fail the approval transaction if allocation fails; do not silently approve`	Developer comment/documentation: Fail the approval transaction if allocation fails; do not silently approve It is not executed.
118	`        // a plan whose outlets cannot be made available to its employee.`	Developer comment/documentation: a plan whose outlets cannot be made available to its employee. It is not executed.
119	`        if (!inserts.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!inserts.isEmpty()).
120	`            Database.insert(inserts, AccessLevel.SYSTEM_MODE);`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
121	`        if (!updates.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!updates.isEmpty()).
122	`            Database.update(updates, AccessLevel.SYSTEM_MODE);`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
123	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
124		Blank line separating logical sections; no executable operation.
125	`    private static String pairKey(Id employeeId, Id outletId) {`	Declares a callable function/method: private static String pairKey(Id employeeId, Id outletId) {. Parameters supply its inputs; the following block implements the operation.
126	`        return String.valueOf(employeeId) + ':' + String.valueOf(outletId);`	Returns String.valueOf(employeeId) + ':' + String.valueOf(outletId) to the caller (or begins returned UI markup) and ends this execution path.
127	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
128	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/SfaPjpAllocationService.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 17e31f2473b0c9f7048b434edab7d12261a9b8a0b9ede833cb9c3141eeeccb7b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>67.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>67.0</apiVersion><status>Active</status>.

force-app/main/default/classes/SfaPjpAllocationServiceTest.cls

Regression tests for SfaPjpAllocationService. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

175 numbered source lines | SHA-256 755d5eb8bbfa71969284c53867605010229f06c62227c0cc00ce9157f2e9f18c

Line	Source code	Explanation / reading note
1	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
2	`private class SfaPjpAllocationServiceTest {`	Declares a class/type: private class SfaPjpAllocationServiceTest {. Members below hold behavior and/or state.
3	`    @TestSetup`	Continues the surrounding declaration/expression or text: @TestSetup. Read it with the preceding opening statement (private class SfaPjpAllocationServiceTest {); it is not a standalone business operation.
4	`    static void setup() {`	Continues the surrounding declaration/expression or text: static void setup() {. Read it with the preceding opening statement (@TestSetup); it is not a standalone business operation.
5	`        Geography__c geo = new Geography__c(`	Assigns the right-hand expression to the named variable/property: Geography__c geo = new Geography__c(. This is in-memory unless it is later persisted by an explicit call.
6	`            Name = 'PJP Allocation Geo',`	Assigns the right-hand expression to the named variable/property: Name = 'PJP Allocation Geo',. This is in-memory unless it is later persisted by an explicit call.
7	`            Nation__c = 'India',`	Assigns the right-hand expression to the named variable/property: Nation__c = 'India',. This is in-memory unless it is later persisted by an explicit call.
8	`            State__c = 'Karnataka',`	Assigns the right-hand expression to the named variable/property: State__c = 'Karnataka',. This is in-memory unless it is later persisted by an explicit call.
9	`            District__c = 'Bengaluru Urban'`	Assigns the right-hand expression to the named variable/property: District__c = 'Bengaluru Urban'. This is in-memory unless it is later persisted by an explicit call.
10	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
11	`        insert geo;`	Performs Salesforce DML: insert geo;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
12	`Employee__c employee = new Employee__c(`	Assigns the right-hand expression to the named variable/property: Employee__c employee = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
13	`Name = 'PJP Employee',`	Assigns the right-hand expression to the named variable/property: Name = 'PJP Employee',. This is in-memory unless it is later persisted by an explicit call.
14	`Phone__c = '9000000901',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000901',. This is in-memory unless it is later persisted by an explicit call.
15	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
16	`Geography__c = geo.Id`	Assigns the right-hand expression to the named variable/property: Geography__c = geo.Id. This is in-memory unless it is later persisted by an explicit call.
17	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`Employee__c other = new Employee__c(`	Assigns the right-hand expression to the named variable/property: Employee__c other = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
19	`Name = 'Other Employee',`	Assigns the right-hand expression to the named variable/property: Name = 'Other Employee',. This is in-memory unless it is later persisted by an explicit call.
20	`Phone__c = '9000000902',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000902',. This is in-memory unless it is later persisted by an explicit call.
21	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
22	`Geography__c = geo.Id`	Assigns the right-hand expression to the named variable/property: Geography__c = geo.Id. This is in-memory unless it is later persisted by an explicit call.
23	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24	`insert new List<Employee__c>{ employee, other };`	Performs Salesforce DML: insert new List<Employee__c>{ employee, other };. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
25	`Beat__c firstBeat = new Beat__c(`	Assigns the right-hand expression to the named variable/property: Beat__c firstBeat = new Beat__c(. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
26	`            Name = 'First Beat',`	Assigns the right-hand expression to the named variable/property: Name = 'First Beat',. This is in-memory unless it is later persisted by an explicit call.
27	`            Geography__c = geo.Id,`	Assigns the right-hand expression to the named variable/property: Geography__c = geo.Id,. This is in-memory unless it is later persisted by an explicit call.
28	`            Assigned_Employee__c = employee.Id,`	Assigns the right-hand expression to the named variable/property: Assigned_Employee__c = employee.Id,. This is in-memory unless it is later persisted by an explicit call.
29	`            Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.
30	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31	`        Beat__c secondBeat = new Beat__c(`	Assigns the right-hand expression to the named variable/property: Beat__c secondBeat = new Beat__c(. This is in-memory unless it is later persisted by an explicit call.
32	`            Name = 'Second Beat',`	Assigns the right-hand expression to the named variable/property: Name = 'Second Beat',. This is in-memory unless it is later persisted by an explicit call.
33	`            Geography__c = geo.Id,`	Assigns the right-hand expression to the named variable/property: Geography__c = geo.Id,. This is in-memory unless it is later persisted by an explicit call.
34	`            Assigned_Employee__c = employee.Id,`	Assigns the right-hand expression to the named variable/property: Assigned_Employee__c = employee.Id,. This is in-memory unless it is later persisted by an explicit call.
35	`            Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.
36	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
37	`        insert new List<Beat__c>{ firstBeat, secondBeat };`	Performs Salesforce DML: insert new List<Beat__c>{ firstBeat, secondBeat };. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
38	`        employee.Beat__c = firstBeat.Id;`	Assigns the right-hand expression to the named variable/property: employee.Beat__c = firstBeat.Id;. This is in-memory unless it is later persisted by an explicit call.
39	`        update employee;`	Performs Salesforce DML: update employee;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
40	`        insert new List<Retailer__c>{`	Performs Salesforce DML: insert new List<Retailer__c>{. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
41	`            new Retailer__c(Name = 'First Outlet', Beat__c = firstBeat.Id, Active__c = true),`	Assigns the right-hand expression to the named variable/property: new Retailer__c(Name = 'First Outlet', Beat__c = firstBeat.Id, Active__c = true),. This is in-memory unless it is later persisted by an explicit call.
42	`            new Retailer__c(Name = 'Second Outlet', Beat__c = secondBeat.Id, Active__c = true),`	Assigns the right-hand expression to the named variable/property: new Retailer__c(Name = 'Second Outlet', Beat__c = secondBeat.Id, Active__c = true),. This is in-memory unless it is later persisted by an explicit call.
43	`            new Retailer__c(Name = 'Inactive Outlet', Beat__c = secondBeat.Id, Active__c = false)`	Assigns the right-hand expression to the named variable/property: new Retailer__c(Name = 'Inactive Outlet', Beat__c = secondBeat.Id, Active__c = false). This is in-memory unless it is later persisted by an explicit call.
44	`        };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
45	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
46		Blank line separating logical sections; no executable operation.
47	`    private static Permanent_Journey_Plan__c draft(String status) {`	Declares a callable function/method: private static Permanent_Journey_Plan__c draft(String status) {. Parameters supply its inputs; the following block implements the operation.
48	`        Id employeeId = [SELECT Id FROM Employee__c WHERE Name = 'PJP Employee'].Id;`	Declares/initializes local data used by the surrounding operation: Id employeeId = [SELECT Id FROM Employee__c WHERE Name = 'PJP Employee'].Id;. Collection contents and assignments below determine its purpose.
49	`        Id beatId = [SELECT Id FROM Beat__c WHERE Name = 'First Beat'].Id;`	Declares/initializes local data used by the surrounding operation: Id beatId = [SELECT Id FROM Beat__c WHERE Name = 'First Beat'].Id;. Collection contents and assignments below determine its purpose.
50	`        Permanent_Journey_Plan__c plan = new Permanent_Journey_Plan__c(`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c plan = new Permanent_Journey_Plan__c(. This is in-memory unless it is later persisted by an explicit call.
51	`            Name = 'Allocation Test PJP',`	Assigns the right-hand expression to the named variable/property: Name = 'Allocation Test PJP',. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
52	`            Employee__c = employeeId,`	Assigns the right-hand expression to the named variable/property: Employee__c = employeeId,. This is in-memory unless it is later persisted by an explicit call.
53	`            Beat__c = beatId,`	Assigns the right-hand expression to the named variable/property: Beat__c = beatId,. This is in-memory unless it is later persisted by an explicit call.
54	`            Status__c = status,`	Assigns the right-hand expression to the named variable/property: Status__c = status,. This is in-memory unless it is later persisted by an explicit call.
55	`            Planned_Date__c = Date.today()`	Calls the named method: Planned_Date__c = Date.today(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
56	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`        insert plan;`	Performs Salesforce DML: insert plan;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
58	`        return plan;`	Returns plan to the caller (or begins returned UI markup) and ends this execution path.
59	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
60		Blank line separating logical sections; no executable operation.
61	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
62	`    static void approvedMultiBeatPlanAllocatesOnlyActiveOutlets() {`	Continues the surrounding declaration/expression or text: static void approvedMultiBeatPlanAllocatesOnlyActiveOutlets() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
63	`        Permanent_Journey_Plan__c plan = draft('Draft');`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c plan = draft('Draft');. This is in-memory unless it is later persisted by an explicit call.
64	`        List<PJP_Selected_Beat__c> selections = new List<PJP_Selected_Beat__c>();`	Declares/initializes local data used by the surrounding operation: List<PJP_Selected_Beat__c> selections = new List<PJP_Selected_Beat__c>();. Collection contents and assignments below determine its purpose.
65	`        for (Beat__c beat : [SELECT Id FROM Beat__c]) {`	Repeats work over the specified records/items or while this condition holds: for (Beat__c beat : [SELECT Id FROM Beat__c]) {. Check where queries/writes occur relative to the loop.

Line	Source code	Explanation / reading note
66	`            selections.add(`	Calls the named method: selections.add(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
67	`                new PJP_Selected_Beat__c(`	Continues the surrounding declaration/expression or text: new PJP_Selected_Beat__c(. Read it with the preceding opening statement (selections.add(); it is not a standalone business operation.
68	`                    PJP__c = plan.Id,`	Assigns the right-hand expression to the named variable/property: PJP__c = plan.Id,. This is in-memory unless it is later persisted by an explicit call.
69	`                    Beat__c = beat.Id,`	Assigns the right-hand expression to the named variable/property: Beat__c = beat.Id,. This is in-memory unless it is later persisted by an explicit call.
70	`                    Unique_Key__c = plan.Id + '-' + beat.Id`	Assigns the right-hand expression to the named variable/property: Unique_Key__c = plan.Id + '-' + beat.Id. This is in-memory unless it is later persisted by an explicit call.
71	`                )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
72	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
73	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
74	`        Database.insert(selections, AccessLevel.SYSTEM_MODE);`	Specifies database execution/access mode explicitly. System mode needs deliberate business authorization; user mode enforces user access restrictions.
75	`        System.assertEquals(0, [SELECT COUNT() FROM Distributor_Outlet_Allocation__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(0, [SELECT COUNT() FROM Distributor_Outlet_Allocation__c]);. A mismatch fails the test.
76	`        Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
77	`        plan.Status__c = 'Approved';`	Assigns the right-hand expression to the named variable/property: plan.Status__c = 'Approved';. This is in-memory unless it is later persisted by an explicit call.
78	`        update plan;`	Performs Salesforce DML: update plan;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
79	`        SfaPjpAllocationService.syncApprovedPlans(new Set<Id>{ plan.Id });`	Calls the named method: SfaPjpAllocationService.syncApprovedPlans(new Set<Id>{ plan.Id });. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
80	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
81	`        List<Distributor_Outlet_Allocation__c> allocations = [`	Declares/initializes local data used by the surrounding operation: List<Distributor_Outlet_Allocation__c> allocations = [. Collection contents and assignments below determine its purpose.
82	`            SELECT`	Selects these Salesforce fields/aggregates: SELECT. Query results are used in the surrounding assignment or loop.
83	`                Employee__c,`	Continues the surrounding declaration/expression or text: Employee__c,. Read it with the preceding opening statement (SELECT); it is not a standalone business operation.
84	`                Distributor__c,`	Continues the surrounding declaration/expression or text: Distributor__c,. Read it with the preceding opening statement (Employee__c,); it is not a standalone business operation.
85	`                Outlet__r.Active__c,`	Continues the surrounding declaration/expression or text: Outlet__r.Active__c,. Read it with the preceding opening statement (Distributor__c,); it is not a standalone business operation.
86	`                Beat__c,`	Continues the surrounding declaration/expression or text: Beat__c,. Read it with the preceding opening statement (Outlet__r.Active__c,); it is not a standalone business operation.
87	`                Outlet__r.Beat__c,`	Continues the surrounding declaration/expression or text: Outlet__r.Beat__c,. Read it with the preceding opening statement (Beat__c,); it is not a standalone business operation.
88	`                Allocation_Status__c`	Continues the surrounding declaration/expression or text: Allocation_Status__c. Read it with the preceding opening statement (Outlet__r.Beat__c,); it is not a standalone business operation.
89	`            FROM Distributor_Outlet_Allocation__c`	Chooses the Salesforce object/subquery source: FROM Distributor_Outlet_Allocation__c.
90	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
91	`        System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
92	`            2,`	Continues the surrounding declaration/expression or text: 2,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
93	`            allocations.size(),`	Calls the named method: allocations.size(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
94	`            'Repeated synchronization must not duplicate allocations.'`	Continues the surrounding declaration/expression or text: 'Repeated synchronization must not duplicate allocations.'. Read it with the preceding opening statement (allocations.size(),); it is not a standalone business operation.
95	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
96	`        for (Distributor_Outlet_Allocation__c allocation : allocations) {`	Repeats work over the specified records/items or while this condition holds: for (Distributor_Outlet_Allocation__c allocation : allocations) {. Check where queries/writes occur relative to the loop.
97	`            System.assertEquals(plan.Employee__c, allocation.Employee__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(plan.Employee__c, allocation.Employee__c);. A mismatch fails the test.
98	`            System.assertEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(. A mismatch fails the test.
99	`                null,`	Continues the surrounding declaration/expression or text: null,. Read it with the preceding opening statement (System.assertEquals(); it is not a standalone business operation.
100	`                allocation.Distributor__c,`	Continues the surrounding declaration/expression or text: allocation.Distributor__c,. Read it with the preceding opening statement (null,); it is not a standalone business operation.
101	`                'Employee allocations need no representative.'`	Continues the surrounding declaration/expression or text: 'Employee allocations need no representative.'. Read it with the preceding opening statement (allocation.Distributor__c,); it is not a standalone business operation.
102	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
103	`            System.assertEquals(true, allocation.Outlet__r.Active__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(true, allocation.Outlet__r.Active__c);. A mismatch fails the test.
104	`            System.assertEquals(allocation.Outlet__r.Beat__c, allocation.Beat__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(allocation.Outlet__r.Beat__c, allocation.Beat__c);. A mismatch fails the test.

Line	Source code	Explanation / reading note
105	`            System.assertEquals('Active', allocation.Allocation_Status__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Active', allocation.Allocation_Status__c);. A mismatch fails the test.
106	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
107	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
108		Blank line separating logical sections; no executable operation.
109	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
110	`    static void legacyPlanReusesInactiveAllocationAndKeepsManualNotes() {`	Continues the surrounding declaration/expression or text: static void legacyPlanReusesInactiveAllocationAndKeepsManualNotes() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
111	`        Permanent_Journey_Plan__c plan = draft('Submitted');`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c plan = draft('Submitted');. This is in-memory unless it is later persisted by an explicit call.
112	`        Id outletId = [SELECT Id FROM Retailer__c WHERE Name = 'First Outlet'].Id;`	Declares/initializes local data used by the surrounding operation: Id outletId = [SELECT Id FROM Retailer__c WHERE Name = 'First Outlet'].Id;. Collection contents and assignments below determine its purpose.
113	`        Distributor_Outlet_Allocation__c allocation = new Distributor_Outlet_Allocation__c(`	Assigns the right-hand expression to the named variable/property: Distributor_Outlet_Allocation__c allocation = new Distributor_Outlet_Allocation__c(. This is in-memory unless it is later persisted by an explicit call.
114	`            Employee__c = plan.Employee__c,`	Assigns the right-hand expression to the named variable/property: Employee__c = plan.Employee__c,. This is in-memory unless it is later persisted by an explicit call.
115	`            Outlet__c = outletId,`	Assigns the right-hand expression to the named variable/property: Outlet__c = outletId,. This is in-memory unless it is later persisted by an explicit call.
116	`            Beat__c = plan.Beat__c,`	Assigns the right-hand expression to the named variable/property: Beat__c = plan.Beat__c,. This is in-memory unless it is later persisted by an explicit call.
117	`            Allocation_Status__c = 'Inactive',`	Assigns the right-hand expression to the named variable/property: Allocation_Status__c = 'Inactive',. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
118	`Allocation_Date__c = Date.today(),`	Calls the named method: Allocation_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
119	`Remarks__c = 'Keep these notes'`	Assigns the right-hand expression to the named variable/property: Remarks__c = 'Keep these notes'. This is in-memory unless it is later persisted by an explicit call.
120	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
121	`insert allocation;`	Performs Salesforce DML: insert allocation;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
122	`Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
123	`plan.Status__c = 'Approved';`	Assigns the right-hand expression to the named variable/property: plan.Status__c = 'Approved';. This is in-memory unless it is later persisted by an explicit call.
124	`update plan;`	Performs Salesforce DML: update plan;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
125	`Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
126	`allocation = [`	Assigns the right-hand expression to the named variable/property: allocation = [. This is in-memory unless it is later persisted by an explicit call.
127	`SELECT Allocation_Status__c, Remarks__c`	Selects these Salesforce fields/aggregates: Allocation_Status__c, Remarks__c. Query results are used in the surrounding assignment or loop.
128	`FROM Distributor_Outlet_Allocation__c`	Chooses the Salesforce object/subquery source: FROM Distributor_Outlet_Allocation__c.
129	`WHERE Id = :allocation.Id`	Adds a query/filter condition: WHERE Id = :allocation.Id. The complete condition determines which records are included.
130	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
131	`System.assertEquals('Active', allocation.Allocation_Status__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Active', allocation.Allocation_Status__c);. A mismatch fails the test.
132	`System.assertEquals('Keep these notes', allocation.Remarks__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Keep these notes', allocation.Remarks__c);. A mismatch fails the test.

Line	Source code	Explanation / reading note
133	`System.assertEquals(1, [SELECT COUNT() FROM Distributor_Outlet_Allocation__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1, [SELECT COUNT() FROM Distributor_Outlet_Allocation__c]);. A mismatch fails the test.
134	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
135		Blank line separating logical sections; no executable operation.
136	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
137	`static void nonApprovedAndUnlinkedPlansDoNotAllocate() {`	Continues the surrounding declaration/expression or text: static void nonApprovedAndUnlinkedPlansDoNotAllocate() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
138	`Permanent_Journey_Plan__c submitted = draft('Submitted');`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c submitted = draft('Submitted');. This is in-memory unless it is later persisted by an explicit call.
139	`Permanent_Journey_Plan__c rejected = draft('Rejected');`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c rejected = draft('Rejected');. This is in-memory unless it is later persisted by an explicit call.
140	`Permanent_Journey_Plan__c unlinked = new Permanent_Journey_Plan__c(`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c unlinked = new Permanent_Journey_Plan__c(. This is in-memory unless it is later persisted by an explicit call.
141	`Name = 'Unlinked',`	Assigns the right-hand expression to the named variable/property: Name = 'Unlinked',. This is in-memory unless it is later persisted by an explicit call.
142	`Beat__c = submitted.Beat__c,`	Assigns the right-hand expression to the named variable/property: Beat__c = submitted.Beat__c,. This is in-memory unless it is later persisted by an explicit call.
143	`Status__c = 'Approved',`	Assigns the right-hand expression to the named variable/property: Status__c = 'Approved',. This is in-memory unless it is later persisted by an explicit call.
144	`Planned_Date__c = Date.today()`	Calls the named method: Planned_Date__c = Date.today(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
145	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
146	`        insert unlinked;`	Performs Salesforce DML: insert unlinked;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
147	`        Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
148	`        SfaPjpAllocationService.syncApprovedPlans(`	Calls the named method: SfaPjpAllocationService.syncApprovedPlans(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
149	`            new Set<Id>{ submitted.Id, rejected.Id, unlinked.Id }`	Continues the surrounding declaration/expression or text: new Set<Id>{ submitted.Id, rejected.Id, unlinked.Id }. Read it with the preceding opening statement (SfaPjpAllocationService.syncApprovedPlans(); it is not a standalone business operation.
150	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
151	`        SfaPjpAllocationService.syncApprovedPlans(new Set<Id>());`	Calls the named method: SfaPjpAllocationService.syncApprovedPlans(new Set<Id>());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
152	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
153	`        System.assertEquals(0, [SELECT COUNT() FROM Distributor_Outlet_Allocation__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(0, [SELECT COUNT() FROM Distributor_Outlet_Allocation__c]);. A mismatch fails the test.
154	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
155		Blank line separating logical sections; no executable operation.
156	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
157	`    static void bulkApprovalsForOverlappingPlansAreDeduplicated() {`	Continues the surrounding declaration/expression or text: static void bulkApprovalsForOverlappingPlansAreDeduplicated() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
158	`        Permanent_Journey_Plan__c sample = draft('Draft');`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c sample = draft('Draft');. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
159	`List<Permanent_Journey_Plan__c> plans = new List<Permanent_Journey_Plan__c>();`	Declares/initializes local data used by the surrounding operation: List<Permanent_Journey_Plan__c> plans = new List<Permanent_Journey_Plan__c>();. Collection contents and assignments below determine its purpose.
160	`for (Integer i = 0; i < 200; i++)`	Repeats work over the specified records/items or while this condition holds: for (Integer i = 0; i < 200; i++). Check where queries/writes occur relative to the loop.
161	`plans.add(`	Calls the named method: plans.add(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
162	`new Permanent_Journey_Plan__c(`	Continues the surrounding declaration/expression or text: new Permanent_Journey_Plan__c(. Read it with the preceding opening statement (plans.add(); it is not a standalone business operation.
163	`Name = 'Bulk ' + i,`	Assigns the right-hand expression to the named variable/property: Name = 'Bulk ' + i,. This is in-memory unless it is later persisted by an explicit call.
164	`Employee__c = sample.Employee__c,`	Assigns the right-hand expression to the named variable/property: Employee__c = sample.Employee__c,. This is in-memory unless it is later persisted by an explicit call.
165	`Beat__c = sample.Beat__c,`	Assigns the right-hand expression to the named variable/property: Beat__c = sample.Beat__c,. This is in-memory unless it is later persisted by an explicit call.
166	`Planned_Date__c = Date.today(),`	Calls the named method: Planned_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
167	`Status__c = 'Approved'`	Assigns the right-hand expression to the named variable/property: Status__c = 'Approved'. This is in-memory unless it is later persisted by an explicit call.
168	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
169	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
170	`Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
171	`insert plans;`	Performs Salesforce DML: insert plans;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
172	`Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
173	`System.assertEquals(1, [SELECT COUNT() FROM Distributor_Outlet_Allocation__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1, [SELECT COUNT() FROM Distributor_Outlet_Allocation__c]);. A mismatch fails the test.
174	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
175	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/SfaPjpAllocationServiceTest.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 17e31f2473b0c9f7048b434edab7d12261a9b8a0b9ede833cb9c3141eeeccb7b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>67.0</apiVersion><status>Active</status></ApexClass>`	Sets Apex Class in the enclosing configuration to <apiVersion>67.0</apiVersion><status>Active</status>.

force-app/main/default/classes/SfaRecordedScopeHandler.cls

Copies beat geography/reporting manager and recalculates affected beat outlet counts/names after outlet changes, including both old and new beats.

91 numbered source lines | SHA-256 173eba65a3c3907c1e2a7791cbf25c37cf553971f3f0a5a3e8546f3f736c8fe6

Line	Source code	Explanation / reading note
1	`public with sharing class SfaRecordedScopeHandler {`	Declares a class/type: public with sharing class SfaRecordedScopeHandler {. Uses record sharing, which does not alone enforce field/object permissions.
2	`    public static void copyBeatGeography(List<Retailer__c> outlets) {`	Declares a callable function/method: public static void copyBeatGeography(List<Retailer__c> outlets) {. Parameters supply its inputs; the following block implements the operation.
3	`        Set<Id> beatIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> beatIds = new Set<Id>();. Collection contents and assignments below determine its purpose.
4	`        for (Retailer__c outlet : outlets) {`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c outlet : outlets) {. Check where queries/writes occur relative to the loop.
5	`            if (outlet.Beat__c != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (outlet.Beat__c != null).
6	`                beatIds.add(outlet.Beat__c);`	Calls the named method: beatIds.add(outlet.Beat__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
7	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
8	`        if (beatIds.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (beatIds.isEmpty()).
9	`            return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
10		Blank line separating logical sections; no executable operation.
11	`        Map<Id, Beat__c> beats = new Map<Id, Beat__c>(`	Declares/initializes local data used by the surrounding operation: Map<Id, Beat__c> beats = new Map<Id, Beat__c>(. Collection contents and assignments below determine its purpose.
12	`            [SELECT Geography__c FROM Beat__c WHERE Id IN :beatIds]`	Continues the surrounding declaration/expression or text: [SELECT Geography__c FROM Beat__c WHERE Id IN :beatIds]. Read it with the preceding opening statement (Map<Id, Beat__c> beats = new Map<Id, Beat__c>(); it is not a standalone business operation.
13	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
14	`        for (Retailer__c outlet : outlets) {`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c outlet : outlets) {. Check where queries/writes occur relative to the loop.
15	`            if (outlet.Beat__c == null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (outlet.Beat__c == null).
16	`                continue;`	Skips the remainder of the current loop iteration and moves to the next item.
17	`            Beat__c beat = beats.get(outlet.Beat__c);`	Calls the named method: Beat__c beat = beats.get(outlet.Beat__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
18	`            outlet.Geography__c = beat == null ? null : beat.Geography__c;`	Assigns the right-hand expression to the named variable/property: outlet.Geography__c = beat == null ? null : beat.Geography__c;. This is in-memory unless it is later persisted by an explicit call.
19	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21		Blank line separating logical sections; no executable operation.
22	`    public static void copyReportingManager(List<Permanent_Journey_Plan__c> plans) {`	Declares a callable function/method: public static void copyReportingManager(List<Permanent_Journey_Plan__c> plans) {. Parameters supply its inputs; the following block implements the operation.
23	`        Set<Id> employeeIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> employeeIds = new Set<Id>();. Collection contents and assignments below determine its purpose.
24	`        for (Permanent_Journey_Plan__c plan : plans) {`	Repeats work over the specified records/items or while this condition holds: for (Permanent_Journey_Plan__c plan : plans) {. Check where queries/writes occur relative to the loop.
25	`            if (plan.Employee__c != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plan.Employee__c != null).
26	`                employeeIds.add(plan.Employee__c);`	Calls the named method: employeeIds.add(plan.Employee__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
27	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
28	`        if (employeeIds.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (employeeIds.isEmpty()).
29	`            return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
30		Blank line separating logical sections; no executable operation.
31	`        Map<Id, Employee__c> employees = new Map<Id, Employee__c>(`	Declares/initializes local data used by the surrounding operation: Map<Id, Employee__c> employees = new Map<Id, Employee__c>(. Collection contents and assignments below determine its purpose.
32	`            [SELECT Reporting_Manager__c FROM Employee__c WHERE Id IN :employeeIds]`	Continues the surrounding declaration/expression or text: [SELECT Reporting_Manager__c FROM Employee__c WHERE Id IN :employeeIds]. Read it with the preceding opening statement (Map<Id, Employee__c> employees = new Map<Id, Employee__c>(); it is not a standalone business operation.
33	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`        for (Permanent_Journey_Plan__c plan : plans) {`	Repeats work over the specified records/items or while this condition holds: for (Permanent_Journey_Plan__c plan : plans) {. Check where queries/writes occur relative to the loop.
35	`            Employee__c employee = employees.get(plan.Employee__c);`	Calls the named method: Employee__c employee = employees.get(plan.Employee__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
36	`            plan.Approver__c = employee == null ? null : employee.Reporting_Manager__c;`	Assigns the right-hand expression to the named variable/property: plan.Approver__c = employee == null ? null : employee.Reporting_Manager__c;. This is in-memory unless it is later persisted by an explicit call.
37	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39		Blank line separating logical sections; no executable operation.
40	`    public static void refreshOutletCounts(List<Retailer__c> newRows, List<Retailer__c> oldRows) {`	Declares a callable function/method: public static void refreshOutletCounts(List<Retailer__c> newRows, List<Retailer__c> oldRows) {. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
41	`Set<Id> beatIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> beatIds = new Set<Id>();. Collection contents and assignments below determine its purpose.
42	`if (newRows != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (newRows != null).
43	`for (Retailer__c row : newRows)`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c row : newRows). Check where queries/writes occur relative to the loop.
44	`if (row.Beat__c != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (row.Beat__c != null).
45	`beatIds.add(row.Beat__c);`	Calls the named method: beatIds.add(row.Beat__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
46	`if (oldRows != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (oldRows != null).
47	`for (Retailer__c row : oldRows)`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c row : oldRows). Check where queries/writes occur relative to the loop.
48	`if (row.Beat__c != null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (row.Beat__c != null).
49	`beatIds.add(row.Beat__c);`	Calls the named method: beatIds.add(row.Beat__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
50	`if (beatIds.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (beatIds.isEmpty()).
51	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
52		Blank line separating logical sections; no executable operation.
53	`Map<Id, Integer> counts = new Map<Id, Integer>();`	Declares/initializes local data used by the surrounding operation: Map<Id, Integer> counts = new Map<Id, Integer>();. Collection contents and assignments below determine its purpose.
54	`for (AggregateResult result : [`	Repeats work over the specified records/items or while this condition holds: for (AggregateResult result : [. Check where queries/writes occur relative to the loop.
55	`SELECT Beat__c beatId, COUNT(Id) outletCount`	Selects these Salesforce fields/aggregates: Beat__c beatId, COUNT(Id) outletCount. Query results are used in the surrounding assignment or loop.

Line	Source code	Explanation / reading note
56	`            FROM Retailer__c`	Chooses the Salesforce object/subquery source: FROM Retailer__c.
57	`            WHERE Beat__c IN :beatIds`	Adds a query/filter condition: WHERE Beat__c IN :beatIds. The complete condition determines which records are included.
58	`            GROUP BY Beat__c`	Controls query sorting, grouping or result count: GROUP BY Beat__c.
59	`        ]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (GROUP BY Beat__c); it is not a standalone business operation.
60	`            counts.put((Id) result.get('beatId'), (Integer) result.get('outletCount'));`	Calls the named method: counts.put((Id) result.get('beatId'), (Integer) result.get('outletCount'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
61	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
62	`        Map<Id, List<String>> outletNamesByBeat = new Map<Id, List<String>>();`	Declares/initializes local data used by the surrounding operation: Map<Id, List<String>> outletNamesByBeat = new Map<Id, List<String>>();. Collection contents and assignments below determine its purpose.
63	`        for (Retailer__c outlet : [`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c outlet : [. Check where queries/writes occur relative to the loop.
64	`            SELECT Name, Beat__c`	Selects these Salesforce fields/aggregates: Name, Beat__c. Query results are used in the surrounding assignment or loop.
65	`            FROM Retailer__c`	Chooses the Salesforce object/subquery source: FROM Retailer__c.
66	`            WHERE Beat__c IN :beatIds`	Adds a query/filter condition: WHERE Beat__c IN :beatIds. The complete condition determines which records are included.
67	`            ORDER BY Name`	Controls query sorting, grouping or result count: ORDER BY Name.
68	`        ]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (ORDER BY Name); it is not a standalone business operation.
69	`            if (!outletNamesByBeat.containsKey(outlet.Beat__c)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!outletNamesByBeat.containsKey(outlet.Beat__c)) {.
70	`                outletNamesByBeat.put(outlet.Beat__c, new List<String>());`	Calls the named method: outletNamesByBeat.put(outlet.Beat__c, new List<String>());. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
71	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
72	`            outletNamesByBeat.get(outlet.Beat__c).add(outlet.Name);`	Calls the named method: outletNamesByBeat.get(outlet.Beat__c).add(outlet.Name);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
73	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
74	`        List<Beat__c> updates = new List<Beat__c>();`	Declares/initializes local data used by the surrounding operation: List<Beat__c> updates = new List<Beat__c>();. Collection contents and assignments below determine its purpose.
75	`        for (Id beatId : beatIds) {`	Repeats work over the specified records/items or while this condition holds: for (Id beatId : beatIds) {. Check where queries/writes occur relative to the loop.
76	`            String outletNames = outletNamesByBeat.containsKey(beatId)`	Declares/initializes local data used by the surrounding operation: String outletNames = outletNamesByBeat.containsKey(beatId). Collection contents and assignments below determine its purpose.
77	`                ? String.join(outletNamesByBeat.get(beatId), ', ')`	Calls the named method: ? String.join(outletNamesByBeat.get(beatId), ', '). Its implementation defines the side effect/result; use the symbol/file index to follow it.
78	`                : '';`	Continues the surrounding declaration/expression or text: : '';. Read it with the preceding opening statement (? String.join(outletNamesByBeat.get(beatId), ', ')); it is not a standalone business operation.
79	`            if (outletNames.length() > 255)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (outletNames.length() > 255).
80	`                outletNames = outletNames.left(255);`	Calls the named method: outletNames = outletNames.left(255);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
81	`            updates.add(`	Calls the named method: updates.add(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
82	`                new Beat__c(`	Continues the surrounding declaration/expression or text: new Beat__c(. Read it with the preceding opening statement (updates.add(); it is not a standalone business operation.
83	`                    Id = beatId,`	Declares/initializes local data used by the surrounding operation: Id = beatId,. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
84	`Outlet_Count__c = counts.containsKey(beatId) ? counts.get(beatId) : 0,`	Calls the named method: Outlet_Count__c = counts.containsKey(beatId) ? counts.get(beatId) : 0,. Its implementation defines the side effect/result; use the symbol/file index to follow it.
85	`Outlet_Names__c = outletNames`	Assigns the right-hand expression to the named variable/property: Outlet_Names__c = outletNames. This is in-memory unless it is later persisted by an explicit call.
86	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
87	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
88	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
89	`update updates;`	Performs Salesforce DML: update updates;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
90	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
91	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/SfaRecordedScopeHandler.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 991f1ca647a6d030b8f1828ad18737c5e94ecbe63a944a972fd685c6ab98f84a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexClass block; child elements specify its configuration.
3	`    <apiVersion>65.0</apiVersion>`	Sets Salesforce API version used for this component to 65.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexClass>`	Closes the ApexClass configuration block.

force-app/main/default/classes/SfaSalesRepresentativeInvitationService.cls

Normalizes legacy representative login email and sends APK/deep-link invitations. Separate from the company DMS distributor record.

79 numbered source lines | SHA-256 c69aff5368b7335ba21fd6aea60c3d796c7b1392a94ab19ef0d4280a4bde1060

Line	Source code	Explanation / reading note
1	`public with sharing class SfaSalesRepresentativeInvitationService {`	Declares a class/type: public with sharing class SfaSalesRepresentativeInvitationService {. Uses record sharing, which does not alone enforce field/object permissions.
2	`    private static final String INSTALL_URL = 'https://expo.dev/accounts/aishwarya1412/projects/sfa-field-sales/builds/bcb92138-58f9-4b72-b409-5c3468069a23';`	Assigns the right-hand expression to the named variable/property: private static final String INSTALL_URL = 'https://expo.dev/accounts/aishwarya1412/projects/sfa-field-sales/builds/bcb92138-58f9-4b72-b409-5c3468069a23';. This is in-memory unless it is later persisted by an explicit call.
3	`    private static final String OPEN_APP_URL = 'sfafieldsales://login';`	Assigns the right-hand expression to the named variable/property: private static final String OPEN_APP_URL = 'sfafieldsales://login';. This is in-memory unless it is later persisted by an explicit call.
4		Blank line separating logical sections; no executable operation.
5	`    public static void synchronizeLoginEmail(List<Distributor__c> representatives) {`	Declares a callable function/method: public static void synchronizeLoginEmail(List<Distributor__c> representatives) {. Parameters supply its inputs; the following block implements the operation.
6	`        for (Distributor__c representative : representatives) {`	Repeats work over the specified records/items or while this condition holds: for (Distributor__c representative : representatives) {. Check where queries/writes occur relative to the loop.
7	`            if (String.isNotBlank(representative.Email__c)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (String.isNotBlank(representative.Email__c)) {.
8	`                representative.Login_Email__c = representative.Email__c.trim().toLowerCase();`	Calls the named method: representative.Login_Email__c = representative.Email__c.trim().toLowerCase();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
9	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
11	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
12		Blank line separating logical sections; no executable operation.
13	`    public static void emailApplicationLinks(`	Declares a callable function/method: public static void emailApplicationLinks(. Parameters supply its inputs; the following block implements the operation.
14	`        List<Distributor__c> representatives,`	Declares/initializes local data used by the surrounding operation: List<Distributor__c> representatives,. Collection contents and assignments below determine its purpose.
15	`        Map<Id, Distributor__c> previousRecords`	Declares/initializes local data used by the surrounding operation: Map<Id, Distributor__c> previousRecords. Collection contents and assignments below determine its purpose.
16	`    ) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (Map<Id, Distributor__c> previousRecords); it is not a standalone business operation.
17	`        List<Messaging.SingleEmailMessage> messages = new List<Messaging.SingleEmailMessage>();`	Declares/initializes local data used by the surrounding operation: List<Messaging.SingleEmailMessage> messages = new List<Messaging.SingleEmailMessage>();. Collection contents and assignments below determine its purpose.
18		Blank line separating logical sections; no executable operation.
19	`        for (Distributor__c representative : representatives) {`	Repeats work over the specified records/items or while this condition holds: for (Distributor__c representative : representatives) {. Check where queries/writes occur relative to the loop.
20	`            if (String.isBlank(representative.Email__c)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (String.isBlank(representative.Email__c)) {.
21	`                continue;`	Skips the remainder of the current loop iteration and moves to the next item.
22	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
23		Blank line separating logical sections; no executable operation.
24	`            Distributor__c previousRecord = previousRecords == null`	Assigns the right-hand expression to the named variable/property: Distributor__c previousRecord = previousRecords == null. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
25	`? null`	Continues the surrounding declaration/expression or text: ? null. Read it with the preceding opening statement (Distributor__c previousRecord = previousRecords == null); it is not a standalone business operation.
26	`: previousRecords.get(representative.Id);`	Calls the named method: : previousRecords.get(representative.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
27	`Boolean isNewRecord = previousRecord == null;`	Declares/initializes local data used by the surrounding operation: Boolean isNewRecord = previousRecord == null;. Collection contents and assignments below determine its purpose.
28	`Boolean emailChanged =`	Declares/initializes local data used by the surrounding operation: Boolean emailChanged =. Collection contents and assignments below determine its purpose.
29	`previousRecord != null &&`	Continues the surrounding declaration/expression or text: previousRecord != null &&. Read it with the preceding opening statement (Boolean emailChanged =); it is not a standalone business operation.
30	`representative.Email__c != previousRecord.Email__c;`	Continues the surrounding declaration/expression or text: representative.Email__c != previousRecord.Email__c;. Read it with the preceding opening statement (previousRecord != null &&); it is not a standalone business operation.
31	`Boolean loginEmailChanged =`	Declares/initializes local data used by the surrounding operation: Boolean loginEmailChanged =. Collection contents and assignments below determine its purpose.
32	`previousRecord != null &&`	Continues the surrounding declaration/expression or text: previousRecord != null &&. Read it with the preceding opening statement (Boolean loginEmailChanged =); it is not a standalone business operation.
33	`representative.Login_Email__c != previousRecord.Login_Email__c;`	Continues the surrounding declaration/expression or text: representative.Login_Email__c != previousRecord.Login_Email__c;. Read it with the preceding opening statement (previousRecord != null &&); it is not a standalone business operation.
34		Blank line separating logical sections; no executable operation.
35	`if (!isNewRecord && !emailChanged && !loginEmailChanged) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!isNewRecord && !emailChanged && !loginEmailChanged) {.
36	`continue;`	Skips the remainder of the current loop iteration and moves to the next item.
37	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
38		Blank line separating logical sections; no executable operation.
39	`Messaging.SingleEmailMessage message = new Messaging.SingleEmailMessage();`	Calls the named method: Messaging.SingleEmailMessage message = new Messaging.SingleEmailMessage();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
40	`message.setToAddresses(new List<String>{ representative.Email__c });`	Calls the named method: message.setToAddresses(new List<String>{ representative.Email__c });. Its implementation defines the side effect/result; use the symbol/file index to follow it.
41	`message.setSubject('Your SFA Mobile application');`	Calls the named method: message.setSubject('Your SFA Mobile application');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
42	`message.setPlainTextBody(buildPlainTextBody(representative.Name));`	Calls the named method: message.setPlainTextBody(buildPlainTextBody(representative.Name));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
43	`message.setHtmlBody(buildHtmlBody(representative.Name));`	Calls the named method: message.setHtmlBody(buildHtmlBody(representative.Name));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
44	`messages.add(message);`	Calls the named method: messages.add(message);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
45	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
46		Blank line separating logical sections; no executable operation.
47	`if (!messages.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!messages.isEmpty()) {.
48	`Messaging.sendEmail(messages, false);`	Asks Salesforce to send the collected emails. Provider acceptance/delivery and partial failures are separate from record saving.
49	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
50	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
51		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
52	`    private static String buildPlainTextBody(String representativeName) {`	Declares a callable function/method: private static String buildPlainTextBody(String representativeName) {. Parameters supply its inputs; the following block implements the operation.
53	`        return 'Hello ' +`	Returns 'Hello ' + to the caller (or begins returned UI markup) and ends this execution path.
54	`            representativeName +`	Continues the surrounding declaration/expression or text: representativeName +. Read it with the preceding opening statement (return 'Hello ' +); it is not a standalone business operation.
55	`            ',\n\n' +`	Continues the surrounding declaration/expression or text: ',\n\n' +. Read it with the preceding opening statement (representativeName +); it is not a standalone business operation.
56	`            'Your SFA Mobile application is ready.\n\n' +`	Continues the surrounding declaration/expression or text: 'Your SFA Mobile application is ready.\n\n' +. Read it with the preceding opening statement (',\n\n' +); it is not a standalone business operation.
57	`            'Install or update the application: ' +`	Continues the surrounding declaration/expression or text: 'Install or update the application: ' +. Read it with the preceding opening statement ('Your SFA Mobile application is ready.\n\n' +); it is not a standalone business operation.
58	`            INSTALL_URL +`	Continues the surrounding declaration/expression or text: INSTALL_URL +. Read it with the preceding opening statement ('Install or update the application: ' +); it is not a standalone business operation.
59	`            '\n\n' +`	Continues the surrounding declaration/expression or text: '\n\n' +. Read it with the preceding opening statement (INSTALL_URL +); it is not a standalone business operation.
60	`            'After installation, open the application: ' +`	Continues the surrounding declaration/expression or text: 'After installation, open the application: ' +. Read it with the preceding opening statement ('\n\n' +); it is not a standalone business operation.
61	`            OPEN_APP_URL +`	Continues the surrounding declaration/expression or text: OPEN_APP_URL +. Read it with the preceding opening statement ('After installation, open the application: ' +); it is not a standalone business operation.
62	`            '\n\n' +`	Continues the surrounding declaration/expression or text: '\n\n' +. Read it with the preceding opening statement (OPEN_APP_URL +); it is not a standalone business operation.
63	`            'Use the email address on your Sales Representative record to sign in.';`	Continues the surrounding declaration/expression or text: 'Use the email address on your Sales Representative record to sign in.';. Read it with the preceding opening statement ('\n\n' +); it is not a standalone business operation.

Line	Source code	Explanation / reading note
64	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
65		Blank line separating logical sections; no executable operation.
66	`    private static String buildHtmlBody(String representativeName) {`	Declares a callable function/method: private static String buildHtmlBody(String representativeName) {. Parameters supply its inputs; the following block implements the operation.
67	`        return '<p>Hello ' +`	Returns ' Hello ' + to the caller (or begins returned UI markup) and ends this execution path.
68	`            String.escapeSingleQuotes(representativeName) +`	Declares/initializes local data used by the surrounding operation: String.escapeSingleQuotes(representativeName) +. Collection contents and assignments below determine its purpose.
69	`            ',</p>' +`	Continues the surrounding declaration/expression or text: ', ' +. Read it with the preceding opening statement (String.escapeSingleQuotes(representativeName) +); it is not a standalone business operation.
70	`            '<p>Your SFA Mobile application is ready.</p>' +`	Continues the surrounding declaration/expression or text: ' Your SFA Mobile application is ready. ' +. Read it with the preceding opening statement (', ' +); it is not a standalone business operation.
71	`            '<p><a href="' +`	Assigns the right-hand expression to the named variable/property: ' <a href="' +. This is in-memory unless it is later persisted by an explicit call.
72	`            INSTALL_URL +`	Continues the surrounding declaration/expression or text: INSTALL_URL +. Read it with the preceding opening statement (' <a href="' +); it is not a standalone business operation.
73	`            '">Install or update SFA Mobile</a></p>' +`	Continues the surrounding declaration/expression or text: '">Install or update SFA Mobile ' +. Read it with the preceding opening statement (INSTALL_URL +); it is not a standalone business operation.
74	`            '<p><a href="' +`	Assigns the right-hand expression to the named variable/property: ' <a href="' +. This is in-memory unless it is later persisted by an explicit call.
75	`            OPEN_APP_URL +`	Continues the surrounding declaration/expression or text: OPEN_APP_URL +. Read it with the preceding opening statement (' <a href="' +); it is not a standalone business operation.

Line	Source code	Explanation / reading note
76	`'">Open SFA Mobile</a></p>' +`	Continues the surrounding declaration/expression or text: '">Open SFA Mobile ' +. Read it with the preceding opening statement (OPEN_APP_URL +); it is not a standalone business operation.
77	`'<p>Use the email address on your Sales Representative record to sign in.</p>';`	Continues the surrounding declaration/expression or text: ' Use the email address on your Sales Representative record to sign in. ';. Read it with the preceding opening statement ('">Open SFA Mobile ' +); it is not a standalone business operation.
78	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
79	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/SfaSalesRepresentativeInvitationService.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 a242f6e22b472afffbd726be71165de394e417355cdf1edd81b5601278ddea32

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexClass block; child elements specify its configuration.
3	`    <apiVersion>67.0</apiVersion>`	Sets Salesforce API version used for this component to 67.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexClass>`	Closes the ApexClass configuration block.

force-app/main/default/classes/SfaVisitActionsController.cls

Aura controller for checked-in visit assets, competitor activity, stock, tickets and returns; also submits employee leave. The external app primarily uses Express endpoints.

129 numbered source lines | SHA-256 8ae4c8a4f3c9a4d4f1d9d91d1e8171e23a876eefce5f79e27fccc44851692313

Line	Source code	Explanation / reading note
1	`public with sharing class SfaVisitActionsController {`	Declares a class/type: public with sharing class SfaVisitActionsController {. Uses record sharing, which does not alone enforce field/object permissions.
2	`    /**`	Developer comment/documentation: It is not executed.
3	`     * Saves one focused in-visit activity. Keeping this method explicit makes the`	Developer comment/documentation: Saves one focused in-visit activity. Keeping this method explicit makes the It is not executed.
4	`     * mobile-to-Salesforce mapping easy for a trainee to read and maintain.`	Developer comment/documentation: mobile-to-Salesforce mapping easy for a trainee to read and maintain. It is not executed.
5	`     */`	Developer comment/documentation: It is not executed.
6	`    @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
7	`    public static Id saveVisitAction(String actionType, Id visitId, String payloadJson) {`	Declares a callable function/method: public static Id saveVisitAction(String actionType, Id visitId, String payloadJson) {. Parameters supply its inputs; the following block implements the operation.
8	`        if (visitId == null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visitId == null).
9	`            throw new AuraHandledException('Select a checked-in visit first.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('Select a checked-in visit first.');. The caller/catch block decides how it is reported.
10		Blank line separating logical sections; no executable operation.
11	`        Visit__c visit = [`	Assigns the right-hand expression to the named variable/property: Visit__c visit = [. This is in-memory unless it is later persisted by an explicit call.
12	`            SELECT Id, Retailer__c, Status__c`	Selects these Salesforce fields/aggregates: Id, Retailer__c, Status__c. Query results are used in the surrounding assignment or loop.
13	`            FROM Visit__c`	Chooses the Salesforce object/subquery source: FROM Visit__c.

Line	Source code	Explanation / reading note
14	`            WHERE Id = :visitId`	Adds a query/filter condition: WHERE Id = :visitId. The complete condition determines which records are included.
15	`            LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
16	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`        if (visit.Status__c != 'Checked In') {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visit.Status__c != 'Checked In') {.
18	`            throw new AuraHandledException('Visit actions are available only after check-in.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('Visit actions are available only after check-in.');. The caller/catch block decides how it is reported.
19	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20		Blank line separating logical sections; no executable operation.
21	`        Map<String, Object> data = (Map<String, Object>) JSON.deserializeUntyped(payloadJson);`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
22	`        if (actionType == 'asset') {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (actionType == 'asset') {.
23	`            Asset_Survey__c record = new Asset_Survey__c(`	Assigns the right-hand expression to the named variable/property: Asset_Survey__c record = new Asset_Survey__c(. This is in-memory unless it is later persisted by an explicit call.
24	`                Visit__c = visit.Id,`	Assigns the right-hand expression to the named variable/property: Visit__c = visit.Id,. This is in-memory unless it is later persisted by an explicit call.
25	`                Outlet__c = visit.Retailer__c,`	Assigns the right-hand expression to the named variable/property: Outlet__c = visit.Retailer__c,. This is in-memory unless it is later persisted by an explicit call.
26	`                Asset_Name__c = text(data, 'assetName'),`	Assigns the right-hand expression to the named variable/property: Asset_Name__c = text(data, 'assetName'),. This is in-memory unless it is later persisted by an explicit call.
27	`                Asset_Code__c = text(data, 'assetCode'),`	Assigns the right-hand expression to the named variable/property: Asset_Code__c = text(data, 'assetCode'),. This is in-memory unless it is later persisted by an explicit call.
28	`                Status__c = text(data, 'status'),`	Assigns the right-hand expression to the named variable/property: Status__c = text(data, 'status'),. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
29	`Picture_URL__c = text(data, 'imageUrl'),`	Assigns the right-hand expression to the named variable/property: Picture_URL__c = text(data, 'imageUrl'),. This is in-memory unless it is later persisted by an explicit call.
30	`Given_Date__c = dateValue(data, 'dateValue')`	Assigns the right-hand expression to the named variable/property: Given_Date__c = dateValue(data, 'dateValue'). This is in-memory unless it is later persisted by an explicit call.
31	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`insert record;`	Performs Salesforce DML: insert record;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
33	`return record.Id;`	Returns record.Id to the caller (or begins returned UI markup) and ends this execution path.
34	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`if (actionType == 'competitor') {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (actionType == 'competitor') {.
36	`Competitor_Activity__c record = new Competitor_Activity__c(`	Assigns the right-hand expression to the named variable/property: Competitor_Activity__c record = new Competitor_Activity__c(. This is in-memory unless it is later persisted by an explicit call.
37	`Visit__c = visit.Id,`	Assigns the right-hand expression to the named variable/property: Visit__c = visit.Id,. This is in-memory unless it is later persisted by an explicit call.
38	`Outlet__c = visit.Retailer__c,`	Assigns the right-hand expression to the named variable/property: Outlet__c = visit.Retailer__c,. This is in-memory unless it is later persisted by an explicit call.
39	`Competitor_Name__c = text(data, 'competitorName'),`	Assigns the right-hand expression to the named variable/property: Competitor_Name__c = text(data, 'competitorName'),. This is in-memory unless it is later persisted by an explicit call.
40	`Company__c = text(data, 'company'),`	Assigns the right-hand expression to the named variable/property: Company__c = text(data, 'company'),. This is in-memory unless it is later persisted by an explicit call.
41	`MRP__c = numberValue(data, 'mrp'),`	Assigns the right-hand expression to the named variable/property: MRP__c = numberValue(data, 'mrp'),. This is in-memory unless it is later persisted by an explicit call.
42	`RBP__c = numberValue(data, 'rbp'),`	Assigns the right-hand expression to the named variable/property: RBP__c = numberValue(data, 'rbp'),. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
43	`Scheme_Details__c = text(data, 'schemeDetails'),`	Assigns the right-hand expression to the named variable/property: Scheme_Details__c = text(data, 'schemeDetails'),. This is in-memory unless it is later persisted by an explicit call.
44	`Image_URL__c = text(data, 'imageUrl')`	Assigns the right-hand expression to the named variable/property: Image_URL__c = text(data, 'imageUrl'). This is in-memory unless it is later persisted by an explicit call.
45	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
46	`insert record;`	Performs Salesforce DML: insert record;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
47	`return record.Id;`	Returns record.Id to the caller (or begins returned UI markup) and ends this execution path.
48	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49	`if (actionType == 'stock') {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (actionType == 'stock') {.
50	`Stock_Check__c record = new Stock_Check__c(`	Assigns the right-hand expression to the named variable/property: Stock_Check__c record = new Stock_Check__c(. This is in-memory unless it is later persisted by an explicit call.
51	`Visit__c = visit.Id,`	Assigns the right-hand expression to the named variable/property: Visit__c = visit.Id,. This is in-memory unless it is later persisted by an explicit call.
52	`Outlet__c = visit.Retailer__c,`	Assigns the right-hand expression to the named variable/property: Outlet__c = visit.Retailer__c,. This is in-memory unless it is later persisted by an explicit call.
53	`Product__c = idValue(data, 'productId'),`	Assigns the right-hand expression to the named variable/property: Product__c = idValue(data, 'productId'),. This is in-memory unless it is later persisted by an explicit call.
54	`Quantity__c = numberValue(data, 'quantity'),`	Assigns the right-hand expression to the named variable/property: Quantity__c = numberValue(data, 'quantity'),. This is in-memory unless it is later persisted by an explicit call.
55	`Manufacturing_Date__c = dateValue(data, 'dateValue')`	Assigns the right-hand expression to the named variable/property: Manufacturing_Date__c = dateValue(data, 'dateValue'). This is in-memory unless it is later persisted by an explicit call.
56	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
57	`            insert record;`	Performs Salesforce DML: insert record;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
58	`            return record.Id;`	Returns record.Id to the caller (or begins returned UI markup) and ends this execution path.
59	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
60	`        if (actionType == 'ticket') {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (actionType == 'ticket') {.
61	`            SFA_Ticket__c record = new SFA_Ticket__c(`	Assigns the right-hand expression to the named variable/property: SFA_Ticket__c record = new SFA_Ticket__c(. This is in-memory unless it is later persisted by an explicit call.
62	`                Visit__c = visit.Id,`	Assigns the right-hand expression to the named variable/property: Visit__c = visit.Id,. This is in-memory unless it is later persisted by an explicit call.
63	`                Outlet__c = visit.Retailer__c,`	Assigns the right-hand expression to the named variable/property: Outlet__c = visit.Retailer__c,. This is in-memory unless it is later persisted by an explicit call.
64	`                Subject__c = text(data, 'subject'),`	Assigns the right-hand expression to the named variable/property: Subject__c = text(data, 'subject'),. This is in-memory unless it is later persisted by an explicit call.
65	`                Description__c = text(data, 'description'),`	Assigns the right-hand expression to the named variable/property: Description__c = text(data, 'description'),. This is in-memory unless it is later persisted by an explicit call.
66	`                Image_URL__c = text(data, 'imageUrl'),`	Assigns the right-hand expression to the named variable/property: Image_URL__c = text(data, 'imageUrl'),. This is in-memory unless it is later persisted by an explicit call.
67	`                Status__c = 'Open'`	Assigns the right-hand expression to the named variable/property: Status__c = 'Open'. This is in-memory unless it is later persisted by an explicit call.
68	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
69	`            insert record;`	Performs Salesforce DML: insert record;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
70	`            return record.Id;`	Returns record.Id to the caller (or begins returned UI markup) and ends this execution path.
71	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
72	`if (actionType == 'return') {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (actionType == 'return') {.
73	`Product_Return__c record = new Product_Return__c(`	Assigns the right-hand expression to the named variable/property: Product_Return__c record = new Product_Return__c(. This is in-memory unless it is later persisted by an explicit call.
74	`Visit__c = visit.Id,`	Assigns the right-hand expression to the named variable/property: Visit__c = visit.Id,. This is in-memory unless it is later persisted by an explicit call.
75	`Outlet__c = visit.Retailer__c,`	Assigns the right-hand expression to the named variable/property: Outlet__c = visit.Retailer__c,. This is in-memory unless it is later persisted by an explicit call.
76	`Product__c = idValue(data, 'productId'),`	Assigns the right-hand expression to the named variable/property: Product__c = idValue(data, 'productId'),. This is in-memory unless it is later persisted by an explicit call.
77	`Quantity__c = numberValue(data, 'quantity'),`	Assigns the right-hand expression to the named variable/property: Quantity__c = numberValue(data, 'quantity'),. This is in-memory unless it is later persisted by an explicit call.
78	`Manufacturing_Date__c = dateValue(data, 'dateValue'),`	Assigns the right-hand expression to the named variable/property: Manufacturing_Date__c = dateValue(data, 'dateValue'),. This is in-memory unless it is later persisted by an explicit call.
79	`Return_Reason__c = text(data, 'returnReason')`	Assigns the right-hand expression to the named variable/property: Return_Reason__c = text(data, 'returnReason'). This is in-memory unless it is later persisted by an explicit call.
80	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
81	`insert record;`	Performs Salesforce DML: insert record;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
82	`return record.Id;`	Returns record.Id to the caller (or begins returned UI markup) and ends this execution path.
83	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
84	`throw new AuraHandledException('Unsupported visit action.');`	Stops this execution path with a validation/error exception: throw new AuraHandledException('Unsupported visit action.');. The caller/catch block decides how it is reported.
85	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
86		Blank line separating logical sections; no executable operation.
87	`    @AuraEnabled`	Exposes this method/property to Lightning. cacheable=true is for reads; the annotation is not a permission check.
88	`    public static Id submitLeave(String payloadJson) {`	Declares a callable function/method: public static Id submitLeave(String payloadJson) {. Parameters supply its inputs; the following block implements the operation.
89	`        Map<String, Object> data = (Map<String, Object>) JSON.deserializeUntyped(payloadJson);`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
90	`        List<Employee__c> employees = [`	Declares/initializes local data used by the surrounding operation: List<Employee__c> employees = [. Collection contents and assignments below determine its purpose.
91	`            SELECT Id, Reporting_Manager__c`	Selects these Salesforce fields/aggregates: Id, Reporting_Manager__c. Query results are used in the surrounding assignment or loop.
92	`            FROM Employee__c`	Chooses the Salesforce object/subquery source: FROM Employee__c.
93	`            WHERE Salesforce_User__c = :UserInfo.getUserId() AND Active__c = TRUE`	Adds a query/filter condition: WHERE Salesforce_User__c = :UserInfo.getUserId() AND Active__c = TRUE. The complete condition determines which records are included.
94	`            LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
95	`        ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
96	`        if (employees.isEmpty())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (employees.isEmpty()).
97	`            throw new AuraHandledException(`	Stops this execution path with a validation/error exception: throw new AuraHandledException(. The caller/catch block decides how it is reported.
98	`                'Your Salesforce user is not linked to an active employee.'`	Continues the surrounding declaration/expression or text: 'Your Salesforce user is not linked to an active employee.'. Read it with the preceding opening statement (throw new AuraHandledException(); it is not a standalone business operation.
99	`            );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
100	`        Employee__c employee = employees[0];`	Assigns the right-hand expression to the named variable/property: Employee__c employee = employees[0];. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
101	`        Leave_Request__c request = new Leave_Request__c(`	Assigns the right-hand expression to the named variable/property: Leave_Request__c request = new Leave_Request__c(. This is in-memory unless it is later persisted by an explicit call.
102	`            Employee__c = employee.Id,`	Assigns the right-hand expression to the named variable/property: Employee__c = employee.Id,. This is in-memory unless it is later persisted by an explicit call.
103	`            Approver__c = employee.Reporting_Manager__c,`	Assigns the right-hand expression to the named variable/property: Approver__c = employee.Reporting_Manager__c,. This is in-memory unless it is later persisted by an explicit call.
104	`            Leave_Date__c = dateValue(data, 'dateValue'),`	Assigns the right-hand expression to the named variable/property: Leave_Date__c = dateValue(data, 'dateValue'),. This is in-memory unless it is later persisted by an explicit call.
105	`            Leave_Type__c = text(data, 'leaveType'),`	Assigns the right-hand expression to the named variable/property: Leave_Type__c = text(data, 'leaveType'),. This is in-memory unless it is later persisted by an explicit call.
106	`            Reason__c = text(data, 'description'),`	Assigns the right-hand expression to the named variable/property: Reason__c = text(data, 'description'),. This is in-memory unless it is later persisted by an explicit call.
107	`            Status__c = 'Pending'`	Assigns the right-hand expression to the named variable/property: Status__c = 'Pending'. This is in-memory unless it is later persisted by an explicit call.
108	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
109	`        insert request;`	Performs Salesforce DML: insert request;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
110	`        return request.Id;`	Returns request.Id to the caller (or begins returned UI markup) and ends this execution path.
111	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
112		Blank line separating logical sections; no executable operation.
113	`    private static String text(Map<String, Object> data, String key) {`	Declares a callable function/method: private static String text(Map<String, Object> data, String key) {. Parameters supply its inputs; the following block implements the operation.
114	`        Object value = data.get(key);`	Calls the named method: Object value = data.get(key);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
115	`        return value == null ? null : String.valueOf(value).trim();`	Returns value == null ? null : String.valueOf(value).trim() to the caller (or begins returned UI markup) and ends this execution path.
116	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
117	`    private static Id idValue(Map<String, Object> data, String key) {`	Declares a callable function/method: private static Id idValue(Map<String, Object> data, String key) {. Parameters supply its inputs; the following block implements the operation.
118	`        String value = text(data, key);`	Declares/initializes local data used by the surrounding operation: String value = text(data, key);. Collection contents and assignments below determine its purpose.
119	`        return String.isBlank(value) ? null : (Id) value;`	Returns String.isBlank(value) ? null : (Id) value to the caller (or begins returned UI markup) and ends this execution path.
120	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
121	`    private static Decimal numberValue(Map<String, Object> data, String key) {`	Declares a callable function/method: private static Decimal numberValue(Map<String, Object> data, String key) {. Parameters supply its inputs; the following block implements the operation.
122	`        String value = text(data, key);`	Declares/initializes local data used by the surrounding operation: String value = text(data, key);. Collection contents and assignments below determine its purpose.
123	`        return String.isBlank(value) ? null : Decimal.valueOf(value);`	Returns String.isBlank(value) ? null : Decimal.valueOf(value) to the caller (or begins returned UI markup) and ends this execution path.
124	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
125	`    private static Date dateValue(Map<String, Object> data, String key) {`	Declares a callable function/method: private static Date dateValue(Map<String, Object> data, String key) {. Parameters supply its inputs; the following block implements the operation.
126	`        String value = text(data, key);`	Declares/initializes local data used by the surrounding operation: String value = text(data, key);. Collection contents and assignments below determine its purpose.
127	`        return String.isBlank(value) ? null : Date.valueOf(value);`	Returns String.isBlank(value) ? null : Date.valueOf(value) to the caller (or begins returned UI markup) and ends this execution path.
128	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
129	}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/SfaVisitActionsController.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 991f1ca647a6d030b8f1828ad18737c5e94ecbe63a944a972fd685c6ab98f84a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexClass block; child elements specify its configuration.
3	`    <apiVersion>65.0</apiVersion>`	Sets Salesforce API version used for this component to 65.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexClass>`	Closes the ApexClass configuration block.

force-app/main/default/classes/SfaVisitActionsControllerTest.cls

Regression tests for SfaVisitActionsController. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

115 numbered source lines | SHA-256 9b025df26e05693d7e859d085431651e1dcf555711e6d51eb80161e480f58d99

Line	Source code	Explanation / reading note
1	`@IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
2	`private class SfaVisitActionsControllerTest {`	Declares a class/type: private class SfaVisitActionsControllerTest {. Members below hold behavior and/or state.
3	`    @TestSetup`	Continues the surrounding declaration/expression or text: @TestSetup. Read it with the preceding opening statement (private class SfaVisitActionsControllerTest {); it is not a standalone business operation.
4	`    static void setupData() {`	Continues the surrounding declaration/expression or text: static void setupData() {. Read it with the preceding opening statement (@TestSetup); it is not a standalone business operation.
5	`        User currentUser = [SELECT Id FROM User WHERE Id = :UserInfo.getUserId()];`	Calls the named method: User currentUser = [SELECT Id FROM User WHERE Id = :UserInfo.getUserId()];. Its implementation defines the side effect/result; use the symbol/file index to follow it.
6	`        Employee__c manager = new Employee__c(`	Assigns the right-hand expression to the named variable/property: Employee__c manager = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
7	`            Name = 'Demo Manager',`	Assigns the right-hand expression to the named variable/property: Name = 'Demo Manager',. This is in-memory unless it is later persisted by an explicit call.
8	`            Employee_Code__c = 'MGR-900',`	Assigns the right-hand expression to the named variable/property: Employee_Code__c = 'MGR-900',. This is in-memory unless it is later persisted by an explicit call.
9	`            Phone__c = '9000000900',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000900',. This is in-memory unless it is later persisted by an explicit call.
10	`            Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
11	`            Salesforce_User__c = currentUser.Id`	Assigns the right-hand expression to the named variable/property: Salesforce_User__c = currentUser.Id. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
12	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13	`insert manager;`	Performs Salesforce DML: insert manager;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
14	`Employee__c employee = new Employee__c(`	Assigns the right-hand expression to the named variable/property: Employee__c employee = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
15	`Name = 'Demo Representative',`	Assigns the right-hand expression to the named variable/property: Name = 'Demo Representative',. This is in-memory unless it is later persisted by an explicit call.
16	`Employee_Code__c = 'REP-900',`	Assigns the right-hand expression to the named variable/property: Employee_Code__c = 'REP-900',. This is in-memory unless it is later persisted by an explicit call.
17	`Phone__c = '9000000901',`	Assigns the right-hand expression to the named variable/property: Phone__c = '9000000901',. This is in-memory unless it is later persisted by an explicit call.
18	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
19	`Reporting_Manager__c = manager.Id`	Assigns the right-hand expression to the named variable/property: Reporting_Manager__c = manager.Id. This is in-memory unless it is later persisted by an explicit call.
20	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21	`insert employee;`	Performs Salesforce DML: insert employee;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
22	`Beat__c beat = new Beat__c(`	Assigns the right-hand expression to the named variable/property: Beat__c beat = new Beat__c(. This is in-memory unless it is later persisted by an explicit call.
23	`Name = 'Creative Demo Beat',`	Assigns the right-hand expression to the named variable/property: Name = 'Creative Demo Beat',. This is in-memory unless it is later persisted by an explicit call.
24	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
25	`Assigned_Employee__c = employee.Id`	Assigns the right-hand expression to the named variable/property: Assigned_Employee__c = employee.Id. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
26	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
27	`insert beat;`	Performs Salesforce DML: insert beat;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
28	`Retailer__c outlet = new Retailer__c(`	Assigns the right-hand expression to the named variable/property: Retailer__c outlet = new Retailer__c(. This is in-memory unless it is later persisted by an explicit call.
29	`Name = 'Nandi Daily Mart',`	Assigns the right-hand expression to the named variable/property: Name = 'Nandi Daily Mart',. This is in-memory unless it is later persisted by an explicit call.
30	`Address__c = '12 Lake View Road, Bengaluru',`	Assigns the right-hand expression to the named variable/property: Address__c = '12 Lake View Road, Bengaluru',. This is in-memory unless it is later persisted by an explicit call.
31	`Beat__c = beat.Id,`	Assigns the right-hand expression to the named variable/property: Beat__c = beat.Id,. This is in-memory unless it is later persisted by an explicit call.
32	`Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.
33	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`insert outlet;`	Performs Salesforce DML: insert outlet;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
35	`Product__c product = new Product__c(`	Assigns the right-hand expression to the named variable/property: Product__c product = new Product__c(. This is in-memory unless it is later persisted by an explicit call.
36	`Name = 'Sunrise Millet Bites',`	Assigns the right-hand expression to the named variable/property: Name = 'Sunrise Millet Bites',. This is in-memory unless it is later persisted by an explicit call.
37	`Product_Code__c = 'SMB-100',`	Assigns the right-hand expression to the named variable/property: Product_Code__c = 'SMB-100',. This is in-memory unless it is later persisted by an explicit call.
38	`Active__c = true,`	Assigns the right-hand expression to the named variable/property: Active__c = true,. This is in-memory unless it is later persisted by an explicit call.
39	`Available_Stock__c = 100,`	Assigns the right-hand expression to the named variable/property: Available_Stock__c = 100,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
40	`Units_Per_Case__c = 20,`	Assigns the right-hand expression to the named variable/property: Units_Per_Case__c = 20,. This is in-memory unless it is later persisted by an explicit call.
41	`MRP__c = 22,`	Assigns the right-hand expression to the named variable/property: MRP__c = 22,. This is in-memory unless it is later persisted by an explicit call.
42	`Retailer_Base_Price__c = 18`	Assigns the right-hand expression to the named variable/property: Retailer_Base_Price__c = 18. This is in-memory unless it is later persisted by an explicit call.
43	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44	`insert product;`	Performs Salesforce DML: insert product;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
45	`Permanent_Journey_Plan__c plan = new Permanent_Journey_Plan__c(`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c plan = new Permanent_Journey_Plan__c(. This is in-memory unless it is later persisted by an explicit call.
46	`Name = 'Creative Demo Plan',`	Assigns the right-hand expression to the named variable/property: Name = 'Creative Demo Plan',. This is in-memory unless it is later persisted by an explicit call.
47	`Beat__c = beat.Id,`	Assigns the right-hand expression to the named variable/property: Beat__c = beat.Id,. This is in-memory unless it is later persisted by an explicit call.
48	`Planned_Date__c = Date.today(),`	Calls the named method: Planned_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
49	`Status__c = 'Approved'`	Assigns the right-hand expression to the named variable/property: Status__c = 'Approved'. This is in-memory unless it is later persisted by an explicit call.
50	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
51	`insert plan;`	Performs Salesforce DML: insert plan;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
52	`Visit__c visit = new Visit__c(`	Assigns the right-hand expression to the named variable/property: Visit__c visit = new Visit__c(. This is in-memory unless it is later persisted by an explicit call.
53	`Name = 'Nandi Daily Mart Visit',`	Assigns the right-hand expression to the named variable/property: Name = 'Nandi Daily Mart Visit',. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
54	`            Retailer__c = outlet.Id,`	Assigns the right-hand expression to the named variable/property: Retailer__c = outlet.Id,. This is in-memory unless it is later persisted by an explicit call.
55	`            Permanent_Journey_Plan__c = plan.Id,`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c = plan.Id,. This is in-memory unless it is later persisted by an explicit call.
56	`            Visit_Date__c = Date.today(),`	Calls the named method: Visit_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
57	`            Status__c = 'Checked In'`	Assigns the right-hand expression to the named variable/property: Status__c = 'Checked In'. This is in-memory unless it is later persisted by an explicit call.
58	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
59	`        insert visit;`	Performs Salesforce DML: insert visit;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
60	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
61		Blank line separating logical sections; no executable operation.
62	`    @IsTest`	Marks test code; it verifies behavior with isolated test data rather than serving normal application requests.
63	`    static void savesEveryVisitAction() {`	Continues the surrounding declaration/expression or text: static void savesEveryVisitAction() {. Read it with the preceding opening statement (@IsTest); it is not a standalone business operation.
64	`        Visit__c visit = [SELECT Id FROM Visit__c LIMIT 1];`	Assigns the right-hand expression to the named variable/property: Visit__c visit = [SELECT Id FROM Visit__c LIMIT 1];. This is in-memory unless it is later persisted by an explicit call.
65	`        Product__c product = [SELECT Id FROM Product__c LIMIT 1];`	Assigns the right-hand expression to the named variable/property: Product__c product = [SELECT Id FROM Product__c LIMIT 1];. This is in-memory unless it is later persisted by an explicit call.
66	`        Map<String, Object> common = new Map<String, Object>{`	Declares/initializes local data used by the surrounding operation: Map<String, Object> common = new Map<String, Object>{. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
67	`'dateValue' => String.valueOf(Date.today()),`	Calls the named method: 'dateValue' => String.valueOf(Date.today()),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
68	`'imageUrl' => 'https://example.com/evidence.jpg'`	Continues the surrounding declaration/expression or text: 'imageUrl' => 'https://example.com/evidence.jpg'. Read it with the preceding opening statement ('dateValue' => String.valueOf(Date.today()),); it is not a standalone business operation.
69	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
70	`common.put('assetName', 'Chiller');`	Calls the named method: common.put('assetName', 'Chiller');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
71	`common.put('assetCode', 'CH-101');`	Calls the named method: common.put('assetCode', 'CH-101');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
72	`common.put('status', 'Working');`	Calls the named method: common.put('status', 'Working');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
73	`Test.startTest();`	Starts the isolated Apex test execution window and resets the relevant governor-limit counters.
74	`System.assertNotEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(. A mismatch fails the test.
75	`null,`	Continues the surrounding declaration/expression or text: null,. Read it with the preceding opening statement (System.assertNotEquals(); it is not a standalone business operation.
76	`SfaVisitActionsController.saveVisitAction('asset', visit.Id, JSON.serialize(common))`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
77	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
78	`System.assertNotEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(. A mismatch fails the test.
79	`null,`	Continues the surrounding declaration/expression or text: null,. Read it with the preceding opening statement (System.assertNotEquals(); it is not a standalone business operation.
80	`SfaVisitActionsController.saveVisitAction(`	Calls the named method: SfaVisitActionsController.saveVisitAction(. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
81	`'competitor',`	Continues the surrounding declaration/expression or text: 'competitor',. Read it with the preceding opening statement (SfaVisitActionsController.saveVisitAction(); it is not a standalone business operation.
82	`visit.Id,`	Continues the surrounding declaration/expression or text: visit.Id,. Read it with the preceding opening statement ('competitor',); it is not a standalone business operation.
83	`'{"competitorName":"Fresh Foods","company":"Fresh Foods Ltd","mrp":30,"rbp":25,"schemeDetails":"Buy 5 get 1"}'`	Continues the surrounding declaration/expression or text: '{"competitorName":"Fresh Foods","company":"Fresh Foods Ltd","mrp":30,"rbp":25,"schemeDetails":"Buy 5 get 1"}'. Read it with the preceding opening statement (visit.Id,); it is not a standalone business operation.
84	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
85	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
86	`String productPayload = JSON.serialize(`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
87	`new Map<String, Object>{`	Continues the surrounding declaration/expression or text: new Map<String, Object>{. Read it with the preceding opening statement (String productPayload = JSON.serialize(); it is not a standalone business operation.
88	`'productId' => product.Id,`	Continues the surrounding declaration/expression or text: 'productId' => product.Id,. Read it with the preceding opening statement (new Map<String, Object>{); it is not a standalone business operation.
89	`'quantity' => 8,`	Continues the surrounding declaration/expression or text: 'quantity' => 8,. Read it with the preceding opening statement ('productId' => product.Id,); it is not a standalone business operation.
90	`'dateValue' => String.valueOf(Date.today())`	Calls the named method: 'dateValue' => String.valueOf(Date.today()). Its implementation defines the side effect/result; use the symbol/file index to follow it.
91	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
92	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
93	`System.assertNotEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(. A mismatch fails the test.
94	`null,`	Continues the surrounding declaration/expression or text: null,. Read it with the preceding opening statement (System.assertNotEquals(); it is not a standalone business operation.
95	`SfaVisitActionsController.saveVisitAction('stock', visit.Id, productPayload)`	Calls the named method: SfaVisitActionsController.saveVisitAction('stock', visit.Id, productPayload). Its implementation defines the side effect/result; use the symbol/file index to follow it.
96	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
97	`System.assertNotEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(. A mismatch fails the test.
98	`null,`	Continues the surrounding declaration/expression or text: null,. Read it with the preceding opening statement (System.assertNotEquals(); it is not a standalone business operation.
99	`SfaVisitActionsController.saveVisitAction(`	Calls the named method: SfaVisitActionsController.saveVisitAction(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
100	`'return',`	Continues the surrounding declaration/expression or text: 'return',. Read it with the preceding opening statement (SfaVisitActionsController.saveVisitAction(); it is not a standalone business operation.
101	`visit.Id,`	Continues the surrounding declaration/expression or text: visit.Id,. Read it with the preceding opening statement ('return',); it is not a standalone business operation.
102	`productPayload.replace('}', ',"returnReason":"Damaged"}')`	Calls the named method: productPayload.replace('}', ',"returnReason":"Damaged"}'). Its implementation defines the side effect/result; use the symbol/file index to follow it.
103	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
104	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
105	`System.assertNotEquals(`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(. A mismatch fails the test.

Line	Source code	Explanation / reading note
106	`            null,`	Continues the surrounding declaration/expression or text: null,. Read it with the preceding opening statement (System.assertNotEquals(); it is not a standalone business operation.
107	`            SfaVisitActionsController.saveVisitAction(`	Calls the named method: SfaVisitActionsController.saveVisitAction(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
108	`                'ticket',`	Continues the surrounding declaration/expression or text: 'ticket',. Read it with the preceding opening statement (SfaVisitActionsController.saveVisitAction(); it is not a standalone business operation.
109	`                visit.Id,`	Continues the surrounding declaration/expression or text: visit.Id,. Read it with the preceding opening statement ('ticket',); it is not a standalone business operation.
110	`                '{"subject":"Display rack issue","description":"Rack needs repair"}'`	Continues the surrounding declaration/expression or text: '{"subject":"Display rack issue","description":"Rack needs repair"}'. Read it with the preceding opening statement (visit.Id,); it is not a standalone business operation.
111	`            )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
112	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
113	`        Test.stopTest();`	Ends the Apex test window and runs queued test asynchronous work before checking outcomes.
114	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
115	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/classes/SfaVisitActionsControllerTest.cls-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 991f1ca647a6d030b8f1828ad18737c5e94ecbe63a944a972fd685c6ab98f84a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexClass xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexClass block; child elements specify its configuration.
3	`    <apiVersion>65.0</apiVersion>`	Sets Salesforce API version used for this component to 65.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexClass>`	Closes the ApexClass configuration block.

Apex triggers

32 files. Expand this area in the PDF bookmarks to jump to an individual file.

force-app/main/default/triggers/DmsDistributorLifecycle.trigger

Salesforce event dispatcher for DMS_Distributor__c (before insert, before update). Delegates to DmsDistributorLifecycleHandler.applyDiscontinuation. Read the linked service for the business rule; trigger context supplies the incoming/previous records.

3 numbered source lines | SHA-256 3d93ff6a584cf50523d8b5ec882a0b9d12ad11c369a469be503fc58db61aecaa

Line	Source code	Explanation / reading note
1	`trigger DmsDistributorLifecycle on DMS_Distributor__c(before insert, before update)` `{`	Registers the Salesforce object and save events. The body dispatches work to handlers using Trigger context.
2	`    DmsDistributorLifecycleHandler.applyDiscontinuation(Trigger.new);`	Calls the named method: DmsDistributorLifecycleHandler.applyDiscontinuation(Trigger.new);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
3	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/triggers/DmsDistributorLifecycle.trigger-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 134df26f0acec2ebfcc6112d674c54d5f3a77691f5522dc77e6ab5a016255b51

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexTrigger xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexTrigger>`	Sets Apex Trigger in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/triggers/DmsDistributorSurvey.trigger

Salesforce event dispatcher for DMS_Distributor_Survey__c (before insert, before update). Delegates to DmsDistributorSurveyHandler.validateOfficer. Read the linked service for the business rule; trigger context supplies the incoming/previous records.

6 numbered source lines | SHA-256 0191c62112ec4a2eb290fa15f1eabf7ab89d3b6cb8bf45a2fc0027eccf3d2275

Line	Source code	Explanation / reading note
1	`trigger DmsDistributorSurvey on DMS_Distributor_Survey__c(before insert, before update) {`	Registers the Salesforce object and save events. The body dispatches work to handlers using Trigger context.
2	`    DmsDistributorSurveyHandler.validateOfficer(`	Calls the named method: DmsDistributorSurveyHandler.validateOfficer(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
3	`        Trigger.new,`	Continues the surrounding declaration/expression or text: Trigger.new,. Read it with the preceding opening statement (DmsDistributorSurveyHandler.validateOfficer(); it is not a standalone business operation.
4	`        Trigger.isInsert ? null : Trigger.oldMap`	Continues the surrounding declaration/expression or text: Trigger.isInsert ? null : Trigger.oldMap. Read it with the preceding opening statement (Trigger.new,); it is not a standalone business operation.
5	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
6	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/triggers/DmsDistributorSurvey.trigger-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 134df26f0acec2ebfcc6112d674c54d5f3a77691f5522dc77e6ab5a016255b51

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexTrigger xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexTrigger>`	Sets Apex Trigger in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/triggers/DmsEmployeeAllocation.trigger

Salesforce event dispatcher for Employee__c (after insert). Delegates to DmsEmployeeAllocator.allocate. Read the linked service for the business rule; trigger context supplies the incoming/previous records.

3 numbered source lines | SHA-256 54fab35b8d051ce3f0db14b09071bbbe2d8d35a9cca0c8a8d5ada785d9af0e60

Line	Source code	Explanation / reading note
1	`trigger DmsEmployeeAllocation on Employee__c(after insert) {`	Registers the Salesforce object and save events. The body dispatches work to handlers using Trigger context.
2	`    DmsEmployeeAllocator.allocate(Trigger.newMap.keySet());`	Calls the named method: DmsEmployeeAllocator.allocate(Trigger.newMap.keySet());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
3	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/triggers/DmsEmployeeAllocation.trigger-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 134df26f0acec2ebfcc6112d674c54d5f3a77691f5522dc77e6ab5a016255b51

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexTrigger xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexTrigger>`	Sets Apex Trigger in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/triggers/DmsPrimaryOrderLineRules.trigger

Salesforce event dispatcher for DMS_Primary_Order_Line__c (before insert, before update, before delete, after insert, after update, after delete, after undelete). Delegates to DmsPrimaryWorkflow.prepareLines, DmsPrimaryWorkflow.updateOrderTotals. Read the linked service for the business rule; trigger context supplies the incoming/previous records.

23 numbered source lines | SHA-256 fada91e945a4142d418afb61a94df61a51baa4603f303696fdc2858df811d0c1

Line	Source code	Explanation / reading note
1	`trigger DmsPrimaryOrderLineRules on DMS_Primary_Order_Line__c(`	Registers the Salesforce object and save events. The body dispatches work to handlers using Trigger context.
2	`    before insert,`	Continues the surrounding declaration/expression or text: before insert,. Read it with the preceding opening statement (trigger DmsPrimaryOrderLineRules on DMS_Primary_Order_Line__c(); it is not a standalone business operation.
3	`    before update,`	Continues the surrounding declaration/expression or text: before update,. Read it with the preceding opening statement (before insert,); it is not a standalone business operation.
4	`    before delete,`	Continues the surrounding declaration/expression or text: before delete,. Read it with the preceding opening statement (before update,); it is not a standalone business operation.
5	`    after insert,`	Continues the surrounding declaration/expression or text: after insert,. Read it with the preceding opening statement (before delete,); it is not a standalone business operation.
6	`    after update,`	Continues the surrounding declaration/expression or text: after update,. Read it with the preceding opening statement (after insert,); it is not a standalone business operation.
7	`    after delete,`	Continues the surrounding declaration/expression or text: after delete,. Read it with the preceding opening statement (after update,); it is not a standalone business operation.
8	`    after undelete`	Continues the surrounding declaration/expression or text: after undelete. Read it with the preceding opening statement (after delete,); it is not a standalone business operation.
9	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (after undelete); it is not a standalone business operation.
10	`    if (Trigger.isBefore) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (Trigger.isBefore) {.
11	`        DmsPrimaryWorkflow.prepareLines(`	Calls the named method: DmsPrimaryWorkflow.prepareLines(. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
12	`            Trigger.isDelete ? Trigger.old : Trigger.new,`	Continues the surrounding declaration/expression or text: Trigger.isDelete ? Trigger.old : Trigger.new,. Read it with the preceding opening statement (DmsPrimaryWorkflow.prepareLines(); it is not a standalone business operation.
13	`            Trigger.isUpdate ? Trigger.oldMap : null,`	Continues the surrounding declaration/expression or text: Trigger.isUpdate ? Trigger.oldMap : null,. Read it with the preceding opening statement (Trigger.isDelete ? Trigger.old : Trigger.new,); it is not a standalone business operation.
14	`            false,`	Continues the surrounding declaration/expression or text: false,. Read it with the preceding opening statement (Trigger.isUpdate ? Trigger.oldMap : null,); it is not a standalone business operation.
15	`            Trigger.isDelete`	Continues the surrounding declaration/expression or text: Trigger.isDelete. Read it with the preceding opening statement (false,); it is not a standalone business operation.
16	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`    } else {`	Alternative branch taken when the preceding condition is false.
18	`        DmsPrimaryWorkflow.updateOrderTotals(`	Calls the named method: DmsPrimaryWorkflow.updateOrderTotals(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
19	`            Trigger.isDelete ? Trigger.old : Trigger.new,`	Continues the surrounding declaration/expression or text: Trigger.isDelete ? Trigger.old : Trigger.new,. Read it with the preceding opening statement (DmsPrimaryWorkflow.updateOrderTotals(); it is not a standalone business operation.
20	`            Trigger.isUpdate ? Trigger.oldMap : null`	Continues the surrounding declaration/expression or text: Trigger.isUpdate ? Trigger.oldMap : null. Read it with the preceding opening statement (Trigger.isDelete ? Trigger.old : Trigger.new,); it is not a standalone business operation.
21	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
22	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
23	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/triggers/DmsPrimaryOrderLineRules.trigger-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 134df26f0acec2ebfcc6112d674c54d5f3a77691f5522dc77e6ab5a016255b51

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexTrigger xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexTrigger>`	Sets Apex Trigger in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/triggers/DmsPrimaryOrderRules.trigger

Salesforce event dispatcher for DMS_Primary_Order__c (before insert, before update, after insert, after update). Delegates to DmsPrimaryWorkflow.prepareHeaders, DmsOfficerSharing.synchronize. Read the linked service for the business rule; trigger context supplies the incoming/previous records.

15 numbered source lines | SHA-256 b195c269124e6b53da47375dd591c20466ed2db374270d9e83f34f364fc6b231

Line	Source code	Explanation / reading note
1	`trigger DmsPrimaryOrderRules on DMS_Primary_Order__c(`	Registers the Salesforce object and save events. The body dispatches work to handlers using Trigger context.
2	`    before insert,`	Continues the surrounding declaration/expression or text: before insert,. Read it with the preceding opening statement (trigger DmsPrimaryOrderRules on DMS_Primary_Order__c(); it is not a standalone business operation.
3	`    before update,`	Continues the surrounding declaration/expression or text: before update,. Read it with the preceding opening statement (before insert,); it is not a standalone business operation.
4	`    after insert,`	Continues the surrounding declaration/expression or text: after insert,. Read it with the preceding opening statement (before update,); it is not a standalone business operation.
5	`    after update`	Continues the surrounding declaration/expression or text: after update. Read it with the preceding opening statement (after insert,); it is not a standalone business operation.
6	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (after update); it is not a standalone business operation.
7	`    if (Trigger.isBefore)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (Trigger.isBefore).
8	`        DmsPrimaryWorkflow.prepareHeaders(`	Calls the named method: DmsPrimaryWorkflow.prepareHeaders(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
9	`            Trigger.new,`	Continues the surrounding declaration/expression or text: Trigger.new,. Read it with the preceding opening statement (DmsPrimaryWorkflow.prepareHeaders(); it is not a standalone business operation.
10	`            Trigger.isInsert ? null : Trigger.oldMap,`	Continues the surrounding declaration/expression or text: Trigger.isInsert ? null : Trigger.oldMap,. Read it with the preceding opening statement (Trigger.new,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
11	`false`	Continues the surrounding declaration/expression or text: false. Read it with the preceding opening statement (Trigger.isInsert ? null : Trigger.oldMap,); it is not a standalone business operation.
12	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13	`else`	Alternative branch taken when the preceding condition is false.
14	`DmsOfficerSharing.synchronize('DMS_Primary_Order__c', Trigger.newMap.keySet());`	Calls the named method: DmsOfficerSharing.synchronize('DMS_Primary_Order__c', Trigger.newMap.keySet());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
15	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/triggers/DmsPrimaryOrderRules.trigger-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 134df26f0acec2ebfcc6112d674c54d5f3a77691f5522dc77e6ab5a016255b51

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexTrigger xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexTrigger>`	Sets Apex Trigger in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/triggers/DmsPrimaryReturnLineRules.trigger

Salesforce event dispatcher for DMS_Primary_Return_Line__c (before insert, before update, before delete, after undelete). Delegates to DmsPrimaryWorkflow.prepareLines. Read the linked service for the business rule; trigger context supplies the incoming/previous records.

13 numbered source lines | SHA-256 7d599c7fcf7aa41289f6a070c9ff2285b3f386c5e7deacb2ac98ecab529897bc

Line	Source code	Explanation / reading note
1	`trigger DmsPrimaryReturnLineRules on DMS_Primary_Return_Line__c(`	Registers the Salesforce object and save events. The body dispatches work to handlers using Trigger context.
2	`    before insert,`	Continues the surrounding declaration/expression or text: before insert,. Read it with the preceding opening statement (trigger DmsPrimaryReturnLineRules on DMS_Primary_Return_Line__c(); it is not a standalone business operation.
3	`    before update,`	Continues the surrounding declaration/expression or text: before update,. Read it with the preceding opening statement (before insert,); it is not a standalone business operation.
4	`    before delete,`	Continues the surrounding declaration/expression or text: before delete,. Read it with the preceding opening statement (before update,); it is not a standalone business operation.
5	`    after undelete`	Continues the surrounding declaration/expression or text: after undelete. Read it with the preceding opening statement (before delete,); it is not a standalone business operation.
6	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (after undelete); it is not a standalone business operation.
7	`    DmsPrimaryWorkflow.prepareLines(`	Calls the named method: DmsPrimaryWorkflow.prepareLines(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
8	`        Trigger.isDelete ? Trigger.old : Trigger.new,`	Continues the surrounding declaration/expression or text: Trigger.isDelete ? Trigger.old : Trigger.new,. Read it with the preceding opening statement (DmsPrimaryWorkflow.prepareLines(); it is not a standalone business operation.
9	`        Trigger.isUpdate ? Trigger.oldMap : null,`	Continues the surrounding declaration/expression or text: Trigger.isUpdate ? Trigger.oldMap : null,. Read it with the preceding opening statement (Trigger.isDelete ? Trigger.old : Trigger.new,); it is not a standalone business operation.
10	`        true,`	Continues the surrounding declaration/expression or text: true,. Read it with the preceding opening statement (Trigger.isUpdate ? Trigger.oldMap : null,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
11	`Trigger.isDelete || Trigger.isUndelete`	Continues the surrounding declaration/expression or text: Trigger.isDelete || Trigger.isUndelete. Read it with the preceding opening statement (true,); it is not a standalone business operation.
12	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/triggers/DmsPrimaryReturnLineRules.trigger-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 134df26f0acec2ebfcc6112d674c54d5f3a77691f5522dc77e6ab5a016255b51

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexTrigger xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexTrigger>`	Sets Apex Trigger in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/triggers/DmsPrimaryReturnRules.trigger

Salesforce event dispatcher for DMS_Primary_Return__c (before insert, before update, after insert, after update). Delegates to DmsPrimaryWorkflow.prepareHeaders, DmsOfficerSharing.synchronize. Read the linked service for the business rule; trigger context supplies the incoming/previous records.

15 numbered source lines | SHA-256 dbebcc8e7c0bc7e363f55e8169d85ad0a9c4238e0f93590d1f6cc6579014ddd7

Line	Source code	Explanation / reading note
1	`trigger DmsPrimaryReturnRules on DMS_Primary_Return__c(`	Registers the Salesforce object and save events. The body dispatches work to handlers using Trigger context.
2	`    before insert,`	Continues the surrounding declaration/expression or text: before insert,. Read it with the preceding opening statement (trigger DmsPrimaryReturnRules on DMS_Primary_Return__c(); it is not a standalone business operation.
3	`    before update,`	Continues the surrounding declaration/expression or text: before update,. Read it with the preceding opening statement (before insert,); it is not a standalone business operation.
4	`    after insert,`	Continues the surrounding declaration/expression or text: after insert,. Read it with the preceding opening statement (before update,); it is not a standalone business operation.
5	`    after update`	Continues the surrounding declaration/expression or text: after update. Read it with the preceding opening statement (after insert,); it is not a standalone business operation.
6	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (after update); it is not a standalone business operation.
7	`    if (Trigger.isBefore)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (Trigger.isBefore).
8	`        DmsPrimaryWorkflow.prepareHeaders(`	Calls the named method: DmsPrimaryWorkflow.prepareHeaders(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
9	`            Trigger.new,`	Continues the surrounding declaration/expression or text: Trigger.new,. Read it with the preceding opening statement (DmsPrimaryWorkflow.prepareHeaders(); it is not a standalone business operation.
10	`            Trigger.isInsert ? null : Trigger.oldMap,`	Continues the surrounding declaration/expression or text: Trigger.isInsert ? null : Trigger.oldMap,. Read it with the preceding opening statement (Trigger.new,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
11	`            true`	Continues the surrounding declaration/expression or text: true. Read it with the preceding opening statement (Trigger.isInsert ? null : Trigger.oldMap,); it is not a standalone business operation.
12	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13	`    else`	Alternative branch taken when the preceding condition is false.
14	`        DmsOfficerSharing.synchronize('DMS_Primary_Return__c', Trigger.newMap.keySet());`	Calls the named method: DmsOfficerSharing.synchronize('DMS_Primary_Return__c', Trigger.newMap.keySet());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
15	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/triggers/DmsPrimaryReturnRules.trigger-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 134df26f0acec2ebfcc6112d674c54d5f3a77691f5522dc77e6ab5a016255b51

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexTrigger xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexTrigger>`	Sets Apex Trigger in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/triggers/DmsSalesTarget.trigger

Salesforce event dispatcher for DMS_Sales_Target__c (before insert, before update). Delegates to DmsSalesTargetHandler.populateScopeKeys. Read the linked service for the business rule; trigger context supplies the incoming/previous records.

3 numbered source lines | SHA-256 3f9cb8ca401e8d10c2910a4f5270acde5c67fa50e7c6839136a8fc68a1f0000f

Line	Source code	Explanation / reading note
1	`trigger DmsSalesTarget on DMS_Sales_Target__c(before insert, before update) {`	Registers the Salesforce object and save events. The body dispatches work to handlers using Trigger context.
2	`    DmsSalesTargetHandler.populateScopeKeys(Trigger.new);`	Calls the named method: DmsSalesTargetHandler.populateScopeKeys(Trigger.new);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
3	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/triggers/DmsSalesTarget.trigger-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 134df26f0acec2ebfcc6112d674c54d5f3a77691f5522dc77e6ab5a016255b51

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexTrigger xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexTrigger>`	Sets Apex Trigger in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/triggers/DmsSecondaryOrderRouting.trigger

Salesforce event dispatcher for Sales_Order__c (before insert). Delegates to DmsSecondaryRouting.route. Read the linked service for the business rule; trigger context supplies the incoming/previous records.

3 numbered source lines | SHA-256 667465452bd295c256a146a4c45f000b7bbfa89586946c1e34121b467b7be982

Line	Source code	Explanation / reading note
1	`trigger DmsSecondaryOrderRouting on Sales_Order__c(before insert) {`	Registers the Salesforce object and save events. The body dispatches work to handlers using Trigger context.
2	`    DmsSecondaryRouting.route(Trigger.new, 'Retailer__c');`	Calls the named method: DmsSecondaryRouting.route(Trigger.new, 'Retailer__c');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
3	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/triggers/DmsSecondaryOrderRouting.trigger-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 134df26f0acec2ebfcc6112d674c54d5f3a77691f5522dc77e6ab5a016255b51

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexTrigger xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexTrigger>`	Sets Apex Trigger in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/triggers/DmsSecondaryReturnRouting.trigger

Salesforce event dispatcher for Product_Return__c (before insert). Delegates to DmsSecondaryRouting.route. Read the linked service for the business rule; trigger context supplies the incoming/previous records.

3 numbered source lines | SHA-256 4264f7f1c5f4d0c22ec14fe8a8819a066a47d1d7557bed740d165fbbc2c912b5

Line	Source code	Explanation / reading note
1	`trigger DmsSecondaryReturnRouting on Product_Return__c(before insert) {`	Registers the Salesforce object and save events. The body dispatches work to handlers using Trigger context.
2	`    DmsSecondaryRouting.route(Trigger.new, 'Outlet__c');`	Calls the named method: DmsSecondaryRouting.route(Trigger.new, 'Outlet__c');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
3	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/triggers/DmsSecondaryReturnRouting.trigger-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 134df26f0acec2ebfcc6112d674c54d5f3a77691f5522dc77e6ab5a016255b51

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexTrigger xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexTrigger>`	Sets Apex Trigger in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/triggers/DmsSupportTicket.trigger

Salesforce event dispatcher for DMS_Support_Ticket__c (before insert, before update). Delegates to DmsTicketRules.validate. Read the linked service for the business rule; trigger context supplies the incoming/previous records.

3 numbered source lines | SHA-256 37f70dfb2f45f4c1260c61f66cca277c2c1651c54bc2ef1e7335008b20207196

Line	Source code	Explanation / reading note
1	`trigger DmsSupportTicket on DMS_Support_Ticket__c(before insert, before update) {`	Registers the Salesforce object and save events. The body dispatches work to handlers using Trigger context.
2	`    DmsTicketRules.validate(Trigger.new, Trigger.isUpdate ? Trigger.oldMap : null);`	Calls the named method: DmsTicketRules.validate(Trigger.new, Trigger.isUpdate ? Trigger.oldMap : null);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
3	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/triggers/DmsSupportTicket.trigger-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 134df26f0acec2ebfcc6112d674c54d5f3a77691f5522dc77e6ab5a016255b51

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexTrigger xmlns="http://soap.sforce.com/2006/04/metadata"><apiVersion>65.0</apiVersion><status>Active</status></ApexTrigger>`	Sets Apex Trigger in the enclosing configuration to <apiVersion>65.0</apiVersion><status>Active</status>.

force-app/main/default/triggers/OutletGeographyTrigger.trigger

Salesforce event dispatcher for Retailer__c (before insert, before update, after insert, after update, after delete, after undelete). Delegates to SfaRecordedScopeHandler.copyBeatGeography, SfaRecordedScopeHandler.refreshOutletCounts. Read the linked service for the business rule; trigger context supplies the incoming/previous records.

18 numbered source lines | SHA-256 0d16826d74e3055adf400e453ffc113fe3c707bfb90094b012e8fea0f18eb82c

Line	Source code	Explanation / reading note
1	`trigger OutletGeographyTrigger on Retailer__c(`	Registers the Salesforce object and save events. The body dispatches work to handlers using Trigger context.
2	`    before insert,`	Continues the surrounding declaration/expression or text: before insert,. Read it with the preceding opening statement (trigger OutletGeographyTrigger on Retailer__c(); it is not a standalone business operation.
3	`    before update,`	Continues the surrounding declaration/expression or text: before update,. Read it with the preceding opening statement (before insert,); it is not a standalone business operation.
4	`    after insert,`	Continues the surrounding declaration/expression or text: after insert,. Read it with the preceding opening statement (before update,); it is not a standalone business operation.
5	`    after update,`	Continues the surrounding declaration/expression or text: after update,. Read it with the preceding opening statement (after insert,); it is not a standalone business operation.
6	`    after delete,`	Continues the surrounding declaration/expression or text: after delete,. Read it with the preceding opening statement (after update,); it is not a standalone business operation.
7	`    after undelete`	Continues the surrounding declaration/expression or text: after undelete. Read it with the preceding opening statement (after delete,); it is not a standalone business operation.
8	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (after undelete); it is not a standalone business operation.
9	`    // Keep trigger entry points small. Business logic belongs in the handler so`	Developer comment/documentation: Keep trigger entry points small. Business logic belongs in the handler so It is not executed.
10	`    // it can be tested directly and reused safely from other Salesforce code.`	Developer comment/documentation: it can be tested directly and reused safely from other Salesforce code. It is not executed.
11	`    if (Trigger.isBefore) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (Trigger.isBefore) {.

Line	Source code	Explanation / reading note
12	`        SfaRecordedScopeHandler.copyBeatGeography(Trigger.new);`	Calls the named method: SfaRecordedScopeHandler.copyBeatGeography(Trigger.new);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
13	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
14		Blank line separating logical sections; no executable operation.
15	`    if (Trigger.isAfter) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (Trigger.isAfter) {.
16	`        SfaRecordedScopeHandler.refreshOutletCounts(Trigger.new, Trigger.old);`	Calls the named method: SfaRecordedScopeHandler.refreshOutletCounts(Trigger.new, Trigger.old);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
17	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/triggers/OutletGeographyTrigger.trigger-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 a3e43179c2993dfc4f58f9b9eee0a1374ee3bdce7aac9280d9799491c782324d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexTrigger xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexTrigger block; child elements specify its configuration.
3	`    <apiVersion>65.0</apiVersion>`	Sets Salesforce API version used for this component to 65.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexTrigger>`	Closes the ApexTrigger configuration block.

force-app/main/default/triggers/PjpApproverTrigger.trigger

Salesforce event dispatcher for Permanent_Journey_Plan__c (before insert, before update, after insert, after update). Delegates to SfaRecordedScopeHandler.copyReportingManager, SfaPjpAllocationService.afterSave. Read the linked service for the business rule; trigger context supplies the incoming/previous records.

12 numbered source lines | SHA-256 59de5d6f7a7728aecfc84862caf146c55dc1c4a0585476a0296c931a56cc720b

Line	Source code	Explanation / reading note
1	`trigger PjpApproverTrigger on Permanent_Journey_Plan__c(`	Registers the Salesforce object and save events. The body dispatches work to handlers using Trigger context.
2	`    before insert,`	Continues the surrounding declaration/expression or text: before insert,. Read it with the preceding opening statement (trigger PjpApproverTrigger on Permanent_Journey_Plan__c(); it is not a standalone business operation.
3	`    before update,`	Continues the surrounding declaration/expression or text: before update,. Read it with the preceding opening statement (before insert,); it is not a standalone business operation.
4	`    after insert,`	Continues the surrounding declaration/expression or text: after insert,. Read it with the preceding opening statement (before update,); it is not a standalone business operation.
5	`    after update`	Continues the surrounding declaration/expression or text: after update. Read it with the preceding opening statement (after insert,); it is not a standalone business operation.
6	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (after update); it is not a standalone business operation.
7	`    if (Trigger.isBefore) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (Trigger.isBefore) {.
8	`        SfaRecordedScopeHandler.copyReportingManager(Trigger.new);`	Calls the named method: SfaRecordedScopeHandler.copyReportingManager(Trigger.new);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
9	`    } else {`	Alternative branch taken when the preceding condition is false.
10	`        SfaPjpAllocationService.afterSave(Trigger.new, Trigger.isInsert ? null : Trigger.oldMap);`	Calls the named method: SfaPjpAllocationService.afterSave(Trigger.new, Trigger.isInsert ? null : Trigger.oldMap);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
11	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
12	}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/triggers/PjpApproverTrigger.trigger-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 a3e43179c2993dfc4f58f9b9eee0a1374ee3bdce7aac9280d9799491c782324d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexTrigger xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexTrigger block; child elements specify its configuration.
3	`    <apiVersion>65.0</apiVersion>`	Sets Salesforce API version used for this component to 65.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexTrigger>`	Closes the ApexTrigger configuration block.

force-app/main/default/triggers/SfaAllocationEmployee.trigger

Salesforce event dispatcher for Distributor_Outlet_Allocation__c (before insert, before update). Delegates to SfaAllocationEmployeeService.populateEmployee. Read the linked service for the business rule; trigger context supplies the incoming/previous records.

3 numbered source lines | SHA-256 635aec93f66b73b38bbc463233db1e6b87687af876b44df50c0eee386c98499b

Line	Source code	Explanation / reading note
1	`trigger SfaAllocationEmployee on Distributor_Outlet_Allocation__c(before insert, before update) {`	Registers the Salesforce object and save events. The body dispatches work to handlers using Trigger context.
2	`    SfaAllocationEmployeeService.populateEmployee(Trigger.new);`	Calls the named method: SfaAllocationEmployeeService.populateEmployee(Trigger.new);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
3	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/triggers/SfaAllocationEmployee.trigger-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 adf36b535e9f1311b8362b5c35b9f62f0eee3e7511296d1e14bbf5a637255132

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexTrigger xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexTrigger block; child elements specify its configuration.
3	`    <apiVersion>65.0</apiVersion>`	Sets Salesforce API version used for this component to 65.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexTrigger>`	Closes the ApexTrigger configuration block.

force-app/main/default/triggers/SfaEmployeeInvitation.trigger

Salesforce event dispatcher for Employee__c (after insert, after update). Delegates to SfaEmployeeInvitationService.emailApplicationLinks. Read the linked service for the business rule; trigger context supplies the incoming/previous records.

6 numbered source lines | SHA-256 82e6f66be2553bfcc9effe2298086c8de243bf35926647523822ccf6e2ee046a

Line	Source code	Explanation / reading note
1	`trigger SfaEmployeeInvitation on Employee__c(after insert, after update) {`	Registers the Salesforce object and save events. The body dispatches work to handlers using Trigger context.
2	`    SfaEmployeeInvitationService.emailApplicationLinks(`	Calls the named method: SfaEmployeeInvitationService.emailApplicationLinks(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
3	`        Trigger.new,`	Continues the surrounding declaration/expression or text: Trigger.new,. Read it with the preceding opening statement (SfaEmployeeInvitationService.emailApplicationLinks(); it is not a standalone business operation.
4	`        Trigger.isInsert ? null : Trigger.oldMap`	Continues the surrounding declaration/expression or text: Trigger.isInsert ? null : Trigger.oldMap. Read it with the preceding opening statement (Trigger.new,); it is not a standalone business operation.
5	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
6	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/triggers/SfaEmployeeInvitation.trigger-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 18a9f7cd9d86eb4e7a191f499acd3b8e2f9aadacf869085fe85472913c6d0748

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexTrigger xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexTrigger block; child elements specify its configuration.
3	`    <apiVersion>67.0</apiVersion>`	Sets Salesforce API version used for this component to 67.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexTrigger>`	Closes the ApexTrigger configuration block.

force-app/main/default/triggers/SfaSalesRepresentativeInvitation.trigger

Salesforce event dispatcher for Distributor__c (before insert, before update, after insert, after update). Delegates to SfaSalesRepresentativeInvitationService.synchronizeLoginEmail, SfaSalesRepresentativeInvitationService.emailApplicationLinks. Read the linked service for the business rule; trigger context supplies the incoming/previous records.

17 numbered source lines | SHA-256 a4c7cdc79fcec7f80447262db0c108214668260ee85e9cd0e70171b679836b92

Line	Source code	Explanation / reading note
1	`trigger SfaSalesRepresentativeInvitation on Distributor__c(`	Registers the Salesforce object and save events. The body dispatches work to handlers using Trigger context.
2	`    before insert,`	Continues the surrounding declaration/expression or text: before insert,. Read it with the preceding opening statement (trigger SfaSalesRepresentativeInvitation on Distributor__c(); it is not a standalone business operation.
3	`    before update,`	Continues the surrounding declaration/expression or text: before update,. Read it with the preceding opening statement (before insert,); it is not a standalone business operation.
4	`    after insert,`	Continues the surrounding declaration/expression or text: after insert,. Read it with the preceding opening statement (before update,); it is not a standalone business operation.
5	`    after update`	Continues the surrounding declaration/expression or text: after update. Read it with the preceding opening statement (after insert,); it is not a standalone business operation.
6	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (after update); it is not a standalone business operation.
7	`    if (Trigger.isBefore) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (Trigger.isBefore) {.
8	`        SfaSalesRepresentativeInvitationService.synchronizeLoginEmail(Trigger.new);`	Calls the named method: SfaSalesRepresentativeInvitationService.synchronizeLoginEmail(Trigger.new);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
9	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10		Blank line separating logical sections; no executable operation.
11	`    if (Trigger.isAfter) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (Trigger.isAfter) {.

Line	Source code	Explanation / reading note
12	`        SfaSalesRepresentativeInvitationService.emailApplicationLinks(`	Calls the named method: SfaSalesRepresentativeInvitationService.emailApplicationLinks(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
13	`            Trigger.new,`	Continues the surrounding declaration/expression or text: Trigger.new,. Read it with the preceding opening statement (SfaSalesRepresentativeInvitationService.emailApplicationLinks(); it is not a standalone business operation.
14	`            Trigger.isInsert ? null : Trigger.oldMap`	Continues the surrounding declaration/expression or text: Trigger.isInsert ? null : Trigger.oldMap. Read it with the preceding opening statement (Trigger.new,); it is not a standalone business operation.
15	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
16	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/triggers/SfaSalesRepresentativeInvitation.trigger-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 18a9f7cd9d86eb4e7a191f499acd3b8e2f9aadacf869085fe85472913c6d0748

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApexTrigger xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApexTrigger block; child elements specify its configuration.
3	`    <apiVersion>67.0</apiVersion>`	Sets Salesforce API version used for this component to 67.0.
4	`    <status>Active</status>`	Sets component activation status to Active.
5	`</ApexTrigger>`	Closes the ApexTrigger configuration block.

Lightning components

12 files. Expand this area in the PDF bookmarks to jump to an individual file.

force-app/main/default/lwc/beatOutletSelector/beatOutletSelector.css

Salesforce LWC quick action: fetches geography-matching options, limits selection to ten, saves through Apex and refreshes the record/toast.

13 numbered source lines | SHA-256 f2a261bef56dd78cd358692786befd58989758e0b29ba7cf01f45533d90215c4

Line	Source code	Explanation / reading note
1	`.count-card {`	Continues the surrounding declaration/expression or text: .count-card {. Read it with the preceding opening statement; it is not a standalone business operation.
2	`  align-items: center;`	Continues the surrounding declaration/expression or text: align-items: center;. Read it with the preceding opening statement (.count-card {); it is not a standalone business operation.
3	`  background: #f3f3f3;`	Sets/declares the named object property or style/type member: background: #f3f3f3;. Interpret it in the enclosing object, props or type definition.
4	`  border-radius: 0.5rem;`	Continues the surrounding declaration/expression or text: border-radius: 0.5rem;. Read it with the preceding opening statement (background: #f3f3f3;); it is not a standalone business operation.
5	`  display: flex;`	Sets/declares the named object property or style/type member: display: flex;. Interpret it in the enclosing object, props or type definition.
6	`  justify-content: space-between;`	Continues the surrounding declaration/expression or text: justify-content: space-between;. Read it with the preceding opening statement (display: flex;); it is not a standalone business operation.
7	`  padding: 0.75rem 1rem;`	Sets/declares the named object property or style/type member: padding: 0.75rem 1rem;. Interpret it in the enclosing object, props or type definition.
8	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
9		Blank line separating logical sections; no executable operation.
10	`.count-card strong {`	Continues the surrounding declaration/expression or text: .count-card strong {. Read it with the preceding opening statement; it is not a standalone business operation.
11	`  color: #0b5cab;`	Sets/declares the named object property or style/type member: color: #0b5cab;. Interpret it in the enclosing object, props or type definition.
12	`  font-size: 1.1rem;`	Continues the surrounding declaration/expression or text: font-size: 1.1rem;. Read it with the preceding opening statement (color: #0b5cab;); it is not a standalone business operation.

Line	Source code	Explanation / reading note
13	}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/lwc/beatOutletSelector/beatOutletSelector.html

Salesforce LWC quick action: fetches geography-matching options, limits selection to ten, saves through Apex and refreshes the record/toast.

58 numbered source lines | SHA-256 df311dea8f84d3ba3a9a3df35b4ff35cfd8cddc9a6860ef04646e599115dd743

Line	Source code	Explanation / reading note
1	`<template>`	Renders/opens a UI element or component: <template>. Props and child content below determine appearance and interactions.
2	`  <lightning-quick-action-panel header="Select Outlets">`	Renders/opens a UI element or component: <lightning-quick-action-panel header="Select Outlets">. Props and child content below determine appearance and interactions.
3	`    <template lwc:if="{isLoading}">`	Renders/opens a UI element or component: <template lwc:if="{isLoading}">. Props and child content below determine appearance and interactions.
4	`      <lightning-spinner alternative-text="Loading outlets"></lightning-spinner>`	Renders/opens a UI element or component: <lightning-spinner alternative-text="Loading outlets"></lightning-spinner>. Props and child content below determine appearance and interactions.
5	`    </template>`	Closes the UI element/component opened above.
6		Blank line separating logical sections; no executable operation.
7	`    <template lwc:else>`	Renders/opens a UI element or component: <template lwc:else>. Props and child content below determine appearance and interactions.
8	`      <p class="slds-m-bottom_small"><strong>{beatName}</strong> · {geographyName}</p>`	Renders/opens a UI element or component: {beatName} · {geographyName} . Props and child content below determine appearance and interactions.
9	`      <p class="slds-m-bottom_medium slds-text-color_weak">`	Renders/opens a UI element or component: . Props and child content below determine appearance and interactions.
10	`        Select up to 10 outlets. Only active outlets from this geography are shown.`	Selects these Salesforce fields/aggregates: up to 10 outlets. Only active outlets from this geography are shown.. Query results are used in the surrounding assignment or loop.
11	`      </p>`	Closes the UI element/component opened above.
12		Blank line separating logical sections; no executable operation.
13	`      <lightning-dual-listbox`	Renders/opens a UI element or component: <lightning-dual-listbox. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
14	`name="outlets"`	Assigns the right-hand expression to the named variable/property: name="outlets". This is in-memory unless it is later persisted by an explicit call.
15	`label="Outlet Names"`	Assigns the right-hand expression to the named variable/property: label="Outlet Names". This is in-memory unless it is later persisted by an explicit call.
16	`source-label="Available Outlets"`	Assigns the right-hand expression to the named variable/property: source-label="Available Outlets". This is in-memory unless it is later persisted by an explicit call.
17	`selected-label="Selected Outlets"`	Assigns the right-hand expression to the named variable/property: selected-label="Selected Outlets". This is in-memory unless it is later persisted by an explicit call.
18	`options="{outletOptions}"`	Assigns the right-hand expression to the named variable/property: options="{outletOptions}". This is in-memory unless it is later persisted by an explicit call.
19	`value="{selectedOutletIds}"`	Assigns the right-hand expression to the named variable/property: value="{selectedOutletIds}". This is in-memory unless it is later persisted by an explicit call.
20	`max="10"`	Assigns the right-hand expression to the named variable/property: max="10". This is in-memory unless it is later persisted by an explicit call.
21	`onchange="`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
22	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (onchange="); it is not a standalone business operation.
23	`handleSelectionChange;`	Continues the surrounding declaration/expression or text: handleSelectionChange;. Read it with the preceding opening statement ({); it is not a standalone business operation.
24	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
25	`"`	Continues the surrounding declaration/expression or text: ". Read it with the preceding opening statement (}); it is not a standalone business operation.
26	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement ("); it is not a standalone business operation.
27	`</lightning-dual-listbox>`	Closes the UI element/component opened above.
28		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
29	`<div class="count-card slds-m-top_medium">`	Renders/opens a UI element or component: . Props and child content below determine appearance and interactions.
30	`<span>Outlet Count</span>`	Renders/opens a UI element or component: Outlet Count. Props and child content below determine appearance and interactions.
31	`<strong>{selectedCount} / 10</strong>`	Renders/opens a UI element or component: {selectedCount} / 10. Props and child content below determine appearance and interactions.
32	`</div>`	Closes the UI element/component opened above.
33	`</template>`	Closes the UI element/component opened above.
34		Blank line separating logical sections; no executable operation.
35	`<div slot="footer">`	Renders/opens a UI element or component: . Props and child content below determine appearance and interactions.
36	`<lightning-button`	Renders/opens a UI element or component: <lightning-button. Props and child content below determine appearance and interactions.
37	`label="Cancel"`	Assigns the right-hand expression to the named variable/property: label="Cancel". This is in-memory unless it is later persisted by an explicit call.
38	`onclick="`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
39	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (onclick="); it is not a standalone business operation.
40	`closeAction;`	Continues the surrounding declaration/expression or text: closeAction;. Read it with the preceding opening statement ({); it is not a standalone business operation.
41	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42	`"`	Continues the surrounding declaration/expression or text: ". Read it with the preceding opening statement (}); it is not a standalone business operation.
43	`></lightning-button>`	Continues the surrounding declaration/expression or text: ></lightning-button>. Read it with the preceding opening statement ("); it is not a standalone business operation.

Line	Source code	Explanation / reading note
44	`<lightning-button`	Renders/opens a UI element or component: <lightning-button. Props and child content below determine appearance and interactions.
45	`class="slds-m-left_small"`	Assigns the right-hand expression to the named variable/property: class="slds-m-left_small". This is in-memory unless it is later persisted by an explicit call.
46	`variant="brand"`	Declares/initializes local data used by the surrounding operation: variant="brand". Collection contents and assignments below determine its purpose.
47	`label="Save Outlets"`	Assigns the right-hand expression to the named variable/property: label="Save Outlets". This is in-memory unless it is later persisted by an explicit call.
48	`disabled="{isLoading}"`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
49	`onclick="`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
50	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (onclick="); it is not a standalone business operation.
51	`saveOutlets;`	Continues the surrounding declaration/expression or text: saveOutlets;. Read it with the preceding opening statement ({); it is not a standalone business operation.
52	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
53	`"`	Continues the surrounding declaration/expression or text: ". Read it with the preceding opening statement (}); it is not a standalone business operation.
54	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement ("); it is not a standalone business operation.
55	`</lightning-button>`	Closes the UI element/component opened above.
56	`</div>`	Closes the UI element/component opened above.
57	`</lightning-quick-action-panel>`	Closes the UI element/component opened above.
58	`</template>`	Closes the UI element/component opened above.

force-app/main/default/lwc/beatOutletSelector/beatOutletSelector.js

Salesforce LWC quick action: fetches geography-matching options, limits selection to ten, saves through Apex and refreshes the record/toast.

94 numbered source lines | SHA-256 7c1c98d3932cb5fc31aa881c6017cdaf2bd1d06487a216e654637d561f7c093c

Line	Source code	Explanation / reading note
1	`import { LightningElement, api } from "lwc";`	Imports dependencies/types used below: import { LightningElement, api } from "lwc";. Importing a function does not call it.
2	`import { CloseActionScreenEvent } from "lightning/actions";`	Imports dependencies/types used below: import { CloseActionScreenEvent } from "lightning/actions";. Importing a function does not call it.
3	`import { ShowToastEvent } from "lightning/platformShowToastEvent";`	Imports dependencies/types used below: import { ShowToastEvent } from "lightning/platformShowToastEvent";. Importing a function does not call it.
4	`import { notifyRecordUpdateAvailable } from "lightning/uiRecordApi";`	Imports dependencies/types used below: import { notifyRecordUpdateAvailable } from "lightning/uiRecordApi";. Importing a function does not call it.
5	`import getSelectorData from "@salesforce/apex/BeatOutletSelectorController.getSelectorData";`	Imports dependencies/types used below: import getSelectorData from "@salesforce/apex/BeatOutletSelectorController.getSelectorData";. Importing a function does not call it.
6	`import saveSelection from "@salesforce/apex/BeatOutletSelectorController.saveSelection";`	Imports dependencies/types used below: import saveSelection from "@salesforce/apex/BeatOutletSelectorController.saveSelection";. Importing a function does not call it.
7		Blank line separating logical sections; no executable operation.
8	`export default class BeatOutletSelector extends LightningElement {`	Declares a class/type: export default class BeatOutletSelector extends LightningElement {. Members below hold behavior and/or state.
9	`  _recordId;`	Continues the surrounding declaration/expression or text: _recordId;. Read it with the preceding opening statement (export default class BeatOutletSelector extends LightningElement {); it is not a standalone business operation.
10	`  hasLoaded = false;`	Assigns the right-hand expression to the named variable/property: hasLoaded = false;. This is in-memory unless it is later persisted by an explicit call.
11	`  isLoading = true;`	Assigns the right-hand expression to the named variable/property: isLoading = true;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
12	`  beatName = "";`	Assigns the right-hand expression to the named variable/property: beatName = "";. This is in-memory unless it is later persisted by an explicit call.
13	`  geographyName = "";`	Assigns the right-hand expression to the named variable/property: geographyName = "";. This is in-memory unless it is later persisted by an explicit call.
14	`  outletOptions = [];`	Assigns the right-hand expression to the named variable/property: outletOptions = [];. This is in-memory unless it is later persisted by an explicit call.
15	`  selectedOutletIds = [];`	Assigns the right-hand expression to the named variable/property: selectedOutletIds = [];. This is in-memory unless it is later persisted by an explicit call.
16		Blank line separating logical sections; no executable operation.
17	`  get selectedCount() {`	Continues the surrounding declaration/expression or text: get selectedCount() {. Read it with the preceding opening statement; it is not a standalone business operation.
18	`    return this.selectedOutletIds.length;`	Returns this.selectedOutletIds.length to the caller (or begins returned UI markup) and ends this execution path.
19	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20		Blank line separating logical sections; no executable operation.
21	`  @api`	Exposes a Lightning component property/method to its host, such as the current record ID.
22	`  get recordId() {`	Continues the surrounding declaration/expression or text: get recordId() {. Read it with the preceding opening statement (@api); it is not a standalone business operation.
23	`    return this._recordId;`	Returns this._recordId to the caller (or begins returned UI markup) and ends this execution path.
24	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
25		Blank line separating logical sections; no executable operation.
26	`  set recordId(value) {`	Continues the surrounding declaration/expression or text: set recordId(value) {. Read it with the preceding opening statement; it is not a standalone business operation.
27	`    this._recordId = value;`	Assigns the right-hand expression to the named variable/property: this._recordId = value;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
28	`    if (value && !this.hasLoaded) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (value && !this.hasLoaded) {.
29	`      this.hasLoaded = true;`	Assigns the right-hand expression to the named variable/property: this.hasLoaded = true;. This is in-memory unless it is later persisted by an explicit call.
30	`      this.loadOutlets();`	Calls the named method: this.loadOutlets();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
31	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33		Blank line separating logical sections; no executable operation.
34	`  async loadOutlets() {`	Continues the surrounding declaration/expression or text: async loadOutlets() {. Read it with the preceding opening statement; it is not a standalone business operation.
35	`    this.isLoading = true;`	Assigns the right-hand expression to the named variable/property: this.isLoading = true;. This is in-memory unless it is later persisted by an explicit call.
36	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
37	`      const data = await getSelectorData({ beatId: this.recordId });`	Waits for this asynchronous operation before continuing: const data = await getSelectorData({ beatId: this.recordId });. The returned result/error must still be handled.
38	`      this.beatName = data.beatName;`	Assigns the right-hand expression to the named variable/property: this.beatName = data.beatName;. This is in-memory unless it is later persisted by an explicit call.
39	`      this.geographyName = data.geographyName;`	Assigns the right-hand expression to the named variable/property: this.geographyName = data.geographyName;. This is in-memory unless it is later persisted by an explicit call.
40	`      this.outletOptions = data.options.map((option) => ({`	Transforms/selects/aggregates collection values with the callback shown here: this.outletOptions = data.options.map((option) => ({. Read the callback body and result assignment together.
41	`        label: option.label,`	Sets/declares the named object property or style/type member: label: option.label,. Interpret it in the enclosing object, props or type definition.
42	`        value: option.value,`	Sets/declares the named object property or style/type member: value: option.value,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
43	`      }));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44	`      this.selectedOutletIds = [...data.selectedOutletIds];`	Assigns the right-hand expression to the named variable/property: this.selectedOutletIds = [...data.selectedOutletIds];. This is in-memory unless it is later persisted by an explicit call.
45	`    } catch (error) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
46	`      this.showToast("Unable to load outlets", this.messageFrom(error), "error");`	Calls the named method: this.showToast("Unable to load outlets", this.messageFrom(error), "error");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
47	`    } finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
48	`      this.isLoading = false;`	Assigns the right-hand expression to the named variable/property: this.isLoading = false;. This is in-memory unless it is later persisted by an explicit call.
49	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
50	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
51		Blank line separating logical sections; no executable operation.
52	`  handleSelectionChange(event) {`	Continues the surrounding declaration/expression or text: handleSelectionChange(event) {. Read it with the preceding opening statement; it is not a standalone business operation.
53	`    const values = event.detail.value;`	Declares/initializes local data used by the surrounding operation: const values = event.detail.value;. Collection contents and assignments below determine its purpose.
54	`    if (values.length > 10) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (values.length > 10) {.
55	`      this.showToast("Maximum reached", "Select no more than 10 outlets.", "warning");`	Calls the named method: this.showToast("Maximum reached", "Select no more than 10 outlets.", "warning");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
56	`      return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
57	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
58	`    this.selectedOutletIds = [...values];`	Assigns the right-hand expression to the named variable/property: this.selectedOutletIds = [...values];. This is in-memory unless it is later persisted by an explicit call.
59	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
60		Blank line separating logical sections; no executable operation.
61	`  async saveOutlets() {`	Continues the surrounding declaration/expression or text: async saveOutlets() {. Read it with the preceding opening statement; it is not a standalone business operation.
62	`    if (this.selectedOutletIds.length > 10) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (this.selectedOutletIds.length > 10) {.
63	`      this.showToast("Maximum reached", "Select no more than 10 outlets.", "warning");`	Calls the named method: this.showToast("Maximum reached", "Select no more than 10 outlets.", "warning");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
64	`      return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
65	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
66		Blank line separating logical sections; no executable operation.
67	`    this.isLoading = true;`	Assigns the right-hand expression to the named variable/property: this.isLoading = true;. This is in-memory unless it is later persisted by an explicit call.
68	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
69	`      const count = await saveSelection({`	Waits for this asynchronous operation before continuing: const count = await saveSelection({. The returned result/error must still be handled.
70	`        beatId: this.recordId,`	Sets/declares the named object property or style/type member: beatId: this.recordId,. Interpret it in the enclosing object, props or type definition.
71	`        selectedOutletIds: this.selectedOutletIds,`	Sets/declares the named object property or style/type member: selectedOutletIds: this.selectedOutletIds,. Interpret it in the enclosing object, props or type definition.
72	`      });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
73	`      await notifyRecordUpdateAvailable([{ recordId: this.recordId }]);`	Waits for this asynchronous operation before continuing: await notifyRecordUpdateAvailable([{ recordId: this.recordId }]);. The returned result/error must still be handled.
74	`      this.showToast("Outlets saved", `${count} outlets are assigned to this Beat.`, "success");`	Calls the named method: this.showToast("Outlets saved", `${count} outlets are assigned to this Beat.`, "success");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
75	`      this.dispatchEvent(new CloseActionScreenEvent());`	Calls the named method: this.dispatchEvent(new CloseActionScreenEvent());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
76	`    } catch (error) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
77	`      this.showToast("Unable to save outlets", this.messageFrom(error), "error");`	Calls the named method: this.showToast("Unable to save outlets", this.messageFrom(error), "error");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
78	`    } finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
79	`      this.isLoading = false;`	Assigns the right-hand expression to the named variable/property: this.isLoading = false;. This is in-memory unless it is later persisted by an explicit call.
80	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
81	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
82		Blank line separating logical sections; no executable operation.
83	`  closeAction() {`	Continues the surrounding declaration/expression or text: closeAction() {. Read it with the preceding opening statement; it is not a standalone business operation.
84	`    this.dispatchEvent(new CloseActionScreenEvent());`	Calls the named method: this.dispatchEvent(new CloseActionScreenEvent());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
85	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
86		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
87	`  showToast(title, message, variant) {`	Continues the surrounding declaration/expression or text: showToast(title, message, variant) {. Read it with the preceding opening statement; it is not a standalone business operation.
88	`    this.dispatchEvent(new ShowToastEvent({ title, message, variant }));`	Calls the named method: this.dispatchEvent(new ShowToastEvent({ title, message, variant }));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
89	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
90		Blank line separating logical sections; no executable operation.
91	`  messageFrom(error) {`	Continues the surrounding declaration/expression or text: messageFrom(error) {. Read it with the preceding opening statement; it is not a standalone business operation.
92	`    return error?.body?.message || error?.message || "An unexpected error occurred.";`	Returns error?.body?.message || error?.message || "An unexpected error occurred." to the caller (or begins returned UI markup) and ends this execution path.
93	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
94	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/lwc/beatOutletSelector/beatOutletSelector.js-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

17 numbered source lines | SHA-256 0a90c70bef5f8bf727af98bbcacd6342ead7d82d7e8861fe885e49e3bdae1633

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<LightningComponentBundle xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the LightningComponentBundle block; child elements specify its configuration.
3	`    <apiVersion>65.0</apiVersion>`	Sets Salesforce API version used for this component to 65.0.
4	`    <isExposed>true</isExposed>`	Sets is Exposed in the enclosing configuration to true.
5	`    <masterLabel>Beat Outlet Selector</masterLabel>`	Sets master Label in the enclosing configuration to Beat Outlet Selector.
6	`    <targets>`	Opens the targets block; child elements specify its configuration.
7	`        <target>lightning__RecordAction</target>`	Sets Lightning surface on which the component can be used to lightning__RecordAction.
8	`    </targets>`	Closes the targets configuration block.
9	`    <targetConfigs>`	Opens the targetConfigs block; child elements specify its configuration.
10	`        <targetConfig targets="lightning__RecordAction">`	Opens the targetConfig block; child elements specify its configuration.
11	`            <actionType>ScreenAction</actionType>`	Sets action Type in the enclosing configuration to ScreenAction.
12	`            <objects>`	Opens the objects block; child elements specify its configuration.
13	`                <object>Beat__c</object>`	Sets object API name configured in this entry to Beat__c.
14	`            </objects>`	Closes the objects configuration block.
15	`        </targetConfig>`	Closes the targetConfig configuration block.
16	`    </targetConfigs>`	Closes the targetConfigs configuration block.
17	`</LightningComponentBundle>`	Closes the LightningComponentBundle configuration block.

force-app/main/default/lwc/employeeProfilePicture/employeeProfilePicture.html

Salesforce file-upload action restricted to image formats; displays success and closes after upload. Does not upload through the mobile backend.

18 numbered source lines | SHA-256 c582ccc3ed73d22cf5d3ccdb555dd2cb2467b608526714dc83e096a2d97a104a

Line	Source code	Explanation / reading note
1	`<template>`	Renders/opens a UI element or component: <template>. Props and child content below determine appearance and interactions.
2	`  <lightning-quick-action-panel header="Upload Profile Picture">`	Renders/opens a UI element or component: <lightning-quick-action-panel header="Upload Profile Picture">. Props and child content below determine appearance and interactions.
3	`    <div class="slds-p-around_medium">`	Renders/opens a UI element or component: . Props and child content below determine appearance and interactions.
4	`      <p class="slds-m-bottom_medium">`	Renders/opens a UI element or component: <p class="slds-m-bottom_medium">. Props and child content below determine appearance and interactions.
5	`        Select a JPG, JPEG or PNG profile picture for this employee.`	Selects these Salesforce fields/aggregates: a JPG, JPEG or PNG profile picture for this employee.. Query results are used in the surrounding assignment or loop.
6	`      </p>`	Closes the UI element/component opened above.
7	`      <lightning-file-upload`	Renders/opens a UI element or component: <lightning-file-upload. Props and child content below determine appearance and interactions.
8	`        label="Profile Picture"`	Assigns the right-hand expression to the named variable/property: label="Profile Picture". This is in-memory unless it is later persisted by an explicit call.
9	`        name="profilePicture"`	Assigns the right-hand expression to the named variable/property: name="profilePicture". This is in-memory unless it is later persisted by an explicit call.
10	`        accept="{acceptedFormats}"`	Assigns the right-hand expression to the named variable/property: accept="{acceptedFormats}". This is in-memory unless it is later persisted by an explicit call.
11	`        record-id="{recordId}"`	Assigns the right-hand expression to the named variable/property: record-id="{recordId}". This is in-memory unless it is later persisted by an explicit call.
12	`        onuploadfinished="{handleUploadFinished}"`	Assigns the right-hand expression to the named variable/property: onuploadfinished="{handleUploadFinished}". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
13	`multiple="{allowSingleFile}"`	Assigns the right-hand expression to the named variable/property: multiple="{allowSingleFile}". This is in-memory unless it is later persisted by an explicit call.
14	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (multiple="{allowSingleFile}"); it is not a standalone business operation.
15	`</lightning-file-upload>`	Closes the UI element/component opened above.
16	`</div>`	Closes the UI element/component opened above.
17	`</lightning-quick-action-panel>`	Closes the UI element/component opened above.
18	`</template>`	Closes the UI element/component opened above.

force-app/main/default/lwc/employeeProfilePicture/employeeProfilePicture.js

Salesforce file-upload action restricted to image formats; displays success and closes after upload. Does not upload through the mobile backend.

24 numbered source lines | SHA-256 54ac5ab11905e20bb76ddac76a66fa10c4f607a536ccb5562a784aa757781431

Line	Source code	Explanation / reading note
1	`import { LightningElement, api } from "lwc";`	Imports dependencies/types used below: import { LightningElement, api } from "lwc";. Importing a function does not call it.
2	`import { ShowToastEvent } from "lightning/platformShowToastEvent";`	Imports dependencies/types used below: import { ShowToastEvent } from "lightning/platformShowToastEvent";. Importing a function does not call it.
3	`import { CloseActionScreenEvent } from "lightning/actions";`	Imports dependencies/types used below: import { CloseActionScreenEvent } from "lightning/actions";. Importing a function does not call it.
4		Blank line separating logical sections; no executable operation.
5	`export default class EmployeeProfilePicture extends LightningElement {`	Declares a class/type: export default class EmployeeProfilePicture extends LightningElement {. Members below hold behavior and/or state.
6	`  @api recordId;`	Exposes a Lightning component property/method to its host, such as the current record ID.
7	`  allowSingleFile = false;`	Assigns the right-hand expression to the named variable/property: allowSingleFile = false;. This is in-memory unless it is later persisted by an explicit call.
8		Blank line separating logical sections; no executable operation.
9	`  get acceptedFormats() {`	Continues the surrounding declaration/expression or text: get acceptedFormats() {. Read it with the preceding opening statement; it is not a standalone business operation.
10	`    return [".jpg", ".jpeg", ".png"];`	Returns [".jpg", ".jpeg", ".png"] to the caller (or begins returned UI markup) and ends this execution path.
11	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
12		Blank line separating logical sections; no executable operation.
13	`  handleUploadFinished(event) {`	Continues the surrounding declaration/expression or text: handleUploadFinished(event) {. Read it with the preceding opening statement; it is not a standalone business operation.
14	`    const uploadedFile = event.detail.files[0];`	Declares/initializes local data used by the surrounding operation: const uploadedFile = event.detail.files[0];. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
15	`    this.dispatchEvent(`	Calls the named method: this.dispatchEvent(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
16	`      new ShowToastEvent({`	Continues the surrounding declaration/expression or text: new ShowToastEvent({. Read it with the preceding opening statement (this.dispatchEvent(); it is not a standalone business operation.
17	`        title: "Profile picture uploaded",`	Sets/declares the named object property or style/type member: title: "Profile picture uploaded",. Interpret it in the enclosing object, props or type definition.
18	`        message: `${uploadedFile.name} is attached to the employee.`,`	Sets/declares the named object property or style/type member: message: `${uploadedFile.name} is attached to the employee.`,. Interpret it in the enclosing object, props or type definition.
19	`        variant: "success",`	Declares/initializes local data used by the surrounding operation: variant: "success",. Collection contents and assignments below determine its purpose.
20	`      }),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
22	`    this.dispatchEvent(new CloseActionScreenEvent());`	Calls the named method: this.dispatchEvent(new CloseActionScreenEvent());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
23	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/lwc/employeeProfilePicture/employeeProfilePicture.js-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

6 numbered source lines | SHA-256 e11ab804dd7d12a1bcf8e59d5af114fe8ed1a858ebfa07bd177d01ec0203236a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<LightningComponentBundle xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the LightningComponentBundle block; child elements specify its configuration.
3	`    <apiVersion>65.0</apiVersion><isExposed>true</isExposed><masterLabel>Employee Profile Picture</masterLabel>`	Opens the apiVersion block; child elements specify its configuration.
4	`    <targets><target>lightning__RecordAction</target></targets>`	Sets targets in the enclosing configuration to <target>lightning__RecordAction</target>.
5	`    <targetConfigs><targetConfig targets="lightning__RecordAction"><actionType>ScreenAction</actionType><objects><object>Employee__c</object></objects></targetConfig></targetConfigs>`	Sets target Configs in the enclosing configuration to <targetConfig targets="lightning__RecordAction"><actionType>ScreenAction</actionType><objects><object>Employee__c</object></objects></targetConfig>.
6	`</LightningComponentBundle>`	Closes the LightningComponentBundle configuration block.

force-app/main/default/lwc/jsconfig.json

First-party lightning components file: jsconfig.json. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

20 numbered source lines | SHA-256 fd5ac58f0cca91eaf7817a74bc290e0c903bf8924892b308c407fa028168f486

Line	Source code	Explanation / reading note
1	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement; it is not a standalone business operation.
2	`  "compilerOptions": {`	Continues the surrounding declaration/expression or text: "compilerOptions": {. Read it with the preceding opening statement ({); it is not a standalone business operation.
3	`    "experimentalDecorators": true,`	Continues the surrounding declaration/expression or text: "experimentalDecorators": true,. Read it with the preceding opening statement ("compilerOptions": {); it is not a standalone business operation.
4	`    "baseUrl": ".",`	Continues the surrounding declaration/expression or text: "baseUrl": ".",. Read it with the preceding opening statement ("experimentalDecorators": true,); it is not a standalone business operation.
5	`    "paths": {`	Continues the surrounding declaration/expression or text: "paths": {. Read it with the preceding opening statement ("baseUrl": ".",); it is not a standalone business operation.
6	`      "c/*": [`	Continues the surrounding declaration/expression or text: "c/*": [. Read it with the preceding opening statement ("paths": {); it is not a standalone business operation.
7	`        "*"`	Continues the surrounding declaration/expression or text: "*". Read it with the preceding opening statement ("c/*": []; it is not a standalone business operation.
8	`      ]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
9	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
11	`  "include": [`	Continues the surrounding declaration/expression or text: "include": [. Read it with the preceding opening statement (},); it is not a standalone business operation.

Line	Source code	Explanation / reading note
12	`    "**/*",`	Continues the surrounding declaration/expression or text: "**/*",. Read it with the preceding opening statement ("include": []); it is not a standalone business operation.
13	`    "../../../../.sfdx/typings/lwc/**/*.d.ts"`	Continues the surrounding declaration/expression or text: "../../../../.sfdx/typings/lwc/**/*.d.ts". Read it with the preceding opening statement ("**/*",); it is not a standalone business operation.
14	`  ],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
15	`  "typeAcquisition": {`	Continues the surrounding declaration/expression or text: "typeAcquisition": {. Read it with the preceding opening statement ( ],); it is not a standalone business operation.
16	`    "include": [`	Continues the surrounding declaration/expression or text: "include": [. Read it with the preceding opening statement ("typeAcquisition": {); it is not a standalone business operation.
17	`      "jest"`	Continues the surrounding declaration/expression or text: "jest". Read it with the preceding opening statement ("include": []); it is not a standalone business operation.
18	`    ]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/lwc/pjpMonthlyPlanner/pjpMonthlyPlanner.css

Salesforce LWC: initializes employee context/beats, saves date-range drafts, submits for approval and invokes explicit manager decisions through SfaPhaseOnePjpController.

46 numbered source lines | SHA-256 29269efcac25825a7afdfe59403a16e5b74aeb8af346118f3b6eb74f08e51cc5

Line	Source code	Explanation / reading note
1	`.form-grid {`	Continues the surrounding declaration/expression or text: .form-grid {. Read it with the preceding opening statement; it is not a standalone business operation.
2	`  display: grid;`	Sets/declares the named object property or style/type member: display: grid;. Interpret it in the enclosing object, props or type definition.
3	`  grid-template-columns: repeat(2, minmax(220px, 1fr));`	Continues the surrounding declaration/expression or text: grid-template-columns: repeat(2, minmax(220px, 1fr));. Read it with the preceding opening statement (display: grid;); it is not a standalone business operation.
4	`  gap: 1rem;`	Sets/declares the named object property or style/type member: gap: 1rem;. Interpret it in the enclosing object, props or type definition.
5	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
6	`.actions {`	Continues the surrounding declaration/expression or text: .actions {. Read it with the preceding opening statement (}); it is not a standalone business operation.
7	`  display: flex;`	Sets/declares the named object property or style/type member: display: flex;. Interpret it in the enclosing object, props or type definition.
8	`  justify-content: flex-end;`	Continues the surrounding declaration/expression or text: justify-content: flex-end;. Read it with the preceding opening statement (display: flex;); it is not a standalone business operation.
9	`  gap: 0.75rem;`	Sets/declares the named object property or style/type member: gap: 0.75rem;. Interpret it in the enclosing object, props or type definition.
10	`  flex-wrap: wrap;`	Continues the surrounding declaration/expression or text: flex-wrap: wrap;. Read it with the preceding opening statement (gap: 0.75rem;); it is not a standalone business operation.
11	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
12	`.summary {`	Continues the surrounding declaration/expression or text: .summary {. Read it with the preceding opening statement ({}); it is not a standalone business operation.
13	`  background: #f3f7fc;`	Sets/declares the named object property or style/type member: background: #f3f7fc;. Interpret it in the enclosing object, props or type definition.
14	`  border-left: 4px solid #0176d3;`	Continues the surrounding declaration/expression or text: border-left: 4px solid #0176d3;. Read it with the preceding opening statement (background: #f3f7fc;); it is not a standalone business operation.
15	`  padding: 0.75rem;`	Sets/declares the named object property or style/type member: padding: 0.75rem;. Interpret it in the enclosing object, props or type definition.
16	`  border-radius: 0.25rem;`	Continues the surrounding declaration/expression or text: border-radius: 0.25rem;. Read it with the preceding opening statement (padding: 0.75rem;); it is not a standalone business operation.
17	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`.plan-row {`	Continues the surrounding declaration/expression or text: .plan-row {. Read it with the preceding opening statement ({}); it is not a standalone business operation.
19	`  display: grid;`	Sets/declares the named object property or style/type member: display: grid;. Interpret it in the enclosing object, props or type definition.
20	`  grid-template-columns: 1fr minmax(220px, 0.45fr);`	Continues the surrounding declaration/expression or text: grid-template-columns: 1fr minmax(220px, 0.45fr);. Read it with the preceding opening statement (display: grid;); it is not a standalone business operation.
21	`  gap: 1rem;`	Sets/declares the named object property or style/type member: gap: 1rem;. Interpret it in the enclosing object, props or type definition.
22	`  padding: 1rem 0;`	Sets/declares the named object property or style/type member: padding: 1rem 0;. Interpret it in the enclosing object, props or type definition.
23	`  border-bottom: 1px solid #ddd;`	Continues the surrounding declaration/expression or text: border-bottom: 1px solid #ddd;. Read it with the preceding opening statement (padding: 1rem 0;); it is not a standalone business operation.
24	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
25	`.decision {`	Continues the surrounding declaration/expression or text: .decision {. Read it with the preceding opening statement (}); it is not a standalone business operation.
26	`  display: flex;`	Sets/declares the named object property or style/type member: display: flex;. Interpret it in the enclosing object, props or type definition.
27	`  align-items: flex-end;`	Continues the surrounding declaration/expression or text: align-items: flex-end;. Read it with the preceding opening statement (display: flex;); it is not a standalone business operation.
28	`  gap: 0.5rem;`	Sets/declares the named object property or style/type member: gap: 0.5rem;. Interpret it in the enclosing object, props or type definition.
29	`  flex-wrap: wrap;`	Continues the surrounding declaration/expression or text: flex-wrap: wrap;. Read it with the preceding opening statement (gap: 0.5rem;); it is not a standalone business operation.
30	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31	`.decision lightning-textarea {`	Continues the surrounding declaration/expression or text: .decision lightning-textarea {. Read it with the preceding opening statement (}); it is not a standalone business operation.
32	`  width: 100%;`	Sets/declares the named object property or style/type member: width: 100%;. Interpret it in the enclosing object, props or type definition.
33	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`.rejected {`	Continues the surrounding declaration/expression or text: .rejected {. Read it with the preceding opening statement (}); it is not a standalone business operation.
35	`  color: #ba0517;`	Sets/declares the named object property or style/type member: color: #ba0517;. Interpret it in the enclosing object, props or type definition.
36	`  margin-top: 0.4rem;`	Continues the surrounding declaration/expression or text: margin-top: 0.4rem;. Read it with the preceding opening statement (color: #ba0517;); it is not a standalone business operation.
37	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`@media (max-width: 700px) {`	Continues the surrounding declaration/expression or text: @media (max-width: 700px) {. Read it with the preceding opening statement (}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
39	`  .form-grid,`	Continues the surrounding declaration/expression or text: .form-grid,. Read it with the preceding opening statement (@media (max-width: 700px) {); it is not a standalone business operation.
40	`  .plan-row {`	Continues the surrounding declaration/expression or text: .plan-row {. Read it with the preceding opening statement (.form-grid,); it is not a standalone business operation.
41	`    grid-template-columns: 1fr;`	Continues the surrounding declaration/expression or text: grid-template-columns: 1fr;. Read it with the preceding opening statement (.plan-row {); it is not a standalone business operation.
42	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43	`  .actions {`	Continues the surrounding declaration/expression or text: .actions {. Read it with the preceding opening statement (}); it is not a standalone business operation.
44	`    justify-content: stretch;`	Continues the surrounding declaration/expression or text: justify-content: stretch;. Read it with the preceding opening statement (.actions {); it is not a standalone business operation.
45	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
46	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/lwc/pjpMonthlyPlanner/pjpMonthlyPlanner.html

Salesforce LWC: initializes employee context/beats, saves date-range drafts, submits for approval and invokes explicit manager decisions through SfaPhaseOnePjpController.

141 numbered source lines | SHA-256 2d32ab816b07d594d3fbe29c7ed92b6173baf2048edac425b7d79fef2f85236e

Line	Source code	Explanation / reading note
1	`<template>`	Renders/opens a UI element or component: <template>. Props and child content below determine appearance and interactions.
2	`  <lightning-card title="My Permanent Journey Plan" icon-name="standard:date_input">`	Renders/opens a UI element or component: <lightning-card title="My Permanent Journey Plan" icon-name="standard:date_input">. Props and child content below determine appearance and interactions.
3	`    <div class="slds-p-around_medium">`	Renders/opens a UI element or component: . Props and child content below determine appearance and interactions.
4	`      <template if:true="{context}">`	Renders/opens a UI element or component: <template if:true="{context}">. Props and child content below determine appearance and interactions.
5	`        <div class="summary">`	Renders/opens a UI element or component: . Props and child content below determine appearance and interactions.
6	`          <strong>Employee:</strong> {context.employeeName} <strong>Approver:</strong>`	Renders/opens a UI element or component: Employee: {context.employeeName} Approver:. Props and child content below determine appearance and interactions.
7	`          {context.managerName}`	Continues the surrounding declaration/expression or text: {context.managerName}. Read it with the preceding opening statement (Employee: {context.employeeName} Approver:); it is not a standalone business operation.
8	`        </div>`	Closes the UI element/component opened above.
9	`        <div class="form-grid slds-m-top_medium">`	Renders/opens a UI element or component: . Props and child content below determine appearance and interactions.
10	`          <lightning-input`	Renders/opens a UI element or component: <lightning-input. Props and child content below determine appearance and interactions.
11	`            type="date"`	Assigns the right-hand expression to the named variable/property: type="date". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
12	`label="Planning Start Date"`	Assigns the right-hand expression to the named variable/property: label="Planning Start Date". This is in-memory unless it is later persisted by an explicit call.
13	`value="{startDate}"`	Assigns the right-hand expression to the named variable/property: value="{startDate}". This is in-memory unless it is later persisted by an explicit call.
14	`onchange="`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
15	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (onchange="); it is not a standalone business operation.
16	`handleStart;`	Continues the surrounding declaration/expression or text: handleStart;. Read it with the preceding opening statement ({); it is not a standalone business operation.
17	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`"`	Continues the surrounding declaration/expression or text: ". Read it with the preceding opening statement (}); it is not a standalone business operation.
19	`></lightning-input>`	Continues the surrounding declaration/expression or text: ></lightning-input>. Read it with the preceding opening statement ("); it is not a standalone business operation.
20	`<lightning-input`	Renders/opens a UI element or component: <lightning-input. Props and child content below determine appearance and interactions.
21	`type="date"`	Assigns the right-hand expression to the named variable/property: type="date". This is in-memory unless it is later persisted by an explicit call.
22	`label="Planning End Date"`	Assigns the right-hand expression to the named variable/property: label="Planning End Date". This is in-memory unless it is later persisted by an explicit call.
23	`value="{endDate}"`	Assigns the right-hand expression to the named variable/property: value="{endDate}". This is in-memory unless it is later persisted by an explicit call.
24	`onchange="`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
25	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (onchange="); it is not a standalone business operation.

Line	Source code	Explanation / reading note
26	`handleEnd;`	Continues the surrounding declaration/expression or text: handleEnd;. Read it with the preceding opening statement ({); it is not a standalone business operation.
27	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
28	`"`	Continues the surrounding declaration/expression or text: ". Read it with the preceding opening statement (}); it is not a standalone business operation.
29	`></lightning-input>`	Continues the surrounding declaration/expression or text: ></lightning-input>. Read it with the preceding opening statement ("); it is not a standalone business operation.
30	`</div>`	Closes the UI element/component opened above.
31	`<lightning-dual-listbox`	Renders/opens a UI element or component: <lightning-dual-listbox. Props and child content below determine appearance and interactions.
32	`class="slds-m-top_medium"`	Assigns the right-hand expression to the named variable/property: class="slds-m-top_medium". This is in-memory unless it is later persisted by an explicit call.
33	`name="beats"`	Assigns the right-hand expression to the named variable/property: name="beats". This is in-memory unless it is later persisted by an explicit call.
34	`label="Select Beats"`	Assigns the right-hand expression to the named variable/property: label="Select Beats". This is in-memory unless it is later persisted by an explicit call.
35	`source-label="Authorized Beats"`	Assigns the right-hand expression to the named variable/property: source-label="Authorized Beats". This is in-memory unless it is later persisted by an explicit call.
36	`selected-label="Selected Beats"`	Assigns the right-hand expression to the named variable/property: selected-label="Selected Beats". This is in-memory unless it is later persisted by an explicit call.
37	`options="{beatOptions}"`	Assigns the right-hand expression to the named variable/property: options="{beatOptions}". This is in-memory unless it is later persisted by an explicit call.
38	`value="{selectedBeatIds}"`	Assigns the right-hand expression to the named variable/property: value="{selectedBeatIds}". This is in-memory unless it is later persisted by an explicit call.
39	`onchange="`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
40	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (onchange="); it is not a standalone business operation.

Line	Source code	Explanation / reading note
41	`handleBeats;`	Continues the surrounding declaration/expression or text: handleBeats;. Read it with the preceding opening statement ({); it is not a standalone business operation.
42	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43	`"`	Continues the surrounding declaration/expression or text: ". Read it with the preceding opening statement (}); it is not a standalone business operation.
44	`></lightning-dual-listbox>`	Continues the surrounding declaration/expression or text: ></lightning-dual-listbox>. Read it with the preceding opening statement ("); it is not a standalone business operation.
45	`<div class="actions slds-m-top_medium">`	Renders/opens a UI element or component: . Props and child content below determine appearance and interactions.
46	`<lightning-button`	Renders/opens a UI element or component: <lightning-button. Props and child content below determine appearance and interactions.
47	`label="Cancel"`	Assigns the right-hand expression to the named variable/property: label="Cancel". This is in-memory unless it is later persisted by an explicit call.
48	`onclick="`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
49	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (onclick="); it is not a standalone business operation.
50	`resetForm;`	Continues the surrounding declaration/expression or text: resetForm;. Read it with the preceding opening statement ({); it is not a standalone business operation.
51	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
52	`"`	Continues the surrounding declaration/expression or text: ". Read it with the preceding opening statement (}); it is not a standalone business operation.
53	`></lightning-button>`	Continues the surrounding declaration/expression or text: ></lightning-button>. Read it with the preceding opening statement ("); it is not a standalone business operation.
54	`<lightning-button`	Renders/opens a UI element or component: <lightning-button. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
55	`label="Save Draft"`	Assigns the right-hand expression to the named variable/property: label="Save Draft". This is in-memory unless it is later persisted by an explicit call.
56	`onclick="`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
57	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (onclick="); it is not a standalone business operation.
58	`saveDraft;`	Continues the surrounding declaration/expression or text: saveDraft;. Read it with the preceding opening statement ({); it is not a standalone business operation.
59	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
60	`"`	Continues the surrounding declaration/expression or text: ". Read it with the preceding opening statement (}); it is not a standalone business operation.
61	`></lightning-button>`	Continues the surrounding declaration/expression or text: ></lightning-button>. Read it with the preceding opening statement ("); it is not a standalone business operation.
62	`<lightning-button`	Renders/opens a UI element or component: <lightning-button. Props and child content below determine appearance and interactions.
63	`variant="brand"`	Declares/initializes local data used by the surrounding operation: variant="brand". Collection contents and assignments below determine its purpose.
64	`label="Submit for Approval"`	Assigns the right-hand expression to the named variable/property: label="Submit for Approval". This is in-memory unless it is later persisted by an explicit call.
65	`onclick="`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
66	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (onclick="); it is not a standalone business operation.
67	`submitForApproval;`	Continues the surrounding declaration/expression or text: submitForApproval;. Read it with the preceding opening statement ({); it is not a standalone business operation.
68	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
69	`"`	Continues the surrounding declaration/expression or text: ". Read it with the preceding opening statement (}); it is not a standalone business operation.
70	`></lightning-button>`	Continues the surrounding declaration/expression or text: ></lightning-button>. Read it with the preceding opening statement ("); it is not a standalone business operation.
71	`</div>`	Closes the UI element/component opened above.
72	`</template>`	Closes the UI element/component opened above.
73	`</div>`	Closes the UI element/component opened above.
74	`</lightning-card>`	Closes the UI element/component opened above.
75	`<lightning-card title="My PJPs" icon-name="standard:orders" class="slds-m-top_medium">`	Renders/opens a UI element or component: <lightning-card title="My PJPs" icon-name="standard:orders" class="slds-m-top_medium">. Props and child content below determine appearance and interactions.
76	`<div class="slds-p-around_medium">`	Renders/opens a UI element or component: . Props and child content below determine appearance and interactions.
77	`<template for:each="{myPjps}" for:item="plan">`	Renders/opens a UI element or component: <template for:each="{myPjps}" for:item="plan">. Props and child content below determine appearance and interactions.
78	`<section key="{plan.id}" class="plan-row">`	Renders/opens a UI element or component: <section key="{plan.id}" class="plan-row">. Props and child content below determine appearance and interactions.
79	`<div>`	Renders/opens a UI element or component: . Props and child content below determine appearance and interactions.
80	`<strong>{plan.name}</strong> {plan.startDate} to {plan.endDate} Beats:`	Renders/opens a UI element or component: {plan.name} {plan.startDate} to {plan.endDate} Beats:. Props and child content below determine appearance and interactions.
81	`{plan.beatList} Approver: {plan.approverName}`	Continues the surrounding declaration/expression or text: {plan.beatList} Approver: {plan.approverName}. Read it with the preceding opening statement ({plan.name} {plan.startDate} to {plan.endDate} Beats:); it is not a standalone business operation.
82	`</div>`	Closes the UI element/component opened above.
83	`<div>`	Renders/opens a UI element or component: . Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
84	`<lightning-badge label="{plan.status}"></lightning-badge`	Renders/opens a UI element or component: <lightning-badge label="{plan.status}"></lightning-badge. Props and child content below determine appearance and interactions.
85	`><template if:true="{plan.rejectionReason}"`	Assigns the right-hand expression to the named variable/property: ><template if:true="{plan.rejectionReason}". This is in-memory unless it is later persisted by an explicit call.
86	`><p class="rejected">{plan.rejectionReason}</p></template`	Assigns the right-hand expression to the named variable/property: > {plan.rejectionReason} </template. This is in-memory unless it is later persisted by an explicit call.
87	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (> {plan.rejectionReason} </template); it is not a standalone business operation.
88	`</div>`	Closes the UI element/component opened above.
89	`</section>`	Closes the UI element/component opened above.
90	`</template>`	Closes the UI element/component opened above.
91	`<template if:false="{hasMyPjps}"><p>No Phase 1 PJP has been created yet.</p></template>`	Renders/opens a UI element or component: <template if:false="{hasMyPjps}"> No Phase 1 PJP has been created yet. </template>. Props and child content below determine appearance and interactions.
92	`</div>`	Closes the UI element/component opened above.
93	`</lightning-card>`	Closes the UI element/component opened above.
94	`<lightning-card title="PJP Approvals" icon-name="standard:approval" class="slds-m-top_medium">`	Renders/opens a UI element or component: <lightning-card title="PJP Approvals" icon-name="standard:approval" class="slds-m-top_medium">. Props and child content below determine appearance and interactions.
95	`<div class="slds-p-around_medium">`	Renders/opens a UI element or component: . Props and child content below determine appearance and interactions.
96	`<template for:each="{approvals}" for:item="plan">`	Renders/opens a UI element or component: <template for:each="{approvals}" for:item="plan">. Props and child content below determine appearance and interactions.
97	`<section key="{plan.id}" class="plan-row">`	Renders/opens a UI element or component: <section key="{plan.id}" class="plan-row">. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
98	`<div>`	Renders/opens a UI element or component: . Props and child content below determine appearance and interactions.
99	`<strong>{plan.name}</strong> Employee: {plan.employeeName} {plan.startDate} to`	Renders/opens a UI element or component: {plan.name} Employee: {plan.employeeName} {plan.startDate} to. Props and child content below determine appearance and interactions.
100	`{plan.endDate} Beats ({plan.beatCount}): {plan.beatList} Submitted:`	Continues the surrounding declaration/expression or text: {plan.endDate} Beats ({plan.beatCount}): {plan.beatList} Submitted:. Read it with the preceding opening statement ({plan.name} Employee: {plan.employeeName} {plan.startDate} to); it is not a standalone business operation.
101	`{plan.submittedDate}`	Continues the surrounding declaration/expression or text: {plan.submittedDate}. Read it with the preceding opening statement ({plan.endDate} Beats ({plan.beatCount}): {plan.beatList} Submitted:); it is not a standalone business operation.
102	`</div>`	Closes the UI element/component opened above.
103	`<div class="decision">`	Renders/opens a UI element or component: . Props and child content below determine appearance and interactions.
104	`<lightning-textarea`	Renders/opens a UI element or component: <lightning-textarea. Props and child content below determine appearance and interactions.
105	`data-id="{plan.id}"`	Assigns the right-hand expression to the named variable/property: data-id="{plan.id}". This is in-memory unless it is later persisted by an explicit call.
106	`label="Rejection Reason"`	Assigns the right-hand expression to the named variable/property: label="Rejection Reason". This is in-memory unless it is later persisted by an explicit call.
107	`onchange="`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
108	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (onchange="); it is not a standalone business operation.
109	`handleReason;`	Continues the surrounding declaration/expression or text: handleReason;. Read it with the preceding opening statement ({); it is not a standalone business operation.
110	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
111	`"`	Continues the surrounding declaration/expression or text: ". Read it with the preceding opening statement (}); it is not a standalone business operation.
112	`></lightning-textarea>`	Continues the surrounding declaration/expression or text: ></lightning-textarea>. Read it with the preceding opening statement ("); it is not a standalone business operation.
113	`<lightning-button`	Renders/opens a UI element or component: <lightning-button. Props and child content below determine appearance and interactions.
114	`data-id="{plan.id}"`	Assigns the right-hand expression to the named variable/property: data-id="{plan.id}". This is in-memory unless it is later persisted by an explicit call.
115	`variant="success"`	Declares/initializes local data used by the surrounding operation: variant="success". Collection contents and assignments below determine its purpose.
116	`label="Approve"`	Assigns the right-hand expression to the named variable/property: label="Approve". This is in-memory unless it is later persisted by an explicit call.
117	`onclick="`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
118	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (onclick="); it is not a standalone business operation.
119	`approve;`	Continues the surrounding declaration/expression or text: approve;. Read it with the preceding opening statement ({); it is not a standalone business operation.
120	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
121	`"`	Continues the surrounding declaration/expression or text: ". Read it with the preceding opening statement (}); it is not a standalone business operation.
122	`></lightning-button>`	Continues the surrounding declaration/expression or text: ></lightning-button>. Read it with the preceding opening statement ("); it is not a standalone business operation.
123	`<lightning-button`	Renders/opens a UI element or component: <lightning-button. Props and child content below determine appearance and interactions.
124	`data-id="{plan.id}"`	Assigns the right-hand expression to the named variable/property: data-id="{plan.id}". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
125	`variant="destructive-text"`	Declares/initializes local data used by the surrounding operation: variant="destructive-text". Collection contents and assignments below determine its purpose.
126	`label="Reject"`	Assigns the right-hand expression to the named variable/property: label="Reject". This is in-memory unless it is later persisted by an explicit call.
127	`onclick="`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
128	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (onclick="); it is not a standalone business operation.
129	`reject;`	Continues the surrounding declaration/expression or text: reject;. Read it with the preceding opening statement ({); it is not a standalone business operation.
130	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
131	`"`	Continues the surrounding declaration/expression or text: ". Read it with the preceding opening statement (}); it is not a standalone business operation.
132	`></lightning-button>`	Continues the surrounding declaration/expression or text: ></lightning-button>. Read it with the preceding opening statement ("); it is not a standalone business operation.
133	`</div>`	Closes the UI element/component opened above.
134	`</section>`	Closes the UI element/component opened above.
135	`</template>`	Closes the UI element/component opened above.
136	`<template if:false="{hasApprovals}"`	Renders/opens a UI element or component: <template if:false="{hasApprovals}". Props and child content below determine appearance and interactions.
137	`><p>No submitted PJPs are waiting for your approval.</p></template`	Continues the surrounding declaration/expression or text: > No submitted PJPs are waiting for your approval. </template. Read it with the preceding opening statement (<template if:false="{hasApprovals}"); it is not a standalone business operation.
138	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (> No submitted PJPs are waiting for your approval. </template); it is not a standalone business operation.
139	`</div>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
140	`  </lightning-card>`	Closes the UI element/component opened above.
141	`</template>`	Closes the UI element/component opened above.

force-app/main/default/lwc/pjpMonthlyPlanner/pjpMonthlyPlanner.js

Salesforce LWC: initializes employee context/beats, saves date-range drafts, submits for approval and invokes explicit manager decisions through SfaPhaseOnePjpController.

136 numbered source lines | SHA-256 0bd994e58f4b59046a14d31e0d01e8fcc8bbed33110d0430c0cd442aa98249f8

Line	Source code	Explanation / reading note
1	`import { LightningElement } from "lwc";`	Imports dependencies/types used below: import { LightningElement } from "lwc";. Importing a function does not call it.
2	`import { ShowToastEvent } from "lightning/platformShowToastEvent";`	Imports dependencies/types used below: import { ShowToastEvent } from "lightning/platformShowToastEvent";. Importing a function does not call it.
3	`import getMyContext from "@salesforce/apex/SfaPhaseOnePjpController.getMyContext";`	Imports dependencies/types used below: import getMyContext from "@salesforce/apex/SfaPhaseOnePjpController.getMyContext";. Importing a function does not call it.
4	`import getMyBeats from "@salesforce/apex/SfaPhaseOnePjpController.getMyBeats";`	Imports dependencies/types used below: import getMyBeats from "@salesforce/apex/SfaPhaseOnePjpController.getMyBeats";. Importing a function does not call it.
5	`import getMyPjps from "@salesforce/apex/SfaPhaseOnePjpController.getMyPjps";`	Imports dependencies/types used below: import getMyPjps from "@salesforce/apex/SfaPhaseOnePjpController.getMyPjps";. Importing a function does not call it.
6	`import getMyApprovals from "@salesforce/apex/SfaPhaseOnePjpController.getMyApprovals" ;`	Imports dependencies/types used below: import getMyApprovals from "@salesforce/apex/SfaPhaseOnePjpController.getMyApprovals";. Importing a function does not call it.
7	`import savePjpDraft from "@salesforce/apex/SfaPhaseOnePjpController.saveDraft";`	Imports dependencies/types used below: import savePjpDraft from "@salesforce/apex/SfaPhaseOnePjpController.saveDraft";. Importing a function does not call it.
8	`import submitPjp from "@salesforce/apex/SfaPhaseOnePjpController.submitPjp";`	Imports dependencies/types used below: import submitPjp from "@salesforce/apex/SfaPhaseOnePjpController.submitPjp";. Importing a function does not call it.
9	`import decidePjp from "@salesforce/apex/SfaPhaseOnePjpController.decidePjp";`	Imports dependencies/types used below: import decidePjp from "@salesforce/apex/SfaPhaseOnePjpController.decidePjp";. Importing a function does not call it.
10		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
11	`export default class PjpMonthlyPlanner extends LightningElement {`	Declares a class/type: export default class PjpMonthlyPlanner extends LightningElement {. Members below hold behavior and/or state.
12	`  context;`	Continues the surrounding declaration/expression or text: context;. Read it with the preceding opening statement (export default class PjpMonthlyPlanner extends LightningElement {); it is not a standalone business operation.
13	`  beats = [];`	Assigns the right-hand expression to the named variable/property: beats = [];. This is in-memory unless it is later persisted by an explicit call.
14	`  myPjps = [];`	Assigns the right-hand expression to the named variable/property: myPjps = [];. This is in-memory unless it is later persisted by an explicit call.
15	`  approvals = [];`	Assigns the right-hand expression to the named variable/property: approvals = [];. This is in-memory unless it is later persisted by an explicit call.
16	`  selectedBeatIds = [];`	Assigns the right-hand expression to the named variable/property: selectedBeatIds = [];. This is in-memory unless it is later persisted by an explicit call.
17	`  rejectionReasons = {};`	Assigns the right-hand expression to the named variable/property: rejectionReasons = {};. This is in-memory unless it is later persisted by an explicit call.
18	`  startDate;`	Continues the surrounding declaration/expression or text: startDate;. Read it with the preceding opening statement (rejectionReasons = {};); it is not a standalone business operation.
19	`  endDate;`	Continues the surrounding declaration/expression or text: endDate;. Read it with the preceding opening statement (startDate;); it is not a standalone business operation.
20	`  draftId;`	Continues the surrounding declaration/expression or text: draftId;. Read it with the preceding opening statement (endDate;); it is not a standalone business operation.
21	`  connectedCallback() {`	Continues the surrounding declaration/expression or text: connectedCallback() {. Read it with the preceding opening statement (draftId;); it is not a standalone business operation.
22	`    this.initialise();`	Calls the named method: this.initialise();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
23	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
24	`  async initialise() {`	Continues the surrounding declaration/expression or text: async initialise() {. Read it with the preceding opening statement (}); it is not a standalone business operation.
25	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
26	`      [this.context, this.beats] = await Promise.all([getMyContext(), getMyBeats()]);`	Starts independent asynchronous operations together and waits for all; rejection propagates to the surrounding error handler.
27	`      this.setDefaultDates();`	Calls the named method: this.setDefaultDates();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
28	`      await this.refreshLists();`	Waits for this asynchronous operation before continuing: await this.refreshLists();. The returned result/error must still be handled.
29	`    } catch (error) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
30	`      this.showError(error);`	Calls the named method: this.showError(error);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
31	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`  get beatOptions() {`	Continues the surrounding declaration/expression or text: get beatOptions() {. Read it with the preceding opening statement (}); it is not a standalone business operation.
34	`    return this.beats.map((beat) => ({`	Returns this.beats.map((beat) => ({ to the caller (or begins returned UI markup) and ends this execution path.
35	`      label: beat.Geography__r?.Name ? `${beat.Name} — ${beat.Geography__r.Name}` : beat.Name,`	Sets/declares the named object property or style/type member: label: beat.Geography__r?.Name ? `${beat.Name} - ${beat.Geography__r.Name}` : beat.Name,. Interpret it in the enclosing object, props or type definition.
36	`      value: beat.Id,`	Sets/declares the named object property or style/type member: value: beat.Id,. Interpret it in the enclosing object, props or type definition.
37	`    }));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
38	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	`  get hasMyPjps() {`	Continues the surrounding declaration/expression or text: get hasMyPjps() {. Read it with the preceding opening statement (}); it is not a standalone business operation.
40	`    return this.myPjps.length > 0;`	Returns this.myPjps.length > 0 to the caller (or begins returned UI markup) and ends this execution path.
41	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42	`  get hasApprovals() {`	Continues the surrounding declaration/expression or text: get hasApprovals() {. Read it with the preceding opening statement (}); it is not a standalone business operation.
43	`    return this.approvals.length > 0;`	Returns this.approvals.length > 0 to the caller (or begins returned UI markup) and ends this execution path.
44	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
45	`  handleStart(event) {`	Continues the surrounding declaration/expression or text: handleStart(event) {. Read it with the preceding opening statement (}); it is not a standalone business operation.
46	`    this.startDate = event.target.value;`	Assigns the right-hand expression to the named variable/property: this.startDate = event.target.value;. This is in-memory unless it is later persisted by an explicit call.
47	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48	`  handleEnd(event) {`	Continues the surrounding declaration/expression or text: handleEnd(event) {. Read it with the preceding opening statement (}); it is not a standalone business operation.
49	`    this.endDate = event.target.value;`	Assigns the right-hand expression to the named variable/property: this.endDate = event.target.value;. This is in-memory unless it is later persisted by an explicit call.
50	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
51	`  handleBeats(event) {`	Continues the surrounding declaration/expression or text: handleBeats(event) {. Read it with the preceding opening statement (}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
52	`    this.selectedBeatIds = event.detail.value;`	Assigns the right-hand expression to the named variable/property: this.selectedBeatIds = event.detail.value;. This is in-memory unless it is later persisted by an explicit call.
53	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
54	`  handleReason(event) {`	Continues the surrounding declaration/expression or text: handleReason(event) {. Read it with the preceding opening statement (}); it is not a standalone business operation.
55	`    this.rejectionReasons = {`	Assigns the right-hand expression to the named variable/property: this.rejectionReasons = {. This is in-memory unless it is later persisted by an explicit call.
56	`      ...this.rejectionReasons,`	Continues the surrounding declaration/expression or text: ...this.rejectionReasons,. Read it with the preceding opening statement (this.rejectionReasons = {); it is not a standalone business operation.
57	`      [event.target.dataset.id]: event.target.value,`	Continues the surrounding declaration/expression or text: [event.target.dataset.id]: event.target.value,. Read it with the preceding opening statement (...this.rejectionReasons,); it is not a standalone business operation.
58	`    };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
59	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
60	`  setDefaultDates() {`	Continues the surrounding declaration/expression or text: setDefaultDates() {. Read it with the preceding opening statement (}); it is not a standalone business operation.
61	`    const now = new Date();`	Declares/initializes local data used by the surrounding operation: const now = new Date();. Collection contents and assignments below determine its purpose.
62	`    const year = now.getFullYear();`	Declares/initializes local data used by the surrounding operation: const year = now.getFullYear();. Collection contents and assignments below determine its purpose.
63	`    const month = String(now.getMonth() + 1).padStart(2, "0");`	Declares/initializes local data used by the surrounding operation: const month = String(now.getMonth() + 1).padStart(2, "0");. Collection contents and assignments below determine its purpose.
64	`    const last = new Date(year, now.getMonth() + 1, 0).getDate();`	Declares/initializes local data used by the surrounding operation: const last = new Date(year, now.getMonth() + 1, 0).getDate();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
65	`this.startDate = `${year}-${month}-01`;`	Assigns the right-hand expression to the named variable/property: this.startDate = `${year}-${month}-01`;. This is in-memory unless it is later persisted by an explicit call.
66	`this.endDate = `${year}-${month}-${String(last).padStart(2, "0")}`;`	Assigns the right-hand expression to the named variable/property: this.endDate = `${year}-${month}-${String(last).padStart(2, "0")}`;. This is in-memory unless it is later persisted by an explicit call.
67	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
68	`resetForm() {`	Continues the surrounding declaration/expression or text: resetForm() {. Read it with the preceding opening statement (}); it is not a standalone business operation.
69	`this.draftId = null;`	Assigns the right-hand expression to the named variable/property: this.draftId = null;. This is in-memory unless it is later persisted by an explicit call.
70	`this.selectedBeatIds = [];`	Assigns the right-hand expression to the named variable/property: this.selectedBeatIds = [];. This is in-memory unless it is later persisted by an explicit call.
71	`this.setDefaultDates();`	Calls the named method: this.setDefaultDates();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
72	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
73	`async saveDraft() {`	Continues the surrounding declaration/expression or text: async saveDraft() {. Read it with the preceding opening statement (}); it is not a standalone business operation.
74	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
75	`this.draftId = await savePjpDraft({`	Waits for this asynchronous operation before continuing: this.draftId = await savePjpDraft({. The returned result/error must still be handled.
76	`pjpId: this.draftId,`	Sets/declares the named object property or style/type member: pjpId: this.draftId,. Interpret it in the enclosing object, props or type definition.
77	`startDate: this.startDate,`	Sets/declares the named object property or style/type member: startDate: this.startDate,. Interpret it in the enclosing object, props or type definition.
78	`endDate: this.endDate,`	Sets/declares the named object property or style/type member: endDate: this.endDate,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
79	`beatIds: this.selectedBeatIds,`	Sets/declares the named object property or style/type member: beatIds: this.selectedBeatIds,. Interpret it in the enclosing object, props or type definition.
80	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
81	`this.toast("Draft saved", "The PJP and selected Beats were saved.", " success");`	Calls the named method: this.toast("Draft saved", "The PJP and selected Beats were saved.", "success");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
82	`await this.refreshLists();`	Waits for this asynchronous operation before continuing: await this.refreshLists();. The returned result/error must still be handled.
83	`} catch (error) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
84	`this.showError(error);`	Calls the named method: this.showError(error);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
85	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
86	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
87	`async submitForApproval() {`	Continues the surrounding declaration/expression or text: async submitForApproval() {. Read it with the preceding opening statement (}); it is not a standalone business operation.
88	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
89	`if (!this.draftId) await this.saveDraft();`	Waits for this asynchronous operation before continuing: if (!this.draftId) await this.saveDraft();. The returned result/error must still be handled.
90	`if (!this.draftId) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!this.draftId) return;.
91	`await submitPjp({ pjpId: this.draftId });`	Waits for this asynchronous operation before continuing: await submitPjp({ pjpId: this.draftId });. The returned result/error must still be handled.
92	`this.toast("PJP submitted", `The PJP was sent to ${this.context.managerName}.`, "success");`	Calls the named method: this.toast("PJP submitted", `The PJP was sent to ${this.context.managerName}.`, "success");. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
93	`      this.resetForm();`	Calls the named method: this.resetForm();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
94	`      await this.refreshLists();`	Waits for this asynchronous operation before continuing: await this.refreshLists();. The returned result/error must still be handled.
95	`    } catch (error) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
96	`      this.showError(error);`	Calls the named method: this.showError(error);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
97	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
98	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
99	`  approve(event) {`	Continues the surrounding declaration/expression or text: approve(event) {. Read it with the preceding opening statement (}); it is not a standalone business operation.
100	`    this.decide(event.target.dataset.id, true);`	Calls the named method: this.decide(event.target.dataset.id, true);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
101	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
102	`  reject(event) {`	Continues the surrounding declaration/expression or text: reject(event) {. Read it with the preceding opening statement (}); it is not a standalone business operation.
103	`    this.decide(event.target.dataset.id, false);`	Calls the named method: this.decide(event.target.dataset.id, false);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
104	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
105	`  async decide(planId, approve) {`	Continues the surrounding declaration/expression or text: async decide(planId, approve) {. Read it with the preceding opening statement (}); it is not a standalone business operation.
106	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.

Line	Source code	Explanation / reading note
107	`await decidePjp({ pjpId: planId, approve, rejectionReason: this.rejectionReasons[planId] });`	Waits for this asynchronous operation before continuing: await decidePjp({ pjpId: planId, approve, rejectionReason: this.rejectionReasons[planId] });. The returned result/error must still be handled.
108	`this.toast(`	Calls the named method: this.toast(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
109	`approve ? "PJP approved" : "PJP rejected",`	Continues the surrounding declaration/expression or text: approve ? "PJP approved" : "PJP rejected",. Read it with the preceding opening statement (this.toast(); it is not a standalone business operation.
110	`"The decision and audit details were saved.",`	Continues the surrounding declaration/expression or text: "The decision and audit details were saved.",. Read it with the preceding opening statement (approve ? "PJP approved" : "PJP rejected",); it is not a standalone business operation.
111	`"success",`	Continues the surrounding declaration/expression or text: "success",. Read it with the preceding opening statement ("The decision and audit details were saved.",); it is not a standalone business operation.
112	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
113	`await this.refreshLists();`	Waits for this asynchronous operation before continuing: await this.refreshLists();. The returned result/error must still be handled.
114	`} catch (error) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
115	`this.showError(error);`	Calls the named method: this.showError(error);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
116	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
117	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
118	`async refreshLists() {`	Continues the surrounding declaration/expression or text: async refreshLists() {. Read it with the preceding opening statement (}); it is not a standalone business operation.
119	`const [mine, pending] = await Promise.all([getMyPjps(), getMyApprovals()]);`	Starts independent asynchronous operations together and waits for all; rejection propagates to the surrounding error handler.

Line	Source code	Explanation / reading note
120	`    this.myPjps = this.decorate(mine);`	Calls the named method: this.myPjps = this.decorate(mine);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
121	`    this.approvals = this.decorate(pending);`	Calls the named method: this.approvals = this.decorate(pending);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
122	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
123	`  decorate(rows) {`	Continues the surrounding declaration/expression or text: decorate(rows) {. Read it with the preceding opening statement (}); it is not a standalone business operation.
124	`    return rows.map((row) => ({`	Returns rows.map((row) => ({ to the caller (or begins returned UI markup) and ends this execution path.
125	`      ...row,`	Continues the surrounding declaration/expression or text: ...row,. Read it with the preceding opening statement (return rows.map((row) => ({); it is not a standalone business operation.
126	`      beatList: row.beatNames.join(", "),`	Sets/declares the named object property or style/type member: beatList: row.beatNames.join(", "),. Interpret it in the enclosing object, props or type definition.
127	`      beatCount: row.beatNames.length,`	Sets/declares the named object property or style/type member: beatCount: row.beatNames.length,. Interpret it in the enclosing object, props or type definition.
128	`    }));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
129	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
130	`  toast(title, message, variant) {`	Continues the surrounding declaration/expression or text: toast(title, message, variant) {. Read it with the preceding opening statement (}); it is not a standalone business operation.
131	`    this.dispatchEvent(new ShowToastEvent({ title, message, variant }));`	Calls the named method: this.dispatchEvent(new ShowToastEvent({ title, message, variant }));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
132	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
133	`  showError(error) {`	Continues the surrounding declaration/expression or text: showError(error) {. Read it with the preceding opening statement (}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
134	`this.toast("Unable to continue", error?.body?.message || error.message, "error");`	Calls the named method: this.toast("Unable to continue", error?.body?.message || error.message, "error");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
135	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
136	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

force-app/main/default/lwc/pjpMonthlyPlanner/pjpMonthlyPlanner.js-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

10 numbered source lines | SHA-256 060b7746b5591cfaed2fd618d89319ffafe98065b6381aa38405ef0b37f400dd

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<LightningComponentBundle xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the LightningComponentBundle block; child elements specify its configuration.
3	`    <apiVersion>65.0</apiVersion>`	Sets Salesforce API version used for this component to 65.0.
4	`    <isExposed>true</isExposed>`	Sets is Exposed in the enclosing configuration to true.
5	`    <masterLabel>PJP Monthly Planner</masterLabel>`	Sets master Label in the enclosing configuration to PJP Monthly Planner.
6	`    <targets>`	Opens the targets block; child elements specify its configuration.
7	`        <target>lightning__Tab</target>`	Sets Lightning surface on which the component can be used to lightning__Tab.
8	`        <target>lightning__AppPage</target>`	Sets Lightning surface on which the component can be used to lightning__AppPage.
9	`    </targets>`	Closes the targets configuration block.
10	`</LightningComponentBundle>`	Closes the LightningComponentBundle configuration block.

Shared backend

35 files. Expand this area in the PDF bookmarks to jump to an individual file.

sales-rep-mobile/backend/src/allocatedBeats.test.ts

Regression tests for allocatedBeats. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

63 numbered source lines | SHA-256 9f02a1da37662ce30fbec1137338267cf08bb83051dc27769b911860576df443

Line	Source code	Explanation / reading note
1	`import { beforeAll, beforeEach, describe, expect, it, vi } from "vitest";`	Imports dependencies/types used below: import { beforeAll, beforeEach, describe, expect, it, vi } from "vitest";. Importing a function does not call it.
2	`import request from "supertest";`	Imports dependencies/types used below: import request from "supertest";. Importing a function does not call it.
3	`import jwt from "jsonwebtoken";`	Imports dependencies/types used below: import jwt from "jsonwebtoken";. Importing a function does not call it.
4	`import type { Express } from "express";`	Imports dependencies/types used below: import type { Express } from "express";. Importing a function does not call it.
5	`import { allocatedBeats } from "./services/allocatedBeats.js";`	Imports dependencies/types used below: import { allocatedBeats } from "./services/allocatedBeats.js";. Importing a function does not call it.
6		Blank line separating logical sections; no executable operation.
7	`const records = vi.hoisted(() => vi.fn());`	Declares/initializes local data used by the surrounding operation: const records = vi.hoisted(() => vi.fn());. Collection contents and assignments below determine its purpose.
8	`vi.mock("./salesforce/SalesforceService.js", () => ({ salesforce: { records } }));`	Calls the named method: vi.mock("./salesforce/SalesforceService.js", () => ({ salesforce: { records } }));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
9	`let app: Express;`	Declares/initializes local data used by the surrounding operation: let app: Express;. Collection contents and assignments below determine its purpose.
10	`let token: string;`	Declares/initializes local data used by the surrounding operation: let token: string;. Collection contents and assignments below determine its purpose.
11	`const allocation = (beat: string, outlet: string) => ({`	Declares/initializes local data used by the surrounding operation: const allocation = (beat: string, outlet: string) => ({. Collection contents and assignments below determine its purpose.
12	`  Beat__c: beat,`	Sets/declares the named object property or style/type member: Beat__c: beat,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
13	`  Beat__r: { Name: beat },`	Sets/declares the named object property or style/type member: Beat__r: { Name: beat },. Interpret it in the enclosing object, props or type definition.
14	`  Outlet__c: outlet,`	Sets/declares the named object property or style/type member: Outlet__c: outlet,. Interpret it in the enclosing object, props or type definition.
15	`  Outlet__r: { Name: outlet },`	Sets/declares the named object property or style/type member: Outlet__r: { Name: outlet },. Interpret it in the enclosing object, props or type definition.
16	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17		Blank line separating logical sections; no executable operation.
18	`beforeAll(async () => {`	Continues the surrounding declaration/expression or text: beforeAll(async () => {. Read it with the preceding opening statement; it is not a standalone business operation.
19	`  process.env.USE_MOCK_DATA = "false";`	Assigns the right-hand expression to the named variable/property: process.env.USE_MOCK_DATA = "false";. This is in-memory unless it is later persisted by an explicit call.
20	`  process.env.JWT_SECRET = "allocation-test-secret-only";`	Assigns the right-hand expression to the named variable/property: process.env.JWT_SECRET = "allocation-test-secret-only";. This is in-memory unless it is later persisted by an explicit call.
21	`  ({ app } = await import("./app.js"));`	Waits for this asynchronous operation before continuing: ({ app } = await import("./app.js"));. The returned result/error must still be handled.
22	`  token = jwt.sign(`	Calls the named method: token = jwt.sign(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
23	`    { employeeId: "employee-test", beatId: "old-primary-beat" },`	Continues the surrounding declaration/expression or text: { employeeId: "employee-test", beatId: "old-primary-beat" },. Read it with the preceding opening statement (token = jwt.sign(); it is not a standalone business operation.
24	`    process.env.JWT_SECRET,`	Continues the surrounding declaration/expression or text: process.env.JWT_SECRET,. Read it with the preceding opening statement ({ employeeId: "employee-test", beatId: "old-primary-beat" },); it is not a standalone business operation.
25	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
26	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
27	`beforeEach(() => records.mockReset());`	Calls the named method: beforeEach(() => records.mockReset());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
28		Blank line separating logical sections; no executable operation.
29	`describe("approved allocation routes", () => {`	Continues the surrounding declaration/expression or text: describe("approved allocation routes", () => {. Read it with the preceding opening statement; it is not a standalone business operation.
30	`  it("deduplicates outlets and calculates completed/pending counts", () => {`	Continues the surrounding declaration/expression or text: it("deduplicates outlets and calculates completed/pending counts", () => {. Read it with the preceding opening statement (describe("approved allocation routes", () => {); it is not a standalone business operation.
31	`    const result = allocatedBeats(`	Declares/initializes local data used by the surrounding operation: const result = allocatedBeats(. Collection contents and assignments below determine its purpose.
32	`      [`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (const result = allocatedBeats(); it is not a standalone business operation.
33	`        allocation("B", "one"),`	Continues the surrounding declaration/expression or text: allocation("B", "one"),. Read it with the preceding opening statement ([]; it is not a standalone business operation.
34	`        allocation("B", "one"),`	Continues the surrounding declaration/expression or text: allocation("B", "one"),. Read it with the preceding opening statement (allocation("B", "one"),); it is not a standalone business operation.
35	`        allocation("B", "two"),`	Continues the surrounding declaration/expression or text: allocation("B", "two"),. Read it with the preceding opening statement (allocation("B", "one"),); it is not a standalone business operation.
36	`        allocation("A", "three"),`	Continues the surrounding declaration/expression or text: allocation("A", "three"),. Read it with the preceding opening statement (allocation("B", "two"),); it is not a standalone business operation.
37	`      ],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`      new Set(["one"]),`	Continues the surrounding declaration/expression or text: new Set(["one"]),. Read it with the preceding opening statement ( ],); it is not a standalone business operation.

Line	Source code	Explanation / reading note
39	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
40	`    expect(result.map((beat) => beat.id)).toEqual(["A", "B"]);`	Test assertion comparing an expected outcome to actual behavior: expect(result.map((beat) => beat.id)).toEqual(["A", "B"]);. A mismatch fails the test.
41	`    expect(result[1]).toMatchObject({ stores: 2, storeCount: 2, completed: 1, pending: 1 });`	Test assertion comparing an expected outcome to actual behavior: expect(result[1]).toMatchObject({ stores: 2, storeCount: 2, completed: 1, pending: 1 });. A mismatch fails the test.
42	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43	`  it("returns all allocated beats rather than the token's single primary beat", async () => {`	Continues the surrounding declaration/expression or text: it("returns all allocated beats rather than the token's single primary beat", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
44	`    records`	Continues the surrounding declaration/expression or text: records. Read it with the preceding opening statement (it("returns all allocated beats rather than the token's single primary beat", async () => {); it is not a standalone business operation.
45	`      .mockResolvedValueOnce([allocation("First", "one"), allocation("Second", "two")])`	Continues the surrounding declaration/expression or text: .mockResolvedValueOnce([allocation("First", "one"), allocation("Second", "two")]). Read it with the preceding opening statement (records); it is not a standalone business operation.
46	`      .mockResolvedValueOnce([]);`	Continues the surrounding declaration/expression or text: .mockResolvedValueOnce([]);. Read it with the preceding opening statement (.mockResolvedValueOnce([allocation("First", "one"), allocation("Second", "two")])); it is not a standalone business operation.
47	`    const response = await request(app).get("/api/beats").set("Authorization", `Bearer ${token}`);`	Waits for this asynchronous operation before continuing: const response = await request(app).get("/api/beats").set("Authorization", `Bearer ${token}`);. The returned result/error must still be handled.
48	`    expect(response.status).toBe(200);`	Test assertion comparing an expected outcome to actual behavior: expect(response.status).toBe(200);. A mismatch fails the test.
49	`    expect(response.body.data.map((beat: any) => beat.id)).toEqual(["First", "Second"]);`	Test assertion comparing an expected outcome to actual behavior: expect(response.body.data.map((beat: any) => beat.id)).toEqual(["First", "Second"]);. A mismatch fails the test.

Line	Source code	Explanation / reading note
50	`    expect(records.mock.calls[0][0]).toContain("Employee__c = 'employee-test'");`	Test assertion comparing an expected outcome to actual behavior: expect(records.mock.calls[0][0]).toContain("Employee__c = 'employee-test'");. A mismatch fails the test.
51	`    expect(records.mock.calls[0][0]).toContain("Allocation_Status__c = 'Active'");`	Test assertion comparing an expected outcome to actual behavior: expect(records.mock.calls[0][0]).toContain("Allocation_Status__c = 'Active'");. A mismatch fails the test.
52	`    expect(records.mock.calls[0][0]).not.toContain("old-primary-beat");`	Test assertion comparing an expected outcome to actual behavior: expect(records.mock.calls[0][0]).not.toContain("old-primary-beat");. A mismatch fails the test.
53	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
54	`  it("returns no routes when the employee has no allocations", async () => {`	Continues the surrounding declaration/expression or text: it("returns no routes when the employee has no allocations", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
55	`    records.mockResolvedValue([]);`	Calls the named method: records.mockResolvedValue([]);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
56	`    const response = await request(app).get("/api/beats").set("Authorization", `Bearer ${token}`);`	Waits for this asynchronous operation before continuing: const response = await request(app).get("/api/beats").set("Authorization", `Bearer ${token}`);. The returned result/error must still be handled.
57	`    expect(response.body.data).toEqual([]);`	Test assertion comparing an expected outcome to actual behavior: expect(response.body.data).toEqual([]);. A mismatch fails the test.
58	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
59	`  it("does not query Salesforce for unauthenticated requests", async () => {`	Continues the surrounding declaration/expression or text: it("does not query Salesforce for unauthenticated requests", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
60	`    expect((await request(app).get("/api/beats")).status).toBe(401);`	Test assertion comparing an expected outcome to actual behavior: expect((await request(app).get("/api/beats")).status).toBe(401);. A mismatch fails the test.
61	`    expect(records).not.toHaveBeenCalled();`	Test assertion comparing an expected outcome to actual behavior: expect(records).not.toHaveBeenCalled();. A mismatch fails the test.

Line	Source code	Explanation / reading note
62	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
63	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/app.test.ts

Regression tests for app. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

85 numbered source lines | SHA-256 290fcf2535567f58a58e40eb92684099819a07d23b7f71b42dd78a7ea38180da

Line	Source code	Explanation / reading note
1	`import { beforeAll, describe, expect, it } from "vitest";`	Imports dependencies/types used below: import { beforeAll, describe, expect, it } from "vitest";. Importing a function does not call it.
2	`import request from "supertest";`	Imports dependencies/types used below: import request from "supertest";. Importing a function does not call it.
3	`import type { Express } from "express";`	Imports dependencies/types used below: import type { Express } from "express";. Importing a function does not call it.
4		Blank line separating logical sections; no executable operation.
5	`let app: Express;`	Declares/initializes local data used by the surrounding operation: let app: Express;. Collection contents and assignments below determine its purpose.
6		Blank line separating logical sections; no executable operation.
7	`beforeAll(async () => {`	Continues the surrounding declaration/expression or text: beforeAll(async () => {. Read it with the preceding opening statement; it is not a standalone business operation.
8	`  process.env.USE_MOCK_DATA = "true";`	Assigns the right-hand expression to the named variable/property: process.env.USE_MOCK_DATA = "true";. This is in-memory unless it is later persisted by an explicit call.
9	`  process.env.AUTH_ALLOW_TEST_CODE = "true";`	Assigns the right-hand expression to the named variable/property: process.env.AUTH_ALLOW_TEST_CODE = "true";. This is in-memory unless it is later persisted by an explicit call.
10	`  ({ app } = await import("./app.js"));`	Waits for this asynchronous operation before continuing: ({ app } = await import("./app.js"));. The returned result/error must still be handled.
11	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
12		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
13	`async function token() {`	Declares a callable function/method: async function token() {. Parameters supply its inputs; the following block implements the operation.
14	`  const requested = await request(app)`	Waits for this asynchronous operation before continuing: const requested = await request(app). The returned result/error must still be handled.
15	`    .post("/api/auth/request-code")`	Continues the surrounding declaration/expression or text: .post("/api/auth/request-code"). Read it with the preceding opening statement (const requested = await request(app)); it is not a standalone business operation.
16	`    .send({ email: "edge@sfa.demo" });`	Continues the surrounding declaration/expression or text: .send({ email: "edge@sfa.demo" });. Read it with the preceding opening statement (.post("/api/auth/request-code")); it is not a standalone business operation.
17	`  const verified = await request(app)`	Waits for this asynchronous operation before continuing: const verified = await request(app). The returned result/error must still be handled.
18	`    .post("/api/auth/verify-code")`	Continues the surrounding declaration/expression or text: .post("/api/auth/verify-code"). Read it with the preceding opening statement (const verified = await request(app)); it is not a standalone business operation.
19	`    .send({ email: "edge@sfa.demo", code: requested.body.data.testCode });`	Continues the surrounding declaration/expression or text: .send({ email: "edge@sfa.demo", code: requested.body.data.testCode });. Read it with the preceding opening statement (.post("/api/auth/verify-code")); it is not a standalone business operation.
20	`  return verified.body.data.token;`	Returns verified.body.data.token to the caller (or begins returned UI markup) and ends this execution path.
21	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
22		Blank line separating logical sections; no executable operation.
23	`describe("SFA API", () => {`	Continues the surrounding declaration/expression or text: describe("SFA API", () => {. Read it with the preceding opening statement; it is not a standalone business operation.
24	`  it("rejects protected requests without an application session", async () => {`	Continues the surrounding declaration/expression or text: it("rejects protected requests without an application session", async () => {. Read it with the preceding opening statement (describe("SFA API", () => {); it is not a standalone business operation.
25	`    const response = await request(app).get("/api/dashboard");`	Waits for this asynchronous operation before continuing: const response = await request(app).get("/api/dashboard");. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
26	`    expect(response.status).toBe(401);`	Test assertion comparing an expected outcome to actual behavior: expect(response.status).toBe(401);. A mismatch fails the test.
27	`    expect(response.body.errorCode).toBe("UNAUTHORIZED");`	Test assertion comparing an expected outcome to actual behavior: expect(response.body.errorCode).toBe("UNAUTHORIZED");. A mismatch fails the test.
28	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29		Blank line separating logical sections; no executable operation.
30	`  it("returns a short-lived test sign-in code and keeps employee identity in the session", async () => {`	Continues the surrounding declaration/expression or text: it("returns a short-lived test sign-in code and keeps employee identity in the session", async () => {. Read it with the preceding opening statement; it is not a standalone business operation.
31	`    const t = await token();`	Waits for this asynchronous operation before continuing: const t = await token();. The returned result/error must still be handled.
32	`    const response = await request(app)`	Waits for this asynchronous operation before continuing: const response = await request(app). The returned result/error must still be handled.
33	`      .get("/api/auth/session")`	Continues the surrounding declaration/expression or text: .get("/api/auth/session"). Read it with the preceding opening statement (const response = await request(app)); it is not a standalone business operation.
34	`      .set("Authorization", `Bearer ${t}`);`	Continues the surrounding declaration/expression or text: .set("Authorization", `Bearer ${t}`);. Read it with the preceding opening statement (.get("/api/auth/session")); it is not a standalone business operation.
35	`    expect(response.body.data.user.employeeName).toBe("Demo Employee");`	Test assertion comparing an expected outcome to actual behavior: expect(response.body.data.user.employeeName).toBe("Demo Employee");. A mismatch fails the test.
36	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
37		Blank line separating logical sections; no executable operation.
38	`  it("rejects an incorrect sign-in code", async () => {`	Continues the surrounding declaration/expression or text: it("rejects an incorrect sign-in code", async () => {. Read it with the preceding opening statement; it is not a standalone business operation.

Line	Source code	Explanation / reading note
39	`    await request(app).post("/api/auth/request-code").send({ email: "edge@sfa.demo" });`	Waits for this asynchronous operation before continuing: await request(app).post("/api/auth/request-code").send({ email: "edge@sfa.demo" });. The returned result/error must still be handled.
40	`    const response = await request(app)`	Waits for this asynchronous operation before continuing: const response = await request(app). The returned result/error must still be handled.
41	`      .post("/api/auth/verify-code")`	Continues the surrounding declaration/expression or text: .post("/api/auth/verify-code"). Read it with the preceding opening statement (const response = await request(app)); it is not a standalone business operation.
42	`      .send({ email: "edge@sfa.demo", code: "000000" });`	Continues the surrounding declaration/expression or text: .send({ email: "edge@sfa.demo", code: "000000" });. Read it with the preceding opening statement (.post("/api/auth/verify-code")); it is not a standalone business operation.
43	`    expect(response.status).toBe(401);`	Test assertion comparing an expected outcome to actual behavior: expect(response.status).toBe(401);. A mismatch fails the test.
44	`    expect(response.body.errorCode).toBe("INVALID_CODE");`	Test assertion comparing an expected outcome to actual behavior: expect(response.body.errorCode).toBe("INVALID_CODE");. A mismatch fails the test.
45	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
46		Blank line separating logical sections; no executable operation.
47	`  it("loads dashboard and beats", async () => {`	Continues the surrounding declaration/expression or text: it("loads dashboard and beats", async () => {. Read it with the preceding opening statement; it is not a standalone business operation.
48	`    const t = await token();`	Waits for this asynchronous operation before continuing: const t = await token();. The returned result/error must still be handled.
49	`    expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
50	`      (await request(app).get("/api/dashboard").set("Authorization", `Bearer ${t}`)).body.success,`	Waits for this asynchronous operation before continuing: (await request(app).get("/api/dashboard").set("Authorization", `Bearer ${t}`)).body.success,. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
51	`).toBe(true);`	Continues the surrounding declaration/expression or text:).toBe(true);. Read it with the preceding opening statement ((await request(app).get("/api/dashboard").set("Authorization", `Bearer ${t}`)).body.success,); it is not a standalone business operation.
52	`expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
53	`(await request(app).get("/api/beats").set("Authorization", `Bearer ${t}`)).body.data.length,`	Waits for this asynchronous operation before continuing: (await request(app).get("/api/beats").set("Authorization", `Bearer ${t}`)).body.data.length,. The returned result/error must still be handled.
54	`).toBeGreaterThan(0);`	Continues the surrounding declaration/expression or text:).toBeGreaterThan(0);. Read it with the preceding opening statement ((await request(app).get("/api/beats").set("Authorization", `Bearer ${t}`)).body.data.length,); it is not a standalone business operation.
55	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
56		Blank line separating logical sections; no executable operation.
57	`it("submits more than one expense claim in one request", async () => {`	Continues the surrounding declaration/expression or text: it("submits more than one expense claim in one request", async () => {. Read it with the preceding opening statement; it is not a standalone business operation.
58	`const t = await token();`	Waits for this asynchronous operation before continuing: const t = await token();. The returned result/error must still be handled.
59	`const response = await request(app)`	Waits for this asynchronous operation before continuing: const response = await request(app). The returned result/error must still be handled.
60	`.post("/api/expenses")`	Continues the surrounding declaration/expression or text: .post("/api/expenses"). Read it with the preceding opening statement (const response = await request(app)); it is not a standalone business operation.
61	`.set("Authorization", `Bearer ${t}`)`	Continues the surrounding declaration/expression or text: .set("Authorization", `Bearer ${t}`). Read it with the preceding opening statement (.post("/api/expenses")); it is not a standalone business operation.
62	`.send({`	Continues the surrounding declaration/expression or text: .send({. Read it with the preceding opening statement (.set("Authorization", `Bearer ${t}`)); it is not a standalone business operation.

Line	Source code	Explanation / reading note
63	`        claims: [`	Sets/declares the named object property or style/type member: claims: [. Interpret it in the enclosing object, props or type definition.
64	`          { policyId: "policy-travel", amount: 250, remarks: "Bus fare" },`	Continues the surrounding declaration/expression or text: { policyId: "policy-travel", amount: 250, remarks: "Bus fare" },. Read it with the preceding opening statement (claims: []); it is not a standalone business operation.
65	`          { policyId: "policy-food", amount: 110, remarks: "Lunch" },`	Continues the surrounding declaration/expression or text: { policyId: "policy-food", amount: 110, remarks: "Lunch" },. Read it with the preceding opening statement ({ policyId: "policy-travel", amount: 250, remarks: "Bus fare" },); it is not a standalone business operation.
66	`        ],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
67	`      });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
68	`    expect(response.body.success).toBe(true);`	Test assertion comparing an expected outcome to actual behavior: expect(response.body.success).toBe(true);. A mismatch fails the test.
69	`    expect(response.body.data).toHaveLength(2);`	Test assertion comparing an expected outcome to actual behavior: expect(response.body.data).toHaveLength(2);. A mismatch fails the test.
70	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
71		Blank line separating logical sections; no executable operation.
72	`  it("enforces the 100 metre visit radius", async () => {`	Continues the surrounding declaration/expression or text: it("enforces the 100 metre visit radius", async () => {. Read it with the preceding opening statement; it is not a standalone business operation.
73	`    const t = await token();`	Waits for this asynchronous operation before continuing: const t = await token();. The returned result/error must still be handled.
74	`    const near = await request(app)`	Waits for this asynchronous operation before continuing: const near = await request(app). The returned result/error must still be handled.
75	`      .post("/api/store/validate-location")`	Continues the surrounding declaration/expression or text: .post("/api/store/validate-location"). Read it with the preceding opening statement (const near = await request(app)); it is not a standalone business operation.

Line	Source code	Explanation / reading note
76	`.set("Authorization", `Bearer ${t}`)`	Continues the surrounding declaration/expression or text: .set("Authorization", `Bearer ${t}`). Read it with the preceding opening statement (.post("/api/store/validate-location")); it is not a standalone business operation.
77	`.send({ storeId: "store-1", location: { latitude: 12.9719, longitude: 77.5949 } });`	Continues the surrounding declaration/expression or text: .send({ storeId: "store-1", location: { latitude: 12.9719, longitude: 77.5949 } });. Read it with the preceding opening statement (.set("Authorization", `Bearer ${t}`)); it is not a standalone business operation.
78	`const far = await request(app)`	Waits for this asynchronous operation before continuing: const far = await request(app). The returned result/error must still be handled.
79	`.post("/api/store/validate-location")`	Continues the surrounding declaration/expression or text: .post("/api/store/validate-location"). Read it with the preceding opening statement (const far = await request(app)); it is not a standalone business operation.
80	`.set("Authorization", `Bearer ${t}`)`	Continues the surrounding declaration/expression or text: .set("Authorization", `Bearer ${t}`). Read it with the preceding opening statement (.post("/api/store/validate-location")); it is not a standalone business operation.
81	`.send({ storeId: "store-1", location: { latitude: 12.981, longitude: 77.61 } });`	Continues the surrounding declaration/expression or text: .send({ storeId: "store-1", location: { latitude: 12.981, longitude: 77.61 } });. Read it with the preceding opening statement (.set("Authorization", `Bearer ${t}`)); it is not a standalone business operation.
82	`expect(near.body.data.allowed).toBe(true);`	Test assertion comparing an expected outcome to actual behavior: expect(near.body.data.allowed).toBe(true);. A mismatch fails the test.
83	`expect(far.body.data.allowed).toBe(false);`	Test assertion comparing an expected outcome to actual behavior: expect(far.body.data.allowed).toBe(false);. A mismatch fails the test.
84	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
85	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/app.ts

Express application: HTTP middleware, separate distributor/employee authentication boundaries, employee field-activity routes, Salesforce writes, recovery, document endpoints and error handling.

1977 numbered source lines | SHA-256 851027e02fa8476198b20d2a7ce3cfad26541da90ae634bf9d68b378f5ebf80d

Line	Source code	Explanation / reading note
1	`import express from "express";`	Imports dependencies/types used below: import express from "express";. Importing a function does not call it.
2	`import cors from "cors";`	Imports dependencies/types used below: import cors from "cors";. Importing a function does not call it.
3	`import helmet from "helmet";`	Imports dependencies/types used below: import helmet from "helmet";. Importing a function does not call it.
4	`import jwt from "jsonwebtoken";`	Imports dependencies/types used below: import jwt from "jsonwebtoken";. Importing a function does not call it.
5	`import nodemailer from "nodemailer";`	Imports dependencies/types used below: import nodemailer from "nodemailer";. Importing a function does not call it.
6	`import { env, objectMap } from "./config/env.js";`	Imports dependencies/types used below: import { env, objectMap } from "./config/env.js";. Importing a function does not call it.
7	`import { rep, schemes, beats, stores, products } from "./data/mock.js";`	Imports dependencies/types used below: import { rep, schemes, beats, stores, products } from "./data/mock.js";. Importing a function does not call it.
8	`import { ok, fail } from "./utils/http.js";`	Imports dependencies/types used below: import { ok, fail } from "./utils/http.js";. Importing a function does not call it.
9	`import { distanceInMeters } from "./utils/distance.js";`	Imports dependencies/types used below: import { distanceInMeters } from "./utils/distance.js";. Importing a function does not call it.
10	`import { createPdf, createExcel } from "./services/documentService.js";`	Imports dependencies/types used below: import { createPdf, createExcel } from "./services/documentService.js";. Importing a function does not call it.
11	`import { salesforce } from "./salesforce/SalesforceService.js";`	Imports dependencies/types used below: import { salesforce } from "./salesforce/SalesforceService.js";. Importing a function does not call it.
12	`import type { VisitPayload } from "./types.js";`	Imports dependencies/types used below: import type { VisitPayload } from "./types.js";. Importing a function does not call it.
13	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.

Line	Source code	Explanation / reading note
14	`  createLoginCode,`	Continues the surrounding declaration/expression or text: createLoginCode,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
15	`  findMockEmployee,`	Continues the surrounding declaration/expression or text: findMockEmployee,. Read it with the preceding opening statement (createLoginCode,); it is not a standalone business operation.
16	`  verifyLoginCode,`	Continues the surrounding declaration/expression or text: verifyLoginCode,. Read it with the preceding opening statement (findMockEmployee,); it is not a standalone business operation.
17	`  type EmployeeIdentity,`	Defines a compile-time data contract: type EmployeeIdentity,. TypeScript types do not validate untrusted runtime JSON by themselves.
18	`} from "./services/authService.js";`	Completes the dependency import and identifies the module supplying those names.
19	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.
20	`  emailDeliveryIsConfigured,`	Continues the surrounding declaration/expression or text: emailDeliveryIsConfigured,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
21	`  sendEmployeeLoginCode,`	Continues the surrounding declaration/expression or text: sendEmployeeLoginCode,. Read it with the preceding opening statement (emailDeliveryIsConfigured,); it is not a standalone business operation.
22	`  sendRetailerOrderSummary,`	Continues the surrounding declaration/expression or text: sendRetailerOrderSummary,. Read it with the preceding opening statement (sendEmployeeLoginCode,); it is not a standalone business operation.
23	`} from "./services/emailService.js";`	Completes the dependency import and identifies the module supplying those names.
24	`import { escapeSoqlLiteral } from "./utils/salesforce.js";`	Imports dependencies/types used below: import { escapeSoqlLiteral } from "./utils/salesforce.js";. Importing a function does not call it.
25	`import { allocatedBeats } from "./services/allocatedBeats.js";`	Imports dependencies/types used below: import { allocatedBeats } from "./services/allocatedBeats.js";. Importing a function does not call it.
26	`import { restoreVisit } from "./services/visitRecovery.js";`	Imports dependencies/types used below: import { restoreVisit } from "./services/visitRecovery.js";. Importing a function does not call it.
27	`import { productIdentity } from "./services/productIdentity.js";`	Imports dependencies/types used below: import { productIdentity } from "./services/productIdentity.js";. Importing a function does not call it.

Line	Source code	Explanation / reading note
28	`import { createDmsRouter } from "./dms/router.js";`	Imports dependencies/types used below: import { createDmsRouter } from "./dms/router.js";. Importing a function does not call it.
29	`import { createEmployeeDmsRouter } from "./dms/employeeRouter.js";`	Imports dependencies/types used below: import { createEmployeeDmsRouter } from "./dms/employeeRouter.js";. Importing a function does not call it.
30	`export const app = express();`	Assigns the right-hand expression to the named variable/property: export const app = express();. This is in-memory unless it is later persisted by an explicit call.
31	`app.use(helmet());`	Registers an HTTP route or middleware: app.use(helmet());. Registration order controls which authentication/validation runs first.
32	`app.use(cors());`	Registers an HTTP route or middleware: app.use(cors());. Registration order controls which authentication/validation runs first.
33	`app.use(express.json({ limit: "5mb" }));`	Registers an HTTP route or middleware: app.use(express.json({ limit: "5mb" }));. Registration order controls which authentication/validation runs first.
34	`// A separate audience and signing key prevent distributor sessions entering SFA.`	Developer comment/documentation: A separate audience and signing key prevent distributor sessions entering SFA. It is not executed.
35	`app.use("/api/dms", createDmsRouter());`	Registers an HTTP route or middleware: app.use("/api/dms", createDmsRouter());. Registration order controls which authentication/validation runs first.
36	`const visits = new Map<string, VisitPayload>();`	Declares/initializes local data used by the surrounding operation: const visits = new Map<string, VisitPayload>();. Collection contents and assignments below determine its purpose.
37	`const idempotency = new Map<string, unknown>();`	Declares/initializes local data used by the surrounding operation: const idempotency = new Map<string, unknown>();. Collection contents and assignments below determine its purpose.
38	`class ValidationError extends Error {`	Declares a class/type: class ValidationError extends Error {. Members below hold behavior and/or state.
39	`  status = 400;`	Assigns the right-hand expression to the named variable/property: status = 400;. This is in-memory unless it is later persisted by an explicit call.
40	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
41	`async function previousAction(objectName: string, visitId: string, key: string) {`	Declares a callable function/method: async function previousAction(objectName: string, visitId: string, key: string) {. Parameters supply its inputs; the following block implements the operation.
42	`  if (!key || env.USE_MOCK_DATA) return undefined;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!key || env.USE_MOCK_DATA) return undefined;.
43	`  const rows = await sfRecords(`	Waits for this asynchronous operation before continuing: const rows = await sfRecords(. The returned result/error must still be handled.
44	`    \`SELECT Id FROM ${objectName} WHERE Visit__c = '${escapeSoqlLiteral(visitId)}' AND Mobile_Request_Key__c = '${escapeSoqlLiteral(key)}' LIMIT 1\`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id FROM ${objectName} WHERE Visit__c = '${escapeSoqlLiteral(visitId)}' AND Mobile_Request_Key__c = '${escapeSoqlLiteral(key)}' LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
45	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
46	`  return rows[0] ? { id: rows[0].Id } : undefined;`	Returns rows[0] ? { id: rows[0].Id } : undefined to the caller (or begins returned UI markup) and ends this execution path.
47	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48	`const sfRecords = async (soql: string) => salesforce.records(soql);`	Invokes the external-data boundary: const sfRecords = async (soql: string) => salesforce.records(soql);. Await/result checks determine whether the operation is confirmed.
49	`async function ownedVisit(id: string, employeeId: string) {`	Declares a callable function/method: async function ownedVisit(id: string, employeeId: string) {. Parameters supply its inputs; the following block implements the operation.
50	`  const cached = visits.get(id);`	Declares/initializes local data used by the surrounding operation: const cached = visits.get(id);. Collection contents and assignments below determine its purpose.
51	`  if (cached) return cached.employeeId === employeeId ? cached : undefined;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (cached) return cached.employeeId === employeeId ? cached : undefined;.
52	`  if (env.USE_MOCK_DATA) return undefined;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA) return undefined;.
53	`  const restored = await restoreVisit(String(id || ""), employeeId);`	Waits for this asynchronous operation before continuing: const restored = await restoreVisit(String(id || ""), employeeId);. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
54	`  if (restored) visits.set(restored.id, restored);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (restored) visits.set(restored.id, restored);.
55	`  return restored;`	Returns restored to the caller (or begins returned UI markup) and ends this execution path.
56	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`const allocatedOutletIds = (employeeId: string) =>`	Declares/initializes local data used by the surrounding operation: const allocatedOutletIds = (employeeId: string) =>. Collection contents and assignments below determine its purpose.
58	`  `SELECT Outlet__c FROM ${objectMap.distributorAllocation} WHERE Employee__c = '${employeeId}' AND Allocation_Status__c = 'Active'`;`	Assigns the right-hand expression to the named variable/property: `SELECT Outlet__c FROM ${objectMap.distributorAllocation} WHERE Employee__c = '${employeeId}' AND Allocation_Status__c = 'Active'`;. This is in-memory unless it is later persisted by an explicit call.
59	`type AuthClaims = {`	Defines a compile-time data contract: type AuthClaims = {. TypeScript types do not validate untrusted runtime JSON by themselves.
60	`  sub: string;`	Sets/declares the named object property or style/type member: sub: string;. Interpret it in the enclosing object, props or type definition.
61	`  displayName: string;`	Sets/declares the named object property or style/type member: displayName: string;. Interpret it in the enclosing object, props or type definition.
62	`  employeeId: string;`	Sets/declares the named object property or style/type member: employeeId: string;. Interpret it in the enclosing object, props or type definition.
63	`  employeeName: string;`	Sets/declares the named object property or style/type member: employeeName: string;. Interpret it in the enclosing object, props or type definition.
64	`  salesforceUserId?: string;`	Sets/declares the named object property or style/type member: salesforceUserId?: string;. Interpret it in the enclosing object, props or type definition.
65	`  beatId?: string;`	Sets/declares the named object property or style/type member: beatId?: string;. Interpret it in the enclosing object, props or type definition.
66	`  beatName?: string;`	Sets/declares the named object property or style/type member: beatName?: string;. Interpret it in the enclosing object, props or type definition.
67	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
68	`type AuthenticatedRequest = express.Request & { auth?: AuthClaims };`	Defines a compile-time data contract: type AuthenticatedRequest = express.Request & { auth?: AuthClaims };. TypeScript types do not validate untrusted runtime JSON by themselves.
69	`const protect: express.RequestHandler = (request, res, next) => {`	Declares/initializes local data used by the surrounding operation: const protect: express.RequestHandler = (request, res, next) => {. Collection contents and assignments below determine its purpose.
70	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
71	`  const token = req.headers.authorization?.replace("Bearer ", "");`	Declares/initializes local data used by the surrounding operation: const token = req.headers.authorization?.replace("Bearer ", "");. Collection contents and assignments below determine its purpose.
72	`  try {`	Starts operations whose failure is handled by the following catch/finally blocks.
73	`    if (!token) throw new Error("Missing token");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!token) throw new Error("Missing token");.
74	`    req.auth = jwt.verify(token, env.JWT_SECRET) as AuthClaims;`	Calls the named method: req.auth = jwt.verify(token, env.JWT_SECRET) as AuthClaims;. Its implementation defines the side effect/result; use the symbol/file index to follow it.
75	`    next();`	Continues the surrounding declaration/expression or text: next();. Read it with the preceding opening statement (req.auth = jwt.verify(token, env.JWT_SECRET) as AuthClaims;); it is not a standalone business operation.
76	`  } catch {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
77	`    return fail(res, 401, "Please login again", "UNAUTHORIZED");`	Returns fail(res, 401, "Please login again", "UNAUTHORIZED") to the caller (or begins returned UI markup) and ends this execution path.
78	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
79	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
80	`app.get("/api/health", (_, res) => ok(res, { mockMode: env.USE_MOCK_DATA }, "SFA API is ready"));`	Registers an HTTP route or middleware: app.get("/api/health", (_, res) => ok(res, { mockMode: env.USE_MOCK_DATA }, "SFA API is ready"));. Registration order controls which authentication/validation runs first.

Line	Source code	Explanation / reading note
81	`async function findEmployee(email: string): Promise<EmployeeIdentity | undefined> {`	Declares a callable function/method: async function findEmployee(email: string): Promise<EmployeeIdentity | undefined> {. Parameters supply its inputs; the following block implements the operation.
82	`  if (env.USE_MOCK_DATA) return findMockEmployee(email);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA) return findMockEmployee(email);.
83		Blank line separating logical sections; no executable operation.
84	`  const safeEmail = escapeSoqlLiteral(email.trim().toLowerCase());`	Declares/initializes local data used by the surrounding operation: const safeEmail = escapeSoqlLiteral(email.trim().toLowerCase());. Collection contents and assignments below determine its purpose.
85	`  const rows = await sfRecords(`	Waits for this asynchronous operation before continuing: const rows = await sfRecords(. The returned result/error must still be handled.
86	`    `SELECT Id, Name, Application_Access_Email__c, Login_Email__c, Email__c, Beat__c, Beat__r.Name, Salesforce_User__c, Salesforce_User__r.Name, Salesforce_User__r.Email, Salesforce_User__r.Username, Salesforce_User__r.IsActive FROM ${objectMap.salesRep} WHERE Active__c = true AND (Application_Access_Email__c = '${safeEmail}' OR Login_Email__c = '${safeEmail}' OR Email__c = '${safeEmail}' OR Salesforce_User__r.Email = '${safeEmail}' OR Salesforce_User__r.Username = '${safeEmail}') ORDER BY Employee_Code__c NULLS LAST LIMIT 1`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Application_Access_Email__c, Login_Email__c, Email__c, Beat__c, Beat__r.Name, Salesforce_User__c, Salesforce_User__r.Name, Salesforce_User__r.Email, Salesforce_User__r.Username, Sale. This is in-memory unless it is later persisted by an explicit call.
87	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
88	`  const row = rows[0];`	Declares/initializes local data used by the surrounding operation: const row = rows[0];. Collection contents and assignments below determine its purpose.
89	`  if (!row || (row.Salesforce_User__c && row.Salesforce_User__r?.IsActive === false))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!row || (row.Salesforce_User__c && row.Salesforce_User__r?.IsActive === false)).
90	`    return undefined;`	Returns undefined to the caller (or begins returned UI markup) and ends this execution path.
91	`  return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
92	`    id: row.Id,`	Sets/declares the named object property or style/type member: id: row.Id,. Interpret it in the enclosing object, props or type definition.
93	`    email: String(`	Sets/declares the named object property or style/type member: email: String(. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
94	`row.Application_Access_Email__c ||`	Continues the surrounding declaration/expression or text: row.Application_Access_Email__c ||. Read it with the preceding opening statement (email: String(); it is not a standalone business operation.
95	`row.Login_Email__c ||`	Continues the surrounding declaration/expression or text: row.Login_Email__c ||. Read it with the preceding opening statement (row.Application_Access_Email__c ||); it is not a standalone business operation.
96	`row.Email__c ||`	Continues the surrounding declaration/expression or text: row.Email__c ||. Read it with the preceding opening statement (row.Login_Email__c ||); it is not a standalone business operation.
97	`row.Salesforce_User__r?.Email ||`	Continues the surrounding declaration/expression or text: row.Salesforce_User__r?.Email ||. Read it with the preceding opening statement (row.Email__c ||); it is not a standalone business operation.
98	`row.Salesforce_User__r?.Username,`	Continues the surrounding declaration/expression or text: row.Salesforce_User__r?.Username,. Read it with the preceding opening statement (row.Salesforce_User__r?.Email ||); it is not a standalone business operation.
99	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
100	`displayName: row.Salesforce_User__r?.Name || row.Name,`	Sets/declares the named object property or style/type member: displayName: row.Salesforce_User__r?.Name || row.Name,. Interpret it in the enclosing object, props or type definition.
101	`employeeName: row.Name,`	Sets/declares the named object property or style/type member: employeeName: row.Name,. Interpret it in the enclosing object, props or type definition.
102	`salesforceUserId: row.Salesforce_User__c,`	Sets/declares the named object property or style/type member: salesforceUserId: row.Salesforce_User__c,. Interpret it in the enclosing object, props or type definition.
103	`beatId: row.Beat__c,`	Sets/declares the named object property or style/type member: beatId: row.Beat__c,. Interpret it in the enclosing object, props or type definition.
104	`beatName: row.Beat__r?.Name,`	Sets/declares the named object property or style/type member: beatName: row.Beat__r?.Name,. Interpret it in the enclosing object, props or type definition.
105	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
106	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
107		Blank line separating logical sections; no executable operation.
108	`app.post("/api/auth/request-code", async (req, res) => {`	Registers an HTTP route or middleware: app.post("/api/auth/request-code", async (req, res) => {. Registration order controls which authentication/validation runs first.
109	`  const email = String(req.body.email || "")`	Declares/initializes local data used by the surrounding operation: const email = String(req.body.email || ""). Collection contents and assignments below determine its purpose.
110	`    .trim()`	Continues the surrounding declaration/expression or text: .trim(). Read it with the preceding opening statement (const email = String(req.body.email || "")); it is not a standalone business operation.
111	`    .toLowerCase();`	Continues the surrounding declaration/expression or text: .toLowerCase();. Read it with the preceding opening statement (.trim()); it is not a standalone business operation.
112	`  if (!/^\S+@\S+\.\S+$/.test(email))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!/^\S+@\S+\.\S+$/.test(email)).
113	`    return fail(res, 400, "Enter a valid email address", "VALIDATION_ERROR");`	Returns fail(res, 400, "Enter a valid email address", "VALIDATION_ERROR") to the caller (or begins returned UI markup) and ends this execution path.
114		Blank line separating logical sections; no executable operation.
115	`  const employee = await findEmployee(email);`	Waits for this asynchronous operation before continuing: const employee = await findEmployee(email);. The returned result/error must still be handled.
116	`  if (!employee)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!employee).
117	`    return fail(res, 403, "No active Employee login is linked to this email", "EMPLOYEE_NOT_FOUND");`	Returns fail(res, 403, "No active Employee login is linked to this email", "EMPLOYEE_NOT_FOUND") to the caller (or begins returned UI markup) and ends this execution path.
118		Blank line separating logical sections; no executable operation.
119	`  const code = createLoginCode(email);`	Declares/initializes local data used by the surrounding operation: const code = createLoginCode(email);. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
120	`  if (emailDeliveryIsConfigured()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (emailDeliveryIsConfigured()) {.
121	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
122	`      await sendEmployeeLoginCode(email, employee.employeeName, code);`	Waits for this asynchronous operation before continuing: await sendEmployeeLoginCode(email, employee.employeeName, code);. The returned result/error must still be handled.
123	`    } catch (error) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
124	`      console.error("Unable to deliver the Employee sign-in code", error);`	Calls the named method: console.error("Unable to deliver the Employee sign-in code", error);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
125	`      return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
126	`        res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
127	`        502,`	Continues the surrounding declaration/expression or text: 502,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
128	`        "The sign-in email could not be delivered. Please try again.",`	Continues the surrounding declaration/expression or text: "The sign-in email could not be delivered. Please try again.",. Read it with the preceding opening statement (502,); it is not a standalone business operation.
129	`        "EMAIL_DELIVERY_FAILED",`	Continues the surrounding declaration/expression or text: "EMAIL_DELIVERY_FAILED",. Read it with the preceding opening statement ("The sign-in email could not be delivered. Please try again.",); it is not a standalone business operation.
130	`      );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
131	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
132	`  } else if (!env.AUTH_ALLOW_TEST_CODE) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: } else if (!env.AUTH_ALLOW_TEST_CODE) {.
133	`    return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
134	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
135	`503,`	Continues the surrounding declaration/expression or text: 503,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
136	`"Email delivery is not configured. Ask the administrator to configure SMTP.",`	Continues the surrounding declaration/expression or text: "Email delivery is not configured. Ask the administrator to configure SMTP.",. Read it with the preceding opening statement (503,); it is not a standalone business operation.
137	`"EMAIL_NOT_CONFIGURED",`	Continues the surrounding declaration/expression or text: "EMAIL_NOT_CONFIGURED",. Read it with the preceding opening statement ("Email delivery is not configured. Ask the administrator to configure SMTP.",); it is not a standalone business operation.
138	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
139	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
140		Blank line separating logical sections; no executable operation.
141	`return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.
142	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
143	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (res,); it is not a standalone business operation.
144	`maskedEmail: email.replace(/^(.{2}).*(@.*)$/, "$1***$2"),`	Sets/declares the named object property or style/type member: maskedEmail: email.replace(/^(.{2}).*(@.*)$/, "$1***$2"),. Interpret it in the enclosing object, props or type definition.
145	`expiresInMinutes: env.AUTH_CODE_TTL_MINUTES,`	Sets/declares the named object property or style/type member: expiresInMinutes: env.AUTH_CODE_TTL_MINUTES,. Interpret it in the enclosing object, props or type definition.
146	`...(env.AUTH_ALLOW_TEST_CODE ? { testCode: code } : {}),`	Continues the surrounding declaration/expression or text: ...(env.AUTH_ALLOW_TEST_CODE ? { testCode: code } : {}),. Read it with the preceding opening statement (expiresInMinutes: env.AUTH_CODE_TTL_MINUTES,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
147	`    },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
148	`    "A sign-in code was sent to the Employee email",`	Continues the surrounding declaration/expression or text: "A sign-in code was sent to the Employee email",. Read it with the preceding opening statement (},); it is not a standalone business operation.
149	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
150	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
151		Blank line separating logical sections; no executable operation.
152	`app.post("/api/auth/verify-code", async (req, res) => {`	Registers an HTTP route or middleware: app.post("/api/auth/verify-code", async (req, res) => {. Registration order controls which authentication/validation runs first.
153	`  const email = String(req.body.email || "")`	Declares/initializes local data used by the surrounding operation: const email = String(req.body.email || ""). Collection contents and assignments below determine its purpose.
154	`    .trim()`	Continues the surrounding declaration/expression or text: .trim(). Read it with the preceding opening statement (const email = String(req.body.email || "")); it is not a standalone business operation.
155	`    .toLowerCase();`	Continues the surrounding declaration/expression or text: .toLowerCase();. Read it with the preceding opening statement (.trim()); it is not a standalone business operation.
156	`  const code = String(req.body.code || "").trim();`	Declares/initializes local data used by the surrounding operation: const code = String(req.body.code || "").trim();. Collection contents and assignments below determine its purpose.
157	`  if (!email || !/^\d{6}$/.test(code))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!email || !/^\d{6}$/.test(code)).
158	`    return fail(res, 400, "Email and a 6-digit code are required", "VALIDATION_ERROR");`	Returns fail(res, 400, "Email and a 6-digit code are required", "VALIDATION_ERROR") to the caller (or begins returned UI markup) and ends this execution path.
159	`  if (!verifyLoginCode(email, code))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!verifyLoginCode(email, code)).

Line	Source code	Explanation / reading note
160	`    return fail(res, 401, "The sign-in code is invalid or expired", "INVALID_CODE");`	Returns fail(res, 401, "The sign-in code is invalid or expired", "INVALID_CODE") to the caller (or begins returned UI markup) and ends this execution path.
161		Blank line separating logical sections; no executable operation.
162	`  const employee = await findEmployee(email);`	Waits for this asynchronous operation before continuing: const employee = await findEmployee(email);. The returned result/error must still be handled.
163	`  if (!employee)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!employee).
164	`    return fail(res, 403, "The Employee login is no longer active", "EMPLOYEE_NOT_FOUND");`	Returns fail(res, 403, "The Employee login is no longer active", "EMPLOYEE_NOT_FOUND") to the caller (or begins returned UI markup) and ends this execution path.
165	`  const claims: AuthClaims = {`	Declares/initializes local data used by the surrounding operation: const claims: AuthClaims = {. Collection contents and assignments below determine its purpose.
166	`    sub: employee.email,`	Sets/declares the named object property or style/type member: sub: employee.email,. Interpret it in the enclosing object, props or type definition.
167	`    displayName: employee.displayName,`	Sets/declares the named object property or style/type member: displayName: employee.displayName,. Interpret it in the enclosing object, props or type definition.
168	`    employeeId: employee.id,`	Sets/declares the named object property or style/type member: employeeId: employee.id,. Interpret it in the enclosing object, props or type definition.
169	`    employeeName: employee.employeeName,`	Sets/declares the named object property or style/type member: employeeName: employee.employeeName,. Interpret it in the enclosing object, props or type definition.
170	`    salesforceUserId: employee.salesforceUserId,`	Sets/declares the named object property or style/type member: salesforceUserId: employee.salesforceUserId,. Interpret it in the enclosing object, props or type definition.
171	`    beatId: employee.beatId,`	Sets/declares the named object property or style/type member: beatId: employee.beatId,. Interpret it in the enclosing object, props or type definition.
172	`    beatName: employee.beatName,`	Sets/declares the named object property or style/type member: beatName: employee.beatName,. Interpret it in the enclosing object, props or type definition.
173	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
174	`  return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
175	`    res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
176	`    {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (res,); it is not a standalone business operation.
177	`      token: jwt.sign(claims, env.JWT_SECRET, { expiresIn: "8h" }),`	Sets/declares the named object property or style/type member: token: jwt.sign(claims, env.JWT_SECRET, { expiresIn: "8h" }),. Interpret it in the enclosing object, props or type definition.
178	`      user: claims,`	Sets/declares the named object property or style/type member: user: claims,. Interpret it in the enclosing object, props or type definition.
179	`    },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
180	`    "Signed in successfully",`	Continues the surrounding declaration/expression or text: "Signed in successfully",. Read it with the preceding opening statement (},); it is not a standalone business operation.
181	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
182	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
183	`app.use("/api", protect);`	Registers an HTTP route or middleware: app.use("/api", protect);. Registration order controls which authentication/validation runs first.
184	`app.use("/api/primary", createEmployeeDmsRouter());`	Registers an HTTP route or middleware: app.use("/api/primary", createEmployeeDmsRouter());. Registration order controls which authentication/validation runs first.
185	`app.post("/api/auth/logout", (_req, res) => ok(res, {}, "Signed out successfully"));`	Registers an HTTP route or middleware: app.post("/api/auth/logout", (_req, res) => ok(res, {}, "Signed out successfully"));. Registration order controls which authentication/validation runs first.
186	`app.get("/api/auth/session", (request, res) => {`	Registers an HTTP route or middleware: app.get("/api/auth/session", (request, res) => {. Registration order controls which authentication/validation runs first.
187	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
188	`  return ok(res, { user: req.auth });`	Returns ok(res, { user: req.auth }) to the caller (or begins returned UI markup) and ends this execution path.
189	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
190	`app.get("/api/dashboard", async (request, res) => {`	Registers an HTTP route or middleware: app.get("/api/dashboard", async (request, res) => {. Registration order controls which authentication/validation runs first.
191	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
192	`  if (env.USE_MOCK_DATA)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA).
193	`    return ok(res, {`	Returns ok(res, { to the caller (or begins returned UI markup) and ends this execution path.
194	`      ...rep,`	Continues the surrounding declaration/expression or text: ...rep,. Read it with the preceding opening statement (return ok(res, {); it is not a standalone business operation.
195	`      userName: req.auth?.displayName,`	Sets/declares the named object property or style/type member: userName: req.auth?.displayName,. Interpret it in the enclosing object, props or type definition.
196	`      employeeName: req.auth?.employeeName,`	Sets/declares the named object property or style/type member: employeeName: req.auth?.employeeName,. Interpret it in the enclosing object, props or type definition.
197	`      schemes,`	Continues the surrounding declaration/expression or text: schemes,. Read it with the preceding opening statement (employeeName: req.auth?.employeeName,); it is not a standalone business operation.
198	`      dataState: "LIVE",`	Sets/declares the named object property or style/type member: dataState: "LIVE",. Interpret it in the enclosing object, props or type definition.
199	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
200	`  const employeeId = escapeSoqlLiteral(req.auth!.employeeId);`	Declares/initializes local data used by the surrounding operation: const employeeId = escapeSoqlLiteral(req.auth!.employeeId);. Collection contents and assignments below determine its purpose.
201	`  const [`	Declares/initializes local data used by the surrounding operation: const [. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
202	`    users,`	Continues the surrounding declaration/expression or text: users,. Read it with the preceding opening statement (const []); it is not a standalone business operation.
203	`    schemeRows,`	Continues the surrounding declaration/expression or text: schemeRows,. Read it with the preceding opening statement (users,); it is not a standalone business operation.
204	`    schemeProductRows,`	Continues the surrounding declaration/expression or text: schemeProductRows,. Read it with the preceding opening statement (schemeRows,); it is not a standalone business operation.
205	`    totalOrders,`	Continues the surrounding declaration/expression or text: totalOrders,. Read it with the preceding opening statement (schemeProductRows,); it is not a standalone business operation.
206	`    pendingOrders,`	Continues the surrounding declaration/expression or text: pendingOrders,. Read it with the preceding opening statement (totalOrders,); it is not a standalone business operation.
207	`    todayVisits,`	Continues the surrounding declaration/expression or text: todayVisits,. Read it with the preceding opening statement (pendingOrders,); it is not a standalone business operation.
208	`    completedVisits,`	Continues the surrounding declaration/expression or text: completedVisits,. Read it with the preceding opening statement (todayVisits,); it is not a standalone business operation.
209	`    pendingDeliveries,`	Continues the surrounding declaration/expression or text: pendingDeliveries,. Read it with the preceding opening statement (completedVisits,); it is not a standalone business operation.
210	`    outstanding,`	Continues the surrounding declaration/expression or text: outstanding,. Read it with the preceding opening statement (pendingDeliveries,); it is not a standalone business operation.
211	`  ] = await Promise.all([`	Starts independent asynchronous operations together and waits for all; rejection propagates to the surrounding error handler.
212	`    sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement ( ] = await Promise.all([); it is not a standalone business operation.
213	`      "SELECT Name FROM User WHERE IsActive = true ORDER BY LastLoginDate DESC NULLS LAST LIMIT 1",`	Assigns the right-hand expression to the named variable/property: "SELECT Name FROM User WHERE IsActive = true ORDER BY LastLoginDate DESC NULLS LAST LIMIT 1",. This is in-memory unless it is later persisted by an explicit call.
214	`    ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
215	`sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
216	`` `SELECT Id, Name, Scheme_Code__c, Scheme_Type__c, Description__c, Discount_Percent__c, Minimum_Quantity__c, Free_Quantity__c, Product__r.Name, Free_Product__r.Name, End_Date__c FROM ${objectMap.scheme} WHERE (Sales_Channel__c = null OR Sales_Channel__c = 'Secondary') AND Active__c = true ORDER BY End_Date__c DESC NULLS LAST`, ``	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Scheme_Code__c, Scheme_Type__c, Description__c, Discount_Percent__c, Minimum_Quantity__c, Free_Quantity__c, Product__r.Name, Free_Product__r.Name, End_Date__c FROM ${objectMap.scheme. This is in-memory unless it is later persisted by an explicit call.
217	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
218	`sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
219	`"SELECT Scheme__c, Product__c, Product__r.Name FROM Scheme_Product__c WHERE Active__c = true",`	Assigns the right-hand expression to the named variable/property: "SELECT Scheme__c, Product__c, Product__r.Name FROM Scheme_Product__c WHERE Active__c = true",. This is in-memory unless it is later persisted by an explicit call.
220	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
221	`sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
222	`` `SELECT COUNT(Id) total FROM ${objectMap.order} WHERE Retailer__c IN (${allocatedOutletIds(employeeId)})`, ``	Continues the surrounding declaration/expression or text: `SELECT COUNT(Id) total FROM ${objectMap.order} WHERE Retailer__c IN (${allocatedOutletIds(employeeId)})`,. Read it with the preceding opening statement (sfRecords(); it is not a standalone business operation.
223	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
224	`sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
225	`` `SELECT COUNT(Id) total FROM ${objectMap.order} WHERE Status__c != 'Completed' AND Retailer__c IN (${allocatedOutletIds(employeeId)})`, ``	Continues the surrounding declaration/expression or text: `SELECT COUNT(Id) total FROM ${objectMap.order} WHERE Status__c != 'Completed' AND Retailer__c IN (${allocatedOutletIds(employeeId)})`,. Read it with the preceding opening statement (sfRecords(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
226	`    ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
227	`    sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
228	`      `SELECT COUNT(Id) total FROM ${objectMap.visit} WHERE Visit_Date__c = TODAY AND Retailer__c IN (${allocatedOutletIds(employeeId)})`,`	Assigns the right-hand expression to the named variable/property: `SELECT COUNT(Id) total FROM ${objectMap.visit} WHERE Visit_Date__c = TODAY AND Retailer__c IN (${allocatedOutletIds(employeeId)})`,. This is in-memory unless it is later persisted by an explicit call.
229	`    ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
230	`    sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
231	`      `SELECT COUNT(Id) total FROM ${objectMap.visit} WHERE Visit_Date__c = TODAY AND Status__c = 'Completed' AND Retailer__c IN (${allocatedOutletIds(employeeId)})`,`	Assigns the right-hand expression to the named variable/property: `SELECT COUNT(Id) total FROM ${objectMap.visit} WHERE Visit_Date__c = TODAY AND Status__c = 'Completed' AND Retailer__c IN (${allocatedOutletIds(employeeId)})`,. This is in-memory unless it is later persisted by an explicit call.
232	`    ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
233	`    sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
234	`      `SELECT COUNT(Id) total FROM ${objectMap.order} WHERE Status__c IN ('Submitted','Confirmed') AND Retailer__c IN (${allocatedOutletIds(employeeId)})`,`	Continues the surrounding declaration/expression or text: `SELECT COUNT(Id) total FROM ${objectMap.order} WHERE Status__c IN ('Submitted','Confirmed') AND Retailer__c IN (${allocatedOutletIds(employeeId)})`,. Read it with the preceding opening statement (sfRecords(); it is not a standalone business operation.
235	`    ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
236	`    sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
Line	**Source code**	**Explanation / reading note**
237	`      `SELECT SUM(Outstanding_Amount__c) total FROM ${objectMap.store} WHERE Id IN (${allocatedOutletIds(employeeId)})`,`	Continues the surrounding declaration/expression or text: `SELECT SUM(Outstanding_Amount__c) total FROM ${objectMap.store} WHERE Id IN

Line	Source code	Explanation / reading note
		(${allocatedOutletIds(employeeId)})`,. Read it with the preceding opening statement (sfRecords(); it is not a standalone business operation.
238	`    ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
239	`  ]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
240	`  const mappedSchemes = schemeRows.map((row) => {`	Declares/initializes local data used by the surrounding operation: const mappedSchemes = schemeRows.map((row) => {. Collection contents and assignments below determine its purpose.
241	`    const linkedProducts = schemeProductRows.filter((link) => link.Scheme__c === row.Id);`	Declares/initializes local data used by the surrounding operation: const linkedProducts = schemeProductRows.filter((link) => link.Scheme__c === row.Id);. Collection contents and assignments below determine its purpose.
242	`    return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
243	`      id: row.Id,`	Sets/declares the named object property or style/type member: id: row.Id,. Interpret it in the enclosing object, props or type definition.
244	`      name: row.Name,`	Sets/declares the named object property or style/type member: name: row.Name,. Interpret it in the enclosing object, props or type definition.
245	`      code: row.Scheme_Code__c,`	Sets/declares the named object property or style/type member: code: row.Scheme_Code__c,. Interpret it in the enclosing object, props or type definition.
246	`      type: row.Scheme_Type__c,`	Sets/declares the named object property or style/type member: type: row.Scheme_Type__c,. Interpret it in the enclosing object, props or type definition.
247	`      product: row.Product__r?.Name,`	Sets/declares the named object property or style/type member: product: row.Product__r?.Name,. Interpret it in the enclosing object, props or type definition.
248	`      freeProduct: row.Free_Product__r?.Name,`	Sets/declares the named object property or style/type member: freeProduct: row.Free_Product__r?.Name,. Interpret it in the enclosing object, props or type definition.
249	`      products: linkedProducts.length`	Sets/declares the named object property or style/type member: products: linkedProducts.length. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
250	`? linkedProducts.map((link) => link.Product__r?.Name).filter(Boolean)`	Transforms/selects/aggregates collection values with the callback shown here: ? linkedProducts.map((link) => link.Product__r?.Name).filter(Boolean). Read the callback body and result assignment together.
251	`: row.Product__r?.Name`	Continues the surrounding declaration/expression or text: : row.Product__r?.Name. Read it with the preceding opening statement (? linkedProducts.map((link) => link.Product__r?.Name).filter(Boolean)); it is not a standalone business operation.
252	`? [row.Product__r.Name]`	Continues the surrounding declaration/expression or text: ? [row.Product__r.Name]. Read it with the preceding opening statement (: row.Product__r?.Name); it is not a standalone business operation.
253	`: ["All active products"],`	Continues the surrounding declaration/expression or text: : ["All active products"],. Read it with the preceding opening statement (? [row.Product__r.Name]); it is not a standalone business operation.
254	`description: row.Description__c,`	Sets/declares the named object property or style/type member: description: row.Description__c,. Interpret it in the enclosing object, props or type definition.
255	`benefit: row.Free_Quantity__c`	Sets/declares the named object property or style/type member: benefit: row.Free_Quantity__c. Interpret it in the enclosing object, props or type definition.
256	`? `Minimum ${row.Minimum_Quantity__c || 0} • Get ${row.Free_Quantity__c} free``	Continues the surrounding declaration/expression or text: ? `Minimum ${row.Minimum_Quantity__c || 0} • Get ${row.Free_Quantity__c} free`. Read it with the preceding opening statement (benefit: row.Free_Quantity__c); it is not a standalone business operation.
257	`: `${row.Discount_Percent__c || 0}% discount`,`	Continues the surrounding declaration/expression or text: : `${row.Discount_Percent__c || 0}% discount`,. Read it with the preceding opening statement (? `Minimum ${row.Minimum_Quantity__c || 0} • Get ${row.Free_Quantity__c} free`); it is not a standalone business operation.
258	`endDate: row.End_Date__c,`	Sets/declares the named object property or style/type member: endDate: row.End_Date__c,. Interpret it in the enclosing object, props or type definition.
259	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
260	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
261	`  ok(res, {`	Continues the surrounding declaration/expression or text: ok(res, {. Read it with the preceding opening statement (});); it is not a standalone business operation.
262	`    employeeName: req.auth?.employeeName,`	Sets/declares the named object property or style/type member: employeeName: req.auth?.employeeName,. Interpret it in the enclosing object, props or type definition.
263	`    userName: req.auth?.displayName || users[0]?.Name,`	Sets/declares the named object property or style/type member: userName: req.auth?.displayName || users[0]?.Name,. Interpret it in the enclosing object, props or type definition.
264	`    loginEmail: req.auth?.sub,`	Sets/declares the named object property or style/type member: loginEmail: req.auth?.sub,. Interpret it in the enclosing object, props or type definition.
265	`    beatName: req.auth?.beatName,`	Sets/declares the named object property or style/type member: beatName: req.auth?.beatName,. Interpret it in the enclosing object, props or type definition.
266	`    totalOrders: Number(totalOrders[0]?.total || 0),`	Sets/declares the named object property or style/type member: totalOrders: Number(totalOrders[0]?.total || 0),. Interpret it in the enclosing object, props or type definition.
267	`    pendingOrders: Number(pendingOrders[0]?.total || 0),`	Sets/declares the named object property or style/type member: pendingOrders: Number(pendingOrders[0]?.total || 0),. Interpret it in the enclosing object, props or type definition.
268	`    todayVisits: Number(todayVisits[0]?.total || 0),`	Sets/declares the named object property or style/type member: todayVisits: Number(todayVisits[0]?.total || 0),. Interpret it in the enclosing object, props or type definition.
269	`    completedVisits: Number(completedVisits[0]?.total || 0),`	Sets/declares the named object property or style/type member: completedVisits: Number(completedVisits[0]?.total || 0),. Interpret it in the enclosing object, props or type definition.
270	`    pendingDeliveries: Number(pendingDeliveries[0]?.total || 0),`	Sets/declares the named object property or style/type member: pendingDeliveries: Number(pendingDeliveries[0]?.total || 0),. Interpret it in the enclosing object, props or type definition.
271	`    outstandingAmount: Number(outstanding[0]?.total || 0),`	Sets/declares the named object property or style/type member: outstandingAmount: Number(outstanding[0]?.total || 0),. Interpret it in the enclosing object, props or type definition.
272	`    schemes: mappedSchemes,`	Sets/declares the named object property or style/type member: schemes: mappedSchemes,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
273	`    dataState: "LIVE",`	Sets/declares the named object property or style/type member: dataState: "LIVE",. Interpret it in the enclosing object, props or type definition.
274	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
275	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
276		Blank line separating logical sections; no executable operation.
277	`app.get("/api/visits", async (request, res) => {`	Registers an HTTP route or middleware: app.get("/api/visits", async (request, res) => {. Registration order controls which authentication/validation runs first.
278	`  if (env.USE_MOCK_DATA) return ok(res, []);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA) return ok(res, []);.
279	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
280	`  const employeeId = escapeSoqlLiteral(req.auth!.employeeId);`	Declares/initializes local data used by the surrounding operation: const employeeId = escapeSoqlLiteral(req.auth!.employeeId);. Collection contents and assignments below determine its purpose.
281	`  const rows = await sfRecords(`	Waits for this asynchronous operation before continuing: const rows = await sfRecords(. The returned result/error must still be handled.
282	`    \`SELECT Id, Name, Visit_Number__c, Visit_Date__c, Status__c, Check_In_Time__c, Check_Out_Time__c, Check_In_Latitude__c, Check_In_Longitude__c, Check_Out_Latitude__c, Check_Out_Longitude__c, Duration_Minutes__c, Employee__r.Name, Sales_Representative__r.Name, Retailer__c, Retailer__r.Name, Outlet_Name__c, Outlet_Geo_Location__Latitude__s, Outlet_Geo_Location__Longitude__s, Previous_Order_Date__c, Previous_Order_Value__c, Order_Gross_Amount__c, Order_Tax__c, Order_Total__c, Order_Total_Quantity__c FROM ${objectMap.visit} WHERE Retailer__c IN (${allocatedOutletIds(employeeId)}) ORDER BY Check_In_Time__c DESC NULLS LAST, Visit_Date__c DESC, CreatedDate DESC LIMIT 500\`,`	Continues the surrounding declaration/expression or text: `SELECT Id, Name, Visit_Number__c, Visit_Date__c, Status__c, Check_In_Time__c, Check_Out_Time__c, Check_In_Latitude__c, Check_In_Longitude__c, Check_Out_Latitude__c, Check_Out_Longitude__c, Duration_M. Read it with the preceding opening statement (const rows = await sfRecords(); it is not a standalone business operation.
283	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
284	`  ok(`	Continues the surrounding declaration/expression or text: ok(. Read it with the preceding opening statement ( );); it is not a standalone business operation.

Line	Source code	Explanation / reading note
285	`    res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (ok(); it is not a standalone business operation.
286	`    rows.map((row) => ({`	Transforms/selects/aggregates collection values with the callback shown here: rows.map((row) => ({. Read the callback body and result assignment together.
287	`      id: row.Id,`	Sets/declares the named object property or style/type member: id: row.Id,. Interpret it in the enclosing object, props or type definition.
288	`      visitNumber: row.Visit_Number__c,`	Sets/declares the named object property or style/type member: visitNumber: row.Visit_Number__c,. Interpret it in the enclosing object, props or type definition.
289	`      name: row.Name,`	Sets/declares the named object property or style/type member: name: row.Name,. Interpret it in the enclosing object, props or type definition.
290	`      date: row.Visit_Date__c,`	Sets/declares the named object property or style/type member: date: row.Visit_Date__c,. Interpret it in the enclosing object, props or type definition.
291	`      status: row.Status__c,`	Sets/declares the named object property or style/type member: status: row.Status__c,. Interpret it in the enclosing object, props or type definition.
292	`      checkInTime: row.Check_In_Time__c,`	Sets/declares the named object property or style/type member: checkInTime: row.Check_In_Time__c,. Interpret it in the enclosing object, props or type definition.
293	`      checkOutTime: row.Check_Out_Time__c,`	Sets/declares the named object property or style/type member: checkOutTime: row.Check_Out_Time__c,. Interpret it in the enclosing object, props or type definition.
294	`      durationMinutes: row.Duration_Minutes__c,`	Sets/declares the named object property or style/type member: durationMinutes: row.Duration_Minutes__c,. Interpret it in the enclosing object, props or type definition.
295	`      checkInLocation:`	Sets/declares the named object property or style/type member: checkInLocation:. Interpret it in the enclosing object, props or type definition.
296	`        row.Check_In_Latitude__c == null`	Continues the surrounding declaration/expression or text: row.Check_In_Latitude__c == null. Read it with the preceding opening statement (checkInLocation:); it is not a standalone business operation.
297	`          ? null`	Continues the surrounding declaration/expression or text: ? null. Read it with the preceding opening statement (row.Check_In_Latitude__c == null); it is not a standalone business operation.

Line	Source code	Explanation / reading note
298	`: {`	Continues the surrounding declaration/expression or text: : {. Read it with the preceding opening statement (? null); it is not a standalone business operation.
299	`latitude: row.Check_In_Latitude__c,`	Sets/declares the named object property or style/type member: latitude: row.Check_In_Latitude__c,. Interpret it in the enclosing object, props or type definition.
300	`longitude: row.Check_In_Longitude__c,`	Sets/declares the named object property or style/type member: longitude: row.Check_In_Longitude__c,. Interpret it in the enclosing object, props or type definition.
301	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
302	`checkOutLocation:`	Sets/declares the named object property or style/type member: checkOutLocation:. Interpret it in the enclosing object, props or type definition.
303	`row.Check_Out_Latitude__c == null`	Continues the surrounding declaration/expression or text: row.Check_Out_Latitude__c == null. Read it with the preceding opening statement (checkOutLocation:); it is not a standalone business operation.
304	`? null`	Continues the surrounding declaration/expression or text: ? null. Read it with the preceding opening statement (row.Check_Out_Latitude__c == null); it is not a standalone business operation.
305	`: {`	Continues the surrounding declaration/expression or text: : {. Read it with the preceding opening statement (? null); it is not a standalone business operation.
306	`latitude: row.Check_Out_Latitude__c,`	Sets/declares the named object property or style/type member: latitude: row.Check_Out_Latitude__c,. Interpret it in the enclosing object, props or type definition.
307	`longitude: row.Check_Out_Longitude__c,`	Sets/declares the named object property or style/type member: longitude: row.Check_Out_Longitude__c,. Interpret it in the enclosing object, props or type definition.
308	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
309	`employeeName: row.Employee__r?.Name || row.Sales_Representative__r?.Name,`	Sets/declares the named object property or style/type member: employeeName: row.Employee__r?.Name || row.Sales_Representative__r?.Name,. Interpret it in the enclosing object, props or type definition.
310	`outletId: row.Retailer__c,`	Sets/declares the named object property or style/type member: outletId: row.Retailer__c,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
311	`outletName: row.Outlet_Name__c || row.Retailer__r?.Name,`	Sets/declares the named object property or style/type member: outletName: row.Outlet_Name__c || row.Retailer__r?.Name,. Interpret it in the enclosing object, props or type definition.
312	`outletLocation:`	Sets/declares the named object property or style/type member: outletLocation:. Interpret it in the enclosing object, props or type definition.
313	`row.Outlet_Geo_Location__Latitude__s == null`	Continues the surrounding declaration/expression or text: row.Outlet_Geo_Location__Latitude__s == null. Read it with the preceding opening statement (outletLocation:); it is not a standalone business operation.
314	`? null`	Continues the surrounding declaration/expression or text: ? null. Read it with the preceding opening statement (row.Outlet_Geo_Location__Latitude__s == null); it is not a standalone business operation.
315	`: {`	Continues the surrounding declaration/expression or text: : {. Read it with the preceding opening statement (? null); it is not a standalone business operation.
316	`latitude: row.Outlet_Geo_Location__Latitude__s,`	Sets/declares the named object property or style/type member: latitude: row.Outlet_Geo_Location__Latitude__s,. Interpret it in the enclosing object, props or type definition.
317	`longitude: row.Outlet_Geo_Location__Longitude__s,`	Sets/declares the named object property or style/type member: longitude: row.Outlet_Geo_Location__Longitude__s,. Interpret it in the enclosing object, props or type definition.
318	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
319	`previousOrderDate: row.Previous_Order_Date__c,`	Sets/declares the named object property or style/type member: previousOrderDate: row.Previous_Order_Date__c,. Interpret it in the enclosing object, props or type definition.
320	`previousOrderValue: row.Previous_Order_Value__c,`	Sets/declares the named object property or style/type member: previousOrderValue: row.Previous_Order_Value__c,. Interpret it in the enclosing object, props or type definition.
321	`order: {`	Sets/declares the named object property or style/type member: order: {. Interpret it in the enclosing object, props or type definition.
322	`grossAmount: row.Order_Gross_Amount__c,`	Sets/declares the named object property or style/type member: grossAmount: row.Order_Gross_Amount__c,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
323	`tax: row.Order_Tax__c,`	Sets/declares the named object property or style/type member: tax: row.Order_Tax__c,. Interpret it in the enclosing object, props or type definition.
324	`total: row.Order_Total__c,`	Sets/declares the named object property or style/type member: total: row.Order_Total__c,. Interpret it in the enclosing object, props or type definition.
325	`totalQuantity: row.Order_Total_Quantity__c,`	Sets/declares the named object property or style/type member: totalQuantity: row.Order_Total_Quantity__c,. Interpret it in the enclosing object, props or type definition.
326	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
327	`})),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
328	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
329	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
330		Blank line separating logical sections; no executable operation.
331	`app.post("/api/visits", async (request, res) => {`	Registers an HTTP route or middleware: app.post("/api/visits", async (request, res) => {. Registration order controls which authentication/validation runs first.
332	`const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
333	`if (env.USE_MOCK_DATA)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA).
334	`return ok(res, { id: \`visit-${Date.now()}\`, ...req.body }, "Visit created");`	Returns ok(res, { id: `visit-${Date.now()}`, ...req.body }, "Visit created") to the caller (or begins returned UI markup) and ends this execution path.
335	`if (!req.body.outletId) return fail(res, 400, "Outlet is required", "OUTLET_REQUIRED");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!req.body.outletId) return fail(res, 400, "Outlet is required", "OUTLET_REQUIRED");.
336	`const employeeId = escapeSoqlLiteral(req.auth!.employeeId);`	Declares/initializes local data used by the surrounding operation: const employeeId = escapeSoqlLiteral(req.auth!.employeeId);. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
337	`  const outletId = escapeSoqlLiteral(String(req.body.outletId));`	Declares/initializes local data used by the surrounding operation: const outletId = escapeSoqlLiteral(String(req.body.outletId));. Collection contents and assignments below determine its purpose.
338	`  const outlets = await sfRecords(`	Waits for this asynchronous operation before continuing: const outlets = await sfRecords(. The returned result/error must still be handled.
339	`    \`SELECT Id, Beat__c FROM ${objectMap.store} WHERE Id = '${outletId}' AND Id IN (${allocatedOutletIds(employeeId)}) LIMIT 1\`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Beat__c FROM ${objectMap.store} WHERE Id = '${outletId}' AND Id IN (${allocatedOutletIds(employeeId)}) LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
340	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
341	`  if (!outlets.length) return fail(res, 404, "Outlet not found", "OUTLET_NOT_FOUND");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!outlets.length) return fail(res, 404, "Outlet not found", "OUTLET_NOT_FOUND");.
342	`  const plans = await sfRecords(`	Waits for this asynchronous operation before continuing: const plans = await sfRecords(. The returned result/error must still be handled.
343	`    \`SELECT Id FROM ${objectMap.journeyPlan} WHERE Beat__c = '${outlets[0].Beat__c}' AND Status__c = 'Approved' ORDER BY Planned_Date__c DESC LIMIT 1\`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id FROM ${objectMap.journeyPlan} WHERE Beat__c = '${outlets[0].Beat__c}' AND Status__c = 'Approved' ORDER BY Planned_Date__c DESC LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
344	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
345	`  if (!plans.length)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!plans.length).
346	`    return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
347	`      res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
348	`      422,`	Continues the surrounding declaration/expression or text: 422,. Read it with the preceding opening statement (res,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
349	`"No approved journey plan exists for this outlet.",`	Continues the surrounding declaration/expression or text: "No approved journey plan exists for this outlet.",. Read it with the preceding opening statement (422,); it is not a standalone business operation.
350	`"APPROVED_PJP_REQUIRED",`	Continues the surrounding declaration/expression or text: "APPROVED_PJP_REQUIRED",. Read it with the preceding opening statement ("No approved journey plan exists for this outlet.",); it is not a standalone business operation.
351	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
352	`const created: any = await salesforce.create(objectMap.visit, {`	Invokes the external-data boundary: const created: any = await salesforce.create(objectMap.visit, {. Await/result checks determine whether the operation is confirmed.
353	`Name: req.body.name || `Mobile Visit ${new Date().toLocaleDateString("en-IN")}`,`	Sets/declares the named object property or style/type member: Name: req.body.name || `Mobile Visit ${new Date().toLocaleDateString("en-IN")}`,. Interpret it in the enclosing object, props or type definition.
354	`Retailer__c: req.body.outletId,`	Sets/declares the named object property or style/type member: Retailer__c: req.body.outletId,. Interpret it in the enclosing object, props or type definition.
355	`Permanent_Journey_Plan__c: plans[0].Id,`	Sets/declares the named object property or style/type member: Permanent_Journey_Plan__c: plans[0].Id,. Interpret it in the enclosing object, props or type definition.
356	`Employee__c: req.auth!.employeeId,`	Sets/declares the named object property or style/type member: Employee__c: req.auth!.employeeId,. Interpret it in the enclosing object, props or type definition.
357	`Sales_Representative__c: req.auth?.salesforceUserId || null,`	Sets/declares the named object property or style/type member: Sales_Representative__c: req.auth?.salesforceUserId || null,. Interpret it in the enclosing object, props or type definition.
358	`Visit_Date__c: req.body.visitDate || new Date().toISOString().slice(0, 10),`	Sets/declares the named object property or style/type member: Visit_Date__c: req.body.visitDate || new Date().toISOString().slice(0, 10),. Interpret it in the enclosing object, props or type definition.
359	`Status__c: req.body.status || "Planned",`	Sets/declares the named object property or style/type member: Status__c: req.body.status || "Planned",. Interpret it in the enclosing object, props or type definition.
360	`Outlet_Geo_Location__Latitude__s: req.body.location?.latitude,`	Sets/declares the named object property or style/type member: Outlet_Geo_Location__Latitude__s: req.body.location?.latitude,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
361	`    Outlet_Geo_Location__Longitude__s: req.body.location?.longitude,`	Sets/declares the named object property or style/type member: Outlet_Geo_Location__Longitude__s: req.body.location?.longitude,. Interpret it in the enclosing object, props or type definition.
362	`    Previous_Order_Date__c: req.body.previousOrderDate || null,`	Sets/declares the named object property or style/type member: Previous_Order_Date__c: req.body.previousOrderDate || null,. Interpret it in the enclosing object, props or type definition.
363	`    Previous_Order_Value__c: Number(req.body.previousOrderValue || 0),`	Sets/declares the named object property or style/type member: Previous_Order_Value__c: Number(req.body.previousOrderValue || 0),. Interpret it in the enclosing object, props or type definition.
364	`    Order_Gross_Amount__c: Number(req.body.order?.grossAmount || 0),`	Sets/declares the named object property or style/type member: Order_Gross_Amount__c: Number(req.body.order?.grossAmount || 0),. Interpret it in the enclosing object, props or type definition.
365	`    Order_Tax__c: Number(req.body.order?.tax || 0),`	Sets/declares the named object property or style/type member: Order_Tax__c: Number(req.body.order?.tax || 0),. Interpret it in the enclosing object, props or type definition.
366	`    Order_Total__c: Number(req.body.order?.total || 0),`	Sets/declares the named object property or style/type member: Order_Total__c: Number(req.body.order?.total || 0),. Interpret it in the enclosing object, props or type definition.
367	`    Order_Total_Quantity__c: Number(req.body.order?.totalQuantity || 0),`	Sets/declares the named object property or style/type member: Order_Total_Quantity__c: Number(req.body.order?.totalQuantity || 0),. Interpret it in the enclosing object, props or type definition.
368	`    Notes__c: req.body.notes || null,`	Sets/declares the named object property or style/type member: Notes__c: req.body.notes || null,. Interpret it in the enclosing object, props or type definition.
369	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
370	`  ok(res, { id: created.id }, "Visit created in Salesforce");`	Continues the surrounding declaration/expression or text: ok(res, { id: created.id }, "Visit created in Salesforce");. Read it with the preceding opening statement (});); it is not a standalone business operation.
371	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
372	`app.get("/api/schemes", async (_, res) => {`	Registers an HTTP route or middleware: app.get("/api/schemes", async (_, res) => {. Registration order controls which authentication/validation runs first.

Line	Source code	Explanation / reading note
373	`  if (env.USE_MOCK_DATA) return ok(res, schemes);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA) return ok(res, schemes);.
374	`  const [rows, schemeProductRows] = await Promise.all([`	Starts independent asynchronous operations together and waits for all; rejection propagates to the surrounding error handler.
375	`    sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement (const [rows, schemeProductRows] = await Promise.all([); it is not a standalone business operation.
376	`      `SELECT Id, Name, Scheme_Code__c, Scheme_Type__c, Description__c, Discount_Percent__c, Minimum_Quantity__c, Free_Quantity__c, Product__c, Product__r.Name, Free_Product__c, Free_Product__r.Name, Start_Date__c, End_Date__c FROM ${objectMap.scheme} WHERE (Sales_Channel__c = null OR Sales_Channel__c = 'Secondary') AND Active__c = true AND (End_Date__c = NULL OR End_Date__c >= TODAY) ORDER BY End_Date__c`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Scheme_Code__c, Scheme_Type__c, Description__c, Discount_Percent__c, Minimum_Quantity__c, Free_Quantity__c, Product__c, Product__r.Name, Free_Product__c, Free_Product__r.Name, Start_. This is in-memory unless it is later persisted by an explicit call.
377	`    ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
378	`    sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
379	`      "SELECT Scheme__c, Product__c, Product__r.Name FROM Scheme_Product__c WHERE Active__c = true",`	Assigns the right-hand expression to the named variable/property: "SELECT Scheme__c, Product__c, Product__r.Name FROM Scheme_Product__c WHERE Active__c = true",. This is in-memory unless it is later persisted by an explicit call.
380	`    ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
381	`  ]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
382	`  ok(`	Continues the surrounding declaration/expression or text: ok(. Read it with the preceding opening statement ( ]);); it is not a standalone business operation.
383	`    res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (ok(); it is not a standalone business operation.
384	`    rows.map((row) => {`	Transforms/selects/aggregates collection values with the callback shown here: rows.map((row) => {. Read the callback body and result assignment together.

Line	Source code	Explanation / reading note
385	`const linkedProducts = schemeProductRows.filter((link) => link.Scheme__c === row.Id);`	Declares/initializes local data used by the surrounding operation: const linkedProducts = schemeProductRows.filter((link) => link.Scheme__c === row.Id);. Collection contents and assignments below determine its purpose.
386	`return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
387	`id: row.Id,`	Sets/declares the named object property or style/type member: id: row.Id,. Interpret it in the enclosing object, props or type definition.
388	`name: row.Name,`	Sets/declares the named object property or style/type member: name: row.Name,. Interpret it in the enclosing object, props or type definition.
389	`code: row.Scheme_Code__c,`	Sets/declares the named object property or style/type member: code: row.Scheme_Code__c,. Interpret it in the enclosing object, props or type definition.
390	`type: row.Scheme_Type__c,`	Sets/declares the named object property or style/type member: type: row.Scheme_Type__c,. Interpret it in the enclosing object, props or type definition.
391	`description: row.Description__c,`	Sets/declares the named object property or style/type member: description: row.Description__c,. Interpret it in the enclosing object, props or type definition.
392	`discountPercent: row.Discount_Percent__c,`	Sets/declares the named object property or style/type member: discountPercent: row.Discount_Percent__c,. Interpret it in the enclosing object, props or type definition.
393	`minimumQuantity: Number(row.Minimum_Quantity__c || 1),`	Sets/declares the named object property or style/type member: minimumQuantity: Number(row.Minimum_Quantity__c || 1),. Interpret it in the enclosing object, props or type definition.
394	`freeQuantity: Number(row.Free_Quantity__c || 0),`	Sets/declares the named object property or style/type member: freeQuantity: Number(row.Free_Quantity__c || 0),. Interpret it in the enclosing object, props or type definition.
395	`productId: linkedProducts[0]?.Product__c || row.Product__c,`	Sets/declares the named object property or style/type member: productId: linkedProducts[0]?.Product__c || row.Product__c,. Interpret it in the enclosing object, props or type definition.
396	`product: linkedProducts[0]?.Product__r?.Name || row.Product__r?.Name,`	Sets/declares the named object property or style/type member: product: linkedProducts[0]?.Product__r?.Name || row.Product__r?.Name,. Interpret it in the enclosing object, props or type definition.
397	`freeProductId: row.Free_Product__c,`	Sets/declares the named object property or style/type member: freeProductId: row.Free_Product__c,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
398	`freeProduct: row.Free_Product__r?.Name,`	Sets/declares the named object property or style/type member: freeProduct: row.Free_Product__r?.Name,. Interpret it in the enclosing object, props or type definition.
399	`productIds: linkedProducts.map((link) => link.Product__c),`	Sets/declares the named object property or style/type member: productIds: linkedProducts.map((link) => link.Product__c),. Interpret it in the enclosing object, props or type definition.
400	`products: linkedProducts.length`	Sets/declares the named object property or style/type member: products: linkedProducts.length. Interpret it in the enclosing object, props or type definition.
401	`? linkedProducts.map((link) => link.Product__r?.Name).filter(Boolean)`	Transforms/selects/aggregates collection values with the callback shown here: ? linkedProducts.map((link) => link.Product__r?.Name).filter(Boolean). Read the callback body and result assignment together.
402	`: row.Product__r?.Name`	Continues the surrounding declaration/expression or text: : row.Product__r?.Name. Read it with the preceding opening statement (? linkedProducts.map((link) => link.Product__r?.Name).filter(Boolean)); it is not a standalone business operation.
403	`? [row.Product__r.Name]`	Continues the surrounding declaration/expression or text: ? [row.Product__r.Name]. Read it with the preceding opening statement (: row.Product__r?.Name); it is not a standalone business operation.
404	`: ["All active products"],`	Continues the surrounding declaration/expression or text: : ["All active products"],. Read it with the preceding opening statement (? [row.Product__r.Name]); it is not a standalone business operation.
405	`startDate: row.Start_Date__c,`	Sets/declares the named object property or style/type member: startDate: row.Start_Date__c,. Interpret it in the enclosing object, props or type definition.
406	`endDate: row.End_Date__c,`	Sets/declares the named object property or style/type member: endDate: row.End_Date__c,. Interpret it in the enclosing object, props or type definition.
407	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
408	`}),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
409	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
410	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
411	`app.get("/api/products", async (request, res) => {`	Registers an HTTP route or middleware: app.get("/api/products", async (request, res) => {. Registration order controls which authentication/validation runs first.
412	`  if (env.USE_MOCK_DATA)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA).
413	`    return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.
414	`      res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
415	`      products.map((product) => ({ ...product, subBrand: "", brandAlias: "" })),`	Transforms/selects/aggregates collection values with the callback shown here: products.map((product) => ({ ...product, subBrand: "", brandAlias: "" })),. Read the callback body and result assignment together.
416	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
417	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
418	`  const outletId = String(request.query.outletId || "").trim();`	Declares/initializes local data used by the surrounding operation: const outletId = String(request.query.outletId || "").trim();. Collection contents and assignments below determine its purpose.
419	`  let outletScope: any;`	Declares/initializes local data used by the surrounding operation: let outletScope: any;. Collection contents and assignments below determine its purpose.
420	`  if (outletId) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (outletId) {.
421	`    const safeOutletId = escapeSoqlLiteral(outletId);`	Declares/initializes local data used by the surrounding operation: const safeOutletId = escapeSoqlLiteral(outletId);. Collection contents and assignments below determine its purpose.
422	`    const employeeId = escapeSoqlLiteral(req.auth!.employeeId);`	Declares/initializes local data used by the surrounding operation: const employeeId = escapeSoqlLiteral(req.auth!.employeeId);. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
423	`    const allowedOutlets = await sfRecords(`	Waits for this asynchronous operation before continuing: const allowedOutlets = await sfRecords(. The returned result/error must still be handled.
424	`      `SELECT Id, Outlet_Type__c, Geography__c, Geography__r.State__c FROM ${objectMap.store} WHERE Id = '${safeOutletId}' AND Id IN (${allocatedOutletIds(employeeId)}) LIMIT 1`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Outlet_Type__c, Geography__c, Geography__r.State__c FROM ${objectMap.store} WHERE Id = '${safeOutletId}' AND Id IN (${allocatedOutletIds(employeeId)}) LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
425	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
426	`    if (!allowedOutlets.length) return fail(res, 404, "Outlet not found", "OUTLET_NOT_FOUND");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!allowedOutlets.length) return fail(res, 404, "Outlet not found", "OUTLET_NOT_FOUND");.
427	`    outletScope = allowedOutlets[0];`	Assigns the right-hand expression to the named variable/property: outletScope = allowedOutlets[0];. This is in-memory unless it is later persisted by an explicit call.
428	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
429	`  const [rows, schemeRows, schemeProductRows, allConfigurationRows] = await Promise.all([`	Starts independent asynchronous operations together and waits for all; rejection propagates to the surrounding error handler.
430	`    sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement (const [rows, schemeRows, schemeProductRows, allConfigurationRows] = await Promise.all([); it is not a standalone business operation.
431	`      `SELECT Id, Name, Product_Code__c, Brand__c, Sub_Brand__c, Brand_Alias__c, Package_Type__c, MRP__c, Retailer_Base_Price__c, Selling_Price__c, GST_Percent__c, Available_Stock__c, Units_Per_Case__c, Active__c FROM ${objectMap.product} WHERE Sellable__c = true AND Active__c = true ORDER BY Name`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Product_Code__c, Brand__c, Sub_Brand__c, Brand_Alias__c, Package_Type__c, MRP__c, Retailer_Base_Price__c, Selling_Price__c, GST_Percent__c, Available_Stock__c, Units_Per_Case__c, Act. This is in-memory unless it is later persisted by an explicit call.
432	`    ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
433	`    sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
Line	**Source code**	**Explanation / reading note**
434	`      `SELECT Id, Name, Scheme_Code__c, Scheme_Type__c, Description__c, Discount_Percent__c, Minimum_Quantity__c, Free_Quantity__c, Product__c, End_Date__c`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Scheme_Code__c, Scheme_Type__c, Description__c, Discount_Percent__c,

Line	Source code	Explanation / reading note
	`FROM ${objectMap.scheme} WHERE (Sales_Channel__c = null OR Sales_Channel__c = ' Secondary') AND Active__c = true AND (End_Date__c = NULL OR End_Date__c >= TODAY) ORDER BY End_Date__c`,`	Minimum_Quantity__c, Free_Quantity__c, Product__c, End_Date__c FROM ${objectMap.scheme} WHERE (Sales_Channel__c =. This is in-memory unless it is later persisted by an explicit call.
435	`    ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
436	`    sfRecords("SELECT Scheme__c, Product__c FROM Scheme_Product__c WHERE Active__c = true"),`	Assigns the right-hand expression to the named variable/property: sfRecords("SELECT Scheme__c, Product__c FROM Scheme_Product__c WHERE Active__c = true"),. This is in-memory unless it is later persisted by an explicit call.
437	`    sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement (sfRecords("SELECT Scheme__c, Product__c FROM Scheme_Product__c WHERE Active__c = true"),); it is not a standalone business operation.
438	`      `SELECT Id, Name, Product__c, Configuration_Type__c, Minimum_Quantity__c, Target_Quantity__c, Start_Date__c, End_Date__c, Geography__c, Geography__r.Name, Geography__r.State__c, Channel__c FROM ${objectMap.productSalesConfiguration} WHERE Active__c = true AND Start_Date__c <= TODAY AND (End_Date__c = NULL OR End_Date__c >= TODAY) ORDER BY CreatedDate DESC`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Product__c, Configuration_Type__c, Minimum_Quantity__c, Target_Quantity__c, Start_Date__c, End_Date__c, Geography__c, Geography__r.Name, Geography__r.State__c, Channel__c FROM ${obje. This is in-memory unless it is later persisted by an explicit call.
439	`    ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
440	`  ]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
441	`  const normalizeChannel = (value: unknown) =>`	Declares/initializes local data used by the surrounding operation: const normalizeChannel = (value: unknown) =>. Collection contents and assignments below determine its purpose.
442	`    String(value || "")`	Declares/initializes local data used by the surrounding operation: String(value || ""). Collection contents and assignments below determine its purpose.
443	`      .toLowerCase()`	Continues the surrounding declaration/expression or text: .toLowerCase(). Read it with the preceding opening statement (String(value || "")); it is not a standalone business operation.
444	`      .replace(/[^a-z]/g, "");`	Continues the surrounding declaration/expression or text: .replace(/[^a-z]/g, "");. Read it with the preceding opening statement (.toLowerCase()); it is not a standalone business operation.
445	`  const configurationRows = allConfigurationRows.filter((configuration) => {`	Declares/initializes local data used by the surrounding operation: const configurationRows = allConfigurationRows.filter((configuration) => {. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
446	`if (!outletScope)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!outletScope).
447	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
448	`!configuration.Geography__c &&`	Continues the surrounding declaration/expression or text: !configuration.Geography__c &&. Read it with the preceding opening statement (return (); it is not a standalone business operation.
449	`(!configuration.Channel__c || configuration.Channel__c === "All Channels")`	Continues the surrounding declaration/expression or text: (!configuration.Channel__c || configuration.Channel__c === "All Channels"). Read it with the preceding opening statement (!configuration.Geography__c &&); it is not a standalone business operation.
450	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
451	`const geographyMatches =`	Declares/initializes local data used by the surrounding operation: const geographyMatches =. Collection contents and assignments below determine its purpose.
452	`!configuration.Geography__c ||`	Continues the surrounding declaration/expression or text: !configuration.Geography__c ||. Read it with the preceding opening statement (const geographyMatches =); it is not a standalone business operation.
453	`configuration.Geography__c === outletScope.Geography__c ||`	Continues the surrounding declaration/expression or text: configuration.Geography__c === outletScope.Geography__c ||. Read it with the preceding opening statement (!configuration.Geography__c ||); it is not a standalone business operation.
454	`(configuration.Geography__r?.State__c &&`	Continues the surrounding declaration/expression or text: (configuration.Geography__r?.State__c &&. Read it with the preceding opening statement (configuration.Geography__c === outletScope.Geography__c ||); it is not a standalone business operation.
455	`configuration.Geography__r.State__c === outletScope.Geography__r?.State__c);`	Continues the surrounding declaration/expression or text: configuration.Geography__r.State__c === outletScope.Geography__r?.State__c);. Read it with the preceding opening statement ((configuration.Geography__r?.State__c &&); it is not a standalone business operation.
456	`const configuredChannel = normalizeChannel(configuration.Channel__c);`	Declares/initializes local data used by the surrounding operation: const configuredChannel = normalizeChannel(configuration.Channel__c);. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
457	`const outletChannel = normalizeChannel(outletScope.Outlet_Type__c);`	Declares/initializes local data used by the surrounding operation: const outletChannel = normalizeChannel(outletScope.Outlet_Type__c);. Collection contents and assignments below determine its purpose.
458	`const channelMatches =`	Declares/initializes local data used by the surrounding operation: const channelMatches =. Collection contents and assignments below determine its purpose.
459	`!configuredChannel ||`	Continues the surrounding declaration/expression or text: !configuredChannel ||. Read it with the preceding opening statement (const channelMatches =); it is not a standalone business operation.
460	`configuredChannel === "allchannels" ||`	Continues the surrounding declaration/expression or text: configuredChannel === "allchannels" ||. Read it with the preceding opening statement (!configuredChannel ||); it is not a standalone business operation.
461	`configuredChannel === outletChannel ||`	Continues the surrounding declaration/expression or text: configuredChannel === outletChannel ||. Read it with the preceding opening statement (configuredChannel === "allchannels" ||); it is not a standalone business operation.
462	`(configuredChannel === "gt" && outletChannel === "generaltrade") ||`	Continues the surrounding declaration/expression or text: (configuredChannel === "gt" && outletChannel === "generaltrade") ||. Read it with the preceding opening statement (configuredChannel === outletChannel ||); it is not a standalone business operation.
463	`(configuredChannel === "mt" && outletChannel === "moderntrade");`	Continues the surrounding declaration/expression or text: (configuredChannel === "mt" && outletChannel === "moderntrade");. Read it with the preceding opening statement ((configuredChannel === "gt" && outletChannel === "generaltrade") ||); it is not a standalone business operation.
464	`return geographyMatches && channelMatches;`	Returns geographyMatches && channelMatches to the caller (or begins returned UI markup) and ends this execution path.
465	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
466	`let recentOrders: any[] = [];`	Declares/initializes local data used by the surrounding operation: let recentOrders: any[] = [];. Collection contents and assignments below determine its purpose.
467	`let purchaseHistory: any[] = [];`	Declares/initializes local data used by the surrounding operation: let purchaseHistory: any[] = [];. Collection contents and assignments below determine its purpose.
468	`if (outletId) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (outletId) {.

Line	Source code	Explanation / reading note
469	`    const safeOutletId = escapeSoqlLiteral(outletId);`	Declares/initializes local data used by the surrounding operation: const safeOutletId = escapeSoqlLiteral(outletId);. Collection contents and assignments below determine its purpose.
470	`    recentOrders = await sfRecords(`	Waits for this asynchronous operation before continuing: recentOrders = await sfRecords(. The returned result/error must still be handled.
471	`      \`SELECT Id, Name, Order_Date__c, Total_Amount__c, Total_Quantity__c FROM ${objectMap.order} WHERE Retailer__c = '${safeOutletId}' ORDER BY Order_Date__c DESC, CreatedDate DESC LIMIT 5\`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Order_Date__c, Total_Amount__c, Total_Quantity__c FROM ${objectMap.order} WHERE Retailer__c = '${safeOutletId}' ORDER BY Order_Date__c DESC, CreatedDate DESC LIMIT 5`,. This is in-memory unless it is later persisted by an explicit call.
472	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
473	`    if (recentOrders.length) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (recentOrders.length) {.
474	`      const orderIds = recentOrders.map((order) => \`'${escapeSoqlLiteral(order.Id)}'\`).join(",");`	Declares/initializes local data used by the surrounding operation: const orderIds = recentOrders.map((order) => `'${escapeSoqlLiteral(order.Id)}'`).join(",");. Collection contents and assignments below determine its purpose.
475	`      purchaseHistory = await sfRecords(`	Waits for this asynchronous operation before continuing: purchaseHistory = await sfRecords(. The returned result/error must still be handled.
476	`        \`SELECT Product__c, Product__r.Name, Piece_Quantity__c, Sales_Order__c, Sales_Order__r.Name, Sales_Order__r.Order_Date__c FROM ${objectMap.orderItem} WHERE Sales_Order__c IN (${orderIds}) ORDER BY Sales_Order__r.Order_Date__c DESC\`,`	Continues the surrounding declaration/expression or text: `SELECT Product__c, Product__r.Name, Piece_Quantity__c, Sales_Order__c, Sales_Order__r.Name, Sales_Order__r.Order_Date__c FROM ${objectMap.orderItem} WHERE Sales_Order__c IN (${orderIds}) ORDER BY Sal. Read it with the preceding opening statement (purchaseHistory = await sfRecords(); it is not a standalone business operation.
477	`      );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
478	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
479	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
480	`  const historyByProduct = new Map<string, any[]>();`	Declares/initializes local data used by the surrounding operation: const historyByProduct = new Map<string, any[]>();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
481	`  for (const item of purchaseHistory) {`	Repeats work over the specified records/items or while this condition holds: for (const item of purchaseHistory) {. Check where queries/writes occur relative to the loop.
482	`    const history = historyByProduct.get(item.Product__c) || [];`	Declares/initializes local data used by the surrounding operation: const history = historyByProduct.get(item.Product__c) || [];. Collection contents and assignments below determine its purpose.
483	`    history.push({`	Calls the named method: history.push({. Its implementation defines the side effect/result; use the symbol/file index to follow it.
484	`      orderId: item.Sales_Order__c,`	Sets/declares the named object property or style/type member: orderId: item.Sales_Order__c,. Interpret it in the enclosing object, props or type definition.
485	`      orderNumber: item.Sales_Order__r?.Name,`	Sets/declares the named object property or style/type member: orderNumber: item.Sales_Order__r?.Name,. Interpret it in the enclosing object, props or type definition.
486	`      orderDate: item.Sales_Order__r?.Order_Date__c,`	Sets/declares the named object property or style/type member: orderDate: item.Sales_Order__r?.Order_Date__c,. Interpret it in the enclosing object, props or type definition.
487	`      quantity: Number(item.Piece_Quantity__c || 0),`	Sets/declares the named object property or style/type member: quantity: Number(item.Piece_Quantity__c || 0),. Interpret it in the enclosing object, props or type definition.
488	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
489	`    historyByProduct.set(item.Product__c, history);`	Calls the named method: historyByProduct.set(item.Product__c, history);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
490	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
491	`  const configurationsByProduct = new Map<string, any[]>();`	Declares/initializes local data used by the surrounding operation: const configurationsByProduct = new Map<string, any[]>();. Collection contents and assignments below determine its purpose.
492	`  for (const configuration of configurationRows) {`	Repeats work over the specified records/items or while this condition holds: for (const configuration of configurationRows) {. Check where queries/writes occur relative to the loop.

Line	Source code	Explanation / reading note
493	`    const existing = configurationsByProduct.get(configuration.Product__c) || [];`	Declares/initializes local data used by the surrounding operation: const existing = configurationsByProduct.get(configuration.Product__c) || [];. Collection contents and assignments below determine its purpose.
494	`    existing.push(configuration);`	Calls the named method: existing.push(configuration);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
495	`    configurationsByProduct.set(configuration.Product__c, existing);`	Calls the named method: configurationsByProduct.set(configuration.Product__c, existing);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
496	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
497	`  ok(`	Continues the surrounding declaration/expression or text: ok(. Read it with the preceding opening statement (}); it is not a standalone business operation.
498	`    res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (ok(); it is not a standalone business operation.
499	`    rows.map((row) => {`	Transforms/selects/aggregates collection values with the callback shown here: rows.map((row) => {. Read the callback body and result assignment together.
500	`      const productConfigurations = configurationsByProduct.get(row.Id) || [];`	Declares/initializes local data used by the surrounding operation: const productConfigurations = configurationsByProduct.get(row.Id) || [];. Collection contents and assignments below determine its purpose.
501	`      const primaryConfiguration =`	Declares/initializes local data used by the surrounding operation: const primaryConfiguration =. Collection contents and assignments below determine its purpose.
502	`        productConfigurations.find((item) => item.Configuration_Type__c === "Must Sell") ||`	Transforms/selects/aggregates collection values with the callback shown here: productConfigurations.find((item) => item.Configuration_Type__c === "Must Sell") ||. Read the callback body and result assignment together.
503	`        productConfigurations[0];`	Continues the surrounding declaration/expression or text: productConfigurations[0];. Read it with the preceding opening statement (productConfigurations.find((item) => item.Configuration_Type__c === "Must Sell") ||); it is not a standalone business operation.
504	`      return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
505	`        id: row.Id,`	Sets/declares the named object property or style/type member: id: row.Id,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
506	`name: row.Name,`	Sets/declares the named object property or style/type member: name: row.Name,. Interpret it in the enclosing object, props or type definition.
507	`code: row.Product_Code__c,`	Sets/declares the named object property or style/type member: code: row.Product_Code__c,. Interpret it in the enclosing object, props or type definition.
508	`...productIdentity(row),`	Continues the surrounding declaration/expression or text: ...productIdentity(row),. Read it with the preceding opening statement (code: row.Product_Code__c,); it is not a standalone business operation.
509	`packSize: row.Package_Type__c,`	Sets/declares the named object property or style/type member: packSize: row.Package_Type__c,. Interpret it in the enclosing object, props or type definition.
510	`mrp: row.MRP__c || 0,`	Sets/declares the named object property or style/type member: mrp: row.MRP__c || 0,. Interpret it in the enclosing object, props or type definition.
511	`retailerPrice: row.Retailer_Base_Price__c || 0,`	Sets/declares the named object property or style/type member: retailerPrice: row.Retailer_Base_Price__c || 0,. Interpret it in the enclosing object, props or type definition.
512	`price: row.Selling_Price__c || 0,`	Sets/declares the named object property or style/type member: price: row.Selling_Price__c || 0,. Interpret it in the enclosing object, props or type definition.
513	`gstPercent: row.GST_Percent__c || 0,`	Sets/declares the named object property or style/type member: gstPercent: row.GST_Percent__c || 0,. Interpret it in the enclosing object, props or type definition.
514	`stock: row.Available_Stock__c || 0,`	Sets/declares the named object property or style/type member: stock: row.Available_Stock__c || 0,. Interpret it in the enclosing object, props or type definition.
515	`unitsPerCase: row.Units_Per_Case__c || 1,`	Sets/declares the named object property or style/type member: unitsPerCase: row.Units_Per_Case__c || 1,. Interpret it in the enclosing object, props or type definition.
516	`active: row.Active__c,`	Sets/declares the named object property or style/type member: active: row.Active__c,. Interpret it in the enclosing object, props or type definition.
517	`configurationId: primaryConfiguration?.Id,`	Sets/declares the named object property or style/type member: configurationId: primaryConfiguration?.Id,. Interpret it in the enclosing object, props or type definition.
518	`configurationName: primaryConfiguration?.Name,`	Sets/declares the named object property or style/type member: configurationName: primaryConfiguration?.Name,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
519	`configuration: primaryConfiguration?.Configuration_Type__c || "Standard",`	Sets/declares the named object property or style/type member: configuration: primaryConfiguration?.Configuration_Type__c || "Standard",. Interpret it in the enclosing object, props or type definition.
520	`minimumQuantity: Number(primaryConfiguration?.Minimum_Quantity__c || 1),`	Sets/declares the named object property or style/type member: minimumQuantity: Number(primaryConfiguration?.Minimum_Quantity__c || 1),. Interpret it in the enclosing object, props or type definition.
521	`targetQuantity: Number(primaryConfiguration?.Target_Quantity__c || 0),`	Sets/declares the named object property or style/type member: targetQuantity: Number(primaryConfiguration?.Target_Quantity__c || 0),. Interpret it in the enclosing object, props or type definition.
522	`configurationStartDate: primaryConfiguration?.Start_Date__c,`	Sets/declares the named object property or style/type member: configurationStartDate: primaryConfiguration?.Start_Date__c,. Interpret it in the enclosing object, props or type definition.
523	`configurationEndDate: primaryConfiguration?.End_Date__c,`	Sets/declares the named object property or style/type member: configurationEndDate: primaryConfiguration?.End_Date__c,. Interpret it in the enclosing object, props or type definition.
524	`suggestionSource: productConfigurations.length`	Sets/declares the named object property or style/type member: suggestionSource: productConfigurations.length. Interpret it in the enclosing object, props or type definition.
525	`? "Configured in Salesforce for this outlet's geography and channel"`	Continues the surrounding declaration/expression or text: ? "Configured in Salesforce for this outlet's geography and channel". Read it with the preceding opening statement (suggestionSource: productConfigurations.length); it is not a standalone business operation.
526	`: undefined,`	Continues the surrounding declaration/expression or text: : undefined,. Read it with the preceding opening statement (? "Configured in Salesforce for this outlet's geography and channel"); it is not a standalone business operation.
527	`configurations: productConfigurations.map((item) => ({`	Sets/declares the named object property or style/type member: configurations: productConfigurations.map((item) => ({. Interpret it in the enclosing object, props or type definition.
528	`id: item.Id,`	Sets/declares the named object property or style/type member: id: item.Id,. Interpret it in the enclosing object, props or type definition.
529	`name: item.Name,`	Sets/declares the named object property or style/type member: name: item.Name,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
530	`type: item.Configuration_Type__c,`	Sets/declares the named object property or style/type member: type: item.Configuration_Type__c,. Interpret it in the enclosing object, props or type definition.
531	`minimumQuantity: Number(item.Minimum_Quantity__c || 1),`	Sets/declares the named object property or style/type member: minimumQuantity: Number(item.Minimum_Quantity__c || 1),. Interpret it in the enclosing object, props or type definition.
532	`targetQuantity: Number(item.Target_Quantity__c || 0),`	Sets/declares the named object property or style/type member: targetQuantity: Number(item.Target_Quantity__c || 0),. Interpret it in the enclosing object, props or type definition.
533	`geography: item.Geography__r?.Name,`	Sets/declares the named object property or style/type member: geography: item.Geography__r?.Name,. Interpret it in the enclosing object, props or type definition.
534	`channel: item.Channel__c || "All Channels",`	Sets/declares the named object property or style/type member: channel: item.Channel__c || "All Channels",. Interpret it in the enclosing object, props or type definition.
535	`})),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
536	`previousQuantity: (historyByProduct.get(row.Id) || []).reduce(`	Sets/declares the named object property or style/type member: previousQuantity: (historyByProduct.get(row.Id) || []).reduce(. Interpret it in the enclosing object, props or type definition.
537	`(sum, item) => sum + item.quantity,`	Continues the surrounding declaration/expression or text: (sum, item) => sum + item.quantity,. Read it with the preceding opening statement (previousQuantity: (historyByProduct.get(row.Id) || []).reduce(); it is not a standalone business operation.
538	`0,`	Continues the surrounding declaration/expression or text: 0,. Read it with the preceding opening statement ((sum, item) => sum + item.quantity,); it is not a standalone business operation.
539	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
540	`lastFiveOrders: historyByProduct.get(row.Id) || [],`	Sets/declares the named object property or style/type member: lastFiveOrders: historyByProduct.get(row.Id) || [],. Interpret it in the enclosing object, props or type definition.
541	`schemes: schemeRows`	Sets/declares the named object property or style/type member: schemes: schemeRows. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
542	`.filter((scheme) => {`	Transforms/selects/aggregates collection values with the callback shown here: .filter((scheme) => {. Read the callback body and result assignment together.
543	`const linkedProductIds = schemeProductRows`	Declares/initializes local data used by the surrounding operation: const linkedProductIds = schemeProductRows. Collection contents and assignments below determine its purpose.
544	`.filter((link) => link.Scheme__c === scheme.Id)`	Transforms/selects/aggregates collection values with the callback shown here: .filter((link) => link.Scheme__c === scheme.Id). Read the callback body and result assignment together.
545	`.map((link) => link.Product__c);`	Transforms/selects/aggregates collection values with the callback shown here: .map((link) => link.Product__c);. Read the callback body and result assignment together.
546	`return linkedProductIds.length`	Returns linkedProductIds.length to the caller (or begins returned UI markup) and ends this execution path.
547	`? linkedProductIds.includes(row.Id)`	Calls the named method: ? linkedProductIds.includes(row.Id). Its implementation defines the side effect/result; use the symbol/file index to follow it.
548	`: !scheme.Product__c || scheme.Product__c === row.Id;`	Continues the surrounding declaration/expression or text: : !scheme.Product__c || scheme.Product__c === row.Id;. Read it with the preceding opening statement (? linkedProductIds.includes(row.Id)); it is not a standalone business operation.
549	`})`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
550	`.map((scheme) => ({`	Transforms/selects/aggregates collection values with the callback shown here: .map((scheme) => ({. Read the callback body and result assignment together.
551	`id: scheme.Id,`	Sets/declares the named object property or style/type member: id: scheme.Id,. Interpret it in the enclosing object, props or type definition.
552	`name: scheme.Name,`	Sets/declares the named object property or style/type member: name: scheme.Name,. Interpret it in the enclosing object, props or type definition.
553	`code: scheme.Scheme_Code__c,`	Sets/declares the named object property or style/type member: code: scheme.Scheme_Code__c,. Interpret it in the enclosing object, props or type definition.
554	`type: scheme.Scheme_Type__c,`	Sets/declares the named object property or style/type member: type: scheme.Scheme_Type__c,. Interpret it in the enclosing object, props or type definition.
555	`description: scheme.Description__c,`	Sets/declares the named object property or style/type member: description: scheme.Description__c,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
556	`            discountPercent: Number(scheme.Discount_Percent__c || 0),`	Sets/declares the named object property or style/type member: discountPercent: Number(scheme.Discount_Percent__c || 0),. Interpret it in the enclosing object, props or type definition.
557	`            minimumQuantity: Number(scheme.Minimum_Quantity__c || 1),`	Sets/declares the named object property or style/type member: minimumQuantity: Number(scheme.Minimum_Quantity__c || 1),. Interpret it in the enclosing object, props or type definition.
558	`            freeQuantity: Number(scheme.Free_Quantity__c || 0),`	Sets/declares the named object property or style/type member: freeQuantity: Number(scheme.Free_Quantity__c || 0),. Interpret it in the enclosing object, props or type definition.
559	`            endDate: scheme.End_Date__c,`	Sets/declares the named object property or style/type member: endDate: scheme.End_Date__c,. Interpret it in the enclosing object, props or type definition.
560	`          })),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
561	`      };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
562	`    }),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
563	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
564	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
565		Blank line separating logical sections; no executable operation.
566	`app.get("/api/surveys", async (request, res) => {`	Registers an HTTP route or middleware: app.get("/api/surveys", async (request, res) => {. Registration order controls which authentication/validation runs first.
567	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
568	`  if (env.USE_MOCK_DATA) return ok(res, []);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA) return ok(res, []);.

Line	Source code	Explanation / reading note
569	`  const outletId = escapeSoqlLiteral(String(request.query.outletId || ""));`	Declares/initializes local data used by the surrounding operation: const outletId = escapeSoqlLiteral(String(request.query.outletId || ""));. Collection contents and assignments below determine its purpose.
570	`  if (!outletId) return fail(res, 400, "Outlet is required", "OUTLET_REQUIRED");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!outletId) return fail(res, 400, "Outlet is required", "OUTLET_REQUIRED");.
571	`  const employeeId = escapeSoqlLiteral(req.auth!.employeeId);`	Declares/initializes local data used by the surrounding operation: const employeeId = escapeSoqlLiteral(req.auth!.employeeId);. Collection contents and assignments below determine its purpose.
572	`  const outlets = await sfRecords(`	Waits for this asynchronous operation before continuing: const outlets = await sfRecords(. The returned result/error must still be handled.
573	`    \`SELECT Id, Outlet_Type__c FROM ${objectMap.store} WHERE Id = '${outletId}' AND Id IN (${allocatedOutletIds(employeeId)}) LIMIT 1\`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Outlet_Type__c FROM ${objectMap.store} WHERE Id = '${outletId}' AND Id IN (${allocatedOutletIds(employeeId)}) LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
574	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
575	`  if (!outlets.length) return fail(res, 404, "Outlet not found", "OUTLET_NOT_FOUND");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!outlets.length) return fail(res, 404, "Outlet not found", "OUTLET_NOT_FOUND");.
576	`  const surveys = await sfRecords(`	Waits for this asynchronous operation before continuing: const surveys = await sfRecords(. The returned result/error must still be handled.
577	`    "SELECT Id, Name, Survey_Type__c, Outlet_Type__c, Start_Date__c, End_Date__c, Active__c, Instructions__c, Rating_Target__c, Maximum_Rating__c, Require_Before_Image__c, Require_After_Image__c FROM Survey__c WHERE Active__c = true AND Start_Date__c <= TODAY AND End_Date__c >= TODAY ORDER BY Name",`	Assigns the right-hand expression to the named variable/property: "SELECT Id, Name, Survey_Type__c, Outlet_Type__c, Start_Date__c, End_Date__c, Active__c, Instructions__c, Rating_Target__c, Maximum_Rating__c, Require_Before_Image__c, Require_After_Image__c FROM Surv. This is in-memory unless it is later persisted by an explicit call.
578	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
579	`  const normalize = (value: unknown) =>`	Declares/initializes local data used by the surrounding operation: const normalize = (value: unknown) =>. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
580	`String(value || "")`	Declares/initializes local data used by the surrounding operation: String(value || ""). Collection contents and assignments below determine its purpose.
581	`.toLowerCase()`	Continues the surrounding declaration/expression or text: .toLowerCase(). Read it with the preceding opening statement (String(value || "")); it is not a standalone business operation.
582	`.replace(/[^a-z]/g, "");`	Continues the surrounding declaration/expression or text: .replace(/[^a-z]/g, "");. Read it with the preceding opening statement (.toLowerCase()); it is not a standalone business operation.
583	`const applicable = surveys.filter(`	Declares/initializes local data used by the surrounding operation: const applicable = surveys.filter(. Collection contents and assignments below determine its purpose.
584	`(survey) =>`	Continues the surrounding declaration/expression or text: (survey) =>. Read it with the preceding opening statement (const applicable = surveys.filter(); it is not a standalone business operation.
585	`normalize(survey.Outlet_Type__c) === "all" ||`	Continues the surrounding declaration/expression or text: normalize(survey.Outlet_Type__c) === "all" ||. Read it with the preceding opening statement ((survey) =>); it is not a standalone business operation.
586	`normalize(survey.Outlet_Type__c) === normalize(outlets[0].Outlet_Type__c),`	Continues the surrounding declaration/expression or text: normalize(survey.Outlet_Type__c) === normalize(outlets[0].Outlet_Type__c),. Read it with the preceding opening statement (normalize(survey.Outlet_Type__c) === "all" ||); it is not a standalone business operation.
587	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
588	`const surveyIds = applicable.map((survey) => `'${escapeSoqlLiteral(survey.Id)}'`).join(",");`	Declares/initializes local data used by the surrounding operation: const surveyIds = applicable.map((survey) => `'${escapeSoqlLiteral(survey.Id)}'`).join(",");. Collection contents and assignments below determine its purpose.
589	`const questions = surveyIds`	Declares/initializes local data used by the surrounding operation: const questions = surveyIds. Collection contents and assignments below determine its purpose.
590	`? await sfRecords(`	Waits for this asynchronous operation before continuing: ? await sfRecords(. The returned result/error must still be handled.
591	`` `SELECT Id, Name, Survey__c, Question_Type__c, Options__c, Display_Order__c, Required__c, Active__c FROM Survey_Question__c WHERE Survey__c IN (${surveyIds}) AND Active__c = true ORDER BY Display_Order__c, CreatedDate` ``	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Survey__c, Question_Type__c, Options__c, Display_Order__c, Required__c, Active__c FROM Survey_Question__c WHERE Survey__c IN (${surveyIds}) AND Active__c = true ORDER BY Display_Orde. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
592	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
593	`: [];`	Continues the surrounding declaration/expression or text: : [];. Read it with the preceding opening statement ( )); it is not a standalone business operation.
594	`return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.
595	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
596	`applicable.map((survey) => ({`	Transforms/selects/aggregates collection values with the callback shown here: applicable.map((survey) => ({. Read the callback body and result assignment together.
597	`id: survey.Id,`	Sets/declares the named object property or style/type member: id: survey.Id,. Interpret it in the enclosing object, props or type definition.
598	`name: survey.Name,`	Sets/declares the named object property or style/type member: name: survey.Name,. Interpret it in the enclosing object, props or type definition.
599	`type: survey.Survey_Type__c,`	Sets/declares the named object property or style/type member: type: survey.Survey_Type__c,. Interpret it in the enclosing object, props or type definition.
600	`outletType: survey.Outlet_Type__c,`	Sets/declares the named object property or style/type member: outletType: survey.Outlet_Type__c,. Interpret it in the enclosing object, props or type definition.
601	`startDate: survey.Start_Date__c,`	Sets/declares the named object property or style/type member: startDate: survey.Start_Date__c,. Interpret it in the enclosing object, props or type definition.
602	`endDate: survey.End_Date__c,`	Sets/declares the named object property or style/type member: endDate: survey.End_Date__c,. Interpret it in the enclosing object, props or type definition.
603	`instructions: survey.Instructions__c,`	Sets/declares the named object property or style/type member: instructions: survey.Instructions__c,. Interpret it in the enclosing object, props or type definition.
604	`ratingTarget: survey.Rating_Target__c,`	Sets/declares the named object property or style/type member: ratingTarget: survey.Rating_Target__c,. Interpret it in the enclosing object, props or type definition.
605	`maximumRating: Number(survey.Maximum_Rating__c || 5),`	Sets/declares the named object property or style/type member: maximumRating: Number(survey.Maximum_Rating__c || 5),. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
606	`requireBeforeImage: Boolean(survey.Require_Before_Image__c),`	Sets/declares the named object property or style/type member: requireBeforeImage: Boolean(survey.Require_Before_Image__c),. Interpret it in the enclosing object, props or type definition.
607	`requireAfterImage: Boolean(survey.Require_After_Image__c),`	Sets/declares the named object property or style/type member: requireAfterImage: Boolean(survey.Require_After_Image__c),. Interpret it in the enclosing object, props or type definition.
608	`questions: questions`	Sets/declares the named object property or style/type member: questions: questions. Interpret it in the enclosing object, props or type definition.
609	`.filter((question) => question.Survey__c === survey.Id)`	Transforms/selects/aggregates collection values with the callback shown here: .filter((question) => question.Survey__c === survey.Id). Read the callback body and result assignment together.
610	`.map((question) => ({`	Transforms/selects/aggregates collection values with the callback shown here: .map((question) => ({. Read the callback body and result assignment together.
611	`id: question.Id,`	Sets/declares the named object property or style/type member: id: question.Id,. Interpret it in the enclosing object, props or type definition.
612	`text: question.Name,`	Sets/declares the named object property or style/type member: text: question.Name,. Interpret it in the enclosing object, props or type definition.
613	`type: question.Question_Type__c,`	Sets/declares the named object property or style/type member: type: question.Question_Type__c,. Interpret it in the enclosing object, props or type definition.
614	`options: String(question.Options__c || "")`	Sets/declares the named object property or style/type member: options: String(question.Options__c || ""). Interpret it in the enclosing object, props or type definition.
615	`.split(";")`	Continues the surrounding declaration/expression or text: .split(";"). Read it with the preceding opening statement (options: String(question.Options__c || "")); it is not a standalone business operation.
616	`.map((value) => value.trim())`	Transforms/selects/aggregates collection values with the callback shown here: .map((value) => value.trim()). Read the callback body and result assignment together.
617	`.filter(Boolean),`	Transforms/selects/aggregates collection values with the callback shown here: .filter(Boolean),. Read the callback body and result assignment together.

Line	Source code	Explanation / reading note
618	`displayOrder: Number(question.Display_Order__c || 0),`	Sets/declares the named object property or style/type member: displayOrder: Number(question.Display_Order__c || 0),. Interpret it in the enclosing object, props or type definition.
619	`required: Boolean(question.Required__c),`	Sets/declares the named object property or style/type member: required: Boolean(question.Required__c),. Interpret it in the enclosing object, props or type definition.
620	`})),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
621	`})),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
622	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
623	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
624		Blank line separating logical sections; no executable operation.
625	`app.post("/api/survey-responses", async (request, res) => {`	Registers an HTTP route or middleware: app.post("/api/survey-responses", async (request, res) => {. Registration order controls which authentication/validation runs first.
626	`const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
627	`if (env.USE_MOCK_DATA) return ok(res, { id: \`survey-${Date.now()}\` }, "Survey submitted");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA) return ok(res, { id: `survey-${Date.now()}` }, "Survey submitted");.
628	`const visit = await ownedVisit(req.body.visitId, req.auth!.employeeId);`	Waits for this asynchronous operation before continuing: const visit = await ownedVisit(req.body.visitId, req.auth!.employeeId);. The returned result/error must still be handled.
629	`if (!visit || visit.employeeId !== req.auth!.employeeId)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!visit || visit.employeeId !== req.auth!.employeeId).
630	`return fail(res, 403, "An active visit is required for this survey", "ACTIVE_VISIT_REQUIRED");`	Returns fail(res, 403, "An active visit is required for this survey", "ACTIVE_VISIT_REQUIRED") to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
631	`  const surveyId = escapeSoqlLiteral(String(req.body.surveyId || ""));`	Declares/initializes local data used by the surrounding operation: const surveyId = escapeSoqlLiteral(String(req.body.surveyId || ""));. Collection contents and assignments below determine its purpose.
632	`  const surveys = await sfRecords(`	Waits for this asynchronous operation before continuing: const surveys = await sfRecords(. The returned result/error must still be handled.
633	`    \`SELECT Id, Name, Survey_Type__c, Require_Before_Image__c, Require_After_Image__c, Maximum_Rating__c FROM Survey__c WHERE Id = '${surveyId}' AND Active__c = true AND Start_Date__c <= TODAY AND End_Date__c >= TODAY LIMIT 1\`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Survey_Type__c, Require_Before_Image__c, Require_After_Image__c, Maximum_Rating__c FROM Survey__c WHERE Id = '${surveyId}' AND Active__c = true AND Start_Date__c <= TODAY AND End_Dat. This is in-memory unless it is later persisted by an explicit call.
634	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
635	`  if (!surveys.length)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!surveys.length).
636	`    return fail(res, 422, "This survey is not currently active", "SURVEY_INACTIVE");`	Returns fail(res, 422, "This survey is not currently active", "SURVEY_INACTIVE") to the caller (or begins returned UI markup) and ends this execution path.
637	`  const survey = surveys[0];`	Declares/initializes local data used by the surrounding operation: const survey = surveys[0];. Collection contents and assignments below determine its purpose.
638	`  const answers = Array.isArray(req.body.answers) ? req.body.answers : [];`	Declares/initializes local data used by the surrounding operation: const answers = Array.isArray(req.body.answers) ? req.body.answers : [];. Collection contents and assignments below determine its purpose.
639	`  const questions = await sfRecords(`	Waits for this asynchronous operation before continuing: const questions = await sfRecords(. The returned result/error must still be handled.
640	`    \`SELECT Id, Name, Question_Type__c, Required__c FROM Survey_Question__c WHERE Survey__c = '${surveyId}' AND Active__c = true\`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Question_Type__c, Required__c FROM Survey_Question__c WHERE Survey__c = '${surveyId}' AND Active__c = true`,. This is in-memory unless it is later persisted by an explicit call.
641	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
642	`  const answerByQuestion = new Map<string, any>(`	Declares/initializes local data used by the surrounding operation: const answerByQuestion = new Map<string, any>(. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
643	`answers.map((answer: any) => [String(answer.questionId), answer]),`	Transforms/selects/aggregates collection values with the callback shown here: answers.map((answer: any) => [String(answer.questionId), answer]),. Read the callback body and result assignment together.
644	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
645	`const missing = questions.filter(`	Declares/initializes local data used by the surrounding operation: const missing = questions.filter(. Collection contents and assignments below determine its purpose.
646	`(question) =>`	Continues the surrounding declaration/expression or text: (question) =>. Read it with the preceding opening statement (const missing = questions.filter(); it is not a standalone business operation.
647	`question.Required__c && !String(answerByQuestion.get(question.Id)?.value ?? "").trim(),`	Calls the named method: question.Required__c && !String(answerByQuestion.get(question.Id)?.value ?? "").trim(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
648	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
649	`if (missing.length)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (missing.length).
650	`return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
651	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
652	`400,`	Continues the surrounding declaration/expression or text: 400,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
653	`` `Answer all required questions: ${missing.map((question) => question.Name).join(", ")}` , ``	Transforms/selects/aggregates collection values with the callback shown here: `Answer all required questions: ${missing.map((question) => question.Name).join(", ")}`,. Read the callback body and result assignment together.
654	`"REQUIRED_ANSWERS_MISSING",`	Continues the surrounding declaration/expression or text: "REQUIRED_ANSWERS_MISSING",. Read it with the preceding opening statement (`Answer all required questions: ${missing.map((question) => question.Name).join(", ")}`,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
655	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
656	`  if (survey.Require_Before_Image__c && !req.body.beforeImageUrl)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (survey.Require_Before_Image__c && !req.body.beforeImageUrl).
657	`    return fail(res, 400, "Before image is required", "BEFORE_IMAGE_REQUIRED");`	Returns fail(res, 400, "Before image is required", "BEFORE_IMAGE_REQUIRED") to the caller (or begins returned UI markup) and ends this execution path.
658	`  if (survey.Require_After_Image__c && !req.body.afterImageUrl)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (survey.Require_After_Image__c && !req.body.afterImageUrl).
659	`    return fail(res, 400, "After image is required", "AFTER_IMAGE_REQUIRED");`	Returns fail(res, 400, "After image is required", "AFTER_IMAGE_REQUIRED") to the caller (or begins returned UI markup) and ends this execution path.
660	`  const duplicate = await sfRecords(`	Waits for this asynchronous operation before continuing: const duplicate = await sfRecords(. The returned result/error must still be handled.
661	`    \`SELECT Id FROM Survey_Response__c WHERE Survey__c = '${surveyId}' AND Visit__c = '${escapeSoqlLiteral(visit.id)}' AND Status__c = 'Completed' LIMIT 1\`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id FROM Survey_Response__c WHERE Survey__c = '${surveyId}' AND Visit__c = '${escapeSoqlLiteral(visit.id)}' AND Status__c = 'Completed' LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
662	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
663	`  if (duplicate.length)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (duplicate.length).
664	`    return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
665	`      res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
666	`      409,`	Continues the surrounding declaration/expression or text: 409,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
667	`      "This survey was already completed for the visit",`	Continues the surrounding declaration/expression or text: "This survey was already completed for the visit",. Read it with the preceding opening statement (409,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
668	`"SURVEY_ALREADY_COMPLETED",`	Continues the surrounding declaration/expression or text: "SURVEY_ALREADY_COMPLETED",. Read it with the preceding opening statement ("This survey was already completed for the visit",); it is not a standalone business operation.
669	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
670	`const created: any = await salesforce.create("Survey_Response__c", {`	Invokes the external-data boundary: const created: any = await salesforce.create("Survey_Response__c", {. Await/result checks determine whether the operation is confirmed.
671	`Survey__c: survey.Id,`	Sets/declares the named object property or style/type member: Survey__c: survey.Id,. Interpret it in the enclosing object, props or type definition.
672	`Outlet__c: visit.storeId,`	Sets/declares the named object property or style/type member: Outlet__c: visit.storeId,. Interpret it in the enclosing object, props or type definition.
673	`Visit__c: visit.id,`	Sets/declares the named object property or style/type member: Visit__c: visit.id,. Interpret it in the enclosing object, props or type definition.
674	`Employee__c: req.auth!.employeeId,`	Sets/declares the named object property or style/type member: Employee__c: req.auth!.employeeId,. Interpret it in the enclosing object, props or type definition.
675	`Status__c: req.body.status === "Draft" ? "Draft" : "Completed",`	Sets/declares the named object property or style/type member: Status__c: req.body.status === "Draft" ? "Draft" : "Completed",. Interpret it in the enclosing object, props or type definition.
676	`Started_At__c: req.body.startedAt || new Date().toISOString(),`	Sets/declares the named object property or style/type member: Started_At__c: req.body.startedAt || new Date().toISOString(),. Interpret it in the enclosing object, props or type definition.
677	`Submitted_At__c: req.body.status === "Draft" ? null : new Date().toISOString(),`	Sets/declares the named object property or style/type member: Submitted_At__c: req.body.status === "Draft" ? null : new Date().toISOString(),. Interpret it in the enclosing object, props or type definition.
678	`Overall_Rating__c: Number(req.body.overallRating || 0) || null,`	Sets/declares the named object property or style/type member: Overall_Rating__c: Number(req.body.overallRating || 0) || null,. Interpret it in the enclosing object, props or type definition.
679	`Remarks__c: req.body.remarks || null,`	Sets/declares the named object property or style/type member: Remarks__c: req.body.remarks || null,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
680	`Latitude__c: req.body.location?.latitude,`	Sets/declares the named object property or style/type member: Latitude__c: req.body.location?.latitude,. Interpret it in the enclosing object, props or type definition.
681	`Longitude__c: req.body.location?.longitude,`	Sets/declares the named object property or style/type member: Longitude__c: req.body.location?.longitude,. Interpret it in the enclosing object, props or type definition.
682	`Before_Image_URL__c: req.body.beforeImageUrl || null,`	Sets/declares the named object property or style/type member: Before_Image_URL__c: req.body.beforeImageUrl || null,. Interpret it in the enclosing object, props or type definition.
683	`After_Image_URL__c: req.body.afterImageUrl || null,`	Sets/declares the named object property or style/type member: After_Image_URL__c: req.body.afterImageUrl || null,. Interpret it in the enclosing object, props or type definition.
684	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
685	`for (const question of questions) {`	Repeats work over the specified records/items or while this condition holds: for (const question of questions) {. Check where queries/writes occur relative to the loop.
686	`const answer: any = answerByQuestion.get(question.Id);`	Declares/initializes local data used by the surrounding operation: const answer: any = answerByQuestion.get(question.Id);. Collection contents and assignments below determine its purpose.
687	`if (!answer || answer.value == null || answer.value === "") continue;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!answer || answer.value == null || answer.value === "") continue;.
688	`const values = Array.isArray(answer.value) ? answer.value : [answer.value];`	Declares/initializes local data used by the surrounding operation: const values = Array.isArray(answer.value) ? answer.value : [answer.value];. Collection contents and assignments below determine its purpose.
689	`await salesforce.create("Survey_Answer__c", {`	Invokes the external-data boundary: await salesforce.create("Survey_Answer__c", {. Await/result checks determine whether the operation is confirmed.
690	`Survey_Response__c: created.id,`	Sets/declares the named object property or style/type member: Survey_Response__c: created.id,. Interpret it in the enclosing object, props or type definition.
691	`Survey_Question__c: question.Id,`	Sets/declares the named object property or style/type member: Survey_Question__c: question.Id,. Interpret it in the enclosing object, props or type definition.
692	`Text_Answer__c: question.Question_Type__c === "Text" ? String(answer.value) : null,`	Sets/declares the named object property or style/type member: Text_Answer__c: question.Question_Type__c === "Text" ? String(answer.value) : null,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
693	`Number_Answer__c: question.Question_Type__c === "Number" ? Number(answer.value) : null,`	Sets/declares the named object property or style/type member: Number_Answer__c: question.Question_Type__c === "Number" ? Number(answer.value) : null,. Interpret it in the enclosing object, props or type definition.
694	`Phone_Answer__c: question.Question_Type__c === "Phone" ? String(answer.value) : null,`	Sets/declares the named object property or style/type member: Phone_Answer__c: question.Question_Type__c === "Phone" ? String(answer.value) : null,. Interpret it in the enclosing object, props or type definition.
695	`Selected_Choice__c:`	Sets/declares the named object property or style/type member: Selected_Choice__c:. Interpret it in the enclosing object, props or type definition.
696	`question.Question_Type__c === "Single Choice" ? String(answer.value) : null,`	Continues the surrounding declaration/expression or text: question.Question_Type__c === "Single Choice" ? String(answer.value) : null,. Read it with the preceding opening statement (Selected_Choice__c:); it is not a standalone business operation.
697	`Multiple_Choices__c:`	Sets/declares the named object property or style/type member: Multiple_Choices__c:. Interpret it in the enclosing object, props or type definition.
698	`question.Question_Type__c === "Multiple Choice" ? values.join("; ") : null,`	Calls the named method: question.Question_Type__c === "Multiple Choice" ? values.join("; ") : null,. Its implementation defines the side effect/result; use the symbol/file index to follow it.
699	`Rating__c: question.Question_Type__c === "Rating" ? Number(answer.value) : null,`	Sets/declares the named object property or style/type member: Rating__c: question.Question_Type__c === "Rating" ? Number(answer.value) : null,. Interpret it in the enclosing object, props or type definition.
700	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
701	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
702	`return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.
703	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
704	`{ id: created.id, status: req.body.status === "Draft" ? "Draft" : "Completed" },`	Continues the surrounding declaration/expression or text: { id: created.id, status: req.body.status === "Draft" ? "Draft" : "Completed" },. Read it with the preceding opening statement (res,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
705	`    "Survey saved in Salesforce",`	Continues the surrounding declaration/expression or text: "Survey saved in Salesforce",. Read it with the preceding opening statement ({ id: created.id, status: req.body.status === "Draft" ? "Draft" : "Completed" },); it is not a standalone business operation.
706	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
707	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
708		Blank line separating logical sections; no executable operation.
709	`app.get("/api/expense-policies", async (request, res) => {`	Registers an HTTP route or middleware: app.get("/api/expense-policies", async (request, res) => {. Registration order controls which authentication/validation runs first.
710	`  if (env.USE_MOCK_DATA) return ok(res, []);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA) return ok(res, []);.
711	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
712	`  const employeeRows = await sfRecords(`	Waits for this asynchronous operation before continuing: const employeeRows = await sfRecords(. The returned result/error must still be handled.
713	`    `SELECT Id, Geography__c, Geography__r.State__c FROM ${objectMap.salesRep} WHERE Id = '${escapeSoqlLiteral(req.auth!.employeeId)}' LIMIT 1`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Geography__c, Geography__r.State__c FROM ${objectMap.salesRep} WHERE Id = '${escapeSoqlLiteral(req.auth!.employeeId)}' LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
714	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
715	`  const employee = employeeRows[0];`	Declares/initializes local data used by the surrounding operation: const employee = employeeRows[0];. Collection contents and assignments below determine its purpose.
716	`  const rows = await sfRecords(`	Waits for this asynchronous operation before continuing: const rows = await sfRecords(. The returned result/error must still be handled.
717	`    `SELECT Id, Name, Expense_Type__c, Category__c, Ownership__c, Travel_Class__c, Rate_Type__c, Rate__c, Maximum_Amount__c, Receipt_Required__c, Geography__c, Geography__r.Name, Geography__r.State__c FROM ${objectMap.expensePolicy} WHERE Active__c = true AND Start_Date__c <= TODAY AND (End_Date__c = NULL OR End_Date__c >= TODAY) ORDER BY Expense_Type__c, Category__c`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Expense_Type__c, Category__c, Ownership__c, Travel_Class__c, Rate_Type__c, Rate__c, Maximum_Amount__c, Receipt_Required__c, Geography__c, Geography__r.Name, Geography__r.State__c FRO. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
718	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
719	`  const applicable = rows.filter(`	Declares/initializes local data used by the surrounding operation: const applicable = rows.filter(. Collection contents and assignments below determine its purpose.
720	`    (policy) =>`	Continues the surrounding declaration/expression or text: (policy) =>. Read it with the preceding opening statement (const applicable = rows.filter(); it is not a standalone business operation.
721	`      !policy.Geography__c ||`	Continues the surrounding declaration/expression or text: !policy.Geography__c ||. Read it with the preceding opening statement ((policy) =>); it is not a standalone business operation.
722	`      policy.Geography__c === employee?.Geography__c ||`	Continues the surrounding declaration/expression or text: policy.Geography__c === employee?.Geography__c ||. Read it with the preceding opening statement (!policy.Geography__c ||); it is not a standalone business operation.
723	`      (policy.Geography__r?.State__c &&`	Continues the surrounding declaration/expression or text: (policy.Geography__r?.State__c &&. Read it with the preceding opening statement (policy.Geography__c === employee?.Geography__c ||); it is not a standalone business operation.
724	`        policy.Geography__r.State__c === employee?.Geography__r?.State__c),`	Continues the surrounding declaration/expression or text: policy.Geography__r.State__c === employee?.Geography__r?.State__c),. Read it with the preceding opening statement ((policy.Geography__r?.State__c &&); it is not a standalone business operation.
725	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
726	`  return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.
727	`    res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
728	`    applicable.map((policy) => ({`	Transforms/selects/aggregates collection values with the callback shown here: applicable.map((policy) => ({. Read the callback body and result assignment together.
729	`      id: policy.Id,`	Sets/declares the named object property or style/type member: id: policy.Id,. Interpret it in the enclosing object, props or type definition.
730	`      name: policy.Name,`	Sets/declares the named object property or style/type member: name: policy.Name,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
731	`expenseType: policy.Expense_Type__c,`	Sets/declares the named object property or style/type member: expenseType: policy.Expense_Type__c,. Interpret it in the enclosing object, props or type definition.
732	`category: policy.Category__c,`	Sets/declares the named object property or style/type member: category: policy.Category__c,. Interpret it in the enclosing object, props or type definition.
733	`ownership: policy.Ownership__c,`	Sets/declares the named object property or style/type member: ownership: policy.Ownership__c,. Interpret it in the enclosing object, props or type definition.
734	`travelClass: policy.Travel_Class__c,`	Sets/declares the named object property or style/type member: travelClass: policy.Travel_Class__c,. Interpret it in the enclosing object, props or type definition.
735	`rateType: policy.Rate_Type__c,`	Sets/declares the named object property or style/type member: rateType: policy.Rate_Type__c,. Interpret it in the enclosing object, props or type definition.
736	`rate: Number(policy.Rate__c || 0),`	Sets/declares the named object property or style/type member: rate: Number(policy.Rate__c || 0),. Interpret it in the enclosing object, props or type definition.
737	`maximumAmount: Number(policy.Maximum_Amount__c || 0),`	Sets/declares the named object property or style/type member: maximumAmount: Number(policy.Maximum_Amount__c || 0),. Interpret it in the enclosing object, props or type definition.
738	`receiptRequired: Boolean(policy.Receipt_Required__c),`	Sets/declares the named object property or style/type member: receiptRequired: Boolean(policy.Receipt_Required__c),. Interpret it in the enclosing object, props or type definition.
739	`geography: policy.Geography__r?.Name,`	Sets/declares the named object property or style/type member: geography: policy.Geography__r?.Name,. Interpret it in the enclosing object, props or type definition.
740	`    })),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
741	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
742	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
743		Blank line separating logical sections; no executable operation.
744	`type ExpenseClaimInput = {`	Defines a compile-time data contract: type ExpenseClaimInput = {. TypeScript types do not validate untrusted runtime JSON by themselves.

Line	Source code	Explanation / reading note
745	`  policyId: string;`	Sets/declares the named object property or style/type member: policyId: string;. Interpret it in the enclosing object, props or type definition.
746	`  amount: number;`	Sets/declares the named object property or style/type member: amount: number;. Interpret it in the enclosing object, props or type definition.
747	`  distanceKm?: number;`	Sets/declares the named object property or style/type member: distanceKm?: number;. Interpret it in the enclosing object, props or type definition.
748	`  startOdometer?: number;`	Sets/declares the named object property or style/type member: startOdometer?: number;. Interpret it in the enclosing object, props or type definition.
749	`  endOdometer?: number;`	Sets/declares the named object property or style/type member: endOdometer?: number;. Interpret it in the enclosing object, props or type definition.
750	`  transportMode?: string;`	Sets/declares the named object property or style/type member: transportMode?: string;. Interpret it in the enclosing object, props or type definition.
751	`  ownership?: string;`	Sets/declares the named object property or style/type member: ownership?: string;. Interpret it in the enclosing object, props or type definition.
752	`  travelClass?: string;`	Sets/declares the named object property or style/type member: travelClass?: string;. Interpret it in the enclosing object, props or type definition.
753	`  receiptUrl?: string;`	Sets/declares the named object property or style/type member: receiptUrl?: string;. Interpret it in the enclosing object, props or type definition.
754	`  remarks?: string;`	Sets/declares the named object property or style/type member: remarks?: string;. Interpret it in the enclosing object, props or type definition.
755	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
756		Blank line separating logical sections; no executable operation.
757	`app.post("/api/expenses", async (request, res) => {`	Registers an HTTP route or middleware: app.post("/api/expenses", async (request, res) => {. Registration order controls which authentication/validation runs first.
758	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
759	`  const claims: ExpenseClaimInput[] = Array.isArray(req.body.claims) ? req.body.claims : [req.body];`	Declares/initializes local data used by the surrounding operation: const claims: ExpenseClaimInput[] = Array.isArray(req.body.claims) ? req.body.claims : [req.body];. Collection contents and assignments below determine its purpose.
760	`  if (!claims.length || claims.some((claim) => !claim.policyId || Number(claim.amount || 0) <= 0))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!claims.length || claims.some((claim) => !claim.policyId || Number(claim.amount || 0) <= 0)).
761	`    return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
762	`      res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
763	`      400,`	Continues the surrounding declaration/expression or text: 400,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
764	`      "Select one or more policies and enter valid amounts",`	Continues the surrounding declaration/expression or text: "Select one or more policies and enter valid amounts",. Read it with the preceding opening statement (400,); it is not a standalone business operation.
765	`      "VALIDATION_ERROR",`	Continues the surrounding declaration/expression or text: "VALIDATION_ERROR",. Read it with the preceding opening statement ("Select one or more policies and enter valid amounts",); it is not a standalone business operation.
766	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
767	`  if (env.USE_MOCK_DATA)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA).
768	`    return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.
769	`      res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
770	`      claims.map((claim, index) => ({`	Transforms/selects/aggregates collection values with the callback shown here: claims.map((claim, index) => ({. Read the callback body and result assignment together.
771	`        id: `expense-${Date.now()}-${index}`,`	Sets/declares the named object property or style/type member: id: `expense-${Date.now()}-${index}`,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
772	`...claim,`	Continues the surrounding declaration/expression or text: ...claim,. Read it with the preceding opening statement (id: `expense-${Date.now()}-${index}`,); it is not a standalone business operation.
773	`status: "Submitted",`	Sets/declares the named object property or style/type member: status: "Submitted",. Interpret it in the enclosing object, props or type definition.
774	`})),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
775	`"Expenses submitted",`	Continues the surrounding declaration/expression or text: "Expenses submitted",. Read it with the preceding opening statement (})),); it is not a standalone business operation.
776	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
777		Blank line separating logical sections; no executable operation.
778	`const policyIds = [...new Set(claims.map((claim) => escapeSoqlLiteral(String(claim.policyId))))];`	Declares/initializes local data used by the surrounding operation: const policyIds = [...new Set(claims.map((claim) => escapeSoqlLiteral(String(claim.policyId))))];. Collection contents and assignments below determine its purpose.
779	`const policies = await sfRecords(`	Waits for this asynchronous operation before continuing: const policies = await sfRecords(. The returned result/error must still be handled.
780	`` `SELECT Id, Name, Maximum_Amount__c, Receipt_Required__c FROM ${objectMap.expensePolicy} WHERE Id IN ('${policyIds.join("','")}') AND Active__c = true` ``	Calls the named method: `SELECT Id, Name, Maximum_Amount__c, Receipt_Required__c FROM ${objectMap.expensePolicy} WHERE Id IN ('${policyIds.join("','")}') AND Active__c = true`,. Its implementation defines the side effect/result; use the symbol/file index to follow it.
781	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
782	`const policyById = new Map(policies.map((policy) => [policy.Id, policy]));`	Declares/initializes local data used by the surrounding operation: const policyById = new Map(policies.map((policy) => [policy.Id, policy]));. Collection contents and assignments below determine its purpose.
783	`const representatives = await sfRecords(`	Waits for this asynchronous operation before continuing: const representatives = await sfRecords(. The returned result/error must still be handled.
Line	**Source code**	**Explanation / reading note**
784	`` `SELECT Id, Name, Employee_Code__c, Email__c, Salesforce_User__c FROM ${objectMap.salesRep} WHERE Id = '${escapeSoqlLiteral(req.auth!.employeeId)}' LIMIT ``	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Employee_Code__c, Email__c, Salesforce_User__c FROM ${objectMap.salesRep} WHERE

Line	Source code	Explanation / reading note
	`1`,	Id = '${escapeSoqlLiteral(req.auth!.employeeId)}' LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
785	);	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
786	const representative = representatives[0];	Declares/initializes local data used by the surrounding operation: const representative = representatives[0];. Collection contents and assignments below determine its purpose.
787	if (!representative)	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!representative).
788	return fail(	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
789	res,	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
790	422,	Continues the surrounding declaration/expression or text: 422,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
791	"No active Employee record is linked to this login",	Continues the surrounding declaration/expression or text: "No active Employee record is linked to this login",. Read it with the preceding opening statement (422,); it is not a standalone business operation.
792	"EMPLOYEE_NOT_LINKED",	Continues the surrounding declaration/expression or text: "EMPLOYEE_NOT_LINKED",. Read it with the preceding opening statement ("No active Employee record is linked to this login",); it is not a standalone business operation.
793	);	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
794	const attendance = await sfRecords(	Waits for this asynchronous operation before continuing: const attendance = await sfRecords(. The returned result/error must still be handled.
795	`SELECT Id FROM ${objectMap.attendance} WHERE Attendance_Date__c = TODAY AND Sales_Representative__c = '${escapeSoqlLiteral(representative.Salesforce_User__c)}' ORDER BY CreatedDate DESC LIMIT 1`,	Assigns the right-hand expression to the named variable/property: `SELECT Id FROM ${objectMap.attendance} WHERE Attendance_Date__c = TODAY AND Sales_Representative__c = '${escapeSoqlLiteral(representative.Salesforce_User__c)}' ORDER BY CreatedDate DESC LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
796	);	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
797	`  const createdClaims: Array<{ id: string; policyId: string; status: string }> = [];`	Declares/initializes local data used by the surrounding operation: const createdClaims: Array<{ id: string; policyId: string; status: string }> = [];. Collection contents and assignments below determine its purpose.
798		Blank line separating logical sections; no executable operation.
799	`  for (const claim of claims) {`	Repeats work over the specified records/items or while this condition holds: for (const claim of claims) {. Check where queries/writes occur relative to the loop.
800	`    const policy = policyById.get(String(claim.policyId));`	Declares/initializes local data used by the surrounding operation: const policy = policyById.get(String(claim.policyId));. Collection contents and assignments below determine its purpose.
801	`    const amount = Number(claim.amount || 0);`	Declares/initializes local data used by the surrounding operation: const amount = Number(claim.amount || 0);. Collection contents and assignments below determine its purpose.
802	`    if (!policy)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!policy).
803	`      return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
804	`        res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
805	`        404,`	Continues the surrounding declaration/expression or text: 404,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
806	`        "One of the selected expense policies is not active",`	Continues the surrounding declaration/expression or text: "One of the selected expense policies is not active",. Read it with the preceding opening statement (404,); it is not a standalone business operation.
807	`        "POLICY_NOT_FOUND",`	Continues the surrounding declaration/expression or text: "POLICY_NOT_FOUND",. Read it with the preceding opening statement ("One of the selected expense policies is not active",); it is not a standalone business operation.
808	`      );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
809	`    if (Number(policy.Maximum_Amount__c || 0) > 0 && amount > Number(policy.Maximum_Amount__c))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (Number(policy.Maximum_Amount__c || 0) > 0 && amount > Number(policy.Maximum_Amount__c)).

Line	Source code	Explanation / reading note
810	`return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
811	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
812	`422,`	Continues the surrounding declaration/expression or text: 422,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
813	`` `${policy.Name} exceeds its policy limit of ₹${policy.Maximum_Amount__c}`, ``	Continues the surrounding declaration/expression or text: `${policy.Name} exceeds its policy limit of ₹${policy.Maximum_Amount__c}`,. Read it with the preceding opening statement (422,); it is not a standalone business operation.
814	`"POLICY_LIMIT_EXCEEDED",`	Continues the surrounding declaration/expression or text: "POLICY_LIMIT_EXCEEDED",. Read it with the preceding opening statement (`${policy.Name} exceeds its policy limit of ₹${policy.Maximum_Amount__c}`,); it is not a standalone business operation.
815	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
816	`if (policy.Receipt_Required__c && !claim.receiptUrl)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (policy.Receipt_Required__c && !claim.receiptUrl).
817	`return fail(res, 422, `Receipt evidence is required for ${policy.Name}`, "RECEIPT_REQUIRED");`	Returns fail(res, 422, `Receipt evidence is required for ${policy.Name}`, "RECEIPT_REQUIRED") to the caller (or begins returned UI markup) and ends this execution path.
818	`if (claim.receiptUrl && !/^https?:\/\//i.test(String(claim.receiptUrl)))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (claim.receiptUrl && !/^https?:\/\//i.test(String(claim.receiptUrl))).
819	`return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
820	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
821	`422,`	Continues the surrounding declaration/expression or text: 422,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
822	`` `Receipt URL for ${policy.Name} must start with http:// or https://`, ``	Continues the surrounding declaration/expression or text: `Receipt URL for ${policy.Name} must start with http:// or https://`,. Read it with the preceding opening statement (422,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
823	`"INVALID_RECEIPT_URL",`	Continues the surrounding declaration/expression or text: "INVALID_RECEIPT_URL",. Read it with the preceding opening statement (`Receipt URL for ${policy.Name} must start with http:// or https://`,); it is not a standalone business operation.
824	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
825	`const startOdometer = Number(claim.startOdometer || 0);`	Declares/initializes local data used by the surrounding operation: const startOdometer = Number(claim.startOdometer || 0);. Collection contents and assignments below determine its purpose.
826	`const endOdometer = Number(claim.endOdometer || 0);`	Declares/initializes local data used by the surrounding operation: const endOdometer = Number(claim.endOdometer || 0);. Collection contents and assignments below determine its purpose.
827	`if (startOdometer > 0 && endOdometer > 0 && endOdometer < startOdometer)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (startOdometer > 0 && endOdometer > 0 && endOdometer < startOdometer).
828	`return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
829	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
830	`422,`	Continues the surrounding declaration/expression or text: 422,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
831	`` `End odometer cannot be lower than start odometer for ${policy.Name}`, ``	Continues the surrounding declaration/expression or text: `End odometer cannot be lower than start odometer for ${policy.Name}`,. Read it with the preceding opening statement (422,); it is not a standalone business operation.
832	`"INVALID_ODOMETER_RANGE",`	Continues the surrounding declaration/expression or text: "INVALID_ODOMETER_RANGE",. Read it with the preceding opening statement (`End odometer cannot be lower than start odometer for ${policy.Name}`,); it is not a standalone business operation.
833	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
834	`const created: any = await salesforce.create(objectMap.expenseClaim, {`	Invokes the external-data boundary: const created: any = await salesforce.create(objectMap.expenseClaim, {. Await/result checks determine whether the operation is confirmed.

Line	Source code	Explanation / reading note
835	`Sales_Representative__c: representative.Id,`	Sets/declares the named object property or style/type member: Sales_Representative__c: representative.Id,. Interpret it in the enclosing object, props or type definition.
836	`Expense_Policy__c: policy.Id,`	Sets/declares the named object property or style/type member: Expense_Policy__c: policy.Id,. Interpret it in the enclosing object, props or type definition.
837	`Attendance__c: attendance[0]?.Id || null,`	Sets/declares the named object property or style/type member: Attendance__c: attendance[0]?.Id || null,. Interpret it in the enclosing object, props or type definition.
838	`Claim_Date__c: new Date().toISOString().slice(0, 10),`	Sets/declares the named object property or style/type member: Claim_Date__c: new Date().toISOString().slice(0, 10),. Interpret it in the enclosing object, props or type definition.
839	`Amount__c: amount,`	Sets/declares the named object property or style/type member: Amount__c: amount,. Interpret it in the enclosing object, props or type definition.
840	`Distance_Km__c:`	Sets/declares the named object property or style/type member: Distance_Km__c:. Interpret it in the enclosing object, props or type definition.
841	`Number(claim.distanceKm || 0) ||`	Continues the surrounding declaration/expression or text: Number(claim.distanceKm || 0) ||. Read it with the preceding opening statement (Distance_Km__c:); it is not a standalone business operation.
842	`(endOdometer >= startOdometer ? endOdometer - startOdometer : null),`	Continues the surrounding declaration/expression or text: (endOdometer >= startOdometer ? endOdometer - startOdometer : null),. Read it with the preceding opening statement (Number(claim.distanceKm || 0) ||); it is not a standalone business operation.
843	`Start_Odometer__c: startOdometer || null,`	Sets/declares the named object property or style/type member: Start_Odometer__c: startOdometer || null,. Interpret it in the enclosing object, props or type definition.
844	`End_Odometer__c: endOdometer || null,`	Sets/declares the named object property or style/type member: End_Odometer__c: endOdometer || null,. Interpret it in the enclosing object, props or type definition.
845	`Transport_Mode__c: claim.transportMode || null,`	Sets/declares the named object property or style/type member: Transport_Mode__c: claim.transportMode || null,. Interpret it in the enclosing object, props or type definition.
846	`Ownership__c: claim.ownership || null,`	Sets/declares the named object property or style/type member: Ownership__c: claim.ownership || null,. Interpret it in the enclosing object, props or type definition.
847	`Travel_Class__c: claim.travelClass || null,`	Sets/declares the named object property or style/type member: Travel_Class__c: claim.travelClass || null,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
848	`Receipt_URL__c: claim.receiptUrl || null,`	Sets/declares the named object property or style/type member: Receipt_URL__c: claim.receiptUrl || null,. Interpret it in the enclosing object, props or type definition.
849	`Remarks__c: claim.remarks || null,`	Sets/declares the named object property or style/type member: Remarks__c: claim.remarks || null,. Interpret it in the enclosing object, props or type definition.
850	`Status__c: "Submitted",`	Sets/declares the named object property or style/type member: Status__c: "Submitted",. Interpret it in the enclosing object, props or type definition.
851	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
852	`createdClaims.push({ id: created.id, policyId: policy.Id, status: "Submitted" });`	Calls the named method: createdClaims.push({ id: created.id, policyId: policy.Id, status: "Submitted" });. Its implementation defines the side effect/result; use the symbol/file index to follow it.
853	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
854	`return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.
855	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
856	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (res,); it is not a standalone business operation.
857	`claims: createdClaims,`	Sets/declares the named object property or style/type member: claims: createdClaims,. Interpret it in the enclosing object, props or type definition.
858	`representative: {`	Sets/declares the named object property or style/type member: representative: {. Interpret it in the enclosing object, props or type definition.
859	`id: representative.Id,`	Sets/declares the named object property or style/type member: id: representative.Id,. Interpret it in the enclosing object, props or type definition.
860	`name: representative.Name,`	Sets/declares the named object property or style/type member: name: representative.Name,. Interpret it in the enclosing object, props or type definition.
861	`employeeCode: representative.Employee_Code__c,`	Sets/declares the named object property or style/type member: employeeCode: representative.Employee_Code__c,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
862	`email: representative.Email__c,`	Sets/declares the named object property or style/type member: email: representative.Email__c,. Interpret it in the enclosing object, props or type definition.
863	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
864	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
865	`` `${createdClaims.length} expense claim${createdClaims.length === 1 ? "" : "s"} submitted for approval`, ``	Continues the surrounding declaration/expression or text: `${createdClaims.length} expense claim${createdClaims.length === 1 ? "" : "s"} submitted for approval`,. Read it with the preceding opening statement (},); it is not a standalone business operation.
866	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
867	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
868	`app.post("/api/product-refusals", async (request, res) => {`	Registers an HTTP route or middleware: app.post("/api/product-refusals", async (request, res) => {. Registration order controls which authentication/validation runs first.
869	`const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
870	`const visit = await ownedVisit(req.body.visitId, req.auth!.employeeId);`	Waits for this asynchronous operation before continuing: const visit = await ownedVisit(req.body.visitId, req.auth!.employeeId);. The returned result/error must still be handled.
871	`if (!visit) return fail(res, 404, "Visit not found", "VISIT_NOT_FOUND");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!visit) return fail(res, 404, "Visit not found", "VISIT_NOT_FOUND");.
872	`if (visit.employeeId !== req.auth!.employeeId)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visit.employeeId !== req.auth!.employeeId).
873	`return fail(res, 403, "This visit belongs to another Employee", "VISIT_ACCESS_DENIED");`	Returns fail(res, 403, "This visit belongs to another Employee", "VISIT_ACCESS_DENIED") to the caller (or begins returned UI markup) and ends this execution path.
874	`const reason = String(req.body.reason || "").trim();`	Declares/initializes local data used by the surrounding operation: const reason = String(req.body.reason || "").trim();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
875	`  if (!reason)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!reason).
876	`    return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
877	`      res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
878	`      400,`	Continues the surrounding declaration/expression or text: 400,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
879	`      "A refusal reason is required for a Must Sell product",`	Continues the surrounding declaration/expression or text: "A refusal reason is required for a Must Sell product",. Read it with the preceding opening statement (400,); it is not a standalone business operation.
880	`      "REFUSAL_REASON_REQUIRED",`	Continues the surrounding declaration/expression or text: "REFUSAL_REASON_REQUIRED",. Read it with the preceding opening statement ("A refusal reason is required for a Must Sell product",); it is not a standalone business operation.
881	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
882	`  const productId = escapeSoqlLiteral(String(req.body.productId || ""));`	Declares/initializes local data used by the surrounding operation: const productId = escapeSoqlLiteral(String(req.body.productId || ""));. Collection contents and assignments below determine its purpose.
883	`  const productRows = await sfRecords(`	Waits for this asynchronous operation before continuing: const productRows = await sfRecords(. The returned result/error must still be handled.
884	`    \`SELECT Id FROM ${objectMap.productSalesConfiguration} WHERE Product__c = '${productId}' AND Configuration_Type__c = 'Must Sell' AND Active__c = true AND Start_Date__c <= TODAY AND (End_Date__c = NULL OR End_Date__c >= TODAY) LIMIT 1\`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id FROM ${objectMap.productSalesConfiguration} WHERE Product__c = '${productId}' AND Configuration_Type__c = 'Must Sell' AND Active__c = true AND Start_Date__c <= TODAY AND (End_Date__c = NULL. This is in-memory unless it is later persisted by an explicit call.
885	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
886	`  if (!productRows.length)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!productRows.length).
887	`    return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
888	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
889	`400,`	Continues the surrounding declaration/expression or text: 400,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
890	`"Only Must Sell products require a refusal record",`	Continues the surrounding declaration/expression or text: "Only Must Sell products require a refusal record",. Read it with the preceding opening statement (400,); it is not a standalone business operation.
891	`"INVALID_REFUSAL_PRODUCT",`	Continues the surrounding declaration/expression or text: "INVALID_REFUSAL_PRODUCT",. Read it with the preceding opening statement ("Only Must Sell products require a refusal record",); it is not a standalone business operation.
892	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
893	`const existing = await sfRecords(`	Waits for this asynchronous operation before continuing: const existing = await sfRecords(. The returned result/error must still be handled.
894	`` `SELECT Id FROM ${objectMap.productRefusal} WHERE Visit__c = '${escapeSoqlLiteral(visit.id)}' AND Product__c = '${productId}' LIMIT 1`, ``	Assigns the right-hand expression to the named variable/property: `SELECT Id FROM ${objectMap.productRefusal} WHERE Visit__c = '${escapeSoqlLiteral(visit.id)}' AND Product__c = '${productId}' LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
895	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
896	`if (existing.length) return ok(res, { id: existing[0].Id }, "Refusal already saved");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (existing.length) return ok(res, { id: existing[0].Id }, "Refusal already saved");.
897	`const created: any = await salesforce.create(objectMap.productRefusal, {`	Invokes the external-data boundary: const created: any = await salesforce.create(objectMap.productRefusal, {. Await/result checks determine whether the operation is confirmed.
898	`Visit__c: visit.id,`	Sets/declares the named object property or style/type member: Visit__c: visit.id,. Interpret it in the enclosing object, props or type definition.
899	`Outlet__c: visit.storeId,`	Sets/declares the named object property or style/type member: Outlet__c: visit.storeId,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
900	`    Product__c: productId,`	Sets/declares the named object property or style/type member: Product__c: productId,. Interpret it in the enclosing object, props or type definition.
901	`    Employee__c: req.auth!.employeeId,`	Sets/declares the named object property or style/type member: Employee__c: req.auth!.employeeId,. Interpret it in the enclosing object, props or type definition.
902	`    Reason__c: reason,`	Sets/declares the named object property or style/type member: Reason__c: reason,. Interpret it in the enclosing object, props or type definition.
903	`    Notes__c: req.body.notes || null,`	Sets/declares the named object property or style/type member: Notes__c: req.body.notes || null,. Interpret it in the enclosing object, props or type definition.
904	`    Refused_At__c: new Date().toISOString(),`	Sets/declares the named object property or style/type member: Refused_At__c: new Date().toISOString(),. Interpret it in the enclosing object, props or type definition.
905	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
906	`  visit.refusedProductIds = [...new Set([...(visit.refusedProductIds || []), productId])];`	Assigns the right-hand expression to the named variable/property: visit.refusedProductIds = [...new Set([...(visit.refusedProductIds || []), productId])];. This is in-memory unless it is later persisted by an explicit call.
907	`  return ok(res, { id: created.id }, "Must Sell refusal saved in Salesforce");`	Returns ok(res, { id: created.id }, "Must Sell refusal saved in Salesforce") to the caller (or begins returned UI markup) and ends this execution path.
908	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
909	`app.get("/api/outlets", async (request, res) => {`	Registers an HTTP route or middleware: app.get("/api/outlets", async (request, res) => {. Registration order controls which authentication/validation runs first.
910	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
911	`  if (env.USE_MOCK_DATA) return ok(res, stores);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA) return ok(res, stores);.
912	`  const employeeId = escapeSoqlLiteral(req.auth!.employeeId);`	Declares/initializes local data used by the surrounding operation: const employeeId = escapeSoqlLiteral(req.auth!.employeeId);. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
913	`  const [rows, visitRows, orderRows] = await Promise.all([`	Starts independent asynchronous operations together and waits for all; rejection propagates to the surrounding error handler.
914	`    sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement (const [rows, visitRows, orderRows] = await Promise.all([); it is not a standalone business operation.
915	`      `SELECT Id, Name, Address__c, Phone__c, Email__c, Outlet_Owner_Name__c, Outlet_Type__c, Outstanding_Amount__c, Active__c, Beat__c, Beat__r.Name, Geography__r.Name, Geo_Location__Latitude__s, Geo_Location__Longitude__s, Latitude__c, Longitude__c FROM ${objectMap.store} WHERE Id IN (${allocatedOutletIds(employeeId)}) ORDER BY Name LIMIT 500`,`	Continues the surrounding declaration/expression or text: `SELECT Id, Name, Address__c, Phone__c, Email__c, Outlet_Owner_Name__c, Outlet_Type__c, Outstanding_Amount__c, Active__c, Beat__c, Beat__r.Name, Geography__r.Name, Geo_Location__Latitude__s, Geo_Locat. Read it with the preceding opening statement (sfRecords(); it is not a standalone business operation.
916	`    ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
917	`    sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
918	`      `SELECT Id, Visit_Number__c, Visit_Date__c, Status__c, Retailer__c, Check_In_Time__c, Check_Out_Time__c, Check_In_Latitude__c, Check_In_Longitude__c, Check_Out_Latitude__c, Check_Out_Longitude__c, Duration_Minutes__c FROM ${objectMap.visit} WHERE Retailer__c IN (${allocatedOutletIds(employeeId)}) ORDER BY Check_In_Time__c DESC NULLS LAST, Visit_Date__c DESC, CreatedDate DESC LIMIT 1000`,`	Continues the surrounding declaration/expression or text: `SELECT Id, Visit_Number__c, Visit_Date__c, Status__c, Retailer__c, Check_In_Time__c, Check_Out_Time__c, Check_In_Latitude__c, Check_In_Longitude__c, Check_Out_Latitude__c, Check_Out_Longitude__c, Dur. Read it with the preceding opening statement (sfRecords(); it is not a standalone business operation.
919	`    ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
920	`    sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
921	`      `SELECT Id, Retailer__c, Order_Date__c, Status__c, Total_Amount__c, Total_Quantity__c FROM ${objectMap.order} WHERE Retailer__c IN (${allocatedOutletIds(employeeId)}) ORDER BY Order_Date__c DESC, CreatedDate DESC LIMIT 1000`,`	Continues the surrounding declaration/expression or text: `SELECT Id, Retailer__c, Order_Date__c, Status__c, Total_Amount__c, Total_Quantity__c FROM ${objectMap.order} WHERE Retailer__c IN (${allocatedOutletIds(employeeId)}) ORDER BY Order_Date__c DESC, Crea. Read it with the preceding opening statement (sfRecords(); it is not a standalone business operation.
922	`    ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
923	`  ]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
924	`  const visitsByOutlet = new Map<string, any[]>();`	Declares/initializes local data used by the surrounding operation: const visitsByOutlet = new Map<string, any[]>();. Collection contents and assignments below determine its purpose.
925	`  for (const visit of visitRows) {`	Repeats work over the specified records/items or while this condition holds: for (const visit of visitRows) {. Check where queries/writes occur relative to the loop.
926	`    const outletVisits = visitsByOutlet.get(visit.Retailer__c) || [];`	Declares/initializes local data used by the surrounding operation: const outletVisits = visitsByOutlet.get(visit.Retailer__c) || [];. Collection contents and assignments below determine its purpose.
927	`    outletVisits.push({`	Calls the named method: outletVisits.push({. Its implementation defines the side effect/result; use the symbol/file index to follow it.
928	`      id: visit.Id,`	Sets/declares the named object property or style/type member: id: visit.Id,. Interpret it in the enclosing object, props or type definition.
929	`      visitNumber: visit.Visit_Number__c,`	Sets/declares the named object property or style/type member: visitNumber: visit.Visit_Number__c,. Interpret it in the enclosing object, props or type definition.
930	`      date: visit.Visit_Date__c,`	Sets/declares the named object property or style/type member: date: visit.Visit_Date__c,. Interpret it in the enclosing object, props or type definition.
931	`      status: visit.Status__c,`	Sets/declares the named object property or style/type member: status: visit.Status__c,. Interpret it in the enclosing object, props or type definition.
932	`      checkInTime: visit.Check_In_Time__c,`	Sets/declares the named object property or style/type member: checkInTime: visit.Check_In_Time__c,. Interpret it in the enclosing object, props or type definition.
933	`      checkOutTime: visit.Check_Out_Time__c,`	Sets/declares the named object property or style/type member: checkOutTime: visit.Check_Out_Time__c,. Interpret it in the enclosing object, props or type definition.
934	`      durationMinutes: visit.Duration_Minutes__c,`	Sets/declares the named object property or style/type member: durationMinutes: visit.Duration_Minutes__c,. Interpret it in the enclosing object, props or type definition.
935	`      checkInLocation:`	Sets/declares the named object property or style/type member: checkInLocation:. Interpret it in the enclosing object, props or type definition.
936	`        visit.Check_In_Latitude__c == null`	Continues the surrounding declaration/expression or text: visit.Check_In_Latitude__c == null. Read it with the preceding opening statement (checkInLocation:); it is not a standalone business operation.

Line	Source code	Explanation / reading note
937	`? null`	Continues the surrounding declaration/expression or text: ? null. Read it with the preceding opening statement (visit.Check_In_Latitude__c == null); it is not a standalone business operation.
938	`: {`	Continues the surrounding declaration/expression or text: : {. Read it with the preceding opening statement (? null); it is not a standalone business operation.
939	`latitude: visit.Check_In_Latitude__c,`	Sets/declares the named object property or style/type member: latitude: visit.Check_In_Latitude__c,. Interpret it in the enclosing object, props or type definition.
940	`longitude: visit.Check_In_Longitude__c,`	Sets/declares the named object property or style/type member: longitude: visit.Check_In_Longitude__c,. Interpret it in the enclosing object, props or type definition.
941	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
942	`checkOutLocation:`	Sets/declares the named object property or style/type member: checkOutLocation:. Interpret it in the enclosing object, props or type definition.
943	`visit.Check_Out_Latitude__c == null`	Continues the surrounding declaration/expression or text: visit.Check_Out_Latitude__c == null. Read it with the preceding opening statement (checkOutLocation:); it is not a standalone business operation.
944	`? null`	Continues the surrounding declaration/expression or text: ? null. Read it with the preceding opening statement (visit.Check_Out_Latitude__c == null); it is not a standalone business operation.
945	`: {`	Continues the surrounding declaration/expression or text: : {. Read it with the preceding opening statement (? null); it is not a standalone business operation.
946	`latitude: visit.Check_Out_Latitude__c,`	Sets/declares the named object property or style/type member: latitude: visit.Check_Out_Latitude__c,. Interpret it in the enclosing object, props or type definition.
947	`longitude: visit.Check_Out_Longitude__c,`	Sets/declares the named object property or style/type member: longitude: visit.Check_Out_Longitude__c,. Interpret it in the enclosing object, props or type definition.
948	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
949	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
950	`    visitsByOutlet.set(visit.Retailer__c, outletVisits);`	Calls the named method: visitsByOutlet.set(visit.Retailer__c, outletVisits);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
951	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
952	`  const ordersByOutlet = new Map<string, any[]>();`	Declares/initializes local data used by the surrounding operation: const ordersByOutlet = new Map<string, any[]>();. Collection contents and assignments below determine its purpose.
953	`  for (const order of orderRows) {`	Repeats work over the specified records/items or while this condition holds: for (const order of orderRows) {. Check where queries/writes occur relative to the loop.
954	`    const outletOrders = ordersByOutlet.get(order.Retailer__c) || [];`	Declares/initializes local data used by the surrounding operation: const outletOrders = ordersByOutlet.get(order.Retailer__c) || [];. Collection contents and assignments below determine its purpose.
955	`    outletOrders.push(order);`	Calls the named method: outletOrders.push(order);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
956	`    ordersByOutlet.set(order.Retailer__c, outletOrders);`	Calls the named method: ordersByOutlet.set(order.Retailer__c, outletOrders);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
957	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
958	`  ok(`	Continues the surrounding declaration/expression or text: ok(. Read it with the preceding opening statement (}); it is not a standalone business operation.
959	`    res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (ok(); it is not a standalone business operation.
960	`    rows.map((row) => {`	Transforms/selects/aggregates collection values with the callback shown here: rows.map((row) => {. Read the callback body and result assignment together.
961	`      const outletVisits = visitsByOutlet.get(row.Id) || [];`	Declares/initializes local data used by the surrounding operation: const outletVisits = visitsByOutlet.get(row.Id) || [];. Collection contents and assignments below determine its purpose.
962	`      const outletOrders = ordersByOutlet.get(row.Id) || [];`	Declares/initializes local data used by the surrounding operation: const outletOrders = ordersByOutlet.get(row.Id) || [];. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
963	`return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
964	`id: row.Id,`	Sets/declares the named object property or style/type member: id: row.Id,. Interpret it in the enclosing object, props or type definition.
965	`code: \`OUT-${row.Id.slice(-5).toUpperCase()}\`,`	Sets/declares the named object property or style/type member: code: `OUT-${row.Id.slice(-5).toUpperCase()}`,. Interpret it in the enclosing object, props or type definition.
966	`name: row.Name,`	Sets/declares the named object property or style/type member: name: row.Name,. Interpret it in the enclosing object, props or type definition.
967	`owner: row.Outlet_Owner_Name__c,`	Sets/declares the named object property or style/type member: owner: row.Outlet_Owner_Name__c,. Interpret it in the enclosing object, props or type definition.
968	`contact: row.Phone__c,`	Sets/declares the named object property or style/type member: contact: row.Phone__c,. Interpret it in the enclosing object, props or type definition.
969	`email: row.Email__c,`	Sets/declares the named object property or style/type member: email: row.Email__c,. Interpret it in the enclosing object, props or type definition.
970	`type: row.Outlet_Type__c,`	Sets/declares the named object property or style/type member: type: row.Outlet_Type__c,. Interpret it in the enclosing object, props or type definition.
971	`address: row.Address__c,`	Sets/declares the named object property or style/type member: address: row.Address__c,. Interpret it in the enclosing object, props or type definition.
972	`geography: row.Geography__r?.Name,`	Sets/declares the named object property or style/type member: geography: row.Geography__r?.Name,. Interpret it in the enclosing object, props or type definition.
973	`beatId: row.Beat__c,`	Sets/declares the named object property or style/type member: beatId: row.Beat__c,. Interpret it in the enclosing object, props or type definition.
974	`beatName: row.Beat__r?.Name,`	Sets/declares the named object property or style/type member: beatName: row.Beat__r?.Name,. Interpret it in the enclosing object, props or type definition.
975	`active: row.Active__c,`	Sets/declares the named object property or style/type member: active: row.Active__c,. Interpret it in the enclosing object, props or type definition.
976	`status: row.Active__c ? "Active" : "Inactive",`	Sets/declares the named object property or style/type member: status: row.Active__c ? "Active" : "Inactive",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
977	`outstandingAmount: row.Outstanding_Amount__c || 0,`	Sets/declares the named object property or style/type member: outstandingAmount: row.Outstanding_Amount__c || 0,. Interpret it in the enclosing object, props or type definition.
978	`latitude: row.Geo_Location__Latitude__s ?? row.Latitude__c,`	Sets/declares the named object property or style/type member: latitude: row.Geo_Location__Latitude__s ?? row.Latitude__c,. Interpret it in the enclosing object, props or type definition.
979	`longitude: row.Geo_Location__Longitude__s ?? row.Longitude__c,`	Sets/declares the named object property or style/type member: longitude: row.Geo_Location__Longitude__s ?? row.Longitude__c,. Interpret it in the enclosing object, props or type definition.
980	`locationStatus:`	Sets/declares the named object property or style/type member: locationStatus:. Interpret it in the enclosing object, props or type definition.
981	`(row.Geo_Location__Latitude__s ?? row.Latitude__c) == null`	Continues the surrounding declaration/expression or text: (row.Geo_Location__Latitude__s ?? row.Latitude__c) == null. Read it with the preceding opening statement (locationStatus:); it is not a standalone business operation.
982	`? "Location missing"`	Continues the surrounding declaration/expression or text: ? "Location missing". Read it with the preceding opening statement ((row.Geo_Location__Latitude__s ?? row.Latitude__c) == null); it is not a standalone business operation.
983	`: "Location available",`	Continues the surrounding declaration/expression or text: : "Location available",. Read it with the preceding opening statement (? "Location missing"); it is not a standalone business operation.
984	`visitCount: outletVisits.length,`	Sets/declares the named object property or style/type member: visitCount: outletVisits.length,. Interpret it in the enclosing object, props or type definition.
985	`lastVisit: outletVisits[0]?.checkInTime || outletVisits[0]?.date || null,`	Sets/declares the named object property or style/type member: lastVisit: outletVisits[0]?.checkInTime || outletVisits[0]?.date || null,. Interpret it in the enclosing object, props or type definition.
986	`lastVisitLocation: outletVisits[0]?.checkInLocation || null,`	Sets/declares the named object property or style/type member: lastVisitLocation: outletVisits[0]?.checkInLocation || null,. Interpret it in the enclosing object, props or type definition.
987	`recentVisits: outletVisits.slice(0, 5),`	Sets/declares the named object property or style/type member: recentVisits: outletVisits.slice(0, 5),. Interpret it in the enclosing object, props or type definition.
988	`orderCount: outletOrders.length,`	Sets/declares the named object property or style/type member: orderCount: outletOrders.length,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
989	`lastOrderDate: outletOrders[0]?.Order_Date__c || null,`	Sets/declares the named object property or style/type member: lastOrderDate: outletOrders[0]?.Order_Date__c || null,. Interpret it in the enclosing object, props or type definition.
990	`lastOrderAmount: Number(outletOrders[0]?.Total_Amount__c || 0),`	Sets/declares the named object property or style/type member: lastOrderAmount: Number(outletOrders[0]?.Total_Amount__c || 0),. Interpret it in the enclosing object, props or type definition.
991	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
992	`}),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
993	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
994	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
995		Blank line separating logical sections; no executable operation.
996	`app.get("/api/orders", async (request, res) => {`	Registers an HTTP route or middleware: app.get("/api/orders", async (request, res) => {. Registration order controls which authentication/validation runs first.
997	`const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
998	`if (env.USE_MOCK_DATA) return ok(res, []);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA) return ok(res, []);.
999	`const employeeId = escapeSoqlLiteral(req.auth!.employeeId);`	Declares/initializes local data used by the surrounding operation: const employeeId = escapeSoqlLiteral(req.auth!.employeeId);. Collection contents and assignments below determine its purpose.
1000	`const rows = await sfRecords(`	Waits for this asynchronous operation before continuing: const rows = await sfRecords(. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
1001	`` `SELECT Id, Name, Order_Date__c, Status__c, Gross_Amount__c, Tax_Amount__c, Total_Amount__c, Total_Quantity__c, SKU__c, Scheme_Applied__c, Scheme_Details__c, Product__r.Name, Visit__r.Name, Retailer__c, Retailer__r.Name FROM ``	Continues the surrounding declaration/expression or text: `SELECT Id, Name, Order_Date__c, Status__c, Gross_Amount__c, Tax_Amount__c, Total_Amount__c, Total_Quantity__c, SKU__c, Scheme_Applied__c, Scheme_Details__c, Product__r.Name,

Line	Source code	Explanation / reading note
	`${objectMap.order} WHERE Retailer__c IN (${allocatedOutletIds(employeeId)}) ORDER BY Order_Date__c DESC, CreatedDate DESC LIMIT 200`,`	Visit__r.Name, Retailer__. Read it with the preceding opening statement (const rows = await sfRecords(); it is not a standalone business operation.
1002	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1003	`  const orderIds = rows.map((row) => `'${escapeSoqlLiteral(row.Id)}'`).join(",");`	Declares/initializes local data used by the surrounding operation: const orderIds = rows.map((row) => `'${escapeSoqlLiteral(row.Id)}'`).join(",");. Collection contents and assignments below determine its purpose.
1004	`  const itemRows = orderIds`	Declares/initializes local data used by the surrounding operation: const itemRows = orderIds. Collection contents and assignments below determine its purpose.
1005	`    ? await sfRecords(`	Waits for this asynchronous operation before continuing: ? await sfRecords(. The returned result/error must still be handled.
1006	`        `SELECT Id, Sales_Order__c, Product__c, Product__r.Name, Piece_Quantity__c, Unit_Price__c, Line_Amount__c, Scheme__c, Scheme__r.Name FROM ${objectMap.orderItem} WHERE Sales_Order__c IN (${orderIds}) ORDER BY CreatedDate`,`	Continues the surrounding declaration/expression or text: `SELECT Id, Sales_Order__c, Product__c, Product__r.Name, Piece_Quantity__c, Unit_Price__c, Line_Amount__c, Scheme__c, Scheme__r.Name FROM ${objectMap.orderItem} WHERE Sales_Order__c IN (${orderIds}) O. Read it with the preceding opening statement (? await sfRecords(); it is not a standalone business operation.
1007	`      )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1008	`    : [];`	Continues the surrounding declaration/expression or text: : [];. Read it with the preceding opening statement ( )); it is not a standalone business operation.
1009	`  ok(`	Continues the surrounding declaration/expression or text: ok(. Read it with the preceding opening statement (: [];); it is not a standalone business operation.
1010	`    res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (ok(); it is not a standalone business operation.
1011	`    rows.map((row) => ({`	Transforms/selects/aggregates collection values with the callback shown here: rows.map((row) => ({. Read the callback body and result assignment together.
1012	`      id: row.Id,`	Sets/declares the named object property or style/type member: id: row.Id,. Interpret it in the enclosing object, props or type definition.
1013	`      orderNumber: row.Name,`	Sets/declares the named object property or style/type member: orderNumber: row.Name,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1014	`date: row.Order_Date__c,`	Sets/declares the named object property or style/type member: date: row.Order_Date__c,. Interpret it in the enclosing object, props or type definition.
1015	`status: row.Status__c,`	Sets/declares the named object property or style/type member: status: row.Status__c,. Interpret it in the enclosing object, props or type definition.
1016	`amount: row.Total_Amount__c || 0,`	Sets/declares the named object property or style/type member: amount: row.Total_Amount__c || 0,. Interpret it in the enclosing object, props or type definition.
1017	`grossAmount: row.Gross_Amount__c || 0,`	Sets/declares the named object property or style/type member: grossAmount: row.Gross_Amount__c || 0,. Interpret it in the enclosing object, props or type definition.
1018	`taxAmount: row.Tax_Amount__c || 0,`	Sets/declares the named object property or style/type member: taxAmount: row.Tax_Amount__c || 0,. Interpret it in the enclosing object, props or type definition.
1019	`totalQuantity: row.Total_Quantity__c || 0,`	Sets/declares the named object property or style/type member: totalQuantity: row.Total_Quantity__c || 0,. Interpret it in the enclosing object, props or type definition.
1020	`sku: row.SKU__c,`	Sets/declares the named object property or style/type member: sku: row.SKU__c,. Interpret it in the enclosing object, props or type definition.
1021	`schemeApplied: row.Scheme_Applied__c,`	Sets/declares the named object property or style/type member: schemeApplied: row.Scheme_Applied__c,. Interpret it in the enclosing object, props or type definition.
1022	`schemeDetails: row.Scheme_Details__c,`	Sets/declares the named object property or style/type member: schemeDetails: row.Scheme_Details__c,. Interpret it in the enclosing object, props or type definition.
1023	`productName: row.Product__r?.Name,`	Sets/declares the named object property or style/type member: productName: row.Product__r?.Name,. Interpret it in the enclosing object, props or type definition.
1024	`visitName: row.Visit__r?.Name,`	Sets/declares the named object property or style/type member: visitName: row.Visit__r?.Name,. Interpret it in the enclosing object, props or type definition.
1025	`outletId: row.Retailer__c,`	Sets/declares the named object property or style/type member: outletId: row.Retailer__c,. Interpret it in the enclosing object, props or type definition.
1026	`outletName: row.Retailer__r?.Name,`	Sets/declares the named object property or style/type member: outletName: row.Retailer__r?.Name,. Interpret it in the enclosing object, props or type definition.
1027	`items: itemRows`	Sets/declares the named object property or style/type member: items: itemRows. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1028	`.filter((item) => item.Sales_Order__c === row.Id)`	Transforms/selects/aggregates collection values with the callback shown here: .filter((item) => item.Sales_Order__c === row.Id). Read the callback body and result assignment together.
1029	`.map((item) => ({`	Transforms/selects/aggregates collection values with the callback shown here: .map((item) => ({. Read the callback body and result assignment together.
1030	`id: item.Id,`	Sets/declares the named object property or style/type member: id: item.Id,. Interpret it in the enclosing object, props or type definition.
1031	`productId: item.Product__c,`	Sets/declares the named object property or style/type member: productId: item.Product__c,. Interpret it in the enclosing object, props or type definition.
1032	`productName: item.Product__r?.Name,`	Sets/declares the named object property or style/type member: productName: item.Product__r?.Name,. Interpret it in the enclosing object, props or type definition.
1033	`quantity: Number(item.Piece_Quantity__c || 0),`	Sets/declares the named object property or style/type member: quantity: Number(item.Piece_Quantity__c || 0),. Interpret it in the enclosing object, props or type definition.
1034	`unitPrice: Number(item.Unit_Price__c || 0),`	Sets/declares the named object property or style/type member: unitPrice: Number(item.Unit_Price__c || 0),. Interpret it in the enclosing object, props or type definition.
1035	`amount: Number(item.Line_Amount__c || 0),`	Sets/declares the named object property or style/type member: amount: Number(item.Line_Amount__c || 0),. Interpret it in the enclosing object, props or type definition.
1036	`schemeId: item.Scheme__c,`	Sets/declares the named object property or style/type member: schemeId: item.Scheme__c,. Interpret it in the enclosing object, props or type definition.
1037	`schemeName: item.Scheme__r?.Name,`	Sets/declares the named object property or style/type member: schemeName: item.Scheme__r?.Name,. Interpret it in the enclosing object, props or type definition.
1038	`})),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1039	`})),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1040	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1041	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1042		Blank line separating logical sections; no executable operation.
1043	`const moduleQueries: Record<string, string> = {`	Declares/initializes local data used by the surrounding operation: const moduleQueries: Record<string, string> = {. Collection contents and assignments below determine its purpose.
1044	`  "asset-surveys": `SELECT Id, Name, Asset_Code__c, Asset_Name__c, Status__c, Given_Date__c, Picture_URL__c, Outlet__r.Name, Visit__r.Name FROM ${objectMap.assetSurvey} ORDER BY CreatedDate DESC LIMIT 200`,`	Continues the surrounding declaration/expression or text: "asset-surveys": `SELECT Id, Name, Asset_Code__c, Asset_Name__c, Status__c, Given_Date__c, Picture_URL__c, Outlet__r.Name, Visit__r.Name FROM ${objectMap.assetSurvey} ORDER BY CreatedDate DESC LIMIT 2. Read it with the preceding opening statement (const moduleQueries: Record<string, string> = {); it is not a standalone business operation.
1045	`  "competitor-activities": `SELECT Id, Name, Competitor_Name__c, Company__c, MRP__c, RBP__c, Scheme_Details__c, Image_URL__c, Outlet__r.Name, Visit__r.Name FROM ${objectMap.competitor} ORDER BY CreatedDate DESC LIMIT 200`,`	Continues the surrounding declaration/expression or text: "competitor-activities": `SELECT Id, Name, Competitor_Name__c, Company__c, MRP__c, RBP__c, Scheme_Details__c, Image_URL__c, Outlet__r.Name, Visit__r.Name FROM ${objectMap.competitor} ORDER BY CreatedD. Read it with the preceding opening statement ( "asset-surveys": `SELECT Id, Name, Asset_Code__c, Asset_Name__c, Status__c, Given_Date__c, Picture_URL__c, Outlet__r.Name, Visit__r.Name FROM ${objectMap.assetSurvey} ORDER BY CreatedDate DESC LIMIT); it is not a standalone business operation.
1046	`  tickets: `SELECT Id, Name, Subject__c, Description__c, Status__c, Image_URL__c, Outlet__r.Name, Visit__r.Name FROM ${objectMap.ticket} ORDER BY CreatedDate DESC LIMIT 200`,`	Sets/declares the named object property or style/type member: tickets: `SELECT Id, Name, Subject__c, Description__c, Status__c, Image_URL__c, Outlet__r.Name, Visit__r.Name FROM ${objectMap.ticket} ORDER BY CreatedDate DESC LIMIT 200`,. Interpret it in the enclosing object, props or type definition.
1047	`  "stock-checks": `SELECT Id, Name, Product__r.Name, Quantity__c, Manufacturing_Date__c, Outlet__r.Name, Visit__r.Name FROM ${objectMap.stockCheck} ORDER BY CreatedDate DESC LIMIT 200`,`	Continues the surrounding declaration/expression or text: "stock-checks": `SELECT Id, Name, Product__r.Name, Quantity__c, Manufacturing_Date__c, Outlet__r.Name, Visit__r.Name FROM ${objectMap.stockCheck} ORDER BY CreatedDate DESC LIMIT 200`,. Read it with the preceding opening statement (tickets: `SELECT Id, Name, Subject__c, Description__c, Status__c, Image_URL__c, Outlet__r.Name, Visit__r.Name FROM ${objectMap.ticket} ORDER BY CreatedDate DESC LIMIT 200`,); it is not a standalone business operation.
1048	`  returns: `SELECT Id, Name, Product__r.Name, Quantity__c, Manufacturing_Date__c, Return_Reason__c, Outlet__r.Name, Visit__r.Name FROM ${objectMap.returns} ORDER BY CreatedDate DESC LIMIT 200`,`	Sets/declares the named object property or style/type member: returns: `SELECT Id, Name, Product__r.Name, Quantity__c, Manufacturing_Date__c, Return_Reason__c, Outlet__r.Name, Visit__r.Name FROM ${objectMap.returns} ORDER BY CreatedDate DESC LIMIT 200`,. Interpret it in the enclosing object, props or type definition.
1049	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1050		Blank line separating logical sections; no executable operation.
1051	`app.get("/api/modules/:moduleName", async (request, res) => {`	Registers an HTTP route or middleware: app.get("/api/modules/:moduleName", async (request, res) => {. Registration order controls which authentication/validation runs first.
1052	`  if (env.USE_MOCK_DATA) return ok(res, []);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA) return ok(res, []);.
1053	`  const moduleName = String(request.params.moduleName);`	Declares/initializes local data used by the surrounding operation: const moduleName = String(request.params.moduleName);. Collection contents and assignments below determine its purpose.
1054	`  const query = moduleQueries[moduleName];`	Declares/initializes local data used by the surrounding operation: const query = moduleQueries[moduleName];. Collection contents and assignments below determine its purpose.
1055	`  if (!query) return fail(res, 404, "Module not found", "MODULE_NOT_FOUND");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!query) return fail(res, 404, "Module not found", "MODULE_NOT_FOUND");.
1056	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
1057	`  const employeeId = escapeSoqlLiteral(req.auth!.employeeId);`	Declares/initializes local data used by the surrounding operation: const employeeId = escapeSoqlLiteral(req.auth!.employeeId);. Collection contents and assignments below determine its purpose.
1058	`  const scopedQuery = query.replace(`	Declares/initializes local data used by the surrounding operation: const scopedQuery = query.replace(. Collection contents and assignments below determine its purpose.
1059	`    " ORDER BY",`	Continues the surrounding declaration/expression or text: " ORDER BY",. Read it with the preceding opening statement (const scopedQuery = query.replace(); it is not a standalone business operation.
1060	`    ` ` WHERE Outlet__c IN (${allocatedOutletIds(employeeId)}) ORDER BY` `,`	Continues the surrounding declaration/expression or text: ` WHERE Outlet__c IN (${allocatedOutletIds(employeeId)}) ORDER BY`,. Read it with the preceding opening statement (" ORDER BY",); it is not a standalone business operation.
1061	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1062	`  const rows = await sfRecords(scopedQuery);`	Waits for this asynchronous operation before continuing: const rows = await sfRecords(scopedQuery);. The returned result/error must still be handled.
1063	`  return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.
1064	`    res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
1065	`    rows.map(({ attributes, ...row }) => ({`	Transforms/selects/aggregates collection values with the callback shown here: rows.map(({ attributes, ...row }) => ({. Read the callback body and result assignment together.
1066	`      ...row,`	Continues the surrounding declaration/expression or text: ...row,. Read it with the preceding opening statement (rows.map(({ attributes, ...row }) => ({); it is not a standalone business operation.
1067	`      outletName: row.Outlet__r?.Name,`	Sets/declares the named object property or style/type member: outletName: row.Outlet__r?.Name,. Interpret it in the enclosing object, props or type definition.
1068	`      visitName: row.Visit__r?.Name,`	Sets/declares the named object property or style/type member: visitName: row.Visit__r?.Name,. Interpret it in the enclosing object, props or type definition.
1069	`      productName: row.Product__r?.Name,`	Sets/declares the named object property or style/type member: productName: row.Product__r?.Name,. Interpret it in the enclosing object, props or type definition.
1070	`      Outlet__r: undefined,`	Sets/declares the named object property or style/type member: Outlet__r: undefined,. Interpret it in the enclosing object, props or type definition.
1071	`      Visit__r: undefined,`	Sets/declares the named object property or style/type member: Visit__r: undefined,. Interpret it in the enclosing object, props or type definition.
1072	`      Product__r: undefined,`	Sets/declares the named object property or style/type member: Product__r: undefined,. Interpret it in the enclosing object, props or type definition.
1073	`    })),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1074	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1075	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1076	`app.get("/api/beats", async (request, res) => {`	Registers an HTTP route or middleware: app.get("/api/beats", async (request, res) => {. Registration order controls which authentication/validation runs first.
1077	`  if (env.USE_MOCK_DATA) return ok(res, beats);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA) return ok(res, beats);.
1078	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
1079	`  const employeeId = escapeSoqlLiteral(req.auth!.employeeId);`	Declares/initializes local data used by the surrounding operation: const employeeId = escapeSoqlLiteral(req.auth!.employeeId);. Collection contents and assignments below determine its purpose.
1080	`  const [allocations, completedVisits] = await Promise.all([`	Starts independent asynchronous operations together and waits for all; rejection propagates to the surrounding error handler.
1081	`    sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement (const [allocations, completedVisits] = await Promise.all([); it is not a standalone business operation.
1082	`      `SELECT Beat__c, Beat__r.Name, Outlet__c, Outlet__r.Name FROM ${objectMap.distributorAllocation} WHERE Employee__c = '${employeeId}' AND Allocation_Status__c = 'Active' AND Beat__r.Active__c = true AND Outlet__r.Active__c = true ORDER BY Beat__r.Name, Outlet__r.Name`,`	Assigns the right-hand expression to the named variable/property: `SELECT Beat__c, Beat__r.Name, Outlet__c, Outlet__r.Name FROM ${objectMap.distributorAllocation} WHERE Employee__c = '${employeeId}' AND Allocation_Status__c = 'Active' AND Beat__r.Active__c = true AN. This is in-memory unless it is later persisted by an explicit call.
1083	`    ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1084	`    sfRecords(`	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
1085	`      `SELECT Retailer__c FROM ${objectMap.visit} WHERE Employee__c = '${employeeId}' AND Visit_Date__c = TODAY AND Status__c = 'Completed'`,`	Assigns the right-hand expression to the named variable/property: `SELECT Retailer__c FROM ${objectMap.visit} WHERE Employee__c = '${employeeId}' AND Visit_Date__c = TODAY AND Status__c = 'Completed'`,. This is in-memory unless it is later persisted by an explicit call.
1086	`    ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1087	`  ]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1088	`  ok(res, allocatedBeats(allocations, new Set(completedVisits.map((visit) => visit.Retailer__c))));`	Transforms/selects/aggregates collection values with the callback shown here: ok(res, allocatedBeats(allocations, new Set(completedVisits.map((visit) => visit.Retailer__c))));. Read the callback body and result assignment together.
1089	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1090	`app.get("/api/beats/:beatId/stores", async (request, res) => {`	Registers an HTTP route or middleware: app.get("/api/beats/:beatId/stores", async (request, res) => {. Registration order controls which authentication/validation runs first.
1091	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
1092	`  if (env.USE_MOCK_DATA)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA).
1093	`    return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.
1094	`      res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
1095	`      stores.filter((store) => store.beatId === req.params.beatId),`	Transforms/selects/aggregates collection values with the callback shown here: stores.filter((store) => store.beatId === req.params.beatId),. Read the callback body and result assignment together.
1096	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1097	`  const beatId = escapeSoqlLiteral(String(req.params.beatId));`	Declares/initializes local data used by the surrounding operation: const beatId = escapeSoqlLiteral(String(req.params.beatId));. Collection contents and assignments below determine its purpose.
1098	`  const employeeId = escapeSoqlLiteral(req.auth!.employeeId);`	Declares/initializes local data used by the surrounding operation: const employeeId = escapeSoqlLiteral(req.auth!.employeeId);. Collection contents and assignments below determine its purpose.
1099	`  const rows = await sfRecords(`	Waits for this asynchronous operation before continuing: const rows = await sfRecords(. The returned result/error must still be handled.
Line	**Source code**	**Explanation / reading note**
1100	`    `SELECT Id, Name, Address__c, Phone__c, Outlet_Type__c, Outstanding_Amount__c, Beat__r.Name, Geo_Location__Latitude__s, Geo_Location__Longitude__s, Latitude__c,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Address__c, Phone__c, Outlet_Type__c, Outstanding_Amount__c, Beat__r.Name,

Line	Source code	Explanation / reading note
	`Longitude__c FROM ${objectMap.store} WHERE Beat__c = '${beatId}' AND Id IN (${allocatedOutletIds(employeeId)}) AND Active__c = true ORDER BY Name`,`	Geo_Location__Latitude__s, Geo_Location__Longitude__s, Latitude__c, Longitude__c FROM ${objectMap.store} WH. This is in-memory unless it is later persisted by an explicit call.
1101	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1102	`  ok(`	Continues the surrounding declaration/expression or text: ok(. Read it with the preceding opening statement ( );); it is not a standalone business operation.
1103	`    res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (ok(); it is not a standalone business operation.
1104	`    rows.map((row) => ({`	Transforms/selects/aggregates collection values with the callback shown here: rows.map((row) => ({. Read the callback body and result assignment together.
1105	`      id: row.Id,`	Sets/declares the named object property or style/type member: id: row.Id,. Interpret it in the enclosing object, props or type definition.
1106	`      beatId: req.params.beatId,`	Sets/declares the named object property or style/type member: beatId: req.params.beatId,. Interpret it in the enclosing object, props or type definition.
1107	`      code: row.Id.slice(-6).toUpperCase(),`	Sets/declares the named object property or style/type member: code: row.Id.slice(-6).toUpperCase(),. Interpret it in the enclosing object, props or type definition.
1108	`      name: row.Name,`	Sets/declares the named object property or style/type member: name: row.Name,. Interpret it in the enclosing object, props or type definition.
1109	`      address: row.Address__c,`	Sets/declares the named object property or style/type member: address: row.Address__c,. Interpret it in the enclosing object, props or type definition.
1110	`      phone: row.Phone__c,`	Sets/declares the named object property or style/type member: phone: row.Phone__c,. Interpret it in the enclosing object, props or type definition.
1111	`      type: row.Outlet_Type__c,`	Sets/declares the named object property or style/type member: type: row.Outlet_Type__c,. Interpret it in the enclosing object, props or type definition.
1112	`      outstandingAmount: row.Outstanding_Amount__c || 0,`	Sets/declares the named object property or style/type member: outstandingAmount: row.Outstanding_Amount__c || 0,. Interpret it in the enclosing object, props or type definition.
1113	`      beatName: row.Beat__r?.Name,`	Sets/declares the named object property or style/type member: beatName: row.Beat__r?.Name,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1114	`latitude: row.Geo_Location__Latitude__s || row.Latitude__c,`	Sets/declares the named object property or style/type member: latitude: row.Geo_Location__Latitude__s || row.Latitude__c,. Interpret it in the enclosing object, props or type definition.
1115	`longitude: row.Geo_Location__Longitude__s || row.Longitude__c,`	Sets/declares the named object property or style/type member: longitude: row.Geo_Location__Longitude__s || row.Longitude__c,. Interpret it in the enclosing object, props or type definition.
1116	`lastVisit: null,`	Sets/declares the named object property or style/type member: lastVisit: null,. Interpret it in the enclosing object, props or type definition.
1117	`lastOrder: null,`	Sets/declares the named object property or style/type member: lastOrder: null,. Interpret it in the enclosing object, props or type definition.
1118	`})),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1119	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1120	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1121	`app.get("/api/stores/:storeId", async (request, res) => {`	Registers an HTTP route or middleware: app.get("/api/stores/:storeId", async (request, res) => {. Registration order controls which authentication/validation runs first.
1122	`const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
1123	`if (!env.USE_MOCK_DATA) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!env.USE_MOCK_DATA) {.
1124	`const storeId = escapeSoqlLiteral(String(req.params.storeId));`	Declares/initializes local data used by the surrounding operation: const storeId = escapeSoqlLiteral(String(req.params.storeId));. Collection contents and assignments below determine its purpose.
1125	`const employeeId = escapeSoqlLiteral(req.auth!.employeeId);`	Declares/initializes local data used by the surrounding operation: const employeeId = escapeSoqlLiteral(req.auth!.employeeId);. Collection contents and assignments below determine its purpose.
1126	`const rows = await sfRecords(`	Waits for this asynchronous operation before continuing: const rows = await sfRecords(. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
1127	`SELECT Id, Name, Beat__c, Beat__r.Name, Address__c, Phone__c, Email__c, Outlet_Owner_Name__c, Outlet_Type__c, Outstanding_Amount__c, Active__c, Geography__r.Name, Geo_Location__Latitude__s, Geo_Location__Longitude__s, Latitude__c, Longitude__c FROM ${objectMap.store} WHERE Id = '${storeId}' AND Id IN (${allocatedOutletIds(employeeId)}) LIMIT 1`,	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Beat__c, Beat__r.Name, Address__c, Phone__c, Email__c, Outlet_Owner_Name__c, Outlet_Type__c, Outstanding_Amount__c, Active__c, Geography__r.Name, Geo_Location__Latitude__s, Geo_Locat. This is in-memory unless it is later persisted by an explicit call.
1128	);	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1129	if (!rows.length) return fail(res, 404, "Store not found", "STORE_NOT_FOUND");	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!rows.length) return fail(res, 404, "Store not found", "STORE_NOT_FOUND");.
1130	const row = rows[0];	Declares/initializes local data used by the surrounding operation: const row = rows[0];. Collection contents and assignments below determine its purpose.
1131	const [visitSummary, orderSummary] = await Promise.all([	Starts independent asynchronous operations together and waits for all; rejection propagates to the surrounding error handler.
1132	sfRecords(	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement (const [visitSummary, orderSummary] = await Promise.all([); it is not a standalone business operation.
1133	`SELECT COUNT(Id) total, MAX(Check_In_Time__c) latest FROM ${objectMap.visit} WHERE Retailer__c = '${storeId}'`,	Assigns the right-hand expression to the named variable/property: `SELECT COUNT(Id) total, MAX(Check_In_Time__c) latest FROM ${objectMap.visit} WHERE Retailer__c = '${storeId}'`,. This is in-memory unless it is later persisted by an explicit call.
1134	),	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1135	sfRecords(	Continues the surrounding declaration/expression or text: sfRecords(. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
1136	`SELECT COUNT(Id) total, MAX(Order_Date__c) latest, SUM(Total_Amount__c) amount FROM ${objectMap.order} WHERE Retailer__c = '${storeId}'`,	Assigns the right-hand expression to the named variable/property: `SELECT COUNT(Id) total, MAX(Order_Date__c) latest, SUM(Total_Amount__c) amount FROM ${objectMap.order} WHERE Retailer__c = '${storeId}'`,. This is in-memory unless it is later persisted by an explicit call.
1137	),	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1138	`    ]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1139	`    return ok(res, {`	Returns ok(res, { to the caller (or begins returned UI markup) and ends this execution path.
1140	`      id: row.Id,`	Sets/declares the named object property or style/type member: id: row.Id,. Interpret it in the enclosing object, props or type definition.
1141	`      beatId: row.Beat__c,`	Sets/declares the named object property or style/type member: beatId: row.Beat__c,. Interpret it in the enclosing object, props or type definition.
1142	`      code: row.Id.slice(-6).toUpperCase(),`	Sets/declares the named object property or style/type member: code: row.Id.slice(-6).toUpperCase(),. Interpret it in the enclosing object, props or type definition.
1143	`      name: row.Name,`	Sets/declares the named object property or style/type member: name: row.Name,. Interpret it in the enclosing object, props or type definition.
1144	`      address: row.Address__c,`	Sets/declares the named object property or style/type member: address: row.Address__c,. Interpret it in the enclosing object, props or type definition.
1145	`      phone: row.Phone__c,`	Sets/declares the named object property or style/type member: phone: row.Phone__c,. Interpret it in the enclosing object, props or type definition.
1146	`      contact: row.Phone__c,`	Sets/declares the named object property or style/type member: contact: row.Phone__c,. Interpret it in the enclosing object, props or type definition.
1147	`      email: row.Email__c,`	Sets/declares the named object property or style/type member: email: row.Email__c,. Interpret it in the enclosing object, props or type definition.
1148	`      owner: row.Outlet_Owner_Name__c,`	Sets/declares the named object property or style/type member: owner: row.Outlet_Owner_Name__c,. Interpret it in the enclosing object, props or type definition.
1149	`      type: row.Outlet_Type__c,`	Sets/declares the named object property or style/type member: type: row.Outlet_Type__c,. Interpret it in the enclosing object, props or type definition.
1150	`      geography: row.Geography__r?.Name,`	Sets/declares the named object property or style/type member: geography: row.Geography__r?.Name,. Interpret it in the enclosing object, props or type definition.
1151	`      beatName: row.Beat__r?.Name,`	Sets/declares the named object property or style/type member: beatName: row.Beat__r?.Name,. Interpret it in the enclosing object, props or type definition.
1152	`      active: row.Active__c,`	Sets/declares the named object property or style/type member: active: row.Active__c,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1153	`outstandingAmount: row.Outstanding_Amount__c || 0,`	Sets/declares the named object property or style/type member: outstandingAmount: row.Outstanding_Amount__c || 0,. Interpret it in the enclosing object, props or type definition.
1154	`latitude: row.Geo_Location__Latitude__s || row.Latitude__c,`	Sets/declares the named object property or style/type member: latitude: row.Geo_Location__Latitude__s || row.Latitude__c,. Interpret it in the enclosing object, props or type definition.
1155	`longitude: row.Geo_Location__Longitude__s || row.Longitude__c,`	Sets/declares the named object property or style/type member: longitude: row.Geo_Location__Longitude__s || row.Longitude__c,. Interpret it in the enclosing object, props or type definition.
1156	`visitCount: Number(visitSummary[0]?.total || 0),`	Sets/declares the named object property or style/type member: visitCount: Number(visitSummary[0]?.total || 0),. Interpret it in the enclosing object, props or type definition.
1157	`lastVisit: visitSummary[0]?.latest || null,`	Sets/declares the named object property or style/type member: lastVisit: visitSummary[0]?.latest || null,. Interpret it in the enclosing object, props or type definition.
1158	`orderCount: Number(orderSummary[0]?.total || 0),`	Sets/declares the named object property or style/type member: orderCount: Number(orderSummary[0]?.total || 0),. Interpret it in the enclosing object, props or type definition.
1159	`lastOrderDate: orderSummary[0]?.latest || null,`	Sets/declares the named object property or style/type member: lastOrderDate: orderSummary[0]?.latest || null,. Interpret it in the enclosing object, props or type definition.
1160	`totalOrderAmount: Number(orderSummary[0]?.amount || 0),`	Sets/declares the named object property or style/type member: totalOrderAmount: Number(orderSummary[0]?.amount || 0),. Interpret it in the enclosing object, props or type definition.
1161	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1162	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1163	`const store = stores.find((s) => s.id === req.params.storeId);`	Declares/initializes local data used by the surrounding operation: const store = stores.find((s) => s.id === req.params.storeId);. Collection contents and assignments below determine its purpose.
1164	`return store ? ok(res, store) : fail(res, 404, "Store not found", "STORE_NOT_FOUND");`	Returns store ? ok(res, store) : fail(res, 404, "Store not found", "STORE_NOT_FOUND") to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
1165	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1166	`app.post("/api/day/start", async (req, res) => {`	Registers an HTTP route or middleware: app.post("/api/day/start", async (req, res) => {. Registration order controls which authentication/validation runs first.
1167	`  const request = req as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const request = req as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
1168	`  const startOdometer = Number(req.body.startOdometer || 0);`	Declares/initializes local data used by the surrounding operation: const startOdometer = Number(req.body.startOdometer || 0);. Collection contents and assignments below determine its purpose.
1169	`  const ownVehicle =`	Declares/initializes local data used by the surrounding operation: const ownVehicle =. Collection contents and assignments below determine its purpose.
1170	`    ["Two Wheeler", "Four Wheeler"].includes(req.body.transportMode) &&`	Continues the surrounding declaration/expression or text: ["Two Wheeler", "Four Wheeler"].includes(req.body.transportMode) &&. Read it with the preceding opening statement (const ownVehicle =); it is not a standalone business operation.
1171	`    req.body.ownership === "Own";`	Continues the surrounding declaration/expression or text: req.body.ownership === "Own";. Read it with the preceding opening statement (["Two Wheeler", "Four Wheeler"].includes(req.body.transportMode) &&); it is not a standalone business operation.
1172	`  if (ownVehicle && (!Number.isFinite(startOdometer) || startOdometer <= 0))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (ownVehicle && (!Number.isFinite(startOdometer) || startOdometer <= 0)).
1173	`    return fail(res, 400, "Enter a valid starting odometer reading", "START_ODOMETER_REQUIRED");`	Returns fail(res, 400, "Enter a valid starting odometer reading", "START_ODOMETER_REQUIRED") to the caller (or begins returned UI markup) and ends this execution path.
1174	`  const data = {`	Declares/initializes local data used by the surrounding operation: const data = {. Collection contents and assignments below determine its purpose.
1175	`    id: `day-${Date.now()}`,`	Sets/declares the named object property or style/type member: id: `day-${Date.now()}`,. Interpret it in the enclosing object, props or type definition.
1176	`    startTime: new Date().toISOString(),`	Sets/declares the named object property or style/type member: startTime: new Date().toISOString(),. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1177	`    location: req.body.location,`	Sets/declares the named object property or style/type member: location: req.body.location,. Interpret it in the enclosing object, props or type definition.
1178	`    status: "Started",`	Sets/declares the named object property or style/type member: status: "Started",. Interpret it in the enclosing object, props or type definition.
1179	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1180	`  if (!env.USE_MOCK_DATA) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!env.USE_MOCK_DATA) {.
1181	`    const rateRows = ownVehicle`	Declares/initializes local data used by the surrounding operation: const rateRows = ownVehicle. Collection contents and assignments below determine its purpose.
1182	`      ? await sfRecords(`	Waits for this asynchronous operation before continuing: ? await sfRecords(. The returned result/error must still be handled.
1183	`          `SELECT Rate__c FROM ${objectMap.expensePolicy} WHERE Active__c = true AND Rate_Type__c = 'Per Kilometer' AND Category__c = '${escapeSoqlLiteral(String(req.body.transportMode))}' AND Start_Date__c <= TODAY AND (End_Date__c = NULL OR End_Date__c >= TODAY) ORDER BY Geography__c NULLS LAST LIMIT 1`,`	Assigns the right-hand expression to the named variable/property: `SELECT Rate__c FROM ${objectMap.expensePolicy} WHERE Active__c = true AND Rate_Type__c = 'Per Kilometer' AND Category__c = '${escapeSoqlLiteral(String(req.body.transportMode))}' AND Start_Date__c <= . This is in-memory unless it is later persisted by an explicit call.
1184	`        )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1185	`      : [];`	Continues the surrounding declaration/expression or text: : [];. Read it with the preceding opening statement ( )); it is not a standalone business operation.
1186	`    const created: any = await salesforce.create(objectMap.attendance, {`	Invokes the external-data boundary: const created: any = await salesforce.create(objectMap.attendance, {. Await/result checks determine whether the operation is confirmed.
1187	`      Attendance_Date__c: new Date().toISOString().slice(0, 10),`	Sets/declares the named object property or style/type member: Attendance_Date__c: new Date().toISOString().slice(0, 10),. Interpret it in the enclosing object, props or type definition.
1188	`      Start_Time__c: data.startTime,`	Sets/declares the named object property or style/type member: Start_Time__c: data.startTime,. Interpret it in the enclosing object, props or type definition.
1189	`      Start_Latitude__c: req.body.location.latitude,`	Sets/declares the named object property or style/type member: Start_Latitude__c: req.body.location.latitude,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1190	`Start_Longitude__c: req.body.location.longitude,`	Sets/declares the named object property or style/type member: Start_Longitude__c: req.body.location.longitude,. Interpret it in the enclosing object, props or type definition.
1191	`Transport_Mode__c: req.body.transportMode || null,`	Sets/declares the named object property or style/type member: Transport_Mode__c: req.body.transportMode || null,. Interpret it in the enclosing object, props or type definition.
1192	`Vehicle_Ownership__c: req.body.ownership || null,`	Sets/declares the named object property or style/type member: Vehicle_Ownership__c: req.body.ownership || null,. Interpret it in the enclosing object, props or type definition.
1193	`Planned_Activity__c: req.body.plannedActivity || null,`	Sets/declares the named object property or style/type member: Planned_Activity__c: req.body.plannedActivity || null,. Interpret it in the enclosing object, props or type definition.
1194	`Start_Odometer__c: startOdometer || null,`	Sets/declares the named object property or style/type member: Start_Odometer__c: startOdometer || null,. Interpret it in the enclosing object, props or type definition.
1195	`Odometer_Evidence_URL__c: req.body.odometerEvidenceUrl || null,`	Sets/declares the named object property or style/type member: Odometer_Evidence_URL__c: req.body.odometerEvidenceUrl || null,. Interpret it in the enclosing object, props or type definition.
1196	`Odometer_Entry_Mode__c: req.body.odometerEntryMode || "Manual",`	Sets/declares the named object property or style/type member: Odometer_Entry_Mode__c: req.body.odometerEntryMode || "Manual",. Interpret it in the enclosing object, props or type definition.
1197	`Travel_Rate_Per_Km__c: Number(rateRows[0]?.Rate__c || 0),`	Sets/declares the named object property or style/type member: Travel_Rate_Per_Km__c: Number(rateRows[0]?.Rate__c || 0),. Interpret it in the enclosing object, props or type definition.
1198	`Employee__c: request.auth?.employeeId || null,`	Sets/declares the named object property or style/type member: Employee__c: request.auth?.employeeId || null,. Interpret it in the enclosing object, props or type definition.
1199	`Sales_Representative__c: request.auth?.salesforceUserId || null,`	Sets/declares the named object property or style/type member: Sales_Representative__c: request.auth?.salesforceUserId || null,. Interpret it in the enclosing object, props or type definition.
1200	`Status__c: "Started",`	Sets/declares the named object property or style/type member: Status__c: "Started",. Interpret it in the enclosing object, props or type definition.
1201	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1202	`data.id = created.id;`	Assigns the right-hand expression to the named variable/property: data.id = created.id;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
1203	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1204	`  ok(res, { ...data, attendanceId: data.id }, "Day started");`	Continues the surrounding declaration/expression or text: ok(res, { ...data, attendanceId: data.id }, "Day started");. Read it with the preceding opening statement (}); it is not a standalone business operation.
1205	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1206	`app.post("/api/day/end", async (request, res) => {`	Registers an HTTP route or middleware: app.post("/api/day/end", async (request, res) => {. Registration order controls which authentication/validation runs first.
1207	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
1208	`  const requestId = String(req.body.requestId || "");`	Declares/initializes local data used by the surrounding operation: const requestId = String(req.body.requestId || "");. Collection contents and assignments below determine its purpose.
1209	`  if (requestId && idempotency.has(requestId))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (requestId && idempotency.has(requestId)).
1210	`    return ok(res, idempotency.get(requestId), "Duplicate request safely reused");`	Returns ok(res, idempotency.get(requestId), "Duplicate request safely reused") to the caller (or begins returned UI markup) and ends this execution path.
1211	`  const endTime = new Date().toISOString();`	Declares/initializes local data used by the surrounding operation: const endTime = new Date().toISOString();. Collection contents and assignments below determine its purpose.
1212	`  const location = req.body.location;`	Declares/initializes local data used by the surrounding operation: const location = req.body.location;. Collection contents and assignments below determine its purpose.
1213	`  const endOdometer = Number(req.body.endOdometer || 0);`	Declares/initializes local data used by the surrounding operation: const endOdometer = Number(req.body.endOdometer || 0);. Collection contents and assignments below determine its purpose.
1214	`  if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
1215	`    !location ||`	Continues the surrounding declaration/expression or text: !location ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1216	`!Number.isFinite(Number(location.latitude)) ||`	Calls the named method: !Number.isFinite(Number(location.latitude)) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
1217	`!Number.isFinite(Number(location.longitude))`	Calls the named method: !Number.isFinite(Number(location.longitude)). Its implementation defines the side effect/result; use the symbol/file index to follow it.
1218	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1219	`return fail(res, 400, "A valid end-day location is required", "LOCATION_REQUIRED");`	Returns fail(res, 400, "A valid end-day location is required", "LOCATION_REQUIRED") to the caller (or begins returned UI markup) and ends this execution path.
1220	`let attendanceId: string | undefined;`	Declares/initializes local data used by the surrounding operation: let attendanceId: string | undefined;. Collection contents and assignments below determine its purpose.
1221	`if (!env.USE_MOCK_DATA) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!env.USE_MOCK_DATA) {.
1222	`const rows = await sfRecords(`	Waits for this asynchronous operation before continuing: const rows = await sfRecords(. The returned result/error must still be handled.
1223	`` `SELECT Id, Start_Odometer__c, Transport_Mode__c, Vehicle_Ownership__c FROM ${objectMap.attendance} WHERE Attendance_Date__c = TODAY AND Status__c = 'Started'${req.auth?.salesforceUserId ? ` AND Sales_Representative__c = '${escapeSoqlLiteral(req.auth.salesforceUserId)}'` : ""} ORDER BY CreatedDate DESC LIMIT 1`, ``	Assigns the right-hand expression to the named variable/property: `SELECT Id, Start_Odometer__c, Transport_Mode__c, Vehicle_Ownership__c FROM ${objectMap.attendance} WHERE Attendance_Date__c = TODAY AND Status__c = 'Started'${req.auth?.salesforceUserId ? ` AND Sales. This is in-memory unless it is later persisted by an explicit call.
1224	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1225	`if (!rows.length)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!rows.length).
1226	`return fail(res, 422, "Start Day must be completed before End Day", "DAY_NOT_STARTED");`	Returns fail(res, 422, "Start Day must be completed before End Day", "DAY_NOT_STARTED") to the caller (or begins returned UI markup) and ends this execution path.
1227	`const startOdometer = Number(rows[0].Start_Odometer__c || 0);`	Declares/initializes local data used by the surrounding operation: const startOdometer = Number(rows[0].Start_Odometer__c || 0);. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
1228	`    const odometerRequired =`	Declares/initializes local data used by the surrounding operation: const odometerRequired =. Collection contents and assignments below determine its purpose.
1229	`      ["Two Wheeler", "Four Wheeler"].includes(rows[0].Transport_Mode__c) &&`	Continues the surrounding declaration/expression or text: ["Two Wheeler", "Four Wheeler"].includes(rows[0].Transport_Mode__c) &&. Read it with the preceding opening statement (const odometerRequired =); it is not a standalone business operation.
1230	`      rows[0].Vehicle_Ownership__c === "Own";`	Continues the surrounding declaration/expression or text: rows[0].Vehicle_Ownership__c === "Own";. Read it with the preceding opening statement (["Two Wheeler", "Four Wheeler"].includes(rows[0].Transport_Mode__c) &&); it is not a standalone business operation.
1231	`    if (odometerRequired && (!Number.isFinite(endOdometer) || endOdometer <= 0))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (odometerRequired && (!Number.isFinite(endOdometer) || endOdometer <= 0)).
1232	`      return fail(res, 400, "Enter a valid ending odometer reading", "END_ODOMETER_REQUIRED");`	Returns fail(res, 400, "Enter a valid ending odometer reading", "END_ODOMETER_REQUIRED") to the caller (or begins returned UI markup) and ends this execution path.
1233	`    if (startOdometer > 0 && endOdometer < startOdometer)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (startOdometer > 0 && endOdometer < startOdometer).
1234	`      return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
1235	`        res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
1236	`        400,`	Continues the surrounding declaration/expression or text: 400,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
1237	`        "End odometer cannot be lower than start odometer",`	Continues the surrounding declaration/expression or text: "End odometer cannot be lower than start odometer",. Read it with the preceding opening statement (400,); it is not a standalone business operation.
1238	`        "INVALID_ODOMETER_RANGE",`	Continues the surrounding declaration/expression or text: "INVALID_ODOMETER_RANGE",. Read it with the preceding opening statement ("End odometer cannot be lower than start odometer",); it is not a standalone business operation.
1239	`      );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1240	`attendanceId = rows[0].Id;`	Assigns the right-hand expression to the named variable/property: attendanceId = rows[0].Id;. This is in-memory unless it is later persisted by an explicit call.
1241	`await salesforce.update(objectMap.attendance, attendanceId!, {`	Invokes the external-data boundary: await salesforce.update(objectMap.attendance, attendanceId!, {. Await/result checks determine whether the operation is confirmed.
1242	`End_Time__c: endTime,`	Sets/declares the named object property or style/type member: End_Time__c: endTime,. Interpret it in the enclosing object, props or type definition.
1243	`End_Latitude__c: Number(location.latitude),`	Sets/declares the named object property or style/type member: End_Latitude__c: Number(location.latitude),. Interpret it in the enclosing object, props or type definition.
1244	`End_Longitude__c: Number(location.longitude),`	Sets/declares the named object property or style/type member: End_Longitude__c: Number(location.longitude),. Interpret it in the enclosing object, props or type definition.
1245	`End_Odometer__c: endOdometer || null,`	Sets/declares the named object property or style/type member: End_Odometer__c: endOdometer || null,. Interpret it in the enclosing object, props or type definition.
1246	`Odometer_Evidence_URL__c: req.body.odometerEvidenceUrl || null,`	Sets/declares the named object property or style/type member: Odometer_Evidence_URL__c: req.body.odometerEvidenceUrl || null,. Interpret it in the enclosing object, props or type definition.
1247	`Status__c: "Completed",`	Sets/declares the named object property or style/type member: Status__c: "Completed",. Interpret it in the enclosing object, props or type definition.
1248	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1249	`const calculatedRows = await sfRecords(`	Waits for this asynchronous operation before continuing: const calculatedRows = await sfRecords(. The returned result/error must still be handled.
1250	`` `SELECT Distance_Travelled_Km__c, Travel_Rate_Per_Km__c, Travel_Amount__c FROM ${objectMap.attendance} WHERE Id = '${escapeSoqlLiteral(attendanceId!)}' LIMIT 1`, ``	Assigns the right-hand expression to the named variable/property: `SELECT Distance_Travelled_Km__c, Travel_Rate_Per_Km__c, Travel_Amount__c FROM ${objectMap.attendance} WHERE Id = '${escapeSoqlLiteral(attendanceId!)}' LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
1251	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1252	`const calculated = calculatedRows[0] || {};`	Declares/initializes local data used by the surrounding operation: const calculated = calculatedRows[0] || {};. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
1253	`    const result = {`	Declares/initializes local data used by the surrounding operation: const result = {. Collection contents and assignments below determine its purpose.
1254	`      attendanceId,`	Continues the surrounding declaration/expression or text: attendanceId,. Read it with the preceding opening statement (const result = {); it is not a standalone business operation.
1255	`      endTime,`	Continues the surrounding declaration/expression or text: endTime,. Read it with the preceding opening statement (attendanceId,); it is not a standalone business operation.
1256	`      location,`	Continues the surrounding declaration/expression or text: location,. Read it with the preceding opening statement (endTime,); it is not a standalone business operation.
1257	`      employeeName: req.auth!.employeeName,`	Sets/declares the named object property or style/type member: employeeName: req.auth!.employeeName,. Interpret it in the enclosing object, props or type definition.
1258	`      distanceTravelledKm: Number(calculated.Distance_Travelled_Km__c || 0),`	Sets/declares the named object property or style/type member: distanceTravelledKm: Number(calculated.Distance_Travelled_Km__c || 0),. Interpret it in the enclosing object, props or type definition.
1259	`      ratePerKm: Number(calculated.Travel_Rate_Per_Km__c || 0),`	Sets/declares the named object property or style/type member: ratePerKm: Number(calculated.Travel_Rate_Per_Km__c || 0),. Interpret it in the enclosing object, props or type definition.
1260	`      totalTravelAmount: Number(calculated.Travel_Amount__c || 0),`	Sets/declares the named object property or style/type member: totalTravelAmount: Number(calculated.Travel_Amount__c || 0),. Interpret it in the enclosing object, props or type definition.
1261	`    };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1262	`    if (requestId) idempotency.set(requestId, result);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (requestId) idempotency.set(requestId, result);.
1263	`    return ok(res, result, "Day ended and travel amount calculated in Salesforce");`	Returns ok(res, result, "Day ended and travel amount calculated in Salesforce") to the caller (or begins returned UI markup) and ends this execution path.
1264	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1265	`  const result = {`	Declares/initializes local data used by the surrounding operation: const result = {. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
1266	`    attendanceId,`	Continues the surrounding declaration/expression or text: attendanceId,. Read it with the preceding opening statement (const result = {}; it is not a standalone business operation.
1267	`    endTime,`	Continues the surrounding declaration/expression or text: endTime,. Read it with the preceding opening statement (attendanceId,); it is not a standalone business operation.
1268	`    location,`	Continues the surrounding declaration/expression or text: location,. Read it with the preceding opening statement (endTime,); it is not a standalone business operation.
1269	`    employeeName: req.auth!.employeeName,`	Sets/declares the named object property or style/type member: employeeName: req.auth!.employeeName,. Interpret it in the enclosing object, props or type definition.
1270	`    distanceTravelledKm: 0,`	Sets/declares the named object property or style/type member: distanceTravelledKm: 0,. Interpret it in the enclosing object, props or type definition.
1271	`    ratePerKm: 0,`	Sets/declares the named object property or style/type member: ratePerKm: 0,. Interpret it in the enclosing object, props or type definition.
1272	`    totalTravelAmount: 0,`	Sets/declares the named object property or style/type member: totalTravelAmount: 0,. Interpret it in the enclosing object, props or type definition.
1273	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1274	`  if (requestId) idempotency.set(requestId, result);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (requestId) idempotency.set(requestId, result);.
1275	`  return ok(res, result, "Day ended successfully");`	Returns ok(res, result, "Day ended successfully") to the caller (or begins returned UI markup) and ends this execution path.
1276	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1277	`app.post("/api/store/validate-location", async (request, res) => {`	Registers an HTTP route or middleware: app.post("/api/store/validate-location", async (request, res) => {. Registration order controls which authentication/validation runs first.
1278	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
1279	`  const storeId = escapeSoqlLiteral(String(req.body.storeId || ""));`	Declares/initializes local data used by the surrounding operation: const storeId = escapeSoqlLiteral(String(req.body.storeId || "")); . Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
1280	`  const employeeId = escapeSoqlLiteral(req.auth!.employeeId);`	Declares/initializes local data used by the surrounding operation: const employeeId = escapeSoqlLiteral(req.auth!.employeeId);. Collection contents and assignments below determine its purpose.
1281	`  const store = env.USE_MOCK_DATA`	Declares/initializes local data used by the surrounding operation: const store = env.USE_MOCK_DATA. Collection contents and assignments below determine its purpose.
1282	`    ? stores.find((item) => item.id === req.body.storeId)`	Transforms/selects/aggregates collection values with the callback shown here: ? stores.find((item) => item.id === req.body.storeId). Read the callback body and result assignment together.
1283	`    : (`	Continues the surrounding declaration/expression or text: : (. Read it with the preceding opening statement (? stores.find((item) => item.id === req.body.storeId)); it is not a standalone business operation.
1284	`        await sfRecords(`	Waits for this asynchronous operation before continuing: await sfRecords(. The returned result/error must still be handled.
1285	`          `SELECT Id, Name, Beat__c, Address__c, Geo_Location__Latitude__s, Geo_Location__Longitude__s, Latitude__c, Longitude__c FROM ${objectMap.store} WHERE Id = '${storeId}' AND Id IN (${allocatedOutletIds(employeeId)}) LIMIT 1`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Beat__c, Address__c, Geo_Location__Latitude__s, Geo_Location__Longitude__s, Latitude__c, Longitude__c FROM ${objectMap.store} WHERE Id = '${storeId}' AND Id IN (${allocatedOutletIds(. This is in-memory unless it is later persisted by an explicit call.
1286	`        )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1287	`      ).map((row) => ({`	Transforms/selects/aggregates collection values with the callback shown here:).map((row) => ({. Read the callback body and result assignment together.
1288	`        id: row.Id,`	Sets/declares the named object property or style/type member: id: row.Id,. Interpret it in the enclosing object, props or type definition.
1289	`        name: row.Name,`	Sets/declares the named object property or style/type member: name: row.Name,. Interpret it in the enclosing object, props or type definition.
1290	`        beatId: row.Beat__c,`	Sets/declares the named object property or style/type member: beatId: row.Beat__c,. Interpret it in the enclosing object, props or type definition.
1291	`        address: row.Address__c,`	Sets/declares the named object property or style/type member: address: row.Address__c,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1292	`latitude: row.Geo_Location__Latitude__s || row.Latitude__c,`	Sets/declares the named object property or style/type member: latitude: row.Geo_Location__Latitude__s || row.Latitude__c,. Interpret it in the enclosing object, props or type definition.
1293	`longitude: row.Geo_Location__Longitude__s || row.Longitude__c,`	Sets/declares the named object property or style/type member: longitude: row.Geo_Location__Longitude__s || row.Longitude__c,. Interpret it in the enclosing object, props or type definition.
1294	`}))[0];`	Continues the surrounding declaration/expression or text: }))[0];. Read it with the preceding opening statement (longitude: row.Geo_Location__Longitude__s || row.Longitude__c,); it is not a standalone business operation.
1295	`if (!store) return fail(res, 404, "Store not found", "STORE_NOT_FOUND");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!store) return fail(res, 404, "Store not found", "STORE_NOT_FOUND");.
1296	`if (store.latitude == null || store.longitude == null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (store.latitude == null || store.longitude == null).
1297	`return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
1298	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
1299	`422,`	Continues the surrounding declaration/expression or text: 422,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
1300	`"This outlet has no Salesforce geolocation. Ask the admin to update it.",`	Continues the surrounding declaration/expression or text: "This outlet has no Salesforce geolocation. Ask the admin to update it.",. Read it with the preceding opening statement (422,); it is not a standalone business operation.
1301	`"OUTLET_LOCATION_MISSING",`	Continues the surrounding declaration/expression or text: "OUTLET_LOCATION_MISSING",. Read it with the preceding opening statement ("This outlet has no Salesforce geolocation. Ask the admin to update it.",); it is not a standalone business operation.
1302	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1303	`const distance = distanceInMeters(req.body.location, store);`	Declares/initializes local data used by the surrounding operation: const distance = distanceInMeters(req.body.location, store);. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
1304	`  ok(res, { allowed: distance <= 100, distance, requiredDistance: 100, store });`	Continues the surrounding declaration/expression or text: ok(res, { allowed: distance <= 100, distance, requiredDistance: 100, store });. Read it with the preceding opening statement (const distance = distanceInMeters(req.body.location, store);); it is not a standalone business operation.
1305	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1306	`app.post("/api/store/visit/start", async (request, res) => {`	Registers an HTTP route or middleware: app.post("/api/store/visit/start", async (request, res) => {. Registration order controls which authentication/validation runs first.
1307	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
1308	`  const id = req.body.requestId || `visit-${Date.now()}`;`	Declares/initializes local data used by the surrounding operation: const id = req.body.requestId || `visit-${Date.now()}`;. Collection contents and assignments below determine its purpose.
1309	`  if (visits.has(id)) return ok(res, visits.get(id), "Existing visit returned");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visits.has(id)) return ok(res, visits.get(id), "Existing visit returned");.
1310	`  const storeId = escapeSoqlLiteral(String(req.body.storeId || ""));`	Declares/initializes local data used by the surrounding operation: const storeId = escapeSoqlLiteral(String(req.body.storeId || "")); . Collection contents and assignments below determine its purpose.
1311	`  const employeeId = escapeSoqlLiteral(req.auth!.employeeId);`	Declares/initializes local data used by the surrounding operation: const employeeId = escapeSoqlLiteral(req.auth!.employeeId);. Collection contents and assignments below determine its purpose.
1312	`  const store = env.USE_MOCK_DATA`	Declares/initializes local data used by the surrounding operation: const store = env.USE_MOCK_DATA. Collection contents and assignments below determine its purpose.
1313	`    ? stores.find((item) => item.id === req.body.storeId)`	Transforms/selects/aggregates collection values with the callback shown here: ? stores.find((item) => item.id === req.body.storeId). Read the callback body and result assignment together.
1314	`    : (`	Continues the surrounding declaration/expression or text: : (. Read it with the preceding opening statement (? stores.find((item) => item.id === req.body.storeId)); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1315	`await sfRecords(`	Waits for this asynchronous operation before continuing: await sfRecords(. The returned result/error must still be handled.
1316	`` `SELECT Id, Name, Beat__c FROM ${objectMap.store} WHERE Id = '${storeId}' AND Id IN (${allocatedOutletIds(employeeId)}) LIMIT 1`, ``	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Beat__c FROM ${objectMap.store} WHERE Id = '${storeId}' AND Id IN (${allocatedOutletIds(employeeId)}) LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
1317	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1318	`).map((row) => ({ id: row.Id, name: row.Name, beatId: row.Beat__c }))[0];`	Transforms/selects/aggregates collection values with the callback shown here:).map((row) => ({ id: row.Id, name: row.Name, beatId: row.Beat__c }))[0];. Read the callback body and result assignment together.
1319	`if (!store) return fail(res, 404, "Store not found", "STORE_NOT_FOUND");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!store) return fail(res, 404, "Store not found", "STORE_NOT_FOUND");.
1320	`let salesforceVisitId: string | undefined;`	Declares/initializes local data used by the surrounding operation: let salesforceVisitId: string | undefined;. Collection contents and assignments below determine its purpose.
1321	`if (!env.USE_MOCK_DATA) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!env.USE_MOCK_DATA) {.
1322	`const existing = await sfRecords(`	Waits for this asynchronous operation before continuing: const existing = await sfRecords(. The returned result/error must still be handled.
1323	`` `SELECT Id FROM ${objectMap.visit} WHERE Employee__c = '${employeeId}' AND Retailer__c = '${storeId}' AND (Offline_Key__c = '${escapeSoqlLiteral(id)}' OR Status__c = 'Checked In') ORDER BY CreatedDate DESC LIMIT 1`, ``	Assigns the right-hand expression to the named variable/property: `SELECT Id FROM ${objectMap.visit} WHERE Employee__c = '${employeeId}' AND Retailer__c = '${storeId}' AND (Offline_Key__c = '${escapeSoqlLiteral(id)}' OR Status__c = 'Checked In') ORDER BY CreatedDate. This is in-memory unless it is later persisted by an explicit call.
1324	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1325	`if (existing.length)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (existing.length).
1326	`return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
1327	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
1328	`await ownedVisit(existing[0].Id, req.auth!.employeeId),`	Waits for this asynchronous operation before continuing: await ownedVisit(existing[0].Id, req.auth!.employeeId),. The returned result/error must still be handled.
1329	`"Existing visit restored",`	Continues the surrounding declaration/expression or text: "Existing visit restored",. Read it with the preceding opening statement (await ownedVisit(existing[0].Id, req.auth!.employeeId),); it is not a standalone business operation.
1330	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1331	`const plans = await sfRecords(`	Waits for this asynchronous operation before continuing: const plans = await sfRecords(. The returned result/error must still be handled.
1332	`` `SELECT Id FROM ${objectMap.journeyPlan} WHERE Beat__c = '${store.beatId}' AND Status__c = 'Approved' ORDER BY Planned_Date__c DESC LIMIT 1`, ``	Assigns the right-hand expression to the named variable/property: `SELECT Id FROM ${objectMap.journeyPlan} WHERE Beat__c = '${store.beatId}' AND Status__c = 'Approved' ORDER BY Planned_Date__c DESC LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
1333	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1334	`let journeyPlanId = plans[0]?.Id;`	Declares/initializes local data used by the surrounding operation: let journeyPlanId = plans[0]?.Id;. Collection contents and assignments below determine its purpose.
1335	`if (!journeyPlanId) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!journeyPlanId) {.
1336	`const today = new Date().toISOString().slice(0, 10);`	Declares/initializes local data used by the surrounding operation: const today = new Date().toISOString().slice(0, 10);. Collection contents and assignments below determine its purpose.
1337	`const createdPlan: any = await salesforce.create(objectMap.journeyPlan, {`	Invokes the external-data boundary: const createdPlan: any = await salesforce.create(objectMap.journeyPlan, {. Await/result checks determine whether the operation is confirmed.
1338	`Name: `${store.name} Mobile Plan ${today}`,`	Sets/declares the named object property or style/type member: Name: `${store.name} Mobile Plan ${today}`,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1339	`Beat__c: store.beatId,`	Sets/declares the named object property or style/type member: Beat__c: store.beatId,. Interpret it in the enclosing object, props or type definition.
1340	`Planned_Date__c: today,`	Sets/declares the named object property or style/type member: Planned_Date__c: today,. Interpret it in the enclosing object, props or type definition.
1341	`Planning_Start_Date__c: today,`	Sets/declares the named object property or style/type member: Planning_Start_Date__c: today,. Interpret it in the enclosing object, props or type definition.
1342	`Planning_End_Date__c: today,`	Sets/declares the named object property or style/type member: Planning_End_Date__c: today,. Interpret it in the enclosing object, props or type definition.
1343	`Status__c: "Approved",`	Sets/declares the named object property or style/type member: Status__c: "Approved",. Interpret it in the enclosing object, props or type definition.
1344	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1345	`journeyPlanId = createdPlan.id;`	Assigns the right-hand expression to the named variable/property: journeyPlanId = createdPlan.id;. This is in-memory unless it is later persisted by an explicit call.
1346	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1347	`const visitFields: Record<string, unknown> = {`	Declares/initializes local data used by the surrounding operation: const visitFields: Record<string, unknown> = {. Collection contents and assignments below determine its purpose.
1348	`Name: \`${store.name} ${new Date().toLocaleDateString("en-IN")}\`,`	Sets/declares the named object property or style/type member: Name: `${store.name} ${new Date().toLocaleDateString("en-IN")}`,. Interpret it in the enclosing object, props or type definition.
1349	`Retailer__c: store.id,`	Sets/declares the named object property or style/type member: Retailer__c: store.id,. Interpret it in the enclosing object, props or type definition.
1350	`Employee__c: req.auth!.employeeId,`	Sets/declares the named object property or style/type member: Employee__c: req.auth!.employeeId,. Interpret it in the enclosing object, props or type definition.
1351	`Sales_Representative__c: req.auth?.salesforceUserId || null,`	Sets/declares the named object property or style/type member: Sales_Representative__c: req.auth?.salesforceUserId || null,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1352	`Permanent_Journey_Plan__c: journeyPlanId,`	Sets/declares the named object property or style/type member: Permanent_Journey_Plan__c: journeyPlanId,. Interpret it in the enclosing object, props or type definition.
1353	`Visit_Date__c: new Date().toISOString().slice(0, 10),`	Sets/declares the named object property or style/type member: Visit_Date__c: new Date().toISOString().slice(0, 10),. Interpret it in the enclosing object, props or type definition.
1354	`Status__c: "Checked In",`	Sets/declares the named object property or style/type member: Status__c: "Checked In",. Interpret it in the enclosing object, props or type definition.
1355	`Check_In_Time__c: new Date().toISOString(),`	Sets/declares the named object property or style/type member: Check_In_Time__c: new Date().toISOString(),. Interpret it in the enclosing object, props or type definition.
1356	`Check_In_Latitude__c: req.body.location.latitude,`	Sets/declares the named object property or style/type member: Check_In_Latitude__c: req.body.location.latitude,. Interpret it in the enclosing object, props or type definition.
1357	`Check_In_Longitude__c: req.body.location.longitude,`	Sets/declares the named object property or style/type member: Check_In_Longitude__c: req.body.location.longitude,. Interpret it in the enclosing object, props or type definition.
1358	`Outlet_Geo_Location__Latitude__s: req.body.location.latitude,`	Sets/declares the named object property or style/type member: Outlet_Geo_Location__Latitude__s: req.body.location.latitude,. Interpret it in the enclosing object, props or type definition.
1359	`Outlet_Geo_Location__Longitude__s: req.body.location.longitude,`	Sets/declares the named object property or style/type member: Outlet_Geo_Location__Longitude__s: req.body.location.longitude,. Interpret it in the enclosing object, props or type definition.
1360	`Offline_Key__c: id,`	Sets/declares the named object property or style/type member: Offline_Key__c: id,. Interpret it in the enclosing object, props or type definition.
1361	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1362	`const created: any = await salesforce.create(objectMap.visit, visitFields);`	Invokes the external-data boundary: const created: any = await salesforce.create(objectMap.visit, visitFields);. Await/result checks determine whether the operation is confirmed.
1363	`salesforceVisitId = created.id;`	Assigns the right-hand expression to the named variable/property: salesforceVisitId = created.id;. This is in-memory unless it is later persisted by an explicit call.
1364	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1365	`  const visit: VisitPayload = {`	Declares/initializes local data used by the surrounding operation: const visit: VisitPayload = {. Collection contents and assignments below determine its purpose.
1366	`    id: salesforceVisitId || id,`	Sets/declares the named object property or style/type member: id: salesforceVisitId || id,. Interpret it in the enclosing object, props or type definition.
1367	`    employeeId: req.auth!.employeeId,`	Sets/declares the named object property or style/type member: employeeId: req.auth!.employeeId,. Interpret it in the enclosing object, props or type definition.
1368	`    storeId: store.id,`	Sets/declares the named object property or style/type member: storeId: store.id,. Interpret it in the enclosing object, props or type definition.
1369	`    storeName: store.name,`	Sets/declares the named object property or style/type member: storeName: store.name,. Interpret it in the enclosing object, props or type definition.
1370	`    beatName: store.beatId,`	Sets/declares the named object property or style/type member: beatName: store.beatId,. Interpret it in the enclosing object, props or type definition.
1371	`    checkIn: { ...req.body.location, timestamp: new Date().toISOString() },`	Sets/declares the named object property or style/type member: checkIn: { ...req.body.location, timestamp: new Date().toISOString() },. Interpret it in the enclosing object, props or type definition.
1372	`    orderLines: [],`	Sets/declares the named object property or style/type member: orderLines: [],. Interpret it in the enclosing object, props or type definition.
1373	`    returns: [],`	Sets/declares the named object property or style/type member: returns: [],. Interpret it in the enclosing object, props or type definition.
1374	`    competitors: [],`	Sets/declares the named object property or style/type member: competitors: [],. Interpret it in the enclosing object, props or type definition.
1375	`    tickets: [],`	Sets/declares the named object property or style/type member: tickets: [],. Interpret it in the enclosing object, props or type definition.
1376	`    status: "In Progress",`	Sets/declares the named object property or style/type member: status: "In Progress",. Interpret it in the enclosing object, props or type definition.
1377	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1378	`  visits.set(visit.id, visit);`	Calls the named method: visits.set(visit.id, visit);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
1379	`  ok(res, visit, "Visit started");`	Continues the surrounding declaration/expression or text: ok(res, visit, "Visit started");. Read it with the preceding opening statement (visits.set(visit.id, visit);); it is not a standalone business operation.
1380	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1381	`app.post("/api/visits/:visitId/order-draft", async (request, res) => {`	Registers an HTTP route or middleware: app.post("/api/visits/:visitId/order-draft", async (request, res) => {. Registration order controls which authentication/validation runs first.
1382	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
1383	`  const visit = await ownedVisit(String(req.params.visitId), req.auth!.employeeId);`	Waits for this asynchronous operation before continuing: const visit = await ownedVisit(String(req.params.visitId), req.auth!.employeeId);. The returned result/error must still be handled.
1384	`  if (!visit) return fail(res, 404, "Visit not found", "VISIT_NOT_FOUND");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!visit) return fail(res, 404, "Visit not found", "VISIT_NOT_FOUND");.
1385	`  if (visit.status === "Completed" || visit.orderSubmitted)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visit.status === "Completed" || visit.orderSubmitted).
1386	`    return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
1387	`      res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
1388	`      409,`	Continues the surrounding declaration/expression or text: 409,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
1389	`      "This order is already submitted. Complete the visit without adding more lines.",`	Continues the surrounding declaration/expression or text: "This order is already submitted. Complete the visit without adding more lines.",. Read it with the preceding opening statement (409,); it is not a standalone business operation.
1390	`      "ORDER_ALREADY_SUBMITTED",`	Continues the surrounding declaration/expression or text: "ORDER_ALREADY_SUBMITTED",. Read it with the preceding opening statement ("This order is already submitted. Complete the visit without adding more lines.",); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1391	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1392	`  const items = req.body.items;`	Declares/initializes local data used by the surrounding operation: const items = req.body.items;. Collection contents and assignments below determine its purpose.
1393	`  if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
1394	`    !Array.isArray(items) ||`	Calls the named method: !Array.isArray(items) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
1395	`    items.length > 200 ||`	Continues the surrounding declaration/expression or text: items.length > 200 ||. Read it with the preceding opening statement (!Array.isArray(items) ||); it is not a standalone business operation.
1396	`    items.some(`	Transforms/selects/aggregates collection values with the callback shown here: items.some(. Read the callback body and result assignment together.
1397	`      (item: any) => !item.productId || !Number.isFinite(item.quantity) || item.quantity <= 0,`	Calls the named method: (item: any) => !item.productId || !Number.isFinite(item.quantity) || item.quantity <= 0,. Its implementation defines the side effect/result; use the symbol/file index to follow it.
1398	`    )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1399	`  )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1400	`    return fail(res, 400, "Enter valid quantities for up to 200 order lines", "INVALID_DRAFT");`	Returns fail(res, 400, "Enter valid quantities for up to 200 order lines", "INVALID_DRAFT") to the caller (or begins returned UI markup) and ends this execution path.
1401	`  if (!env.USE_MOCK_DATA)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!env.USE_MOCK_DATA).
1402	`    await salesforce.update(objectMap.visit, visit.id, {`	Invokes the external-data boundary: await salesforce.update(objectMap.visit, visit.id, {. Await/result checks determine whether the operation is confirmed.
1403	`      Mobile_Order_Draft__c: JSON.stringify(items),`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
1404	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1405	`  visit.orderLines = items;`	Assigns the right-hand expression to the named variable/property: visit.orderLines = items;. This is in-memory unless it is later persisted by an explicit call.
1406	`  return ok(res, { items }, "Order draft saved in Salesforce. Complete Visit to submit it.");`	Returns ok(res, { items }, "Order draft saved in Salesforce. Complete Visit to submit it.") to the caller (or begins returned UI markup) and ends this execution path.
1407	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1408	`app.post("/api/store/revisit", (req, res) => ok(res, { ...req.body, id: \`revisit-${Date.now()}\` }));`	Registers an HTTP route or middleware: app.post("/api/store/revisit", (req, res) => ok(res, { ...req.body, id: `revisit-${Date.now()}` }));. Registration order controls which authentication/validation runs first.
1409	`app.post("/api/outlets/:storeId/visit-status", async (request, res) => {`	Registers an HTTP route or middleware: app.post("/api/outlets/:storeId/visit-status", async (request, res) => {. Registration order controls which authentication/validation runs first.
1410	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
1411	`  const storeId = escapeSoqlLiteral(String(req.params.storeId));`	Declares/initializes local data used by the surrounding operation: const storeId = escapeSoqlLiteral(String(req.params.storeId));. Collection contents and assignments below determine its purpose.
1412	`  const employeeId = escapeSoqlLiteral(req.auth!.employeeId);`	Declares/initializes local data used by the surrounding operation: const employeeId = escapeSoqlLiteral(req.auth!.employeeId);. Collection contents and assignments below determine its purpose.
1413	`  const rows = await sfRecords(`	Waits for this asynchronous operation before continuing: const rows = await sfRecords(. The returned result/error must still be handled.
1414	`    \`SELECT Id, Name, Beat__c FROM ${objectMap.store} WHERE Id = '${storeId}' AND Id IN (${allocatedOutletIds(employeeId)}) LIMIT 1\`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Beat__c FROM ${objectMap.store} WHERE Id = '${storeId}' AND Id IN (${allocatedOutletIds(employeeId)}) LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
1415	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1416	`  if (!rows.length) return fail(res, 404, "Outlet not found", "OUTLET_NOT_FOUND");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!rows.length) return fail(res, 404, "Outlet not found", "OUTLET_NOT_FOUND");.

Line	Source code	Explanation / reading note
1417	`  const status = String(req.body.status || "Not Visited");`	Declares/initializes local data used by the surrounding operation: const status = String(req.body.status || "Not Visited");. Collection contents and assignments below determine its purpose.
1418	`  if (!env.USE_MOCK_DATA) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!env.USE_MOCK_DATA) {.
1419	`    const plans = await sfRecords(`	Waits for this asynchronous operation before continuing: const plans = await sfRecords(. The returned result/error must still be handled.
1420	`      \`SELECT Id FROM ${objectMap.journeyPlan} WHERE Beat__c = '${rows[0].Beat__c}' AND Status__c = 'Approved' ORDER BY Planned_Date__c DESC LIMIT 1\`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id FROM ${objectMap.journeyPlan} WHERE Beat__c = '${rows[0].Beat__c}' AND Status__c = 'Approved' ORDER BY Planned_Date__c DESC LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
1421	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1422	`    const created: any = await salesforce.create(objectMap.visit, {`	Invokes the external-data boundary: const created: any = await salesforce.create(objectMap.visit, {. Await/result checks determine whether the operation is confirmed.
1423	`      Name: \`${rows[0].Name} ${status}\`,`	Sets/declares the named object property or style/type member: Name: `${rows[0].Name} ${status}`,. Interpret it in the enclosing object, props or type definition.
1424	`      Retailer__c: rows[0].Id,`	Sets/declares the named object property or style/type member: Retailer__c: rows[0].Id,. Interpret it in the enclosing object, props or type definition.
1425	`      Employee__c: req.auth!.employeeId,`	Sets/declares the named object property or style/type member: Employee__c: req.auth!.employeeId,. Interpret it in the enclosing object, props or type definition.
1426	`      Sales_Representative__c: req.auth?.salesforceUserId || null,`	Sets/declares the named object property or style/type member: Sales_Representative__c: req.auth?.salesforceUserId || null,. Interpret it in the enclosing object, props or type definition.
1427	`      Permanent_Journey_Plan__c: plans[0]?.Id || null,`	Sets/declares the named object property or style/type member: Permanent_Journey_Plan__c: plans[0]?.Id || null,. Interpret it in the enclosing object, props or type definition.
1428	`      Visit_Date__c: new Date().toISOString().slice(0, 10),`	Sets/declares the named object property or style/type member: Visit_Date__c: new Date().toISOString().slice(0, 10),. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1429	`      Status__c: "Missed",`	Sets/declares the named object property or style/type member: Status__c: "Missed",. Interpret it in the enclosing object, props or type definition.
1430	`      Missed_Reason__c:`	Sets/declares the named object property or style/type member: Missed_Reason__c:. Interpret it in the enclosing object, props or type definition.
1431	`        status === "Not Available" ? "Owner unavailable" : req.body.reason || "Not visited",`	Continues the surrounding declaration/expression or text: status === "Not Available" ? "Owner unavailable" : req.body.reason || "Not visited",. Read it with the preceding opening statement (Missed_Reason__c:); it is not a standalone business operation.
1432	`      Notes__c: req.body.notes || null,`	Sets/declares the named object property or style/type member: Notes__c: req.body.notes || null,. Interpret it in the enclosing object, props or type definition.
1433	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1434	`    return ok(res, { id: created.id, status }, "Outlet visit status saved in Salesforce");`	Returns ok(res, { id: created.id, status }, "Outlet visit status saved in Salesforce") to the caller (or begins returned UI markup) and ends this execution path.
1435	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1436	`  return ok(res, { id: \`visit-${Date.now()}\`, status });`	Returns ok(res, { id: `visit-${Date.now()}`, status }) to the caller (or begins returned UI markup) and ends this execution path.
1437	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1438	`for (const [path, key] of [`	Repeats work over the specified records/items or while this condition holds: for (const [path, key] of [. Check where queries/writes occur relative to the loop.
1439	`  ["/api/orders", "orderLines"],`	Continues the surrounding declaration/expression or text: ["/api/orders", "orderLines"],. Read it with the preceding opening statement (for (const [path, key] of []); it is not a standalone business operation.
1440	`  ["/api/returns", "returns"],`	Continues the surrounding declaration/expression or text: ["/api/returns", "returns"],. Read it with the preceding opening statement (["/api/orders", "orderLines"],); it is not a standalone business operation.
1441	`  ["/api/competitor-activities", "competitors"],`	Continues the surrounding declaration/expression or text: ["/api/competitor-activities", "competitors"],. Read it with the preceding opening statement (["/api/returns", "returns"],); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1442	`  ["/api/tickets", "tickets"],`	Continues the surrounding declaration/expression or text: ["/api/tickets", "tickets"],. Read it with the preceding opening statement (["/api/competitor-activities", "competitors"],); it is not a standalone business operation.
1443	`] as const)`	Continues the surrounding declaration/expression or text:] as const). Read it with the preceding opening statement (["/api/tickets", "tickets"],); it is not a standalone business operation.
1444	`  app.post(path, async (request, res) => {`	Registers an HTTP route or middleware: app.post(path, async (request, res) => {. Registration order controls which authentication/validation runs first.
1445	`    const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
1446	`    const requestId = req.body.requestId`	Declares/initializes local data used by the surrounding operation: const requestId = req.body.requestId. Collection contents and assignments below determine its purpose.
1447	`      ? `${req.auth!.employeeId}:${path}:${req.body.requestId}``	Continues the surrounding declaration/expression or text: ? `${req.auth!.employeeId}:${path}:${req.body.requestId}`. Read it with the preceding opening statement (const requestId = req.body.requestId); it is not a standalone business operation.
1448	`      : undefined;`	Continues the surrounding declaration/expression or text: : undefined;. Read it with the preceding opening statement (? `${req.auth!.employeeId}:${path}:${req.body.requestId}`); it is not a standalone business operation.
1449	`    if (requestId && idempotency.has(requestId))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (requestId && idempotency.has(requestId)).
1450	`      return ok(res, idempotency.get(requestId), "Duplicate request safely reused");`	Returns ok(res, idempotency.get(requestId), "Duplicate request safely reused") to the caller (or begins returned UI markup) and ends this execution path.
1451	`    let result: any = { ...req.body, id: `${key}-${Date.now()}` };`	Declares/initializes local data used by the surrounding operation: let result: any = { ...req.body, id: `${key}-${Date.now()}` };. Collection contents and assignments below determine its purpose.
1452	`    if (!env.USE_MOCK_DATA) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!env.USE_MOCK_DATA) {.
1453	`      const visit = await ownedVisit(req.body.visitId, req.auth!.employeeId);`	Waits for this asynchronous operation before continuing: const visit = await ownedVisit(req.body.visitId, req.auth!.employeeId);. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
1454	`if (!visit) return fail(res, 404, "Visit not found", "VISIT_NOT_FOUND");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!visit) return fail(res, 404, "Visit not found", "VISIT_NOT_FOUND");.
1455	`if (visit.employeeId !== req.auth!.employeeId)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visit.employeeId !== req.auth!.employeeId).
1456	`return fail(res, 403, "This visit belongs to another Employee", "VISIT_ACCESS_DENIED");`	Returns fail(res, 403, "This visit belongs to another Employee", "VISIT_ACCESS_DENIED") to the caller (or begins returned UI markup) and ends this execution path.
1457	`const actionObject =`	Declares/initializes local data used by the surrounding operation: const actionObject =. Collection contents and assignments below determine its purpose.
1458	`path === "/api/returns"`	Continues the surrounding declaration/expression or text: path === "/api/returns". Read it with the preceding opening statement (const actionObject =); it is not a standalone business operation.
1459	`? objectMap.returns`	Continues the surrounding declaration/expression or text: ? objectMap.returns. Read it with the preceding opening statement (path === "/api/returns"); it is not a standalone business operation.
1460	`: path === "/api/competitor-activities"`	Continues the surrounding declaration/expression or text: : path === "/api/competitor-activities". Read it with the preceding opening statement (? objectMap.returns); it is not a standalone business operation.
1461	`? objectMap.competitor`	Continues the surrounding declaration/expression or text: ? objectMap.competitor. Read it with the preceding opening statement (: path === "/api/competitor-activities"); it is not a standalone business operation.
1462	`: path === "/api/tickets"`	Continues the surrounding declaration/expression or text: : path === "/api/tickets". Read it with the preceding opening statement (? objectMap.competitor); it is not a standalone business operation.
1463	`? objectMap.ticket`	Continues the surrounding declaration/expression or text: ? objectMap.ticket. Read it with the preceding opening statement (: path === "/api/tickets"); it is not a standalone business operation.
1464	`: undefined;`	Continues the surrounding declaration/expression or text: : undefined;. Read it with the preceding opening statement (? objectMap.ticket); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1465	`const actionKey = req.body.requestId ? `${req.auth!.employeeId}:${req.body.requestId}` : "";`	Declares/initializes local data used by the surrounding operation: const actionKey = req.body.requestId ? `${req.auth!.employeeId}:${req.body.requestId}` : "";. Collection contents and assignments below determine its purpose.
1466	`if (actionObject) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (actionObject) {.
1467	`const existing = await previousAction(actionObject, visit.id, actionKey);`	Waits for this asynchronous operation before continuing: const existing = await previousAction(actionObject, visit.id, actionKey);. The returned result/error must still be handled.
1468	`if (existing) return ok(res, existing, "Previously saved record returned");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (existing) return ok(res, existing, "Previously saved record returned");.
1469	`if (visit.status === "Completed")`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visit.status === "Completed").
1470	`return fail(res, 409, "This visit is completed", "VISIT_COMPLETED");`	Returns fail(res, 409, "This visit is completed", "VISIT_COMPLETED") to the caller (or begins returned UI markup) and ends this execution path.
1471	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1472	`if (path === "/api/orders") {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (path === "/api/orders") {.
1473	`const existing = await sfRecords(`	Waits for this asynchronous operation before continuing: const existing = await sfRecords(. The returned result/error must still be handled.
1474	`` `SELECT Id, Total_Amount__c FROM ${objectMap.order} WHERE Visit__c = '${escapeSoqlLiteral(visit.id)}' ORDER BY CreatedDate LIMIT 1`, ``	Assigns the right-hand expression to the named variable/property: `SELECT Id, Total_Amount__c FROM ${objectMap.order} WHERE Visit__c = '${escapeSoqlLiteral(visit.id)}' ORDER BY CreatedDate LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
1475	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1476	`if (existing.length) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (existing.length) {.

Line	Source code	Explanation / reading note
1477	`const restored = await restoreVisit(visit.id, req.auth!.employeeId);`	Waits for this asynchronous operation before continuing: const restored = await restoreVisit(visit.id, req.auth!.employeeId);. The returned result/error must still be handled.
1478	`if (restored) visits.set(restored.id, restored);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (restored) visits.set(restored.id, restored);.
1479	`visit.orderSubmitted = true;`	Assigns the right-hand expression to the named variable/property: visit.orderSubmitted = true;. This is in-memory unless it is later persisted by an explicit call.
1480	`return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.
1481	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
1482	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (res,); it is not a standalone business operation.
1483	`id: existing[0].Id,`	Sets/declares the named object property or style/type member: id: existing[0].Id,. Interpret it in the enclosing object, props or type definition.
1484	`totalAmount: existing[0].Total_Amount__c,`	Sets/declares the named object property or style/type member: totalAmount: existing[0].Total_Amount__c,. Interpret it in the enclosing object, props or type definition.
1485	`items: restored?.orderLines || visit.orderLines,`	Sets/declares the named object property or style/type member: items: restored?.orderLines || visit.orderLines,. Interpret it in the enclosing object, props or type definition.
1486	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1487	`"Existing visit order returned; no duplicate was created",`	Continues the surrounding declaration/expression or text: "Existing visit order returned; no duplicate was created",. Read it with the preceding opening statement (},); it is not a standalone business operation.
1488	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1489	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1490	`if (visit.status === "Completed")`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visit.status === "Completed").

Line	Source code	Explanation / reading note
1491	`return fail(res, 409, "This visit is completed", "VISIT_COMPLETED");`	Returns fail(res, 409, "This visit is completed", "VISIT_COMPLETED") to the caller (or begins returned UI markup) and ends this execution path.
1492	`const requestedItems = Array.isArray(req.body.items) ? req.body.items : [];`	Declares/initializes local data used by the surrounding operation: const requestedItems = Array.isArray(req.body.items) ? req.body.items : [];. Collection contents and assignments below determine its purpose.
1493	`if (requestedItems.length > 200)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (requestedItems.length > 200).
1494	`return fail(res, 400, "An order supports up to 200 lines", "ORDER_TOO_LARGE");`	Returns fail(res, 400, "An order supports up to 200 lines", "ORDER_TOO_LARGE") to the caller (or begins returned UI markup) and ends this execution path.
1495	`if (!requestedItems.length)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!requestedItems.length).
1496	`return fail(res, 400, "At least one order item is required", "ORDER_ITEMS_REQUIRED");`	Returns fail(res, 400, "At least one order item is required", "ORDER_ITEMS_REQUIRED") to the caller (or begins returned UI markup) and ends this execution path.
1497	`const productIds: string[] = [`	Declares/initializes local data used by the surrounding operation: const productIds: string[] = [. Collection contents and assignments below determine its purpose.
1498	`...new Set<string>(requestedItems.map((item: any) => String(item.productId || ""))),`	Transforms/selects/aggregates collection values with the callback shown here: ...new Set<string>(requestedItems.map((item: any) => String(item.productId || ""))),. Read the callback body and result assignment together.
1499	`].filter(Boolean);`	Transforms/selects/aggregates collection values with the callback shown here:].filter(Boolean);. Read the callback body and result assignment together.
1500	`const safeIds = productIds.map((id) => `'${escapeSoqlLiteral(id)}'`).join(",");`	Declares/initializes local data used by the surrounding operation: const safeIds = productIds.map((id) => `'${escapeSoqlLiteral(id)}'`).join(",");. Collection contents and assignments below determine its purpose.
1501	`const productRows = await sfRecords(`	Waits for this asynchronous operation before continuing: const productRows = await sfRecords(. The returned result/error must still be handled.
1502	`` `SELECT Id, Name, Product_Code__c, Selling_Price__c, GST_Percent__c, Available_Stock__c, Units_Per_Case__c, Active__c, Sellable__c FROM ${objectMap.product} WHERE Id IN (${safeIds})` ``	Continues the surrounding declaration/expression or text: `SELECT Id, Name, Product_Code__c, Selling_Price__c, GST_Percent__c, Available_Stock__c, Units_Per_Case__c, Active__c, Sellable__c FROM ${objectMap.product} WHERE Id IN (${safeIds})`,. Read it with the preceding opening statement (const productRows = await sfRecords(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1503	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1504	`        const productById = new Map(productRows.map((product) => [product.Id, product]));`	Declares/initializes local data used by the surrounding operation: const productById = new Map(productRows.map((product) => [product.Id, product]));. Collection contents and assignments below determine its purpose.
1505	`        const configurationIds = [`	Declares/initializes local data used by the surrounding operation: const configurationIds = [. Collection contents and assignments below determine its purpose.
1506	`          ...new Set<string>(requestedItems.map((item: any) => String(item.configurationId || ""))),`	Transforms/selects/aggregates collection values with the callback shown here: ...new Set<string>(requestedItems.map((item: any) => String(item.configurationId || ""))),. Read the callback body and result assignment together.
1507	`        ].filter(Boolean);`	Transforms/selects/aggregates collection values with the callback shown here:].filter(Boolean);. Read the callback body and result assignment together.
1508	`        const configurations = configurationIds.length`	Declares/initializes local data used by the surrounding operation: const configurations = configurationIds.length. Collection contents and assignments below determine its purpose.
1509	`          ? await sfRecords(`	Waits for this asynchronous operation before continuing: ? await sfRecords(. The returned result/error must still be handled.
1510	`              \`SELECT Id, Product__c, Configuration_Type__c, Minimum_Quantity__c FROM ${objectMap.productSalesConfiguration} WHERE Id IN (${configurationIds.map((id) => \`'${escapeSoqlLiteral(id)}'\`).join(",")}) AND Active__c = true AND Start_Date__c <= TODAY AND (End_Date__c = NULL OR End_Date__c >= TODAY)\`,`	Transforms/selects/aggregates collection values with the callback shown here: `SELECT Id, Product__c, Configuration_Type__c, Minimum_Quantity__c FROM ${objectMap.productSalesConfiguration} WHERE Id IN (${configurationIds.map((id) => `'${escapeSoqlLiteral(id)}'`).join(",")}) AND. Read the callback body and result assignment together.
1511	`            )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1512	`          : [];`	Continues the surrounding declaration/expression or text: : [];. Read it with the preceding opening statement ( )); it is not a standalone business operation.
1513	`        const configurationById = new Map(`	Declares/initializes local data used by the surrounding operation: const configurationById = new Map(. Collection contents and assignments below determine its purpose.
1514	`          configurations.map((configuration) => [configuration.Id, configuration]),`	Transforms/selects/aggregates collection values with the callback shown here: configurations.map((configuration) => [configuration.Id, configuration]),. Read the callback body and result assignment together.

Line	Source code	Explanation / reading note
1515	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1516	`const schemeIds = [`	Declares/initializes local data used by the surrounding operation: const schemeIds = [. Collection contents and assignments below determine its purpose.
1517	`...new Set<string>(requestedItems.map((item: any) => String(item.schemeId || ""))),`	Transforms/selects/aggregates collection values with the callback shown here: ...new Set<string>(requestedItems.map((item: any) => String(item.schemeId || ""))),. Read the callback body and result assignment together.
1518	`].filter(Boolean);`	Transforms/selects/aggregates collection values with the callback shown here:].filter(Boolean);. Read the callback body and result assignment together.
1519	`const activeSchemes = schemeIds.length`	Declares/initializes local data used by the surrounding operation: const activeSchemes = schemeIds.length. Collection contents and assignments below determine its purpose.
1520	`? await sfRecords(`	Waits for this asynchronous operation before continuing: ? await sfRecords(. The returned result/error must still be handled.
1521	`` `SELECT Id, Name, Product__c FROM ${objectMap.scheme} WHERE Id IN (${schemeIds.map((id) => `'${escapeSoqlLiteral(id)}'`).join(",")}) AND (Sales_Channel__c = null OR Sales_Channel__c = 'Secondary') AND Active__c = true AND Start_Date__c <= TODAY AND (End_Date__c = NULL OR End_Date__c >= TODAY)`, ``	Transforms/selects/aggregates collection values with the callback shown here: `SELECT Id, Name, Product__c FROM ${objectMap.scheme} WHERE Id IN (${schemeIds.map((id) => `'${escapeSoqlLiteral(id)}'`).join(",")}) AND (Sales_Channel__c = null OR Sales_Channel__c = 'Secondary') AND. Read the callback body and result assignment together.
1522	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1523	`: [];`	Continues the surrounding declaration/expression or text: : [];. Read it with the preceding opening statement ( )); it is not a standalone business operation.
1524	`const schemeById = new Map(activeSchemes.map((scheme) => [scheme.Id, scheme]));`	Declares/initializes local data used by the surrounding operation: const schemeById = new Map(activeSchemes.map((scheme) => [scheme.Id, scheme]));. Collection contents and assignments below determine its purpose.
1525	`const schemeProductLinks = schemeIds.length`	Declares/initializes local data used by the surrounding operation: const schemeProductLinks = schemeIds.length. Collection contents and assignments below determine its purpose.
1526	`? await sfRecords(`	Waits for this asynchronous operation before continuing: ? await sfRecords(. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
1527	`SELECT Scheme__c, Product__c FROM Scheme_Product__c WHERE Scheme__c IN (${schemeIds.map((id) => `'${escapeSoqlLiteral(id)}'`).join(",")}) AND Active__c = true`,	Transforms/selects/aggregates collection values with the callback shown here: `SELECT Scheme__c, Product__c FROM Scheme_Product__c WHERE Scheme__c IN (${schemeIds.map((id) => `'${escapeSoqlLiteral(id)}'`).join(",")}) AND Active__c = true`,. Read the callback body and result assignment together.
1528	)	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1529	: [];	Continues the surrounding declaration/expression or text: : [];. Read it with the preceding opening statement ( )); it is not a standalone business operation.
1530	const lines: Array<{	Declares/initializes local data used by the surrounding operation: const lines: Array<{. Collection contents and assignments below determine its purpose.
1531	product: any;	Sets/declares the named object property or style/type member: product: any;. Interpret it in the enclosing object, props or type definition.
1532	quantity: number;	Sets/declares the named object property or style/type member: quantity: number;. Interpret it in the enclosing object, props or type definition.
1533	unitPrice: number;	Sets/declares the named object property or style/type member: unitPrice: number;. Interpret it in the enclosing object, props or type definition.
1534	discount: number;	Sets/declares the named object property or style/type member: discount: number;. Interpret it in the enclosing object, props or type definition.
1535	grossAmount: number;	Sets/declares the named object property or style/type member: grossAmount: number;. Interpret it in the enclosing object, props or type definition.
1536	taxAmount: number;	Sets/declares the named object property or style/type member: taxAmount: number;. Interpret it in the enclosing object, props or type definition.
1537	totalAmount: number;	Sets/declares the named object property or style/type member: totalAmount: number;. Interpret it in the enclosing object, props or type definition.
1538	schemeId?: string;	Sets/declares the named object property or style/type member: schemeId?: string;. Interpret it in the enclosing object, props or type definition.
1539	schemeName?: string;	Sets/declares the named object property or style/type member: schemeName?: string;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1540	`configurationId?: string;`	Sets/declares the named object property or style/type member: configurationId?: string;. Interpret it in the enclosing object, props or type definition.
1541	`}> = requestedItems.map((item: any) => {`	Transforms/selects/aggregates collection values with the callback shown here: }> = requestedItems.map((item: any) => {. Read the callback body and result assignment together.
1542	`const product = productById.get(String(item.productId));`	Declares/initializes local data used by the surrounding operation: const product = productById.get(String(item.productId));. Collection contents and assignments below determine its purpose.
1543	`const quantity = Number(item.quantity || 0);`	Declares/initializes local data used by the surrounding operation: const quantity = Number(item.quantity || 0);. Collection contents and assignments below determine its purpose.
1544	`if (!product || !product.Active__c || !product.Sellable__c)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!product || !product.Active__c || !product.Sellable__c).
1545	`throw new ValidationError(`Product ${item.productId} is not available for sale`);`	Stops this execution path with a validation/error exception: throw new ValidationError(`Product ${item.productId} is not available for sale`);. The caller/catch block decides how it is reported.
1546	`if (!Number.isFinite(quantity) || quantity <= 0)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!Number.isFinite(quantity) || quantity <= 0).
1547	`throw new ValidationError(`Quantity must be greater than zero for ${product.Name}`);`	Stops this execution path with a validation/error exception: throw new ValidationError(`Quantity must be greater than zero for ${product.Name}`);. The caller/catch block decides how it is reported.
1548	`if (quantity > Number(product.Available_Stock__c || 0))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (quantity > Number(product.Available_Stock__c || 0)).
1549	`throw new ValidationError(`Insufficient stock for ${product.Name}`);`	Stops this execution path with a validation/error exception: throw new ValidationError(`Insufficient stock for ${product.Name}`);. The caller/catch block decides how it is reported.
1550	`const configuration = item.configurationId`	Declares/initializes local data used by the surrounding operation: const configuration = item.configurationId. Collection contents and assignments below determine its purpose.
1551	`? configurationById.get(String(item.configurationId))`	Calls the named method: ? configurationById.get(String(item.configurationId)). Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
1552	`: undefined;`	Continues the surrounding declaration/expression or text: : undefined;. Read it with the preceding opening statement (? configurationById.get(String(item.configurationId))); it is not a standalone business operation.
1553	`if (item.configurationId && (!configuration || configuration.Product__c !== product.Id))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (item.configurationId && (!configuration || configuration.Product__c !== product.Id)).
1554	`throw new ValidationError(`	Stops this execution path with a validation/error exception: throw new ValidationError(. The caller/catch block decides how it is reported.
1555	`` `The sales configuration for ${product.Name} is not active or does not belong to this product`, ``	Continues the surrounding declaration/expression or text: `The sales configuration for ${product.Name} is not active or does not belong to this product`,. Read it with the preceding opening statement (throw new ValidationError(); it is not a standalone business operation.
1556	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1557	`if (configuration && quantity < Number(configuration.Minimum_Quantity__c || 1))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (configuration && quantity < Number(configuration.Minimum_Quantity__c || 1)).
1558	`throw new ValidationError(`	Stops this execution path with a validation/error exception: throw new ValidationError(. The caller/catch block decides how it is reported.
1559	`` `${product.Name} requires at least ${configuration.Minimum_Quantity__c} units for ${configuration.Configuration_Type__c}`, ``	Continues the surrounding declaration/expression or text: `${product.Name} requires at least ${configuration.Minimum_Quantity__c} units for ${configuration.Configuration_Type__c}`,. Read it with the preceding opening statement (throw new ValidationError(); it is not a standalone business operation.
1560	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1561	`const scheme = item.schemeId ? schemeById.get(String(item.schemeId)) : undefined;`	Declares/initializes local data used by the surrounding operation: const scheme = item.schemeId ? schemeById.get(String(item.schemeId)) : undefined;. Collection contents and assignments below determine its purpose.
1562	`const linkedProducts = scheme`	Declares/initializes local data used by the surrounding operation: const linkedProducts = scheme. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
1563	`? schemeProductLinks`	Continues the surrounding declaration/expression or text: ? schemeProductLinks. Read it with the preceding opening statement (const linkedProducts = scheme); it is not a standalone business operation.
1564	`.filter((link) => link.Scheme__c === scheme.Id)`	Transforms/selects/aggregates collection values with the callback shown here: .filter((link) => link.Scheme__c === scheme.Id). Read the callback body and result assignment together.
1565	`.map((link) => link.Product__c)`	Transforms/selects/aggregates collection values with the callback shown here: .map((link) => link.Product__c). Read the callback body and result assignment together.
1566	`: [];`	Continues the surrounding declaration/expression or text: : [];. Read it with the preceding opening statement (.map((link) => link.Product__c)); it is not a standalone business operation.
1567	`if (item.schemeId && !scheme)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (item.schemeId && !scheme).
1568	`throw new ValidationError(`	Stops this execution path with a validation/error exception: throw new ValidationError(. The caller/catch block decides how it is reported.
1569	`` `The selected scheme for ${product.Name} is no longer active`, ``	Continues the surrounding declaration/expression or text: `The selected scheme for ${product.Name} is no longer active`,. Read it with the preceding opening statement (throw new ValidationError(); it is not a standalone business operation.
1570	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1571	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
1572	`scheme &&`	Continues the surrounding declaration/expression or text: scheme &&. Read it with the preceding opening statement (if (); it is not a standalone business operation.
1573	`(linkedProducts.length`	Continues the surrounding declaration/expression or text: (linkedProducts.length. Read it with the preceding opening statement (scheme &&); it is not a standalone business operation.
1574	`? !linkedProducts.includes(product.Id)`	Calls the named method: ? !linkedProducts.includes(product.Id). Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
1575	`: scheme.Product__c && scheme.Product__c !== product.Id)`	Continues the surrounding declaration/expression or text: : scheme.Product__c && scheme.Product__c !== product.Id). Read it with the preceding opening statement (? !linkedProducts.includes(product.Id)); it is not a standalone business operation.
1576	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1577	`throw new ValidationError(`${scheme.Name} is not applicable to ${product.Name}`);`	Stops this execution path with a validation/error exception: throw new ValidationError(`${scheme.Name} is not applicable to ${product.Name}`);. The caller/catch block decides how it is reported.
1578	`const unitPrice = Number(product.Selling_Price__c || 0);`	Declares/initializes local data used by the surrounding operation: const unitPrice = Number(product.Selling_Price__c || 0);. Collection contents and assignments below determine its purpose.
1579	`const baseAmount = quantity * unitPrice;`	Declares/initializes local data used by the surrounding operation: const baseAmount = quantity * unitPrice;. Collection contents and assignments below determine its purpose.
1580	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
1581	`!Number.isFinite(Number(item.discount || 0)) ||`	Calls the named method: !Number.isFinite(Number(item.discount || 0)) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
1582	`Number(item.discount || 0) < 0 ||`	Continues the surrounding declaration/expression or text: Number(item.discount || 0) < 0 ||. Read it with the preceding opening statement (!Number.isFinite(Number(item.discount || 0)) ||); it is not a standalone business operation.
1583	`Number(item.discount || 0) > baseAmount`	Continues the surrounding declaration/expression or text: Number(item.discount || 0) > baseAmount. Read it with the preceding opening statement (Number(item.discount || 0) < 0 ||); it is not a standalone business operation.
1584	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1585	`throw new ValidationError(`Enter a valid discount for ${product.Name}`);`	Stops this execution path with a validation/error exception: throw new ValidationError(`Enter a valid discount for ${product.Name}`);. The caller/catch block decides how it is reported.
1586	`const discount = Math.max(0, Math.min(baseAmount, Number(item.discount || 0)));`	Declares/initializes local data used by the surrounding operation: const discount = Math.max(0, Math.min(baseAmount, Number(item.discount || 0)));. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
1587	`const grossAmount = baseAmount - discount;`	Declares/initializes local data used by the surrounding operation: const grossAmount = baseAmount - discount;. Collection contents and assignments below determine its purpose.
1588	`const taxAmount = (grossAmount * Number(product.GST_Percent__c || 0)) / 100;`	Declares/initializes local data used by the surrounding operation: const taxAmount = (grossAmount * Number(product.GST_Percent__c || 0)) / 100;. Collection contents and assignments below determine its purpose.
1589	`return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
1590	`product,`	Continues the surrounding declaration/expression or text: product,. Read it with the preceding opening statement (return {); it is not a standalone business operation.
1591	`quantity,`	Continues the surrounding declaration/expression or text: quantity,. Read it with the preceding opening statement (product,); it is not a standalone business operation.
1592	`unitPrice,`	Continues the surrounding declaration/expression or text: unitPrice,. Read it with the preceding opening statement (quantity,); it is not a standalone business operation.
1593	`discount,`	Continues the surrounding declaration/expression or text: discount,. Read it with the preceding opening statement (unitPrice,); it is not a standalone business operation.
1594	`grossAmount,`	Continues the surrounding declaration/expression or text: grossAmount,. Read it with the preceding opening statement (discount,); it is not a standalone business operation.
1595	`taxAmount,`	Continues the surrounding declaration/expression or text: taxAmount,. Read it with the preceding opening statement (grossAmount,); it is not a standalone business operation.
1596	`totalAmount: grossAmount + taxAmount,`	Sets/declares the named object property or style/type member: totalAmount: grossAmount + taxAmount,. Interpret it in the enclosing object, props or type definition.
1597	`schemeId: scheme?.Id,`	Sets/declares the named object property or style/type member: schemeId: scheme?.Id,. Interpret it in the enclosing object, props or type definition.
1598	`schemeName: scheme?.Name,`	Sets/declares the named object property or style/type member: schemeName: scheme?.Name,. Interpret it in the enclosing object, props or type definition.
1599	`configurationId: configuration?.Id,`	Sets/declares the named object property or style/type member: configurationId: configuration?.Id,. Interpret it in the enclosing object, props or type definition.
1600	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1601	`        });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1602	`        for (const productId of productIds) {`	Repeats work over the specified records/items or while this condition holds: for (const productId of productIds) {. Check where queries/writes occur relative to the loop.
1603	`          const product = productById.get(productId);`	Declares/initializes local data used by the surrounding operation: const product = productById.get(productId);. Collection contents and assignments below determine its purpose.
1604	`          const totalOrdered = lines`	Declares/initializes local data used by the surrounding operation: const totalOrdered = lines. Collection contents and assignments below determine its purpose.
1605	`            .filter((line) => line.product.Id === productId)`	Transforms/selects/aggregates collection values with the callback shown here: .filter((line) => line.product.Id === productId). Read the callback body and result assignment together.
1606	`            .reduce((sum, line) => sum + line.quantity, 0);`	Transforms/selects/aggregates collection values with the callback shown here: .reduce((sum, line) => sum + line.quantity, 0);. Read the callback body and result assignment together.
1607	`          if (totalOrdered > Number(product.Available_Stock__c || 0))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (totalOrdered > Number(product.Available_Stock__c || 0)).
1608	`            throw new ValidationError(`Insufficient stock for the combined ${product.Name} lines`);`	Stops this execution path with a validation/error exception: throw new ValidationError(`Insufficient stock for the combined ${product.Name} lines`);. The caller/catch block decides how it is reported.
1609	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1610	`        const totalQuantity = lines.reduce((sum, line) => sum + line.quantity, 0);`	Declares/initializes local data used by the surrounding operation: const totalQuantity = lines.reduce((sum, line) => sum + line.quantity, 0);. Collection contents and assignments below determine its purpose.
1611	`        const grossAmount = lines.reduce((sum, line) => sum + line.grossAmount, 0);`	Declares/initializes local data used by the surrounding operation: const grossAmount = lines.reduce((sum, line) => sum + line.grossAmount, 0);. Collection contents and assignments below determine its purpose.
1612	`        const taxAmount = lines.reduce((sum, line) => sum + line.taxAmount, 0);`	Declares/initializes local data used by the surrounding operation: const taxAmount = lines.reduce((sum, line) => sum + line.taxAmount, 0);. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
1613	`const totalAmount = grossAmount + taxAmount;`	Declares/initializes local data used by the surrounding operation: const totalAmount = grossAmount + taxAmount;. Collection contents and assignments below determine its purpose.
1614	`const appliedSchemeId = requestedItems.find((item: any) => item.schemeId)?.schemeId || null;`	Declares/initializes local data used by the surrounding operation: const appliedSchemeId = requestedItems.find((item: any) => item.schemeId)?.schemeId || null;. Collection contents and assignments below determine its purpose.
1615	`const appliedSchemeNames = requestedItems`	Declares/initializes local data used by the surrounding operation: const appliedSchemeNames = requestedItems. Collection contents and assignments below determine its purpose.
1616	`.map((item: any) => item.schemeName)`	Transforms/selects/aggregates collection values with the callback shown here: .map((item: any) => item.schemeName). Read the callback body and result assignment together.
1617	`.filter(Boolean);`	Transforms/selects/aggregates collection values with the callback shown here: .filter(Boolean);. Read the callback body and result assignment together.
1618	`const orderFields = {`	Declares/initializes local data used by the surrounding operation: const orderFields = {. Collection contents and assignments below determine its purpose.
1619	`Mobile_Request_Key__c: \`visit-${visit.id}\`,`	Sets/declares the named object property or style/type member: Mobile_Request_Key__c: `visit-${visit.id}`,. Interpret it in the enclosing object, props or type definition.
1620	`Order_Date__c: new Date().toISOString().slice(0, 10),`	Sets/declares the named object property or style/type member: Order_Date__c: new Date().toISOString().slice(0, 10),. Interpret it in the enclosing object, props or type definition.
1621	`Status__c: "Submitted",`	Sets/declares the named object property or style/type member: Status__c: "Submitted",. Interpret it in the enclosing object, props or type definition.
1622	`Retailer__c: visit.storeId,`	Sets/declares the named object property or style/type member: Retailer__c: visit.storeId,. Interpret it in the enclosing object, props or type definition.
1623	`Visit__c: visit.id,`	Sets/declares the named object property or style/type member: Visit__c: visit.id,. Interpret it in the enclosing object, props or type definition.
1624	`Total_Quantity__c: totalQuantity,`	Sets/declares the named object property or style/type member: Total_Quantity__c: totalQuantity,. Interpret it in the enclosing object, props or type definition.
1625	`Gross_Amount__c: grossAmount,`	Sets/declares the named object property or style/type member: Gross_Amount__c: grossAmount,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1626	`Tax_Amount__c: taxAmount,`	Sets/declares the named object property or style/type member: Tax_Amount__c: taxAmount,. Interpret it in the enclosing object, props or type definition.
1627	`Total_Amount__c: totalAmount,`	Sets/declares the named object property or style/type member: Total_Amount__c: totalAmount,. Interpret it in the enclosing object, props or type definition.
1628	`Product__c: lines[0].product.Id,`	Sets/declares the named object property or style/type member: Product__c: lines[0].product.Id,. Interpret it in the enclosing object, props or type definition.
1629	`Scheme_Applied__c: appliedSchemeId,`	Sets/declares the named object property or style/type member: Scheme_Applied__c: appliedSchemeId,. Interpret it in the enclosing object, props or type definition.
1630	`Scheme_Details__c: appliedSchemeNames.length`	Sets/declares the named object property or style/type member: Scheme_Details__c: appliedSchemeNames.length. Interpret it in the enclosing object, props or type definition.
1631	`? [...new Set(appliedSchemeNames)].join(", ")`	Continues the surrounding declaration/expression or text: ? [...new Set(appliedSchemeNames)].join(", "). Read it with the preceding opening statement (Scheme_Details__c: appliedSchemeNames.length); it is not a standalone business operation.
1632	`: null,`	Continues the surrounding declaration/expression or text: : null,. Read it with the preceding opening statement (? [...new Set(appliedSchemeNames)].join(", ")); it is not a standalone business operation.
1633	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1634	`const itemFields = lines.map((line) => ({`	Declares/initializes local data used by the surrounding operation: const itemFields = lines.map((line) => ({. Collection contents and assignments below determine its purpose.
1635	`attributes: { type: objectMap.orderItem },`	Sets/declares the named object property or style/type member: attributes: { type: objectMap.orderItem },. Interpret it in the enclosing object, props or type definition.
1636	`Sales_Order__c: "@{order.id}",`	Sets/declares the named object property or style/type member: Sales_Order__c: "@{order.id}",. Interpret it in the enclosing object, props or type definition.
1637	`Product__c: line.product.Id,`	Sets/declares the named object property or style/type member: Product__c: line.product.Id,. Interpret it in the enclosing object, props or type definition.
1638	`Product_Sales_Configuration__c: line.configurationId || null,`	Sets/declares the named object property or style/type member: Product_Sales_Configuration__c: line.configurationId || null,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1639	`Scheme__c: line.schemeId || null,`	Sets/declares the named object property or style/type member: Scheme__c: line.schemeId || null,. Interpret it in the enclosing object, props or type definition.
1640	`Piece_Quantity__c: line.quantity,`	Sets/declares the named object property or style/type member: Piece_Quantity__c: line.quantity,. Interpret it in the enclosing object, props or type definition.
1641	`Total_Pieces__c: line.quantity,`	Sets/declares the named object property or style/type member: Total_Pieces__c: line.quantity,. Interpret it in the enclosing object, props or type definition.
1642	`Unit_Price__c: line.unitPrice,`	Sets/declares the named object property or style/type member: Unit_Price__c: line.unitPrice,. Interpret it in the enclosing object, props or type definition.
1643	`Line_Amount__c: line.totalAmount,`	Sets/declares the named object property or style/type member: Line_Amount__c: line.totalAmount,. Interpret it in the enclosing object, props or type definition.
1644	`}));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1645	`const apiRoot = \`/services/data/v${env.SALESFORCE_API_VERSION}\`;`	Declares/initializes local data used by the surrounding operation: const apiRoot = `/services/data/v${env.SALESFORCE_API_VERSION}`;. Collection contents and assignments below determine its purpose.
1646	`const committed = await salesforce.composite([`	Invokes the external-data boundary: const committed = await salesforce.composite([. Await/result checks determine whether the operation is confirmed.
1647	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (const committed = await salesforce.composite([); it is not a standalone business operation.
1648	`method: "POST",`	Sets/declares the named object property or style/type member: method: "POST",. Interpret it in the enclosing object, props or type definition.
1649	`url: \`${apiRoot}/sobjects/${objectMap.order}\`,`	Sets/declares the named object property or style/type member: url: `${apiRoot}/sobjects/${objectMap.order}`,. Interpret it in the enclosing object, props or type definition.
1650	`referenceId: "order",`	Sets/declares the named object property or style/type member: referenceId: "order",. Interpret it in the enclosing object, props or type definition.
1651	`body: orderFields,`	Sets/declares the named object property or style/type member: body: orderFields,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1652	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1653	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
1654	`method: "POST",`	Sets/declares the named object property or style/type member: method: "POST",. Interpret it in the enclosing object, props or type definition.
1655	`url: \`${apiRoot}/composite/sobjects\`,`	Sets/declares the named object property or style/type member: url: `${apiRoot}/composite/sobjects`,. Interpret it in the enclosing object, props or type definition.
1656	`referenceId: "items",`	Sets/declares the named object property or style/type member: referenceId: "items",. Interpret it in the enclosing object, props or type definition.
1657	`body: { allOrNone: true, records: itemFields },`	Sets/declares the named object property or style/type member: body: { allOrNone: true, records: itemFields },. Interpret it in the enclosing object, props or type definition.
1658	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1659	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
1660	`method: "PATCH",`	Sets/declares the named object property or style/type member: method: "PATCH",. Interpret it in the enclosing object, props or type definition.
1661	`url: \`${apiRoot}/sobjects/${objectMap.visit}/${visit.id}\`,`	Sets/declares the named object property or style/type member: url: `${apiRoot}/sobjects/${objectMap.visit}/${visit.id}`,. Interpret it in the enclosing object, props or type definition.
1662	`referenceId: "visit",`	Sets/declares the named object property or style/type member: referenceId: "visit",. Interpret it in the enclosing object, props or type definition.
1663	`body: {`	Sets/declares the named object property or style/type member: body: {. Interpret it in the enclosing object, props or type definition.
1664	`Order_Gross_Amount__c: grossAmount,`	Sets/declares the named object property or style/type member: Order_Gross_Amount__c: grossAmount,. Interpret it in the enclosing object, props or type definition.
1665	`Order_Tax__c: taxAmount,`	Sets/declares the named object property or style/type member: Order_Tax__c: taxAmount,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1666	`Order_Total__c: totalAmount,`	Sets/declares the named object property or style/type member: Order_Total__c: totalAmount,. Interpret it in the enclosing object, props or type definition.
1667	`Order_Total_Quantity__c: totalQuantity,`	Sets/declares the named object property or style/type member: Order_Total_Quantity__c: totalQuantity,. Interpret it in the enclosing object, props or type definition.
1668	`Mobile_Order_Draft__c: null,`	Sets/declares the named object property or style/type member: Mobile_Order_Draft__c: null,. Interpret it in the enclosing object, props or type definition.
1669	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1670	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1671	`]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1672	`const records = lines.map((line, index) => ({`	Declares/initializes local data used by the surrounding operation: const records = lines.map((line, index) => ({. Collection contents and assignments below determine its purpose.
1673	`...line,`	Continues the surrounding declaration/expression or text: ...line,. Read it with the preceding opening statement (const records = lines.map((line, index) => ({); it is not a standalone business operation.
1674	`id: committed[1].body[index].id,`	Sets/declares the named object property or style/type member: id: committed[1].body[index].id,. Interpret it in the enclosing object, props or type definition.
1675	`productId: line.product.Id,`	Sets/declares the named object property or style/type member: productId: line.product.Id,. Interpret it in the enclosing object, props or type definition.
1676	`productName: line.product.Name,`	Sets/declares the named object property or style/type member: productName: line.product.Name,. Interpret it in the enclosing object, props or type definition.
1677	`amount: line.totalAmount,`	Sets/declares the named object property or style/type member: amount: line.totalAmount,. Interpret it in the enclosing object, props or type definition.
1678	`}));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1679	`visit.orderSubmitted = true;`	Assigns the right-hand expression to the named variable/property: visit.orderSubmitted = true;. This is in-memory unless it is later persisted by an explicit call.
1680	`result = {`	Assigns the right-hand expression to the named variable/property: result = {. This is in-memory unless it is later persisted by an explicit call.
1681	`id: committed[0].body.id,`	Sets/declares the named object property or style/type member: id: committed[0].body.id,. Interpret it in the enclosing object, props or type definition.
1682	`totalQuantity,`	Continues the surrounding declaration/expression or text: totalQuantity,. Read it with the preceding opening statement (id: committed[0].body.id,); it is not a standalone business operation.
1683	`grossAmount,`	Continues the surrounding declaration/expression or text: grossAmount,. Read it with the preceding opening statement (totalQuantity,); it is not a standalone business operation.
1684	`taxAmount,`	Continues the surrounding declaration/expression or text: taxAmount,. Read it with the preceding opening statement (grossAmount,); it is not a standalone business operation.
1685	`totalAmount,`	Continues the surrounding declaration/expression or text: totalAmount,. Read it with the preceding opening statement (taxAmount,); it is not a standalone business operation.
1686	`items: records,`	Sets/declares the named object property or style/type member: items: records,. Interpret it in the enclosing object, props or type definition.
1687	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1688	`} else if (path === "/api/returns") {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: } else if (path === "/api/returns") {.
1689	`const created: any = await salesforce.create(objectMap.returns, {`	Invokes the external-data boundary: const created: any = await salesforce.create(objectMap.returns, {. Await/result checks determine whether the operation is confirmed.
1690	`Mobile_Request_Key__c: actionKey || null,`	Sets/declares the named object property or style/type member: Mobile_Request_Key__c: actionKey || null,. Interpret it in the enclosing object, props or type definition.
1691	`Outlet__c: visit.storeId,`	Sets/declares the named object property or style/type member: Outlet__c: visit.storeId,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1692	`Visit__c: visit.id,`	Sets/declares the named object property or style/type member: Visit__c: visit.id,. Interpret it in the enclosing object, props or type definition.
1693	`Product__c: req.body.productId,`	Sets/declares the named object property or style/type member: Product__c: req.body.productId,. Interpret it in the enclosing object, props or type definition.
1694	`Quantity__c: Number(req.body.quantity),`	Sets/declares the named object property or style/type member: Quantity__c: Number(req.body.quantity),. Interpret it in the enclosing object, props or type definition.
1695	`Manufacturing_Date__c: req.body.manufacturingDate || null,`	Sets/declares the named object property or style/type member: Manufacturing_Date__c: req.body.manufacturingDate || null,. Interpret it in the enclosing object, props or type definition.
1696	`Return_Reason__c: req.body.reason || "Other",`	Sets/declares the named object property or style/type member: Return_Reason__c: req.body.reason || "Other",. Interpret it in the enclosing object, props or type definition.
1697	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1698	`result = { ...req.body, id: created.id };`	Assigns the right-hand expression to the named variable/property: result = { ...req.body, id: created.id };. This is in-memory unless it is later persisted by an explicit call.
1699	`} else if (path === "/api/competitor-activities") {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: } else if (path === "/api/competitor-activities") {.
1700	`const created: any = await salesforce.create(objectMap.competitor, {`	Invokes the external-data boundary: const created: any = await salesforce.create(objectMap.competitor, {. Await/result checks determine whether the operation is confirmed.
1701	`Mobile_Request_Key__c: actionKey || null,`	Sets/declares the named object property or style/type member: Mobile_Request_Key__c: actionKey || null,. Interpret it in the enclosing object, props or type definition.
1702	`Outlet__c: visit.storeId,`	Sets/declares the named object property or style/type member: Outlet__c: visit.storeId,. Interpret it in the enclosing object, props or type definition.
1703	`Visit__c: visit.id,`	Sets/declares the named object property or style/type member: Visit__c: visit.id,. Interpret it in the enclosing object, props or type definition.
1704	`Competitor_Name__c: req.body.competitorName,`	Sets/declares the named object property or style/type member: Competitor_Name__c: req.body.competitorName,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1705	`Company__c: req.body.company,`	Sets/declares the named object property or style/type member: Company__c: req.body.company,. Interpret it in the enclosing object, props or type definition.
1706	`MRP__c: Number(req.body.mrp || req.body.price || 0),`	Sets/declares the named object property or style/type member: MRP__c: Number(req.body.mrp || req.body.price || 0),. Interpret it in the enclosing object, props or type definition.
1707	`RBP__c: Number(req.body.rbp || 0),`	Sets/declares the named object property or style/type member: RBP__c: Number(req.body.rbp || 0),. Interpret it in the enclosing object, props or type definition.
1708	`Scheme_Details__c: req.body.promotion || req.body.remarks,`	Sets/declares the named object property or style/type member: Scheme_Details__c: req.body.promotion || req.body.remarks,. Interpret it in the enclosing object, props or type definition.
1709	`Image_URL__c: req.body.imageUrl || null,`	Sets/declares the named object property or style/type member: Image_URL__c: req.body.imageUrl || null,. Interpret it in the enclosing object, props or type definition.
1710	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1711	`result = { ...req.body, id: created.id };`	Assigns the right-hand expression to the named variable/property: result = { ...req.body, id: created.id };. This is in-memory unless it is later persisted by an explicit call.
1712	`} else if (path === "/api/tickets") {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: } else if (path === "/api/tickets") {.
1713	`const created: any = await salesforce.create(objectMap.ticket, {`	Invokes the external-data boundary: const created: any = await salesforce.create(objectMap.ticket, {. Await/result checks determine whether the operation is confirmed.
1714	`Mobile_Request_Key__c: actionKey || null,`	Sets/declares the named object property or style/type member: Mobile_Request_Key__c: actionKey || null,. Interpret it in the enclosing object, props or type definition.
1715	`Outlet__c: visit.storeId,`	Sets/declares the named object property or style/type member: Outlet__c: visit.storeId,. Interpret it in the enclosing object, props or type definition.
1716	`Visit__c: visit.id,`	Sets/declares the named object property or style/type member: Visit__c: visit.id,. Interpret it in the enclosing object, props or type definition.
1717	`Subject__c: req.body.subject || req.body.ticketType,`	Sets/declares the named object property or style/type member: Subject__c: req.body.subject || req.body.ticketType,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1718	`Description__c: req.body.description,`	Sets/declares the named object property or style/type member: Description__c: req.body.description,. Interpret it in the enclosing object, props or type definition.
1719	`Status__c: "Open",`	Sets/declares the named object property or style/type member: Status__c: "Open",. Interpret it in the enclosing object, props or type definition.
1720	`Image_URL__c: req.body.imageUrl || null,`	Sets/declares the named object property or style/type member: Image_URL__c: req.body.imageUrl || null,. Interpret it in the enclosing object, props or type definition.
1721	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1722	`result = { ...req.body, id: created.id };`	Assigns the right-hand expression to the named variable/property: result = { ...req.body, id: created.id };. This is in-memory unless it is later persisted by an explicit call.
1723	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1724	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1725	`if (requestId) idempotency.set(requestId, result);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (requestId) idempotency.set(requestId, result);.
1726	`const visit = visits.get(req.body.visitId);`	Declares/initializes local data used by the surrounding operation: const visit = visits.get(req.body.visitId);. Collection contents and assignments below determine its purpose.
1727	`if (visit)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visit).
1728	`(visit as any)[key] =`	Continues the surrounding declaration/expression or text: (visit as any)[key] =. Read it with the preceding opening statement (if (visit)); it is not a standalone business operation.
1729	`key === "orderLines" ? result.items || req.body.items : [...(visit as any)[key], result];`	Continues the surrounding declaration/expression or text: key === "orderLines" ? result.items || req.body.items : [...(visit as any)[key], result];. Read it with the preceding opening statement ((visit as any)[key] =); it is not a standalone business operation.
1730	`ok(res, result);`	Continues the surrounding declaration/expression or text: ok(res, result);. Read it with the preceding opening statement (key === "orderLines" ? result.items || req.body.items : [...(visit as any)[key], result];); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1731	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1732	`app.post("/api/orders/:orderId/items", (req, res) =>`	Registers an HTTP route or middleware: app.post("/api/orders/:orderId/items", (req, res) =>. Registration order controls which authentication/validation runs first.
1733	`  ok(res, { orderId: req.params.orderId, items: req.body.items }),`	Continues the surrounding declaration/expression or text: ok(res, { orderId: req.params.orderId, items: req.body.items }),. Read it with the preceding opening statement (app.post("/api/orders/:orderId/items", (req, res) =>); it is not a standalone business operation.
1734	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1735	`app.post("/api/stock-checks", async (request, res) => {`	Registers an HTTP route or middleware: app.post("/api/stock-checks", async (request, res) => {. Registration order controls which authentication/validation runs first.
1736	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
1737	`  const visit = await ownedVisit(req.body.visitId, req.auth!.employeeId);`	Waits for this asynchronous operation before continuing: const visit = await ownedVisit(req.body.visitId, req.auth!.employeeId);. The returned result/error must still be handled.
1738	`  if (!visit || visit.employeeId !== req.auth!.employeeId)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!visit || visit.employeeId !== req.auth!.employeeId).
1739	`    return fail(res, 404, "Visit not found", "VISIT_NOT_FOUND");`	Returns fail(res, 404, "Visit not found", "VISIT_NOT_FOUND") to the caller (or begins returned UI markup) and ends this execution path.
1740	`  const actionKey = req.body.requestId ? `${req.auth!.employeeId}:${req.body.requestId}` : "";`	Declares/initializes local data used by the surrounding operation: const actionKey = req.body.requestId ? `${req.auth!.employeeId}:${req.body.requestId}` : "";. Collection contents and assignments below determine its purpose.
1741	`  const existing = await previousAction(objectMap.stockCheck, visit.id, actionKey);`	Waits for this asynchronous operation before continuing: const existing = await previousAction(objectMap.stockCheck, visit.id, actionKey);. The returned result/error must still be handled.
1742	`  if (existing) return ok(res, existing, "Stock check already saved");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (existing) return ok(res, existing, "Stock check already saved");.

Line	Source code	Explanation / reading note
1743	`  if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
1744	`    !req.body.productId ||`	Continues the surrounding declaration/expression or text: !req.body.productId ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
1745	`    !Number.isFinite(Number(req.body.quantity)) ||`	Calls the named method: !Number.isFinite(Number(req.body.quantity)) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
1746	`    Number(req.body.quantity) < 0`	Continues the surrounding declaration/expression or text: Number(req.body.quantity) < 0. Read it with the preceding opening statement (!Number.isFinite(Number(req.body.quantity)) ||); it is not a standalone business operation.
1747	`  )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1748	`    return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
1749	`      res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
1750	`      400,`	Continues the surrounding declaration/expression or text: 400,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
1751	`      "Select a product and enter a valid shelf quantity",`	Continues the surrounding declaration/expression or text: "Select a product and enter a valid shelf quantity",. Read it with the preceding opening statement (400,); it is not a standalone business operation.
1752	`      "INVALID_STOCK_CHECK",`	Continues the surrounding declaration/expression or text: "INVALID_STOCK_CHECK",. Read it with the preceding opening statement ("Select a product and enter a valid shelf quantity",); it is not a standalone business operation.
1753	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1754	`  const created: any = env.USE_MOCK_DATA`	Declares/initializes local data used by the surrounding operation: const created: any = env.USE_MOCK_DATA. Collection contents and assignments below determine its purpose.
1755	`    ? { id: `stock-${Date.now()}` }`	Calls the named method: ? { id: `stock-${Date.now()}` }. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
1756	`    : await salesforce.create(objectMap.stockCheck, {`	Invokes the external-data boundary: : await salesforce.create(objectMap.stockCheck, {. Await/result checks determine whether the operation is confirmed.
1757	`        Mobile_Request_Key__c: actionKey || null,`	Sets/declares the named object property or style/type member: Mobile_Request_Key__c: actionKey || null,. Interpret it in the enclosing object, props or type definition.
1758	`        Outlet__c: visit.storeId,`	Sets/declares the named object property or style/type member: Outlet__c: visit.storeId,. Interpret it in the enclosing object, props or type definition.
1759	`        Visit__c: visit.id,`	Sets/declares the named object property or style/type member: Visit__c: visit.id,. Interpret it in the enclosing object, props or type definition.
1760	`        Product__c: req.body.productId,`	Sets/declares the named object property or style/type member: Product__c: req.body.productId,. Interpret it in the enclosing object, props or type definition.
1761	`        Quantity__c: Number(req.body.quantity || 0),`	Sets/declares the named object property or style/type member: Quantity__c: Number(req.body.quantity || 0),. Interpret it in the enclosing object, props or type definition.
1762	`        Manufacturing_Date__c: req.body.manufacturingDate || null,`	Sets/declares the named object property or style/type member: Manufacturing_Date__c: req.body.manufacturingDate || null,. Interpret it in the enclosing object, props or type definition.
1763	`      });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1764	`  visit.stocks = [...(visit.stocks || []), { ...req.body, id: created.id }];`	Assigns the right-hand expression to the named variable/property: visit.stocks = [...(visit.stocks || []), { ...req.body, id: created.id }];. This is in-memory unless it is later persisted by an explicit call.
1765	`  return ok(res, { ...req.body, id: created.id }, "Stock check saved in Salesforce");`	Returns ok(res, { ...req.body, id: created.id }, "Stock check saved in Salesforce") to the caller (or begins returned UI markup) and ends this execution path.
1766	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1767	`app.post("/api/asset-surveys", async (request, res) => {`	Registers an HTTP route or middleware: app.post("/api/asset-surveys", async (request, res) => {. Registration order controls which authentication/validation runs first.
1768	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
1769	`  const visit = await ownedVisit(req.body.visitId, req.auth!.employeeId);`	Waits for this asynchronous operation before continuing: const visit = await ownedVisit(req.body.visitId, req.auth!.employeeId);. The returned result/error must still be handled.
1770	`  if (!visit || visit.employeeId !== req.auth!.employeeId)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!visit || visit.employeeId !== req.auth!.employeeId).
1771	`    return fail(res, 404, "Visit not found", "VISIT_NOT_FOUND");`	Returns fail(res, 404, "Visit not found", "VISIT_NOT_FOUND") to the caller (or begins returned UI markup) and ends this execution path.
1772	`  const actionKey = req.body.requestId ? `${req.auth!.employeeId}:${req.body.requestId}` : "";`	Declares/initializes local data used by the surrounding operation: const actionKey = req.body.requestId ? `${req.auth!.employeeId}:${req.body.requestId}` : "";. Collection contents and assignments below determine its purpose.
1773	`  const existing = await previousAction(objectMap.assetSurvey, visit.id, actionKey);`	Waits for this asynchronous operation before continuing: const existing = await previousAction(objectMap.assetSurvey, visit.id, actionKey);. The returned result/error must still be handled.
1774	`  if (existing) return ok(res, existing, "Asset survey already saved");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (existing) return ok(res, existing, "Asset survey already saved");.
1775	`  const created: any = env.USE_MOCK_DATA`	Declares/initializes local data used by the surrounding operation: const created: any = env.USE_MOCK_DATA. Collection contents and assignments below determine its purpose.
1776	`    ? { id: `asset-${Date.now()}` }`	Calls the named method: ? { id: `asset-${Date.now()}` }. Its implementation defines the side effect/result; use the symbol/file index to follow it.
1777	`    : await salesforce.create(objectMap.assetSurvey, {`	Invokes the external-data boundary: : await salesforce.create(objectMap.assetSurvey, {. Await/result checks determine whether the operation is confirmed.
1778	`        Mobile_Request_Key__c: actionKey || null,`	Sets/declares the named object property or style/type member: Mobile_Request_Key__c: actionKey || null,. Interpret it in the enclosing object, props or type definition.
1779	`        Outlet__c: visit.storeId,`	Sets/declares the named object property or style/type member: Outlet__c: visit.storeId,. Interpret it in the enclosing object, props or type definition.
1780	`        Visit__c: visit.id,`	Sets/declares the named object property or style/type member: Visit__c: visit.id,. Interpret it in the enclosing object, props or type definition.
1781	`        Asset_Code__c: req.body.assetCode,`	Sets/declares the named object property or style/type member: Asset_Code__c: req.body.assetCode,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1782	`Asset_Name__c: req.body.assetName,`	Sets/declares the named object property or style/type member: Asset_Name__c: req.body.assetName,. Interpret it in the enclosing object, props or type definition.
1783	`Status__c: req.body.status === "Available" ? "Working" : req.body.status || "Working",`	Sets/declares the named object property or style/type member: Status__c: req.body.status === "Available" ? "Working" : req.body.status || "Working",. Interpret it in the enclosing object, props or type definition.
1784	`Given_Date__c: req.body.givenDate || new Date().toISOString().slice(0, 10),`	Sets/declares the named object property or style/type member: Given_Date__c: req.body.givenDate || new Date().toISOString().slice(0, 10),. Interpret it in the enclosing object, props or type definition.
1785	`Picture_URL__c: req.body.pictureUrl || null,`	Sets/declares the named object property or style/type member: Picture_URL__c: req.body.pictureUrl || null,. Interpret it in the enclosing object, props or type definition.
1786	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1787	`visit.assets = [...(visit.assets || []), { ...req.body, id: created.id }];`	Assigns the right-hand expression to the named variable/property: visit.assets = [...(visit.assets || []), { ...req.body, id: created.id }];. This is in-memory unless it is later persisted by an explicit call.
1788	`return ok(res, { ...req.body, id: created.id }, "Asset survey saved in Salesforce");`	Returns ok(res, { ...req.body, id: created.id }, "Asset survey saved in Salesforce") to the caller (or begins returned UI markup) and ends this execution path.
1789	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1790	`app.post("/api/store/checkout", async (request, res) => {`	Registers an HTTP route or middleware: app.post("/api/store/checkout", async (request, res) => {. Registration order controls which authentication/validation runs first.
1791	`const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
1792	`const visit = await ownedVisit(req.body.visitId, req.auth!.employeeId);`	Waits for this asynchronous operation before continuing: const visit = await ownedVisit(req.body.visitId, req.auth!.employeeId);. The returned result/error must still be handled.
1793	`if (!visit) return fail(res, 404, "Visit not found", "VISIT_NOT_FOUND");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!visit) return fail(res, 404, "Visit not found", "VISIT_NOT_FOUND");.

Line	Source code	Explanation / reading note
1794	`  if (visit.employeeId !== req.auth!.employeeId)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visit.employeeId !== req.auth!.employeeId).
1795	`    return fail(res, 403, "This visit belongs to another Employee", "VISIT_ACCESS_DENIED");`	Returns fail(res, 403, "This visit belongs to another Employee", "VISIT_ACCESS_DENIED") to the caller (or begins returned UI markup) and ends this execution path.
1796	`  if (visit.status === "Completed") return ok(res, visit, "Visit was already completed");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visit.status === "Completed") return ok(res, visit, "Visit was already completed");.
1797	`  if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
1798	`    !req.body.location ||`	Continues the surrounding declaration/expression or text: !req.body.location ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
1799	`    !Number.isFinite(req.body.location.latitude) ||`	Calls the named method: !Number.isFinite(req.body.location.latitude) ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
1800	`    !Number.isFinite(req.body.location.longitude)`	Calls the named method: !Number.isFinite(req.body.location.longitude). Its implementation defines the side effect/result; use the symbol/file index to follow it.
1801	`  )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1802	`    return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
1803	`      res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
1804	`      400,`	Continues the surrounding declaration/expression or text: 400,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
1805	`      "Capture your GPS position before completing the visit",`	Continues the surrounding declaration/expression or text: "Capture your GPS position before completing the visit",. Read it with the preceding opening statement (400,); it is not a standalone business operation.
1806	`      "LOCATION_REQUIRED",`	Continues the surrounding declaration/expression or text: "LOCATION_REQUIRED",. Read it with the preceding opening statement ("Capture your GPS position before completing the visit",); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1807	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1808	`  if (visit.orderLines.length && !visit.orderSubmitted && !env.USE_MOCK_DATA)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visit.orderLines.length && !visit.orderSubmitted && !env.USE_MOCK_DATA).
1809	`    return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
1810	`      res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
1811	`      409,`	Continues the surrounding declaration/expression or text: 409,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
1812	`      "Submit the saved order draft before completing the visit",`	Continues the surrounding declaration/expression or text: "Submit the saved order draft before completing the visit",. Read it with the preceding opening statement (409,); it is not a standalone business operation.
1813	`      "ORDER_DRAFT_PENDING",`	Continues the surrounding declaration/expression or text: "ORDER_DRAFT_PENDING",. Read it with the preceding opening statement ("Submit the saved order draft before completing the visit",); it is not a standalone business operation.
1814	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1815	`  const checkOut = {`	Declares/initializes local data used by the surrounding operation: const checkOut = {. Collection contents and assignments below determine its purpose.
1816	`    ...req.body.location,`	Continues the surrounding declaration/expression or text: ...req.body.location,. Read it with the preceding opening statement (const checkOut = {); it is not a standalone business operation.
1817	`    timestamp: new Date().toISOString(),`	Sets/declares the named object property or style/type member: timestamp: new Date().toISOString(),. Interpret it in the enclosing object, props or type definition.
1818	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1819	`  if (!env.USE_MOCK_DATA)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!env.USE_MOCK_DATA).

Line	Source code	Explanation / reading note
1820	`    await salesforce.update(objectMap.visit, visit.id, {`	Invokes the external-data boundary: await salesforce.update(objectMap.visit, visit.id, {. Await/result checks determine whether the operation is confirmed.
1821	`      Status__c: "Completed",`	Sets/declares the named object property or style/type member: Status__c: "Completed",. Interpret it in the enclosing object, props or type definition.
1822	`      Check_Out_Time__c: checkOut.timestamp,`	Sets/declares the named object property or style/type member: Check_Out_Time__c: checkOut.timestamp,. Interpret it in the enclosing object, props or type definition.
1823	`      Check_Out_Latitude__c: checkOut.latitude,`	Sets/declares the named object property or style/type member: Check_Out_Latitude__c: checkOut.latitude,. Interpret it in the enclosing object, props or type definition.
1824	`      Check_Out_Longitude__c: checkOut.longitude,`	Sets/declares the named object property or style/type member: Check_Out_Longitude__c: checkOut.longitude,. Interpret it in the enclosing object, props or type definition.
1825	`      Notes__c: req.body.remarks,`	Sets/declares the named object property or style/type member: Notes__c: req.body.remarks,. Interpret it in the enclosing object, props or type definition.
1826	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1827	`  visit.checkOut = checkOut;`	Assigns the right-hand expression to the named variable/property: visit.checkOut = checkOut;. This is in-memory unless it is later persisted by an explicit call.
1828	`  visit.remarks = req.body.remarks;`	Assigns the right-hand expression to the named variable/property: visit.remarks = req.body.remarks;. This is in-memory unless it is later persisted by an explicit call.
1829	`  visit.status = "Completed";`	Assigns the right-hand expression to the named variable/property: visit.status = "Completed";. This is in-memory unless it is later persisted by an explicit call.
1830	`  const receiptItems = visit.orderLines;`	Declares/initializes local data used by the surrounding operation: const receiptItems = visit.orderLines;. Collection contents and assignments below determine its purpose.
1831	`  let retailerEmailSent = false;`	Declares/initializes local data used by the surrounding operation: let retailerEmailSent = false;. Collection contents and assignments below determine its purpose.
1832	`  let retailerEmailError: string | undefined;`	Declares/initializes local data used by the surrounding operation: let retailerEmailError: string | undefined;. Collection contents and assignments below determine its purpose.
1833	`  if (req.body.retailerEmail && receiptItems.length) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (req.body.retailerEmail && receiptItems.length) {.
1834	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.

Line	Source code	Explanation / reading note
1835	`const schemeRows = env.USE_MOCK_DATA`	Declares/initializes local data used by the surrounding operation: const schemeRows = env.USE_MOCK_DATA. Collection contents and assignments below determine its purpose.
1836	`? []`	Continues the surrounding declaration/expression or text: ? []. Read it with the preceding opening statement (const schemeRows = env.USE_MOCK_DATA); it is not a standalone business operation.
1837	`: await sfRecords(`	Waits for this asynchronous operation before continuing: : await sfRecords(. The returned result/error must still be handled.
1838	`` `SELECT Name FROM ${objectMap.scheme} WHERE (Sales_Channel__c = null OR Sales_Channel__c = 'Secondary') AND Active__c = true ORDER BY End_Date__c LIMIT 20`, ``	Assigns the right-hand expression to the named variable/property: `SELECT Name FROM ${objectMap.scheme} WHERE (Sales_Channel__c = null OR Sales_Channel__c = 'Secondary') AND Active__c = true ORDER BY End_Date__c LIMIT 20`,. This is in-memory unless it is later persisted by an explicit call.
1839	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1840	`await sendRetailerOrderSummary(`	Waits for this asynchronous operation before continuing: await sendRetailerOrderSummary(. The returned result/error must still be handled.
1841	`String(req.body.retailerEmail),`	Declares/initializes local data used by the surrounding operation: String(req.body.retailerEmail),. Collection contents and assignments below determine its purpose.
1842	`String(req.body.outletName || visit.storeName),`	Declares/initializes local data used by the surrounding operation: String(req.body.outletName || visit.storeName),. Collection contents and assignments below determine its purpose.
1843	`receiptItems,`	Continues the surrounding declaration/expression or text: receiptItems,. Read it with the preceding opening statement (String(req.body.outletName || visit.storeName),); it is not a standalone business operation.
1844	`receiptItems.reduce((sum, item) => sum + Number(item.amount || 0), 0),`	Transforms/selects/aggregates collection values with the callback shown here: receiptItems.reduce((sum, item) => sum + Number(item.amount || 0), 0),. Read the callback body and result assignment together.
1845	`schemeRows.map((row) => row.Name),`	Transforms/selects/aggregates collection values with the callback shown here: schemeRows.map((row) => row.Name),. Read the callback body and result assignment together.
1846	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1847	`retailerEmailSent = true;`	Assigns the right-hand expression to the named variable/property: retailerEmailSent = true;. This is in-memory unless it is later persisted by an explicit call.
1848	`} catch (error: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
1849	`retailerEmailError = error?.message || "Retailer email delivery failed";`	Assigns the right-hand expression to the named variable/property: retailerEmailError = error?.message || "Retailer email delivery failed";. This is in-memory unless it is later persisted by an explicit call.
1850	`console.error("Visit completed, but the retailer email could not be sent", error);`	Calls the named method: console.error("Visit completed, but the retailer email could not be sent", error);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
1851	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1852	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1853	`ok(res, { ...visit, retailerEmailSent, retailerEmailError }, "Visit completed successfully");`	Continues the surrounding declaration/expression or text: ok(res, { ...visit, retailerEmailSent, retailerEmailError }, "Visit completed successfully");. Read it with the preceding opening statement (}); it is not a standalone business operation.
1854	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1855	`app.get("/api/visits/:visitId", async (request, res) => {`	Registers an HTTP route or middleware: app.get("/api/visits/:visitId", async (request, res) => {. Registration order controls which authentication/validation runs first.
1856	`const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
1857	`const visitId = Array.isArray(req.params.visitId) ? req.params.visitId[0] : req.params.visitId;`	Declares/initializes local data used by the surrounding operation: const visitId = Array.isArray(req.params.visitId) ? req.params.visitId[0] : req.params.visitId;. Collection contents and assignments below determine its purpose.
1858	`const visit = env.USE_MOCK_DATA`	Declares/initializes local data used by the surrounding operation: const visit = env.USE_MOCK_DATA. Collection contents and assignments below determine its purpose.
1859	`? await ownedVisit(visitId, req.auth!.employeeId)`	Waits for this asynchronous operation before continuing: ? await ownedVisit(visitId, req.auth!.employeeId). The returned result/error must still be handled.

Line	Source code	Explanation / reading note
1860	`    : await restoreVisit(visitId, req.auth!.employeeId);`	Waits for this asynchronous operation before continuing: : await restoreVisit(visitId, req.auth!.employeeId);. The returned result/error must still be handled.
1861	`  if (visit) visits.set(visit.id, visit);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visit) visits.set(visit.id, visit);.
1862	`  return visit && visit.employeeId === req.auth!.employeeId`	Returns visit && visit.employeeId === req.auth!.employeeId to the caller (or begins returned UI markup) and ends this execution path.
1863	`    ? ok(res, visit)`	Continues the surrounding declaration/expression or text: ? ok(res, visit). Read it with the preceding opening statement (return visit && visit.employeeId === req.auth!.employeeId); it is not a standalone business operation.
1864	`    : fail(res, 404, "Visit not found", "VISIT_NOT_FOUND");`	Continues the surrounding declaration/expression or text: : fail(res, 404, "Visit not found", "VISIT_NOT_FOUND");. Read it with the preceding opening statement (? ok(res, visit)); it is not a standalone business operation.
1865	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1866	`app.post("/api/documents/pdf", async (req, res) => {`	Registers an HTTP route or middleware: app.post("/api/documents/pdf", async (req, res) => {. Registration order controls which authentication/validation runs first.
1867	`  const buffer = await createPdf(req.body);`	Waits for this asynchronous operation before continuing: const buffer = await createPdf(req.body);. The returned result/error must still be handled.
1868	`  res.type("pdf").send(buffer);`	Calls the named method: res.type("pdf").send(buffer);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
1869	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1870	`app.post("/api/documents/excel", async (req, res) => {`	Registers an HTTP route or middleware: app.post("/api/documents/excel", async (req, res) => {. Registration order controls which authentication/validation runs first.
1871	`  const buffer = await createExcel(req.body);`	Waits for this asynchronous operation before continuing: const buffer = await createExcel(req.body);. The returned result/error must still be handled.
1872	`  res.type("application/vnd.openxmlformats-officedocument.spreadsheetml.sheet").send(buffer);`	Calls the named method: res.type("application/vnd.openxmlformats-officedocument.spreadsheetml.sheet").send(buffer);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
1873	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1874	`async function loadVisitDocument(visitId: string, employeeId: string) {`	Declares a callable function/method: async function loadVisitDocument(visitId: string, employeeId: string) {. Parameters supply its inputs; the following block implements the operation.
1875	`  const activeVisit = visits.get(visitId);`	Declares/initializes local data used by the surrounding operation: const activeVisit = visits.get(visitId);. Collection contents and assignments below determine its purpose.
1876	`  if (activeVisit?.employeeId === employeeId) return activeVisit;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (activeVisit?.employeeId === employeeId) return activeVisit;.
1877	`  if (env.USE_MOCK_DATA) return undefined;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA) return undefined;.
1878		Blank line separating logical sections; no executable operation.
1879	`  const safeVisitId = escapeSoqlLiteral(visitId);`	Declares/initializes local data used by the surrounding operation: const safeVisitId = escapeSoqlLiteral(visitId);. Collection contents and assignments below determine its purpose.
1880	`  const safeEmployeeId = escapeSoqlLiteral(employeeId);`	Declares/initializes local data used by the surrounding operation: const safeEmployeeId = escapeSoqlLiteral(employeeId);. Collection contents and assignments below determine its purpose.
1881	`  const visitRows = await sfRecords(`	Waits for this asynchronous operation before continuing: const visitRows = await sfRecords(. The returned result/error must still be handled.
1882	`    \`SELECT Id, Name, Status__c, Retailer__c, Retailer__r.Name, Check_In_Time__c, Check_Out_Time__c, Check_In_Latitude__c, Check_In_Longitude__c, Check_Out_Latitude__c, Check_Out_Longitude__c, Permanent_Journey_Plan__r.Beat__r.Name FROM ${objectMap.visit} WHERE Id = '${safeVisitId}' AND Retailer__c IN (${allocatedOutletIds(safeEmployeeId)}) LIMIT 1\`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Status__c, Retailer__c, Retailer__r.Name, Check_In_Time__c, Check_Out_Time__c, Check_In_Latitude__c, Check_In_Longitude__c, Check_Out_Latitude__c, Check_Out_Longitude__c, Permanent_J. This is in-memory unless it is later persisted by an explicit call.
1883	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1884	`  if (!visitRows.length) return undefined;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!visitRows.length) return undefined;.

Line	Source code	Explanation / reading note
1885	`  const row = visitRows[0];`	Declares/initializes local data used by the surrounding operation: const row = visitRows[0];. Collection contents and assignments below determine its purpose.
1886	`  const itemRows = await sfRecords(`	Waits for this asynchronous operation before continuing: const itemRows = await sfRecords(. The returned result/error must still be handled.
1887	`    `SELECT Product__c, Product__r.Name, Piece_Quantity__c, Unit_Price__c, Line_Amount__c, Scheme__c, Scheme__r.Name FROM ${objectMap.orderItem} WHERE Sales_Order__r.Visit__c = '${safeVisitId}' ORDER BY CreatedDate`,`	Assigns the right-hand expression to the named variable/property: `SELECT Product__c, Product__r.Name, Piece_Quantity__c, Unit_Price__c, Line_Amount__c, Scheme__c, Scheme__r.Name FROM ${objectMap.orderItem} WHERE Sales_Order__r.Visit__c = '${safeVisitId}' ORDER BY C. This is in-memory unless it is later persisted by an explicit call.
1888	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1889	`  return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
1890	`    id: row.Id,`	Sets/declares the named object property or style/type member: id: row.Id,. Interpret it in the enclosing object, props or type definition.
1891	`    employeeId,`	Continues the surrounding declaration/expression or text: employeeId,. Read it with the preceding opening statement (id: row.Id,); it is not a standalone business operation.
1892	`    storeId: row.Retailer__c,`	Sets/declares the named object property or style/type member: storeId: row.Retailer__c,. Interpret it in the enclosing object, props or type definition.
1893	`    storeName: row.Retailer__r?.Name || row.Name,`	Sets/declares the named object property or style/type member: storeName: row.Retailer__r?.Name || row.Name,. Interpret it in the enclosing object, props or type definition.
1894	`    beatName: row.Permanent_Journey_Plan__r?.Beat__r?.Name || "-",`	Sets/declares the named object property or style/type member: beatName: row.Permanent_Journey_Plan__r?.Beat__r?.Name || "-",. Interpret it in the enclosing object, props or type definition.
1895	`    status: row.Status__c,`	Sets/declares the named object property or style/type member: status: row.Status__c,. Interpret it in the enclosing object, props or type definition.
1896	`    checkIn: row.Check_In_Time__c`	Sets/declares the named object property or style/type member: checkIn: row.Check_In_Time__c. Interpret it in the enclosing object, props or type definition.
1897	`      ? {`	Continues the surrounding declaration/expression or text: ? {. Read it with the preceding opening statement (checkIn: row.Check_In_Time__c); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1898	`latitude: Number(row.Check_In_Latitude__c || 0),`	Sets/declares the named object property or style/type member: latitude: Number(row.Check_In_Latitude__c || 0),. Interpret it in the enclosing object, props or type definition.
1899	`longitude: Number(row.Check_In_Longitude__c || 0),`	Sets/declares the named object property or style/type member: longitude: Number(row.Check_In_Longitude__c || 0),. Interpret it in the enclosing object, props or type definition.
1900	`timestamp: row.Check_In_Time__c,`	Sets/declares the named object property or style/type member: timestamp: row.Check_In_Time__c,. Interpret it in the enclosing object, props or type definition.
1901	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1902	`: undefined,`	Continues the surrounding declaration/expression or text: : undefined,. Read it with the preceding opening statement (}); it is not a standalone business operation.
1903	`checkOut: row.Check_Out_Time__c`	Sets/declares the named object property or style/type member: checkOut: row.Check_Out_Time__c. Interpret it in the enclosing object, props or type definition.
1904	`? {`	Continues the surrounding declaration/expression or text: ? {. Read it with the preceding opening statement (checkOut: row.Check_Out_Time__c); it is not a standalone business operation.
1905	`latitude: Number(row.Check_Out_Latitude__c || 0),`	Sets/declares the named object property or style/type member: latitude: Number(row.Check_Out_Latitude__c || 0),. Interpret it in the enclosing object, props or type definition.
1906	`longitude: Number(row.Check_Out_Longitude__c || 0),`	Sets/declares the named object property or style/type member: longitude: Number(row.Check_Out_Longitude__c || 0),. Interpret it in the enclosing object, props or type definition.
1907	`timestamp: row.Check_Out_Time__c,`	Sets/declares the named object property or style/type member: timestamp: row.Check_Out_Time__c,. Interpret it in the enclosing object, props or type definition.
1908	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1909	`: undefined,`	Continues the surrounding declaration/expression or text: : undefined,. Read it with the preceding opening statement (}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1910	`orderLines: itemRows.map((item) => ({`	Sets/declares the named object property or style/type member: orderLines: itemRows.map((item) => ({. Interpret it in the enclosing object, props or type definition.
1911	`productId: item.Product__c,`	Sets/declares the named object property or style/type member: productId: item.Product__c,. Interpret it in the enclosing object, props or type definition.
1912	`productName: item.Product__r?.Name || "Product",`	Sets/declares the named object property or style/type member: productName: item.Product__r?.Name || "Product",. Interpret it in the enclosing object, props or type definition.
1913	`quantity: Number(item.Piece_Quantity__c || 0),`	Sets/declares the named object property or style/type member: quantity: Number(item.Piece_Quantity__c || 0),. Interpret it in the enclosing object, props or type definition.
1914	`unitPrice: Number(item.Unit_Price__c || 0),`	Sets/declares the named object property or style/type member: unitPrice: Number(item.Unit_Price__c || 0),. Interpret it in the enclosing object, props or type definition.
1915	`discount: 0,`	Sets/declares the named object property or style/type member: discount: 0,. Interpret it in the enclosing object, props or type definition.
1916	`amount: Number(item.Line_Amount__c || 0),`	Sets/declares the named object property or style/type member: amount: Number(item.Line_Amount__c || 0),. Interpret it in the enclosing object, props or type definition.
1917	`schemeId: item.Scheme__c,`	Sets/declares the named object property or style/type member: schemeId: item.Scheme__c,. Interpret it in the enclosing object, props or type definition.
1918	`schemeName: item.Scheme__r?.Name,`	Sets/declares the named object property or style/type member: schemeName: item.Scheme__r?.Name,. Interpret it in the enclosing object, props or type definition.
1919	`})),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1920	`returns: [],`	Sets/declares the named object property or style/type member: returns: [],. Interpret it in the enclosing object, props or type definition.
1921	`competitors: [],`	Sets/declares the named object property or style/type member: competitors: [],. Interpret it in the enclosing object, props or type definition.
1922	`tickets: [],`	Sets/declares the named object property or style/type member: tickets: [],. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1923	`  } satisfies VisitPayload;`	Continues the surrounding declaration/expression or text: } satisfies VisitPayload;. Read it with the preceding opening statement (tickets: [],); it is not a standalone business operation.
1924	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1925	`app.get("/api/documents/:kind/:visitId", async (request, res) => {`	Registers an HTTP route or middleware: app.get("/api/documents/:kind/:visitId", async (request, res) => {. Registration order controls which authentication/validation runs first.
1926	`  const req = request as AuthenticatedRequest;`	Declares/initializes local data used by the surrounding operation: const req = request as AuthenticatedRequest;. Collection contents and assignments below determine its purpose.
1927	`  const visit = await loadVisitDocument(String(req.params.visitId), req.auth!.employeeId);`	Waits for this asynchronous operation before continuing: const visit = await loadVisitDocument(String(req.params.visitId), req.auth!.employeeId);. The returned result/error must still be handled.
1928	`  if (!visit) return fail(res, 404, "Visit document is no longer available", "VISIT_NOT_FOUND");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!visit) return fail(res, 404, "Visit document is no longer available", "VISIT_NOT_FOUND");.
1929	`  const kind = String(req.params.kind);`	Declares/initializes local data used by the surrounding operation: const kind = String(req.params.kind);. Collection contents and assignments below determine its purpose.
1930	`  if (kind !== "pdf" && kind !== "excel")`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (kind !== "pdf" && kind !== "excel").
1931	`    return fail(res, 400, "Choose PDF or Excel", "DOCUMENT_TYPE_INVALID");`	Returns fail(res, 400, "Choose PDF or Excel", "DOCUMENT_TYPE_INVALID") to the caller (or begins returned UI markup) and ends this execution path.
1932	`  const buffer = kind === "pdf" ? await createPdf(visit) : await createExcel(visit);`	Waits for this asynchronous operation before continuing: const buffer = kind === "pdf" ? await createPdf(visit) : await createExcel(visit);. The returned result/error must still be handled.
1933	`  const extension = kind === "pdf" ? "pdf" : "xlsx";`	Declares/initializes local data used by the surrounding operation: const extension = kind === "pdf" ? "pdf" : "xlsx";. Collection contents and assignments below determine its purpose.
1934	`  res.setHeader(`	Calls the named method: res.setHeader(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
1935	`    "Content-Disposition",`	Continues the surrounding declaration/expression or text: "Content-Disposition",. Read it with the preceding opening statement (res.setHeader(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1936	`    `attachment; filename=\"${visit.storeName.replace(/[^a-z0-9]+/gi, "-")}-visit.${extension}\"`,`	Calls the named method: `attachment; filename=\"${visit.storeName.replace(/[^a-z0-9]+/gi, "-")}-visit.${extension}\"`,. Its implementation defines the side effect/result; use the symbol/file index to follow it.
1937	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1938	`  res`	Continues the surrounding declaration/expression or text: res. Read it with the preceding opening statement ( );); it is not a standalone business operation.
1939	`    .type(`	Continues the surrounding declaration/expression or text: .type(. Read it with the preceding opening statement (res); it is not a standalone business operation.
1940	`      kind === "pdf"`	Continues the surrounding declaration/expression or text: kind === "pdf". Read it with the preceding opening statement (.type(); it is not a standalone business operation.
1941	`        ? "application/pdf"`	Continues the surrounding declaration/expression or text: ? "application/pdf". Read it with the preceding opening statement (kind === "pdf"); it is not a standalone business operation.
1942	`        : "application/vnd.openxmlformats-officedocument.spreadsheetml.sheet",`	Continues the surrounding declaration/expression or text: : "application/vnd.openxmlformats-officedocument.spreadsheetml.sheet",. Read it with the preceding opening statement (? "application/pdf"); it is not a standalone business operation.
1943	`    )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1944	`    .send(buffer);`	Continues the surrounding declaration/expression or text: .send(buffer);. Read it with the preceding opening statement ( )); it is not a standalone business operation.
1945	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1946	`app.post("/api/email/send", async (req, res) => {`	Registers an HTTP route or middleware: app.post("/api/email/send", async (req, res) => {. Registration order controls which authentication/validation runs first.
1947	`  if (!env.SMTP_HOST)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!env.SMTP_HOST).
1948	`    return fail(res, 503, "Email service is not configured", "EMAIL_NOT_CONFIGURED");`	Returns fail(res, 503, "Email service is not configured", "EMAIL_NOT_CONFIGURED") to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
1949	`  const transport = nodemailer.createTransport({`	Declares/initializes local data used by the surrounding operation: const transport = nodemailer.createTransport({. Collection contents and assignments below determine its purpose.
1950	`    host: env.SMTP_HOST,`	Sets/declares the named object property or style/type member: host: env.SMTP_HOST,. Interpret it in the enclosing object, props or type definition.
1951	`    port: env.SMTP_PORT,`	Sets/declares the named object property or style/type member: port: env.SMTP_PORT,. Interpret it in the enclosing object, props or type definition.
1952	`    auth: { user: env.SMTP_USER, pass: env.SMTP_PASSWORD },`	Sets/declares the named object property or style/type member: auth: { user: env.SMTP_USER, pass: env.SMTP_PASSWORD },. Interpret it in the enclosing object, props or type definition.
1953	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1954	`  await transport.sendMail({`	Waits for this asynchronous operation before continuing: await transport.sendMail({. The returned result/error must still be handled.
1955	`    from: env.EMAIL_FROM,`	Completes the dependency import and identifies the module supplying those names.
1956	`    to: req.body.to,`	Sets/declares the named object property or style/type member: to: req.body.to,. Interpret it in the enclosing object, props or type definition.
1957	`    cc: req.body.cc,`	Sets/declares the named object property or style/type member: cc: req.body.cc,. Interpret it in the enclosing object, props or type definition.
1958	`    subject: req.body.subject,`	Sets/declares the named object property or style/type member: subject: req.body.subject,. Interpret it in the enclosing object, props or type definition.
1959	`    text: req.body.body,`	Sets/declares the named object property or style/type member: text: req.body.body,. Interpret it in the enclosing object, props or type definition.
1960	`    attachments: req.body.attachments,`	Sets/declares the named object property or style/type member: attachments: req.body.attachments,. Interpret it in the enclosing object, props or type definition.
1961	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1962	`  ok(res, {}, "Email sent");`	Continues the surrounding declaration/expression or text: ok(res, {}, "Email sent");. Read it with the preceding opening statement (});); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1963	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1964	`app.use((error: any, _req: express.Request, res: express.Response, _next: express.NextFunction) => {`	Registers an HTTP route or middleware: app.use((error: any, _req: express.Request, res: express.Response, _next: express.NextFunction) => {. Registration order controls which authentication/validation runs first.
1965	`  console.error(error);`	Calls the named method: console.error(error);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
1966	`  if (error instanceof ValidationError) return fail(res, 400, error.message, "VALIDATION_ERROR");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (error instanceof ValidationError) return fail(res, 400, error.message, "VALIDATION_ERROR");.
1967	`  const message = String(error?.message || "");`	Declares/initializes local data used by the surrounding operation: const message = String(error?.message || "");. Collection contents and assignments below determine its purpose.
1968	`  const fieldError = message.match(/"message"\s*:\s*"([^"\n]+)"/);`	Declares/initializes local data used by the surrounding operation: const fieldError = message.match(/"message"\s*:\s*"([^"\n]+)"/);. Collection contents and assignments below determine its purpose.
1969	`  if (fieldError && message.startsWith("Salesforce"))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (fieldError && message.startsWith("Salesforce")).
1970	`    return fail(res, 422, fieldError[1], "SALESFORCE_VALIDATION_ERROR");`	Returns fail(res, 422, fieldError[1], "SALESFORCE_VALIDATION_ERROR") to the caller (or begins returned UI markup) and ends this execution path.
1971	`  fail(`	Continues the surrounding declaration/expression or text: fail(. Read it with the preceding opening statement (return fail(res, 422, fieldError[1], "SALESFORCE_VALIDATION_ERROR");); it is not a standalone business operation.
1972	`    res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (fail(); it is not a standalone business operation.
1973	`    500,`	Continues the surrounding declaration/expression or text: 500,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
1974	`    "Unable to save to Salesforce. Your entries are unchanged. Please retry or contact your administrator.",`	Continues the surrounding declaration/expression or text: "Unable to save to Salesforce. Your entries are unchanged. Please retry or contact your administrator.",. Read it with the preceding opening statement (500,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1975	`"INTERNAL_ERROR",`	Continues the surrounding declaration/expression or text: "INTERNAL_ERROR",. Read it with the preceding opening statement ("Unable to save to Salesforce. Your entries are unchanged. Please retry or contact your administrator.",); it is not a standalone business operation.
1976	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1977	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/config/env.ts

Reads backend environment configuration and object API-name mappings. Real .env files are excluded from this guide.

67 numbered source lines | SHA-256 d2aaeffddae93fd7f2f6ac4fb0bc962ffb1f9b4d62c7277d20523c9077abf7c6

Line	Source code	Explanation / reading note
1	`import "dotenv/config";`	Imports dependencies/types used below: import "dotenv/config";. Importing a function does not call it.
2	`import { z } from "zod";`	Imports dependencies/types used below: import { z } from "zod";. Importing a function does not call it.
3		Blank line separating logical sections; no executable operation.
4	`const schema = z.object({`	Declares/initializes local data used by the surrounding operation: const schema = z.object({. Collection contents and assignments below determine its purpose.
5	`  PORT: z.coerce.number().default(4000),`	Sets/declares the named object property or style/type member: PORT: z.coerce.number().default(4000),. Interpret it in the enclosing object, props or type definition.
6	`  USE_MOCK_DATA: z`	Sets/declares the named object property or style/type member: USE_MOCK_DATA: z. Interpret it in the enclosing object, props or type definition.
7	`    .string()`	Continues the surrounding declaration/expression or text: .string(). Read it with the preceding opening statement (USE_MOCK_DATA: z); it is not a standalone business operation.
8	`    .default("true")`	Continues the surrounding declaration/expression or text: .default("true"). Read it with the preceding opening statement (.string()); it is not a standalone business operation.
9	`    .transform((value) => value === "true"),`	Continues the surrounding declaration/expression or text: .transform((value) => value === "true"),. Read it with the preceding opening statement (.default("true")); it is not a standalone business operation.
10	`  JWT_SECRET: z.string().min(16).default("development-secret-change-me"),`	Sets/declares the named object property or style/type member: JWT_SECRET: z.string().min(16).default("development-secret-change-me"),. Interpret it in the enclosing object, props or type definition.
11	`  SALESFORCE_LOGIN_URL: z.string().url().default("https://login.salesforce.com"),`	Sets/declares the named object property or style/type member: SALESFORCE_LOGIN_URL: z.string().url().default("https://login.salesforce.com"),. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
12	`SALESFORCE_INSTANCE_URL: z.string().url().optional(),`	Sets/declares the named object property or style/type member: SALESFORCE_INSTANCE_URL: z.string().url().optional(),. Interpret it in the enclosing object, props or type definition.
13	`SALESFORCE_CLIENT_ID: z.string().optional(),`	Sets/declares the named object property or style/type member: SALESFORCE_CLIENT_ID: z.string().optional(),. Interpret it in the enclosing object, props or type definition.
14	`SALESFORCE_CLIENT_SECRET: z.string().optional(),`	Sets/declares the named object property or style/type member: SALESFORCE_CLIENT_SECRET: z.string().optional(),. Interpret it in the enclosing object, props or type definition.
15	`SALESFORCE_USERNAME: z.string().optional(),`	Sets/declares the named object property or style/type member: SALESFORCE_USERNAME: z.string().optional(),. Interpret it in the enclosing object, props or type definition.
16	`SALESFORCE_PASSWORD: z.string().optional(),`	Sets/declares the named object property or style/type member: SALESFORCE_PASSWORD: z.string().optional(),. Interpret it in the enclosing object, props or type definition.
17	`SALESFORCE_SECURITY_TOKEN: z.string().optional(),`	Sets/declares the named object property or style/type member: SALESFORCE_SECURITY_TOKEN: z.string().optional(),. Interpret it in the enclosing object, props or type definition.
18	`SALESFORCE_ORG_ALIAS: z`	Sets/declares the named object property or style/type member: SALESFORCE_ORG_ALIAS: z. Interpret it in the enclosing object, props or type definition.
19	`.string()`	Continues the surrounding declaration/expression or text: .string(). Read it with the preceding opening statement (SALESFORCE_ORG_ALIAS: z); it is not a standalone business operation.
20	`.regex(/^[A-Za-z0-9_.@-]+$/)`	Continues the surrounding declaration/expression or text: .regex(/^[A-Za-z0-9_.@-]+$/). Read it with the preceding opening statement (.string()); it is not a standalone business operation.
21	`.default("sfaNewOrg"),`	Continues the surrounding declaration/expression or text: .default("sfaNewOrg"),. Read it with the preceding opening statement (.regex(/^[A-Za-z0-9_.@-]+$/)); it is not a standalone business operation.
22	`SALESFORCE_REDIRECT_URI: z.string().optional(),`	Sets/declares the named object property or style/type member: SALESFORCE_REDIRECT_URI: z.string().optional(),. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
23	`SALESFORCE_API_VERSION: z.string().default("67.0"),`	Sets/declares the named object property or style/type member: SALESFORCE_API_VERSION: z.string().default("67.0"),. Interpret it in the enclosing object, props or type definition.
24	`AUTH_CODE_TTL_MINUTES: z.coerce.number().int().min(2).max(30).default(10),`	Sets/declares the named object property or style/type member: AUTH_CODE_TTL_MINUTES: z.coerce.number().int().min(2).max(30).default(10),. Interpret it in the enclosing object, props or type definition.
25	`AUTH_CODE_MAX_ATTEMPTS: z.coerce.number().int().min(1).max(10).default(5),`	Sets/declares the named object property or style/type member: AUTH_CODE_MAX_ATTEMPTS: z.coerce.number().int().min(1).max(10).default(5),. Interpret it in the enclosing object, props or type definition.
26	`AUTH_ALLOW_TEST_CODE: z`	Sets/declares the named object property or style/type member: AUTH_ALLOW_TEST_CODE: z. Interpret it in the enclosing object, props or type definition.
27	`.string()`	Continues the surrounding declaration/expression or text: .string(). Read it with the preceding opening statement (AUTH_ALLOW_TEST_CODE: z); it is not a standalone business operation.
28	`.default("false")`	Continues the surrounding declaration/expression or text: .default("false"). Read it with the preceding opening statement (.string()); it is not a standalone business operation.
29	`.transform((value) => value === "true"),`	Continues the surrounding declaration/expression or text: .transform((value) => value === "true"),. Read it with the preceding opening statement (.default("false")); it is not a standalone business operation.
30	`APP_PUBLIC_URL: z.string().url().default("http://localhost:8081"),`	Sets/declares the named object property or style/type member: APP_PUBLIC_URL: z.string().url().default("http://localhost:8081"),. Interpret it in the enclosing object, props or type definition.
31	`SMTP_HOST: z.string().optional(),`	Sets/declares the named object property or style/type member: SMTP_HOST: z.string().optional(),. Interpret it in the enclosing object, props or type definition.
32	`SMTP_PORT: z.coerce.number().default(587),`	Sets/declares the named object property or style/type member: SMTP_PORT: z.coerce.number().default(587),. Interpret it in the enclosing object, props or type definition.
33	`SMTP_SECURE: z`	Sets/declares the named object property or style/type member: SMTP_SECURE: z. Interpret it in the enclosing object, props or type definition.
34	`.string()`	Continues the surrounding declaration/expression or text: .string(). Read it with the preceding opening statement (SMTP_SECURE: z); it is not a standalone business operation.

Line	Source code	Explanation / reading note
35	`    .default("false")`	Continues the surrounding declaration/expression or text: .default("false"). Read it with the preceding opening statement (.string()); it is not a standalone business operation.
36	`    .transform((value) => value === "true"),`	Continues the surrounding declaration/expression or text: .transform((value) => value === "true"),. Read it with the preceding opening statement (.default("false")); it is not a standalone business operation.
37	`  SMTP_USER: z.string().optional(),`	Sets/declares the named object property or style/type member: SMTP_USER: z.string().optional(),. Interpret it in the enclosing object, props or type definition.
38	`  SMTP_PASSWORD: z.string().optional(),`	Sets/declares the named object property or style/type member: SMTP_PASSWORD: z.string().optional(),. Interpret it in the enclosing object, props or type definition.
39	`  EMAIL_FROM: z.string().optional(),`	Sets/declares the named object property or style/type member: EMAIL_FROM: z.string().optional(),. Interpret it in the enclosing object, props or type definition.
40	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
41	`export const env = schema.parse(process.env);`	Calls the named method: export const env = schema.parse(process.env);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
42		Blank line separating logical sections; no executable operation.
43	`export const objectMap = {`	Assigns the right-hand expression to the named variable/property: export const objectMap = {. This is in-memory unless it is later persisted by an explicit call.
44	`  distributor: process.env.DISTRIBUTOR_OBJECT || "Distributor__c",`	Sets/declares the named object property or style/type member: distributor: process.env.DISTRIBUTOR_OBJECT || "Distributor__c",. Interpret it in the enclosing object, props or type definition.
45	`  distributorAllocation:`	Sets/declares the named object property or style/type member: distributorAllocation:. Interpret it in the enclosing object, props or type definition.
46	`    process.env.DISTRIBUTOR_ALLOCATION_OBJECT || "Distributor_Outlet_Allocation__c",`	Continues the surrounding declaration/expression or text: process.env.DISTRIBUTOR_ALLOCATION_OBJECT || "Distributor_Outlet_Allocation__c",. Read it with the preceding opening statement (distributorAllocation:); it is not a standalone business operation.
47	`  salesRep: process.env.SALES_REP_OBJECT || "Employee__c",`	Sets/declares the named object property or style/type member: salesRep: process.env.SALES_REP_OBJECT || "Employee__c",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
48	`beat: process.env.BEAT_OBJECT || "Beat__c",`	Sets/declares the named object property or style/type member: beat: process.env.BEAT_OBJECT || "Beat__c",. Interpret it in the enclosing object, props or type definition.
49	`store: process.env.STORE_OBJECT || "Retailer__c",`	Sets/declares the named object property or style/type member: store: process.env.STORE_OBJECT || "Retailer__c",. Interpret it in the enclosing object, props or type definition.
50	`visit: process.env.VISIT_OBJECT || "Visit__c",`	Sets/declares the named object property or style/type member: visit: process.env.VISIT_OBJECT || "Visit__c",. Interpret it in the enclosing object, props or type definition.
51	`order: process.env.ORDER_OBJECT || "Sales_Order__c",`	Sets/declares the named object property or style/type member: order: process.env.ORDER_OBJECT || "Sales_Order__c",. Interpret it in the enclosing object, props or type definition.
52	`orderItem: process.env.ORDER_ITEM_OBJECT || "Order_Item__c",`	Sets/declares the named object property or style/type member: orderItem: process.env.ORDER_ITEM_OBJECT || "Order_Item__c",. Interpret it in the enclosing object, props or type definition.
53	`returns: process.env.RETURN_OBJECT || "Product_Return__c",`	Sets/declares the named object property or style/type member: returns: process.env.RETURN_OBJECT || "Product_Return__c",. Interpret it in the enclosing object, props or type definition.
54	`competitor: process.env.COMPETITOR_ACTIVITY_OBJECT || "Competitor_Activity__c",`	Sets/declares the named object property or style/type member: competitor: process.env.COMPETITOR_ACTIVITY_OBJECT || "Competitor_Activity__c",. Interpret it in the enclosing object, props or type definition.
55	`ticket: process.env.TICKET_OBJECT || "SFA_Ticket__c",`	Sets/declares the named object property or style/type member: ticket: process.env.TICKET_OBJECT || "SFA_Ticket__c",. Interpret it in the enclosing object, props or type definition.
56	`scheme: process.env.SCHEME_OBJECT || "Scheme__c",`	Sets/declares the named object property or style/type member: scheme: process.env.SCHEME_OBJECT || "Scheme__c",. Interpret it in the enclosing object, props or type definition.
57	`product: process.env.PRODUCT_OBJECT || "Product__c",`	Sets/declares the named object property or style/type member: product: process.env.PRODUCT_OBJECT || "Product__c",. Interpret it in the enclosing object, props or type definition.
58	`productSalesConfiguration:`	Sets/declares the named object property or style/type member: productSalesConfiguration:. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
59	`process.env.PRODUCT_SALES_CONFIGURATION_OBJECT || "Product_Sales_Configuration__c",`	Continues the surrounding declaration/expression or text: process.env.PRODUCT_SALES_CONFIGURATION_OBJECT || "Product_Sales_Configuration__c",. Read it with the preceding opening statement (productSalesConfiguration:); it is not a standalone business operation.
60	`productRefusal: process.env.PRODUCT_REFUSAL_OBJECT || "Product_Refusal__c",`	Sets/declares the named object property or style/type member: productRefusal: process.env.PRODUCT_REFUSAL_OBJECT || "Product_Refusal__c",. Interpret it in the enclosing object, props or type definition.
61	`attendance: process.env.ATTENDANCE_OBJECT || "Attendance__c",`	Sets/declares the named object property or style/type member: attendance: process.env.ATTENDANCE_OBJECT || "Attendance__c",. Interpret it in the enclosing object, props or type definition.
62	`expensePolicy: process.env.EXPENSE_POLICY_OBJECT || "Expense_Policy__c",`	Sets/declares the named object property or style/type member: expensePolicy: process.env.EXPENSE_POLICY_OBJECT || "Expense_Policy__c",. Interpret it in the enclosing object, props or type definition.
63	`expenseClaim: process.env.EXPENSE_CLAIM_OBJECT || "Expense_Claim__c",`	Sets/declares the named object property or style/type member: expenseClaim: process.env.EXPENSE_CLAIM_OBJECT || "Expense_Claim__c",. Interpret it in the enclosing object, props or type definition.
64	`journeyPlan: process.env.JOURNEY_PLAN_OBJECT || "Permanent_Journey_Plan__c",`	Sets/declares the named object property or style/type member: journeyPlan: process.env.JOURNEY_PLAN_OBJECT || "Permanent_Journey_Plan__c",. Interpret it in the enclosing object, props or type definition.
65	`assetSurvey: process.env.ASSET_SURVEY_OBJECT || "Asset_Survey__c",`	Sets/declares the named object property or style/type member: assetSurvey: process.env.ASSET_SURVEY_OBJECT || "Asset_Survey__c",. Interpret it in the enclosing object, props or type definition.
66	`stockCheck: process.env.STOCK_CHECK_OBJECT || "Stock_Check__c",`	Sets/declares the named object property or style/type member: stockCheck: process.env.STOCK_CHECK_OBJECT || "Stock_Check__c",. Interpret it in the enclosing object, props or type definition.
67	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/data/mock.ts

Local catalogue/demo snapshot or mock fixture data. Static data is not proof of current Salesforce state; inspect the caller and USE_MOCK_DATA configuration.

115 numbered source lines | SHA-256 7b0a2fa1ee8446efffbb71054b1de011e9aa7e563ec3a3742c8e5eaabf2e9e39

Line	Source code	Explanation / reading note
1	`export const rep = {`	Assigns the right-hand expression to the named variable/property: export const rep = {. This is in-memory unless it is later persisted by an explicit call.
2	`  id: "rep-1",`	Sets/declares the named object property or style/type member: id: "rep-1",. Interpret it in the enclosing object, props or type definition.
3	`  name: "Aishwarya",`	Sets/declares the named object property or style/type member: name: "Aishwarya",. Interpret it in the enclosing object, props or type definition.
4	`  role: "Employee",`	Sets/declares the named object property or style/type member: role: "Employee",. Interpret it in the enclosing object, props or type definition.
5	`  target: 100000,`	Sets/declares the named object property or style/type member: target: 100000,. Interpret it in the enclosing object, props or type definition.
6	`  achievement: 65000,`	Sets/declares the named object property or style/type member: achievement: 65000,. Interpret it in the enclosing object, props or type definition.
7	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
8	`export const schemes = [`	Assigns the right-hand expression to the named variable/property: export const schemes = [. This is in-memory unless it is later persisted by an explicit call.
9	`  {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (export const schemes = []; it is not a standalone business operation.
10	`    id: "sch-1",`	Sets/declares the named object property or style/type member: id: "sch-1",. Interpret it in the enclosing object, props or type definition.
11	`    name: "Festival Growth Offer",`	Sets/declares the named object property or style/type member: name: "Festival Growth Offer",. Interpret it in the enclosing object, props or type definition.
12	`    description: "Buy 10 cases and receive 5% discount",`	Sets/declares the named object property or style/type member: description: "Buy 10 cases and receive 5% discount",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
13	`startDate: "2026-10-01",`	Sets/declares the named object property or style/type member: startDate: "2026-10-01",. Interpret it in the enclosing object, props or type definition.
14	`endDate: "2026-10-31",`	Sets/declares the named object property or style/type member: endDate: "2026-10-31",. Interpret it in the enclosing object, props or type definition.
15	`products: ["Sunrise Millet Bites"],`	Sets/declares the named object property or style/type member: products: ["Sunrise Millet Bites"],. Interpret it in the enclosing object, props or type definition.
16	`target: 10,`	Sets/declares the named object property or style/type member: target: 10,. Interpret it in the enclosing object, props or type definition.
17	`benefit: "5% discount",`	Sets/declares the named object property or style/type member: benefit: "5% discount",. Interpret it in the enclosing object, props or type definition.
18	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
20	`id: "sch-2",`	Sets/declares the named object property or style/type member: id: "sch-2",. Interpret it in the enclosing object, props or type definition.
21	`name: "Retailer Booster",`	Sets/declares the named object property or style/type member: name: "Retailer Booster",. Interpret it in the enclosing object, props or type definition.
22	`description: "Buy 5 cases and receive 1 case free",`	Sets/declares the named object property or style/type member: description: "Buy 5 cases and receive 1 case free",. Interpret it in the enclosing object, props or type definition.
23	`startDate: "2026-10-01",`	Sets/declares the named object property or style/type member: startDate: "2026-10-01",. Interpret it in the enclosing object, props or type definition.
24	`endDate: "2026-11-15",`	Sets/declares the named object property or style/type member: endDate: "2026-11-15",. Interpret it in the enclosing object, props or type definition.
25	`products: ["Classic Masala Mix"],`	Sets/declares the named object property or style/type member: products: ["Classic Masala Mix"],. Interpret it in the enclosing object, props or type definition.
26	`target: 5,`	Sets/declares the named object property or style/type member: target: 5,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
27	`    benefit: "1 case free",`	Sets/declares the named object property or style/type member: benefit: "1 case free",. Interpret it in the enclosing object, props or type definition.
28	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`export const beats = [`	Assigns the right-hand expression to the named variable/property: export const beats = [. This is in-memory unless it is later persisted by an explicit call.
31	`  {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (export const beats = []; it is not a standalone business operation.
32	`    id: "beat-1",`	Sets/declares the named object property or style/type member: id: "beat-1",. Interpret it in the enclosing object, props or type definition.
33	`    name: "Lakeside Market Beat",`	Sets/declares the named object property or style/type member: name: "Lakeside Market Beat",. Interpret it in the enclosing object, props or type definition.
34	`    stores: 4,`	Sets/declares the named object property or style/type member: stores: 4,. Interpret it in the enclosing object, props or type definition.
35	`    completed: 1,`	Sets/declares the named object property or style/type member: completed: 1,. Interpret it in the enclosing object, props or type definition.
36	`    pending: 3,`	Sets/declares the named object property or style/type member: pending: 3,. Interpret it in the enclosing object, props or type definition.
37	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	`export const stores = [`	Assigns the right-hand expression to the named variable/property: export const stores = [. This is in-memory unless it is later persisted by an explicit call.
40	`  {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (export const stores = []; it is not a standalone business operation.

Line	Source code	Explanation / reading note
41	`    id: "store-1",`	Sets/declares the named object property or style/type member: id: "store-1",. Interpret it in the enclosing object, props or type definition.
42	`    beatId: "beat-1",`	Sets/declares the named object property or style/type member: beatId: "beat-1",. Interpret it in the enclosing object, props or type definition.
43	`    name: "Nandi Daily Mart",`	Sets/declares the named object property or style/type member: name: "Nandi Daily Mart",. Interpret it in the enclosing object, props or type definition.
44	`    code: "NDM-001",`	Sets/declares the named object property or style/type member: code: "NDM-001",. Interpret it in the enclosing object, props or type definition.
45	`    address: "18 Lakeside Main Road, Bengaluru",`	Sets/declares the named object property or style/type member: address: "18 Lakeside Main Road, Bengaluru",. Interpret it in the enclosing object, props or type definition.
46	`    contact: "Meera Rao",`	Sets/declares the named object property or style/type member: contact: "Meera Rao",. Interpret it in the enclosing object, props or type definition.
47	`    status: "Pending",`	Sets/declares the named object property or style/type member: status: "Pending",. Interpret it in the enclosing object, props or type definition.
48	`    lastVisit: "2026-10-05",`	Sets/declares the named object property or style/type member: lastVisit: "2026-10-05",. Interpret it in the enclosing object, props or type definition.
49	`    lastOrder: 25000,`	Sets/declares the named object property or style/type member: lastOrder: 25000,. Interpret it in the enclosing object, props or type definition.
50	`    latitude: 12.9719,`	Sets/declares the named object property or style/type member: latitude: 12.9719,. Interpret it in the enclosing object, props or type definition.
51	`    longitude: 77.5949,`	Sets/declares the named object property or style/type member: longitude: 77.5949,. Interpret it in the enclosing object, props or type definition.
52	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
53	`  {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
54	`    id: "store-2",`	Sets/declares the named object property or style/type member: id: "store-2",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
55	`beatId: "beat-1",`	Sets/declares the named object property or style/type member: beatId: "beat-1",. Interpret it in the enclosing object, props or type definition.
56	`name: "Sunrise Supermarket",`	Sets/declares the named object property or style/type member: name: "Sunrise Supermarket",. Interpret it in the enclosing object, props or type definition.
57	`code: "SSM-002",`	Sets/declares the named object property or style/type member: code: "SSM-002",. Interpret it in the enclosing object, props or type definition.
58	`address: "Lake View Road, Bengaluru",`	Sets/declares the named object property or style/type member: address: "Lake View Road, Bengaluru",. Interpret it in the enclosing object, props or type definition.
59	`contact: "Kiran Das",`	Sets/declares the named object property or style/type member: contact: "Kiran Das",. Interpret it in the enclosing object, props or type definition.
60	`status: "Pending",`	Sets/declares the named object property or style/type member: status: "Pending",. Interpret it in the enclosing object, props or type definition.
61	`lastVisit: "2026-10-03",`	Sets/declares the named object property or style/type member: lastVisit: "2026-10-03",. Interpret it in the enclosing object, props or type definition.
62	`lastOrder: 18750,`	Sets/declares the named object property or style/type member: lastOrder: 18750,. Interpret it in the enclosing object, props or type definition.
63	`latitude: 12.9745,`	Sets/declares the named object property or style/type member: latitude: 12.9745,. Interpret it in the enclosing object, props or type definition.
64	`longitude: 77.599,`	Sets/declares the named object property or style/type member: longitude: 77.599,. Interpret it in the enclosing object, props or type definition.
65	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
66	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
67	`id: "store-3",`	Sets/declares the named object property or style/type member: id: "store-3",. Interpret it in the enclosing object, props or type definition.
68	`beatId: "beat-1",`	Sets/declares the named object property or style/type member: beatId: "beat-1",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
69	`name: "Green Basket",`	Sets/declares the named object property or style/type member: name: "Green Basket",. Interpret it in the enclosing object, props or type definition.
70	`code: "GB-003",`	Sets/declares the named object property or style/type member: code: "GB-003",. Interpret it in the enclosing object, props or type definition.
71	`address: "Central Avenue, Bengaluru",`	Sets/declares the named object property or style/type member: address: "Central Avenue, Bengaluru",. Interpret it in the enclosing object, props or type definition.
72	`contact: "Ravi Kumar",`	Sets/declares the named object property or style/type member: contact: "Ravi Kumar",. Interpret it in the enclosing object, props or type definition.
73	`status: "Completed",`	Sets/declares the named object property or style/type member: status: "Completed",. Interpret it in the enclosing object, props or type definition.
74	`lastVisit: "2026-10-08",`	Sets/declares the named object property or style/type member: lastVisit: "2026-10-08",. Interpret it in the enclosing object, props or type definition.
75	`lastOrder: 31500,`	Sets/declares the named object property or style/type member: lastOrder: 31500,. Interpret it in the enclosing object, props or type definition.
76	`latitude: 12.9717,`	Sets/declares the named object property or style/type member: latitude: 12.9717,. Interpret it in the enclosing object, props or type definition.
77	`longitude: 77.5947,`	Sets/declares the named object property or style/type member: longitude: 77.5947,. Interpret it in the enclosing object, props or type definition.
78	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
79	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
80	`id: "store-4",`	Sets/declares the named object property or style/type member: id: "store-4",. Interpret it in the enclosing object, props or type definition.
81	`beatId: "beat-1",`	Sets/declares the named object property or style/type member: beatId: "beat-1",. Interpret it in the enclosing object, props or type definition.
82	`name: "City Choice Stores",`	Sets/declares the named object property or style/type member: name: "City Choice Stores",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
83	`    code: "CCS-004",`	Sets/declares the named object property or style/type member: code: "CCS-004",. Interpret it in the enclosing object, props or type definition.
84	`    address: "Market Cross, Bengaluru",`	Sets/declares the named object property or style/type member: address: "Market Cross, Bengaluru",. Interpret it in the enclosing object, props or type definition.
85	`    contact: "Anita Shah",`	Sets/declares the named object property or style/type member: contact: "Anita Shah",. Interpret it in the enclosing object, props or type definition.
86	`    status: "Not Visited",`	Sets/declares the named object property or style/type member: status: "Not Visited",. Interpret it in the enclosing object, props or type definition.
87	`    lastVisit: "2026-09-28",`	Sets/declares the named object property or style/type member: lastVisit: "2026-09-28",. Interpret it in the enclosing object, props or type definition.
88	`    lastOrder: 9200,`	Sets/declares the named object property or style/type member: lastOrder: 9200,. Interpret it in the enclosing object, props or type definition.
89	`    latitude: 12.981,`	Sets/declares the named object property or style/type member: latitude: 12.981,. Interpret it in the enclosing object, props or type definition.
90	`    longitude: 77.61,`	Sets/declares the named object property or style/type member: longitude: 77.61,. Interpret it in the enclosing object, props or type definition.
91	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
92	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
93	`export const products = [`	Assigns the right-hand expression to the named variable/property: export const products = [. This is in-memory unless it is later persisted by an explicit call.
94	`  {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (export const products = []; it is not a standalone business operation.
95	`    id: "prod-1",`	Sets/declares the named object property or style/type member: id: "prod-1",. Interpret it in the enclosing object, props or type definition.
96	`    name: "Sunrise Millet Bites",`	Sets/declares the named object property or style/type member: name: "Sunrise Millet Bites",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
97	`code: "SMB-100",`	Sets/declares the named object property or style/type member: code: "SMB-100",. Interpret it in the enclosing object, props or type definition.
98	`price: 20,`	Sets/declares the named object property or style/type member: price: 20,. Interpret it in the enclosing object, props or type definition.
99	`stock: 480,`	Sets/declares the named object property or style/type member: stock: 480,. Interpret it in the enclosing object, props or type definition.
100	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
101	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
102	`id: "prod-2",`	Sets/declares the named object property or style/type member: id: "prod-2",. Interpret it in the enclosing object, props or type definition.
103	`name: "Classic Masala Mix",`	Sets/declares the named object property or style/type member: name: "Classic Masala Mix",. Interpret it in the enclosing object, props or type definition.
104	`code: "CMM-200",`	Sets/declares the named object property or style/type member: code: "CMM-200",. Interpret it in the enclosing object, props or type definition.
105	`price: 45,`	Sets/declares the named object property or style/type member: price: 45,. Interpret it in the enclosing object, props or type definition.
106	`stock: 260,`	Sets/declares the named object property or style/type member: stock: 260,. Interpret it in the enclosing object, props or type definition.
107	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
108	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
109	`id: "prod-3",`	Sets/declares the named object property or style/type member: id: "prod-3",. Interpret it in the enclosing object, props or type definition.
110	`name: "Healthy Grain Cookies",`	Sets/declares the named object property or style/type member: name: "Healthy Grain Cookies",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
111	`    code: "HGC-300",`	Sets/declares the named object property or style/type member: code: "HGC-300",. Interpret it in the enclosing object, props or type definition.
112	`    price: 35,`	Sets/declares the named object property or style/type member: price: 35,. Interpret it in the enclosing object, props or type definition.
113	`    stock: 320,`	Sets/declares the named object property or style/type member: stock: 320,. Interpret it in the enclosing object, props or type definition.
114	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
115	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/dms/dashboard.test.ts

Regression tests for dashboard. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

49 numbered source lines | SHA-256 933e70dab4dc4275ff9a107098d13210e28d6df959e938bd94763273c5b1ac9f

Line	Source code	Explanation / reading note
1	`import { describe, it, expect } from "vitest";`	Imports dependencies/types used below: import { describe, it, expect } from "vitest";. Importing a function does not call it.
2	`import { distributorDashboard } from "./dashboard.js";`	Imports dependencies/types used below: import { distributorDashboard } from "./dashboard.js";. Importing a function does not call it.
3	`describe("purchased versus sold aggregates", () => {`	Continues the surrounding declaration/expression or text: describe("purchased versus sold aggregates", () => {. Read it with the preceding opening statement (import { distributorDashboard } from "./dashboard.js";); it is not a standalone business operation.
4	`  it("does not use capped detail lists and fills months without transactions with zero", async () => {`	Continues the surrounding declaration/expression or text: it("does not use capped detail lists and fills months without transactions with zero", async () => {. Read it with the preceding opening statement (describe("purchased versus sold aggregates", () => {); it is not a standalone business operation.
5	`    const queries: string[] = [];`	Declares/initializes local data used by the surrounding operation: const queries: string[] = [];. Collection contents and assignments below determine its purpose.
6	`    const data = await distributorDashboard(`	Waits for this asynchronous operation before continuing: const data = await distributorDashboard(. The returned result/error must still be handled.
7	`      "a0T000000000001AAA",`	Continues the surrounding declaration/expression or text: "a0T000000000001AAA",. Read it with the preceding opening statement (const data = await distributorDashboard(); it is not a standalone business operation.
8	`      async (query) => {`	Continues the surrounding declaration/expression or text: async (query) => {. Read it with the preceding opening statement ("a0T000000000001AAA",); it is not a standalone business operation.
9	`        queries.push(query);`	Calls the named method: queries.push(query);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
10	`        if (!query.includes("GROUP BY"))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!query.includes("GROUP BY")).

Line	Source code	Explanation / reading note
11	`return [{ amount: query.includes("Receipt") ? 20000 : 15000 }];`	Returns [{ amount: query.includes("Receipt") ? 20000 : 15000 }] to the caller (or begins returned UI markup) and ends this execution path.
12	`return [`	Returns [to the caller (or begins returned UI markup) and ends this execution path.
13	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (return []); it is not a standalone business operation.
14	`year: 2026,`	Sets/declares the named object property or style/type member: year: 2026,. Interpret it in the enclosing object, props or type definition.
15	`month: 10,`	Sets/declares the named object property or style/type member: month: 10,. Interpret it in the enclosing object, props or type definition.
16	`amount: query.includes("Receipt") ? 5000 : 3000,`	Sets/declares the named object property or style/type member: amount: query.includes("Receipt") ? 5000 : 3000,. Interpret it in the enclosing object, props or type definition.
17	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20	`new Date("2026-10-21T10:00:00Z"),`	Continues the surrounding declaration/expression or text: new Date("2026-10-21T10:00:00Z"),. Read it with the preceding opening statement (},); it is not a standalone business operation.
21	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
22	`expect(data.purchased).toBe(20000);`	Test assertion comparing an expected outcome to actual behavior: expect(data.purchased).toBe(20000);. A mismatch fails the test.
23	`expect(data.sold).toBe(15000);`	Test assertion comparing an expected outcome to actual behavior: expect(data.sold).toBe(15000);. A mismatch fails the test.
24	`expect(data.months).toHaveLength(6);`	Test assertion comparing an expected outcome to actual behavior: expect(data.months).toHaveLength(6);. A mismatch fails the test.

Line	Source code	Explanation / reading note
25	`    expect(data.months[0]).toMatchObject({ month: 5, purchased: 0, sold: 0 });`	Test assertion comparing an expected outcome to actual behavior: expect(data.months[0]).toMatchObject({ month: 5, purchased: 0, sold: 0 });. A mismatch fails the test.
26	`    expect(data.months[5]).toMatchObject({`	Test assertion comparing an expected outcome to actual behavior: expect(data.months[5]).toMatchObject({. A mismatch fails the test.
27	`      month: 10,`	Sets/declares the named object property or style/type member: month: 10,. Interpret it in the enclosing object, props or type definition.
28	`      purchased: 5000,`	Sets/declares the named object property or style/type member: purchased: 5000,. Interpret it in the enclosing object, props or type definition.
29	`      sold: 3000,`	Sets/declares the named object property or style/type member: sold: 3000,. Interpret it in the enclosing object, props or type definition.
30	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31	`    queries.forEach((query) => {`	Calls the named method: queries.forEach((query) => {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
32	`      expect(query).toContain("Distributor__c='a0T000000000001AAA'");`	Test assertion comparing an expected outcome to actual behavior: expect(query).toContain("Distributor__c='a0T000000000001AAA'");. A mismatch fails the test.
33	`      expect(query).not.toContain("LIMIT");`	Test assertion comparing an expected outcome to actual behavior: expect(query).not.toContain("LIMIT");. A mismatch fails the test.
34	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`    expect(queries[0]).toContain("Status__c='Received'");`	Test assertion comparing an expected outcome to actual behavior: expect(queries[0]).toContain("Status__c='Received'");. A mismatch fails the test.
36	`    expect(queries[2]).toContain("Status__c='Issued'");`	Test assertion comparing an expected outcome to actual behavior: expect(queries[2]).toContain("Status__c='Issued'");. A mismatch fails the test.
37	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
38	`  it("handles empty totals and year boundaries", async () => {`	Continues the surrounding declaration/expression or text: it("handles empty totals and year boundaries", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
39	`    const data = await distributorDashboard(`	Waits for this asynchronous operation before continuing: const data = await distributorDashboard(. The returned result/error must still be handled.
40	`      "a0T000000000001AAA",`	Continues the surrounding declaration/expression or text: "a0T000000000001AAA",. Read it with the preceding opening statement (const data = await distributorDashboard(); it is not a standalone business operation.
41	`      async () => [{ amount: null }],`	Continues the surrounding declaration/expression or text: async () => [{ amount: null }],. Read it with the preceding opening statement ("a0T000000000001AAA",); it is not a standalone business operation.
42	`      new Date("2026-01-02T00:00:00Z"),`	Continues the surrounding declaration/expression or text: new Date("2026-01-02T00:00:00Z"),. Read it with the preceding opening statement (async () => [{ amount: null }],); it is not a standalone business operation.
43	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44	`    expect(data.purchased).toBe(0);`	Test assertion comparing an expected outcome to actual behavior: expect(data.purchased).toBe(0);. A mismatch fails the test.
45	`    expect(data.sold).toBe(0);`	Test assertion comparing an expected outcome to actual behavior: expect(data.sold).toBe(0);. A mismatch fails the test.
46	`    expect(data.months[0]).toMatchObject({ year: 2025, month: 8 });`	Test assertion comparing an expected outcome to actual behavior: expect(data.months[0]).toMatchObject({ year: 2025, month: 8 });. A mismatch fails the test.
47	`    expect(data.months[5]).toMatchObject({ year: 2026, month: 1 });`	Test assertion comparing an expected outcome to actual behavior: expect(data.months[5]).toMatchObject({ year: 2026, month: 1 });. A mismatch fails the test.
48	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/dms/dashboard.ts

Collects distributor-related orders, returns, receipt lines, stock and outlet activity for the overview snapshot, with scoped query filters.

47 numbered source lines | SHA-256 63cc254326bdc62eedc7e21242e2fabd600876e0a8455f550dda27bfe9a964ca

Line	Source code	Explanation / reading note
1	`/** Aggregate independently of capped detail lists; never infer delivery from approval. */`	Developer comment/documentation: Aggregate independently of capped detail lists; never infer delivery from approval. */ It is not executed.
2	`export async function distributorDashboard(`	Declares a callable function/method: export async function distributorDashboard(. Parameters supply its inputs; the following block implements the operation.
3	`  id: string,`	Sets/declares the named object property or style/type member: id: string,. Interpret it in the enclosing object, props or type definition.
4	`  records: (query: string) => Promise<any[]>,`	Sets/declares the named object property or style/type member: records: (query: string) => Promise<any[]>,. Interpret it in the enclosing object, props or type definition.
5	`  now = new Date(),`	Assigns the right-hand expression to the named variable/property: now = new Date(),. This is in-memory unless it is later persisted by an explicit call.
6	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (now = new Date(),); it is not a standalone business operation.
7	`  const months = Array.from({ length: 6 }, (_, index) => {`	Declares/initializes local data used by the surrounding operation: const months = Array.from({ length: 6 }, (_, index) => {. Collection contents and assignments below determine its purpose.
8	`    const date = new Date(Date.UTC(now.getUTCFullYear(), now.getUTCMonth() - 5 + index, 1));`	Declares/initializes local data used by the surrounding operation: const date = new Date(Date.UTC(now.getUTCFullYear(), now.getUTCMonth() - 5 + index, 1));. Collection contents and assignments below determine its purpose.
9	`    return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
10	`      year: date.getUTCFullYear(),`	Sets/declares the named object property or style/type member: year: date.getUTCFullYear(),. Interpret it in the enclosing object, props or type definition.
11	`      month: date.getUTCMonth() + 1,`	Sets/declares the named object property or style/type member: month: date.getUTCMonth() + 1,. Interpret it in the enclosing object, props or type definition.
12	`      label: date.toLocaleDateString("en-IN", {`	Sets/declares the named object property or style/type member: label: date.toLocaleDateString("en-IN", {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
13	`month: "short",`	Sets/declares the named object property or style/type member: month: "short",. Interpret it in the enclosing object, props or type definition.
14	`year: "2-digit",`	Sets/declares the named object property or style/type member: year: "2-digit",. Interpret it in the enclosing object, props or type definition.
15	`timeZone: "UTC",`	Sets/declares the named object property or style/type member: timeZone: "UTC",. Interpret it in the enclosing object, props or type definition.
16	`}),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`purchased: 0,`	Sets/declares the named object property or style/type member: purchased: 0,. Interpret it in the enclosing object, props or type definition.
18	`sold: 0,`	Sets/declares the named object property or style/type member: sold: 0,. Interpret it in the enclosing object, props or type definition.
19	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21	`const from = \`${months[0].year}-${String(months[0].month).padStart(2, "0")}-01\`;`	Declares/initializes local data used by the surrounding operation: const from = `${months[0].year}-${String(months[0].month).padStart(2, "0")}-01`;. Collection contents and assignments below determine its purpose.
22	`const summaries: Record<string, number> = {};`	Declares/initializes local data used by the surrounding operation: const summaries: Record<string, number> = {};. Collection contents and assignments below determine its purpose.
23	`for (const [key, object, field, status, dateField] of [`	Repeats work over the specified records/items or while this condition holds: for (const [key, object, field, status, dateField] of [. Check where queries/writes occur relative to the loop.
24	`["purchased", "DMS_Goods_Receipt__c", "Total_Value__c", "Received", "Received_Date__c"],`	Continues the surrounding declaration/expression or text: ["purchased", "DMS_Goods_Receipt__c", "Total_Value__c", "Received", "Received_Date__c"],. Read it with the preceding opening statement (for (const [key, object, field, status, dateField] of []); it is not a standalone business operation.

Line	Source code	Explanation / reading note
25	`    ["sold", "DMS_Invoice__c", "Total_Amount__c", "Issued", "Invoice_Date__c"],`	Continues the surrounding declaration/expression or text: ["sold", "DMS_Invoice__c", "Total_Amount__c", "Issued", "Invoice_Date__c"],. Read it with the preceding opening statement (["purchased", "DMS_Goods_Receipt__c", "Total_Value__c", "Received", "Received_Date__c"],); it is not a standalone business operation.
26	`  ]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (["sold", "DMS_Invoice__c", "Total_Amount__c", "Issued", "Invoice_Date__c"],); it is not a standalone business operation.
27	`    const filter = `FROM ${object} WHERE Distributor__c='${id}' AND Status__c='${status}'`;`	Declares/initializes local data used by the surrounding operation: const filter = `FROM ${object} WHERE Distributor__c='${id}' AND Status__c='${status}'`;. Collection contents and assignments below determine its purpose.
28	`    const total = await records(`SELECT SUM(${field}) amount ${filter}`);`	Waits for this asynchronous operation before continuing: const total = await records(`SELECT SUM(${field}) amount ${filter}`);. The returned result/error must still be handled.
29	`    summaries[key] = Number(total[0]?.amount || 0);`	Assigns the right-hand expression to the named variable/property: summaries[key] = Number(total[0]?.amount || 0);. This is in-memory unless it is later persisted by an explicit call.
30	`    const groups = await records(`	Waits for this asynchronous operation before continuing: const groups = await records(. The returned result/error must still be handled.
31	`      `SELECT CALENDAR_YEAR(${dateField}) year,CALENDAR_MONTH(${dateField}) month,SUM(${field}) amount ${filter} AND ${dateField}>=${from} AND ${dateField}<=TODAY GROUP BY CALENDAR_YEAR(${dateField}),CALENDAR_MONTH(${dateField})` ,`	Continues the surrounding declaration/expression or text: `SELECT CALENDAR_YEAR(${dateField}) year,CALENDAR_MONTH(${dateField}) month,SUM(${field}) amount ${filter} AND ${dateField}>=${from} AND ${dateField}<=TODAY GROUP BY CALENDAR_YEAR(${dateField}),CALEND. Read it with the preceding opening statement (const groups = await records(); it is not a standalone business operation.
32	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`    for (const group of groups) {`	Repeats work over the specified records/items or while this condition holds: for (const group of groups) {. Check where queries/writes occur relative to the loop.
34	`      const month = months.find(`	Declares/initializes local data used by the surrounding operation: const month = months.find(. Collection contents and assignments below determine its purpose.
35	`        (row) => row.year === Number(group.year) && row.month === Number(group.month),`	Continues the surrounding declaration/expression or text: (row) => row.year === Number(group.year) && row.month === Number(group.month),. Read it with the preceding opening statement (const month = months.find(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
36	`      );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
37	`      if (month) month[key as "purchased" | "sold"] = Number(group.amount || 0);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (month) month[key as "purchased" | "sold"] = Number(group.amount || 0);.
38	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
40	`  return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
41	`    purchased: summaries.purchased,`	Sets/declares the named object property or style/type member: purchased: summaries.purchased,. Interpret it in the enclosing object, props or type definition.
42	`    sold: summaries.sold,`	Sets/declares the named object property or style/type member: sold: summaries.sold,. Interpret it in the enclosing object, props or type definition.
43	`    months,`	Continues the surrounding declaration/expression or text: months,. Read it with the preceding opening statement (sold: summaries.sold,); it is not a standalone business operation.
44	`    basis:`	Sets/declares the named object property or style/type member: basis:. Interpret it in the enclosing object, props or type definition.
45	`      "Received purchase cost versus issued sales invoice value; not net of returns and not a profit calculation.",`	Continues the surrounding declaration/expression or text: "Received purchase cost versus issued sales invoice value; not net of returns and not a profit calculation.",. Read it with the preceding opening statement (basis:); it is not a standalone business operation.
46	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/dms/employeeRouter.test.ts

Regression tests for employeeRouter. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

97 numbered source lines | SHA-256 b978d6070dbad40488f0a173932b4231ed76951d430da7097e53021bf3f3f646

Line	Source code	Explanation / reading note
1	`import { describe, it, expect } from "vitest";`	Imports dependencies/types used below: import { describe, it, expect } from "vitest";. Importing a function does not call it.
2	`import express from "express";`	Imports dependencies/types used below: import express from "express";. Importing a function does not call it.
3	`import request from "supertest";`	Imports dependencies/types used below: import request from "supertest";. Importing a function does not call it.
4	`import { randomUUID } from "node:crypto";`	Imports dependencies/types used below: import { randomUUID } from "node:crypto";. Importing a function does not call it.
5	`import { createEmployeeDmsRouter } from "./employeeRouter.js";`	Imports dependencies/types used below: import { createEmployeeDmsRouter } from "./employeeRouter.js";. Importing a function does not call it.
6	`const employeeId = "a0E000000000001AAA",`	Declares/initializes local data used by the surrounding operation: const employeeId = "a0E000000000001AAA",. Collection contents and assignments below determine its purpose.
7	`  distributorId = "a0T000000000001AAA";`	Assigns the right-hand expression to the named variable/property: distributorId = "a0T000000000001AAA";. This is in-memory unless it is later persisted by an explicit call.
8	`function fixture(assigned = true) {`	Declares a callable function/method: function fixture(assigned = true) {. Parameters supply its inputs; the following block implements the operation.
9	`  const commands: any[] = [],`	Declares/initializes local data used by the surrounding operation: const commands: any[] = [],. Collection contents and assignments below determine its purpose.
10	`    queries: string[] = [];`	Sets/declares the named object property or style/type member: queries: string[] = [];. Interpret it in the enclosing object, props or type definition.
11	`  const app = express();`	Declares/initializes local data used by the surrounding operation: const app = express();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
12	`app.use(express.json());`	Registers an HTTP route or middleware: app.use(express.json());. Registration order controls which authentication/validation runs first.
13	`app.use((req, _res, next) => {`	Registers an HTTP route or middleware: app.use((req, _res, next) => {. Registration order controls which authentication/validation runs first.
14	`  (req as any).auth = { employeeId };`	Assigns the right-hand expression to the named variable/property: (req as any).auth = { employeeId };. This is in-memory unless it is later persisted by an explicit call.
15	`  next();`	Continues the surrounding declaration/expression or text: next();. Read it with the preceding opening statement ((req as any).auth = { employeeId };); it is not a standalone business operation.
16	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`app.use(`	Registers an HTTP route or middleware: app.use(. Registration order controls which authentication/validation runs first.
18	`  "/primary",`	Continues the surrounding declaration/expression or text: "/primary",. Read it with the preceding opening statement (app.use(); it is not a standalone business operation.
19	`  createEmployeeDmsRouter({`	Continues the surrounding declaration/expression or text: createEmployeeDmsRouter({. Read it with the preceding opening statement ("/primary",); it is not a standalone business operation.
20	`    records: async (query) => {`	Sets/declares the named object property or style/type member: records: async (query) => {. Interpret it in the enclosing object, props or type definition.
21	`      queries.push(query);`	Calls the named method: queries.push(query);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
22	`      return query.includes("FROM Employee__c") && assigned`	Returns query.includes("FROM Employee__c") && assigned to the caller (or begins returned UI markup) and ends this execution path.
23	`        ? [{ Id: employeeId, DMS_Distributor__c: distributorId }]`	Continues the surrounding declaration/expression or text: ? [{ Id: employeeId, DMS_Distributor__c: distributorId }]. Read it with the preceding opening statement (return query.includes("FROM Employee__c") && assigned); it is not a standalone business operation.

Line	Source code	Explanation / reading note
24	`          : [];`	Continues the surrounding declaration/expression or text: : [];. Read it with the preceding opening statement (? [{ Id: employeeId, DMS_Distributor__c: distributorId }]); it is not a standalone business operation.
25	`        },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
26	`        command: async (body) => {`	Sets/declares the named object property or style/type member: command: async (body) => {. Interpret it in the enclosing object, props or type definition.
27	`          commands.push(body);`	Calls the named method: commands.push(body);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
28	`          return { id: "saved", status: "Submitted" };`	Returns { id: "saved", status: "Submitted" } to the caller (or begins returned UI markup) and ends this execution path.
29	`        },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`      }),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`    return { app, commands, queries };`	Returns { app, commands, queries } to the caller (or begins returned UI markup) and ends this execution path.
33	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`describe("SFA primary entry boundary", () => {`	Continues the surrounding declaration/expression or text: describe("SFA primary entry boundary", () => {. Read it with the preceding opening statement (}); it is not a standalone business operation.
35	`  it("passes a selected scheme ID but rejects client-owned prices", async () => {`	Continues the surrounding declaration/expression or text: it("passes a selected scheme ID but rejects client-owned prices", async () => {. Read it with the preceding opening statement (describe("SFA primary entry boundary", () => {); it is not a standalone business operation.
36	`    const f = fixture();`	Declares/initializes local data used by the surrounding operation: const f = fixture();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
37	`    const body = {`	Declares/initializes local data used by the surrounding operation: const body = {. Collection contents and assignments below determine its purpose.
38	`      action: "primaryOrder",`	Sets/declares the named object property or style/type member: action: "primaryOrder",. Interpret it in the enclosing object, props or type definition.
39	`      requestKey: randomUUID(),`	Sets/declares the named object property or style/type member: requestKey: randomUUID(),. Interpret it in the enclosing object, props or type definition.
40	`      lines: [{ productId: distributorId, schemeId: employeeId, cases: 3 }],`	Sets/declares the named object property or style/type member: lines: [{ productId: distributorId, schemeId: employeeId, cases: 3 }],. Interpret it in the enclosing object, props or type definition.
41	`    };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42	`    expect((await request(f.app).post("/primary/submit").send(body)).status).toBe(200);`	Test assertion comparing an expected outcome to actual behavior: expect((await request(f.app).post("/primary/submit").send(body)).status).toBe(200);. A mismatch fails the test.
43	`    expect(f.commands[0].lines[0]).toMatchObject({ schemeId: employeeId, cases: 3 });`	Test assertion comparing an expected outcome to actual behavior: expect(f.commands[0].lines[0]).toMatchObject({ schemeId: employeeId, cases: 3 });. A mismatch fails the test.
44	`    expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
45	`      (`	Continues the surrounding declaration/expression or text: (. Read it with the preceding opening statement (expect(); it is not a standalone business operation.
46	`        await request(f.app)`	Waits for this asynchronous operation before continuing: await request(f.app). The returned result/error must still be handled.
47	`          .post("/primary/submit")`	Continues the surrounding declaration/expression or text: .post("/primary/submit"). Read it with the preceding opening statement (await request(f.app)); it is not a standalone business operation.
48	`          .send({ ...body, lines: [{ ...body.lines[0], casePrice: 1 }] })`	Continues the surrounding declaration/expression or text: .send({ ...body, lines: [{ ...body.lines[0], casePrice: 1 }] }). Read it with the preceding opening statement (.post("/primary/submit")); it is not a standalone business operation.

Line	Source code	Explanation / reading note
49	`      ).status,`	Continues the surrounding declaration/expression or text:).status,. Read it with the preceding opening statement (.send({ ...body, lines: [{ ...body.lines[0], casePrice: 1 }] })); it is not a standalone business operation.
50	`    ).toBe(400);`	Continues the surrounding declaration/expression or text:).toBe(400);. Read it with the preceding opening statement ( ).status,); it is not a standalone business operation.
51	`    expect(f.commands).toHaveLength(1);`	Test assertion comparing an expected outcome to actual behavior: expect(f.commands).toHaveLength(1);. A mismatch fails the test.
52	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
53	`  it("derives distributor and employee from the verified session", async () => {`	Continues the surrounding declaration/expression or text: it("derives distributor and employee from the verified session", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
54	`    const f = fixture(),`	Declares/initializes local data used by the surrounding operation: const f = fixture(),. Collection contents and assignments below determine its purpose.
55	`      body = {`	Assigns the right-hand expression to the named variable/property: body = {. This is in-memory unless it is later persisted by an explicit call.
56	`        action: "primaryOrder",`	Sets/declares the named object property or style/type member: action: "primaryOrder",. Interpret it in the enclosing object, props or type definition.
57	`        requestKey: randomUUID(),`	Sets/declares the named object property or style/type member: requestKey: randomUUID(),. Interpret it in the enclosing object, props or type definition.
58	`        lines: [{ productId: distributorId, cases: 2 }],`	Sets/declares the named object property or style/type member: lines: [{ productId: distributorId, cases: 2 }],. Interpret it in the enclosing object, props or type definition.
59	`      };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
60	`    expect((await request(f.app).post("/primary/submit").send(body)).status).toBe(200);`	Test assertion comparing an expected outcome to actual behavior: expect((await request(f.app).post("/primary/submit").send(body)).status).toBe(200);. A mismatch fails the test.
61	`    expect(f.commands[0]).toMatchObject({ employeeId, distributorId });`	Test assertion comparing an expected outcome to actual behavior: expect(f.commands[0]).toMatchObject({ employeeId, distributorId });. A mismatch fails the test.

Line	Source code	Explanation / reading note
62	`    expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
63	`      (`	Continues the surrounding declaration/expression or text: (. Read it with the preceding opening statement (expect(); it is not a standalone business operation.
64	`        await request(f.app)`	Waits for this asynchronous operation before continuing: await request(f.app). The returned result/error must still be handled.
65	`          .post("/primary/submit")`	Continues the surrounding declaration/expression or text: .post("/primary/submit"). Read it with the preceding opening statement (await request(f.app)); it is not a standalone business operation.
66	`          .send({ ...body, employeeId: "forged" })`	Continues the surrounding declaration/expression or text: .send({ ...body, employeeId: "forged" }). Read it with the preceding opening statement (.post("/primary/submit")); it is not a standalone business operation.
67	`      ).status,`	Continues the surrounding declaration/expression or text:).status,. Read it with the preceding opening statement (.send({ ...body, employeeId: "forged" })); it is not a standalone business operation.
68	`    ).toBe(400);`	Continues the surrounding declaration/expression or text:).toBe(400);. Read it with the preceding opening statement ( ).status,); it is not a standalone business operation.
69	`    expect(f.commands).toHaveLength(1);`	Test assertion comparing an expected outcome to actual behavior: expect(f.commands).toHaveLength(1);. A mismatch fails the test.
70	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
71	`  it("blocks unassigned employees and invalid returns", async () => {`	Continues the surrounding declaration/expression or text: it("blocks unassigned employees and invalid returns", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
72	`    expect((await request(fixture(false).app).get("/primary/catalogue")).status).toBe(403);`	Test assertion comparing an expected outcome to actual behavior: expect((await request(fixture(false).app).get("/primary/catalogue")).status).toBe(403);. A mismatch fails the test.
73	`    const f = fixture();`	Declares/initializes local data used by the surrounding operation: const f = fixture();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
74	`    expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
75	`      (`	Continues the surrounding declaration/expression or text: (. Read it with the preceding opening statement (expect(); it is not a standalone business operation.
76	`        await request(f.app)`	Waits for this asynchronous operation before continuing: await request(f.app). The returned result/error must still be handled.
77	`          .post("/primary/submit")`	Continues the surrounding declaration/expression or text: .post("/primary/submit"). Read it with the preceding opening statement (await request(f.app)); it is not a standalone business operation.
78	`          .send({`	Continues the surrounding declaration/expression or text: .send({. Read it with the preceding opening statement (.post("/primary/submit")); it is not a standalone business operation.
79	`            action: "primaryReturn",`	Sets/declares the named object property or style/type member: action: "primaryReturn",. Interpret it in the enclosing object, props or type definition.
80	`            requestKey: randomUUID(),`	Sets/declares the named object property or style/type member: requestKey: randomUUID(),. Interpret it in the enclosing object, props or type definition.
81	`            lines: [{ receiptLineId: distributorId, cases: 1, reason: "Other" }],`	Sets/declares the named object property or style/type member: lines: [{ receiptLineId: distributorId, cases: 1, reason: "Other" }],. Interpret it in the enclosing object, props or type definition.
82	`          })`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
83	`      ).status,`	Continues the surrounding declaration/expression or text:).status,. Read it with the preceding opening statement (})); it is not a standalone business operation.
84	`    ).toBe(400);`	Continues the surrounding declaration/expression or text:).toBe(400);. Read it with the preceding opening statement ( ).status,); it is not a standalone business operation.
85	`    expect(f.commands).toHaveLength(0);`	Test assertion comparing an expected outcome to actual behavior: expect(f.commands).toHaveLength(0);. A mismatch fails the test.
86	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
87	`  it("scopes order history to employee and receipts to distributor", async () => {`	Continues the surrounding declaration/expression or text: it("scopes order history to employee and receipts to distributor", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
88	`    const f = fixture();`	Declares/initializes local data used by the surrounding operation: const f = fixture();. Collection contents and assignments below determine its purpose.
89	`    expect((await request(f.app).get("/primary/catalogue")).status).toBe(200);`	Test assertion comparing an expected outcome to actual behavior: expect((await request(f.app).get("/primary/catalogue")).status).toBe(200);. A mismatch fails the test.
90	`    expect(f.queries.find((q) => q.includes("FROM DMS_Primary_Order__c"))).toContain(`	Test assertion comparing an expected outcome to actual behavior: expect(f.queries.find((q) => q.includes("FROM DMS_Primary_Order__c"))).toContain(. A mismatch fails the test.
91	`      `Employee__c='${employeeId}'`,`	Assigns the right-hand expression to the named variable/property: `Employee__c='${employeeId}'`,. This is in-memory unless it is later persisted by an explicit call.
92	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
93	`    expect(f.queries.find((q) => q.includes("FROM DMS_Goods_Receipt_Line__c"))).toContain(`	Test assertion comparing an expected outcome to actual behavior: expect(f.queries.find((q) => q.includes("FROM DMS_Goods_Receipt_Line__c"))).toContain(. A mismatch fails the test.
94	`      `Distributor__c='${distributorId}'`,`	Assigns the right-hand expression to the named variable/property: `Distributor__c='${distributorId}'`,. This is in-memory unless it is later persisted by an explicit call.
95	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
96	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
97	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/dms/employeeRouter.ts

Employee-authenticated primary catalogue/submission routes. Derives the assigned distributor and actor from the SFA session rather than trusting a posted actor ID.

137 numbered source lines | SHA-256 56794de2ee45bc2ac310dcfc80a99f4e7014fc751c6dee80c587ad8c0400468a

Line	Source code	Explanation / reading note
1	`import express from "express";`	Imports dependencies/types used below: import express from "express";. Importing a function does not call it.
2	`import { z } from "zod";`	Imports dependencies/types used below: import { z } from "zod";. Importing a function does not call it.
3	`import { salesforce } from "../salesforce/SalesforceService.js";`	Imports dependencies/types used below: import { salesforce } from "../salesforce/SalesforceService.js";. Importing a function does not call it.
4	`import { ok, fail } from "../utils/http.js";`	Imports dependencies/types used below: import { ok, fail } from "../utils/http.js";. Importing a function does not call it.
5	`import { DmsTransport, DmsUpstreamError } from "./transport.js";`	Imports dependencies/types used below: import { DmsTransport, DmsUpstreamError } from "./transport.js";. Importing a function does not call it.
6		Blank line separating logical sections; no executable operation.
7	`const id = z.string().regex(/^[A-Za-z0-9]{18}$/);`	Declares/initializes local data used by the surrounding operation: const id = z.string().regex(/^[A-Za-z0-9]{18}$/);. Collection contents and assignments below determine its purpose.
8	`const transport = new DmsTransport((refresh) => salesforce.dmsSession(refresh));`	Declares/initializes local data used by the surrounding operation: const transport = new DmsTransport((refresh) => salesforce.dmsSession(refresh));. Collection contents and assignments below determine its purpose.
9	`type Dependencies = {`	Defines a compile-time data contract: type Dependencies = {. TypeScript types do not validate untrusted runtime JSON by themselves.
10	`  records: (query: string) => Promise<any[]>;`	Sets/declares the named object property or style/type member: records: (query: string) => Promise<any[]>;. Interpret it in the enclosing object, props or type definition.
11	`  command: (body: Record<string, unknown>) => Promise<any>;`	Sets/declares the named object property or style/type member: command: (body: Record<string, unknown>) => Promise<any>;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
12	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13	`export function createEmployeeDmsRouter(`	Declares a callable function/method: export function createEmployeeDmsRouter(. Parameters supply its inputs; the following block implements the operation.
14	`  deps: Dependencies = {`	Sets/declares the named object property or style/type member: deps: Dependencies = {. Interpret it in the enclosing object, props or type definition.
15	`    records: (q) => salesforce.records(q),`	Invokes the external-data boundary: records: (q) => salesforce.records(q),. Await/result checks determine whether the operation is confirmed.
16	`    command: (b) => transport.command(b),`	Sets/declares the named object property or style/type member: command: (b) => transport.command(b),. Interpret it in the enclosing object, props or type definition.
17	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (},); it is not a standalone business operation.
19	`  const router = express.Router();`	Declares/initializes local data used by the surrounding operation: const router = express.Router();. Collection contents and assignments below determine its purpose.
20	`  // Mounted AFTER SFA's existing authentication middleware, not the distributor router.`	Developer comment/documentation: Mounted AFTER SFA's existing authentication middleware, not the distributor router. It is not executed.
21	`  router.use(async (req, res, next) => {`	Registers an HTTP route or middleware: router.use(async (req, res, next) => {. Registration order controls which authentication/validation runs first.
22	`    const employeeId = id.safeParse((req as any).auth?.employeeId);`	Declares/initializes local data used by the surrounding operation: const employeeId = id.safeParse((req as any).auth?.employeeId);. Collection contents and assignments below determine its purpose.
23	`    if (!employeeId.success)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!employeeId.success).
24	`      return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
25	`        res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
26	`403,`	Continues the surrounding declaration/expression or text: 403,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
27	`"An active Salesforce employee session is required",`	Continues the surrounding declaration/expression or text: "An active Salesforce employee session is required",. Read it with the preceding opening statement (403,); it is not a standalone business operation.
28	`"EMPLOYEE_REQUIRED",`	Continues the surrounding declaration/expression or text: "EMPLOYEE_REQUIRED",. Read it with the preceding opening statement ("An active Salesforce employee session is required",); it is not a standalone business operation.
29	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`const employees = await deps.records(`	Invokes the external-data boundary: const employees = await deps.records(. Await/result checks determine whether the operation is confirmed.
31	`` `SELECT Id,Name,DMS_Distributor__c,DMS_Distributor__r.Name,DMS_Distributor__r.Officer__r.Name,DMS_Distributor__r.Geography__r.Name FROM Employee__c WHERE Id='${employeeId.data}' AND Active__c=true AND DMS_Distributor__r.Active__c=true LIMIT 1`, ``	Assigns the right-hand expression to the named variable/property: `SELECT Id,Name,DMS_Distributor__c,DMS_Distributor__r.Name,DMS_Distributor__r.Officer__r.Name,DMS_Distributor__r.Geography__r.Name FROM Employee__c WHERE Id='${employeeId.data}' AND Active__c=true AND. This is in-memory unless it is later persisted by an explicit call.
32	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`if (!employees[0]?.DMS_Distributor__c)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!employees[0]?.DMS_Distributor__c).
34	`return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
35	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
36	`403,`	Continues the surrounding declaration/expression or text: 403,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
37	`"Assign this employee to an active DMS distributor first",`	Continues the surrounding declaration/expression or text: "Assign this employee to an active DMS distributor first",. Read it with the preceding opening statement (403,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
38	`"DISTRIBUTOR_REQUIRED",`	Continues the surrounding declaration/expression or text: "DISTRIBUTOR_REQUIRED",. Read it with the preceding opening statement ("Assign this employee to an active DMS distributor first",); it is not a standalone business operation.
39	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
40	`(req as any).dmsEmployee = employees[0];`	Assigns the right-hand expression to the named variable/property: (req as any).dmsEmployee = employees[0];. This is in-memory unless it is later persisted by an explicit call.
41	`next();`	Continues the surrounding declaration/expression or text: next();. Read it with the preceding opening statement ((req as any).dmsEmployee = employees[0];); it is not a standalone business operation.
42	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43	`router.get("/catalogue", async (req, res) => {`	Registers an HTTP route or middleware: router.get("/catalogue", async (req, res) => {. Registration order controls which authentication/validation runs first.
44	`const employee = (req as any).dmsEmployee,`	Declares/initializes local data used by the surrounding operation: const employee = (req as any).dmsEmployee,. Collection contents and assignments below determine its purpose.
45	`distributorId = employee.DMS_Distributor__c;`	Assigns the right-hand expression to the named variable/property: distributorId = employee.DMS_Distributor__c;. This is in-memory unless it is later persisted by an explicit call.
46	`const products = await deps.records(`	Invokes the external-data boundary: const products = await deps.records(. Await/result checks determine whether the operation is confirmed.
47	`"SELECT Id,Name,Product_Code__c,Units_Per_Case__c,DMS_Case_Price__c,GST_Percent__c FROM Product__c WHERE Active__c=true AND Sellable__c=true ORDER BY Name LIMIT 2000",`	Assigns the right-hand expression to the named variable/property: "SELECT Id,Name,Product_Code__c,Units_Per_Case__c,DMS_Case_Price__c,GST_Percent__c FROM Product__c WHERE Active__c=true AND Sellable__c=true ORDER BY Name LIMIT 2000",. This is in-memory unless it is later persisted by an explicit call.
48	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49	`const orders = await deps.records(`	Invokes the external-data boundary: const orders = await deps.records(. Await/result checks determine whether the operation is confirmed.

Line	Source code	Explanation / reading note
50	`SELECT Id,Name,Status__c,Total_Amount__c,Order_Date__c FROM DMS_Primary_Order__c WHERE Employee__c='${employee.Id}' ORDER BY CreatedDate DESC LIMIT 100`,	Assigns the right-hand expression to the named variable/property: `SELECT Id,Name,Status__c,Total_Amount__c,Order_Date__c FROM DMS_Primary_Order__c WHERE Employee__c='${employee.Id}' ORDER BY CreatedDate DESC LIMIT 100`,. This is in-memory unless it is later persisted by an explicit call.
51	);	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
52	const returns = await deps.records(	Invokes the external-data boundary: const returns = await deps.records(. Await/result checks determine whether the operation is confirmed.
53	`SELECT Id,Name,Status__c,Total_Amount__c,Return_Date__c FROM DMS_Primary_Return__c WHERE Employee__c='${employee.Id}' ORDER BY CreatedDate DESC LIMIT 100`,	Assigns the right-hand expression to the named variable/property: `SELECT Id,Name,Status__c,Total_Amount__c,Return_Date__c FROM DMS_Primary_Return__c WHERE Employee__c='${employee.Id}' ORDER BY CreatedDate DESC LIMIT 100`,. This is in-memory unless it is later persisted by an explicit call.
54	);	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
55	const receipts = await deps.records(	Invokes the external-data boundary: const receipts = await deps.records(. Await/result checks determine whether the operation is confirmed.
56	`SELECT Id,Product__r.Name,Received_Cases__c,Free_Cases__c,Case_Cost__c,Batch_Number__c,Expiry_Date__c FROM DMS_Goods_Receipt_Line__c WHERE Goods_Receipt__r.Distributor__c='${distributorId}' AND Goods_Receipt__r.Status__c='Received' ORDER BY CreatedDate DESC LIMIT 200`,	Assigns the right-hand expression to the named variable/property: `SELECT Id,Product__r.Name,Received_Cases__c,Free_Cases__c,Case_Cost__c,Batch_Number__c,Expiry_Date__c FROM DMS_Goods_Receipt_Line__c WHERE Goods_Receipt__r.Distributor__c='${distributorId}' AND Goods. This is in-memory unless it is later persisted by an explicit call.
57	);	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
58	const schemes = await deps.records(	Invokes the external-data boundary: const schemes = await deps.records(. Await/result checks determine whether the operation is confirmed.
59	"SELECT Id,Name,Product__c,Region__c,Minimum_Cases__c,Free_Cases__c,Free_Product__r.Name,Discount_Percent__c,Discount_Amount__c,Free_Gift__c,Gift_Quantity__c,(SELECT Product__c FROM Scheme_Products__r WHERE Active__c=true) FROM Scheme__c WHERE Active__c=true AND Sales_Channel__c='Primary' AND Outlet_Type__c=null AND (Start_Date__c=null OR Start_Date__c<=TODAY) AND (End_Date__c=null OR End_Date__c>=TODAY) ORDER BY Name LIMIT 2000",	Assigns the right-hand expression to the named variable/property: "SELECT Id,Name,Product__c,Region__c,Minimum_Cases__c,Free_Cases__c,Free_Product__r.Name,Discount_Percent__c,Discount_Amount__c,Free_Gift__c,Gift_Quantity__c,(SELECT Product__c FROM Scheme_Products__r. This is in-memory unless it is later persisted by an explicit call.
60	);	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
61	`    return ok(res, {`	Returns ok(res, { to the caller (or begins returned UI markup) and ends this execution path.
62	`      employee,`	Continues the surrounding declaration/expression or text: employee,. Read it with the preceding opening statement (return ok(res, {); it is not a standalone business operation.
63	`      products,`	Continues the surrounding declaration/expression or text: products,. Read it with the preceding opening statement (employee,); it is not a standalone business operation.
64	`      orders,`	Continues the surrounding declaration/expression or text: orders,. Read it with the preceding opening statement (products,); it is not a standalone business operation.
65	`      returns,`	Continues the surrounding declaration/expression or text: returns,. Read it with the preceding opening statement (orders,); it is not a standalone business operation.
66	`      receipts,`	Continues the surrounding declaration/expression or text: receipts,. Read it with the preceding opening statement (returns,); it is not a standalone business operation.
67	`      schemes: schemes.filter(`	Sets/declares the named object property or style/type member: schemes: schemes.filter(. Interpret it in the enclosing object, props or type definition.
68	`        (row) =>`	Continues the surrounding declaration/expression or text: (row) =>. Read it with the preceding opening statement (schemes: schemes.filter(); it is not a standalone business operation.
69	`          !row.Region__c || row.Region__c === employee.DMS_Distributor__r?.Geography__r?.Name,`	Continues the surrounding declaration/expression or text: !row.Region__c || row.Region__c === employee.DMS_Distributor__r?.Geography__r?.Name,. Read it with the preceding opening statement ((row) =>); it is not a standalone business operation.
70	`      ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
71	`      retrievedAt: new Date().toISOString(),`	Sets/declares the named object property or style/type member: retrievedAt: new Date().toISOString(),. Interpret it in the enclosing object, props or type definition.
72	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
73	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
74	`  router.post("/submit", async (req, res) => {`	Registers an HTTP route or middleware: router.post("/submit", async (req, res) => {. Registration order controls which authentication/validation runs first.

Line	Source code	Explanation / reading note
75	`    const line = z`	Declares/initializes local data used by the surrounding operation: const line = z. Collection contents and assignments below determine its purpose.
76	`      .object({`	Continues the surrounding declaration/expression or text: .object({. Read it with the preceding opening statement (const line = z); it is not a standalone business operation.
77	`        productId: id.optional(),`	Sets/declares the named object property or style/type member: productId: id.optional(),. Interpret it in the enclosing object, props or type definition.
78	`        receiptLineId: id.optional(),`	Sets/declares the named object property or style/type member: receiptLineId: id.optional(),. Interpret it in the enclosing object, props or type definition.
79	`        schemeId: id.optional(),`	Sets/declares the named object property or style/type member: schemeId: id.optional(),. Interpret it in the enclosing object, props or type definition.
80	`        cases: z.number().int().positive().max(100000),`	Sets/declares the named object property or style/type member: cases: z.number().int().positive().max(100000),. Interpret it in the enclosing object, props or type definition.
81	`        reason: z.enum(["Damaged", "Expired", "Delayed Delivery", "No Demand", "Other"]).optional(),`	Sets/declares the named object property or style/type member: reason: z.enum(["Damaged", "Expired", "Delayed Delivery", "No Demand", "Other"]).optional(),. Interpret it in the enclosing object, props or type definition.
82	`        notes: z.string().max(1000).optional(),`	Sets/declares the named object property or style/type member: notes: z.string().max(1000).optional(),. Interpret it in the enclosing object, props or type definition.
83	`      })`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
84	`      .strict();`	Continues the surrounding declaration/expression or text: .strict();. Read it with the preceding opening statement (})); it is not a standalone business operation.
85	`    const body = z`	Declares/initializes local data used by the surrounding operation: const body = z. Collection contents and assignments below determine its purpose.
86	`      .object({`	Continues the surrounding declaration/expression or text: .object({. Read it with the preceding opening statement (const body = z); it is not a standalone business operation.
87	`        action: z.enum(["primaryOrder", "primaryReturn"]),`	Sets/declares the named object property or style/type member: action: z.enum(["primaryOrder", "primaryReturn"]),. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
88	`requestKey: z.string().uuid(),`	Sets/declares the named object property or style/type member: requestKey: z.string().uuid(),. Interpret it in the enclosing object, props or type definition.
89	`notes: z.string().max(1000).optional(),`	Sets/declares the named object property or style/type member: notes: z.string().max(1000).optional(),. Interpret it in the enclosing object, props or type definition.
90	`lines: z.array(line).min(1).max(50),`	Sets/declares the named object property or style/type member: lines: z.array(line).min(1).max(50),. Interpret it in the enclosing object, props or type definition.
91	`})`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
92	`.strict()`	Continues the surrounding declaration/expression or text: .strict(). Read it with the preceding opening statement (})); it is not a standalone business operation.
93	`.parse(req.body);`	Continues the surrounding declaration/expression or text: .parse(req.body);. Read it with the preceding opening statement (.strict()); it is not a standalone business operation.
94	`for (const entry of body.lines) {`	Repeats work over the specified records/items or while this condition holds: for (const entry of body.lines) {. Check where queries/writes occur relative to the loop.
95	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
96	`body.action === "primaryOrder"`	Continues the surrounding declaration/expression or text: body.action === "primaryOrder". Read it with the preceding opening statement (if (); it is not a standalone business operation.
97	`? !entry.productId`	Continues the surrounding declaration/expression or text: ? !entry.productId. Read it with the preceding opening statement (body.action === "primaryOrder"); it is not a standalone business operation.
98	`: !entry.receiptLineId ||`	Continues the surrounding declaration/expression or text: : !entry.receiptLineId ||. Read it with the preceding opening statement (? !entry.productId); it is not a standalone business operation.
99	`!entry.reason ||`	Continues the surrounding declaration/expression or text: !entry.reason ||. Read it with the preceding opening statement (: !entry.receiptLineId ||); it is not a standalone business operation.
100	`(entry.reason === "Other" && !entry.notes?.trim())`	Continues the surrounding declaration/expression or text: (entry.reason === "Other" && !entry.notes?.trim()). Read it with the preceding opening statement (!entry.reason ||); it is not a standalone business operation.

Line	Source code	Explanation / reading note
101	`      )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
102	`        return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
103	`          res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
104	`          400,`	Continues the surrounding declaration/expression or text: 400,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
105	`          "Select a product or original receipt, cases, and a return reason where needed",`	Continues the surrounding declaration/expression or text: "Select a product or original receipt, cases, and a return reason where needed",. Read it with the preceding opening statement (400,); it is not a standalone business operation.
106	`          "VALIDATION_ERROR",`	Continues the surrounding declaration/expression or text: "VALIDATION_ERROR",. Read it with the preceding opening statement ("Select a product or original receipt, cases, and a return reason where needed",); it is not a standalone business operation.
107	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
108	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
109	`    const employee = (req as any).dmsEmployee;`	Declares/initializes local data used by the surrounding operation: const employee = (req as any).dmsEmployee;. Collection contents and assignments below determine its purpose.
110	`    return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.
111	`      res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
112	`      await deps.command({`	Invokes the external-data boundary: await deps.command({. Await/result checks determine whether the operation is confirmed.
113	`        ...body,`	Continues the surrounding declaration/expression or text: ...body,. Read it with the preceding opening statement (await deps.command({); it is not a standalone business operation.
114	`        employeeId: employee.Id,`	Sets/declares the named object property or style/type member: employeeId: employee.Id,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
115	`distributorId: employee.DMS_Distributor__c,`	Sets/declares the named object property or style/type member: distributorId: employee.DMS_Distributor__c,. Interpret it in the enclosing object, props or type definition.
116	`}),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
117	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
118	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
119	`router.use(((error: any, _req: any, res: any, _next: any) => {`	Registers an HTTP route or middleware: router.use(((error: any, _req: any, res: any, _next: any) => {. Registration order controls which authentication/validation runs first.
120	`if (error instanceof z.ZodError)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (error instanceof z.ZodError).
121	`return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
122	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
123	`400,`	Continues the surrounding declaration/expression or text: 400,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
124	`error.issues.map((issue) => issue.message).join("; "),`	Transforms/selects/aggregates collection values with the callback shown here: error.issues.map((issue) => issue.message).join("; "),. Read the callback body and result assignment together.
125	`"VALIDATION_ERROR",`	Continues the surrounding declaration/expression or text: "VALIDATION_ERROR",. Read it with the preceding opening statement (error.issues.map((issue) => issue.message).join("; "),); it is not a standalone business operation.
126	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
127	`if (error instanceof DmsUpstreamError)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (error instanceof DmsUpstreamError).
128	`return fail(res, error.status, error.message, "SALESFORCE_ERROR");`	Returns fail(res, error.status, error.message, "SALESFORCE_ERROR") to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
129	`    return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
130	`      res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
131	`      502,`	Continues the surrounding declaration/expression or text: 502,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
132	`      "Salesforce could not confirm the primary transaction. Keep your saved request and retry.",`	Continues the surrounding declaration/expression or text: "Salesforce could not confirm the primary transaction. Keep your saved request and retry.",. Read it with the preceding opening statement (502,); it is not a standalone business operation.
133	`      "UPSTREAM_ERROR",`	Continues the surrounding declaration/expression or text: "UPSTREAM_ERROR",. Read it with the preceding opening statement ("Salesforce could not confirm the primary transaction. Keep your saved request and retry.",); it is not a standalone business operation.
134	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
135	`  }) as express.ErrorRequestHandler);`	Continues the surrounding declaration/expression or text: }) as express.ErrorRequestHandler);. Read it with the preceding opening statement ( );); it is not a standalone business operation.
136	`  return router;`	Returns router to the caller (or begins returned UI markup) and ends this execution path.
137	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/dms/primaryCatalogue.test.ts

Regression tests for primaryCatalogue. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

28 numbered source lines | SHA-256 aa6df95ffe546ff96aef83f8d467d8e2b812cefa67b927e71b4f6bfe6ba036af

Line	Source code	Explanation / reading note
1	`import { describe, it, expect } from "vitest";`	Imports dependencies/types used below: import { describe, it, expect } from "vitest";. Importing a function does not call it.
2	`import { primaryCatalogue } from "./primaryCatalogue.js";`	Imports dependencies/types used below: import { primaryCatalogue } from "./primaryCatalogue.js";. Importing a function does not call it.
3	`describe("distributor primary catalogue", () => {`	Continues the surrounding declaration/expression or text: describe("distributor primary catalogue", () => {. Read it with the preceding opening statement (import { primaryCatalogue } from "./primaryCatalogue.js";); it is not a standalone business operation.
4	`  it("keeps only product-linked, matching-region Primary schemes without inventing prices", async () => {`	Continues the surrounding declaration/expression or text: it("keeps only product-linked, matching-region Primary schemes without inventing prices", async () => {. Read it with the preceding opening statement (describe("distributor primary catalogue", () => {); it is not a standalone business operation.
5	`    const queries: string[] = [];`	Declares/initializes local data used by the surrounding operation: const queries: string[] = [];. Collection contents and assignments below determine its purpose.
6	`    const result = await primaryCatalogue(`	Waits for this asynchronous operation before continuing: const result = await primaryCatalogue(. The returned result/error must still be handled.
7	`      { Id: "dist", Geography__r: { Name: "North" } },`	Continues the surrounding declaration/expression or text: { Id: "dist", Geography__r: { Name: "North" } },. Read it with the preceding opening statement (const result = await primaryCatalogue(); it is not a standalone business operation.
8	`      async (query) => {`	Continues the surrounding declaration/expression or text: async (query) => {. Read it with the preceding opening statement ({ Id: "dist", Geography__r: { Name: "North" } },); it is not a standalone business operation.
9	`        queries.push(query);`	Calls the named method: queries.push(query);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
10	`        return query.includes("FROM Product__c")`	Returns query.includes("FROM Product__c") to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
11	`          ? [{ Id: "p", Name: "Product", DMS_Case_Price__c: null }]`	Continues the surrounding declaration/expression or text: ? [{ Id: "p", Name: "Product", DMS_Case_Price__c: null }]. Read it with the preceding opening statement (return query.includes("FROM Product__c")); it is not a standalone business operation.
12	`          : [`	Continues the surrounding declaration/expression or text: : [. Read it with the preceding opening statement (? [{ Id: "p", Name: "Product", DMS_Case_Price__c: null }]); it is not a standalone business operation.
13	`            { Id: "direct", Product__c: "p", Region__c: "North" },`	Continues the surrounding declaration/expression or text: { Id: "direct", Product__c: "p", Region__c: "North" },. Read it with the preceding opening statement (: []); it is not a standalone business operation.
14	`            { Id: "linked", Scheme_Products__r: { records: [{ Product__c: "p" }] } },`	Continues the surrounding declaration/expression or text: { Id: "linked", Scheme_Products__r: { records: [{ Product__c: "p" }] } },. Read it with the preceding opening statement ({ Id: "direct", Product__c: "p", Region__c: "North" },); it is not a standalone business operation.
15	`            { Id: "other-region", Product__c: "p", Region__c: "South" },`	Continues the surrounding declaration/expression or text: { Id: "other-region", Product__c: "p", Region__c: "South" },. Read it with the preceding opening statement ({ Id: "linked", Scheme_Products__r: { records: [{ Product__c: "p" }] } },); it is not a standalone business operation.
16	`            { Id: "other-product", Product__c: "q" },`	Continues the surrounding declaration/expression or text: { Id: "other-product", Product__c: "q" },. Read it with the preceding opening statement ({ Id: "other-region", Product__c: "p", Region__c: "South" },); it is not a standalone business operation.
17	`          ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`      },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20	`    expect(result.products[0].schemes.map((s: any) => s.Id)).toEqual(["direct", "linked"]);`	Test assertion comparing an expected outcome to actual behavior: expect(result.products[0].schemes.map((s: any) => s.Id)).toEqual(["direct", "linked"]);. A mismatch fails the test.
21	`    expect(result.products[0].DMS_Case_Price__c).toBeNull();`	Test assertion comparing an expected outcome to actual behavior: expect(result.products[0].DMS_Case_Price__c).toBeNull();. A mismatch fails the test.

Line	Source code	Explanation / reading note
22	`    expect(queries[1]).toContain("Sales_Channel__c='Primary'");`	Test assertion comparing an expected outcome to actual behavior: expect(queries[1]).toContain("Sales_Channel__c='Primary'");. A mismatch fails the test.
23	`    expect(queries[1]).toContain("End_Date__c>=TODAY");`	Test assertion comparing an expected outcome to actual behavior: expect(queries[1]).toContain("End_Date__c>=TODAY");. A mismatch fails the test.
24	`    expect(queries[1]).toContain("Start_Date__c<=TODAY");`	Test assertion comparing an expected outcome to actual behavior: expect(queries[1]).toContain("Start_Date__c<=TODAY");. A mismatch fails the test.
25	`    expect(queries[1]).toContain("Outlet_Type__c=null");`	Test assertion comparing an expected outcome to actual behavior: expect(queries[1]).toContain("Outlet_Type__c=null");. A mismatch fails the test.
26	`    expect(queries.every((q) => !q.includes("LIMIT"))).toBe(true);`	Test assertion comparing an expected outcome to actual behavior: expect(queries.every((q) => !q.includes("LIMIT"))).toBe(true);. A mismatch fails the test.
27	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
28	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/dms/primaryCatalogue.ts

Fetches active sellable products and date/channel/product/geography-qualified Primary schemes for the authenticated distributor.

26 numbered source lines | SHA-256 741a69907c1201a5571dbcce4f0d0ab9ac7bb410e60d5f6dd881c070ad063b6d

Line	Source code	Explanation / reading note
1	`type ReadRecords = (query: string) => Promise<any[]>;`	Defines a compile-time data contract: type ReadRecords = (query: string) => Promise<any[]>;. TypeScript types do not validate untrusted runtime JSON by themselves.
2		Blank line separating logical sections; no executable operation.
3	`/** Read-only catalogue; final eligibility and all financial values are owned by Apex. */`	Developer comment/documentation: Read-only catalogue; final eligibility and all financial values are owned by Apex. */ It is not executed.
4	`export async function primaryCatalogue(distributor: any, records: ReadRecords) {`	Declares a callable function/method: export async function primaryCatalogue(distributor: any, records: ReadRecords) {. Parameters supply its inputs; the following block implements the operation.
5	`  const products = await records(`	Waits for this asynchronous operation before continuing: const products = await records(. The returned result/error must still be handled.
6	`    "SELECT Id,Name,Product_Code__c,Units_Per_Case__c,DMS_Case_Price__c,GST_Percent__c FROM Product__c WHERE Active__c=true AND Sellable__c=true ORDER BY Name",`	Assigns the right-hand expression to the named variable/property: "SELECT Id,Name,Product_Code__c,Units_Per_Case__c,DMS_Case_Price__c,GST_Percent__c FROM Product__c WHERE Active__c=true AND Sellable__c=true ORDER BY Name",. This is in-memory unless it is later persisted by an explicit call.
7	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
8	`  const schemes = await records(`	Waits for this asynchronous operation before continuing: const schemes = await records(. The returned result/error must still be handled.
9	` "SELECT Id,Name,Product__c,Region__c,Minimum_Cases__c,Free_Cases__c,Free_Product__r.Name,Discount_Percent__c,Discount_Amount__c,Free_Gift__c,Gift_Quantity__c,(SELECT Product__c FROM Scheme_Products__r WHERE Active__c=true) FROM Scheme__c WHERE Active__c=true AND Sales_Channel__c='Primary' AND Outlet_Type__c=null AND (Start_Date__c=null OR Start_Date__c<=TODAY) AND (End_Date__c=null OR End_Date__c>=TODAY) ORDER BY Name",`	Assigns the right-hand expression to the named variable/property: "SELECT Id,Name,Product__c,Region__c,Minimum_Cases__c,Free_Cases__c,Free_Product__r.Name,Discount_Percent__c,Discount_Amount__c,Free_Gift__c,Gift_Quantity__c,(SELECT Product__c FROM Scheme_Products__r. This is in-memory unless it is later persisted by an explicit call.
10	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
11	`  return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
12	`    distributor,`	Continues the surrounding declaration/expression or text: distributor,. Read it with the preceding opening statement (return {); it is not a standalone business operation.
13	`    products: products.map((product) => ({`	Sets/declares the named object property or style/type member: products: products.map((product) => ({. Interpret it in the enclosing object, props or type definition.
14	`      ...product,`	Continues the surrounding declaration/expression or text: ...product,. Read it with the preceding opening statement (products: products.map((product) => ({); it is not a standalone business operation.
15	`      schemes: schemes.filter(`	Sets/declares the named object property or style/type member: schemes: schemes.filter(. Interpret it in the enclosing object, props or type definition.
16	`        (scheme) =>`	Continues the surrounding declaration/expression or text: (scheme) =>. Read it with the preceding opening statement (schemes: schemes.filter(); it is not a standalone business operation.
17	`          (!scheme.Region__c || scheme.Region__c === distributor.Geography__r?.Name) &&`	Continues the surrounding declaration/expression or text: (!scheme.Region__c || scheme.Region__c === distributor.Geography__r?.Name) &&. Read it with the preceding opening statement ((scheme) =>); it is not a standalone business operation.
18	`          (scheme.Product__c === product.Id ||`	Continues the surrounding declaration/expression or text: (scheme.Product__c === product.Id ||. Read it with the preceding opening statement ((!scheme.Region__c || scheme.Region__c === distributor.Geography__r?.Name) &&); it is not a standalone business operation.
19	`            scheme.Scheme_Products__r?.records?.some(`	Transforms/selects/aggregates collection values with the callback shown here: scheme.Scheme_Products__r?.records?.some(. Read the callback body and result assignment together.
20	`              (link: any) => link.Product__c === product.Id,`	Continues the surrounding declaration/expression or text: (link: any) => link.Product__c === product.Id,. Read it with the preceding opening statement (scheme.Scheme_Products__r?.records?.some(); it is not a standalone business operation.
21	`            )),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
22	`      ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
23	`    })),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
24	`    retrievedAt: new Date().toISOString(),`	Sets/declares the named object property or style/type member: retrievedAt: new Date().toISOString(),. Interpret it in the enclosing object, props or type definition.
25	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
26	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/dms/reports.test.ts

Regression tests for reports. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

159 numbered source lines | SHA-256 7a4ae4abdddce672bbdc8feb34d8184d089d8ed116042993a0effbfc7485a5e0

Line	Source code	Explanation / reading note
1	`import { describe, it, expect } from "vitest";`	Imports dependencies/types used below: import { describe, it, expect } from "vitest";. Importing a function does not call it.
2	`import { calculateReports, distributorReports, reportPeriod } from "./reports.js";`	Imports dependencies/types used below: import { calculateReports, distributorReports, reportPeriod } from "./reports.js";. Importing a function does not call it.
3	`const now = new Date("2026-10-21T08:00:00Z");`	Declares/initializes local data used by the surrounding operation: const now = new Date("2026-10-21T08:00:00Z");. Collection contents and assignments below determine its purpose.
4	`const period = reportPeriod(now);`	Declares/initializes local data used by the surrounding operation: const period = reportPeriod(now);. Collection contents and assignments below determine its purpose.
5	`function fixture() {`	Declares a callable function/method: function fixture() {. Parameters supply its inputs; the following block implements the operation.
6	`  return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
7	`    outlets: [1, 2, 3].map((n) => ({`	Sets/declares the named object property or style/type member: outlets: [1, 2, 3].map((n) => ({. Interpret it in the enclosing object, props or type definition.
8	`      Id: `r${n}`,`	Declares/initializes local data used by the surrounding operation: Id: `r${n}`,. Collection contents and assignments below determine its purpose.
9	`      Active__c: n !== 3,`	Sets/declares the named object property or style/type member: Active__c: n !== 3,. Interpret it in the enclosing object, props or type definition.
10	`      Beat__c: "b1",`	Sets/declares the named object property or style/type member: Beat__c: "b1",. Interpret it in the enclosing object, props or type definition.
11	`      Beat__r: { Name: "Central beat" },`	Sets/declares the named object property or style/type member: Beat__r: { Name: "Central beat" },. Interpret it in the enclosing object, props or type definition.
12	`      Geography__c: "g1",`	Sets/declares the named object property or style/type member: Geography__c: "g1",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
13	`Geography__r: { Name: "Area" },`	Sets/declares the named object property or style/type member: Geography__r: { Name: "Area" },. Interpret it in the enclosing object, props or type definition.
14	`})),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
15	`orders: [`	Sets/declares the named object property or style/type member: orders: [. Interpret it in the enclosing object, props or type definition.
16	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (orders: []); it is not a standalone business operation.
17	`Id: "o1",`	Declares/initializes local data used by the surrounding operation: Id: "o1",. Collection contents and assignments below determine its purpose.
18	`Retailer__c: "r1",`	Sets/declares the named object property or style/type member: Retailer__c: "r1",. Interpret it in the enclosing object, props or type definition.
19	`Visit__c: "v1",`	Sets/declares the named object property or style/type member: Visit__c: "v1",. Interpret it in the enclosing object, props or type definition.
20	`Order_Date__c: "2026-10-10",`	Sets/declares the named object property or style/type member: Order_Date__c: "2026-10-10",. Interpret it in the enclosing object, props or type definition.
21	`Total_Amount__c: 100,`	Sets/declares the named object property or style/type member: Total_Amount__c: 100,. Interpret it in the enclosing object, props or type definition.
22	`Visit__r: { Employee__c: "e1", Employee__r: { Name: "Employee" } },`	Sets/declares the named object property or style/type member: Visit__r: { Employee__c: "e1", Employee__r: { Name: "Employee" } },. Interpret it in the enclosing object, props or type definition.
23	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
25	`Id: "o2",`	Declares/initializes local data used by the surrounding operation: Id: "o2",. Collection contents and assignments below determine its purpose.
26	`Retailer__c: "r1",`	Sets/declares the named object property or style/type member: Retailer__c: "r1",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
27	`Visit__c: "v1",`	Sets/declares the named object property or style/type member: Visit__c: "v1",. Interpret it in the enclosing object, props or type definition.
28	`Order_Date__c: "2026-10-10",`	Sets/declares the named object property or style/type member: Order_Date__c: "2026-10-10",. Interpret it in the enclosing object, props or type definition.
29	`Total_Amount__c: 50,`	Sets/declares the named object property or style/type member: Total_Amount__c: 50,. Interpret it in the enclosing object, props or type definition.
30	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
32	`Id: "o3",`	Declares/initializes local data used by the surrounding operation: Id: "o3",. Collection contents and assignments below determine its purpose.
33	`Retailer__c: "r2",`	Sets/declares the named object property or style/type member: Retailer__c: "r2",. Interpret it in the enclosing object, props or type definition.
34	`Order_Date__c: "2026-09-10",`	Sets/declares the named object property or style/type member: Order_Date__c: "2026-09-10",. Interpret it in the enclosing object, props or type definition.
35	`Total_Amount__c: 80,`	Sets/declares the named object property or style/type member: Total_Amount__c: 80,. Interpret it in the enclosing object, props or type definition.
36	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
37	`],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`lines: [`	Sets/declares the named object property or style/type member: lines: [. Interpret it in the enclosing object, props or type definition.
39	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (lines: []); it is not a standalone business operation.
40	`Sales_Order__c: "o1",`	Sets/declares the named object property or style/type member: Sales_Order__c: "o1",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
41	`Product__c: "p1",`	Sets/declares the named object property or style/type member: Product__c: "p1",. Interpret it in the enclosing object, props or type definition.
42	`Product__r: { Name: "Product" },`	Sets/declares the named object property or style/type member: Product__r: { Name: "Product" },. Interpret it in the enclosing object, props or type definition.
43	`Line_Amount__c: 90,`	Sets/declares the named object property or style/type member: Line_Amount__c: 90,. Interpret it in the enclosing object, props or type definition.
44	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
45	`],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
46	`visits: [`	Sets/declares the named object property or style/type member: visits: [. Interpret it in the enclosing object, props or type definition.
47	`{ Id: "v1", Retailer__c: "r1", Status__c: "Completed" },`	Continues the surrounding declaration/expression or text: { Id: "v1", Retailer__c: "r1", Status__c: "Completed" },. Read it with the preceding opening statement (visits: []); it is not a standalone business operation.
48	`{ Id: "v2", Retailer__c: "r2", Status__c: "Planned" },`	Continues the surrounding declaration/expression or text: { Id: "v2", Retailer__c: "r2", Status__c: "Planned" },. Read it with the preceding opening statement ({ Id: "v1", Retailer__c: "r1", Status__c: "Completed" },); it is not a standalone business operation.
49	`],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
50	`plans: [{ Beat__c: "b1" }, { Beat__c: "b1" }],`	Sets/declares the named object property or style/type member: plans: [{ Beat__c: "b1" }, { Beat__c: "b1" }],. Interpret it in the enclosing object, props or type definition.
51	`inventory: [`	Sets/declares the named object property or style/type member: inventory: [. Interpret it in the enclosing object, props or type definition.
52	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (inventory: []); it is not a standalone business operation.
53	`Id: "i1",`	Declares/initializes local data used by the surrounding operation: Id: "i1",. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
54	`Product__c: "p1",`	Sets/declares the named object property or style/type member: Product__c: "p1",. Interpret it in the enclosing object, props or type definition.
55	`On_Hand_Pieces__c: 10,`	Sets/declares the named object property or style/type member: On_Hand_Pieces__c: 10,. Interpret it in the enclosing object, props or type definition.
56	`Available_Pieces__c: 8,`	Sets/declares the named object property or style/type member: Available_Pieces__c: 8,. Interpret it in the enclosing object, props or type definition.
57	`Expiry_Date__c: "2026-11-01",`	Sets/declares the named object property or style/type member: Expiry_Date__c: "2026-11-01",. Interpret it in the enclosing object, props or type definition.
58	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
59	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
60	`Id: "i2",`	Declares/initializes local data used by the surrounding operation: Id: "i2",. Collection contents and assignments below determine its purpose.
61	`Product__c: "p2",`	Sets/declares the named object property or style/type member: Product__c: "p2",. Interpret it in the enclosing object, props or type definition.
62	`On_Hand_Pieces__c: 5,`	Sets/declares the named object property or style/type member: On_Hand_Pieces__c: 5,. Interpret it in the enclosing object, props or type definition.
63	`Available_Pieces__c: 5,`	Sets/declares the named object property or style/type member: Available_Pieces__c: 5,. Interpret it in the enclosing object, props or type definition.
64	`Expiry_Date__c: "2026-10-20",`	Sets/declares the named object property or style/type member: Expiry_Date__c: "2026-10-20",. Interpret it in the enclosing object, props or type definition.
65	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
66	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
67	`Id: "i3",`	Declares/initializes local data used by the surrounding operation: Id: "i3",. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
68	`Product__c: "p3",`	Sets/declares the named object property or style/type member: Product__c: "p3",. Interpret it in the enclosing object, props or type definition.
69	`On_Hand_Pieces__c: 0,`	Sets/declares the named object property or style/type member: On_Hand_Pieces__c: 0,. Interpret it in the enclosing object, props or type definition.
70	`Available_Pieces__c: 0,`	Sets/declares the named object property or style/type member: Available_Pieces__c: 0,. Interpret it in the enclosing object, props or type definition.
71	`Expiry_Date__c: "2026-10-21",`	Sets/declares the named object property or style/type member: Expiry_Date__c: "2026-10-21",. Interpret it in the enclosing object, props or type definition.
72	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
73	`],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
74	`movement: [{ Product__c: "p1", Stock_Out_Pieces__c: 2 }],`	Sets/declares the named object property or style/type member: movement: [{ Product__c: "p1", Stock_Out_Pieces__c: 2 }],. Interpret it in the enclosing object, props or type definition.
75	`targets: [`	Sets/declares the named object property or style/type member: targets: [. Interpret it in the enclosing object, props or type definition.
76	`{ Month__c: "2026-10-01", Target_Amount__c: 300 },`	Continues the surrounding declaration/expression or text: { Month__c: "2026-10-01", Target_Amount__c: 300 },. Read it with the preceding opening statement (targets: []); it is not a standalone business operation.
77	`{ Month__c: "2026-10-01", Product__c: "p1", Target_Amount__c: 200 },`	Continues the surrounding declaration/expression or text: { Month__c: "2026-10-01", Product__c: "p1", Target_Amount__c: 200 },. Read it with the preceding opening statement ({ Month__c: "2026-10-01", Target_Amount__c: 300 },); it is not a standalone business operation.
78	`],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
79	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
80	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
81	`describe("DMS management reports", () => {`	Continues the surrounding declaration/expression or text: describe("DMS management reports", () => {. Read it with the preceding opening statement (}); it is not a standalone business operation.
82	`  it("uses India calendar month across year and UTC midnight boundaries", () => {`	Continues the surrounding declaration/expression or text: it("uses India calendar month across year and UTC midnight boundaries", () => {. Read it with the preceding opening statement (describe("DMS management reports", () => {); it is not a standalone business operation.
83	`    const p = reportPeriod(new Date("2026-12-31T20:00:00Z"));`	Declares/initializes local data used by the surrounding operation: const p = reportPeriod(new Date("2026-12-31T20:00:00Z"));. Collection contents and assignments below determine its purpose.
84	`    expect(p.today).toBe("2027-01-01");`	Test assertion comparing an expected outcome to actual behavior: expect(p.today).toBe("2027-01-01");. A mismatch fails the test.
85	`    expect(p.previous).toBe("2026-12-01");`	Test assertion comparing an expected outcome to actual behavior: expect(p.previous).toBe("2026-12-01");. A mismatch fails the test.
86	`    expect(p.priorDay).toBe("2026-12-31");`	Test assertion comparing an expected outcome to actual behavior: expect(p.priorDay).toBe("2026-12-31");. A mismatch fails the test.
87	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
88	`  it("deduplicates buyers, planned shops and productive visits, excluding inactive coverage", () => {`	Continues the surrounding declaration/expression or text: it("deduplicates buyers, planned shops and productive visits, excluding inactive coverage", () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
89	`    const r = calculateReports(fixture(), period, now);`	Declares/initializes local data used by the surrounding operation: const r = calculateReports(fixture(), period, now);. Collection contents and assignments below determine its purpose.
90	`    expect(r.sales.current).toBe(150);`	Test assertion comparing an expected outcome to actual behavior: expect(r.sales.current).toBe(150);. A mismatch fails the test.
91	`    expect(r.sales.previous).toBe(80);`	Test assertion comparing an expected outcome to actual behavior: expect(r.sales.previous).toBe(80);. A mismatch fails the test.
92	`    expect(r.sales.achievement).toBe(50);`	Test assertion comparing an expected outcome to actual behavior: expect(r.sales.achievement).toBe(50);. A mismatch fails the test.

Line	Source code	Explanation / reading note
93	`expect(r.sales.byProduct[0].current).toBe(90);`	Test assertion comparing an expected outcome to actual behavior: expect(r.sales.byProduct[0].current).toBe(90);. A mismatch fails the test.
94	`expect(r.sales.byProduct[0].target).toBe(200);`	Test assertion comparing an expected outcome to actual behavior: expect(r.sales.byProduct[0].target).toBe(200);. A mismatch fails the test.
95	`expect(r.beats[0]).toMatchObject({`	Test assertion comparing an expected outcome to actual behavior: expect(r.beats[0]).toMatchObject({. A mismatch fails the test.
96	`assigned: 2,`	Sets/declares the named object property or style/type member: assigned: 2,. Interpret it in the enclosing object, props or type definition.
97	`planned: 2,`	Sets/declares the named object property or style/type member: planned: 2,. Interpret it in the enclosing object, props or type definition.
98	`visited: 1,`	Sets/declares the named object property or style/type member: visited: 1,. Interpret it in the enclosing object, props or type definition.
99	`productive: 1,`	Sets/declares the named object property or style/type member: productive: 1,. Interpret it in the enclosing object, props or type definition.
100	`productivity: 100,`	Sets/declares the named object property or style/type member: productivity: 100,. Interpret it in the enclosing object, props or type definition.
101	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
102	`expect(r.coverage).toMatchObject({ outlets: 2, buyers: 1, percent: 50 });`	Test assertion comparing an expected outcome to actual behavior: expect(r.coverage).toMatchObject({ outlets: 2, buyers: 1, percent: 50 });. A mismatch fails the test.
103	`expect(r.stock).toMatchObject({`	Test assertion comparing an expected outcome to actual behavior: expect(r.stock).toMatchObject({. A mismatch fails the test.
104	`onHand: 15,`	Sets/declares the named object property or style/type member: onHand: 15,. Interpret it in the enclosing object, props or type definition.
105	`available: 13,`	Sets/declares the named object property or style/type member: available: 13,. Interpret it in the enclosing object, props or type definition.
106	`nearExpiry: 1,`	Sets/declares the named object property or style/type member: nearExpiry: 1,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
107	`      expired: 1,`	Sets/declares the named object property or style/type member: expired: 1,. Interpret it in the enclosing object, props or type definition.
108	`      noRecentSales: 1,`	Sets/declares the named object property or style/type member: noRecentSales: 1,. Interpret it in the enclosing object, props or type definition.
109	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
110	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
111	`  it("does not fabricate targets, empty coverage or slow movement for empty stock", () => {`	Continues the surrounding declaration/expression or text: it("does not fabricate targets, empty coverage or slow movement for empty stock", () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
112	`    const r = calculateReports(`	Declares/initializes local data used by the surrounding operation: const r = calculateReports(. Collection contents and assignments below determine its purpose.
113	`      {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (const r = calculateReports(); it is not a standalone business operation.
114	`        outlets: [],`	Sets/declares the named object property or style/type member: outlets: [],. Interpret it in the enclosing object, props or type definition.
115	`        orders: [],`	Sets/declares the named object property or style/type member: orders: [],. Interpret it in the enclosing object, props or type definition.
116	`        lines: [],`	Sets/declares the named object property or style/type member: lines: [],. Interpret it in the enclosing object, props or type definition.
117	`        visits: [],`	Sets/declares the named object property or style/type member: visits: [],. Interpret it in the enclosing object, props or type definition.
118	`        plans: [],`	Sets/declares the named object property or style/type member: plans: [],. Interpret it in the enclosing object, props or type definition.
119	`        inventory: [],`	Sets/declares the named object property or style/type member: inventory: [],. Interpret it in the enclosing object, props or type definition.
120	`        movement: [],`	Sets/declares the named object property or style/type member: movement: [],. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
121	`        targets: [],`	Sets/declares the named object property or style/type member: targets: [],. Interpret it in the enclosing object, props or type definition.
122	`      },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
123	`      period,`	Continues the surrounding declaration/expression or text: period,. Read it with the preceding opening statement (},); it is not a standalone business operation.
124	`      now,`	Continues the surrounding declaration/expression or text: now,. Read it with the preceding opening statement (period,); it is not a standalone business operation.
125	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
126	`    expect(r.sales.target).toBeNull();`	Test assertion comparing an expected outcome to actual behavior: expect(r.sales.target).toBeNull();. A mismatch fails the test.
127	`    expect(r.sales.achievement).toBeNull();`	Test assertion comparing an expected outcome to actual behavior: expect(r.sales.achievement).toBeNull();. A mismatch fails the test.
128	`    expect(r.coverage.percent).toBeNull();`	Test assertion comparing an expected outcome to actual behavior: expect(r.coverage.percent).toBeNull();. A mismatch fails the test.
129	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
130	`  it("has no 200-record report cap and applies distributor and valid-order scopes to every query", async () => {`	Continues the surrounding declaration/expression or text: it("has no 200-record report cap and applies distributor and valid-order scopes to every query", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
131	`    const queries: string[] = [],`	Declares/initializes local data used by the surrounding operation: const queries: string[] = [],. Collection contents and assignments below determine its purpose.
132	`      id = "a0T000000000001AAA";`	Assigns the right-hand expression to the named variable/property: id = "a0T000000000001AAA";. This is in-memory unless it is later persisted by an explicit call.
133	`    await distributorReports(`	Waits for this asynchronous operation before continuing: await distributorReports(. The returned result/error must still be handled.
134	`      id,`	Continues the surrounding declaration/expression or text: id,. Read it with the preceding opening statement (await distributorReports(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
135	`async (query) => {`	Continues the surrounding declaration/expression or text: async (query) => {. Read it with the preceding opening statement (id,); it is not a standalone business operation.
136	`queries.push(query);`	Calls the named method: queries.push(query);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
137	`return [];`	Returns [] to the caller (or begins returned UI markup) and ends this execution path.
138	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
139	`now,`	Continues the surrounding declaration/expression or text: now,. Read it with the preceding opening statement (},); it is not a standalone business operation.
140	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
141	`expect(queries).toHaveLength(8);`	Test assertion comparing an expected outcome to actual behavior: expect(queries).toHaveLength(8);. A mismatch fails the test.
142	`for (const query of queries) {`	Repeats work over the specified records/items or while this condition holds: for (const query of queries) {. Check where queries/writes occur relative to the loop.
143	`expect(query).toContain(id);`	Test assertion comparing an expected outcome to actual behavior: expect(query).toContain(id);. A mismatch fails the test.
144	`expect(query).not.toContain("LIMIT 200");`	Test assertion comparing an expected outcome to actual behavior: expect(query).not.toContain("LIMIT 200");. A mismatch fails the test.
145	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
146	`expect(queries.find((q) => q.includes("FROM Sales_Order__c"))).toContain(`	Test assertion comparing an expected outcome to actual behavior: expect(queries.find((q) => q.includes("FROM Sales_Order__c"))).toContain(. A mismatch fails the test.
147	`"Status__c IN ('Submitted','Fulfilled')",`	Continues the surrounding declaration/expression or text: "Status__c IN ('Submitted','Fulfilled')",. Read it with the preceding opening statement (expect(queries.find((q) => q.includes("FROM Sales_Order__c"))).toContain(); it is not a standalone business operation.
148	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
149	`    expect(queries.find((q) => q.includes("FROM Sales_Order__c"))).toContain(`	Test assertion comparing an expected outcome to actual behavior: expect(queries.find((q) => q.includes("FROM Sales_Order__c"))).toContain(. A mismatch fails the test.
150	`      "DMS_Status__c!='Rejected'",`	Continues the surrounding declaration/expression or text: "DMS_Status__c!='Rejected'",. Read it with the preceding opening statement (expect(queries.find((q) => q.includes("FROM Sales_Order__c"))).toContain(); it is not a standalone business operation.
151	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
152	`    expect(queries.find((q) => q.includes("FROM DMS_Invoice_Line__c"))).toContain(`	Test assertion comparing an expected outcome to actual behavior: expect(queries.find((q) => q.includes("FROM DMS_Invoice_Line__c"))).toContain(. A mismatch fails the test.
153	`      "Invoice__r.Status__c='Issued'",`	Assigns the right-hand expression to the named variable/property: "Invoice__r.Status__c='Issued'",. This is in-memory unless it is later persisted by an explicit call.
154	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
155	`    await expect(distributorReports("' forged", async () => [])).rejects.toThrow(`	Test assertion comparing an expected outcome to actual behavior: await expect(distributorReports("' forged", async () => [])).rejects.toThrow(. A mismatch fails the test.
156	`      "Invalid distributor",`	Continues the surrounding declaration/expression or text: "Invalid distributor",. Read it with the preceding opening statement (await expect(distributorReports("' forged", async () => [])).rejects.toThrow(); it is not a standalone business operation.
157	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
158	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
159	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/dms/reports.ts

Builds India-time reporting periods, retrieves paginated Salesforce data and calculates sales/target, beat productivity, outlet coverage and stock movement/expiry metrics.

220 numbered source lines | SHA-256 0135473e318e0b7c0d83100d8329baeab45317b26c0f18ea1ecaf44438f6422b

Line	Source code	Explanation / reading note
1	`type Row = Record<string, any>;`	Defines a compile-time data contract: type Row = Record<string, any>;. TypeScript types do not validate untrusted runtime JSON by themselves.
2	`type Reader = (query: string) => Promise<Row[]>;`	Defines a compile-time data contract: type Reader = (query: string) => Promise<Row[]>;. TypeScript types do not validate untrusted runtime JSON by themselves.
3	`const amount = (value: unknown) => Number(value || 0);`	Declares/initializes local data used by the surrounding operation: const amount = (value: unknown) => Number(value || 0);. Collection contents and assignments below determine its purpose.
4	`const percent = (part: number, total: number) =>`	Declares/initializes local data used by the surrounding operation: const percent = (part: number, total: number) =>. Collection contents and assignments below determine its purpose.
5	`  total > 0 ? Math.round((part / total) * 1000) / 10 : null;`	Calls the named method: total > 0 ? Math.round((part / total) * 1000) / 10 : null;. Its implementation defines the side effect/result; use the symbol/file index to follow it.
6		Blank line separating logical sections; no executable operation.
7	`/** Calendar dates use the business timezone, including the UTC/India midnight boundary. */`	Developer comment/documentation: Calendar dates use the business timezone, including the UTC/India midnight boundary. */ It is not executed.
8	`export function reportPeriod(now = new Date()) {`	Declares a callable function/method: export function reportPeriod(now = new Date()) {. Parameters supply its inputs; the following block implements the operation.
9	`  const today = new Intl.DateTimeFormat("en-CA", {`	Declares/initializes local data used by the surrounding operation: const today = new Intl.DateTimeFormat("en-CA", {. Collection contents and assignments below determine its purpose.
10	`    timeZone: "Asia/Kolkata",`	Sets/declares the named object property or style/type member: timeZone: "Asia/Kolkata",. Interpret it in the enclosing object, props or type definition.
11	`    year: "numeric",`	Sets/declares the named object property or style/type member: year: "numeric",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
12	`    month: "2-digit",`	Sets/declares the named object property or style/type member: month: "2-digit",. Interpret it in the enclosing object, props or type definition.
13	`    day: "2-digit",`	Sets/declares the named object property or style/type member: day: "2-digit",. Interpret it in the enclosing object, props or type definition.
14	`  }).format(now);`	Continues the surrounding declaration/expression or text: }).format(now);. Read it with the preceding opening statement (day: "2-digit",); it is not a standalone business operation.
15	`  const [year, month] = today.split("-").map(Number);`	Declares/initializes local data used by the surrounding operation: const [year, month] = today.split("-").map(Number);. Collection contents and assignments below determine its purpose.
16	`  const start = `${year}-${String(month).padStart(2, "0")}-01`;`	Declares/initializes local data used by the surrounding operation: const start = `${year}-${String(month).padStart(2, "0")}-01`;. Collection contents and assignments below determine its purpose.
17	`  const previous = new Date(Date.UTC(year, month - 2, 1)).toISOString().slice(0, 10);`	Declares/initializes local data used by the surrounding operation: const previous = new Date(Date.UTC(year, month - 2, 1)).toISOString().slice(0, 10);. Collection contents and assignments below determine its purpose.
18	`  const priorDay = new Date(Date.UTC(year, month - 1, 0)).toISOString().slice(0, 10);`	Declares/initializes local data used by the surrounding operation: const priorDay = new Date(Date.UTC(year, month - 1, 0)).toISOString().slice(0, 10);. Collection contents and assignments below determine its purpose.
19	`  const shift = (days: number) =>`	Declares/initializes local data used by the surrounding operation: const shift = (days: number) =>. Collection contents and assignments below determine its purpose.
20	`    new Date(Date.parse(today + "T00:00:00Z") + days * 86400000).toISOString().slice(0, 10);`	Calls the named method: new Date(Date.parse(today + "T00:00:00Z") + days * 86400000).toISOString().slice(0, 10);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
21	`  return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
22	`    today,`	Continues the surrounding declaration/expression or text: today,. Read it with the preceding opening statement (return {); it is not a standalone business operation.
23	`    start,`	Continues the surrounding declaration/expression or text: start,. Read it with the preceding opening statement (today,); it is not a standalone business operation.
24	`    previous,`	Continues the surrounding declaration/expression or text: previous,. Read it with the preceding opening statement (start,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
25	`    priorDay,`	Continues the surrounding declaration/expression or text: priorDay,. Read it with the preceding opening statement (previous,); it is not a standalone business operation.
26	`    nearExpiry: shift(30),`	Sets/declares the named object property or style/type member: nearExpiry: shift(30),. Interpret it in the enclosing object, props or type definition.
27	`    movementFrom: shift(-30),`	Sets/declares the named object property or style/type member: movementFrom: shift(-30),. Interpret it in the enclosing object, props or type definition.
28	`    timezone: "Asia/Kolkata",`	Sets/declares the named object property or style/type member: timezone: "Asia/Kolkata",. Interpret it in the enclosing object, props or type definition.
29	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31		Blank line separating logical sections; no executable operation.
32	`export async function distributorReports(id: string, records: Reader, now = new Date()) {`	Declares a callable function/method: export async function distributorReports(id: string, records: Reader, now = new Date()) {. Parameters supply its inputs; the following block implements the operation.
33	`  if (!/^[a-zA-Z0-9]{18}$/.test(id)) throw new Error("Invalid distributor");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!/^[a-zA-Z0-9]{18}$/.test(id)) throw new Error("Invalid distributor");.
34	`  const period = reportPeriod(now);`	Declares/initializes local data used by the surrounding operation: const period = reportPeriod(now);. Collection contents and assignments below determine its purpose.
35	`  const outletScope = `SELECT Id FROM Retailer__c WHERE DMS_Distributor__c='${id}'`;`	Declares/initializes local data used by the surrounding operation: const outletScope = `SELECT Id FROM Retailer__c WHERE DMS_Distributor__c='${id}'`;. Collection contents and assignments below determine its purpose.
36	`  const orderScope = `DMS_Distributor__c='${id}' AND Order_Date__c>=${period.previous} AND Order_Date__c<=${period.today} AND Status__c IN ('Submitted','Fulfilled') AND (DMS_Status__c=null OR DMS_Status__c!='Rejected')`;`	Declares/initializes local data used by the surrounding operation: const orderScope = `DMS_Distributor__c='${id}' AND Order_Date__c>=${period.previous} AND Order_Date__c<=${period.today} AND Status__c IN ('Submitted','Fulfilled') AND (DMS_Status__c=null OR DMS_Status. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
37	`  // records() follows Salesforce nextRecordsUrl: reports must not use the UI's 200-row cap.`	Developer comment/documentation: records() follows Salesforce nextRecordsUrl: reports must not use the UI's 200-row cap. It is not executed.
38	`  const queries = {`	Declares/initializes local data used by the surrounding operation: const queries = {. Collection contents and assignments below determine its purpose.
39	`    outlets: `SELECT Id,Name,Active__c,Beat__c,Beat__r.Name,Geography__c,Geography__r.Name FROM Retailer__c WHERE DMS_Distributor__c='${id}'`,`	Sets/declares the named object property or style/type member: outlets: `SELECT Id,Name,Active__c,Beat__c,Beat__r.Name,Geography__c,Geography__r.Name FROM Retailer__c WHERE DMS_Distributor__c='${id}'`,. Interpret it in the enclosing object, props or type definition.
40	`    orders: `SELECT Id,Retailer__c,Visit__c,Visit__r.Employee__c,Visit__r.Employee__r.Name,Order_Date__c,Total_Amount__c FROM Sales_Order__c WHERE ${orderScope}`,`	Sets/declares the named object property or style/type member: orders: `SELECT Id,Retailer__c,Visit__c,Visit__r.Employee__c,Visit__r.Employee__r.Name,Order_Date__c,Total_Amount__c FROM Sales_Order__c WHERE ${orderScope}`,. Interpret it in the enclosing object, props or type definition.
41	`    lines: `SELECT Id,Product__c,Product__r.Name,Line_Amount__c,Sales_Order__c FROM Order_Item__c WHERE Sales_Order__c IN (SELECT Id FROM Sales_Order__c WHERE ${orderScope})`,`	Sets/declares the named object property or style/type member: lines: `SELECT Id,Product__c,Product__r.Name,Line_Amount__c,Sales_Order__c FROM Order_Item__c WHERE Sales_Order__c IN (SELECT Id FROM Sales_Order__c WHERE ${orderScope})`,. Interpret it in the enclosing object, props or type definition.
42	`    visits: `SELECT Id,Retailer__c,Status__c,Visit_Date__c FROM Visit__c WHERE Retailer__c IN (${outletScope}) AND Visit_Date__c>=${period.start} AND Visit_Date__c<=${period.today} AND Status__c!='Cancelled'`,`	Sets/declares the named object property or style/type member: visits: `SELECT Id,Retailer__c,Status__c,Visit_Date__c FROM Visit__c WHERE Retailer__c IN (${outletScope}) AND Visit_Date__c>=${period.start} AND Visit_Date__c<=${period.today} AND Status__c!='Cancell. Interpret it in the enclosing object, props or type definition.
43	`    plans: `SELECT Beat__c FROM PJP_Selected_Beat__c WHERE Beat__c IN (SELECT Beat__c FROM Retailer__c WHERE DMS_Distributor__c='${id}') AND PJP__r.Status__c='Approved' AND PJP__r.Planning_Start_Date__c<=${period.today} AND PJP__r.Planning_End_Date__c>=${period.start}`,`	Sets/declares the named object property or style/type member: plans: `SELECT Beat__c FROM PJP_Selected_Beat__c WHERE Beat__c IN (SELECT Beat__c FROM Retailer__c WHERE DMS_Distributor__c='${id}') AND PJP__r.Status__c='Approved' AND PJP__r.Planning_Start_Date__c<=. Interpret it in the enclosing object, props or type definition.
44	`    inventory: `SELECT Id,Product__c,Product__r.Name,Batch_Number__c,Expiry_Date__c,On_Hand_Pieces__c,Available_Pieces__c,Low_Stock__c,Last_Stock_Update__c FROM DMS_Inventory__c WHERE Distributor__c='${id}'`,`	Sets/declares the named object property or style/type member: inventory: `SELECT Id,Product__c,Product__r.Name,Batch_Number__c,Expiry_Date__c,On_Hand_Pieces__c,Available_Pieces__c,Low_Stock__c,Last_Stock_Update__c FROM DMS_Inventory__c WHERE Distributor__c='${id. Interpret it in the enclosing object, props or type definition.
45	`    movement: `SELECT Product__c,Stock_Out_Pieces__c FROM DMS_Invoice_Line__c WHERE Invoice__r.Distributor__c='${id}' AND Invoice__r.Status__c='Issued' AND Invoice__r.Invoice_Date__c>=${period.movementFrom} AND Invoice__r.Invoice_Date__c<=${period.today}`,`	Sets/declares the named object property or style/type member: movement: `SELECT Product__c,Stock_Out_Pieces__c FROM DMS_Invoice_Line__c WHERE Invoice__r.Distributor__c='${id}' AND Invoice__r.Status__c='Issued' AND Invoice__r.Invoice_Date__c>=${period.movementFro. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
46	`    targets: `SELECT Id,Month__c,Target_Amount__c,Employee__c,Employee__r.Name,Geography__c,Geography__r.Name,Product__c,Product__r.Name FROM DMS_Sales_Target__c WHERE Distributor__c='${id}' AND Month__c IN (${period.start},${period.previous})`,`	Sets/declares the named object property or style/type member: targets: `SELECT Id,Month__c,Target_Amount__c,Employee__c,Employee__r.Name,Geography__c,Geography__r.Name,Product__c,Product__r.Name FROM DMS_Sales_Target__c WHERE Distributor__c='${id}' AND Month__c . Interpret it in the enclosing object, props or type definition.
47	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48	`  const data: Record<string, Row[]> = {};`	Declares/initializes local data used by the surrounding operation: const data: Record<string, Row[]> = {};. Collection contents and assignments below determine its purpose.
49	`  for (const [key, query] of Object.entries(queries)) data[key] = await records(query);`	Waits for this asynchronous operation before continuing: for (const [key, query] of Object.entries(queries)) data[key] = await records(query);. The returned result/error must still be handled.
50	`  return calculateReports(data, period, now);`	Returns calculateReports(data, period, now) to the caller (or begins returned UI markup) and ends this execution path.
51	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
52		Blank line separating logical sections; no executable operation.
53	`export function calculateReports(`	Declares a callable function/method: export function calculateReports(. Parameters supply its inputs; the following block implements the operation.
54	`  data: Record<string, Row[]>,`	Sets/declares the named object property or style/type member: data: Record<string, Row[]>,. Interpret it in the enclosing object, props or type definition.
55	`  period: ReturnType<typeof reportPeriod>,`	Sets/declares the named object property or style/type member: period: ReturnType<typeof reportPeriod>,. Interpret it in the enclosing object, props or type definition.
56	`  now = new Date(),`	Assigns the right-hand expression to the named variable/property: now = new Date(),. This is in-memory unless it is later persisted by an explicit call.
57	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (now = new Date(),); it is not a standalone business operation.
58	`  const outlets = new Map(data.outlets.map((row) => [row.Id, row]));`	Declares/initializes local data used by the surrounding operation: const outlets = new Map(data.outlets.map((row) => [row.Id, row]));. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
59	`  const orderMap = new Map(data.orders.map((row) => [row.Id, row]));`	Declares/initializes local data used by the surrounding operation: const orderMap = new Map(data.orders.map((row) => [row.Id, row]));. Collection contents and assignments below determine its purpose.
60	`  const currentOrders = data.orders.filter((row) => row.Order_Date__c >= period.start);`	Declares/initializes local data used by the surrounding operation: const currentOrders = data.orders.filter((row) => row.Order_Date__c >= period.start);. Collection contents and assignments below determine its purpose.
61	`  const sales: any = {`	Declares/initializes local data used by the surrounding operation: const sales: any = {. Collection contents and assignments below determine its purpose.
62	`    current: 0,`	Sets/declares the named object property or style/type member: current: 0,. Interpret it in the enclosing object, props or type definition.
63	`    previous: 0,`	Sets/declares the named object property or style/type member: previous: 0,. Interpret it in the enclosing object, props or type definition.
64	`    target: null,`	Sets/declares the named object property or style/type member: target: null,. Interpret it in the enclosing object, props or type definition.
65	`    previousTarget: null,`	Sets/declares the named object property or style/type member: previousTarget: null,. Interpret it in the enclosing object, props or type definition.
66	`    achievement: null,`	Sets/declares the named object property or style/type member: achievement: null,. Interpret it in the enclosing object, props or type definition.
67	`    byEmployee: [],`	Sets/declares the named object property or style/type member: byEmployee: [],. Interpret it in the enclosing object, props or type definition.
68	`    byArea: [],`	Sets/declares the named object property or style/type member: byArea: [],. Interpret it in the enclosing object, props or type definition.
69	`    byProduct: [],`	Sets/declares the named object property or style/type member: byProduct: [],. Interpret it in the enclosing object, props or type definition.
70	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
71	`  const dimensions = {`	Declares/initializes local data used by the surrounding operation: const dimensions = {. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
72	`byEmployee: new Map<string, Row>(),`	Sets/declares the named object property or style/type member: byEmployee: new Map<string, Row>(),. Interpret it in the enclosing object, props or type definition.
73	`byArea: new Map<string, Row>(),`	Sets/declares the named object property or style/type member: byArea: new Map<string, Row>(),. Interpret it in the enclosing object, props or type definition.
74	`byProduct: new Map<string, Row>(),`	Sets/declares the named object property or style/type member: byProduct: new Map<string, Row>(),. Interpret it in the enclosing object, props or type definition.
75	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
76	`function group(kind: keyof typeof dimensions, id: string | undefined, name: string | undefined) {`	Declares a callable function/method: function group(kind: keyof typeof dimensions, id: string | undefined, name: string | undefined) {. Parameters supply its inputs; the following block implements the operation.
77	`const key = id || "unassigned";`	Declares/initializes local data used by the surrounding operation: const key = id || "unassigned";. Collection contents and assignments below determine its purpose.
78	`if (!dimensions[kind].has(key))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!dimensions[kind].has(key)).
79	`dimensions[kind].set(key, {`	Continues the surrounding declaration/expression or text: dimensions[kind].set(key, {. Read it with the preceding opening statement (if (!dimensions[kind].has(key))); it is not a standalone business operation.
80	`id: key,`	Sets/declares the named object property or style/type member: id: key,. Interpret it in the enclosing object, props or type definition.
81	`name: name || "Not assigned",`	Sets/declares the named object property or style/type member: name: name || "Not assigned",. Interpret it in the enclosing object, props or type definition.
82	`current: 0,`	Sets/declares the named object property or style/type member: current: 0,. Interpret it in the enclosing object, props or type definition.
83	`previous: 0,`	Sets/declares the named object property or style/type member: previous: 0,. Interpret it in the enclosing object, props or type definition.
84	`target: null,`	Sets/declares the named object property or style/type member: target: null,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
85	`previousTarget: null,`	Sets/declares the named object property or style/type member: previousTarget: null,. Interpret it in the enclosing object, props or type definition.
86	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
87	`return dimensions[kind].get(key)!;`	Returns dimensions[kind].get(key)! to the caller (or begins returned UI markup) and ends this execution path.
88	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
89	`for (const row of data.orders) {`	Repeats work over the specified records/items or while this condition holds: for (const row of data.orders) {. Check where queries/writes occur relative to the loop.
90	`const which = row.Order_Date__c >= period.start ? "current" : "previous";`	Declares/initializes local data used by the surrounding operation: const which = row.Order_Date__c >= period.start ? "current" : "previous";. Collection contents and assignments below determine its purpose.
91	`sales[which] += amount(row.Total_Amount__c);`	Assigns the right-hand expression to the named variable/property: sales[which] += amount(row.Total_Amount__c);. This is in-memory unless it is later persisted by an explicit call.
92	`group("byEmployee", row.Visit__r?.Employee__c, row.Visit__r?.Employee__r?.Name)[which] +=`	Continues the surrounding declaration/expression or text: group("byEmployee", row.Visit__r?.Employee__c, row.Visit__r?.Employee__r?.Name)[which] +=. Read it with the preceding opening statement (sales[which] += amount(row.Total_Amount__c);); it is not a standalone business operation.
93	`amount(row.Total_Amount__c);`	Continues the surrounding declaration/expression or text: amount(row.Total_Amount__c);. Read it with the preceding opening statement (group("byEmployee", row.Visit__r?.Employee__c, row.Visit__r?.Employee__r?.Name)[which] +=); it is not a standalone business operation.
94	`const outlet = outlets.get(row.Retailer__c);`	Declares/initializes local data used by the surrounding operation: const outlet = outlets.get(row.Retailer__c);. Collection contents and assignments below determine its purpose.
95	`group("byArea", outlet?.Geography__c, outlet?.Geography__r?.Name)[which] += amount(`	Assigns the right-hand expression to the named variable/property: group("byArea", outlet?.Geography__c, outlet?.Geography__r?.Name)[which] += amount(. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
96	`row.Total_Amount__c,`	Continues the surrounding declaration/expression or text: row.Total_Amount__c,. Read it with the preceding opening statement (group("byArea", outlet?.Geography__c, outlet?.Geography__r?.Name)[which] += amount(); it is not a standalone business operation.
97	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
98	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
99	`for (const row of data.lines) {`	Repeats work over the specified records/items or while this condition holds: for (const row of data.lines) {. Check where queries/writes occur relative to the loop.
100	`const order = orderMap.get(row.Sales_Order__c);`	Declares/initializes local data used by the surrounding operation: const order = orderMap.get(row.Sales_Order__c);. Collection contents and assignments below determine its purpose.
101	`if (order)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (order).
102	`group("byProduct", row.Product__c, row.Product__r?.Name)[`	Continues the surrounding declaration/expression or text: group("byProduct", row.Product__c, row.Product__r?.Name)[. Read it with the preceding opening statement (if (order)); it is not a standalone business operation.
103	`order.Order_Date__c >= period.start ? "current" : "previous"`	Continues the surrounding declaration/expression or text: order.Order_Date__c >= period.start ? "current" : "previous". Read it with the preceding opening statement (group("byProduct", row.Product__c, row.Product__r?.Name)[); it is not a standalone business operation.
104	`] += amount(row.Line_Amount__c);`	Assigns the right-hand expression to the named variable/property:] += amount(row.Line_Amount__c);. This is in-memory unless it is later persisted by an explicit call.
105	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
106	`for (const row of data.targets) {`	Repeats work over the specified records/items or while this condition holds: for (const row of data.targets) {. Check where queries/writes occur relative to the loop.
107	`const key = row.Month__c === period.start ? "target" : "previousTarget";`	Declares/initializes local data used by the surrounding operation: const key = row.Month__c === period.start ? "target" : "previousTarget";. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
108	`    const target = amount(row.Target_Amount__c);`	Declares/initializes local data used by the surrounding operation: const target = amount(row.Target_Amount__c);. Collection contents and assignments below determine its purpose.
109	`    if (row.Employee__c) group("byEmployee", row.Employee__c, row.Employee__r?.Name)[key] = target;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (row.Employee__c) group("byEmployee", row.Employee__c, row.Employee__r?.Name)[key] = target;.
110	`    else if (row.Geography__c)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: else if (row.Geography__c).
111	`      group("byArea", row.Geography__c, row.Geography__r?.Name)[key] = target;`	Assigns the right-hand expression to the named variable/property: group("byArea", row.Geography__c, row.Geography__r?.Name)[key] = target;. This is in-memory unless it is later persisted by an explicit call.
112	`    else if (row.Product__c) group("byProduct", row.Product__c, row.Product__r?.Name)[key] = target;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: else if (row.Product__c) group("byProduct", row.Product__c, row.Product__r?.Name)[key] = target;.
113	`    else sales[key] = target;`	Alternative branch taken when the preceding condition is false.
114	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
115	`  sales.achievement = percent(sales.current, sales.target || 0);`	Assigns the right-hand expression to the named variable/property: sales.achievement = percent(sales.current, sales.target || 0);. This is in-memory unless it is later persisted by an explicit call.
116	`  for (const [key, values] of Object.entries(dimensions))`	Repeats work over the specified records/items or while this condition holds: for (const [key, values] of Object.entries(dimensions)). Check where queries/writes occur relative to the loop.
117	`    sales[key] = [...values.values()].map((row) => ({`	Transforms/selects/aggregates collection values with the callback shown here: sales[key] = [...values.values()].map((row) => ({. Read the callback body and result assignment together.
118	`      ...row,`	Continues the surrounding declaration/expression or text: ...row,. Read it with the preceding opening statement (sales[key] = [...values.values()].map((row) => ({); it is not a standalone business operation.
119	`      achievement: percent(row.current, row.target || 0),`	Sets/declares the named object property or style/type member: achievement: percent(row.current, row.target || 0),. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
120	`    }));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
121	`  sales.basis =`	Continues the surrounding declaration/expression or text: sales.basis =. Read it with the preceding opening statement (}));); it is not a standalone business operation.
122	`    "Booked secondary orders: Submitted/Fulfilled, excluding distributor rejection. Not invoiced revenue or net of returns. Product breakdown uses line values; order totals may include tax.";`	Continues the surrounding declaration/expression or text: "Booked secondary orders: Submitted/Fulfilled, excluding distributor rejection. Not invoiced revenue or net of returns. Product breakdown uses line values; order totals may include tax.";. Read it with the preceding opening statement (sales.basis =); it is not a standalone business operation.
123		Blank line separating logical sections; no executable operation.
124	`  const plannedBeats = new Set(data.plans.map((row) => row.Beat__c));`	Declares/initializes local data used by the surrounding operation: const plannedBeats = new Set(data.plans.map((row) => row.Beat__c));. Collection contents and assignments below determine its purpose.
125	`  const beatGroups = new Map<string, any>();`	Declares/initializes local data used by the surrounding operation: const beatGroups = new Map<string, any>();. Collection contents and assignments below determine its purpose.
126	`  const visited = new Set<string>();`	Declares/initializes local data used by the surrounding operation: const visited = new Set<string>();. Collection contents and assignments below determine its purpose.
127	`  const productive = new Set<string>();`	Declares/initializes local data used by the surrounding operation: const productive = new Set<string>();. Collection contents and assignments below determine its purpose.
128	`  const orderedVisitIds = new Set(currentOrders.map((row) => row.Visit__c).filter(Boolean));`	Declares/initializes local data used by the surrounding operation: const orderedVisitIds = new Set(currentOrders.map((row) => row.Visit__c).filter(Boolean));. Collection contents and assignments below determine its purpose.
129	`  for (const visit of data.visits) {`	Repeats work over the specified records/items or while this condition holds: for (const visit of data.visits) {. Check where queries/writes occur relative to the loop.
130	`    if (["Checked In", "Completed"].includes(visit.Status__c)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (["Checked In", "Completed"].includes(visit.Status__c)) {.
131	`      visited.add(visit.Retailer__c);`	Calls the named method: visited.add(visit.Retailer__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
132	`      if (orderedVisitIds.has(visit.Id)) productive.add(visit.Retailer__c);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (orderedVisitIds.has(visit.Id)) productive.add(visit.Retailer__c);.

Line	Source code	Explanation / reading note
133	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
134	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
135	`  const buyers = new Set(`	Declares/initializes local data used by the surrounding operation: const buyers = new Set(. Collection contents and assignments below determine its purpose.
136	`    currentOrders.filter((row) => amount(row.Total_Amount__c) > 0).map((row) => row.Retailer__c),`	Transforms/selects/aggregates collection values with the callback shown here: currentOrders.filter((row) => amount(row.Total_Amount__c) > 0).map((row) => row.Retailer__c),. Read the callback body and result assignment together.
137	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
138	`  const coverageAreas = new Map<string, any>();`	Declares/initializes local data used by the surrounding operation: const coverageAreas = new Map<string, any>();. Collection contents and assignments below determine its purpose.
139	`  for (const outlet of data.outlets.filter((row) => row.Active__c)) {`	Repeats work over the specified records/items or while this condition holds: for (const outlet of data.outlets.filter((row) => row.Active__c)) {. Check where queries/writes occur relative to the loop.
140	`    const beatId = outlet.Beat__c || "unassigned";`	Declares/initializes local data used by the surrounding operation: const beatId = outlet.Beat__c || "unassigned";. Collection contents and assignments below determine its purpose.
141	`    if (!beatGroups.has(beatId))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!beatGroups.has(beatId)).
142	`      beatGroups.set(beatId, {`	Calls the named method: beatGroups.set(beatId, {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
143	`        id: beatId,`	Sets/declares the named object property or style/type member: id: beatId,. Interpret it in the enclosing object, props or type definition.
144	`        name: outlet.Beat__r?.Name || "No beat assigned",`	Sets/declares the named object property or style/type member: name: outlet.Beat__r?.Name || "No beat assigned",. Interpret it in the enclosing object, props or type definition.
145	`        assigned: 0,`	Sets/declares the named object property or style/type member: assigned: 0,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
146	`planned: 0,`	Sets/declares the named object property or style/type member: planned: 0,. Interpret it in the enclosing object, props or type definition.
147	`visited: 0,`	Sets/declares the named object property or style/type member: visited: 0,. Interpret it in the enclosing object, props or type definition.
148	`productive: 0,`	Sets/declares the named object property or style/type member: productive: 0,. Interpret it in the enclosing object, props or type definition.
149	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
150	`const beat = beatGroups.get(beatId);`	Declares/initializes local data used by the surrounding operation: const beat = beatGroups.get(beatId);. Collection contents and assignments below determine its purpose.
151	`beat.assigned++;`	Continues the surrounding declaration/expression or text: beat.assigned++;. Read it with the preceding opening statement (const beat = beatGroups.get(beatId);); it is not a standalone business operation.
152	`if (plannedBeats.has(outlet.Beat__c)) beat.planned++;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plannedBeats.has(outlet.Beat__c)) beat.planned++;.
153	`if (visited.has(outlet.Id)) beat.visited++;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visited.has(outlet.Id)) beat.visited++;.
154	`if (productive.has(outlet.Id)) beat.productive++;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (productive.has(outlet.Id)) beat.productive++;.
155	`const areaId = outlet.Geography__c || "unassigned";`	Declares/initializes local data used by the surrounding operation: const areaId = outlet.Geography__c || "unassigned";. Collection contents and assignments below determine its purpose.
156	`if (!coverageAreas.has(areaId))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!coverageAreas.has(areaId)).
157	`coverageAreas.set(areaId, {`	Calls the named method: coverageAreas.set(areaId, {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
158	`id: areaId,`	Sets/declares the named object property or style/type member: id: areaId,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
159	`name: outlet.Geography__r?.Name || "No area assigned",`	Sets/declares the named object property or style/type member: name: outlet.Geography__r?.Name || "No area assigned",. Interpret it in the enclosing object, props or type definition.
160	`outlets: 0,`	Sets/declares the named object property or style/type member: outlets: 0,. Interpret it in the enclosing object, props or type definition.
161	`buyers: 0,`	Sets/declares the named object property or style/type member: buyers: 0,. Interpret it in the enclosing object, props or type definition.
162	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
163	`const area = coverageAreas.get(areaId);`	Declares/initializes local data used by the surrounding operation: const area = coverageAreas.get(areaId);. Collection contents and assignments below determine its purpose.
164	`area.outlets++;`	Continues the surrounding declaration/expression or text: area.outlets++;. Read it with the preceding opening statement (const area = coverageAreas.get(areaId);); it is not a standalone business operation.
165	`if (buyers.has(outlet.Id)) area.buyers++;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (buyers.has(outlet.Id)) area.buyers++;.
166	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
167	`const areas = [...coverageAreas.values()].map((row) => ({`	Declares/initializes local data used by the surrounding operation: const areas = [...coverageAreas.values()].map((row) => ({. Collection contents and assignments below determine its purpose.
168	`...row,`	Continues the surrounding declaration/expression or text: ...row,. Read it with the preceding opening statement (const areas = [...coverageAreas.values()].map((row) => ({); it is not a standalone business operation.
169	`percent: percent(row.buyers, row.outlets),`	Sets/declares the named object property or style/type member: percent: percent(row.buyers, row.outlets),. Interpret it in the enclosing object, props or type definition.
170	`}));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
171	`  const coverage = {`	Declares/initializes local data used by the surrounding operation: const coverage = {. Collection contents and assignments below determine its purpose.
172	`    outlets: areas.reduce((n, r) => n + r.outlets, 0),`	Sets/declares the named object property or style/type member: outlets: areas.reduce((n, r) => n + r.outlets, 0),. Interpret it in the enclosing object, props or type definition.
173	`    buyers: areas.reduce((n, r) => n + r.buyers, 0),`	Sets/declares the named object property or style/type member: buyers: areas.reduce((n, r) => n + r.buyers, 0),. Interpret it in the enclosing object, props or type definition.
174	`    percent: null as number | null,`	Sets/declares the named object property or style/type member: percent: null as number | null,. Interpret it in the enclosing object, props or type definition.
175	`    areas,`	Continues the surrounding declaration/expression or text: areas,. Read it with the preceding opening statement (percent: null as number | null,); it is not a standalone business operation.
176	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
177	`  coverage.percent = percent(coverage.buyers, coverage.outlets);`	Assigns the right-hand expression to the named variable/property: coverage.percent = percent(coverage.buyers, coverage.outlets);. This is in-memory unless it is later persisted by an explicit call.
178	`  const moved = new Set(`	Declares/initializes local data used by the surrounding operation: const moved = new Set(. Collection contents and assignments below determine its purpose.
179	`    data.movement.filter((row) => amount(row.Stock_Out_Pieces__c) > 0).map((row) => row.Product__c),`	Transforms/selects/aggregates collection values with the callback shown here: data.movement.filter((row) => amount(row.Stock_Out_Pieces__c) > 0).map((row) => row.Product__c),. Read the callback body and result assignment together.
180	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
181	`  const batches: Row[] = data.inventory.map((row) => {`	Declares/initializes local data used by the surrounding operation: const batches: Row[] = data.inventory.map((row) => {. Collection contents and assignments below determine its purpose.
182	`    const inStock = amount(row.On_Hand_Pieces__c) > 0;`	Declares/initializes local data used by the surrounding operation: const inStock = amount(row.On_Hand_Pieces__c) > 0;. Collection contents and assignments below determine its purpose.
183	`    return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
184	`...row,`	Continues the surrounding declaration/expression or text: ...row,. Read it with the preceding opening statement (return {); it is not a standalone business operation.
185	`expired: inStock && !!row.Expiry_Date__c && row.Expiry_Date__c < period.today,`	Sets/declares the named object property or style/type member: expired: inStock && !!row.Expiry_Date__c && row.Expiry_Date__c < period.today,. Interpret it in the enclosing object, props or type definition.
186	`nearExpiry:`	Sets/declares the named object property or style/type member: nearExpiry:. Interpret it in the enclosing object, props or type definition.
187	`inStock &&`	Continues the surrounding declaration/expression or text: inStock &&. Read it with the preceding opening statement (nearExpiry:); it is not a standalone business operation.
188	`!!row.Expiry_Date__c &&`	Continues the surrounding declaration/expression or text: !!row.Expiry_Date__c &&. Read it with the preceding opening statement (inStock &&); it is not a standalone business operation.
189	`row.Expiry_Date__c >= period.today &&`	Continues the surrounding declaration/expression or text: row.Expiry_Date__c >= period.today &&. Read it with the preceding opening statement (!!row.Expiry_Date__c &&); it is not a standalone business operation.
190	`row.Expiry_Date__c <= period.nearExpiry,`	Continues the surrounding declaration/expression or text: row.Expiry_Date__c <= period.nearExpiry,. Read it with the preceding opening statement (row.Expiry_Date__c >= period.today &&); it is not a standalone business operation.
191	`noRecentSales: inStock && !moved.has(row.Product__c),`	Sets/declares the named object property or style/type member: noRecentSales: inStock && !moved.has(row.Product__c),. Interpret it in the enclosing object, props or type definition.
192	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
193	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
194	`return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
195	`period,`	Continues the surrounding declaration/expression or text: period,. Read it with the preceding opening statement (return {); it is not a standalone business operation.
196	`calculatedAt: now.toISOString(),`	Sets/declares the named object property or style/type member: calculatedAt: now.toISOString(),. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
197	`    sales,`	Continues the surrounding declaration/expression or text: sales,. Read it with the preceding opening statement (calculatedAt: now.toISOString(),); it is not a standalone business operation.
198	`    beats: [...beatGroups.values()].map((row) => ({`	Sets/declares the named object property or style/type member: beats: [...beatGroups.values()].map((row) => ({. Interpret it in the enclosing object, props or type definition.
199	`      ...row,`	Continues the surrounding declaration/expression or text: ...row,. Read it with the preceding opening statement (beats: [...beatGroups.values()].map((row) => ({); it is not a standalone business operation.
200	`      productivity: percent(row.productive, row.visited),`	Sets/declares the named object property or style/type member: productivity: percent(row.productive, row.visited),. Interpret it in the enclosing object, props or type definition.
201	`    })),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
202	`    coverage,`	Continues the surrounding declaration/expression or text: coverage,. Read it with the preceding opening statement (})),); it is not a standalone business operation.
203	`    stock: {`	Sets/declares the named object property or style/type member: stock: {. Interpret it in the enclosing object, props or type definition.
204	`      onHand: batches.reduce((n, r) => n + amount(r.On_Hand_Pieces__c), 0),`	Sets/declares the named object property or style/type member: onHand: batches.reduce((n, r) => n + amount(r.On_Hand_Pieces__c), 0),. Interpret it in the enclosing object, props or type definition.
205	`      available: batches.reduce((n, r) => n + amount(r.Available_Pieces__c), 0),`	Sets/declares the named object property or style/type member: available: batches.reduce((n, r) => n + amount(r.Available_Pieces__c), 0),. Interpret it in the enclosing object, props or type definition.
206	`      nearExpiry: batches.filter((r) => r.nearExpiry).length,`	Sets/declares the named object property or style/type member: nearExpiry: batches.filter((r) => r.nearExpiry).length,. Interpret it in the enclosing object, props or type definition.
207	`      expired: batches.filter((r) => r.expired).length,`	Sets/declares the named object property or style/type member: expired: batches.filter((r) => r.expired).length,. Interpret it in the enclosing object, props or type definition.
208	`      noRecentSales: batches.filter((r) => r.noRecentSales).length,`	Sets/declares the named object property or style/type member: noRecentSales: batches.filter((r) => r.noRecentSales).length,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
209	`batches,`	Continues the surrounding declaration/expression or text: batches,. Read it with the preceding opening statement (noRecentSales: batches.filter((r) => r.noRecentSales).length,); it is not a standalone business operation.
210	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
211	`definitions: {`	Sets/declares the named object property or style/type member: definitions: {. Interpret it in the enclosing object, props or type definition.
212	`beats:`	Sets/declares the named object property or style/type member: beats:. Interpret it in the enclosing object, props or type definition.
213	`"Unique active assigned outlets in approved monthly PJP beats; visited = Checked In or Completed; productive = visited outlets with a qualifying order on that visit. Ad-hoc visits can exceed planned shops.",`	Assigns the right-hand expression to the named variable/property: "Unique active assigned outlets in approved monthly PJP beats; visited = Checked In or Completed; productive = visited outlets with a qualifying order on that visit. Ad-hoc visits can exceed planned s. This is in-memory unless it is later persisted by an explicit call.
214	`coverage:`	Sets/declares the named object property or style/type member: coverage:. Interpret it in the enclosing object, props or type definition.
215	`"Active assigned outlets with a positive booked order this month / active assigned outlets.",`	Continues the surrounding declaration/expression or text: "Active assigned outlets with a positive booked order this month / active assigned outlets.",. Read it with the preceding opening statement (coverage:); it is not a standalone business operation.
216	`stock:`	Sets/declares the named object property or style/type member: stock:. Interpret it in the enclosing object, props or type definition.
217	`"Near expiry = next 30 days. No recent sales = no issued invoice stock movement in the past 30 days; new stock may also be flagged. Review before calling it slow-moving.",`	Assigns the right-hand expression to the named variable/property: "Near expiry = next 30 days. No recent sales = no issued invoice stock movement in the past 30 days; new stock may also be flagged. Review before calling it slow-moving.",. This is in-memory unless it is later persisted by an explicit call.
218	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
219	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
220	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/dms/router.test.ts

Regression tests for router. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

239 numbered source lines | SHA-256 f9be7a25105eb1c891ceb2eb2df5e5e7a107572808e2d2043d3865257905fae9

Line	Source code	Explanation / reading note
1	`import { describe, it, expect, vi } from "vitest";`	Imports dependencies/types used below: import { describe, it, expect, vi } from "vitest";. Importing a function does not call it.
2	`import express from "express";`	Imports dependencies/types used below: import express from "express";. Importing a function does not call it.
3	`import request from "supertest";`	Imports dependencies/types used below: import request from "supertest";. Importing a function does not call it.
4	`import jwt from "jsonwebtoken";`	Imports dependencies/types used below: import jwt from "jsonwebtoken";. Importing a function does not call it.
5	`import { randomUUID } from "node:crypto";`	Imports dependencies/types used below: import { randomUUID } from "node:crypto";. Importing a function does not call it.
6	`import { createDmsRouter } from "./router.js";`	Imports dependencies/types used below: import { createDmsRouter } from "./router.js";. Importing a function does not call it.
7	`import { env } from "../config/env.js";`	Imports dependencies/types used below: import { env } from "../config/env.js";. Importing a function does not call it.
8		Blank line separating logical sections; no executable operation.
9	`const distributorId = "a0T000000000001AAA";`	Declares/initializes local data used by the surrounding operation: const distributorId = "a0T000000000001AAA";. Collection contents and assignments below determine its purpose.
10	`function fixture() {`	Declares a callable function/method: function fixture() {. Parameters supply its inputs; the following block implements the operation.
11	`  let code = "",`	Declares/initializes local data used by the surrounding operation: let code = "",. Collection contents and assignments below determine its purpose.
12	`    active = true,`	Assigns the right-hand expression to the named variable/property: active = true,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
13	`    duplicate = false,`	Assigns the right-hand expression to the named variable/property: duplicate = false,. This is in-memory unless it is later persisted by an explicit call.
14	`    emailFails = false;`	Assigns the right-hand expression to the named variable/property: emailFails = false;. This is in-memory unless it is later persisted by an explicit call.
15	`  const queries: string[] = [],`	Declares/initializes local data used by the surrounding operation: const queries: string[] = [],. Collection contents and assignments below determine its purpose.
16	`    commands: any[] = [];`	Sets/declares the named object property or style/type member: commands: any[] = [];. Interpret it in the enclosing object, props or type definition.
17	`  const app = express();`	Declares/initializes local data used by the surrounding operation: const app = express();. Collection contents and assignments below determine its purpose.
18	`  app.use(express.json());`	Registers an HTTP route or middleware: app.use(express.json());. Registration order controls which authentication/validation runs first.
19	`  app.use(`	Registers an HTTP route or middleware: app.use(. Registration order controls which authentication/validation runs first.
20	`    "/api/dms",`	Continues the surrounding declaration/expression or text: "/api/dms",. Read it with the preceding opening statement (app.use(); it is not a standalone business operation.
21	`    createDmsRouter({`	Continues the surrounding declaration/expression or text: createDmsRouter({. Read it with the preceding opening statement ("/api/dms",); it is not a standalone business operation.
22	`      records: async (query) => {`	Sets/declares the named object property or style/type member: records: async (query) => {. Interpret it in the enclosing object, props or type definition.
23	`        queries.push(query);`	Calls the named method: queries.push(query);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
24	`        if (query.includes("FROM DMS_Distributor__c"))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (query.includes("FROM DMS_Distributor__c")).
25	`          return !active`	Returns !active to the caller (or begins returned UI markup) and ends this execution path.
26	`            ? []`	Continues the surrounding declaration/expression or text: ? []. Read it with the preceding opening statement (return !active); it is not a standalone business operation.
27	`            : duplicate`	Continues the surrounding declaration/expression or text: : duplicate. Read it with the preceding opening statement (? []); it is not a standalone business operation.

Line	Source code	Explanation / reading note
28	`? [{ Id: distributorId }, { Id: "other" }]`	Continues the surrounding declaration/expression or text: ? [{ Id: distributorId }, { Id: "other" }]. Read it with the preceding opening statement (: duplicate); it is not a standalone business operation.
29	`: [`	Continues the surrounding declaration/expression or text: : [. Read it with the preceding opening statement (? [{ Id: distributorId }, { Id: "other" }]); it is not a standalone business operation.
30	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (: []); it is not a standalone business operation.
31	`Id: distributorId,`	Declares/initializes local data used by the surrounding operation: Id: distributorId,. Collection contents and assignments below determine its purpose.
32	`Name: "Test distributor",`	Sets/declares the named object property or style/type member: Name: "Test distributor",. Interpret it in the enclosing object, props or type definition.
33	`Login_Email__c: "test@example.invalid",`	Sets/declares the named object property or style/type member: Login_Email__c: "test@example.invalid",. Interpret it in the enclosing object, props or type definition.
34	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
36	`return [];`	Returns [] to the caller (or begins returned UI markup) and ends this execution path.
37	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`sendCode: async (_email, value) => {`	Sets/declares the named object property or style/type member: sendCode: async (_email, value) => {. Interpret it in the enclosing object, props or type definition.
39	`if (emailFails) throw new Error("Synthetic email failure");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (emailFails) throw new Error("Synthetic email failure");.
40	`code = value;`	Assigns the right-hand expression to the named variable/property: code = value;. This is in-memory unless it is later persisted by an explicit call.
41	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
42	`command: async (body) => {`	Sets/declares the named object property or style/type member: command: async (body) => {. Interpret it in the enclosing object, props or type definition.
43	`commands.push(body);`	Calls the named method: commands.push(body);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
44	`return { id: "a0T000000000002AAA", status: "Open" };`	Returns { id: "a0T000000000002AAA", status: "Open" } to the caller (or begins returned UI markup) and ends this execution path.
45	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
46	`}),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48	`const login = async () => {`	Declares/initializes local data used by the surrounding operation: const login = async () => {. Collection contents and assignments below determine its purpose.
49	`const sent = await request(app)`	Waits for this asynchronous operation before continuing: const sent = await request(app). The returned result/error must still be handled.
50	`.post("/api/dms/auth/request-code")`	Continues the surrounding declaration/expression or text: .post("/api/dms/auth/request-code"). Read it with the preceding opening statement (const sent = await request(app)); it is not a standalone business operation.
51	`.send({ email: "test@example.invalid" });`	Continues the surrounding declaration/expression or text: .send({ email: "test@example.invalid" });. Read it with the preceding opening statement (.post("/api/dms/auth/request-code")); it is not a standalone business operation.
52	`expect(sent.body.data.testCode).toBeUndefined();`	Test assertion comparing an expected outcome to actual behavior: expect(sent.body.data.testCode).toBeUndefined();. A mismatch fails the test.
53	`return request(app)`	Returns request(app) to the caller (or begins returned UI markup) and ends this execution path.
54	`.post("/api/dms/auth/verify-code")`	Continues the surrounding declaration/expression or text: .post("/api/dms/auth/verify-code"). Read it with the preceding opening statement (return request(app)); it is not a standalone business operation.

Line	Source code	Explanation / reading note
55	`.send({ email: "test@example.invalid", code });`	Continues the surrounding declaration/expression or text: .send({ email: "test@example.invalid", code });. Read it with the preceding opening statement (.post("/api/dms/auth/verify-code")); it is not a standalone business operation.
56	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
58	`app,`	Continues the surrounding declaration/expression or text: app,. Read it with the preceding opening statement (return {); it is not a standalone business operation.
59	`login,`	Continues the surrounding declaration/expression or text: login,. Read it with the preceding opening statement (app,); it is not a standalone business operation.
60	`commands,`	Continues the surrounding declaration/expression or text: commands,. Read it with the preceding opening statement (login,); it is not a standalone business operation.
61	`queries,`	Continues the surrounding declaration/expression or text: queries,. Read it with the preceding opening statement (commands,); it is not a standalone business operation.
62	`getCode: () => code,`	Sets/declares the named object property or style/type member: getCode: () => code,. Interpret it in the enclosing object, props or type definition.
63	`disable: () => (active = false),`	Sets/declares the named object property or style/type member: disable: () => (active = false),. Interpret it in the enclosing object, props or type definition.
64	`duplicate: () => (duplicate = true),`	Sets/declares the named object property or style/type member: duplicate: () => (duplicate = true),. Interpret it in the enclosing object, props or type definition.
65	`failEmail: () => (emailFails = true),`	Sets/declares the named object property or style/type member: failEmail: () => (emailFails = true),. Interpret it in the enclosing object, props or type definition.
66	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
67	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
68	`describe("isolated DMS distributor API", () => {`	Continues the surrounding declaration/expression or text: describe("isolated DMS distributor API", () => {. Read it with the preceding opening statement (}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
69	`  it("sends a different code on resend and rejects the old code", async () => {`	Continues the surrounding declaration/expression or text: it("sends a different code on resend and rejects the old code", async () => {. Read it with the preceding opening statement (describe("isolated DMS distributor API", () => {); it is not a standalone business operation.
70	`    const clock = vi.spyOn(Date, "now");`	Declares/initializes local data used by the surrounding operation: const clock = vi.spyOn(Date, "now");. Collection contents and assignments below determine its purpose.
71	`    const start = Date.now();`	Declares/initializes local data used by the surrounding operation: const start = Date.now();. Collection contents and assignments below determine its purpose.
72	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
73	`      clock.mockReturnValue(start);`	Calls the named method: clock.mockReturnValue(start);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
74	`      const f = fixture();`	Declares/initializes local data used by the surrounding operation: const f = fixture();. Collection contents and assignments below determine its purpose.
75	`      const send = () =>`	Declares/initializes local data used by the surrounding operation: const send = () =>. Collection contents and assignments below determine its purpose.
76	`        request(f.app).post("/api/dms/auth/request-code").send({ email: "test@example.invalid" });`	Continues the surrounding declaration/expression or text: request(f.app).post("/api/dms/auth/request-code").send({ email: "test@example.invalid" });. Read it with the preceding opening statement (const send = () =>); it is not a standalone business operation.
77	`      expect((await send()).status).toBe(200);`	Test assertion comparing an expected outcome to actual behavior: expect((await send()).status).toBe(200);. A mismatch fails the test.
78	`      const oldCode = f.getCode();`	Declares/initializes local data used by the surrounding operation: const oldCode = f.getCode();. Collection contents and assignments below determine its purpose.
79	`      expect((await send()).status).toBe(429);`	Test assertion comparing an expected outcome to actual behavior: expect((await send()).status).toBe(429);. A mismatch fails the test.
80	`      clock.mockReturnValue(start + 61000);`	Calls the named method: clock.mockReturnValue(start + 61000);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
81	`      const resent = await send();`	Waits for this asynchronous operation before continuing: const resent = await send();. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
82	`expect(resent.status).toBe(200);`	Test assertion comparing an expected outcome to actual behavior: expect(resent.status).toBe(200);. A mismatch fails the test.
83	`expect(JSON.stringify(resent.body)).not.toContain(f.getCode());`	Test assertion comparing an expected outcome to actual behavior: expect(JSON.stringify(resent.body)).not.toContain(f.getCode());. A mismatch fails the test.
84	`expect(f.getCode()).not.toBe(oldCode);`	Test assertion comparing an expected outcome to actual behavior: expect(f.getCode()).not.toBe(oldCode);. A mismatch fails the test.
85	`expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
86	`(`	Continues the surrounding declaration/expression or text: (. Read it with the preceding opening statement (expect(); it is not a standalone business operation.
87	`await request(f.app)`	Waits for this asynchronous operation before continuing: await request(f.app). The returned result/error must still be handled.
88	`.post("/api/dms/auth/verify-code")`	Continues the surrounding declaration/expression or text: .post("/api/dms/auth/verify-code"). Read it with the preceding opening statement (await request(f.app)); it is not a standalone business operation.
89	`.send({ email: "test@example.invalid", code: oldCode })`	Continues the surrounding declaration/expression or text: .send({ email: "test@example.invalid", code: oldCode }). Read it with the preceding opening statement (.post("/api/dms/auth/verify-code")); it is not a standalone business operation.
90	`).status,`	Continues the surrounding declaration/expression or text:).status,. Read it with the preceding opening statement (.send({ email: "test@example.invalid", code: oldCode })); it is not a standalone business operation.
91	`).toBe(401);`	Continues the surrounding declaration/expression or text:).toBe(401);. Read it with the preceding opening statement ( ).status,); it is not a standalone business operation.
92	`expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
93	`(`	Continues the surrounding declaration/expression or text: (. Read it with the preceding opening statement (expect(); it is not a standalone business operation.
94	`await request(f.app)`	Waits for this asynchronous operation before continuing: await request(f.app). The returned result/error must still be handled.

Line	Source code	Explanation / reading note
95	`.post("/api/dms/auth/verify-code")`	Continues the surrounding declaration/expression or text: .post("/api/dms/auth/verify-code"). Read it with the preceding opening statement (await request(f.app)); it is not a standalone business operation.
96	`.send({ email: "test@example.invalid", code: f.getCode() })`	Calls the named method: .send({ email: "test@example.invalid", code: f.getCode() }). Its implementation defines the side effect/result; use the symbol/file index to follow it.
97	`).status,`	Continues the surrounding declaration/expression or text:).status,. Read it with the preceding opening statement (.send({ email: "test@example.invalid", code: f.getCode() })); it is not a standalone business operation.
98	`).toBe(200);`	Continues the surrounding declaration/expression or text:).toBe(200);. Read it with the preceding opening statement ( ).status,); it is not a standalone business operation.
99	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
100	`clock.mockRestore();`	Calls the named method: clock.mockRestore();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
101	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
102	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
103	`it("does not invalidate an existing code when resend email fails", async () => {`	Continues the surrounding declaration/expression or text: it("does not invalidate an existing code when resend email fails", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
104	`const clock = vi.spyOn(Date, "now");`	Declares/initializes local data used by the surrounding operation: const clock = vi.spyOn(Date, "now");. Collection contents and assignments below determine its purpose.
105	`const start = Date.now();`	Declares/initializes local data used by the surrounding operation: const start = Date.now();. Collection contents and assignments below determine its purpose.
106	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
107	`clock.mockReturnValue(start);`	Calls the named method: clock.mockReturnValue(start);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
108	`const f = fixture();`	Declares/initializes local data used by the surrounding operation: const f = fixture();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
109	`await request(f.app)`	Waits for this asynchronous operation before continuing: await request(f.app). The returned result/error must still be handled.
110	`.post("/api/dms/auth/request-code")`	Continues the surrounding declaration/expression or text: .post("/api/dms/auth/request-code"). Read it with the preceding opening statement (await request(f.app)); it is not a standalone business operation.
111	`.send({ email: "test@example.invalid" });`	Continues the surrounding declaration/expression or text: .send({ email: "test@example.invalid" });. Read it with the preceding opening statement (.post("/api/dms/auth/request-code")); it is not a standalone business operation.
112	`const original = f.getCode();`	Declares/initializes local data used by the surrounding operation: const original = f.getCode();. Collection contents and assignments below determine its purpose.
113	`f.failEmail();`	Calls the named method: f.failEmail();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
114	`clock.mockReturnValue(start + 61000);`	Calls the named method: clock.mockReturnValue(start + 61000);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
115	`expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
116	`(`	Continues the surrounding declaration/expression or text: (. Read it with the preceding opening statement (expect(); it is not a standalone business operation.
117	`await request(f.app)`	Waits for this asynchronous operation before continuing: await request(f.app). The returned result/error must still be handled.
118	`.post("/api/dms/auth/request-code")`	Continues the surrounding declaration/expression or text: .post("/api/dms/auth/request-code"). Read it with the preceding opening statement (await request(f.app)); it is not a standalone business operation.
119	`.send({ email: "test@example.invalid" })`	Continues the surrounding declaration/expression or text: .send({ email: "test@example.invalid" }). Read it with the preceding opening statement (.post("/api/dms/auth/request-code")); it is not a standalone business operation.
120	`).status,`	Continues the surrounding declaration/expression or text:).status,. Read it with the preceding opening statement (.send({ email: "test@example.invalid" })); it is not a standalone business operation.

Line	Source code	Explanation / reading note
121	`).toBe(503);`	Continues the surrounding declaration/expression or text:).toBe(503);. Read it with the preceding opening statement ( ).status,); it is not a standalone business operation.
122	`expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
123	`(`	Continues the surrounding declaration/expression or text: (. Read it with the preceding opening statement (expect(); it is not a standalone business operation.
124	`await request(f.app)`	Waits for this asynchronous operation before continuing: await request(f.app). The returned result/error must still be handled.
125	`.post("/api/dms/auth/verify-code")`	Continues the surrounding declaration/expression or text: .post("/api/dms/auth/verify-code"). Read it with the preceding opening statement (await request(f.app)); it is not a standalone business operation.
126	`.send({ email: "test@example.invalid", code: original })`	Continues the surrounding declaration/expression or text: .send({ email: "test@example.invalid", code: original }). Read it with the preceding opening statement (.post("/api/dms/auth/verify-code")); it is not a standalone business operation.
127	`).status,`	Continues the surrounding declaration/expression or text:).status,. Read it with the preceding opening statement (.send({ email: "test@example.invalid", code: original })); it is not a standalone business operation.
128	`).toBe(200);`	Continues the surrounding declaration/expression or text:).toBe(200);. Read it with the preceding opening statement ( ).status,); it is not a standalone business operation.
129	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
130	`clock.mockRestore();`	Calls the named method: clock.mockRestore();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
131	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
132	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
133	`it("submits distributor primary orders with session identity only and rejects client pricing", async () => {`	Continues the surrounding declaration/expression or text: it("submits distributor primary orders with session identity only and rejects client pricing", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.

Line	Source code	Explanation / reading note
134	`    const f = fixture(),`	Declares/initializes local data used by the surrounding operation: const f = fixture(),. Collection contents and assignments below determine its purpose.
135	`      token = (await f.login()).body.data.token;`	Waits for this asynchronous operation before continuing: token = (await f.login()).body.data.token;. The returned result/error must still be handled.
136	`    const body = {`	Declares/initializes local data used by the surrounding operation: const body = {. Collection contents and assignments below determine its purpose.
137	`      requestKey: randomUUID(),`	Sets/declares the named object property or style/type member: requestKey: randomUUID(),. Interpret it in the enclosing object, props or type definition.
138	`      lines: [{ productId: "a01000000000001AAA", cases: 2, schemeId: "a02000000000001AAA" }],`	Sets/declares the named object property or style/type member: lines: [{ productId: "a01000000000001AAA", cases: 2, schemeId: "a02000000000001AAA" }],. Interpret it in the enclosing object, props or type definition.
139	`    };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
140	`    const submit = (payload: any) =>`	Declares/initializes local data used by the surrounding operation: const submit = (payload: any) =>. Collection contents and assignments below determine its purpose.
141	`      request(f.app).post("/api/dms/primary/orders").auth(token, { type: "bearer" }).send(payload);`	Continues the surrounding declaration/expression or text: request(f.app).post("/api/dms/primary/orders").auth(token, { type: "bearer" }).send(payload);. Read it with the preceding opening statement (const submit = (payload: any) =>); it is not a standalone business operation.
142	`    expect((await submit(body)).status).toBe(200);`	Test assertion comparing an expected outcome to actual behavior: expect((await submit(body)).status).toBe(200);. A mismatch fails the test.
143	`    expect(f.commands[0]).toEqual({ ...body, action: "distributorPrimaryOrder", distributorId });`	Test assertion comparing an expected outcome to actual behavior: expect(f.commands[0]).toEqual({ ...body, action: "distributorPrimaryOrder", distributorId });. A mismatch fails the test.
144	`    expect((await submit({ ...body, employeeId: distributorId })).status).toBe(400);`	Test assertion comparing an expected outcome to actual behavior: expect((await submit({ ...body, employeeId: distributorId })).status).toBe(400);. A mismatch fails the test.
145	`    expect((await submit({ ...body, distributorId: "another" })).status).toBe(400);`	Test assertion comparing an expected outcome to actual behavior: expect((await submit({ ...body, distributorId: "another" })).status).toBe(400);. A mismatch fails the test.
146	`    expect((await submit({ ...body, lines: [{ ...body.lines[0], price: 1 }] })).status).toBe(400);`	Test assertion comparing an expected outcome to actual behavior: expect((await submit({ ...body, lines: [{ ...body.lines[0], price: 1 }] })).status).toBe(400);. A mismatch fails the test.

Line	Source code	Explanation / reading note
147	`    expect((await submit({ ...body, lines: [body.lines[0], body.lines[0]] })).status).toBe(400);`	Test assertion comparing an expected outcome to actual behavior: expect((await submit({ ...body, lines: [body.lines[0], body.lines[0]] })).status).toBe(400);. A mismatch fails the test.
148	`    expect((await submit({ ...body, lines: [{ ...body.lines[0], cases: 0.5 }] })).status).toBe(400);`	Test assertion comparing an expected outcome to actual behavior: expect((await submit({ ...body, lines: [{ ...body.lines[0], cases: 0.5 }] })).status).toBe(400);. A mismatch fails the test.
149	`    expect(f.commands).toHaveLength(1);`	Test assertion comparing an expected outcome to actual behavior: expect(f.commands).toHaveLength(1);. A mismatch fails the test.
150	`   expect((await request(f.app).post("/api/dms/primary/orders").send(body)).status).toBe(401);`	Test assertion comparing an expected outcome to actual behavior: expect((await request(f.app).post("/api/dms/primary/orders").send(body)).status).toBe(401);. A mismatch fails the test.
151	`    expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
152	`      (await request(f.app).get("/api/dms/primary/catalogue").auth(token, { type: "bearer" }))`	Waits for this asynchronous operation before continuing: (await request(f.app).get("/api/dms/primary/catalogue").auth(token, { type: "bearer" })). The returned result/error must still be handled.
153	`        .status,`	Continues the surrounding declaration/expression or text: .status,. Read it with the preceding opening statement ((await request(f.app).get("/api/dms/primary/catalogue").auth(token, { type: "bearer" }))); it is not a standalone business operation.
154	`    ).toBe(200);`	Continues the surrounding declaration/expression or text:).toBe(200);. Read it with the preceding opening statement (.status,); it is not a standalone business operation.
155	`    f.disable();`	Calls the named method: f.disable();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
156	`    expect((await submit(body)).status).toBe(403);`	Test assertion comparing an expected outcome to actual behavior: expect((await submit(body)).status).toBe(403);. A mismatch fails the test.
157	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
158	`  it("rejects anonymous and existing SFA tokens", async () => {`	Continues the surrounding declaration/expression or text: it("rejects anonymous and existing SFA tokens", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
159	`    const f = fixture();`	Declares/initializes local data used by the surrounding operation: const f = fixture();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
160	`    expect((await request(f.app).get("/api/dms/overview")).status).toBe(401);`	Test assertion comparing an expected outcome to actual behavior: expect((await request(f.app).get("/api/dms/overview")).status).toBe(401);. A mismatch fails the test.
161	`    const token = jwt.sign({ employeeId: "employee", distributorId }, env.JWT_SECRET);`	Declares/initializes local data used by the surrounding operation: const token = jwt.sign({ employeeId: "employee", distributorId }, env.JWT_SECRET);. Collection contents and assignments below determine its purpose.
162	`    expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
163	`      (await request(f.app).get("/api/dms/overview").auth(token, { type: "bearer" })).status,`	Waits for this asynchronous operation before continuing: (await request(f.app).get("/api/dms/overview").auth(token, { type: "bearer" })).status,. The returned result/error must still be handled.
164	`    ).toBe(401);`	Continues the surrounding declaration/expression or text:).toBe(401);. Read it with the preceding opening statement ((await request(f.app).get("/api/dms/overview").auth(token, { type: "bearer" })).status,); it is not a standalone business operation.
165	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
166	`  it("uses one-use codes, throttles requests and never returns codes", async () => {`	Continues the surrounding declaration/expression or text: it("uses one-use codes, throttles requests and never returns codes", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
167	`    const f = fixture();`	Declares/initializes local data used by the surrounding operation: const f = fixture();. Collection contents and assignments below determine its purpose.
168	`    expect((await f.login()).status).toBe(200);`	Test assertion comparing an expected outcome to actual behavior: expect((await f.login()).status).toBe(200);. A mismatch fails the test.
169	`    expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
170	`      (`	Continues the surrounding declaration/expression or text: (. Read it with the preceding opening statement (expect(); it is not a standalone business operation.
171	`        await request(f.app)`	Waits for this asynchronous operation before continuing: await request(f.app). The returned result/error must still be handled.

Line	Source code	Explanation / reading note
172	`.post("/api/dms/auth/verify-code")`	Continues the surrounding declaration/expression or text: .post("/api/dms/auth/verify-code"). Read it with the preceding opening statement (await request(f.app)); it is not a standalone business operation.
173	`.send({ email: "test@example.invalid", code: f.getCode() })`	Calls the named method: .send({ email: "test@example.invalid", code: f.getCode() }). Its implementation defines the side effect/result; use the symbol/file index to follow it.
174	`).status,`	Continues the surrounding declaration/expression or text:).status,. Read it with the preceding opening statement (.send({ email: "test@example.invalid", code: f.getCode() })); it is not a standalone business operation.
175	`).toBe(401);`	Continues the surrounding declaration/expression or text:).toBe(401);. Read it with the preceding opening statement ( ).status,); it is not a standalone business operation.
176	`expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
177	`(`	Continues the surrounding declaration/expression or text: (. Read it with the preceding opening statement (expect(); it is not a standalone business operation.
178	`await request(f.app)`	Waits for this asynchronous operation before continuing: await request(f.app). The returned result/error must still be handled.
179	`.post("/api/dms/auth/request-code")`	Continues the surrounding declaration/expression or text: .post("/api/dms/auth/request-code"). Read it with the preceding opening statement (await request(f.app)); it is not a standalone business operation.
180	`.send({ email: "test@example.invalid" })`	Continues the surrounding declaration/expression or text: .send({ email: "test@example.invalid" }). Read it with the preceding opening statement (.post("/api/dms/auth/request-code")); it is not a standalone business operation.
181	`).status,`	Continues the surrounding declaration/expression or text:).status,. Read it with the preceding opening statement (.send({ email: "test@example.invalid" })); it is not a standalone business operation.
182	`).toBe(429);`	Continues the surrounding declaration/expression or text:).toBe(429);. Read it with the preceding opening statement ( ).status,); it is not a standalone business operation.
183	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
184	`  it("does not send a code for ambiguous logins", async () => {`	Continues the surrounding declaration/expression or text: it("does not send a code for ambiguous logins", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
185	`    const f = fixture();`	Declares/initializes local data used by the surrounding operation: const f = fixture();. Collection contents and assignments below determine its purpose.
186	`    f.duplicate();`	Calls the named method: f.duplicate();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
187	`    await request(f.app).post("/api/dms/auth/request-code").send({ email: "test@example.invalid" });`	Waits for this asynchronous operation before continuing: await request(f.app).post("/api/dms/auth/request-code").send({ email: "test@example.invalid" });. The returned result/error must still be handled.
188	`    expect(f.getCode()).toBe("");`	Test assertion comparing an expected outcome to actual behavior: expect(f.getCode()).toBe("");. A mismatch fails the test.
189	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
190	`  it("queries only session distributor data and revokes a disabled account", async () => {`	Continues the surrounding declaration/expression or text: it("queries only session distributor data and revokes a disabled account", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
191	`    const f = fixture(),`	Declares/initializes local data used by the surrounding operation: const f = fixture(),. Collection contents and assignments below determine its purpose.
192	`      token = (await f.login()).body.data.token;`	Waits for this asynchronous operation before continuing: token = (await f.login()).body.data.token;. The returned result/error must still be handled.
193	`    expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
194	`      (await request(f.app).get("/api/dms/overview").auth(token, { type: "bearer" })).status,`	Waits for this asynchronous operation before continuing: (await request(f.app).get("/api/dms/overview").auth(token, { type: "bearer" })).status,. The returned result/error must still be handled.
195	`    ).toBe(200);`	Continues the surrounding declaration/expression or text:).toBe(200);. Read it with the preceding opening statement ((await request(f.app).get("/api/dms/overview").auth(token, { type: "bearer" })).status,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
196	`    const scoped = f.queries.filter((query) => !query.includes("FROM DMS_Distributor__c"));`	Declares/initializes local data used by the surrounding operation: const scoped = f.queries.filter((query) => !query.includes("FROM DMS_Distributor__c"));. Collection contents and assignments below determine its purpose.
197	`    expect(scoped).toHaveLength(17);`	Test assertion comparing an expected outcome to actual behavior: expect(scoped).toHaveLength(17);. A mismatch fails the test.
198	`    for (const query of scoped) {`	Repeats work over the specified records/items or while this condition holds: for (const query of scoped) {. Check where queries/writes occur relative to the loop.
199	`      expect(query).toContain(distributorId);`	Test assertion comparing an expected outcome to actual behavior: expect(query).toContain(distributorId);. A mismatch fails the test.
200	`      if (!query.includes("SUM(")) expect(query).toContain("LIMIT 200");`	Test assertion comparing an expected outcome to actual behavior: if (!query.includes("SUM(")) expect(query).toContain("LIMIT 200");. A mismatch fails the test.
201	`      else expect(query).not.toContain("LIMIT 200");`	Test assertion comparing an expected outcome to actual behavior: else expect(query).not.toContain("LIMIT 200");. A mismatch fails the test.
202	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
203	`    expect(scoped.some((query) => query.includes("FROM Asset_Survey__c"))).toBe(true);`	Test assertion comparing an expected outcome to actual behavior: expect(scoped.some((query) => query.includes("FROM Asset_Survey__c"))).toBe(true);. A mismatch fails the test.
204	`   const report = await request(f.app).get("/api/dms/reports").auth(token, { type: "bearer" });`	Waits for this asynchronous operation before continuing: const report = await request(f.app).get("/api/dms/reports").auth(token, { type: "bearer" });. The returned result/error must still be handled.
205	`    expect(report.status).toBe(200);`	Test assertion comparing an expected outcome to actual behavior: expect(report.status).toBe(200);. A mismatch fails the test.
206	`    expect(report.body.data.sales.target).toBeNull();`	Test assertion comparing an expected outcome to actual behavior: expect(report.body.data.sales.target).toBeNull();. A mismatch fails the test.
207	`    expect(report.body.data.coverage.percent).toBeNull();`	Test assertion comparing an expected outcome to actual behavior: expect(report.body.data.coverage.percent).toBeNull();. A mismatch fails the test.
208	`    f.disable();`	Calls the named method: f.disable();. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
209	`    expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
210	`      (await request(f.app).get("/api/dms/overview").auth(token, { type: "bearer" })).status,`	Waits for this asynchronous operation before continuing: (await request(f.app).get("/api/dms/overview").auth(token, { type: "bearer" })).status,. The returned result/error must still be handled.
211	`    ).toBe(403);`	Continues the surrounding declaration/expression or text:).toBe(403);. Read it with the preceding opening statement ((await request(f.app).get("/api/dms/overview").auth(token, { type: "bearer" })).status,); it is not a standalone business operation.
212	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
213	`  it("ignores forged distributor identity and validates before writing", async () => {`	Continues the surrounding declaration/expression or text: it("ignores forged distributor identity and validates before writing", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
214	`    const f = fixture(),`	Declares/initializes local data used by the surrounding operation: const f = fixture(),. Collection contents and assignments below determine its purpose.
215	`      token = (await f.login()).body.data.token;`	Waits for this asynchronous operation before continuing: token = (await f.login()).body.data.token;. The returned result/error must still be handled.
216	`    const ticket = {`	Declares/initializes local data used by the surrounding operation: const ticket = {. Collection contents and assignments below determine its purpose.
217	`      requestKey: randomUUID(),`	Sets/declares the named object property or style/type member: requestKey: randomUUID(),. Interpret it in the enclosing object, props or type definition.
218	`      subject: "Delivery",`	Sets/declares the named object property or style/type member: subject: "Delivery",. Interpret it in the enclosing object, props or type definition.
219	`      category: "Delivery",`	Sets/declares the named object property or style/type member: category: "Delivery",. Interpret it in the enclosing object, props or type definition.
220	`      description: "Missing shipment",`	Sets/declares the named object property or style/type member: description: "Missing shipment",. Interpret it in the enclosing object, props or type definition.
221	`      distributorId: "forged",`	Sets/declares the named object property or style/type member: distributorId: "forged",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
222	`    };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
223	`    expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
224	`      (await request(f.app).post("/api/dms/tickets").auth(token, { type: "bearer" }).send(ticket))`	Waits for this asynchronous operation before continuing: (await request(f.app).post("/api/dms/tickets").auth(token, { type: "bearer" }).send(ticket)). The returned result/error must still be handled.
225	`        .status,`	Continues the surrounding declaration/expression or text: .status,. Read it with the preceding opening statement ((await request(f.app).post("/api/dms/tickets").auth(token, { type: "bearer" }).send(ticket))); it is not a standalone business operation.
226	`    ).toBe(200);`	Continues the surrounding declaration/expression or text:).toBe(200);. Read it with the preceding opening statement (.status,); it is not a standalone business operation.
227	`    expect(f.commands[0].distributorId).toBe(distributorId);`	Test assertion comparing an expected outcome to actual behavior: expect(f.commands[0].distributorId).toBe(distributorId);. A mismatch fails the test.
228	`    expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
229	`      (`	Continues the surrounding declaration/expression or text: (. Read it with the preceding opening statement (expect(); it is not a standalone business operation.
230	`        await request(f.app).post("/api/dms/transactions").auth(token, { type: "bearer" }).send({`	Waits for this asynchronous operation before continuing: await request(f.app).post("/api/dms/transactions").auth(token, { type: "bearer" }).send({. The returned result/error must still be handled.
231	`          action: "returnDecision",`	Sets/declares the named object property or style/type member: action: "returnDecision",. Interpret it in the enclosing object, props or type definition.
232	`          recordId: distributorId,`	Sets/declares the named object property or style/type member: recordId: distributorId,. Interpret it in the enclosing object, props or type definition.
233	`          decision: "Rejected",`	Sets/declares the named object property or style/type member: decision: "Rejected",. Interpret it in the enclosing object, props or type definition.
234	`        })`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
235	`      ).status,`	Continues the surrounding declaration/expression or text:).status,. Read it with the preceding opening statement (})); it is not a standalone business operation.
236	`    ).toBe(400);`	Continues the surrounding declaration/expression or text:).toBe(400);. Read it with the preceding opening statement ( ).status,); it is not a standalone business operation.
237	`    expect(f.commands).toHaveLength(1);`	Test assertion comparing an expected outcome to actual behavior: expect(f.commands).toHaveLength(1);. A mismatch fails the test.
238	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
239	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/dms/router.ts

DMS distributor HTTP routes: code request/verify, JWT audience checks, active-account lookup, scoped overview/catalogue/reports and validated command dispatch.

296 numbered source lines | SHA-256 463aff4dfdd53ab09f9d0795e4840a65c5e77de50aadccec60d75ec7c0705f98

Line	Source code	Explanation / reading note
1	`import express from "express";`	Imports dependencies/types used below: import express from "express";. Importing a function does not call it.
2	`import jwt from "jsonwebtoken";`	Imports dependencies/types used below: import jwt from "jsonwebtoken";. Importing a function does not call it.
3	`import { createHash, createHmac, randomInt, timingSafeEqual } from "node:crypto";`	Imports dependencies/types used below: import { createHash, createHmac, randomInt, timingSafeEqual } from "node:crypto";. Importing a function does not call it.
4	`import { z } from "zod";`	Imports dependencies/types used below: import { z } from "zod";. Importing a function does not call it.
5	`import { env } from "../config/env.js";`	Imports dependencies/types used below: import { env } from "../config/env.js";. Importing a function does not call it.
6	`import { salesforce } from "../salesforce/SalesforceService.js";`	Imports dependencies/types used below: import { salesforce } from "../salesforce/SalesforceService.js";. Importing a function does not call it.
7	`import { escapeSoqlLiteral } from "../utils/salesforce.js";`	Imports dependencies/types used below: import { escapeSoqlLiteral } from "../utils/salesforce.js";. Importing a function does not call it.
8	`import { ok, fail } from "../utils/http.js";`	Imports dependencies/types used below: import { ok, fail } from "../utils/http.js";. Importing a function does not call it.
9	`import { DmsTransport, DmsUpstreamError } from "./transport.js";`	Imports dependencies/types used below: import { DmsTransport, DmsUpstreamError } from "./transport.js";. Importing a function does not call it.
10	`import { distributorDashboard } from "./dashboard.js";`	Imports dependencies/types used below: import { distributorDashboard } from "./dashboard.js";. Importing a function does not call it.
11	`import { distributorReports } from "./reports.js";`	Imports dependencies/types used below: import { distributorReports } from "./reports.js";. Importing a function does not call it.
12	`import { primaryCatalogue } from "./primaryCatalogue.js";`	Imports dependencies/types used below: import { primaryCatalogue } from "./primaryCatalogue.js";. Importing a function does not call it.
13		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
14	`const audience = "dms-distributor";`	Declares/initializes local data used by the surrounding operation: const audience = "dms-distributor";. Collection contents and assignments below determine its purpose.
15	`const secret = () => createHmac("sha256", env.JWT_SECRET).update(audience).digest("hex");`	Declares/initializes local data used by the surrounding operation: const secret = () => createHmac("sha256", env.JWT_SECRET).update(audience).digest("hex");. Collection contents and assignments below determine its purpose.
16	`const hash = (code: string) => createHash("sha256").update(code).digest();`	Declares/initializes local data used by the surrounding operation: const hash = (code: string) => createHash("sha256").update(code).digest();. Collection contents and assignments below determine its purpose.
17	`const emailInput = z`	Declares/initializes local data used by the surrounding operation: const emailInput = z. Collection contents and assignments below determine its purpose.
18	`  .string()`	Continues the surrounding declaration/expression or text: .string(). Read it with the preceding opening statement (const emailInput = z); it is not a standalone business operation.
19	`  .trim()`	Continues the surrounding declaration/expression or text: .trim(). Read it with the preceding opening statement (.string()); it is not a standalone business operation.
20	`  .email()`	Continues the surrounding declaration/expression or text: .email(). Read it with the preceding opening statement (.trim()); it is not a standalone business operation.
21	`  .max(254)`	Continues the surrounding declaration/expression or text: .max(254). Read it with the preceding opening statement (.email()); it is not a standalone business operation.
22	`  .transform((value) => value.toLowerCase());`	Calls the named method: .transform((value) => value.toLowerCase());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
23	`const idInput = z.string().regex(/^[A-Za-z0-9]{18}$/);`	Declares/initializes local data used by the surrounding operation: const idInput = z.string().regex(/^[A-Za-z0-9]{18}$/);. Collection contents and assignments below determine its purpose.
24	`const keyInput = z.string().uuid();`	Declares/initializes local data used by the surrounding operation: const keyInput = z.string().uuid();. Collection contents and assignments below determine its purpose.
25	`type Claims = { distributorId: string; email: string };`	Defines a compile-time data contract: type Claims = { distributorId: string; email: string };. TypeScript types do not validate untrusted runtime JSON by themselves.
26	`type Request = express.Request & { distributor?: any };`	Defines a compile-time data contract: type Request = express.Request & { distributor?: any };. TypeScript types do not validate untrusted runtime JSON by themselves.

Line	Source code	Explanation / reading note
27	`type Dependencies = {`	Defines a compile-time data contract: type Dependencies = {. TypeScript types do not validate untrusted runtime JSON by themselves.
28	`  records: (query: string) => Promise<any[]>;`	Sets/declares the named object property or style/type member: records: (query: string) => Promise<any[]>;. Interpret it in the enclosing object, props or type definition.
29	`  command: (body: Record<string, unknown>) => Promise<any>;`	Sets/declares the named object property or style/type member: command: (body: Record<string, unknown>) => Promise<any>;. Interpret it in the enclosing object, props or type definition.
30	`  sendCode: (email: string, code: string) => Promise<void>;`	Sets/declares the named object property or style/type member: sendCode: (email: string, code: string) => Promise<void>;. Interpret it in the enclosing object, props or type definition.
31	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`const transport = new DmsTransport((refresh) => salesforce.dmsSession(refresh));`	Declares/initializes local data used by the surrounding operation: const transport = new DmsTransport((refresh) => salesforce.dmsSession(refresh));. Collection contents and assignments below determine its purpose.
33	`const dependencies: Dependencies = {`	Declares/initializes local data used by the surrounding operation: const dependencies: Dependencies = {. Collection contents and assignments below determine its purpose.
34	`  records: (query) => transport.records(query, env.SALESFORCE_API_VERSION),`	Sets/declares the named object property or style/type member: records: (query) => transport.records(query, env.SALESFORCE_API_VERSION),. Interpret it in the enclosing object, props or type definition.
35	`  command: (body) => transport.command(body),`	Sets/declares the named object property or style/type member: command: (body) => transport.command(body),. Interpret it in the enclosing object, props or type definition.
36	`  sendCode: async (email, code) => {`	Sets/declares the named object property or style/type member: sendCode: async (email, code) => {. Interpret it in the enclosing object, props or type definition.
37	`    const response = await salesforce.invokeStandardAction("emailSimple", [`	Waits for this asynchronous operation before continuing: const response = await salesforce.invokeStandardAction("emailSimple", [. The returned result/error must still be handled.
38	`      {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (const response = await salesforce.invokeStandardAction("emailSimple", []); it is not a standalone business operation.

Line	Source code	Explanation / reading note
39	`recipientAddresses: [email],`	Sets/declares the named object property or style/type member: recipientAddresses: [email],. Interpret it in the enclosing object, props or type definition.
40	`emailSubject: "Your DMS distributor sign-in code",`	Sets/declares the named object property or style/type member: emailSubject: "Your DMS distributor sign-in code",. Interpret it in the enclosing object, props or type definition.
41	`emailBody: `Your one-use DMS sign-in code is ${code}. It expires in 10 minutes. Ignore this message if you did not request it.`,`	Sets/declares the named object property or style/type member: emailBody: `Your one-use DMS sign-in code is ${code}. It expires in 10 minutes. Ignore this message if you did not request it.`,. Interpret it in the enclosing object, props or type definition.
42	`sendRichBody: false,`	Sets/declares the named object property or style/type member: sendRichBody: false,. Interpret it in the enclosing object, props or type definition.
43	`senderType: "CurrentUser",`	Sets/declares the named object property or style/type member: senderType: "CurrentUser",. Interpret it in the enclosing object, props or type definition.
44	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
45	`]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
46	`if (!response?.[0]?.isSuccess) throw new Error("Email delivery failed");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!response?.[0]?.isSuccess) throw new Error("Email delivery failed");.
47	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49		Blank line separating logical sections; no executable operation.
50	`export function createDmsRouter(deps: Dependencies = dependencies) {`	Declares a callable function/method: export function createDmsRouter(deps: Dependencies = dependencies) {. Parameters supply its inputs; the following block implements the operation.
51	`const router = express.Router();`	Declares/initializes local data used by the surrounding operation: const router = express.Router();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
52	`  const codes = new Map<string, { digest: Buffer; expires: number; attempts: number }>();`	Declares/initializes local data used by the surrounding operation: const codes = new Map<string, { digest: Buffer; expires: number; attempts: number }>();. Collection contents and assignments below determine its purpose.
53	`  const limits = new Map<string, { count: number; expires: number }>();`	Declares/initializes local data used by the surrounding operation: const limits = new Map<string, { count: number; expires: number }>();. Collection contents and assignments below determine its purpose.
54	`  function limited(key: string, max: number, windowMs: number) {`	Declares a callable function/method: function limited(key: string, max: number, windowMs: number) {. Parameters supply its inputs; the following block implements the operation.
55	`    const now = Date.now();`	Declares/initializes local data used by the surrounding operation: const now = Date.now();. Collection contents and assignments below determine its purpose.
56	`    for (const [key, value] of limits) if (value.expires < now) limits.delete(key);`	Repeats work over the specified records/items or while this condition holds: for (const [key, value] of limits) if (value.expires < now) limits.delete(key);. Check where queries/writes occur relative to the loop.
57	`    const value = limits.get(key) || { count: 0, expires: now + windowMs };`	Declares/initializes local data used by the surrounding operation: const value = limits.get(key) || { count: 0, expires: now + windowMs };. Collection contents and assignments below determine its purpose.
58	`    value.count++;`	Continues the surrounding declaration/expression or text: value.count++;. Read it with the preceding opening statement (const value = limits.get(key) || { count: 0, expires: now + windowMs };); it is not a standalone business operation.
59	`    if (limits.size > 5000 && !limits.has(key)) return true;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (limits.size > 5000 && !limits.has(key)) return true;.
60	`    limits.set(key, value);`	Calls the named method: limits.set(key, value);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
61	`    return value.count > max;`	Returns value.count > max to the caller (or begins returned UI markup) and ends this execution path.
62	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
63	`  async function find(email: string) {`	Declares a callable function/method: async function find(email: string) {. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
64	`    const rows = await deps.records(`	Invokes the external-data boundary: const rows = await deps.records(. Await/result checks determine whether the operation is confirmed.
65	`      `SELECT Id,Name,Login_Email__c,Officer__r.Name,Officer__r.IsActive,Geography__r.Name,Active__c FROM DMS_Distributor__c WHERE Active__c=true AND Login_Email__c='${escapeSoqlLiteral(email)}' LIMIT 2`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id,Name,Login_Email__c,Officer__r.Name,Officer__r.IsActive,Geography__r.Name,Active__c FROM DMS_Distributor__c WHERE Active__c=true AND Login_Email__c='${escapeSoqlLiteral(email)}' LIMIT 2`,. This is in-memory unless it is later persisted by an explicit call.
66	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
67	`    return rows.length === 1 ? rows[0] : undefined;`	Returns rows.length === 1 ? rows[0] : undefined to the caller (or begins returned UI markup) and ends this execution path.
68	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
69	`  router.post("/auth/request-code", async (req, res) => {`	Registers an HTTP route or middleware: router.post("/auth/request-code", async (req, res) => {. Registration order controls which authentication/validation runs first.
70	`    const parsed = emailInput.safeParse(req.body?.email);`	Declares/initializes local data used by the surrounding operation: const parsed = emailInput.safeParse(req.body?.email);. Collection contents and assignments below determine its purpose.
71	`    if (!parsed.success) return fail(res, 400, "Enter a valid email address", "VALIDATION_ERROR");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!parsed.success) return fail(res, 400, "Enter a valid email address", "VALIDATION_ERROR");.
72	`    const email = parsed.data;`	Declares/initializes local data used by the surrounding operation: const email = parsed.data;. Collection contents and assignments below determine its purpose.
73	`    if (limited(`ip:${req.ip}`, 20, 600_000) || limited(`email:${email}`, 1, 60_000))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (limited(`ip:${req.ip}`, 20, 600_000) || limited(`email:${email}`, 1, 60_000)).
74	`      return fail(res, 429, "Please wait before requesting another code", "RATE_LIMITED");`	Returns fail(res, 429, "Please wait before requesting another code", "RATE_LIMITED") to the caller (or begins returned UI markup) and ends this execution path.
75	`    const distributor = await find(email);`	Waits for this asynchronous operation before continuing: const distributor = await find(email);. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
76	`    if (distributor) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (distributor) {.
77	`      // A resend replaces the previous challenge only after the email is accepted.`	Developer comment/documentation: A resend replaces the previous challenge only after the email is accepted. It is not executed.
78	`      // Ensure the new value is different even in the unlikely event of an RNG repeat.`	Developer comment/documentation: Ensure the new value is different even in the unlikely event of an RNG repeat. It is not executed.
79	`      let code: string;`	Declares/initializes local data used by the surrounding operation: let code: string;. Collection contents and assignments below determine its purpose.
80	`      do {`	Continues the surrounding declaration/expression or text: do {. Read it with the preceding opening statement (let code: string;); it is not a standalone business operation.
81	`        code = String(randomInt(100000, 1000000));`	Assigns the right-hand expression to the named variable/property: code = String(randomInt(100000, 1000000));. This is in-memory unless it is later persisted by an explicit call.
82	`      } while (codes.get(email)?.digest.equals(hash(code)));`	Calls the named method: } while (codes.get(email)?.digest.equals(hash(code)));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
83	`      for (const [email, entry] of codes) if (entry.expires < Date.now()) codes.delete(email);`	Repeats work over the specified records/items or while this condition holds: for (const [email, entry] of codes) if (entry.expires < Date.now()) codes.delete(email);. Check where queries/writes occur relative to the loop.
84	`      if (codes.size >= 5000) return fail(res, 503, "Please retry later", "BUSY");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (codes.size >= 5000) return fail(res, 503, "Please retry later", "BUSY");.
85	`      try {`	Starts operations whose failure is handled by the following catch/finally blocks.
86	`        await deps.sendCode(email, code);`	Waits for this asynchronous operation before continuing: await deps.sendCode(email, code);. The returned result/error must still be handled.
87	`      } catch {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
88	`        return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
89	`          res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
90	`503,`	Continues the surrounding declaration/expression or text: 503,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
91	`"The sign-in email could not be sent. Please retry later.",`	Continues the surrounding declaration/expression or text: "The sign-in email could not be sent. Please retry later.",. Read it with the preceding opening statement (503,); it is not a standalone business operation.
92	`"EMAIL_FAILED",`	Continues the surrounding declaration/expression or text: "EMAIL_FAILED",. Read it with the preceding opening statement ("The sign-in email could not be sent. Please retry later.",); it is not a standalone business operation.
93	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
94	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
95	`codes.set(email, {`	Calls the named method: codes.set(email, {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
96	`digest: hash(code),`	Sets/declares the named object property or style/type member: digest: hash(code),. Interpret it in the enclosing object, props or type definition.
97	`expires: Date.now() + 600_000,`	Sets/declares the named object property or style/type member: expires: Date.now() + 600_000,. Interpret it in the enclosing object, props or type definition.
98	`attempts: 0,`	Sets/declares the named object property or style/type member: attempts: 0,. Interpret it in the enclosing object, props or type definition.
99	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
100	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
101	`return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.
102	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
103	`{ expiresInMinutes: 10 },`	Continues the surrounding declaration/expression or text: { expiresInMinutes: 10 },. Read it with the preceding opening statement (res,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
104	`"If this is a unique active distributor login, a code has been sent.",`	Continues the surrounding declaration/expression or text: "If this is a unique active distributor login, a code has been sent.",. Read it with the preceding opening statement ({ expiresInMinutes: 10 },); it is not a standalone business operation.
105	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
106	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
107	`router.post("/auth/verify-code", async (req, res) => {`	Registers an HTTP route or middleware: router.post("/auth/verify-code", async (req, res) => {. Registration order controls which authentication/validation runs first.
108	`const parsed = emailInput.safeParse(req.body?.email);`	Declares/initializes local data used by the surrounding operation: const parsed = emailInput.safeParse(req.body?.email);. Collection contents and assignments below determine its purpose.
109	`if (!parsed.success || !/^\d{6}$/.test(String(req.body.code || "")))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!parsed.success || !/^\d{6}$/.test(String(req.body.code || ""))).
110	`return fail(res, 401, "Invalid or expired code", "INVALID_CODE");`	Returns fail(res, 401, "Invalid or expired code", "INVALID_CODE") to the caller (or begins returned UI markup) and ends this execution path.
111	`const email = parsed.data,`	Declares/initializes local data used by the surrounding operation: const email = parsed.data,. Collection contents and assignments below determine its purpose.
112	`entry = codes.get(email);`	Calls the named method: entry = codes.get(email);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
113	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
114	`!entry ||`	Continues the surrounding declaration/expression or text: !entry ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
115	`entry.expires < Date.now() ||`	Calls the named method: entry.expires < Date.now() ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
116	`++entry.attempts > 5 ||`	Continues the surrounding declaration/expression or text: ++entry.attempts > 5 ||. Read it with the preceding opening statement (entry.expires < Date.now() ||); it is not a standalone business operation.

Line	Source code	Explanation / reading note
117	`      !timingSafeEqual(entry.digest, hash(String(req.body.code)))`	Continues the surrounding declaration/expression or text: !timingSafeEqual(entry.digest, hash(String(req.body.code))). Read it with the preceding opening statement (++entry.attempts > 5 ||); it is not a standalone business operation.
118	`    ) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (!timingSafeEqual(entry.digest, hash(String(req.body.code)))); it is not a standalone business operation.
119	`      if (entry && (entry.attempts >= 5 || entry.expires < Date.now())) codes.delete(email);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (entry && (entry.attempts >= 5 || entry.expires < Date.now())) codes.delete(email);.
120	`      return fail(res, 401, "Invalid or expired code", "INVALID_CODE");`	Returns fail(res, 401, "Invalid or expired code", "INVALID_CODE") to the caller (or begins returned UI markup) and ends this execution path.
121	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
122	`    codes.delete(email);`	Calls the named method: codes.delete(email);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
123	`    const distributor = await find(email);`	Waits for this asynchronous operation before continuing: const distributor = await find(email);. The returned result/error must still be handled.
124	`    if (!distributor)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!distributor).
125	`      return fail(res, 403, "Distributor login is no longer active or unique", "DISABLED");`	Returns fail(res, 403, "Distributor login is no longer active or unique", "DISABLED") to the caller (or begins returned UI markup) and ends this execution path.
126	`    return ok(res, {`	Returns ok(res, { to the caller (or begins returned UI markup) and ends this execution path.
127	`      token: jwt.sign({ distributorId: distributor.Id, email }, secret(), {`	Sets/declares the named object property or style/type member: token: jwt.sign({ distributorId: distributor.Id, email }, secret(), {. Interpret it in the enclosing object, props or type definition.
128	`        algorithm: "HS256",`	Sets/declares the named object property or style/type member: algorithm: "HS256",. Interpret it in the enclosing object, props or type definition.
129	`        audience,`	Continues the surrounding declaration/expression or text: audience,. Read it with the preceding opening statement (algorithm: "HS256",); it is not a standalone business operation.

Line	Source code	Explanation / reading note
130	`expiresIn: "8h",`	Sets/declares the named object property or style/type member: expiresIn: "8h",. Interpret it in the enclosing object, props or type definition.
131	`}),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
132	`user: { id: distributor.Id, name: distributor.Name },`	Sets/declares the named object property or style/type member: user: { id: distributor.Id, name: distributor.Name },. Interpret it in the enclosing object, props or type definition.
133	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
134	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
135	`router.use(async (req, res, next) => {`	Registers an HTTP route or middleware: router.use(async (req, res, next) => {. Registration order controls which authentication/validation runs first.
136	`let claims: Claims;`	Declares/initializes local data used by the surrounding operation: let claims: Claims;. Collection contents and assignments below determine its purpose.
137	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
138	`claims = jwt.verify(req.headers.authorization?.replace(/^Bearer /, "") || "", secret(), {`	Calls the named method: claims = jwt.verify(req.headers.authorization?.replace(/^Bearer /, "") || "", secret(), {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
139	`algorithms: ["HS256"],`	Sets/declares the named object property or style/type member: algorithms: ["HS256"],. Interpret it in the enclosing object, props or type definition.
140	`audience,`	Continues the surrounding declaration/expression or text: audience,. Read it with the preceding opening statement (algorithms: ["HS256"],); it is not a standalone business operation.
141	`}) as Claims;`	Continues the surrounding declaration/expression or text: }) as Claims;. Read it with the preceding opening statement (audience,); it is not a standalone business operation.
142	`idInput.parse(claims.distributorId);`	Calls the named method: idInput.parse(claims.distributorId);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
143	`emailInput.parse(claims.email);`	Calls the named method: emailInput.parse(claims.email);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
144	`    } catch {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
145	`      return fail(res, 401, "Please sign in to DMS again", "UNAUTHORIZED");`	Returns fail(res, 401, "Please sign in to DMS again", "UNAUTHORIZED") to the caller (or begins returned UI markup) and ends this execution path.
146	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
147	`    const row = await find(claims.email);`	Waits for this asynchronous operation before continuing: const row = await find(claims.email);. The returned result/error must still be handled.
148	`    if (!row || row.Id !== claims.distributorId)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!row || row.Id !== claims.distributorId).
149	`      return fail(res, 403, "Distributor login is disabled or changed", "DISABLED");`	Returns fail(res, 403, "Distributor login is disabled or changed", "DISABLED") to the caller (or begins returned UI markup) and ends this execution path.
150	`    (req as Request).distributor = row;`	Assigns the right-hand expression to the named variable/property: (req as Request).distributor = row;. This is in-memory unless it is later persisted by an explicit call.
151	`    next();`	Continues the surrounding declaration/expression or text: next();. Read it with the preceding opening statement ((req as Request).distributor = row;); it is not a standalone business operation.
152	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
153	`  router.get("/overview", async (request, res) => {`	Registers an HTTP route or middleware: router.get("/overview", async (request, res) => {. Registration order controls which authentication/validation runs first.
154	`    const distributor = (request as Request).distributor,`	Declares/initializes local data used by the surrounding operation: const distributor = (request as Request).distributor,. Collection contents and assignments below determine its purpose.
155	`      id = distributor.Id;`	Assigns the right-hand expression to the named variable/property: id = distributor.Id;. This is in-memory unless it is later persisted by an explicit call.
156	`    const outletFilter = `SELECT Id FROM Retailer__c WHERE DMS_Distributor__c='${id}'`;`	Declares/initializes local data used by the surrounding operation: const outletFilter = `SELECT Id FROM Retailer__c WHERE DMS_Distributor__c='${id}'`;. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
157	`const queries: Record<string, string> = {`	Declares/initializes local data used by the surrounding operation: const queries: Record<string, string> = {. Collection contents and assignments below determine its purpose.
158	`outlets: `SELECT Id,Name,Beat__c,Beat__r.Name,Active__c FROM Retailer__c WHERE DMS_Distributor__c='${id}'`,`	Sets/declares the named object property or style/type member: outlets: `SELECT Id,Name,Beat__c,Beat__r.Name,Active__c FROM Retailer__c WHERE DMS_Distributor__c='${id}'`,. Interpret it in the enclosing object, props or type definition.
159	`primaryOrders: `SELECT Id,Name,Status__c,Order_Date__c,Order_Source__c,Employee__r.Name,Total_Amount__c,(SELECT Id,Product__r.Name,Cases__c,Pieces_Per_Case__c,Case_Price__c,Net_Amount__c,Scheme__r.Name,Discount_Amount__c,Free_Cases__c,Free_Product__r.Name,Free_Gift__c,Gift_Quantity__c FROM Order_Lines__r) FROM DMS_Primary_Order__c WHERE Distributor__c='${id}'`,`	Sets/declares the named object property or style/type member: primaryOrders: `SELECT Id,Name,Status__c,Order_Date__c,Order_Source__c,Employee__r.Name,Total_Amount__c,(SELECT Id,Product__r.Name,Cases__c,Pieces_Per_Case__c,Case_Price__c,Net_Amount__c,Scheme__r.Nam. Interpret it in the enclosing object, props or type definition.
160	`secondaryOrders: `SELECT Id,Name,DMS_Status__c,DMS_Decision_Notes__c,Retailer__r.Name,Order_Date__c,Total_Amount__c FROM Sales_Order__c WHERE DMS_Distributor__c='${id}'`,`	Sets/declares the named object property or style/type member: secondaryOrders: `SELECT Id,Name,DMS_Status__c,DMS_Decision_Notes__c,Retailer__r.Name,Order_Date__c,Total_Amount__c FROM Sales_Order__c WHERE DMS_Distributor__c='${id}'`,. Interpret it in the enclosing object, props or type definition.
161	`secondaryLines: `SELECT Id,Sales_Order__c,Product__r.Name,Piece_Quantity__c,Line_Amount__c FROM Order_Item__c WHERE Sales_Order__r.DMS_Distributor__c='${id}'`,`	Sets/declares the named object property or style/type member: secondaryLines: `SELECT Id,Sales_Order__c,Product__r.Name,Piece_Quantity__c,Line_Amount__c FROM Order_Item__c WHERE Sales_Order__r.DMS_Distributor__c='${id}'`,. Interpret it in the enclosing object, props or type definition.
162	`returns: `SELECT Id,Name,Outlet__r.Name,Product__r.Name,Quantity__c,Return_Reason__c,DMS_Status__c,DMS_Decision_Notes__c FROM Product_Return__c WHERE DMS_Distributor__c='${id}'`,`	Sets/declares the named object property or style/type member: returns: `SELECT Id,Name,Outlet__r.Name,Product__r.Name,Quantity__c,Return_Reason__c,DMS_Status__c,DMS_Decision_Notes__c FROM Product_Return__c WHERE DMS_Distributor__c='${id}'`,. Interpret it in the enclosing object, props or type definition.
163	`primaryReturns: `SELECT Id,Name,Status__c,Employee__r.Name,Total_Cases__c,Total_Amount__c FROM DMS_Primary_Return__c WHERE Distributor__c='${id}'`,`	Sets/declares the named object property or style/type member: primaryReturns: `SELECT Id,Name,Status__c,Employee__r.Name,Total_Cases__c,Total_Amount__c FROM DMS_Primary_Return__c WHERE Distributor__c='${id}'`,. Interpret it in the enclosing object, props or type definition.
164	`inventory: `SELECT Id,Product__r.Name,Batch_Number__c,Expiry_Date__c,On_Hand_Pieces__c,Available_Pieces__c,Low_Stock__c,Expired__c,Reorder_Level_Pieces__c FROM DMS_Inventory__c WHERE Distributor__c='${id}'`,`	Sets/declares the named object property or style/type member: inventory: `SELECT Id,Product__r.Name,Batch_Number__c,Expiry_Date__c,On_Hand_Pieces__c,Available_Pieces__c,Low_Stock__c,Expired__c,Reorder_Level_Pieces__c FROM DMS_Inventory__c WHERE Distributor__c='$. Interpret it in the enclosing object, props or type definition.
165	`receipts: `SELECT Id,Name,Status__c,Received_Date__c,Total_Value__c,Total_Pieces__c FROM DMS_Goods_Receipt__c WHERE Distributor__c='${id}'`,`	Sets/declares the named object property or style/type member: receipts: `SELECT Id,Name,Status__c,Received_Date__c,Total_Value__c,Total_Pieces__c FROM DMS_Goods_Receipt__c WHERE Distributor__c='${id}'`,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
166	`invoices: `SELECT Id,Name,Status__c,Invoice_Date__c,Outlet__r.Name,Total_Amount__c,Balance_Due__c FROM DMS_Invoice__c WHERE Distributor__c='${id}'`,`	Sets/declares the named object property or style/type member: invoices: `SELECT Id,Name,Status__c,Invoice_Date__c,Outlet__r.Name,Total_Amount__c,Balance_Due__c FROM DMS_Invoice__c WHERE Distributor__c='${id}'`,. Interpret it in the enclosing object, props or type definition.
167	`tickets: `SELECT Id,Name,Subject__c,Category__c,Description__c,Status__c,Resolution__c,Officer__r.Name FROM DMS_Support_Ticket__c WHERE Distributor__c='${id}'`,`	Sets/declares the named object property or style/type member: tickets: `SELECT Id,Name,Subject__c,Category__c,Description__c,Status__c,Resolution__c,Officer__r.Name FROM DMS_Support_Ticket__c WHERE Distributor__c='${id}'`,. Interpret it in the enclosing object, props or type definition.
168	`outletTickets: `SELECT Id,Name,Subject__c,Description__c,Status__c,Outlet__r.Name FROM SFA_Ticket__c WHERE Outlet__c IN (${outletFilter})`,`	Sets/declares the named object property or style/type member: outletTickets: `SELECT Id,Name,Subject__c,Description__c,Status__c,Outlet__r.Name FROM SFA_Ticket__c WHERE Outlet__c IN (${outletFilter})`,. Interpret it in the enclosing object, props or type definition.
169	`stockChecks: `SELECT Id,Product__r.Name,Outlet__r.Name,Quantity__c,CreatedDate FROM Stock_Check__c WHERE Outlet__c IN (${outletFilter})`,`	Sets/declares the named object property or style/type member: stockChecks: `SELECT Id,Product__r.Name,Outlet__r.Name,Quantity__c,CreatedDate FROM Stock_Check__c WHERE Outlet__c IN (${outletFilter})`,. Interpret it in the enclosing object, props or type definition.
170	`assets: `SELECT Id,Name,Asset_Name__c,Asset_Code__c,Status__c,Given_Date__c,Picture_URL__c,Outlet__r.Name,Visit__r.Employee__r.Name,CreatedDate FROM Asset_Survey__c WHERE Outlet__c IN (${outletFilter})`,`	Sets/declares the named object property or style/type member: assets: `SELECT Id,Name,Asset_Name__c,Asset_Code__c,Status__c,Given_Date__c,Picture_URL__c,Outlet__r.Name,Visit__r.Employee__r.Name,CreatedDate FROM Asset_Survey__c WHERE Outlet__c IN (${outletFilter}. Interpret it in the enclosing object, props or type definition.
171	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
172	`const result: Record<string, any> = {`	Declares/initializes local data used by the surrounding operation: const result: Record<string, any> = {. Collection contents and assignments below determine its purpose.
173	`distributor,`	Continues the surrounding declaration/expression or text: distributor,. Read it with the preceding opening statement (const result: Record<string, any> = {); it is not a standalone business operation.
174	`retrievedAt: new Date().toISOString(),`	Sets/declares the named object property or style/type member: retrievedAt: new Date().toISOString(),. Interpret it in the enclosing object, props or type definition.
175	`limitPerList: 200,`	Sets/declares the named object property or style/type member: limitPerList: 200,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
176	`    };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
177	`    // Sequential bounded queries avoid flooding the existing SFA Salesforce connection.`	Developer comment/documentation: Sequential bounded queries avoid flooding the existing SFA Salesforce connection. It is not executed.
178	`    for (const [name, query] of Object.entries(queries))`	Repeats work over the specified records/items or while this condition holds: for (const [name, query] of Object.entries(queries)). Check where queries/writes occur relative to the loop.
179	`      result[name] = await deps.records(`${query} ORDER BY CreatedDate DESC LIMIT 200`);`	Invokes the external-data boundary: result[name] = await deps.records(`${query} ORDER BY CreatedDate DESC LIMIT 200`);. Await/result checks determine whether the operation is confirmed.
180	`    for (const order of result.secondaryOrders)`	Repeats work over the specified records/items or while this condition holds: for (const order of result.secondaryOrders). Check where queries/writes occur relative to the loop.
181	`      order.lines = result.secondaryLines.filter((line: any) => line.Sales_Order__c === order.Id);`	Transforms/selects/aggregates collection values with the callback shown here: order.lines = result.secondaryLines.filter((line: any) => line.Sales_Order__c === order.Id);. Read the callback body and result assignment together.
182	`    result.truncatedLists = Object.keys(queries).filter((name) => result[name].length === 200);`	Transforms/selects/aggregates collection values with the callback shown here: result.truncatedLists = Object.keys(queries).filter((name) => result[name].length === 200);. Read the callback body and result assignment together.
183	`    delete result.secondaryLines;`	Performs Salesforce DML: delete result.secondaryLines;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
184	`    result.dashboard = await distributorDashboard(id, deps.records);`	Invokes the external-data boundary: result.dashboard = await distributorDashboard(id, deps.records);. Await/result checks determine whether the operation is confirmed.
185	`    return ok(res, result);`	Returns ok(res, result) to the caller (or begins returned UI markup) and ends this execution path.
186	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
187	`  router.get("/primary/catalogue", async (request, res) => {`	Registers an HTTP route or middleware: router.get("/primary/catalogue", async (request, res) => {. Registration order controls which authentication/validation runs first.
188	`    return ok(res, await primaryCatalogue((request as Request).distributor, deps.records));`	Invokes the external-data boundary: return ok(res, await primaryCatalogue((request as Request).distributor, deps.records));. Await/result checks determine whether the operation is confirmed.

Line	Source code	Explanation / reading note
189	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
190	`router.post("/primary/orders", async (request, res) => {`	Registers an HTTP route or middleware: router.post("/primary/orders", async (request, res) => {. Registration order controls which authentication/validation runs first.
191	`  const body = z`	Declares/initializes local data used by the surrounding operation: const body = z. Collection contents and assignments below determine its purpose.
192	`    .object({`	Continues the surrounding declaration/expression or text: .object({. Read it with the preceding opening statement (const body = z); it is not a standalone business operation.
193	`      requestKey: keyInput,`	Sets/declares the named object property or style/type member: requestKey: keyInput,. Interpret it in the enclosing object, props or type definition.
194	`      notes: z.string().max(1000).optional(),`	Sets/declares the named object property or style/type member: notes: z.string().max(1000).optional(),. Interpret it in the enclosing object, props or type definition.
195	`      lines: z`	Sets/declares the named object property or style/type member: lines: z. Interpret it in the enclosing object, props or type definition.
196	`        .array(`	Continues the surrounding declaration/expression or text: .array(. Read it with the preceding opening statement (lines: z); it is not a standalone business operation.
197	`          z`	Continues the surrounding declaration/expression or text: z. Read it with the preceding opening statement (.array(); it is not a standalone business operation.
198	`            .object({`	Continues the surrounding declaration/expression or text: .object({. Read it with the preceding opening statement (z); it is not a standalone business operation.
199	`              productId: idInput,`	Sets/declares the named object property or style/type member: productId: idInput,. Interpret it in the enclosing object, props or type definition.
200	`              cases: z.number().int().positive().max(100000),`	Sets/declares the named object property or style/type member: cases: z.number().int().positive().max(100000),. Interpret it in the enclosing object, props or type definition.
201	`              schemeId: idInput.optional(),`	Sets/declares the named object property or style/type member: schemeId: idInput.optional(),. Interpret it in the enclosing object, props or type definition.
202	`            })`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
203	`.strict(),`	Continues the surrounding declaration/expression or text: .strict(),. Read it with the preceding opening statement (})); it is not a standalone business operation.
204	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
205	`.min(1)`	Continues the surrounding declaration/expression or text: .min(1). Read it with the preceding opening statement ( )); it is not a standalone business operation.
206	`.max(50),`	Continues the surrounding declaration/expression or text: .max(50),. Read it with the preceding opening statement (.min(1)); it is not a standalone business operation.
207	`})`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
208	`.strict()`	Continues the surrounding declaration/expression or text: .strict(). Read it with the preceding opening statement (})); it is not a standalone business operation.
209	`.parse(request.body);`	Continues the surrounding declaration/expression or text: .parse(request.body);. Read it with the preceding opening statement (.strict()); it is not a standalone business operation.
210	`if (new Set(body.lines.map((line) => line.productId)).size !== body.lines.length)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (new Set(body.lines.map((line) => line.productId)).size !== body.lines.length).
211	`return fail(res, 400, "Combine repeated products into one line", "VALIDATION_ERROR");`	Returns fail(res, 400, "Combine repeated products into one line", "VALIDATION_ERROR") to the caller (or begins returned UI markup) and ends this execution path.
212	`return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.
213	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
214	`await deps.command({`	Invokes the external-data boundary: await deps.command({. Await/result checks determine whether the operation is confirmed.
215	`...body,`	Continues the surrounding declaration/expression or text: ...body,. Read it with the preceding opening statement (await deps.command({); it is not a standalone business operation.
216	`action: "distributorPrimaryOrder",`	Sets/declares the named object property or style/type member: action: "distributorPrimaryOrder",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
217	`distributorId: (request as Request).distributor.Id,`	Sets/declares the named object property or style/type member: distributorId: (request as Request).distributor.Id,. Interpret it in the enclosing object, props or type definition.
218	`}),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
219	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
220	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
221	`router.get("/reports", async (request, res) => {`	Registers an HTTP route or middleware: router.get("/reports", async (request, res) => {. Registration order controls which authentication/validation runs first.
222	`return ok(res, await distributorReports((request as Request).distributor.Id, deps.records));`	Invokes the external-data boundary: return ok(res, await distributorReports((request as Request).distributor.Id, deps.records));. Await/result checks determine whether the operation is confirmed.
223	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
224	`router.post("/tickets", async (request, res) => {`	Registers an HTTP route or middleware: router.post("/tickets", async (request, res) => {. Registration order controls which authentication/validation runs first.
225	`const body = z`	Declares/initializes local data used by the surrounding operation: const body = z. Collection contents and assignments below determine its purpose.
226	`.object({`	Continues the surrounding declaration/expression or text: .object({. Read it with the preceding opening statement (const body = z); it is not a standalone business operation.
227	`requestKey: keyInput,`	Sets/declares the named object property or style/type member: requestKey: keyInput,. Interpret it in the enclosing object, props or type definition.
228	`subject: z.string().trim().min(1).max(180),`	Sets/declares the named object property or style/type member: subject: z.string().trim().min(1).max(180),. Interpret it in the enclosing object, props or type definition.
229	`category: z.enum(["Product", "Portal", "Delivery"]),`	Sets/declares the named object property or style/type member: category: z.enum(["Product", "Portal", "Delivery"]),. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
230	`description: z.string().trim().min(1).max(32000),`	Sets/declares the named object property or style/type member: description: z.string().trim().min(1).max(32000),. Interpret it in the enclosing object, props or type definition.
231	`})`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
232	`.parse(request.body);`	Continues the surrounding declaration/expression or text: .parse(request.body);. Read it with the preceding opening statement (})); it is not a standalone business operation.
233	`return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.
234	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
235	`await deps.command({`	Invokes the external-data boundary: await deps.command({. Await/result checks determine whether the operation is confirmed.
236	`...body,`	Continues the surrounding declaration/expression or text: ...body,. Read it with the preceding opening statement (await deps.command({); it is not a standalone business operation.
237	`action: "ticket",`	Sets/declares the named object property or style/type member: action: "ticket",. Interpret it in the enclosing object, props or type definition.
238	`distributorId: (request as Request).distributor.Id,`	Sets/declares the named object property or style/type member: distributorId: (request as Request).distributor.Id,. Interpret it in the enclosing object, props or type definition.
239	`}),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
240	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
241	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
242	`router.post("/transactions", async (request, res) => {`	Registers an HTTP route or middleware: router.post("/transactions", async (request, res) => {. Registration order controls which authentication/validation runs first.
243	`const base = { recordId: idInput, notes: z.string().max(255).optional() };`	Declares/initializes local data used by the surrounding operation: const base = { recordId: idInput, notes: z.string().max(255).optional() };. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
244	`    const body = z`	Declares/initializes local data used by the surrounding operation: const body = z. Collection contents and assignments below determine its purpose.
245	`      .discriminatedUnion("action", [`	Continues the surrounding declaration/expression or text: .discriminatedUnion("action", [. Read it with the preceding opening statement (const body = z); it is not a standalone business operation.
246	`        z.object({`	Calls the named method: z.object({. Its implementation defines the side effect/result; use the symbol/file index to follow it.
247	`          ...base,`	Continues the surrounding declaration/expression or text: ...base,. Read it with the preceding opening statement (z.object({); it is not a standalone business operation.
248	`          action: z.literal("secondaryDecision"),`	Sets/declares the named object property or style/type member: action: z.literal("secondaryDecision"),. Interpret it in the enclosing object, props or type definition.
249	`          decision: z.enum(["Approved", "Rejected"]),`	Sets/declares the named object property or style/type member: decision: z.enum(["Approved", "Rejected"]),. Interpret it in the enclosing object, props or type definition.
250	`        }),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
251	`        z.object({`	Calls the named method: z.object({. Its implementation defines the side effect/result; use the symbol/file index to follow it.
252	`          ...base,`	Continues the surrounding declaration/expression or text: ...base,. Read it with the preceding opening statement (z.object({); it is not a standalone business operation.
253	`          action: z.literal("returnDecision"),`	Sets/declares the named object property or style/type member: action: z.literal("returnDecision"),. Interpret it in the enclosing object, props or type definition.
254	`          decision: z.enum(["Approved", "Rejected"]),`	Sets/declares the named object property or style/type member: decision: z.enum(["Approved", "Rejected"]),. Interpret it in the enclosing object, props or type definition.
255	`        }),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
256	`        z.object({`	Calls the named method: z.object({. Its implementation defines the side effect/result; use the symbol/file index to follow it.
257	`          action: z.literal("receiveGoods"),`	Sets/declares the named object property or style/type member: action: z.literal("receiveGoods"),. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
258	`receiptKind: z.enum(["Paid", "Free"]).optional(),`	Sets/declares the named object property or style/type member: receiptKind: z.enum(["Paid", "Free"]).optional(),. Interpret it in the enclosing object, props or type definition.
259	`recordId: idInput,`	Sets/declares the named object property or style/type member: recordId: idInput,. Interpret it in the enclosing object, props or type definition.
260	`requestKey: keyInput,`	Sets/declares the named object property or style/type member: requestKey: keyInput,. Interpret it in the enclosing object, props or type definition.
261	`cases: z.number().int().positive().max(100000),`	Sets/declares the named object property or style/type member: cases: z.number().int().positive().max(100000),. Interpret it in the enclosing object, props or type definition.
262	`batch: z.string().trim().min(1).max(80),`	Sets/declares the named object property or style/type member: batch: z.string().trim().min(1).max(80),. Interpret it in the enclosing object, props or type definition.
263	`expiry: z.iso.date(),`	Sets/declares the named object property or style/type member: expiry: z.iso.date(),. Interpret it in the enclosing object, props or type definition.
264	`}),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
265	`])`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
266	`.parse(request.body);`	Continues the surrounding declaration/expression or text: .parse(request.body);. Read it with the preceding opening statement ( ])); it is not a standalone business operation.
267	`if ("decision" in body && body.decision === "Rejected" && !body.notes?.trim())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ("decision" in body && body.decision === "Rejected" && !body.notes?.trim()).
268	`return fail(res, 400, "Enter a rejection reason", "VALIDATION_ERROR");`	Returns fail(res, 400, "Enter a rejection reason", "VALIDATION_ERROR") to the caller (or begins returned UI markup) and ends this execution path.
269	`return ok(`	Returns ok(to the caller (or begins returned UI markup) and ends this execution path.
270	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return ok(); it is not a standalone business operation.
271	`await deps.command({`	Invokes the external-data boundary: await deps.command({. Await/result checks determine whether the operation is confirmed.

Line	Source code	Explanation / reading note
272	`...body,`	Continues the surrounding declaration/expression or text: ...body,. Read it with the preceding opening statement (await deps.command({}); it is not a standalone business operation.
273	`distributorId: (request as Request).distributor.Id,`	Sets/declares the named object property or style/type member: distributorId: (request as Request).distributor.Id,. Interpret it in the enclosing object, props or type definition.
274	`}),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
275	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
276	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
277	`router.use((_req, res) => fail(res, 404, "DMS endpoint not found", "NOT_FOUND"));`	Registers an HTTP route or middleware: router.use((_req, res) => fail(res, 404, "DMS endpoint not found", "NOT_FOUND"));. Registration order controls which authentication/validation runs first.
278	`router.use(((error: any, _req: any, res: any, _next: any) => {`	Registers an HTTP route or middleware: router.use(((error: any, _req: any, res: any, _next: any) => {. Registration order controls which authentication/validation runs first.
279	`if (error instanceof z.ZodError)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (error instanceof z.ZodError).
280	`return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
281	`res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
282	`400,`	Continues the surrounding declaration/expression or text: 400,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
283	`error.issues.map((item) => `${item.path.join(".")}: ${item.message}`).join("; "),`	Transforms/selects/aggregates collection values with the callback shown here: error.issues.map((item) => `${item.path.join(".")}: ${item.message}`).join("; "),. Read the callback body and result assignment together.
284	`"VALIDATION_ERROR",`	Continues the surrounding declaration/expression or text: "VALIDATION_ERROR",. Read it with the preceding opening statement (error.issues.map((item) => `${item.path.join(".")}: ${item.message}`).join("; "),); it is not a standalone business operation.

Line	Source code	Explanation / reading note
285	`      );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
286	`    if (error instanceof DmsUpstreamError)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (error instanceof DmsUpstreamError).
287	`      return fail(res, error.status, error.message, "SALESFORCE_ERROR");`	Returns fail(res, error.status, error.message, "SALESFORCE_ERROR") to the caller (or begins returned UI markup) and ends this execution path.
288	`    return fail(`	Returns fail(to the caller (or begins returned UI markup) and ends this execution path.
289	`      res,`	Continues the surrounding declaration/expression or text: res,. Read it with the preceding opening statement (return fail(); it is not a standalone business operation.
290	`      502,`	Continues the surrounding declaration/expression or text: 502,. Read it with the preceding opening statement (res,); it is not a standalone business operation.
291	`      "Salesforce is unavailable or the DMS configuration is incomplete. Please retry or contact the administrator.",`	Continues the surrounding declaration/expression or text: "Salesforce is unavailable or the DMS configuration is incomplete. Please retry or contact the administrator.",. Read it with the preceding opening statement (502,); it is not a standalone business operation.
292	`      "UPSTREAM_ERROR",`	Continues the surrounding declaration/expression or text: "UPSTREAM_ERROR",. Read it with the preceding opening statement ("Salesforce is unavailable or the DMS configuration is incomplete. Please retry or contact the administrator.",); it is not a standalone business operation.
293	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
294	`  }) as express.ErrorRequestHandler);`	Continues the surrounding declaration/expression or text: }) as express.ErrorRequestHandler);. Read it with the preceding opening statement ( );); it is not a standalone business operation.
295	`  return router;`	Returns router to the caller (or begins returned UI markup) and ends this execution path.
296	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/dms/transport.simulation.test.ts

Regression tests for transport.simulation. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

159 numbered source lines | SHA-256 f5ffa571e9e07674f50c5d5354621a922cbb1a86e606f74d9223e16559be8665

Line	Source code	Explanation / reading note
1	`import { describe, it, expect } from "vitest";`	Imports dependencies/types used below: import { describe, it, expect } from "vitest";. Importing a function does not call it.
2	`import { randomUUID } from "node:crypto";`	Imports dependencies/types used below: import { randomUUID } from "node:crypto";. Importing a function does not call it.
3	`import { DmsTransport } from "./transport.js";`	Imports dependencies/types used below: import { DmsTransport } from "./transport.js";. Importing a function does not call it.
4	`import { distributorReports } from "./reports.js";`	Imports dependencies/types used below: import { distributorReports } from "./reports.js";. Importing a function does not call it.
5	`import express from "express";`	Imports dependencies/types used below: import express from "express";. Importing a function does not call it.
6	`import request from "supertest";`	Imports dependencies/types used below: import request from "supertest";. Importing a function does not call it.
7	`import { createDmsRouter } from "./router.js";`	Imports dependencies/types used below: import { createDmsRouter } from "./router.js";. Importing a function does not call it.
8		Blank line separating logical sections; no executable operation.
9	`// Opt-in integration test: start the documented local Postman simulation first.`	Developer comment/documentation: Opt-in integration test: start the documented local Postman simulation first. It is not executed.
10	`describe.skipIf(!process.env.DMS_SIMULATION_URL)("DMS actual HTTP dependency simulation", () => {`	Calls the named method: describe.skipIf(!process.env.DMS_SIMULATION_URL)("DMS actual HTTP dependency simulation", () => {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
11	`  const simulationSession = randomUUID();`	Declares/initializes local data used by the surrounding operation: const simulationSession = randomUUID();. Collection contents and assignments below determine its purpose.
12	`  const transport = new DmsTransport(`	Declares/initializes local data used by the surrounding operation: const transport = new DmsTransport(. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
13	`    async () => ({`	Continues the surrounding declaration/expression or text: async () => ({. Read it with the preceding opening statement (const transport = new DmsTransport(); it is not a standalone business operation.
14	`      instanceUrl: process.env.DMS_SIMULATION_URL!,`	Sets/declares the named object property or style/type member: instanceUrl: process.env.DMS_SIMULATION_URL!,. Interpret it in the enclosing object, props or type definition.
15	`      accessToken: "simulation-only-not-a-credential",`	Sets/declares the named object property or style/type member: accessToken: "simulation-only-not-a-credential",. Interpret it in the enclosing object, props or type definition.
16	`    }),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`    (url, options) =>`	Continues the surrounding declaration/expression or text: (url, options) =>. Read it with the preceding opening statement (}),); it is not a standalone business operation.
18	`      fetch(url, {`	Invokes the external-data boundary: fetch(url, {. Await/result checks determine whether the operation is confirmed.
19	`        ...options,`	Continues the surrounding declaration/expression or text: ...options,. Read it with the preceding opening statement (fetch(url, {); it is not a standalone business operation.
20	`        headers: { ...options?.headers, "x-mock-session": simulationSession },`	Sets/declares the named object property or style/type member: headers: { ...options?.headers, "x-mock-session": simulationSession },. Interpret it in the enclosing object, props or type definition.
21	`      }),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
22	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
23	`  const ticket = () => ({`	Declares/initializes local data used by the surrounding operation: const ticket = () => ({. Collection contents and assignments below determine its purpose.
24	`    action: "ticket",`	Sets/declares the named object property or style/type member: action: "ticket",. Interpret it in the enclosing object, props or type definition.
25	`    distributorId: "a0T000000000001AAA",`	Sets/declares the named object property or style/type member: distributorId: "a0T000000000001AAA",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
26	`    requestKey: randomUUID(),`	Sets/declares the named object property or style/type member: requestKey: randomUUID(),. Interpret it in the enclosing object, props or type definition.
27	`    subject: "Delivery",`	Sets/declares the named object property or style/type member: subject: "Delivery",. Interpret it in the enclosing object, props or type definition.
28	`    category: "Delivery",`	Sets/declares the named object property or style/type member: category: "Delivery",. Interpret it in the enclosing object, props or type definition.
29	`    description: "Missing shipment",`	Sets/declares the named object property or style/type member: description: "Missing shipment",. Interpret it in the enclosing object, props or type definition.
30	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31	`  it("runs distributor catalogue and submission routes through the real Salesforce HTTP transport", async () => {`	Continues the surrounding declaration/expression or text: it("runs distributor catalogue and submission routes through the real Salesforce HTTP transport", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
32	`    let code = "";`	Declares/initializes local data used by the surrounding operation: let code = "";. Collection contents and assignments below determine its purpose.
33	`    const app = express();`	Declares/initializes local data used by the surrounding operation: const app = express();. Collection contents and assignments below determine its purpose.
34	`    app.use(express.json());`	Registers an HTTP route or middleware: app.use(express.json());. Registration order controls which authentication/validation runs first.
35	`    app.use(`	Registers an HTTP route or middleware: app.use(. Registration order controls which authentication/validation runs first.
36	`      "/dms",`	Continues the surrounding declaration/expression or text: "/dms",. Read it with the preceding opening statement (app.use(); it is not a standalone business operation.
37	`      createDmsRouter({`	Continues the surrounding declaration/expression or text: createDmsRouter({. Read it with the preceding opening statement ("/dms",); it is not a standalone business operation.
38	`        records: (q) => transport.records(q),`	Sets/declares the named object property or style/type member: records: (q) => transport.records(q),. Interpret it in the enclosing object, props or type definition.
39	`        command: (b) => transport.command(b),`	Sets/declares the named object property or style/type member: command: (b) => transport.command(b),. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
40	`sendCode: async (_, value) => {`	Sets/declares the named object property or style/type member: sendCode: async (_, value) => {. Interpret it in the enclosing object, props or type definition.
41	`code = value;`	Assigns the right-hand expression to the named variable/property: code = value;. This is in-memory unless it is later persisted by an explicit call.
42	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43	`}),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
45	`await request(app).post("/dms/auth/request-code").send({ email: "test@example.invalid" });`	Waits for this asynchronous operation before continuing: await request(app).post("/dms/auth/request-code").send({ email: "test@example.invalid" });. The returned result/error must still be handled.
46	`const login = await request(app)`	Waits for this asynchronous operation before continuing: const login = await request(app). The returned result/error must still be handled.
47	`.post("/dms/auth/verify-code")`	Continues the surrounding declaration/expression or text: .post("/dms/auth/verify-code"). Read it with the preceding opening statement (const login = await request(app)); it is not a standalone business operation.
48	`.send({ email: "test@example.invalid", code });`	Continues the surrounding declaration/expression or text: .send({ email: "test@example.invalid", code });. Read it with the preceding opening statement (.post("/dms/auth/verify-code")); it is not a standalone business operation.
49	`const token = login.body.data.token;`	Declares/initializes local data used by the surrounding operation: const token = login.body.data.token;. Collection contents and assignments below determine its purpose.
50	`const catalogue = await request(app)`	Waits for this asynchronous operation before continuing: const catalogue = await request(app). The returned result/error must still be handled.
51	`.get("/dms/primary/catalogue")`	Continues the surrounding declaration/expression or text: .get("/dms/primary/catalogue"). Read it with the preceding opening statement (const catalogue = await request(app)); it is not a standalone business operation.

Line	Source code	Explanation / reading note
52	`.auth(token, { type: "bearer" });`	Continues the surrounding declaration/expression or text: .auth(token, { type: "bearer" });. Read it with the preceding opening statement (.get("/dms/primary/catalogue")); it is not a standalone business operation.
53	`expect(catalogue.status).toBe(200);`	Test assertion comparing an expected outcome to actual behavior: expect(catalogue.status).toBe(200);. A mismatch fails the test.
54	`expect(catalogue.body.data.products[0].schemes).toHaveLength(1);`	Test assertion comparing an expected outcome to actual behavior: expect(catalogue.body.data.products[0].schemes).toHaveLength(1);. A mismatch fails the test.
55	`const body = {`	Declares/initializes local data used by the surrounding operation: const body = {. Collection contents and assignments below determine its purpose.
56	`requestKey: randomUUID(),`	Sets/declares the named object property or style/type member: requestKey: randomUUID(),. Interpret it in the enclosing object, props or type definition.
57	`lines: [{ productId: "a01000000000001AAA", cases: 2, schemeId: "a02000000000001AAA" }],`	Sets/declares the named object property or style/type member: lines: [{ productId: "a01000000000001AAA", cases: 2, schemeId: "a02000000000001AAA" }],. Interpret it in the enclosing object, props or type definition.
58	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
59	`const submit = (payload: any) =>`	Declares/initializes local data used by the surrounding operation: const submit = (payload: any) =>. Collection contents and assignments below determine its purpose.
60	`request(app).post("/dms/primary/orders").auth(token, { type: "bearer" }).send(payload);`	Continues the surrounding declaration/expression or text: request(app).post("/dms/primary/orders").auth(token, { type: "bearer" }).send(payload);. Read it with the preceding opening statement (const submit = (payload: any) =>); it is not a standalone business operation.
61	`const saved = await submit(body);`	Waits for this asynchronous operation before continuing: const saved = await submit(body);. The returned result/error must still be handled.
62	`expect(saved.status).toBe(200);`	Test assertion comparing an expected outcome to actual behavior: expect(saved.status).toBe(200);. A mismatch fails the test.
63	`expect(saved.body.data.status).toBe("Submitted");`	Test assertion comparing an expected outcome to actual behavior: expect(saved.body.data.status).toBe("Submitted");. A mismatch fails the test.

Line	Source code	Explanation / reading note
64	`    expect((await submit(body)).body.data).toEqual(saved.body.data);`	Test assertion comparing an expected outcome to actual behavior: expect((await submit(body)).body.data).toEqual(saved.body.data);. A mismatch fails the test.
65	`    expect((await submit({ ...body, notes: "changed" })).status).toBe(400);`	Test assertion comparing an expected outcome to actual behavior: expect((await submit({ ...body, notes: "changed" })).status).toBe(400);. A mismatch fails the test.
66	`    expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
67	`      (await submit({ ...body, requestKey: randomUUID(), lines: [{ . ..body.lines[0], cases: 1 }] }))`	Waits for this asynchronous operation before continuing: (await submit({ ...body, requestKey: randomUUID(), lines: [{ ...body.lines[0], cases: 1 }] })). The returned result/error must still be handled.
68	`        .status,`	Continues the surrounding declaration/expression or text: .status,. Read it with the preceding opening statement ((await submit({ ...body, requestKey: randomUUID(), lines: [{ ...body.lines[0], cases: 1 }] }))); it is not a standalone business operation.
69	`    ).toBe(400);`	Continues the surrounding declaration/expression or text:).toBe(400);. Read it with the preceding opening statement (.status,); it is not a standalone business operation.
70	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
71	`  it("calculates management reports through real HTTP reads", async () => {`	Continues the surrounding declaration/expression or text: it("calculates management reports through real HTTP reads", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
72	`    const reports = await distributorReports(`	Waits for this asynchronous operation before continuing: const reports = await distributorReports(. The returned result/error must still be handled.
73	`      "a0T000000000001AAA",`	Continues the surrounding declaration/expression or text: "a0T000000000001AAA",. Read it with the preceding opening statement (const reports = await distributorReports(); it is not a standalone business operation.
74	`      (query) => transport.records(query),`	Calls the named method: (query) => transport.records(query),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
75	`      new Date("2026-10-21T08:00:00Z"),`	Continues the surrounding declaration/expression or text: new Date("2026-10-21T08:00:00Z"),. Read it with the preceding opening statement ((query) => transport.records(query),); it is not a standalone business operation.

Line	Source code	Explanation / reading note
76	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
77	`    expect(reports.sales.current).toBe(200);`	Test assertion comparing an expected outcome to actual behavior: expect(reports.sales.current).toBe(200);. A mismatch fails the test.
78	`    expect(reports.sales.target).toBeNull();`	Test assertion comparing an expected outcome to actual behavior: expect(reports.sales.target).toBeNull();. A mismatch fails the test.
79	`    expect(reports.coverage.percent).toBe(100);`	Test assertion comparing an expected outcome to actual behavior: expect(reports.coverage.percent).toBe(100);. A mismatch fails the test.
80	`    expect(reports.beats[0]).toMatchObject({`	Test assertion comparing an expected outcome to actual behavior: expect(reports.beats[0]).toMatchObject({. A mismatch fails the test.
81	`      planned: 1,`	Sets/declares the named object property or style/type member: planned: 1,. Interpret it in the enclosing object, props or type definition.
82	`      visited: 1,`	Sets/declares the named object property or style/type member: visited: 1,. Interpret it in the enclosing object, props or type definition.
83	`      productive: 1,`	Sets/declares the named object property or style/type member: productive: 1,. Interpret it in the enclosing object, props or type definition.
84	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
85	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
86	`  it("posts a goods receipt through the authenticated route and reads it back", async () => {`	Continues the surrounding declaration/expression or text: it("posts a goods receipt through the authenticated route and reads it back", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
87	`    let code = "";`	Declares/initializes local data used by the surrounding operation: let code = "";. Collection contents and assignments below determine its purpose.
88	`    const app = express();`	Declares/initializes local data used by the surrounding operation: const app = express();. Collection contents and assignments below determine its purpose.
89	`    app.use(express.json());`	Registers an HTTP route or middleware: app.use(express.json());. Registration order controls which authentication/validation runs first.

Line	Source code	Explanation / reading note
90	`app.use(`	Registers an HTTP route or middleware: app.use(. Registration order controls which authentication/validation runs first.
91	`"/dms",`	Continues the surrounding declaration/expression or text: "/dms",. Read it with the preceding opening statement (app.use(); it is not a standalone business operation.
92	`createDmsRouter({`	Continues the surrounding declaration/expression or text: createDmsRouter({. Read it with the preceding opening statement ("/dms",); it is not a standalone business operation.
93	`records: (q) => transport.records(q),`	Sets/declares the named object property or style/type member: records: (q) => transport.records(q),. Interpret it in the enclosing object, props or type definition.
94	`command: (b) => transport.command(b),`	Sets/declares the named object property or style/type member: command: (b) => transport.command(b),. Interpret it in the enclosing object, props or type definition.
95	`sendCode: async (_, value) => {`	Sets/declares the named object property or style/type member: sendCode: async (_, value) => {. Interpret it in the enclosing object, props or type definition.
96	`code = value;`	Assigns the right-hand expression to the named variable/property: code = value;. This is in-memory unless it is later persisted by an explicit call.
97	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
98	`}),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
99	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
100	`await request(app).post("/dms/auth/request-code").send({ email: " test@example.invalid" });`	Waits for this asynchronous operation before continuing: await request(app).post("/dms/auth/request-code").send({ email: "test@example.invalid" });. The returned result/error must still be handled.
101	`const login = await request(app)`	Waits for this asynchronous operation before continuing: const login = await request(app). The returned result/error must still be handled.
102	`.post("/dms/auth/verify-code")`	Continues the surrounding declaration/expression or text: .post("/dms/auth/verify-code"). Read it with the preceding opening statement (const login = await request(app)); it is not a standalone business operation.

Line	Source code	Explanation / reading note
103	`.send({ email: "test@example.invalid", code });`	Continues the surrounding declaration/expression or text: .send({ email: "test@example.invalid", code });. Read it with the preceding opening statement (.post("/dms/auth/verify-code")); it is not a standalone business operation.
104	`const token = login.body.data.token;`	Declares/initializes local data used by the surrounding operation: const token = login.body.data.token;. Collection contents and assignments below determine its purpose.
105	`const body = {`	Declares/initializes local data used by the surrounding operation: const body = {. Collection contents and assignments below determine its purpose.
106	`action: "receiveGoods",`	Sets/declares the named object property or style/type member: action: "receiveGoods",. Interpret it in the enclosing object, props or type definition.
107	`receiptKind: "Paid",`	Sets/declares the named object property or style/type member: receiptKind: "Paid",. Interpret it in the enclosing object, props or type definition.
108	`recordId: "a0U000000000001AAA",`	Sets/declares the named object property or style/type member: recordId: "a0U000000000001AAA",. Interpret it in the enclosing object, props or type definition.
109	`requestKey: randomUUID(),`	Sets/declares the named object property or style/type member: requestKey: randomUUID(),. Interpret it in the enclosing object, props or type definition.
110	`cases: 1,`	Sets/declares the named object property or style/type member: cases: 1,. Interpret it in the enclosing object, props or type definition.
111	`batch: "01",`	Sets/declares the named object property or style/type member: batch: "01",. Interpret it in the enclosing object, props or type definition.
112	`expiry: "2026-12-14",`	Sets/declares the named object property or style/type member: expiry: "2026-12-14",. Interpret it in the enclosing object, props or type definition.
113	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
114	`const submit = (payload: any) =>`	Declares/initializes local data used by the surrounding operation: const submit = (payload: any) =>. Collection contents and assignments below determine its purpose.
115	`request(app).post("/dms/transactions").auth(token, { type: "bearer" }).send(payload);`	Continues the surrounding declaration/expression or text: request(app).post("/dms/transactions").auth(token, { type: "bearer" }).send(payload);. Read it with the preceding opening statement (const submit = (payload: any) =>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
116	`    const saved = await submit(body);`	Waits for this asynchronous operation before continuing: const saved = await submit(body);. The returned result/error must still be handled.
117	`    expect(saved.status).toBe(200);`	Test assertion comparing an expected outcome to actual behavior: expect(saved.status).toBe(200);. A mismatch fails the test.
118	`    expect(saved.body.data).toEqual({ id: "a0Z000000000001AAA", status: "Received" });`	Test assertion comparing an expected outcome to actual behavior: expect(saved.body.data).toEqual({ id: "a0Z000000000001AAA", status: "Received" });. A mismatch fails the test.
119	`    expect((await submit(body)).body.data).toEqual(saved.body.data);`	Test assertion comparing an expected outcome to actual behavior: expect((await submit(body)).body.data).toEqual(saved.body.data);. A mismatch fails the test.
120	`    expect((await submit({ ...body, expiry: "14-12-2026" })).status).toBe(400);`	Test assertion comparing an expected outcome to actual behavior: expect((await submit({ ...body, expiry: "14-12-2026" })).status).toBe(400);. A mismatch fails the test.
121	`    const rows = await transport.records(`	Waits for this asynchronous operation before continuing: const rows = await transport.records(. The returned result/error must still be handled.
122	`      "SELECT Id,Name FROM DMS_Goods_Receipt__c WHERE Distributor__c='a0T000000000001AAA'",`	Assigns the right-hand expression to the named variable/property: "SELECT Id,Name FROM DMS_Goods_Receipt__c WHERE Distributor__c='a0T000000000001AAA'",. This is in-memory unless it is later persisted by an explicit call.
123	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
124	`    expect(rows).toHaveLength(1);`	Test assertion comparing an expected outcome to actual behavior: expect(rows).toHaveLength(1);. A mismatch fails the test.
125	`    expect(rows[0]).toMatchObject({`	Test assertion comparing an expected outcome to actual behavior: expect(rows[0]).toMatchObject({. A mismatch fails the test.
126	`      Id: saved.body.data.id,`	Declares/initializes local data used by the surrounding operation: Id: saved.body.data.id,. Collection contents and assignments below determine its purpose.
127	`      Status__c: "Received",`	Sets/declares the named object property or style/type member: Status__c: "Received",. Interpret it in the enclosing object, props or type definition.
128	`      Total_Pieces__c: 72,`	Sets/declares the named object property or style/type member: Total_Pieces__c: 72,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
129	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
130	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
131	`  it("follows query pages and does not turn an upstream failure into empty reports", async () => {`	Continues the surrounding declaration/expression or text: it("follows query pages and does not turn an upstream failure into empty reports", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
132	`    expect(await transport.records("SIMULATE_PAGE")).toEqual([{ Id: "first" }, { Id: "second" }]);`	Test assertion comparing an expected outcome to actual behavior: expect(await transport.records("SIMULATE_PAGE")).toEqual([{ Id: "first" }, { Id: "second" }]);. A mismatch fails the test.
133	`    await expect(transport.records("SIMULATE_READ_HTML")).rejects.toMatchObject({ status: 502 });`	Test assertion comparing an expected outcome to actual behavior: await expect(transport.records("SIMULATE_READ_HTML")).rejects.toMatchObject({ status: 502 });. A mismatch fails the test.
134	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
135	`  it("writes over HTTP and replays the same stable request", async () => {`	Continues the surrounding declaration/expression or text: it("writes over HTTP and replays the same stable request", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
136	`    const body = ticket(),`	Declares/initializes local data used by the surrounding operation: const body = ticket(),. Collection contents and assignments below determine its purpose.
137	`      saved = await transport.command(body);`	Waits for this asynchronous operation before continuing: saved = await transport.command(body);. The returned result/error must still be handled.
138	`    expect(saved.status).toBe("Open");`	Test assertion comparing an expected outcome to actual behavior: expect(saved.status).toBe("Open");. A mismatch fails the test.
139	`    expect(await transport.command(body)).toEqual(saved);`	Test assertion comparing an expected outcome to actual behavior: expect(await transport.command(body)).toEqual(saved);. A mismatch fails the test.
140	`    await expect(`	Test assertion comparing an expected outcome to actual behavior: await expect(. A mismatch fails the test.
141	`      transport.command({ ...body, description: "Changed payload" }),`	Calls the named method: transport.command({ ...body, description: "Changed payload" }),. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
142	`    ).rejects.toMatchObject({ status: 400 });`	Calls the named method:).rejects.toMatchObject({ status: 400 });. Its implementation defines the side effect/result; use the symbol/file index to follow it.
143	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
144	`  it("preserves validation errors without claiming success", async () => {`	Continues the surrounding declaration/expression or text: it("preserves validation errors without claiming success", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
145	`    await expect(transport.command({ ...ticket(), category: "Invalid" })).rejects.toMatchObject({`	Test assertion comparing an expected outcome to actual behavior: await expect(transport.command({ ...ticket(), category: "Invalid" })).rejects.toMatchObject({. A mismatch fails the test.
146	`      status: 400,`	Sets/declares the named object property or style/type member: status: 400,. Interpret it in the enclosing object, props or type definition.
147	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
148	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
149	`  it("handles HTML 530 as an unconfirmed operation", async () => {`	Continues the surrounding declaration/expression or text: it("handles HTML 530 as an unconfirmed operation", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
150	`    await expect(`	Test assertion comparing an expected outcome to actual behavior: await expect(. A mismatch fails the test.
151	`      transport.command({ ...ticket(), subject: "SIMULATE_HTML_530" }),`	Calls the named method: transport.command({ ...ticket(), subject: "SIMULATE_HTML_530" }),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
152	`    ).rejects.toMatchObject({ status: 502 });`	Calls the named method:).rejects.toMatchObject({ status: 502 });. Its implementation defines the side effect/result; use the symbol/file index to follow it.
153	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
154	`  it("rejects malformed 200 responses", async () => {`	Continues the surrounding declaration/expression or text: it("rejects malformed 200 responses", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.

Line	Source code	Explanation / reading note
155	`    await expect(`	Test assertion comparing an expected outcome to actual behavior: await expect(. A mismatch fails the test.
156	`      transport.command({ ...ticket(), subject: "SIMULATE_INVALID_SUCCESS" }),`	Calls the named method: transport.command({ ...ticket(), subject: "SIMULATE_INVALID_SUCCESS" }),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
157	`    ).rejects.toMatchObject({ status: 502 });`	Calls the named method:).rejects.toMatchObject({ status: 502 });. Its implementation defines the side effect/result; use the symbol/file index to follow it.
158	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
159	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/dms/transport.ts

DMS Salesforce HTTP transport: bounded timeouts, one authorization refresh, safe pagination paths and rejection of malformed/error command responses.

101 numbered source lines | SHA-256 108d11867446e2887effba28dc6f03795f638b460ddb33df521012b4400cd10a

Line	Source code	Explanation / reading note
1	`export class DmsUpstreamError extends Error {`	Declares a class/type: export class DmsUpstreamError extends Error {. Members below hold behavior and/or state.
2	`  constructor(`	Declares/initializes local data used by the surrounding operation: constructor(. Collection contents and assignments below determine its purpose.
3	`    public status: number,`	Continues the surrounding declaration/expression or text: public status: number,. Read it with the preceding opening statement (constructor(); it is not a standalone business operation.
4	`    message: string,`	Sets/declares the named object property or style/type member: message: string,. Interpret it in the enclosing object, props or type definition.
5	`  ) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (message: string,); it is not a standalone business operation.
6	`    super(message);`	Continues the surrounding declaration/expression or text: super(message);. Read it with the preceding opening statement ( ) {); it is not a standalone business operation.
7	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
8	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
9		Blank line separating logical sections; no executable operation.
10	`/** Actual HTTP transport, with injectable credentials for local HTTP simulation. */`	Developer comment/documentation: Actual HTTP transport, with injectable credentials for local HTTP simulation. */ It is not executed.
11	`export class DmsTransport {`	Declares a class/type: export class DmsTransport {. Members below hold behavior and/or state.
12	`  constructor(`	Declares/initializes local data used by the surrounding operation: constructor(. Collection contents and assignments below determine its purpose.
13	`    private session: (refresh?: boolean) => Promise<{`	Declares a callable function/method: private session: (refresh?: boolean) => Promise<{. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
14	`instanceUrl: string;`	Sets/declares the named object property or style/type member: instanceUrl: string;. Interpret it in the enclosing object, props or type definition.
15	`accessToken: string;`	Sets/declares the named object property or style/type member: accessToken: string;. Interpret it in the enclosing object, props or type definition.
16	`}>,`	Continues the surrounding declaration/expression or text: }>,. Read it with the preceding opening statement (accessToken: string;); it is not a standalone business operation.
17	`private fetchHttp: typeof fetch = fetch,`	Assigns the right-hand expression to the named variable/property: private fetchHttp: typeof fetch = fetch,. This is in-memory unless it is later persisted by an explicit call.
18	`) {}`	Continues the surrounding declaration/expression or text:) {}. Read it with the preceding opening statement (private fetchHttp: typeof fetch = fetch,); it is not a standalone business operation.
19		Blank line separating logical sections; no executable operation.
20	`/** Read-only DMS queries use the same server credentials, with bounded HTTP waits. */`	Developer comment/documentation: Read-only DMS queries use the same server credentials, with bounded HTTP waits. */ It is not executed.
21	`async records(query: string, version = "67.0"): Promise<any[]> {`	Assigns the right-hand expression to the named variable/property: async records(query: string, version = "67.0"): Promise<any[]> {. This is in-memory unless it is later persisted by an explicit call.
22	`let path = `/services/data/v${version}/query?q=${encodeURIComponent(query)}`;`	Declares/initializes local data used by the surrounding operation: let path = `/services/data/v${version}/query?q=${encodeURIComponent(query)}`;. Collection contents and assignments below determine its purpose.
23	`const rows: any[] = [];`	Declares/initializes local data used by the surrounding operation: const rows: any[] = [];. Collection contents and assignments below determine its purpose.
24	`while (path) {`	Repeats work over the specified records/items or while this condition holds: while (path) {. Check where queries/writes occur relative to the loop.
25	`// Salesforce pagination must never redirect a bearer token to another host.`	Developer comment/documentation: Salesforce pagination must never redirect a bearer token to another host. It is not executed.
26	`if (!/^\/services\/data\/v[\d.]+\/query(?:\?|\/)/.test(path))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!/^\/services\/data\/v[\d.]+\/query(?:\?|\/)/.test(path)).

Line	Source code	Explanation / reading note
27	`throw new DmsUpstreamError(502, "Invalid Salesforce pagination response");`	Stops this execution path with a validation/error exception: throw new DmsUpstreamError(502, "Invalid Salesforce pagination response");. The caller/catch block decides how it is reported.
28	`let data: any;`	Declares/initializes local data used by the surrounding operation: let data: any;. Collection contents and assignments below determine its purpose.
29	`for (let attempt = 0; attempt < 2; attempt++) {`	Repeats work over the specified records/items or while this condition holds: for (let attempt = 0; attempt < 2; attempt++) {. Check where queries/writes occur relative to the loop.
30	`const session = await this.session(attempt > 0);`	Waits for this asynchronous operation before continuing: const session = await this.session(attempt > 0);. The returned result/error must still be handled.
31	`let response: Response;`	Declares/initializes local data used by the surrounding operation: let response: Response;. Collection contents and assignments below determine its purpose.
32	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
33	`response = await this.fetchHttp(`${session.instanceUrl}${path}`, {`	Invokes the external-data boundary: response = await this.fetchHttp(`${session.instanceUrl}${path}`, {. Await/result checks determine whether the operation is confirmed.
34	`headers: { Authorization: `Bearer ${session.accessToken}` },`	Sets/declares the named object property or style/type member: headers: { Authorization: `Bearer ${session.accessToken}` },. Interpret it in the enclosing object, props or type definition.
35	`signal: AbortSignal.timeout(20_000),`	Sets/declares the named object property or style/type member: signal: AbortSignal.timeout(20_000),. Interpret it in the enclosing object, props or type definition.
36	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
37	`} catch {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
38	`throw new DmsUpstreamError(`	Stops this execution path with a validation/error exception: throw new DmsUpstreamError(. The caller/catch block decides how it is reported.
39	`502,`	Continues the surrounding declaration/expression or text: 502,. Read it with the preceding opening statement (throw new DmsUpstreamError(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
40	`"Salesforce could not be reached. Your last saved data has not been replaced.",`	Continues the surrounding declaration/expression or text: "Salesforce could not be reached. Your last saved data has not been replaced.",. Read it with the preceding opening statement (502,); it is not a standalone business operation.
41	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43	`if (response.status === 401 && attempt === 0) continue;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (response.status === 401 && attempt === 0) continue;.
44	`data = await response.json().catch(() => null);`	Waits for this asynchronous operation before continuing: data = await response.json().catch(() => null);. The returned result/error must still be handled.
45	`if (!response.ok || !Array.isArray(data?.records) || typeof data.done !== "boolean")`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!response.ok || !Array.isArray(data?.records) || typeof data.done !== "boolean").
46	`throw new DmsUpstreamError(`	Stops this execution path with a validation/error exception: throw new DmsUpstreamError(. The caller/catch block decides how it is reported.
47	`502,`	Continues the surrounding declaration/expression or text: 502,. Read it with the preceding opening statement (throw new DmsUpstreamError(); it is not a standalone business operation.
48	`"Salesforce could not return the requested data. Check the connection and report permissions.",`	Continues the surrounding declaration/expression or text: "Salesforce could not return the requested data. Check the connection and report permissions.",. Read it with the preceding opening statement (502,); it is not a standalone business operation.
49	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
50	`break;`	Exits the current loop/switch. For sync, this can deliberately leave a failed request pending.
51	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
52	`rows.push(...data.records);`	Calls the named method: rows.push(...data.records);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
53	`if (!data.done && typeof data.nextRecordsUrl !== "string")`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!data.done && typeof data.nextRecordsUrl !== "string").
54	`throw new DmsUpstreamError(502, "Incomplete Salesforce query response");`	Stops this execution path with a validation/error exception: throw new DmsUpstreamError(502, "Incomplete Salesforce query response");. The caller/catch block decides how it is reported.
55	`path = data.done ? "" : data.nextRecordsUrl;`	Assigns the right-hand expression to the named variable/property: path = data.done ? "" : data.nextRecordsUrl;. This is in-memory unless it is later persisted by an explicit call.
56	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`return rows;`	Returns rows to the caller (or begins returned UI markup) and ends this execution path.
58	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
59		Blank line separating logical sections; no executable operation.
60	`async command(input: Record<string, unknown>, allowAuthRetry = true): Promise<any> {`	Assigns the right-hand expression to the named variable/property: async command(input: Record<string, unknown>, allowAuthRetry = true): Promise<any> {. This is in-memory unless it is later persisted by an explicit call.
61	`const session = await this.session();`	Waits for this asynchronous operation before continuing: const session = await this.session();. The returned result/error must still be handled.
62	`let response: Response;`	Declares/initializes local data used by the surrounding operation: let response: Response;. Collection contents and assignments below determine its purpose.
63	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
64	`response = await this.fetchHttp(`${session.instanceUrl}/services/apexrest/dms/portal/`, {`	Invokes the external-data boundary: response = await this.fetchHttp(`${session.instanceUrl}/services/apexrest/dms/portal/`, {. Await/result checks determine whether the operation is confirmed.
65	`method: "POST",`	Sets/declares the named object property or style/type member: method: "POST",. Interpret it in the enclosing object, props or type definition.
66	`headers: {`	Sets/declares the named object property or style/type member: headers: {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
67	`Authorization: `Bearer ${session.accessToken}`,`	Sets/declares the named object property or style/type member: Authorization: `Bearer ${session.accessToken}`,. Interpret it in the enclosing object, props or type definition.
68	`"Content-Type": "application/json",`	Continues the surrounding declaration/expression or text: "Content-Type": "application/json",. Read it with the preceding opening statement (Authorization: `Bearer ${session.accessToken}`,); it is not a standalone business operation.
69	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
70	`body: JSON.stringify(input),`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
71	`signal: AbortSignal.timeout(20_000),`	Sets/declares the named object property or style/type member: signal: AbortSignal.timeout(20_000),. Interpret it in the enclosing object, props or type definition.
72	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
73	`} catch {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
74	`throw new DmsUpstreamError(`	Stops this execution path with a validation/error exception: throw new DmsUpstreamError(. The caller/catch block decides how it is reported.
75	`502,`	Continues the surrounding declaration/expression or text: 502,. Read it with the preceding opening statement (throw new DmsUpstreamError(); it is not a standalone business operation.
76	`"Salesforce is unreachable. Keep your saved request and retry with the same key.",`	Continues the surrounding declaration/expression or text: "Salesforce is unreachable. Keep your saved request and retry with the same key.",. Read it with the preceding opening statement (502,); it is not a standalone business operation.
77	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
78	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
79	`if (response.status === 401 && allowAuthRetry) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (response.status === 401 && allowAuthRetry) {.

Line	Source code	Explanation / reading note
80	`await this.session(true);`	Waits for this asynchronous operation before continuing: await this.session(true);. The returned result/error must still be handled.
81	`return this.command(input, false);`	Returns this.command(input, false) to the caller (or begins returned UI markup) and ends this execution path.
82	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
83	`const data = (await response.json().catch(() => null)) as any;`	Waits for this asynchronous operation before continuing: const data = (await response.json().catch(() => null)) as any;. The returned result/error must still be handled.
84	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
85	`!response.ok ||`	Continues the surrounding declaration/expression or text: !response.ok ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
86	`!data ||`	Continues the surrounding declaration/expression or text: !data ||. Read it with the preceding opening statement (!response.ok ||); it is not a standalone business operation.
87	`data.error ||`	Continues the surrounding declaration/expression or text: data.error ||. Read it with the preceding opening statement (!data ||); it is not a standalone business operation.
88	`typeof data.id !== "string" ||`	Continues the surrounding declaration/expression or text: typeof data.id !== "string" ||. Read it with the preceding opening statement (data.error ||); it is not a standalone business operation.
89	`!/^[A-Za-z0-9]{15,18}$/.test(data.id) ||`	Continues the surrounding declaration/expression or text: !/^[A-Za-z0-9]{15,18}$/.test(data.id) ||. Read it with the preceding opening statement (typeof data.id !== "string" ||); it is not a standalone business operation.
90	`typeof data.status !== "string"`	Continues the surrounding declaration/expression or text: typeof data.status !== "string". Read it with the preceding opening statement (!/^[A-Za-z0-9]{15,18}$/.test(data.id) ||); it is not a standalone business operation.
91	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (typeof data.status !== "string"); it is not a standalone business operation.
92	`throw new DmsUpstreamError(`	Stops this execution path with a validation/error exception: throw new DmsUpstreamError(. The caller/catch block decides how it is reported.

Line	Source code	Explanation / reading note
93	`response.status === 400 && typeof data?.error === "string" ? 400 : 502,`	Continues the surrounding declaration/expression or text: response.status === 400 && typeof data?.error === "string" ? 400 : 502,. Read it with the preceding opening statement (throw new DmsUpstreamError(); it is not a standalone business operation.
94	`response.status === 400 && typeof data?.error === "string"`	Continues the surrounding declaration/expression or text: response.status === 400 && typeof data?.error === "string". Read it with the preceding opening statement (response.status === 400 && typeof data?.error === "string" ? 400 : 502,); it is not a standalone business operation.
95	`? data.error`	Continues the surrounding declaration/expression or text: ? data.error. Read it with the preceding opening statement (response.status === 400 && typeof data?.error === "string"); it is not a standalone business operation.
96	`: "Salesforce could not confirm the operation. Your request has not been marked successful.",`	Continues the surrounding declaration/expression or text: : "Salesforce could not confirm the operation. Your request has not been marked successful.",. Read it with the preceding opening statement (? data.error); it is not a standalone business operation.
97	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
98	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
99	`return data;`	Returns data to the caller (or begins returned UI markup) and ends this execution path.
100	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
101	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/localServer.ts

Local serving/proxy entry point. Read its paths and listener configuration before changing startup behavior.

6 numbered source lines | SHA-256 04ae30a7656bb89ed1329e0f710452be1159ccc31295c790edafdf6510636a27

Line	Source code	Explanation / reading note
1	`import "./server.js";`	Imports dependencies/types used below: import "./server.js";. Importing a function does not call it.
2		Blank line separating logical sections; no executable operation.
3	`// Some Windows launchers close an otherwise healthy child process after the`	Developer comment/documentation: Some Windows launchers close an otherwise healthy child process after the It is not executed.
4	`// parent batch file exits. Keeping this timer active makes the local API stay`	Developer comment/documentation: parent batch file exits. Keeping this timer active makes the local API stay It is not executed.
5	`// available until the user closes the SFA API command window.`	Developer comment/documentation: available until the user closes the SFA API command window. It is not executed.
6	`setInterval(() => undefined, 2_147_483_647);`	Schedules periodic/delayed work. The delay and cleanup determine refresh/retry behavior; it is not immediate server push.

sales-rep-mobile/backend/src/salesforce/SalesforceService.ts

Server-side Salesforce session acquisition, HTTP envelope handling, query pagination, CRUD, standard actions and all-or-none composite result validation.

163 numbered source lines | SHA-256 549db5c3240a3b2a4204d765d7a5a41b8d8016649ba872e63495cbc4f4440d03

Line	Source code	Explanation / reading note
1	`import { env } from "../config/env.js";`	Imports dependencies/types used below: import { env } from "../config/env.js";. Importing a function does not call it.
2	`import { execFile } from "node:child_process";`	Imports dependencies/types used below: import { execFile } from "node:child_process";. Importing a function does not call it.
3	`import { promisify } from "node:util";`	Imports dependencies/types used below: import { promisify } from "node:util";. Importing a function does not call it.
4	`import { loadCliSession } from "./cliSession.js";`	Imports dependencies/types used below: import { loadCliSession } from "./cliSession.js";. Importing a function does not call it.
5		Blank line separating logical sections; no executable operation.
6	`const execFileAsync = promisify(execFile);`	Declares/initializes local data used by the surrounding operation: const execFileAsync = promisify(execFile);. Collection contents and assignments below determine its purpose.
7		Blank line separating logical sections; no executable operation.
8	`type Token = { accessToken: string; instanceUrl: string; expiresAt: number };`	Defines a compile-time data contract: type Token = { accessToken: string; instanceUrl: string; expiresAt: number };. TypeScript types do not validate untrusted runtime JSON by themselves.
9	`export class SalesforceService {`	Declares a class/type: export class SalesforceService {. Members below hold behavior and/or state.
10	`  private token?: Token;`	Continues the surrounding declaration/expression or text: private token?: Token;. Read it with the preceding opening statement (export class SalesforceService {); it is not a standalone business operation.
11	`  private async authenticate() {`	Declares a callable function/method: private async authenticate() {. Parameters supply its inputs; the following block implements the operation.
12	`    if (this.token && this.token.expiresAt > Date.now() + 60000) return this.token;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (this.token && this.token.expiresAt > Date.now() + 60000) return this.token;.

Line	Source code	Explanation / reading note
13	`if (!env.SALESFORCE_CLIENT_ID || !env.SALESFORCE_CLIENT_SECRET) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!env.SALESFORCE_CLIENT_ID || !env.SALESFORCE_CLIENT_SECRET) {.
14	`// Local development can safely reuse the existing Salesforce CLI login.`	Developer comment/documentation: Local development can safely reuse the existing Salesforce CLI login. It is not executed.
15	`// The access token remains on the backend and never reaches the phone.`	Developer comment/documentation: The access token remains on the backend and never reaches the phone. It is not executed.
16	`const executable = process.platform === "win32" ? "cmd.exe" : "sf";`	Declares/initializes local data used by the surrounding operation: const executable = process.platform === "win32" ? "cmd.exe" : "sf";. Collection contents and assignments below determine its purpose.
17	`const result = await loadCliSession(async (command) => {`	Waits for this asynchronous operation before continuing: const result = await loadCliSession(async (command) => {. The returned result/error must still be handled.
18	`const argumentsForCli =`	Declares/initializes local data used by the surrounding operation: const argumentsForCli =. Collection contents and assignments below determine its purpose.
19	`process.platform === "win32"`	Continues the surrounding declaration/expression or text: process.platform === "win32". Read it with the preceding opening statement (const argumentsForCli =); it is not a standalone business operation.
20	`? [`	Continues the surrounding declaration/expression or text: ? [. Read it with the preceding opening statement (process.platform === "win32"); it is not a standalone business operation.
21	`"/d",`	Continues the surrounding declaration/expression or text: "/d",. Read it with the preceding opening statement (? []); it is not a standalone business operation.
22	`"/s",`	Continues the surrounding declaration/expression or text: "/s",. Read it with the preceding opening statement ("/d",); it is not a standalone business operation.
23	`"/c",`	Continues the surrounding declaration/expression or text: "/c",. Read it with the preceding opening statement ("/s",); it is not a standalone business operation.
24	`` `sf ${command.join(" ")} --target-org ${env.SALESFORCE_ORG_ALIAS} --json`, ``	Calls the named method: `sf ${command.join(" ")} --target-org ${env.SALESFORCE_ORG_ALIAS} --json`,. Its implementation defines the side effect/result; use the symbol/file index to follow it.
25	`]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
26	`: [...command, "--target-org", env.SALESFORCE_ORG_ALIAS, "--json"];`	Continues the surrounding declaration/expression or text: : [...command, "--target-org", env.SALESFORCE_ORG_ALIAS, "--json"];. Read it with the preceding opening statement ( ]); it is not a standalone business operation.
27	`const { stdout } = await execFileAsync(executable, argumentsForCli, {`	Waits for this asynchronous operation before continuing: const { stdout } = await execFileAsync(executable, argumentsForCli, {. The returned result/error must still be handled.
28	`env: { ...process.env, SF_DISABLE_TELEMETRY: "true" },`	Sets/declares the named object property or style/type member: env: { ...process.env, SF_DISABLE_TELEMETRY: "true" },. Interpret it in the enclosing object, props or type definition.
29	`windowsHide: true,`	Sets/declares the named object property or style/type member: windowsHide: true,. Interpret it in the enclosing object, props or type definition.
30	`maxBuffer: 2 * 1024 * 1024,`	Sets/declares the named object property or style/type member: maxBuffer: 2 * 1024 * 1024,. Interpret it in the enclosing object, props or type definition.
31	`timeout: 30000,`	Sets/declares the named object property or style/type member: timeout: 30000,. Interpret it in the enclosing object, props or type definition.
32	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`const response = JSON.parse(stdout.slice(stdout.indexOf("{")));`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
34	`if (response.status !== 0) throw new Error("Salesforce CLI login could not be loaded.");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (response.status !== 0) throw new Error("Salesforce CLI login could not be loaded.");.
35	`return response.result;`	Returns response.result to the caller (or begins returned UI markup) and ends this execution path.
36	`}, env.SALESFORCE_INSTANCE_URL);`	Continues the surrounding declaration/expression or text: }, env.SALESFORCE_INSTANCE_URL);. Read it with the preceding opening statement (return response.result;); it is not a standalone business operation.
37	`this.token = {`	Assigns the right-hand expression to the named variable/property: this.token = {. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
38	`accessToken: result.accessToken,`	Sets/declares the named object property or style/type member: accessToken: result.accessToken,. Interpret it in the enclosing object, props or type definition.
39	`instanceUrl: result.instanceUrl,`	Sets/declares the named object property or style/type member: instanceUrl: result.instanceUrl,. Interpret it in the enclosing object, props or type definition.
40	`expiresAt: Date.now() + 10 * 60 * 1000,`	Sets/declares the named object property or style/type member: expiresAt: Date.now() + 10 * 60 * 1000,. Interpret it in the enclosing object, props or type definition.
41	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42	`return this.token;`	Returns this.token to the caller (or begins returned UI markup) and ends this execution path.
43	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44	`const usePasswordFlow = Boolean(env.SALESFORCE_USERNAME && env.SALESFORCE_PASSWORD);`	Declares/initializes local data used by the surrounding operation: const usePasswordFlow = Boolean(env.SALESFORCE_USERNAME && env.SALESFORCE_PASSWORD);. Collection contents and assignments below determine its purpose.
45	`const body = new URLSearchParams(`	Declares/initializes local data used by the surrounding operation: const body = new URLSearchParams(. Collection contents and assignments below determine its purpose.
46	`usePasswordFlow`	Continues the surrounding declaration/expression or text: usePasswordFlow. Read it with the preceding opening statement (const body = new URLSearchParams(); it is not a standalone business operation.
47	`? {`	Continues the surrounding declaration/expression or text: ? {. Read it with the preceding opening statement (usePasswordFlow); it is not a standalone business operation.
48	`grant_type: "password",`	Sets/declares the named object property or style/type member: grant_type: "password",. Interpret it in the enclosing object, props or type definition.
49	`client_id: env.SALESFORCE_CLIENT_ID,`	Sets/declares the named object property or style/type member: client_id: env.SALESFORCE_CLIENT_ID,. Interpret it in the enclosing object, props or type definition.
50	`client_secret: env.SALESFORCE_CLIENT_SECRET,`	Sets/declares the named object property or style/type member: client_secret: env.SALESFORCE_CLIENT_SECRET,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
51	`username: env.SALESFORCE_USERNAME!,`	Sets/declares the named object property or style/type member: username: env.SALESFORCE_USERNAME!,. Interpret it in the enclosing object, props or type definition.
52	`password: `${env.SALESFORCE_PASSWORD}${env.SALESFORCE_SECURITY_TOKEN || ""}`,`	Sets/declares the named object property or style/type member: password: `${env.SALESFORCE_PASSWORD}${env.SALESFORCE_SECURITY_TOKEN || ""}`,. Interpret it in the enclosing object, props or type definition.
53	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
54	`: {`	Continues the surrounding declaration/expression or text: : {. Read it with the preceding opening statement (}); it is not a standalone business operation.
55	`grant_type: "client_credentials",`	Sets/declares the named object property or style/type member: grant_type: "client_credentials",. Interpret it in the enclosing object, props or type definition.
56	`client_id: env.SALESFORCE_CLIENT_ID,`	Sets/declares the named object property or style/type member: client_id: env.SALESFORCE_CLIENT_ID,. Interpret it in the enclosing object, props or type definition.
57	`client_secret: env.SALESFORCE_CLIENT_SECRET,`	Sets/declares the named object property or style/type member: client_secret: env.SALESFORCE_CLIENT_SECRET,. Interpret it in the enclosing object, props or type definition.
58	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
59	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
60	`const response = await fetch(`${env.SALESFORCE_LOGIN_URL}/services/oauth2/token`, {`	Invokes the external-data boundary: const response = await fetch(`${env.SALESFORCE_LOGIN_URL}/services/oauth2/token`, {. Await/result checks determine whether the operation is confirmed.
61	`method: "POST",`	Sets/declares the named object property or style/type member: method: "POST",. Interpret it in the enclosing object, props or type definition.
62	`headers: { "content-type": "application/x-www-form-urlencoded" },`	Sets/declares the named object property or style/type member: headers: { "content-type": "application/x-www-form-urlencoded" },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
63	`      body,`	Continues the surrounding declaration/expression or text: body,. Read it with the preceding opening statement (headers: { "content-type": "application/x-www-form-urlencoded" },); it is not a standalone business operation.
64	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
65	`    if (!response.ok) throw new Error("Salesforce authentication failed");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!response.ok) throw new Error("Salesforce authentication failed");.
66	`    const result: any = await response.json();`	Waits for this asynchronous operation before continuing: const result: any = await response.json();. The returned result/error must still be handled.
67	`    this.token = {`	Assigns the right-hand expression to the named variable/property: this.token = {. This is in-memory unless it is later persisted by an explicit call.
68	`      accessToken: result.access_token,`	Sets/declares the named object property or style/type member: accessToken: result.access_token,. Interpret it in the enclosing object, props or type definition.
69	`      instanceUrl: result.instance_url,`	Sets/declares the named object property or style/type member: instanceUrl: result.instance_url,. Interpret it in the enclosing object, props or type definition.
70	`      expiresAt: Date.now() + 55 * 60 * 1000,`	Sets/declares the named object property or style/type member: expiresAt: Date.now() + 55 * 60 * 1000,. Interpret it in the enclosing object, props or type definition.
71	`    };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
72	`    return this.token;`	Returns this.token to the caller (or begins returned UI markup) and ends this execution path.
73	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
74	`  private async request(`	Declares a callable function/method: private async request(. Parameters supply its inputs; the following block implements the operation.
75	`    path: string,`	Sets/declares the named object property or style/type member: path: string,. Interpret it in the enclosing object, props or type definition.
76	`    init: RequestInit = {},`	Sets/declares the named object property or style/type member: init: RequestInit = {},. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
77	`    allowSessionRetry = true,`	Assigns the right-hand expression to the named variable/property: allowSessionRetry = true,. This is in-memory unless it is later persisted by an explicit call.
78	`  ): Promise<any> {`	Continues the surrounding declaration/expression or text:): Promise<any> {. Read it with the preceding opening statement (allowSessionRetry = true,); it is not a standalone business operation.
79	`    const token = await this.authenticate();`	Waits for this asynchronous operation before continuing: const token = await this.authenticate();. The returned result/error must still be handled.
80	`    const response = await fetch(`	Invokes the external-data boundary: const response = await fetch(. Await/result checks determine whether the operation is confirmed.
81	`      `${token.instanceUrl}/services/data/v${env.SALESFORCE_API_VERSION}${path}`,`	Continues the surrounding declaration/expression or text: `${token.instanceUrl}/services/data/v${env.SALESFORCE_API_VERSION}${path}`,. Read it with the preceding opening statement (const response = await fetch(); it is not a standalone business operation.
82	`      {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (`${token.instanceUrl}/services/data/v${env.SALESFORCE_API_VERSION}${path}`,); it is not a standalone business operation.
83	`        ...init,`	Continues the surrounding declaration/expression or text: ...init,. Read it with the preceding opening statement ({); it is not a standalone business operation.
84	`        headers: {`	Sets/declares the named object property or style/type member: headers: {. Interpret it in the enclosing object, props or type definition.
85	`          Authorization: `Bearer ${token.accessToken}`,`	Sets/declares the named object property or style/type member: Authorization: `Bearer ${token.accessToken}`,. Interpret it in the enclosing object, props or type definition.
86	`          "content-type": "application/json",`	Continues the surrounding declaration/expression or text: "content-type": "application/json",. Read it with the preceding opening statement (Authorization: `Bearer ${token.accessToken}`,); it is not a standalone business operation.
87	`          ...(init.headers || {}),`	Continues the surrounding declaration/expression or text: ...(init.headers || {}),. Read it with the preceding opening statement ("content-type": "application/json",); it is not a standalone business operation.
88	`        },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
89	`      },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
90	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
91	`    if (response.status === 401 && allowSessionRetry) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (response.status === 401 && allowSessionRetry) {.
92	`      this.token = undefined;`	Assigns the right-hand expression to the named variable/property: this.token = undefined;. This is in-memory unless it is later persisted by an explicit call.
93	`      return this.request(path, init, false);`	Returns this.request(path, init, false) to the caller (or begins returned UI markup) and ends this execution path.
94	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
95	`    if (!response.ok) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!response.ok) {.
96	`      const details = await response.text();`	Waits for this asynchronous operation before continuing: const details = await response.text();. The returned result/error must still be handled.
97	`      throw new Error(`Salesforce request failed (${response.status}): ${details.slice(0, 500)}`);`	Stops this execution path with a validation/error exception: throw new Error(`Salesforce request failed (${response.status}): ${details.slice(0, 500)}`);. The caller/catch block decides how it is reported.
98	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
99	`    return response.status === 204 ? null : response.json();`	Returns response.status === 204 ? null : response.json() to the caller (or begins returned UI markup) and ends this execution path.
100	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
101	`  query(soql: string) {`	Continues the surrounding declaration/expression or text: query(soql: string) {. Read it with the preceding opening statement (}); it is not a standalone business operation.
102	`    return this.request(`/query?q=${encodeURIComponent(soql)}`);`	Returns this.request(`/query?q=${encodeURIComponent(soql)}`) to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
103	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
104	`  async records(soql: string) {`	Continues the surrounding declaration/expression or text: async records(soql: string) {. Read it with the preceding opening statement (}); it is not a standalone business operation.
105	`    let result = await this.query(soql);`	Waits for this asynchronous operation before continuing: let result = await this.query(soql);. The returned result/error must still be handled.
106	`    const records = [...result.records];`	Declares/initializes local data used by the surrounding operation: const records = [...result.records];. Collection contents and assignments below determine its purpose.
107	`    while (!result.done && result.nextRecordsUrl) {`	Repeats work over the specified records/items or while this condition holds: while (!result.done && result.nextRecordsUrl) {. Check where queries/writes occur relative to the loop.
108	`      result = await this.request(result.nextRecordsUrl.replace(/^\/services\/data\/v[\d.]+/, ""));`	Waits for this asynchronous operation before continuing: result = await this.request(result.nextRecordsUrl.replace(/^\/services\/data\/v[\d.]+/, ""));. The returned result/error must still be handled.
109	`      records.push(...result.records);`	Calls the named method: records.push(...result.records);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
110	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
111	`    return records;`	Returns records to the caller (or begins returned UI markup) and ends this execution path.
112	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
113	`  /** Commit the order, all lines, and visit totals together or roll them all back. */`	Developer comment/documentation: Commit the order, all lines, and visit totals together or roll them all back. */ It is not executed.
114	`  async composite(compositeRequest: unknown[]) {`	Continues the surrounding declaration/expression or text: async composite(compositeRequest: unknown[]) {. Read it with the preceding opening statement (/** Commit the order, all lines, and visit totals together or roll them all back. */); it is not a standalone business operation.
115	`    const result = await this.request("/composite", {`	Waits for this asynchronous operation before continuing: const result = await this.request("/composite", {. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
116	`      method: "POST",`	Sets/declares the named object property or style/type member: method: "POST",. Interpret it in the enclosing object, props or type definition.
117	`      body: JSON.stringify({ allOrNone: true, compositeRequest }),`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
118	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
119	`    const failed = result.compositeResponse.find(`	Declares/initializes local data used by the surrounding operation: const failed = result.compositeResponse.find(. Collection contents and assignments below determine its purpose.
120	`      (part: any) =>`	Continues the surrounding declaration/expression or text: (part: any) =>. Read it with the preceding opening statement (const failed = result.compositeResponse.find(); it is not a standalone business operation.
121	`        part.httpStatusCode >= 400 ||`	Continues the surrounding declaration/expression or text: part.httpStatusCode >= 400 ||. Read it with the preceding opening statement ((part: any) =>); it is not a standalone business operation.
122	`        (Array.isArray(part.body) && part.body.some((row: any) => row.success === false)),`	Transforms/selects/aggregates collection values with the callback shown here: (Array.isArray(part.body) && part.body.some((row: any) => row.success === false)),. Read the callback body and result assignment together.
123	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
124	`    if (failed)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (failed).
125	`      throw new Error(`	Stops this execution path with a validation/error exception: throw new Error(. The caller/catch block decides how it is reported.
126	`        \`Salesforce transaction failed: ${JSON.stringify(failed.body).slice(0, 700)}\`,`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
127	`      );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
128	`    return result.compositeResponse;`	Returns result.compositeResponse to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
129	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
130	`  create(objectName: string, record: unknown) {`	Continues the surrounding declaration/expression or text: create(objectName: string, record: unknown) {. Read it with the preceding opening statement (}); it is not a standalone business operation.
131	`    return this.request(`/sobjects/${objectName}`, {`	Returns this.request(`/sobjects/${objectName}`, { to the caller (or begins returned UI markup) and ends this execution path.
132	`      method: "POST",`	Sets/declares the named object property or style/type member: method: "POST",. Interpret it in the enclosing object, props or type definition.
133	`      body: JSON.stringify(record),`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
134	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
135	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
136	`  update(objectName: string, id: string, record: unknown) {`	Continues the surrounding declaration/expression or text: update(objectName: string, id: string, record: unknown) {. Read it with the preceding opening statement (}); it is not a standalone business operation.
137	`    return this.request(`/sobjects/${objectName}/${id}`, {`	Returns this.request(`/sobjects/${objectName}/${id}`, { to the caller (or begins returned UI markup) and ends this execution path.
138	`      method: "PATCH",`	Sets/declares the named object property or style/type member: method: "PATCH",. Interpret it in the enclosing object, props or type definition.
139	`      body: JSON.stringify(record),`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
140	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
141	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
142	`  retrieve(objectName: string, id: string) {`	Continues the surrounding declaration/expression or text: retrieve(objectName: string, id: string) {. Read it with the preceding opening statement (}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
143	`    return this.request(`/sobjects/${objectName}/${id}`);`	Returns this.request(`/sobjects/${objectName}/${id}`) to the caller (or begins returned UI markup) and ends this execution path.
144	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
145		Blank line separating logical sections; no executable operation.
146	`  invokeStandardAction(actionName: string, inputs: unknown[]) {`	Continues the surrounding declaration/expression or text: invokeStandardAction(actionName: string, inputs: unknown[]) {. Read it with the preceding opening statement; it is not a standalone business operation.
147	`    return this.request(`/actions/standard/${encodeURIComponent(actionName)}`, {`	Returns this.request(`/actions/standard/${encodeURIComponent(actionName)}`, { to the caller (or begins returned UI markup) and ends this execution path.
148	`      method: "POST",`	Sets/declares the named object property or style/type member: method: "POST",. Interpret it in the enclosing object, props or type definition.
149	`      body: JSON.stringify({ inputs }),`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
150	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
151	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
152		Blank line separating logical sections; no executable operation.
153	`  clearCachedSession() {`	Continues the surrounding declaration/expression or text: clearCachedSession() {. Read it with the preceding opening statement; it is not a standalone business operation.
154	`    this.token = undefined;`	Assigns the right-hand expression to the named variable/property: this.token = undefined;. This is in-memory unless it is later persisted by an explicit call.
155	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
156		Blank line separating logical sections; no executable operation.
157	`  /** Server-side only: used by the isolated DMS transport, never returned to clients. */`	Developer comment/documentation: Server-side only: used by the isolated DMS transport, never returned to clients. */ It is not executed.

Line	Source code	Explanation / reading note
158	`  async dmsSession(refresh = false) {`	Assigns the right-hand expression to the named variable/property: async dmsSession(refresh = false) {. This is in-memory unless it is later persisted by an explicit call.
159	`    if (refresh) this.token = undefined;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (refresh) this.token = undefined;.
160	`    return this.authenticate();`	Returns this.authenticate() to the caller (or begins returned UI markup) and ends this execution path.
161	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
162	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
163	`export const salesforce = new SalesforceService();`	Assigns the right-hand expression to the named variable/property: export const salesforce = new SalesforceService();. This is in-memory unless it is later persisted by an explicit call.

sales-rep-mobile/backend/src/salesforce/cliSession.test.ts

Regression tests for cliSession. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

45 numbered source lines | SHA-256 4a4f7a360a91cddc17403df181e1f1321a31e0dc57d2eb450df059e603558164

Line	Source code	Explanation / reading note
1	`import { describe, it, expect } from "vitest";`	Imports dependencies/types used below: import { describe, it, expect } from "vitest";. Importing a function does not call it.
2	`import { loadCliSession } from "./cliSession.js";`	Imports dependencies/types used below: import { loadCliSession } from "./cliSession.js";. Importing a function does not call it.
3		Blank line separating logical sections; no executable operation.
4	`describe("Salesforce CLI session metadata", () => {`	Continues the surrounding declaration/expression or text: describe("Salesforce CLI session metadata", () => {. Read it with the preceding opening statement; it is not a standalone business operation.
5	`  it("loads the org URL when the token command returns only a token", async () => {`	Continues the surrounding declaration/expression or text: it("loads the org URL when the token command returns only a token", async () => {. Read it with the preceding opening statement (describe("Salesforce CLI session metadata", () => {); it is not a standalone business operation.
6	`    const commands: string[][] = [];`	Declares/initializes local data used by the surrounding operation: const commands: string[][] = [];. Collection contents and assignments below determine its purpose.
7	`    const session = await loadCliSession(async (command) => {`	Waits for this asynchronous operation before continuing: const session = await loadCliSession(async (command) => {. The returned result/error must still be handled.
8	`      commands.push(command);`	Calls the named method: commands.push(command);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
9	`      return command.includes("display")`	Returns command.includes("display") to the caller (or begins returned UI markup) and ends this execution path.
10	`        ? { instanceUrl: "https://example.my.salesforce.com" }`	Continues the surrounding declaration/expression or text: ? { instanceUrl: "https://example.my.salesforce.com" }. Read it with the preceding opening statement (return command.includes("display")); it is not a standalone business operation.

Line	Source code	Explanation / reading note
11	`: { accessToken: "synthetic-token" };`	Continues the surrounding declaration/expression or text: : { accessToken: "synthetic-token" };. Read it with the preceding opening statement (? { instanceUrl: "https://example.my.salesforce.com" }); it is not a standalone business operation.
12	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13	`expect(commands).toEqual([`	Test assertion comparing an expected outcome to actual behavior: expect(commands).toEqual([. A mismatch fails the test.
14	`["org", "auth", "show-access-token"],`	Continues the surrounding declaration/expression or text: ["org", "auth", "show-access-token"],. Read it with the preceding opening statement (expect(commands).toEqual([); it is not a standalone business operation.
15	`["org", "display"],`	Continues the surrounding declaration/expression or text: ["org", "display"],. Read it with the preceding opening statement (["org", "auth", "show-access-token"],); it is not a standalone business operation.
16	`]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`expect(session).toEqual({`	Test assertion comparing an expected outcome to actual behavior: expect(session).toEqual({. A mismatch fails the test.
18	`accessToken: "synthetic-token",`	Sets/declares the named object property or style/type member: accessToken: "synthetic-token",. Interpret it in the enclosing object, props or type definition.
19	`instanceUrl: "https://example.my.salesforce.com",`	Sets/declares the named object property or style/type member: instanceUrl: "https://example.my.salesforce.com",. Interpret it in the enclosing object, props or type definition.
20	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
22	`it("preserves an explicit HTTPS instance without an extra CLI command", async () => {`	Continues the surrounding declaration/expression or text: it("preserves an explicit HTTPS instance without an extra CLI command", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.

Line	Source code	Explanation / reading note
23	`    let calls = 0;`	Declares/initializes local data used by the surrounding operation: let calls = 0;. Collection contents and assignments below determine its purpose.
24	`    expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
25	`      (`	Continues the surrounding declaration/expression or text: (. Read it with the preceding opening statement (expect(); it is not a standalone business operation.
26	`        await loadCliSession(async () => {`	Waits for this asynchronous operation before continuing: await loadCliSession(async () => {. The returned result/error must still be handled.
27	`          calls++;`	Continues the surrounding declaration/expression or text: calls++;. Read it with the preceding opening statement (await loadCliSession(async () => {); it is not a standalone business operation.
28	`          return { accessToken: "test" };`	Returns { accessToken: "test" } to the caller (or begins returned UI markup) and ends this execution path.
29	`        }, "https://example.my.salesforce.com/")`	Continues the surrounding declaration/expression or text: }, "https://example.my.salesforce.com/"). Read it with the preceding opening statement (return { accessToken: "test" };); it is not a standalone business operation.
30	`      ).instanceUrl,`	Continues the surrounding declaration/expression or text:).instanceUrl,. Read it with the preceding opening statement (}, "https://example.my.salesforce.com/")); it is not a standalone business operation.
31	`    ).toBe("https://example.my.salesforce.com");`	Continues the surrounding declaration/expression or text:).toBe("https://example.my.salesforce.com");. Read it with the preceding opening statement ( ).instanceUrl,); it is not a standalone business operation.
32	`    expect(calls).toBe(1);`	Test assertion comparing an expected outcome to actual behavior: expect(calls).toBe(1);. A mismatch fails the test.
33	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`  it("fails before HTTP on missing URL or token, without leaking credentials", async () => {`	Continues the surrounding declaration/expression or text: it("fails before HTTP on missing URL or token, without leaking credentials", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.

Line	Source code	Explanation / reading note
35	`    await expect(loadCliSession(async () => ({ accessToken: "private-value" }))).rejects.toThrow(`	Test assertion comparing an expected outcome to actual behavior: await expect(loadCliSession(async () => ({ accessToken: "private-value" }))).rejects.toThrow(. A mismatch fails the test.
36	`      "Salesforce instance URL is missing or invalid",`	Continues the surrounding declaration/expression or text: "Salesforce instance URL is missing or invalid",. Read it with the preceding opening statement (await expect(loadCliSession(async () => ({ accessToken: "private-value" }))).rejects.toThrow(); it is not a standalone business operation.
37	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`    await expect(`	Test assertion comparing an expected outcome to actual behavior: await expect(. A mismatch fails the test.
39	`      loadCliSession(async () => ({ instanceUrl: "https://example.my.salesforce.com" })),`	Continues the surrounding declaration/expression or text: loadCliSession(async () => ({ instanceUrl: "https://example.my.salesforce.com" })),. Read it with the preceding opening statement (await expect(); it is not a standalone business operation.
40	`    ).rejects.toThrow("Salesforce CLI returned no access token");`	Calls the named method:).rejects.toThrow("Salesforce CLI returned no access token");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
41	`    await expect(`	Test assertion comparing an expected outcome to actual behavior: await expect(. A mismatch fails the test.
42	`      loadCliSession(async () => ({ accessToken: "test" }), "http://example.my.salesforce.com"),`	Continues the surrounding declaration/expression or text: loadCliSession(async () => ({ accessToken: "test" }), "http://example.my.salesforce.com"),. Read it with the preceding opening statement (await expect(); it is not a standalone business operation.
43	`    ).rejects.toThrow("Salesforce instance URL is missing or invalid");`	Calls the named method:).rejects.toThrow("Salesforce instance URL is missing or invalid");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
44	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
45	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/salesforce/cliSession.ts

Acquires the local Salesforce CLI session without sending it to clients. A developer convenience rather than permanent cloud authentication.

24 numbered source lines | SHA-256 a3e7841c945dae9cf91365bb44fcd40bb5112170970fa0a7ec941095b08bf9b3

Line	Source code	Explanation / reading note
1	`/** The access-token command does not promise an instanceUrl; read org metadata separately. */`	Developer comment/documentation: The access-token command does not promise an instanceUrl; read org metadata separately. */ It is not executed.
2	`export async function loadCliSession(`	Declares a callable function/method: export async function loadCliSession(. Parameters supply its inputs; the following block implements the operation.
3	`  run: (command: string[]) => Promise<any>,`	Sets/declares the named object property or style/type member: run: (command: string[]) => Promise<any>,. Interpret it in the enclosing object, props or type definition.
4	`  configuredUrl?: string,`	Sets/declares the named object property or style/type member: configuredUrl?: string,. Interpret it in the enclosing object, props or type definition.
5	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (configuredUrl?: string,); it is not a standalone business operation.
6	`  const auth = await run(["org", "auth", "show-access-token"]);`	Waits for this asynchronous operation before continuing: const auth = await run(["org", "auth", "show-access-token"]);. The returned result/error must still be handled.
7	`  const org = auth?.instanceUrl || configuredUrl ? null : await run(["org", "display"]);`	Waits for this asynchronous operation before continuing: const org = auth?.instanceUrl || configuredUrl ? null : await run(["org", "display"]);. The returned result/error must still be handled.
8	`  const instanceUrl = auth?.instanceUrl || configuredUrl || org?.instanceUrl;`	Declares/initializes local data used by the surrounding operation: const instanceUrl = auth?.instanceUrl || configuredUrl || org?.instanceUrl;. Collection contents and assignments below determine its purpose.
9	`  let url: URL;`	Declares/initializes local data used by the surrounding operation: let url: URL;. Collection contents and assignments below determine its purpose.
10	`  try {`	Starts operations whose failure is handled by the following catch/finally blocks.
11	`    url = new URL(instanceUrl);`	Assigns the right-hand expression to the named variable/property: url = new URL(instanceUrl);. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
12	`    if (url.protocol !== "https:" || url.username || url.password || url.search || url.hash)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (url.protocol !== "https:" || url.username || url.password || url.search || url.hash).
13	`      throw new Error();`	Stops this execution path with a validation/error exception: throw new Error();. The caller/catch block decides how it is reported.
14	`  } catch {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
15	`    throw new Error(`	Stops this execution path with a validation/error exception: throw new Error(. The caller/catch block decides how it is reported.
16	`      "Salesforce instance URL is missing or invalid. Reconnect the configured Salesforce org.",`	Continues the surrounding declaration/expression or text: "Salesforce instance URL is missing or invalid. Reconnect the configured Salesforce org.",. Read it with the preceding opening statement (throw new Error(); it is not a standalone business operation.
17	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`  if (typeof auth?.accessToken !== "string" || !auth.accessToken.trim())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (typeof auth?.accessToken !== "string" || !auth.accessToken.trim()).
20	`    throw new Error(`	Stops this execution path with a validation/error exception: throw new Error(. The caller/catch block decides how it is reported.
21	`      "Salesforce CLI returned no access token. Reconnect the configured Salesforce org.",`	Continues the surrounding declaration/expression or text: "Salesforce CLI returned no access token. Reconnect the configured Salesforce org.",. Read it with the preceding opening statement (throw new Error(); it is not a standalone business operation.
22	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
23	`  return { accessToken: auth.accessToken, instanceUrl: url.origin };`	Returns { accessToken: auth.accessToken, instanceUrl: url.origin } to the caller (or begins returned UI markup) and ends this execution path.
24	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/scripts/sendDistributorInvitation.ts

First-party shared backend file: send Distributor Invitation. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

42 numbered source lines | SHA-256 f567f5ab4d00183ec9dab07b8ea10195d95a992e25599af876a652c2278b6ce0

Line	Source code	Explanation / reading note
1	`import { env, objectMap } from "../config/env.js";`	Imports dependencies/types used below: import { env, objectMap } from "../config/env.js";. Importing a function does not call it.
2	`import { salesforce } from "../salesforce/SalesforceService.js";`	Imports dependencies/types used below: import { salesforce } from "../salesforce/SalesforceService.js";. Importing a function does not call it.
3	`import { sendDistributorInvitation } from "../services/emailService.js";`	Imports dependencies/types used below: import { sendDistributorInvitation } from "../services/emailService.js";. Importing a function does not call it.
4	`import { escapeSoqlLiteral } from "../utils/salesforce.js";`	Imports dependencies/types used below: import { escapeSoqlLiteral } from "../utils/salesforce.js";. Importing a function does not call it.
5		Blank line separating logical sections; no executable operation.
6	`async function main() {`	Declares a callable function/method: async function main() {. Parameters supply its inputs; the following block implements the operation.
7	`  const email = String(process.argv[2] || "")`	Declares/initializes local data used by the surrounding operation: const email = String(process.argv[2] || ""). Collection contents and assignments below determine its purpose.
8	`    .trim()`	Continues the surrounding declaration/expression or text: .trim(). Read it with the preceding opening statement (const email = String(process.argv[2] || "")); it is not a standalone business operation.
9	`    .toLowerCase();`	Continues the surrounding declaration/expression or text: .toLowerCase();. Read it with the preceding opening statement (.trim()); it is not a standalone business operation.
10		Blank line separating logical sections; no executable operation.
11	`  if (!/^\S+@\S+\.\S+$/.test(email)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!/^\S+@\S+\.\S+$/.test(email)) {.
12	`    throw new Error("Pass a valid distributor email address");`	Stops this execution path with a validation/error exception: throw new Error("Pass a valid distributor email address");. The caller/catch block decides how it is reported.

Line	Source code	Explanation / reading note
13	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
14		Blank line separating logical sections; no executable operation.
15	`  if (env.USE_MOCK_DATA) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA) {.
16	`    throw new Error("Invitation emails require the live Salesforce connection");`	Stops this execution path with a validation/error exception: throw new Error("Invitation emails require the live Salesforce connection");. The caller/catch block decides how it is reported.
17	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18		Blank line separating logical sections; no executable operation.
19	`  const safeEmail = escapeSoqlLiteral(email);`	Declares/initializes local data used by the surrounding operation: const safeEmail = escapeSoqlLiteral(email);. Collection contents and assignments below determine its purpose.
20	`  const records = await salesforce.records(`	Invokes the external-data boundary: const records = await salesforce.records(. Await/result checks determine whether the operation is confirmed.
21	`    `SELECT Id, Name, Login_Email__c, User__r.Email FROM ${objectMap.distributor} WHERE Status__c = 'Active' AND (Login_Email__c = '${safeEmail}' OR User__r.Email = '${safeEmail}') LIMIT 1`,`	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Login_Email__c, User__r.Email FROM ${objectMap.distributor} WHERE Status__c = 'Active' AND (Login_Email__c = '${safeEmail}' OR User__r.Email = '${safeEmail}') LIMIT 1`,. This is in-memory unless it is later persisted by an explicit call.
22	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
23	`  const distributor = records[0];`	Declares/initializes local data used by the surrounding operation: const distributor = records[0];. Collection contents and assignments below determine its purpose.
24		Blank line separating logical sections; no executable operation.
25	`  if (!distributor) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!distributor) {.
26	`    throw new Error("No active distributor is linked to this email address");`	Stops this execution path with a validation/error exception: throw new Error("No active distributor is linked to this email address");. The caller/catch block decides how it is reported.
27	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
28		Blank line separating logical sections; no executable operation.
29	`  if (distributor.Login_Email__c !== email) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (distributor.Login_Email__c !== email) {.
30	`    await salesforce.update(objectMap.distributor, distributor.Id, {`	Invokes the external-data boundary: await salesforce.update(objectMap.distributor, distributor.Id, {. Await/result checks determine whether the operation is confirmed.
31	`      Login_Email__c: email,`	Sets/declares the named object property or style/type member: Login_Email__c: email,. Interpret it in the enclosing object, props or type definition.
32	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34		Blank line separating logical sections; no executable operation.
35	`  await sendDistributorInvitation(email, distributor.Name);`	Waits for this asynchronous operation before continuing: await sendDistributorInvitation(email, distributor.Name);. The returned result/error must still be handled.
36	`  console.log(`Invitation sent to ${email} for ${distributor.Name}`);`	Calls the named method: console.log(`Invitation sent to ${email} for ${distributor.Name}`);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
37	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38		Blank line separating logical sections; no executable operation.
39	`main().catch((error) => {`	Continues the surrounding declaration/expression or text: main().catch((error) => {. Read it with the preceding opening statement; it is not a standalone business operation.
40	`  console.error(error instanceof Error ? error.message : error);`	Calls the named method: console.error(error instanceof Error ? error.message : error);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
41	`  process.exitCode = 1;`	Assigns the right-hand expression to the named variable/property: process.exitCode = 1;. This is in-memory unless it is later persisted by an explicit call.
42	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/server.ts

Starts the Express API listener using backend configuration; the server must remain running for localhost requests.

5 numbered source lines | SHA-256 e09388f41cba6db2e43836ed837019b17fc5d2b03b0263f4e3773beb7e5f9e71

Line	Source code	Explanation / reading note
1	`import { app } from "./app.js";`	Imports dependencies/types used below: import { app } from "./app.js";. Importing a function does not call it.
2	`import { env } from "./config/env.js";`	Imports dependencies/types used below: import { env } from "./config/env.js";. Importing a function does not call it.
3	`app.listen(env.PORT, "0.0.0.0", () =>`	Calls the named method: app.listen(env.PORT, "0.0.0.0", () =>. Its implementation defines the side effect/result; use the symbol/file index to follow it.
4	`  console.log(`SFA API listening on port ${env.PORT} for localhost and mobile devices`),`	Calls the named method: console.log(`SFA API listening on port ${env.PORT} for localhost and mobile devices`),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
5	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/services/allocatedBeats.ts

Builds employee outlet/beat access scopes from active allocations so all allocated beats can be returned rather than only one assigned beat.

33 numbered source lines | SHA-256 cfae8e68169f21679ebefe226eb0ffd484a0052941748a5fe880caa11be43791

Line	Source code	Explanation / reading note
1	`type Allocation = {`	Defines a compile-time data contract: type Allocation = {. TypeScript types do not validate untrusted runtime JSON by themselves.
2	`  Beat__c: string;`	Sets/declares the named object property or style/type member: Beat__c: string;. Interpret it in the enclosing object, props or type definition.
3	`  Beat__r: { Name: string };`	Sets/declares the named object property or style/type member: Beat__r: { Name: string };. Interpret it in the enclosing object, props or type definition.
4	`  Outlet__c: string;`	Sets/declares the named object property or style/type member: Outlet__c: string;. Interpret it in the enclosing object, props or type definition.
5	`  Outlet__r: { Name: string };`	Sets/declares the named object property or style/type member: Outlet__r: { Name: string };. Interpret it in the enclosing object, props or type definition.
6	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
7		Blank line separating logical sections; no executable operation.
8	`/** One route per allocated beat, counting an outlet only once. */`	Developer comment/documentation: One route per allocated beat, counting an outlet only once. */ It is not executed.
9	`export function allocatedBeats(rows: Allocation[], completedOutletIds: Set<string>)` `{`	Declares a callable function/method: export function allocatedBeats(rows: Allocation[], completedOutletIds: Set<string>) {. Parameters supply its inputs; the following block implements the operation.
10	`  const grouped = new Map<string, { name: string; outlets: Map<string, string> }>();`	Declares/initializes local data used by the surrounding operation: const grouped = new Map<string, { name: string; outlets: Map<string, string> }>();. Collection contents and assignments below determine its purpose.
11	`  for (const row of rows) {`	Repeats work over the specified records/items or while this condition holds: for (const row of rows) {. Check where queries/writes occur relative to the loop.
12	`    if (!grouped.has(row.Beat__c))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!grouped.has(row.Beat__c)).

Line	Source code	Explanation / reading note
13	`grouped.set(row.Beat__c, { name: row.Beat__r.Name, outlets: new Map() });`	Calls the named method: grouped.set(row.Beat__c, { name: row.Beat__r.Name, outlets: new Map() });. Its implementation defines the side effect/result; use the symbol/file index to follow it.
14	`grouped.get(row.Beat__c)!.outlets.set(row.Outlet__c, row.Outlet__r.Name);`	Calls the named method: grouped.get(row.Beat__c)!.outlets.set(row.Outlet__c, row.Outlet__r.Name);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
15	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
16	`return [...grouped]`	Returns [...grouped] to the caller (or begins returned UI markup) and ends this execution path.
17	`.map(([id, beat]) => {`	Transforms/selects/aggregates collection values with the callback shown here: .map(([id, beat]) => {. Read the callback body and result assignment together.
18	`const stores = beat.outlets.size;`	Declares/initializes local data used by the surrounding operation: const stores = beat.outlets.size;. Collection contents and assignments below determine its purpose.
19	`const completed = [...beat.outlets.keys()].filter((outletId) =>`	Declares/initializes local data used by the surrounding operation: const completed = [...beat.outlets.keys()].filter((outletId) =>. Collection contents and assignments below determine its purpose.
20	`completedOutletIds.has(outletId),`	Calls the named method: completedOutletIds.has(outletId),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
21	`).length;`	Continues the surrounding declaration/expression or text:).length;. Read it with the preceding opening statement (completedOutletIds.has(outletId),); it is not a standalone business operation.
22	`return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
23	`id,`	Continues the surrounding declaration/expression or text: id,. Read it with the preceding opening statement (return {); it is not a standalone business operation.
24	`name: beat.name,`	Sets/declares the named object property or style/type member: name: beat.name,. Interpret it in the enclosing object, props or type definition.
25	`stores,`	Continues the surrounding declaration/expression or text: stores,. Read it with the preceding opening statement (name: beat.name,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
26	`storeCount: stores,`	Sets/declares the named object property or style/type member: storeCount: stores,. Interpret it in the enclosing object, props or type definition.
27	`completed,`	Continues the surrounding declaration/expression or text: completed,. Read it with the preceding opening statement (storeCount: stores,); it is not a standalone business operation.
28	`pending: stores - completed,`	Sets/declares the named object property or style/type member: pending: stores - completed,. Interpret it in the enclosing object, props or type definition.
29	`outletNames: [...beat.outlets.values()].sort().join(", "),`	Sets/declares the named object property or style/type member: outletNames: [...beat.outlets.values()].sort().join(", "),. Interpret it in the enclosing object, props or type definition.
30	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31	`})`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`.sort((left, right) => left.name.localeCompare(right.name));`	Calls the named method: .sort((left, right) => left.name.localeCompare(right.name));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
33	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/services/authService.ts

Employee authentication helper: sign-in challenge/session handling and middleware. Distinct from DMS distributor audience and challenge store.

67 numbered source lines | SHA-256 b13054a17a447c4797295d6052c3f673e4965be3ad20c586da9d7452b9b73960

Line	Source code	Explanation / reading note
1	`import { createHmac, timingSafeEqual } from "node:crypto";`	Imports dependencies/types used below: import { createHmac, timingSafeEqual } from "node:crypto";. Importing a function does not call it.
2	`import { env } from "../config/env.js";`	Imports dependencies/types used below: import { env } from "../config/env.js";. Importing a function does not call it.
3		Blank line separating logical sections; no executable operation.
4	`export type EmployeeIdentity = {`	Defines a compile-time data contract: export type EmployeeIdentity = {. TypeScript types do not validate untrusted runtime JSON by themselves.
5	`  id: string;`	Sets/declares the named object property or style/type member: id: string;. Interpret it in the enclosing object, props or type definition.
6	`  email: string;`	Sets/declares the named object property or style/type member: email: string;. Interpret it in the enclosing object, props or type definition.
7	`  displayName: string;`	Sets/declares the named object property or style/type member: displayName: string;. Interpret it in the enclosing object, props or type definition.
8	`  employeeName: string;`	Sets/declares the named object property or style/type member: employeeName: string;. Interpret it in the enclosing object, props or type definition.
9	`  salesforceUserId?: string;`	Sets/declares the named object property or style/type member: salesforceUserId?: string;. Interpret it in the enclosing object, props or type definition.
10	`  beatId?: string;`	Sets/declares the named object property or style/type member: beatId?: string;. Interpret it in the enclosing object, props or type definition.
11	`  beatName?: string;`	Sets/declares the named object property or style/type member: beatName?: string;. Interpret it in the enclosing object, props or type definition.
12	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
14	`export const mockEmployees: EmployeeIdentity[] = [`	Assigns the right-hand expression to the named variable/property: export const mockEmployees: EmployeeIdentity[] = [. This is in-memory unless it is later persisted by an explicit call.
15	`  {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (export const mockEmployees: EmployeeIdentity[] = []; it is not a standalone business operation.
16	`    id: "mock-edge-employee",`	Sets/declares the named object property or style/type member: id: "mock-edge-employee",. Interpret it in the enclosing object, props or type definition.
17	`    email: "edge@sfa.demo",`	Sets/declares the named object property or style/type member: email: "edge@sfa.demo",. Interpret it in the enclosing object, props or type definition.
18	`    displayName: "Demo Employee",`	Sets/declares the named object property or style/type member: displayName: "Demo Employee",. Interpret it in the enclosing object, props or type definition.
19	`    employeeName: "Demo Employee",`	Sets/declares the named object property or style/type member: employeeName: "Demo Employee",. Interpret it in the enclosing object, props or type definition.
20	`    salesforceUserId: "mock-user-edge",`	Sets/declares the named object property or style/type member: salesforceUserId: "mock-user-edge",. Interpret it in the enclosing object, props or type definition.
21	`    beatId: "beat-1",`	Sets/declares the named object property or style/type member: beatId: "beat-1",. Interpret it in the enclosing object, props or type definition.
22	`    beatName: "Lakeside Market Beat",`	Sets/declares the named object property or style/type member: beatName: "Lakeside Market Beat",. Interpret it in the enclosing object, props or type definition.
23	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24	`  {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
25	`    id: "mock-express-employee",`	Sets/declares the named object property or style/type member: id: "mock-express-employee",. Interpret it in the enclosing object, props or type definition.
26	`    email: "express@sfa.demo",`	Sets/declares the named object property or style/type member: email: "express@sfa.demo",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
27	`    displayName: "Second Employee",`	Sets/declares the named object property or style/type member: displayName: "Second Employee",. Interpret it in the enclosing object, props or type definition.
28	`    employeeName: "Second Employee",`	Sets/declares the named object property or style/type member: employeeName: "Second Employee",. Interpret it in the enclosing object, props or type definition.
29	`    salesforceUserId: "mock-user-express",`	Sets/declares the named object property or style/type member: salesforceUserId: "mock-user-express",. Interpret it in the enclosing object, props or type definition.
30	`    beatId: "beat-1",`	Sets/declares the named object property or style/type member: beatId: "beat-1",. Interpret it in the enclosing object, props or type definition.
31	`    beatName: "Lakeside Market Beat",`	Sets/declares the named object property or style/type member: beatName: "Lakeside Market Beat",. Interpret it in the enclosing object, props or type definition.
32	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34		Blank line separating logical sections; no executable operation.
35	`function normalizeEmail(email: string) {`	Declares a callable function/method: function normalizeEmail(email: string) {. Parameters supply its inputs; the following block implements the operation.
36	`  return email.trim().toLowerCase();`	Returns email.trim().toLowerCase() to the caller (or begins returned UI markup) and ends this execution path.
37	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38		Blank line separating logical sections; no executable operation.
39	`function timeWindow(now = Date.now()) {`	Declares a callable function/method: function timeWindow(now = Date.now()) {. Parameters supply its inputs; the following block implements the operation.
40	`  return Math.floor(now / (env.AUTH_CODE_TTL_MINUTES * 60_000));`	Returns Math.floor(now / (env.AUTH_CODE_TTL_MINUTES * 60_000)) to the caller (or begins returned UI markup) and ends this execution path.
41	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
42		Blank line separating logical sections; no executable operation.
43	`function codeForWindow(email: string, window: number) {`	Declares a callable function/method: function codeForWindow(email: string, window: number) {. Parameters supply its inputs; the following block implements the operation.
44	`  const digest = createHmac("sha256", env.JWT_SECRET)`	Declares/initializes local data used by the surrounding operation: const digest = createHmac("sha256", env.JWT_SECRET). Collection contents and assignments below determine its purpose.
45	`    .update(`${normalizeEmail(email)}:${window}`)`	Continues the surrounding declaration/expression or text: .update(`${normalizeEmail(email)}:${window}`). Read it with the preceding opening statement (const digest = createHmac("sha256", env.JWT_SECRET)); it is not a standalone business operation.
46	`    .digest();`	Continues the surrounding declaration/expression or text: .digest();. Read it with the preceding opening statement (.update(`${normalizeEmail(email)}:${window}`)); it is not a standalone business operation.
47	`  return String((digest.readUInt32BE(0) % 900000) + 100000);`	Returns String((digest.readUInt32BE(0) % 900000) + 100000) to the caller (or begins returned UI markup) and ends this execution path.
48	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49		Blank line separating logical sections; no executable operation.
50	`export function findMockEmployee(email: string) {`	Declares a callable function/method: export function findMockEmployee(email: string) {. Parameters supply its inputs; the following block implements the operation.
51	`  const normalized = normalizeEmail(email);`	Declares/initializes local data used by the surrounding operation: const normalized = normalizeEmail(email);. Collection contents and assignments below determine its purpose.
52	`  return mockEmployees.find((item) => item.email === normalized);`	Returns mockEmployees.find((item) => item.email === normalized) to the caller (or begins returned UI markup) and ends this execution path.
53	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
54		Blank line separating logical sections; no executable operation.
55	`export function createLoginCode(email: string) {`	Declares a callable function/method: export function createLoginCode(email: string) {. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
56	`  return codeForWindow(email, timeWindow());`	Returns codeForWindow(email, timeWindow()) to the caller (or begins returned UI markup) and ends this execution path.
57	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
58		Blank line separating logical sections; no executable operation.
59	`export function verifyLoginCode(email: string, code: string) {`	Declares a callable function/method: export function verifyLoginCode(email: string, code: string) {. Parameters supply its inputs; the following block implements the operation.
60	`  if (!/^\d{6}$/.test(code)) return false;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!/^\d{6}$/.test(code)) return false;.
61	`  const supplied = Buffer.from(code);`	Declares/initializes local data used by the surrounding operation: const supplied = Buffer.from(code);. Collection contents and assignments below determine its purpose.
62	`  const window = timeWindow();`	Declares/initializes local data used by the surrounding operation: const window = timeWindow();. Collection contents and assignments below determine its purpose.
63	`  return [window, window - 1].some((candidateWindow) => {`	Returns [window, window - 1].some((candidateWindow) => { to the caller (or begins returned UI markup) and ends this execution path.
64	`    const expected = Buffer.from(codeForWindow(email, candidateWindow));`	Declares/initializes local data used by the surrounding operation: const expected = Buffer.from(codeForWindow(email, candidateWindow));. Collection contents and assignments below determine its purpose.
65	`    return timingSafeEqual(supplied, expected);`	Returns timingSafeEqual(supplied, expected) to the caller (or begins returned UI markup) and ends this execution path.
66	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
67	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/services/documentService.ts

Builds visit summary PDF/Excel outputs from application data. Generating a document does not itself create the underlying business transaction.

76 numbered source lines | SHA-256 c236197ef8e3d43ff348aba490e20f5cea4821672b76b30e7f42032a6bea7b70

Line	Source code	Explanation / reading note
1	`import PDFDocument from "pdfkit";`	Imports dependencies/types used below: import PDFDocument from "pdfkit";. Importing a function does not call it.
2	`import ExcelJS from "exceljs";`	Imports dependencies/types used below: import ExcelJS from "exceljs";. Importing a function does not call it.
3	`import type { VisitPayload } from "../types.js";`	Imports dependencies/types used below: import type { VisitPayload } from "../types.js";. Importing a function does not call it.
4	`export async function createPdf(visit: VisitPayload) {`	Declares a callable function/method: export async function createPdf(visit: VisitPayload) {. Parameters supply its inputs; the following block implements the operation.
5	`  return new Promise<Buffer>((resolve, reject) => {`	Returns new Promise<Buffer>((resolve, reject) => { to the caller (or begins returned UI markup) and ends this execution path.
6	`    const doc = new PDFDocument({ margin: 42 });`	Declares/initializes local data used by the surrounding operation: const doc = new PDFDocument({ margin: 42 });. Collection contents and assignments below determine its purpose.
7	`    const chunks: Buffer[] = [];`	Declares/initializes local data used by the surrounding operation: const chunks: Buffer[] = [];. Collection contents and assignments below determine its purpose.
8	`    doc.on("data", (c) => chunks.push(c));`	Calls the named method: doc.on("data", (c) => chunks.push(c));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
9	`    doc.on("end", () => resolve(Buffer.concat(chunks)));`	Calls the named method: doc.on("end", () => resolve(Buffer.concat(chunks)));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
10	`    doc.on("error", reject);`	Calls the named method: doc.on("error", reject);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
11	`    doc.fontSize(20).fillColor("#0B5CAB").text("SFA Store Visit Summary");`	Calls the named method: doc.fontSize(20).fillColor("#0B5CAB").text("SFA Store Visit Summary");. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
12	`    doc.moveDown().fontSize(11).fillColor("#172B4D");`	Calls the named method: doc.moveDown().fontSize(11).fillColor("#172B4D");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
13	`    [`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (doc.moveDown().fontSize(11).fillColor("#172B4D");); it is not a standalone business operation.
14	`      ["Store", visit.storeName],`	Continues the surrounding declaration/expression or text: ["Store", visit.storeName],. Read it with the preceding opening statement ([]); it is not a standalone business operation.
15	`      ["Beat", visit.beatName],`	Continues the surrounding declaration/expression or text: ["Beat", visit.beatName],. Read it with the preceding opening statement (["Store", visit.storeName],); it is not a standalone business operation.
16	`      ["Status", visit.status],`	Continues the surrounding declaration/expression or text: ["Status", visit.status],. Read it with the preceding opening statement (["Beat", visit.beatName],); it is not a standalone business operation.
17	`      ["Visit start", visit.checkIn?.timestamp || "-"],`	Continues the surrounding declaration/expression or text: ["Visit start", visit.checkIn?.timestamp || "-"],. Read it with the preceding opening statement (["Status", visit.status],); it is not a standalone business operation.
18	`      ["Visit end", visit.checkOut?.timestamp || "-"],`	Continues the surrounding declaration/expression or text: ["Visit end", visit.checkOut?.timestamp || "-"],. Read it with the preceding opening statement (["Visit start", visit.checkIn?.timestamp || "-"],); it is not a standalone business operation.
19	`    ].forEach(([a, b]) => doc.text(`${a}: ${b}`));`	Calls the named method:].forEach(([a, b]) => doc.text(`${a}: ${b}`));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
20	`    doc.moveDown().fontSize(14).text("Order details");`	Calls the named method: doc.moveDown().fontSize(14).text("Order details");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
21	`    visit.orderLines.forEach((l) =>`	Calls the named method: visit.orderLines.forEach((l) =>. Its implementation defines the side effect/result; use the symbol/file index to follow it.
22	`      doc`	Continues the surrounding declaration/expression or text: doc. Read it with the preceding opening statement (visit.orderLines.forEach((l) =>); it is not a standalone business operation.
23	`        .fontSize(10)`	Continues the surrounding declaration/expression or text: .fontSize(10). Read it with the preceding opening statement (doc); it is not a standalone business operation.

Line	Source code	Explanation / reading note
24	`.text(`	Continues the surrounding declaration/expression or text: .text(. Read it with the preceding opening statement (.fontSize(10)); it is not a standalone business operation.
25	`` `${l.productName} | ${l.quantity} × INR ${l.unitPrice} | Discount INR ${l.discount} | INR ${l.amount}`, ``	Continues the surrounding declaration/expression or text: `${l.productName} | ${l.quantity} × INR ${l.unitPrice} | Discount INR ${l.discount} | INR ${l.amount}`,. Read it with the preceding opening statement (.text(); it is not a standalone business operation.
26	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
27	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
28	`const appliedSchemes = visit.orderLines.filter((line) => line.schemeName);`	Declares/initializes local data used by the surrounding operation: const appliedSchemes = visit.orderLines.filter((line) => line.schemeName);. Collection contents and assignments below determine its purpose.
29	`if (appliedSchemes.length) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (appliedSchemes.length) {.
30	`doc.moveDown().fontSize(14).text("Applied schemes");`	Calls the named method: doc.moveDown().fontSize(14).text("Applied schemes");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
31	`appliedSchemes.forEach((line) =>`	Calls the named method: appliedSchemes.forEach((line) =>. Its implementation defines the side effect/result; use the symbol/file index to follow it.
32	`doc.fontSize(10).text(`${line.productName}: ${line.schemeName}`),`	Calls the named method: doc.fontSize(10).text(`${line.productName}: ${line.schemeName}`),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
33	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`doc.moveDown().text(`Total: INR ${visit.orderLines.reduce((s, l) => s + l.amount, 0)}`);`	Transforms/selects/aggregates collection values with the callback shown here: doc.moveDown().text(`Total: INR ${visit.orderLines.reduce((s, l) => s + l.amount, 0)}`);. Read the callback body and result assignment together.
36	`doc.text(`	Calls the named method: doc.text(. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
37	`Returns: ${visit.returns.length} Competitor activities: ${visit.competitors.length} Tickets: ${visit.tickets.length}`,	Continues the surrounding declaration/expression or text: `Returns: ${visit.returns.length} Competitor activities: ${visit.competitors.length} Tickets: ${visit.tickets.length}`,. Read it with the preceding opening statement (doc.text(); it is not a standalone business operation.
38	);	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	doc.end();	Calls the named method: doc.end();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
40	});	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
41	}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42	export async function createExcel(visit: VisitPayload) {	Declares a callable function/method: export async function createExcel(visit: VisitPayload) {. Parameters supply its inputs; the following block implements the operation.
43	const book = new ExcelJS.Workbook();	Declares/initializes local data used by the surrounding operation: const book = new ExcelJS.Workbook();. Collection contents and assignments below determine its purpose.
44	const summary = book.addWorksheet("Visit Summary");	Declares/initializes local data used by the surrounding operation: const summary = book.addWorksheet("Visit Summary");. Collection contents and assignments below determine its purpose.
45	summary.addRows([	Calls the named method: summary.addRows([. Its implementation defines the side effect/result; use the symbol/file index to follow it.
46	["Store", visit.storeName],	Continues the surrounding declaration/expression or text: ["Store", visit.storeName],. Read it with the preceding opening statement (summary.addRows([); it is not a standalone business operation.
47	["Beat", visit.beatName],	Continues the surrounding declaration/expression or text: ["Beat", visit.beatName],. Read it with the preceding opening statement (["Store", visit.storeName],); it is not a standalone business operation.
48	["Status", visit.status],	Continues the surrounding declaration/expression or text: ["Status", visit.status],. Read it with the preceding opening statement (["Beat", visit.beatName],); it is not a standalone business operation.

Line	Source code	Explanation / reading note
49	`["Start", visit.checkIn?.timestamp],`	Continues the surrounding declaration/expression or text: ["Start", visit.checkIn?.timestamp],. Read it with the preceding opening statement (["Status", visit.status],); it is not a standalone business operation.
50	`["End", visit.checkOut?.timestamp],`	Continues the surrounding declaration/expression or text: ["End", visit.checkOut?.timestamp],. Read it with the preceding opening statement (["Start", visit.checkIn?.timestamp],); it is not a standalone business operation.
51	`]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
52	`const orders = book.addWorksheet("Order Details");`	Declares/initializes local data used by the surrounding operation: const orders = book.addWorksheet("Order Details");. Collection contents and assignments below determine its purpose.
53	`orders.addRow(["Product", "Quantity", "Unit Price", "Discount", "Applied Scheme", "Amount"]);`	Calls the named method: orders.addRow(["Product", "Quantity", "Unit Price", "Discount", "Applied Scheme", "Amount"]);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
54	`visit.orderLines.forEach((l) =>`	Calls the named method: visit.orderLines.forEach((l) =>. Its implementation defines the side effect/result; use the symbol/file index to follow it.
55	`orders.addRow([`	Calls the named method: orders.addRow([. Its implementation defines the side effect/result; use the symbol/file index to follow it.
56	`l.productName,`	Continues the surrounding declaration/expression or text: l.productName,. Read it with the preceding opening statement (orders.addRow([); it is not a standalone business operation.
57	`l.quantity,`	Continues the surrounding declaration/expression or text: l.quantity,. Read it with the preceding opening statement (l.productName,); it is not a standalone business operation.
58	`l.unitPrice,`	Continues the surrounding declaration/expression or text: l.unitPrice,. Read it with the preceding opening statement (l.quantity,); it is not a standalone business operation.
59	`l.discount,`	Continues the surrounding declaration/expression or text: l.discount,. Read it with the preceding opening statement (l.unitPrice,); it is not a standalone business operation.
60	`l.schemeName || "",`	Continues the surrounding declaration/expression or text: l.schemeName || "",. Read it with the preceding opening statement (l.discount,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
61	`      l.amount,`	Continues the surrounding declaration/expression or text: l.amount,. Read it with the preceding opening statement (l.schemeName || "",); it is not a standalone business operation.
62	`    ]),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
63	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
64	`  for (const [name, rows] of [`	Repeats work over the specified records/items or while this condition holds: for (const [name, rows] of [. Check where queries/writes occur relative to the loop.
65	`    ["Returns", visit.returns],`	Continues the surrounding declaration/expression or text: ["Returns", visit.returns],. Read it with the preceding opening statement (for (const [name, rows] of []); it is not a standalone business operation.
66	`    ["Competitor Activity", visit.competitors],`	Continues the surrounding declaration/expression or text: ["Competitor Activity", visit.competitors],. Read it with the preceding opening statement (["Returns", visit.returns],); it is not a standalone business operation.
67	`    ["Tickets", visit.tickets],`	Continues the surrounding declaration/expression or text: ["Tickets", visit.tickets],. Read it with the preceding opening statement (["Competitor Activity", visit.competitors],); it is not a standalone business operation.
68	`  ] as const) {`	Continues the surrounding declaration/expression or text:] as const) {. Read it with the preceding opening statement (["Tickets", visit.tickets],); it is not a standalone business operation.
69	`    const sheet = book.addWorksheet(name);`	Declares/initializes local data used by the surrounding operation: const sheet = book.addWorksheet(name);. Collection contents and assignments below determine its purpose.
70	`    if (rows.length) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (rows.length) {.
71	`      sheet.columns = Object.keys(rows[0]).map((key) => ({ header: key, key }));`	Transforms/selects/aggregates collection values with the callback shown here: sheet.columns = Object.keys(rows[0]).map((key) => ({ header: key, key }));. Read the callback body and result assignment together.
72	`      sheet.addRows(rows);`	Calls the named method: sheet.addRows(rows);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
73	`    } else sheet.addRow(["No records"]);`	Alternative branch taken when the preceding condition is false.
74	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
75	`  return Buffer.from(await book.xlsx.writeBuffer());`	Waits for this asynchronous operation before continuing: return Buffer.from(await book.xlsx.writeBuffer());. The returned result/error must still be handled.
76	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/services/emailService.ts

Builds/sends SFA email through configured mail transport. Credentials come from environment; successful submission is not proof of inbox delivery.

100 numbered source lines | SHA-256 547415b8c38dfbb4da2559bf8277515829498aaf1d2e0b49ff2d2995f5d699f4

Line	Source code	Explanation / reading note
1	`import nodemailer from "nodemailer";`	Imports dependencies/types used below: import nodemailer from "nodemailer";. Importing a function does not call it.
2	`import { env } from "../config/env.js";`	Imports dependencies/types used below: import { env } from "../config/env.js";. Importing a function does not call it.
3	`import { salesforce } from "../salesforce/SalesforceService.js";`	Imports dependencies/types used below: import { salesforce } from "../salesforce/SalesforceService.js";. Importing a function does not call it.
4		Blank line separating logical sections; no executable operation.
5	`export function emailDeliveryIsConfigured() {`	Declares a callable function/method: export function emailDeliveryIsConfigured() {. Parameters supply its inputs; the following block implements the operation.
6	`  const smtpIsConfigured = Boolean(`	Declares/initializes local data used by the surrounding operation: const smtpIsConfigured = Boolean(. Collection contents and assignments below determine its purpose.
7	`    env.SMTP_HOST && env.SMTP_USER && env.SMTP_PASSWORD && env.EMAIL_FROM,`	Continues the surrounding declaration/expression or text: env.SMTP_HOST && env.SMTP_USER && env.SMTP_PASSWORD && env.EMAIL_FROM,. Read it with the preceding opening statement (const smtpIsConfigured = Boolean(); it is not a standalone business operation.
8	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
9	`  return smtpIsConfigured || !env.USE_MOCK_DATA;`	Returns smtpIsConfigured || !env.USE_MOCK_DATA to the caller (or begins returned UI markup) and ends this execution path.
10	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
11		Blank line separating logical sections; no executable operation.
12	`async function sendEmail(recipient: string, subject: string, text: string, html: string) {`	Declares a callable function/method: async function sendEmail(recipient: string, subject: string, text: string, html: string) {. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
13	`  const smtpIsConfigured = Boolean(`	Declares/initializes local data used by the surrounding operation: const smtpIsConfigured = Boolean(. Collection contents and assignments below determine its purpose.
14	`    env.SMTP_HOST && env.SMTP_USER && env.SMTP_PASSWORD && env.EMAIL_FROM,`	Continues the surrounding declaration/expression or text: env.SMTP_HOST && env.SMTP_USER && env.SMTP_PASSWORD && env.EMAIL_FROM,. Read it with the preceding opening statement (const smtpIsConfigured = Boolean(); it is not a standalone business operation.
15	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
16		Blank line separating logical sections; no executable operation.
17	`  if (smtpIsConfigured) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (smtpIsConfigured) {.
18	`    const transport = nodemailer.createTransport({`	Declares/initializes local data used by the surrounding operation: const transport = nodemailer.createTransport({. Collection contents and assignments below determine its purpose.
19	`      host: env.SMTP_HOST,`	Sets/declares the named object property or style/type member: host: env.SMTP_HOST,. Interpret it in the enclosing object, props or type definition.
20	`      port: env.SMTP_PORT,`	Sets/declares the named object property or style/type member: port: env.SMTP_PORT,. Interpret it in the enclosing object, props or type definition.
21	`      secure: env.SMTP_SECURE,`	Sets/declares the named object property or style/type member: secure: env.SMTP_SECURE,. Interpret it in the enclosing object, props or type definition.
22	`      auth: { user: env.SMTP_USER, pass: env.SMTP_PASSWORD },`	Sets/declares the named object property or style/type member: auth: { user: env.SMTP_USER, pass: env.SMTP_PASSWORD },. Interpret it in the enclosing object, props or type definition.
23	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24		Blank line separating logical sections; no executable operation.
25	`    await transport.sendMail({`	Waits for this asynchronous operation before continuing: await transport.sendMail({. The returned result/error must still be handled.
26	`      from: env.EMAIL_FROM,`	Completes the dependency import and identifies the module supplying those names.

Line	Source code	Explanation / reading note
27	`      to: recipient,`	Sets/declares the named object property or style/type member: to: recipient,. Interpret it in the enclosing object, props or type definition.
28	`      subject,`	Continues the surrounding declaration/expression or text: subject,. Read it with the preceding opening statement (to: recipient,); it is not a standalone business operation.
29	`      text,`	Continues the surrounding declaration/expression or text: text,. Read it with the preceding opening statement (subject,); it is not a standalone business operation.
30	`      html,`	Continues the surrounding declaration/expression or text: html,. Read it with the preceding opening statement (text,); it is not a standalone business operation.
31	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`    return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
33	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34		Blank line separating logical sections; no executable operation.
35	`  if (env.USE_MOCK_DATA) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (env.USE_MOCK_DATA) {.
36	`    throw new Error("Email delivery has not been configured on the server");`	Stops this execution path with a validation/error exception: throw new Error("Email delivery has not been configured on the server");. The caller/catch block decides how it is reported.
37	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38		Blank line separating logical sections; no executable operation.
39	`  const results = await salesforce.invokeStandardAction("emailSimple", [`	Waits for this asynchronous operation before continuing: const results = await salesforce.invokeStandardAction("emailSimple", [. The returned result/error must still be handled.
40	`    {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (const results = await salesforce.invokeStandardAction("emailSimple", []; it is not a standalone business operation.
41	`      recipientAddresses: [recipient],`	Sets/declares the named object property or style/type member: recipientAddresses: [recipient],. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
42	`emailSubject: subject,`	Sets/declares the named object property or style/type member: emailSubject: subject,. Interpret it in the enclosing object, props or type definition.
43	`emailBody: html,`	Sets/declares the named object property or style/type member: emailBody: html,. Interpret it in the enclosing object, props or type definition.
44	`sendRichBody: true,`	Sets/declares the named object property or style/type member: sendRichBody: true,. Interpret it in the enclosing object, props or type definition.
45	`senderType: "CurrentUser",`	Sets/declares the named object property or style/type member: senderType: "CurrentUser",. Interpret it in the enclosing object, props or type definition.
46	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48		Blank line separating logical sections; no executable operation.
49	`const deliveryResult = Array.isArray(results) ? results[0] : undefined;`	Declares/initializes local data used by the surrounding operation: const deliveryResult = Array.isArray(results) ? results[0] : undefined;. Collection contents and assignments below determine its purpose.
50	`if (!deliveryResult?.isSuccess) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!deliveryResult?.isSuccess) {.
51	`const deliveryError = deliveryResult?.errors?.[0]?.message;`	Declares/initializes local data used by the surrounding operation: const deliveryError = deliveryResult?.errors?.[0]?.message;. Collection contents and assignments below determine its purpose.
52	`throw new Error(deliveryError || "Salesforce did not accept the email for delivery");`	Stops this execution path with a validation/error exception: throw new Error(deliveryError || "Salesforce did not accept the email for delivery");. The caller/catch block decides how it is reported.
53	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
54	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
55		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
56	`export async function sendEmployeeLoginCode(recipient: string, employeeName: string, code: string) {`	Declares a callable function/method: export async function sendEmployeeLoginCode(recipient: string, employeeName: string, code: string) {. Parameters supply its inputs; the following block implements the operation.
57	`  await sendEmail(`	Waits for this asynchronous operation before continuing: await sendEmail(. The returned result/error must still be handled.
58	`    recipient,`	Continues the surrounding declaration/expression or text: recipient,. Read it with the preceding opening statement (await sendEmail(); it is not a standalone business operation.
59	`    "Your SFA Mobile sign-in code",`	Continues the surrounding declaration/expression or text: "Your SFA Mobile sign-in code",. Read it with the preceding opening statement (recipient,); it is not a standalone business operation.
60	`    \`Hello ${employeeName},\n\nYour SFA Mobile sign-in code is ${code}. It expires in ${env.AUTH_CODE_TTL_MINUTES} minutes.\n\nIf you did not request this code, you can ignore this email.\`,`	Continues the surrounding declaration/expression or text: `Hello ${employeeName},\n\nYour SFA Mobile sign-in code is ${code}. It expires in ${env.AUTH_CODE_TTL_MINUTES} minutes.\n\nIf you did not request this code, you can ignore this email.`,. Read it with the preceding opening statement ("Your SFA Mobile sign-in code",); it is not a standalone business operation.
61	`    \` Hello ${employeeName}, Your SFA Mobile sign-in code is: ${code} This code expires in ${env.AUTH_CODE_TTL_MINUTES} minutes. If you did not request it, you can ignore this email. \`,`	Assigns the right-hand expression to the named variable/property: ` Hello ${employeeName}, Your SFA Mobile sign-in code is: ${code} This code expires in ${env.AUTH_CODE_TTL_MINUTES} minute. This is in-memory unless it is later persisted by an explicit call.
62	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
63	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
64		Blank line separating logical sections; no executable operation.
65	`export async function sendDistributorInvitation(recipient: string, employeeName: string) {`	Declares a callable function/method: export async function sendDistributorInvitation(recipient: string, employeeName: string) {. Parameters supply its inputs; the following block implements the operation.
66	`  const link = env.APP_PUBLIC_URL;`	Declares/initializes local data used by the surrounding operation: const link = env.APP_PUBLIC_URL;. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
67	`  await sendEmail(`	Waits for this asynchronous operation before continuing: await sendEmail(. The returned result/error must still be handled.
68	`    recipient,`	Continues the surrounding declaration/expression or text: recipient,. Read it with the preceding opening statement (await sendEmail(); it is not a standalone business operation.
69	`    "Your SFA Mobile application link",`	Continues the surrounding declaration/expression or text: "Your SFA Mobile application link",. Read it with the preceding opening statement (recipient,); it is not a standalone business operation.
70	`    `Hello ${employeeName},\n\nOpen the SFA Mobile application: ${link}\n\nEnter this email address to receive your secure sign-in code.`,`	Continues the surrounding declaration/expression or text: `Hello ${employeeName},\n\nOpen the SFA Mobile application: ${link}\n\nEnter this email address to receive your secure sign-in code.`,. Read it with the preceding opening statement ("Your SFA Mobile application link",); it is not a standalone business operation.
71	`    ` Hello ${employeeName}, Your SFA Mobile application is ready. Open SFA Mobile Enter ${recipient} on the login page to receive your secure sign-in code. `,`	Assigns the right-hand expression to the named variable/property: ` Hello ${employeeName}, Your SFA Mobile application is ready. <a href="${link}" style="display:inline-block;padding:12px 20px;background:#1677c8;color:#fff;text-decoration:none;border-r. This is in-memory unless it is later persisted by an explicit call.
72	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
73	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
74		Blank line separating logical sections; no executable operation.
75	`export async function sendRetailerOrderSummary(`	Declares a callable function/method: export async function sendRetailerOrderSummary(. Parameters supply its inputs; the following block implements the operation.
76	`  recipient: string,`	Sets/declares the named object property or style/type member: recipient: string,. Interpret it in the enclosing object, props or type definition.
77	`  outletName: string,`	Sets/declares the named object property or style/type member: outletName: string,. Interpret it in the enclosing object, props or type definition.
78	`  items: Array<{ productName: string; quantity: number; amount: number }>,`	Sets/declares the named object property or style/type member: items: Array<{ productName: string; quantity: number; amount: number }>,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
79	`  totalAmount: number,`	Sets/declares the named object property or style/type member: totalAmount: number,. Interpret it in the enclosing object, props or type definition.
80	`  schemes: string[],`	Sets/declares the named object property or style/type member: schemes: string[],. Interpret it in the enclosing object, props or type definition.
81	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (schemes: string[],); it is not a standalone business operation.
82	`  const itemText = items`	Declares/initializes local data used by the surrounding operation: const itemText = items. Collection contents and assignments below determine its purpose.
83	`    .map(`	Transforms/selects/aggregates collection values with the callback shown here: .map(. Read the callback body and result assignment together.
84	`      (item) => `${item.productName} - Qty ${item.quantity} - ₹${Number(item.amount).toFixed(2)}`,`	Continues the surrounding declaration/expression or text: (item) => `${item.productName} - Qty ${item.quantity} - ₹${Number(item.amount).toFixed(2)}`,. Read it with the preceding opening statement (.map(); it is not a standalone business operation.
85	`    )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
86	`    .join("\n");`	Continues the surrounding declaration/expression or text: .join("\n");. Read it with the preceding opening statement ( )); it is not a standalone business operation.
87	`  const itemRows = items`	Declares/initializes local data used by the surrounding operation: const itemRows = items. Collection contents and assignments below determine its purpose.
88	`    .map(`	Transforms/selects/aggregates collection values with the callback shown here: .map(. Read the callback body and result assignment together.
89	`      (item) =>`	Continues the surrounding declaration/expression or text: (item) =>. Read it with the preceding opening statement (.map(); it is not a standalone business operation.
90	`       `<tr><td>${item.productName}</td><td>${item.quantity}</td><td>₹${Number(item.amount).toFixed(2)}</td></tr>`,`	Continues the surrounding declaration/expression or text: `<tr><td>${item.productName}</td><td>${item.quantity}</td><td>₹${Number(item.amount).toFixed(2)}</td></tr>`,. Read it with the preceding opening statement ((item) =>); it is not a standalone business operation.
91	`    )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
92	`.join("");`	Continues the surrounding declaration/expression or text: .join("");. Read it with the preceding opening statement ( )); it is not a standalone business operation.
93	`const schemeText = schemes.length ? schemes.join(", ") : "No active product scheme";`	Declares/initializes local data used by the surrounding operation: const schemeText = schemes.length ? schemes.join(", ") : "No active product scheme";. Collection contents and assignments below determine its purpose.
94	`await sendEmail(`	Waits for this asynchronous operation before continuing: await sendEmail(. The returned result/error must still be handled.
95	`recipient,`	Continues the surrounding declaration/expression or text: recipient,. Read it with the preceding opening statement (await sendEmail(); it is not a standalone business operation.
96	`` `SFA order confirmation - ${outletName}`, ``	Continues the surrounding declaration/expression or text: `SFA order confirmation - ${outletName}`,. Read it with the preceding opening statement (recipient,); it is not a standalone business operation.
97	`` `Hello ${outletName},\n\nYour order has been booked.\n${itemText}\n\nTotal: ₹${Number(totalAmount).toFixed(2)}\nAvailable schemes: ${schemeText}`, ``	Continues the surrounding declaration/expression or text: `Hello ${outletName},\n\nYour order has been booked.\n${itemText}\n\nTotal: ₹${Number(totalAmount).toFixed(2)}\nAvailable schemes: ${schemeText}`,. Read it with the preceding opening statement (`SFA order confirmation - ${outletName}`,); it is not a standalone business operation.
98	`` ` Hello ${outletName}, Your order has been booked successfully. <table cellpadding="7" cellspacing="0" border="1"><tr><th>Product</th><th>Quantity</th><th>Amount</th></tr>${itemRows}</table> Total: ₹${Number(totalAmount).toFixed(2)} Available schemes: ${schemeText} `, ``	Assigns the right-hand expression to the named variable/property: ` Hello ${outletName}, Your order has been booked successfully. <table cellpadding="7" cellspacing="0" border="1"><tr><th>Product</th><th>Quantity</th><th>Amount</th></tr>${itemRows}</table. This is in-memory unless it is later persisted by an explicit call.
99	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
100	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/services/productIdentity.test.ts

Regression tests for productIdentity. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

17 numbered source lines | SHA-256 13d24b325233338ebcac25db574bc5530a25fb9313d2652638387720f773a11d

Line	Source code	Explanation / reading note
1	`import { describe, expect, it } from "vitest";`	Imports dependencies/types used below: import { describe, expect, it } from "vitest";. Importing a function does not call it.
2	`import { productIdentity } from "./productIdentity.js";`	Imports dependencies/types used below: import { productIdentity } from "./productIdentity.js";. Importing a function does not call it.
3		Blank line separating logical sections; no executable operation.
4	`describe("Salesforce product identity", () => {`	Continues the surrounding declaration/expression or text: describe("Salesforce product identity", () => {. Read it with the preceding opening statement; it is not a standalone business operation.
5	`  it("maps the three fields from the same Salesforce product", () => {`	Continues the surrounding declaration/expression or text: it("maps the three fields from the same Salesforce product", () => {. Read it with the preceding opening statement (describe("Salesforce product identity", () => {); it is not a standalone business operation.
6	`    expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
7	`      productIdentity({ Brand__c: "Brand A", Sub_Brand__c: "Range A", Brand_Alias__c: "Alias A" }),`	Continues the surrounding declaration/expression or text: productIdentity({ Brand__c: "Brand A", Sub_Brand__c: "Range A", Brand_Alias__c: "Alias A" }),. Read it with the preceding opening statement (expect(); it is not a standalone business operation.
8	`    ).toEqual({ brand: "Brand A", subBrand: "Range A", brandAlias: "Alias A" });`	Continues the surrounding declaration/expression or text:).toEqual({ brand: "Brand A", subBrand: "Range A", brandAlias: "Alias A" });. Read it with the preceding opening statement (productIdentity({ Brand__c: "Brand A", Sub_Brand__c: "Range A", Brand_Alias__c: "Alias A" }),); it is not a standalone business operation.
9	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`  it("returns empty values without inventing product metadata", () => {`	Continues the surrounding declaration/expression or text: it("returns empty values without inventing product metadata", () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.

Line	Source code	Explanation / reading note
11	`    expect(productIdentity({ Brand__c: null })).toEqual({`	Test assertion comparing an expected outcome to actual behavior: expect(productIdentity({ Brand__c: null })).toEqual({. A mismatch fails the test.
12	`      brand: "",`	Sets/declares the named object property or style/type member: brand: "",. Interpret it in the enclosing object, props or type definition.
13	`      subBrand: "",`	Sets/declares the named object property or style/type member: subBrand: "",. Interpret it in the enclosing object, props or type definition.
14	`      brandAlias: "",`	Sets/declares the named object property or style/type member: brandAlias: "",. Interpret it in the enclosing object, props or type definition.
15	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
16	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/services/productIdentity.ts

Normalizes brand, sub-brand and alias information into the product shape used by employee screens.

12 numbered source lines | SHA-256 dd40853ddc9ede722d4b0da4cf7a3ffe7b348addf3bddaf2ed5a4d43d6a93ed5

Line	Source code	Explanation / reading note
1	`/** Always include the three Salesforce product identity fields in API responses. */`	Developer comment/documentation: Always include the three Salesforce product identity fields in API responses. */ It is not executed.
2	`export function productIdentity(row: {`	Declares a callable function/method: export function productIdentity(row: {. Parameters supply its inputs; the following block implements the operation.
3	`  Brand__c?: string | null;`	Sets/declares the named object property or style/type member: Brand__c?: string | null;. Interpret it in the enclosing object, props or type definition.
4	`  Sub_Brand__c?: string | null;`	Sets/declares the named object property or style/type member: Sub_Brand__c?: string | null;. Interpret it in the enclosing object, props or type definition.
5	`  Brand_Alias__c?: string | null;`	Sets/declares the named object property or style/type member: Brand_Alias__c?: string | null;. Interpret it in the enclosing object, props or type definition.
6	`}) {`	Continues the surrounding declaration/expression or text: }) {. Read it with the preceding opening statement (Brand_Alias__c?: string | null;); it is not a standalone business operation.
7	`  return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
8	`    brand: row.Brand__c ?? "",`	Sets/declares the named object property or style/type member: brand: row.Brand__c ?? "",. Interpret it in the enclosing object, props or type definition.
9	`    subBrand: row.Sub_Brand__c ?? "",`	Sets/declares the named object property or style/type member: subBrand: row.Sub_Brand__c ?? "",. Interpret it in the enclosing object, props or type definition.
10	`    brandAlias: row.Brand_Alias__c ?? "",`	Sets/declares the named object property or style/type member: brandAlias: row.Brand_Alias__c ?? "",. Interpret it in the enclosing object, props or type definition.
11	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
12	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/services/visitRecovery.ts

Reconstructs an employee-owned Salesforce visit and related saved activity after restart; submitted order items take precedence over an old JSON draft.

89 numbered source lines | SHA-256 b02b7ed75d64cb4c3b662122d57f4b07873a7cc224441626e0456c9038386c7c

Line	Source code	Explanation / reading note
1	`import { salesforce } from "../salesforce/SalesforceService.js";`	Imports dependencies/types used below: import { salesforce } from "../salesforce/SalesforceService.js";. Importing a function does not call it.
2	`import { objectMap } from "../config/env.js";`	Imports dependencies/types used below: import { objectMap } from "../config/env.js";. Importing a function does not call it.
3	`import { escapeSoqlLiteral } from "../utils/salesforce.js";`	Imports dependencies/types used below: import { escapeSoqlLiteral } from "../utils/salesforce.js";. Importing a function does not call it.
4	`import type { VisitPayload } from "../types.js";`	Imports dependencies/types used below: import type { VisitPayload } from "../types.js";. Importing a function does not call it.
5		Blank line separating logical sections; no executable operation.
6	`/** Salesforce, not server memory, owns the visit after check-in. */`	Developer comment/documentation: Salesforce, not server memory, owns the visit after check-in. */ It is not executed.
7	`export async function restoreVisit(`	Declares a callable function/method: export async function restoreVisit(. Parameters supply its inputs; the following block implements the operation.
8	`  visitId: string,`	Sets/declares the named object property or style/type member: visitId: string,. Interpret it in the enclosing object, props or type definition.
9	`  employeeId: string,`	Sets/declares the named object property or style/type member: employeeId: string,. Interpret it in the enclosing object, props or type definition.
10	`): Promise<VisitPayload | undefined> {`	Continues the surrounding declaration/expression or text:): Promise<VisitPayload | undefined> {. Read it with the preceding opening statement (employeeId: string,); it is not a standalone business operation.
11	`  const safeId = escapeSoqlLiteral(visitId);`	Declares/initializes local data used by the surrounding operation: const safeId = escapeSoqlLiteral(visitId);. Collection contents and assignments below determine its purpose.
12	`  const rows = await salesforce.records(`	Invokes the external-data boundary: const rows = await salesforce.records(. Await/result checks determine whether the operation is confirmed.

Line	Source code	Explanation / reading note
13	`SELECT Id, Name, Employee__c, Retailer__c, Retailer__r.Name, Status__c, Notes__c, Mobile_Order_Draft__c, Check_In_Time__c, Check_Out_Time__c, Check_In_Latitude__c, Check_In_Longitude__c, Check_Out_Latitude__c, Check_Out_Longitude__c, Permanent_Journey_Plan__r.Beat__r.Name FROM ${objectMap.visit} WHERE Id = '${safeId}' AND Employee__c = ' ${escapeSoqlLiteral(employeeId)}' LIMIT 1`,	Assigns the right-hand expression to the named variable/property: `SELECT Id, Name, Employee__c, Retailer__c, Retailer__r.Name, Status__c, Notes__c, Mobile_Order_Draft__c, Check_In_Time__c, Check_Out_Time__c, Check_In_Latitude__c, Check_In_Longitude__c, Check_Out_La. This is in-memory unless it is later persisted by an explicit call.
14	);	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
15	if (!rows.length) return undefined;	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!rows.length) return undefined;.
16	const row = rows[0];	Declares/initializes local data used by the surrounding operation: const row = rows[0];. Collection contents and assignments below determine its purpose.
17	const [items, returns, competitors, tickets, refusals, stocks, assets] = await Promise.all([	Starts independent asynchronous operations together and waits for all; rejection propagates to the surrounding error handler.
18	salesforce.records(	Invokes the external-data boundary: salesforce.records(. Await/result checks determine whether the operation is confirmed.
19	`SELECT Id, Product__c, Product__r.Name, Piece_Quantity__c, Unit_Price__c, Line_Amount__c, Scheme__c, Scheme__r.Name, Product_Sales_Configuration__c FROM ${objectMap.orderItem} WHERE Sales_Order__r.Visit__c = '${safeId}' ORDER BY CreatedDate`,	Assigns the right-hand expression to the named variable/property: `SELECT Id, Product__c, Product__r.Name, Piece_Quantity__c, Unit_Price__c, Line_Amount__c, Scheme__c, Scheme__r.Name, Product_Sales_Configuration__c FROM ${objectMap.orderItem} WHERE Sales_Order__r.Vi. This is in-memory unless it is later persisted by an explicit call.
20	),	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21	salesforce.records(	Invokes the external-data boundary: salesforce.records(. Await/result checks determine whether the operation is confirmed.
22	`SELECT Id, Product__r.Name, Quantity__c, Return_Reason__c FROM ${objectMap.returns} WHERE Visit__c = '${safeId}'`,	Assigns the right-hand expression to the named variable/property: `SELECT Id, Product__r.Name, Quantity__c, Return_Reason__c FROM ${objectMap.returns} WHERE Visit__c = '${safeId}'`,. This is in-memory unless it is later persisted by an explicit call.
23	),	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24	salesforce.records(	Invokes the external-data boundary: salesforce.records(. Await/result checks determine whether the operation is confirmed.

Line	Source code	Explanation / reading note
25	`SELECT Id, Competitor_Name__c, Company__c FROM ${objectMap.competitor} WHERE Visit__c = '${safeId}'`,	Assigns the right-hand expression to the named variable/property: `SELECT Id, Competitor_Name__c, Company__c FROM ${objectMap.competitor} WHERE Visit__c = '${safeId}'`,. This is in-memory unless it is later persisted by an explicit call.
26	),	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
27	salesforce.records(	Invokes the external-data boundary: salesforce.records(. Await/result checks determine whether the operation is confirmed.
28	`SELECT Id, Subject__c, Status__c FROM ${objectMap.ticket} WHERE Visit__c = '${safeId}'`,	Assigns the right-hand expression to the named variable/property: `SELECT Id, Subject__c, Status__c FROM ${objectMap.ticket} WHERE Visit__c = '${safeId}'`,. This is in-memory unless it is later persisted by an explicit call.
29	),	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	salesforce.records(	Invokes the external-data boundary: salesforce.records(. Await/result checks determine whether the operation is confirmed.
31	`SELECT Id, Product__c, Reason__c FROM ${objectMap.productRefusal} WHERE Visit__c = '${safeId}'`,	Assigns the right-hand expression to the named variable/property: `SELECT Id, Product__c, Reason__c FROM ${objectMap.productRefusal} WHERE Visit__c = '${safeId}'`,. This is in-memory unless it is later persisted by an explicit call.
32	),	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	salesforce.records(	Invokes the external-data boundary: salesforce.records(. Await/result checks determine whether the operation is confirmed.
34	`SELECT Id, Product__r.Name, Quantity__c FROM ${objectMap.stockCheck} WHERE Visit__c = '${safeId}'`,	Assigns the right-hand expression to the named variable/property: `SELECT Id, Product__r.Name, Quantity__c FROM ${objectMap.stockCheck} WHERE Visit__c = '${safeId}'`,. This is in-memory unless it is later persisted by an explicit call.
35	),	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
36	salesforce.records(	Invokes the external-data boundary: salesforce.records(. Await/result checks determine whether the operation is confirmed.

Line	Source code	Explanation / reading note
37	`SELECT Id, Asset_Name__c, Status__c FROM ${objectMap.assetSurvey} WHERE Visit__c = '${safeId}'`,	Assigns the right-hand expression to the named variable/property: `SELECT Id, Asset_Name__c, Status__c FROM ${objectMap.assetSurvey} WHERE Visit__c = '${safeId}'`,. This is in-memory unless it is later persisted by an explicit call.
38	),	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	]);	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
40	let draft = [];	Declares/initializes local data used by the surrounding operation: let draft = [];. Collection contents and assignments below determine its purpose.
41	try {	Starts operations whose failure is handled by the following catch/finally blocks.
42	draft = JSON.parse(row.Mobile_Order_Draft__c || "[]");	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
43	} catch {	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
44	/* Older or manually edited drafts must not hide submitted orders. */	Developer comment/documentation: Older or manually edited drafts must not hide submitted orders. */ It is not executed.
45	}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
46	return {	Returns { to the caller (or begins returned UI markup) and ends this execution path.
47	id: row.Id,	Sets/declares the named object property or style/type member: id: row.Id,. Interpret it in the enclosing object, props or type definition.
48	employeeId: row.Employee__c,	Sets/declares the named object property or style/type member: employeeId: row.Employee__c,. Interpret it in the enclosing object, props or type definition.
49	storeId: row.Retailer__c,	Sets/declares the named object property or style/type member: storeId: row.Retailer__c,. Interpret it in the enclosing object, props or type definition.
50	storeName: row.Retailer__r?.Name || row.Name,	Sets/declares the named object property or style/type member: storeName: row.Retailer__r?.Name || row.Name,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
51	`beatName: row.Permanent_Journey_Plan__r?.Beat__r?.Name || "",`	Sets/declares the named object property or style/type member: beatName: row.Permanent_Journey_Plan__r?.Beat__r?.Name || "",. Interpret it in the enclosing object, props or type definition.
52	`status: row.Status__c,`	Sets/declares the named object property or style/type member: status: row.Status__c,. Interpret it in the enclosing object, props or type definition.
53	`remarks: row.Notes__c,`	Sets/declares the named object property or style/type member: remarks: row.Notes__c,. Interpret it in the enclosing object, props or type definition.
54	`checkIn: {`	Sets/declares the named object property or style/type member: checkIn: {. Interpret it in the enclosing object, props or type definition.
55	`latitude: row.Check_In_Latitude__c,`	Sets/declares the named object property or style/type member: latitude: row.Check_In_Latitude__c,. Interpret it in the enclosing object, props or type definition.
56	`longitude: row.Check_In_Longitude__c,`	Sets/declares the named object property or style/type member: longitude: row.Check_In_Longitude__c,. Interpret it in the enclosing object, props or type definition.
57	`timestamp: row.Check_In_Time__c,`	Sets/declares the named object property or style/type member: timestamp: row.Check_In_Time__c,. Interpret it in the enclosing object, props or type definition.
58	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
59	`checkOut: row.Check_Out_Time__c`	Sets/declares the named object property or style/type member: checkOut: row.Check_Out_Time__c. Interpret it in the enclosing object, props or type definition.
60	`? {`	Continues the surrounding declaration/expression or text: ? {. Read it with the preceding opening statement (checkOut: row.Check_Out_Time__c); it is not a standalone business operation.
61	`latitude: row.Check_Out_Latitude__c,`	Sets/declares the named object property or style/type member: latitude: row.Check_Out_Latitude__c,. Interpret it in the enclosing object, props or type definition.
62	`longitude: row.Check_Out_Longitude__c,`	Sets/declares the named object property or style/type member: longitude: row.Check_Out_Longitude__c,. Interpret it in the enclosing object, props or type definition.
63	`timestamp: row.Check_Out_Time__c,`	Sets/declares the named object property or style/type member: timestamp: row.Check_Out_Time__c,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
64	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
65	`      : undefined,`	Continues the surrounding declaration/expression or text: : undefined,. Read it with the preceding opening statement (}); it is not a standalone business operation.
66	`    orderSubmitted: items.length > 0,`	Sets/declares the named object property or style/type member: orderSubmitted: items.length > 0,. Interpret it in the enclosing object, props or type definition.
67	`    orderLines: items.length`	Sets/declares the named object property or style/type member: orderLines: items.length. Interpret it in the enclosing object, props or type definition.
68	`      ? items.map((item) => ({`	Transforms/selects/aggregates collection values with the callback shown here: ? items.map((item) => ({. Read the callback body and result assignment together.
69	`          productId: item.Product__c,`	Sets/declares the named object property or style/type member: productId: item.Product__c,. Interpret it in the enclosing object, props or type definition.
70	`          productName: item.Product__r?.Name,`	Sets/declares the named object property or style/type member: productName: item.Product__r?.Name,. Interpret it in the enclosing object, props or type definition.
71	`          quantity: Number(item.Piece_Quantity__c),`	Sets/declares the named object property or style/type member: quantity: Number(item.Piece_Quantity__c),. Interpret it in the enclosing object, props or type definition.
72	`          unitPrice: Number(item.Unit_Price__c),`	Sets/declares the named object property or style/type member: unitPrice: Number(item.Unit_Price__c),. Interpret it in the enclosing object, props or type definition.
73	`          discount: 0,`	Sets/declares the named object property or style/type member: discount: 0,. Interpret it in the enclosing object, props or type definition.
74	`          amount: Number(item.Line_Amount__c),`	Sets/declares the named object property or style/type member: amount: Number(item.Line_Amount__c),. Interpret it in the enclosing object, props or type definition.
75	`          schemeId: item.Scheme__c,`	Sets/declares the named object property or style/type member: schemeId: item.Scheme__c,. Interpret it in the enclosing object, props or type definition.
76	`          schemeName: item.Scheme__r?.Name,`	Sets/declares the named object property or style/type member: schemeName: item.Scheme__r?.Name,. Interpret it in the enclosing object, props or type definition.
77	`          configurationId: item.Product_Sales_Configuration__c,`	Sets/declares the named object property or style/type member: configurationId: item.Product_Sales_Configuration__c,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
78	`        }))`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
79	`      : Array.isArray(draft)`	Calls the named method: : Array.isArray(draft). Its implementation defines the side effect/result; use the symbol/file index to follow it.
80	`        ? draft`	Continues the surrounding declaration/expression or text: ? draft. Read it with the preceding opening statement (: Array.isArray(draft)); it is not a standalone business operation.
81	`        : [],`	Continues the surrounding declaration/expression or text: : [],. Read it with the preceding opening statement (? draft); it is not a standalone business operation.
82	`    returns,`	Continues the surrounding declaration/expression or text: returns,. Read it with the preceding opening statement (: [],); it is not a standalone business operation.
83	`    competitors,`	Continues the surrounding declaration/expression or text: competitors,. Read it with the preceding opening statement (returns,); it is not a standalone business operation.
84	`    tickets,`	Continues the surrounding declaration/expression or text: tickets,. Read it with the preceding opening statement (competitors,); it is not a standalone business operation.
85	`    stocks,`	Continues the surrounding declaration/expression or text: stocks,. Read it with the preceding opening statement (tickets,); it is not a standalone business operation.
86	`    assets,`	Continues the surrounding declaration/expression or text: assets,. Read it with the preceding opening statement (stocks,); it is not a standalone business operation.
87	`    refusedProductIds: refusals.map((refusal) => refusal.Product__c),`	Sets/declares the named object property or style/type member: refusedProductIds: refusals.map((refusal) => refusal.Product__c),. Interpret it in the enclosing object, props or type definition.
88	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
89	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/types.ts

First-party shared backend file: types. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

35 numbered source lines | SHA-256 0e10b616110e820f17cf7cb7276218dac2bcb924a3ab9dcb2e8402c4dcf48efc

Line	Source code	Explanation / reading note
1	`export type Location = {`	Defines a compile-time data contract: export type Location = {. TypeScript types do not validate untrusted runtime JSON by themselves.
2	`  latitude: number;`	Sets/declares the named object property or style/type member: latitude: number;. Interpret it in the enclosing object, props or type definition.
3	`  longitude: number;`	Sets/declares the named object property or style/type member: longitude: number;. Interpret it in the enclosing object, props or type definition.
4	`  timestamp?: string;`	Sets/declares the named object property or style/type member: timestamp?: string;. Interpret it in the enclosing object, props or type definition.
5	`  requestId?: string;`	Sets/declares the named object property or style/type member: requestId?: string;. Interpret it in the enclosing object, props or type definition.
6	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
7	`export type OrderLine = {`	Defines a compile-time data contract: export type OrderLine = {. TypeScript types do not validate untrusted runtime JSON by themselves.
8	`  productId: string;`	Sets/declares the named object property or style/type member: productId: string;. Interpret it in the enclosing object, props or type definition.
9	`  productName: string;`	Sets/declares the named object property or style/type member: productName: string;. Interpret it in the enclosing object, props or type definition.
10	`  quantity: number;`	Sets/declares the named object property or style/type member: quantity: number;. Interpret it in the enclosing object, props or type definition.
11	`  unitPrice: number;`	Sets/declares the named object property or style/type member: unitPrice: number;. Interpret it in the enclosing object, props or type definition.
12	`  discount: number;`	Sets/declares the named object property or style/type member: discount: number;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
13	`  amount: number;`	Sets/declares the named object property or style/type member: amount: number;. Interpret it in the enclosing object, props or type definition.
14	`  schemeId?: string;`	Sets/declares the named object property or style/type member: schemeId?: string;. Interpret it in the enclosing object, props or type definition.
15	`  schemeName?: string;`	Sets/declares the named object property or style/type member: schemeName?: string;. Interpret it in the enclosing object, props or type definition.
16	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`export type VisitPayload = {`	Defines a compile-time data contract: export type VisitPayload = {. TypeScript types do not validate untrusted runtime JSON by themselves.
18	`  id: string;`	Sets/declares the named object property or style/type member: id: string;. Interpret it in the enclosing object, props or type definition.
19	`  employeeId: string;`	Sets/declares the named object property or style/type member: employeeId: string;. Interpret it in the enclosing object, props or type definition.
20	`  storeId: string;`	Sets/declares the named object property or style/type member: storeId: string;. Interpret it in the enclosing object, props or type definition.
21	`  storeName: string;`	Sets/declares the named object property or style/type member: storeName: string;. Interpret it in the enclosing object, props or type definition.
22	`  beatName: string;`	Sets/declares the named object property or style/type member: beatName: string;. Interpret it in the enclosing object, props or type definition.
23	`  checkIn?: Location;`	Sets/declares the named object property or style/type member: checkIn?: Location;. Interpret it in the enclosing object, props or type definition.
24	`  checkOut?: Location;`	Sets/declares the named object property or style/type member: checkOut?: Location;. Interpret it in the enclosing object, props or type definition.
25	`  orderLines: OrderLine[];`	Sets/declares the named object property or style/type member: orderLines: OrderLine[];. Interpret it in the enclosing object, props or type definition.
26	`  returns: any[];`	Sets/declares the named object property or style/type member: returns: any[];. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
27	`  competitors: any[];`	Sets/declares the named object property or style/type member: competitors: any[];. Interpret it in the enclosing object, props or type definition.
28	`  tickets: any[];`	Sets/declares the named object property or style/type member: tickets: any[];. Interpret it in the enclosing object, props or type definition.
29	`  remarks?: string;`	Sets/declares the named object property or style/type member: remarks?: string;. Interpret it in the enclosing object, props or type definition.
30	`  status: string;`	Sets/declares the named object property or style/type member: status: string;. Interpret it in the enclosing object, props or type definition.
31	`  orderSubmitted?: boolean;`	Sets/declares the named object property or style/type member: orderSubmitted?: boolean;. Interpret it in the enclosing object, props or type definition.
32	`  stocks?: any[];`	Sets/declares the named object property or style/type member: stocks?: any[];. Interpret it in the enclosing object, props or type definition.
33	`  assets?: any[];`	Sets/declares the named object property or style/type member: assets?: any[];. Interpret it in the enclosing object, props or type definition.
34	`  refusedProductIds?: string[];`	Sets/declares the named object property or style/type member: refusedProductIds?: string[];. Interpret it in the enclosing object, props or type definition.
35	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/utils/distance.ts

Haversine coordinate distance calculation in metres used for visit radius decisions.

13 numbered source lines | SHA-256 7cdc7c28ec528e917c0ce2fc566aff1de2972c6f2f33e832fbd568054170b41e

Line	Source code	Explanation / reading note
1	`const radians = (value: number) => (value * Math.PI) / 180;`	Declares/initializes local data used by the surrounding operation: const radians = (value: number) => (value * Math.PI) / 180;. Collection contents and assignments below determine its purpose.
2	`export function distanceInMeters(`	Declares a callable function/method: export function distanceInMeters(. Parameters supply its inputs; the following block implements the operation.
3	`  a: { latitude: number; longitude: number },`	Sets/declares the named object property or style/type member: a: { latitude: number; longitude: number },. Interpret it in the enclosing object, props or type definition.
4	`  b: { latitude: number; longitude: number },`	Sets/declares the named object property or style/type member: b: { latitude: number; longitude: number },. Interpret it in the enclosing object, props or type definition.
5	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (b: { latitude: number; longitude: number },); it is not a standalone business operation.
6	`  const radius = 6371000,`	Declares/initializes local data used by the surrounding operation: const radius = 6371000,. Collection contents and assignments below determine its purpose.
7	`    dLat = radians(b.latitude - a.latitude),`	Assigns the right-hand expression to the named variable/property: dLat = radians(b.latitude - a.latitude),. This is in-memory unless it is later persisted by an explicit call.
8	`    dLon = radians(b.longitude - a.longitude);`	Assigns the right-hand expression to the named variable/property: dLon = radians(b.longitude - a.longitude);. This is in-memory unless it is later persisted by an explicit call.
9	`  const value =`	Declares/initializes local data used by the surrounding operation: const value =. Collection contents and assignments below determine its purpose.
10	`    Math.sin(dLat / 2) ** 2 +`	Calls the named method: Math.sin(dLat / 2) ** 2 +. Its implementation defines the side effect/result; use the symbol/file index to follow it.
11	`    Math.cos(radians(a.latitude)) * Math.cos(radians(b.latitude)) * Math.sin(dLon / 2) ** 2;`	Calls the named method: Math.cos(radians(a.latitude)) * Math.cos(radians(b.latitude)) * Math.sin(dLon / 2) ** 2;. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
12	`  return Math.round(radius * 2 * Math.atan2(Math.sqrt(value), Math.sqrt(1 - value)));`	Returns Math.round(radius * 2 * Math.atan2(Math.sqrt(value), Math.sqrt(1 - value))) to the caller (or begins returned UI markup) and ends this execution path.
13	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/utils/http.ts

Consistent HTTP success/failure response helpers. Clients must check both status and success/error fields.

5 numbered source lines | SHA-256 69b0814eddfcbbca41fd886b7348b1ccb8e593d582cb0b5a26daa7115fdfc1de

Line	Source code	Explanation / reading note
1	`import type { Response } from "express";`	Imports dependencies/types used below: import type { Response } from "express";. Importing a function does not call it.
2	`export const ok = (res: Response, data: unknown, message = "Operation successful") =>`	Assigns the right-hand expression to the named variable/property: export const ok = (res: Response, data: unknown, message = "Operation successful") =>. This is in-memory unless it is later persisted by an explicit call.
3	`  res.json({ success: true, data, message });`	Calls the named method: res.json({ success: true, data, message });. Its implementation defines the side effect/result; use the symbol/file index to follow it.
4	`export const fail = (res: Response, status: number, message: string, errorCode: string) =>`	Assigns the right-hand expression to the named variable/property: export const fail = (res: Response, status: number, message: string, errorCode: string) =>. This is in-memory unless it is later persisted by an explicit call.
5	`  res.status(status).json({ success: false, data: null, message, errorCode });`	Calls the named method: res.status(status).json({ success: false, data: null, message, errorCode });. Its implementation defines the side effect/result; use the symbol/file index to follow it.

sales-rep-mobile/backend/src/utils/salesforce.ts

SOQL literal escaping helper; input validation and authorization remain necessary in callers.

10 numbered source lines | SHA-256 d6c9f00fcc552015638ab7e8503db025172aa8627db8323493a9a49c636ad938

Line	Source code	Explanation / reading note
1	`export function escapeSoqlLiteral(value: string) {`	Declares a callable function/method: export function escapeSoqlLiteral(value: string) {. Parameters supply its inputs; the following block implements the operation.
2	`  return value.replace(/\\/g, "\\\\").replace(/'/g, "\\'");`	Returns value.replace(/\\/g, "\\\\").replace(/'/g, "\\'") to the caller (or begins returned UI markup) and ends this execution path.
3	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
4		Blank line separating logical sections; no executable operation.
5	`export function requireSalesforceId(value: unknown, label: string) {`	Declares a callable function/method: export function requireSalesforceId(value: unknown, label: string) {. Parameters supply its inputs; the following block implements the operation.
6	`  if (typeof value !== "string" || !/^[a-zA-Z0-9]{15,18}$/.test(value)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (typeof value !== "string" || !/^[a-zA-Z0-9]{15,18}$/.test(value)) {.
7	`    throw new Error(`${label} is invalid`);`	Stops this execution path with a validation/error exception: throw new Error(`${label} is invalid`);. The caller/catch block decides how it is reported.
8	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
9	`  return value;`	Returns value to the caller (or begins returned UI markup) and ends this execution path.
10	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/src/visitRecovery.test.ts

Regression tests for visitRecovery. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

51 numbered source lines | SHA-256 885fd84ae18b6145e42235388fc8a956d61ba8ef2cc4ba854ff2a23f40e9f964

Line	Source code	Explanation / reading note
1	`import { beforeEach, describe, expect, it, vi } from "vitest";`	Imports dependencies/types used below: import { beforeEach, describe, expect, it, vi } from "vitest";. Importing a function does not call it.
2	`import { salesforce, SalesforceService } from "./salesforce/SalesforceService.js";`	Imports dependencies/types used below: import { salesforce, SalesforceService } from "./salesforce/SalesforceService.js";. Importing a function does not call it.
3	`import { restoreVisit } from "./services/visitRecovery.js";`	Imports dependencies/types used below: import { restoreVisit } from "./services/visitRecovery.js";. Importing a function does not call it.
4		Blank line separating logical sections; no executable operation.
5	`describe("durable visit recovery", () => {`	Continues the surrounding declaration/expression or text: describe("durable visit recovery", () => {. Read it with the preceding opening statement; it is not a standalone business operation.
6	`  beforeEach(() => vi.restoreAllMocks());`	Calls the named method: beforeEach(() => vi.restoreAllMocks());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
7	`  it("only restores a visit owned by the signed-in employee", async () => {`	Continues the surrounding declaration/expression or text: it("only restores a visit owned by the signed-in employee", async () => {. Read it with the preceding opening statement (beforeEach(() => vi.restoreAllMocks());); it is not a standalone business operation.
8	`    const records = vi.spyOn(salesforce, "records").mockResolvedValue([]);`	Declares/initializes local data used by the surrounding operation: const records = vi.spyOn(salesforce, "records").mockResolvedValue([]);. Collection contents and assignments below determine its purpose.
9	`    expect(await restoreVisit("visit-id", "employee-id")).toBeUndefined();`	Test assertion comparing an expected outcome to actual behavior: expect(await restoreVisit("visit-id", "employee-id")).toBeUndefined();. A mismatch fails the test.
10	`    expect(records.mock.calls[0][0]).toContain("Employee__c = 'employee-id'");`	Test assertion comparing an expected outcome to actual behavior: expect(records.mock.calls[0][0]).toContain("Employee__c = 'employee-id'");. A mismatch fails the test.
11	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
12	`  it("restores the Salesforce draft and saved actions after server memory is lost", async () => {`	Continues the surrounding declaration/expression or text: it("restores the Salesforce draft and saved actions after server memory is lost", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
13	`    vi.spyOn(salesforce, "records")`	Calls the named method: vi.spyOn(salesforce, "records"). Its implementation defines the side effect/result; use the symbol/file index to follow it.
14	`      .mockResolvedValueOnce([{ Id: "v", Employee__c: "e", Retailer__c: "r", Status__c: "Checked In", Mobile_Order_Draft__c: JSON.stringify([{ productId: "p", quantity: 2 }]) }])`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
15	`      .mockResolvedValueOnce([]).mockResolvedValueOnce([{ Id: "return" }]).mockResolvedValueOnce([])`	Continues the surrounding declaration/expression or text: .mockResolvedValueOnce([]).mockResolvedValueOnce([{ Id: "return" }]).mockResolvedValueOnce([]). Read it with the preceding opening statement (.mockResolvedValueOnce([{ Id: "v", Employee__c: "e", Retailer__c: "r", Status__c: "Checked In", Mobile_Order_Draft__c: JSON.stringify([{ productId: "p", quantity: 2 }]) }])); it is not a standalone business operation.
16	`      .mockResolvedValueOnce([{ Id: "ticket" }]).mockResolvedValueOnce([{ Product__c: "refused" }])`	Continues the surrounding declaration/expression or text: .mockResolvedValueOnce([{ Id: "ticket" }]).mockResolvedValueOnce([{ Product__c: "refused" }]). Read it with the preceding opening statement (.mockResolvedValueOnce([]).mockResolvedValueOnce([{ Id: "return" }]).mockResolvedValueOnce([])); it is not a standalone business operation.
17	`      .mockResolvedValueOnce([{ Id: "stock" }]).mockResolvedValueOnce([{ Id: "asset" }]);`	Continues the surrounding declaration/expression or text: .mockResolvedValueOnce([{ Id: "stock" }]).mockResolvedValueOnce([{ Id: "asset" }]);. Read it with the preceding opening statement (.mockResolvedValueOnce([{ Id: "ticket" }]).mockResolvedValueOnce([{ Product__c: "refused" }])); it is not a standalone business operation.
18	`    const result = await restoreVisit("v", "e");`	Waits for this asynchronous operation before continuing: const result = await restoreVisit("v", "e");. The returned result/error must still be handled.
19	`    expect(result?.orderLines[0].quantity).toBe(2);`	Test assertion comparing an expected outcome to actual behavior: expect(result?.orderLines[0].quantity).toBe(2);. A mismatch fails the test.
20	`    expect(result?.orderSubmitted).toBe(false);`	Test assertion comparing an expected outcome to actual behavior: expect(result?.orderSubmitted).toBe(false);. A mismatch fails the test.
21	`    expect(result?.returns).toHaveLength(1);`	Test assertion comparing an expected outcome to actual behavior: expect(result?.returns).toHaveLength(1);. A mismatch fails the test.
22	`    expect(result?.tickets).toHaveLength(1);`	Test assertion comparing an expected outcome to actual behavior: expect(result?.tickets).toHaveLength(1);. A mismatch fails the test.

Line	Source code	Explanation / reading note
23	`    expect(result?.stocks).toHaveLength(1);`	Test assertion comparing an expected outcome to actual behavior: expect(result?.stocks).toHaveLength(1);. A mismatch fails the test.
24	`    expect(result?.assets).toHaveLength(1);`	Test assertion comparing an expected outcome to actual behavior: expect(result?.assets).toHaveLength(1);. A mismatch fails the test.
25	`    expect(result?.refusedProductIds).toEqual(["refused"]);`	Test assertion comparing an expected outcome to actual behavior: expect(result?.refusedProductIds).toEqual(["refused"]);. A mismatch fails the test.
26	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
27	`  it("prefers committed order items over an older draft", async () => {`	Continues the surrounding declaration/expression or text: it("prefers committed order items over an older draft", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
28	`    vi.spyOn(salesforce, "records").mockResolvedValue([])`	Calls the named method: vi.spyOn(salesforce, "records").mockResolvedValue([]). Its implementation defines the side effect/result; use the symbol/file index to follow it.
29	`      .mockResolvedValueOnce([{ Id: "v", Employee__c: "e", Mobile_Order_Draft__c: "not-json" }])`	Continues the surrounding declaration/expression or text: .mockResolvedValueOnce([{ Id: "v", Employee__c: "e", Mobile_Order_Draft__c: "not-json" }]). Read it with the preceding opening statement (vi.spyOn(salesforce, "records").mockResolvedValue([])); it is not a standalone business operation.
30	`      .mockResolvedValueOnce([{ Product__c: "p", Piece_Quantity__c: 4, Unit_Price__c: 20, Line_Amount__c: 80, Scheme__r: { Name: "Offer" } }]);`	Continues the surrounding declaration/expression or text: .mockResolvedValueOnce([{ Product__c: "p", Piece_Quantity__c: 4, Unit_Price__c: 20, Line_Amount__c: 80, Scheme__r: { Name: "Offer" } }]);. Read it with the preceding opening statement (.mockResolvedValueOnce([{ Id: "v", Employee__c: "e", Mobile_Order_Draft__c: "not-json" }])); it is not a standalone business operation.
31	`    const visit = await restoreVisit("v", "e");`	Waits for this asynchronous operation before continuing: const visit = await restoreVisit("v", "e");. The returned result/error must still be handled.
32	`    expect(visit?.orderSubmitted).toBe(true);`	Test assertion comparing an expected outcome to actual behavior: expect(visit?.orderSubmitted).toBe(true);. A mismatch fails the test.
33	`    expect(visit?.orderLines[0].amount).toBe(80);`	Test assertion comparing an expected outcome to actual behavior: expect(visit?.orderLines[0].amount).toBe(80);. A mismatch fails the test.
34	`    expect(visit?.orderLines[0].schemeName).toBe("Offer");`	Test assertion comparing an expected outcome to actual behavior: expect(visit?.orderLines[0].schemeName).toBe("Offer");. A mismatch fails the test.

Line	Source code	Explanation / reading note
35	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
36	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
37		Blank line separating logical sections; no executable operation.
38	`describe("atomic Salesforce writes", () => {`	Continues the surrounding declaration/expression or text: describe("atomic Salesforce writes", () => {. Read it with the preceding opening statement; it is not a standalone business operation.
39	`  it("requests all-or-none and rejects failures inside an HTTP 200 composite", async () => {`	Continues the surrounding declaration/expression or text: it("requests all-or-none and rejects failures inside an HTTP 200 composite", async () => {. Read it with the preceding opening statement (describe("atomic Salesforce writes", () => {); it is not a standalone business operation.
40	`    const sf = new SalesforceService();`	Declares/initializes local data used by the surrounding operation: const sf = new SalesforceService();. Collection contents and assignments below determine its purpose.
41	`    const request = vi.spyOn(sf as any, "request").mockResolvedValue({ compositeResponse: [{ httpStatusCode: 200, body: [{ success: false, errors: ["validation"] }] }] });`	Declares/initializes local data used by the surrounding operation: const request = vi.spyOn(sf as any, "request").mockResolvedValue({ compositeResponse: [{ httpStatusCode: 200, body: [{ success: false, errors: ["validation"] }] }] });. Collection contents and assignments below determine its purpose.
42	`    await expect(sf.composite([{ referenceId: "order" }])).rejects.toThrow("Salesforce transaction failed");`	Test assertion comparing an expected outcome to actual behavior: await expect(sf.composite([{ referenceId: "order" }])).rejects.toThrow("Salesforce transaction failed");. A mismatch fails the test.
43	`    expect(JSON.parse((request.mock.calls[0][1] as RequestInit).body as string).allOrNone).toBe(true);`	Test assertion comparing an expected outcome to actual behavior: expect(JSON.parse((request.mock.calls[0][1] as RequestInit).body as string).allOrNone).toBe(true);. A mismatch fails the test.
44	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
45	`  it("does not drop Salesforce query pages", async () => {`	Continues the surrounding declaration/expression or text: it("does not drop Salesforce query pages", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
46	`    const sf = new SalesforceService();`	Declares/initializes local data used by the surrounding operation: const sf = new SalesforceService();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
47	`    vi.spyOn(sf as any, "request").mockResolvedValueOnce({ records: [{ Id: "one" }], done: false, nextRecordsUrl: "/services/data/v67.0/query/next" })`	Calls the named method: vi.spyOn(sf as any, "request").mockResolvedValueOnce({ records: [{ Id: "one" }], done: false, nextRecordsUrl: "/services/data/v67.0/query/next" }). Its implementation defines the side effect/result; use the symbol/file index to follow it.
48	`      .mockResolvedValueOnce({ records: [{ Id: "two" }], done: true });`	Continues the surrounding declaration/expression or text: .mockResolvedValueOnce({ records: [{ Id: "two" }], done: true });. Read it with the preceding opening statement (vi.spyOn(sf as any, "request").mockResolvedValueOnce({ records: [{ Id: "one" }], done: false, nextRecordsUrl: "/services/data/v67.0/query/next" })); it is not a standalone business operation.
49	`    expect(await sf.records("SELECT Id FROM Product__c")).toEqual([{ Id: "one" }, { Id: "two" }]);`	Test assertion comparing an expected outcome to actual behavior: expect(await sf.records("SELECT Id FROM Product__c")).toEqual([{ Id: "one" }, { Id: "two" }]);. A mismatch fails the test.
50	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
51	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

SFA mobile

44 files. Expand this area in the PDF bookmarks to jump to an individual file.

sales-rep-mobile/mobile/App.tsx

SFA navigation entry: registers screens and reconnect-driven queue flushing. Screen registration determines reachable navigation routes.

61 numbered source lines | SHA-256 d7d7bb9a1d20b723c8304ef756339df7d29162c0b43bf0767e10cd7e4629d010

Line	Source code	Explanation / reading note
1	`import React, { useEffect } from "react";`	Imports dependencies/types used below: import React, { useEffect } from "react";. Importing a function does not call it.
2	`import NetInfo from "@react-native-community/netinfo";`	Imports dependencies/types used below: import NetInfo from "@react-native-community/netinfo";. Importing a function does not call it.
3	`import { StatusBar } from "expo-status-bar";`	Imports dependencies/types used below: import { StatusBar } from "expo-status-bar";. Importing a function does not call it.
4	`import { NavigationContainer } from "@react-navigation/native";`	Imports dependencies/types used below: import { NavigationContainer } from "@react-navigation/native";. Importing a function does not call it.
5	`import { createNativeStackNavigator } from "@react-navigation/native-stack";`	Imports dependencies/types used below: import { createNativeStackNavigator } from "@react-navigation/native-stack";. Importing a function does not call it.
6	`import HomeScreen from "./src/screens/HomeScreen";`	Imports dependencies/types used below: import HomeScreen from "./src/screens/HomeScreen";. Importing a function does not call it.
7	`import BeatsScreen from "./src/screens/BeatsScreen";`	Imports dependencies/types used below: import BeatsScreen from "./src/screens/BeatsScreen";. Importing a function does not call it.
8	`import StoresScreen from "./src/screens/StoresScreen";`	Imports dependencies/types used below: import StoresScreen from "./src/screens/StoresScreen";. Importing a function does not call it.
9	`import StoreGateScreen from "./src/screens/StoreGateScreen";`	Imports dependencies/types used below: import StoreGateScreen from "./src/screens/StoreGateScreen";. Importing a function does not call it.
10	`import VisitScreen from "./src/screens/VisitScreen";`	Imports dependencies/types used below: import VisitScreen from "./src/screens/VisitScreen";. Importing a function does not call it.
11	`import OrdersScreen from "./src/screens/OrdersScreen";`	Imports dependencies/types used below: import OrdersScreen from "./src/screens/OrdersScreen";. Importing a function does not call it.
12	`import ProductsScreen from "./src/screens/ProductsScreen";`	Imports dependencies/types used below: import ProductsScreen from "./src/screens/ProductsScreen";. Importing a function does not call it.

Line	Source code	Explanation / reading note
13	`import MoreScreen from "./src/screens/MoreScreen";`	Imports dependencies/types used below: import MoreScreen from "./src/screens/MoreScreen";. Importing a function does not call it.
14	`import OutletsScreen from "./src/screens/OutletsScreen";`	Imports dependencies/types used below: import OutletsScreen from "./src/screens/OutletsScreen";. Importing a function does not call it.
15	`import LoginScreen from "./src/screens/LoginScreen";`	Imports dependencies/types used below: import LoginScreen from "./src/screens/LoginScreen";. Importing a function does not call it.
16	`import OutletMapScreen from "./src/screens/OutletMapScreen";`	Imports dependencies/types used below: import OutletMapScreen from "./src/screens/OutletMapScreen";. Importing a function does not call it.
17	`import ModuleListScreen from "./src/screens/ModuleListScreen";`	Imports dependencies/types used below: import ModuleListScreen from "./src/screens/ModuleListScreen";. Importing a function does not call it.
18	`import ExpensesScreen from "./src/screens/ExpensesScreen";`	Imports dependencies/types used below: import ExpensesScreen from "./src/screens/ExpensesScreen";. Importing a function does not call it.
19	`import DayScreen from "./src/screens/DayScreen";`	Imports dependencies/types used below: import DayScreen from "./src/screens/DayScreen";. Importing a function does not call it.
20	`import SurveyScreen from "./src/screens/SurveyScreen";`	Imports dependencies/types used below: import SurveyScreen from "./src/screens/SurveyScreen";. Importing a function does not call it.
21	`import PrimaryScreen from "./src/screens/PrimaryScreen";`	Imports dependencies/types used below: import PrimaryScreen from "./src/screens/PrimaryScreen";. Importing a function does not call it.
22	`import type { RootStack } from "./src/types";`	Imports dependencies/types used below: import type { RootStack } from "./src/types";. Importing a function does not call it.
23	`import { flushQueue } from "./src/storage/syncQueue";`	Imports dependencies/types used below: import { flushQueue } from "./src/storage/syncQueue";. Importing a function does not call it.
24		Blank line separating logical sections; no executable operation.
25	`const Stack = createNativeStackNavigator<RootStack>();`	Declares/initializes local data used by the surrounding operation: const Stack = createNativeStackNavigator<RootStack>();. Collection contents and assignments below determine its purpose.
26		Blank line separating logical sections; no executable operation.
27	`export default function App() {`	Declares a callable function/method: export default function App() {. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
28	`  useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.
29	`    void flushQueue();`	Continues the surrounding declaration/expression or text: void flushQueue();. Read it with the preceding opening statement (useEffect(() => {); it is not a standalone business operation.
30	`    const unsubscribe = NetInfo.addEventListener((state) => {`	Declares/initializes local data used by the surrounding operation: const unsubscribe = NetInfo.addEventListener((state) => {. Collection contents and assignments below determine its purpose.
31	`      if (state.isConnected) void flushQueue();`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (state.isConnected) void flushQueue();.
32	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`    return unsubscribe;`	Returns unsubscribe to the caller (or begins returned UI markup) and ends this execution path.
34	`  }, []);`	Continues the surrounding declaration/expression or text: }, []);. Read it with the preceding opening statement (return unsubscribe;); it is not a standalone business operation.
35		Blank line separating logical sections; no executable operation.
36	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
37	`    <>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
38	`      <StatusBar style="light" />`	Renders/opens a UI element or component: <StatusBar style="light" />. Props and child content below determine appearance and interactions.
39	`      <NavigationContainer>`	Renders/opens a UI element or component: <NavigationContainer>. Props and child content below determine appearance and interactions.
40	`        <Stack.Navigator initialRouteName="Login">`	Renders/opens a UI element or component: <Stack.Navigator initialRouteName="Login">. Props and child content below determine appearance and interactions.
41	`          <Stack.Screen name="Login" component={LoginScreen} options={{ headerShown: false }} />`	Renders/opens a UI element or component: <Stack.Screen name="Login" component={LoginScreen} options={{ headerShown: false }} />. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
42	`<Stack.Screen name="Main" component={HomeScreen} options={{ headerShown: false }} />`	Renders/opens a UI element or component: <Stack.Screen name="Main" component={HomeScreen} options={{ headerShown: false }} />. Props and child content below determine appearance and interactions.
43	`<Stack.Screen name="Beats" component={BeatsScreen} options={{ title: "Today's Route" }} />`	Renders/opens a UI element or component: <Stack.Screen name="Beats" component={BeatsScreen} options={{ title: "Today's Route" }} />. Props and child content below determine appearance and interactions.
44	`<Stack.Screen name="Stores" component={StoresScreen} options={{ title: "My Outlets" }} />`	Renders/opens a UI element or component: <Stack.Screen name="Stores" component={StoresScreen} options={{ title: "My Outlets" }} />. Props and child content below determine appearance and interactions.
45	`<Stack.Screen name="StoreGate" component={StoreGateScreen} options={{ title: "Outlet Details" }} />`	Renders/opens a UI element or component: <Stack.Screen name="StoreGate" component={StoreGateScreen} options={{ title: "Outlet Details" }} />. Props and child content below determine appearance and interactions.
46	`<Stack.Screen name="Visit" component={VisitScreen} options={{ title: "Outlet Visit" }} />`	Renders/opens a UI element or component: <Stack.Screen name="Visit" component={VisitScreen} options={{ title: "Outlet Visit" }} />. Props and child content below determine appearance and interactions.
47	`<Stack.Screen name="Orders" component={OrdersScreen} options={{ headerShown: false }} />`	Renders/opens a UI element or component: <Stack.Screen name="Orders" component={OrdersScreen} options={{ headerShown: false }} />. Props and child content below determine appearance and interactions.
48	`<Stack.Screen name="Products" component={ProductsScreen} options={{ headerShown: false }} />`	Renders/opens a UI element or component: <Stack.Screen name="Products" component={ProductsScreen} options={{ headerShown: false }} />. Props and child content below determine appearance and interactions.
49	`<Stack.Screen name="More" component={MoreScreen} options={{ headerShown: false }} />`	Renders/opens a UI element or component: <Stack.Screen name="More" component={MoreScreen} options={{ headerShown: false }} />. Props and child content below determine appearance and interactions.
50	`<Stack.Screen name="Outlets" component={OutletsScreen} options={{ headerShown: false }} />`	Renders/opens a UI element or component: <Stack.Screen name="Outlets" component={OutletsScreen} options={{ headerShown: false }} />. Props and child content below determine appearance and interactions.
51	`<Stack.Screen name="OutletMap" component={OutletMapScreen} options={{ title: "Outlet Map" }} />`	Renders/opens a UI element or component: <Stack.Screen name="OutletMap" component={OutletMapScreen} options={{ title: "Outlet Map" }} />. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
52	`<Stack.Screen name="ModuleList" component={ModuleListScreen} options={({ route }) => ({ title: route.params.title })} />`	Renders/opens a UI element or component: <Stack.Screen name="ModuleList" component={ModuleListScreen} options={({ route }) => ({ title: route.params.title })} />. Props and child content below determine appearance and interactions.
53	`<Stack.Screen name="Expenses" component={ExpensesScreen} options={{ title: "Expenses" }} />`	Renders/opens a UI element or component: <Stack.Screen name="Expenses" component={ExpensesScreen} options={{ title: "Expenses" }} />. Props and child content below determine appearance and interactions.
54	`<Stack.Screen name="Day" component={DayScreen} options={{ title: "Start / End Day" }} />`	Renders/opens a UI element or component: <Stack.Screen name="Day" component={DayScreen} options={{ title: "Start / End Day" }} />. Props and child content below determine appearance and interactions.
55	`<Stack.Screen name="Survey" component={SurveyScreen} options={{ title: "Outlet Survey" }} />`	Renders/opens a UI element or component: <Stack.Screen name="Survey" component={SurveyScreen} options={{ title: "Outlet Survey" }} />. Props and child content below determine appearance and interactions.
56	`<Stack.Screen name="Primary" component={PrimaryScreen} options={{ title: "Primary orders / returns" }} />`	Renders/opens a UI element or component: <Stack.Screen name="Primary" component={PrimaryScreen} options={{ title: "Primary orders / returns" }} />. Props and child content below determine appearance and interactions.
57	`</Stack.Navigator>`	Closes the UI element/component opened above.
58	`</NavigationContainer>`	Closes the UI element/component opened above.
59	`</>`	Closes the UI element/component opened above.
60	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
61	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/api/client.test.ts

Regression tests for client. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

51 numbered source lines | SHA-256 bcfd07819967802e9f5df47d3b2d6ba490e83a56eff2682a45040f76f1a316c4

Line	Source code	Explanation / reading note
1	`import { beforeEach, describe, expect, it, vi } from "vitest";`	Imports dependencies/types used below: import { beforeEach, describe, expect, it, vi } from "vitest";. Importing a function does not call it.
2	`const storage = vi.hoisted(() => ({ getItem: vi.fn(), setItem: vi.fn(), multiRemove: vi.fn() }));`	Declares/initializes local data used by the surrounding operation: const storage = vi.hoisted(() => ({ getItem: vi.fn(), setItem: vi.fn(), multiRemove: vi.fn() }));. Collection contents and assignments below determine its purpose.
3	`vi.mock("@react-native-async-storage/async-storage", () => ({ default: storage }));`	Calls the named method: vi.mock("@react-native-async-storage/async-storage", () => ({ default: storage }));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
4	`import { api, post, postRecoverable } from "./client";`	Imports dependencies/types used below: import { api, post, postRecoverable } from "./client";. Importing a function does not call it.
5		Blank line separating logical sections; no executable operation.
6	`describe("network failure handling", () => {`	Continues the surrounding declaration/expression or text: describe("network failure handling", () => {. Read it with the preceding opening statement; it is not a standalone business operation.
7	`  beforeEach(() => {`	Continues the surrounding declaration/expression or text: beforeEach(() => {. Read it with the preceding opening statement (describe("network failure handling", () => {); it is not a standalone business operation.
8	`    vi.restoreAllMocks();`	Calls the named method: vi.restoreAllMocks();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
9	`    vi.useRealTimers();`	Calls the named method: vi.useRealTimers();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
10	`    storage.getItem.mockResolvedValue(null);`	Calls the named method: storage.getItem.mockResolvedValue(null);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
11	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
12	`  it("shows a useful message for the HTML 530 tunnel error", async () => {`	Continues the surrounding declaration/expression or text: it("shows a useful message for the HTML 530 tunnel error", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
13	`    vi.stubGlobal(`	Calls the named method: vi.stubGlobal(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
14	`      "fetch",`	Continues the surrounding declaration/expression or text: "fetch",. Read it with the preceding opening statement (vi.stubGlobal(); it is not a standalone business operation.
15	`      vi.fn().mockResolvedValue(new Response("<html>530</html>", { status: 530 })),`	Calls the named method: vi.fn().mockResolvedValue(new Response("<html>530</html>", { status: 530 })),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
16	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`    await expect(post("/store/checkout", {})).rejects.toThrow("temporarily unavailable (530)");`	Test assertion comparing an expected outcome to actual behavior: await expect(post("/store/checkout", {})).rejects.toThrow("temporarily unavailable (530)");. A mismatch fails the test.
18	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`  it("does not retry a validation failure", async () => {`	Continues the surrounding declaration/expression or text: it("does not retry a validation failure", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
20	`    const fetch = vi`	Declares/initializes local data used by the surrounding operation: const fetch = vi. Collection contents and assignments below determine its purpose.
21	`      .fn()`	Continues the surrounding declaration/expression or text: .fn(). Read it with the preceding opening statement (const fetch = vi); it is not a standalone business operation.
22	`      .mockResolvedValue(`	Continues the surrounding declaration/expression or text: .mockResolvedValue(. Read it with the preceding opening statement (.fn()); it is not a standalone business operation.
23	`        new Response(JSON.stringify({ success: false, message: "Quantity required" }), {`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
24	`          status: 400,`	Sets/declares the named object property or style/type member: status: 400,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
25	`  }),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
26	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
27	`  vi.stubGlobal("fetch", fetch);`	Calls the named method: vi.stubGlobal("fetch", fetch);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
28	`  await expect(postRecoverable("/orders", {})).rejects.toThrow("Quantity required");`	Test assertion comparing an expected outcome to actual behavior: await expect(postRecoverable("/orders", {})).rejects.toThrow("Quantity required");. A mismatch fails the test.
29	`  expect(fetch).toHaveBeenCalledTimes(1);`	Test assertion comparing an expected outcome to actual behavior: expect(fetch).toHaveBeenCalledTimes(1);. A mismatch fails the test.
30	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31	`it("retries the same idempotent payload after a tunnel failure", async () => {`	Continues the surrounding declaration/expression or text: it("retries the same idempotent payload after a tunnel failure", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
32	`  vi.useFakeTimers();`	Calls the named method: vi.useFakeTimers();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
33	`  const fetch = vi`	Declares/initializes local data used by the surrounding operation: const fetch = vi. Collection contents and assignments below determine its purpose.
34	`    .fn()`	Continues the surrounding declaration/expression or text: .fn(). Read it with the preceding opening statement (const fetch = vi); it is not a standalone business operation.
35	`    .mockResolvedValueOnce(new Response("Unavailable", { status: 530 }))`	Continues the surrounding declaration/expression or text: .mockResolvedValueOnce(new Response("Unavailable", { status: 530 })). Read it with the preceding opening statement (.fn()); it is not a standalone business operation.
36	`    .mockResolvedValueOnce(`	Continues the surrounding declaration/expression or text: .mockResolvedValueOnce(. Read it with the preceding opening statement (.mockResolvedValueOnce(new Response("Unavailable", { status: 530 }))); it is not a standalone business operation.
37	`      new Response(JSON.stringify({ success: true, data: { id: "order" } })),`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.

Line	Source code	Explanation / reading note
38	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	`  vi.stubGlobal("fetch", fetch);`	Calls the named method: vi.stubGlobal("fetch", fetch);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
40	`  const result = postRecoverable("/orders", { visitId: "v", requestId: "same" });`	Declares/initializes local data used by the surrounding operation: const result = postRecoverable("/orders", { visitId: "v", requestId: "same" });. Collection contents and assignments below determine its purpose.
41	`  await vi.runAllTimersAsync();`	Waits for this asynchronous operation before continuing: await vi.runAllTimersAsync();. The returned result/error must still be handled.
42	`  expect(await result).toEqual({ id: "order" });`	Test assertion comparing an expected outcome to actual behavior: expect(await result).toEqual({ id: "order" });. A mismatch fails the test.
43	`  expect(fetch.mock.calls[0][1].body).toEqual(fetch.mock.calls[1][1].body);`	Test assertion comparing an expected outcome to actual behavior: expect(fetch.mock.calls[0][1].body).toEqual(fetch.mock.calls[1][1].body);. A mismatch fails the test.
44	`  vi.useRealTimers();`	Calls the named method: vi.useRealTimers();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
45	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
46	`it("never treats a failed write as a cached success", async () => {`	Continues the surrounding declaration/expression or text: it("never treats a failed write as a cached success", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
47	`  storage.getItem.mockResolvedValue('{"id":"cached"}');`	Calls the named method: storage.getItem.mockResolvedValue('{"id":"cached"}');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
48	`  vi.stubGlobal("fetch", vi.fn().mockRejectedValue(new Error("offline")));`	Calls the named method: vi.stubGlobal("fetch", vi.fn().mockRejectedValue(new Error("offline")));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
49	`  await expect(post("/tickets", {})).rejects.toThrow("Cannot reach the server");`	Test assertion comparing an expected outcome to actual behavior: await expect(post("/tickets", {})).rejects.toThrow("Cannot reach the server");. A mismatch fails the test.

Line	Source code	Explanation / reading note
50	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
51	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/api/client.ts

SFA HTTP client: builds requests with the current session, handles response envelopes/errors and exposes API/recoverable write helpers.

81 numbered source lines | SHA-256 a3b066b443e743c05fab72a2bcba0c2af6615043a0e06e2b565044b68e6821e2

Line	Source code	Explanation / reading note
1	`import AsyncStorage from "@react-native-async-storage/async-storage";`	Imports dependencies/types used below: import AsyncStorage from "@react-native-async-storage/async-storage";. Importing a function does not call it.
2	`const base = process.env.EXPO_PUBLIC_API_URL || "http://localhost:4000/api";`	Declares/initializes local data used by the surrounding operation: const base = process.env.EXPO_PUBLIC_API_URL || "http://localhost:4000/api";. Collection contents and assignments below determine its purpose.
3		Blank line separating logical sections; no executable operation.
4	`const CACHE_PREFIX = "sfa-api-cache:";`	Declares/initializes local data used by the surrounding operation: const CACHE_PREFIX = "sfa-api-cache:";. Collection contents and assignments below determine its purpose.
5	`export class ApiError extends Error {`	Declares a class/type: export class ApiError extends Error {. Members below hold behavior and/or state.
6	`  constructor(`	Declares/initializes local data used by the surrounding operation: constructor(. Collection contents and assignments below determine its purpose.
7	`    message: string,`	Sets/declares the named object property or style/type member: message: string,. Interpret it in the enclosing object, props or type definition.
8	`    public status: number,`	Continues the surrounding declaration/expression or text: public status: number,. Read it with the preceding opening statement (message: string,); it is not a standalone business operation.
9	`    public retryable = false,`	Assigns the right-hand expression to the named variable/property: public retryable = false,. This is in-memory unless it is later persisted by an explicit call.
10	`  ) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (public retryable = false,); it is not a standalone business operation.
11	`    super(message);`	Continues the surrounding declaration/expression or text: super(message);. Read it with the preceding opening statement ( ) {); it is not a standalone business operation.
12	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
13	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
14		Blank line separating logical sections; no executable operation.
15	`function isReadRequest(options: RequestInit) {`	Declares a callable function/method: function isReadRequest(options: RequestInit) {. Parameters supply its inputs; the following block implements the operation.
16	`  return !options.method || options.method.toUpperCase() === "GET";`	Returns !options.method || options.method.toUpperCase() === "GET" to the caller (or begins returned UI markup) and ends this execution path.
17	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18		Blank line separating logical sections; no executable operation.
19	`export async function api<T>(path: string, options: RequestInit = {}) {`	Declares a callable function/method: export async function api<T>(path: string, options: RequestInit = {}) {. Parameters supply its inputs; the following block implements the operation.
20	`  const token = await AsyncStorage.getItem("token");`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
21	`  const cacheKey = \`${CACHE_PREFIX}${token || "public"}:${path}\`;`	Declares/initializes local data used by the surrounding operation: const cacheKey = `${CACHE_PREFIX}${token || "public"}:${path}`;. Collection contents and assignments below determine its purpose.
22	`  let response: Response;`	Declares/initializes local data used by the surrounding operation: let response: Response;. Collection contents and assignments below determine its purpose.
23		Blank line separating logical sections; no executable operation.
24	`  try {`	Starts operations whose failure is handled by the following catch/finally blocks.
25	`    response = await fetch(\`${base}${path}\`, {`	Invokes the external-data boundary: response = await fetch(`${base}${path}`, {. Await/result checks determine whether the operation is confirmed.
26	`      ...options,`	Continues the surrounding declaration/expression or text: ...options,. Read it with the preceding opening statement (response = await fetch(`${base}${path}`, {); it is not a standalone business operation.
27	`      headers: {`	Sets/declares the named object property or style/type member: headers: {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
28	`"content-type": "application/json",`	Continues the surrounding declaration/expression or text: "content-type": "application/json",. Read it with the preceding opening statement (headers: {); it is not a standalone business operation.
29	`...(token ? { Authorization: `Bearer ${token}` } : {}),`	Continues the surrounding declaration/expression or text: ...(token ? { Authorization: `Bearer ${token}` } : {}),. Read it with the preceding opening statement ("content-type": "application/json",); it is not a standalone business operation.
30	`...(options.headers || {}),`	Continues the surrounding declaration/expression or text: ...(options.headers || {}),. Read it with the preceding opening statement (...(token ? { Authorization: `Bearer ${token}` } : {}),); it is not a standalone business operation.
31	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`} catch (error) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
34	`if (isReadRequest(options)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (isReadRequest(options)) {.
35	`const cachedValue = await AsyncStorage.getItem(cacheKey);`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
36	`if (cachedValue !== null) return JSON.parse(cachedValue) as T;`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
37	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`throw new ApiError(`	Stops this execution path with a validation/error exception: throw new ApiError(. The caller/catch block decides how it is reported.
39	`"Cannot reach the server. Your entries are unchanged. Check your connection and try again.",`	Continues the surrounding declaration/expression or text: "Cannot reach the server. Your entries are unchanged. Check your connection and try again.",. Read it with the preceding opening statement (throw new ApiError(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
40	`0,`	Continues the surrounding declaration/expression or text: 0,. Read it with the preceding opening statement ("Cannot reach the server. Your entries are unchanged. Check your connection and try again.",); it is not a standalone business operation.
41	`true,`	Continues the surrounding declaration/expression or text: true,. Read it with the preceding opening statement (0,); it is not a standalone business operation.
42	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44		Blank line separating logical sections; no executable operation.
45	`const body = await response.json().catch(() => ({`	Waits for this asynchronous operation before continuing: const body = await response.json().catch(() => ({. The returned result/error must still be handled.
46	`success: false,`	Sets/declares the named object property or style/type member: success: false,. Interpret it in the enclosing object, props or type definition.
47	`message:`	Sets/declares the named object property or style/type member: message:. Interpret it in the enclosing object, props or type definition.
48	`response.status >= 500`	Continues the surrounding declaration/expression or text: response.status >= 500. Read it with the preceding opening statement (message:); it is not a standalone business operation.
49	`? `The connection to the server is temporarily unavailable (${response.status}). Your entries are unchanged; please try again.``	Continues the surrounding declaration/expression or text: ? `The connection to the server is temporarily unavailable (${response.status}). Your entries are unchanged; please try again.`. Read it with the preceding opening statement (response.status >= 500); it is not a standalone business operation.
50	`: `The server returned an unexpected response (${response.status}). Please try again.`,`	Continues the surrounding declaration/expression or text: : `The server returned an unexpected response (${response.status}). Please try again.`,. Read it with the preceding opening statement (? `The connection to the server is temporarily unavailable (${response.status}). Your entries are unchanged; please try again.`); it is not a standalone business operation.
51	`}));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
52	`  if (response.status === 401) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (response.status === 401) {.
53	`    await AsyncStorage.multiRemove(["token", "currentUser"]);`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
54	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
55	`  if (!response.ok || !body.success)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!response.ok || !body.success).
56	`    throw new ApiError(`	Stops this execution path with a validation/error exception: throw new ApiError(. The caller/catch block decides how it is reported.
57	`      body.message || "Unable to complete operation",`	Continues the surrounding declaration/expression or text: body.message || "Unable to complete operation",. Read it with the preceding opening statement (throw new ApiError(); it is not a standalone business operation.
58	`      response.status,`	Continues the surrounding declaration/expression or text: response.status,. Read it with the preceding opening statement (body.message || "Unable to complete operation",); it is not a standalone business operation.
59	`      response.status >= 502,`	Continues the surrounding declaration/expression or text: response.status >= 502,. Read it with the preceding opening statement (response.status,); it is not a standalone business operation.
60	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
61		Blank line separating logical sections; no executable operation.
62	`  // An in-flight request must not restore a signed-out employee's cached data.`	Developer comment/documentation: An in-flight request must not restore a signed-out employee's cached data. It is not executed.
63	`  if (isReadRequest(options) && (await AsyncStorage.getItem("token")) === token) {`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
64	`    await AsyncStorage.setItem(cacheKey, JSON.stringify(body.data));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
65	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
66	`  return body.data as T;`	Returns body.data as T to the caller (or begins returned UI markup) and ends this execution path.
67	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
68	`export const post = <T>(path: string, data: unknown) =>`	Assigns the right-hand expression to the named variable/property: export const post = <T>(path: string, data: unknown) =>. This is in-memory unless it is later persisted by an explicit call.
69	`  api<T>(path, { method: "POST", body: JSON.stringify(data) });`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
70		Blank line separating logical sections; no executable operation.
71	`/** Only use for server operations that explicitly support idempotent retries. */`	Developer comment/documentation: Only use for server operations that explicitly support idempotent retries. */ It is not executed.
72	`export async function postRecoverable<T>(path: string, data: unknown): Promise<T> {`	Declares a callable function/method: export async function postRecoverable<T>(path: string, data: unknown): Promise<T> {. Parameters supply its inputs; the following block implements the operation.
73	`  for (let attempt = 0; ; attempt++) {`	Repeats work over the specified records/items or while this condition holds: for (let attempt = 0; ; attempt++) {. Check where queries/writes occur relative to the loop.
74	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
75	`      return await post<T>(path, data);`	Waits for this asynchronous operation before continuing: return await post<T>(path, data);. The returned result/error must still be handled.
76	`    } catch (error) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
77	`      if (!(error instanceof ApiError) || !error.retryable || attempt >= 2) throw error;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!(error instanceof ApiError) || !error.retryable || attempt >= 2) throw error;.
78	`      await new Promise((resolve) => setTimeout(resolve, 1000 * (attempt + 1)));`	Schedules periodic/delayed work. The delay and cleanup determine refresh/retry behavior; it is not immediate server push.
79	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
80	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
81	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/components/BottomNav.tsx

Reusable employee navigation controls and active-route styling.

54 numbered source lines | SHA-256 250024b670d21bebe92c4624740b5e8eddb95fb293c3d0ef5753bfe6e68d2b4d

Line	Source code	Explanation / reading note
1	`import React from "react";`	Imports dependencies/types used below: import React from "react";. Importing a function does not call it.
2	`import { Pressable, StyleSheet, Text, View } from "react-native";`	Imports dependencies/types used below: import { Pressable, StyleSheet, Text, View } from "react-native";. Importing a function does not call it.
3	`import { useNavigation } from "@react-navigation/native";`	Imports dependencies/types used below: import { useNavigation } from "@react-navigation/native";. Importing a function does not call it.
4	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
5		Blank line separating logical sections; no executable operation.
6	`const items = [`	Declares/initializes local data used by the surrounding operation: const items = [. Collection contents and assignments below determine its purpose.
7	`  ["Main", "⌂", "Home"],`	Continues the surrounding declaration/expression or text: ["Main", "⌂", "Home"],. Read it with the preceding opening statement (const items = []; it is not a standalone business operation.
8	`  ["Outlets", "◎", "Outlets"],`	Continues the surrounding declaration/expression or text: ["Outlets", "◎", "Outlets"],. Read it with the preceding opening statement (["Main", "⌂", "Home"],); it is not a standalone business operation.
9	`  ["Orders", "▤", "Orders"],`	Continues the surrounding declaration/expression or text: ["Orders", "▤", "Orders"],. Read it with the preceding opening statement (["Outlets", "◎", "Outlets"],); it is not a standalone business operation.
10	`  ["Products", "▦", "Products"],`	Continues the surrounding declaration/expression or text: ["Products", "▦", "Products"],. Read it with the preceding opening statement (["Orders", "▤", "Orders"],); it is not a standalone business operation.
11	`  ["More", "•••", "More"],`	Continues the surrounding declaration/expression or text: ["More", "•••", "More"],. Read it with the preceding opening statement (["Products", "▦", "Products"],); it is not a standalone business operation.

Line	Source code	Explanation / reading note
12	`] as const;`	Continues the surrounding declaration/expression or text:] as const;. Read it with the preceding opening statement (["More", "•••", "More"],); it is not a standalone business operation.
13		Blank line separating logical sections; no executable operation.
14	`export default function BottomNav({ active }: { active: string }) {`	Declares a callable function/method: export default function BottomNav({ active }: { active: string }) {. Parameters supply its inputs; the following block implements the operation.
15	`  const navigation = useNavigation<any>();`	Declares/initializes local data used by the surrounding operation: const navigation = useNavigation<any>();. Collection contents and assignments below determine its purpose.
16	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
17	`    <View style={s.bar}>`	Renders/opens a UI element or component: <View style={s.bar}>. Props and child content below determine appearance and interactions.
18	`      {items.map(([screen, icon, label]) => {`	Transforms/selects/aggregates collection values with the callback shown here: {items.map(([screen, icon, label]) => {. Read the callback body and result assignment together.
19	`        const selected = active === screen;`	Declares/initializes local data used by the surrounding operation: const selected = active === screen;. Collection contents and assignments below determine its purpose.
20	`        return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
21	`          <Pressable key={screen} style={s.item} onPress={() => navigation.navigate(screen)}>`	Renders/opens a UI element or component: <Pressable key={screen} style={s.item} onPress={() => navigation.navigate(screen)}>. Props and child content below determine appearance and interactions.
22	`            <Text style={[s.icon, selected && s.selected]}>{icon}</Text>`	Renders/opens a UI element or component: <Text style={[s.icon, selected && s.selected]}>{icon}</Text>. Props and child content below determine appearance and interactions.
23	`            <Text style={[s.label, selected && s.selected]}>{label}</Text>`	Renders/opens a UI element or component: <Text style={[s.label, selected && s.selected]}>{label}</Text>. Props and child content below determine appearance and interactions.
24	`          </Pressable>`	Closes the UI element/component opened above.
25	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
26	`      })}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
27	`    </View>`	Closes the UI element/component opened above.
28	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30		Blank line separating logical sections; no executable operation.
31	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
32	`  bar: {`	Sets/declares the named object property or style/type member: bar: {. Interpret it in the enclosing object, props or type definition.
33	`    height: 70,`	Sets/declares the named object property or style/type member: height: 70,. Interpret it in the enclosing object, props or type definition.
34	`    maxWidth: 450,`	Sets/declares the named object property or style/type member: maxWidth: 450,. Interpret it in the enclosing object, props or type definition.
35	`    width: "94%",`	Sets/declares the named object property or style/type member: width: "94%",. Interpret it in the enclosing object, props or type definition.
36	`    alignSelf: "center",`	Sets/declares the named object property or style/type member: alignSelf: "center",. Interpret it in the enclosing object, props or type definition.
37	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
38	`    backgroundColor: "#FFFDF7",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFFDF7",. Interpret it in the enclosing object, props or type definition.
39	`    borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
40	`    borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
41	`borderRadius: 22,`	Sets/declares the named object property or style/type member: borderRadius: 22,. Interpret it in the enclosing object, props or type definition.
42	`paddingTop: 7,`	Sets/declares the named object property or style/type member: paddingTop: 7,. Interpret it in the enclosing object, props or type definition.
43	`paddingBottom: 5,`	Sets/declares the named object property or style/type member: paddingBottom: 5,. Interpret it in the enclosing object, props or type definition.
44	`marginBottom: 8,`	Sets/declares the named object property or style/type member: marginBottom: 8,. Interpret it in the enclosing object, props or type definition.
45	`shadowColor: colors.navy,`	Sets/declares the named object property or style/type member: shadowColor: colors.navy,. Interpret it in the enclosing object, props or type definition.
46	`shadowOpacity: 0.14,`	Sets/declares the named object property or style/type member: shadowOpacity: 0.14,. Interpret it in the enclosing object, props or type definition.
47	`shadowRadius: 12,`	Sets/declares the named object property or style/type member: shadowRadius: 12,. Interpret it in the enclosing object, props or type definition.
48	`elevation: 8,`	Sets/declares the named object property or style/type member: elevation: 8,. Interpret it in the enclosing object, props or type definition.
49	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
50	`item: { flex: 1, alignItems: "center", justifyContent: "center" },`	Sets/declares the named object property or style/type member: item: { flex: 1, alignItems: "center", justifyContent: "center" },. Interpret it in the enclosing object, props or type definition.
51	`icon: { color: colors.muted, fontSize: 20, fontWeight: "900", lineHeight: 22 },`	Sets/declares the named object property or style/type member: icon: { color: colors.muted, fontSize: 20, fontWeight: "900", lineHeight: 22 },. Interpret it in the enclosing object, props or type definition.
52	`label: { color: colors.muted, fontSize: 10, fontWeight: "700", marginTop: 2 },`	Sets/declares the named object property or style/type member: label: { color: colors.muted, fontSize: 10, fontWeight: "700", marginTop: 2 },. Interpret it in the enclosing object, props or type definition.
53	`selected: { color: colors.blue },`	Sets/declares the named object property or style/type member: selected: { color: colors.blue },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
54	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/components/BrandHeader.tsx

Reusable SFA visual heading/brand component.

39 numbered source lines | SHA-256 9f819c4896d38b72a883d24e25063ea9f9424c95e45684737fe9125da4f1908b

Line	Source code	Explanation / reading note
1	`import React from "react";`	Imports dependencies/types used below: import React from "react";. Importing a function does not call it.
2	`import { StyleSheet, Text, View } from "react-native";`	Imports dependencies/types used below: import { StyleSheet, Text, View } from "react-native";. Importing a function does not call it.
3	`import BrandLogo from "./BrandLogo";`	Imports dependencies/types used below: import BrandLogo from "./BrandLogo";. Importing a function does not call it.
4	`export default function BrandHeader() {`	Declares a callable function/method: export default function BrandHeader() {. Parameters supply its inputs; the following block implements the operation.
5	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
6	`    <View style={s.header}>`	Renders/opens a UI element or component: <View style={s.header}>. Props and child content below determine appearance and interactions.
7	`      <View style={{ marginRight: 10 }}>`	Renders/opens a UI element or component: <View style={{ marginRight: 10 }}>. Props and child content below determine appearance and interactions.
8	`        <BrandLogo width={70} />`	Renders/opens a UI element or component: <BrandLogo width={70} />. Props and child content below determine appearance and interactions.
9	`      </View>`	Closes the UI element/component opened above.
10	`      <Text style={s.title}>SFA MOBILE</Text>`	Renders/opens a UI element or component: <Text style={s.title}>SFA MOBILE</Text>. Props and child content below determine appearance and interactions.
11	`      <Text style={s.badge}>EMPLOYEE</Text>`	Renders/opens a UI element or component: <Text style={s.badge}>EMPLOYEE</Text>. Props and child content below determine appearance and interactions.
12	`    </View>`	Closes the UI element/component opened above.
13	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
14	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
15	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
16	`  header: {`	Sets/declares the named object property or style/type member: header: {. Interpret it in the enclosing object, props or type definition.
17	`    height: 66,`	Sets/declares the named object property or style/type member: height: 66,. Interpret it in the enclosing object, props or type definition.
18	`    backgroundColor: "#123F3B",`	Sets/declares the named object property or style/type member: backgroundColor: "#123F3B",. Interpret it in the enclosing object, props or type definition.
19	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
20	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
21	`    paddingHorizontal: 18,`	Sets/declares the named object property or style/type member: paddingHorizontal: 18,. Interpret it in the enclosing object, props or type definition.
22	`    borderBottomRightRadius: 26,`	Sets/declares the named object property or style/type member: borderBottomRightRadius: 26,. Interpret it in the enclosing object, props or type definition.
23	`    shadowColor: "#173A36",`	Sets/declares the named object property or style/type member: shadowColor: "#173A36",. Interpret it in the enclosing object, props or type definition.
24	`    shadowOpacity: 0.18,`	Sets/declares the named object property or style/type member: shadowOpacity: 0.18,. Interpret it in the enclosing object, props or type definition.
25	`    shadowRadius: 10,`	Sets/declares the named object property or style/type member: shadowRadius: 10,. Interpret it in the enclosing object, props or type definition.
26	`    elevation: 5,`	Sets/declares the named object property or style/type member: elevation: 5,. Interpret it in the enclosing object, props or type definition.
27	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
28	`  truck: { color: "#F6C85F", fontSize: 20, marginRight: 9 },`	Sets/declares the named object property or style/type member: truck: { color: "#F6C85F", fontSize: 20, marginRight: 9 },. Interpret it in the enclosing object, props or type definition.
29	`  title: { color: "#FFFDF7", fontSize: 18, fontWeight: "900", letterSpacing: 0.5, flex: 1 },`	Sets/declares the named object property or style/type member: title: { color: "#FFFDF7", fontSize: 18, fontWeight: "900", letterSpacing: 0.5, flex: 1 },. Interpret it in the enclosing object, props or type definition.
30	`  badge: {`	Sets/declares the named object property or style/type member: badge: {. Interpret it in the enclosing object, props or type definition.
31	`    color: "#123F3B",`	Sets/declares the named object property or style/type member: color: "#123F3B",. Interpret it in the enclosing object, props or type definition.
32	`    fontSize: 10,`	Sets/declares the named object property or style/type member: fontSize: 10,. Interpret it in the enclosing object, props or type definition.
33	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
34	`    backgroundColor: "#F6C85F",`	Sets/declares the named object property or style/type member: backgroundColor: "#F6C85F",. Interpret it in the enclosing object, props or type definition.
35	`    paddingHorizontal: 12,`	Sets/declares the named object property or style/type member: paddingHorizontal: 12,. Interpret it in the enclosing object, props or type definition.
36	`    paddingVertical: 7,`	Sets/declares the named object property or style/type member: paddingVertical: 7,. Interpret it in the enclosing object, props or type definition.
37	`    borderRadius: 8,`	Sets/declares the named object property or style/type member: borderRadius: 8,. Interpret it in the enclosing object, props or type definition.
38	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/components/BrandLogo.tsx

Presents the supplied Nestlé asset with predictable contain sizing. It does not alter credentials or data ownership.

13 numbered source lines | SHA-256 b8eaf0d7ee7a248ae4028b5791222e8bb0f9c666b7182d56bb9e92b5655ad86d

Line	Source code	Explanation / reading note
1	`import React from "react";`	Imports dependencies/types used below: import React from "react";. Importing a function does not call it.
2	`import { Image } from "react-native";`	Imports dependencies/types used below: import { Image } from "react-native";. Importing a function does not call it.
3		Blank line separating logical sections; no executable operation.
4	`export default function BrandLogo({ width = 84 }: { width?: number }) {`	Declares a callable function/method: export default function BrandLogo({ width = 84 }: { width?: number }) {. Parameters supply its inputs; the following block implements the operation.
5	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
6	`    <Image`	Renders/opens a UI element or component: <Image. Props and child content below determine appearance and interactions.
7	`      source={require("../../assets/nestle-logo.png")}`	Assigns the right-hand expression to the named variable/property: source={require("../../assets/nestle-logo.png")}. This is in-memory unless it is later persisted by an explicit call.
8	`      accessibilityLabel="Nestlé logo"`	Assigns the right-hand expression to the named variable/property: accessibilityLabel="Nestlé logo". This is in-memory unless it is later persisted by an explicit call.
9	`      resizeMode="contain"`	Assigns the right-hand expression to the named variable/property: resizeMode="contain". This is in-memory unless it is later persisted by an explicit call.
10	`      style={{ width, height: (width * 138) / 246, backgroundColor: "white", borderRadius: 4 }}`	Assigns the right-hand expression to the named variable/property: style={{ width, height: (width * 138) / 246, backgroundColor: "white", borderRadius: 4 }}. This is in-memory unless it is later persisted by an explicit call.
11	`    />`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (style={{ width, height: (width * 138) / 246, backgroundColor: "white", borderRadius: 4 }}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
12	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/components/ExpenseClaimEditor.test.tsx

Regression tests for ExpenseClaimEditor. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

83 numbered source lines | SHA-256 5e644178fd86e6b85874e9e3d4647fdaac608294a588844197a8692f1a648977

Line	Source code	Explanation / reading note
1	`import React from "react";`	Imports dependencies/types used below: import React from "react";. Importing a function does not call it.
2	`import { describe, expect, it, vi } from "vitest";`	Imports dependencies/types used below: import { describe, expect, it, vi } from "vitest";. Importing a function does not call it.
3	`vi.mock("react-native", () => ({`	Calls the named method: vi.mock("react-native", () => ({. Its implementation defines the side effect/result; use the symbol/file index to follow it.
4	`  View: "View",`	Sets/declares the named object property or style/type member: View: "View",. Interpret it in the enclosing object, props or type definition.
5	`  Text: "Text",`	Sets/declares the named object property or style/type member: Text: "Text",. Interpret it in the enclosing object, props or type definition.
6	`  TextInput: "TextInput",`	Sets/declares the named object property or style/type member: TextInput: "TextInput",. Interpret it in the enclosing object, props or type definition.
7	`  Pressable: "Pressable",`	Sets/declares the named object property or style/type member: Pressable: "Pressable",. Interpret it in the enclosing object, props or type definition.
8	`  StyleSheet: { create: (styles: unknown) => styles },`	Sets/declares the named object property or style/type member: StyleSheet: { create: (styles: unknown) => styles },. Interpret it in the enclosing object, props or type definition.
9	`}));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`import ExpenseClaimEditor, { ExpenseField } from "./ExpenseClaimEditor";`	Imports dependencies/types used below: import ExpenseClaimEditor, { ExpenseField } from "./ExpenseClaimEditor";. Importing a function does not call it.
11		Blank line separating logical sections; no executable operation.
12	`function elements(node: React.ReactNode): React.ReactElement<any>[] {`	Declares a callable function/method: function elements(node: React.ReactNode): React.ReactElement<any>[] {. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
13	`  return React.Children.toArray(node).flatMap((child) =>`	Returns React.Children.toArray(node).flatMap((child) => to the caller (or begins returned UI markup) and ends this execution path.
14	`    React.isValidElement<any>(child)`	Continues the surrounding declaration/expression or text: React.isValidElement<any>(child). Read it with the preceding opening statement (return React.Children.toArray(node).flatMap((child) =>); it is not a standalone business operation.
15	`      ? [`	Continues the surrounding declaration/expression or text: ? [. Read it with the preceding opening statement (React.isValidElement<any>(child)); it is not a standalone business operation.
16	`          child,`	Continues the surrounding declaration/expression or text: child,. Read it with the preceding opening statement (? []); it is not a standalone business operation.
17	`          ...elements((child as React.ReactElement<{ children?: React.ReactNode }>).props.children),`	Continues the surrounding declaration/expression or text: ...elements((child as React.ReactElement<{ children?: React.ReactNode }>).props.children),. Read it with the preceding opening statement (child,); it is not a standalone business operation.
18	`        ]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`      : [],`	Continues the surrounding declaration/expression or text: : [],. Read it with the preceding opening statement ( ]); it is not a standalone business operation.
20	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
22	`function fields(category = "Mobile Internet", receiptRequired = true) {`	Declares a callable function/method: function fields(category = "Mobile Internet", receiptRequired = true) {. Parameters supply its inputs; the following block implements the operation.
23	`  return elements(`	Returns elements(to the caller (or begins returned UI markup) and ends this execution path.
24	`    ExpenseClaimEditor({`	Continues the surrounding declaration/expression or text: ExpenseClaimEditor({. Read it with the preceding opening statement (return elements(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
25	`policy: { name: "Monthly Internet", category, receiptRequired },`	Sets/declares the named object property or style/type member: policy: { name: "Monthly Internet", category, receiptRequired },. Interpret it in the enclosing object, props or type definition.
26	`form: {},`	Sets/declares the named object property or style/type member: form: {},. Interpret it in the enclosing object, props or type definition.
27	`update: vi.fn(),`	Sets/declares the named object property or style/type member: update: vi.fn(),. Interpret it in the enclosing object, props or type definition.
28	`}),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`).filter((element) => element.type === ExpenseField);`	Transforms/selects/aggregates collection values with the callback shown here:).filter((element) => element.type === ExpenseField);. Read the callback body and result assignment together.
30	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31		Blank line separating logical sections; no executable operation.
32	`describe("expense field guidance", () => {`	Continues the surrounding declaration/expression or text: describe("expense field guidance", () => {. Read it with the preceding opening statement; it is not a standalone business operation.
33	`it("gives all four ordinary claim fields persistent labels and example placeholders", () => {`	Continues the surrounding declaration/expression or text: it("gives all four ordinary claim fields persistent labels and example placeholders", () => {. Read it with the preceding opening statement (describe("expense field guidance", () => {); it is not a standalone business operation.
34	`const inputs = fields();`	Declares/initializes local data used by the surrounding operation: const inputs = fields();. Collection contents and assignments below determine its purpose.
35	`expect(inputs).toHaveLength(4);`	Test assertion comparing an expected outcome to actual behavior: expect(inputs).toHaveLength(4);. A mismatch fails the test.
36	`for (const input of inputs) {`	Repeats work over the specified records/items or while this condition holds: for (const input of inputs) {. Check where queries/writes occur relative to the loop.
37	`expect(input.props.label).toBeTruthy();`	Test assertion comparing an expected outcome to actual behavior: expect(input.props.label).toBeTruthy();. A mismatch fails the test.

Line	Source code	Explanation / reading note
38	`expect(input.props.placeholder).toBeTruthy();`	Test assertion comparing an expected outcome to actual behavior: expect(input.props.placeholder).toBeTruthy();. A mismatch fails the test.
39	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
40	`expect(inputs[0].props.label).toContain("required");`	Test assertion comparing an expected outcome to actual behavior: expect(inputs[0].props.label).toContain("required");. A mismatch fails the test.
41	`expect(inputs[1].props.hint).toContain("Leave blank");`	Test assertion comparing an expected outcome to actual behavior: expect(inputs[1].props.hint).toContain("Leave blank");. A mismatch fails the test.
42	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43	`it("adds labelled odometer fields for vehicle claims", () => {`	Continues the surrounding declaration/expression or text: it("adds labelled odometer fields for vehicle claims", () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
44	`expect(fields("Two Wheeler").map((field) => field.props.label)).toContain(`	Test assertion comparing an expected outcome to actual behavior: expect(fields("Two Wheeler").map((field) => field.props.label)).toContain(. A mismatch fails the test.
45	`"Start odometer (km) — optional",`	Continues the surrounding declaration/expression or text: "Start odometer (km) - optional",. Read it with the preceding opening statement (expect(fields("Two Wheeler").map((field) => field.props.label)).toContain(); it is not a standalone business operation.
46	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`expect(fields("Four Wheeler")).toHaveLength(6);`	Test assertion comparing an expected outcome to actual behavior: expect(fields("Four Wheeler")).toHaveLength(6);. A mismatch fails the test.
48	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49	`it("shows whether receipt evidence is required by the policy", () => {`	Continues the surrounding declaration/expression or text: it("shows whether receipt evidence is required by the policy", () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
50	`expect(fields()[2].props.label).toContain("required");`	Test assertion comparing an expected outcome to actual behavior: expect(fields()[2].props.label).toContain("required");. A mismatch fails the test.

Line	Source code	Explanation / reading note
51	`    expect(fields("Food", false)[2].props.label).toContain("optional");`	Test assertion comparing an expected outcome to actual behavior: expect(fields("Food", false)[2].props.label).toContain("optional");. A mismatch fails the test.
52	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
53	`  it("explicitly colors hints and preserves the label after typing", () => {`	Continues the surrounding declaration/expression or text: it("explicitly colors hints and preserves the label after typing", () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
54	`    const tree = elements(`	Declares/initializes local data used by the surrounding operation: const tree = elements(. Collection contents and assignments below determine its purpose.
55	`      ExpenseField({ label: "Claim amount", value: "200", placeholder: "e.g. 200" }),`	Continues the surrounding declaration/expression or text: ExpenseField({ label: "Claim amount", value: "200", placeholder: "e.g. 200" }),. Read it with the preceding opening statement (const tree = elements(); it is not a standalone business operation.
56	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`    expect(tree.some((element) => element.props.children === "Claim amount")).toBe(true);`	Test assertion comparing an expected outcome to actual behavior: expect(tree.some((element) => element.props.children === "Claim amount")).toBe(true);. A mismatch fails the test.
58	`    const input = tree.find((element) => element.props.accessibilityLabel === "Claim amount")!;`	Declares/initializes local data used by the surrounding operation: const input = tree.find((element) => element.props.accessibilityLabel === "Claim amount")!;. Collection contents and assignments below determine its purpose.
59	`    expect(input.props.placeholderTextColor).toBe("#627873");`	Test assertion comparing an expected outcome to actual behavior: expect(input.props.placeholderTextColor).toBe("#627873");. A mismatch fails the test.
60	`    expect(input.props.value).toBe("200");`	Test assertion comparing an expected outcome to actual behavior: expect(input.props.value).toBe("200");. A mismatch fails the test.
61	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
62	`  it("keeps each field connected to the existing claim payload", () => {`	Continues the surrounding declaration/expression or text: it("keeps each field connected to the existing claim payload", () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.

Line	Source code	Explanation / reading note
63	`  const update = vi.fn();`	Declares/initializes local data used by the surrounding operation: const update = vi.fn();. Collection contents and assignments below determine its purpose.
64	`  const tree = elements(`	Declares/initializes local data used by the surrounding operation: const tree = elements(. Collection contents and assignments below determine its purpose.
65	`    ExpenseClaimEditor({`	Continues the surrounding declaration/expression or text: ExpenseClaimEditor({. Read it with the preceding opening statement (const tree = elements(); it is not a standalone business operation.
66	`      policy: { name: "Petrol", category: "Two Wheeler", receiptRequired: true },`	Sets/declares the named object property or style/type member: policy: { name: "Petrol", category: "Two Wheeler", receiptRequired: true },. Interpret it in the enclosing object, props or type definition.
67	`      form: { amount: "200" },`	Sets/declares the named object property or style/type member: form: { amount: "200" },. Interpret it in the enclosing object, props or type definition.
68	`      update,`	Continues the surrounding declaration/expression or text: update,. Read it with the preceding opening statement (form: { amount: "200" },); it is not a standalone business operation.
69	`    }),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
70	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
71	`  const inputs = tree.filter((element) => element.type === ExpenseField);`	Declares/initializes local data used by the surrounding operation: const inputs = tree.filter((element) => element.type === ExpenseField);. Collection contents and assignments below determine its purpose.
72	`  expect(inputs[0].props.value).toBe("200");`	Test assertion comparing an expected outcome to actual behavior: expect(inputs[0].props.value).toBe("200");. A mismatch fails the test.
73	`  inputs.forEach((input) => input.props.onChangeText("test"));`	Calls the named method: inputs.forEach((input) => input.props.onChangeText("test"));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
74	`  expect(update.mock.calls.map(([key]) => key)).toEqual([`	Test assertion comparing an expected outcome to actual behavior: expect(update.mock.calls.map(([key]) => key)).toEqual([. A mismatch fails the test.
75	`    "amount",`	Continues the surrounding declaration/expression or text: "amount",. Read it with the preceding opening statement (expect(update.mock.calls.map(([key]) => key)).toEqual([); it is not a standalone business operation.

Line	Source code	Explanation / reading note
76	`"distanceKm",`	Continues the surrounding declaration/expression or text: "distanceKm",. Read it with the preceding opening statement ("amount",); it is not a standalone business operation.
77	`"startOdometer",`	Continues the surrounding declaration/expression or text: "startOdometer",. Read it with the preceding opening statement ("distanceKm",); it is not a standalone business operation.
78	`"endOdometer",`	Continues the surrounding declaration/expression or text: "endOdometer",. Read it with the preceding opening statement ("startOdometer",); it is not a standalone business operation.
79	`"receiptUrl",`	Continues the surrounding declaration/expression or text: "receiptUrl",. Read it with the preceding opening statement ("endOdometer",); it is not a standalone business operation.
80	`"remarks",`	Continues the surrounding declaration/expression or text: "remarks",. Read it with the preceding opening statement ("receiptUrl",); it is not a standalone business operation.
81	`]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
82	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
83	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/components/ExpenseClaimEditor.tsx

Reusable labelled expense claim inputs, values and callbacks used by ExpensesScreen.

119 numbered source lines | SHA-256 9245a2a6e429f95a97eddcfa8d6c75184bf9448f7fb8ce58af70bab8c8c2294c

Line	Source code	Explanation / reading note
1	`import React from "react";`	Imports dependencies/types used below: import React from "react";. Importing a function does not call it.
2	`import { StyleSheet, Text, TextInput, TextInputProps, View } from "react-native";`	Imports dependencies/types used below: import { StyleSheet, Text, TextInput, TextInputProps, View } from "react-native";. Importing a function does not call it.
3	`import { Card, Label } from "./ui";`	Imports dependencies/types used below: import { Card, Label } from "./ui";. Importing a function does not call it.
4	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
5		Blank line separating logical sections; no executable operation.
6	`export type ClaimForm = {`	Defines a compile-time data contract: export type ClaimForm = {. TypeScript types do not validate untrusted runtime JSON by themselves.
7	`  amount?: string;`	Sets/declares the named object property or style/type member: amount?: string;. Interpret it in the enclosing object, props or type definition.
8	`  distanceKm?: string;`	Sets/declares the named object property or style/type member: distanceKm?: string;. Interpret it in the enclosing object, props or type definition.
9	`  startOdometer?: string;`	Sets/declares the named object property or style/type member: startOdometer?: string;. Interpret it in the enclosing object, props or type definition.
10	`  endOdometer?: string;`	Sets/declares the named object property or style/type member: endOdometer?: string;. Interpret it in the enclosing object, props or type definition.
11	`  receiptUrl?: string;`	Sets/declares the named object property or style/type member: receiptUrl?: string;. Interpret it in the enclosing object, props or type definition.
12	`  remarks?: string;`	Sets/declares the named object property or style/type member: remarks?: string;. Interpret it in the enclosing object, props or type definition.
13	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
14		Blank line separating logical sections; no executable operation.
15	`type ExpenseFieldProps = TextInputProps & { label: string; hint?: string };`	Defines a compile-time data contract: type ExpenseFieldProps = TextInputProps & { label: string; hint?: string };. TypeScript types do not validate untrusted runtime JSON by themselves.
16		Blank line separating logical sections; no executable operation.
17	`/** Keep field names visible after typing; do not rely on Android's default hint color. */`	Developer comment/documentation: Keep field names visible after typing; do not rely on Android's default hint color. */ It is not executed.
18	`export function ExpenseField({ label, hint, multiline, ...input }: ExpenseFieldProps) {`	Declares a callable function/method: export function ExpenseField({ label, hint, multiline, ...input }: ExpenseFieldProps) {. Parameters supply its inputs; the following block implements the operation.
19	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
20	`    <View style={styles.field}>`	Renders/opens a UI element or component: <View style={styles.field}>. Props and child content below determine appearance and interactions.
21	`      <Text style={styles.label}>{label}</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>{label}</Text>. Props and child content below determine appearance and interactions.
22	`      <TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
23	`        {...input}`	Continues the surrounding declaration/expression or text: {...input}. Read it with the preceding opening statement (<TextInput); it is not a standalone business operation.
24	`        accessibilityLabel={label}`	Assigns the right-hand expression to the named variable/property: accessibilityLabel={label}. This is in-memory unless it is later persisted by an explicit call.
25	`        accessibilityHint={hint}`	Assigns the right-hand expression to the named variable/property: accessibilityHint={hint}. This is in-memory unless it is later persisted by an explicit call.
26	`        placeholderTextColor="#627873"`	Assigns the right-hand expression to the named variable/property: placeholderTextColor="#627873". This is in-memory unless it is later persisted by an explicit call.
27	`        selectionColor={colors.brand}`	Assigns the right-hand expression to the named variable/property: selectionColor={colors.brand}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
28	`multiline={multiline}`	Assigns the right-hand expression to the named variable/property: multiline={multiline}. This is in-memory unless it is later persisted by an explicit call.
29	`style={[styles.input, multiline && styles.notes]}`	Assigns the right-hand expression to the named variable/property: style={[styles.input, multiline && styles.notes]}. This is in-memory unless it is later persisted by an explicit call.
30	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (style={[styles.input, multiline && styles.notes]}); it is not a standalone business operation.
31	`{!!hint && <Text style={styles.hint}>{hint}</Text>}`	Assigns the right-hand expression to the named variable/property: {!!hint && <Text style={styles.hint}>{hint}</Text>}. This is in-memory unless it is later persisted by an explicit call.
32	`</View>`	Closes the UI element/component opened above.
33	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35		Blank line separating logical sections; no executable operation.
36	`export default function ExpenseClaimEditor({`	Declares a callable function/method: export default function ExpenseClaimEditor({. Parameters supply its inputs; the following block implements the operation.
37	`policy,`	Continues the surrounding declaration/expression or text: policy,. Read it with the preceding opening statement (export default function ExpenseClaimEditor({); it is not a standalone business operation.
38	`form,`	Continues the surrounding declaration/expression or text: form,. Read it with the preceding opening statement (policy,); it is not a standalone business operation.
39	`update,`	Continues the surrounding declaration/expression or text: update,. Read it with the preceding opening statement (form,); it is not a standalone business operation.
40	`}: {`	Continues the surrounding declaration/expression or text: }: {. Read it with the preceding opening statement (update,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
41	`  policy: { name: string; category: string; receiptRequired: boolean };`	Sets/declares the named object property or style/type member: policy: { name: string; category: string; receiptRequired: boolean };. Interpret it in the enclosing object, props or type definition.
42	`  form: ClaimForm;`	Sets/declares the named object property or style/type member: form: ClaimForm;. Interpret it in the enclosing object, props or type definition.
43	`  update: (key: keyof ClaimForm, value: string) => void;`	Sets/declares the named object property or style/type member: update: (key: keyof ClaimForm, value: string) => void;. Interpret it in the enclosing object, props or type definition.
44	`}) {`	Continues the surrounding declaration/expression or text: }) {. Read it with the preceding opening statement (update: (key: keyof ClaimForm, value: string) => void;); it is not a standalone business operation.
45	`  const usesOdometer = ["Two Wheeler", "Four Wheeler"].includes(policy.category);`	Declares/initializes local data used by the surrounding operation: const usesOdometer = ["Two Wheeler", "Four Wheeler"].includes(policy.category);. Collection contents and assignments below determine its purpose.
46	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
47	`    <Card style={styles.card}>`	Renders/opens a UI element or component: <Card style={styles.card}>. Props and child content below determine appearance and interactions.
48	`      <Label>{policy.name.toUpperCase()} CLAIM DETAILS</Label>`	Renders/opens a UI element or component: <Label>{policy.name.toUpperCase()} CLAIM DETAILS</Label>. Props and child content below determine appearance and interactions.
49	`      <ExpenseField`	Renders/opens a UI element or component: <ExpenseField. Props and child content below determine appearance and interactions.
50	`        label="Claim amount (₹) — required"`	Assigns the right-hand expression to the named variable/property: label="Claim amount (₹) - required". This is in-memory unless it is later persisted by an explicit call.
51	`        placeholder="e.g. 200.00"`	Assigns the right-hand expression to the named variable/property: placeholder="e.g. 200.00". This is in-memory unless it is later persisted by an explicit call.
52	`        keyboardType="decimal-pad"`	Assigns the right-hand expression to the named variable/property: keyboardType="decimal-pad". This is in-memory unless it is later persisted by an explicit call.
53	`        value={form.amount || ""}`	Assigns the right-hand expression to the named variable/property: value={form.amount || ""}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
54	`onChangeText={(value) => update("amount", value)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
55	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(value) => update("amount", value)}); it is not a standalone business operation.
56	`<ExpenseField`	Renders/opens a UI element or component: <ExpenseField. Props and child content below determine appearance and interactions.
57	`label="Distance travelled (km) — optional"`	Assigns the right-hand expression to the named variable/property: label="Distance travelled (km) - optional". This is in-memory unless it is later persisted by an explicit call.
58	`placeholder="e.g. 10.5"`	Assigns the right-hand expression to the named variable/property: placeholder="e.g. 10.5". This is in-memory unless it is later persisted by an explicit call.
59	`hint="For travel claims only. Leave blank if this expense is not for travel."`	Assigns the right-hand expression to the named variable/property: hint="For travel claims only. Leave blank if this expense is not for travel.". This is in-memory unless it is later persisted by an explicit call.
60	`keyboardType="decimal-pad"`	Assigns the right-hand expression to the named variable/property: keyboardType="decimal-pad". This is in-memory unless it is later persisted by an explicit call.
61	`value={form.distanceKm || ""}`	Assigns the right-hand expression to the named variable/property: value={form.distanceKm || ""}. This is in-memory unless it is later persisted by an explicit call.
62	`onChangeText={(value) => update("distanceKm", value)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
63	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(value) => update("distanceKm", value)}); it is not a standalone business operation.
64	`{usesOdometer && (`	Continues the surrounding declaration/expression or text: {usesOdometer && (. Read it with the preceding opening statement (/>); it is not a standalone business operation.
65	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
66	`<ExpenseField`	Renders/opens a UI element or component: <ExpenseField. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
67	`label="Start odometer (km) — optional"`	Assigns the right-hand expression to the named variable/property: label="Start odometer (km) - optional". This is in-memory unless it is later persisted by an explicit call.
68	`placeholder="e.g. 12450"`	Assigns the right-hand expression to the named variable/property: placeholder="e.g. 12450". This is in-memory unless it is later persisted by an explicit call.
69	`keyboardType="decimal-pad"`	Assigns the right-hand expression to the named variable/property: keyboardType="decimal-pad". This is in-memory unless it is later persisted by an explicit call.
70	`value={form.startOdometer || ""}`	Assigns the right-hand expression to the named variable/property: value={form.startOdometer || ""}. This is in-memory unless it is later persisted by an explicit call.
71	`onChangeText={(value) => update("startOdometer", value)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
72	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(value) => update("startOdometer", value)}); it is not a standalone business operation.
73	`<ExpenseField`	Renders/opens a UI element or component: <ExpenseField. Props and child content below determine appearance and interactions.
74	`label="End odometer (km) — optional"`	Assigns the right-hand expression to the named variable/property: label="End odometer (km) - optional". This is in-memory unless it is later persisted by an explicit call.
75	`placeholder="e.g. 12475"`	Assigns the right-hand expression to the named variable/property: placeholder="e.g. 12475". This is in-memory unless it is later persisted by an explicit call.
76	`keyboardType="decimal-pad"`	Assigns the right-hand expression to the named variable/property: keyboardType="decimal-pad". This is in-memory unless it is later persisted by an explicit call.
77	`value={form.endOdometer || ""}`	Assigns the right-hand expression to the named variable/property: value={form.endOdometer || ""}. This is in-memory unless it is later persisted by an explicit call.
78	`onChangeText={(value) => update("endOdometer", value)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
79	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(value) => update("endOdometer", value)}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
80	`</>`	Closes the UI element/component opened above.
81	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
82	`<ExpenseField`	Renders/opens a UI element or component: <ExpenseField. Props and child content below determine appearance and interactions.
83	`label={`Receipt / evidence URL — ${policy.receiptRequired ? "required" : "optional"}`}`	Assigns the right-hand expression to the named variable/property: label={`Receipt / evidence URL - ${policy.receiptRequired ? "required" : "optional"}`}. This is in-memory unless it is later persisted by an explicit call.
84	`placeholder="https://example.com/receipt.jpg"`	Assigns the right-hand expression to the named variable/property: placeholder="https://example.com/receipt.jpg". This is in-memory unless it is later persisted by an explicit call.
85	`hint="Paste a link to your receipt or supporting evidence."`	Assigns the right-hand expression to the named variable/property: hint="Paste a link to your receipt or supporting evidence.". This is in-memory unless it is later persisted by an explicit call.
86	`keyboardType="url"`	Assigns the right-hand expression to the named variable/property: keyboardType="url". This is in-memory unless it is later persisted by an explicit call.
87	`autoCapitalize="none"`	Assigns the right-hand expression to the named variable/property: autoCapitalize="none". This is in-memory unless it is later persisted by an explicit call.
88	`autoCorrect={false}`	Assigns the right-hand expression to the named variable/property: autoCorrect={false}. This is in-memory unless it is later persisted by an explicit call.
89	`value={form.receiptUrl || ""}`	Assigns the right-hand expression to the named variable/property: value={form.receiptUrl || ""}. This is in-memory unless it is later persisted by an explicit call.
90	`onChangeText={(value) => update("receiptUrl", value)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
91	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(value) => update("receiptUrl", value)}); it is not a standalone business operation.
92	`<ExpenseField`	Renders/opens a UI element or component: <ExpenseField. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
93	`label="Purpose and remarks — optional"`	Assigns the right-hand expression to the named variable/property: label="Purpose and remarks - optional". This is in-memory unless it is later persisted by an explicit call.
94	`placeholder="Explain what this expense was for"`	Assigns the right-hand expression to the named variable/property: placeholder="Explain what this expense was for". This is in-memory unless it is later persisted by an explicit call.
95	`multiline`	Continues the surrounding declaration/expression or text: multiline. Read it with the preceding opening statement (placeholder="Explain what this expense was for"); it is not a standalone business operation.
96	`value={form.remarks || ""}`	Assigns the right-hand expression to the named variable/property: value={form.remarks || ""}. This is in-memory unless it is later persisted by an explicit call.
97	`onChangeText={(value) => update("remarks", value)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
98	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(value) => update("remarks", value)}); it is not a standalone business operation.
99	`</Card>`	Closes the UI element/component opened above.
100	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
101	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
102		Blank line separating logical sections; no executable operation.
103	`const styles = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const styles = StyleSheet.create({. Collection contents and assignments below determine its purpose.
104	`card: { marginTop: -4, marginBottom: 14, borderLeftWidth: 4, borderLeftColor: colors.brand },`	Sets/declares the named object property or style/type member: card: { marginTop: -4, marginBottom: 14, borderLeftWidth: 4, borderLeftColor: colors.brand },. Interpret it in the enclosing object, props or type definition.
105	`field: { marginTop: 16 },`	Sets/declares the named object property or style/type member: field: { marginTop: 16 },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
106	`label: { color: colors.ink, fontSize: 14, fontWeight: "700", marginBottom: 7 },`	Sets/declares the named object property or style/type member: label: { color: colors.ink, fontSize: 14, fontWeight: "700", marginBottom: 7 },. Interpret it in the enclosing object, props or type definition.
107	`input: {`	Sets/declares the named object property or style/type member: input: {. Interpret it in the enclosing object, props or type definition.
108	`color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
109	`backgroundColor: "#FFFFFF",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFFFFF",. Interpret it in the enclosing object, props or type definition.
110	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
111	`borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
112	`borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
113	`padding: 13,`	Sets/declares the named object property or style/type member: padding: 13,. Interpret it in the enclosing object, props or type definition.
114	`minHeight: 50,`	Sets/declares the named object property or style/type member: minHeight: 50,. Interpret it in the enclosing object, props or type definition.
115	`fontSize: 16,`	Sets/declares the named object property or style/type member: fontSize: 16,. Interpret it in the enclosing object, props or type definition.
116	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
117	`hint: { color: "#627873", fontSize: 12, lineHeight: 18, marginTop: 5 },`	Sets/declares the named object property or style/type member: hint: { color: "#627873", fontSize: 12, lineHeight: 18, marginTop: 5 },. Interpret it in the enclosing object, props or type definition.
118	`notes: { minHeight: 100, textAlignVertical: "top" },`	Sets/declares the named object property or style/type member: notes: { minHeight: 100, textAlignVertical: "top" },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
119	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/components/ProductIdentityFields.test.tsx

Regression tests for ProductIdentityFields. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

57 numbered source lines | SHA-256 ccf87dcdeb4596adf21a5d7746fdf3c8ac4bf79c7c94cb4446f8bbd931f44160

Line	Source code	Explanation / reading note
1	`import React from "react";`	Imports dependencies/types used below: import React from "react";. Importing a function does not call it.
2	`import { describe, expect, it, vi } from "vitest";`	Imports dependencies/types used below: import { describe, expect, it, vi } from "vitest";. Importing a function does not call it.
3	`vi.mock("react-native", () => ({`	Calls the named method: vi.mock("react-native", () => ({. Its implementation defines the side effect/result; use the symbol/file index to follow it.
4	`  View: "View",`	Sets/declares the named object property or style/type member: View: "View",. Interpret it in the enclosing object, props or type definition.
5	`  Text: "Text",`	Sets/declares the named object property or style/type member: Text: "Text",. Interpret it in the enclosing object, props or type definition.
6	`  StyleSheet: { create: (styles: unknown) => styles },`	Sets/declares the named object property or style/type member: StyleSheet: { create: (styles: unknown) => styles },. Interpret it in the enclosing object, props or type definition.
7	`}));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
8	`import ProductIdentityFields from "./ProductIdentityFields";`	Imports dependencies/types used below: import ProductIdentityFields from "./ProductIdentityFields";. Importing a function does not call it.
9	`import { nextProduct } from "../utils/productSelection";`	Imports dependencies/types used below: import { nextProduct } from "../utils/productSelection";. Importing a function does not call it.
10		Blank line separating logical sections; no executable operation.
11	`const products = [`	Declares/initializes local data used by the surrounding operation: const products = [. Collection contents and assignments below determine its purpose.
12	`  { id: "one", brand: "Brand A", subBrand: "Range A", brandAlias: "Alias A" },`	Continues the surrounding declaration/expression or text: { id: "one", brand: "Brand A", subBrand: "Range A", brandAlias: "Alias A" },. Read it with the preceding opening statement (const products = []); it is not a standalone business operation.

Line	Source code	Explanation / reading note
13	`  { id: "two", brand: "Brand B", subBrand: "Range B", brandAlias: "Alias B" },`	Continues the surrounding declaration/expression or text: { id: "two", brand: "Brand B", subBrand: "Range B", brandAlias: "Alias B" },. Read it with the preceding opening statement ({ id: "one", brand: "Brand A", subBrand: "Range A", brandAlias: "Alias A" },); it is not a standalone business operation.
14	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
15	`function displayed(product?: Parameters<typeof ProductIdentityFields>[0]["product"]) {`	Declares a callable function/method: function displayed(product?: Parameters<typeof ProductIdentityFields>[0]["product"]) {. Parameters supply its inputs; the following block implements the operation.
16	`  const fields = React.Children.toArray(`	Declares/initializes local data used by the surrounding operation: const fields = React.Children.toArray(. Collection contents and assignments below determine its purpose.
17	`    ProductIdentityFields({ product }).props.children,`	Continues the surrounding declaration/expression or text: ProductIdentityFields({ product }).props.children,. Read it with the preceding opening statement (const fields = React.Children.toArray(); it is not a standalone business operation.
18	`  ) as React.ReactElement<any>[];`	Continues the surrounding declaration/expression or text:) as React.ReactElement<any>[];. Read it with the preceding opening statement (ProductIdentityFields({ product }).props.children,); it is not a standalone business operation.
19	`  return fields.map(`	Returns fields.map(to the caller (or begins returned UI markup) and ends this execution path.
20	`    (field) =>`	Continues the surrounding declaration/expression or text: (field) =>. Read it with the preceding opening statement (return fields.map(); it is not a standalone business operation.
21	`      (React.Children.toArray(field.props.children)[1] as React.ReactElement<any>).props`	Calls the named method: (React.Children.toArray(field.props.children)[1] as React.ReactElement<any>).props. Its implementation defines the side effect/result; use the symbol/file index to follow it.
22	`        .accessibilityLabel,`	Continues the surrounding declaration/expression or text: .accessibilityLabel,. Read it with the preceding opening statement ((React.Children.toArray(field.props.children)[1] as React.ReactElement<any>).props); it is not a standalone business operation.
23	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
25	`describe("selected product identity", () => {`	Continues the surrounding declaration/expression or text: describe("selected product identity", () => {. Read it with the preceding opening statement (}); it is not a standalone business operation.
26	`  it("changes all three displayed fields when Next Product selects another product", () => {`	Continues the surrounding declaration/expression or text: it("changes all three displayed fields when Next Product selects another product", () => {. Read it with the preceding opening statement (describe("selected product identity", () => {); it is not a standalone business operation.
27	`    expect(displayed(products[0])).toEqual([`	Test assertion comparing an expected outcome to actual behavior: expect(displayed(products[0])).toEqual([. A mismatch fails the test.
28	`      "BRAND: Brand A",`	Continues the surrounding declaration/expression or text: "BRAND: Brand A",. Read it with the preceding opening statement (expect(displayed(products[0])).toEqual([); it is not a standalone business operation.
29	`      "SUB-BRAND: Range A",`	Continues the surrounding declaration/expression or text: "SUB-BRAND: Range A",. Read it with the preceding opening statement ("BRAND: Brand A",); it is not a standalone business operation.
30	`      "ALIAS: Alias A",`	Continues the surrounding declaration/expression or text: "ALIAS: Alias A",. Read it with the preceding opening statement ("SUB-BRAND: Range A",); it is not a standalone business operation.
31	`    ]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`    expect(displayed(nextProduct(products, "one"))).toEqual([`	Test assertion comparing an expected outcome to actual behavior: expect(displayed(nextProduct(products, "one"))).toEqual([. A mismatch fails the test.
33	`      "BRAND: Brand B",`	Continues the surrounding declaration/expression or text: "BRAND: Brand B",. Read it with the preceding opening statement (expect(displayed(nextProduct(products, "one"))).toEqual([); it is not a standalone business operation.
34	`      "SUB-BRAND: Range B",`	Continues the surrounding declaration/expression or text: "SUB-BRAND: Range B",. Read it with the preceding opening statement ("BRAND: Brand B",); it is not a standalone business operation.
35	`      "ALIAS: Alias B",`	Continues the surrounding declaration/expression or text: "ALIAS: Alias B",. Read it with the preceding opening statement ("SUB-BRAND: Range B",); it is not a standalone business operation.

Line	Source code	Explanation / reading note
36	`  ]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
37	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`it("wraps to the first product and respects the filtered product list", () => {`	Continues the surrounding declaration/expression or text: it("wraps to the first product and respects the filtered product list", () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
39	`  expect(nextProduct(products, "two")).toBe(products[0]);`	Test assertion comparing an expected outcome to actual behavior: expect(nextProduct(products, "two")).toBe(products[0]);. A mismatch fails the test.
40	`  expect(nextProduct([products[1]], "one")).toBe(products[1]);`	Test assertion comparing an expected outcome to actual behavior: expect(nextProduct([products[1]], "one")).toBe(products[1]);. A mismatch fails the test.
41	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42	`it("never retains another product's missing metadata", () => {`	Continues the surrounding declaration/expression or text: it("never retains another product's missing metadata", () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
43	`  expect(displayed({ brand: "Brand C" })).toEqual([`	Test assertion comparing an expected outcome to actual behavior: expect(displayed({ brand: "Brand C" })).toEqual([. A mismatch fails the test.
44	`    "BRAND: Brand C",`	Continues the surrounding declaration/expression or text: "BRAND: Brand C",. Read it with the preceding opening statement (expect(displayed({ brand: "Brand C" })).toEqual([); it is not a standalone business operation.
45	`    "SUB-BRAND: Not set in Salesforce",`	Continues the surrounding declaration/expression or text: "SUB-BRAND: Not set in Salesforce",. Read it with the preceding opening statement ("BRAND: Brand C",); it is not a standalone business operation.
46	`    "ALIAS: Not set in Salesforce",`	Continues the surrounding declaration/expression or text: "ALIAS: Not set in Salesforce",. Read it with the preceding opening statement ("SUB-BRAND: Not set in Salesforce",); it is not a standalone business operation.
47	`  ]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
48	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49	`  it("handles an empty catalogue", () => {`	Continues the surrounding declaration/expression or text: it("handles an empty catalogue", () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
50	`    expect(nextProduct([], "one")).toBeUndefined();`	Test assertion comparing an expected outcome to actual behavior: expect(nextProduct([], "one")).toBeUndefined();. A mismatch fails the test.
51	`    expect(displayed()).toEqual([`	Test assertion comparing an expected outcome to actual behavior: expect(displayed()).toEqual([. A mismatch fails the test.
52	`      "BRAND: No product selected",`	Continues the surrounding declaration/expression or text: "BRAND: No product selected",. Read it with the preceding opening statement (expect(displayed()).toEqual([); it is not a standalone business operation.
53	`      "SUB-BRAND: No product selected",`	Continues the surrounding declaration/expression or text: "SUB-BRAND: No product selected",. Read it with the preceding opening statement ("BRAND: No product selected",); it is not a standalone business operation.
54	`      "ALIAS: No product selected",`	Continues the surrounding declaration/expression or text: "ALIAS: No product selected",. Read it with the preceding opening statement ("SUB-BRAND: No product selected",); it is not a standalone business operation.
55	`    ]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
56	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/components/ProductIdentityFields.tsx

Displays brand, sub-brand and alias from the current product; does not retain a separate stale identity selection.

48 numbered source lines | SHA-256 f0cc17d35f8d313b67759e0697e6c8d1116ca13325c7567adffa8f6f59993587

Line	Source code	Explanation / reading note
1	`import React from "react";`	Imports dependencies/types used below: import React from "react";. Importing a function does not call it.
2	`import { StyleSheet, Text, View } from "react-native";`	Imports dependencies/types used below: import { StyleSheet, Text, View } from "react-native";. Importing a function does not call it.
3	`import type { Product } from "../types";`	Imports dependencies/types used below: import type { Product } from "../types";. Importing a function does not call it.
4	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
5		Blank line separating logical sections; no executable operation.
6	`/** Display the selected record's values, independently of catalogue filters. */`	Developer comment/documentation: Display the selected record's values, independently of catalogue filters. */ It is not executed.
7	`export default function ProductIdentityFields({`	Declares a callable function/method: export default function ProductIdentityFields({. Parameters supply its inputs; the following block implements the operation.
8	`  product,`	Continues the surrounding declaration/expression or text: product,. Read it with the preceding opening statement (export default function ProductIdentityFields({); it is not a standalone business operation.
9	`}: {`	Continues the surrounding declaration/expression or text: }: {. Read it with the preceding opening statement (product,); it is not a standalone business operation.
10	`  product?: Pick<Product, "brand" | "subBrand" | "brandAlias">;`	Sets/declares the named object property or style/type member: product?: Pick<Product, "brand" | "subBrand" | "brandAlias">;. Interpret it in the enclosing object, props or type definition.
11	`}) {`	Continues the surrounding declaration/expression or text: }) {. Read it with the preceding opening statement (product?: Pick<Product, "brand" | "subBrand" | "brandAlias">;); it is not a standalone business operation.

Line	Source code	Explanation / reading note
12	`  const fields = [`	Declares/initializes local data used by the surrounding operation: const fields = [. Collection contents and assignments below determine its purpose.
13	`    ["BRAND", product?.brand],`	Continues the surrounding declaration/expression or text: ["BRAND", product?.brand],. Read it with the preceding opening statement (const fields = []; it is not a standalone business operation.
14	`    ["SUB-BRAND", product?.subBrand],`	Continues the surrounding declaration/expression or text: ["SUB-BRAND", product?.subBrand],. Read it with the preceding opening statement (["BRAND", product?.brand],); it is not a standalone business operation.
15	`    ["ALIAS", product?.brandAlias],`	Continues the surrounding declaration/expression or text: ["ALIAS", product?.brandAlias],. Read it with the preceding opening statement (["SUB-BRAND", product?.subBrand],); it is not a standalone business operation.
16	`  ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
18	`    <View style={styles.row}>`	Renders/opens a UI element or component: <View style={styles.row}>. Props and child content below determine appearance and interactions.
19	`      {fields.map(([label, value]) => (`	Transforms/selects/aggregates collection values with the callback shown here: {fields.map(([label, value]) => (. Read the callback body and result assignment together.
20	`        <View key={label} style={styles.field}>`	Renders/opens a UI element or component: <View key={label} style={styles.field}>. Props and child content below determine appearance and interactions.
21	`          <Text style={styles.label}>{label}</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>{label}</Text>. Props and child content below determine appearance and interactions.
22	`          <Text`	Renders/opens a UI element or component: <Text. Props and child content below determine appearance and interactions.
23	`            style={styles.value}`	Assigns the right-hand expression to the named variable/property: style={styles.value}. This is in-memory unless it is later persisted by an explicit call.
24	`            accessibilityLabel={`${label}: ${value?.trim() || (product ? "Not set in Salesforce" : "No product selected")}`}`	Assigns the right-hand expression to the named variable/property: accessibilityLabel={`${label}: ${value?.trim() || (product ? "Not set in Salesforce" : "No product selected")}`}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
25	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (accessibilityLabel={`${label}: ${value?.trim() || (product ? "Not set in Salesforce" : "No product selected")}`}); it is not a standalone business operation.
26	`{value?.trim() || (product ? "Not set in Salesforce" : "No product selected")}`	Continues the surrounding declaration/expression or text: {value?.trim() || (product ? "Not set in Salesforce" : "No product selected")}. Read it with the preceding opening statement (>); it is not a standalone business operation.
27	`</Text>`	Closes the UI element/component opened above.
28	`</View>`	Closes the UI element/component opened above.
29	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`</View>`	Closes the UI element/component opened above.
31	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33		Blank line separating logical sections; no executable operation.
34	`const styles = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const styles = StyleSheet.create({. Collection contents and assignments below determine its purpose.
35	`row: { flexDirection: "row", flexWrap: "wrap", gap: 8, marginVertical: 10 },`	Sets/declares the named object property or style/type member: row: { flexDirection: "row", flexWrap: "wrap", gap: 8, marginVertical: 10 },. Interpret it in the enclosing object, props or type definition.
36	`field: {`	Sets/declares the named object property or style/type member: field: {. Interpret it in the enclosing object, props or type definition.
37	`flexGrow: 1,`	Sets/declares the named object property or style/type member: flexGrow: 1,. Interpret it in the enclosing object, props or type definition.
38	`flexBasis: 90,`	Sets/declares the named object property or style/type member: flexBasis: 90,. Interpret it in the enclosing object, props or type definition.
39	`minWidth: 0,`	Sets/declares the named object property or style/type member: minWidth: 0,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
40	`    padding: 10,`	Sets/declares the named object property or style/type member: padding: 10,. Interpret it in the enclosing object, props or type definition.
41	`    borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
42	`    backgroundColor: "#F1F8F6",`	Sets/declares the named object property or style/type member: backgroundColor: "#F1F8F6",. Interpret it in the enclosing object, props or type definition.
43	`    borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
44	`    borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
45	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
46	`  label: { color: colors.muted, fontSize: 10, fontWeight: "800", marginBottom: 4 },`	Sets/declares the named object property or style/type member: label: { color: colors.muted, fontSize: 10, fontWeight: "800", marginBottom: 4 },. Interpret it in the enclosing object, props or type definition.
47	`  value: { color: colors.ink, fontSize: 13, fontWeight: "700", flexShrink: 1 },`	Sets/declares the named object property or style/type member: value: { color: colors.ink, fontSize: 13, fontWeight: "700", flexShrink: 1 },. Interpret it in the enclosing object, props or type definition.
48	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/components/VisitField.test.tsx

Regression tests for VisitField. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

50 numbered source lines | SHA-256 2baac4a4698992f52de2e560802c9c6c1eb764f2ba696b1ee8d8a050e7cfe2c9

Line	Source code	Explanation / reading note
1	`import React from "react";`	Imports dependencies/types used below: import React from "react";. Importing a function does not call it.
2	`import { describe, expect, it, vi } from "vitest";`	Imports dependencies/types used below: import { describe, expect, it, vi } from "vitest";. Importing a function does not call it.
3	`import { readFileSync } from "node:fs";`	Imports dependencies/types used below: import { readFileSync } from "node:fs";. Importing a function does not call it.
4	`import { URL } from "node:url";`	Imports dependencies/types used below: import { URL } from "node:url";. Importing a function does not call it.
5	`vi.mock("react-native", () => ({`	Calls the named method: vi.mock("react-native", () => ({. Its implementation defines the side effect/result; use the symbol/file index to follow it.
6	`  View: "View",`	Sets/declares the named object property or style/type member: View: "View",. Interpret it in the enclosing object, props or type definition.
7	`  Text: "Text",`	Sets/declares the named object property or style/type member: Text: "Text",. Interpret it in the enclosing object, props or type definition.
8	`  TextInput: "TextInput",`	Sets/declares the named object property or style/type member: TextInput: "TextInput",. Interpret it in the enclosing object, props or type definition.
9	`  StyleSheet: { create: (styles: unknown) => styles },`	Sets/declares the named object property or style/type member: StyleSheet: { create: (styles: unknown) => styles },. Interpret it in the enclosing object, props or type definition.
10	`}));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
11	`import VisitField from "./VisitField";`	Imports dependencies/types used below: import VisitField from "./VisitField";. Importing a function does not call it.
12		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
13	`function children(props: Parameters<typeof VisitField>[0]) {`	Declares a callable function/method: function children(props: Parameters<typeof VisitField>[0]) {. Parameters supply its inputs; the following block implements the operation.
14	`  return React.Children.toArray(VisitField(props).props.children) as React.ReactElement<any>[];`	Returns React.Children.toArray(VisitField(props).props.children) as React.ReactElement<any>[] to the caller (or begins returned UI markup) and ends this execution path.
15	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
16		Blank line separating logical sections; no executable operation.
17	`describe("Outlet Visit field guidance", () => {`	Continues the surrounding declaration/expression or text: describe("Outlet Visit field guidance", () => {. Read it with the preceding opening statement; it is not a standalone business operation.
18	`  it("retains the visible label after entering a quantity", () => {`	Continues the surrounding declaration/expression or text: it("retains the visible label after entering a quantity", () => {. Read it with the preceding opening statement (describe("Outlet Visit field guidance", () => {); it is not a standalone business operation.
19	`    const [label, input] = children({ label: "Quantity", placeholder: "e.g. 10", value: "12" });`	Declares/initializes local data used by the surrounding operation: const [label, input] = children({ label: "Quantity", placeholder: "e.g. 10", value: "12" });. Collection contents and assignments below determine its purpose.
20	`    expect(label.props.children).toBe("Quantity");`	Test assertion comparing an expected outcome to actual behavior: expect(label.props.children).toBe("Quantity");. A mismatch fails the test.
21	`    expect(input.props.value).toBe("12");`	Test assertion comparing an expected outcome to actual behavior: expect(input.props.value).toBe("12");. A mismatch fails the test.
22	`    expect(input.props.accessibilityLabel).toBe("Quantity");`	Test assertion comparing an expected outcome to actual behavior: expect(input.props.accessibilityLabel).toBe("Quantity");. A mismatch fails the test.
23	`    expect(input.props.placeholderTextColor).toBe("#627873");`	Test assertion comparing an expected outcome to actual behavior: expect(input.props.placeholderTextColor).toBe("#627873");. A mismatch fails the test.
24	`    expect(input.props.style[1].color).toBeTruthy();`	Test assertion comparing an expected outcome to actual behavior: expect(input.props.style[1].color).toBeTruthy();. A mismatch fails the test.
25	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
26	`  it("uses existing hints as labels for the other visit forms", () => {`	Continues the surrounding declaration/expression or text: it("uses existing hints as labels for the other visit forms", () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
27	`    const [label] = children({ placeholder: "Return quantity" });`	Declares/initializes local data used by the surrounding operation: const [label] = children({ placeholder: "Return quantity" });. Collection contents and assignments below determine its purpose.
28	`    expect(label.props.children).toBe("Return quantity");`	Test assertion comparing an expected outcome to actual behavior: expect(label.props.children).toBe("Return quantity");. A mismatch fails the test.
29	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`  it("preserves input behavior and multiline notes", () => {`	Continues the surrounding declaration/expression or text: it("preserves input behavior and multiline notes", () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
31	`    const onChangeText = vi.fn();`	Declares/initializes local data used by the surrounding operation: const onChangeText = vi.fn();. Collection contents and assignments below determine its purpose.
32	`    const [, input] = children({`	Declares/initializes local data used by the surrounding operation: const [, input] = children({. Collection contents and assignments below determine its purpose.
33	`      placeholder: "Notes",`	Sets/declares the named object property or style/type member: placeholder: "Notes",. Interpret it in the enclosing object, props or type definition.
34	`      multiline: true,`	Sets/declares the named object property or style/type member: multiline: true,. Interpret it in the enclosing object, props or type definition.
35	`      keyboardType: "default",`	Sets/declares the named object property or style/type member: keyboardType: "default",. Interpret it in the enclosing object, props or type definition.
36	`      onChangeText,`	Continues the surrounding declaration/expression or text: onChangeText,. Read it with the preceding opening statement (keyboardType: "default",); it is not a standalone business operation.
37	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`    input.props.onChangeText("Retailer requested a follow-up");`	Calls the named method: input.props.onChangeText("Retailer requested a follow-up");. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
39	`    expect(onChangeText).toHaveBeenCalledWith("Retailer requested a follow-up");`	Test assertion comparing an expected outcome to actual behavior: expect(onChangeText).toHaveBeenCalledWith("Retailer requested a follow-up");. A mismatch fails the test.
40	`    expect(input.props.multiline).toBe(true);`	Test assertion comparing an expected outcome to actual behavior: expect(input.props.multiline).toBe(true);. A mismatch fails the test.
41	`    expect(input.props.style[2].textAlignVertical).toBe("top");`	Test assertion comparing an expected outcome to actual behavior: expect(input.props.style[2].textAlignVertical).toBe("top");. A mismatch fails the test.
42	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43	`  it("covers every input on the Outlet Visit screen, including quantity and discount", () => {`	Continues the surrounding declaration/expression or text: it("covers every input on the Outlet Visit screen, including quantity and discount", () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
44	`    const source = readFileSync(new URL("../screens/VisitScreen.tsx", import.meta.url), "utf8");`	Declares/initializes local data used by the surrounding operation: const source = readFileSync(new URL("../screens/VisitScreen.tsx", import.meta.url), "utf8");. Collection contents and assignments below determine its purpose.
45	`    expect(source).not.toContain("<TextInput");`	Test assertion comparing an expected outcome to actual behavior: expect(source).not.toContain("<TextInput");. A mismatch fails the test.
46	`    expect(source.match(/<VisitField\b/g)?.length).toBeGreaterThan(20);`	Test assertion comparing an expected outcome to actual behavior: expect(source.match(/<VisitField\b/g)?.length).toBeGreaterThan(20);. A mismatch fails the test.
47	`    expect(source).toContain('label="Quantity"');`	Test assertion comparing an expected outcome to actual behavior: expect(source).toContain('label="Quantity"');. A mismatch fails the test.
48	`    expect(source).toContain('label="Discount (₹)"');`	Test assertion comparing an expected outcome to actual behavior: expect(source).toContain('label="Discount (₹)"');. A mismatch fails the test.
49	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
50	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/components/VisitField.tsx

Reusable labelled input with explicit visible placeholder/text styling, avoiding invisible native hints.

37 numbered source lines | SHA-256 07d68a76efd4b6906c65e6496e3becb70fcf4d37bc057b5e98287c32bc7934c5

Line	Source code	Explanation / reading note
1	`import React from "react";`	Imports dependencies/types used below: import React from "react";. Importing a function does not call it.
2	`import { StyleSheet, Text, TextInput, TextInputProps, View } from "react-native";`	Imports dependencies/types used below: import { StyleSheet, Text, TextInput, TextInputProps, View } from "react-native";. Importing a function does not call it.
3	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
4		Blank line separating logical sections; no executable operation.
5	`type VisitFieldProps = TextInputProps & { label?: string };`	Defines a compile-time data contract: type VisitFieldProps = TextInputProps & { label?: string };. TypeScript types do not validate untrusted runtime JSON by themselves.
6		Blank line separating logical sections; no executable operation.
7	`/** Persistent field names and explicit colors keep Android form inputs readable. */`	Developer comment/documentation: Persistent field names and explicit colors keep Android form inputs readable. */ It is not executed.
8	`export default function VisitField({`	Declares a callable function/method: export default function VisitField({. Parameters supply its inputs; the following block implements the operation.
9	`  label,`	Continues the surrounding declaration/expression or text: label,. Read it with the preceding opening statement (export default function VisitField({); it is not a standalone business operation.
10	`  placeholder,`	Continues the surrounding declaration/expression or text: placeholder,. Read it with the preceding opening statement (label,); it is not a standalone business operation.
11	`  style,`	Continues the surrounding declaration/expression or text: style,. Read it with the preceding opening statement (placeholder,); it is not a standalone business operation.
12	`  multiline,`	Continues the surrounding declaration/expression or text: multiline,. Read it with the preceding opening statement (style,); it is not a standalone business operation.
13	`  ...input`	Continues the surrounding declaration/expression or text: ...input. Read it with the preceding opening statement (multiline,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
14	`}: VisitFieldProps) {`	Continues the surrounding declaration/expression or text: }: VisitFieldProps) {. Read it with the preceding opening statement (...input); it is not a standalone business operation.
15	`  const fieldName = label || placeholder;`	Declares/initializes local data used by the surrounding operation: const fieldName = label || placeholder;. Collection contents and assignments below determine its purpose.
16	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
17	`    <View style={styles.field}>`	Renders/opens a UI element or component: <View style={styles.field}>. Props and child content below determine appearance and interactions.
18	`      <Text style={styles.label}>{fieldName}</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>{fieldName}</Text>. Props and child content below determine appearance and interactions.
19	`      <TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
20	`        {...input}`	Continues the surrounding declaration/expression or text: {...input}. Read it with the preceding opening statement (<TextInput); it is not a standalone business operation.
21	`        accessibilityLabel={input.accessibilityLabel || fieldName}`	Assigns the right-hand expression to the named variable/property: accessibilityLabel={input.accessibilityLabel || fieldName}. This is in-memory unless it is later persisted by an explicit call.
22	`        placeholder={placeholder}`	Assigns the right-hand expression to the named variable/property: placeholder={placeholder}. This is in-memory unless it is later persisted by an explicit call.
23	`        placeholderTextColor="#627873"`	Assigns the right-hand expression to the named variable/property: placeholderTextColor="#627873". This is in-memory unless it is later persisted by an explicit call.
24	`        selectionColor={colors.brand}`	Assigns the right-hand expression to the named variable/property: selectionColor={colors.brand}. This is in-memory unless it is later persisted by an explicit call.
25	`        multiline={multiline}`	Assigns the right-hand expression to the named variable/property: multiline={multiline}. This is in-memory unless it is later persisted by an explicit call.
26	`        style={[style, styles.input, multiline && styles.notes]}`	Assigns the right-hand expression to the named variable/property: style={[style, styles.input, multiline && styles.notes]}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
27	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (style={[style, styles.input, multiline && styles.notes]}); it is not a standalone business operation.
28	`</View>`	Closes the UI element/component opened above.
29	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31		Blank line separating logical sections; no executable operation.
32	`const styles = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const styles = StyleSheet.create({. Collection contents and assignments below determine its purpose.
33	`field: { marginTop: 12 },`	Sets/declares the named object property or style/type member: field: { marginTop: 12 },. Interpret it in the enclosing object, props or type definition.
34	`label: { color: colors.ink, fontSize: 14, fontWeight: "700", marginBottom: 4 },`	Sets/declares the named object property or style/type member: label: { color: colors.ink, fontSize: 14, fontWeight: "700", marginBottom: 4 },. Interpret it in the enclosing object, props or type definition.
35	`input: { color: colors.ink, backgroundColor: "#FFFFFF", fontSize: 16, minHeight: 50 },`	Sets/declares the named object property or style/type member: input: { color: colors.ink, backgroundColor: "#FFFFFF", fontSize: 16, minHeight: 50 },. Interpret it in the enclosing object, props or type definition.
36	`notes: { minHeight: 100, textAlignVertical: "top" },`	Sets/declares the named object property or style/type member: notes: { minHeight: 100, textAlignVertical: "top" },. Interpret it in the enclosing object, props or type definition.
37	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/components/ui.tsx

Shared buttons/cards/labels/money formatting so screen presentation and disabled states remain consistent.

70 numbered source lines | SHA-256 b58cddcb212bea2a940732de7812ee638f96fca9306a42a4501b6d1e64a5ce59

Line	Source code	Explanation / reading note
1	`import React from "react";`	Imports dependencies/types used below: import React from "react";. Importing a function does not call it.
2	`import { Pressable, StyleSheet, Text, View, ViewStyle } from "react-native";`	Imports dependencies/types used below: import { Pressable, StyleSheet, Text, View, ViewStyle } from "react-native";. Importing a function does not call it.
3	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
4	`export const Card = ({ children, style }: { children: React.ReactNode; style?: ViewStyle }) => (`	Assigns the right-hand expression to the named variable/property: export const Card = ({ children, style }: { children: React.ReactNode; style?: ViewStyle }) => (. This is in-memory unless it is later persisted by an explicit call.
5	`  <View style={[s.card, style]}>{children}</View>`	Renders/opens a UI element or component: <View style={[s.card, style]}>{children}</View>. Props and child content below determine appearance and interactions.
6	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
7	`export const Button = ({`	Assigns the right-hand expression to the named variable/property: export const Button = ({. This is in-memory unless it is later persisted by an explicit call.
8	`  title,`	Continues the surrounding declaration/expression or text: title,. Read it with the preceding opening statement (export const Button = ({); it is not a standalone business operation.
9	`  onPress,`	Continues the surrounding declaration/expression or text: onPress,. Read it with the preceding opening statement (title,); it is not a standalone business operation.
10	`  kind = "brand",`	Assigns the right-hand expression to the named variable/property: kind = "brand",. This is in-memory unless it is later persisted by an explicit call.
11	`  disabled = false,`	Assigns the right-hand expression to the named variable/property: disabled = false,. This is in-memory unless it is later persisted by an explicit call.
12	`}: {`	Continues the surrounding declaration/expression or text: }: {. Read it with the preceding opening statement (disabled = false,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
13	`  title: string;`	Sets/declares the named object property or style/type member: title: string;. Interpret it in the enclosing object, props or type definition.
14	`  onPress: () => void;`	Sets/declares the named object property or style/type member: onPress: () => void;. Interpret it in the enclosing object, props or type definition.
15	`  kind?: "brand" | "secondary" | "danger";`	Sets/declares the named object property or style/type member: kind?: "brand" | "secondary" | "danger";. Interpret it in the enclosing object, props or type definition.
16	`  disabled?: boolean;`	Sets/declares the named object property or style/type member: disabled?: boolean;. Interpret it in the enclosing object, props or type definition.
17	`}) => (`	Continues the surrounding declaration/expression or text: }) => (. Read it with the preceding opening statement (disabled?: boolean;); it is not a standalone business operation.
18	`  <Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
19	`    disabled={disabled}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
20	`    onPress={onPress}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
21	`    style={[`	Assigns the right-hand expression to the named variable/property: style={[. This is in-memory unless it is later persisted by an explicit call.
22	`      s.button,`	Continues the surrounding declaration/expression or text: s.button,. Read it with the preceding opening statement (style={[); it is not a standalone business operation.
23	`      kind === "secondary" && s.secondary,`	Continues the surrounding declaration/expression or text: kind === "secondary" && s.secondary,. Read it with the preceding opening statement (s.button,); it is not a standalone business operation.
24	`      kind === "danger" && s.danger,`	Continues the surrounding declaration/expression or text: kind === "danger" && s.danger,. Read it with the preceding opening statement (kind === "secondary" && s.secondary,); it is not a standalone business operation.
25	`      disabled && { opacity: 0.45 },`	Continues the surrounding declaration/expression or text: disabled && { opacity: 0.45 },. Read it with the preceding opening statement (kind === "danger" && s.danger,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
26	`    ]}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
27	`  >`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement ( ]}); it is not a standalone business operation.
28	`    <Text style={[s.buttonText, kind === "secondary" && { color: colors.brand }]}>{title}</Text>`	Renders/opens a UI element or component: <Text style={[s.buttonText, kind === "secondary" && { color: colors.brand }]}>{title}</Text>. Props and child content below determine appearance and interactions.
29	`  </Pressable>`	Closes the UI element/component opened above.
30	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31	`export const Label = ({ children }: { children: React.ReactNode }) => (`	Assigns the right-hand expression to the named variable/property: export const Label = ({ children }: { children: React.ReactNode }) => (. This is in-memory unless it is later persisted by an explicit call.
32	`  <Text style={s.label}>{children}</Text>`	Renders/opens a UI element or component: <Text style={s.label}>{children}</Text>. Props and child content below determine appearance and interactions.
33	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`export const Money = ({ value }: { value: number }) => (`	Assigns the right-hand expression to the named variable/property: export const Money = ({ value }: { value: number }) => (. This is in-memory unless it is later persisted by an explicit call.
35	`  <Text>₹{new Intl.NumberFormat("en-IN").format(value)}</Text>`	Renders/opens a UI element or component: <Text>₹{new Intl.NumberFormat("en-IN").format(value)}</Text>. Props and child content below determine appearance and interactions.
36	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
37	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
38	`  card: {`	Sets/declares the named object property or style/type member: card: {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
39	`backgroundColor: colors.white,`	Sets/declares the named object property or style/type member: backgroundColor: colors.white,. Interpret it in the enclosing object, props or type definition.
40	`borderRadius: 18,`	Sets/declares the named object property or style/type member: borderRadius: 18,. Interpret it in the enclosing object, props or type definition.
41	`padding: 16,`	Sets/declares the named object property or style/type member: padding: 16,. Interpret it in the enclosing object, props or type definition.
42	`marginBottom: 12,`	Sets/declares the named object property or style/type member: marginBottom: 12,. Interpret it in the enclosing object, props or type definition.
43	`shadowColor: "#032D60",`	Sets/declares the named object property or style/type member: shadowColor: "#032D60",. Interpret it in the enclosing object, props or type definition.
44	`shadowOpacity: 0.08,`	Sets/declares the named object property or style/type member: shadowOpacity: 0.08,. Interpret it in the enclosing object, props or type definition.
45	`shadowRadius: 12,`	Sets/declares the named object property or style/type member: shadowRadius: 12,. Interpret it in the enclosing object, props or type definition.
46	`elevation: 3,`	Sets/declares the named object property or style/type member: elevation: 3,. Interpret it in the enclosing object, props or type definition.
47	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48	`button: {`	Sets/declares the named object property or style/type member: button: {. Interpret it in the enclosing object, props or type definition.
49	`backgroundColor: colors.brand,`	Sets/declares the named object property or style/type member: backgroundColor: colors.brand,. Interpret it in the enclosing object, props or type definition.
50	`paddingVertical: 14,`	Sets/declares the named object property or style/type member: paddingVertical: 14,. Interpret it in the enclosing object, props or type definition.
51	`paddingHorizontal: 18,`	Sets/declares the named object property or style/type member: paddingHorizontal: 18,. Interpret it in the enclosing object, props or type definition.
52	`borderRadius: 14,`	Sets/declares the named object property or style/type member: borderRadius: 14,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
53	`alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
54	`marginVertical: 5,`	Sets/declares the named object property or style/type member: marginVertical: 5,. Interpret it in the enclosing object, props or type definition.
55	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
56	`secondary: {`	Sets/declares the named object property or style/type member: secondary: {. Interpret it in the enclosing object, props or type definition.
57	`backgroundColor: colors.white,`	Sets/declares the named object property or style/type member: backgroundColor: colors.white,. Interpret it in the enclosing object, props or type definition.
58	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
59	`borderColor: colors.brand,`	Sets/declares the named object property or style/type member: borderColor: colors.brand,. Interpret it in the enclosing object, props or type definition.
60	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
61	`danger: { backgroundColor: colors.danger },`	Sets/declares the named object property or style/type member: danger: { backgroundColor: colors.danger },. Interpret it in the enclosing object, props or type definition.
62	`buttonText: { color: colors.white, fontWeight: "800" },`	Sets/declares the named object property or style/type member: buttonText: { color: colors.white, fontWeight: "800" },. Interpret it in the enclosing object, props or type definition.
63	`label: {`	Sets/declares the named object property or style/type member: label: {. Interpret it in the enclosing object, props or type definition.
64	`fontSize: 12,`	Sets/declares the named object property or style/type member: fontSize: 12,. Interpret it in the enclosing object, props or type definition.
65	`color: colors.muted,`	Sets/declares the named object property or style/type member: color: colors.muted,. Interpret it in the enclosing object, props or type definition.
66	`fontWeight: "700",`	Sets/declares the named object property or style/type member: fontWeight: "700",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
67	`    textTransform: "uppercase",`	Sets/declares the named object property or style/type member: textTransform: "uppercase",. Interpret it in the enclosing object, props or type definition.
68	`    letterSpacing: 0.8,`	Declares/initializes local data used by the surrounding operation: letterSpacing: 0.8,. Collection contents and assignments below determine its purpose.
69	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
70	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/constants/theme.ts

Shared presentation tokens such as colors, spacing and typography. Changing these affects appearance, not business record persistence.

13 numbered source lines | SHA-256 208a033524aad2f891aa145473ee7d19615fe839bee605f511d05ed26c7d2e56

Line	Source code	Explanation / reading note
1	`export const colors = {`	Assigns the right-hand expression to the named variable/property: export const colors = {. This is in-memory unless it is later persisted by an explicit call.
2	`  navy: "#123F3B",`	Sets/declares the named object property or style/type member: navy: "#123F3B",. Interpret it in the enclosing object, props or type definition.
3	`  brand: "#147D74",`	Sets/declares the named object property or style/type member: brand: "#147D74",. Interpret it in the enclosing object, props or type definition.
4	`  blue: "#F26B4A",`	Sets/declares the named object property or style/type member: blue: "#F26B4A",. Interpret it in the enclosing object, props or type definition.
5	`  ink: "#173A36",`	Sets/declares the named object property or style/type member: ink: "#173A36",. Interpret it in the enclosing object, props or type definition.
6	`  muted: "#627873",`	Sets/declares the named object property or style/type member: muted: "#627873",. Interpret it in the enclosing object, props or type definition.
7	`  surface: "#F7F4EC",`	Sets/declares the named object property or style/type member: surface: "#F7F4EC",. Interpret it in the enclosing object, props or type definition.
8	`  white: "#FFFFFF",`	Sets/declares the named object property or style/type member: white: "#FFFFFF",. Interpret it in the enclosing object, props or type definition.
9	`  success: "#27936A",`	Sets/declares the named object property or style/type member: success: "#27936A",. Interpret it in the enclosing object, props or type definition.
10	`  warning: "#E69A3B",`	Sets/declares the named object property or style/type member: warning: "#E69A3B",. Interpret it in the enclosing object, props or type definition.
11	`  danger: "#C94F45",`	Sets/declares the named object property or style/type member: danger: "#C94F45",. Interpret it in the enclosing object, props or type definition.
12	`  border: "#D6E3DE",`	Sets/declares the named object property or style/type member: border: "#D6E3DE",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
13	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/data/orgOutlets.ts

Local catalogue/demo snapshot or mock fixture data. Static data is not proof of current Salesforce state; inspect the caller and USE_MOCK_DATA configuration.

31 numbered source lines | SHA-256 3ffd99f13f4dfec9d4fecbbac5e2c3e1f5ffa07fc93cd8efea0fb59df5b33de0

Line	Source code	Explanation / reading note
1	`import type { Store } from "../types";`	Imports dependencies/types used below: import type { Store } from "../types";. Importing a function does not call it.
2	`export const orgOutlets: Store[] = [`	Assigns the right-hand expression to the named variable/property: export const orgOutlets: Store[] = [. This is in-memory unless it is later persisted by an explicit call.
3	`  ["a05jV000002aKP3QAM", "EC City Bazaar", "9210000088", "MG Road 3rd cross"],`	Continues the surrounding declaration/expression or text: ["a05jV000002aKP3QAM", "EC City Bazaar", "9210000088", "MG Road 3rd cross"],. Read it with the preceding opening statement (export const orgOutlets: Store[] = []; it is not a standalone business operation.
4	`  ["a05jV000002aKP5QAM", "EC Corner Shop", "9210000090", "Central Market Beat"],`	Continues the surrounding declaration/expression or text: ["a05jV000002aKP5QAM", "EC Corner Shop", "9210000090", "Central Market Beat"],. Read it with the preceding opening statement (["a05jV000002aKP3QAM", "EC City Bazaar", "9210000088", "MG Road 3rd cross"],); it is not a standalone business operation.
5	`  ["a05jV000002aKP4QAM", "EC Daily Needs", "9210000089", "Electronic City Beat"],`	Continues the surrounding declaration/expression or text: ["a05jV000002aKP4QAM", "EC Daily Needs", "9210000089", "Electronic City Beat"],. Read it with the preceding opening statement (["a05jV000002aKP5QAM", "EC Corner Shop", "9210000090", "Central Market Beat"],); it is not a standalone business operation.
6	`  ["a05jV000002aKOwQAM", "EC Family Mart", "9210000081", "Electronic City Beat"],`	Continues the surrounding declaration/expression or text: ["a05jV000002aKOwQAM", "EC Family Mart", "9210000081", "Electronic City Beat"],. Read it with the preceding opening statement (["a05jV000002aKP4QAM", "EC Daily Needs", "9210000089", "Electronic City Beat"],); it is not a standalone business operation.
7	`  ["a05jV000002aKP1QAM", "EC Fresh Mart", "9210000086", "Electronic City Beat"],`	Continues the surrounding declaration/expression or text: ["a05jV000002aKP1QAM", "EC Fresh Mart", "9210000086", "Electronic City Beat"],. Read it with the preceding opening statement (["a05jV000002aKOwQAM", "EC Family Mart", "9210000081", "Electronic City Beat"],); it is not a standalone business operation.
8	`  ["a05jV000002aKOyQAM", "EC Green Grocers", "9210000083", "Electronic City Beat"],`	Continues the surrounding declaration/expression or text: ["a05jV000002aKOyQAM", "EC Green Grocers", "9210000083", "Electronic City Beat"],. Read it with the preceding opening statement (["a05jV000002aKP1QAM", "EC Fresh Mart", "9210000086", "Electronic City Beat"],); it is not a standalone business operation.

Line	Source code	Explanation / reading note
9	`  ["a05jV000002aKP0QAM", "EC Provision House", "9210000085", "Electronic City Beat"],`	Continues the surrounding declaration/expression or text: ["a05jV000002aKP0QAM", "EC Provision House", "9210000085", "Electronic City Beat"],. Read it with the preceding opening statement (["a05jV000002aKOyQAM", "EC Green Grocers", "9210000083", "Electronic City Beat"],); it is not a standalone business operation.
10	`  ["a05jV000002aKOxQAM", "EC Super Store", "9210000082", "Electronic City Beat"],`	Continues the surrounding declaration/expression or text: ["a05jV000002aKOxQAM", "EC Super Store", "9210000082", "Electronic City Beat"],. Read it with the preceding opening statement (["a05jV000002aKP0QAM", "EC Provision House", "9210000085", "Electronic City Beat"],); it is not a standalone business operation.
11	`  ["a05jV000002aKP2QAM", "EC Traders", "9210000087", "Electronic City Beat"],`	Continues the surrounding declaration/expression or text: ["a05jV000002aKP2QAM", "EC Traders", "9210000087", "Electronic City Beat"],. Read it with the preceding opening statement (["a05jV000002aKOxQAM", "EC Super Store", "9210000082", "Electronic City Beat"],); it is not a standalone business operation.
12	`  ["a05jV000002aKOzQAM", "EC Value Store", "9210000084", "Electronic City Beat"],`	Continues the surrounding declaration/expression or text: ["a05jV000002aKOzQAM", "EC Value Store", "9210000084", "Electronic City Beat"],. Read it with the preceding opening statement (["a05jV000002aKP2QAM", "EC Traders", "9210000087", "Electronic City Beat"],); it is not a standalone business operation.
13	`].map(`	Transforms/selects/aggregates collection values with the callback shown here:].map(. Read the callback body and result assignment together.
14	`  ([id, name, phone, beat], i) =>`	Continues the surrounding declaration/expression or text: ([id, name, phone, beat], i) =>. Read it with the preceding opening statement (].map(); it is not a standalone business operation.
15	`    ({`	Continues the surrounding declaration/expression or text: ({. Read it with the preceding opening statement (([id, name, phone, beat], i) =>); it is not a standalone business operation.
16	`      id,`	Continues the surrounding declaration/expression or text: id,. Read it with the preceding opening statement (({); it is not a standalone business operation.
17	`      beatId: "snapshot",`	Sets/declares the named object property or style/type member: beatId: "snapshot",. Interpret it in the enclosing object, props or type definition.
18	`      name,`	Continues the surrounding declaration/expression or text: name,. Read it with the preceding opening statement (beatId: "snapshot",); it is not a standalone business operation.
19	`      code: \`EC-OUT-${String(i + 1).padStart(3, "0")}\`,`	Sets/declares the named object property or style/type member: code: `EC-OUT-${String(i + 1).padStart(3, "0")}`,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
20	`address: "Electronic City, Bengaluru",`	Sets/declares the named object property or style/type member: address: "Electronic City, Bengaluru",. Interpret it in the enclosing object, props or type definition.
21	`contact: phone,`	Sets/declares the named object property or style/type member: contact: phone,. Interpret it in the enclosing object, props or type definition.
22	`status: "Active",`	Sets/declares the named object property or style/type member: status: "Active",. Interpret it in the enclosing object, props or type definition.
23	`lastVisit: "None",`	Sets/declares the named object property or style/type member: lastVisit: "None",. Interpret it in the enclosing object, props or type definition.
24	`lastOrder: 0,`	Sets/declares the named object property or style/type member: lastOrder: 0,. Interpret it in the enclosing object, props or type definition.
25	`latitude: 12.84,`	Sets/declares the named object property or style/type member: latitude: 12.84,. Interpret it in the enclosing object, props or type definition.
26	`longitude: 77.67,`	Sets/declares the named object property or style/type member: longitude: 77.67,. Interpret it in the enclosing object, props or type definition.
27	`beatName: beat,`	Sets/declares the named object property or style/type member: beatName: beat,. Interpret it in the enclosing object, props or type definition.
28	`owner: "Retail Partner",`	Sets/declares the named object property or style/type member: owner: "Retail Partner",. Interpret it in the enclosing object, props or type definition.
29	`distance: 18.4 + i / 10,`	Sets/declares the named object property or style/type member: distance: 18.4 + i / 10,. Interpret it in the enclosing object, props or type definition.
30	`}) as Store,`	Continues the surrounding declaration/expression or text: }) as Store,. Read it with the preceding opening statement (distance: 18.4 + i / 10,); it is not a standalone business operation.
31	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/data/orgProducts.ts

Local catalogue/demo snapshot or mock fixture data. Static data is not proof of current Salesforce state; inspect the caller and USE_MOCK_DATA configuration.

33 numbered source lines | SHA-256 39ca20458fdc614ed968f054a156b7886a060c4b8ecff2c167864f1c17b67da5

Line	Source code	Explanation / reading note
1	`import type { Product } from "../types";`	Imports dependencies/types used below: import type { Product } from "../types";. Importing a function does not call it.
2		Blank line separating logical sections; no executable operation.
3	`// Last successful Salesforce synchronization. The API replaces this snapshot when online.`	Developer comment/documentation: Last successful Salesforce synchronization. The API replaces this snapshot when online. It is not executed.
4	`export const orgProducts: Product[] = [`	Assigns the right-hand expression to the named variable/property: export const orgProducts: Product[] = [. This is in-memory unless it is later persisted by an explicit call.
5	`  ["a04jV000000WyndQAC", "Aashirvaad Atta 5kg", "SFA-P013", 263.5, 800],`	Continues the surrounding declaration/expression or text: ["a04jV000000WyndQAC", "Aashirvaad Atta 5kg", "SFA-P013", 263.5, 800],. Read it with the preceding opening statement (export const orgProducts: Product[] = []; it is not a standalone business operation.
6	`  ["a04jV000000WynYQAS", "Bingo Mad Angles", "SFA-P008", 17, 675],`	Continues the surrounding declaration/expression or text: ["a04jV000000WynYQAS", "Bingo Mad Angles", "SFA-P008", 17, 675],. Read it with the preceding opening statement (["a04jV000000WyndQAC", "Aashirvaad Atta 5kg", "SFA-P013", 263.5, 800],); it is not a standalone business operation.
7	`  ["a04jV000000WynSQAS", "Britannia Good Day Cashew", "SFA-P002", 34, 525],`	Continues the surrounding declaration/expression or text: ["a04jV000000WynSQAS", "Britannia Good Day Cashew", "SFA-P002", 34, 525],. Read it with the preceding opening statement (["a04jV000000WynYQAS", "Bingo Mad Angles", "SFA-P008", 17, 675],); it is not a standalone business operation.
8	`  ["a04jV000000WyniQAC", "Colgate Strong Teeth 200g", "SFA-P018", 97.75, 925],`	Continues the surrounding declaration/expression or text: ["a04jV000000WyniQAC", "Colgate Strong Teeth 200g", "SFA-P018", 97.75, 925],. Read it with the preceding opening statement (["a04jV000000WynSQAS", "Britannia Good Day Cashew", "SFA-P002", 34, 525],); it is not a standalone business operation.
9	`  ["a04jV000000WynjQAC", "Dettol Handwash 200ml", "SFA-P019", 84.15, 950],`	Continues the surrounding declaration/expression or text: ["a04jV000000WynjQAC", "Dettol Handwash 200ml", "SFA-P019", 84.15, 950],. Read it with the preceding opening statement (["a04jV000000WyniQAC", "Colgate Strong Teeth 200g", "SFA-P018", 97.75, 925],); it is not a standalone business operation.

Line	Source code	Explanation / reading note
10	`["a04jV000000WynhQAC", "Dove Bathing Bar", "SFA-P017", 55.25, 900],`	Continues the surrounding declaration/expression or text: ["a04jV000000WynhQAC", "Dove Bathing Bar", "SFA-P017", 55.25, 900],. Read it with the preceding opening statement (["a04jV000000WynjQAC", "Dettol Handwash 200ml", "SFA-P019", 84.15, 950],); it is not a standalone business operation.
11	`["a04jV000000WyneQAC", "Fortune Sunflower Oil 1L", "SFA-P014", 123.25, 825],`	Continues the surrounding declaration/expression or text: ["a04jV000000WyneQAC", "Fortune Sunflower Oil 1L", "SFA-P014", 123.25, 825],. Read it with the preceding opening statement (["a04jV000000WynhQAC", "Dove Bathing Bar", "SFA-P017", 55.25, 900],); it is not a standalone business operation.
12	`["a04jV000000WynZQAS", "Haldiram Aloo Bhujia", "SFA-P009", 46.75, 700],`	Continues the surrounding declaration/expression or text: ["a04jV000000WynZQAS", "Haldiram Aloo Bhujia", "SFA-P009", 46.75, 700],. Read it with the preceding opening statement (["a04jV000000WyneQAC", "Fortune Sunflower Oil 1L", "SFA-P014", 123.25, 825],); it is not a standalone business operation.
13	`["a04jV000000WynVQAS", "Hide and Seek Chocolate", "SFA-P005", 42.5, 600],`	Continues the surrounding declaration/expression or text: ["a04jV000000WynVQAS", "Hide and Seek Chocolate", "SFA-P005", 42.5, 600],. Read it with the preceding opening statement (["a04jV000000WynZQAS", "Haldiram Aloo Bhujia", "SFA-P009", 46.75, 700],); it is not a standalone business operation.
14	`["a04jV000000WynWQAS", "Kurkure Masala Munch", "SFA-P006", 17, 625],`	Continues the surrounding declaration/expression or text: ["a04jV000000WynWQAS", "Kurkure Masala Munch", "SFA-P006", 17, 625],. Read it with the preceding opening statement (["a04jV000000WynVQAS", "Hide and Seek Chocolate", "SFA-P005", 42.5, 600],); it is not a standalone business operation.
15	`["a04jV000000WynXQAS", "Lays Classic Salted", "SFA-P007", 17, 650],`	Continues the surrounding declaration/expression or text: ["a04jV000000WynXQAS", "Lays Classic Salted", "SFA-P007", 17, 650],. Read it with the preceding opening statement (["a04jV000000WynWQAS", "Kurkure Masala Munch", "SFA-P006", 17, 625],); it is not a standalone business operation.
16	`["a04jV000000WynaQAC", "Maggi 2-Minute Noodles", "SFA-P010", 11.9, 725],`	Continues the surrounding declaration/expression or text: ["a04jV000000WynaQAC", "Maggi 2-Minute Noodles", "SFA-P010", 11.9, 725],. Read it with the preceding opening statement (["a04jV000000WynXQAS", "Lays Classic Salted", "SFA-P007", 17, 650],); it is not a standalone business operation.
17	`["a04jV000000WynUQAS", "Oreo Vanilla Creme", "SFA-P004", 29.75, 575],`	Continues the surrounding declaration/expression or text: ["a04jV000000WynUQAS", "Oreo Vanilla Creme", "SFA-P004", 29.75, 575],. Read it with the preceding opening statement (["a04jV000000WynaQAC", "Maggi 2-Minute Noodles", "SFA-P010", 11.9, 725],); it is not a standalone business operation.

Line	Source code	Explanation / reading note
18	`["a04jV000000VjbxQAC", "Parle-G Demo Pack", "PG-DEMO-001", 9, 500],`	Continues the surrounding declaration/expression or text: ["a04jV000000VjbxQAC", "Parle-G Demo Pack", "PG-DEMO-001", 9, 500],. Read it with the preceding opening statement (["a04jV000000WynUQAS", "Oreo Vanilla Creme", "SFA-P004", 29.75, 575],); it is not a standalone business operation.
19	`["a04jV000000WynRQAS", "Parle-G Original 100g", "SFA-P001", 8.5, 500],`	Continues the surrounding declaration/expression or text: ["a04jV000000WynRQAS", "Parle-G Original 100g", "SFA-P001", 8.5, 500],. Read it with the preceding opening statement (["a04jV000000VjbxQAC", "Parle-G Demo Pack", "PG-DEMO-001", 9, 500],); it is not a standalone business operation.
20	`["a04jV000000WynkQAC", "Red Label Tea 500g", "SFA-P020", 229.5, 975],`	Continues the surrounding declaration/expression or text: ["a04jV000000WynkQAC", "Red Label Tea 500g", "SFA-P020", 229.5, 975],. Read it with the preceding opening statement (["a04jV000000WynRQAS", "Parle-G Original 100g", "SFA-P001", 8.5, 500],); it is not a standalone business operation.
21	`["a04jV000000WynTQAS", "Sunfeast Marie Light", "SFA-P003", 25.5, 550],`	Continues the surrounding declaration/expression or text: ["a04jV000000WynTQAS", "Sunfeast Marie Light", "SFA-P003", 25.5, 550],. Read it with the preceding opening statement (["a04jV000000WynkQAC", "Red Label Tea 500g", "SFA-P020", 229.5, 975],); it is not a standalone business operation.
22	`["a04jV000000XkNRQA0", "Sunrise Millet Bites", "SMB-100", 22, 480],`	Continues the surrounding declaration/expression or text: ["a04jV000000XkNRQA0", "Sunrise Millet Bites", "SMB-100", 22, 480],. Read it with the preceding opening statement (["a04jV000000WynTQAS", "Sunfeast Marie Light", "SFA-P003", 25.5, 550],); it is not a standalone business operation.
23	`["a04jV000000WynfQAC", "Surf Excel Easy Wash 1kg", "SFA-P015", 140.25, 850],`	Continues the surrounding declaration/expression or text: ["a04jV000000WynfQAC", "Surf Excel Easy Wash 1kg", "SFA-P015", 140.25, 850],. Read it with the preceding opening statement (["a04jV000000XkNRQA0", "Sunrise Millet Bites", "SMB-100", 22, 480],); it is not a standalone business operation.
24	`["a04jV000000WyncQAC", "Tata Salt 1kg", "SFA-P012", 23.8, 775],`	Continues the surrounding declaration/expression or text: ["a04jV000000WyncQAC", "Tata Salt 1kg", "SFA-P012", 23.8, 775],. Read it with the preceding opening statement (["a04jV000000WynfQAC", "Surf Excel Easy Wash 1kg", "SFA-P015", 140.25, 850],); it is not a standalone business operation.
25	`["a04jV000000WyngQAC", "Vim Dishwash Bar", "SFA-P016", 8.5, 875],`	Continues the surrounding declaration/expression or text: ["a04jV000000WyngQAC", "Vim Dishwash Bar", "SFA-P016", 8.5, 875],. Read it with the preceding opening statement (["a04jV000000WyncQAC", "Tata Salt 1kg", "SFA-P012", 23.8, 775],); it is not a standalone business operation.

Line	Source code	Explanation / reading note
26	`  ["a04jV000000WynbQAC", "Yippee Magic Masala", "SFA-P011", 12.75, 750],`	Continues the surrounding declaration/expression or text: ["a04jV000000WynbQAC", "Yippee Magic Masala", "SFA-P011", 12.75, 750],. Read it with the preceding opening statement (["a04jV000000WyngQAC", "Vim Dishwash Bar", "SFA-P016", 8.5, 875],); it is not a standalone business operation.
27	`].map(([id, name, code, price, stock]) => ({`	Transforms/selects/aggregates collection values with the callback shown here:].map(([id, name, code, price, stock]) => ({. Read the callback body and result assignment together.
28	`  id: String(id),`	Sets/declares the named object property or style/type member: id: String(id),. Interpret it in the enclosing object, props or type definition.
29	`  name: String(name),`	Sets/declares the named object property or style/type member: name: String(name),. Interpret it in the enclosing object, props or type definition.
30	`  code: String(code),`	Sets/declares the named object property or style/type member: code: String(code),. Interpret it in the enclosing object, props or type definition.
31	`  price: Number(price),`	Sets/declares the named object property or style/type member: price: Number(price),. Interpret it in the enclosing object, props or type definition.
32	`  stock: Number(stock),`	Sets/declares the named object property or style/type member: stock: Number(stock),. Interpret it in the enclosing object, props or type definition.
33	`}));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/data/orgSchemes.ts

Local catalogue/demo snapshot or mock fixture data. Static data is not proof of current Salesforce state; inspect the caller and USE_MOCK_DATA configuration.

76 numbered source lines | SHA-256 d8015ec33ad6a9b186b009520a6bcd536e66b8fa1f250dc0ee9211cf90875139

Line	Source code	Explanation / reading note
1	`// Latest Salesforce Scheme__c snapshot from sfaNewOrg.`	Developer comment/documentation: Latest Salesforce Scheme__c snapshot from sfaNewOrg. It is not executed.
2	`// HomeScreen replaces this automatically whenever the live API is available.`	Developer comment/documentation: HomeScreen replaces this automatically whenever the live API is available. It is not executed.
3	`export const orgSchemes = [`	Assigns the right-hand expression to the named variable/property: export const orgSchemes = [. This is in-memory unless it is later persisted by an explicit call.
4	`  {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (export const orgSchemes = []; it is not a standalone business operation.
5	`    id: "a07jV000005WrmHQAS",`	Sets/declares the named object property or style/type member: id: "a07jV000005WrmHQAS",. Interpret it in the enclosing object, props or type definition.
6	`    name: "Buy 2 Get 1 Biscuit Offer",`	Sets/declares the named object property or style/type member: name: "Buy 2 Get 1 Biscuit Offer",. Interpret it in the enclosing object, props or type definition.
7	`    type: "Same Product Free",`	Sets/declares the named object property or style/type member: type: "Same Product Free",. Interpret it in the enclosing object, props or type definition.
8	`    description: "Buy 2 cases and receive 1 case free.",`	Sets/declares the named object property or style/type member: description: "Buy 2 cases and receive 1 case free.",. Interpret it in the enclosing object, props or type definition.
9	`    benefit: "Buy 2 • Get 1 free • 3% discount",`	Sets/declares the named object property or style/type member: benefit: "Buy 2 • Get 1 free • 3% discount",. Interpret it in the enclosing object, props or type definition.
10	`    endDate: "2026-10-31",`	Sets/declares the named object property or style/type member: endDate: "2026-10-31",. Interpret it in the enclosing object, props or type definition.
11	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
12	`  {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.

Line	Source code	Explanation / reading note
13	`id: "a07jV000005WBkCQAW",`	Sets/declares the named object property or style/type member: id: "a07jV000005WBkCQAW",. Interpret it in the enclosing object, props or type definition.
14	`name: "Metro Retailer Value Bundle",`	Sets/declares the named object property or style/type member: name: "Metro Retailer Value Bundle",. Interpret it in the enclosing object, props or type definition.
15	`type: "Bundle",`	Sets/declares the named object property or style/type member: type: "Bundle",. Interpret it in the enclosing object, props or type definition.
16	`description: "Special value bundle for metro retailers.",`	Sets/declares the named object property or style/type member: description: "Special value bundle for metro retailers.",. Interpret it in the enclosing object, props or type definition.
17	`benefit: "Minimum 2 • 8% discount",`	Sets/declares the named object property or style/type member: benefit: "Minimum 2 • 8% discount",. Interpret it in the enclosing object, props or type definition.
18	`endDate: "2026-10-31",`	Sets/declares the named object property or style/type member: endDate: "2026-10-31",. Interpret it in the enclosing object, props or type definition.
19	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
21	`id: "a07jV000005WWGTQA4",`	Sets/declares the named object property or style/type member: id: "a07jV000005WWGTQA4",. Interpret it in the enclosing object, props or type definition.
22	`name: "Free Sample Promotion",`	Sets/declares the named object property or style/type member: name: "Free Sample Promotion",. Interpret it in the enclosing object, props or type definition.
23	`type: "Non-listed Product Free",`	Sets/declares the named object property or style/type member: type: "Non-listed Product Free",. Interpret it in the enclosing object, props or type definition.
24	`description: "Receive one promotional sample with five qualifying cases.",`	Sets/declares the named object property or style/type member: description: "Receive one promotional sample with five qualifying cases.",. Interpret it in the enclosing object, props or type definition.
25	`benefit: "Buy 5 • Get 1 sample • 5% discount",`	Sets/declares the named object property or style/type member: benefit: "Buy 5 • Get 1 sample • 5% discount",. Interpret it in the enclosing object, props or type definition.
26	`endDate: "2026-10-31",`	Sets/declares the named object property or style/type member: endDate: "2026-10-31",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
27	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
28	`  {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
29	`    id: "a07jV000005Wb1hQAC",`	Sets/declares the named object property or style/type member: id: "a07jV000005Wb1hQAC",. Interpret it in the enclosing object, props or type definition.
30	`    name: "Wholesale Slab Discount 10%",`	Sets/declares the named object property or style/type member: name: "Wholesale Slab Discount 10%",. Interpret it in the enclosing object, props or type definition.
31	`    type: "Slab Discount",`	Sets/declares the named object property or style/type member: type: "Slab Discount",. Interpret it in the enclosing object, props or type definition.
32	`    description: "Ten percent discount for wholesale orders of 25 cases.",`	Sets/declares the named object property or style/type member: description: "Ten percent discount for wholesale orders of 25 cases.",. Interpret it in the enclosing object, props or type definition.
33	`    benefit: "Minimum 25 • 10% discount",`	Sets/declares the named object property or style/type member: benefit: "Minimum 25 • 10% discount",. Interpret it in the enclosing object, props or type definition.
34	`    endDate: "2026-10-31",`	Sets/declares the named object property or style/type member: endDate: "2026-10-31",. Interpret it in the enclosing object, props or type definition.
35	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
36	`  {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
37	`    id: "a07jV000005WfZzQAK",`	Sets/declares the named object property or style/type member: id: "a07jV000005WfZzQAK",. Interpret it in the enclosing object, props or type definition.
38	`    name: "Buy 3 Get 1 Snack Offer",`	Sets/declares the named object property or style/type member: name: "Buy 3 Get 1 Snack Offer",. Interpret it in the enclosing object, props or type definition.
39	`    type: "Same Product Free",`	Sets/declares the named object property or style/type member: type: "Same Product Free",. Interpret it in the enclosing object, props or type definition.
40	`    description: "Buy 3 snack cases and receive 1 case free.",`	Sets/declares the named object property or style/type member: description: "Buy 3 snack cases and receive 1 case free.",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
41	`    benefit: "Buy 3 • Get 1 free • 4% discount",`	Sets/declares the named object property or style/type member: benefit: "Buy 3 • Get 1 free • 4% discount",. Interpret it in the enclosing object, props or type definition.
42	`    endDate: "2026-10-31",`	Sets/declares the named object property or style/type member: endDate: "2026-10-31",. Interpret it in the enclosing object, props or type definition.
43	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44	`  {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
45	`    id: "a07jV000005WjghQAC",`	Sets/declares the named object property or style/type member: id: "a07jV000005WjghQAC",. Interpret it in the enclosing object, props or type definition.
46	`    name: "Festival Slab Discount 5%",`	Sets/declares the named object property or style/type member: name: "Festival Slab Discount 5%",. Interpret it in the enclosing object, props or type definition.
47	`    type: "Slab Discount",`	Sets/declares the named object property or style/type member: type: "Slab Discount",. Interpret it in the enclosing object, props or type definition.
48	`    description: "Five percent discount for orders of 10 cases or more.",`	Sets/declares the named object property or style/type member: description: "Five percent discount for orders of 10 cases or more.",. Interpret it in the enclosing object, props or type definition.
49	`    benefit: "Minimum 10 • Salesforce value: 55%",`	Sets/declares the named object property or style/type member: benefit: "Minimum 10 • Salesforce value: 55%",. Interpret it in the enclosing object, props or type definition.
50	`    endDate: "2026-10-31",`	Sets/declares the named object property or style/type member: endDate: "2026-10-31",. Interpret it in the enclosing object, props or type definition.
51	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
52	`  {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
53	`    id: "a07jV000005WjnHQAS",`	Sets/declares the named object property or style/type member: id: "a07jV000005WjnHQAS",. Interpret it in the enclosing object, props or type definition.
54	`    name: "Cross Brand Bonus Offer",`	Sets/declares the named object property or style/type member: name: "Cross Brand Bonus Offer",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
55	`    type: "Different Listed Product Free",`	Sets/declares the named object property or style/type member: type: "Different Listed Product Free",. Interpret it in the enclosing object, props or type definition.
56	`    description: "Receive one listed bonus product with four qualifying cases.",`	Sets/declares the named object property or style/type member: description: "Receive one listed bonus product with four qualifying cases.",. Interpret it in the enclosing object, props or type definition.
57	`    benefit: "Buy 4 • Get 1 bonus • 7% discount",`	Sets/declares the named object property or style/type member: benefit: "Buy 4 • Get 1 bonus • 7% discount",. Interpret it in the enclosing object, props or type definition.
58	`    endDate: "2026-10-31",`	Sets/declares the named object property or style/type member: endDate: "2026-10-31",. Interpret it in the enclosing object, props or type definition.
59	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
60	`  {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.
61	`    id: "a07jV000005Wrj5QAC",`	Sets/declares the named object property or style/type member: id: "a07jV000005Wrj5QAC",. Interpret it in the enclosing object, props or type definition.
62	`    name: "Retailer Starter Combo",`	Sets/declares the named object property or style/type member: name: "Retailer Starter Combo",. Interpret it in the enclosing object, props or type definition.
63	`    type: "Bundle",`	Sets/declares the named object property or style/type member: type: "Bundle",. Interpret it in the enclosing object, props or type definition.
64	`    description: "Starter bundle for newly onboarded retailers.",`	Sets/declares the named object property or style/type member: description: "Starter bundle for newly onboarded retailers.",. Interpret it in the enclosing object, props or type definition.
65	`    benefit: "Minimum 1 • 6% discount",`	Sets/declares the named object property or style/type member: benefit: "Minimum 1 • 6% discount",. Interpret it in the enclosing object, props or type definition.
66	`    endDate: "2026-10-31",`	Sets/declares the named object property or style/type member: endDate: "2026-10-31",. Interpret it in the enclosing object, props or type definition.
67	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
68	`  {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (},); it is not a standalone business operation.

Line	Source code	Explanation / reading note
69	`id: "a07jV000005DIg0QAG",`	Sets/declares the named object property or style/type member: id: "a07jV000005DIg0QAG",. Interpret it in the enclosing object, props or type definition.
70	`name: "Buy 2 Get 1 Demo",`	Sets/declares the named object property or style/type member: name: "Buy 2 Get 1 Demo",. Interpret it in the enclosing object, props or type definition.
71	`type: "Same Product Free",`	Sets/declares the named object property or style/type member: type: "Same Product Free",. Interpret it in the enclosing object, props or type definition.
72	`description: "Buy two cases and receive one case free.",`	Sets/declares the named object property or style/type member: description: "Buy two cases and receive one case free.",. Interpret it in the enclosing object, props or type definition.
73	`benefit: "Same-product free offer",`	Sets/declares the named object property or style/type member: benefit: "Same-product free offer",. Interpret it in the enclosing object, props or type definition.
74	`endDate: "2026-10-09",`	Sets/declares the named object property or style/type member: endDate: "2026-10-09",. Interpret it in the enclosing object, props or type definition.
75	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
76	`] as const;`	Continues the surrounding declaration/expression or text:] as const;. Read it with the preceding opening statement (},); it is not a standalone business operation.

sales-rep-mobile/mobile/src/screens/BeatsScreen.tsx

Displays the employee’s allowed beats and navigates to the selected beat’s stores.

73 numbered source lines | SHA-256 3a1802c7a7ad4197722432f6b03afa08a648dc257f9b544ab5c4761c04e94891

Line	Source code	Explanation / reading note
1	`import React, { useEffect, useState } from "react";`	Imports dependencies/types used below: import React, { useEffect, useState } from "react";. Importing a function does not call it.
2	`import { Alert, FlatList, StyleSheet, Text, TextInput, View } from "react-native";`	Imports dependencies/types used below: import { Alert, FlatList, StyleSheet, Text, TextInput, View } from "react-native";. Importing a function does not call it.
3	`import { useNavigation } from "@react-navigation/native";`	Imports dependencies/types used below: import { useNavigation } from "@react-navigation/native";. Importing a function does not call it.
4	`import { api } from "../api/client";`	Imports dependencies/types used below: import { api } from "../api/client";. Importing a function does not call it.
5	`import { Button, Card, Label } from "../components/ui";`	Imports dependencies/types used below: import { Button, Card, Label } from "../components/ui";. Importing a function does not call it.
6	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
7	`import type { Beat } from "../types";`	Imports dependencies/types used below: import type { Beat } from "../types";. Importing a function does not call it.
8	`export default function BeatsScreen() {`	Declares a callable function/method: export default function BeatsScreen() {. Parameters supply its inputs; the following block implements the operation.
9	`  const [beats, setBeats] = useState<Beat[]>([]),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
10	`    [search, setSearch] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
11	`  const nav: any = useNavigation();`	Declares/initializes local data used by the surrounding operation: const nav: any = useNavigation();. Collection contents and assignments below determine its purpose.
12	`  useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.

Line	Source code	Explanation / reading note
13	`api<Beat[]>("/beats")`	Continues the surrounding declaration/expression or text: api<Beat[]>("/beats"). Read it with the preceding opening statement (useEffect(() => {); it is not a standalone business operation.
14	`.then(setBeats)`	Continues the surrounding declaration/expression or text: .then(setBeats). Read it with the preceding opening statement (api<Beat[]>("/beats")); it is not a standalone business operation.
15	`.catch((e) => Alert.alert("Unable to load beats", e.message));`	Calls the named method: .catch((e) => Alert.alert("Unable to load beats", e.message));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
16	`}, []);`	Continues the surrounding declaration/expression or text: }, []);. Read it with the preceding opening statement (.catch((e) => Alert.alert("Unable to load beats", e.message));); it is not a standalone business operation.
17	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
18	`<View style={s.root}>`	Renders/opens a UI element or component: <View style={s.root}>. Props and child content below determine appearance and interactions.
19	`<Text style={s.heading}>My Beats</Text>`	Renders/opens a UI element or component: <Text style={s.heading}>My Beats</Text>. Props and child content below determine appearance and interactions.
20	`<TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
21	`style={s.search}`	Assigns the right-hand expression to the named variable/property: style={s.search}. This is in-memory unless it is later persisted by an explicit call.
22	`value={search}`	Assigns the right-hand expression to the named variable/property: value={search}. This is in-memory unless it is later persisted by an explicit call.
23	`onChangeText={setSearch}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
24	`placeholder="Search assigned beats"`	Assigns the right-hand expression to the named variable/property: placeholder="Search assigned beats". This is in-memory unless it is later persisted by an explicit call.
25	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (placeholder="Search assigned beats"); it is not a standalone business operation.

Line	Source code	Explanation / reading note
26	`<FlatList`	Renders/opens a UI element or component: <FlatList. Props and child content below determine appearance and interactions.
27	`data={beats.filter((b) => b.name.toLowerCase().includes(search.toLowerCase()))}`	Transforms/selects/aggregates collection values with the callback shown here: data={beats.filter((b) => b.name.toLowerCase().includes(search.toLowerCase()))}. Read the callback body and result assignment together.
28	`keyExtractor={(b) => b.id}`	Assigns the right-hand expression to the named variable/property: keyExtractor={(b) => b.id}. This is in-memory unless it is later persisted by an explicit call.
29	`renderItem={({ item }) => (`	Assigns the right-hand expression to the named variable/property: renderItem={({ item }) => (. This is in-memory unless it is later persisted by an explicit call.
30	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
31	`<Label>Assigned route</Label>`	Renders/opens a UI element or component: <Label>Assigned route</Label>. Props and child content below determine appearance and interactions.
32	`<Text style={s.name}>{item.name}</Text>`	Renders/opens a UI element or component: <Text style={s.name}>{item.name}</Text>. Props and child content below determine appearance and interactions.
33	`<View style={s.row}>`	Renders/opens a UI element or component: <View style={s.row}>. Props and child content below determine appearance and interactions.
34	`<Text>{item.stores} Stores</Text>`	Renders/opens a UI element or component: <Text>{item.stores} Stores</Text>. Props and child content below determine appearance and interactions.
35	`<Text style={s.done}>{item.completed} Completed</Text>`	Renders/opens a UI element or component: <Text style={s.done}>{item.completed} Completed</Text>. Props and child content below determine appearance and interactions.
36	`<Text>{item.pending} Pending</Text>`	Renders/opens a UI element or component: <Text>{item.pending} Pending</Text>. Props and child content below determine appearance and interactions.
37	`</View>`	Closes the UI element/component opened above.
38	`<Button title="VIEW OUTLETS" onPress={() => nav.navigate("Stores", { beat: item })} />`	Renders/opens a UI element or component: <Button title="VIEW OUTLETS" onPress={() => nav.navigate("Stores", { beat: item })} />. Props and child content below determine appearance and interactions.
39	`</Card>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
40	`        )}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
41	`      />`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
42	`    </View>`	Closes the UI element/component opened above.
43	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
45	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
46	`  root: { flex: 1, backgroundColor: colors.surface, padding: 16 },`	Sets/declares the named object property or style/type member: root: { flex: 1, backgroundColor: colors.surface, padding: 16 },. Interpret it in the enclosing object, props or type definition.
47	`  heading: {`	Sets/declares the named object property or style/type member: heading: {. Interpret it in the enclosing object, props or type definition.
48	`    fontSize: 26,`	Sets/declares the named object property or style/type member: fontSize: 26,. Interpret it in the enclosing object, props or type definition.
49	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
50	`    color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
51	`    marginVertical: 12,`	Sets/declares the named object property or style/type member: marginVertical: 12,. Interpret it in the enclosing object, props or type definition.
52	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
53	`  search: {`	Sets/declares the named object property or style/type member: search: {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
54	`backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
55	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
56	`borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
57	`borderRadius: 14,`	Sets/declares the named object property or style/type member: borderRadius: 14,. Interpret it in the enclosing object, props or type definition.
58	`padding: 14,`	Sets/declares the named object property or style/type member: padding: 14,. Interpret it in the enclosing object, props or type definition.
59	`marginBottom: 14,`	Sets/declares the named object property or style/type member: marginBottom: 14,. Interpret it in the enclosing object, props or type definition.
60	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
61	`name: {`	Sets/declares the named object property or style/type member: name: {. Interpret it in the enclosing object, props or type definition.
62	`fontSize: 19,`	Sets/declares the named object property or style/type member: fontSize: 19,. Interpret it in the enclosing object, props or type definition.
63	`fontWeight: "800",`	Sets/declares the named object property or style/type member: fontWeight: "800",. Interpret it in the enclosing object, props or type definition.
64	`color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
65	`marginVertical: 8,`	Sets/declares the named object property or style/type member: marginVertical: 8,. Interpret it in the enclosing object, props or type definition.
66	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
67	`row: {`	Sets/declares the named object property or style/type member: row: {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
68	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
69	`    justifyContent: "space-between",`	Sets/declares the named object property or style/type member: justifyContent: "space-between",. Interpret it in the enclosing object, props or type definition.
70	`    marginBottom: 8,`	Sets/declares the named object property or style/type member: marginBottom: 8,. Interpret it in the enclosing object, props or type definition.
71	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
72	`  done: { color: colors.success, fontWeight: "700" },`	Sets/declares the named object property or style/type member: done: { color: colors.success, fontWeight: "700" },. Interpret it in the enclosing object, props or type definition.
73	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/screens/DayScreen.tsx

Employee start/end day interface; gathers required state and submits attendance/day operations.

283 numbered source lines | SHA-256 b19444f613caff960b99d577832fa3393cda0bbaaedc1b756731c9fdd4794843

Line	Source code	Explanation / reading note
1	`import * as Location from "expo-location";`	Imports dependencies/types used below: import * as Location from "expo-location";. Importing a function does not call it.
2	`import React, { useEffect, useState } from "react";`	Imports dependencies/types used below: import React, { useEffect, useState } from "react";. Importing a function does not call it.
3	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.
4	`  Alert,`	Continues the surrounding declaration/expression or text: Alert,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
5	`  ScrollView,`	Continues the surrounding declaration/expression or text: ScrollView,. Read it with the preceding opening statement (Alert,); it is not a standalone business operation.
6	`  StyleSheet,`	Continues the surrounding declaration/expression or text: StyleSheet,. Read it with the preceding opening statement (ScrollView,); it is not a standalone business operation.
7	`  Text,`	Continues the surrounding declaration/expression or text: Text,. Read it with the preceding opening statement (StyleSheet,); it is not a standalone business operation.
8	`  TextInput,`	Continues the surrounding declaration/expression or text: TextInput,. Read it with the preceding opening statement (Text,); it is not a standalone business operation.
9	`  TouchableOpacity,`	Continues the surrounding declaration/expression or text: TouchableOpacity,. Read it with the preceding opening statement (TextInput,); it is not a standalone business operation.
10	`  View,`	Continues the surrounding declaration/expression or text: View,. Read it with the preceding opening statement (TouchableOpacity,); it is not a standalone business operation.
11	`} from "react-native";`	Completes the dependency import and identifies the module supplying those names.
12		Blank line separating logical sections; no executable operation.
13	`import { post } from "../api/client";`	Imports dependencies/types used below: import { post } from "../api/client";. Importing a function does not call it.
14		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
15	`const transportModes = ["Two Wheeler", "Four Wheeler", "Bus", "Train", "Auto", "Other"];`	Declares/initializes local data used by the surrounding operation: const transportModes = ["Two Wheeler", "Four Wheeler", "Bus", "Train", "Auto", "Other"];. Collection contents and assignments below determine its purpose.
16	`const ownershipOptions = ["Own", "Company", "Public"];`	Declares/initializes local data used by the surrounding operation: const ownershipOptions = ["Own", "Company", "Public"];. Collection contents and assignments below determine its purpose.
17	`const plannedActivities = ["Outlet Visits", "Office Work", "Market Survey", "Other"];`	Declares/initializes local data used by the surrounding operation: const plannedActivities = ["Outlet Visits", "Office Work", "Market Survey", "Other"];. Collection contents and assignments below determine its purpose.
18	`const odometerEntryModes = ["Manual", "GPS Assisted"];`	Declares/initializes local data used by the surrounding operation: const odometerEntryModes = ["Manual", "GPS Assisted"];. Collection contents and assignments below determine its purpose.
19		Blank line separating logical sections; no executable operation.
20	`type TravelSummary = {`	Defines a compile-time data contract: type TravelSummary = {. TypeScript types do not validate untrusted runtime JSON by themselves.
21	`  distanceTravelledKm: number;`	Sets/declares the named object property or style/type member: distanceTravelledKm: number;. Interpret it in the enclosing object, props or type definition.
22	`  ratePerKm: number;`	Sets/declares the named object property or style/type member: ratePerKm: number;. Interpret it in the enclosing object, props or type definition.
23	`  totalTravelAmount: number;`	Sets/declares the named object property or style/type member: totalTravelAmount: number;. Interpret it in the enclosing object, props or type definition.
24	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
25		Blank line separating logical sections; no executable operation.
26	`export default function DayScreen() {`	Declares a callable function/method: export default function DayScreen() {. Parameters supply its inputs; the following block implements the operation.
27	`  const [transportMode, setTransportMode] = useState("Two Wheeler");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.

Line	Source code	Explanation / reading note
28	`  const [ownership, setOwnership] = useState("Own");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
29	`  const [plannedActivity, setPlannedActivity] = useState("Outlet Visits");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
30	`  const [entryMode, setEntryMode] = useState("Manual");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
31	`  const [startOdometer, setStartOdometer] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
32	`  const [endOdometer, setEndOdometer] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
33	`  const [evidenceUrl, setEvidenceUrl] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
34	`  const [attendanceId, setAttendanceId] = useState<string | null>(null);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
35	`  const [travelSummary, setTravelSummary] = useState<TravelSummary | null>(null);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
36	`  const [busy, setBusy] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
37		Blank line separating logical sections; no executable operation.
38	`  useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.
39	`    setTravelSummary(null);`	Continues the surrounding declaration/expression or text: setTravelSummary(null);. Read it with the preceding opening statement (useEffect(() => {); it is not a standalone business operation.
40	`  }, [startOdometer, endOdometer]);`	Continues the surrounding declaration/expression or text: }, [startOdometer, endOdometer]);. Read it with the preceding opening statement (setTravelSummary(null);); it is not a standalone business operation.
41		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
42	`  async function captureLocation() {`	Declares a callable function/method: async function captureLocation() {. Parameters supply its inputs; the following block implements the operation.
43	`    const permission = await Location.requestForegroundPermissionsAsync();`	Waits for this asynchronous operation before continuing: const permission = await Location.requestForegroundPermissionsAsync();. The returned result/error must still be handled.
44	`    if (permission.status !== "granted") {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (permission.status !== "granted") {.
45	`      throw new Error("Location permission is required for odometer tracking.");`	Stops this execution path with a validation/error exception: throw new Error("Location permission is required for odometer tracking.");. The caller/catch block decides how it is reported.
46	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`    const position = await Location.getCurrentPositionAsync({ accuracy: Location.Accuracy.High });`	Waits for this asynchronous operation before continuing: const position = await Location.getCurrentPositionAsync({ accuracy: Location.Accuracy.High });. The returned result/error must still be handled.
48	`    return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
49	`      latitude: position.coords.latitude,`	Sets/declares the named object property or style/type member: latitude: position.coords.latitude,. Interpret it in the enclosing object, props or type definition.
50	`      longitude: position.coords.longitude,`	Sets/declares the named object property or style/type member: longitude: position.coords.longitude,. Interpret it in the enclosing object, props or type definition.
51	`    };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
52	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
53		Blank line separating logical sections; no executable operation.
54	`  async function startDay() {`	Declares a callable function/method: async function startDay() {. Parameters supply its inputs; the following block implements the operation.
55	`    if (!startOdometer || Number(startOdometer) < 0) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!startOdometer || Number(startOdometer) < 0) {.

Line	Source code	Explanation / reading note
56	`Alert.alert("Start odometer required", "Enter a valid starting odometer reading.");`	Calls the named method: Alert.alert("Start odometer required", "Enter a valid starting odometer reading.");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
57	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
58	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
59		Blank line separating logical sections; no executable operation.
60	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
61	`setBusy(true);`	Continues the surrounding declaration/expression or text: setBusy(true);. Read it with the preceding opening statement (try {); it is not a standalone business operation.
62	`const location = await captureLocation();`	Waits for this asynchronous operation before continuing: const location = await captureLocation();. The returned result/error must still be handled.
63	`const result = await post<{ attendanceId: string }>("/day/start", {`	Waits for this asynchronous operation before continuing: const result = await post<{ attendanceId: string }>("/day/start", {. The returned result/error must still be handled.
64	`location,`	Continues the surrounding declaration/expression or text: location,. Read it with the preceding opening statement (const result = await post<{ attendanceId: string }>("/day/start", {); it is not a standalone business operation.
65	`transportMode,`	Continues the surrounding declaration/expression or text: transportMode,. Read it with the preceding opening statement (location,); it is not a standalone business operation.
66	`ownership,`	Continues the surrounding declaration/expression or text: ownership,. Read it with the preceding opening statement (transportMode,); it is not a standalone business operation.
67	`plannedActivity,`	Continues the surrounding declaration/expression or text: plannedActivity,. Read it with the preceding opening statement (ownership,); it is not a standalone business operation.
68	`startOdometer: Number(startOdometer),`	Sets/declares the named object property or style/type member: startOdometer: Number(startOdometer),. Interpret it in the enclosing object, props or type definition.
69	`odometerEvidenceUrl: evidenceUrl.trim(),`	Sets/declares the named object property or style/type member: odometerEvidenceUrl: evidenceUrl.trim(),. Interpret it in the enclosing object, props or type definition.
70	`odometerEntryMode: entryMode,`	Sets/declares the named object property or style/type member: odometerEntryMode: entryMode,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
71	`      });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
72	`      setAttendanceId(result.attendanceId);`	Continues the surrounding declaration/expression or text: setAttendanceId(result.attendanceId);. Read it with the preceding opening statement (});); it is not a standalone business operation.
73	`      Alert.alert("Odometer started", "The starting reading was saved in Salesforce.");`	Calls the named method: Alert.alert("Odometer started", "The starting reading was saved in Salesforce.");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
74	`    } catch (error) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
75	`      Alert.alert(`	Calls the named method: Alert.alert(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
76	`        "Unable to start odometer",`	Continues the surrounding declaration/expression or text: "Unable to start odometer",. Read it with the preceding opening statement (Alert.alert(); it is not a standalone business operation.
77	`        error instanceof Error ? error.message : "Try again.",`	Continues the surrounding declaration/expression or text: error instanceof Error ? error.message : "Try again.",. Read it with the preceding opening statement ("Unable to start odometer",); it is not a standalone business operation.
78	`      );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
79	`    } finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
80	`      setBusy(false);`	Continues the surrounding declaration/expression or text: setBusy(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
81	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
82	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
83		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
84	`  async function endDay() {`	Declares a callable function/method: async function endDay() {. Parameters supply its inputs; the following block implements the operation.
85	`    if (!attendanceId) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!attendanceId) {.
86	`      Alert.alert("Start first", "Start the odometer before recording the ending reading.");`	Calls the named method: Alert.alert("Start first", "Start the odometer before recording the ending reading.");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
87	`      return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
88	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
89	`    if (!endOdometer || Number(endOdometer) < Number(startOdometer)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!endOdometer || Number(endOdometer) < Number(startOdometer)) {.
90	`      Alert.alert(`	Calls the named method: Alert.alert(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
91	`        "Invalid ending reading",`	Continues the surrounding declaration/expression or text: "Invalid ending reading",. Read it with the preceding opening statement (Alert.alert(); it is not a standalone business operation.
92	`        "End odometer must be greater than or equal to start odometer.",`	Continues the surrounding declaration/expression or text: "End odometer must be greater than or equal to start odometer.",. Read it with the preceding opening statement ("Invalid ending reading",); it is not a standalone business operation.
93	`      );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
94	`      return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
95	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
96		Blank line separating logical sections; no executable operation.
97	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
98	`      setBusy(true);`	Continues the surrounding declaration/expression or text: setBusy(true);. Read it with the preceding opening statement (try {); it is not a standalone business operation.

Line	Source code	Explanation / reading note
99	`const location = await captureLocation();`	Waits for this asynchronous operation before continuing: const location = await captureLocation();. The returned result/error must still be handled.
100	`const result = await post<TravelSummary>("/day/end", {`	Waits for this asynchronous operation before continuing: const result = await post<TravelSummary>("/day/end", {. The returned result/error must still be handled.
101	`location,`	Continues the surrounding declaration/expression or text: location,. Read it with the preceding opening statement (const result = await post<TravelSummary>("/day/end", {); it is not a standalone business operation.
102	`endOdometer: Number(endOdometer),`	Sets/declares the named object property or style/type member: endOdometer: Number(endOdometer),. Interpret it in the enclosing object, props or type definition.
103	`odometerEvidenceUrl: evidenceUrl.trim(),`	Sets/declares the named object property or style/type member: odometerEvidenceUrl: evidenceUrl.trim(),. Interpret it in the enclosing object, props or type definition.
104	`requestId: \`end-${attendanceId}\`,`	Sets/declares the named object property or style/type member: requestId: `end-${attendanceId}`,. Interpret it in the enclosing object, props or type definition.
105	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
106	`setTravelSummary({`	Continues the surrounding declaration/expression or text: setTravelSummary({. Read it with the preceding opening statement (});); it is not a standalone business operation.
107	`distanceTravelledKm: Number(result.distanceTravelledKm || 0),`	Sets/declares the named object property or style/type member: distanceTravelledKm: Number(result.distanceTravelledKm || 0),. Interpret it in the enclosing object, props or type definition.
108	`ratePerKm: Number(result.ratePerKm || 0),`	Sets/declares the named object property or style/type member: ratePerKm: Number(result.ratePerKm || 0),. Interpret it in the enclosing object, props or type definition.
109	`totalTravelAmount: Number(result.totalTravelAmount || 0),`	Sets/declares the named object property or style/type member: totalTravelAmount: Number(result.totalTravelAmount || 0),. Interpret it in the enclosing object, props or type definition.
110	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
111	`Alert.alert(`	Calls the named method: Alert.alert(. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
112	`"Odometer ended",`	Continues the surrounding declaration/expression or text: "Odometer ended",. Read it with the preceding opening statement (Alert.alert(); it is not a standalone business operation.
113	`"Salesforce calculated the travelled distance and total amount.",`	Continues the surrounding declaration/expression or text: "Salesforce calculated the travelled distance and total amount.",. Read it with the preceding opening statement ("Odometer ended",); it is not a standalone business operation.
114	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
115	`} catch (error) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
116	`Alert.alert("Unable to end odometer", error instanceof Error ? error.message : "Try again.");`	Calls the named method: Alert.alert("Unable to end odometer", error instanceof Error ? error.message : "Try again."); . Its implementation defines the side effect/result; use the symbol/file index to follow it.
117	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
118	`setBusy(false);`	Continues the surrounding declaration/expression or text: setBusy(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
119	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
120	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
121		Blank line separating logical sections; no executable operation.
122	`function ChoiceRow({`	Declares a callable function/method: function ChoiceRow({. Parameters supply its inputs; the following block implements the operation.
123	`values,`	Continues the surrounding declaration/expression or text: values,. Read it with the preceding opening statement (function ChoiceRow({); it is not a standalone business operation.
124	`selected,`	Continues the surrounding declaration/expression or text: selected,. Read it with the preceding opening statement (values,); it is not a standalone business operation.
125	`onSelect,`	Continues the surrounding declaration/expression or text: onSelect,. Read it with the preceding opening statement (selected,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
126	`}: {`	Continues the surrounding declaration/expression or text: }: {. Read it with the preceding opening statement (onSelect,); it is not a standalone business operation.
127	`values: string[];`	Sets/declares the named object property or style/type member: values: string[];. Interpret it in the enclosing object, props or type definition.
128	`selected: string;`	Sets/declares the named object property or style/type member: selected: string;. Interpret it in the enclosing object, props or type definition.
129	`onSelect: (value: string) => void;`	Sets/declares the named object property or style/type member: onSelect: (value: string) => void;. Interpret it in the enclosing object, props or type definition.
130	`}) {`	Continues the surrounding declaration/expression or text: }) {. Read it with the preceding opening statement (onSelect: (value: string) => void;); it is not a standalone business operation.
131	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
132	`<View style={styles.choiceRow}>`	Renders/opens a UI element or component: <View style={styles.choiceRow}>. Props and child content below determine appearance and interactions.
133	`{values.map((value) => (`	Transforms/selects/aggregates collection values with the callback shown here: {values.map((value) => (. Read the callback body and result assignment together.
134	`<TouchableOpacity`	Renders/opens a UI element or component: <TouchableOpacity. Props and child content below determine appearance and interactions.
135	`key={value}`	Assigns the right-hand expression to the named variable/property: key={value}. This is in-memory unless it is later persisted by an explicit call.
136	`style={[styles.choice, selected === value && styles.choiceSelected]}`	Assigns the right-hand expression to the named variable/property: style={[styles.choice, selected === value && styles.choiceSelected]}. This is in-memory unless it is later persisted by an explicit call.
137	`onPress={() => onSelect(value)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
138	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (onPress={() => onSelect(value)}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
139	`<Text style={[styles.choiceText, selected === value && styles.choiceTextSelected]}>`	Renders/opens a UI element or component: <Text style={[styles.choiceText, selected === value && styles.choiceTextSelected]}>. Props and child content below determine appearance and interactions.
140	`{value}`	Continues the surrounding declaration/expression or text: {value}. Read it with the preceding opening statement (<Text style={[styles.choiceText, selected === value && styles.choiceTextSelected]}>); it is not a standalone business operation.
141	`</Text>`	Closes the UI element/component opened above.
142	`</TouchableOpacity>`	Closes the UI element/component opened above.
143	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
144	`</View>`	Closes the UI element/component opened above.
145	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
146	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
147		Blank line separating logical sections; no executable operation.
148	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
149	`<ScrollView contentContainerStyle={styles.container}>`	Renders/opens a UI element or component: <ScrollView contentContainerStyle={styles.container}>. Props and child content below determine appearance and interactions.
150	`<Text style={styles.title}>Odometer Tracking</Text>`	Renders/opens a UI element or component: <Text style={styles.title}>Odometer Tracking</Text>. Props and child content below determine appearance and interactions.
151	`<Text style={styles.help}>`	Renders/opens a UI element or component: <Text style={styles.help}>. Props and child content below determine appearance and interactions.
152	`Enter the vehicle dashboard reading manually. GPS Assisted mode also records your location`	Continues the surrounding declaration/expression or text: Enter the vehicle dashboard reading manually. GPS Assisted mode also records your location. Read it with the preceding opening statement (<Text style={styles.help}>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
153	`as evidence.`	Continues the surrounding declaration/expression or text: as evidence.. Read it with the preceding opening statement (Enter the vehicle dashboard reading manually. GPS Assisted mode also records your location); it is not a standalone business operation.
154	`</Text>`	Closes the UI element/component opened above.
155		Blank line separating logical sections; no executable operation.
156	`<Text style={styles.label}>Odometer entry mode</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>Odometer entry mode</Text>. Props and child content below determine appearance and interactions.
157	`<ChoiceRow values={odometerEntryModes} selected={entryMode} onSelect={setEntryMode} />`	Renders/opens a UI element or component: <ChoiceRow values={odometerEntryModes} selected={entryMode} onSelect={setEntryMode} />. Props and child content below determine appearance and interactions.
158	`<Text style={styles.label}>Transport mode</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>Transport mode</Text>. Props and child content below determine appearance and interactions.
159	`<ChoiceRow values={transportModes} selected={transportMode} onSelect={setTransportMode} />`	Renders/opens a UI element or component: <ChoiceRow values={transportModes} selected={transportMode} onSelect={setTransportMode} />. Props and child content below determine appearance and interactions.
160	`<Text style={styles.label}>Vehicle ownership</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>Vehicle ownership</Text>. Props and child content below determine appearance and interactions.
161	`<ChoiceRow values={ownershipOptions} selected={ownership} onSelect={setOwnership} />`	Renders/opens a UI element or component: <ChoiceRow values={ownershipOptions} selected={ownership} onSelect={setOwnership} />. Props and child content below determine appearance and interactions.
162	`<Text style={styles.label}>Planned activity</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>Planned activity</Text>. Props and child content below determine appearance and interactions.
163	`<ChoiceRow`	Renders/opens a UI element or component: <ChoiceRow. Props and child content below determine appearance and interactions.
164	`values={plannedActivities}`	Assigns the right-hand expression to the named variable/property: values={plannedActivities}. This is in-memory unless it is later persisted by an explicit call.
165	`selected={plannedActivity}`	Assigns the right-hand expression to the named variable/property: selected={plannedActivity}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
166	`onSelect={setPlannedActivity}`	Assigns the right-hand expression to the named variable/property: onSelect={setPlannedActivity}. This is in-memory unless it is later persisted by an explicit call.
167	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onSelect={setPlannedActivity}); it is not a standalone business operation.
168		Blank line separating logical sections; no executable operation.
169	`<Text style={styles.label}>Start odometer (km)</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>Start odometer (km)</Text>. Props and child content below determine appearance and interactions.
170	`<TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
171	`style={styles.input}`	Assigns the right-hand expression to the named variable/property: style={styles.input}. This is in-memory unless it is later persisted by an explicit call.
172	`keyboardType="decimal-pad"`	Assigns the right-hand expression to the named variable/property: keyboardType="decimal-pad". This is in-memory unless it is later persisted by an explicit call.
173	`value={startOdometer}`	Assigns the right-hand expression to the named variable/property: value={startOdometer}. This is in-memory unless it is later persisted by an explicit call.
174	`onChangeText={setStartOdometer}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
175	`placeholder="Example: 12450"`	Assigns the right-hand expression to the named variable/property: placeholder="Example: 12450". This is in-memory unless it is later persisted by an explicit call.
176	`editable={!attendanceId}`	Assigns the right-hand expression to the named variable/property: editable={!attendanceId}. This is in-memory unless it is later persisted by an explicit call.
177	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (editable={!attendanceId}); it is not a standalone business operation.
178	`<TouchableOpacity`	Renders/opens a UI element or component: <TouchableOpacity. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
179	`style={[styles.primaryButton, (busy || !!attendanceId) && styles.disabled]}`	Assigns the right-hand expression to the named variable/property: style={[styles.primaryButton, (busy || !!attendanceId) && styles.disabled]}. This is in-memory unless it is later persisted by an explicit call.
180	`disabled={busy || !!attendanceId}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
181	`onPress={startDay}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
182	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (onPress={startDay}); it is not a standalone business operation.
183	`<Text style={styles.primaryButtonText}>START ODOMETER</Text>`	Renders/opens a UI element or component: <Text style={styles.primaryButtonText}>START ODOMETER</Text>. Props and child content below determine appearance and interactions.
184	`</TouchableOpacity>`	Closes the UI element/component opened above.
185		Blank line separating logical sections; no executable operation.
186	`<Text style={styles.label}>End odometer (km)</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>End odometer (km)</Text>. Props and child content below determine appearance and interactions.
187	`<TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
188	`style={styles.input}`	Assigns the right-hand expression to the named variable/property: style={styles.input}. This is in-memory unless it is later persisted by an explicit call.
189	`keyboardType="decimal-pad"`	Assigns the right-hand expression to the named variable/property: keyboardType="decimal-pad". This is in-memory unless it is later persisted by an explicit call.
190	`value={endOdometer}`	Assigns the right-hand expression to the named variable/property: value={endOdometer}. This is in-memory unless it is later persisted by an explicit call.
191	`onChangeText={setEndOdometer}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
192	`placeholder="Example: 12525"`	Assigns the right-hand expression to the named variable/property: placeholder="Example: 12525". This is in-memory unless it is later persisted by an explicit call.
193	`editable={!!attendanceId && !travelSummary}`	Assigns the right-hand expression to the named variable/property: editable={!!attendanceId && !travelSummary}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
194	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (editable={!!attendanceId && !travelSummary}); it is not a standalone business operation.
195	`<Text style={styles.label}>Evidence URL (optional)</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>Evidence URL (optional)</Text>. Props and child content below determine appearance and interactions.
196	`<TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
197	`style={styles.input}`	Assigns the right-hand expression to the named variable/property: style={styles.input}. This is in-memory unless it is later persisted by an explicit call.
198	`autoCapitalize="none"`	Assigns the right-hand expression to the named variable/property: autoCapitalize="none". This is in-memory unless it is later persisted by an explicit call.
199	`value={evidenceUrl}`	Assigns the right-hand expression to the named variable/property: value={evidenceUrl}. This is in-memory unless it is later persisted by an explicit call.
200	`onChangeText={setEvidenceUrl}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
201	`placeholder="Receipt or odometer-photo URL"`	Assigns the right-hand expression to the named variable/property: placeholder="Receipt or odometer-photo URL". This is in-memory unless it is later persisted by an explicit call.
202	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (placeholder="Receipt or odometer-photo URL"); it is not a standalone business operation.
203	`<TouchableOpacity`	Renders/opens a UI element or component: <TouchableOpacity. Props and child content below determine appearance and interactions.
204	`style={[`	Assigns the right-hand expression to the named variable/property: style={[. This is in-memory unless it is later persisted by an explicit call.
205	`styles.primaryButton,`	Continues the surrounding declaration/expression or text: styles.primaryButton,. Read it with the preceding opening statement (style={[); it is not a standalone business operation.
206	`(busy || !attendanceId || !!travelSummary) && styles.disabled,`	Continues the surrounding declaration/expression or text: (busy || !attendanceId || !!travelSummary) && styles.disabled,. Read it with the preceding opening statement (styles.primaryButton,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
207	`]}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
208	`disabled={busy || !attendanceId || !!travelSummary}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
209	`onPress={endDay}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
210	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (onPress={endDay}); it is not a standalone business operation.
211	`<Text style={styles.primaryButtonText}>END ODOMETER</Text>`	Renders/opens a UI element or component: <Text style={styles.primaryButtonText}>END ODOMETER</Text>. Props and child content below determine appearance and interactions.
212	`</TouchableOpacity>`	Closes the UI element/component opened above.
213		Blank line separating logical sections; no executable operation.
214	`{travelSummary && (`	Continues the surrounding declaration/expression or text: {travelSummary && (. Read it with the preceding opening statement; it is not a standalone business operation.
215	`<View style={styles.summaryCard}>`	Renders/opens a UI element or component: <View style={styles.summaryCard}>. Props and child content below determine appearance and interactions.
216	`<Text style={styles.summaryTitle}>Salesforce Calculation</Text>`	Renders/opens a UI element or component: <Text style={styles.summaryTitle}>Salesforce Calculation</Text>. Props and child content below determine appearance and interactions.
217	`<View style={styles.summaryLine}>`	Renders/opens a UI element or component: <View style={styles.summaryLine}>. Props and child content below determine appearance and interactions.
218	`<Text>Distance travelled</Text>`	Renders/opens a UI element or component: <Text>Distance travelled</Text>. Props and child content below determine appearance and interactions.
219	`<Text style={styles.summaryValue}>`	Renders/opens a UI element or component: <Text style={styles.summaryValue}>. Props and child content below determine appearance and interactions.
220	`{travelSummary.distanceTravelledKm.toFixed(2)} km`	Calls the named method: {travelSummary.distanceTravelledKm.toFixed(2)} km. Its implementation defines the side effect/result; use the symbol/file index to follow it.
221	`</Text>`	Closes the UI element/component opened above.
222	`</View>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
223	`          <View style={styles.summaryLine}>`	Renders/opens a UI element or component: <View style={styles.summaryLine}>. Props and child content below determine appearance and interactions.
224	`            <Text>Applicable rate</Text>`	Renders/opens a UI element or component: <Text>Applicable rate</Text>. Props and child content below determine appearance and interactions.
225	`            <Text style={styles.summaryValue}>₹{travelSummary.ratePerKm.toFixed(2)} / km</Text>`	Renders/opens a UI element or component: <Text style={styles.summaryValue}>₹{travelSummary.ratePerKm.toFixed(2)} / km</Text>. Props and child content below determine appearance and interactions.
226	`          </View>`	Closes the UI element/component opened above.
227	`          <View style={styles.summaryLine}>`	Renders/opens a UI element or component: <View style={styles.summaryLine}>. Props and child content below determine appearance and interactions.
228	`            <Text>Total travel amount</Text>`	Renders/opens a UI element or component: <Text>Total travel amount</Text>. Props and child content below determine appearance and interactions.
229	`            <Text style={styles.totalValue}>₹{travelSummary.totalTravelAmount.toFixed(2)}</Text>`	Renders/opens a UI element or component: <Text style={styles.totalValue}>₹{travelSummary.totalTravelAmount.toFixed(2)}</Text>. Props and child content below determine appearance and interactions.
230	`          </View>`	Closes the UI element/component opened above.
231	`        </View>`	Closes the UI element/component opened above.
232	`      )}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
233	`    </ScrollView>`	Closes the UI element/component opened above.
234	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
235	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
236		Blank line separating logical sections; no executable operation.
237	`const styles = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const styles = StyleSheet.create({. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
238	`container: { padding: 20, paddingBottom: 48, backgroundColor: "#f6f2e9" },`	Sets/declares the named object property or style/type member: container: { padding: 20, paddingBottom: 48, backgroundColor: "#f6f2e9" },. Interpret it in the enclosing object, props or type definition.
239	`title: { fontSize: 28, fontWeight: "800", color: "#113f3a", marginBottom: 6 },`	Sets/declares the named object property or style/type member: title: { fontSize: 28, fontWeight: "800", color: "#113f3a", marginBottom: 6 },. Interpret it in the enclosing object, props or type definition.
240	`help: { color: "#5d7470", lineHeight: 21, marginBottom: 20 },`	Sets/declares the named object property or style/type member: help: { color: "#5d7470", lineHeight: 21, marginBottom: 20 },. Interpret it in the enclosing object, props or type definition.
241	`label: { color: "#365b57", fontWeight: "700", marginTop: 14, marginBottom: 8 },`	Sets/declares the named object property or style/type member: label: { color: "#365b57", fontWeight: "700", marginTop: 14, marginBottom: 8 },. Interpret it in the enclosing object, props or type definition.
242	`choiceRow: { flexDirection: "row", flexWrap: "wrap", gap: 8 },`	Sets/declares the named object property or style/type member: choiceRow: { flexDirection: "row", flexWrap: "wrap", gap: 8 },. Interpret it in the enclosing object, props or type definition.
243	`choice: {`	Sets/declares the named object property or style/type member: choice: {. Interpret it in the enclosing object, props or type definition.
244	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
245	`borderColor: "#8ccbc4",`	Sets/declares the named object property or style/type member: borderColor: "#8ccbc4",. Interpret it in the enclosing object, props or type definition.
246	`borderRadius: 18,`	Sets/declares the named object property or style/type member: borderRadius: 18,. Interpret it in the enclosing object, props or type definition.
247	`paddingVertical: 8,`	Sets/declares the named object property or style/type member: paddingVertical: 8,. Interpret it in the enclosing object, props or type definition.
248	`paddingHorizontal: 13,`	Sets/declares the named object property or style/type member: paddingHorizontal: 13,. Interpret it in the enclosing object, props or type definition.
249	`backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
250	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
251	`  choiceSelected: { backgroundColor: "#16867c", borderColor: "#16867c" },`	Sets/declares the named object property or style/type member: choiceSelected: { backgroundColor: "#16867c", borderColor: "#16867c" },. Interpret it in the enclosing object, props or type definition.
252	`  choiceText: { color: "#164b46", fontWeight: "600" },`	Sets/declares the named object property or style/type member: choiceText: { color: "#164b46", fontWeight: "600" },. Interpret it in the enclosing object, props or type definition.
253	`  choiceTextSelected: { color: "white" },`	Sets/declares the named object property or style/type member: choiceTextSelected: { color: "white" },. Interpret it in the enclosing object, props or type definition.
254	`  input: {`	Sets/declares the named object property or style/type member: input: {. Interpret it in the enclosing object, props or type definition.
255	`    borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
256	`    borderColor: "#c7d9d6",`	Sets/declares the named object property or style/type member: borderColor: "#c7d9d6",. Interpret it in the enclosing object, props or type definition.
257	`    borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
258	`    backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
259	`    padding: 14,`	Sets/declares the named object property or style/type member: padding: 14,. Interpret it in the enclosing object, props or type definition.
260	`    fontSize: 16,`	Sets/declares the named object property or style/type member: fontSize: 16,. Interpret it in the enclosing object, props or type definition.
261	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
262	`  primaryButton: {`	Sets/declares the named object property or style/type member: primaryButton: {. Interpret it in the enclosing object, props or type definition.
263	`    backgroundColor: "#16867c",`	Sets/declares the named object property or style/type member: backgroundColor: "#16867c",. Interpret it in the enclosing object, props or type definition.
264	`    borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
265	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
266	`    padding: 16,`	Sets/declares the named object property or style/type member: padding: 16,. Interpret it in the enclosing object, props or type definition.
267	`    marginTop: 12,`	Sets/declares the named object property or style/type member: marginTop: 12,. Interpret it in the enclosing object, props or type definition.
268	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
269	`  disabled: { opacity: 0.45 },`	Sets/declares the named object property or style/type member: disabled: { opacity: 0.45 },. Interpret it in the enclosing object, props or type definition.
270	`  primaryButtonText: { color: "white", fontWeight: "800" },`	Sets/declares the named object property or style/type member: primaryButtonText: { color: "white", fontWeight: "800" },. Interpret it in the enclosing object, props or type definition.
271	`  summaryCard: {`	Sets/declares the named object property or style/type member: summaryCard: {. Interpret it in the enclosing object, props or type definition.
272	`    backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
273	`    borderRadius: 16,`	Sets/declares the named object property or style/type member: borderRadius: 16,. Interpret it in the enclosing object, props or type definition.
274	`    padding: 18,`	Sets/declares the named object property or style/type member: padding: 18,. Interpret it in the enclosing object, props or type definition.
275	`    marginTop: 24,`	Sets/declares the named object property or style/type member: marginTop: 24,. Interpret it in the enclosing object, props or type definition.
276	`    borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
277	`    borderColor: "#cae1dd",`	Sets/declares the named object property or style/type member: borderColor: "#cae1dd",. Interpret it in the enclosing object, props or type definition.
278	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
279	`  summaryTitle: { color: "#0d756d", fontWeight: "800", fontSize: 18, marginBottom: 12 },`	Sets/declares the named object property or style/type member: summaryTitle: { color: "#0d756d", fontWeight: "800", fontSize: 18, marginBottom: 12 },. Interpret it in the enclosing object, props or type definition.
280	`  summaryLine: { flexDirection: "row", justifyContent: "space-between", paddingVertical: 7 },`	Sets/declares the named object property or style/type member: summaryLine: { flexDirection: "row", justifyContent: "space-between", paddingVertical: 7 },. Interpret it in the enclosing object, props or type definition.
281	`  summaryValue: { color: "#183f3b", fontWeight: "700" },`	Sets/declares the named object property or style/type member: summaryValue: { color: "#183f3b", fontWeight: "700" },. Interpret it in the enclosing object, props or type definition.
282	`  totalValue: { color: "#0d756d", fontWeight: "900", fontSize: 18 },`	Sets/declares the named object property or style/type member: totalValue: { color: "#0d756d", fontWeight: "900", fontSize: 18 },. Interpret it in the enclosing object, props or type definition.
283	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/screens/ExpensesScreen.tsx

Loads expense policies and captures claims using structured reusable input fields; submits claim details to the backend.

243 numbered source lines | SHA-256 08e99599961147824ac9bfc3b4736b4d06c49a9b0312d7fd02cbdb0cf8055eea

Line	Source code	Explanation / reading note
1	`import React, { useEffect, useState } from "react";`	Imports dependencies/types used below: import React, { useEffect, useState } from "react";. Importing a function does not call it.
2	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.
3	`  ActivityIndicator,`	Continues the surrounding declaration/expression or text: ActivityIndicator,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
4	`  Alert,`	Continues the surrounding declaration/expression or text: Alert,. Read it with the preceding opening statement (ActivityIndicator,); it is not a standalone business operation.
5	`  Pressable,`	Continues the surrounding declaration/expression or text: Pressable,. Read it with the preceding opening statement (Alert,); it is not a standalone business operation.
6	`  SafeAreaView,`	Continues the surrounding declaration/expression or text: SafeAreaView,. Read it with the preceding opening statement (Pressable,); it is not a standalone business operation.
7	`  ScrollView,`	Continues the surrounding declaration/expression or text: ScrollView,. Read it with the preceding opening statement (SafeAreaView,); it is not a standalone business operation.
8	`  StyleSheet,`	Continues the surrounding declaration/expression or text: StyleSheet,. Read it with the preceding opening statement (ScrollView,); it is not a standalone business operation.
9	`  Text,`	Continues the surrounding declaration/expression or text: Text,. Read it with the preceding opening statement (StyleSheet,); it is not a standalone business operation.
10	`  View,`	Continues the surrounding declaration/expression or text: View,. Read it with the preceding opening statement (Text,); it is not a standalone business operation.
11	`} from "react-native";`	Completes the dependency import and identifies the module supplying those names.
12	`import { api, post } from "../api/client";`	Imports dependencies/types used below: import { api, post } from "../api/client";. Importing a function does not call it.
13	`import { Button, Card, Label, Money } from "../components/ui";`	Imports dependencies/types used below: import { Button, Card, Label, Money } from "../components/ui";. Importing a function does not call it.

Line	Source code	Explanation / reading note
14	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
15	`import ClaimEditor, { ClaimForm } from "../components/ExpenseClaimEditor";`	Imports dependencies/types used below: import ClaimEditor, { ClaimForm } from "../components/ExpenseClaimEditor";. Importing a function does not call it.
16		Blank line separating logical sections; no executable operation.
17	`type ExpensePolicy = {`	Defines a compile-time data contract: type ExpensePolicy = {. TypeScript types do not validate untrusted runtime JSON by themselves.
18	`  id: string;`	Sets/declares the named object property or style/type member: id: string;. Interpret it in the enclosing object, props or type definition.
19	`  name: string;`	Sets/declares the named object property or style/type member: name: string;. Interpret it in the enclosing object, props or type definition.
20	`  expenseType: string;`	Sets/declares the named object property or style/type member: expenseType: string;. Interpret it in the enclosing object, props or type definition.
21	`  category: string;`	Sets/declares the named object property or style/type member: category: string;. Interpret it in the enclosing object, props or type definition.
22	`  ownership?: string;`	Sets/declares the named object property or style/type member: ownership?: string;. Interpret it in the enclosing object, props or type definition.
23	`  travelClass?: string;`	Sets/declares the named object property or style/type member: travelClass?: string;. Interpret it in the enclosing object, props or type definition.
24	`  rateType: string;`	Sets/declares the named object property or style/type member: rateType: string;. Interpret it in the enclosing object, props or type definition.
25	`  rate: number;`	Sets/declares the named object property or style/type member: rate: number;. Interpret it in the enclosing object, props or type definition.
26	`  maximumAmount: number;`	Sets/declares the named object property or style/type member: maximumAmount: number;. Interpret it in the enclosing object, props or type definition.
27	`  receiptRequired: boolean;`	Sets/declares the named object property or style/type member: receiptRequired: boolean;. Interpret it in the enclosing object, props or type definition.
28	`  geography?: string;`	Sets/declares the named object property or style/type member: geography?: string;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
29	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30		Blank line separating logical sections; no executable operation.
31	`export default function ExpensesScreen() {`	Declares a callable function/method: export default function ExpensesScreen() {. Parameters supply its inputs; the following block implements the operation.
32	`  const [policies, setPolicies] = useState<ExpensePolicy[]>([]);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
33	`  const [selectedIds, setSelectedIds] = useState<string[]>([]);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
34	`  const [forms, setForms] = useState<Record<string, ClaimForm>>({});`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
35	`  const [loading, setLoading] = useState(true);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
36	`  const [saving, setSaving] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
37	`  const [error, setError] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
38	`  const [validationError, setValidationError] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
39	`  const load = async () => {`	Declares/initializes local data used by the surrounding operation: const load = async () => {. Collection contents and assignments below determine its purpose.
40	`    setLoading(true);`	Continues the surrounding declaration/expression or text: setLoading(true);. Read it with the preceding opening statement (const load = async () => {); it is not a standalone business operation.
41	`    setError("");`	Continues the surrounding declaration/expression or text: setError("");. Read it with the preceding opening statement (setLoading(true);); it is not a standalone business operation.
42	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
43	`      setPolicies(await api<ExpensePolicy[]>("/expense-policies"));`	Waits for this asynchronous operation before continuing: setPolicies(await api<ExpensePolicy[]>("/expense-policies"));. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
44	`    } catch (e: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
45	`      setError(e.message || "Unable to load expense policies.");`	Continues the surrounding declaration/expression or text: setError(e.message || "Unable to load expense policies.");. Read it with the preceding opening statement (} catch (e: any) {); it is not a standalone business operation.
46	`    } finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
47	`      setLoading(false);`	Continues the surrounding declaration/expression or text: setLoading(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
48	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
50	`  useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.
51	`    load();`	Continues the surrounding declaration/expression or text: load();. Read it with the preceding opening statement (useEffect(() => {); it is not a standalone business operation.
52	`  }, []);`	Continues the surrounding declaration/expression or text: }, []);. Read it with the preceding opening statement (load();); it is not a standalone business operation.
53	`  const toggle = (policyId: string) =>`	Declares/initializes local data used by the surrounding operation: const toggle = (policyId: string) =>. Collection contents and assignments below determine its purpose.
54	`    setSelectedIds((current) =>`	Continues the surrounding declaration/expression or text: setSelectedIds((current) =>. Read it with the preceding opening statement (const toggle = (policyId: string) =>); it is not a standalone business operation.
55	`      current.includes(policyId) ? current.filter((id) => id !== policyId) : [...current, policyId],`	Transforms/selects/aggregates collection values with the callback shown here: current.includes(policyId) ? current.filter((id) => id !== policyId) : [...current, policyId],. Read the callback body and result assignment together.
56	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
57	`  const update = (policyId: string, key: keyof ClaimForm, value: string) =>`	Declares/initializes local data used by the surrounding operation: const update = (policyId: string, key: keyof ClaimForm, value: string) =>. Collection contents and assignments below determine its purpose.
58	`    setForms((current) => ({ ...current, [policyId]: { ...current[policyId], [key]: value } }));`	Continues the surrounding declaration/expression or text: setForms((current) => ({ ...current, [policyId]: { ...current[policyId], [key]: value } }));. Read it with the preceding opening statement (const update = (policyId: string, key: keyof ClaimForm, value: string) =>); it is not a standalone business operation.
59	`  const submit = async () => {`	Declares/initializes local data used by the surrounding operation: const submit = async () => {. Collection contents and assignments below determine its purpose.
60	`    setValidationError("");`	Continues the surrounding declaration/expression or text: setValidationError("");. Read it with the preceding opening statement (const submit = async () => {); it is not a standalone business operation.
61	`    if (!selectedIds.length) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!selectedIds.length) {.
62	`      setValidationError("Choose one or more applicable Salesforce expense policies.");`	Continues the surrounding declaration/expression or text: setValidationError("Choose one or more applicable Salesforce expense policies.");. Read it with the preceding opening statement (if (!selectedIds.length) {); it is not a standalone business operation.
63	`      return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
64	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
65	`    const selectedPolicies = policies.filter((policy) => selectedIds.includes(policy.id));`	Declares/initializes local data used by the surrounding operation: const selectedPolicies = policies.filter((policy) => selectedIds.includes(policy.id));. Collection contents and assignments below determine its purpose.
66	`    for (const policy of selectedPolicies) {`	Repeats work over the specified records/items or while this condition holds: for (const policy of selectedPolicies) {. Check where queries/writes occur relative to the loop.
67	`      const form = forms[policy.id] || {};`	Declares/initializes local data used by the surrounding operation: const form = forms[policy.id] || {};. Collection contents and assignments below determine its purpose.
68	`      const amount = Number(form.amount || 0);`	Declares/initializes local data used by the surrounding operation: const amount = Number(form.amount || 0);. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
69	`if (amount <= 0) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (amount <= 0) {.
70	`setValidationError(`Enter a valid amount for ${policy.name}.`);`	Continues the surrounding declaration/expression or text: setValidationError(`Enter a valid amount for ${policy.name}.`);. Read it with the preceding opening statement (if (amount <= 0) {); it is not a standalone business operation.
71	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
72	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
73	`if (policy.maximumAmount > 0 && amount > policy.maximumAmount) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (policy.maximumAmount > 0 && amount > policy.maximumAmount) {.
74	`setValidationError(`${policy.name} allows a maximum of ₹${policy.maximumAmount}.`);`	Continues the surrounding declaration/expression or text: setValidationError(`${policy.name} allows a maximum of ₹${policy.maximumAmount}.`);. Read it with the preceding opening statement (if (policy.maximumAmount > 0 && amount > policy.maximumAmount) {); it is not a standalone business operation.
75	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
76	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
77	`if (policy.receiptRequired && !form.receiptUrl?.trim()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (policy.receiptRequired && !form.receiptUrl?.trim()) {.
78	`setValidationError(`Receipt / evidence URL is required for ${policy.name}.`);`	Continues the surrounding declaration/expression or text: setValidationError(`Receipt / evidence URL is required for ${policy.name}.`);. Read it with the preceding opening statement (if (policy.receiptRequired && !form.receiptUrl?.trim()) {); it is not a standalone business operation.
79	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
80	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
81	`if (form.receiptUrl && !/^https?:\/\//i.test(form.receiptUrl.trim())) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (form.receiptUrl && !/^https?:\/\//i.test(form.receiptUrl.trim())) {.

Line	Source code	Explanation / reading note
82	`setValidationError(`${policy.name}: receipt URL must start with http:// or https://.`);`	Continues the surrounding declaration/expression or text: setValidationError(`${policy.name}: receipt URL must start with http:// or https://.`);. Read it with the preceding opening statement (if (form.receiptUrl && !/^https?:\/\/i.test(form.receiptUrl.trim())) {); it is not a standalone business operation.
83	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
84	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
85	`const start = Number(form.startOdometer || 0);`	Declares/initializes local data used by the surrounding operation: const start = Number(form.startOdometer || 0);. Collection contents and assignments below determine its purpose.
86	`const end = Number(form.endOdometer || 0);`	Declares/initializes local data used by the surrounding operation: const end = Number(form.endOdometer || 0);. Collection contents and assignments below determine its purpose.
87	`if (start > 0 && end > 0 && end < start) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (start > 0 && end > 0 && end < start) {.
88	`setValidationError(`${policy.name}: end odometer cannot be lower than start odometer.`);`	Continues the surrounding declaration/expression or text: setValidationError(`${policy.name}: end odometer cannot be lower than start odometer.`);. Read it with the preceding opening statement (if (start > 0 && end > 0 && end < start) {); it is not a standalone business operation.
89	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
90	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
91	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
92	`const claims = selectedPolicies.map((policy) => {`	Declares/initializes local data used by the surrounding operation: const claims = selectedPolicies.map((policy) => {. Collection contents and assignments below determine its purpose.
93	`const form = forms[policy.id] || {};`	Declares/initializes local data used by the surrounding operation: const form = forms[policy.id] || {};. Collection contents and assignments below determine its purpose.
94	`return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
95	`policyId: policy.id,`	Sets/declares the named object property or style/type member: policyId: policy.id,. Interpret it in the enclosing object, props or type definition.
96	`amount: Number(form.amount || 0),`	Sets/declares the named object property or style/type member: amount: Number(form.amount || 0),. Interpret it in the enclosing object, props or type definition.
97	`distanceKm: Number(form.distanceKm || 0),`	Sets/declares the named object property or style/type member: distanceKm: Number(form.distanceKm || 0),. Interpret it in the enclosing object, props or type definition.
98	`startOdometer: Number(form.startOdometer || 0),`	Sets/declares the named object property or style/type member: startOdometer: Number(form.startOdometer || 0),. Interpret it in the enclosing object, props or type definition.
99	`endOdometer: Number(form.endOdometer || 0),`	Sets/declares the named object property or style/type member: endOdometer: Number(form.endOdometer || 0),. Interpret it in the enclosing object, props or type definition.
100	`transportMode: policy.category,`	Sets/declares the named object property or style/type member: transportMode: policy.category,. Interpret it in the enclosing object, props or type definition.
101	`ownership: policy.ownership,`	Sets/declares the named object property or style/type member: ownership: policy.ownership,. Interpret it in the enclosing object, props or type definition.
102	`travelClass: policy.travelClass,`	Sets/declares the named object property or style/type member: travelClass: policy.travelClass,. Interpret it in the enclosing object, props or type definition.
103	`receiptUrl: form.receiptUrl,`	Sets/declares the named object property or style/type member: receiptUrl: form.receiptUrl,. Interpret it in the enclosing object, props or type definition.
104	`remarks: form.remarks,`	Sets/declares the named object property or style/type member: remarks: form.remarks,. Interpret it in the enclosing object, props or type definition.
105	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
106	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
107	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
108	`setSaving(true);`	Continues the surrounding declaration/expression or text: setSaving(true);. Read it with the preceding opening statement (try {); it is not a standalone business operation.
109	`await post("/expenses", { claims });`	Waits for this asynchronous operation before continuing: await post("/expenses", { claims });. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
110	`setSelectedIds([]);`	Continues the surrounding declaration/expression or text: setSelectedIds([]);. Read it with the preceding opening statement (await post("/expenses", { claims });); it is not a standalone business operation.
111	`setForms({});`	Continues the surrounding declaration/expression or text: setForms({});. Read it with the preceding opening statement (setSelectedIds([]);); it is not a standalone business operation.
112	`setValidationError("");`	Continues the surrounding declaration/expression or text: setValidationError("");. Read it with the preceding opening statement (setForms({});); it is not a standalone business operation.
113	`Alert.alert(`	Calls the named method: Alert.alert(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
114	`"Expenses submitted",`	Continues the surrounding declaration/expression or text: "Expenses submitted",. Read it with the preceding opening statement (Alert.alert(); it is not a standalone business operation.
115	`` `${claims.length} expense claim${claims.length === 1 ? "" : "s"} saved in Salesforce with your Employee details.`, ``	Continues the surrounding declaration/expression or text: `${claims.length} expense claim${claims.length === 1 ? "" : "s"} saved in Salesforce with your Employee details.`,. Read it with the preceding opening statement ("Expenses submitted",); it is not a standalone business operation.
116	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
117	`} catch (e: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
118	`setValidationError(e.message || "Unable to submit expenses. Please try again.");`	Continues the surrounding declaration/expression or text: setValidationError(e.message || "Unable to submit expenses. Please try again.");. Read it with the preceding opening statement (} catch (e: any) {); it is not a standalone business operation.
119	`Alert.alert("Unable to submit expenses", e.message || "Please try again.");`	Calls the named method: Alert.alert("Unable to submit expenses", e.message || "Please try again.");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
120	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
121	`setSaving(false);`	Continues the surrounding declaration/expression or text: setSaving(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
122	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
123	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
124	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
125	`    <SafeAreaView style={s.safe}>`	Renders/opens a UI element or component: <SafeAreaView style={s.safe}>. Props and child content below determine appearance and interactions.
126	`      <ScrollView contentContainerStyle={s.page}>`	Renders/opens a UI element or component: <ScrollView contentContainerStyle={s.page}>. Props and child content below determine appearance and interactions.
127	`        <View style={s.header}>`	Renders/opens a UI element or component: <View style={s.header}>. Props and child content below determine appearance and interactions.
128	`          <Text style={s.kicker}>EXPENSE MANAGEMENT</Text>`	Renders/opens a UI element or component: <Text style={s.kicker}>EXPENSE MANAGEMENT</Text>. Props and child content below determine appearance and interactions.
129	`          <Text style={s.title}>Add Expenses</Text>`	Renders/opens a UI element or component: <Text style={s.title}>Add Expenses</Text>. Props and child content below determine appearance and interactions.
130	`          <Text style={s.copy}>`	Renders/opens a UI element or component: <Text style={s.copy}>. Props and child content below determine appearance and interactions.
131	`            Select one or more policies. Each selection creates a separate Salesforce Expense Claim`	Selects these Salesforce fields/aggregates: one or more policies. Each selection creates a separate Salesforce Expense Claim. Query results are used in the surrounding assignment or loop.
132	`            linked to your Employee record.`	Continues the surrounding declaration/expression or text: linked to your Employee record.. Read it with the preceding opening statement (Select one or more policies. Each selection creates a separate Salesforce Expense Claim); it is not a standalone business operation.
133	`          </Text>`	Closes the UI element/component opened above.
134	`        </View>`	Closes the UI element/component opened above.
135	`        {loading ? <ActivityIndicator color={colors.brand} /> : null}`	Assigns the right-hand expression to the named variable/property: {loading ? <ActivityIndicator color={colors.brand} /> : null}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
136	`{error ? (`	Continues the surrounding declaration/expression or text: {error ? (. Read it with the preceding opening statement ({loading ? <ActivityIndicator color={colors.brand} /> : null}); it is not a standalone business operation.
137	`<Pressable onPress={load}>`	Renders/opens a UI element or component: <Pressable onPress={load}>. Props and child content below determine appearance and interactions.
138	`<Text style={s.error}>{error} · Tap to retry</Text>`	Renders/opens a UI element or component: <Text style={s.error}>{error} · Tap to retry</Text>. Props and child content below determine appearance and interactions.
139	`</Pressable>`	Closes the UI element/component opened above.
140	`) : null}`	Continues the surrounding declaration/expression or text:) : null}. Read it with the preceding opening statement (</Pressable>); it is not a standalone business operation.
141	`<View style={s.selectionHeading}>`	Renders/opens a UI element or component: <View style={s.selectionHeading}>. Props and child content below determine appearance and interactions.
142	`<Label>APPLICABLE POLICIES</Label>`	Renders/opens a UI element or component: <Label>APPLICABLE POLICIES</Label>. Props and child content below determine appearance and interactions.
143	`<Text style={s.count}>{selectedIds.length} selected</Text>`	Renders/opens a UI element or component: <Text style={s.count}>{selectedIds.length} selected</Text>. Props and child content below determine appearance and interactions.
144	`</View>`	Closes the UI element/component opened above.
145	`{policies.map((policy) => {`	Transforms/selects/aggregates collection values with the callback shown here: {policies.map((policy) => {. Read the callback body and result assignment together.
146	`const selected = selectedIds.includes(policy.id);`	Declares/initializes local data used by the surrounding operation: const selected = selectedIds.includes(policy.id);. Collection contents and assignments below determine its purpose.
147	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
148	`<View key={policy.id}>`	Renders/opens a UI element or component: <View key={policy.id}>. Props and child content below determine appearance and interactions.
149	`<Pressable onPress={() => toggle(policy.id)}>`	Renders/opens a UI element or component: <Pressable onPress={() => toggle(policy.id)}>. Props and child content below determine appearance and interactions.
150	`<Card style={{ ...s.policy, ...(selected ? s.selected : {}) }}>`	Renders/opens a UI element or component: <Card style={{ ...s.policy, ...(selected ? s.selected : {}) }}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
151	`<View style={s.row}>`	Renders/opens a UI element or component: <View style={s.row}>. Props and child content below determine appearance and interactions.
152	`<Text style={s.policyName}>`	Renders/opens a UI element or component: <Text style={s.policyName}>. Props and child content below determine appearance and interactions.
153	`{selected ? "☑ " : "☐ "}`	Continues the surrounding declaration/expression or text: {selected ? "☑ " : "☐ "}. Read it with the preceding opening statement (<Text style={s.policyName}>); it is not a standalone business operation.
154	`{policy.name}`	Continues the surrounding declaration/expression or text: {policy.name}. Read it with the preceding opening statement ({selected ? "☑ " : "☐ "}); it is not a standalone business operation.
155	`</Text>`	Closes the UI element/component opened above.
156	`<Text style={s.type}>{policy.expenseType}</Text>`	Renders/opens a UI element or component: <Text style={s.type}>{policy.expenseType}</Text>. Props and child content below determine appearance and interactions.
157	`</View>`	Closes the UI element/component opened above.
158	`<Text style={s.detail}>`	Renders/opens a UI element or component: <Text style={s.detail}>. Props and child content below determine appearance and interactions.
159	`{policy.category}`	Continues the surrounding declaration/expression or text: {policy.category}. Read it with the preceding opening statement (<Text style={s.detail}>); it is not a standalone business operation.
160	`{policy.ownership && policy.ownership !== "Not Applicable"`	Continues the surrounding declaration/expression or text: {policy.ownership && policy.ownership !== "Not Applicable". Read it with the preceding opening statement ({policy.category}); it is not a standalone business operation.
161	`? ` · ${policy.ownership}``	Continues the surrounding declaration/expression or text: ? ` · ${policy.ownership}`. Read it with the preceding opening statement ({policy.ownership && policy.ownership !== "Not Applicable"); it is not a standalone business operation.
162	`: ""}`	Continues the surrounding declaration/expression or text: : ""}. Read it with the preceding opening statement (? ` · ${policy.ownership}`); it is not a standalone business operation.

Line	Source code	Explanation / reading note
163	`{policy.travelClass ? ` · ${policy.travelClass}` : ""}`	Continues the surrounding declaration/expression or text: {policy.travelClass ? ` · ${policy.travelClass}` : ""}. Read it with the preceding opening statement (: ""}); it is not a standalone business operation.
164	`</Text>`	Closes the UI element/component opened above.
165	`<Text style={s.detail}>`	Renders/opens a UI element or component: <Text style={s.detail}>. Props and child content below determine appearance and interactions.
166	`{policy.rateType}: <Money value={policy.rate} />`	Assigns the right-hand expression to the named variable/property: {policy.rateType}: <Money value={policy.rate} />. This is in-memory unless it is later persisted by an explicit call.
167	`{policy.maximumAmount ? ` · Maximum ₹${policy.maximumAmount}` : ""}`	Continues the surrounding declaration/expression or text: {policy.maximumAmount ? ` · Maximum ₹${policy.maximumAmount}` : ""}. Read it with the preceding opening statement ({policy.rateType}: <Money value={policy.rate} />); it is not a standalone business operation.
168	`{policy.receiptRequired ? " · Receipt required" : ""}`	Continues the surrounding declaration/expression or text: {policy.receiptRequired ? " · Receipt required" : ""}. Read it with the preceding opening statement ({policy.maximumAmount ? ` · Maximum ₹${policy.maximumAmount}` : ""}); it is not a standalone business operation.
169	`</Text>`	Closes the UI element/component opened above.
170	`{policy.geography ? (`	Continues the surrounding declaration/expression or text: {policy.geography ? (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
171	`<Text style={s.scope}>Geography: {policy.geography}</Text>`	Renders/opens a UI element or component: <Text style={s.scope}>Geography: {policy.geography}</Text>. Props and child content below determine appearance and interactions.
172	`) : null}`	Continues the surrounding declaration/expression or text:) : null}. Read it with the preceding opening statement (<Text style={s.scope}>Geography: {policy.geography}</Text>); it is not a standalone business operation.
173	`</Card>`	Closes the UI element/component opened above.
174	`</Pressable>`	Closes the UI element/component opened above.
175	`{selected ? (`	Continues the surrounding declaration/expression or text: {selected ? (. Read it with the preceding opening statement (</Pressable>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
176	`<ClaimEditor`	Renders/opens a UI element or component: <ClaimEditor. Props and child content below determine appearance and interactions.
177	`policy={policy}`	Assigns the right-hand expression to the named variable/property: policy={policy}. This is in-memory unless it is later persisted by an explicit call.
178	`form={forms[policy.id] || {}}`	Assigns the right-hand expression to the named variable/property: form={forms[policy.id] || {}}. This is in-memory unless it is later persisted by an explicit call.
179	`update={(key, value) => update(policy.id, key, value)}`	Assigns the right-hand expression to the named variable/property: update={(key, value) => update(policy.id, key, value)}. This is in-memory unless it is later persisted by an explicit call.
180	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (update={(key, value) => update(policy.id, key, value)}); it is not a standalone business operation.
181	`) : null}`	Continues the surrounding declaration/expression or text:) : null}. Read it with the preceding opening statement (/>); it is not a standalone business operation.
182	`</View>`	Closes the UI element/component opened above.
183	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
184	`})}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
185	`{!loading && !policies.length ? (`	Continues the surrounding declaration/expression or text: {!loading && !policies.length ? (. Read it with the preceding opening statement (})}); it is not a standalone business operation.
186	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
187	`<Text>No active expense policies are available for your geography.</Text>`	Renders/opens a UI element or component: <Text>No active expense policies are available for your geography.</Text>. Props and child content below determine appearance and interactions.
188	`</Card>`	Closes the UI element/component opened above.
189	`) : null}`	Continues the surrounding declaration/expression or text:) : null}. Read it with the preceding opening statement (</Card>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
190	`{validationError ? (`	Continues the surrounding declaration/expression or text: {validationError ? (. Read it with the preceding opening statement ( ) : null}); it is not a standalone business operation.
191	`<Card style={s.validationCard}>`	Renders/opens a UI element or component: <Card style={s.validationCard}>. Props and child content below determine appearance and interactions.
192	`<Text style={s.validationTitle}>Please complete the claim</Text>`	Renders/opens a UI element or component: <Text style={s.validationTitle}>Please complete the claim</Text>. Props and child content below determine appearance and interactions.
193	`<Text style={s.validationText}>{validationError}</Text>`	Renders/opens a UI element or component: <Text style={s.validationText}>{validationError}</Text>. Props and child content below determine appearance and interactions.
194	`</Card>`	Closes the UI element/component opened above.
195	`) : null}`	Continues the surrounding declaration/expression or text:) : null}. Read it with the preceding opening statement (</Card>); it is not a standalone business operation.
196	`{selectedIds.length ? (`	Continues the surrounding declaration/expression or text: {selectedIds.length ? (. Read it with the preceding opening statement ( ) : null}); it is not a standalone business operation.
197	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
198	`title={`	Assigns the right-hand expression to the named variable/property: title={. This is in-memory unless it is later persisted by an explicit call.
199	`saving`	Continues the surrounding declaration/expression or text: saving. Read it with the preceding opening statement (title={); it is not a standalone business operation.
200	`? "SUBMITTING…"`	Continues the surrounding declaration/expression or text: ? "SUBMITTING…". Read it with the preceding opening statement (saving); it is not a standalone business operation.
201	`: `SUBMIT ${selectedIds.length} CLAIM${selectedIds.length === 1 ? "" : "S"} FOR APPROVAL``	Continues the surrounding declaration/expression or text: : `SUBMIT ${selectedIds.length} CLAIM${selectedIds.length === 1 ? "" : "S"} FOR APPROVAL`. Read it with the preceding opening statement (? "SUBMITTING…"); it is not a standalone business operation.
202	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
203	`onPress={submit}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.

Line	Source code	Explanation / reading note
204	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={submit}); it is not a standalone business operation.
205	`) : null}`	Continues the surrounding declaration/expression or text:) : null}. Read it with the preceding opening statement (/>); it is not a standalone business operation.
206	`</ScrollView>`	Closes the UI element/component opened above.
207	`</SafeAreaView>`	Closes the UI element/component opened above.
208	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
209	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
210		Blank line separating logical sections; no executable operation.
211	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
212	`safe: { flex: 1, backgroundColor: colors.surface },`	Sets/declares the named object property or style/type member: safe: { flex: 1, backgroundColor: colors.surface },. Interpret it in the enclosing object, props or type definition.
213	`page: { padding: 14, paddingBottom: 40, maxWidth: 700, width: "100%", alignSelf: "center" },`	Sets/declares the named object property or style/type member: page: { padding: 14, paddingBottom: 40, maxWidth: 700, width: "100%", alignSelf: "center" },. Interpret it in the enclosing object, props or type definition.
214	`header: { backgroundColor: colors.navy, padding: 20, borderRadius: 20, marginBottom: 16 },`	Sets/declares the named object property or style/type member: header: { backgroundColor: colors.navy, padding: 20, borderRadius: 20, marginBottom: 16 },. Interpret it in the enclosing object, props or type definition.
215	`kicker: { color: "#9DD9C9", fontSize: 11, fontWeight: "900", letterSpacing: 1 },`	Sets/declares the named object property or style/type member: kicker: { color: "#9DD9C9", fontSize: 11, fontWeight: "900", letterSpacing: 1 },. Interpret it in the enclosing object, props or type definition.
216	`title: { color: "white", fontSize: 26, fontWeight: "900", marginTop: 6 },`	Sets/declares the named object property or style/type member: title: { color: "white", fontSize: 26, fontWeight: "900", marginTop: 6 },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
217	`  copy: { color: "#D8EEE8", marginTop: 6, lineHeight: 19 },`	Sets/declares the named object property or style/type member: copy: { color: "#D8EEE8", marginTop: 6, lineHeight: 19 },. Interpret it in the enclosing object, props or type definition.
218	`  error: { color: colors.danger, textAlign: "center", marginBottom: 12 },`	Sets/declares the named object property or style/type member: error: { color: colors.danger, textAlign: "center", marginBottom: 12 },. Interpret it in the enclosing object, props or type definition.
219	`  selectionHeading: { flexDirection: "row", justifyContent: "space-between", alignItems: "center" },`	Sets/declares the named object property or style/type member: selectionHeading: { flexDirection: "row", justifyContent: "space-between", alignItems: "center" },. Interpret it in the enclosing object, props or type definition.
220	`  count: { color: colors.brand, fontWeight: "900" },`	Sets/declares the named object property or style/type member: count: { color: colors.brand, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
221	`  policy: { marginBottom: 9, borderWidth: 1, borderColor: colors.border },`	Sets/declares the named object property or style/type member: policy: { marginBottom: 9, borderWidth: 1, borderColor: colors.border },. Interpret it in the enclosing object, props or type definition.
222	`  selected: { borderColor: colors.brand, backgroundColor: "#E7F5F3" },`	Sets/declares the named object property or style/type member: selected: { borderColor: colors.brand, backgroundColor: "#E7F5F3" },. Interpret it in the enclosing object, props or type definition.
223	`  claim: { marginTop: -4, marginBottom: 14, borderLeftWidth: 4, borderLeftColor: colors.brand },`	Sets/declares the named object property or style/type member: claim: { marginTop: -4, marginBottom: 14, borderLeftWidth: 4, borderLeftColor: colors.brand },. Interpret it in the enclosing object, props or type definition.
224	`  validationCard: { borderWidth: 1, borderColor: colors.danger, backgroundColor: "#FFF1F0" },`	Sets/declares the named object property or style/type member: validationCard: { borderWidth: 1, borderColor: colors.danger, backgroundColor: "#FFF1F0" },. Interpret it in the enclosing object, props or type definition.
225	`  validationTitle: { color: colors.danger, fontWeight: "900", fontSize: 15 },`	Sets/declares the named object property or style/type member: validationTitle: { color: colors.danger, fontWeight: "900", fontSize: 15 },. Interpret it in the enclosing object, props or type definition.
226	`  validationText: { color: colors.danger, marginTop: 5 },`	Sets/declares the named object property or style/type member: validationText: { color: colors.danger, marginTop: 5 },. Interpret it in the enclosing object, props or type definition.
227	`  row: { flexDirection: "row", gap: 8, alignItems: "center" },`	Sets/declares the named object property or style/type member: row: { flexDirection: "row", gap: 8, alignItems: "center" },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
228	`policyName: { flex: 1, color: colors.ink, fontWeight: "900", fontSize: 15 },`	Sets/declares the named object property or style/type member: policyName: { flex: 1, color: colors.ink, fontWeight: "900", fontSize: 15 },. Interpret it in the enclosing object, props or type definition.
229	`type: { color: colors.brand, fontWeight: "800", fontSize: 10 },`	Sets/declares the named object property or style/type member: type: { color: colors.brand, fontWeight: "800", fontSize: 10 },. Interpret it in the enclosing object, props or type definition.
230	`detail: { color: colors.muted, marginTop: 6, fontSize: 12 },`	Sets/declares the named object property or style/type member: detail: { color: colors.muted, marginTop: 6, fontSize: 12 },. Interpret it in the enclosing object, props or type definition.
231	`scope: { color: colors.blue, fontWeight: "700", marginTop: 5, fontSize: 11 },`	Sets/declares the named object property or style/type member: scope: { color: colors.blue, fontWeight: "700", marginTop: 5, fontSize: 11 },. Interpret it in the enclosing object, props or type definition.
232	`input: {`	Sets/declares the named object property or style/type member: input: {. Interpret it in the enclosing object, props or type definition.
233	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
234	`borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
235	`borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
236	`padding: 13,`	Sets/declares the named object property or style/type member: padding: 13,. Interpret it in the enclosing object, props or type definition.
237	`marginTop: 10,`	Sets/declares the named object property or style/type member: marginTop: 10,. Interpret it in the enclosing object, props or type definition.
238	`color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
239	`backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
240	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
241	`  flex: { flex: 1 },`	Sets/declares the named object property or style/type member: flex: { flex: 1 },. Interpret it in the enclosing object, props or type definition.
242	`  notes: { minHeight: 80, textAlignVertical: "top" },`	Sets/declares the named object property or style/type member: notes: { minHeight: 80, textAlignVertical: "top" },. Interpret it in the enclosing object, props or type definition.
243	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/screens/HomeScreen.tsx

Employee landing dashboard and shortcuts using backend data. It is separate from the distributor reporting dashboard.

455 numbered source lines | SHA-256 8e5ed4c3b64a93d0bda9054e0e056604189e1850f4d62130c96c94affdf39efa

Line	Source code	Explanation / reading note
1	`import React, { useEffect, useMemo, useState } from "react";`	Imports dependencies/types used below: import React, { useEffect, useMemo, useState } from "react";. Importing a function does not call it.
2	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.
3	`  ActivityIndicator,`	Continues the surrounding declaration/expression or text: ActivityIndicator,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
4	`  Alert,`	Continues the surrounding declaration/expression or text: Alert,. Read it with the preceding opening statement (ActivityIndicator,); it is not a standalone business operation.
5	`  Pressable,`	Continues the surrounding declaration/expression or text: Pressable,. Read it with the preceding opening statement (Alert,); it is not a standalone business operation.
6	`  SafeAreaView,`	Continues the surrounding declaration/expression or text: SafeAreaView,. Read it with the preceding opening statement (Pressable,); it is not a standalone business operation.
7	`  ScrollView,`	Continues the surrounding declaration/expression or text: ScrollView,. Read it with the preceding opening statement (SafeAreaView,); it is not a standalone business operation.
8	`  StyleSheet,`	Continues the surrounding declaration/expression or text: StyleSheet,. Read it with the preceding opening statement (ScrollView,); it is not a standalone business operation.
9	`  Text,`	Continues the surrounding declaration/expression or text: Text,. Read it with the preceding opening statement (StyleSheet,); it is not a standalone business operation.
10	`  View,`	Continues the surrounding declaration/expression or text: View,. Read it with the preceding opening statement (Text,); it is not a standalone business operation.
11	`} from "react-native";`	Completes the dependency import and identifies the module supplying those names.
12	`import { useNavigation } from "@react-navigation/native";`	Imports dependencies/types used below: import { useNavigation } from "@react-navigation/native";. Importing a function does not call it.
13	`import { api } from "../api/client";`	Imports dependencies/types used below: import { api } from "../api/client";. Importing a function does not call it.

Line	Source code	Explanation / reading note
14	`import { Card, Money } from "../components/ui";`	Imports dependencies/types used below: import { Card, Money } from "../components/ui";. Importing a function does not call it.
15	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
16	`import { orgSchemes } from "../data/orgSchemes";`	Imports dependencies/types used below: import { orgSchemes } from "../data/orgSchemes";. Importing a function does not call it.
17	`import BottomNav from "../components/BottomNav";`	Imports dependencies/types used below: import BottomNav from "../components/BottomNav";. Importing a function does not call it.
18	`import BrandHeader from "../components/BrandHeader";`	Imports dependencies/types used below: import BrandHeader from "../components/BrandHeader";. Importing a function does not call it.
19		Blank line separating logical sections; no executable operation.
20	`type Scheme = {`	Defines a compile-time data contract: type Scheme = {. TypeScript types do not validate untrusted runtime JSON by themselves.
21	`  id: string;`	Sets/declares the named object property or style/type member: id: string;. Interpret it in the enclosing object, props or type definition.
22	`  name: string;`	Sets/declares the named object property or style/type member: name: string;. Interpret it in the enclosing object, props or type definition.
23	`  type?: string;`	Sets/declares the named object property or style/type member: type?: string;. Interpret it in the enclosing object, props or type definition.
24	`  product?: string;`	Sets/declares the named object property or style/type member: product?: string;. Interpret it in the enclosing object, props or type definition.
25	`  products?: string[];`	Sets/declares the named object property or style/type member: products?: string[];. Interpret it in the enclosing object, props or type definition.
26	`  benefit?: string;`	Sets/declares the named object property or style/type member: benefit?: string;. Interpret it in the enclosing object, props or type definition.
27	`  description?: string;`	Sets/declares the named object property or style/type member: description?: string;. Interpret it in the enclosing object, props or type definition.
28	`  endDate?: string;`	Sets/declares the named object property or style/type member: endDate?: string;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
29	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`type Dashboard = {`	Defines a compile-time data contract: type Dashboard = {. TypeScript types do not validate untrusted runtime JSON by themselves.
31	`  employeeName?: string;`	Sets/declares the named object property or style/type member: employeeName?: string;. Interpret it in the enclosing object, props or type definition.
32	`  name?: string;`	Sets/declares the named object property or style/type member: name?: string;. Interpret it in the enclosing object, props or type definition.
33	`  userName?: string;`	Sets/declares the named object property or style/type member: userName?: string;. Interpret it in the enclosing object, props or type definition.
34	`  loginEmail?: string;`	Sets/declares the named object property or style/type member: loginEmail?: string;. Interpret it in the enclosing object, props or type definition.
35	`  beatName?: string;`	Sets/declares the named object property or style/type member: beatName?: string;. Interpret it in the enclosing object, props or type definition.
36	`  target?: number;`	Sets/declares the named object property or style/type member: target?: number;. Interpret it in the enclosing object, props or type definition.
37	`  achievement?: number;`	Sets/declares the named object property or style/type member: achievement?: number;. Interpret it in the enclosing object, props or type definition.
38	`  totalOrders?: number;`	Sets/declares the named object property or style/type member: totalOrders?: number;. Interpret it in the enclosing object, props or type definition.
39	`  pendingOrders?: number;`	Sets/declares the named object property or style/type member: pendingOrders?: number;. Interpret it in the enclosing object, props or type definition.
40	`  todayVisits?: number;`	Sets/declares the named object property or style/type member: todayVisits?: number;. Interpret it in the enclosing object, props or type definition.
41	`  completedVisits?: number;`	Sets/declares the named object property or style/type member: completedVisits?: number;. Interpret it in the enclosing object, props or type definition.
42	`  pendingDeliveries?: number;`	Sets/declares the named object property or style/type member: pendingDeliveries?: number;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
43	`  outstandingAmount?: number;`	Sets/declares the named object property or style/type member: outstandingAmount?: number;. Interpret it in the enclosing object, props or type definition.
44	`  schemes?: Scheme[];`	Sets/declares the named object property or style/type member: schemes?: Scheme[];. Interpret it in the enclosing object, props or type definition.
45	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
46		Blank line separating logical sections; no executable operation.
47	`const displayDate = (value?: string) => {`	Declares/initializes local data used by the surrounding operation: const displayDate = (value?: string) => {. Collection contents and assignments below determine its purpose.
48	`  if (!value) return "Not specified";`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!value) return "Not specified";.
49	`  const date = new Date(value);`	Declares/initializes local data used by the surrounding operation: const date = new Date(value);. Collection contents and assignments below determine its purpose.
50	`  return Number.isNaN(date.getTime())`	Returns Number.isNaN(date.getTime()) to the caller (or begins returned UI markup) and ends this execution path.
51	`    ? value`	Continues the surrounding declaration/expression or text: ? value. Read it with the preceding opening statement (return Number.isNaN(date.getTime())); it is not a standalone business operation.
52	`    : date.toLocaleDateString("en-IN", { day: "numeric", month: "short", year: " numeric" });`	Calls the named method: : date.toLocaleDateString("en-IN", { day: "numeric", month: "short", year: "numeric" });. Its implementation defines the side effect/result; use the symbol/file index to follow it.
53	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
54		Blank line separating logical sections; no executable operation.
55	`export default function HomeScreen() {`	Declares a callable function/method: export default function HomeScreen() {. Parameters supply its inputs; the following block implements the operation.
56	`  const navigation = useNavigation<any>();`	Declares/initializes local data used by the surrounding operation: const navigation = useNavigation<any>();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
57	`  const [data, setData] = useState<Dashboard>();`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
58	`  const [loading, setLoading] = useState(true);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
59	`  const [error, setError] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
60		Blank line separating logical sections; no executable operation.
61	`  const loadDashboard = async () => {`	Declares/initializes local data used by the surrounding operation: const loadDashboard = async () => {. Collection contents and assignments below determine its purpose.
62	`    setLoading(true);`	Continues the surrounding declaration/expression or text: setLoading(true);. Read it with the preceding opening statement (const loadDashboard = async () => {); it is not a standalone business operation.
63	`    setError("");`	Continues the surrounding declaration/expression or text: setError("");. Read it with the preceding opening statement (setLoading(true);); it is not a standalone business operation.
64	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
65	`      setData(await api<Dashboard>("/dashboard"));`	Waits for this asynchronous operation before continuing: setData(await api<Dashboard>("/dashboard"));. The returned result/error must still be handled.
66	`    } catch {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
67	`      setData({ schemes: [...orgSchemes] });`	Continues the surrounding declaration/expression or text: setData({ schemes: [...orgSchemes] });. Read it with the preceding opening statement (} catch {); it is not a standalone business operation.
68	`      setError(`	Continues the surrounding declaration/expression or text: setError(. Read it with the preceding opening statement (setData({ schemes: [...orgSchemes] });); it is not a standalone business operation.
69	`        "Live refresh is unavailable. Showing the latest schemes synchronized from Salesforce.",`	Continues the surrounding declaration/expression or text: "Live refresh is unavailable. Showing the latest schemes synchronized from Salesforce.",. Read it with the preceding opening statement (setError(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
70	`      );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
71	`    } finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
72	`      setLoading(false);`	Continues the surrounding declaration/expression or text: setLoading(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
73	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
74	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
75		Blank line separating logical sections; no executable operation.
76	`  useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.
77	`    loadDashboard();`	Continues the surrounding declaration/expression or text: loadDashboard();. Read it with the preceding opening statement (useEffect(() => {); it is not a standalone business operation.
78	`  }, []);`	Continues the surrounding declaration/expression or text: }, []);. Read it with the preceding opening statement (loadDashboard();); it is not a standalone business operation.
79		Blank line separating logical sections; no executable operation.
80	`  const percentage = useMemo(() => {`	Caches a derived value using the listed dependencies, such as filtered products or totals.
81	`    if (data?.target === undefined || data?.achievement === undefined || data.target <= 0) return 0;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (data?.target === undefined || data?.achievement === undefined || data.target <= 0) return 0;.
82	`    return Math.min(Math.round((data.achievement / data.target) * 100), 100);`	Returns Math.min(Math.round((data.achievement / data.target) * 100), 100) to the caller (or begins returned UI markup) and ends this execution path.
83	`  }, [data]);`	Continues the surrounding declaration/expression or text: }, [data]);. Read it with the preceding opening statement (return Math.min(Math.round((data.achievement / data.target) * 100), 100);); it is not a standalone business operation.
84		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
85	`  const metrics = [`	Declares/initializes local data used by the surrounding operation: const metrics = [. Collection contents and assignments below determine its purpose.
86	`    ["Total Orders", data?.totalOrders, "🗏"],`	Continues the surrounding declaration/expression or text: ["Total Orders", data?.totalOrders, "🗏"],. Read it with the preceding opening statement (const metrics = []; it is not a standalone business operation.
87	`    ["Pending Orders", data?.pendingOrders, "🗏"],`	Continues the surrounding declaration/expression or text: ["Pending Orders", data?.pendingOrders, "🗏"],. Read it with the preceding opening statement (["Total Orders", data?.totalOrders, "🗏"],); it is not a standalone business operation.
88	`    ["Today's Visits", data?.todayVisits, "◉"],`	Continues the surrounding declaration/expression or text: ["Today's Visits", data?.todayVisits, "◉"],. Read it with the preceding opening statement (["Pending Orders", data?.pendingOrders, "🗏"],); it is not a standalone business operation.
89	`    ["Completed Visits", data?.completedVisits, "✓"],`	Continues the surrounding declaration/expression or text: ["Completed Visits", data?.completedVisits, "✓"],. Read it with the preceding opening statement (["Today's Visits", data?.todayVisits, "◉"],); it is not a standalone business operation.
90	`    ["Pending Deliveries", data?.pendingDeliveries, "▣"],`	Continues the surrounding declaration/expression or text: ["Pending Deliveries", data?.pendingDeliveries, "▣"],. Read it with the preceding opening statement (["Completed Visits", data?.completedVisits, "✓"],); it is not a standalone business operation.
91	`  ];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
92		Blank line separating logical sections; no executable operation.
93	`  const money = (value?: number) =>`	Declares/initializes local data used by the surrounding operation: const money = (value?: number) =>. Collection contents and assignments below determine its purpose.
94	`    value === undefined ? <Text>—</Text> : <Money value={value} />;`	Assigns the right-hand expression to the named variable/property: value === undefined ? <Text> - </Text> : <Money value={value} />;. This is in-memory unless it is later persisted by an explicit call.
95		Blank line separating logical sections; no executable operation.
96	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
97	`    <SafeAreaView style={s.safe}>`	Renders/opens a UI element or component: <SafeAreaView style={s.safe}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
98	`<View style={s.shell}>`	Renders/opens a UI element or component: <View style={s.shell}>. Props and child content below determine appearance and interactions.
99	`<BrandHeader />`	Renders/opens a UI element or component: <BrandHeader />. Props and child content below determine appearance and interactions.
100	`<ScrollView`	Renders/opens a UI element or component: <ScrollView. Props and child content below determine appearance and interactions.
101	`style={s.page}`	Assigns the right-hand expression to the named variable/property: style={s.page}. This is in-memory unless it is later persisted by an explicit call.
102	`contentContainerStyle={s.content}`	Assigns the right-hand expression to the named variable/property: contentContainerStyle={s.content}. This is in-memory unless it is later persisted by an explicit call.
103	`showsVerticalScrollIndicator={false}`	Assigns the right-hand expression to the named variable/property: showsVerticalScrollIndicator={false}. This is in-memory unless it is later persisted by an explicit call.
104	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (showsVerticalScrollIndicator={false}); it is not a standalone business operation.
105	`<View style={s.header}>`	Renders/opens a UI element or component: <View style={s.header}>. Props and child content below determine appearance and interactions.
106	`<View style={s.headerRow}>`	Renders/opens a UI element or component: <View style={s.headerRow}>. Props and child content below determine appearance and interactions.
107	`<View style={s.identity}>`	Renders/opens a UI element or component: <View style={s.identity}>. Props and child content below determine appearance and interactions.
108	`<Text style={s.appLabel}>EMPLOYEE HUB</Text>`	Renders/opens a UI element or component: <Text style={s.appLabel}>EMPLOYEE HUB</Text>. Props and child content below determine appearance and interactions.
109	`<Text style={s.distributor}>{data?.employeeName || "Employee"}</Text>`	Renders/opens a UI element or component: <Text style={s.distributor}>{data?.employeeName || "Employee"}</Text>. Props and child content below determine appearance and interactions.
110	`<Text style={s.manager}>`	Renders/opens a UI element or component: <Text style={s.manager}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
111	`User: <Text style={{ fontWeight: "900" }}>{data?.userName || "Loading…"}</Text>`	Sets/declares the named object property or style/type member: User: <Text style={{ fontWeight: "900" }}>{data?.userName || "Loading…"}</Text>. Interpret it in the enclosing object, props or type definition.
112	`</Text>`	Closes the UI element/component opened above.
113	`<Text style={s.profileLine}>{data?.loginEmail || ""}</Text>`	Renders/opens a UI element or component: <Text style={s.profileLine}>{data?.loginEmail || ""}</Text>. Props and child content below determine appearance and interactions.
114	`<Text style={s.profileLine}>`	Renders/opens a UI element or component: <Text style={s.profileLine}>. Props and child content below determine appearance and interactions.
115	`{data?.beatName ? `Assigned beat: ${data.beatName}` : ""}`	Continues the surrounding declaration/expression or text: {data?.beatName ? `Assigned beat: ${data.beatName}` : ""}. Read it with the preceding opening statement (<Text style={s.profileLine}>); it is not a standalone business operation.
116	`</Text>`	Closes the UI element/component opened above.
117	`</View>`	Closes the UI element/component opened above.
118	`<Text style={s.date}>`	Renders/opens a UI element or component: <Text style={s.date}>. Props and child content below determine appearance and interactions.
119	`▣{" "}`	Continues the surrounding declaration/expression or text: ▣{" "}. Read it with the preceding opening statement (<Text style={s.date}>); it is not a standalone business operation.
120	`{new Date().toLocaleDateString("en-IN", {`	Continues the surrounding declaration/expression or text: {new Date().toLocaleDateString("en-IN", {. Read it with the preceding opening statement (▣{" "}); it is not a standalone business operation.
121	`weekday: "short",`	Sets/declares the named object property or style/type member: weekday: "short",. Interpret it in the enclosing object, props or type definition.
122	`day: "numeric",`	Sets/declares the named object property or style/type member: day: "numeric",. Interpret it in the enclosing object, props or type definition.
123	`month: "short",`	Sets/declares the named object property or style/type member: month: "short",. Interpret it in the enclosing object, props or type definition.
124	`year: "numeric",`	Sets/declares the named object property or style/type member: year: "numeric",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
125	`})}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
126	`</Text>`	Closes the UI element/component opened above.
127	`</View>`	Closes the UI element/component opened above.
128	`<View style={s.headerActions}>`	Renders/opens a UI element or component: <View style={s.headerActions}>. Props and child content below determine appearance and interactions.
129	`<Pressable style={s.startPill} onPress={() => navigation.navigate("Day")}>`	Renders/opens a UI element or component: <Pressable style={s.startPill} onPress={() => navigation.navigate("Day")}>. Props and child content below determine appearance and interactions.
130	`<Text style={s.startPillText}>▷ Start / End Day</Text>`	Renders/opens a UI element or component: <Text style={s.startPillText}>▷ Start / End Day</Text>. Props and child content below determine appearance and interactions.
131	`</Pressable>`	Closes the UI element/component opened above.
132	`<Pressable style={s.routePill} onPress={() => navigation.navigate("Outlets")}>`	Renders/opens a UI element or component: <Pressable style={s.routePill} onPress={() => navigation.navigate("Outlets")}>. Props and child content below determine appearance and interactions.
133	`<Text style={s.routeText}>➤ Today's Route</Text>`	Renders/opens a UI element or component: <Text style={s.routeText}>➤ Today's Route</Text>. Props and child content below determine appearance and interactions.
134	`</Pressable>`	Closes the UI element/component opened above.
135	`</View>`	Closes the UI element/component opened above.
136	`</View>`	Closes the UI element/component opened above.
137		Blank line separating logical sections; no executable operation.
138	`{loading && (`	Continues the surrounding declaration/expression or text: {loading && (. Read it with the preceding opening statement; it is not a standalone business operation.
139	`<View style={s.loading}>`	Renders/opens a UI element or component: <View style={s.loading}>. Props and child content below determine appearance and interactions.
140	`<ActivityIndicator color={colors.brand} />`	Renders/opens a UI element or component: <ActivityIndicator color={colors.brand} />. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
141	`<Text style={s.muted}>Loading live Salesforce data…</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>Loading live Salesforce data…</Text>. Props and child content below determine appearance and interactions.
142	`</View>`	Closes the UI element/component opened above.
143	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
144	`{!!error && !loading && (`	Continues the surrounding declaration/expression or text: {!!error && !loading && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
145	`<Pressable onPress={loadDashboard}>`	Renders/opens a UI element or component: <Pressable onPress={loadDashboard}>. Props and child content below determine appearance and interactions.
146	`<Text style={s.snapshot}>Salesforce snapshot • tap to refresh</Text>`	Renders/opens a UI element or component: <Text style={s.snapshot}>Salesforce snapshot • tap to refresh</Text>. Props and child content below determine appearance and interactions.
147	`</Pressable>`	Closes the UI element/component opened above.
148	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
149		Blank line separating logical sections; no executable operation.
150	`<Card style={s.targetCard}>`	Renders/opens a UI element or component: <Card style={s.targetCard}>. Props and child content below determine appearance and interactions.
151	`<View style={s.targetTop}>`	Renders/opens a UI element or component: <View style={s.targetTop}>. Props and child content below determine appearance and interactions.
152	`<View>`	Renders/opens a UI element or component: <View>. Props and child content below determine appearance and interactions.
153	`<Text style={s.label}>TODAY'S TARGET</Text>`	Renders/opens a UI element or component: <Text style={s.label}>TODAY'S TARGET</Text>. Props and child content below determine appearance and interactions.
154	`<Text style={s.targetValue}>{money(data?.target)}</Text>`	Renders/opens a UI element or component: <Text style={s.targetValue}>{money(data?.target)}</Text>. Props and child content below determine appearance and interactions.
155	`</View>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
156	`<View style={s.badge}>`	Renders/opens a UI element or component: <View style={s.badge}>. Props and child content below determine appearance and interactions.
157	`<Text style={s.badgeValue}>{percentage}%</Text>`	Renders/opens a UI element or component: <Text style={s.badgeValue}>{percentage}%</Text>. Props and child content below determine appearance and interactions.
158	`<Text style={s.badgeLabel}>ACHIEVED</Text>`	Renders/opens a UI element or component: <Text style={s.badgeLabel}>ACHIEVED</Text>. Props and child content below determine appearance and interactions.
159	`</View>`	Closes the UI element/component opened above.
160	`</View>`	Closes the UI element/component opened above.
161	`<View style={s.track}>`	Renders/opens a UI element or component: <View style={s.track}>. Props and child content below determine appearance and interactions.
162	`<View style={[s.fill, { width: \`${percentage}%\` }]} />`	Renders/opens a UI element or component: <View style={[s.fill, { width: `${percentage}%` }]} />. Props and child content below determine appearance and interactions.
163	`</View>`	Closes the UI element/component opened above.
164	`<View style={s.amountRow}>`	Renders/opens a UI element or component: <View style={s.amountRow}>. Props and child content below determine appearance and interactions.
165	`<View style={s.flex}>`	Renders/opens a UI element or component: <View style={s.flex}>. Props and child content below determine appearance and interactions.
166	`<Text style={s.label}>TODAY'S ACHIEVEMENT</Text>`	Renders/opens a UI element or component: <Text style={s.label}>TODAY'S ACHIEVEMENT</Text>. Props and child content below determine appearance and interactions.
167	`<Text style={s.amount}>{money(data?.achievement)}</Text>`	Renders/opens a UI element or component: <Text style={s.amount}>{money(data?.achievement)}</Text>. Props and child content below determine appearance and interactions.
168	`</View>`	Closes the UI element/component opened above.
169	`<View style={s.divider} />`	Renders/opens a UI element or component: <View style={s.divider} />. Props and child content below determine appearance and interactions.
170	`<View style={s.flex}>`	Renders/opens a UI element or component: <View style={s.flex}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
171	`<Text style={s.label}>REMAINING</Text>`	Renders/opens a UI element or component: <Text style={s.label}>REMAINING</Text>. Props and child content below determine appearance and interactions.
172	`<Text style={s.amount}>`	Renders/opens a UI element or component: <Text style={s.amount}>. Props and child content below determine appearance and interactions.
173	`{data?.target === undefined || data?.achievement === undefined ? (`	Continues the surrounding declaration/expression or text: {data?.target === undefined || data?.achievement === undefined ? (. Read it with the preceding opening statement (<Text style={s.amount}>); it is not a standalone business operation.
174	`"—"`	Continues the surrounding declaration/expression or text: " - ". Read it with the preceding opening statement ({data?.target === undefined || data?.achievement === undefined ? (); it is not a standalone business operation.
175	`) : (`	Continues the surrounding declaration/expression or text:) : (. Read it with the preceding opening statement (" - "); it is not a standalone business operation.
176	`<Money value={Math.max(data.target - data.achievement, 0)} />`	Renders/opens a UI element or component: <Money value={Math.max(data.target - data.achievement, 0)} />. Props and child content below determine appearance and interactions.
177	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
178	`</Text>`	Closes the UI element/component opened above.
179	`</View>`	Closes the UI element/component opened above.
180	`</View>`	Closes the UI element/component opened above.
181	`</Card>`	Closes the UI element/component opened above.
182		Blank line separating logical sections; no executable operation.
183	`<View style={s.grid}>`	Renders/opens a UI element or component: <View style={s.grid}>. Props and child content below determine appearance and interactions.
184	`{metrics.map(([label, value, icon]) => (`	Transforms/selects/aggregates collection values with the callback shown here: {metrics.map(([label, value, icon]) => (. Read the callback body and result assignment together.
185	`<Card key={String(label)} style={s.metricCard}>`	Renders/opens a UI element or component: <Card key={String(label)} style={s.metricCard}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
186	`<View style={s.icon}>`	Renders/opens a UI element or component: <View style={s.icon}>. Props and child content below determine appearance and interactions.
187	`<Text style={s.iconText}>{icon}</Text>`	Renders/opens a UI element or component: <Text style={s.iconText}>{icon}</Text>. Props and child content below determine appearance and interactions.
188	`</View>`	Closes the UI element/component opened above.
189	`<Text style={s.metricValue}>{value ?? "—"}</Text>`	Renders/opens a UI element or component: <Text style={s.metricValue}>{value ?? " - "}</Text>. Props and child content below determine appearance and interactions.
190	`<Text style={s.metricLabel}>{label}</Text>`	Renders/opens a UI element or component: <Text style={s.metricLabel}>{label}</Text>. Props and child content below determine appearance and interactions.
191	`</Card>`	Closes the UI element/component opened above.
192	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
193	`</View>`	Closes the UI element/component opened above.
194		Blank line separating logical sections; no executable operation.
195	`<Card style={s.outstanding}>`	Renders/opens a UI element or component: <Card style={s.outstanding}>. Props and child content below determine appearance and interactions.
196	`<View>`	Renders/opens a UI element or component: <View>. Props and child content below determine appearance and interactions.
197	`<Text style={s.label}>OUTSTANDING AMOUNT</Text>`	Renders/opens a UI element or component: <Text style={s.label}>OUTSTANDING AMOUNT</Text>. Props and child content below determine appearance and interactions.
198	`<Text style={s.outstandingValue}>{money(data?.outstandingAmount)}</Text>`	Renders/opens a UI element or component: <Text style={s.outstandingValue}>{money(data?.outstandingAmount)}</Text>. Props and child content below determine appearance and interactions.
199	`</View>`	Closes the UI element/component opened above.
200	`<View style={s.rupee}>`	Renders/opens a UI element or component: <View style={s.rupee}>. Props and child content below determine appearance and interactions.
201	`<Text style={s.rupeeText}>₹</Text>`	Renders/opens a UI element or component: <Text style={s.rupeeText}>₹</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
202	`</View>`	Closes the UI element/component opened above.
203	`</Card>`	Closes the UI element/component opened above.
204		Blank line separating logical sections; no executable operation.
205	`<View style={s.sectionHeader}>`	Renders/opens a UI element or component: <View style={s.sectionHeader}>. Props and child content below determine appearance and interactions.
206	`<View>`	Renders/opens a UI element or component: <View>. Props and child content below determine appearance and interactions.
207	`<Text style={s.sectionTitle}>Active Schemes</Text>`	Renders/opens a UI element or component: <Text style={s.sectionTitle}>Active Schemes</Text>. Props and child content below determine appearance and interactions.
208	`<Text style={s.muted}>Offers available from Salesforce</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>Offers available from Salesforce</Text>. Props and child content below determine appearance and interactions.
209	`</View>`	Closes the UI element/component opened above.
210	`<Text style={s.count}>{data?.schemes?.length ?? 0}</Text>`	Renders/opens a UI element or component: <Text style={s.count}>{data?.schemes?.length ?? 0}</Text>. Props and child content below determine appearance and interactions.
211	`</View>`	Closes the UI element/component opened above.
212	`{!loading && !data?.schemes?.length && (`	Continues the surrounding declaration/expression or text: {!loading && !data?.schemes?.length && (. Read it with the preceding opening statement (</View>); it is not a standalone business operation.
213	`<Card style={s.empty}>`	Renders/opens a UI element or component: <Card style={s.empty}>. Props and child content below determine appearance and interactions.
214	`<Text style={s.emptyTitle}>No active schemes</Text>`	Renders/opens a UI element or component: <Text style={s.emptyTitle}>No active schemes</Text>. Props and child content below determine appearance and interactions.
215	`<Text style={s.muted}>New active offers will appear here automatically.</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>New active offers will appear here automatically.</Text>. Props and child content below determine appearance and interactions.
216	`</Card>`	Closes the UI element/component opened above.
217	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
218	`{data?.schemes?.map((scheme, index) => (`	Transforms/selects/aggregates collection values with the callback shown here: {data?.schemes?.map((scheme, index) => (. Read the callback body and result assignment together.
219	`<Card`	Renders/opens a UI element or component: <Card. Props and child content below determine appearance and interactions.
220	`key={scheme.id}`	Assigns the right-hand expression to the named variable/property: key={scheme.id}. This is in-memory unless it is later persisted by an explicit call.
221	`style={{ ...s.scheme, borderTopColor: index % 2 ? colors.blue : colors.warning }}`	Assigns the right-hand expression to the named variable/property: style={{ ...s.scheme, borderTopColor: index % 2 ? colors.blue : colors.warning }}. This is in-memory unless it is later persisted by an explicit call.
222	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (style={{ ...s.scheme, borderTopColor: index % 2 ? colors.blue : colors.warning }}); it is not a standalone business operation.
223	`<View style={s.schemeTop}>`	Renders/opens a UI element or component: <View style={s.schemeTop}>. Props and child content below determine appearance and interactions.
224	`<Text style={s.schemeType}>{scheme.type || "ACTIVE OFFER"}</Text>`	Renders/opens a UI element or component: <Text style={s.schemeType}>{scheme.type || "ACTIVE OFFER"}</Text>. Props and child content below determine appearance and interactions.
225	`<Text style={s.schemeExpiry}>Valid until {displayDate(scheme.endDate)}</Text>`	Renders/opens a UI element or component: <Text style={s.schemeExpiry}>Valid until {displayDate(scheme.endDate)}</Text>. Props and child content below determine appearance and interactions.
226	`</View>`	Closes the UI element/component opened above.
227	`<Text style={s.schemeName}>{scheme.name}</Text>`	Renders/opens a UI element or component: <Text style={s.schemeName}>{scheme.name}</Text>. Props and child content below determine appearance and interactions.
228	`<Text style={s.schemeProduct}>`	Renders/opens a UI element or component: <Text style={s.schemeProduct}>. Props and child content below determine appearance and interactions.
229	`{scheme.product || scheme.products?.join(", ") || "Eligible products"}`	Continues the surrounding declaration/expression or text: {scheme.product || scheme.products?.join(", ") || "Eligible products"}. Read it with the preceding opening statement (<Text style={s.schemeProduct}>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
230	`</Text>`	Closes the UI element/component opened above.
231	`<Text style={s.schemeBenefit}>`	Renders/opens a UI element or component: <Text style={s.schemeBenefit}>. Props and child content below determine appearance and interactions.
232	`{scheme.benefit || scheme.description || "View offer details"}`	Continues the surrounding declaration/expression or text: {scheme.benefit || scheme.description || "View offer details"}. Read it with the preceding opening statement (<Text style={s.schemeBenefit}>); it is not a standalone business operation.
233	`</Text>`	Closes the UI element/component opened above.
234	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
235	`style={s.viewButton}`	Assigns the right-hand expression to the named variable/property: style={s.viewButton}. This is in-memory unless it is later persisted by an explicit call.
236	`onPress={() =>`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
237	`Alert.alert(`	Calls the named method: Alert.alert(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
238	`scheme.name,`	Continues the surrounding declaration/expression or text: scheme.name,. Read it with the preceding opening statement (Alert.alert(); it is not a standalone business operation.
239	`scheme.description ||`	Continues the surrounding declaration/expression or text: scheme.description ||. Read it with the preceding opening statement (scheme.name,); it is not a standalone business operation.
240	`scheme.benefit ||`	Continues the surrounding declaration/expression or text: scheme.benefit ||. Read it with the preceding opening statement (scheme.description ||); it is not a standalone business operation.
241	`"Scheme details are available in Salesforce.",`	Continues the surrounding declaration/expression or text: "Scheme details are available in Salesforce.",. Read it with the preceding opening statement (scheme.benefit ||); it is not a standalone business operation.
242	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
243	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
244	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (}); it is not a standalone business operation.
245	`<Text style={s.viewButtonText}>VIEW SCHEME →</Text>`	Renders/opens a UI element or component: <Text style={s.viewButtonText}>VIEW SCHEME →</Text>. Props and child content below determine appearance and interactions.
246	`</Pressable>`	Closes the UI element/component opened above.
247	`</Card>`	Closes the UI element/component opened above.
248	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
249	`</ScrollView>`	Closes the UI element/component opened above.
250	`<BottomNav active="Main" />`	Renders/opens a UI element or component: <BottomNav active="Main" />. Props and child content below determine appearance and interactions.
251	`</View>`	Closes the UI element/component opened above.
252	`</SafeAreaView>`	Closes the UI element/component opened above.
253	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
254	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
255		Blank line separating logical sections; no executable operation.
256	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
257	`safe: { flex: 1, backgroundColor: "#E8E1D3" },`	Sets/declares the named object property or style/type member: safe: { flex: 1, backgroundColor: "#E8E1D3" },. Interpret it in the enclosing object, props or type definition.
258	`shell: {`	Sets/declares the named object property or style/type member: shell: {. Interpret it in the enclosing object, props or type definition.
259	`flex: 1,`	Sets/declares the named object property or style/type member: flex: 1,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
260	`    width: "100%",`	Sets/declares the named object property or style/type member: width: "100%",. Interpret it in the enclosing object, props or type definition.
261	`    maxWidth: 430,`	Sets/declares the named object property or style/type member: maxWidth: 430,. Interpret it in the enclosing object, props or type definition.
262	`    alignSelf: "center",`	Sets/declares the named object property or style/type member: alignSelf: "center",. Interpret it in the enclosing object, props or type definition.
263	`    backgroundColor: colors.surface,`	Sets/declares the named object property or style/type member: backgroundColor: colors.surface,. Interpret it in the enclosing object, props or type definition.
264	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
265	`  page: { flex: 1, backgroundColor: colors.surface },`	Sets/declares the named object property or style/type member: page: { flex: 1, backgroundColor: colors.surface },. Interpret it in the enclosing object, props or type definition.
266	`  content: { paddingBottom: 20 },`	Sets/declares the named object property or style/type member: content: { paddingBottom: 20 },. Interpret it in the enclosing object, props or type definition.
267	`  header: {`	Sets/declares the named object property or style/type member: header: {. Interpret it in the enclosing object, props or type definition.
268	`    backgroundColor: colors.navy,`	Sets/declares the named object property or style/type member: backgroundColor: colors.navy,. Interpret it in the enclosing object, props or type definition.
269	`    margin: 14,`	Sets/declares the named object property or style/type member: margin: 14,. Interpret it in the enclosing object, props or type definition.
270	`    padding: 17,`	Sets/declares the named object property or style/type member: padding: 17,. Interpret it in the enclosing object, props or type definition.
271	`    borderTopLeftRadius: 8,`	Sets/declares the named object property or style/type member: borderTopLeftRadius: 8,. Interpret it in the enclosing object, props or type definition.
272	`    borderTopRightRadius: 28,`	Sets/declares the named object property or style/type member: borderTopRightRadius: 28,. Interpret it in the enclosing object, props or type definition.
273	`    borderBottomLeftRadius: 28,`	Sets/declares the named object property or style/type member: borderBottomLeftRadius: 28,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
274	`    borderBottomRightRadius: 8,`	Sets/declares the named object property or style/type member: borderBottomRightRadius: 8,. Interpret it in the enclosing object, props or type definition.
275	`    shadowColor: colors.navy,`	Sets/declares the named object property or style/type member: shadowColor: colors.navy,. Interpret it in the enclosing object, props or type definition.
276	`    shadowOpacity: 0.2,`	Sets/declares the named object property or style/type member: shadowOpacity: 0.2,. Interpret it in the enclosing object, props or type definition.
277	`    shadowRadius: 10,`	Sets/declares the named object property or style/type member: shadowRadius: 10,. Interpret it in the enclosing object, props or type definition.
278	`    elevation: 5,`	Sets/declares the named object property or style/type member: elevation: 5,. Interpret it in the enclosing object, props or type definition.
279	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
280	`  headerRow: { flexDirection: "row", justifyContent: "space-between", alignItems: "flex-start" },`	Sets/declares the named object property or style/type member: headerRow: { flexDirection: "row", justifyContent: "space-between", alignItems: "flex-start" },. Interpret it in the enclosing object, props or type definition.
281	`  identity: { flex: 1, paddingRight: 8 },`	Sets/declares the named object property or style/type member: identity: { flex: 1, paddingRight: 8 },. Interpret it in the enclosing object, props or type definition.
282	`  appLabel: { color: "#9DD9C9", fontSize: 10, fontWeight: "800" },`	Sets/declares the named object property or style/type member: appLabel: { color: "#9DD9C9", fontSize: 10, fontWeight: "800" },. Interpret it in the enclosing object, props or type definition.
283	`  distributor: { color: colors.white, fontSize: 19, fontWeight: "900", marginTop: 5 },`	Sets/declares the named object property or style/type member: distributor: { color: colors.white, fontSize: 19, fontWeight: "900", marginTop: 5 },. Interpret it in the enclosing object, props or type definition.
284	`  manager: { color: "#D8EEE8", fontSize: 11, marginTop: 5 },`	Sets/declares the named object property or style/type member: manager: { color: "#D8EEE8", fontSize: 11, marginTop: 5 },. Interpret it in the enclosing object, props or type definition.
285	`  profileLine: { color: "#BFD9D2", fontSize: 9, marginTop: 3 },`	Sets/declares the named object property or style/type member: profileLine: { color: "#BFD9D2", fontSize: 9, marginTop: 3 },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
286	`  headerActions: {`	Sets/declares the named object property or style/type member: headerActions: {. Interpret it in the enclosing object, props or type definition.
287	`    borderTopWidth: 1,`	Sets/declares the named object property or style/type member: borderTopWidth: 1,. Interpret it in the enclosing object, props or type definition.
288	`    borderTopColor: "#34635E",`	Sets/declares the named object property or style/type member: borderTopColor: "#34635E",. Interpret it in the enclosing object, props or type definition.
289	`    marginTop: 13,`	Sets/declares the named object property or style/type member: marginTop: 13,. Interpret it in the enclosing object, props or type definition.
290	`    paddingTop: 11,`	Sets/declares the named object property or style/type member: paddingTop: 11,. Interpret it in the enclosing object, props or type definition.
291	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
292	`    justifyContent: "space-between",`	Sets/declares the named object property or style/type member: justifyContent: "space-between",. Interpret it in the enclosing object, props or type definition.
293	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
294	`  startPill: {`	Sets/declares the named object property or style/type member: startPill: {. Interpret it in the enclosing object, props or type definition.
295	`    backgroundColor: "#FFFDF7",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFFDF7",. Interpret it in the enclosing object, props or type definition.
296	`    borderRadius: 10,`	Sets/declares the named object property or style/type member: borderRadius: 10,. Interpret it in the enclosing object, props or type definition.
297	`    paddingHorizontal: 14,`	Sets/declares the named object property or style/type member: paddingHorizontal: 14,. Interpret it in the enclosing object, props or type definition.
298	`    paddingVertical: 9,`	Sets/declares the named object property or style/type member: paddingVertical: 9,. Interpret it in the enclosing object, props or type definition.
299	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
300	`  startPillText: { color: colors.navy, fontWeight: "900", fontSize: 12 },`	Sets/declares the named object property or style/type member: startPillText: { color: colors.navy, fontWeight: "900", fontSize: 12 },. Interpret it in the enclosing object, props or type definition.
301	`  routePill: {`	Sets/declares the named object property or style/type member: routePill: {. Interpret it in the enclosing object, props or type definition.
302	`    backgroundColor: colors.blue,`	Sets/declares the named object property or style/type member: backgroundColor: colors.blue,. Interpret it in the enclosing object, props or type definition.
303	`    borderRadius: 10,`	Sets/declares the named object property or style/type member: borderRadius: 10,. Interpret it in the enclosing object, props or type definition.
304	`    paddingHorizontal: 14,`	Sets/declares the named object property or style/type member: paddingHorizontal: 14,. Interpret it in the enclosing object, props or type definition.
305	`    paddingVertical: 9,`	Sets/declares the named object property or style/type member: paddingVertical: 9,. Interpret it in the enclosing object, props or type definition.
306	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
307	`  routeText: { color: "white", fontWeight: "800", fontSize: 11 },`	Sets/declares the named object property or style/type member: routeText: { color: "white", fontWeight: "800", fontSize: 11 },. Interpret it in the enclosing object, props or type definition.
308	`  snapshot: { textAlign: "center", fontSize: 10, color: colors.muted, marginBottom: 5 },`	Sets/declares the named object property or style/type member: snapshot: { textAlign: "center", fontSize: 10, color: colors.muted, marginBottom: 5 },. Interpret it in the enclosing object, props or type definition.
309	`  avatar: {`	Sets/declares the named object property or style/type member: avatar: {. Interpret it in the enclosing object, props or type definition.
310	`    width: 46,`	Sets/declares the named object property or style/type member: width: 46,. Interpret it in the enclosing object, props or type definition.
311	`    height: 46,`	Sets/declares the named object property or style/type member: height: 46,. Interpret it in the enclosing object, props or type definition.
312	`    borderRadius: 14,`	Sets/declares the named object property or style/type member: borderRadius: 14,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
313	`alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
314	`justifyContent: "center",`	Sets/declares the named object property or style/type member: justifyContent: "center",. Interpret it in the enclosing object, props or type definition.
315	`backgroundColor: colors.blue,`	Sets/declares the named object property or style/type member: backgroundColor: colors.blue,. Interpret it in the enclosing object, props or type definition.
316	`borderWidth: 2,`	Sets/declares the named object property or style/type member: borderWidth: 2,. Interpret it in the enclosing object, props or type definition.
317	`borderColor: "#FFC0AF",`	Sets/declares the named object property or style/type member: borderColor: "#FFC0AF",. Interpret it in the enclosing object, props or type definition.
318	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
319	`avatarText: { color: colors.white, fontSize: 19, fontWeight: "900" },`	Sets/declares the named object property or style/type member: avatarText: { color: colors.white, fontSize: 19, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
320	`greeting: { color: colors.white, fontSize: 25, fontWeight: "900", marginTop: 22 },`	Sets/declares the named object property or style/type member: greeting: { color: colors.white, fontSize: 25, fontWeight: "900", marginTop: 22 },. Interpret it in the enclosing object, props or type definition.
321	`date: {`	Sets/declares the named object property or style/type member: date: {. Interpret it in the enclosing object, props or type definition.
322	`color: colors.navy,`	Sets/declares the named object property or style/type member: color: colors.navy,. Interpret it in the enclosing object, props or type definition.
323	`fontSize: 9,`	Sets/declares the named object property or style/type member: fontSize: 9,. Interpret it in the enclosing object, props or type definition.
324	`backgroundColor: "#F6C85F",`	Sets/declares the named object property or style/type member: backgroundColor: "#F6C85F",. Interpret it in the enclosing object, props or type definition.
325	`padding: 7,`	Sets/declares the named object property or style/type member: padding: 7,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
326	`borderRadius: 8,`	Sets/declares the named object property or style/type member: borderRadius: 8,. Interpret it in the enclosing object, props or type definition.
327	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
328	`loading: { flexDirection: "row", gap: 10, justifyContent: "center", padding: 18 },`	Sets/declares the named object property or style/type member: loading: { flexDirection: "row", gap: 10, justifyContent: "center", padding: 18 },. Interpret it in the enclosing object, props or type definition.
329	`muted: { color: colors.muted, fontSize: 12 },`	Sets/declares the named object property or style/type member: muted: { color: colors.muted, fontSize: 12 },. Interpret it in the enclosing object, props or type definition.
330	`syncCard: {`	Sets/declares the named object property or style/type member: syncCard: {. Interpret it in the enclosing object, props or type definition.
331	`marginHorizontal: 16,`	Sets/declares the named object property or style/type member: marginHorizontal: 16,. Interpret it in the enclosing object, props or type definition.
332	`marginTop: 14,`	Sets/declares the named object property or style/type member: marginTop: 14,. Interpret it in the enclosing object, props or type definition.
333	`borderLeftWidth: 4,`	Sets/declares the named object property or style/type member: borderLeftWidth: 4,. Interpret it in the enclosing object, props or type definition.
334	`borderLeftColor: colors.warning,`	Sets/declares the named object property or style/type member: borderLeftColor: colors.warning,. Interpret it in the enclosing object, props or type definition.
335	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
336	`syncTitle: { color: colors.ink, fontWeight: "900", fontSize: 16 },`	Sets/declares the named object property or style/type member: syncTitle: { color: colors.ink, fontWeight: "900", fontSize: 16 },. Interpret it in the enclosing object, props or type definition.
337	`errorText: { color: colors.muted, lineHeight: 20, marginVertical: 7 },`	Sets/declares the named object property or style/type member: errorText: { color: colors.muted, lineHeight: 20, marginVertical: 7 },. Interpret it in the enclosing object, props or type definition.
338	`targetCard: { marginHorizontal: 14, padding: 16 },`	Sets/declares the named object property or style/type member: targetCard: { marginHorizontal: 14, padding: 16 },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
339	`  targetTop: { flexDirection: "row", justifyContent: "space-between", alignItems: "center" },`	Sets/declares the named object property or style/type member: targetTop: { flexDirection: "row", justifyContent: "space-between", alignItems: "center" },. Interpret it in the enclosing object, props or type definition.
340	`  label: { color: colors.muted, fontSize: 10, fontWeight: "900", letterSpacing: 0.4 },`	Sets/declares the named object property or style/type member: label: { color: colors.muted, fontSize: 10, fontWeight: "900", letterSpacing: 0.4 },. Interpret it in the enclosing object, props or type definition.
341	`  targetValue: { color: colors.ink, fontSize: 22, fontWeight: "900", marginTop: 5 },`	Sets/declares the named object property or style/type member: targetValue: { color: colors.ink, fontSize: 22, fontWeight: "900", marginTop: 5 },. Interpret it in the enclosing object, props or type definition.
342	`  badge: {`	Sets/declares the named object property or style/type member: badge: {. Interpret it in the enclosing object, props or type definition.
343	`    backgroundColor: "#DFF3ED",`	Sets/declares the named object property or style/type member: backgroundColor: "#DFF3ED",. Interpret it in the enclosing object, props or type definition.
344	`    borderRadius: 10,`	Sets/declares the named object property or style/type member: borderRadius: 10,. Interpret it in the enclosing object, props or type definition.
345	`    paddingVertical: 8,`	Sets/declares the named object property or style/type member: paddingVertical: 8,. Interpret it in the enclosing object, props or type definition.
346	`    paddingHorizontal: 13,`	Sets/declares the named object property or style/type member: paddingHorizontal: 13,. Interpret it in the enclosing object, props or type definition.
347	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
348	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
349	`  badgeValue: { color: colors.brand, fontWeight: "900", fontSize: 17 },`	Sets/declares the named object property or style/type member: badgeValue: { color: colors.brand, fontWeight: "900", fontSize: 17 },. Interpret it in the enclosing object, props or type definition.
350	`  badgeLabel: { color: colors.brand, fontSize: 8, fontWeight: "900" },`	Sets/declares the named object property or style/type member: badgeLabel: { color: colors.brand, fontSize: 8, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
351	`track: {`	Sets/declares the named object property or style/type member: track: {. Interpret it in the enclosing object, props or type definition.
352	`height: 9,`	Sets/declares the named object property or style/type member: height: 9,. Interpret it in the enclosing object, props or type definition.
353	`backgroundColor: "#DDE8E3",`	Sets/declares the named object property or style/type member: backgroundColor: "#DDE8E3",. Interpret it in the enclosing object, props or type definition.
354	`borderRadius: 9,`	Sets/declares the named object property or style/type member: borderRadius: 9,. Interpret it in the enclosing object, props or type definition.
355	`overflow: "hidden",`	Sets/declares the named object property or style/type member: overflow: "hidden",. Interpret it in the enclosing object, props or type definition.
356	`marginVertical: 18,`	Sets/declares the named object property or style/type member: marginVertical: 18,. Interpret it in the enclosing object, props or type definition.
357	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
358	`fill: { height: 9, backgroundColor: colors.success, borderRadius: 9 },`	Sets/declares the named object property or style/type member: fill: { height: 9, backgroundColor: colors.success, borderRadius: 9 },. Interpret it in the enclosing object, props or type definition.
359	`amountRow: { flexDirection: "row", alignItems: "center" },`	Sets/declares the named object property or style/type member: amountRow: { flexDirection: "row", alignItems: "center" },. Interpret it in the enclosing object, props or type definition.
360	`flex: { flex: 1 },`	Sets/declares the named object property or style/type member: flex: { flex: 1 },. Interpret it in the enclosing object, props or type definition.
361	`divider: { height: 42, width: 1, backgroundColor: colors.border, marginHorizontal: 14 },`	Sets/declares the named object property or style/type member: divider: { height: 42, width: 1, backgroundColor: colors.border, marginHorizontal: 14 },. Interpret it in the enclosing object, props or type definition.
362	`amount: { color: colors.ink, fontSize: 17, fontWeight: "900", marginTop: 5 },`	Sets/declares the named object property or style/type member: amount: { color: colors.ink, fontSize: 17, fontWeight: "900", marginTop: 5 },. Interpret it in the enclosing object, props or type definition.
363	`grid: { flexDirection: "row", flexWrap: "wrap", paddingHorizontal: 10 },`	Sets/declares the named object property or style/type member: grid: { flexDirection: "row", flexWrap: "wrap", paddingHorizontal: 10 },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
364	`  metricCard: {`	Sets/declares the named object property or style/type member: metricCard: {. Interpret it in the enclosing object, props or type definition.
365	`    width: "46%",`	Sets/declares the named object property or style/type member: width: "46%",. Interpret it in the enclosing object, props or type definition.
366	`    marginHorizontal: "2%",`	Sets/declares the named object property or style/type member: marginHorizontal: "2%",. Interpret it in the enclosing object, props or type definition.
367	`    minHeight: 126,`	Sets/declares the named object property or style/type member: minHeight: 126,. Interpret it in the enclosing object, props or type definition.
368	`    padding: 15,`	Sets/declares the named object property or style/type member: padding: 15,. Interpret it in the enclosing object, props or type definition.
369	`    borderTopWidth: 3,`	Sets/declares the named object property or style/type member: borderTopWidth: 3,. Interpret it in the enclosing object, props or type definition.
370	`    borderTopColor: "#9DD9C9",`	Sets/declares the named object property or style/type member: borderTopColor: "#9DD9C9",. Interpret it in the enclosing object, props or type definition.
371	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
372	`  icon: {`	Sets/declares the named object property or style/type member: icon: {. Interpret it in the enclosing object, props or type definition.
373	`    width: 32,`	Sets/declares the named object property or style/type member: width: 32,. Interpret it in the enclosing object, props or type definition.
374	`    height: 32,`	Sets/declares the named object property or style/type member: height: 32,. Interpret it in the enclosing object, props or type definition.
375	`    borderRadius: 16,`	Sets/declares the named object property or style/type member: borderRadius: 16,. Interpret it in the enclosing object, props or type definition.
376	`    backgroundColor: "#DFF3ED",`	Sets/declares the named object property or style/type member: backgroundColor: "#DFF3ED",. Interpret it in the enclosing object, props or type definition.
377	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
378	`    justifyContent: "center",`	Sets/declares the named object property or style/type member: justifyContent: "center",. Interpret it in the enclosing object, props or type definition.
379	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
380	`  iconText: { color: colors.brand, fontSize: 17, fontWeight: "900" },`	Sets/declares the named object property or style/type member: iconText: { color: colors.brand, fontSize: 17, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
381	`  metricValue: { color: colors.ink, fontSize: 25, fontWeight: "900", marginTop: 10 },`	Sets/declares the named object property or style/type member: metricValue: { color: colors.ink, fontSize: 25, fontWeight: "900", marginTop: 10 },. Interpret it in the enclosing object, props or type definition.
382	`  metricLabel: { color: colors.muted, fontSize: 12, marginTop: 3 },`	Sets/declares the named object property or style/type member: metricLabel: { color: colors.muted, fontSize: 12, marginTop: 3 },. Interpret it in the enclosing object, props or type definition.
383	`  outstanding: {`	Sets/declares the named object property or style/type member: outstanding: {. Interpret it in the enclosing object, props or type definition.
384	`    marginHorizontal: 16,`	Sets/declares the named object property or style/type member: marginHorizontal: 16,. Interpret it in the enclosing object, props or type definition.
385	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
386	`    justifyContent: "space-between",`	Sets/declares the named object property or style/type member: justifyContent: "space-between",. Interpret it in the enclosing object, props or type definition.
387	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
388	`    padding: 18,`	Sets/declares the named object property or style/type member: padding: 18,. Interpret it in the enclosing object, props or type definition.
389	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
390	`  outstandingValue: { color: colors.danger, fontSize: 24, fontWeight: "900", marginTop: 5 },`	Sets/declares the named object property or style/type member: outstandingValue: { color: colors.danger, fontSize: 24, fontWeight: "900", marginTop: 5 },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
391	`  rupee: {`	Sets/declares the named object property or style/type member: rupee: {. Interpret it in the enclosing object, props or type definition.
392	`    width: 42,`	Sets/declares the named object property or style/type member: width: 42,. Interpret it in the enclosing object, props or type definition.
393	`    height: 42,`	Sets/declares the named object property or style/type member: height: 42,. Interpret it in the enclosing object, props or type definition.
394	`    borderRadius: 14,`	Sets/declares the named object property or style/type member: borderRadius: 14,. Interpret it in the enclosing object, props or type definition.
395	`    backgroundColor: "#FFF0F1",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFF0F1",. Interpret it in the enclosing object, props or type definition.
396	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
397	`    justifyContent: "center",`	Sets/declares the named object property or style/type member: justifyContent: "center",. Interpret it in the enclosing object, props or type definition.
398	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
399	`  rupeeText: { color: colors.danger, fontWeight: "900", fontSize: 22 },`	Sets/declares the named object property or style/type member: rupeeText: { color: colors.danger, fontWeight: "900", fontSize: 22 },. Interpret it in the enclosing object, props or type definition.
400	`  sectionHeader: {`	Sets/declares the named object property or style/type member: sectionHeader: {. Interpret it in the enclosing object, props or type definition.
401	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
402	`    justifyContent: "space-between",`	Sets/declares the named object property or style/type member: justifyContent: "space-between",. Interpret it in the enclosing object, props or type definition.
403	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
404	`    marginHorizontal: 18,`	Sets/declares the named object property or style/type member: marginHorizontal: 18,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
405	`    marginTop: 9,`	Sets/declares the named object property or style/type member: marginTop: 9,. Interpret it in the enclosing object, props or type definition.
406	`    marginBottom: 11,`	Sets/declares the named object property or style/type member: marginBottom: 11,. Interpret it in the enclosing object, props or type definition.
407	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
408	`  sectionTitle: { color: colors.ink, fontSize: 20, fontWeight: "900" },`	Sets/declares the named object property or style/type member: sectionTitle: { color: colors.ink, fontSize: 20, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
409	`  count: {`	Sets/declares the named object property or style/type member: count: {. Interpret it in the enclosing object, props or type definition.
410	`    color: colors.white,`	Sets/declares the named object property or style/type member: color: colors.white,. Interpret it in the enclosing object, props or type definition.
411	`    backgroundColor: colors.brand,`	Sets/declares the named object property or style/type member: backgroundColor: colors.brand,. Interpret it in the enclosing object, props or type definition.
412	`    minWidth: 28,`	Sets/declares the named object property or style/type member: minWidth: 28,. Interpret it in the enclosing object, props or type definition.
413	`    textAlign: "center",`	Sets/declares the named object property or style/type member: textAlign: "center",. Interpret it in the enclosing object, props or type definition.
414	`    paddingVertical: 5,`	Sets/declares the named object property or style/type member: paddingVertical: 5,. Interpret it in the enclosing object, props or type definition.
415	`    borderRadius: 14,`	Sets/declares the named object property or style/type member: borderRadius: 14,. Interpret it in the enclosing object, props or type definition.
416	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
417	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
418	`  empty: { marginHorizontal: 16, alignItems: "center", padding: 22 },`	Sets/declares the named object property or style/type member: empty: { marginHorizontal: 16, alignItems: "center", padding: 22 },. Interpret it in the enclosing object, props or type definition.
419	`  emptyTitle: { color: colors.ink, fontSize: 16, fontWeight: "900", marginBottom: 5 },`	Sets/declares the named object property or style/type member: emptyTitle: { color: colors.ink, fontSize: 16, fontWeight: "900", marginBottom: 5 },. Interpret it in the enclosing object, props or type definition.
420	`  scheme: {`	Sets/declares the named object property or style/type member: scheme: {. Interpret it in the enclosing object, props or type definition.
421	`    marginHorizontal: 14,`	Sets/declares the named object property or style/type member: marginHorizontal: 14,. Interpret it in the enclosing object, props or type definition.
422	`    padding: 16,`	Sets/declares the named object property or style/type member: padding: 16,. Interpret it in the enclosing object, props or type definition.
423	`    borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
424	`    borderColor: "#F5B8A8",`	Sets/declares the named object property or style/type member: borderColor: "#F5B8A8",. Interpret it in the enclosing object, props or type definition.
425	`    backgroundColor: "#FFF2EC",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFF2EC",. Interpret it in the enclosing object, props or type definition.
426	`    borderTopRightRadius: 24,`	Sets/declares the named object property or style/type member: borderTopRightRadius: 24,. Interpret it in the enclosing object, props or type definition.
427	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
428	`  schemeTop: { flexDirection: "row", justifyContent: "space-between", gap: 10 },`	Sets/declares the named object property or style/type member: schemeTop: { flexDirection: "row", justifyContent: "space-between", gap: 10 },. Interpret it in the enclosing object, props or type definition.
429	`  schemeType: { color: "#A44934", fontSize: 10, fontWeight: "900" },`	Sets/declares the named object property or style/type member: schemeType: { color: "#A44934", fontSize: 10, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
430	`  schemeExpiry: { color: colors.muted, fontSize: 10 },`	Sets/declares the named object property or style/type member: schemeExpiry: { color: colors.muted, fontSize: 10 },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
431	`  schemeName: { color: colors.navy, fontSize: 15, fontWeight: "900", marginTop: 9 },`	Sets/declares the named object property or style/type member: schemeName: { color: colors.navy, fontSize: 15, fontWeight: "900", marginTop: 9 },. Interpret it in the enclosing object, props or type definition.
432	`  schemeProduct: { color: "#A44934", fontSize: 11, fontWeight: "700", marginTop: 5 },`	Sets/declares the named object property or style/type member: schemeProduct: { color: "#A44934", fontSize: 11, fontWeight: "700", marginTop: 5 },. Interpret it in the enclosing object, props or type definition.
433	`  schemeBenefit: { color: "#66534E", lineHeight: 18, marginTop: 6, fontSize: 11 },`	Sets/declares the named object property or style/type member: schemeBenefit: { color: "#66534E", lineHeight: 18, marginTop: 6, fontSize: 11 },. Interpret it in the enclosing object, props or type definition.
434	`  viewButton: {`	Sets/declares the named object property or style/type member: viewButton: {. Interpret it in the enclosing object, props or type definition.
435	`    alignSelf: "flex-end",`	Sets/declares the named object property or style/type member: alignSelf: "flex-end",. Interpret it in the enclosing object, props or type definition.
436	`    marginTop: 12,`	Sets/declares the named object property or style/type member: marginTop: 12,. Interpret it in the enclosing object, props or type definition.
437	`    paddingVertical: 9,`	Sets/declares the named object property or style/type member: paddingVertical: 9,. Interpret it in the enclosing object, props or type definition.
438	`    paddingHorizontal: 14,`	Sets/declares the named object property or style/type member: paddingHorizontal: 14,. Interpret it in the enclosing object, props or type definition.
439	`    backgroundColor: colors.blue,`	Sets/declares the named object property or style/type member: backgroundColor: colors.blue,. Interpret it in the enclosing object, props or type definition.
440	`    borderRadius: 9,`	Sets/declares the named object property or style/type member: borderRadius: 9,. Interpret it in the enclosing object, props or type definition.
441	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
442	`  viewButtonText: { color: "white", fontSize: 10, fontWeight: "900" },`	Sets/declares the named object property or style/type member: viewButtonText: { color: "white", fontSize: 10, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
443	`  startCard: { marginHorizontal: 16, marginTop: 8, padding: 20 },`	Sets/declares the named object property or style/type member: startCard: { marginHorizontal: 16, marginTop: 8, padding: 20 },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
444	`  startIcon: {`	Sets/declares the named object property or style/type member: startIcon: {. Interpret it in the enclosing object, props or type definition.
445	`    width: 44,`	Sets/declares the named object property or style/type member: width: 44,. Interpret it in the enclosing object, props or type definition.
446	`    height: 44,`	Sets/declares the named object property or style/type member: height: 44,. Interpret it in the enclosing object, props or type definition.
447	`    borderRadius: 15,`	Sets/declares the named object property or style/type member: borderRadius: 15,. Interpret it in the enclosing object, props or type definition.
448	`    backgroundColor: "#E8F7EC",`	Sets/declares the named object property or style/type member: backgroundColor: "#E8F7EC",. Interpret it in the enclosing object, props or type definition.
449	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
450	`    justifyContent: "center",`	Sets/declares the named object property or style/type member: justifyContent: "center",. Interpret it in the enclosing object, props or type definition.
451	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
452	`  startIconText: { color: colors.success, fontSize: 18, fontWeight: "900" },`	Sets/declares the named object property or style/type member: startIconText: { color: colors.success, fontSize: 18, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
453	`  startTitle: { color: colors.ink, fontSize: 19, fontWeight: "900", marginTop: 12 },`	Sets/declares the named object property or style/type member: startTitle: { color: colors.ink, fontSize: 19, fontWeight: "900", marginTop: 12 },. Interpret it in the enclosing object, props or type definition.
454	`  startDescription: { color: colors.muted, lineHeight: 20, marginVertical: 7 },`	Sets/declares the named object property or style/type member: startDescription: { color: colors.muted, lineHeight: 20, marginVertical: 7 },. Interpret it in the enclosing object, props or type definition.
455	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/screens/LoginScreen.tsx

Employee email-code login screen and stored-session handling; renders input, busy and error state and navigates after verification.

256 numbered source lines | SHA-256 3fad1d2ad903a96b91feadf90be2df234323c0badb33f971bbd025c82b0c7c11

Line	Source code	Explanation / reading note
1	`import React, { useEffect, useState } from "react";`	Imports dependencies/types used below: import React, { useEffect, useState } from "react";. Importing a function does not call it.
2	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.
3	`  Alert,`	Continues the surrounding declaration/expression or text: Alert,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
4	`  KeyboardAvoidingView,`	Continues the surrounding declaration/expression or text: KeyboardAvoidingView,. Read it with the preceding opening statement (Alert,); it is not a standalone business operation.
5	`  Platform,`	Continues the surrounding declaration/expression or text: Platform,. Read it with the preceding opening statement (KeyboardAvoidingView,); it is not a standalone business operation.
6	`  SafeAreaView,`	Continues the surrounding declaration/expression or text: SafeAreaView,. Read it with the preceding opening statement (Platform,); it is not a standalone business operation.
7	`  StyleSheet,`	Continues the surrounding declaration/expression or text: StyleSheet,. Read it with the preceding opening statement (SafeAreaView,); it is not a standalone business operation.
8	`  Text,`	Continues the surrounding declaration/expression or text: Text,. Read it with the preceding opening statement (StyleSheet,); it is not a standalone business operation.
9	`  TextInput,`	Continues the surrounding declaration/expression or text: TextInput,. Read it with the preceding opening statement (Text,); it is not a standalone business operation.
10	`  View,`	Continues the surrounding declaration/expression or text: View,. Read it with the preceding opening statement (TextInput,); it is not a standalone business operation.
11	`} from "react-native";`	Completes the dependency import and identifies the module supplying those names.
12	`import AsyncStorage from "@react-native-async-storage/async-storage";`	Imports dependencies/types used below: import AsyncStorage from "@react-native-async-storage/async-storage";. Importing a function does not call it.
13	`import { NativeStackScreenProps } from "@react-navigation/native-stack";`	Imports dependencies/types used below: import { NativeStackScreenProps } from "@react-navigation/native-stack";. Importing a function does not call it.

Line	Source code	Explanation / reading note
14	`import { post } from "../api/client";`	Imports dependencies/types used below: import { post } from "../api/client";. Importing a function does not call it.
15	`import { Button } from "../components/ui";`	Imports dependencies/types used below: import { Button } from "../components/ui";. Importing a function does not call it.
16	`import BrandLogo from "../components/BrandLogo";`	Imports dependencies/types used below: import BrandLogo from "../components/BrandLogo";. Importing a function does not call it.
17	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
18	`import type { RootStack } from "../types";`	Imports dependencies/types used below: import type { RootStack } from "../types";. Importing a function does not call it.
19		Blank line separating logical sections; no executable operation.
20	`type CodeDelivery = { maskedEmail: string; expiresInMinutes: number; testCode?: string };`	Defines a compile-time data contract: type CodeDelivery = { maskedEmail: string; expiresInMinutes: number; testCode?: string };. TypeScript types do not validate untrusted runtime JSON by themselves.
21	`type LoginResult = {`	Defines a compile-time data contract: type LoginResult = {. TypeScript types do not validate untrusted runtime JSON by themselves.
22	`  token: string;`	Sets/declares the named object property or style/type member: token: string;. Interpret it in the enclosing object, props or type definition.
23	`  user: { displayName: string; employeeName: string; employeeId: string };`	Sets/declares the named object property or style/type member: user: { displayName: string; employeeName: string; employeeId: string };. Interpret it in the enclosing object, props or type definition.
24	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
25		Blank line separating logical sections; no executable operation.
26	`export default function LoginScreen({ navigation }: NativeStackScreenProps<RootStack, "Login">) {`	Declares a callable function/method: export default function LoginScreen({ navigation }: NativeStackScreenProps<RootStack, "Login">) {. Parameters supply its inputs; the following block implements the operation.
27	`  const [email, setEmail] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.

Line	Source code	Explanation / reading note
28	`  const [code, setCode] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
29	`  const [delivery, setDelivery] = useState<CodeDelivery>();`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
30	`  const [busy, setBusy] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
31	`  const [error, setError] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
32		Blank line separating logical sections; no executable operation.
33	`  useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.
34	`    AsyncStorage.multiGet(["token", "currentUser"]).then((entries) => {`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
35	`      const savedToken = entries[0][1];`	Declares/initializes local data used by the surrounding operation: const savedToken = entries[0][1];. Collection contents and assignments below determine its purpose.
36	`      const savedUser = entries[1][1];`	Declares/initializes local data used by the surrounding operation: const savedUser = entries[1][1];. Collection contents and assignments below determine its purpose.
37	`      if (savedToken && savedUser) navigation.replace("Main");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (savedToken && savedUser) navigation.replace("Main");.
38	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	`  }, [navigation]);`	Continues the surrounding declaration/expression or text: }, [navigation]);. Read it with the preceding opening statement (});); it is not a standalone business operation.
40		Blank line separating logical sections; no executable operation.
41	`  const requestCode = async () => {`	Declares/initializes local data used by the surrounding operation: const requestCode = async () => {. Collection contents and assignments below determine its purpose.
42	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.

Line	Source code	Explanation / reading note
43	`setBusy(true);`	Continues the surrounding declaration/expression or text: setBusy(true);. Read it with the preceding opening statement (try {); it is not a standalone business operation.
44	`setError("");`	Continues the surrounding declaration/expression or text: setError("");. Read it with the preceding opening statement (setBusy(true);); it is not a standalone business operation.
45	`const result = await post<CodeDelivery>("/auth/request-code", { email: email.trim() });`	Waits for this asynchronous operation before continuing: const result = await post<CodeDelivery>("/auth/request-code", { email: email.trim() });. The returned result/error must still be handled.
46	`setDelivery(result);`	Continues the surrounding declaration/expression or text: setDelivery(result);. Read it with the preceding opening statement (const result = await post<CodeDelivery>("/auth/request-code", { email: email.trim() });); it is not a standalone business operation.
47	`setCode(result.testCode || "");`	Continues the surrounding declaration/expression or text: setCode(result.testCode || "");. Read it with the preceding opening statement (setDelivery(result);); it is not a standalone business operation.
48	`} catch (error: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
49	`setError(error.message || "Unable to send the code. Please try again.");`	Continues the surrounding declaration/expression or text: setError(error.message || "Unable to send the code. Please try again.");. Read it with the preceding opening statement (} catch (error: any) {); it is not a standalone business operation.
50	`Alert.alert("Unable to send code", error.message);`	Calls the named method: Alert.alert("Unable to send code", error.message);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
51	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
52	`setBusy(false);`	Continues the surrounding declaration/expression or text: setBusy(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
53	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
54	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
55		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
56	`  const showCodeEntry = () => {`	Declares/initializes local data used by the surrounding operation: const showCodeEntry = () => {. Collection contents and assignments below determine its purpose.
57	`    const normalizedEmail = email.trim().toLowerCase();`	Declares/initializes local data used by the surrounding operation: const normalizedEmail = email.trim().toLowerCase();. Collection contents and assignments below determine its purpose.
58	`    if (!/^\S+@\S+\.\S+$/.test(normalizedEmail)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!/^\S+@\S+\.\S+$/.test(normalizedEmail)) {.
59	`      Alert.alert("Email required", "Enter the Employee email address first.");`	Calls the named method: Alert.alert("Email required", "Enter the Employee email address first.");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
60	`      return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
61	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
62	`    setDelivery({`	Continues the surrounding declaration/expression or text: setDelivery({. Read it with the preceding opening statement (}); it is not a standalone business operation.
63	`      maskedEmail: normalizedEmail.replace(/^(.{2}).*(@.*)$/, "$1***$2"),`	Sets/declares the named object property or style/type member: maskedEmail: normalizedEmail.replace(/^(.{2}).*(@.*)$/, "$1***$2"),. Interpret it in the enclosing object, props or type definition.
64	`      expiresInMinutes: 10,`	Sets/declares the named object property or style/type member: expiresInMinutes: 10,. Interpret it in the enclosing object, props or type definition.
65	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
66	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
67		Blank line separating logical sections; no executable operation.
68	`  const verifyCode = async () => {`	Declares/initializes local data used by the surrounding operation: const verifyCode = async () => {. Collection contents and assignments below determine its purpose.
69	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
70	`      setBusy(true);`	Continues the surrounding declaration/expression or text: setBusy(true);. Read it with the preceding opening statement (try {}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
71	`setError("");`	Continues the surrounding declaration/expression or text: setError("");. Read it with the preceding opening statement (setBusy(true);); it is not a standalone business operation.
72	`const result = await post<LoginResult>("/auth/verify-code", {`	Waits for this asynchronous operation before continuing: const result = await post<LoginResult>("/auth/verify-code", {. The returned result/error must still be handled.
73	`email: email.trim(),`	Sets/declares the named object property or style/type member: email: email.trim(),. Interpret it in the enclosing object, props or type definition.
74	`code: code.trim(),`	Sets/declares the named object property or style/type member: code: code.trim(),. Interpret it in the enclosing object, props or type definition.
75	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
76	`await AsyncStorage.multiSet([`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
77	`["token", result.token],`	Continues the surrounding declaration/expression or text: ["token", result.token],. Read it with the preceding opening statement (await AsyncStorage.multiSet([); it is not a standalone business operation.
78	`["currentUser", JSON.stringify(result.user)],`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
79	`]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
80	`navigation.replace("Main");`	Calls the named method: navigation.replace("Main");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
81	`} catch (error: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
82	`setError(error.message || "The code could not be verified.");`	Continues the surrounding declaration/expression or text: setError(error.message || "The code could not be verified.");. Read it with the preceding opening statement (} catch (error: any) {); it is not a standalone business operation.
83	`Alert.alert("Sign-in failed", error.message);`	Calls the named method: Alert.alert("Sign-in failed", error.message);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
84	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.

Line	Source code	Explanation / reading note
85	`      setBusy(false);`	Continues the surrounding declaration/expression or text: setBusy(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
86	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
87	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
88		Blank line separating logical sections; no executable operation.
89	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
90	`    <SafeAreaView style={styles.root}>`	Renders/opens a UI element or component: <SafeAreaView style={styles.root}>. Props and child content below determine appearance and interactions.
91	`      <KeyboardAvoidingView`	Renders/opens a UI element or component: <KeyboardAvoidingView. Props and child content below determine appearance and interactions.
92	`        style={styles.content}`	Assigns the right-hand expression to the named variable/property: style={styles.content}. This is in-memory unless it is later persisted by an explicit call.
93	`        behavior={Platform.OS === "ios" ? "padding" : undefined}`	Assigns the right-hand expression to the named variable/property: behavior={Platform.OS === "ios" ? "padding" : undefined}. This is in-memory unless it is later persisted by an explicit call.
94	`      >`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (behavior={Platform.OS === "ios" ? "padding" : undefined}); it is not a standalone business operation.
95	`        <View style={styles.brandPanel}>`	Renders/opens a UI element or component: <View style={styles.brandPanel}>. Props and child content below determine appearance and interactions.
96	`          <View style={{ marginBottom: 20 }}>`	Renders/opens a UI element or component: <View style={{ marginBottom: 20 }}>. Props and child content below determine appearance and interactions.
97	`            <BrandLogo width={132} />`	Renders/opens a UI element or component: <BrandLogo width={132} />. Props and child content below determine appearance and interactions.
98	`          </View>`	Closes the UI element/component opened above.
99	`          <Text style={styles.eyebrow}>EMPLOYEE PORTAL</Text>`	Renders/opens a UI element or component: <Text style={styles.eyebrow}>EMPLOYEE PORTAL</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
100	`<Text style={styles.title}>Your field-sales workspace</Text>`	Renders/opens a UI element or component: <Text style={styles.title}>Your field-sales workspace</Text>. Props and child content below determine appearance and interactions.
101	`<Text style={styles.subtitle}>`	Renders/opens a UI element or component: <Text style={styles.subtitle}>. Props and child content below determine appearance and interactions.
102	`View assigned outlets, follow the beat and manage every visit from one secure mobile`	Continues the surrounding declaration/expression or text: View assigned outlets, follow the beat and manage every visit from one secure mobile. Read it with the preceding opening statement (<Text style={styles.subtitle}>); it is not a standalone business operation.
103	`application.`	Continues the surrounding declaration/expression or text: application.. Read it with the preceding opening statement (View assigned outlets, follow the beat and manage every visit from one secure mobile); it is not a standalone business operation.
104	`</Text>`	Closes the UI element/component opened above.
105	`</View>`	Closes the UI element/component opened above.
106		Blank line separating logical sections; no executable operation.
107	`<View style={styles.card}>`	Renders/opens a UI element or component: <View style={styles.card}>. Props and child content below determine appearance and interactions.
108	`<Text style={styles.cardTitle}>`	Renders/opens a UI element or component: <Text style={styles.cardTitle}>. Props and child content below determine appearance and interactions.
109	`{delivery ? "Enter verification code" : "Employee sign in"}`	Continues the surrounding declaration/expression or text: {delivery ? "Enter verification code" : "Employee sign in"}. Read it with the preceding opening statement (<Text style={styles.cardTitle}>); it is not a standalone business operation.
110	`</Text>`	Closes the UI element/component opened above.
111	`<Text style={styles.cardCopy}>`	Renders/opens a UI element or component: <Text style={styles.cardCopy}>. Props and child content below determine appearance and interactions.
112	`{delivery`	Continues the surrounding declaration/expression or text: {delivery. Read it with the preceding opening statement (<Text style={styles.cardCopy}>); it is not a standalone business operation.
113	`? `We sent a 6-digit code to ${delivery.maskedEmail}. It is valid for ${delivery.expiresInMinutes} minutes.``	Continues the surrounding declaration/expression or text: ? `We sent a 6-digit code to ${delivery.maskedEmail}. It is valid for ${delivery.expiresInMinutes} minutes.`. Read it with the preceding opening statement ({delivery); it is not a standalone business operation.

Line	Source code	Explanation / reading note
114	`: "Use the email linked to your active Employee record in Salesforce."}`	Continues the surrounding declaration/expression or text: : "Use the email linked to your active Employee record in Salesforce."}. Read it with the preceding opening statement (? `We sent a 6-digit code to ${delivery.maskedEmail}. It is valid for ${delivery.expiresInMinutes} minutes.`); it is not a standalone business operation.
115	`</Text>`	Closes the UI element/component opened above.
116	`<Text style={styles.label}>Email address</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>Email address</Text>. Props and child content below determine appearance and interactions.
117	`<TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
118	`style={[styles.input, delivery && styles.readOnlyInput]}`	Assigns the right-hand expression to the named variable/property: style={[styles.input, delivery && styles.readOnlyInput]}. This is in-memory unless it is later persisted by an explicit call.
119	`value={email}`	Assigns the right-hand expression to the named variable/property: value={email}. This is in-memory unless it is later persisted by an explicit call.
120	`onChangeText={setEmail}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
121	`autoCapitalize="none"`	Assigns the right-hand expression to the named variable/property: autoCapitalize="none". This is in-memory unless it is later persisted by an explicit call.
122	`autoCorrect={false}`	Assigns the right-hand expression to the named variable/property: autoCorrect={false}. This is in-memory unless it is later persisted by an explicit call.
123	`keyboardType="email-address"`	Assigns the right-hand expression to the named variable/property: keyboardType="email-address". This is in-memory unless it is later persisted by an explicit call.
124	`placeholder="employee@company.com"`	Assigns the right-hand expression to the named variable/property: placeholder="employee@company.com". This is in-memory unless it is later persisted by an explicit call.
125	`editable={!delivery && !busy}`	Assigns the right-hand expression to the named variable/property: editable={!delivery && !busy}. This is in-memory unless it is later persisted by an explicit call.
126	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (editable={!delivery && !busy}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
127		Blank line separating logical sections; no executable operation.
128	`{delivery ? (`	Continues the surrounding declaration/expression or text: {delivery ? (. Read it with the preceding opening statement; it is not a standalone business operation.
129	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
130	`<Text style={styles.label}>6-digit code</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>6-digit code</Text>. Props and child content below determine appearance and interactions.
131	`<TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
132	`style={styles.codeInput}`	Assigns the right-hand expression to the named variable/property: style={styles.codeInput}. This is in-memory unless it is later persisted by an explicit call.
133	`value={code}`	Assigns the right-hand expression to the named variable/property: value={code}. This is in-memory unless it is later persisted by an explicit call.
134	`onChangeText={(value: string) => setCode(value.replace(/\D/g, "").slice(0, 6))}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
135	`keyboardType="number-pad"`	Assigns the right-hand expression to the named variable/property: keyboardType="number-pad". This is in-memory unless it is later persisted by an explicit call.
136	`maxLength={6}`	Assigns the right-hand expression to the named variable/property: maxLength={6}. This is in-memory unless it is later persisted by an explicit call.
137	`placeholder="000000"`	Assigns the right-hand expression to the named variable/property: placeholder="000000". This is in-memory unless it is later persisted by an explicit call.
138	`textContentType="oneTimeCode"`	Assigns the right-hand expression to the named variable/property: textContentType="oneTimeCode". This is in-memory unless it is later persisted by an explicit call.
139	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (textContentType="oneTimeCode"); it is not a standalone business operation.
140	`{delivery.testCode ? (`	Continues the surrounding declaration/expression or text: {delivery.testCode ? (. Read it with the preceding opening statement (/>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
141	`<Text style={styles.testNote}>Local preview code: {delivery.testCode}</Text>`	Renders/opens a UI element or component: <Text style={styles.testNote}>Local preview code: {delivery.testCode}</Text>. Props and child content below determine appearance and interactions.
142	`) : null}`	Continues the surrounding declaration/expression or text:) : null}. Read it with the preceding opening statement (<Text style={styles.testNote}>Local preview code: {delivery.testCode}</Text>); it is not a standalone business operation.
143	`{!!error && <Text style={styles.errorText}>{error}</Text>}`	Assigns the right-hand expression to the named variable/property: {!!error && <Text style={styles.errorText}>{error}</Text>}. This is in-memory unless it is later persisted by an explicit call.
144	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
145	`title={busy ? "VERIFYING…" : "VERIFY & SIGN IN"}`	Assigns the right-hand expression to the named variable/property: title={busy ? "VERIFYING…" : "VERIFY & SIGN IN"}. This is in-memory unless it is later persisted by an explicit call.
146	`onPress={verifyCode}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
147	`disabled={busy || code.length !== 6}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
148	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (disabled={busy || code.length !== 6}); it is not a standalone business operation.
149	`<Text onPress={requestCode} style={styles.link}>`	Renders/opens a UI element or component: <Text onPress={requestCode} style={styles.link}>. Props and child content below determine appearance and interactions.
150	`Send a fresh code`	Continues the surrounding declaration/expression or text: Send a fresh code. Read it with the preceding opening statement (<Text onPress={requestCode} style={styles.link}>); it is not a standalone business operation.
151	`</Text>`	Closes the UI element/component opened above.
152	`<Text onPress={() => setDelivery(undefined)} style={styles.link}>`	Renders/opens a UI element or component: <Text onPress={() => setDelivery(undefined)} style={styles.link}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
153	`Use a different email`	Continues the surrounding declaration/expression or text: Use a different email. Read it with the preceding opening statement (<Text onPress={() => setDelivery(undefined)} style={styles.link}>); it is not a standalone business operation.
154	`</Text>`	Closes the UI element/component opened above.
155	`</>`	Closes the UI element/component opened above.
156	`) : (`	Continues the surrounding declaration/expression or text:) : (. Read it with the preceding opening statement (</>); it is not a standalone business operation.
157	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
158	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
159	`title={busy ? "SENDING…" : "EMAIL MY SIGN-IN CODE"}`	Assigns the right-hand expression to the named variable/property: title={busy ? "SENDING…" : "EMAIL MY SIGN-IN CODE"}. This is in-memory unless it is later persisted by an explicit call.
160	`onPress={requestCode}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
161	`disabled={busy || !email.trim().includes("@")}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
162	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (disabled={busy || !email.trim().includes("@")}); it is not a standalone business operation.
163	`{!!error && <Text style={styles.errorText}>{error}</Text>}`	Assigns the right-hand expression to the named variable/property: {!!error && <Text style={styles.errorText}>{error}</Text>}. This is in-memory unless it is later persisted by an explicit call.
164	`<Text onPress={showCodeEntry} style={styles.link}>`	Renders/opens a UI element or component: <Text onPress={showCodeEntry} style={styles.link}>. Props and child content below determine appearance and interactions.
165	`I already received a code`	Continues the surrounding declaration/expression or text: I already received a code. Read it with the preceding opening statement (<Text onPress={showCodeEntry} style={styles.link}>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
166	`</Text>`	Closes the UI element/component opened above.
167	`</>`	Closes the UI element/component opened above.
168	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
169	`<Text style={styles.securityNote}>`	Renders/opens a UI element or component: <Text style={styles.securityNote}>. Props and child content below determine appearance and interactions.
170	`🔒 Your login determines exactly which beat and outlets you can access. Passwords are`	Continues the surrounding declaration/expression or text: 🔒 Your login determines exactly which beat and outlets you can access. Passwords are. Read it with the preceding opening statement (<Text style={styles.securityNote}>); it is not a standalone business operation.
171	`never stored in this application.`	Continues the surrounding declaration/expression or text: never stored in this application.. Read it with the preceding opening statement (🔒 Your login determines exactly which beat and outlets you can access. Passwords are); it is not a standalone business operation.
172	`</Text>`	Closes the UI element/component opened above.
173	`</View>`	Closes the UI element/component opened above.
174	`</KeyboardAvoidingView>`	Closes the UI element/component opened above.
175	`</SafeAreaView>`	Closes the UI element/component opened above.
176	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
177	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
178		Blank line separating logical sections; no executable operation.
179	`const styles = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const styles = StyleSheet.create({. Collection contents and assignments below determine its purpose.
180	`root: { flex: 1, backgroundColor: "#F3F6FA" },`	Sets/declares the named object property or style/type member: root: { flex: 1, backgroundColor: "#F3F6FA" },. Interpret it in the enclosing object, props or type definition.
181	`content: { flex: 1, justifyContent: "center", padding: 20 },`	Sets/declares the named object property or style/type member: content: { flex: 1, justifyContent: "center", padding: 20 },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
182	`  brandPanel: { backgroundColor: colors.navy, borderRadius: 24, padding: 26, paddingBottom: 48 },`	Sets/declares the named object property or style/type member: brandPanel: { backgroundColor: colors.navy, borderRadius: 24, padding: 26, paddingBottom: 48 },. Interpret it in the enclosing object, props or type definition.
183	`  logoBadge: {`	Sets/declares the named object property or style/type member: logoBadge: {. Interpret it in the enclosing object, props or type definition.
184	`    width: 56,`	Sets/declares the named object property or style/type member: width: 56,. Interpret it in the enclosing object, props or type definition.
185	`    height: 56,`	Sets/declares the named object property or style/type member: height: 56,. Interpret it in the enclosing object, props or type definition.
186	`    borderRadius: 18,`	Sets/declares the named object property or style/type member: borderRadius: 18,. Interpret it in the enclosing object, props or type definition.
187	`    backgroundColor: "#2478DD",`	Sets/declares the named object property or style/type member: backgroundColor: "#2478DD",. Interpret it in the enclosing object, props or type definition.
188	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
189	`    justifyContent: "center",`	Sets/declares the named object property or style/type member: justifyContent: "center",. Interpret it in the enclosing object, props or type definition.
190	`    marginBottom: 20,`	Sets/declares the named object property or style/type member: marginBottom: 20,. Interpret it in the enclosing object, props or type definition.
191	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
192	`  logoText: { color: "white", fontSize: 18, fontWeight: "900" },`	Sets/declares the named object property or style/type member: logoText: { color: "white", fontSize: 18, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
193	`  eyebrow: { color: "#8DC9FF", fontSize: 12, fontWeight: "800", letterSpacing: 1.3 },`	Sets/declares the named object property or style/type member: eyebrow: { color: "#8DC9FF", fontSize: 12, fontWeight: "800", letterSpacing: 1.3 },. Interpret it in the enclosing object, props or type definition.
194	`  title: { color: "white", fontSize: 30, fontWeight: "900", marginTop: 8 },`	Sets/declares the named object property or style/type member: title: { color: "white", fontSize: 30, fontWeight: "900", marginTop: 8 },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
195	`subtitle: { color: "#D6E6F7", fontSize: 15, lineHeight: 22, marginTop: 10 },`	Sets/declares the named object property or style/type member: subtitle: { color: "#D6E6F7", fontSize: 15, lineHeight: 22, marginTop: 10 },. Interpret it in the enclosing object, props or type definition.
196	`card: {`	Sets/declares the named object property or style/type member: card: {. Interpret it in the enclosing object, props or type definition.
197	`backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
198	`borderRadius: 20,`	Sets/declares the named object property or style/type member: borderRadius: 20,. Interpret it in the enclosing object, props or type definition.
199	`padding: 22,`	Sets/declares the named object property or style/type member: padding: 22,. Interpret it in the enclosing object, props or type definition.
200	`marginHorizontal: 10,`	Sets/declares the named object property or style/type member: marginHorizontal: 10,. Interpret it in the enclosing object, props or type definition.
201	`marginTop: -24,`	Sets/declares the named object property or style/type member: marginTop: -24,. Interpret it in the enclosing object, props or type definition.
202	`shadowColor: "#0B2345",`	Sets/declares the named object property or style/type member: shadowColor: "#0B2345",. Interpret it in the enclosing object, props or type definition.
203	`shadowOpacity: 0.12,`	Sets/declares the named object property or style/type member: shadowOpacity: 0.12,. Interpret it in the enclosing object, props or type definition.
204	`shadowRadius: 18,`	Sets/declares the named object property or style/type member: shadowRadius: 18,. Interpret it in the enclosing object, props or type definition.
205	`shadowOffset: { width: 0, height: 8 },`	Sets/declares the named object property or style/type member: shadowOffset: { width: 0, height: 8 },. Interpret it in the enclosing object, props or type definition.
206	`elevation: 5,`	Sets/declares the named object property or style/type member: elevation: 5,. Interpret it in the enclosing object, props or type definition.
207	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
208	`cardTitle: { color: "#102A4D", fontSize: 22, fontWeight: "900" },`	Sets/declares the named object property or style/type member: cardTitle: { color: "#102A4D", fontSize: 22, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
209	`cardCopy: { color: "#607087", lineHeight: 20, marginTop: 7, marginBottom: 18 },`	Sets/declares the named object property or style/type member: cardCopy: { color: "#607087", lineHeight: 20, marginTop: 7, marginBottom: 18 },. Interpret it in the enclosing object, props or type definition.
210	`label: { color: "#2B405F", fontSize: 13, fontWeight: "800", marginBottom: 7 },`	Sets/declares the named object property or style/type member: label: { color: "#2B405F", fontSize: 13, fontWeight: "800", marginBottom: 7 },. Interpret it in the enclosing object, props or type definition.
211	`input: {`	Sets/declares the named object property or style/type member: input: {. Interpret it in the enclosing object, props or type definition.
212	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
213	`borderColor: "#CED8E5",`	Sets/declares the named object property or style/type member: borderColor: "#CED8E5",. Interpret it in the enclosing object, props or type definition.
214	`borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
215	`backgroundColor: "#FBFCFE",`	Sets/declares the named object property or style/type member: backgroundColor: "#FBFCFE",. Interpret it in the enclosing object, props or type definition.
216	`padding: 14,`	Sets/declares the named object property or style/type member: padding: 14,. Interpret it in the enclosing object, props or type definition.
217	`marginBottom: 16,`	Sets/declares the named object property or style/type member: marginBottom: 16,. Interpret it in the enclosing object, props or type definition.
218	`fontSize: 16,`	Sets/declares the named object property or style/type member: fontSize: 16,. Interpret it in the enclosing object, props or type definition.
219	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
220	`readOnlyInput: { color: "#607087", backgroundColor: "#F2F5F8" },`	Sets/declares the named object property or style/type member: readOnlyInput: { color: "#607087", backgroundColor: "#F2F5F8" },. Interpret it in the enclosing object, props or type definition.
221	`codeInput: {`	Sets/declares the named object property or style/type member: codeInput: {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
222	`borderWidth: 1.5,`	Sets/declares the named object property or style/type member: borderWidth: 1.5,. Interpret it in the enclosing object, props or type definition.
223	`borderColor: "#2478DD",`	Sets/declares the named object property or style/type member: borderColor: "#2478DD",. Interpret it in the enclosing object, props or type definition.
224	`borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
225	`padding: 14,`	Sets/declares the named object property or style/type member: padding: 14,. Interpret it in the enclosing object, props or type definition.
226	`marginBottom: 14,`	Sets/declares the named object property or style/type member: marginBottom: 14,. Interpret it in the enclosing object, props or type definition.
227	`textAlign: "center",`	Sets/declares the named object property or style/type member: textAlign: "center",. Interpret it in the enclosing object, props or type definition.
228	`fontSize: 24,`	Sets/declares the named object property or style/type member: fontSize: 24,. Interpret it in the enclosing object, props or type definition.
229	`fontWeight: "800",`	Sets/declares the named object property or style/type member: fontWeight: "800",. Interpret it in the enclosing object, props or type definition.
230	`letterSpacing: 8,`	Declares/initializes local data used by the surrounding operation: letterSpacing: 8,. Collection contents and assignments below determine its purpose.
231	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
232	`link: { textAlign: "center", color: "#1769C2", fontWeight: "700", marginTop: 16 },`	Sets/declares the named object property or style/type member: link: { textAlign: "center", color: "#1769C2", fontWeight: "700", marginTop: 16 },. Interpret it in the enclosing object, props or type definition.
233	`testNote: {`	Sets/declares the named object property or style/type member: testNote: {. Interpret it in the enclosing object, props or type definition.
234	`color: "#805900",`	Sets/declares the named object property or style/type member: color: "#805900",. Interpret it in the enclosing object, props or type definition.
235	`backgroundColor: "#FFF6D8",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFF6D8",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
236	`    padding: 10,`	Sets/declares the named object property or style/type member: padding: 10,. Interpret it in the enclosing object, props or type definition.
237	`    borderRadius: 8,`	Sets/declares the named object property or style/type member: borderRadius: 8,. Interpret it in the enclosing object, props or type definition.
238	`    marginBottom: 12,`	Sets/declares the named object property or style/type member: marginBottom: 12,. Interpret it in the enclosing object, props or type definition.
239	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
240	`  errorText: {`	Sets/declares the named object property or style/type member: errorText: {. Interpret it in the enclosing object, props or type definition.
241	`    color: "#B42318",`	Sets/declares the named object property or style/type member: color: "#B42318",. Interpret it in the enclosing object, props or type definition.
242	`    backgroundColor: "#FFF1F0",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFF1F0",. Interpret it in the enclosing object, props or type definition.
243	`    padding: 10,`	Sets/declares the named object property or style/type member: padding: 10,. Interpret it in the enclosing object, props or type definition.
244	`    borderRadius: 8,`	Sets/declares the named object property or style/type member: borderRadius: 8,. Interpret it in the enclosing object, props or type definition.
245	`    marginBottom: 12,`	Sets/declares the named object property or style/type member: marginBottom: 12,. Interpret it in the enclosing object, props or type definition.
246	`    textAlign: "center",`	Sets/declares the named object property or style/type member: textAlign: "center",. Interpret it in the enclosing object, props or type definition.
247	`    fontWeight: "700",`	Sets/declares the named object property or style/type member: fontWeight: "700",. Interpret it in the enclosing object, props or type definition.
248	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
249	`  securityNote: {`	Sets/declares the named object property or style/type member: securityNote: {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
250	`    color: "#607087",`	Sets/declares the named object property or style/type member: color: "#607087",. Interpret it in the enclosing object, props or type definition.
251	`    textAlign: "center",`	Sets/declares the named object property or style/type member: textAlign: "center",. Interpret it in the enclosing object, props or type definition.
252	`    fontSize: 12,`	Sets/declares the named object property or style/type member: fontSize: 12,. Interpret it in the enclosing object, props or type definition.
253	`    lineHeight: 18,`	Sets/declares the named object property or style/type member: lineHeight: 18,. Interpret it in the enclosing object, props or type definition.
254	`    marginTop: 18,`	Sets/declares the named object property or style/type member: marginTop: 18,. Interpret it in the enclosing object, props or type definition.
255	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
256	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/screens/ModuleListScreen.tsx

Reusable module record list driven by a route-selected module name and backend records.

122 numbered source lines | SHA-256 621dff2b12bb3cce09d9833a89724637ca458a4636ae45ae6cd9b0a9f56cecde

Line	Source code	Explanation / reading note
1	`import React, { useCallback, useState } from "react";`	Imports dependencies/types used below: import React, { useCallback, useState } from "react";. Importing a function does not call it.
2	`import { useFocusEffect } from "@react-navigation/native";`	Imports dependencies/types used below: import { useFocusEffect } from "@react-navigation/native";. Importing a function does not call it.
3	`import { ActivityIndicator, Pressable, ScrollView, StyleSheet, Text, View } from "react-native";`	Imports dependencies/types used below: import { ActivityIndicator, Pressable, ScrollView, StyleSheet, Text, View } from "react-native";. Importing a function does not call it.
4	`import { NativeStackScreenProps } from "@react-navigation/native-stack";`	Imports dependencies/types used below: import { NativeStackScreenProps } from "@react-navigation/native-stack";. Importing a function does not call it.
5	`import { api } from "../api/client";`	Imports dependencies/types used below: import { api } from "../api/client";. Importing a function does not call it.
6	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
7	`import type { RootStack } from "../types";`	Imports dependencies/types used below: import type { RootStack } from "../types";. Importing a function does not call it.
8		Blank line separating logical sections; no executable operation.
9	`const labels: Record<string, string> = {`	Declares/initializes local data used by the surrounding operation: const labels: Record<string, string> = {. Collection contents and assignments below determine its purpose.
10	`  Name: "Record Number",`	Sets/declares the named object property or style/type member: Name: "Record Number",. Interpret it in the enclosing object, props or type definition.
11	`  Asset_Code__c: "Asset Code",`	Sets/declares the named object property or style/type member: Asset_Code__c: "Asset Code",. Interpret it in the enclosing object, props or type definition.
12	`  Asset_Name__c: "Asset Name",`	Sets/declares the named object property or style/type member: Asset_Name__c: "Asset Name",. Interpret it in the enclosing object, props or type definition.
13	`  Status__c: "Status",`	Sets/declares the named object property or style/type member: Status__c: "Status",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
14	`Given_Date__c: "Given Date",`	Sets/declares the named object property or style/type member: Given_Date__c: "Given Date",. Interpret it in the enclosing object, props or type definition.
15	`Competitor_Name__c: "Competitor",`	Sets/declares the named object property or style/type member: Competitor_Name__c: "Competitor",. Interpret it in the enclosing object, props or type definition.
16	`Company__c: "Company",`	Sets/declares the named object property or style/type member: Company__c: "Company",. Interpret it in the enclosing object, props or type definition.
17	`MRP__c: "MRP",`	Sets/declares the named object property or style/type member: MRP__c: "MRP",. Interpret it in the enclosing object, props or type definition.
18	`RBP__c: "Retail Buying Price",`	Sets/declares the named object property or style/type member: RBP__c: "Retail Buying Price",. Interpret it in the enclosing object, props or type definition.
19	`Scheme_Details__c: "Scheme",`	Sets/declares the named object property or style/type member: Scheme_Details__c: "Scheme",. Interpret it in the enclosing object, props or type definition.
20	`Subject__c: "Subject",`	Sets/declares the named object property or style/type member: Subject__c: "Subject",. Interpret it in the enclosing object, props or type definition.
21	`Description__c: "Description",`	Sets/declares the named object property or style/type member: Description__c: "Description",. Interpret it in the enclosing object, props or type definition.
22	`Quantity__c: "Quantity",`	Sets/declares the named object property or style/type member: Quantity__c: "Quantity",. Interpret it in the enclosing object, props or type definition.
23	`Manufacturing_Date__c: "Manufacturing Date",`	Sets/declares the named object property or style/type member: Manufacturing_Date__c: "Manufacturing Date",. Interpret it in the enclosing object, props or type definition.
24	`Return_Reason__c: "Return Reason",`	Sets/declares the named object property or style/type member: Return_Reason__c: "Return Reason",. Interpret it in the enclosing object, props or type definition.
25	`outletName: "Outlet",`	Sets/declares the named object property or style/type member: outletName: "Outlet",. Interpret it in the enclosing object, props or type definition.
26	`visitName: "Visit",`	Sets/declares the named object property or style/type member: visitName: "Visit",. Interpret it in the enclosing object, props or type definition.
27	`productName: "Product",`	Sets/declares the named object property or style/type member: productName: "Product",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
28	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`export default function ModuleListScreen({`	Declares a callable function/method: export default function ModuleListScreen({. Parameters supply its inputs; the following block implements the operation.
30	`  route,`	Continues the surrounding declaration/expression or text: route,. Read it with the preceding opening statement (export default function ModuleListScreen({); it is not a standalone business operation.
31	`}: NativeStackScreenProps<RootStack, "ModuleList">) {`	Continues the surrounding declaration/expression or text: }: NativeStackScreenProps<RootStack, "ModuleList">) {. Read it with the preceding opening statement (route,); it is not a standalone business operation.
32	`  const [rows, setRows] = useState<any[]>([]),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
33	`    [loading, setLoading] = useState(true),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
34	`    [error, setError] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
35	`  const load = () => {`	Declares/initializes local data used by the surrounding operation: const load = () => {. Collection contents and assignments below determine its purpose.
36	`    setLoading(true);`	Continues the surrounding declaration/expression or text: setLoading(true);. Read it with the preceding opening statement (const load = () => {); it is not a standalone business operation.
37	`    setError("");`	Continues the surrounding declaration/expression or text: setError("");. Read it with the preceding opening statement (setLoading(true);); it is not a standalone business operation.
38	`    api<any[]>(`/modules/${route.params.moduleName}`)`	Continues the surrounding declaration/expression or text: api<any[]>(`/modules/${route.params.moduleName}`). Read it with the preceding opening statement (setError("");); it is not a standalone business operation.
39	`      .then(setRows)`	Continues the surrounding declaration/expression or text: .then(setRows). Read it with the preceding opening statement (api<any[]>(`/modules/${route.params.moduleName}`)); it is not a standalone business operation.

Line	Source code	Explanation / reading note
40	`.catch((e) => setError(e.message))`	Continues the surrounding declaration/expression or text: .catch((e) => setError(e.message)). Read it with the preceding opening statement (.then(setRows)); it is not a standalone business operation.
41	`.finally(() => setLoading(false));`	Continues the surrounding declaration/expression or text: .finally(() => setLoading(false));. Read it with the preceding opening statement (.catch((e) => setError(e.message))); it is not a standalone business operation.
42	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43	`useFocusEffect(useCallback(load, [route.params.moduleName]));`	Continues the surrounding declaration/expression or text: useFocusEffect(useCallback(load, [route.params.moduleName]));. Read it with the preceding opening statement (};); it is not a standalone business operation.
44	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
45	`<ScrollView style={s.page} contentContainerStyle={s.content}>`	Renders/opens a UI element or component: <ScrollView style={s.page} contentContainerStyle={s.content}>. Props and child content below determine appearance and interactions.
46	`<Text style={s.title}>{route.params.title}</Text>`	Renders/opens a UI element or component: <Text style={s.title}>{route.params.title}</Text>. Props and child content below determine appearance and interactions.
47	`<Text style={s.sub}>Live Salesforce records for your outlets</Text>`	Renders/opens a UI element or component: <Text style={s.sub}>Live Salesforce records for your outlets</Text>. Props and child content below determine appearance and interactions.
48	`<Pressable accessibilityRole="button" onPress={load}>`	Renders/opens a UI element or component: <Pressable accessibilityRole="button" onPress={load}>. Props and child content below determine appearance and interactions.
49	`<Text style={s.retry}>REFRESH SALESFORCE RECORDS</Text>`	Renders/opens a UI element or component: <Text style={s.retry}>REFRESH SALESFORCE RECORDS</Text>. Props and child content below determine appearance and interactions.
50	`</Pressable>`	Closes the UI element/component opened above.
51	`{loading && <ActivityIndicator color={colors.brand} style={s.loader} />}{" "}`	Assigns the right-hand expression to the named variable/property: {loading && <ActivityIndicator color={colors.brand} style={s.loader} />}{" "}. This is in-memory unless it is later persisted by an explicit call.
52	`{!!error && (`	Continues the surrounding declaration/expression or text: {!!error && (. Read it with the preceding opening statement ({loading && <ActivityIndicator color={colors.brand} style={s.loader} />}{" "}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
53	`<Pressable style={s.error} onPress={load}>`	Renders/opens a UI element or component: <Pressable style={s.error} onPress={load}>. Props and child content below determine appearance and interactions.
54	`<Text style={s.errorTitle}>{error}</Text>`	Renders/opens a UI element or component: <Text style={s.errorTitle}>{error}</Text>. Props and child content below determine appearance and interactions.
55	`<Text style={s.retry}>TAP TO RETRY</Text>`	Renders/opens a UI element or component: <Text style={s.retry}>TAP TO RETRY</Text>. Props and child content below determine appearance and interactions.
56	`</Pressable>`	Closes the UI element/component opened above.
57	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
58	`{!loading && !error && !rows.length && (`	Continues the surrounding declaration/expression or text: {!loading && !error && !rows.length && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
59	`<View style={s.empty}>`	Renders/opens a UI element or component: <View style={s.empty}>. Props and child content below determine appearance and interactions.
60	`<Text style={s.recordTitle}>No records found</Text>`	Renders/opens a UI element or component: <Text style={s.recordTitle}>No records found</Text>. Props and child content below determine appearance and interactions.
61	`<Text style={s.sub}>Records created from outlet visits will appear here.</Text>`	Renders/opens a UI element or component: <Text style={s.sub}>Records created from outlet visits will appear here.</Text>. Props and child content below determine appearance and interactions.
62	`</View>`	Closes the UI element/component opened above.
63	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
64	`{rows.map((row) => (`	Transforms/selects/aggregates collection values with the callback shown here: {rows.map((row) => (. Read the callback body and result assignment together.
65	`<View key={row.Id} style={s.card}>`	Renders/opens a UI element or component: <View key={row.Id} style={s.card}>. Props and child content below determine appearance and interactions.
66	`<Text style={s.recordTitle}>{row.Name || row.Subject__c || "Salesforce record"}</Text>`	Renders/opens a UI element or component: <Text style={s.recordTitle}>{row.Name || row.Subject__c || "Salesforce record"}</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
67	`{Object.entries(row)`	Calls the named method: {Object.entries(row). Its implementation defines the side effect/result; use the symbol/file index to follow it.
68	`.filter(`	Transforms/selects/aggregates collection values with the callback shown here: .filter(. Read the callback body and result assignment together.
69	`([key, value]) =>`	Continues the surrounding declaration/expression or text: ([key, value]) =>. Read it with the preceding opening statement (.filter(); it is not a standalone business operation.
70	`key !== "Id" &&`	Continues the surrounding declaration/expression or text: key !== "Id" &&. Read it with the preceding opening statement (([key, value]) =>); it is not a standalone business operation.
71	`key !== "Name" &&`	Continues the surrounding declaration/expression or text: key !== "Name" &&. Read it with the preceding opening statement (key !== "Id" &&); it is not a standalone business operation.
72	`value !== null &&`	Continues the surrounding declaration/expression or text: value !== null &&. Read it with the preceding opening statement (key !== "Name" &&); it is not a standalone business operation.
73	`value !== undefined &&`	Continues the surrounding declaration/expression or text: value !== undefined &&. Read it with the preceding opening statement (value !== null &&); it is not a standalone business operation.
74	`value !== "",`	Continues the surrounding declaration/expression or text: value !== "",. Read it with the preceding opening statement (value !== undefined &&); it is not a standalone business operation.
75	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
76	`.map(([key, value]) => (`	Transforms/selects/aggregates collection values with the callback shown here: .map(([key, value]) => (. Read the callback body and result assignment together.
77	`<View key={key} style={s.field}>`	Renders/opens a UI element or component: <View key={key} style={s.field}>. Props and child content below determine appearance and interactions.
78	`<Text style={s.label}>`	Renders/opens a UI element or component: <Text style={s.label}>. Props and child content below determine appearance and interactions.
79	`{labels[key] || key.replace(/__c$/, "").replaceAll("_", " ")}`	Calls the named method: {labels[key] || key.replace(/__c$/, "").replaceAll("_", " ")}. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
80	`</Text>`	Closes the UI element/component opened above.
81	`<Text style={s.value}>`	Renders/opens a UI element or component: <Text style={s.value}>. Props and child content below determine appearance and interactions.
82	`{typeof value === "number" && ["MRP__c", "RBP__c"].includes(key)`	Continues the surrounding declaration/expression or text: {typeof value === "number" && ["MRP__c", "RBP__c"].includes(key). Read it with the preceding opening statement (<Text style={s.value}>); it is not a standalone business operation.
83	`? `₹${value}``	Continues the surrounding declaration/expression or text: ? `₹${value}`. Read it with the preceding opening statement ({typeof value === "number" && ["MRP__c", "RBP__c"].includes(key)); it is not a standalone business operation.
84	`: String(value)}`	Continues the surrounding declaration/expression or text: : String(value)}. Read it with the preceding opening statement (? `₹${value}`); it is not a standalone business operation.
85	`</Text>`	Closes the UI element/component opened above.
86	`</View>`	Closes the UI element/component opened above.
87	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
88	`</View>`	Closes the UI element/component opened above.
89	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
90	`</ScrollView>`	Closes the UI element/component opened above.
91	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
92	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
93	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
94	`page: { flex: 1, backgroundColor: colors.surface },`	Sets/declares the named object property or style/type member: page: { flex: 1, backgroundColor: colors.surface },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
95	`  content: { padding: 16 },`	Sets/declares the named object property or style/type member: content: { padding: 16 },. Interpret it in the enclosing object, props or type definition.
96	`  title: { fontSize: 24, fontWeight: "900", color: colors.navy },`	Sets/declares the named object property or style/type member: title: { fontSize: 24, fontWeight: "900", color: colors.navy },. Interpret it in the enclosing object, props or type definition.
97	`  sub: { fontSize: 11, color: colors.muted, marginTop: 4 },`	Sets/declares the named object property or style/type member: sub: { fontSize: 11, color: colors.muted, marginTop: 4 },. Interpret it in the enclosing object, props or type definition.
98	`  loader: { marginTop: 30 },`	Sets/declares the named object property or style/type member: loader: { marginTop: 30 },. Interpret it in the enclosing object, props or type definition.
99	`  card: {`	Sets/declares the named object property or style/type member: card: {. Interpret it in the enclosing object, props or type definition.
100	`    backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
101	`    borderRadius: 16,`	Sets/declares the named object property or style/type member: borderRadius: 16,. Interpret it in the enclosing object, props or type definition.
102	`    padding: 15,`	Sets/declares the named object property or style/type member: padding: 15,. Interpret it in the enclosing object, props or type definition.
103	`    marginTop: 12,`	Sets/declares the named object property or style/type member: marginTop: 12,. Interpret it in the enclosing object, props or type definition.
104	`    borderLeftWidth: 4,`	Sets/declares the named object property or style/type member: borderLeftWidth: 4,. Interpret it in the enclosing object, props or type definition.
105	`    borderLeftColor: "#9DD9C9",`	Sets/declares the named object property or style/type member: borderLeftColor: "#9DD9C9",. Interpret it in the enclosing object, props or type definition.
106	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
107	`  recordTitle: { fontSize: 15, fontWeight: "900", color: colors.ink, marginBottom: 8 },`	Sets/declares the named object property or style/type member: recordTitle: { fontSize: 15, fontWeight: "900", color: colors.ink, marginBottom: 8 },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
108	`  field: {`	Sets/declares the named object property or style/type member: field: {. Interpret it in the enclosing object, props or type definition.
109	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
110	`    justifyContent: "space-between",`	Sets/declares the named object property or style/type member: justifyContent: "space-between",. Interpret it in the enclosing object, props or type definition.
111	`    borderTopWidth: 1,`	Sets/declares the named object property or style/type member: borderTopWidth: 1,. Interpret it in the enclosing object, props or type definition.
112	`    borderTopColor: colors.border,`	Sets/declares the named object property or style/type member: borderTopColor: colors.border,. Interpret it in the enclosing object, props or type definition.
113	`    paddingVertical: 7,`	Sets/declares the named object property or style/type member: paddingVertical: 7,. Interpret it in the enclosing object, props or type definition.
114	`    gap: 10,`	Sets/declares the named object property or style/type member: gap: 10,. Interpret it in the enclosing object, props or type definition.
115	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
116	`  label: { fontSize: 10, color: colors.muted, textTransform: "capitalize", flex: 1 },`	Sets/declares the named object property or style/type member: label: { fontSize: 10, color: colors.muted, textTransform: "capitalize", flex: 1 },. Interpret it in the enclosing object, props or type definition.
117	`  value: { fontSize: 11, color: colors.ink, fontWeight: "700", flex: 1, textAlign: "right" },`	Sets/declares the named object property or style/type member: value: { fontSize: 11, color: colors.ink, fontWeight: "700", flex: 1, textAlign: "right" },. Interpret it in the enclosing object, props or type definition.
118	`  empty: { alignItems: "center", padding: 30, marginTop: 20 },`	Sets/declares the named object property or style/type member: empty: { alignItems: "center", padding: 30, marginTop: 20 },. Interpret it in the enclosing object, props or type definition.
119	`  error: { backgroundColor: "#FFF0F1", padding: 15, borderRadius: 12, marginTop: 16 },`	Sets/declares the named object property or style/type member: error: { backgroundColor: "#FFF0F1", padding: 15, borderRadius: 12, marginTop: 16 },. Interpret it in the enclosing object, props or type definition.
120	`  errorTitle: { color: colors.danger, fontWeight: "800" },`	Sets/declares the named object property or style/type member: errorTitle: { color: colors.danger, fontWeight: "800" },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
121	`  retry: { color: colors.brand, fontWeight: "900", fontSize: 10, marginTop: 8 },`	Sets/declares the named object property or style/type member: retry: { color: colors.brand, fontWeight: "900", fontSize: 10, marginTop: 8 },. Interpret it in the enclosing object, props or type definition.
122	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/screens/MoreScreen.tsx

Employee secondary navigation, synchronization/status and account controls.

167 numbered source lines | SHA-256 f0dcaa3f74e54b6af9e4a56260632683303a660796469b9e61f1fb59a6d416bb

Line	Source code	Explanation / reading note
1	`import React, { useState } from "react";`	Imports dependencies/types used below: import React, { useState } from "react";. Importing a function does not call it.
2	`import { Pressable, SafeAreaView, ScrollView, StyleSheet, Text, View } from "react-native";`	Imports dependencies/types used below: import { Pressable, SafeAreaView, ScrollView, StyleSheet, Text, View } from "react-native";. Importing a function does not call it.
3	`import { useNavigation } from "@react-navigation/native";`	Imports dependencies/types used below: import { useNavigation } from "@react-navigation/native";. Importing a function does not call it.
4	`import BottomNav from "../components/BottomNav";`	Imports dependencies/types used below: import BottomNav from "../components/BottomNav";. Importing a function does not call it.
5	`import { Button, Card } from "../components/ui";`	Imports dependencies/types used below: import { Button, Card } from "../components/ui";. Importing a function does not call it.
6	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
7	`import { logOut } from "../storage/session";`	Imports dependencies/types used below: import { logOut } from "../storage/session";. Importing a function does not call it.
8	`import { flushQueue } from "../storage/syncQueue";`	Imports dependencies/types used below: import { flushQueue } from "../storage/syncQueue";. Importing a function does not call it.
9		Blank line separating logical sections; no executable operation.
10	`const modules = [`	Declares/initializes local data used by the surrounding operation: const modules = [. Collection contents and assignments below determine its purpose.
11	`  ["Primary orders / returns", "Primary", "目"],`	Continues the surrounding declaration/expression or text: ["Primary orders / returns", "Primary", "目"],. Read it with the preceding opening statement (const modules = []; it is not a standalone business operation.
12	`  ["Sales Orders", "Orders", "目"],`	Continues the surrounding declaration/expression or text: ["Sales Orders", "Orders", "目"],. Read it with the preceding opening statement (["Primary orders / returns", "Primary", "目"],); it is not a standalone business operation.

Line	Source code	Explanation / reading note
13	`  ["Asset Surveys", "asset-surveys", "▣"],`	Continues the surrounding declaration/expression or text: ["Asset Surveys", "asset-surveys", "▣"],. Read it with the preceding opening statement (["Sales Orders", "Orders", "▤"],); it is not a standalone business operation.
14	`  ["Competitor Activities", "competitor-activities", "◉"],`	Continues the surrounding declaration/expression or text: ["Competitor Activities", "competitor-activities", "◉"],. Read it with the preceding opening statement (["Asset Surveys", "asset-surveys", "▣"],); it is not a standalone business operation.
15	`  ["Tickets", "tickets", "!"],`	Continues the surrounding declaration/expression or text: ["Tickets", "tickets", "!"],. Read it with the preceding opening statement (["Competitor Activities", "competitor-activities", "◉"],); it is not a standalone business operation.
16	`  ["Stock Checks", "stock-checks", "▦"],`	Continues the surrounding declaration/expression or text: ["Stock Checks", "stock-checks", "▦"],. Read it with the preceding opening statement (["Tickets", "tickets", "!"],); it is not a standalone business operation.
17	`  ["Returns", "returns", "↩"],`	Continues the surrounding declaration/expression or text: ["Returns", "returns", "↩"],. Read it with the preceding opening statement (["Stock Checks", "stock-checks", "▦"],); it is not a standalone business operation.
18	`  ["Expenses", "Expenses", "₹"],`	Continues the surrounding declaration/expression or text: ["Expenses", "Expenses", "₹"],. Read it with the preceding opening statement (["Returns", "returns", "↩"],); it is not a standalone business operation.
19	`] as const;`	Continues the surrounding declaration/expression or text:] as const;. Read it with the preceding opening statement (["Expenses", "Expenses", "₹"],); it is not a standalone business operation.
20		Blank line separating logical sections; no executable operation.
21	`export default function MoreScreen() {`	Declares a callable function/method: export default function MoreScreen() {. Parameters supply its inputs; the following block implements the operation.
22	`  const navigation = useNavigation<any>();`	Declares/initializes local data used by the surrounding operation: const navigation = useNavigation<any>();. Collection contents and assignments below determine its purpose.
23	`  const [confirming, setConfirming] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
24	`  const [busy, setBusy] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.

Line	Source code	Explanation / reading note
25	`  const [message, setMessage] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
26		Blank line separating logical sections; no executable operation.
27	`  async function confirmLogOut() {`	Declares a callable function/method: async function confirmLogOut() {. Parameters supply its inputs; the following block implements the operation.
28	`    setBusy(true);`	Continues the surrounding declaration/expression or text: setBusy(true);. Read it with the preceding opening statement (async function confirmLogOut() {); it is not a standalone business operation.
29	`    setMessage("");`	Continues the surrounding declaration/expression or text: setMessage("");. Read it with the preceding opening statement (setBusy(true);); it is not a standalone business operation.
30	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
31	`      await logOut();`	Waits for this asynchronous operation before continuing: await logOut();. The returned result/error must still be handled.
32	`      // Back must not reopen the previous employee's screens.`	Developer comment/documentation: Back must not reopen the previous employee's screens. It is not executed.
33	`      navigation.reset({ index: 0, routes: [{ name: "Login" }] });`	Calls the named method: navigation.reset({ index: 0, routes: [{ name: "Login" }] });. Its implementation defines the side effect/result; use the symbol/file index to follow it.
34	`    } catch (error: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
35	`      setMessage(error.message || "Unable to log out. Please try again.");`	Continues the surrounding declaration/expression or text: setMessage(error.message || "Unable to log out. Please try again.");. Read it with the preceding opening statement (} catch (error: any) {); it is not a standalone business operation.
36	`    } finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
37	`      setBusy(false);`	Continues the surrounding declaration/expression or text: setBusy(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
38	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
40		Blank line separating logical sections; no executable operation.
41	`  async function syncChanges() {`	Declares a callable function/method: async function syncChanges() {. Parameters supply its inputs; the following block implements the operation.
42	`    setBusy(true);`	Continues the surrounding declaration/expression or text: setBusy(true);. Read it with the preceding opening statement (async function syncChanges() {); it is not a standalone business operation.
43	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
44	`      const result = await flushQueue();`	Waits for this asynchronous operation before continuing: const result = await flushQueue();. The returned result/error must still be handled.
45	`      setMessage(`	Continues the surrounding declaration/expression or text: setMessage(. Read it with the preceding opening statement (const result = await flushQueue();); it is not a standalone business operation.
46	`        result.failed`	Continues the surrounding declaration/expression or text: result.failed. Read it with the preceding opening statement (setMessage(); it is not a standalone business operation.
47	`          ? `${result.failed} changes still need syncing. Your work is saved on this device; please retry when connected.``	Continues the surrounding declaration/expression or text: ? `${result.failed} changes still need syncing. Your work is saved on this device; please retry when connected.`. Read it with the preceding opening statement (result.failed); it is not a standalone business operation.
48	`          : "All queued changes are synced. You can now log out.",`	Continues the surrounding declaration/expression or text: : "All queued changes are synced. You can now log out.",. Read it with the preceding opening statement (? `${result.failed} changes still need syncing. Your work is saved on this device; please retry when connected.`); it is not a standalone business operation.
49	`      );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
50	`    } catch {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
51	`      setMessage("Unable to sync. Your work is still saved on this device.");`	Continues the surrounding declaration/expression or text: setMessage("Unable to sync. Your work is still saved on this device.");. Read it with the preceding opening statement (} catch {); it is not a standalone business operation.
52	`    } finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.

Line	Source code	Explanation / reading note
53	`      setBusy(false);`	Continues the surrounding declaration/expression or text: setBusy(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
54	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
55	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
56		Blank line separating logical sections; no executable operation.
57	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
58	`    <SafeAreaView style={s.safe}>`	Renders/opens a UI element or component: <SafeAreaView style={s.safe}>. Props and child content below determine appearance and interactions.
59	`      <View style={s.shell}>`	Renders/opens a UI element or component: <View style={s.shell}>. Props and child content below determine appearance and interactions.
60	`        <View style={s.header}>`	Renders/opens a UI element or component: <View style={s.header}>. Props and child content below determine appearance and interactions.
61	`          <Text style={s.kicker}>SFA MOBILE</Text>`	Renders/opens a UI element or component: <Text style={s.kicker}>SFA MOBILE</Text>. Props and child content below determine appearance and interactions.
62	`          <Text style={s.title}>Salesforce Modules</Text>`	Renders/opens a UI element or component: <Text style={s.title}>Salesforce Modules</Text>. Props and child content below determine appearance and interactions.
63	`          <Text style={s.copy}>Live records belonging to your allocated outlets</Text>`	Renders/opens a UI element or component: <Text style={s.copy}>Live records belonging to your allocated outlets</Text>. Props and child content below determine appearance and interactions.
64	`        </View>`	Closes the UI element/component opened above.
65	`        <ScrollView style={s.body} contentContainerStyle={{ paddingBottom: 24 }}>`	Renders/opens a UI element or component: <ScrollView style={s.body} contentContainerStyle={{ paddingBottom: 24 }}>. Props and child content below determine appearance and interactions.
66	`          {modules`	Continues the surrounding declaration/expression or text: {modules. Read it with the preceding opening statement (<ScrollView style={s.body} contentContainerStyle={{ paddingBottom: 24 }}>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
67	`.filter(`	Transforms/selects/aggregates collection values with the callback shown here: .filter(. Read the callback body and result assignment together.
68	`([, name]) =>`	Continues the surrounding declaration/expression or text: ([, name]) =>. Read it with the preceding opening statement (.filter(); it is not a standalone business operation.
69	`name !== "Primary" || process.env.EXPO_PUBLIC_ENABLE_DMS_PRIMARY === "true",`	Continues the surrounding declaration/expression or text: name !== "Primary" || process.env.EXPO_PUBLIC_ENABLE_DMS_PRIMARY === "true",. Read it with the preceding opening statement (([, name]) =>); it is not a standalone business operation.
70	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
71	`.map(([title, moduleName, icon]) => (`	Transforms/selects/aggregates collection values with the callback shown here: .map(([title, moduleName, icon]) => (. Read the callback body and result assignment together.
72	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
73	`key={title}`	Assigns the right-hand expression to the named variable/property: key={title}. This is in-memory unless it is later persisted by an explicit call.
74	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
75	`onPress={() =>`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
76	`moduleName === "Orders"`	Continues the surrounding declaration/expression or text: moduleName === "Orders". Read it with the preceding opening statement (onPress={() =>); it is not a standalone business operation.
77	`? navigation.navigate("Orders")`	Calls the named method: ? navigation.navigate("Orders"). Its implementation defines the side effect/result; use the symbol/file index to follow it.
78	`: moduleName === "Expenses"`	Continues the surrounding declaration/expression or text: : moduleName === "Expenses". Read it with the preceding opening statement (? navigation.navigate("Orders")); it is not a standalone business operation.
79	`? navigation.navigate("Expenses")`	Calls the named method: ? navigation.navigate("Expenses"). Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
80	`: moduleName === "Primary"`	Continues the surrounding declaration/expression or text: : moduleName === "Primary". Read it with the preceding opening statement (? navigation.navigate("Expenses")); it is not a standalone business operation.
81	`? navigation.navigate("Primary")`	Calls the named method: ? navigation.navigate("Primary"). Its implementation defines the side effect/result; use the symbol/file index to follow it.
82	`: navigation.navigate("ModuleList", { moduleName, title })`	Calls the named method: : navigation.navigate("ModuleList", { moduleName, title }). Its implementation defines the side effect/result; use the symbol/file index to follow it.
83	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
84	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (}); it is not a standalone business operation.
85	`<Card style={s.row}>`	Renders/opens a UI element or component: <Card style={s.row}>. Props and child content below determine appearance and interactions.
86	`<Text style={s.icon}>{icon}</Text>`	Renders/opens a UI element or component: <Text style={s.icon}>{icon}</Text>. Props and child content below determine appearance and interactions.
87	`<Text style={s.name}>{title}</Text>`	Renders/opens a UI element or component: <Text style={s.name}>{title}</Text>. Props and child content below determine appearance and interactions.
88	`<Text style={s.arrow}>›</Text>`	Renders/opens a UI element or component: <Text style={s.arrow}>›</Text>. Props and child content below determine appearance and interactions.
89	`</Card>`	Closes the UI element/component opened above.
90	`</Pressable>`	Closes the UI element/component opened above.
91	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
92	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
93	`<Text style={s.name}>Account</Text>`	Renders/opens a UI element or component: <Text style={s.name}>Account</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
94	`{confirming ? (`	Continues the surrounding declaration/expression or text: {confirming ? (. Read it with the preceding opening statement (<Text style={s.name}>Account</Text>); it is not a standalone business operation.
95	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
96	`<Text style={{ color: colors.ink, lineHeight: 21, marginVertical: 12 }}>`	Renders/opens a UI element or component: <Text style={{ color: colors.ink, lineHeight: 21, marginVertical: 12 }}>. Props and child content below determine appearance and interactions.
97	`Log out of this device? Save any unfinished work first. You will need a new email`	Continues the surrounding declaration/expression or text: Log out of this device? Save any unfinished work first. You will need a new email. Read it with the preceding opening statement (<Text style={{ color: colors.ink, lineHeight: 21, marginVertical: 12 }}>); it is not a standalone business operation.
98	`code to sign in again.`	Continues the surrounding declaration/expression or text: code to sign in again.. Read it with the preceding opening statement (Log out of this device? Save any unfinished work first. You will need a new email); it is not a standalone business operation.
99	`</Text>`	Closes the UI element/component opened above.
100	`{!!message && (`	Continues the surrounding declaration/expression or text: {!!message && (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
101	`<Text accessibilityRole="alert" style={{ color: colors.ink, marginVertical: 12 }}>`	Renders/opens a UI element or component: <Text accessibilityRole="alert" style={{ color: colors.ink, marginVertical: 12 }}>. Props and child content below determine appearance and interactions.
102	`{message}`	Continues the surrounding declaration/expression or text: {message}. Read it with the preceding opening statement (<Text accessibilityRole="alert" style={{ color: colors.ink, marginVertical: 12 }}>); it is not a standalone business operation.
103	`</Text>`	Closes the UI element/component opened above.
104	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
105	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
106	`title={busy ? "Please wait…" : "Confirm log out"}`	Assigns the right-hand expression to the named variable/property: title={busy ? "Please wait…" : "Confirm log out"}. This is in-memory unless it is later persisted by an explicit call.
107	`kind="danger"`	Assigns the right-hand expression to the named variable/property: kind="danger". This is in-memory unless it is later persisted by an explicit call.
108	`onPress={confirmLogOut}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
109	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
110	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (disabled={busy}); it is not a standalone business operation.
111	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
112	`title="Sync changes"`	Assigns the right-hand expression to the named variable/property: title="Sync changes". This is in-memory unless it is later persisted by an explicit call.
113	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.
114	`onPress={syncChanges}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
115	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
116	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (disabled={busy}); it is not a standalone business operation.
117	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
118	`title="Cancel"`	Assigns the right-hand expression to the named variable/property: title="Cancel". This is in-memory unless it is later persisted by an explicit call.
119	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
120	`onPress={() => {`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
121	`setConfirming(false);`	Continues the surrounding declaration/expression or text: setConfirming(false);. Read it with the preceding opening statement (onPress={() => {); it is not a standalone business operation.
122	`setMessage("");`	Continues the surrounding declaration/expression or text: setMessage("");. Read it with the preceding opening statement (setConfirming(false);); it is not a standalone business operation.
123	`}}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
124	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
125	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (disabled={busy}); it is not a standalone business operation.
126	`</>`	Closes the UI element/component opened above.
127	`) : (`	Continues the surrounding declaration/expression or text:) : (. Read it with the preceding opening statement (</>); it is not a standalone business operation.
128	`<Button title="Log out" kind="danger" onPress={() => setConfirming(true)} />`	Renders/opens a UI element or component: <Button title="Log out" kind="danger" onPress={() => setConfirming(true)} />. Props and child content below determine appearance and interactions.
129	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
130	`</Card>`	Closes the UI element/component opened above.
131	`</ScrollView>`	Closes the UI element/component opened above.
132	`{!busy && <BottomNav active="More" />}`	Assigns the right-hand expression to the named variable/property: {!busy && <BottomNav active="More" />}. This is in-memory unless it is later persisted by an explicit call.
133	`</View>`	Closes the UI element/component opened above.
134	`</SafeAreaView>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
135	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
136	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
137	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
138	`  safe: { flex: 1, backgroundColor: "#E8E1D3" },`	Sets/declares the named object property or style/type member: safe: { flex: 1, backgroundColor: "#E8E1D3" },. Interpret it in the enclosing object, props or type definition.
139	`  shell: {`	Sets/declares the named object property or style/type member: shell: {. Interpret it in the enclosing object, props or type definition.
140	`    flex: 1,`	Sets/declares the named object property or style/type member: flex: 1,. Interpret it in the enclosing object, props or type definition.
141	`    width: "100%",`	Sets/declares the named object property or style/type member: width: "100%",. Interpret it in the enclosing object, props or type definition.
142	`    maxWidth: 480,`	Sets/declares the named object property or style/type member: maxWidth: 480,. Interpret it in the enclosing object, props or type definition.
143	`    alignSelf: "center",`	Sets/declares the named object property or style/type member: alignSelf: "center",. Interpret it in the enclosing object, props or type definition.
144	`    backgroundColor: colors.surface,`	Sets/declares the named object property or style/type member: backgroundColor: colors.surface,. Interpret it in the enclosing object, props or type definition.
145	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
146	`  header: {`	Sets/declares the named object property or style/type member: header: {. Interpret it in the enclosing object, props or type definition.
147	`    backgroundColor: colors.navy,`	Sets/declares the named object property or style/type member: backgroundColor: colors.navy,. Interpret it in the enclosing object, props or type definition.
148	`    padding: 20,`	Sets/declares the named object property or style/type member: padding: 20,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
149	`paddingBottom: 24,`	Sets/declares the named object property or style/type member: paddingBottom: 24,. Interpret it in the enclosing object, props or type definition.
150	`borderBottomRightRadius: 28,`	Sets/declares the named object property or style/type member: borderBottomRightRadius: 28,. Interpret it in the enclosing object, props or type definition.
151	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
152	`kicker: { color: "#9DD9C9", fontWeight: "900", fontSize: 11, letterSpacing: 1.4 },`	Sets/declares the named object property or style/type member: kicker: { color: "#9DD9C9", fontWeight: "900", fontSize: 11, letterSpacing: 1.4 },. Interpret it in the enclosing object, props or type definition.
153	`title: { color: "white", fontSize: 25, fontWeight: "900", marginTop: 5 },`	Sets/declares the named object property or style/type member: title: { color: "white", fontSize: 25, fontWeight: "900", marginTop: 5 },. Interpret it in the enclosing object, props or type definition.
154	`copy: { color: "#D8EEE8", fontSize: 11, marginTop: 5 },`	Sets/declares the named object property or style/type member: copy: { color: "#D8EEE8", fontSize: 11, marginTop: 5 },. Interpret it in the enclosing object, props or type definition.
155	`body: { flex: 1, padding: 14 },`	Sets/declares the named object property or style/type member: body: { flex: 1, padding: 14 },. Interpret it in the enclosing object, props or type definition.
156	`row: {`	Sets/declares the named object property or style/type member: row: {. Interpret it in the enclosing object, props or type definition.
157	`flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
158	`alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
159	`padding: 16,`	Sets/declares the named object property or style/type member: padding: 16,. Interpret it in the enclosing object, props or type definition.
160	`marginBottom: 9,`	Sets/declares the named object property or style/type member: marginBottom: 9,. Interpret it in the enclosing object, props or type definition.
161	`borderLeftWidth: 4,`	Sets/declares the named object property or style/type member: borderLeftWidth: 4,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
162	`    borderLeftColor: "#F6C85F",`	Sets/declares the named object property or style/type member: borderLeftColor: "#F6C85F",. Interpret it in the enclosing object, props or type definition.
163	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
164	`  icon: { width: 32, color: colors.blue, fontSize: 19, fontWeight: "900" },`	Sets/declares the named object property or style/type member: icon: { width: 32, color: colors.blue, fontSize: 19, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
165	`  name: { flex: 1, color: colors.ink, fontWeight: "800" },`	Sets/declares the named object property or style/type member: name: { flex: 1, color: colors.ink, fontWeight: "800" },. Interpret it in the enclosing object, props or type definition.
166	`  arrow: { color: colors.muted, fontSize: 24 },`	Sets/declares the named object property or style/type member: arrow: { color: colors.muted, fontSize: 24 },. Interpret it in the enclosing object, props or type definition.
167	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/screens/OrdersScreen.tsx

Employee order history and product-line display. Reads saved data; rendering a card does not imply a new write.

220 numbered source lines | SHA-256 66de2be1d8e0bd58dafcd5361504ed72aaaf1b37778c45e6c353c297122c8f88

Line	Source code	Explanation / reading note
1	`import React, { useCallback, useState } from "react";`	Imports dependencies/types used below: import React, { useCallback, useState } from "react";. Importing a function does not call it.
2	`import { useFocusEffect } from "@react-navigation/native";`	Imports dependencies/types used below: import { useFocusEffect } from "@react-navigation/native";. Importing a function does not call it.
3	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.
4	`  ActivityIndicator,`	Continues the surrounding declaration/expression or text: ActivityIndicator,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
5	`  Pressable,`	Continues the surrounding declaration/expression or text: Pressable,. Read it with the preceding opening statement (ActivityIndicator,); it is not a standalone business operation.
6	`  SafeAreaView,`	Continues the surrounding declaration/expression or text: SafeAreaView,. Read it with the preceding opening statement (Pressable,); it is not a standalone business operation.
7	`  ScrollView,`	Continues the surrounding declaration/expression or text: ScrollView,. Read it with the preceding opening statement (SafeAreaView,); it is not a standalone business operation.
8	`  StyleSheet,`	Continues the surrounding declaration/expression or text: StyleSheet,. Read it with the preceding opening statement (ScrollView,); it is not a standalone business operation.
9	`  Text,`	Continues the surrounding declaration/expression or text: Text,. Read it with the preceding opening statement (StyleSheet,); it is not a standalone business operation.
10	`  View,`	Continues the surrounding declaration/expression or text: View,. Read it with the preceding opening statement (Text,); it is not a standalone business operation.
11	`} from "react-native";`	Completes the dependency import and identifies the module supplying those names.
12	`import { api } from "../api/client";`	Imports dependencies/types used below: import { api } from "../api/client";. Importing a function does not call it.
13	`import BrandHeader from "../components/BrandHeader";`	Imports dependencies/types used below: import BrandHeader from "../components/BrandHeader";. Importing a function does not call it.

Line	Source code	Explanation / reading note
14	`import BottomNav from "../components/BottomNav";`	Imports dependencies/types used below: import BottomNav from "../components/BottomNav";. Importing a function does not call it.
15	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
16		Blank line separating logical sections; no executable operation.
17	`type OrderItemSummary = {`	Defines a compile-time data contract: type OrderItemSummary = {. TypeScript types do not validate untrusted runtime JSON by themselves.
18	`  id: string;`	Sets/declares the named object property or style/type member: id: string;. Interpret it in the enclosing object, props or type definition.
19	`  productName?: string;`	Sets/declares the named object property or style/type member: productName?: string;. Interpret it in the enclosing object, props or type definition.
20	`  quantity: number;`	Sets/declares the named object property or style/type member: quantity: number;. Interpret it in the enclosing object, props or type definition.
21	`  amount: number;`	Sets/declares the named object property or style/type member: amount: number;. Interpret it in the enclosing object, props or type definition.
22	`  schemeName?: string;`	Sets/declares the named object property or style/type member: schemeName?: string;. Interpret it in the enclosing object, props or type definition.
23	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24	`type OrderSummary = {`	Defines a compile-time data contract: type OrderSummary = {. TypeScript types do not validate untrusted runtime JSON by themselves.
25	`  id: string;`	Sets/declares the named object property or style/type member: id: string;. Interpret it in the enclosing object, props or type definition.
26	`  orderNumber: string;`	Sets/declares the named object property or style/type member: orderNumber: string;. Interpret it in the enclosing object, props or type definition.
27	`  outletName?: string;`	Sets/declares the named object property or style/type member: outletName?: string;. Interpret it in the enclosing object, props or type definition.
28	`  date?: string;`	Sets/declares the named object property or style/type member: date?: string;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
29	`  status?: string;`	Sets/declares the named object property or style/type member: status?: string;. Interpret it in the enclosing object, props or type definition.
30	`  amount?: number;`	Sets/declares the named object property or style/type member: amount?: number;. Interpret it in the enclosing object, props or type definition.
31	`  grossAmount?: number;`	Sets/declares the named object property or style/type member: grossAmount?: number;. Interpret it in the enclosing object, props or type definition.
32	`  taxAmount?: number;`	Sets/declares the named object property or style/type member: taxAmount?: number;. Interpret it in the enclosing object, props or type definition.
33	`  totalQuantity?: number;`	Sets/declares the named object property or style/type member: totalQuantity?: number;. Interpret it in the enclosing object, props or type definition.
34	`  sku?: string;`	Sets/declares the named object property or style/type member: sku?: string;. Interpret it in the enclosing object, props or type definition.
35	`  schemeApplied?: boolean;`	Sets/declares the named object property or style/type member: schemeApplied?: boolean;. Interpret it in the enclosing object, props or type definition.
36	`  schemeDetails?: string;`	Sets/declares the named object property or style/type member: schemeDetails?: string;. Interpret it in the enclosing object, props or type definition.
37	`  productName?: string;`	Sets/declares the named object property or style/type member: productName?: string;. Interpret it in the enclosing object, props or type definition.
38	`  visitName?: string;`	Sets/declares the named object property or style/type member: visitName?: string;. Interpret it in the enclosing object, props or type definition.
39	`  items?: OrderItemSummary[];`	Sets/declares the named object property or style/type member: items?: OrderItemSummary[];. Interpret it in the enclosing object, props or type definition.
40	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
41		Blank line separating logical sections; no executable operation.
42	`export default function OrdersScreen() {`	Declares a callable function/method: export default function OrdersScreen() {. Parameters supply its inputs; the following block implements the operation.
43	`  const [filter, setFilter] = useState("ALL");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.

Line	Source code	Explanation / reading note
44	`  const [orders, setOrders] = useState<OrderSummary[]>([]);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
45	`  const [loading, setLoading] = useState(true);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
46	`  const [error, setError] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
47	`  const load = () => {`	Declares/initializes local data used by the surrounding operation: const load = () => {. Collection contents and assignments below determine its purpose.
48	`    setLoading(true);`	Continues the surrounding declaration/expression or text: setLoading(true);. Read it with the preceding opening statement (const load = () => {); it is not a standalone business operation.
49	`    setError("");`	Continues the surrounding declaration/expression or text: setError("");. Read it with the preceding opening statement (setLoading(true);); it is not a standalone business operation.
50	`    api<OrderSummary[]>("/orders")`	Continues the surrounding declaration/expression or text: api<OrderSummary[]>("/orders"). Read it with the preceding opening statement (setError("");); it is not a standalone business operation.
51	`      .then(setOrders)`	Continues the surrounding declaration/expression or text: .then(setOrders). Read it with the preceding opening statement (api<OrderSummary[]>("/orders")); it is not a standalone business operation.
52	`      .catch((reason) => setError(reason.message || "Unable to load orders"))`	Continues the surrounding declaration/expression or text: .catch((reason) => setError(reason.message || "Unable to load orders")). Read it with the preceding opening statement (.then(setOrders)); it is not a standalone business operation.
53	`      .finally(() => setLoading(false));`	Continues the surrounding declaration/expression or text: .finally(() => setLoading(false));. Read it with the preceding opening statement (.catch((reason) => setError(reason.message || "Unable to load orders"))); it is not a standalone business operation.
54	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
55	`  useFocusEffect(useCallback(load, []));`	Continues the surrounding declaration/expression or text: useFocusEffect(useCallback(load, []));. Read it with the preceding opening statement (};); it is not a standalone business operation.

Line	Source code	Explanation / reading note
56	`  const visibleOrders = orders.filter(`	Declares/initializes local data used by the surrounding operation: const visibleOrders = orders.filter(. Collection contents and assignments below determine its purpose.
57	`    (order) =>`	Continues the surrounding declaration/expression or text: (order) =>. Read it with the preceding opening statement (const visibleOrders = orders.filter(); it is not a standalone business operation.
58	`      filter === "ALL" ||`	Continues the surrounding declaration/expression or text: filter === "ALL" ||. Read it with the preceding opening statement ((order) =>); it is not a standalone business operation.
59	`      (filter === "COMPLETED"`	Continues the surrounding declaration/expression or text: (filter === "COMPLETED". Read it with the preceding opening statement (filter === "ALL" ||); it is not a standalone business operation.
60	`        ? order.status === "Fulfilled"`	Continues the surrounding declaration/expression or text: ? order.status === "Fulfilled". Read it with the preceding opening statement ((filter === "COMPLETED"); it is not a standalone business operation.
61	`        : ["Draft", "Submitted"].includes(order.status || "")),`	Continues the surrounding declaration/expression or text: : ["Draft", "Submitted"].includes(order.status || "")),. Read it with the preceding opening statement (? order.status === "Fulfilled"); it is not a standalone business operation.
62	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
63	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
64	`    <SafeAreaView style={s.safe}>`	Renders/opens a UI element or component: <SafeAreaView style={s.safe}>. Props and child content below determine appearance and interactions.
65	`      <View style={s.shell}>`	Renders/opens a UI element or component: <View style={s.shell}>. Props and child content below determine appearance and interactions.
66	`        <BrandHeader />`	Renders/opens a UI element or component: <BrandHeader />. Props and child content below determine appearance and interactions.
67	`        <ScrollView contentContainerStyle={s.body}>`	Renders/opens a UI element or component: <ScrollView contentContainerStyle={s.body}>. Props and child content below determine appearance and interactions.
68	`          <Text style={s.title}>MY ORDERS</Text>`	Renders/opens a UI element or component: <Text style={s.title}>MY ORDERS</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
69	`<Text style={s.sub}>Orders synchronized with Salesforce</Text>`	Renders/opens a UI element or component: <Text style={s.sub}>Orders synchronized with Salesforce</Text>. Props and child content below determine appearance and interactions.
70	`<Pressable accessibilityRole="button" onPress={load}>`	Renders/opens a UI element or component: <Pressable accessibilityRole="button" onPress={load}>. Props and child content below determine appearance and interactions.
71	`<Text style={s.retry}>REFRESH SALESFORCE ORDERS</Text>`	Renders/opens a UI element or component: <Text style={s.retry}>REFRESH SALESFORCE ORDERS</Text>. Props and child content below determine appearance and interactions.
72	`</Pressable>`	Closes the UI element/component opened above.
73	`<View style={s.tabs}>`	Renders/opens a UI element or component: <View style={s.tabs}>. Props and child content below determine appearance and interactions.
74	`{["ALL", "PENDING", "COMPLETED"].map((value) => (`	Transforms/selects/aggregates collection values with the callback shown here: {["ALL", "PENDING", "COMPLETED"].map((value) => (. Read the callback body and result assignment together.
75	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
76	`key={value}`	Assigns the right-hand expression to the named variable/property: key={value}. This is in-memory unless it is later persisted by an explicit call.
77	`onPress={() => setFilter(value)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
78	`accessibilityRole="button"`	Assigns the right-hand expression to the named variable/property: accessibilityRole="button". This is in-memory unless it is later persisted by an explicit call.
79	`accessibilityState={{ selected: filter === value }}`	Assigns the right-hand expression to the named variable/property: accessibilityState={{ selected: filter === value }}. This is in-memory unless it is later persisted by an explicit call.
80	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (accessibilityState={{ selected: filter === value }}); it is not a standalone business operation.
81	`<Text style={filter === value ? s.tabOn : s.tab}>{value}</Text>`	Renders/opens a UI element or component: <Text style={filter === value ? s.tabOn : s.tab}>{value}</Text>. Props and child content below determine appearance and interactions.
82	`</Pressable>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
83	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
84	`</View>`	Closes the UI element/component opened above.
85	`{loading && <ActivityIndicator color={colors.brand} />}{" "}`	Assigns the right-hand expression to the named variable/property: {loading && <ActivityIndicator color={colors.brand} />}{" "}. This is in-memory unless it is later persisted by an explicit call.
86	`{!!error && (`	Continues the surrounding declaration/expression or text: {!!error && (. Read it with the preceding opening statement ({loading && <ActivityIndicator color={colors.brand} />}{" "}); it is not a standalone business operation.
87	`<Pressable style={s.error} onPress={load}>`	Renders/opens a UI element or component: <Pressable style={s.error} onPress={load}>. Props and child content below determine appearance and interactions.
88	`<Text style={s.errorTitle}>Order data unavailable</Text>`	Renders/opens a UI element or component: <Text style={s.errorTitle}>Order data unavailable</Text>. Props and child content below determine appearance and interactions.
89	`<Text style={s.sub}>{error}</Text>`	Renders/opens a UI element or component: <Text style={s.sub}>{error}</Text>. Props and child content below determine appearance and interactions.
90	`<Text style={s.retry}>TAP TO RETRY</Text>`	Renders/opens a UI element or component: <Text style={s.retry}>TAP TO RETRY</Text>. Props and child content below determine appearance and interactions.
91	`</Pressable>`	Closes the UI element/component opened above.
92	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
93	`{!loading && !error && !visibleOrders.length && (`	Continues the surrounding declaration/expression or text: {!loading && !error && !visibleOrders.length && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
94	`<View style={s.empty}>`	Renders/opens a UI element or component: <View style={s.empty}>. Props and child content below determine appearance and interactions.
95	`<Text style={s.id}>No orders found</Text>`	Renders/opens a UI element or component: <Text style={s.id}>No orders found</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
96	`<Text style={s.sub}>Orders created for your Employee account will appear here.</Text>`	Renders/opens a UI element or component: <Text style={s.sub}>Orders created for your Employee account will appear here.</Text>. Props and child content below determine appearance and interactions.
97	`</View>`	Closes the UI element/component opened above.
98	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
99	`{visibleOrders.map((order) => (`	Transforms/selects/aggregates collection values with the callback shown here: {visibleOrders.map((order) => (. Read the callback body and result assignment together.
100	`<View key={order.id} style={s.card}>`	Renders/opens a UI element or component: <View key={order.id} style={s.card}>. Props and child content below determine appearance and interactions.
101	`<View style={s.row}>`	Renders/opens a UI element or component: <View style={s.row}>. Props and child content below determine appearance and interactions.
102	`<Text style={s.id}>{order.orderNumber}</Text>`	Renders/opens a UI element or component: <Text style={s.id}>{order.orderNumber}</Text>. Props and child content below determine appearance and interactions.
103	`<Text style={s.status}>{order.status || "Draft"}</Text>`	Renders/opens a UI element or component: <Text style={s.status}>{order.status || "Draft"}</Text>. Props and child content below determine appearance and interactions.
104	`</View>`	Closes the UI element/component opened above.
105	`<Text style={s.outlet}>{order.outletName || "Outlet unavailable"}</Text>`	Renders/opens a UI element or component: <Text style={s.outlet}>{order.outletName || "Outlet unavailable"}</Text>. Props and child content below determine appearance and interactions.
106	`<Text style={s.meta}>`	Renders/opens a UI element or component: <Text style={s.meta}>. Props and child content below determine appearance and interactions.
107	`Order date: {order.date || "Unavailable"} · Quantity: {order.totalQuantity || 0}`	Continues the surrounding declaration/expression or text: Order date: {order.date || "Unavailable"} · Quantity: {order.totalQuantity || 0}. Read it with the preceding opening statement (<Text style={s.meta}>); it is not a standalone business operation.
108	`</Text>`	Closes the UI element/component opened above.
109	`<Text style={s.meta}>Visit: {order.visitName || "—"}</Text>`	Renders/opens a UI element or component: <Text style={s.meta}>Visit: {order.visitName || " - "}</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
110	`{order.items?.map((item) => (`	Transforms/selects/aggregates collection values with the callback shown here: {order.items?.map((item) => (. Read the callback body and result assignment together.
111	`<View key={item.id} style={s.item}>`	Renders/opens a UI element or component: <View key={item.id} style={s.item}>. Props and child content below determine appearance and interactions.
112	`<Text style={s.itemProduct}>`	Renders/opens a UI element or component: <Text style={s.itemProduct}>. Props and child content below determine appearance and interactions.
113	`{item.productName || "Product"} · Qty {item.quantity}`	Continues the surrounding declaration/expression or text: {item.productName || "Product"} · Qty {item.quantity}. Read it with the preceding opening statement (<Text style={s.itemProduct}>); it is not a standalone business operation.
114	`</Text>`	Closes the UI element/component opened above.
115	`<Text style={s.meta}>Applied scheme: {item.schemeName || "No scheme"}</Text>`	Renders/opens a UI element or component: <Text style={s.meta}>Applied scheme: {item.schemeName || "No scheme"}</Text>. Props and child content below determine appearance and interactions.
116	`<Text style={s.meta}>`	Renders/opens a UI element or component: <Text style={s.meta}>. Props and child content below determine appearance and interactions.
117	`Line amount: ₹{Number(item.amount || 0).toLocaleString("en-IN")}`	Continues the surrounding declaration/expression or text: Line amount: ₹{Number(item.amount || 0).toLocaleString("en-IN")}. Read it with the preceding opening statement (<Text style={s.meta}>); it is not a standalone business operation.
118	`</Text>`	Closes the UI element/component opened above.
119	`</View>`	Closes the UI element/component opened above.
120	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
121	`{!order.items?.length && (`	Continues the surrounding declaration/expression or text: {!order.items?.length && (. Read it with the preceding opening statement ( ))}); it is not a standalone business operation.
122	`<Text style={s.meta}>`	Renders/opens a UI element or component: <Text style={s.meta}>. Props and child content below determine appearance and interactions.
123	`Product: {order.productName || "See order items"} · Scheme:{" "}`	Sets/declares the named object property or style/type member: Product: {order.productName || "See order items"} · Scheme:{" "}. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
124	`{order.schemeDetails || "No scheme"}`	Continues the surrounding declaration/expression or text: {order.schemeDetails || "No scheme"}. Read it with the preceding opening statement (Product: {order.productName || "See order items"} · Scheme:{" "}); it is not a standalone business operation.
125	`</Text>`	Closes the UI element/component opened above.
126	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
127	`<View style={s.amounts}>`	Renders/opens a UI element or component: <View style={s.amounts}>. Props and child content below determine appearance and interactions.
128	`<Text style={s.meta}>`	Renders/opens a UI element or component: <Text style={s.meta}>. Props and child content below determine appearance and interactions.
129	`Gross ₹{Number(order.grossAmount || 0).toLocaleString("en-IN")}`	Continues the surrounding declaration/expression or text: Gross ₹{Number(order.grossAmount || 0).toLocaleString("en-IN")}. Read it with the preceding opening statement (<Text style={s.meta}>); it is not a standalone business operation.
130	`</Text>`	Closes the UI element/component opened above.
131	`<Text style={s.meta}>`	Renders/opens a UI element or component: <Text style={s.meta}>. Props and child content below determine appearance and interactions.
132	`Tax ₹{Number(order.taxAmount || 0).toLocaleString("en-IN")}`	Continues the surrounding declaration/expression or text: Tax ₹{Number(order.taxAmount || 0).toLocaleString("en-IN")}. Read it with the preceding opening statement (<Text style={s.meta}>); it is not a standalone business operation.
133	`</Text>`	Closes the UI element/component opened above.
134	`<Text style={s.amount}>`	Renders/opens a UI element or component: <Text style={s.amount}>. Props and child content below determine appearance and interactions.
135	`Total ₹{Number(order.amount || 0).toLocaleString("en-IN")}`	Continues the surrounding declaration/expression or text: Total ₹{Number(order.amount || 0).toLocaleString("en-IN")}. Read it with the preceding opening statement (<Text style={s.amount}>); it is not a standalone business operation.
136	`</Text>`	Closes the UI element/component opened above.
137	`</View>`	Closes the UI element/component opened above.
138	`</View>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
139	`          ))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
140	`        </ScrollView>`	Closes the UI element/component opened above.
141	`        <BottomNav active="Orders" />`	Renders/opens a UI element or component: <BottomNav active="Orders" />. Props and child content below determine appearance and interactions.
142	`      </View>`	Closes the UI element/component opened above.
143	`    </SafeAreaView>`	Closes the UI element/component opened above.
144	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
145	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
146		Blank line separating logical sections; no executable operation.
147	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
148	`  safe: { flex: 1, backgroundColor: "#E8E1D3" },`	Sets/declares the named object property or style/type member: safe: { flex: 1, backgroundColor: "#E8E1D3" },. Interpret it in the enclosing object, props or type definition.
149	`  shell: {`	Sets/declares the named object property or style/type member: shell: {. Interpret it in the enclosing object, props or type definition.
150	`    flex: 1,`	Sets/declares the named object property or style/type member: flex: 1,. Interpret it in the enclosing object, props or type definition.
151	`    maxWidth: 430,`	Sets/declares the named object property or style/type member: maxWidth: 430,. Interpret it in the enclosing object, props or type definition.
152	`    width: "100%",`	Sets/declares the named object property or style/type member: width: "100%",. Interpret it in the enclosing object, props or type definition.
153	`    alignSelf: "center",`	Sets/declares the named object property or style/type member: alignSelf: "center",. Interpret it in the enclosing object, props or type definition.
154	`    backgroundColor: colors.surface,`	Sets/declares the named object property or style/type member: backgroundColor: colors.surface,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
155	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
156	`  body: { padding: 16 },`	Sets/declares the named object property or style/type member: body: { padding: 16 },. Interpret it in the enclosing object, props or type definition.
157	`  title: { fontSize: 22, fontWeight: "900", color: colors.navy },`	Sets/declares the named object property or style/type member: title: { fontSize: 22, fontWeight: "900", color: colors.navy },. Interpret it in the enclosing object, props or type definition.
158	`  sub: { fontSize: 11, color: colors.muted, marginTop: 3 },`	Sets/declares the named object property or style/type member: sub: { fontSize: 11, color: colors.muted, marginTop: 3 },. Interpret it in the enclosing object, props or type definition.
159	`  tabs: {`	Sets/declares the named object property or style/type member: tabs: {. Interpret it in the enclosing object, props or type definition.
160	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
161	`    marginVertical: 15,`	Sets/declares the named object property or style/type member: marginVertical: 15,. Interpret it in the enclosing object, props or type definition.
162	`    borderBottomWidth: 1,`	Sets/declares the named object property or style/type member: borderBottomWidth: 1,. Interpret it in the enclosing object, props or type definition.
163	`    borderBottomColor: colors.border,`	Sets/declares the named object property or style/type member: borderBottomColor: colors.border,. Interpret it in the enclosing object, props or type definition.
164	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
165	`  tab: { padding: 10, color: colors.muted, fontSize: 10, fontWeight: "800" },`	Sets/declares the named object property or style/type member: tab: { padding: 10, color: colors.muted, fontSize: 10, fontWeight: "800" },. Interpret it in the enclosing object, props or type definition.
166	`  tabOn: {`	Sets/declares the named object property or style/type member: tabOn: {. Interpret it in the enclosing object, props or type definition.
167	`    padding: 10,`	Sets/declares the named object property or style/type member: padding: 10,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
168	`    color: colors.blue,`	Sets/declares the named object property or style/type member: color: colors.blue,. Interpret it in the enclosing object, props or type definition.
169	`    fontSize: 10,`	Sets/declares the named object property or style/type member: fontSize: 10,. Interpret it in the enclosing object, props or type definition.
170	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
171	`    borderBottomWidth: 3,`	Sets/declares the named object property or style/type member: borderBottomWidth: 3,. Interpret it in the enclosing object, props or type definition.
172	`    borderBottomColor: colors.blue,`	Sets/declares the named object property or style/type member: borderBottomColor: colors.blue,. Interpret it in the enclosing object, props or type definition.
173	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
174	`  card: {`	Sets/declares the named object property or style/type member: card: {. Interpret it in the enclosing object, props or type definition.
175	`    backgroundColor: "#FFFDF7",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFFDF7",. Interpret it in the enclosing object, props or type definition.
176	`    borderRadius: 16,`	Sets/declares the named object property or style/type member: borderRadius: 16,. Interpret it in the enclosing object, props or type definition.
177	`    padding: 15,`	Sets/declares the named object property or style/type member: padding: 15,. Interpret it in the enclosing object, props or type definition.
178	`    marginBottom: 11,`	Sets/declares the named object property or style/type member: marginBottom: 11,. Interpret it in the enclosing object, props or type definition.
179	`    borderLeftWidth: 4,`	Sets/declares the named object property or style/type member: borderLeftWidth: 4,. Interpret it in the enclosing object, props or type definition.
180	`    borderLeftColor: "#9DD9C9",`	Sets/declares the named object property or style/type member: borderLeftColor: "#9DD9C9",. Interpret it in the enclosing object, props or type definition.
181	`    shadowColor: colors.navy,`	Sets/declares the named object property or style/type member: shadowColor: colors.navy,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
182	`    shadowOpacity: 0.08,`	Sets/declares the named object property or style/type member: shadowOpacity: 0.08,. Interpret it in the enclosing object, props or type definition.
183	`    shadowRadius: 7,`	Sets/declares the named object property or style/type member: shadowRadius: 7,. Interpret it in the enclosing object, props or type definition.
184	`    elevation: 2,`	Sets/declares the named object property or style/type member: elevation: 2,. Interpret it in the enclosing object, props or type definition.
185	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
186	`  row: { flexDirection: "row", justifyContent: "space-between", alignItems: "center" },`	Sets/declares the named object property or style/type member: row: { flexDirection: "row", justifyContent: "space-between", alignItems: "center" },. Interpret it in the enclosing object, props or type definition.
187	`  id: { fontWeight: "900", color: colors.ink },`	Sets/declares the named object property or style/type member: id: { fontWeight: "900", color: colors.ink },. Interpret it in the enclosing object, props or type definition.
188	`  status: {`	Sets/declares the named object property or style/type member: status: {. Interpret it in the enclosing object, props or type definition.
189	`    fontSize: 10,`	Sets/declares the named object property or style/type member: fontSize: 10,. Interpret it in the enclosing object, props or type definition.
190	`    color: colors.success,`	Sets/declares the named object property or style/type member: color: colors.success,. Interpret it in the enclosing object, props or type definition.
191	`    backgroundColor: "#DFF3E9",`	Sets/declares the named object property or style/type member: backgroundColor: "#DFF3E9",. Interpret it in the enclosing object, props or type definition.
192	`    paddingHorizontal: 8,`	Sets/declares the named object property or style/type member: paddingHorizontal: 8,. Interpret it in the enclosing object, props or type definition.
193	`    paddingVertical: 4,`	Sets/declares the named object property or style/type member: paddingVertical: 4,. Interpret it in the enclosing object, props or type definition.
194	`    borderRadius: 8,`	Sets/declares the named object property or style/type member: borderRadius: 8,. Interpret it in the enclosing object, props or type definition.
195	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
196	`  outlet: { fontSize: 15, fontWeight: "900", color: colors.ink, marginVertical: 10 },`	Sets/declares the named object property or style/type member: outlet: { fontSize: 15, fontWeight: "900", color: colors.ink, marginVertical: 10 },. Interpret it in the enclosing object, props or type definition.
197	`  meta: { fontSize: 11, color: colors.muted, marginTop: 4 },`	Sets/declares the named object property or style/type member: meta: { fontSize: 11, color: colors.muted, marginTop: 4 },. Interpret it in the enclosing object, props or type definition.
198	`  item: { backgroundColor: "#F1F8F6", borderRadius: 10, padding: 10, marginTop: 8 },`	Sets/declares the named object property or style/type member: item: { backgroundColor: "#F1F8F6", borderRadius: 10, padding: 10, marginTop: 8 },. Interpret it in the enclosing object, props or type definition.
199	`  itemProduct: { fontSize: 12, fontWeight: "900", color: colors.ink },`	Sets/declares the named object property or style/type member: itemProduct: { fontSize: 12, fontWeight: "900", color: colors.ink },. Interpret it in the enclosing object, props or type definition.
200	`  amounts: {`	Sets/declares the named object property or style/type member: amounts: {. Interpret it in the enclosing object, props or type definition.
201	`    borderTopWidth: 1,`	Sets/declares the named object property or style/type member: borderTopWidth: 1,. Interpret it in the enclosing object, props or type definition.
202	`    borderTopColor: colors.border,`	Sets/declares the named object property or style/type member: borderTopColor: colors.border,. Interpret it in the enclosing object, props or type definition.
203	`    marginTop: 10,`	Sets/declares the named object property or style/type member: marginTop: 10,. Interpret it in the enclosing object, props or type definition.
204	`    paddingTop: 8,`	Sets/declares the named object property or style/type member: paddingTop: 8,. Interpret it in the enclosing object, props or type definition.
205	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
206	`    justifyContent: "space-between",`	Sets/declares the named object property or style/type member: justifyContent: "space-between",. Interpret it in the enclosing object, props or type definition.
207	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
208	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
209	`  amount: { fontSize: 13, fontWeight: "900", color: colors.success },`	Sets/declares the named object property or style/type member: amount: { fontSize: 13, fontWeight: "900", color: colors.success },. Interpret it in the enclosing object, props or type definition.
210	`  error: {`	Sets/declares the named object property or style/type member: error: {. Interpret it in the enclosing object, props or type definition.
211	`    backgroundColor: "#FFF0F1",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFF0F1",. Interpret it in the enclosing object, props or type definition.
212	`    padding: 15,`	Sets/declares the named object property or style/type member: padding: 15,. Interpret it in the enclosing object, props or type definition.
213	`    borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
214	`    borderLeftWidth: 4,`	Sets/declares the named object property or style/type member: borderLeftWidth: 4,. Interpret it in the enclosing object, props or type definition.
215	`    borderLeftColor: colors.danger,`	Sets/declares the named object property or style/type member: borderLeftColor: colors.danger,. Interpret it in the enclosing object, props or type definition.
216	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
217	`  errorTitle: { color: colors.danger, fontWeight: "900" },`	Sets/declares the named object property or style/type member: errorTitle: { color: colors.danger, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
218	`  retry: { color: colors.brand, fontWeight: "900", fontSize: 10, marginTop: 8 },`	Sets/declares the named object property or style/type member: retry: { color: colors.brand, fontWeight: "900", fontSize: 10, marginTop: 8 },. Interpret it in the enclosing object, props or type definition.
219	`  empty: { padding: 24, alignItems: "center" },`	Sets/declares the named object property or style/type member: empty: { padding: 24, alignItems: "center" },. Interpret it in the enclosing object, props or type definition.
220	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/screens/OutletMapScreen.tsx

Displays outlet location information/map navigation; distinct from server-side radius enforcement.

101 numbered source lines | SHA-256 5403f1944ac685aa503438fe516f861cd7cf76146abc8f585e67822fcbbd7946

Line	Source code	Explanation / reading note
1	`import React, { useEffect, useState } from "react";`	Imports dependencies/types used below: import React, { useEffect, useState } from "react";. Importing a function does not call it.
2	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.
3	`  ActivityIndicator,`	Continues the surrounding declaration/expression or text: ActivityIndicator,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
4	`  Linking,`	Continues the surrounding declaration/expression or text: Linking,. Read it with the preceding opening statement (ActivityIndicator,); it is not a standalone business operation.
5	`  Pressable,`	Continues the surrounding declaration/expression or text: Pressable,. Read it with the preceding opening statement (Linking,); it is not a standalone business operation.
6	`  SafeAreaView,`	Continues the surrounding declaration/expression or text: SafeAreaView,. Read it with the preceding opening statement (Pressable,); it is not a standalone business operation.
7	`  ScrollView,`	Continues the surrounding declaration/expression or text: ScrollView,. Read it with the preceding opening statement (SafeAreaView,); it is not a standalone business operation.
8	`  StyleSheet,`	Continues the surrounding declaration/expression or text: StyleSheet,. Read it with the preceding opening statement (ScrollView,); it is not a standalone business operation.
9	`  Text,`	Continues the surrounding declaration/expression or text: Text,. Read it with the preceding opening statement (StyleSheet,); it is not a standalone business operation.
10	`  View,`	Continues the surrounding declaration/expression or text: View,. Read it with the preceding opening statement (Text,); it is not a standalone business operation.
11	`} from "react-native";`	Completes the dependency import and identifies the module supplying those names.
12	`import { api } from "../api/client";`	Imports dependencies/types used below: import { api } from "../api/client";. Importing a function does not call it.
13	`import { Card } from "../components/ui";`	Imports dependencies/types used below: import { Card } from "../components/ui";. Importing a function does not call it.

Line	Source code	Explanation / reading note
14	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
15	`import type { Store } from "../types";`	Imports dependencies/types used below: import type { Store } from "../types";. Importing a function does not call it.
16		Blank line separating logical sections; no executable operation.
17	`export default function OutletMapScreen() {`	Declares a callable function/method: export default function OutletMapScreen() {. Parameters supply its inputs; the following block implements the operation.
18	`  const [outlets, setOutlets] = useState<Store[]>([]);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
19	`  const [loading, setLoading] = useState(true);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
20	`  const [error, setError] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
21	`  useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.
22	`    api<Store[]>("/outlets")`	Continues the surrounding declaration/expression or text: api<Store[]>("/outlets"). Read it with the preceding opening statement (useEffect(() => {); it is not a standalone business operation.
23	`      .then((rows) =>`	Continues the surrounding declaration/expression or text: .then((rows) =>. Read it with the preceding opening statement (api<Store[]>("/outlets")); it is not a standalone business operation.
24	`        setOutlets(rows.filter((row) => row.latitude != null && row.longitude != null)),`	Transforms/selects/aggregates collection values with the callback shown here: setOutlets(rows.filter((row) => row.latitude != null && row.longitude != null)),. Read the callback body and result assignment together.
25	`      )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
26	`      .catch((reason) => setError(reason.message || "Unable to load outlet locations"))`	Continues the surrounding declaration/expression or text: .catch((reason) => setError(reason.message || "Unable to load outlet locations")). Read it with the preceding opening statement ( )); it is not a standalone business operation.

Line	Source code	Explanation / reading note
27	`      .finally(() => setLoading(false));`	Continues the surrounding declaration/expression or text: .finally(() => setLoading(false));. Read it with the preceding opening statement (.catch((reason) => setError(reason.message || "Unable to load outlet locations"))); it is not a standalone business operation.
28	`  }, []);`	Continues the surrounding declaration/expression or text: }, []);. Read it with the preceding opening statement (.finally(() => setLoading(false));); it is not a standalone business operation.
29	`  const navigate = (outlet: Store) =>`	Declares/initializes local data used by the surrounding operation: const navigate = (outlet: Store) =>. Collection contents and assignments below determine its purpose.
30	`    Linking.openURL(`	Calls the named method: Linking.openURL(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
31	`      \`https://www.openstreetmap.org/directions?engine=fossgis_osrm_car&route=;${outlet.latitude},${outlet.longitude}\`,`	Assigns the right-hand expression to the named variable/property: `https://www.openstreetmap.org/directions?engine=fossgis_osrm_car&route=;${outlet.latitude},${outlet.longitude}`,. This is in-memory unless it is later persisted by an explicit call.
32	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
34	`    <SafeAreaView style={s.root}>`	Renders/opens a UI element or component: <SafeAreaView style={s.root}>. Props and child content below determine appearance and interactions.
35	`      <ScrollView contentContainerStyle={s.content}>`	Renders/opens a UI element or component: <ScrollView contentContainerStyle={s.content}>. Props and child content below determine appearance and interactions.
36	`        <Text style={s.title}>OUTLET MAP</Text>`	Renders/opens a UI element or component: <Text style={s.title}>OUTLET MAP</Text>. Props and child content below determine appearance and interactions.
37	`        <Text style={s.subtitle}>`	Renders/opens a UI element or component: <Text style={s.subtitle}>. Props and child content below determine appearance and interactions.
38	`          Salesforce outlet locations assigned to your Employee account`	Continues the surrounding declaration/expression or text: Salesforce outlet locations assigned to your Employee account. Read it with the preceding opening statement (<Text style={s.subtitle}>); it is not a standalone business operation.
39	`        </Text>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
40	`{loading && <ActivityIndicator color={colors.brand} />}`	Assigns the right-hand expression to the named variable/property: {loading && <ActivityIndicator color={colors.brand} />}. This is in-memory unless it is later persisted by an explicit call.
41	`{!!error && (`	Continues the surrounding declaration/expression or text: {!!error && (. Read it with the preceding opening statement ({loading && <ActivityIndicator color={colors.brand} />}); it is not a standalone business operation.
42	`<Card style={s.error}>`	Renders/opens a UI element or component: <Card style={s.error}>. Props and child content below determine appearance and interactions.
43	`<Text style={s.errorTitle}>Map data unavailable</Text>`	Renders/opens a UI element or component: <Text style={s.errorTitle}>Map data unavailable</Text>. Props and child content below determine appearance and interactions.
44	`<Text style={s.subtitle}>{error}</Text>`	Renders/opens a UI element or component: <Text style={s.subtitle}>{error}</Text>. Props and child content below determine appearance and interactions.
45	`</Card>`	Closes the UI element/component opened above.
46	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`{!loading && !error && !outlets.length && (`	Continues the surrounding declaration/expression or text: {!loading && !error && !outlets.length && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
48	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
49	`<Text style={s.name}>No mapped outlets</Text>`	Renders/opens a UI element or component: <Text style={s.name}>No mapped outlets</Text>. Props and child content below determine appearance and interactions.
50	`<Text style={s.subtitle}>`	Renders/opens a UI element or component: <Text style={s.subtitle}>. Props and child content below determine appearance and interactions.
51	`Ask the administrator to maintain outlet geolocation in Salesforce.`	Continues the surrounding declaration/expression or text: Ask the administrator to maintain outlet geolocation in Salesforce.. Read it with the preceding opening statement (<Text style={s.subtitle}>); it is not a standalone business operation.
52	`</Text>`	Closes the UI element/component opened above.
53	`</Card>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
54	`        )}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
55	`        {outlets.map((outlet) => (`	Transforms/selects/aggregates collection values with the callback shown here: {outlets.map((outlet) => (. Read the callback body and result assignment together.
56	`          <Card key={outlet.id} style={s.card}>`	Renders/opens a UI element or component: <Card key={outlet.id} style={s.card}>. Props and child content below determine appearance and interactions.
57	`            <View style={s.row}>`	Renders/opens a UI element or component: <View style={s.row}>. Props and child content below determine appearance and interactions.
58	`              <Text style={s.pin}>◎</Text>`	Renders/opens a UI element or component: <Text style={s.pin}>◎</Text>. Props and child content below determine appearance and interactions.
59	`              <View style={s.details}>`	Renders/opens a UI element or component: <View style={s.details}>. Props and child content below determine appearance and interactions.
60	`                <Text style={s.name}>{outlet.name}</Text>`	Renders/opens a UI element or component: <Text style={s.name}>{outlet.name}</Text>. Props and child content below determine appearance and interactions.
61	`                <Text style={s.subtitle}>`	Renders/opens a UI element or component: <Text style={s.subtitle}>. Props and child content below determine appearance and interactions.
62	`                  {outlet.code} • {outlet.beatName || "Unassigned beat"}`	Continues the surrounding declaration/expression or text: {outlet.code} • {outlet.beatName || "Unassigned beat"}. Read it with the preceding opening statement (<Text style={s.subtitle}>); it is not a standalone business operation.
63	`                </Text>`	Closes the UI element/component opened above.
64	`                <Text style={s.subtitle}>`	Renders/opens a UI element or component: <Text style={s.subtitle}>. Props and child content below determine appearance and interactions.
65	`                  {outlet.owner || "Owner not specified"} •{" "}`	Continues the surrounding declaration/expression or text: {outlet.owner || "Owner not specified"} •{" "}. Read it with the preceding opening statement (<Text style={s.subtitle}>); it is not a standalone business operation.
66	`                  {outlet.contact || outlet.phone || "Phone unavailable"}`	Continues the surrounding declaration/expression or text: {outlet.contact || outlet.phone || "Phone unavailable"}. Read it with the preceding opening statement ({outlet.owner || "Owner not specified"} •{" "}); it is not a standalone business operation.
67	`                </Text>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
68	`              </View>`	Closes the UI element/component opened above.
69	`            </View>`	Closes the UI element/component opened above.
70	`            <Pressable style={s.button} onPress={() => navigate(outlet)}>`	Renders/opens a UI element or component: <Pressable style={s.button} onPress={() => navigate(outlet)}>. Props and child content below determine appearance and interactions.
71	`              <Text style={s.buttonText}>NAVIGATE</Text>`	Renders/opens a UI element or component: <Text style={s.buttonText}>NAVIGATE</Text>. Props and child content below determine appearance and interactions.
72	`            </Pressable>`	Closes the UI element/component opened above.
73	`          </Card>`	Closes the UI element/component opened above.
74	`        ))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
75	`      </ScrollView>`	Closes the UI element/component opened above.
76	`    </SafeAreaView>`	Closes the UI element/component opened above.
77	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
78	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
79		Blank line separating logical sections; no executable operation.
80	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
81	`  root: { flex: 1, backgroundColor: colors.surface },`	Sets/declares the named object property or style/type member: root: { flex: 1, backgroundColor: colors.surface },. Interpret it in the enclosing object, props or type definition.
82	`  content: { padding: 16, gap: 12 },`	Sets/declares the named object property or style/type member: content: { padding: 16, gap: 12 },. Interpret it in the enclosing object, props or type definition.
83	`  title: { fontSize: 24, fontWeight: "900", color: colors.navy },`	Sets/declares the named object property or style/type member: title: { fontSize: 24, fontWeight: "900", color: colors.navy },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
84	`subtitle: { fontSize: 12, color: colors.muted, marginTop: 3 },`	Sets/declares the named object property or style/type member: subtitle: { fontSize: 12, color: colors.muted, marginTop: 3 },. Interpret it in the enclosing object, props or type definition.
85	`card: { padding: 16, borderLeftWidth: 4, borderLeftColor: "#F6C85F" },`	Sets/declares the named object property or style/type member: card: { padding: 16, borderLeftWidth: 4, borderLeftColor: "#F6C85F" },. Interpret it in the enclosing object, props or type definition.
86	`row: { flexDirection: "row", alignItems: "center" },`	Sets/declares the named object property or style/type member: row: { flexDirection: "row", alignItems: "center" },. Interpret it in the enclosing object, props or type definition.
87	`pin: { fontSize: 28, color: colors.blue, marginRight: 12 },`	Sets/declares the named object property or style/type member: pin: { fontSize: 28, color: colors.blue, marginRight: 12 },. Interpret it in the enclosing object, props or type definition.
88	`details: { flex: 1 },`	Sets/declares the named object property or style/type member: details: { flex: 1 },. Interpret it in the enclosing object, props or type definition.
89	`name: { fontSize: 15, fontWeight: "900", color: colors.ink },`	Sets/declares the named object property or style/type member: name: { fontSize: 15, fontWeight: "900", color: colors.ink },. Interpret it in the enclosing object, props or type definition.
90	`button: {`	Sets/declares the named object property or style/type member: button: {. Interpret it in the enclosing object, props or type definition.
91	`alignSelf: "flex-end",`	Sets/declares the named object property or style/type member: alignSelf: "flex-end",. Interpret it in the enclosing object, props or type definition.
92	`backgroundColor: colors.blue,`	Sets/declares the named object property or style/type member: backgroundColor: colors.blue,. Interpret it in the enclosing object, props or type definition.
93	`paddingHorizontal: 14,`	Sets/declares the named object property or style/type member: paddingHorizontal: 14,. Interpret it in the enclosing object, props or type definition.
94	`paddingVertical: 9,`	Sets/declares the named object property or style/type member: paddingVertical: 9,. Interpret it in the enclosing object, props or type definition.
95	`borderRadius: 9,`	Sets/declares the named object property or style/type member: borderRadius: 9,. Interpret it in the enclosing object, props or type definition.
96	`marginTop: 12,`	Sets/declares the named object property or style/type member: marginTop: 12,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
97	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
98	`  buttonText: { color: "white", fontSize: 10, fontWeight: "900" },`	Sets/declares the named object property or style/type member: buttonText: { color: "white", fontSize: 10, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
99	`  error: { padding: 16, borderLeftWidth: 4, borderLeftColor: colors.danger },`	Sets/declares the named object property or style/type member: error: { padding: 16, borderLeftWidth: 4, borderLeftColor: colors.danger },. Interpret it in the enclosing object, props or type definition.
100	`  errorTitle: { color: colors.danger, fontWeight: "900" },`	Sets/declares the named object property or style/type member: errorTitle: { color: colors.danger, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
101	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/screens/OutletsScreen.tsx

Employee-scoped outlet listing and navigation to outlet details.

325 numbered source lines | SHA-256 79ee24664ed578cfd12f2f2ed7a8b40bd40550dda835a20dd5f93d57cdf21c75

Line	Source code	Explanation / reading note
1	`import React, { useEffect, useMemo, useState } from "react";`	Imports dependencies/types used below: import React, { useEffect, useMemo, useState } from "react";. Importing a function does not call it.
2	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.
3	`  ActivityIndicator,`	Continues the surrounding declaration/expression or text: ActivityIndicator,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
4	`  Pressable,`	Continues the surrounding declaration/expression or text: Pressable,. Read it with the preceding opening statement (ActivityIndicator,); it is not a standalone business operation.
5	`  SafeAreaView,`	Continues the surrounding declaration/expression or text: SafeAreaView,. Read it with the preceding opening statement (Pressable,); it is not a standalone business operation.
6	`  ScrollView,`	Continues the surrounding declaration/expression or text: ScrollView,. Read it with the preceding opening statement (SafeAreaView,); it is not a standalone business operation.
7	`  StyleSheet,`	Continues the surrounding declaration/expression or text: StyleSheet,. Read it with the preceding opening statement (ScrollView,); it is not a standalone business operation.
8	`  Text,`	Continues the surrounding declaration/expression or text: Text,. Read it with the preceding opening statement (StyleSheet,); it is not a standalone business operation.
9	`  TextInput,`	Continues the surrounding declaration/expression or text: TextInput,. Read it with the preceding opening statement (Text,); it is not a standalone business operation.
10	`  View,`	Continues the surrounding declaration/expression or text: View,. Read it with the preceding opening statement (TextInput,); it is not a standalone business operation.
11	`} from "react-native";`	Completes the dependency import and identifies the module supplying those names.
12	`import { useNavigation } from "@react-navigation/native";`	Imports dependencies/types used below: import { useNavigation } from "@react-navigation/native";. Importing a function does not call it.
13	`import { api } from "../api/client";`	Imports dependencies/types used below: import { api } from "../api/client";. Importing a function does not call it.

Line	Source code	Explanation / reading note
14	`import BrandHeader from "../components/BrandHeader";`	Imports dependencies/types used below: import BrandHeader from "../components/BrandHeader";. Importing a function does not call it.
15	`import BottomNav from "../components/BottomNav";`	Imports dependencies/types used below: import BottomNav from "../components/BottomNav";. Importing a function does not call it.
16	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
17	`import type { Store } from "../types";`	Imports dependencies/types used below: import type { Store } from "../types";. Importing a function does not call it.
18		Blank line separating logical sections; no executable operation.
19	`export default function OutletsScreen() {`	Declares a callable function/method: export default function OutletsScreen() {. Parameters supply its inputs; the following block implements the operation.
20	`  const navigation = useNavigation<any>();`	Declares/initializes local data used by the surrounding operation: const navigation = useNavigation<any>();. Collection contents and assignments below determine its purpose.
21	`  const [outlets, setOutlets] = useState<Store[]>([]);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
22	`  const [query, setQuery] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
23	`  const [selectedBeat, setSelectedBeat] = useState("All Beats");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
24	`  const [loading, setLoading] = useState(true);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
25	`  const [error, setError] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
26	`  const [expandedOutlet, setExpandedOutlet] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
27		Blank line separating logical sections; no executable operation.
28	`  const formatVisitTime = (value?: string) => {`	Declares/initializes local data used by the surrounding operation: const formatVisitTime = (value?: string) => {. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
29	`    if (!value) return "Time not captured";`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!value) return "Time not captured";.
30	`    const date = new Date(value);`	Declares/initializes local data used by the surrounding operation: const date = new Date(value);. Collection contents and assignments below determine its purpose.
31	`    return Number.isNaN(date.getTime())`	Returns Number.isNaN(date.getTime()) to the caller (or begins returned UI markup) and ends this execution path.
32	`      ? value`	Continues the surrounding declaration/expression or text: ? value. Read it with the preceding opening statement (return Number.isNaN(date.getTime())); it is not a standalone business operation.
33	`      : date.toLocaleString("en-IN", { dateStyle: "medium", timeStyle: "short" });`	Calls the named method: : date.toLocaleString("en-IN", { dateStyle: "medium", timeStyle: "short" });. Its implementation defines the side effect/result; use the symbol/file index to follow it.
34	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`  const formatLocation = (location?: { latitude: number; longitude: number } | null) =>`	Declares/initializes local data used by the surrounding operation: const formatLocation = (location?: { latitude: number; longitude: number } | null) =>. Collection contents and assignments below determine its purpose.
36	`    location`	Continues the surrounding declaration/expression or text: location. Read it with the preceding opening statement (const formatLocation = (location?: { latitude: number; longitude: number } | null) =>); it is not a standalone business operation.
37	`      ? `${Number(location.latitude).toFixed(5)}, ${Number(location.longitude).toFixed(5)}``	Continues the surrounding declaration/expression or text: ? `${Number(location.latitude).toFixed(5)}, ${Number(location.longitude).toFixed(5)}`. Read it with the preceding opening statement (location); it is not a standalone business operation.
38	`      : "Location not captured";`	Continues the surrounding declaration/expression or text: : "Location not captured";. Read it with the preceding opening statement (? `${Number(location.latitude).toFixed(5)}, ${Number(location.longitude).toFixed(5)}`); it is not a standalone business operation.
39		Blank line separating logical sections; no executable operation.
40	`  const loadOutlets = async () => {`	Declares/initializes local data used by the surrounding operation: const loadOutlets = async () => {. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
41	`    setLoading(true);`	Continues the surrounding declaration/expression or text: setLoading(true);. Read it with the preceding opening statement (const loadOutlets = async () => {); it is not a standalone business operation.
42	`    setError("");`	Continues the surrounding declaration/expression or text: setError("");. Read it with the preceding opening statement (setLoading(true);); it is not a standalone business operation.
43	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
44	`      setOutlets(await api<Store[]>("/outlets"));`	Waits for this asynchronous operation before continuing: setOutlets(await api<Store[]>("/outlets"));. The returned result/error must still be handled.
45	`    } catch (reason: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
46	`      setError(reason.message || "Unable to load outlets");`	Continues the surrounding declaration/expression or text: setError(reason.message || "Unable to load outlets");. Read it with the preceding opening statement (} catch (reason: any) {); it is not a standalone business operation.
47	`    } finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
48	`      setLoading(false);`	Continues the surrounding declaration/expression or text: setLoading(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
49	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
50	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
51	`  useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.
52	`    loadOutlets();`	Continues the surrounding declaration/expression or text: loadOutlets();. Read it with the preceding opening statement (useEffect(() => {); it is not a standalone business operation.
53	`  }, []);`	Continues the surrounding declaration/expression or text: }, []);. Read it with the preceding opening statement (loadOutlets();); it is not a standalone business operation.
54		Blank line separating logical sections; no executable operation.
55	`  const beats = useMemo(`	Caches a derived value using the listed dependencies, such as filtered products or totals.

Line	Source code	Explanation / reading note
56	`() => ["All Beats", ...Array.from(new Set(outlets.map((row) => row.beatName).filter(Boolean)))],`	Transforms/selects/aggregates collection values with the callback shown here: () => ["All Beats", ...Array.from(new Set(outlets.map((row) => row.beatName).filter(Boolean)))],. Read the callback body and result assignment together.
57	`[outlets],`	Continues the surrounding declaration/expression or text: [outlets],. Read it with the preceding opening statement (() => ["All Beats", ...Array.from(new Set(outlets.map((row) => row.beatName).filter(Boolean)))],); it is not a standalone business operation.
58	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
59	`const visible = useMemo(() => {`	Caches a derived value using the listed dependencies, such as filtered products or totals.
60	`const text = query.trim().toLowerCase();`	Declares/initializes local data used by the surrounding operation: const text = query.trim().toLowerCase();. Collection contents and assignments below determine its purpose.
61	`return outlets.filter((outlet) => {`	Returns outlets.filter((outlet) => { to the caller (or begins returned UI markup) and ends this execution path.
62	`const matchesSearch =`	Declares/initializes local data used by the surrounding operation: const matchesSearch =. Collection contents and assignments below determine its purpose.
63	`` `${outlet.name} ${outlet.code} ${outlet.owner || ""} ${outlet.contact || outlet.phone || ""}` ``	Continues the surrounding declaration/expression or text: `${outlet.name} ${outlet.code} ${outlet.owner || ""} ${outlet.contact || outlet.phone || ""}`. Read it with the preceding opening statement (const matchesSearch =); it is not a standalone business operation.
64	`.toLowerCase()`	Continues the surrounding declaration/expression or text: .toLowerCase(). Read it with the preceding opening statement (`${outlet.name} ${outlet.code} ${outlet.owner || ""} ${outlet.contact || outlet.phone || ""}`); it is not a standalone business operation.
65	`.includes(text);`	Continues the surrounding declaration/expression or text: .includes(text);. Read it with the preceding opening statement (.toLowerCase()); it is not a standalone business operation.
66	`return matchesSearch && (selectedBeat === "All Beats" || outlet.beatName === selectedBeat);`	Returns matchesSearch && (selectedBeat === "All Beats" || outlet.beatName === selectedBeat) to the caller (or begins returned UI markup) and ends this execution path.
67	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
68	`}, [outlets, query, selectedBeat]);`	Continues the surrounding declaration/expression or text: }, [outlets, query, selectedBeat]);. Read it with the preceding opening statement (});); it is not a standalone business operation.

Line	Source code	Explanation / reading note
69		Blank line separating logical sections; no executable operation.
70	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
71	`    <SafeAreaView style={s.safe}>`	Renders/opens a UI element or component: <SafeAreaView style={s.safe}>. Props and child content below determine appearance and interactions.
72	`      <View style={s.shell}>`	Renders/opens a UI element or component: <View style={s.shell}>. Props and child content below determine appearance and interactions.
73	`        <BrandHeader />`	Renders/opens a UI element or component: <BrandHeader />. Props and child content below determine appearance and interactions.
74	`        <ScrollView style={s.page} contentContainerStyle={s.content}>`	Renders/opens a UI element or component: <ScrollView style={s.page} contentContainerStyle={s.content}>. Props and child content below determine appearance and interactions.
75	`          <View style={s.top}>`	Renders/opens a UI element or component: <View style={s.top}>. Props and child content below determine appearance and interactions.
76	`            <View>`	Renders/opens a UI element or component: <View>. Props and child content below determine appearance and interactions.
77	`              <Text style={s.title}>MY OUTLETS</Text>`	Renders/opens a UI element or component: <Text style={s.title}>MY OUTLETS</Text>. Props and child content below determine appearance and interactions.
78	`              <Text style={s.muted}>{outlets.length} Outlets Assigned to You</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>{outlets.length} Outlets Assigned to You</Text>. Props and child content below determine appearance and interactions.
79	`            </View>`	Closes the UI element/component opened above.
80	`            <Pressable style={s.map} onPress={() => navigation.navigate("OutletMap")}>`	Renders/opens a UI element or component: <Pressable style={s.map} onPress={() => navigation.navigate("OutletMap")}>. Props and child content below determine appearance and interactions.
81	`              <Text style={s.mapText}>➤ Map View</Text>`	Renders/opens a UI element or component: <Text style={s.mapText}>➤ Map View</Text>. Props and child content below determine appearance and interactions.
82	`            </Pressable>`	Closes the UI element/component opened above.
83	`          </View>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
84	`<TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
85	`value={query}`	Assigns the right-hand expression to the named variable/property: value={query}. This is in-memory unless it is later persisted by an explicit call.
86	`onChangeText={setQuery}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
87	`placeholder="Search outlet, code, owner, phone..."`	Assigns the right-hand expression to the named variable/property: placeholder="Search outlet, code, owner, phone...". This is in-memory unless it is later persisted by an explicit call.
88	`style={s.search}`	Assigns the right-hand expression to the named variable/property: style={s.search}. This is in-memory unless it is later persisted by an explicit call.
89	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (style={s.search}); it is not a standalone business operation.
90	`<ScrollView`	Renders/opens a UI element or component: <ScrollView. Props and child content below determine appearance and interactions.
91	`horizontal`	Continues the surrounding declaration/expression or text: horizontal. Read it with the preceding opening statement (<ScrollView); it is not a standalone business operation.
92	`showsHorizontalScrollIndicator={false}`	Assigns the right-hand expression to the named variable/property: showsHorizontalScrollIndicator={false}. This is in-memory unless it is later persisted by an explicit call.
93	`contentContainerStyle={s.chips}`	Assigns the right-hand expression to the named variable/property: contentContainerStyle={s.chips}. This is in-memory unless it is later persisted by an explicit call.
94	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (contentContainerStyle={s.chips}); it is not a standalone business operation.
95	`{beats.map((beat) => (`	Transforms/selects/aggregates collection values with the callback shown here: {beats.map((beat) => (. Read the callback body and result assignment together.
96	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
97	`key={beat}`	Assigns the right-hand expression to the named variable/property: key={beat}. This is in-memory unless it is later persisted by an explicit call.
98	`onPress={() => setSelectedBeat(beat || "All Beats")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
99	`style={[s.chip, selectedBeat === beat && s.chipOn]}`	Assigns the right-hand expression to the named variable/property: style={[s.chip, selectedBeat === beat && s.chipOn]}. This is in-memory unless it is later persisted by an explicit call.
100	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (style={[s.chip, selectedBeat === beat && s.chipOn]}); it is not a standalone business operation.
101	`<Text style={[s.chipText, selectedBeat === beat && s.chipTextOn]}>{beat}</Text>`	Renders/opens a UI element or component: <Text style={[s.chipText, selectedBeat === beat && s.chipTextOn]}>{beat}</Text>. Props and child content below determine appearance and interactions.
102	`</Pressable>`	Closes the UI element/component opened above.
103	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
104	`</ScrollView>`	Closes the UI element/component opened above.
105	`{loading && (`	Continues the surrounding declaration/expression or text: {loading && (. Read it with the preceding opening statement (</ScrollView>); it is not a standalone business operation.
106	`<View style={s.state}>`	Renders/opens a UI element or component: <View style={s.state}>. Props and child content below determine appearance and interactions.
107	`<ActivityIndicator color={colors.brand} />`	Renders/opens a UI element or component: <ActivityIndicator color={colors.brand} />. Props and child content below determine appearance and interactions.
108	`<Text style={s.muted}>Loading Salesforce outlets…</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>Loading Salesforce outlets…</Text>. Props and child content below determine appearance and interactions.
109	`</View>`	Closes the UI element/component opened above.
110	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
111	`{!!error && !loading && (`	Continues the surrounding declaration/expression or text: {!!error && !loading && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
112	`<Pressable style={s.error} onPress={loadOutlets}>`	Renders/opens a UI element or component: <Pressable style={s.error} onPress={loadOutlets}>. Props and child content below determine appearance and interactions.
113	`<Text style={s.errorTitle}>Outlet data unavailable</Text>`	Renders/opens a UI element or component: <Text style={s.errorTitle}>Outlet data unavailable</Text>. Props and child content below determine appearance and interactions.
114	`<Text style={s.muted}>{error}</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>{error}</Text>. Props and child content below determine appearance and interactions.
115	`<Text style={s.retry}>TAP TO RETRY</Text>`	Renders/opens a UI element or component: <Text style={s.retry}>TAP TO RETRY</Text>. Props and child content below determine appearance and interactions.
116	`</Pressable>`	Closes the UI element/component opened above.
117	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
118	`{!loading && !error && !visible.length && (`	Continues the surrounding declaration/expression or text: {!loading && !error && !visible.length && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
119	`<View style={s.state}>`	Renders/opens a UI element or component: <View style={s.state}>. Props and child content below determine appearance and interactions.
120	`<Text style={s.name}>No outlets found</Text>`	Renders/opens a UI element or component: <Text style={s.name}>No outlets found</Text>. Props and child content below determine appearance and interactions.
121	`<Text style={s.muted}>Try a different search or beat.</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>Try a different search or beat.</Text>. Props and child content below determine appearance and interactions.
122	`</View>`	Closes the UI element/component opened above.
123	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
124	`{visible.map((outlet) => (`	Transforms/selects/aggregates collection values with the callback shown here: {visible.map((outlet) => (. Read the callback body and result assignment together.

Line	Source code	Explanation / reading note
125	`<View key={outlet.id} style={s.card}>`	Renders/opens a UI element or component: <View key={outlet.id} style={s.card}>. Props and child content below determine appearance and interactions.
126	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
127	`onPress={() => setExpandedOutlet(expandedOutlet === outlet.id ? "" : outlet.id)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
128	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (onPress={() => setExpandedOutlet(expandedOutlet === outlet.id ? "" : outlet.id)}); it is not a standalone business operation.
129	`<View style={s.row}>`	Renders/opens a UI element or component: <View style={s.row}>. Props and child content below determine appearance and interactions.
130	`<Text style={s.name}>{outlet.name}</Text>`	Renders/opens a UI element or component: <Text style={s.name}>{outlet.name}</Text>. Props and child content below determine appearance and interactions.
131	`<Text style={outlet.active === false ? s.inactive : s.active}>`	Renders/opens a UI element or component: <Text style={outlet.active === false ? s.inactive : s.active}>. Props and child content below determine appearance and interactions.
132	`{outlet.active === false ? "Inactive" : "Active"}`	Continues the surrounding declaration/expression or text: {outlet.active === false ? "Inactive" : "Active"}. Read it with the preceding opening statement (<Text style={outlet.active === false ? s.inactive : s.active}>); it is not a standalone business operation.
133	`</Text>`	Closes the UI element/component opened above.
134	`<Text style={s.arrow}>›</Text>`	Renders/opens a UI element or component: <Text style={s.arrow}>›</Text>. Props and child content below determine appearance and interactions.
135	`</View>`	Closes the UI element/component opened above.
136	`<Text style={s.meta}>`	Renders/opens a UI element or component: <Text style={s.meta}>. Props and child content below determine appearance and interactions.
137	`Code: {outlet.code} | Type: {outlet.type || "Not specified"}`	Sets/declares the named object property or style/type member: Code: {outlet.code} | Type: {outlet.type || "Not specified"}. Interpret it in the enclosing object, props or type definition.
138	`</Text>`	Closes the UI element/component opened above.
139	`<View style={s.row}>`	Renders/opens a UI element or component: <View style={s.row}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
140	`<Text style={s.owner}>Owner: {outlet.owner || "Not specified"}</Text>`	Renders/opens a UI element or component: <Text style={s.owner}>Owner: {outlet.owner || "Not specified"}</Text>. Props and child content below determine appearance and interactions.
141	`<Text style={s.phone}>☎ {outlet.contact || outlet.phone || "Not specified"}</Text>`	Renders/opens a UI element or component: <Text style={s.phone}>☎ {outlet.contact || outlet.phone || "Not specified"}</Text>. Props and child content below determine appearance and interactions.
142	`</View>`	Closes the UI element/component opened above.
143	`<View style={s.row}>`	Renders/opens a UI element or component: <View style={s.row}>. Props and child content below determine appearance and interactions.
144	`<Text style={s.location}>`	Renders/opens a UI element or component: <Text style={s.location}>. Props and child content below determine appearance and interactions.
145	`◎ {outlet.address || outlet.geography || "Address unavailable"}`	Continues the surrounding declaration/expression or text: ◎ {outlet.address || outlet.geography || "Address unavailable"}. Read it with the preceding opening statement (<Text style={s.location}>); it is not a standalone business operation.
146	`</Text>`	Closes the UI element/component opened above.
147	`<Text style={s.beat}>{outlet.beatName || "Unassigned"}</Text>`	Renders/opens a UI element or component: <Text style={s.beat}>{outlet.beatName || "Unassigned"}</Text>. Props and child content below determine appearance and interactions.
148	`</View>`	Closes the UI element/component opened above.
149	`<View style={s.bottom}>`	Renders/opens a UI element or component: <View style={s.bottom}>. Props and child content below determine appearance and interactions.
150	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
151	`Outstanding:{" "}`	Sets/declares the named object property or style/type member: Outstanding:{" "}. Interpret it in the enclosing object, props or type definition.
152	`<Text style={Number(outlet.outstandingAmount) > 0 ? s.red : s.green}>`	Renders/opens a UI element or component: <Text style={Number(outlet.outstandingAmount) > 0 ? s.red : s.green}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
153	`₹{Number(outlet.outstandingAmount || 0).toLocaleString("en-IN")}`	Continues the surrounding declaration/expression or text: ₹{Number(outlet.outstandingAmount || 0).toLocaleString("en-IN")}. Read it with the preceding opening statement (<Text style={Number(outlet.outstandingAmount) > 0 ? s.red : s.green}>); it is not a standalone business operation.
154	`</Text>`	Closes the UI element/component opened above.
155	`</Text>`	Closes the UI element/component opened above.
156	`<Text style={s.visitCount}>`	Renders/opens a UI element or component: <Text style={s.visitCount}>. Props and child content below determine appearance and interactions.
157	`Orders: {outlet.orderCount || 0} · Visits: {outlet.visitCount || 0}`	Sets/declares the named object property or style/type member: Orders: {outlet.orderCount || 0} · Visits: {outlet.visitCount || 0}. Interpret it in the enclosing object, props or type definition.
158	`</Text>`	Closes the UI element/component opened above.
159	`</View>`	Closes the UI element/component opened above.
160	`<Text style={s.lastVisit}>`	Renders/opens a UI element or component: <Text style={s.lastVisit}>. Props and child content below determine appearance and interactions.
161	`Last visit: {outlet.lastVisit ? formatVisitTime(outlet.lastVisit) : "Not visited"}`	Continues the surrounding declaration/expression or text: Last visit: {outlet.lastVisit ? formatVisitTime(outlet.lastVisit) : "Not visited"}. Read it with the preceding opening statement (<Text style={s.lastVisit}>); it is not a standalone business operation.
162	`</Text>`	Closes the UI element/component opened above.
163	`</Pressable>`	Closes the UI element/component opened above.
164	`{expandedOutlet === outlet.id && (`	Continues the surrounding declaration/expression or text: {expandedOutlet === outlet.id && (. Read it with the preceding opening statement (</Pressable>); it is not a standalone business operation.
165	`<View style={s.historyPanel}>`	Renders/opens a UI element or component: <View style={s.historyPanel}>. Props and child content below determine appearance and interactions.
166	`<Text style={s.historyTitle}>VISIT HISTORY</Text>`	Renders/opens a UI element or component: <Text style={s.historyTitle}>VISIT HISTORY</Text>. Props and child content below determine appearance and interactions.
167	`{!outlet.recentVisits?.length && (`	Continues the surrounding declaration/expression or text: {!outlet.recentVisits?.length && (. Read it with the preceding opening statement (<Text style={s.historyTitle}>VISIT HISTORY</Text>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
168	`<Text style={s.muted}>No Salesforce visits recorded for this outlet.</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>No Salesforce visits recorded for this outlet.</Text>. Props and child content below determine appearance and interactions.
169	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
170	`{outlet.recentVisits?.map((visit) => (`	Transforms/selects/aggregates collection values with the callback shown here: {outlet.recentVisits?.map((visit) => (. Read the callback body and result assignment together.
171	`<View key={visit.id} style={s.visitRow}>`	Renders/opens a UI element or component: <View key={visit.id} style={s.visitRow}>. Props and child content below determine appearance and interactions.
172	`<View style={s.visitHeader}>`	Renders/opens a UI element or component: <View style={s.visitHeader}>. Props and child content below determine appearance and interactions.
173	`<Text style={s.visitNumber}>{visit.visitNumber || "Visit"}</Text>`	Renders/opens a UI element or component: <Text style={s.visitNumber}>{visit.visitNumber || "Visit"}</Text>. Props and child content below determine appearance and interactions.
174	`<Text style={s.visitStatus}>{visit.status || "Recorded"}</Text>`	Renders/opens a UI element or component: <Text style={s.visitStatus}>{visit.status || "Recorded"}</Text>. Props and child content below determine appearance and interactions.
175	`</View>`	Closes the UI element/component opened above.
176	`<Text style={s.visitDetail}>`	Renders/opens a UI element or component: <Text style={s.visitDetail}>. Props and child content below determine appearance and interactions.
177	`Check-in: {formatVisitTime(visit.checkInTime || visit.date)}`	Continues the surrounding declaration/expression or text: Check-in: {formatVisitTime(visit.checkInTime || visit.date)}. Read it with the preceding opening statement (<Text style={s.visitDetail}>); it is not a standalone business operation.
178	`</Text>`	Closes the UI element/component opened above.
179	`<Text style={s.visitDetail}>`	Renders/opens a UI element or component: <Text style={s.visitDetail}>. Props and child content below determine appearance and interactions.
180	`Location: {formatLocation(visit.checkInLocation)}`	Sets/declares the named object property or style/type member: Location: {formatLocation(visit.checkInLocation)}. Interpret it in the enclosing object, props or type definition.
181	`</Text>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
182	`{visit.checkOutTime ? (`	Continues the surrounding declaration/expression or text: {visit.checkOutTime ? (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
183	`<Text style={s.visitDetail}>`	Renders/opens a UI element or component: <Text style={s.visitDetail}>. Props and child content below determine appearance and interactions.
184	`Check-out: {formatVisitTime(visit.checkOutTime)}`	Continues the surrounding declaration/expression or text: Check-out: {formatVisitTime(visit.checkOutTime)}. Read it with the preceding opening statement (<Text style={s.visitDetail}>); it is not a standalone business operation.
185	`</Text>`	Closes the UI element/component opened above.
186	`) : null}`	Continues the surrounding declaration/expression or text:) : null}. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
187	`</View>`	Closes the UI element/component opened above.
188	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
189	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
190	`style={s.openButton}`	Assigns the right-hand expression to the named variable/property: style={s.openButton}. This is in-memory unless it is later persisted by an explicit call.
191	`onPress={() => navigation.navigate("StoreGate", { store: outlet })}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
192	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (onPress={() => navigation.navigate("StoreGate", { store: outlet })}); it is not a standalone business operation.
193	`<Text style={s.openButtonText}>OPEN OUTLET</Text>`	Renders/opens a UI element or component: <Text style={s.openButtonText}>OPEN OUTLET</Text>. Props and child content below determine appearance and interactions.
194	`</Pressable>`	Closes the UI element/component opened above.
195	`</View>`	Closes the UI element/component opened above.
196	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
197	`            </View>`	Closes the UI element/component opened above.
198	`          ))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
199	`        </ScrollView>`	Closes the UI element/component opened above.
200	`        <BottomNav active="Outlets" />`	Renders/opens a UI element or component: <BottomNav active="Outlets" />. Props and child content below determine appearance and interactions.
201	`      </View>`	Closes the UI element/component opened above.
202	`    </SafeAreaView>`	Closes the UI element/component opened above.
203	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
204	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
205		Blank line separating logical sections; no executable operation.
206	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
207	`  safe: { flex: 1, backgroundColor: "#E8E1D3" },`	Sets/declares the named object property or style/type member: safe: { flex: 1, backgroundColor: "#E8E1D3" },. Interpret it in the enclosing object, props or type definition.
208	`  shell: {`	Sets/declares the named object property or style/type member: shell: {. Interpret it in the enclosing object, props or type definition.
209	`    flex: 1,`	Sets/declares the named object property or style/type member: flex: 1,. Interpret it in the enclosing object, props or type definition.
210	`    maxWidth: 430,`	Sets/declares the named object property or style/type member: maxWidth: 430,. Interpret it in the enclosing object, props or type definition.
211	`    width: "100%",`	Sets/declares the named object property or style/type member: width: "100%",. Interpret it in the enclosing object, props or type definition.
212	`    alignSelf: "center",`	Sets/declares the named object property or style/type member: alignSelf: "center",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
213	`backgroundColor: colors.surface,`	Sets/declares the named object property or style/type member: backgroundColor: colors.surface,. Interpret it in the enclosing object, props or type definition.
214	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
215	`page: { flex: 1 },`	Sets/declares the named object property or style/type member: page: { flex: 1 },. Interpret it in the enclosing object, props or type definition.
216	`content: { padding: 16, paddingBottom: 22 },`	Sets/declares the named object property or style/type member: content: { padding: 16, paddingBottom: 22 },. Interpret it in the enclosing object, props or type definition.
217	`top: { flexDirection: "row", justifyContent: "space-between", alignItems: "center" },`	Sets/declares the named object property or style/type member: top: { flexDirection: "row", justifyContent: "space-between", alignItems: "center" },. Interpret it in the enclosing object, props or type definition.
218	`title: { fontSize: 22, fontWeight: "900", color: colors.navy },`	Sets/declares the named object property or style/type member: title: { fontSize: 22, fontWeight: "900", color: colors.navy },. Interpret it in the enclosing object, props or type definition.
219	`muted: { fontSize: 11, color: colors.muted, marginTop: 3 },`	Sets/declares the named object property or style/type member: muted: { fontSize: 11, color: colors.muted, marginTop: 3 },. Interpret it in the enclosing object, props or type definition.
220	`map: { backgroundColor: colors.blue, padding: 11, borderRadius: 10 },`	Sets/declares the named object property or style/type member: map: { backgroundColor: colors.blue, padding: 11, borderRadius: 10 },. Interpret it in the enclosing object, props or type definition.
221	`mapText: { color: "white", fontWeight: "800", fontSize: 12 },`	Sets/declares the named object property or style/type member: mapText: { color: "white", fontWeight: "800", fontSize: 12 },. Interpret it in the enclosing object, props or type definition.
222	`search: {`	Sets/declares the named object property or style/type member: search: {. Interpret it in the enclosing object, props or type definition.
223	`marginTop: 12,`	Sets/declares the named object property or style/type member: marginTop: 12,. Interpret it in the enclosing object, props or type definition.
224	`backgroundColor: "#FFFDF7",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFFDF7",. Interpret it in the enclosing object, props or type definition.
225	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
226	`    borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
227	`    borderRadius: 14,`	Sets/declares the named object property or style/type member: borderRadius: 14,. Interpret it in the enclosing object, props or type definition.
228	`    padding: 12,`	Sets/declares the named object property or style/type member: padding: 12,. Interpret it in the enclosing object, props or type definition.
229	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
230	`  chips: { gap: 6, paddingVertical: 10 },`	Sets/declares the named object property or style/type member: chips: { gap: 6, paddingVertical: 10 },. Interpret it in the enclosing object, props or type definition.
231	`  chip: {`	Sets/declares the named object property or style/type member: chip: {. Interpret it in the enclosing object, props or type definition.
232	`    borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
233	`    borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
234	`    borderRadius: 9,`	Sets/declares the named object property or style/type member: borderRadius: 9,. Interpret it in the enclosing object, props or type definition.
235	`    paddingHorizontal: 11,`	Sets/declares the named object property or style/type member: paddingHorizontal: 11,. Interpret it in the enclosing object, props or type definition.
236	`    paddingVertical: 7,`	Sets/declares the named object property or style/type member: paddingVertical: 7,. Interpret it in the enclosing object, props or type definition.
237	`    backgroundColor: "#FFFDF7",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFFDF7",. Interpret it in the enclosing object, props or type definition.
238	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
239	`  chipOn: { backgroundColor: colors.brand },`	Sets/declares the named object property or style/type member: chipOn: { backgroundColor: colors.brand },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
240	`chipText: { fontSize: 10, fontWeight: "800", color: colors.muted },`	Sets/declares the named object property or style/type member: chipText: { fontSize: 10, fontWeight: "800", color: colors.muted },. Interpret it in the enclosing object, props or type definition.
241	`chipTextOn: { color: "white" },`	Sets/declares the named object property or style/type member: chipTextOn: { color: "white" },. Interpret it in the enclosing object, props or type definition.
242	`card: {`	Sets/declares the named object property or style/type member: card: {. Interpret it in the enclosing object, props or type definition.
243	`backgroundColor: "#FFFDF7",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFFDF7",. Interpret it in the enclosing object, props or type definition.
244	`borderRadius: 16,`	Sets/declares the named object property or style/type member: borderRadius: 16,. Interpret it in the enclosing object, props or type definition.
245	`padding: 14,`	Sets/declares the named object property or style/type member: padding: 14,. Interpret it in the enclosing object, props or type definition.
246	`marginBottom: 11,`	Sets/declares the named object property or style/type member: marginBottom: 11,. Interpret it in the enclosing object, props or type definition.
247	`borderLeftWidth: 4,`	Sets/declares the named object property or style/type member: borderLeftWidth: 4,. Interpret it in the enclosing object, props or type definition.
248	`borderLeftColor: "#F6C85F",`	Sets/declares the named object property or style/type member: borderLeftColor: "#F6C85F",. Interpret it in the enclosing object, props or type definition.
249	`shadowColor: colors.navy,`	Sets/declares the named object property or style/type member: shadowColor: colors.navy,. Interpret it in the enclosing object, props or type definition.
250	`shadowOpacity: 0.08,`	Sets/declares the named object property or style/type member: shadowOpacity: 0.08,. Interpret it in the enclosing object, props or type definition.
251	`shadowRadius: 7,`	Sets/declares the named object property or style/type member: shadowRadius: 7,. Interpret it in the enclosing object, props or type definition.
252	`elevation: 2,`	Sets/declares the named object property or style/type member: elevation: 2,. Interpret it in the enclosing object, props or type definition.
253	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
254	`row: { flexDirection: "row", alignItems: "center" },`	Sets/declares the named object property or style/type member: row: { flexDirection: "row", alignItems: "center" },. Interpret it in the enclosing object, props or type definition.
255	`name: { fontSize: 15, fontWeight: "900", color: colors.ink },`	Sets/declares the named object property or style/type member: name: { fontSize: 15, fontWeight: "900", color: colors.ink },. Interpret it in the enclosing object, props or type definition.
256	`active: {`	Sets/declares the named object property or style/type member: active: {. Interpret it in the enclosing object, props or type definition.
257	`fontSize: 10,`	Sets/declares the named object property or style/type member: fontSize: 10,. Interpret it in the enclosing object, props or type definition.
258	`color: colors.success,`	Sets/declares the named object property or style/type member: color: colors.success,. Interpret it in the enclosing object, props or type definition.
259	`backgroundColor: "#DFF3E9",`	Sets/declares the named object property or style/type member: backgroundColor: "#DFF3E9",. Interpret it in the enclosing object, props or type definition.
260	`paddingHorizontal: 7,`	Sets/declares the named object property or style/type member: paddingHorizontal: 7,. Interpret it in the enclosing object, props or type definition.
261	`paddingVertical: 4,`	Sets/declares the named object property or style/type member: paddingVertical: 4,. Interpret it in the enclosing object, props or type definition.
262	`borderRadius: 8,`	Sets/declares the named object property or style/type member: borderRadius: 8,. Interpret it in the enclosing object, props or type definition.
263	`marginLeft: 7,`	Sets/declares the named object property or style/type member: marginLeft: 7,. Interpret it in the enclosing object, props or type definition.
264	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
265	`inactive: {`	Sets/declares the named object property or style/type member: inactive: {. Interpret it in the enclosing object, props or type definition.
266	`fontSize: 10,`	Sets/declares the named object property or style/type member: fontSize: 10,. Interpret it in the enclosing object, props or type definition.
267	`color: colors.danger,`	Sets/declares the named object property or style/type member: color: colors.danger,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
268	`backgroundColor: "#FFF0F1",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFF0F1",. Interpret it in the enclosing object, props or type definition.
269	`paddingHorizontal: 7,`	Sets/declares the named object property or style/type member: paddingHorizontal: 7,. Interpret it in the enclosing object, props or type definition.
270	`paddingVertical: 4,`	Sets/declares the named object property or style/type member: paddingVertical: 4,. Interpret it in the enclosing object, props or type definition.
271	`borderRadius: 8,`	Sets/declares the named object property or style/type member: borderRadius: 8,. Interpret it in the enclosing object, props or type definition.
272	`marginLeft: 7,`	Sets/declares the named object property or style/type member: marginLeft: 7,. Interpret it in the enclosing object, props or type definition.
273	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
274	`arrow: { marginLeft: "auto", fontSize: 22, color: "#96AAA4" },`	Sets/declares the named object property or style/type member: arrow: { marginLeft: "auto", fontSize: 22, color: "#96AAA4" },. Interpret it in the enclosing object, props or type definition.
275	`meta: { fontSize: 10, color: colors.muted, marginTop: 3 },`	Sets/declares the named object property or style/type member: meta: { fontSize: 10, color: colors.muted, marginTop: 3 },. Interpret it in the enclosing object, props or type definition.
276	`owner: { fontSize: 11, color: colors.muted, marginTop: 8, flex: 1 },`	Sets/declares the named object property or style/type member: owner: { fontSize: 11, color: colors.muted, marginTop: 8, flex: 1 },. Interpret it in the enclosing object, props or type definition.
277	`phone: { fontSize: 11, color: colors.brand, marginTop: 8 },`	Sets/declares the named object property or style/type member: phone: { fontSize: 11, color: colors.brand, marginTop: 8 },. Interpret it in the enclosing object, props or type definition.
278	`location: { fontSize: 10, color: colors.success, marginTop: 8, flex: 1 },`	Sets/declares the named object property or style/type member: location: { fontSize: 10, color: colors.success, marginTop: 8, flex: 1 },. Interpret it in the enclosing object, props or type definition.
279	`beat: {`	Sets/declares the named object property or style/type member: beat: {. Interpret it in the enclosing object, props or type definition.
280	`fontSize: 9,`	Sets/declares the named object property or style/type member: fontSize: 9,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
281	`    color: colors.navy,`	Sets/declares the named object property or style/type member: color: colors.navy,. Interpret it in the enclosing object, props or type definition.
282	`    backgroundColor: "#DFF3ED",`	Sets/declares the named object property or style/type member: backgroundColor: "#DFF3ED",. Interpret it in the enclosing object, props or type definition.
283	`    padding: 4,`	Sets/declares the named object property or style/type member: padding: 4,. Interpret it in the enclosing object, props or type definition.
284	`    borderRadius: 5,`	Sets/declares the named object property or style/type member: borderRadius: 5,. Interpret it in the enclosing object, props or type definition.
285	`    marginTop: 8,`	Sets/declares the named object property or style/type member: marginTop: 8,. Interpret it in the enclosing object, props or type definition.
286	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
287	`  bottom: {`	Sets/declares the named object property or style/type member: bottom: {. Interpret it in the enclosing object, props or type definition.
288	`    borderTopWidth: 1,`	Sets/declares the named object property or style/type member: borderTopWidth: 1,. Interpret it in the enclosing object, props or type definition.
289	`    borderTopColor: colors.border,`	Sets/declares the named object property or style/type member: borderTopColor: colors.border,. Interpret it in the enclosing object, props or type definition.
290	`    marginTop: 10,`	Sets/declares the named object property or style/type member: marginTop: 10,. Interpret it in the enclosing object, props or type definition.
291	`    paddingTop: 9,`	Sets/declares the named object property or style/type member: paddingTop: 9,. Interpret it in the enclosing object, props or type definition.
292	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
293	`    justifyContent: "space-between",`	Sets/declares the named object property or style/type member: justifyContent: "space-between",. Interpret it in the enclosing object, props or type definition.
294	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
295	`  red: { color: colors.danger, fontWeight: "900" },`	Sets/declares the named object property or style/type member: red: { color: colors.danger, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
296	`  green: { color: colors.success, fontWeight: "900" },`	Sets/declares the named object property or style/type member: green: { color: colors.success, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
297	`  visitCount: { color: colors.blue, fontSize: 11, fontWeight: "900" },`	Sets/declares the named object property or style/type member: visitCount: { color: colors.blue, fontSize: 11, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
298	`  lastVisit: { fontSize: 10, color: colors.muted, marginTop: 7 },`	Sets/declares the named object property or style/type member: lastVisit: { fontSize: 10, color: colors.muted, marginTop: 7 },. Interpret it in the enclosing object, props or type definition.
299	`  historyPanel: { borderTopWidth: 1, borderTopColor: colors.border, marginTop: 11, paddingTop: 10 },`	Sets/declares the named object property or style/type member: historyPanel: { borderTopWidth: 1, borderTopColor: colors.border, marginTop: 11, paddingTop: 10 },. Interpret it in the enclosing object, props or type definition.
300	`  historyTitle: { fontSize: 10, fontWeight: "900", color: colors.navy, letterSpacing: 0.6 },`	Sets/declares the named object property or style/type member: historyTitle: { fontSize: 10, fontWeight: "900", color: colors.navy, letterSpacing: 0.6 },. Interpret it in the enclosing object, props or type definition.
301	`  visitRow: { backgroundColor: "#F2F7F5", padding: 10, borderRadius: 10, marginTop: 8 },`	Sets/declares the named object property or style/type member: visitRow: { backgroundColor: "#F2F7F5", padding: 10, borderRadius: 10, marginTop: 8 },. Interpret it in the enclosing object, props or type definition.
302	`  visitHeader: { flexDirection: "row", justifyContent: "space-between" },`	Sets/declares the named object property or style/type member: visitHeader: { flexDirection: "row", justifyContent: "space-between" },. Interpret it in the enclosing object, props or type definition.
303	`  visitNumber: { fontSize: 11, fontWeight: "900", color: colors.ink },`	Sets/declares the named object property or style/type member: visitNumber: { fontSize: 11, fontWeight: "900", color: colors.ink },. Interpret it in the enclosing object, props or type definition.
304	`  visitStatus: { fontSize: 9, fontWeight: "800", color: colors.success },`	Sets/declares the named object property or style/type member: visitStatus: { fontSize: 9, fontWeight: "800", color: colors.success },. Interpret it in the enclosing object, props or type definition.
305	`  visitDetail: { fontSize: 10, color: colors.muted, marginTop: 4 },`	Sets/declares the named object property or style/type member: visitDetail: { fontSize: 10, color: colors.muted, marginTop: 4 },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
306	`  openButton: {`	Sets/declares the named object property or style/type member: openButton: {. Interpret it in the enclosing object, props or type definition.
307	`    backgroundColor: colors.blue,`	Sets/declares the named object property or style/type member: backgroundColor: colors.blue,. Interpret it in the enclosing object, props or type definition.
308	`    borderRadius: 9,`	Sets/declares the named object property or style/type member: borderRadius: 9,. Interpret it in the enclosing object, props or type definition.
309	`    padding: 10,`	Sets/declares the named object property or style/type member: padding: 10,. Interpret it in the enclosing object, props or type definition.
310	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
311	`    marginTop: 10,`	Sets/declares the named object property or style/type member: marginTop: 10,. Interpret it in the enclosing object, props or type definition.
312	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
313	`  openButtonText: { color: "white", fontSize: 10, fontWeight: "900" },`	Sets/declares the named object property or style/type member: openButtonText: { color: "white", fontSize: 10, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
314	`  state: { padding: 28, alignItems: "center", gap: 8 },`	Sets/declares the named object property or style/type member: state: { padding: 28, alignItems: "center", gap: 8 },. Interpret it in the enclosing object, props or type definition.
315	`  error: {`	Sets/declares the named object property or style/type member: error: {. Interpret it in the enclosing object, props or type definition.
316	`    backgroundColor: "#FFF0F1",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFF0F1",. Interpret it in the enclosing object, props or type definition.
317	`    borderLeftWidth: 4,`	Sets/declares the named object property or style/type member: borderLeftWidth: 4,. Interpret it in the enclosing object, props or type definition.
318	`    borderLeftColor: colors.danger,`	Sets/declares the named object property or style/type member: borderLeftColor: colors.danger,. Interpret it in the enclosing object, props or type definition.
319	`    padding: 15,`	Sets/declares the named object property or style/type member: padding: 15,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
320	`    borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
321	`    marginBottom: 12,`	Sets/declares the named object property or style/type member: marginBottom: 12,. Interpret it in the enclosing object, props or type definition.
322	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
323	`  errorTitle: { fontWeight: "900", color: colors.danger },`	Sets/declares the named object property or style/type member: errorTitle: { fontWeight: "900", color: colors.danger },. Interpret it in the enclosing object, props or type definition.
324	`  retry: { fontSize: 10, fontWeight: "900", color: colors.brand, marginTop: 9 },`	Sets/declares the named object property or style/type member: retry: { fontSize: 10, fontWeight: "900", color: colors.brand, marginTop: 9 },. Interpret it in the enclosing object, props or type definition.
325	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/screens/PrimaryScreen.tsx

SFA employee primary order/return entry in whole cases, assigned-distributor catalogue, original receipts and recoverable queued submission.

373 numbered source lines | SHA-256 7f3e0ed5d389ddddbecd104a5ba9fce2702f1cd88042beed981a1d4e7bc646fa

Line	Source code	Explanation / reading note
1	`import React, { useEffect, useState } from "react";`	Imports dependencies/types used below: import React, { useEffect, useState } from "react";. Importing a function does not call it.
2	`import { ScrollView, Text, TextInput, View, StyleSheet } from "react-native";`	Imports dependencies/types used below: import { ScrollView, Text, TextInput, View, StyleSheet } from "react-native";. Importing a function does not call it.
3	`import { api } from "../api/client";`	Imports dependencies/types used below: import { api } from "../api/client";. Importing a function does not call it.
4	`import { Button, Card } from "../components/ui";`	Imports dependencies/types used below: import { Button, Card } from "../components/ui";. Importing a function does not call it.
5	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.
6	`  employeeId,`	Continues the surrounding declaration/expression or text: employeeId,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
7	`  primaryPending,`	Continues the surrounding declaration/expression or text: primaryPending,. Read it with the preceding opening statement (employeeId,); it is not a standalone business operation.
8	`  savePrimary,`	Continues the surrounding declaration/expression or text: savePrimary,. Read it with the preceding opening statement (primaryPending,); it is not a standalone business operation.
9	`  syncPrimary,`	Continues the surrounding declaration/expression or text: syncPrimary,. Read it with the preceding opening statement (savePrimary,); it is not a standalone business operation.
10	`  primaryRequestKey,`	Continues the surrounding declaration/expression or text: primaryRequestKey,. Read it with the preceding opening statement (syncPrimary,); it is not a standalone business operation.
11	`  discardRejectedPrimary,`	Continues the surrounding declaration/expression or text: discardRejectedPrimary,. Read it with the preceding opening statement (primaryRequestKey,); it is not a standalone business operation.
12	`  PrimaryPending,`	Continues the surrounding declaration/expression or text: PrimaryPending,. Read it with the preceding opening statement (discardRejectedPrimary,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
13	`} from "../storage/primaryQueue";`	Completes the dependency import and identifies the module supplying those names.
14		Blank line separating logical sections; no executable operation.
15	`export default function PrimaryScreen() {`	Declares a callable function/method: export default function PrimaryScreen() {. Parameters supply its inputs; the following block implements the operation.
16	`  const [data, setData] = useState<any>(null),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
17	`    [owner, setOwner] = useState(""),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
18	`    [pending, setPending] = useState<PrimaryPending[]>([]);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
19	`  const [mode, setMode] = useState<"primaryOrder" | "primaryReturn">("primaryOrder"),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
20	`    [quantities, setQuantities] = useState<Record<string, string>>({});`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
21	`  const [reason, setReason] = useState("Damaged"),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
22	`    [notes, setNotes] = useState(""),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
23	`    [message, setMessage] = useState(""),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
24	`    [busy, setBusy] = useState(false),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
25	`    [review, setReview] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
26	`  const [selectedSchemes, setSelectedSchemes] = useState<Record<string, string>>({});`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
27	`  async function load() {`	Declares a callable function/method: async function load() {. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
28	`    setBusy(true);`	Continues the surrounding declaration/expression or text: setBusy(true);. Read it with the preceding opening statement (async function load() {); it is not a standalone business operation.
29	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
30	`      const id = await employeeId();`	Waits for this asynchronous operation before continuing: const id = await employeeId();. The returned result/error must still be handled.
31	`      setOwner(id);`	Continues the surrounding declaration/expression or text: setOwner(id);. Read it with the preceding opening statement (const id = await employeeId();); it is not a standalone business operation.
32	`      setPending(await primaryPending(id));`	Waits for this asynchronous operation before continuing: setPending(await primaryPending(id));. The returned result/error must still be handled.
33	`      setData(await api("/primary/catalogue"));`	Waits for this asynchronous operation before continuing: setData(await api("/primary/catalogue"));. The returned result/error must still be handled.
34	`    } catch (error: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
35	`      setMessage(error.message);`	Continues the surrounding declaration/expression or text: setMessage(error.message);. Read it with the preceding opening statement (} catch (error: any) {); it is not a standalone business operation.
36	`    } finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
37	`      setBusy(false);`	Continues the surrounding declaration/expression or text: setBusy(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
38	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
40	`  useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.
41	`    void load();`	Continues the surrounding declaration/expression or text: void load();. Read it with the preceding opening statement (useEffect(() => {); it is not a standalone business operation.

Line	Source code	Explanation / reading note
42	`}, []);`	Continues the surrounding declaration/expression or text: }, []);. Read it with the preceding opening statement (void load();); it is not a standalone business operation.
43	`async function synchronize() {`	Declares a callable function/method: async function synchronize() {. Parameters supply its inputs; the following block implements the operation.
44	`  setBusy(true);`	Continues the surrounding declaration/expression or text: setBusy(true);. Read it with the preceding opening statement (async function synchronize() {); it is not a standalone business operation.
45	`  try {`	Starts operations whose failure is handled by the following catch/finally blocks.
46	`    await syncPrimary(owner);`	Waits for this asynchronous operation before continuing: await syncPrimary(owner);. The returned result/error must still be handled.
47	`    setMessage("Synchronization finished. Check the Salesforce status below.");`	Continues the surrounding declaration/expression or text: setMessage("Synchronization finished. Check the Salesforce status below.");. Read it with the preceding opening statement (await syncPrimary(owner);); it is not a standalone business operation.
48	`  } catch (error: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
49	`    setMessage(error.message);`	Continues the surrounding declaration/expression or text: setMessage(error.message);. Read it with the preceding opening statement (} catch (error: any) {); it is not a standalone business operation.
50	`  } finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
51	`    setPending(await primaryPending(owner));`	Waits for this asynchronous operation before continuing: setPending(await primaryPending(owner));. The returned result/error must still be handled.
52	`    setBusy(false);`	Continues the surrounding declaration/expression or text: setBusy(false);. Read it with the preceding opening statement (setPending(await primaryPending(owner));); it is not a standalone business operation.
53	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
54	`  await load();`	Waits for this asynchronous operation before continuing: await load();. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
55	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
56	`  async function save() {`	Declares a callable function/method: async function save() {. Parameters supply its inputs; the following block implements the operation.
57	`    setBusy(true);`	Continues the surrounding declaration/expression or text: setBusy(true);. Read it with the preceding opening statement (async function save() {); it is not a standalone business operation.
58	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
59	`      const lines = Object.entries(quantities)`	Declares/initializes local data used by the surrounding operation: const lines = Object.entries(quantities). Collection contents and assignments below determine its purpose.
60	`        .filter(([, value]) => Number(value) > 0)`	Transforms/selects/aggregates collection values with the callback shown here: .filter(([, value]) => Number(value) > 0). Read the callback body and result assignment together.
61	`        .map(([id, value]) =>`	Transforms/selects/aggregates collection values with the callback shown here: .map(([id, value]) =>. Read the callback body and result assignment together.
62	`          mode === "primaryOrder"`	Continues the surrounding declaration/expression or text: mode === "primaryOrder". Read it with the preceding opening statement (.map(([id, value]) =>); it is not a standalone business operation.
63	`            ? {`	Continues the surrounding declaration/expression or text: ? {. Read it with the preceding opening statement (mode === "primaryOrder"); it is not a standalone business operation.
64	`              productId: id,`	Sets/declares the named object property or style/type member: productId: id,. Interpret it in the enclosing object, props or type definition.
65	`              cases: Number(value),`	Sets/declares the named object property or style/type member: cases: Number(value),. Interpret it in the enclosing object, props or type definition.
66	`              ...(selectedSchemes[id] ? { schemeId: selectedSchemes[id] } : {}),`	Continues the surrounding declaration/expression or text: ...(selectedSchemes[id] ? { schemeId: selectedSchemes[id] } : {}),. Read it with the preceding opening statement (cases: Number(value),); it is not a standalone business operation.
67	`            }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
68	`: { receiptLineId: id, cases: Number(value), reason, notes },`	Continues the surrounding declaration/expression or text: : { receiptLineId: id, cases: Number(value), reason, notes },. Read it with the preceding opening statement (}); it is not a standalone business operation.
69	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
70	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
71	`!lines.length ||`	Continues the surrounding declaration/expression or text: !lines.length ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
72	`lines.some((line) => !Number.isInteger(line.cases) || line.cases > 100000)`	Transforms/selects/aggregates collection values with the callback shown here: lines.some((line) => !Number.isInteger(line.cases) || line.cases > 100000). Read the callback body and result assignment together.
73	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
74	`throw new Error("Enter positive whole cases for at least one line.");`	Stops this execution path with a validation/error exception: throw new Error("Enter positive whole cases for at least one line.");. The caller/catch block decides how it is reported.
75	`if (mode === "primaryReturn" && reason === "Other" && !notes.trim())`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (mode === "primaryReturn" && reason === "Other" && !notes.trim()).
76	`throw new Error("Explain the Other return reason.");`	Stops this execution path with a validation/error exception: throw new Error("Explain the Other return reason.");. The caller/catch block decides how it is reported.
77	`await savePrimary(owner, {`	Waits for this asynchronous operation before continuing: await savePrimary(owner, {. The returned result/error must still be handled.
78	`action: mode,`	Sets/declares the named object property or style/type member: action: mode,. Interpret it in the enclosing object, props or type definition.
79	`requestKey: primaryRequestKey(),`	Sets/declares the named object property or style/type member: requestKey: primaryRequestKey(),. Interpret it in the enclosing object, props or type definition.
80	`lines,`	Continues the surrounding declaration/expression or text: lines,. Read it with the preceding opening statement (requestKey: primaryRequestKey(),); it is not a standalone business operation.

Line	Source code	Explanation / reading note
81	`notes,`	Continues the surrounding declaration/expression or text: notes,. Read it with the preceding opening statement (lines,); it is not a standalone business operation.
82	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
83	`setQuantities({});`	Continues the surrounding declaration/expression or text: setQuantities({});. Read it with the preceding opening statement (});); it is not a standalone business operation.
84	`setSelectedSchemes({});`	Continues the surrounding declaration/expression or text: setSelectedSchemes({});. Read it with the preceding opening statement (setQuantities({});); it is not a standalone business operation.
85	`setNotes("");`	Continues the surrounding declaration/expression or text: setNotes("");. Read it with the preceding opening statement (setSelectedSchemes({});); it is not a standalone business operation.
86	`setReview(false);`	Continues the surrounding declaration/expression or text: setReview(false);. Read it with the preceding opening statement (setNotes("");); it is not a standalone business operation.
87	`setMessage("Saved on this device, awaiting Salesforce approval submission.");`	Continues the surrounding declaration/expression or text: setMessage("Saved on this device, awaiting Salesforce approval submission.");. Read it with the preceding opening statement (setReview(false);); it is not a standalone business operation.
88	`await syncPrimary(owner);`	Waits for this asynchronous operation before continuing: await syncPrimary(owner);. The returned result/error must still be handled.
89	`setMessage("Submitted to the company Distributor Officer.");`	Continues the surrounding declaration/expression or text: setMessage("Submitted to the company Distributor Officer.");. Read it with the preceding opening statement (await syncPrimary(owner);); it is not a standalone business operation.
90	`} catch (error: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
91	`setMessage(error.message);`	Continues the surrounding declaration/expression or text: setMessage(error.message);. Read it with the preceding opening statement (} catch (error: any) {); it is not a standalone business operation.
92	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
93	`setPending(await primaryPending(owner));`	Waits for this asynchronous operation before continuing: setPending(await primaryPending(owner));. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
94	`setBusy(false);`	Continues the surrounding declaration/expression or text: setBusy(false);. Read it with the preceding opening statement (setPending(await primaryPending(owner));); it is not a standalone business operation.
95	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
96	`await load();`	Waits for this asynchronous operation before continuing: await load();. The returned result/error must still be handled.
97	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
98	`const products = mode === "primaryOrder" ? data?.products || [] : data?.receipts || [];`	Declares/initializes local data used by the surrounding operation: const products = mode === "primaryOrder" ? data?.products || [] : data?.receipts || [];. Collection contents and assignments below determine its purpose.
99	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
100	`<ScrollView contentContainerStyle={styles.page} keyboardShouldPersistTaps="handled">`	Renders/opens a UI element or component: <ScrollView contentContainerStyle={styles.page} keyboardShouldPersistTaps="handled">. Props and child content below determine appearance and interactions.
101	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
102	`<Text style={styles.heading}>Distributor primary transactions</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>Distributor primary transactions</Text>. Props and child content below determine appearance and interactions.
103	`<Text>Employee: {data?.employee?.Name || "Loading"}</Text>`	Renders/opens a UI element or component: <Text>Employee: {data?.employee?.Name || "Loading"}</Text>. Props and child content below determine appearance and interactions.
104	`<Text>Distributor: {data?.employee?.DMS_Distributor__r?.Name || "Not loaded"}</Text>`	Renders/opens a UI element or component: <Text>Distributor: {data?.employee?.DMS_Distributor__r?.Name || "Not loaded"}</Text>. Props and child content below determine appearance and interactions.
105	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
106	`Company officer: {data?.employee?.DMS_Distributor__r?.Officer__r?.Name || "Not assigned"}`	Continues the surrounding declaration/expression or text: Company officer: {data?.employee?.DMS_Distributor__r?.Officer__r?.Name || "Not assigned"}. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
107	`</Text>`	Closes the UI element/component opened above.
108	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
109	`Catalogue snapshot:{" "}`	Continues the surrounding declaration/expression or text: Catalogue snapshot:{" "}. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
110	`{data?.retrievedAt ? new Date(data.retrievedAt).toLocaleString() : "Not downloaded"}.`	Continues the surrounding declaration/expression or text: {data?.retrievedAt ? new Date(data.retrievedAt).toLocaleString() : "Not downloaded"}.. Read it with the preceding opening statement (Catalogue snapshot:{" "}); it is not a standalone business operation.
111	`Refresh online before ordering; Salesforce validates final prices.`	Continues the surrounding declaration/expression or text: Refresh online before ordering; Salesforce validates final prices.. Read it with the preceding opening statement ({data?.retrievedAt ? new Date(data.retrievedAt).toLocaleString() : "Not downloaded"}.); it is not a standalone business operation.
112	`</Text>`	Closes the UI element/component opened above.
113	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
114	`Primary orders are placed in whole cases. Select an eligible Primary scheme below.`	Continues the surrounding declaration/expression or text: Primary orders are placed in whole cases. Select an eligible Primary scheme below.. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
115	`Salesforce calculates discounts and free cases, then submits the order to the company`	Continues the surrounding declaration/expression or text: Salesforce calculates discounts and free cases, then submits the order to the company. Read it with the preceding opening statement (Primary orders are placed in whole cases. Select an eligible Primary scheme below.); it is not a standalone business operation.
116	`officer. Secondary outlet orders remain in the existing outlet workflow.`	Continues the surrounding declaration/expression or text: officer. Secondary outlet orders remain in the existing outlet workflow.. Read it with the preceding opening statement (Salesforce calculates discounts and free cases, then submits the order to the company); it is not a standalone business operation.
117	`</Text>`	Closes the UI element/component opened above.
118	`</Card>`	Closes the UI element/component opened above.
119	`{!!message && (`	Continues the surrounding declaration/expression or text: {!!message && (. Read it with the preceding opening statement (</Card>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
120	`<Text accessibilityRole="alert" style={styles.message}>`	Renders/opens a UI element or component: <Text accessibilityRole="alert" style={styles.message}>. Props and child content below determine appearance and interactions.
121	`{message}`	Continues the surrounding declaration/expression or text: {message}. Read it with the preceding opening statement (<Text accessibilityRole="alert" style={styles.message}>); it is not a standalone business operation.
122	`</Text>`	Closes the UI element/component opened above.
123	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
124	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
125	`title="Refresh catalogue"`	Assigns the right-hand expression to the named variable/property: title="Refresh catalogue". This is in-memory unless it is later persisted by an explicit call.
126	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.
127	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
128	`onPress={() => void load()}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
129	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => void load()}); it is not a standalone business operation.
130	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
131	`title="Primary order — cases"`	Assigns the right-hand expression to the named variable/property: title="Primary order - cases". This is in-memory unless it is later persisted by an explicit call.
132	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.

Line	Source code	Explanation / reading note
133	`kind={mode === "primaryOrder" ? "brand" : "secondary"}`	Assigns the right-hand expression to the named variable/property: kind={mode === "primaryOrder" ? "brand" : "secondary"}. This is in-memory unless it is later persisted by an explicit call.
134	`onPress={() => {`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
135	`setMode("primaryOrder");`	Continues the surrounding declaration/expression or text: setMode("primaryOrder");. Read it with the preceding opening statement (onPress={() => {); it is not a standalone business operation.
136	`setQuantities({});`	Continues the surrounding declaration/expression or text: setQuantities({});. Read it with the preceding opening statement (setMode("primaryOrder");); it is not a standalone business operation.
137	`setReview(false);`	Continues the surrounding declaration/expression or text: setReview(false);. Read it with the preceding opening statement (setQuantities({});); it is not a standalone business operation.
138	`}}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
139	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}}); it is not a standalone business operation.
140	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
141	`title="Primary return — original receipts"`	Assigns the right-hand expression to the named variable/property: title="Primary return - original receipts". This is in-memory unless it is later persisted by an explicit call.
142	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
143	`kind={mode === "primaryReturn" ? "brand" : "secondary"}`	Assigns the right-hand expression to the named variable/property: kind={mode === "primaryReturn" ? "brand" : "secondary"}. This is in-memory unless it is later persisted by an explicit call.
144	`onPress={() => {`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.

Line	Source code	Explanation / reading note
145	`setMode("primaryReturn");`	Continues the surrounding declaration/expression or text: setMode("primaryReturn");. Read it with the preceding opening statement (onPress={() => {); it is not a standalone business operation.
146	`setQuantities({});`	Continues the surrounding declaration/expression or text: setQuantities({});. Read it with the preceding opening statement (setMode("primaryReturn");); it is not a standalone business operation.
147	`setReview(false);`	Continues the surrounding declaration/expression or text: setReview(false);. Read it with the preceding opening statement (setQuantities({});); it is not a standalone business operation.
148	`}}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
149	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}}); it is not a standalone business operation.
150	`{!products.length && (`	Continues the surrounding declaration/expression or text: {!products.length && (. Read it with the preceding opening statement (/>); it is not a standalone business operation.
151	`<Text style={styles.message}>`	Renders/opens a UI element or component: <Text style={styles.message}>. Props and child content below determine appearance and interactions.
152	`No eligible {mode === "primaryOrder" ? "products" : "received purchase lines"} found. Ask`	Continues the surrounding declaration/expression or text: No eligible {mode === "primaryOrder" ? "products" : "received purchase lines"} found. Ask. Read it with the preceding opening statement (<Text style={styles.message}>); it is not a standalone business operation.
153	`the administrator to complete the catalogue or goods receipts.`	Continues the surrounding declaration/expression or text: the administrator to complete the catalogue or goods receipts.. Read it with the preceding opening statement (No eligible {mode === "primaryOrder" ? "products" : "received purchase lines"} found. Ask); it is not a standalone business operation.
154	`</Text>`	Closes the UI element/component opened above.
155	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
156	`{products.map((row: any) => {`	Transforms/selects/aggregates collection values with the callback shown here: {products.map((row: any) => {. Read the callback body and result assignment together.

Line	Source code	Explanation / reading note
157	`const eligible =`	Declares/initializes local data used by the surrounding operation: const eligible =. Collection contents and assignments below determine its purpose.
158	`mode === "primaryReturn" ||`	Continues the surrounding declaration/expression or text: mode === "primaryReturn" ||. Read it with the preceding opening statement (const eligible =); it is not a standalone business operation.
159	`(Number(row.DMS_Case_Price__c) > 0 &&`	Continues the surrounding declaration/expression or text: (Number(row.DMS_Case_Price__c) > 0 &&. Read it with the preceding opening statement (mode === "primaryReturn" ||); it is not a standalone business operation.
160	`Number(row.Units_Per_Case__c) > 0 &&`	Continues the surrounding declaration/expression or text: Number(row.Units_Per_Case__c) > 0 &&. Read it with the preceding opening statement ((Number(row.DMS_Case_Price__c) > 0 &&); it is not a standalone business operation.
161	`Number.isInteger(Number(row.Units_Per_Case__c)));`	Calls the named method: Number.isInteger(Number(row.Units_Per_Case__c));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
162	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
163	`<Card key={row.Id}>`	Renders/opens a UI element or component: <Card key={row.Id}>. Props and child content below determine appearance and interactions.
164	`<Text style={styles.heading}>{row.Name || row.Product__r?.Name}</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>{row.Name || row.Product__r?.Name}</Text>. Props and child content below determine appearance and interactions.
165	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
166	`{mode === "primaryOrder"`	Continues the surrounding declaration/expression or text: {mode === "primaryOrder". Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
167	`? \`₹${row.DMS_Case_Price__c || 0} per case · ${row.Units_Per_Case__c || 0} pieces/case\``	Continues the surrounding declaration/expression or text: ? `₹${row.DMS_Case_Price__c || 0} per case · ${row.Units_Per_Case__c || 0} pieces/case`. Read it with the preceding opening statement ({mode === "primaryOrder"); it is not a standalone business operation.
168	`: \`Batch ${row.Batch_Number__c || "Not recorded"} · ${Number(row.Received_Cases__c || 0) + Number(row.Free_Cases__c || 0)} received cases\`}`	Continues the surrounding declaration/expression or text: : `Batch ${row.Batch_Number__c || "Not recorded"} · ${Number(row.Received_Cases__c \|\| 0) + Number(row.Free_Cases__c \|\| 0)} received cases`}. Read it with the preceding opening statement (? `₹${row.DMS_Case_Price__c || 0} per case · ${row.Units_Per_Case__c || 0} pieces/case`); it is not a standalone business operation.

Line	Source code	Explanation / reading note
169	`</Text>`	Closes the UI element/component opened above.
170	`{!eligible ? (`	Continues the surrounding declaration/expression or text: {!eligible ? (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
171	`<Text style={styles.message}>`	Renders/opens a UI element or component: <Text style={styles.message}>. Props and child content below determine appearance and interactions.
172	`Salesforce case price / conversion needs configuration.`	Continues the surrounding declaration/expression or text: Salesforce case price / conversion needs configuration.. Read it with the preceding opening statement (<Text style={styles.message}>); it is not a standalone business operation.
173	`</Text>`	Closes the UI element/component opened above.
174	`) : (`	Continues the surrounding declaration/expression or text:) : (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
175	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
176	`<Text style={styles.label}>Cases — whole number</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>Cases - whole number</Text>. Props and child content below determine appearance and interactions.
177	`<TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
178	`accessibilityLabel={`Cases for ${row.Name || row.Product__r?.Name}`}`	Assigns the right-hand expression to the named variable/property: accessibilityLabel={`Cases for ${row.Name || row.Product__r?.Name}`}. This is in-memory unless it is later persisted by an explicit call.
179	`editable={!busy && !review}`	Assigns the right-hand expression to the named variable/property: editable={!busy && !review}. This is in-memory unless it is later persisted by an explicit call.
180	`style={styles.input}`	Assigns the right-hand expression to the named variable/property: style={styles.input}. This is in-memory unless it is later persisted by an explicit call.
181	`placeholder="Enter number of cases"`	Assigns the right-hand expression to the named variable/property: placeholder="Enter number of cases". This is in-memory unless it is later persisted by an explicit call.
182	`placeholderTextColor="#607970"`	Assigns the right-hand expression to the named variable/property: placeholderTextColor="#607970". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
183	`keyboardType="numeric"`	Assigns the right-hand expression to the named variable/property: keyboardType="numeric". This is in-memory unless it is later persisted by an explicit call.
184	`value={quantities[row.Id] || ""}`	Assigns the right-hand expression to the named variable/property: value={quantities[row.Id] || ""}. This is in-memory unless it is later persisted by an explicit call.
185	`onChangeText={(value) => setQuantities((old) => ({ ...old, [row.Id]: value }))}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
186	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(value) => setQuantities((old) => ({ ...old, [row.Id]: value }))}); it is not a standalone business operation.
187	`{mode === "primaryOrder" && (`	Continues the surrounding declaration/expression or text: {mode === "primaryOrder" && (. Read it with the preceding opening statement (/>); it is not a standalone business operation.
188	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
189	`<Text style={styles.label}>Primary scheme (optional)</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>Primary scheme (optional)</Text>. Props and child content below determine appearance and interactions.
190	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
191	`title="No scheme"`	Assigns the right-hand expression to the named variable/property: title="No scheme". This is in-memory unless it is later persisted by an explicit call.
192	`kind={!selectedSchemes[row.Id] ? "brand" : "secondary"}`	Assigns the right-hand expression to the named variable/property: kind={!selectedSchemes[row.Id] ? "brand" : "secondary"}. This is in-memory unless it is later persisted by an explicit call.
193	`disabled={busy || review}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
194	`onPress={() => setSelectedSchemes((old) => ({ ...old, [row.Id]: "" }))}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
195	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setSelectedSchemes((old) => ({ ...old, [row.Id]: "" }))}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
196	`{(data?.schemes || [])`	Continues the surrounding declaration/expression or text: {(data?.schemes || []). Read it with the preceding opening statement (/>); it is not a standalone business operation.
197	`.filter(`	Transforms/selects/aggregates collection values with the callback shown here: .filter(. Read the callback body and result assignment together.
198	`(scheme: any) =>`	Continues the surrounding declaration/expression or text: (scheme: any) =>. Read it with the preceding opening statement (.filter(); it is not a standalone business operation.
199	`scheme.Product__c === row.Id ||`	Continues the surrounding declaration/expression or text: scheme.Product__c === row.Id ||. Read it with the preceding opening statement ((scheme: any) =>); it is not a standalone business operation.
200	`scheme.Scheme_Products__r?.records?.some(`	Transforms/selects/aggregates collection values with the callback shown here: scheme.Scheme_Products__r?.records?.some(. Read the callback body and result assignment together.
201	`(link: any) => link.Product__c === row.Id,`	Continues the surrounding declaration/expression or text: (link: any) => link.Product__c === row.Id,. Read it with the preceding opening statement (scheme.Scheme_Products__r?.records?.some(); it is not a standalone business operation.
202	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
203	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
204	`.map((scheme: any) => (`	Transforms/selects/aggregates collection values with the callback shown here: .map((scheme: any) => (. Read the callback body and result assignment together.
205	`<View key={scheme.Id}>`	Renders/opens a UI element or component: <View key={scheme.Id}>. Props and child content below determine appearance and interactions.
206	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
207	`title={`${selectedSchemes[row.Id] === scheme.Id ? "✓ " : ""}${scheme.Name}`}`	Assigns the right-hand expression to the named variable/property: title={`${selectedSchemes[row.Id] === scheme.Id ? "✓ " : ""}${scheme.Name}`}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
208	`kind={selectedSchemes[row.Id] === scheme.Id ? "brand" : "secondary"}`	Assigns the right-hand expression to the named variable/property: kind={selectedSchemes[row.Id] === scheme.Id ? "brand" : "secondary"}. This is in-memory unless it is later persisted by an explicit call.
209	`disabled={busy || review}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
210	`onPress={() =>`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
211	`setSelectedSchemes((old) => ({`	Continues the surrounding declaration/expression or text: setSelectedSchemes((old) => ({. Read it with the preceding opening statement (onPress={() =>); it is not a standalone business operation.
212	`...old,`	Continues the surrounding declaration/expression or text: ...old,. Read it with the preceding opening statement (setSelectedSchemes((old) => ({); it is not a standalone business operation.
213	`[row.Id]: scheme.Id,`	Continues the surrounding declaration/expression or text: [row.Id]: scheme.Id,. Read it with the preceding opening statement (...old,); it is not a standalone business operation.
214	`}))`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
215	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
216	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}); it is not a standalone business operation.
217	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
218	`Buy {scheme.Minimum_Cases__c || "not configured"} cases ·{" "}`	Continues the surrounding declaration/expression or text: Buy {scheme.Minimum_Cases__c || "not configured"} cases ·{" "}. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
219	`{scheme.Free_Cases__c || 0} free cases of{" "}`	Continues the surrounding declaration/expression or text: {scheme.Free_Cases__c || 0} free cases of{" "}. Read it with the preceding opening statement (Buy {scheme.Minimum_Cases__c || "not configured"} cases ·{" "}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
220	`{scheme.Free_Product__r?.Name || row.Name} per complete buy block ·{" "}`	Continues the surrounding declaration/expression or text: {scheme.Free_Product__r?.Name || row.Name} per complete buy block ·{" "}. Read it with the preceding opening statement ({scheme.Free_Cases__c || 0} free cases of{" "}); it is not a standalone business operation.
221	`{scheme.Discount_Percent__c || 0}% discount · ₹`	Continues the surrounding declaration/expression or text: {scheme.Discount_Percent__c || 0}% discount · ₹. Read it with the preceding opening statement ({scheme.Free_Product__r?.Name || row.Name} per complete buy block ·{" "}); it is not a standalone business operation.
222	`{scheme.Discount_Amount__c || 0} off per block`	Continues the surrounding declaration/expression or text: {scheme.Discount_Amount__c || 0} off per block. Read it with the preceding opening statement ({scheme.Discount_Percent__c || 0}% discount · ₹); it is not a standalone business operation.
223	`</Text>`	Closes the UI element/component opened above.
224	`{!!scheme.Free_Gift__c && (`	Continues the surrounding declaration/expression or text: {!!scheme.Free_Gift__c && (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
225	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
226	`Gift: {scheme.Free_Gift__c} × {scheme.Gift_Quantity__c || 0} per block`	Sets/declares the named object property or style/type member: Gift: {scheme.Free_Gift__c} × {scheme.Gift_Quantity__c || 0} per block. Interpret it in the enclosing object, props or type definition.
227	`</Text>`	Closes the UI element/component opened above.
228	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
229	`</View>`	Closes the UI element/component opened above.
230	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
231	`</>`	Closes the UI element/component opened above.
232	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
233	`</>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
234	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
235	`</Card>`	Closes the UI element/component opened above.
236	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
237	`})}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
238	`{mode === "primaryReturn" && (`	Continues the surrounding declaration/expression or text: {mode === "primaryReturn" && (. Read it with the preceding opening statement (})}); it is not a standalone business operation.
239	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
240	`<Text style={styles.heading}>Return reason (all selected lines)</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>Return reason (all selected lines)</Text>. Props and child content below determine appearance and interactions.
241	`{["Damaged", "Expired", "Delayed Delivery", "No Demand", "Other"].map((value) => (`	Transforms/selects/aggregates collection values with the callback shown here: {["Damaged", "Expired", "Delayed Delivery", "No Demand", "Other"].map((value) => (. Read the callback body and result assignment together.
242	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
243	`key={value}`	Assigns the right-hand expression to the named variable/property: key={value}. This is in-memory unless it is later persisted by an explicit call.
244	`title={value}`	Assigns the right-hand expression to the named variable/property: title={value}. This is in-memory unless it is later persisted by an explicit call.
245	`disabled={busy || review}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
246	`kind={reason === value ? "brand" : "secondary"}`	Assigns the right-hand expression to the named variable/property: kind={reason === value ? "brand" : "secondary"}. This is in-memory unless it is later persisted by an explicit call.
247	`onPress={() => setReason(value)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.

Line	Source code	Explanation / reading note
248	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setReason(value)}); it is not a standalone business operation.
249	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
250	`</Card>`	Closes the UI element/component opened above.
251	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
252	`<Text style={styles.label}>Notes — explain Other returns</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>Notes - explain Other returns</Text>. Props and child content below determine appearance and interactions.
253	`<TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
254	`accessibilityLabel="Primary transaction notes"`	Assigns the right-hand expression to the named variable/property: accessibilityLabel="Primary transaction notes". This is in-memory unless it is later persisted by an explicit call.
255	`editable={!busy && !review}`	Assigns the right-hand expression to the named variable/property: editable={!busy && !review}. This is in-memory unless it is later persisted by an explicit call.
256	`style={styles.input}`	Assigns the right-hand expression to the named variable/property: style={styles.input}. This is in-memory unless it is later persisted by an explicit call.
257	`multiline`	Continues the surrounding declaration/expression or text: multiline. Read it with the preceding opening statement (style={styles.input}); it is not a standalone business operation.
258	`maxLength={1000}`	Assigns the right-hand expression to the named variable/property: maxLength={1000}. This is in-memory unless it is later persisted by an explicit call.
259	`placeholder="Enter notes"`	Assigns the right-hand expression to the named variable/property: placeholder="Enter notes". This is in-memory unless it is later persisted by an explicit call.
260	`placeholderTextColor="#607970"`	Assigns the right-hand expression to the named variable/property: placeholderTextColor="#607970". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
261	`value={notes}`	Assigns the right-hand expression to the named variable/property: value={notes}. This is in-memory unless it is later persisted by an explicit call.
262	`onChangeText={setNotes}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
263	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={setNotes}); it is not a standalone business operation.
264	`{review ? (`	Continues the surrounding declaration/expression or text: {review ? (. Read it with the preceding opening statement (/>); it is not a standalone business operation.
265	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
266	`<Text style={styles.heading}>Confirm submission</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>Confirm submission</Text>. Props and child content below determine appearance and interactions.
267	`{Object.entries(quantities)`	Calls the named method: {Object.entries(quantities). Its implementation defines the side effect/result; use the symbol/file index to follow it.
268	`.filter(([, quantity]) => Number(quantity) > 0)`	Transforms/selects/aggregates collection values with the callback shown here: .filter(([, quantity]) => Number(quantity) > 0). Read the callback body and result assignment together.
269	`.map(([id, quantity]) => (`	Transforms/selects/aggregates collection values with the callback shown here: .map(([id, quantity]) => (. Read the callback body and result assignment together.
270	`<Text key={id}>`	Renders/opens a UI element or component: <Text key={id}>. Props and child content below determine appearance and interactions.
271	`{products.find((row: any) => row.Id === id)?.Name ||`	Transforms/selects/aggregates collection values with the callback shown here: {products.find((row: any) => row.Id === id)?.Name ||. Read the callback body and result assignment together.
272	`products.find((row: any) => row.Id === id)?.Product__r?.Name}`	Transforms/selects/aggregates collection values with the callback shown here: products.find((row: any) => row.Id === id)?.Product__r?.Name}. Read the callback body and result assignment together.
273	`: {quantity} cases`	Continues the surrounding declaration/expression or text: : {quantity} cases. Read it with the preceding opening statement (products.find((row: any) => row.Id === id)?.Product__r?.Name}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
274	`{selectedSchemes[id] && mode === "primaryOrder"`	Continues the surrounding declaration/expression or text: {selectedSchemes[id] && mode === "primaryOrder". Read it with the preceding opening statement (: {quantity} cases); it is not a standalone business operation.
275	`? ` · Scheme: ${data?.schemes?.find((scheme: any) => scheme.Id === selectedSchemes[id])?.Name || "Selected"}``	Transforms/selects/aggregates collection values with the callback shown here: ? ` · Scheme: ${data?.schemes?.find((scheme: any) => scheme.Id === selectedSchemes[id])?.Name || "Selected"}`. Read the callback body and result assignment together.
276	`: ""}`	Continues the surrounding declaration/expression or text: : ""}. Read it with the preceding opening statement (? ` · Scheme: ${data?.schemes?.find((scheme: any) => scheme.Id === selectedSchemes[id])?.Name || "Selected"}`); it is not a standalone business operation.
277	`</Text>`	Closes the UI element/component opened above.
278	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
279	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
280	`Prices are validated in Salesforce and the company officer must approve. This is not an`	Continues the surrounding declaration/expression or text: Prices are validated in Salesforce and the company officer must approve. This is not an. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
281	`invoice or stock movement.`	Continues the surrounding declaration/expression or text: invoice or stock movement.. Read it with the preceding opening statement (Prices are validated in Salesforce and the company officer must approve. This is not an); it is not a standalone business operation.
282	`</Text>`	Closes the UI element/component opened above.
283	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
284	`title="Confirm and submit for approval"`	Assigns the right-hand expression to the named variable/property: title="Confirm and submit for approval". This is in-memory unless it is later persisted by an explicit call.
285	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
286	`onPress={() => void save()}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.

Line	Source code	Explanation / reading note
287	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => void save()}); it is not a standalone business operation.
288	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
289	`title="Back to editing"`	Assigns the right-hand expression to the named variable/property: title="Back to editing". This is in-memory unless it is later persisted by an explicit call.
290	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.
291	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
292	`onPress={() => setReview(false)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
293	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setReview(false)}); it is not a standalone business operation.
294	`</Card>`	Closes the UI element/component opened above.
295	`) : (`	Continues the surrounding declaration/expression or text:) : (. Read it with the preceding opening statement (</Card>); it is not a standalone business operation.
296	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
297	`title="Review selected cases"`	Assigns the right-hand expression to the named variable/property: title="Review selected cases". This is in-memory unless it is later persisted by an explicit call.
298	`disabled={busy || !data}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
299	`onPress={() => setReview(true)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
300	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setReview(true)}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
301	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
302	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
303	`<Text style={styles.heading}>Pending requests: {pending.length}</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>Pending requests: {pending.length}</Text>. Props and child content below determine appearance and interactions.
304	`{pending.map((row) => (`	Transforms/selects/aggregates collection values with the callback shown here: {pending.map((row) => (. Read the callback body and result assignment together.
305	`<View key={row.requestKey}>`	Renders/opens a UI element or component: <View key={row.requestKey}>. Props and child content below determine appearance and interactions.
306	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
307	`{row.action === "primaryOrder" ? "Primary order" : "Primary return"} ·{" "}`	Continues the surrounding declaration/expression or text: {row.action === "primaryOrder" ? "Primary order" : "Primary return"} ·{" "}. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
308	`{row.error || "Waiting to sync"}`	Continues the surrounding declaration/expression or text: {row.error || "Waiting to sync"}. Read it with the preceding opening statement ({row.action === "primaryOrder" ? "Primary order" : "Primary return"} ·{" "}); it is not a standalone business operation.
309	`</Text>`	Closes the UI element/component opened above.
310	`{row.status === 400 && (`	Continues the surrounding declaration/expression or text: {row.status === 400 && (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
311	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
312	`title="Remove rejected request, then correct and resubmit"`	Assigns the right-hand expression to the named variable/property: title="Remove rejected request, then correct and resubmit". This is in-memory unless it is later persisted by an explicit call.
313	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.

Line	Source code	Explanation / reading note
314	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.
315	`onPress={() => void discardRejectedPrimary(owner, row.requestKey).then(load)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
316	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => void discardRejectedPrimary(owner, row.requestKey).then(load)}); it is not a standalone business operation.
317	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
318	`</View>`	Closes the UI element/component opened above.
319	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
320	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
321	`title="Sync saved primary requests"`	Assigns the right-hand expression to the named variable/property: title="Sync saved primary requests". This is in-memory unless it is later persisted by an explicit call.
322	`disabled={busy || !owner}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
323	`onPress={() => void synchronize()}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
324	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => void synchronize()}); it is not a standalone business operation.
325	`</Card>`	Closes the UI element/component opened above.
326	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
327	`<Text style={styles.heading}>My latest primary orders</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>My latest primary orders</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
328	`{(data?.orders || []).map((row: any) => (`	Transforms/selects/aggregates collection values with the callback shown here: {(data?.orders || []).map((row: any) => (. Read the callback body and result assignment together.
329	`<Text key={row.Id}>`	Renders/opens a UI element or component: <Text key={row.Id}>. Props and child content below determine appearance and interactions.
330	`{row.Name} · {row.Status__c} · ₹{row.Total_Amount__c || 0}`	Continues the surrounding declaration/expression or text: {row.Name} · {row.Status__c} · ₹{row.Total_Amount__c || 0}. Read it with the preceding opening statement (<Text key={row.Id}>); it is not a standalone business operation.
331	`</Text>`	Closes the UI element/component opened above.
332	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
333	`<Text style={styles.heading}>My latest primary returns</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>My latest primary returns</Text>. Props and child content below determine appearance and interactions.
334	`{(data?.returns || []).map((row: any) => (`	Transforms/selects/aggregates collection values with the callback shown here: {(data?.returns || []).map((row: any) => (. Read the callback body and result assignment together.
335	`<Text key={row.Id}>`	Renders/opens a UI element or component: <Text key={row.Id}>. Props and child content below determine appearance and interactions.
336	`{row.Name} · {row.Status__c} · ₹{row.Total_Amount__c || 0}`	Continues the surrounding declaration/expression or text: {row.Name} · {row.Status__c} · ₹{row.Total_Amount__c || 0}. Read it with the preceding opening statement (<Text key={row.Id}>); it is not a standalone business operation.
337	`</Text>`	Closes the UI element/component opened above.
338	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
339	`</Card>`	Closes the UI element/component opened above.
340	`</ScrollView>`	Closes the UI element/component opened above.
341	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
342	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
343	`const styles = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const styles = StyleSheet.create({. Collection contents and assignments below determine its purpose.
344	`  page: {`	Sets/declares the named object property or style/type member: page: {. Interpret it in the enclosing object, props or type definition.
345	`    padding: 18,`	Sets/declares the named object property or style/type member: padding: 18,. Interpret it in the enclosing object, props or type definition.
346	`    backgroundColor: "#f6f3ea",`	Sets/declares the named object property or style/type member: backgroundColor: "#f6f3ea",. Interpret it in the enclosing object, props or type definition.
347	`    maxWidth: 900,`	Sets/declares the named object property or style/type member: maxWidth: 900,. Interpret it in the enclosing object, props or type definition.
348	`    width: "100%",`	Sets/declares the named object property or style/type member: width: "100%",. Interpret it in the enclosing object, props or type definition.
349	`    alignSelf: "center",`	Sets/declares the named object property or style/type member: alignSelf: "center",. Interpret it in the enclosing object, props or type definition.
350	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
351	`  heading: {`	Sets/declares the named object property or style/type member: heading: {. Interpret it in the enclosing object, props or type definition.
352	`    fontSize: 18,`	Sets/declares the named object property or style/type member: fontSize: 18,. Interpret it in the enclosing object, props or type definition.
353	`    fontWeight: "700",`	Sets/declares the named object property or style/type member: fontWeight: "700",. Interpret it in the enclosing object, props or type definition.
354	`    color: "#173f37",`	Sets/declares the named object property or style/type member: color: "#173f37",. Interpret it in the enclosing object, props or type definition.
355	`    marginVertical: 10,`	Sets/declares the named object property or style/type member: marginVertical: 10,. Interpret it in the enclosing object, props or type definition.
356	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
357	`label: { color: "#23483d", marginVertical: 8 },`	Sets/declares the named object property or style/type member: label: { color: "#23483d", marginVertical: 8 },. Interpret it in the enclosing object, props or type definition.
358	`input: {`	Sets/declares the named object property or style/type member: input: {. Interpret it in the enclosing object, props or type definition.
359	`padding: 14,`	Sets/declares the named object property or style/type member: padding: 14,. Interpret it in the enclosing object, props or type definition.
360	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
361	`borderColor: "#aabeb5",`	Sets/declares the named object property or style/type member: borderColor: "#aabeb5",. Interpret it in the enclosing object, props or type definition.
362	`backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
363	`color: "#173f37",`	Sets/declares the named object property or style/type member: color: "#173f37",. Interpret it in the enclosing object, props or type definition.
364	`borderRadius: 10,`	Sets/declares the named object property or style/type member: borderRadius: 10,. Interpret it in the enclosing object, props or type definition.
365	`marginBottom: 12,`	Sets/declares the named object property or style/type member: marginBottom: 12,. Interpret it in the enclosing object, props or type definition.
366	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
367	`message: {`	Sets/declares the named object property or style/type member: message: {. Interpret it in the enclosing object, props or type definition.
368	`padding: 12,`	Sets/declares the named object property or style/type member: padding: 12,. Interpret it in the enclosing object, props or type definition.
369	`backgroundColor: "#fff0c8",`	Sets/declares the named object property or style/type member: backgroundColor: "#fff0c8",. Interpret it in the enclosing object, props or type definition.
370	`color: "#483e22",`	Sets/declares the named object property or style/type member: color: "#483e22",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
371	`    marginVertical: 10,`	Sets/declares the named object property or style/type member: marginVertical: 10,. Interpret it in the enclosing object, props or type definition.
372	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
373	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/screens/ProductsScreen.tsx

Product catalogue presentation, identity fields, pricing and configured sales/scheme information.

159 numbered source lines | SHA-256 8e43fa5a8b1fa08e8d7cd634af93dfe3837e66cb4960a48610730e650af1793d

Line	Source code	Explanation / reading note
1	`import React, { useCallback, useMemo, useState } from "react";`	Imports dependencies/types used below: import React, { useCallback, useMemo, useState } from "react";. Importing a function does not call it.
2	`import { useFocusEffect } from "@react-navigation/native";`	Imports dependencies/types used below: import { useFocusEffect } from "@react-navigation/native";. Importing a function does not call it.
3	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.
4	`  ActivityIndicator,`	Continues the surrounding declaration/expression or text: ActivityIndicator,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
5	`  Pressable,`	Continues the surrounding declaration/expression or text: Pressable,. Read it with the preceding opening statement (ActivityIndicator,); it is not a standalone business operation.
6	`  SafeAreaView,`	Continues the surrounding declaration/expression or text: SafeAreaView,. Read it with the preceding opening statement (Pressable,); it is not a standalone business operation.
7	`  ScrollView,`	Continues the surrounding declaration/expression or text: ScrollView,. Read it with the preceding opening statement (SafeAreaView,); it is not a standalone business operation.
8	`  StyleSheet,`	Continues the surrounding declaration/expression or text: StyleSheet,. Read it with the preceding opening statement (ScrollView,); it is not a standalone business operation.
9	`  Text,`	Continues the surrounding declaration/expression or text: Text,. Read it with the preceding opening statement (StyleSheet,); it is not a standalone business operation.
10	`  TextInput,`	Continues the surrounding declaration/expression or text: TextInput,. Read it with the preceding opening statement (Text,); it is not a standalone business operation.
11	`  View,`	Continues the surrounding declaration/expression or text: View,. Read it with the preceding opening statement (TextInput,); it is not a standalone business operation.
12	`} from "react-native";`	Completes the dependency import and identifies the module supplying those names.
13	`import { api } from "../api/client";`	Imports dependencies/types used below: import { api } from "../api/client";. Importing a function does not call it.

Line	Source code	Explanation / reading note
14	`import BottomNav from "../components/BottomNav";`	Imports dependencies/types used below: import BottomNav from "../components/BottomNav";. Importing a function does not call it.
15	`import { Card, Money } from "../components/ui";`	Imports dependencies/types used below: import { Card, Money } from "../components/ui";. Importing a function does not call it.
16	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
17	`import type { Product } from "../types";`	Imports dependencies/types used below: import type { Product } from "../types";. Importing a function does not call it.
18	`import ProductIdentityFields from "../components/ProductIdentityFields";`	Imports dependencies/types used below: import ProductIdentityFields from "../components/ProductIdentityFields";. Importing a function does not call it.
19		Blank line separating logical sections; no executable operation.
20	`export default function ProductsScreen() {`	Declares a callable function/method: export default function ProductsScreen() {. Parameters supply its inputs; the following block implements the operation.
21	`  const [products, setProducts] = useState<Product[]>([]);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
22	`  const [search, setSearch] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
23	`  const [loading, setLoading] = useState(true);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
24	`  const [error, setError] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
25	`  const load = () => {`	Declares/initializes local data used by the surrounding operation: const load = () => {. Collection contents and assignments below determine its purpose.
26	`    setLoading(true);`	Continues the surrounding declaration/expression or text: setLoading(true);. Read it with the preceding opening statement (const load = () => {); it is not a standalone business operation.
27	`    setError("");`	Continues the surrounding declaration/expression or text: setError("");. Read it with the preceding opening statement (setLoading(true);); it is not a standalone business operation.

Line	Source code	Explanation / reading note
28	`    api<Product[]>("/products")`	Continues the surrounding declaration/expression or text: api<Product[]>("/products"). Read it with the preceding opening statement (setError("");); it is not a standalone business operation.
29	`      .then(setProducts)`	Continues the surrounding declaration/expression or text: .then(setProducts). Read it with the preceding opening statement (api<Product[]>("/products")); it is not a standalone business operation.
30	`      .catch((reason) => setError(reason.message || "Unable to load products"))`	Continues the surrounding declaration/expression or text: .catch((reason) => setError(reason.message || "Unable to load products")). Read it with the preceding opening statement (.then(setProducts)); it is not a standalone business operation.
31	`      .finally(() => setLoading(false));`	Continues the surrounding declaration/expression or text: .finally(() => setLoading(false));. Read it with the preceding opening statement (.catch((reason) => setError(reason.message || "Unable to load products"))); it is not a standalone business operation.
32	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`  useFocusEffect(useCallback(load, []));`	Continues the surrounding declaration/expression or text: useFocusEffect(useCallback(load, []));. Read it with the preceding opening statement (};); it is not a standalone business operation.
34	`  const visible = useMemo(`	Caches a derived value using the listed dependencies, such as filtered products or totals.
35	`    () =>`	Continues the surrounding declaration/expression or text: () =>. Read it with the preceding opening statement (const visible = useMemo(); it is not a standalone business operation.
36	`      products.filter((p) => `${p.name} ${p.code}`.toLowerCase().includes(search.toLowerCase())),`	Transforms/selects/aggregates collection values with the callback shown here: products.filter((p) => `${p.name} ${p.code}`.toLowerCase().includes(search.toLowerCase())),. Read the callback body and result assignment together.
37	`    [products, search],`	Continues the surrounding declaration/expression or text: [products, search],. Read it with the preceding opening statement (products.filter((p) => `${p.name} ${p.code}`.toLowerCase().includes(search.toLowerCase())),); it is not a standalone business operation.
38	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
40	`    <SafeAreaView style={s.safe}>`	Renders/opens a UI element or component: <SafeAreaView style={s.safe}>. Props and child content below determine appearance and interactions.
41	`      <View style={s.shell}>`	Renders/opens a UI element or component: <View style={s.shell}>. Props and child content below determine appearance and interactions.
42	`        <View style={s.header}>`	Renders/opens a UI element or component: <View style={s.header}>. Props and child content below determine appearance and interactions.
43	`          <Text style={s.kicker}>SFA MOBILE</Text>`	Renders/opens a UI element or component: <Text style={s.kicker}>SFA MOBILE</Text>. Props and child content below determine appearance and interactions.
44	`          <Text style={s.title}>Product Catalog</Text>`	Renders/opens a UI element or component: <Text style={s.title}>Product Catalog</Text>. Props and child content below determine appearance and interactions.
45	`          <Text style={s.sub}>Live products available from Salesforce</Text>`	Renders/opens a UI element or component: <Text style={s.sub}>Live products available from Salesforce</Text>. Props and child content below determine appearance and interactions.
46	`        </View>`	Closes the UI element/component opened above.
47	`        <TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
48	`          style={[s.search, { color: colors.ink }]}`	Assigns the right-hand expression to the named variable/property: style={[s.search, { color: colors.ink }]}. This is in-memory unless it is later persisted by an explicit call.
49	`          placeholderTextColor="#627873"`	Assigns the right-hand expression to the named variable/property: placeholderTextColor="#627873". This is in-memory unless it is later persisted by an explicit call.
50	`          placeholder="Search product or SKU"`	Assigns the right-hand expression to the named variable/property: placeholder="Search product or SKU". This is in-memory unless it is later persisted by an explicit call.
51	`          value={search}`	Assigns the right-hand expression to the named variable/property: value={search}. This is in-memory unless it is later persisted by an explicit call.
52	`          onChangeText={setSearch}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
53	`        />`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={setSearch}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
54	`<Pressable accessibilityRole="button" onPress={load}>`	Renders/opens a UI element or component: <Pressable accessibilityRole="button" onPress={load}>. Props and child content below determine appearance and interactions.
55	`<Text style={[s.retry, { padding: 14 }]}>REFRESH SALESFORCE PRODUCTS</Text>`	Renders/opens a UI element or component: <Text style={[s.retry, { padding: 14 }]}>REFRESH SALESFORCE PRODUCTS</Text>. Props and child content below determine appearance and interactions.
56	`</Pressable>`	Closes the UI element/component opened above.
57	`<ScrollView contentContainerStyle={s.content}>`	Renders/opens a UI element or component: <ScrollView contentContainerStyle={s.content}>. Props and child content below determine appearance and interactions.
58	`{loading && <ActivityIndicator color={colors.brand} />}{" "}`	Assigns the right-hand expression to the named variable/property: {loading && <ActivityIndicator color={colors.brand} />}{" "}. This is in-memory unless it is later persisted by an explicit call.
59	`{!!error && (`	Continues the surrounding declaration/expression or text: {!!error && (. Read it with the preceding opening statement ({loading && <ActivityIndicator color={colors.brand} />}{" "}); it is not a standalone business operation.
60	`<Pressable onPress={load}>`	Renders/opens a UI element or component: <Pressable onPress={load}>. Props and child content below determine appearance and interactions.
61	`<Card style={s.error}>`	Renders/opens a UI element or component: <Card style={s.error}>. Props and child content below determine appearance and interactions.
62	`<Text style={s.errorTitle}>Product data unavailable</Text>`	Renders/opens a UI element or component: <Text style={s.errorTitle}>Product data unavailable</Text>. Props and child content below determine appearance and interactions.
63	`<Text style={s.code}>{error}</Text>`	Renders/opens a UI element or component: <Text style={s.code}>{error}</Text>. Props and child content below determine appearance and interactions.
64	`<Text style={s.retry}>TAP TO RETRY</Text>`	Renders/opens a UI element or component: <Text style={s.retry}>TAP TO RETRY</Text>. Props and child content below determine appearance and interactions.
65	`</Card>`	Closes the UI element/component opened above.
66	`</Pressable>`	Closes the UI element/component opened above.
67	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
68	`{!loading &&`	Continues the surrounding declaration/expression or text: {!loading &&. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
69	`!error &&`	Continues the surrounding declaration/expression or text: !error &&. Read it with the preceding opening statement ({!loading &&); it is not a standalone business operation.
70	`(visible.length ? (`	Continues the surrounding declaration/expression or text: (visible.length ? (. Read it with the preceding opening statement (!error &&); it is not a standalone business operation.
71	`visible.map((p) => (`	Transforms/selects/aggregates collection values with the callback shown here: visible.map((p) => (. Read the callback body and result assignment together.
72	`<Card key={p.id} style={s.card}>`	Renders/opens a UI element or component: <Card key={p.id} style={s.card}>. Props and child content below determine appearance and interactions.
73	`<View style={s.productIcon}>`	Renders/opens a UI element or component: <View style={s.productIcon}>. Props and child content below determine appearance and interactions.
74	`<Text style={s.productIconText}>▦</Text>`	Renders/opens a UI element or component: <Text style={s.productIconText}>▦</Text>. Props and child content below determine appearance and interactions.
75	`</View>`	Closes the UI element/component opened above.
76	`<View style={s.details}>`	Renders/opens a UI element or component: <View style={s.details}>. Props and child content below determine appearance and interactions.
77	`<Text style={s.name}>{p.name}</Text>`	Renders/opens a UI element or component: <Text style={s.name}>{p.name}</Text>. Props and child content below determine appearance and interactions.
78	`<ProductIdentityFields product={p} />`	Renders/opens a UI element or component: <ProductIdentityFields product={p} />. Props and child content below determine appearance and interactions.
79	`<Text style={s.code}>`	Renders/opens a UI element or component: <Text style={s.code}>. Props and child content below determine appearance and interactions.
80	`{p.code} {p.brand ? `• ${p.brand}` : ""}`	Continues the surrounding declaration/expression or text: {p.code} {p.brand ? `• ${p.brand}` : ""}. Read it with the preceding opening statement (<Text style={s.code}>); it is not a standalone business operation.
81	`</Text>`	Closes the UI element/component opened above.
82	`<Text style={s.code}>`	Renders/opens a UI element or component: <Text style={s.code}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
83	`{p.packSize || "Pack not specified"} • GST {p.gstPercent || 0}%`	Continues the surrounding declaration/expression or text: {p.packSize || "Pack not specified"} • GST {p.gstPercent || 0}%. Read it with the preceding opening statement (<Text style={s.code}>); it is not a standalone business operation.
84	`</Text>`	Closes the UI element/component opened above.
85	`<View style={s.row}>`	Renders/opens a UI element or component: <View style={s.row}>. Props and child content below determine appearance and interactions.
86	`<Text style={s.price}>`	Renders/opens a UI element or component: <Text style={s.price}>. Props and child content below determine appearance and interactions.
87	`<Money value={p.price} />`	Renders/opens a UI element or component: <Money value={p.price} />. Props and child content below determine appearance and interactions.
88	`</Text>`	Closes the UI element/component opened above.
89	`<Text style={s.stock}>{p.stock} in stock</Text>`	Renders/opens a UI element or component: <Text style={s.stock}>{p.stock} in stock</Text>. Props and child content below determine appearance and interactions.
90	`</View>`	Closes the UI element/component opened above.
91	`</View>`	Closes the UI element/component opened above.
92	`</Card>`	Closes the UI element/component opened above.
93	`))`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
94	`) : (`	Continues the surrounding declaration/expression or text:) : (. Read it with the preceding opening statement ( ))); it is not a standalone business operation.
95	`<Card style={s.empty}>`	Renders/opens a UI element or component: <Card style={s.empty}>. Props and child content below determine appearance and interactions.
96	`<Text style={s.name}>No products found</Text>`	Renders/opens a UI element or component: <Text style={s.name}>No products found</Text>. Props and child content below determine appearance and interactions.
97	`<Text style={s.code}>Products synchronized from Salesforce will appear here.</Text>`	Renders/opens a UI element or component: <Text style={s.code}>Products synchronized from Salesforce will appear here.</Text>. Props and child content below determine appearance and interactions.
98	`</Card>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
99	))}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
100	</ScrollView>	Closes the UI element/component opened above.
101	<BottomNav active="Products" />	Renders/opens a UI element or component: <BottomNav active="Products" />. Props and child content below determine appearance and interactions.
102	</View>	Closes the UI element/component opened above.
103	</SafeAreaView>	Closes the UI element/component opened above.
104	);	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
105	}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
106	const s = StyleSheet.create({	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
107	safe: { flex: 1, backgroundColor: "#E8E1D3" },	Sets/declares the named object property or style/type member: safe: { flex: 1, backgroundColor: "#E8E1D3" },. Interpret it in the enclosing object, props or type definition.
108	shell: {	Sets/declares the named object property or style/type member: shell: {. Interpret it in the enclosing object, props or type definition.
109	flex: 1,	Sets/declares the named object property or style/type member: flex: 1,. Interpret it in the enclosing object, props or type definition.
110	width: "100%",	Sets/declares the named object property or style/type member: width: "100%",. Interpret it in the enclosing object, props or type definition.
111	maxWidth: 480,	Sets/declares the named object property or style/type member: maxWidth: 480,. Interpret it in the enclosing object, props or type definition.
112	alignSelf: "center",	Sets/declares the named object property or style/type member: alignSelf: "center",. Interpret it in the enclosing object, props or type definition.
113	backgroundColor: colors.surface,	Sets/declares the named object property or style/type member: backgroundColor: colors.surface,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
114	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
115	`  header: {`	Sets/declares the named object property or style/type member: header: {. Interpret it in the enclosing object, props or type definition.
116	`    backgroundColor: colors.navy,`	Sets/declares the named object property or style/type member: backgroundColor: colors.navy,. Interpret it in the enclosing object, props or type definition.
117	`    padding: 20,`	Sets/declares the named object property or style/type member: padding: 20,. Interpret it in the enclosing object, props or type definition.
118	`    paddingBottom: 24,`	Sets/declares the named object property or style/type member: paddingBottom: 24,. Interpret it in the enclosing object, props or type definition.
119	`    borderBottomRightRadius: 28,`	Sets/declares the named object property or style/type member: borderBottomRightRadius: 28,. Interpret it in the enclosing object, props or type definition.
120	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
121	`  kicker: { color: "#9DD9C9", fontWeight: "900", fontSize: 11, letterSpacing: 1.4 },`	Sets/declares the named object property or style/type member: kicker: { color: "#9DD9C9", fontWeight: "900", fontSize: 11, letterSpacing: 1.4 },. Interpret it in the enclosing object, props or type definition.
122	`  title: { color: "white", fontSize: 25, fontWeight: "900", marginTop: 5 },`	Sets/declares the named object property or style/type member: title: { color: "white", fontSize: 25, fontWeight: "900", marginTop: 5 },. Interpret it in the enclosing object, props or type definition.
123	`  sub: { color: "#D8EEE8", fontSize: 12, marginTop: 4 },`	Sets/declares the named object property or style/type member: sub: { color: "#D8EEE8", fontSize: 12, marginTop: 4 },. Interpret it in the enclosing object, props or type definition.
124	`  search: {`	Sets/declares the named object property or style/type member: search: {. Interpret it in the enclosing object, props or type definition.
125	`    backgroundColor: "#FFFDF7",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFFDF7",. Interpret it in the enclosing object, props or type definition.
126	`    borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
127	`    borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
128	`    borderRadius: 14,`	Sets/declares the named object property or style/type member: borderRadius: 14,. Interpret it in the enclosing object, props or type definition.
129	`    padding: 13,`	Sets/declares the named object property or style/type member: padding: 13,. Interpret it in the enclosing object, props or type definition.
130	`    margin: 14,`	Sets/declares the named object property or style/type member: margin: 14,. Interpret it in the enclosing object, props or type definition.
131	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
132	`  content: { paddingHorizontal: 14, paddingBottom: 18 },`	Sets/declares the named object property or style/type member: content: { paddingHorizontal: 14, paddingBottom: 18 },. Interpret it in the enclosing object, props or type definition.
133	`  card: {`	Sets/declares the named object property or style/type member: card: {. Interpret it in the enclosing object, props or type definition.
134	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
135	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
136	`    padding: 14,`	Sets/declares the named object property or style/type member: padding: 14,. Interpret it in the enclosing object, props or type definition.
137	`    borderLeftWidth: 4,`	Sets/declares the named object property or style/type member: borderLeftWidth: 4,. Interpret it in the enclosing object, props or type definition.
138	`    borderLeftColor: "#F6C85F",`	Sets/declares the named object property or style/type member: borderLeftColor: "#F6C85F",. Interpret it in the enclosing object, props or type definition.
139	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
140	`  productIcon: {`	Sets/declares the named object property or style/type member: productIcon: {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
141	`width: 48,`	Sets/declares the named object property or style/type member: width: 48,. Interpret it in the enclosing object, props or type definition.
142	`height: 48,`	Sets/declares the named object property or style/type member: height: 48,. Interpret it in the enclosing object, props or type definition.
143	`borderRadius: 24,`	Sets/declares the named object property or style/type member: borderRadius: 24,. Interpret it in the enclosing object, props or type definition.
144	`backgroundColor: "#DFF3ED",`	Sets/declares the named object property or style/type member: backgroundColor: "#DFF3ED",. Interpret it in the enclosing object, props or type definition.
145	`alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
146	`justifyContent: "center",`	Sets/declares the named object property or style/type member: justifyContent: "center",. Interpret it in the enclosing object, props or type definition.
147	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
148	`productIconText: { color: colors.brand, fontSize: 22 },`	Sets/declares the named object property or style/type member: productIconText: { color: colors.brand, fontSize: 22 },. Interpret it in the enclosing object, props or type definition.
149	`details: { flex: 1, marginLeft: 12 },`	Sets/declares the named object property or style/type member: details: { flex: 1, marginLeft: 12 },. Interpret it in the enclosing object, props or type definition.
150	`name: { fontSize: 16, fontWeight: "900", color: colors.ink },`	Sets/declares the named object property or style/type member: name: { fontSize: 16, fontWeight: "900", color: colors.ink },. Interpret it in the enclosing object, props or type definition.
151	`code: { fontSize: 11, color: colors.muted, marginTop: 3 },`	Sets/declares the named object property or style/type member: code: { fontSize: 11, color: colors.muted, marginTop: 3 },. Interpret it in the enclosing object, props or type definition.
152	`row: { flexDirection: "row", justifyContent: "space-between", marginTop: 9 },`	Sets/declares the named object property or style/type member: row: { flexDirection: "row", justifyContent: "space-between", marginTop: 9 },. Interpret it in the enclosing object, props or type definition.
153	`price: { color: colors.blue, fontWeight: "900" },`	Sets/declares the named object property or style/type member: price: { color: colors.blue, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
154	`  stock: { color: colors.success, fontSize: 11, fontWeight: "700" },`	Sets/declares the named object property or style/type member: stock: { color: colors.success, fontSize: 11, fontWeight: "700" },. Interpret it in the enclosing object, props or type definition.
155	`  empty: { alignItems: "center", padding: 24 },`	Sets/declares the named object property or style/type member: empty: { alignItems: "center", padding: 24 },. Interpret it in the enclosing object, props or type definition.
156	`  error: { padding: 16, borderLeftWidth: 4, borderLeftColor: colors.danger },`	Sets/declares the named object property or style/type member: error: { padding: 16, borderLeftWidth: 4, borderLeftColor: colors.danger },. Interpret it in the enclosing object, props or type definition.
157	`  errorTitle: { color: colors.danger, fontWeight: "900" },`	Sets/declares the named object property or style/type member: errorTitle: { color: colors.danger, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
158	`  retry: { color: colors.brand, fontWeight: "900", fontSize: 10, marginTop: 8 },`	Sets/declares the named object property or style/type member: retry: { color: colors.brand, fontWeight: "900", fontSize: 10, marginTop: 8 },. Interpret it in the enclosing object, props or type definition.
159	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/screens/StatusScreens.tsx

Status/auxiliary screen components. Check exports and navigation registrations to determine which are reachable.

72 numbered source lines | SHA-256 0787cc65f3d9f33a8c83df7795cc3a22b4b76c61bac8b2aeff03101d6e6f19d8

Line	Source code	Explanation / reading note
1	`import React, { useEffect, useState } from "react";`	Imports dependencies/types used below: import React, { useEffect, useState } from "react";. Importing a function does not call it.
2	`import { StyleSheet, Text, View } from "react-native";`	Imports dependencies/types used below: import { StyleSheet, Text, View } from "react-native";. Importing a function does not call it.
3	`import { Card, Label } from "../components/ui";`	Imports dependencies/types used below: import { Card, Label } from "../components/ui";. Importing a function does not call it.
4	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
5	`import { flushQueue, pendingCount } from "../storage/syncQueue";`	Imports dependencies/types used below: import { flushQueue, pendingCount } from "../storage/syncQueue";. Importing a function does not call it.
6	`export function VisitsScreen() {`	Declares a callable function/method: export function VisitsScreen() {. Parameters supply its inputs; the following block implements the operation.
7	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
8	`    <View style={s.root}>`	Renders/opens a UI element or component: <View style={s.root}>. Props and child content below determine appearance and interactions.
9	`      <Text style={s.title}>Today's Visits</Text>`	Renders/opens a UI element or component: <Text style={s.title}>Today's Visits</Text>. Props and child content below determine appearance and interactions.
10	`      <Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
11	`        <Label>Route progress</Label>`	Renders/opens a UI element or component: <Label>Route progress</Label>. Props and child content below determine appearance and interactions.
12	`        <Text style={s.big}>1 completed · 3 pending</Text>`	Renders/opens a UI element or component: <Text style={s.big}>1 completed · 3 pending</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
13	`        <Text style={s.muted}>Open Beats to continue the Lakeside Market route.</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>Open Beats to continue the Lakeside Market route.</Text>. Props and child content below determine appearance and interactions.
14	`      </Card>`	Closes the UI element/component opened above.
15	`    </View>`	Closes the UI element/component opened above.
16	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`export function OrdersScreen() {`	Declares a callable function/method: export function OrdersScreen() {. Parameters supply its inputs; the following block implements the operation.
19	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
20	`    <View style={s.root}>`	Renders/opens a UI element or component: <View style={s.root}>. Props and child content below determine appearance and interactions.
21	`      <Text style={s.title}>Orders</Text>`	Renders/opens a UI element or component: <Text style={s.title}>Orders</Text>. Props and child content below determine appearance and interactions.
22	`      <Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
23	`        <Label>Today</Label>`	Renders/opens a UI element or component: <Label>Today</Label>. Props and child content below determine appearance and interactions.
24	`        <Text style={s.big}>Orders appear here after checkout</Text>`	Renders/opens a UI element or component: <Text style={s.big}>Orders appear here after checkout</Text>. Props and child content below determine appearance and interactions.
25	`        <Text style={s.muted}>PDF and Excel sharing is available from the completed visit.</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>PDF and Excel sharing is available from the completed visit.</Text>. Props and child content below determine appearance and interactions.
26	`      </Card>`	Closes the UI element/component opened above.
27	`    </View>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
28	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`export function ProfileScreen() {`	Declares a callable function/method: export function ProfileScreen() {. Parameters supply its inputs; the following block implements the operation.
31	`  const [pending, setPending] = useState(0),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
32	`    [message, setMessage] = useState("Ready");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
33	`  useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.
34	`    pendingCount().then(setPending);`	Continues the surrounding declaration/expression or text: pendingCount().then(setPending);. Read it with the preceding opening statement (useEffect(() => {); it is not a standalone business operation.
35	`  }, []);`	Continues the surrounding declaration/expression or text: }, []);. Read it with the preceding opening statement (pendingCount().then(setPending);); it is not a standalone business operation.
36	`  const sync = async () => {`	Declares/initializes local data used by the surrounding operation: const sync = async () => {. Collection contents and assignments below determine its purpose.
37	`    const r = await flushQueue();`	Waits for this asynchronous operation before continuing: const r = await flushQueue();. The returned result/error must still be handled.
38	`    setPending(r.failed);`	Continues the surrounding declaration/expression or text: setPending(r.failed);. Read it with the preceding opening statement (const r = await flushQueue();); it is not a standalone business operation.
39	`    setMessage(`${r.synced} synced · ${r.failed} failed`);`	Continues the surrounding declaration/expression or text: setMessage(`${r.synced} synced · ${r.failed} failed`);. Read it with the preceding opening statement (setPending(r.failed);); it is not a standalone business operation.
40	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
41	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
42	`    <View style={s.root}>`	Renders/opens a UI element or component: <View style={s.root}>. Props and child content below determine appearance and interactions.
43	`      <Text style={s.title}>Aishwarya</Text>`	Renders/opens a UI element or component: <Text style={s.title}>Aishwarya</Text>. Props and child content below determine appearance and interactions.
44	`      <Text style={s.muted}>Employee</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>Employee</Text>. Props and child content below determine appearance and interactions.
45	`      <Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
46	`        <Label>Offline synchronization</Label>`	Renders/opens a UI element or component: <Label>Offline synchronization</Label>. Props and child content below determine appearance and interactions.
47	`        <Text style={s.big}>{pending} pending</Text>`	Renders/opens a UI element or component: <Text style={s.big}>{pending} pending</Text>. Props and child content below determine appearance and interactions.
48	`        <Text onPress={sync} style={s.link}>`	Renders/opens a UI element or component: <Text onPress={sync} style={s.link}>. Props and child content below determine appearance and interactions.
49	`          Retry synchronization`	Continues the surrounding declaration/expression or text: Retry synchronization. Read it with the preceding opening statement (<Text onPress={sync} style={s.link}>); it is not a standalone business operation.
50	`        </Text>`	Closes the UI element/component opened above.
51	`        <Text style={s.muted}>{message}</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>{message}</Text>. Props and child content below determine appearance and interactions.
52	`      </Card>`	Closes the UI element/component opened above.
53	`    </View>`	Closes the UI element/component opened above.
54	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
55	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
56	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
57	`  root: { flex: 1, backgroundColor: colors.surface, padding: 18 },`	Sets/declares the named object property or style/type member: root: { flex: 1, backgroundColor: colors.surface, padding: 18 },. Interpret it in the enclosing object, props or type definition.
58	`  title: {`	Sets/declares the named object property or style/type member: title: {. Interpret it in the enclosing object, props or type definition.
59	`    fontSize: 26,`	Sets/declares the named object property or style/type member: fontSize: 26,. Interpret it in the enclosing object, props or type definition.
60	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
61	`    color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
62	`    marginVertical: 12,`	Sets/declares the named object property or style/type member: marginVertical: 12,. Interpret it in the enclosing object, props or type definition.
63	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
64	`  big: {`	Sets/declares the named object property or style/type member: big: {. Interpret it in the enclosing object, props or type definition.
65	`    fontSize: 17,`	Sets/declares the named object property or style/type member: fontSize: 17,. Interpret it in the enclosing object, props or type definition.
66	`    fontWeight: "800",`	Sets/declares the named object property or style/type member: fontWeight: "800",. Interpret it in the enclosing object, props or type definition.
67	`    color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
68	`    marginVertical: 8,`	Sets/declares the named object property or style/type member: marginVertical: 8,. Interpret it in the enclosing object, props or type definition.
69	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
70	`  muted: { color: colors.muted },`	Sets/declares the named object property or style/type member: muted: { color: colors.muted },. Interpret it in the enclosing object, props or type definition.
71	`  link: { color: colors.brand, fontWeight: "800", marginVertical: 10 },`	Sets/declares the named object property or style/type member: link: { color: colors.brand, fontWeight: "800", marginVertical: 10 },. Interpret it in the enclosing object, props or type definition.
72	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/screens/StoreGateScreen.tsx

Refreshes outlet details, obtains native GPS (or preview coordinates on web), calls radius validation and opens the visit when allowed. Also records missed/unavailable status.

230 numbered source lines | SHA-256 d63012defa631cea3c43daf30edf25ead279cc6a90a33a6e98a517ec3e51acaf

Line	Source code	Explanation / reading note
1	`import React, { useEffect, useState } from "react";`	Imports dependencies/types used below: import React, { useEffect, useState } from "react";. Importing a function does not call it.
2	`import { Alert, Platform, ScrollView, StyleSheet, Text, View } from "react-native";`	Imports dependencies/types used below: import { Alert, Platform, ScrollView, StyleSheet, Text, View } from "react-native";. Importing a function does not call it.
3	`import * as Location from "expo-location";`	Imports dependencies/types used below: import * as Location from "expo-location";. Importing a function does not call it.
4	`import { NativeStackScreenProps } from "@react-navigation/native-stack";`	Imports dependencies/types used below: import { NativeStackScreenProps } from "@react-navigation/native-stack";. Importing a function does not call it.
5	`import { api, post } from "../api/client";`	Imports dependencies/types used below: import { api, post } from "../api/client";. Importing a function does not call it.
6	`import { Button, Card, Label } from "../components/ui";`	Imports dependencies/types used below: import { Button, Card, Label } from "../components/ui";. Importing a function does not call it.
7	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
8	`import type { RootStack } from "../types";`	Imports dependencies/types used below: import type { RootStack } from "../types";. Importing a function does not call it.
9	`export default function StoreGateScreen({`	Declares a callable function/method: export default function StoreGateScreen({. Parameters supply its inputs; the following block implements the operation.
10	`  route,`	Continues the surrounding declaration/expression or text: route,. Read it with the preceding opening statement (export default function StoreGateScreen({); it is not a standalone business operation.
11	`  navigation,`	Continues the surrounding declaration/expression or text: navigation,. Read it with the preceding opening statement (route,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
12	`}: NativeStackScreenProps<RootStack, "StoreGate">) {`	Continues the surrounding declaration/expression or text: }: NativeStackScreenProps<RootStack, "StoreGate">) {. Read it with the preceding opening statement (navigation,); it is not a standalone business operation.
13	`  const [result, setResult] = useState<any>(),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
14	`    [busy, setBusy] = useState(false),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
15	`    [store, setStore] = useState(route.params.store),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
16	`    [message, setMessage] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
17	`  useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.
18	`    api<any>(`/stores/${route.params.store.id}`)`	Continues the surrounding declaration/expression or text: api<any>(`/stores/${route.params.store.id}`). Read it with the preceding opening statement (useEffect(() => {); it is not a standalone business operation.
19	`      .then((details) => setStore({ ...route.params.store, ...details }))`	Continues the surrounding declaration/expression or text: .then((details) => setStore({ ...route.params.store, ...details })). Read it with the preceding opening statement (api<any>(`/stores/${route.params.store.id}`)); it is not a standalone business operation.
20	`      .catch(() => undefined);`	Continues the surrounding declaration/expression or text: .catch(() => undefined);. Read it with the preceding opening statement (.then((details) => setStore({ ...route.params.store, ...details }))); it is not a standalone business operation.
21	`  }, [route.params.store.id]);`	Continues the surrounding declaration/expression or text: }, [route.params.store.id]);. Read it with the preceding opening statement (.catch(() => undefined);); it is not a standalone business operation.
22	`  const validate = async () => {`	Declares/initializes local data used by the surrounding operation: const validate = async () => {. Collection contents and assignments below determine its purpose.
23	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
24	`      setBusy(true);`	Continues the surrounding declaration/expression or text: setBusy(true);. Read it with the preceding opening statement (try {); it is not a standalone business operation.

Line	Source code	Explanation / reading note
25	`setMessage("");`	Continues the surrounding declaration/expression or text: setMessage("");. Read it with the preceding opening statement (setBusy(true);); it is not a standalone business operation.
26	`let latitude: number;`	Declares/initializes local data used by the surrounding operation: let latitude: number;. Collection contents and assignments below determine its purpose.
27	`let longitude: number;`	Declares/initializes local data used by the surrounding operation: let longitude: number;. Collection contents and assignments below determine its purpose.
28	`if (Platform.OS === "web") {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (Platform.OS === "web") {.
29	`if (store.latitude == null || store.longitude == null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (store.latitude == null || store.longitude == null) {.
30	`throw new Error(`	Stops this execution path with a validation/error exception: throw new Error(. The caller/catch block decides how it is reported.
31	`"This outlet has no Salesforce location. Add its latitude and longitude before starting a visit.",`	Continues the surrounding declaration/expression or text: "This outlet has no Salesforce location. Add its latitude and longitude before starting a visit.",. Read it with the preceding opening statement (throw new Error(); it is not a standalone business operation.
32	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`latitude = Number(store.latitude);`	Assigns the right-hand expression to the named variable/property: latitude = Number(store.latitude);. This is in-memory unless it is later persisted by an explicit call.
35	`longitude = Number(store.longitude);`	Assigns the right-hand expression to the named variable/property: longitude = Number(store.longitude);. This is in-memory unless it is later persisted by an explicit call.
36	`setMessage(`	Continues the surrounding declaration/expression or text: setMessage(. Read it with the preceding opening statement (longitude = Number(store.longitude);); it is not a standalone business operation.
37	`"Local web preview is using the outlet coordinates from Salesforce. The mobile build uses live device GPS.",`	Continues the surrounding declaration/expression or text: "Local web preview is using the outlet coordinates from Salesforce. The mobile build uses live device GPS.",. Read it with the preceding opening statement (setMessage(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
38	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	`      } else {`	Alternative branch taken when the preceding condition is false.
40	`        const p = await Location.requestForegroundPermissionsAsync();`	Waits for this asynchronous operation before continuing: const p = await Location.requestForegroundPermissionsAsync();. The returned result/error must still be handled.
41	`        if (p.status !== "granted")`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (p.status !== "granted").
42	`          throw new Error("GPS permission is required to validate this outlet.");`	Stops this execution path with a validation/error exception: throw new Error("GPS permission is required to validate this outlet.");. The caller/catch block decides how it is reported.
43	`        const loc = await Location.getCurrentPositionAsync({ accuracy: Location.Accuracy.High });`	Waits for this asynchronous operation before continuing: const loc = await Location.getCurrentPositionAsync({ accuracy: Location.Accuracy.High });. The returned result/error must still be handled.
44	`        latitude = loc.coords.latitude;`	Assigns the right-hand expression to the named variable/property: latitude = loc.coords.latitude;. This is in-memory unless it is later persisted by an explicit call.
45	`        longitude = loc.coords.longitude;`	Assigns the right-hand expression to the named variable/property: longitude = loc.coords.longitude;. This is in-memory unless it is later persisted by an explicit call.
46	`      }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`      const location = {`	Declares/initializes local data used by the surrounding operation: const location = {. Collection contents and assignments below determine its purpose.
48	`        latitude,`	Continues the surrounding declaration/expression or text: latitude,. Read it with the preceding opening statement (const location = {); it is not a standalone business operation.
49	`        longitude,`	Continues the surrounding declaration/expression or text: longitude,. Read it with the preceding opening statement (latitude,); it is not a standalone business operation.
50	`        timestamp: new Date().toISOString(),`	Sets/declares the named object property or style/type member: timestamp: new Date().toISOString(),. Interpret it in the enclosing object, props or type definition.
51	`        requestId: `gps-${Date.now()}`,`	Sets/declares the named object property or style/type member: requestId: `gps-${Date.now()}`,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
52	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
53	`const r = await post<any>("/store/validate-location", {`	Waits for this asynchronous operation before continuing: const r = await post<any>("/store/validate-location", {. The returned result/error must still be handled.
54	`storeId: route.params.store.id,`	Sets/declares the named object property or style/type member: storeId: route.params.store.id,. Interpret it in the enclosing object, props or type definition.
55	`location,`	Continues the surrounding declaration/expression or text: location,. Read it with the preceding opening statement (storeId: route.params.store.id,); it is not a standalone business operation.
56	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`setResult({ ...r, location });`	Continues the surrounding declaration/expression or text: setResult({ ...r, location });. Read it with the preceding opening statement (});); it is not a standalone business operation.
58	`if (r.allowed) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (r.allowed) {.
59	`navigation.replace("Visit", {`	Calls the named method: navigation.replace("Visit", {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
60	`store,`	Continues the surrounding declaration/expression or text: store,. Read it with the preceding opening statement (navigation.replace("Visit", {); it is not a standalone business operation.
61	`location,`	Continues the surrounding declaration/expression or text: location,. Read it with the preceding opening statement (store,); it is not a standalone business operation.
62	`distance: r.distance,`	Sets/declares the named object property or style/type member: distance: r.distance,. Interpret it in the enclosing object, props or type definition.
63	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
64	`} else {`	Alternative branch taken when the preceding condition is false.
65	`setMessage(`	Continues the surrounding declaration/expression or text: setMessage(. Read it with the preceding opening statement (} else {); it is not a standalone business operation.

Line	Source code	Explanation / reading note
66	`"You are outside the allowed 100 metre radius. Move closer to the outlet and try again.",`	Continues the surrounding declaration/expression or text: "You are outside the allowed 100 metre radius. Move closer to the outlet and try again.",. Read it with the preceding opening statement (setMessage(); it is not a standalone business operation.
67	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
68	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
69	`} catch (e: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
70	`setMessage(e.message || "Location validation failed.");`	Continues the surrounding declaration/expression or text: setMessage(e.message || "Location validation failed.");. Read it with the preceding opening statement (} catch (e: any) {); it is not a standalone business operation.
71	`Alert.alert("Location unavailable", e.message);`	Calls the named method: Alert.alert("Location unavailable", e.message);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
72	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
73	`setBusy(false);`	Continues the surrounding declaration/expression or text: setBusy(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
74	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
75	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
76	`const saveMissedStatus = async (status: "Not Visited" | "Not Available") => {`	Declares/initializes local data used by the surrounding operation: const saveMissedStatus = async (status: "Not Visited" | "Not Available") => {. Collection contents and assignments below determine its purpose.
77	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
78	`setBusy(true);`	Continues the surrounding declaration/expression or text: setBusy(true);. Read it with the preceding opening statement (try {); it is not a standalone business operation.

Line	Source code	Explanation / reading note
79	`      await post(`/outlets/${store.id}/visit-status`, { status });`	Waits for this asynchronous operation before continuing: await post(`/outlets/${store.id}/visit-status`, { status });. The returned result/error must still be handled.
80	`      setMessage(`${status} saved in Salesforce`);`	Continues the surrounding declaration/expression or text: setMessage(`${status} saved in Salesforce`);. Read it with the preceding opening statement (await post(`/outlets/${store.id}/visit-status`, { status });); it is not a standalone business operation.
81	`      Alert.alert("Saved", `${status} was recorded for ${store.name}.`);`	Calls the named method: Alert.alert("Saved", `${status} was recorded for ${store.name}.`);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
82	`    } catch (error: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
83	`      Alert.alert("Unable to save", error.message);`	Calls the named method: Alert.alert("Unable to save", error.message);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
84	`    } finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
85	`      setBusy(false);`	Continues the surrounding declaration/expression or text: setBusy(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
86	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
87	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
88	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
89	`    <ScrollView style={s.root} contentContainerStyle={s.content}>`	Renders/opens a UI element or component: <ScrollView style={s.root} contentContainerStyle={s.content}>. Props and child content below determine appearance and interactions.
90	`      <Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
91	`        <View style={s.top}>`	Renders/opens a UI element or component: <View style={s.top}>. Props and child content below determine appearance and interactions.
92	`          <Label>ACTIVE OUTLET</Label>`	Renders/opens a UI element or component: <Label>ACTIVE OUTLET</Label>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
93	`<Text style={s.status}>ACTIVE</Text>`	Renders/opens a UI element or component: <Text style={s.status}>ACTIVE</Text>. Props and child content below determine appearance and interactions.
94	`</View>`	Closes the UI element/component opened above.
95	`<Text style={s.name}>{store.name}</Text>`	Renders/opens a UI element or component: <Text style={s.name}>{store.name}</Text>. Props and child content below determine appearance and interactions.
96	`<Text style={s.sub}>`	Renders/opens a UI element or component: <Text style={s.sub}>. Props and child content below determine appearance and interactions.
97	`{store.code} · {store.contact || store.phone || "Phone unavailable"}`	Continues the surrounding declaration/expression or text: {store.code} · {store.contact || store.phone || "Phone unavailable"}. Read it with the preceding opening statement (<Text style={s.sub}>); it is not a standalone business operation.
98	`</Text>`	Closes the UI element/component opened above.
99	`<Text style={s.sub}>{store.address || "Address unavailable"}</Text>`	Renders/opens a UI element or component: <Text style={s.sub}>{store.address || "Address unavailable"}</Text>. Props and child content below determine appearance and interactions.
100	`<Text style={s.sub}>`	Renders/opens a UI element or component: <Text style={s.sub}>. Props and child content below determine appearance and interactions.
101	`Owner: {store.owner || "Not specified"} · {store.email || "Email unavailable"}`	Sets/declares the named object property or style/type member: Owner: {store.owner || "Not specified"} · {store.email || "Email unavailable"}. Interpret it in the enclosing object, props or type definition.
102	`</Text>`	Closes the UI element/component opened above.
103	`<View style={s.line} />`	Renders/opens a UI element or component: <View style={s.line} />. Props and child content below determine appearance and interactions.
104	`<View style={s.summary}>`	Renders/opens a UI element or component: <View style={s.summary}>. Props and child content below determine appearance and interactions.
105	`<View>`	Renders/opens a UI element or component: <View>. Props and child content below determine appearance and interactions.
106	`<Label>OUTSTANDING</Label>`	Renders/opens a UI element or component: <Label>OUTSTANDING</Label>. Props and child content below determine appearance and interactions.
107	`<Text style={s.value}>`	Renders/opens a UI element or component: <Text style={s.value}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
108	`₹{Number(store.outstandingAmount || 0).toLocaleString("en-IN")}`	Continues the surrounding declaration/expression or text: ₹{Number(store.outstandingAmount || 0).toLocaleString("en-IN")}. Read it with the preceding opening statement (<Text style={s.value}>); it is not a standalone business operation.
109	`</Text>`	Closes the UI element/component opened above.
110	`</View>`	Closes the UI element/component opened above.
111	`<View>`	Renders/opens a UI element or component: <View>. Props and child content below determine appearance and interactions.
112	`<Label>VISITS</Label>`	Renders/opens a UI element or component: <Label>VISITS</Label>. Props and child content below determine appearance and interactions.
113	`<Text style={s.value}>{store.visitCount || 0}</Text>`	Renders/opens a UI element or component: <Text style={s.value}>{store.visitCount || 0}</Text>. Props and child content below determine appearance and interactions.
114	`</View>`	Closes the UI element/component opened above.
115	`<View>`	Renders/opens a UI element or component: <View>. Props and child content below determine appearance and interactions.
116	`<Label>ORDERS</Label>`	Renders/opens a UI element or component: <Label>ORDERS</Label>. Props and child content below determine appearance and interactions.
117	`<Text style={s.value}>{store.orderCount || 0}</Text>`	Renders/opens a UI element or component: <Text style={s.value}>{store.orderCount || 0}</Text>. Props and child content below determine appearance and interactions.
118	`</View>`	Closes the UI element/component opened above.
119	`</View>`	Closes the UI element/component opened above.
120	`<Text style={s.sub}>`	Renders/opens a UI element or component: <Text style={s.sub}>. Props and child content below determine appearance and interactions.
121	`Last visit:{" "}`	Continues the surrounding declaration/expression or text: Last visit:{" "}. Read it with the preceding opening statement (<Text style={s.sub}>); it is not a standalone business operation.
122	`{store.lastVisit ? new Date(store.lastVisit).toLocaleString("en-IN") : "Not visited"}`	Continues the surrounding declaration/expression or text: {store.lastVisit ? new Date(store.lastVisit).toLocaleString("en-IN") : "Not visited"}. Read it with the preceding opening statement (Last visit:{" "}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
123	`</Text>`	Closes the UI element/component opened above.
124	`<Text style={s.sub}>`	Renders/opens a UI element or component: <Text style={s.sub}>. Props and child content below determine appearance and interactions.
125	`Last order: {store.lastOrderDate || "No orders"} · ₹`	Continues the surrounding declaration/expression or text: Last order: {store.lastOrderDate || "No orders"} · ₹. Read it with the preceding opening statement (<Text style={s.sub}>); it is not a standalone business operation.
126	`{Number(store.lastOrderAmount || 0).toLocaleString("en-IN")}`	Continues the surrounding declaration/expression or text: {Number(store.lastOrderAmount || 0).toLocaleString("en-IN")}. Read it with the preceding opening statement (Last order: {store.lastOrderDate || "No orders"} · ₹); it is not a standalone business operation.
127	`</Text>`	Closes the UI element/component opened above.
128	`</Card>`	Closes the UI element/component opened above.
129	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
130	`<Label>OUTLET VISIT STATUS</Label>`	Renders/opens a UI element or component: <Label>OUTLET VISIT STATUS</Label>. Props and child content below determine appearance and interactions.
131	`<View style={s.statusButtons}>`	Renders/opens a UI element or component: <View style={s.statusButtons}>. Props and child content below determine appearance and interactions.
132	`<Button title="VISITED" onPress={validate} disabled={busy} />`	Renders/opens a UI element or component: <Button title="VISITED" onPress={validate} disabled={busy} />. Props and child content below determine appearance and interactions.
133	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
134	`title="NOT VISITED"`	Assigns the right-hand expression to the named variable/property: title="NOT VISITED". This is in-memory unless it is later persisted by an explicit call.
135	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.
136	`onPress={() => saveMissedStatus("Not Visited")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
137	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.

Line	Source code	Explanation / reading note
138	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (disabled={busy}); it is not a standalone business operation.
139	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
140	`title="NOT AVAILABLE"`	Assigns the right-hand expression to the named variable/property: title="NOT AVAILABLE". This is in-memory unless it is later persisted by an explicit call.
141	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.
142	`onPress={() => saveMissedStatus("Not Available")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
143	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
144	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (disabled={busy}); it is not a standalone business operation.
145	`</View>`	Closes the UI element/component opened above.
146	`{!!message && <Text style={s.saved}>{message}</Text>}`	Assigns the right-hand expression to the named variable/property: {!!message && <Text style={s.saved}>{message}</Text>}. This is in-memory unless it is later persisted by an explicit call.
147	`</Card>`	Closes the UI element/component opened above.
148	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
149	`<Label>100 METRE LOCATION VALIDATION</Label>`	Renders/opens a UI element or component: <Label>100 METRE LOCATION VALIDATION</Label>. Props and child content below determine appearance and interactions.
150	`<Text style={s.sub}>`	Renders/opens a UI element or component: <Text style={s.sub}>. Props and child content below determine appearance and interactions.
151	`Capture your current GPS position before entering the outlet. This protects the accuracy`	Continues the surrounding declaration/expression or text: Capture your current GPS position before entering the outlet. This protects the accuracy. Read it with the preceding opening statement (<Text style={s.sub}>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
152	`of every visit.`	Continues the surrounding declaration/expression or text: of every visit.. Read it with the preceding opening statement (Capture your current GPS position before entering the outlet. This protects the accuracy); it is not a standalone business operation.
153	`</Text>`	Closes the UI element/component opened above.
154	`</Card>`	Closes the UI element/component opened above.
155	`{result && !result.allowed && (`	Continues the surrounding declaration/expression or text: {result && !result.allowed && (. Read it with the preceding opening statement (</Card>); it is not a standalone business operation.
156	`<Card`	Renders/opens a UI element or component: <Card. Props and child content below determine appearance and interactions.
157	`style={{`	Assigns the right-hand expression to the named variable/property: style={{. This is in-memory unless it is later persisted by an explicit call.
158	`borderLeftWidth: 5,`	Sets/declares the named object property or style/type member: borderLeftWidth: 5,. Interpret it in the enclosing object, props or type definition.
159	`borderLeftColor: result.allowed ? colors.success : colors.danger,`	Sets/declares the named object property or style/type member: borderLeftColor: result.allowed ? colors.success : colors.danger,. Interpret it in the enclosing object, props or type definition.
160	`}}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
161	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (}}); it is not a standalone business operation.
162	`<Label>GPS validation</Label>`	Renders/opens a UI element or component: <Label>GPS validation</Label>. Props and child content below determine appearance and interactions.
163	`<Text style={s.distance}>{result.distance} metres</Text>`	Renders/opens a UI element or component: <Text style={s.distance}>{result.distance} metres</Text>. Props and child content below determine appearance and interactions.
164	`<Text style={s.sub}>`	Renders/opens a UI element or component: <Text style={s.sub}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
165	`{result.allowed`	Continues the surrounding declaration/expression or text: {result.allowed. Read it with the preceding opening statement (<Text style={s.sub}>); it is not a standalone business operation.
166	`? "You are within the permitted outlet radius."`	Continues the surrounding declaration/expression or text: ? "You are within the permitted outlet radius.". Read it with the preceding opening statement ({result.allowed); it is not a standalone business operation.
167	`: "You are outside the allowed 100 metre outlet radius. Move closer and try again."}`	Continues the surrounding declaration/expression or text: : "You are outside the allowed 100 metre outlet radius. Move closer and try again."}. Read it with the preceding opening statement (? "You are within the permitted outlet radius."); it is not a standalone business operation.
168	`</Text>`	Closes the UI element/component opened above.
169	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
170	`<Button title="TRY AGAIN" onPress={validate} />`	Renders/opens a UI element or component: <Button title="TRY AGAIN" onPress={validate} />. Props and child content below determine appearance and interactions.
171	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
172	`title="MOVE TO NEXT OUTLET"`	Assigns the right-hand expression to the named variable/property: title="MOVE TO NEXT OUTLET". This is in-memory unless it is later persisted by an explicit call.
173	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.
174	`onPress={() =>`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
175	`Alert.alert(`	Calls the named method: Alert.alert(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
176	`"Reason required",`	Continues the surrounding declaration/expression or text: "Reason required",. Read it with the preceding opening statement (Alert.alert(); it is not a standalone business operation.
Line	**Source code**	**Explanation / reading note**
177	`"Choose Store closed, Owner unavailable, Wrong location, GPS issue, or Other from the missed-visit form.",`	Continues the surrounding declaration/expression or text: "Choose Store closed, Owner unavailable, Wrong location, GPS issue, or Other from the missed-visit form.",. Read it with

Line	Source code	Explanation / reading note
		the preceding opening statement ("Reason required",); it is not a standalone business operation.
178	)	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
179	}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
180	/>	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}); it is not a standalone business operation.
181	</>	Closes the UI element/component opened above.
182	</Card>	Closes the UI element/component opened above.
183	)}{" "}	Continues the surrounding declaration/expression or text:)}{" "}. Read it with the preceding opening statement (</Card>); it is not a standalone business operation.
184	{!result && (	Continues the surrounding declaration/expression or text: {!result && (. Read it with the preceding opening statement ( )}{" "}); it is not a standalone business operation.
185	<Text style={s.hint}>	Renders/opens a UI element or component: <Text style={s.hint}>. Props and child content below determine appearance and interactions.
186	Choose Visited to validate your location and open product selection.	Continues the surrounding declaration/expression or text: Choose Visited to validate your location and open product selection.. Read it with the preceding opening statement (<Text style={s.hint}>); it is not a standalone business operation.
187	</Text>	Closes the UI element/component opened above.
188	)}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
189	</ScrollView>	Closes the UI element/component opened above.
190	);	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
191	}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
192	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
193	`  root: {`	Sets/declares the named object property or style/type member: root: {. Interpret it in the enclosing object, props or type definition.
194	`    flex: 1,`	Sets/declares the named object property or style/type member: flex: 1,. Interpret it in the enclosing object, props or type definition.
195	`    backgroundColor: colors.surface,`	Sets/declares the named object property or style/type member: backgroundColor: colors.surface,. Interpret it in the enclosing object, props or type definition.
196	`    width: "100%",`	Sets/declares the named object property or style/type member: width: "100%",. Interpret it in the enclosing object, props or type definition.
197	`    maxWidth: 480,`	Sets/declares the named object property or style/type member: maxWidth: 480,. Interpret it in the enclosing object, props or type definition.
198	`    alignSelf: "center",`	Sets/declares the named object property or style/type member: alignSelf: "center",. Interpret it in the enclosing object, props or type definition.
199	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
200	`  content: { padding: 16, paddingTop: 24 },`	Sets/declares the named object property or style/type member: content: { padding: 16, paddingTop: 24 },. Interpret it in the enclosing object, props or type definition.
201	`  top: { flexDirection: "row", justifyContent: "space-between", alignItems: "center" },`	Sets/declares the named object property or style/type member: top: { flexDirection: "row", justifyContent: "space-between", alignItems: "center" },. Interpret it in the enclosing object, props or type definition.
202	`  status: {`	Sets/declares the named object property or style/type member: status: {. Interpret it in the enclosing object, props or type definition.
203	`    fontSize: 10,`	Sets/declares the named object property or style/type member: fontSize: 10,. Interpret it in the enclosing object, props or type definition.
204	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
205	`    color: colors.success,`	Sets/declares the named object property or style/type member: color: colors.success,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
206	`backgroundColor: "#E8F7EC",`	Sets/declares the named object property or style/type member: backgroundColor: "#E8F7EC",. Interpret it in the enclosing object, props or type definition.
207	`paddingHorizontal: 10,`	Sets/declares the named object property or style/type member: paddingHorizontal: 10,. Interpret it in the enclosing object, props or type definition.
208	`paddingVertical: 5,`	Sets/declares the named object property or style/type member: paddingVertical: 5,. Interpret it in the enclosing object, props or type definition.
209	`borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
210	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
211	`summary: { flexDirection: "row", justifyContent: "space-between" },`	Sets/declares the named object property or style/type member: summary: { flexDirection: "row", justifyContent: "space-between" },. Interpret it in the enclosing object, props or type definition.
212	`value: { color: colors.ink, fontSize: 12, fontWeight: "900", marginTop: 5 },`	Sets/declares the named object property or style/type member: value: { color: colors.ink, fontSize: 12, fontWeight: "900", marginTop: 5 },. Interpret it in the enclosing object, props or type definition.
213	`name: {`	Sets/declares the named object property or style/type member: name: {. Interpret it in the enclosing object, props or type definition.
214	`fontSize: 24,`	Sets/declares the named object property or style/type member: fontSize: 24,. Interpret it in the enclosing object, props or type definition.
215	`fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
216	`color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
217	`marginVertical: 8,`	Sets/declares the named object property or style/type member: marginVertical: 8,. Interpret it in the enclosing object, props or type definition.
218	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
219	`  sub: { color: colors.muted, marginTop: 5 },`	Sets/declares the named object property or style/type member: sub: { color: colors.muted, marginTop: 5 },. Interpret it in the enclosing object, props or type definition.
220	`  line: { height: 1, backgroundColor: colors.border, marginVertical: 14 },`	Sets/declares the named object property or style/type member: line: { height: 1, backgroundColor: colors.border, marginVertical: 14 },. Interpret it in the enclosing object, props or type definition.
221	`  distance: {`	Sets/declares the named object property or style/type member: distance: {. Interpret it in the enclosing object, props or type definition.
222	`    fontSize: 34,`	Sets/declares the named object property or style/type member: fontSize: 34,. Interpret it in the enclosing object, props or type definition.
223	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
224	`    color: colors.brand,`	Sets/declares the named object property or style/type member: color: colors.brand,. Interpret it in the enclosing object, props or type definition.
225	`    marginVertical: 8,`	Sets/declares the named object property or style/type member: marginVertical: 8,. Interpret it in the enclosing object, props or type definition.
226	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
227	`  statusButtons: { marginTop: 10 },`	Sets/declares the named object property or style/type member: statusButtons: { marginTop: 10 },. Interpret it in the enclosing object, props or type definition.
228	`  saved: { color: colors.success, fontWeight: "800", marginTop: 8 },`	Sets/declares the named object property or style/type member: saved: { color: colors.success, fontWeight: "800", marginTop: 8 },. Interpret it in the enclosing object, props or type definition.
229	`  hint: { textAlign: "center", color: colors.muted, marginVertical: 10 },`	Sets/declares the named object property or style/type member: hint: { textAlign: "center", color: colors.muted, marginVertical: 10 },. Interpret it in the enclosing object, props or type definition.
230	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/screens/StoresScreen.tsx

Shows outlets for the selected beat and passes the selected outlet into the location gate.

122 numbered source lines | SHA-256 952374ccdc5dc7465455be64f075c9d48998729c17909e6e94631236b3a587e2

Line	Source code	Explanation / reading note
1	`import React, { useEffect, useState } from "react";`	Imports dependencies/types used below: import React, { useEffect, useState } from "react";. Importing a function does not call it.
2	`import { Alert, FlatList, Pressable, StyleSheet, Text, TextInput, View } from "react-native";`	Imports dependencies/types used below: import { Alert, FlatList, Pressable, StyleSheet, Text, TextInput, View } from "react-native";. Importing a function does not call it.
3	`import { NativeStackScreenProps } from "@react-navigation/native-stack";`	Imports dependencies/types used below: import { NativeStackScreenProps } from "@react-navigation/native-stack";. Importing a function does not call it.
4	`import { api } from "../api/client";`	Imports dependencies/types used below: import { api } from "../api/client";. Importing a function does not call it.
5	`import { Button, Card, Label, Money } from "../components/ui";`	Imports dependencies/types used below: import { Button, Card, Label, Money } from "../components/ui";. Importing a function does not call it.
6	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
7	`import type { RootStack, Store } from "../types";`	Imports dependencies/types used below: import type { RootStack, Store } from "../types";. Importing a function does not call it.
8	`export default function StoresScreen({`	Declares a callable function/method: export default function StoresScreen({. Parameters supply its inputs; the following block implements the operation.
9	`  route,`	Continues the surrounding declaration/expression or text: route,. Read it with the preceding opening statement (export default function StoresScreen({); it is not a standalone business operation.
10	`  navigation,`	Continues the surrounding declaration/expression or text: navigation,. Read it with the preceding opening statement (route,); it is not a standalone business operation.
11	`}: NativeStackScreenProps<RootStack, "Stores">) {`	Continues the surrounding declaration/expression or text: }: NativeStackScreenProps<RootStack, "Stores">) {. Read it with the preceding opening statement (navigation,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
12	`  const [stores, setStores] = useState<Store[]>([]),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
13	`    [filter, setFilter] = useState("All"),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
14	`    [search, setSearch] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
15	`  useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.
16	`    api<Store[]>(`/beats/${route.params.beat.id}/stores`)`	Continues the surrounding declaration/expression or text: api<Store[]>(`/beats/${route.params.beat.id}/stores`). Read it with the preceding opening statement (useEffect(() => {); it is not a standalone business operation.
17	`      .then(setStores)`	Continues the surrounding declaration/expression or text: .then(setStores). Read it with the preceding opening statement (api<Store[]>(`/beats/${route.params.beat.id}/stores`)); it is not a standalone business operation.
18	`      .catch((e) => Alert.alert("Unable to load outlets", e.message));`	Calls the named method: .catch((e) => Alert.alert("Unable to load outlets", e.message));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
19	`  }, []);`	Continues the surrounding declaration/expression or text: }, []);. Read it with the preceding opening statement (.catch((e) => Alert.alert("Unable to load outlets", e.message));); it is not a standalone business operation.
20	`  const visible = stores.filter(`	Declares/initializes local data used by the surrounding operation: const visible = stores.filter(. Collection contents and assignments below determine its purpose.
21	`    (x) =>`	Continues the surrounding declaration/expression or text: (x) =>. Read it with the preceding opening statement (const visible = stores.filter(); it is not a standalone business operation.
22	`      (filter === "All" || x.status === filter) &&`	Continues the surrounding declaration/expression or text: (filter === "All" || x.status === filter) &&. Read it with the preceding opening statement ((x) =>); it is not a standalone business operation.
23	`      x.name.toLowerCase().includes(search.toLowerCase()),`	Calls the named method: x.name.toLowerCase().includes(search.toLowerCase()),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
24	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
25	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
26	`    <View style={s.root}>`	Renders/opens a UI element or component: <View style={s.root}>. Props and child content below determine appearance and interactions.
27	`      <Label>{route.params.beat.name}</Label>`	Renders/opens a UI element or component: <Label>{route.params.beat.name}</Label>. Props and child content below determine appearance and interactions.
28	`      <Text style={s.heading}>Choose an outlet</Text>`	Renders/opens a UI element or component: <Text style={s.heading}>Choose an outlet</Text>. Props and child content below determine appearance and interactions.
29	`      <TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
30	`        style={s.search}`	Assigns the right-hand expression to the named variable/property: style={s.search}. This is in-memory unless it is later persisted by an explicit call.
31	`        placeholder="Search outlet"`	Assigns the right-hand expression to the named variable/property: placeholder="Search outlet". This is in-memory unless it is later persisted by an explicit call.
32	`        value={search}`	Assigns the right-hand expression to the named variable/property: value={search}. This is in-memory unless it is later persisted by an explicit call.
33	`        onChangeText={setSearch}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
34	`      />`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={setSearch}); it is not a standalone business operation.
35	`      <View style={s.filters}>`	Renders/opens a UI element or component: <View style={s.filters}>. Props and child content below determine appearance and interactions.
36	`        {["All", "Pending", "Completed", "Not Visited"].map((x) => (`	Transforms/selects/aggregates collection values with the callback shown here: {["All", "Pending", "Completed", "Not Visited"].map((x) => (. Read the callback body and result assignment together.
37	`          <Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
38	`            key={x}`	Assigns the right-hand expression to the named variable/property: key={x}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
39	`onPress={() => setFilter(x)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
40	`style={[s.chip, filter === x && s.active]}`	Assigns the right-hand expression to the named variable/property: style={[s.chip, filter === x && s.active]}. This is in-memory unless it is later persisted by an explicit call.
41	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (style={[s.chip, filter === x && s.active]}); it is not a standalone business operation.
42	`<Text style={filter === x && { color: "white" }}>{x}</Text>`	Renders/opens a UI element or component: <Text style={filter === x && { color: "white" }}>{x}</Text>. Props and child content below determine appearance and interactions.
43	`</Pressable>`	Closes the UI element/component opened above.
44	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
45	`</View>`	Closes the UI element/component opened above.
46	`<FlatList`	Renders/opens a UI element or component: <FlatList. Props and child content below determine appearance and interactions.
47	`data={visible}`	Assigns the right-hand expression to the named variable/property: data={visible}. This is in-memory unless it is later persisted by an explicit call.
48	`keyExtractor={(x) => x.id}`	Assigns the right-hand expression to the named variable/property: keyExtractor={(x) => x.id}. This is in-memory unless it is later persisted by an explicit call.
49	`renderItem={({ item }) => (`	Assigns the right-hand expression to the named variable/property: renderItem={({ item }) => (. This is in-memory unless it is later persisted by an explicit call.
50	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
51	`<View style={s.between}>`	Renders/opens a UI element or component: <View style={s.between}>. Props and child content below determine appearance and interactions.
52	`<Text style={s.name}>{item.name}</Text>`	Renders/opens a UI element or component: <Text style={s.name}>{item.name}</Text>. Props and child content below determine appearance and interactions.
53	`<Text style={s.badge}>{item.status}</Text>`	Renders/opens a UI element or component: <Text style={s.badge}>{item.status}</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
54	`</View>`	Closes the UI element/component opened above.
55	`<Text style={s.sub}>`	Renders/opens a UI element or component: <Text style={s.sub}>. Props and child content below determine appearance and interactions.
56	`{item.code} · {item.contact}`	Continues the surrounding declaration/expression or text: {item.code} · {item.contact}. Read it with the preceding opening statement (<Text style={s.sub}>); it is not a standalone business operation.
57	`</Text>`	Closes the UI element/component opened above.
58	`<Text style={s.sub}>{item.address}</Text>`	Renders/opens a UI element or component: <Text style={s.sub}>{item.address}</Text>. Props and child content below determine appearance and interactions.
59	`<View style={s.history}>`	Renders/opens a UI element or component: <View style={s.history}>. Props and child content below determine appearance and interactions.
60	`<View>`	Renders/opens a UI element or component: <View>. Props and child content below determine appearance and interactions.
61	`<Label>Last Visit</Label>`	Renders/opens a UI element or component: <Label>Last Visit</Label>. Props and child content below determine appearance and interactions.
62	`<Text>{item.lastVisit}</Text>`	Renders/opens a UI element or component: <Text>{item.lastVisit}</Text>. Props and child content below determine appearance and interactions.
63	`</View>`	Closes the UI element/component opened above.
64	`<View>`	Renders/opens a UI element or component: <View>. Props and child content below determine appearance and interactions.
65	`<Label>Last Order</Label>`	Renders/opens a UI element or component: <Label>Last Order</Label>. Props and child content below determine appearance and interactions.
66	`<Money value={item.lastOrder} />`	Renders/opens a UI element or component: <Money value={item.lastOrder} />. Props and child content below determine appearance and interactions.
67	`</View>`	Closes the UI element/component opened above.
68	`</View>`	Closes the UI element/component opened above.
69	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
70	`title="VISIT OUTLET"`	Assigns the right-hand expression to the named variable/property: title="VISIT OUTLET". This is in-memory unless it is later persisted by an explicit call.
71	`onPress={() => navigation.navigate("StoreGate", { store: item })}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
72	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => navigation.navigate("StoreGate", { store: item })}); it is not a standalone business operation.
73	`</Card>`	Closes the UI element/component opened above.
74	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
75	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
76	`</View>`	Closes the UI element/component opened above.
77	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
78	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
79	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
80	`root: { flex: 1, backgroundColor: colors.surface, padding: 16 },`	Sets/declares the named object property or style/type member: root: { flex: 1, backgroundColor: colors.surface, padding: 16 },. Interpret it in the enclosing object, props or type definition.
81	`heading: {`	Sets/declares the named object property or style/type member: heading: {. Interpret it in the enclosing object, props or type definition.
82	`fontSize: 25,`	Sets/declares the named object property or style/type member: fontSize: 25,. Interpret it in the enclosing object, props or type definition.
83	`fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
84	`color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
85	`marginVertical: 7,`	Sets/declares the named object property or style/type member: marginVertical: 7,. Interpret it in the enclosing object, props or type definition.
86	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
87	`search: {`	Sets/declares the named object property or style/type member: search: {. Interpret it in the enclosing object, props or type definition.
88	`backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
89	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
90	`borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
91	`borderRadius: 14,`	Sets/declares the named object property or style/type member: borderRadius: 14,. Interpret it in the enclosing object, props or type definition.
92	`padding: 13,`	Sets/declares the named object property or style/type member: padding: 13,. Interpret it in the enclosing object, props or type definition.
93	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
94	`filters: {`	Sets/declares the named object property or style/type member: filters: {. Interpret it in the enclosing object, props or type definition.
95	`flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
96	`gap: 7,`	Sets/declares the named object property or style/type member: gap: 7,. Interpret it in the enclosing object, props or type definition.
97	`marginVertical: 12,`	Sets/declares the named object property or style/type member: marginVertical: 12,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
98	`flexWrap: "wrap",`	Sets/declares the named object property or style/type member: flexWrap: "wrap",. Interpret it in the enclosing object, props or type definition.
99	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
100	`chip: {`	Sets/declares the named object property or style/type member: chip: {. Interpret it in the enclosing object, props or type definition.
101	`paddingHorizontal: 12,`	Sets/declares the named object property or style/type member: paddingHorizontal: 12,. Interpret it in the enclosing object, props or type definition.
102	`paddingVertical: 8,`	Sets/declares the named object property or style/type member: paddingVertical: 8,. Interpret it in the enclosing object, props or type definition.
103	`borderRadius: 20,`	Sets/declares the named object property or style/type member: borderRadius: 20,. Interpret it in the enclosing object, props or type definition.
104	`backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
105	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
106	`active: { backgroundColor: colors.brand },`	Sets/declares the named object property or style/type member: active: { backgroundColor: colors.brand },. Interpret it in the enclosing object, props or type definition.
107	`between: { flexDirection: "row", justifyContent: "space-between" },`	Sets/declares the named object property or style/type member: between: { flexDirection: "row", justifyContent: "space-between" },. Interpret it in the enclosing object, props or type definition.
108	`name: { fontSize: 18, fontWeight: "900", color: colors.ink },`	Sets/declares the named object property or style/type member: name: { fontSize: 18, fontWeight: "900", color: colors.ink },. Interpret it in the enclosing object, props or type definition.
109	`badge: {`	Sets/declares the named object property or style/type member: badge: {. Interpret it in the enclosing object, props or type definition.
110	`fontSize: 11,`	Sets/declares the named object property or style/type member: fontSize: 11,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
111	`    color: colors.brand,`	Sets/declares the named object property or style/type member: color: colors.brand,. Interpret it in the enclosing object, props or type definition.
112	`    backgroundColor: "#EAF5FE",`	Sets/declares the named object property or style/type member: backgroundColor: "#EAF5FE",. Interpret it in the enclosing object, props or type definition.
113	`    padding: 6,`	Sets/declares the named object property or style/type member: padding: 6,. Interpret it in the enclosing object, props or type definition.
114	`    borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
115	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
116	`  sub: { color: colors.muted, marginTop: 4 },`	Sets/declares the named object property or style/type member: sub: { color: colors.muted, marginTop: 4 },. Interpret it in the enclosing object, props or type definition.
117	`  history: {`	Sets/declares the named object property or style/type member: history: {. Interpret it in the enclosing object, props or type definition.
118	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
119	`    justifyContent: "space-between",`	Sets/declares the named object property or style/type member: justifyContent: "space-between",. Interpret it in the enclosing object, props or type definition.
120	`    marginVertical: 14,`	Sets/declares the named object property or style/type member: marginVertical: 14,. Interpret it in the enclosing object, props or type definition.
121	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
122	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/screens/SurveyScreen.tsx

Loads survey configuration and captures employee responses for submission.

301 numbered source lines | SHA-256 a71be28d74e99d30b24358c302f7d500f024335cfecca739a0b094809b8d8818

Line	Source code	Explanation / reading note
1	`import React, { useEffect, useState } from "react";`	Imports dependencies/types used below: import React, { useEffect, useState } from "react";. Importing a function does not call it.
2	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.
3	`  ActivityIndicator,`	Continues the surrounding declaration/expression or text: ActivityIndicator,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
4	`  Alert,`	Continues the surrounding declaration/expression or text: Alert,. Read it with the preceding opening statement (ActivityIndicator,); it is not a standalone business operation.
5	`  Pressable,`	Continues the surrounding declaration/expression or text: Pressable,. Read it with the preceding opening statement (Alert,); it is not a standalone business operation.
6	`  ScrollView,`	Continues the surrounding declaration/expression or text: ScrollView,. Read it with the preceding opening statement (Pressable,); it is not a standalone business operation.
7	`  StyleSheet,`	Continues the surrounding declaration/expression or text: StyleSheet,. Read it with the preceding opening statement (ScrollView,); it is not a standalone business operation.
8	`  Text,`	Continues the surrounding declaration/expression or text: Text,. Read it with the preceding opening statement (StyleSheet,); it is not a standalone business operation.
9	`  TextInput,`	Continues the surrounding declaration/expression or text: TextInput,. Read it with the preceding opening statement (Text,); it is not a standalone business operation.
10	`  View,`	Continues the surrounding declaration/expression or text: View,. Read it with the preceding opening statement (TextInput,); it is not a standalone business operation.
11	`} from "react-native";`	Completes the dependency import and identifies the module supplying those names.
12	`import { NativeStackScreenProps } from "@react-navigation/native-stack";`	Imports dependencies/types used below: import { NativeStackScreenProps } from "@react-navigation/native-stack";. Importing a function does not call it.
13	`import { api, post } from "../api/client";`	Imports dependencies/types used below: import { api, post } from "../api/client";. Importing a function does not call it.

Line	Source code	Explanation / reading note
14	`import { Button, Card, Label } from "../components/ui";`	Imports dependencies/types used below: import { Button, Card, Label } from "../components/ui";. Importing a function does not call it.
15	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
16	`import type { RootStack } from "../types";`	Imports dependencies/types used below: import type { RootStack } from "../types";. Importing a function does not call it.
17		Blank line separating logical sections; no executable operation.
18	`type Question = { id: string; text: string; type: string; options: string[]; required: boolean };`	Defines a compile-time data contract: type Question = { id: string; text: string; type: string; options: string[]; required: boolean };. TypeScript types do not validate untrusted runtime JSON by themselves.
19	`type Survey = {`	Defines a compile-time data contract: type Survey = {. TypeScript types do not validate untrusted runtime JSON by themselves.
20	`  id: string;`	Sets/declares the named object property or style/type member: id: string;. Interpret it in the enclosing object, props or type definition.
21	`  name: string;`	Sets/declares the named object property or style/type member: name: string;. Interpret it in the enclosing object, props or type definition.
22	`  type: string;`	Sets/declares the named object property or style/type member: type: string;. Interpret it in the enclosing object, props or type definition.
23	`  instructions?: string;`	Sets/declares the named object property or style/type member: instructions?: string;. Interpret it in the enclosing object, props or type definition.
24	`  ratingTarget?: string;`	Sets/declares the named object property or style/type member: ratingTarget?: string;. Interpret it in the enclosing object, props or type definition.
25	`  maximumRating: number;`	Sets/declares the named object property or style/type member: maximumRating: number;. Interpret it in the enclosing object, props or type definition.
26	`  requireBeforeImage: boolean;`	Sets/declares the named object property or style/type member: requireBeforeImage: boolean;. Interpret it in the enclosing object, props or type definition.
27	`  requireAfterImage: boolean;`	Sets/declares the named object property or style/type member: requireAfterImage: boolean;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
28	`  questions: Question[];`	Sets/declares the named object property or style/type member: questions: Question[];. Interpret it in the enclosing object, props or type definition.
29	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30		Blank line separating logical sections; no executable operation.
31	`export default function SurveyScreen({`	Declares a callable function/method: export default function SurveyScreen({. Parameters supply its inputs; the following block implements the operation.
32	`  route,`	Continues the surrounding declaration/expression or text: route,. Read it with the preceding opening statement (export default function SurveyScreen({); it is not a standalone business operation.
33	`  navigation,`	Continues the surrounding declaration/expression or text: navigation,. Read it with the preceding opening statement (route,); it is not a standalone business operation.
34	`}: NativeStackScreenProps<RootStack, "Survey">) {`	Continues the surrounding declaration/expression or text: }: NativeStackScreenProps<RootStack, "Survey">) {. Read it with the preceding opening statement (navigation,); it is not a standalone business operation.
35	`  const [surveys, setSurveys] = useState<Survey[]>([]),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
36	`    [selected, setSelected] = useState<Survey>(),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
37	`    [answers, setAnswers] = useState<Record<string, string | string[]>>({});`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
38	`  const [beforeImageUrl, setBeforeImageUrl] = useState(""),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
39	`    [afterImageUrl, setAfterImageUrl] = useState(""),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
40	`    [remarks, setRemarks] = useState(""),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
41	`    [rating, setRating] = useState(0);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.

Line	Source code	Explanation / reading note
42	`  const [loading, setLoading] = useState(true),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
43	`    [saving, setSaving] = useState(false),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
44	`    [error, setError] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
45	`  const load = () => {`	Declares/initializes local data used by the surrounding operation: const load = () => {. Collection contents and assignments below determine its purpose.
46	`    setLoading(true);`	Continues the surrounding declaration/expression or text: setLoading(true);. Read it with the preceding opening statement (const load = () => {); it is not a standalone business operation.
47	`    setError("");`	Continues the surrounding declaration/expression or text: setError("");. Read it with the preceding opening statement (setLoading(true);); it is not a standalone business operation.
48	`    api<Survey[]>(`/surveys?outletId=${encodeURIComponent(route.params.store.id)}`)`	Assigns the right-hand expression to the named variable/property: api<Survey[]>(`/surveys?outletId=${encodeURIComponent(route.params.store.id)}`). This is in-memory unless it is later persisted by an explicit call.
49	`      .then((rows) => {`	Continues the surrounding declaration/expression or text: .then((rows) => {. Read it with the preceding opening statement (api<Survey[]>(`/surveys?outletId=${encodeURIComponent(route.params.store.id)}`)); it is not a standalone business operation.
50	`        setSurveys(rows);`	Continues the surrounding declaration/expression or text: setSurveys(rows);. Read it with the preceding opening statement (.then((rows) => {); it is not a standalone business operation.
51	`        setSelected(rows[0]);`	Continues the surrounding declaration/expression or text: setSelected(rows[0]);. Read it with the preceding opening statement (setSurveys(rows);); it is not a standalone business operation.
52	`      })`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
53	`      .catch((e) => setError(e.message))`	Continues the surrounding declaration/expression or text: .catch((e) => setError(e.message)). Read it with the preceding opening statement (})); it is not a standalone business operation.

Line	Source code	Explanation / reading note
54	`      .finally(() => setLoading(false));`	Continues the surrounding declaration/expression or text: .finally(() => setLoading(false));. Read it with the preceding opening statement (.catch((e) => setError(e.message))); it is not a standalone business operation.
55	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
56	`  useEffect(load, []);`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.
57	`  const setAnswer = (id: string, value: string | string[]) =>`	Declares/initializes local data used by the surrounding operation: const setAnswer = (id: string, value: string | string[]) =>. Collection contents and assignments below determine its purpose.
58	`    setAnswers((current) => ({ ...current, [id]: value }));`	Continues the surrounding declaration/expression or text: setAnswers((current) => ({ ...current, [id]: value }));. Read it with the preceding opening statement (const setAnswer = (id: string, value: string | string[]) =>); it is not a standalone business operation.
59	`  const chooseMultiple = (question: Question, option: string) => {`	Declares/initializes local data used by the surrounding operation: const chooseMultiple = (question: Question, option: string) => {. Collection contents and assignments below determine its purpose.
60	`    const current = Array.isArray(answers[question.id]) ? (answers[question.id] as string[]) : [];`	Declares/initializes local data used by the surrounding operation: const current = Array.isArray(answers[question.id]) ? (answers[question.id] as string[]) : [];. Collection contents and assignments below determine its purpose.
61	`    setAnswer(`	Continues the surrounding declaration/expression or text: setAnswer(. Read it with the preceding opening statement (const current = Array.isArray(answers[question.id]) ? (answers[question.id] as string[]) : [];); it is not a standalone business operation.
62	`      question.id,`	Continues the surrounding declaration/expression or text: question.id,. Read it with the preceding opening statement (setAnswer(); it is not a standalone business operation.
63	`      current.includes(option) ? current.filter((value) => value !== option) : [...current, option],`	Transforms/selects/aggregates collection values with the callback shown here: current.includes(option) ? current.filter((value) => value !== option) : [...current, option],. Read the callback body and result assignment together.
64	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
65	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
66	`  const submit = async (status: "Draft" | "Completed") => {`	Declares/initializes local data used by the surrounding operation: const submit = async (status: "Draft" | "Completed") => {. Collection contents and assignments below determine its purpose.
67	`    if (!selected) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!selected) return;.
68	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
69	`      setSaving(true);`	Continues the surrounding declaration/expression or text: setSaving(true);. Read it with the preceding opening statement (try {); it is not a standalone business operation.
70	`      const result = await post<{ id: string; status: string }>("/survey-responses", {`	Waits for this asynchronous operation before continuing: const result = await post<{ id: string; status: string }>("/survey-responses", {. The returned result/error must still be handled.
71	`        surveyId: selected.id,`	Sets/declares the named object property or style/type member: surveyId: selected.id,. Interpret it in the enclosing object, props or type definition.
72	`        visitId: route.params.visitId,`	Sets/declares the named object property or style/type member: visitId: route.params.visitId,. Interpret it in the enclosing object, props or type definition.
73	`        status,`	Continues the surrounding declaration/expression or text: status,. Read it with the preceding opening statement (visitId: route.params.visitId,); it is not a standalone business operation.
74	`        answers: Object.entries(answers).map(([questionId, value]) => ({ questionId, value })),`	Sets/declares the named object property or style/type member: answers: Object.entries(answers).map(([questionId, value]) => ({ questionId, value })),. Interpret it in the enclosing object, props or type definition.
75	`        overallRating: rating || undefined,`	Sets/declares the named object property or style/type member: overallRating: rating || undefined,. Interpret it in the enclosing object, props or type definition.
76	`        remarks,`	Continues the surrounding declaration/expression or text: remarks,. Read it with the preceding opening statement (overallRating: rating || undefined,); it is not a standalone business operation.
77	`        beforeImageUrl,`	Continues the surrounding declaration/expression or text: beforeImageUrl,. Read it with the preceding opening statement (remarks,); it is not a standalone business operation.
78	`        afterImageUrl,`	Continues the surrounding declaration/expression or text: afterImageUrl,. Read it with the preceding opening statement (beforeImageUrl,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
79	`location: route.params.location,`	Sets/declares the named object property or style/type member: location: route.params.location,. Interpret it in the enclosing object, props or type definition.
80	`startedAt: new Date().toISOString(),`	Sets/declares the named object property or style/type member: startedAt: new Date().toISOString(),. Interpret it in the enclosing object, props or type definition.
81	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
82	`Alert.alert("Survey saved", `${selected.name} was saved as ${result.status}.`);`	Calls the named method: Alert.alert("Survey saved", `${selected.name} was saved as ${result.status}.`);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
83	`if (status === "Completed") navigation.goBack();`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (status === "Completed") navigation.goBack();.
84	`} catch (e: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
85	`Alert.alert("Unable to save survey", e.message || "Try again.");`	Calls the named method: Alert.alert("Unable to save survey", e.message || "Try again.");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
86	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
87	`setSaving(false);`	Continues the surrounding declaration/expression or text: setSaving(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
88	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
89	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
90	`if (loading)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (loading).
91	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
92	`<View style={s.center}>`	Renders/opens a UI element or component: <View style={s.center}>. Props and child content below determine appearance and interactions.
93	`<ActivityIndicator color={colors.brand} />`	Renders/opens a UI element or component: <ActivityIndicator color={colors.brand} />. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
94	`<Text>Loading Salesforce surveys…</Text>`	Renders/opens a UI element or component: <Text>Loading Salesforce surveys…</Text>. Props and child content below determine appearance and interactions.
95	`</View>`	Closes the UI element/component opened above.
96	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
97	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
98	`<ScrollView contentContainerStyle={s.body}>`	Renders/opens a UI element or component: <ScrollView contentContainerStyle={s.body}>. Props and child content below determine appearance and interactions.
99	`<Text style={s.title}>Outlet Surveys</Text>`	Renders/opens a UI element or component: <Text style={s.title}>Outlet Surveys</Text>. Props and child content below determine appearance and interactions.
100	`<Text style={s.sub}>`	Renders/opens a UI element or component: <Text style={s.sub}>. Props and child content below determine appearance and interactions.
101	`{route.params.store.name} · only active surveys for this outlet type are shown`	Continues the surrounding declaration/expression or text: {route.params.store.name} · only active surveys for this outlet type are shown. Read it with the preceding opening statement (<Text style={s.sub}>); it is not a standalone business operation.
102	`</Text>`	Closes the UI element/component opened above.
103	`{!!error && (`	Continues the surrounding declaration/expression or text: {!!error && (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
104	`<Pressable style={s.error} onPress={load}>`	Renders/opens a UI element or component: <Pressable style={s.error} onPress={load}>. Props and child content below determine appearance and interactions.
105	`<Text>{error} · Tap to retry</Text>`	Renders/opens a UI element or component: <Text>{error} · Tap to retry</Text>. Props and child content below determine appearance and interactions.
106	`</Pressable>`	Closes the UI element/component opened above.
107	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
108	`{!surveys.length && !error && (`	Continues the surrounding declaration/expression or text: {!surveys.length && !error && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
109	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
110	`<Text>No applicable surveys are active today.</Text>`	Renders/opens a UI element or component: <Text>No applicable surveys are active today.</Text>. Props and child content below determine appearance and interactions.
111	`</Card>`	Closes the UI element/component opened above.
112	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
113	`<View style={s.tabs}>`	Renders/opens a UI element or component: <View style={s.tabs}>. Props and child content below determine appearance and interactions.
114	`{surveys.map((survey) => (`	Transforms/selects/aggregates collection values with the callback shown here: {surveys.map((survey) => (. Read the callback body and result assignment together.
115	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
116	`key={survey.id}`	Assigns the right-hand expression to the named variable/property: key={survey.id}. This is in-memory unless it is later persisted by an explicit call.
117	`style={[s.tab, selected?.id === survey.id && s.tabOn]}`	Assigns the right-hand expression to the named variable/property: style={[s.tab, selected?.id === survey.id && s.tabOn]}. This is in-memory unless it is later persisted by an explicit call.
118	`onPress={() => {`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
119	`setSelected(survey);`	Continues the surrounding declaration/expression or text: setSelected(survey);. Read it with the preceding opening statement (onPress={() => {); it is not a standalone business operation.
120	`setAnswers({});`	Continues the surrounding declaration/expression or text: setAnswers({});. Read it with the preceding opening statement (setSelected(survey);); it is not a standalone business operation.
121	`setRating(0);`	Continues the surrounding declaration/expression or text: setRating(0);. Read it with the preceding opening statement (setAnswers({});); it is not a standalone business operation.
122	`}}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
123	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (}}); it is not a standalone business operation.
124	`<Text style={selected?.id === survey.id ? s.tabTextOn : s.tabText}>{survey.name}</Text>`	Renders/opens a UI element or component: <Text style={selected?.id === survey.id ? s.tabTextOn : s.tabText}>{survey.name}</Text>. Props and child content below determine appearance and interactions.
125	`</Pressable>`	Closes the UI element/component opened above.
126	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
127	`</View>`	Closes the UI element/component opened above.
128	`{selected && (`	Continues the surrounding declaration/expression or text: {selected && (. Read it with the preceding opening statement (</View>); it is not a standalone business operation.
129	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
130	`<Label>{selected.type.toUpperCase()}</Label>`	Renders/opens a UI element or component: <Label>{selected.type.toUpperCase()}</Label>. Props and child content below determine appearance and interactions.
131	`<Text style={s.name}>{selected.name}</Text>`	Renders/opens a UI element or component: <Text style={s.name}>{selected.name}</Text>. Props and child content below determine appearance and interactions.
132	`{!!selected.instructions && <Text style={s.instructions}>{selected.instructions}</Text>}`	Assigns the right-hand expression to the named variable/property: {!!selected.instructions && <Text style={s.instructions}>{selected.instructions}</Text>}. This is in-memory unless it is later persisted by an explicit call.
133	`{selected.type === "Rating" && (`	Continues the surrounding declaration/expression or text: {selected.type === "Rating" && (. Read it with the preceding opening statement ({!!selected.instructions && <Text style={s.instructions}>{selected.instructions}</Text>}); it is not a standalone business operation.
134	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
135	`<Label>RATE {selected.ratingTarget || "OUTLET"}</Label>`	Renders/opens a UI element or component: <Label>RATE {selected.ratingTarget || "OUTLET"}</Label>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
136	`<View style={s.rating}>`	Renders/opens a UI element or component: <View style={s.rating}>. Props and child content below determine appearance and interactions.
137	`{Array.from({ length: selected.maximumRating || 5 }, (_, index) => index + 1).map(`	Transforms/selects/aggregates collection values with the callback shown here: {Array.from({ length: selected.maximumRating || 5 }, (_, index) => index + 1).map(. Read the callback body and result assignment together.
138	`(value) => (`	Continues the surrounding declaration/expression or text: (value) => (. Read it with the preceding opening statement ({Array.from({ length: selected.maximumRating || 5 }, (_, index) => index + 1).map(); it is not a standalone business operation.
139	`<Pressable key={value} onPress={() => setRating(value)}>`	Renders/opens a UI element or component: <Pressable key={value} onPress={() => setRating(value)}>. Props and child content below determine appearance and interactions.
140	`<Text style={[s.star, value <= rating && s.starOn]}>★</Text>`	Renders/opens a UI element or component: <Text style={[s.star, value <= rating && s.starOn]}>★</Text>. Props and child content below determine appearance and interactions.
141	`</Pressable>`	Closes the UI element/component opened above.
142	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
143	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
144	`</View>`	Closes the UI element/component opened above.
145	`</>`	Closes the UI element/component opened above.
146	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
147	`{(selected.type === "Image Upload" || selected.requireBeforeImage) && (`	Continues the surrounding declaration/expression or text: {(selected.type === "Image Upload" || selected.requireBeforeImage) && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
148	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
149	`<Label>BEFORE ARRANGEMENT IMAGE {selected.requireBeforeImage ? "*" : ""}</Label>`	Renders/opens a UI element or component: <Label>BEFORE ARRANGEMENT IMAGE {selected.requireBeforeImage ? "*" : ""}</Label>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
150	`<TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
151	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
152	`value={beforeImageUrl}`	Assigns the right-hand expression to the named variable/property: value={beforeImageUrl}. This is in-memory unless it is later persisted by an explicit call.
153	`onChangeText={setBeforeImageUrl}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
154	`placeholder="Paste captured before-image URL"`	Assigns the right-hand expression to the named variable/property: placeholder="Paste captured before-image URL". This is in-memory unless it is later persisted by an explicit call.
155	`autoCapitalize="none"`	Assigns the right-hand expression to the named variable/property: autoCapitalize="none". This is in-memory unless it is later persisted by an explicit call.
156	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (autoCapitalize="none"); it is not a standalone business operation.
157	`</>`	Closes the UI element/component opened above.
158	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
159	`{(selected.type === "Image Upload" || selected.requireAfterImage) && (`	Continues the surrounding declaration/expression or text: {(selected.type === "Image Upload" || selected.requireAfterImage) && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
160	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
161	`<Label>AFTER ARRANGEMENT IMAGE {selected.requireAfterImage ? "*" : ""}</Label>`	Renders/opens a UI element or component: <Label>AFTER ARRANGEMENT IMAGE {selected.requireAfterImage ? "*" : ""}</Label>. Props and child content below determine appearance and interactions.
162	`<TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
163	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
164	`value={afterImageUrl}`	Assigns the right-hand expression to the named variable/property: value={afterImageUrl}. This is in-memory unless it is later persisted by an explicit call.
165	`onChangeText={setAfterImageUrl}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
166	`placeholder="Paste captured after-image URL"`	Assigns the right-hand expression to the named variable/property: placeholder="Paste captured after-image URL". This is in-memory unless it is later persisted by an explicit call.
167	`autoCapitalize="none"`	Assigns the right-hand expression to the named variable/property: autoCapitalize="none". This is in-memory unless it is later persisted by an explicit call.
168	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (autoCapitalize="none"); it is not a standalone business operation.
169	`</>`	Closes the UI element/component opened above.
170	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
171	`{selected.questions.map((question) => (`	Transforms/selects/aggregates collection values with the callback shown here: {selected.questions.map((question) => (. Read the callback body and result assignment together.
172	`<View key={question.id} style={s.question}>`	Renders/opens a UI element or component: <View key={question.id} style={s.question}>. Props and child content below determine appearance and interactions.
173	`<Label>`	Renders/opens a UI element or component: <Label>. Props and child content below determine appearance and interactions.
174	`{question.text}`	Continues the surrounding declaration/expression or text: {question.text}. Read it with the preceding opening statement (<Label>); it is not a standalone business operation.
175	`{question.required ? " *" : ""}`	Continues the surrounding declaration/expression or text: {question.required ? " *" : ""}. Read it with the preceding opening statement ({question.text}); it is not a standalone business operation.
176	`</Label>`	Closes the UI element/component opened above.
177	`{question.type === "Single Choice" ? (`	Continues the surrounding declaration/expression or text: {question.type === "Single Choice" ? (. Read it with the preceding opening statement (</Label>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
178	`<View style={s.options}>`	Renders/opens a UI element or component: <View style={s.options}>. Props and child content below determine appearance and interactions.
179	`{question.options.map((option) => (`	Transforms/selects/aggregates collection values with the callback shown here: {question.options.map((option) => (. Read the callback body and result assignment together.
180	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
181	`key={option}`	Assigns the right-hand expression to the named variable/property: key={option}. This is in-memory unless it is later persisted by an explicit call.
182	`style={[s.option, answers[question.id] === option && s.optionOn]}`	Assigns the right-hand expression to the named variable/property: style={[s.option, answers[question.id] === option && s.optionOn]}. This is in-memory unless it is later persisted by an explicit call.
183	`onPress={() => setAnswer(question.id, option)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
184	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (onPress={() => setAnswer(question.id, option)}); it is not a standalone business operation.
185	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
186	`{answers[question.id] === option ? "✓ " : ""}`	Continues the surrounding declaration/expression or text: {answers[question.id] === option ? "✓ " : ""}. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
187	`{option}`	Continues the surrounding declaration/expression or text: {option}. Read it with the preceding opening statement ({answers[question.id] === option ? "✓ " : ""}); it is not a standalone business operation.
188	`</Text>`	Closes the UI element/component opened above.
189	`</Pressable>`	Closes the UI element/component opened above.
190	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
191	`</View>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
192	`) : question.type === "Multiple Choice" ? (`	Continues the surrounding declaration/expression or text:) : question.type === "Multiple Choice" ? (. Read it with the preceding opening statement (</View>); it is not a standalone business operation.
193	`<View style={s.options}>`	Renders/opens a UI element or component: <View style={s.options}>. Props and child content below determine appearance and interactions.
194	`{question.options.map((option) => {`	Transforms/selects/aggregates collection values with the callback shown here: {question.options.map((option) => {. Read the callback body and result assignment together.
195	`const checked =`	Declares/initializes local data used by the surrounding operation: const checked =. Collection contents and assignments below determine its purpose.
196	`Array.isArray(answers[question.id]) &&`	Calls the named method: Array.isArray(answers[question.id]) &&. Its implementation defines the side effect/result; use the symbol/file index to follow it.
197	`(answers[question.id] as string[]).includes(option);`	Continues the surrounding declaration/expression or text: (answers[question.id] as string[]).includes(option);. Read it with the preceding opening statement (Array.isArray(answers[question.id]) &&); it is not a standalone business operation.
198	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
199	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
200	`key={option}`	Assigns the right-hand expression to the named variable/property: key={option}. This is in-memory unless it is later persisted by an explicit call.
201	`style={[s.option, checked && s.optionOn]}`	Assigns the right-hand expression to the named variable/property: style={[s.option, checked && s.optionOn]}. This is in-memory unless it is later persisted by an explicit call.
202	`onPress={() => chooseMultiple(question, option)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
203	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (onPress={() => chooseMultiple(question, option)}); it is not a standalone business operation.
204	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
205	`{checked ? "✓ " : ""}`	Continues the surrounding declaration/expression or text: {checked ? "✓ " : ""}. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
206	`{option}`	Continues the surrounding declaration/expression or text: {option}. Read it with the preceding opening statement ({checked ? "✓ " : ""}); it is not a standalone business operation.
207	`</Text>`	Closes the UI element/component opened above.
208	`</Pressable>`	Closes the UI element/component opened above.
209	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
210	`})}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
211	`</View>`	Closes the UI element/component opened above.
212	`) : question.type === "Rating" ? (`	Continues the surrounding declaration/expression or text:) : question.type === "Rating" ? (. Read it with the preceding opening statement (</View>); it is not a standalone business operation.
213	`<View style={s.rating}>`	Renders/opens a UI element or component: <View style={s.rating}>. Props and child content below determine appearance and interactions.
214	`{[1, 2, 3, 4, 5].map((value) => (`	Transforms/selects/aggregates collection values with the callback shown here: {[1, 2, 3, 4, 5].map((value) => (. Read the callback body and result assignment together.
215	`<Pressable key={value} onPress={() => setAnswer(question.id, String(value))}>`	Renders/opens a UI element or component: <Pressable key={value} onPress={() => setAnswer(question.id, String(value))}>. Props and child content below determine appearance and interactions.
216	`<Text`	Renders/opens a UI element or component: <Text. Props and child content below determine appearance and interactions.
217	`style={[s.star, value <= Number(answers[question.id] || 0) && s.starOn]}`	Assigns the right-hand expression to the named variable/property: style={[s.star, value <= Number(answers[question.id] || 0) && s.starOn]}. This is in-memory unless it is later persisted by an explicit call.
218	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (style={[s.star, value <= Number(answers[question.id] || 0) && s.starOn]}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
219	★	Continues the surrounding declaration/expression or text: ★. Read it with the preceding opening statement (>); it is not a standalone business operation.
220	</Text>	Closes the UI element/component opened above.
221	</Pressable>	Closes the UI element/component opened above.
222	))}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
223	</View>	Closes the UI element/component opened above.
224	) : (	Continues the surrounding declaration/expression or text:) : (. Read it with the preceding opening statement (</View>); it is not a standalone business operation.
225	<TextInput	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
226	style={s.input}	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
227	value={String(answers[question.id] || "")}	Assigns the right-hand expression to the named variable/property: value={String(answers[question.id] || "")}. This is in-memory unless it is later persisted by an explicit call.
228	onChangeText={(value) => setAnswer(question.id, value)}	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
229	keyboardType={	Assigns the right-hand expression to the named variable/property: keyboardType={. This is in-memory unless it is later persisted by an explicit call.
230	question.type === "Number" || question.type === "Phone"	Continues the surrounding declaration/expression or text: question.type === "Number" || question.type === "Phone". Read it with the preceding opening statement (keyboardType={); it is not a standalone business operation.
231	? "phone-pad"	Continues the surrounding declaration/expression or text: ? "phone-pad". Read it with the preceding opening statement (question.type === "Number" || question.type === "Phone"); it is not a standalone business operation.
232	: "default"	Continues the surrounding declaration/expression or text: : "default". Read it with the preceding opening statement (? "phone-pad"); it is not a standalone business operation.

Line	Source code	Explanation / reading note
233	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
234	`placeholder={`Enter ${question.type.toLowerCase()} answer`}`	Calls the named method: placeholder={`Enter ${question.type.toLowerCase()} answer`}. Its implementation defines the side effect/result; use the symbol/file index to follow it.
235	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (placeholder={`Enter ${question.type.toLowerCase()} answer`}); it is not a standalone business operation.
236	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
237	`</View>`	Closes the UI element/component opened above.
238	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
239	`<Label>REMARKS</Label>`	Renders/opens a UI element or component: <Label>REMARKS</Label>. Props and child content below determine appearance and interactions.
240	`<TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
241	`style={[s.input, s.notes]}`	Assigns the right-hand expression to the named variable/property: style={[s.input, s.notes]}. This is in-memory unless it is later persisted by an explicit call.
242	`value={remarks}`	Assigns the right-hand expression to the named variable/property: value={remarks}. This is in-memory unless it is later persisted by an explicit call.
243	`onChangeText={setRemarks}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
244	`multiline`	Continues the surrounding declaration/expression or text: multiline. Read it with the preceding opening statement (onChangeText={setRemarks}); it is not a standalone business operation.
245	`placeholder="Survey remarks"`	Assigns the right-hand expression to the named variable/property: placeholder="Survey remarks". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
246	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (placeholder="Survey remarks"); it is not a standalone business operation.
247	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
248	`title="SAVE DRAFT"`	Assigns the right-hand expression to the named variable/property: title="SAVE DRAFT". This is in-memory unless it is later persisted by an explicit call.
249	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.
250	`disabled={saving}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
251	`onPress={() => submit("Draft")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
252	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => submit("Draft")}); it is not a standalone business operation.
253	`<Button title="SUBMIT SURVEY" disabled={saving} onPress={() => submit("Completed")} />`	Renders/opens a UI element or component: <Button title="SUBMIT SURVEY" disabled={saving} onPress={() => submit("Completed")} />. Props and child content below determine appearance and interactions.
254	`</Card>`	Closes the UI element/component opened above.
255	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
256	`</ScrollView>`	Closes the UI element/component opened above.
257	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
258	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
259	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
260	`body: { padding: 16, paddingBottom: 50, backgroundColor: "#F5F1E8" },`	Sets/declares the named object property or style/type member: body: { padding: 16, paddingBottom: 50, backgroundColor: "#F5F1E8" },. Interpret it in the enclosing object, props or type definition.
261	`center: { flex: 1, alignItems: "center", justifyContent: "center", gap: 10 },`	Sets/declares the named object property or style/type member: center: { flex: 1, alignItems: "center", justifyContent: "center", gap: 10 },. Interpret it in the enclosing object, props or type definition.
262	`title: { fontSize: 25, fontWeight: "900", color: colors.ink },`	Sets/declares the named object property or style/type member: title: { fontSize: 25, fontWeight: "900", color: colors.ink },. Interpret it in the enclosing object, props or type definition.
263	`sub: { color: colors.muted, marginBottom: 14 },`	Sets/declares the named object property or style/type member: sub: { color: colors.muted, marginBottom: 14 },. Interpret it in the enclosing object, props or type definition.
264	`error: { backgroundColor: "#FFE8E8", padding: 12, borderRadius: 10 },`	Sets/declares the named object property or style/type member: error: { backgroundColor: "#FFE8E8", padding: 12, borderRadius: 10 },. Interpret it in the enclosing object, props or type definition.
265	`tabs: { flexDirection: "row", flexWrap: "wrap", gap: 8, marginBottom: 12 },`	Sets/declares the named object property or style/type member: tabs: { flexDirection: "row", flexWrap: "wrap", gap: 8, marginBottom: 12 },. Interpret it in the enclosing object, props or type definition.
266	`tab: {`	Sets/declares the named object property or style/type member: tab: {. Interpret it in the enclosing object, props or type definition.
267	`padding: 10,`	Sets/declares the named object property or style/type member: padding: 10,. Interpret it in the enclosing object, props or type definition.
268	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
269	`borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
270	`borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
271	`backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
272	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
273	`  tabOn: { backgroundColor: colors.brand },`	Sets/declares the named object property or style/type member: tabOn: { backgroundColor: colors.brand },. Interpret it in the enclosing object, props or type definition.
274	`  tabText: { color: colors.ink, fontWeight: "700" },`	Sets/declares the named object property or style/type member: tabText: { color: colors.ink, fontWeight: "700" },. Interpret it in the enclosing object, props or type definition.
275	`  tabTextOn: { color: "white", fontWeight: "900" },`	Sets/declares the named object property or style/type member: tabTextOn: { color: "white", fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
276	`  name: { fontSize: 20, fontWeight: "900", color: colors.ink, marginVertical: 8 },`	Sets/declares the named object property or style/type member: name: { fontSize: 20, fontWeight: "900", color: colors.ink, marginVertical: 8 },. Interpret it in the enclosing object, props or type definition.
277	`  instructions: { color: colors.muted, lineHeight: 20, marginBottom: 14 },`	Sets/declares the named object property or style/type member: instructions: { color: colors.muted, lineHeight: 20, marginBottom: 14 },. Interpret it in the enclosing object, props or type definition.
278	`  question: { marginTop: 14 },`	Sets/declares the named object property or style/type member: question: { marginTop: 14 },. Interpret it in the enclosing object, props or type definition.
279	`  input: {`	Sets/declares the named object property or style/type member: input: {. Interpret it in the enclosing object, props or type definition.
280	`    borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
281	`    borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
282	`    borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
283	`    padding: 13,`	Sets/declares the named object property or style/type member: padding: 13,. Interpret it in the enclosing object, props or type definition.
284	`    backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
285	`marginVertical: 6,`	Sets/declares the named object property or style/type member: marginVertical: 6,. Interpret it in the enclosing object, props or type definition.
286	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
287	`notes: { minHeight: 80, textAlignVertical: "top" },`	Sets/declares the named object property or style/type member: notes: { minHeight: 80, textAlignVertical: "top" },. Interpret it in the enclosing object, props or type definition.
288	`options: { flexDirection: "row", flexWrap: "wrap", gap: 7, marginTop: 7 },`	Sets/declares the named object property or style/type member: options: { flexDirection: "row", flexWrap: "wrap", gap: 7, marginTop: 7 },. Interpret it in the enclosing object, props or type definition.
289	`option: {`	Sets/declares the named object property or style/type member: option: {. Interpret it in the enclosing object, props or type definition.
290	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
291	`borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
292	`borderRadius: 18,`	Sets/declares the named object property or style/type member: borderRadius: 18,. Interpret it in the enclosing object, props or type definition.
293	`paddingVertical: 8,`	Sets/declares the named object property or style/type member: paddingVertical: 8,. Interpret it in the enclosing object, props or type definition.
294	`paddingHorizontal: 11,`	Sets/declares the named object property or style/type member: paddingHorizontal: 11,. Interpret it in the enclosing object, props or type definition.
295	`backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
296	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
297	`optionOn: { borderColor: colors.brand, backgroundColor: "#DFF3EF" },`	Sets/declares the named object property or style/type member: optionOn: { borderColor: colors.brand, backgroundColor: "#DFF3EF" },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
298	`  rating: { flexDirection: "row", gap: 7, marginVertical: 8 },`	Sets/declares the named object property or style/type member: rating: { flexDirection: "row", gap: 7, marginVertical: 8 },. Interpret it in the enclosing object, props or type definition.
299	`  star: { fontSize: 32, color: "#CBD5D3" },`	Sets/declares the named object property or style/type member: star: { fontSize: 32, color: "#CBD5D3" },. Interpret it in the enclosing object, props or type definition.
300	`  starOn: { color: "#F5B82E" },`	Sets/declares the named object property or style/type member: starOn: { color: "#F5B82E" },. Interpret it in the enclosing object, props or type definition.
301	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/screens/VisitScreen.tsx

Main field workflow: visit recovery, product filters, brand/sub-brand/alias, schemes, local/Salesforce drafts, actions, order submission, checkout and document sharing.

1140 numbered source lines | SHA-256 3f84a22378b07b19bf72163b8ac5100260c5c87e78a0b9ffe0a7c3423cb8caa3

Line	Source code	Explanation / reading note
1	`import React, { useEffect, useMemo, useRef, useState } from "react";`	Imports dependencies/types used below: import React, { useEffect, useMemo, useRef, useState } from "react";. Importing a function does not call it.
2	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.
3	`  Alert,`	Continues the surrounding declaration/expression or text: Alert,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
4	`  Platform,`	Continues the surrounding declaration/expression or text: Platform,. Read it with the preceding opening statement (Alert,); it is not a standalone business operation.
5	`  Pressable,`	Continues the surrounding declaration/expression or text: Pressable,. Read it with the preceding opening statement (Platform,); it is not a standalone business operation.
6	`  ScrollView,`	Continues the surrounding declaration/expression or text: ScrollView,. Read it with the preceding opening statement (Pressable,); it is not a standalone business operation.
7	`  StyleSheet,`	Continues the surrounding declaration/expression or text: StyleSheet,. Read it with the preceding opening statement (ScrollView,); it is not a standalone business operation.
8	`  Text,`	Continues the surrounding declaration/expression or text: Text,. Read it with the preceding opening statement (StyleSheet,); it is not a standalone business operation.
9	`  View,`	Continues the surrounding declaration/expression or text: View,. Read it with the preceding opening statement (Text,); it is not a standalone business operation.
10	`  Linking,`	Continues the surrounding declaration/expression or text: Linking,. Read it with the preceding opening statement (View,); it is not a standalone business operation.
11	`} from "react-native";`	Completes the dependency import and identifies the module supplying those names.
12	`import * as Location from "expo-location";`	Imports dependencies/types used below: import * as Location from "expo-location";. Importing a function does not call it.
13	`import * as FileSystem from "expo-file-system/legacy";`	Imports dependencies/types used below: import * as FileSystem from "expo-file-system/legacy";. Importing a function does not call it.

Line	Source code	Explanation / reading note
14	`import * as Sharing from "expo-sharing";`	Imports dependencies/types used below: import * as Sharing from "expo-sharing";. Importing a function does not call it.
15	`import { NativeStackScreenProps } from "@react-navigation/native-stack";`	Imports dependencies/types used below: import { NativeStackScreenProps } from "@react-navigation/native-stack";. Importing a function does not call it.
16	`import { api, post, postRecoverable } from "../api/client";`	Imports dependencies/types used below: import { api, post, postRecoverable } from "../api/client";. Importing a function does not call it.
17	`import { Button, Card, Label, Money } from "../components/ui";`	Imports dependencies/types used below: import { Button, Card, Label, Money } from "../components/ui";. Importing a function does not call it.
18	`import VisitField from "../components/VisitField";`	Imports dependencies/types used below: import VisitField from "../components/VisitField";. Importing a function does not call it.
19	`import ProductIdentityFields from "../components/ProductIdentityFields";`	Imports dependencies/types used below: import ProductIdentityFields from "../components/ProductIdentityFields";. Importing a function does not call it.
20	`import { nextProduct } from "../utils/productSelection";`	Imports dependencies/types used below: import { nextProduct } from "../utils/productSelection";. Importing a function does not call it.
21	`import { colors } from "../constants/theme";`	Imports dependencies/types used below: import { colors } from "../constants/theme";. Importing a function does not call it.
22	`import { clearVisitDraft, readVisitDraft, writeVisitDraft } from " ../storage/visitDraft";`	Imports dependencies/types used below: import { clearVisitDraft, readVisitDraft, writeVisitDraft } from "../storage/visitDraft";. Importing a function does not call it.
23	`import type { OrderLine, Product, RootStack } from "../types";`	Imports dependencies/types used below: import type { OrderLine, Product, RootStack } from "../types";. Importing a function does not call it.
24	`type Action = "order" | "return" | "competitor" | "ticket" | "stock" | "asset" | " revisit" | null;`	Defines a compile-time data contract: type Action = "order" | "return" | "competitor" | "ticket" | "stock" | "asset" | "revisit" | null;. TypeScript types do not validate untrusted runtime JSON by themselves.
25	`type OrderView = "All Products" | "Must Sell" | "Focus Sell" | "Suggested Sell";`	Defines a compile-time data contract: type OrderView = "All Products" | "Must Sell" | "Focus Sell" | "Suggested Sell";. TypeScript types do not validate untrusted runtime JSON by themselves.
26	`const refusalReasons = [`	Declares/initializes local data used by the surrounding operation: const refusalReasons = [. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
27	`  "Stock already available",`	Continues the surrounding declaration/expression or text: "Stock already available",. Read it with the preceding opening statement (const refusalReasons = []); it is not a standalone business operation.
28	`  "Low demand",`	Continues the surrounding declaration/expression or text: "Low demand",. Read it with the preceding opening statement ("Stock already available",); it is not a standalone business operation.
29	`  "No product demand",`	Continues the surrounding declaration/expression or text: "No product demand",. Read it with the preceding opening statement ("Low demand",); it is not a standalone business operation.
30	`  "Product not selling",`	Continues the surrounding declaration/expression or text: "Product not selling",. Read it with the preceding opening statement ("No product demand",); it is not a standalone business operation.
31	`  "Season expired",`	Continues the surrounding declaration/expression or text: "Season expired",. Read it with the preceding opening statement ("Product not selling",); it is not a standalone business operation.
32	`  "Other",`	Continues the surrounding declaration/expression or text: "Other",. Read it with the preceding opening statement ("Season expired",); it is not a standalone business operation.
33	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`export default function VisitScreen({`	Declares a callable function/method: export default function VisitScreen({. Parameters supply its inputs; the following block implements the operation.
35	`  route,`	Continues the surrounding declaration/expression or text: route,. Read it with the preceding opening statement (export default function VisitScreen({); it is not a standalone business operation.
36	`  navigation,`	Continues the surrounding declaration/expression or text: navigation,. Read it with the preceding opening statement (route,); it is not a standalone business operation.
37	`}: NativeStackScreenProps<RootStack, "Visit">) {`	Continues the surrounding declaration/expression or text: }: NativeStackScreenProps<RootStack, "Visit">) {. Read it with the preceding opening statement (navigation,); it is not a standalone business operation.
38	`  const [visit, setVisit] = useState<any>(),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.

Line	Source code	Explanation / reading note
39	`[products, setProducts] = useState<Product[]>([]),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
40	`[action, setAction] = useState<Action>(null),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
41	`[form, setForm] = useState<Record<string, string>>({}),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
42	`[lines, setLines] = useState<OrderLine[]>([]),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
43	`[returns, setReturns] = useState<any[]>([]),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
44	`[competitors, setCompetitors] = useState<any[]>([]),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
45	`[tickets, setTickets] = useState<any[]>([]),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
46	`[startError, setStartError] = useState(""),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
47	`[completed, setCompleted] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
48	`const [orderView, setOrderView] = useState<OrderView>("All Products");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
49	`const [productSearch, setProductSearch] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
50	`const [brandFilter, setBrandFilter] = useState("All brands");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
51	`const [subBrandFilter, setSubBrandFilter] = useState("All sub-brands");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
52	`const [aliasFilter, setAliasFilter] = useState("All aliases");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.

Line	Source code	Explanation / reading note
53	`  const [showProductFilters, setShowProductFilters] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
54	`  const [refusedProductIds, setRefusedProductIds] = useState<string[]>([]);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
55	`  const [selectedRefusalReason, setSelectedRefusalReason] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
56	`  const [isCompleting, setIsCompleting] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
57	`  const [completionMessage, setCompletionMessage] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
58	`  const [completionError, setCompletionError] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
59	`  const [isSaving, setIsSaving] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
60	`  const [saveMessage, setSaveMessage] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
61	`  const [saveError, setSaveError] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
62	`  const [showSchemes, setShowSchemes] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
63	`  const [refreshing, setRefreshing] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
64	`  const startRequestId = useRef(`visit-${Date.now()}-${Math.random().toString(36).slice(2)}`);`	Stores a mutable value across renders without causing a re-render, such as a stable request key or sync lock.
65	`  const actionRequestId = useRef("");`	Stores a mutable value across renders without causing a re-render, such as a stable request key or sync lock.
66	`  const startVisit = () => {`	Declares/initializes local data used by the surrounding operation: const startVisit = () => {. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
67	`    setStartError("");`	Continues the surrounding declaration/expression or text: setStartError("");. Read it with the preceding opening statement (const startVisit = () => {}; it is not a standalone business operation.
68	`    Promise.all([`	Starts independent asynchronous operations together and waits for all; rejection propagates to the surrounding error handler.
69	`      post<any>("/store/visit/start", {`	Continues the surrounding declaration/expression or text: post<any>("/store/visit/start", {. Read it with the preceding opening statement (Promise.all([); it is not a standalone business operation.
70	`        storeId: route.params.store.id,`	Sets/declares the named object property or style/type member: storeId: route.params.store.id,. Interpret it in the enclosing object, props or type definition.
71	`        location: route.params.location,`	Sets/declares the named object property or style/type member: location: route.params.location,. Interpret it in the enclosing object, props or type definition.
72	`        requestId: startRequestId.current,`	Sets/declares the named object property or style/type member: requestId: startRequestId.current,. Interpret it in the enclosing object, props or type definition.
73	`      }),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
74	`      api<Product[]>(`/products?outletId=${encodeURIComponent(route.params.store.id)}`),`	Assigns the right-hand expression to the named variable/property: api<Product[]>(`/products?outletId=${encodeURIComponent(route.params.store.id)}`),. This is in-memory unless it is later persisted by an explicit call.
75	`    ])`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
76	`      .then(async ([v, p]) => {`	Continues the surrounding declaration/expression or text: .then(async ([v, p]) => {. Read it with the preceding opening statement ( ])); it is not a standalone business operation.
77	`        setVisit(v);`	Continues the surrounding declaration/expression or text: setVisit(v);. Read it with the preceding opening statement (.then(async ([v, p]) => {); it is not a standalone business operation.
78	`        setProducts(p);`	Continues the surrounding declaration/expression or text: setProducts(p);. Read it with the preceding opening statement (setVisit(v);); it is not a standalone business operation.
79	`        const draft = await readVisitDraft(route.params.store.id);`	Waits for this asynchronous operation before continuing: const draft = await readVisitDraft(route.params.store.id);. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
80	`setLines(!v.orderSubmitted && draft?.dirty ? draft.items : v.orderLines || []);`	Continues the surrounding declaration/expression or text: setLines(!v.orderSubmitted && draft?.dirty ? draft.items : v.orderLines || []);. Read it with the preceding opening statement (const draft = await readVisitDraft(route.params.store.id);); it is not a standalone business operation.
81	`setReturns(v.returns || []);`	Continues the surrounding declaration/expression or text: setReturns(v.returns || []);. Read it with the preceding opening statement (setLines(!v.orderSubmitted && draft?.dirty ? draft.items : v.orderLines || []);); it is not a standalone business operation.
82	`setCompetitors(v.competitors || []);`	Continues the surrounding declaration/expression or text: setCompetitors(v.competitors || []);. Read it with the preceding opening statement (setReturns(v.returns || []);); it is not a standalone business operation.
83	`setTickets(v.tickets || []);`	Continues the surrounding declaration/expression or text: setTickets(v.tickets || []);. Read it with the preceding opening statement (setCompetitors(v.competitors || []);); it is not a standalone business operation.
84	`setRefusedProductIds(v.refusedProductIds || []);`	Continues the surrounding declaration/expression or text: setRefusedProductIds(v.refusedProductIds || []);. Read it with the preceding opening statement (setTickets(v.tickets || []);); it is not a standalone business operation.
85	`setCompleted(v.status === "Completed");`	Continues the surrounding declaration/expression or text: setCompleted(v.status === "Completed");. Read it with the preceding opening statement (setRefusedProductIds(v.refusedProductIds || []);); it is not a standalone business operation.
86	`if (draft?.dirty && !v.orderSubmitted)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (draft?.dirty && !v.orderSubmitted).
87	`setSaveMessage(`	Continues the surrounding declaration/expression or text: setSaveMessage(. Read it with the preceding opening statement (if (draft?.dirty && !v.orderSubmitted)); it is not a standalone business operation.
88	`"Recovered an order draft from this device. Tap Save draft to Salesforce when connected.",`	Continues the surrounding declaration/expression or text: "Recovered an order draft from this device. Tap Save draft to Salesforce when connected.",. Read it with the preceding opening statement (setSaveMessage(); it is not a standalone business operation.
89	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
90	`})`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
91	`.catch((e) => {`	Continues the surrounding declaration/expression or text: .catch((e) => {. Read it with the preceding opening statement (})); it is not a standalone business operation.
92	`setStartError(e.message || "Visit could not start.");`	Continues the surrounding declaration/expression or text: setStartError(e.message || "Visit could not start.");. Read it with the preceding opening statement (.catch((e) => {); it is not a standalone business operation.
93	`Alert.alert("Visit could not start", e.message);`	Calls the named method: Alert.alert("Visit could not start", e.message);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
94	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
95	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
96	`useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.
97	`startVisit();`	Continues the surrounding declaration/expression or text: startVisit();. Read it with the preceding opening statement (useEffect(() => {); it is not a standalone business operation.
98	`}, []);`	Continues the surrounding declaration/expression or text: }, []);. Read it with the preceding opening statement (startVisit();); it is not a standalone business operation.
99	`const total = useMemo(() => lines.reduce((s, l) => s + l.amount, 0), [lines]);`	Caches a derived value using the listed dependencies, such as filtered products or totals.
100	`const brands = useMemo(`	Caches a derived value using the listed dependencies, such as filtered products or totals.
101	`() => [`	Continues the surrounding declaration/expression or text: () => [. Read it with the preceding opening statement (const brands = useMemo(); it is not a standalone business operation.
102	`"All brands",`	Continues the surrounding declaration/expression or text: "All brands",. Read it with the preceding opening statement (() => []); it is not a standalone business operation.
103	`...Array.from(new Set(products.map((product) => product.brand).filter(Boolean) as string[])),`	Transforms/selects/aggregates collection values with the callback shown here: ...Array.from(new Set(products.map((product) => product.brand).filter(Boolean) as string[])),. Read the callback body and result assignment together.
104	`],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
105	`    [products],`	Continues the surrounding declaration/expression or text: [products],. Read it with the preceding opening statement ( ],); it is not a standalone business operation.
106	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
107	`  const subBrands = useMemo(`	Caches a derived value using the listed dependencies, such as filtered products or totals.
108	`    () => [`	Continues the surrounding declaration/expression or text: () => [. Read it with the preceding opening statement (const subBrands = useMemo(); it is not a standalone business operation.
109	`      "All sub-brands",`	Continues the surrounding declaration/expression or text: "All sub-brands",. Read it with the preceding opening statement (() => []); it is not a standalone business operation.
110	`      ...Array.from(`	Calls the named method: ...Array.from(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
111	`        new Set(products.map((product) => product.subBrand).filter(Boolean) as string[]),`	Transforms/selects/aggregates collection values with the callback shown here: new Set(products.map((product) => product.subBrand).filter(Boolean) as string[]),. Read the callback body and result assignment together.
112	`      ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
113	`    ],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
114	`    [products],`	Continues the surrounding declaration/expression or text: [products],. Read it with the preceding opening statement ( ],); it is not a standalone business operation.
115	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
116	`  const aliases = useMemo(`	Caches a derived value using the listed dependencies, such as filtered products or totals.
117	`    () => [`	Continues the surrounding declaration/expression or text: () => [. Read it with the preceding opening statement (const aliases = useMemo(); it is not a standalone business operation.
118	`      "All aliases",`	Continues the surrounding declaration/expression or text: "All aliases",. Read it with the preceding opening statement (() => []); it is not a standalone business operation.

Line	Source code	Explanation / reading note
119	`...Array.from(`	Calls the named method: ...Array.from(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
120	`new Set(products.map((product) => product.brandAlias).filter(Boolean) as string[]),`	Transforms/selects/aggregates collection values with the callback shown here: new Set(products.map((product) => product.brandAlias).filter(Boolean) as string[]),. Read the callback body and result assignment together.
121	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
122	`],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
123	`[products],`	Continues the surrounding declaration/expression or text: [products],. Read it with the preceding opening statement ( ],); it is not a standalone business operation.
124	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
125	`const visibleProducts = useMemo(`	Caches a derived value using the listed dependencies, such as filtered products or totals.
126	`() =>`	Continues the surrounding declaration/expression or text: () =>. Read it with the preceding opening statement (const visibleProducts = useMemo(); it is not a standalone business operation.
127	`products.filter((product) => {`	Transforms/selects/aggregates collection values with the callback shown here: products.filter((product) => {. Read the callback body and result assignment together.
128	`const matchesView =`	Declares/initializes local data used by the surrounding operation: const matchesView =. Collection contents and assignments below determine its purpose.
129	`orderView === "All Products" ||`	Continues the surrounding declaration/expression or text: orderView === "All Products" ||. Read it with the preceding opening statement (const matchesView =); it is not a standalone business operation.
130	`product.configuration === orderView ||`	Continues the surrounding declaration/expression or text: product.configuration === orderView ||. Read it with the preceding opening statement (orderView === "All Products" ||); it is not a standalone business operation.
131	`product.configurations?.some((configuration) => configuration.type === orderView);`	Transforms/selects/aggregates collection values with the callback shown here: product.configurations?.some((configuration) => configuration.type === orderView);. Read the callback body and result assignment together.

Line	Source code	Explanation / reading note
132	`const matchesBrand = brandFilter === "All brands" || product.brand === brandFilter;`	Declares/initializes local data used by the surrounding operation: const matchesBrand = brandFilter === "All brands" || product.brand === brandFilter;. Collection contents and assignments below determine its purpose.
133	`const matchesSubBrand =`	Declares/initializes local data used by the surrounding operation: const matchesSubBrand =. Collection contents and assignments below determine its purpose.
134	`subBrandFilter === "All sub-brands" || product.subBrand === subBrandFilter;`	Continues the surrounding declaration/expression or text: subBrandFilter === "All sub-brands" || product.subBrand === subBrandFilter;. Read it with the preceding opening statement (const matchesSubBrand =); it is not a standalone business operation.
135	`const matchesAlias = aliasFilter === "All aliases" || product.brandAlias === aliasFilter;`	Declares/initializes local data used by the surrounding operation: const matchesAlias = aliasFilter === "All aliases" || product.brandAlias === aliasFilter;. Collection contents and assignments below determine its purpose.
136	`const text =`	Declares/initializes local data used by the surrounding operation: const text =. Collection contents and assignments below determine its purpose.
137	`` `${product.name} ${product.code} ${product.brand || ""} ${product.subBrand || ""} ${product.brandAlias || ""}`.toLowerCase(); ``	Continues the surrounding declaration/expression or text: `${product.name} ${product.code} ${product.brand || ""} ${product.subBrand || ""} ${product.brandAlias || ""}`.toLowerCase();. Read it with the preceding opening statement (const text =); it is not a standalone business operation.
138	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
139	`matchesView &&`	Continues the surrounding declaration/expression or text: matchesView &&. Read it with the preceding opening statement (return (); it is not a standalone business operation.
140	`matchesBrand &&`	Continues the surrounding declaration/expression or text: matchesBrand &&. Read it with the preceding opening statement (matchesView &&); it is not a standalone business operation.
141	`matchesSubBrand &&`	Continues the surrounding declaration/expression or text: matchesSubBrand &&. Read it with the preceding opening statement (matchesBrand &&); it is not a standalone business operation.
142	`matchesAlias &&`	Continues the surrounding declaration/expression or text: matchesAlias &&. Read it with the preceding opening statement (matchesSubBrand &&); it is not a standalone business operation.
143	`text.includes(productSearch.toLowerCase())`	Calls the named method: text.includes(productSearch.toLowerCase()). Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
144	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
145	`      }),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
146	`    [products, orderView, brandFilter, subBrandFilter, aliasFilter, productSearch],`	Continues the surrounding declaration/expression or text: [products, orderView, brandFilter, subBrandFilter, aliasFilter, productSearch],. Read it with the preceding opening statement (}),); it is not a standalone business operation.
147	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
148	`  const selectedProduct =`	Declares/initializes local data used by the surrounding operation: const selectedProduct =. Collection contents and assignments below determine its purpose.
149	`    visibleProducts.find((product) => product.id === form.productId) || visibleProducts[0];`	Transforms/selects/aggregates collection values with the callback shown here: visibleProducts.find((product) => product.id === form.productId) || visibleProducts[0];. Read the callback body and result assignment together.
150	`  const selectedConfiguration =`	Declares/initializes local data used by the surrounding operation: const selectedConfiguration =. Collection contents and assignments below determine its purpose.
151	`    selectedProduct?.configurations?.find((configuration) => configuration.type === orderView) ||`	Transforms/selects/aggregates collection values with the callback shown here: selectedProduct?.configurations?.find((configuration) => configuration.type === orderView) ||. Read the callback body and result assignment together.
152	`   selectedProduct?.configurations?.find((configuration) => configuration.type === "Must Sell") ||`	Transforms/selects/aggregates collection values with the callback shown here: selectedProduct?.configurations?.find((configuration) => configuration.type === "Must Sell") ||. Read the callback body and result assignment together.
153	`    selectedProduct?.configurations?.[0];`	Continues the surrounding declaration/expression or text: selectedProduct?.configurations?.[0];. Read it with the preceding opening statement (selectedProduct?.configurations?.find((configuration) => configuration.type === "Must Sell") ||); it is not a standalone business operation.
154	`  const selectedScheme = selectedProduct?.schemes?.find((scheme) => scheme.id === form.schemeId);`	Declares/initializes local data used by the surrounding operation: const selectedScheme = selectedProduct?.schemes?.find((scheme) => scheme.id === form.schemeId);. Collection contents and assignments below determine its purpose.
155	`  const update = (k: string, v: string) => {`	Declares/initializes local data used by the surrounding operation: const update = (k: string, v: string) => {. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
156	`actionRequestId.current = "";`	Assigns the right-hand expression to the named variable/property: actionRequestId.current = "";. This is in-memory unless it is later persisted by an explicit call.
157	`setForm((x) => ({ ...x, [k]: v }));`	Continues the surrounding declaration/expression or text: setForm((x) => ({ ...x, [k]: v }));. Read it with the preceding opening statement (actionRequestId.current = "";); it is not a standalone business operation.
158	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
159	`const refreshRecords = async () => {`	Declares/initializes local data used by the surrounding operation: const refreshRecords = async () => {. Collection contents and assignments below determine its purpose.
160	`if (!visit || refreshing) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!visit || refreshing) return;.
161	`setRefreshing(true);`	Continues the surrounding declaration/expression or text: setRefreshing(true);. Read it with the preceding opening statement (if (!visit || refreshing) return;); it is not a standalone business operation.
162	`setSaveError("");`	Continues the surrounding declaration/expression or text: setSaveError("");. Read it with the preceding opening statement (setRefreshing(true);); it is not a standalone business operation.
163	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
164	`const [freshProducts, freshVisit] = await Promise.all([`	Starts independent asynchronous operations together and waits for all; rejection propagates to the surrounding error handler.
165	`api<Product[]>(`/products?outletId=${encodeURIComponent(route.params.store.id)}`),`	Assigns the right-hand expression to the named variable/property: api<Product[]>(`/products?outletId=${encodeURIComponent(route.params.store.id)}`),. This is in-memory unless it is later persisted by an explicit call.
166	`api<any>(`/visits/${visit.id}`),`	Continues the surrounding declaration/expression or text: api<any>(`/visits/${visit.id}`),. Read it with the preceding opening statement (api<Product[]>(`/products?outletId=${encodeURIComponent(route.params.store.id)}`),); it is not a standalone business operation.
167	`]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
168	`setProducts(freshProducts);`	Continues the surrounding declaration/expression or text: setProducts(freshProducts);. Read it with the preceding opening statement ( ]);); it is not a standalone business operation.
169	`setVisit(freshVisit);`	Continues the surrounding declaration/expression or text: setVisit(freshVisit);. Read it with the preceding opening statement (setProducts(freshProducts);); it is not a standalone business operation.
170	`setReturns(freshVisit.returns || []);`	Continues the surrounding declaration/expression or text: setReturns(freshVisit.returns || []);. Read it with the preceding opening statement (setVisit(freshVisit);); it is not a standalone business operation.
171	`setCompetitors(freshVisit.competitors || []);`	Continues the surrounding declaration/expression or text: setCompetitors(freshVisit.competitors || []);. Read it with the preceding opening statement (setReturns(freshVisit.returns || []);); it is not a standalone business operation.
172	`setTickets(freshVisit.tickets || []);`	Continues the surrounding declaration/expression or text: setTickets(freshVisit.tickets || []);. Read it with the preceding opening statement (setCompetitors(freshVisit.competitors || []);); it is not a standalone business operation.
173	`setRefusedProductIds(freshVisit.refusedProductIds || []);`	Continues the surrounding declaration/expression or text: setRefusedProductIds(freshVisit.refusedProductIds || []);. Read it with the preceding opening statement (setTickets(freshVisit.tickets || []);); it is not a standalone business operation.
174	`setCompleted(freshVisit.status === "Completed");`	Continues the surrounding declaration/expression or text: setCompleted(freshVisit.status === "Completed");. Read it with the preceding opening statement (setRefusedProductIds(freshVisit.refusedProductIds || []);); it is not a standalone business operation.
175	`const local = await readVisitDraft(route.params.store.id);`	Waits for this asynchronous operation before continuing: const local = await readVisitDraft(route.params.store.id);. The returned result/error must still be handled.
176	`if (!local?.dirty || freshVisit.orderSubmitted) setLines(freshVisit.orderLines || []);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!local?.dirty || freshVisit.orderSubmitted) setLines(freshVisit.orderLines || []);.
177	`} catch (error: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
178	`setSaveError(error.message);`	Continues the surrounding declaration/expression or text: setSaveError(error.message);. Read it with the preceding opening statement (} catch (error: any) {); it is not a standalone business operation.

Line	Source code	Explanation / reading note
179	`    } finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
180	`      setRefreshing(false);`	Continues the surrounding declaration/expression or text: setRefreshing(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
181	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
182	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
183	`  const saveDraft = async (items = lines) => {`	Declares/initializes local data used by the surrounding operation: const saveDraft = async (items = lines) => {. Collection contents and assignments below determine its purpose.
184	`    await writeVisitDraft(route.params.store.id, items, true);`	Waits for this asynchronous operation before continuing: await writeVisitDraft(route.params.store.id, items, true);. The returned result/error must still be handled.
185	`    await postRecoverable(`/visits/${visit.id}/order-draft`, { items });`	Waits for this asynchronous operation before continuing: await postRecoverable(`/visits/${visit.id}/order-draft`, { items });. The returned result/error must still be handled.
186	`    await writeVisitDraft(route.params.store.id, items, false);`	Waits for this asynchronous operation before continuing: await writeVisitDraft(route.params.store.id, items, false);. The returned result/error must still be handled.
187	`    setSaveMessage(`	Continues the surrounding declaration/expression or text: setSaveMessage(. Read it with the preceding opening statement (await writeVisitDraft(route.params.store.id, items, false);); it is not a standalone business operation.
188	`      "Order draft saved in Salesforce. Complete Visit to submit the Sales Order and Order Items.",`	Continues the surrounding declaration/expression or text: "Order draft saved in Salesforce. Complete Visit to submit the Sales Order and Order Items.",. Read it with the preceding opening statement (setSaveMessage(); it is not a standalone business operation.
189	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
190	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
191	`  const selectView = (view: OrderView) => {`	Declares/initializes local data used by the surrounding operation: const selectView = (view: OrderView) => {. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
192	`    setOrderView(view);`	Continues the surrounding declaration/expression or text: setOrderView(view);. Read it with the preceding opening statement (const selectView = (view: OrderView) => {); it is not a standalone business operation.
193	`    setSelectedRefusalReason("");`	Continues the surrounding declaration/expression or text: setSelectedRefusalReason("");. Read it with the preceding opening statement (setOrderView(view);); it is not a standalone business operation.
194	`    setForm((current) => ({ ...current, productId: "", schemeId: "", refusalNotes: "" }));`	Continues the surrounding declaration/expression or text: setForm((current) => ({ ...current, productId: "", schemeId: "", refusalNotes: "" }));. Read it with the preceding opening statement (setSelectedRefusalReason("");); it is not a standalone business operation.
195	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
196	`  const cycleFilter = (values: string[], current: string, setter: (value: string) => void) => {`	Declares/initializes local data used by the surrounding operation: const cycleFilter = (values: string[], current: string, setter: (value: string) => void) => {. Collection contents and assignments below determine its purpose.
197	`    const index = Math.max(0, values.indexOf(current));`	Declares/initializes local data used by the surrounding operation: const index = Math.max(0, values.indexOf(current));. Collection contents and assignments below determine its purpose.
198	`    setter(values[(index + 1) % values.length]);`	Continues the surrounding declaration/expression or text: setter(values[(index + 1) % values.length]);. Read it with the preceding opening statement (const index = Math.max(0, values.indexOf(current));); it is not a standalone business operation.
199	`    setSelectedRefusalReason("");`	Continues the surrounding declaration/expression or text: setSelectedRefusalReason("");. Read it with the preceding opening statement (setter(values[(index + 1) % values.length]);); it is not a standalone business operation.
200	`    setForm((value) => ({ ...value, productId: "", schemeId: "", refusalNotes: "" }));`	Continues the surrounding declaration/expression or text: setForm((value) => ({ ...value, productId: "", schemeId: "", refusalNotes: "" }));. Read it with the preceding opening statement (setSelectedRefusalReason("");); it is not a standalone business operation.
201	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
202	`  const selectRefusalReason = (reason: string) => {`	Declares/initializes local data used by the surrounding operation: const selectRefusalReason = (reason: string) => {. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
203	`    const nextReason = selectedRefusalReason === reason ? "" : reason;`	Declares/initializes local data used by the surrounding operation: const nextReason = selectedRefusalReason === reason ? "" : reason;. Collection contents and assignments below determine its purpose.
204	`    setSelectedRefusalReason(nextReason);`	Continues the surrounding declaration/expression or text: setSelectedRefusalReason(nextReason);. Read it with the preceding opening statement (const nextReason = selectedRefusalReason === reason ? "" : reason;); it is not a standalone business operation.
205	`    setForm((current) => ({ ...current, refusalNotes: nextReason }));`	Continues the surrounding declaration/expression or text: setForm((current) => ({ ...current, refusalNotes: nextReason }));. Read it with the preceding opening statement (setSelectedRefusalReason(nextReason);); it is not a standalone business operation.
206	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
207	`  const saveRefusal = async (reason: string) => {`	Declares/initializes local data used by the surrounding operation: const saveRefusal = async (reason: string) => {. Collection contents and assignments below determine its purpose.
208	`    if (!visit || !selectedProduct) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!visit || !selectedProduct) return;.
209	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
210	`      await post("/product-refusals", {`	Waits for this asynchronous operation before continuing: await post("/product-refusals", {. The returned result/error must still be handled.
211	`        visitId: visit.id,`	Sets/declares the named object property or style/type member: visitId: visit.id,. Interpret it in the enclosing object, props or type definition.
212	`        productId: selectedProduct.id,`	Sets/declares the named object property or style/type member: productId: selectedProduct.id,. Interpret it in the enclosing object, props or type definition.
213	`        reason,`	Continues the surrounding declaration/expression or text: reason,. Read it with the preceding opening statement (productId: selectedProduct.id,); it is not a standalone business operation.
214	`        notes: form.refusalNotes,`	Sets/declares the named object property or style/type member: notes: form.refusalNotes,. Interpret it in the enclosing object, props or type definition.
215	`      });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
216	`setRefusedProductIds((ids) => [...new Set([...ids, selectedProduct.id])]);`	Continues the surrounding declaration/expression or text: setRefusedProductIds((ids) => [...new Set([...ids, selectedProduct.id])]);. Read it with the preceding opening statement (});); it is not a standalone business operation.
217	`setSelectedRefusalReason("");`	Continues the surrounding declaration/expression or text: setSelectedRefusalReason("");. Read it with the preceding opening statement (setRefusedProductIds((ids) => [...new Set([...ids, selectedProduct.id])]);); it is not a standalone business operation.
218	`setForm((current) => ({ ...current, refusalNotes: "" }));`	Continues the surrounding declaration/expression or text: setForm((current) => ({ ...current, refusalNotes: "" }));. Read it with the preceding opening statement (setSelectedRefusalReason("");); it is not a standalone business operation.
219	`Alert.alert("Refusal saved", `${selectedProduct.name}: ${reason}`);`	Calls the named method: Alert.alert("Refusal saved", `${selectedProduct.name}: ${reason}`);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
220	`} catch (error: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
221	`Alert.alert("Could not save refusal", error.message || "Please try again.");`	Calls the named method: Alert.alert("Could not save refusal", error.message || "Please try again.");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
222	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
223	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
224	`const save = async () => {`	Declares/initializes local data used by the surrounding operation: const save = async () => {. Collection contents and assignments below determine its purpose.
225	`if (!visit || isSaving || isCompleting) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!visit || isSaving || isCompleting) return;.
226	`setIsSaving(true);`	Continues the surrounding declaration/expression or text: setIsSaving(true);. Read it with the preceding opening statement (if (!visit || isSaving || isCompleting) return;); it is not a standalone business operation.
227	`setSaveError("");`	Continues the surrounding declaration/expression or text: setSaveError("");. Read it with the preceding opening statement (setIsSaving(true);); it is not a standalone business operation.

Line	Source code	Explanation / reading note
228	`    setSaveMessage("");`	Continues the surrounding declaration/expression or text: setSaveMessage("");. Read it with the preceding opening statement (setSaveError("");); it is not a standalone business operation.
229	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
230	`      if (action === "order") {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (action === "order") {.
231	`        if (visit.orderSubmitted)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visit.orderSubmitted).
232	`          throw new Error(`	Stops this execution path with a validation/error exception: throw new Error(. The caller/catch block decides how it is reported.
233	`            "This order has already been submitted. Complete this visit before taking another order.",`	Continues the surrounding declaration/expression or text: "This order has already been submitted. Complete this visit before taking another order.",. Read it with the preceding opening statement (throw new Error(); it is not a standalone business operation.
234	`          );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
235	`        const product = selectedProduct;`	Declares/initializes local data used by the surrounding operation: const product = selectedProduct;. Collection contents and assignments below determine its purpose.
236	`        if (selectedRefusalReason) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (selectedRefusalReason) {.
237	`          await saveRefusal(selectedRefusalReason);`	Waits for this asynchronous operation before continuing: await saveRefusal(selectedRefusalReason);. The returned result/error must still be handled.
238	`          return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
239	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
240	`        const quantity = Number(form.quantity || 0);`	Declares/initializes local data used by the surrounding operation: const quantity = Number(form.quantity || 0);. Collection contents and assignments below determine its purpose.
241	`        if (!product || !Number.isFinite(quantity) || quantity <= 0)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!product || !Number.isFinite(quantity) || quantity <= 0).

Line	Source code	Explanation / reading note
242	`throw new Error("Select a product and enter a valid quantity.");`	Stops this execution path with a validation/error exception: throw new Error("Select a product and enter a valid quantity.");. The caller/catch block decides how it is reported.
243	`const minimumQuantity =`	Declares/initializes local data used by the surrounding operation: const minimumQuantity =. Collection contents and assignments below determine its purpose.
244	`selectedConfiguration?.minimumQuantity || product.minimumQuantity || 1;`	Continues the surrounding declaration/expression or text: selectedConfiguration?.minimumQuantity || product.minimumQuantity || 1;. Read it with the preceding opening statement (const minimumQuantity =); it is not a standalone business operation.
245	`if (quantity < minimumQuantity)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (quantity < minimumQuantity).
246	`throw new Error(`	Stops this execution path with a validation/error exception: throw new Error(. The caller/catch block decides how it is reported.
247	`` `${selectedConfiguration?.name || product.configurationName || product.name} requires at least ${minimumQuantity} units.`, ``	Continues the surrounding declaration/expression or text: `${selectedConfiguration?.name || product.configurationName || product.name} requires at least ${minimumQuantity} units.`,. Read it with the preceding opening statement (throw new Error(); it is not a standalone business operation.
248	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
249	`if (selectedScheme && quantity < selectedScheme.minimumQuantity)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (selectedScheme && quantity < selectedScheme.minimumQuantity).
250	`throw new Error(`	Stops this execution path with a validation/error exception: throw new Error(. The caller/catch block decides how it is reported.
251	`` `${selectedScheme.name} requires at least ${selectedScheme.minimumQuantity} units.`, ``	Continues the surrounding declaration/expression or text: `${selectedScheme.name} requires at least ${selectedScheme.minimumQuantity} units.`,. Read it with the preceding opening statement (throw new Error(); it is not a standalone business operation.
252	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
253	`const automaticDiscount = selectedScheme`	Declares/initializes local data used by the surrounding operation: const automaticDiscount = selectedScheme. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
254	`? (quantity * product.price * selectedScheme.discountPercent) / 100`	Continues the surrounding declaration/expression or text: ? (quantity * product.price * selectedScheme.discountPercent) / 100. Read it with the preceding opening statement (const automaticDiscount = selectedScheme); it is not a standalone business operation.
255	`: 0;`	Continues the surrounding declaration/expression or text: : 0;. Read it with the preceding opening statement (? (quantity * product.price * selectedScheme.discountPercent) / 100); it is not a standalone business operation.
256	`const discount = automaticDiscount + Number(form.discount || 0);`	Declares/initializes local data used by the surrounding operation: const discount = automaticDiscount + Number(form.discount || 0);. Collection contents and assignments below determine its purpose.
257	`if (!Number.isFinite(discount) || discount < 0 || discount > quantity * product.price)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!Number.isFinite(discount) || discount < 0 || discount > quantity * product.price).
258	`throw new Error("Enter a valid discount between zero and the product total.");`	Stops this execution path with a validation/error exception: throw new Error("Enter a valid discount between zero and the product total."); . The caller/catch block decides how it is reported.
259	`const line = {`	Declares/initializes local data used by the surrounding operation: const line = {. Collection contents and assignments below determine its purpose.
260	`productId: product.id,`	Sets/declares the named object property or style/type member: productId: product.id,. Interpret it in the enclosing object, props or type definition.
261	`productName: product.name,`	Sets/declares the named object property or style/type member: productName: product.name,. Interpret it in the enclosing object, props or type definition.
262	`quantity,`	Continues the surrounding declaration/expression or text: quantity,. Read it with the preceding opening statement (productName: product.name,); it is not a standalone business operation.
263	`unitPrice: product.price,`	Sets/declares the named object property or style/type member: unitPrice: product.price,. Interpret it in the enclosing object, props or type definition.
264	`discount,`	Continues the surrounding declaration/expression or text: discount,. Read it with the preceding opening statement (unitPrice: product.price,); it is not a standalone business operation.
265	`amount: quantity * product.price - discount,`	Sets/declares the named object property or style/type member: amount: quantity * product.price - discount,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
266	`schemeId: selectedScheme?.id,`	Sets/declares the named object property or style/type member: schemeId: selectedScheme?.id,. Interpret it in the enclosing object, props or type definition.
267	`schemeName: selectedScheme?.name,`	Sets/declares the named object property or style/type member: schemeName: selectedScheme?.name,. Interpret it in the enclosing object, props or type definition.
268	`configurationId: selectedConfiguration?.id || product.configurationId,`	Sets/declares the named object property or style/type member: configurationId: selectedConfiguration?.id || product.configurationId,. Interpret it in the enclosing object, props or type definition.
269	`configurationType: selectedConfiguration?.type || product.configuration,`	Sets/declares the named object property or style/type member: configurationType: selectedConfiguration?.type || product.configuration,. Interpret it in the enclosing object, props or type definition.
270	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
271	`const next = [...lines, line];`	Declares/initializes local data used by the surrounding operation: const next = [...lines, line];. Collection contents and assignments below determine its purpose.
272	`await writeVisitDraft(route.params.store.id, next, true);`	Waits for this asynchronous operation before continuing: await writeVisitDraft(route.params.store.id, next, true);. The returned result/error must still be handled.
273	`setLines(next);`	Continues the surrounding declaration/expression or text: setLines(next);. Read it with the preceding opening statement (await writeVisitDraft(route.params.store.id, next, true);); it is not a standalone business operation.
274	`setForm({});`	Continues the surrounding declaration/expression or text: setForm({});. Read it with the preceding opening statement (setLines(next);); it is not a standalone business operation.
275	`await saveDraft(next);`	Waits for this asynchronous operation before continuing: await saveDraft(next);. The returned result/error must still be handled.
276	`} else {`	Alternative branch taken when the preceding condition is false.
277	`const payload = {`	Declares/initializes local data used by the surrounding operation: const payload = {. Collection contents and assignments below determine its purpose.
278	`visitId: visit.id,`	Sets/declares the named object property or style/type member: visitId: visit.id,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
279	`...form,`	Continues the surrounding declaration/expression or text: ...form,. Read it with the preceding opening statement (visitId: visit.id,); it is not a standalone business operation.
280	`...((action === "return" || action === "stock") && !form.productId`	Continues the surrounding declaration/expression or text: ...((action === "return" || action === "stock") && !form.productId. Read it with the preceding opening statement (...form,); it is not a standalone business operation.
281	`? { productId: products[0]?.id }`	Continues the surrounding declaration/expression or text: ? { productId: products[0]?.id }. Read it with the preceding opening statement (...((action === "return" || action === "stock") && !form.productId); it is not a standalone business operation.
282	`: {}),`	Continues the surrounding declaration/expression or text: : {}),. Read it with the preceding opening statement (? { productId: products[0]?.id }); it is not a standalone business operation.
283	`requestId:`	Sets/declares the named object property or style/type member: requestId:. Interpret it in the enclosing object, props or type definition.
284	`actionRequestId.current ||`	Continues the surrounding declaration/expression or text: actionRequestId.current ||. Read it with the preceding opening statement (requestId:); it is not a standalone business operation.
285	`(actionRequestId.current = \`${action}-${Date.now()}-${Math.random().toString(36).slice(2)}\`),`	Calls the named method: (actionRequestId.current = `${action}-${Date.now()}-${Math.random().toString(36).slice(2)}`),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
286	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
287	`const path =`	Declares/initializes local data used by the surrounding operation: const path =. Collection contents and assignments below determine its purpose.
288	`action === "return"`	Continues the surrounding declaration/expression or text: action === "return". Read it with the preceding opening statement (const path =); it is not a standalone business operation.
289	`? "/returns"`	Continues the surrounding declaration/expression or text: ? "/returns". Read it with the preceding opening statement (action === "return"); it is not a standalone business operation.
290	`: action === "stock"`	Continues the surrounding declaration/expression or text: : action === "stock". Read it with the preceding opening statement (? "/returns"); it is not a standalone business operation.

Line	Source code	Explanation / reading note
291	`? "/stock-checks"`	Continues the surrounding declaration/expression or text: ? "/stock-checks". Read it with the preceding opening statement (: action === "stock"); it is not a standalone business operation.
292	`: action === "asset"`	Continues the surrounding declaration/expression or text: : action === "asset". Read it with the preceding opening statement (? "/stock-checks"); it is not a standalone business operation.
293	`? "/asset-surveys"`	Continues the surrounding declaration/expression or text: ? "/asset-surveys". Read it with the preceding opening statement (: action === "asset"); it is not a standalone business operation.
294	`: action === "competitor"`	Continues the surrounding declaration/expression or text: : action === "competitor". Read it with the preceding opening statement (? "/asset-surveys"); it is not a standalone business operation.
295	`? "/competitor-activities"`	Continues the surrounding declaration/expression or text: ? "/competitor-activities". Read it with the preceding opening statement (: action === "competitor"); it is not a standalone business operation.
296	`: action === "ticket"`	Continues the surrounding declaration/expression or text: : action === "ticket". Read it with the preceding opening statement (? "/competitor-activities"); it is not a standalone business operation.
297	`? "/tickets"`	Continues the surrounding declaration/expression or text: ? "/tickets". Read it with the preceding opening statement (: action === "ticket"); it is not a standalone business operation.
298	`: "/store/revisit";`	Continues the surrounding declaration/expression or text: : "/store/revisit";. Read it with the preceding opening statement (? "/tickets"); it is not a standalone business operation.
299	`await post(path, payload);`	Waits for this asynchronous operation before continuing: await post(path, payload);. The returned result/error must still be handled.
300	`actionRequestId.current = "";`	Assigns the right-hand expression to the named variable/property: actionRequestId.current = "";. This is in-memory unless it is later persisted by an explicit call.
301	`if (action === "return") setReturns((x) => [...x, payload]);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (action === "return") setReturns((x) => [...x, payload]);.
302	`if (action === "competitor") setCompetitors((x) => [...x, payload]);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (action === "competitor") setCompetitors((x) => [...x, payload]);.

Line	Source code	Explanation / reading note
303	`if (action === "ticket") setTickets((x) => [...x, payload]);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (action === "ticket") setTickets((x) => [...x, payload]);.
304	`if (action === "stock")`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (action === "stock").
305	`setVisit((current: any) => ({`	Continues the surrounding declaration/expression or text: setVisit((current: any) => ({. Read it with the preceding opening statement (if (action === "stock")); it is not a standalone business operation.
306	`...current,`	Continues the surrounding declaration/expression or text: ...current,. Read it with the preceding opening statement (setVisit((current: any) => ({); it is not a standalone business operation.
307	`stocks: [...(current.stocks || []), payload],`	Sets/declares the named object property or style/type member: stocks: [...(current.stocks || []), payload],. Interpret it in the enclosing object, props or type definition.
308	`}));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
309	`if (action === "asset")`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (action === "asset").
310	`setVisit((current: any) => ({`	Continues the surrounding declaration/expression or text: setVisit((current: any) => ({. Read it with the preceding opening statement (if (action === "asset")); it is not a standalone business operation.
311	`...current,`	Continues the surrounding declaration/expression or text: ...current,. Read it with the preceding opening statement (setVisit((current: any) => ({); it is not a standalone business operation.
312	`assets: [...(current.assets || []), payload],`	Sets/declares the named object property or style/type member: assets: [...(current.assets || []), payload],. Interpret it in the enclosing object, props or type definition.
313	`}));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
314	`setSaveMessage(`	Continues the surrounding declaration/expression or text: setSaveMessage(. Read it with the preceding opening statement (}));); it is not a standalone business operation.

Line	Source code	Explanation / reading note
315	`"The record was saved in Salesforce. View it from More or refresh this visit.",`	Continues the surrounding declaration/expression or text: "The record was saved in Salesforce. View it from More or refresh this visit.",. Read it with the preceding opening statement (setSaveMessage(); it is not a standalone business operation.
316	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
317	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
318	`if (action === "order") {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (action === "order") {.
319	`setForm({});`	Continues the surrounding declaration/expression or text: setForm({});. Read it with the preceding opening statement (if (action === "order") {); it is not a standalone business operation.
320	`} else {`	Alternative branch taken when the preceding condition is false.
321	`setAction(null);`	Continues the surrounding declaration/expression or text: setAction(null);. Read it with the preceding opening statement (} else {); it is not a standalone business operation.
322	`setForm({});`	Continues the surrounding declaration/expression or text: setForm({});. Read it with the preceding opening statement (setAction(null);); it is not a standalone business operation.
323	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
324	`Alert.alert(`	Calls the named method: Alert.alert(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
325	`"Saved",`	Continues the surrounding declaration/expression or text: "Saved",. Read it with the preceding opening statement (Alert.alert(); it is not a standalone business operation.
326	`action === "order"`	Continues the surrounding declaration/expression or text: action === "order". Read it with the preceding opening statement ("Saved",); it is not a standalone business operation.
327	`? "Order draft saved in Salesforce. Complete Visit to submit the order."`	Continues the surrounding declaration/expression or text: ? "Order draft saved in Salesforce. Complete Visit to submit the order.". Read it with the preceding opening statement (action === "order"); it is not a standalone business operation.

Line	Source code	Explanation / reading note
328	`: "The visit action was saved in Salesforce.",`	Continues the surrounding declaration/expression or text: : "The visit action was saved in Salesforce.",. Read it with the preceding opening statement (? "Order draft saved in Salesforce. Complete Visit to submit the order."); it is not a standalone business operation.
329	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
330	`} catch (e: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
331	`setSaveError(e.message || "The record could not be saved. Your entries are unchanged.");`	Continues the surrounding declaration/expression or text: setSaveError(e.message || "The record could not be saved. Your entries are unchanged.");. Read it with the preceding opening statement (} catch (e: any) {); it is not a standalone business operation.
332	`Alert.alert("Save not confirmed", e.message || "Please try again.");`	Calls the named method: Alert.alert("Save not confirmed", e.message || "Please try again.");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
333	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
334	`setIsSaving(false);`	Continues the surrounding declaration/expression or text: setIsSaving(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
335	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
336	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
337	`const checkout = async () => {`	Declares/initializes local data used by the surrounding operation: const checkout = async () => {. Collection contents and assignments below determine its purpose.
338	`if (isCompleting || isSaving) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (isCompleting || isSaving) return;.
339	`setIsCompleting(true);`	Continues the surrounding declaration/expression or text: setIsCompleting(true);. Read it with the preceding opening statement (if (isCompleting || isSaving) return;); it is not a standalone business operation.
340	`setCompletionMessage("");`	Continues the surrounding declaration/expression or text: setCompletionMessage("");. Read it with the preceding opening statement (setIsCompleting(true);); it is not a standalone business operation.

Line	Source code	Explanation / reading note
341	`    setCompletionError("");`	Continues the surrounding declaration/expression or text: setCompletionError("");. Read it with the preceding opening statement (setCompletionMessage("");); it is not a standalone business operation.
342	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
343	`      const handledProductIds = new Set([`	Declares/initializes local data used by the surrounding operation: const handledProductIds = new Set([. Collection contents and assignments below determine its purpose.
344	`        ...lines.map((line) => line.productId),`	Transforms/selects/aggregates collection values with the callback shown here: ...lines.map((line) => line.productId),. Read the callback body and result assignment together.
345	`        ...refusedProductIds,`	Continues the surrounding declaration/expression or text: ...refusedProductIds,. Read it with the preceding opening statement (...lines.map((line) => line.productId),); it is not a standalone business operation.
346	`      ]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
347	`      const pendingMustSell = products.filter(`	Declares/initializes local data used by the surrounding operation: const pendingMustSell = products.filter(. Collection contents and assignments below determine its purpose.
348	`        (product) =>`	Continues the surrounding declaration/expression or text: (product) =>. Read it with the preceding opening statement (const pendingMustSell = products.filter(); it is not a standalone business operation.
349	`          (product.configuration === "Must Sell" ||`	Continues the surrounding declaration/expression or text: (product.configuration === "Must Sell" ||. Read it with the preceding opening statement ((product) =>); it is not a standalone business operation.
350	`            product.configurations?.some((configuration) => configuration.type === "Must Sell")) &&`	Transforms/selects/aggregates collection values with the callback shown here: product.configurations?.some((configuration) => configuration.type === "Must Sell")) &&. Read the callback body and result assignment together.
351	`          !handledProductIds.has(product.id),`	Calls the named method: !handledProductIds.has(product.id),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
352	`      );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
353	`      if (pendingMustSell.length)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (pendingMustSell.length).

Line	Source code	Explanation / reading note
354	`throw new Error(`	Stops this execution path with a validation/error exception: throw new Error(. The caller/catch block decides how it is reported.
355	`` `Complete or record a refusal for every Must Sell product: ${pendingMustSell.map((product) => product.name).join(", ")}` ``	Transforms/selects/aggregates collection values with the callback shown here: `Complete or record a refusal for every Must Sell product: ${pendingMustSell.map((product) => product.name).join(", ")}`,. Read the callback body and result assignment together.
356	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
357	`if (lines.length) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (lines.length) {.
358	`const order = await postRecoverable<any>("/orders", {`	Waits for this asynchronous operation before continuing: const order = await postRecoverable<any>("/orders", {. The returned result/error must still be handled.
359	`visitId: visit.id,`	Sets/declares the named object property or style/type member: visitId: visit.id,. Interpret it in the enclosing object, props or type definition.
360	`items: lines,`	Sets/declares the named object property or style/type member: items: lines,. Interpret it in the enclosing object, props or type definition.
361	`` requestId: `order-final-${visit.id}`, ``	Sets/declares the named object property or style/type member: requestId: `order-final-${visit.id}`,. Interpret it in the enclosing object, props or type definition.
362	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
363	`setVisit((current: any) => ({ ...current, orderSubmitted: true }));`	Continues the surrounding declaration/expression or text: setVisit((current: any) => ({ ...current, orderSubmitted: true }));. Read it with the preceding opening statement (});); it is not a standalone business operation.
364	`if (order.items) setLines(order.items);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (order.items) setLines(order.items);.
365	`await clearVisitDraft(route.params.store.id);`	Waits for this asynchronous operation before continuing: await clearVisitDraft(route.params.store.id);. The returned result/error must still be handled.
366	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
367	`const loc =`	Declares/initializes local data used by the surrounding operation: const loc =. Collection contents and assignments below determine its purpose.
368	`Platform.OS === "web"`	Continues the surrounding declaration/expression or text: Platform.OS === "web". Read it with the preceding opening statement (const loc =); it is not a standalone business operation.
369	`? {`	Continues the surrounding declaration/expression or text: ? {. Read it with the preceding opening statement (Platform.OS === "web"); it is not a standalone business operation.
370	`coords: {`	Sets/declares the named object property or style/type member: coords: {. Interpret it in the enclosing object, props or type definition.
371	`latitude: route.params.location.latitude,`	Sets/declares the named object property or style/type member: latitude: route.params.location.latitude,. Interpret it in the enclosing object, props or type definition.
372	`longitude: route.params.location.longitude,`	Sets/declares the named object property or style/type member: longitude: route.params.location.longitude,. Interpret it in the enclosing object, props or type definition.
373	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
374	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
375	`: await Location.getCurrentPositionAsync({ accuracy: Location.Accuracy.High });`	Waits for this asynchronous operation before continuing: : await Location.getCurrentPositionAsync({ accuracy: Location.Accuracy.High });. The returned result/error must still be handled.
376	`const completion = await postRecoverable<{`	Waits for this asynchronous operation before continuing: const completion = await postRecoverable<{. The returned result/error must still be handled.
377	`retailerEmailSent?: boolean;`	Sets/declares the named object property or style/type member: retailerEmailSent?: boolean;. Interpret it in the enclosing object, props or type definition.
378	`retailerEmailError?: string;`	Sets/declares the named object property or style/type member: retailerEmailError?: string;. Interpret it in the enclosing object, props or type definition.
379	`}>("/store/checkout", {`	Continues the surrounding declaration/expression or text: }>("/store/checkout", {. Read it with the preceding opening statement (retailerEmailError?: string;); it is not a standalone business operation.

Line	Source code	Explanation / reading note
380	`visitId: visit.id,`	Sets/declares the named object property or style/type member: visitId: visit.id,. Interpret it in the enclosing object, props or type definition.
381	`location: {`	Sets/declares the named object property or style/type member: location: {. Interpret it in the enclosing object, props or type definition.
382	`latitude: loc.coords.latitude,`	Sets/declares the named object property or style/type member: latitude: loc.coords.latitude,. Interpret it in the enclosing object, props or type definition.
383	`longitude: loc.coords.longitude,`	Sets/declares the named object property or style/type member: longitude: loc.coords.longitude,. Interpret it in the enclosing object, props or type definition.
384	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
385	`remarks: form.remarks,`	Sets/declares the named object property or style/type member: remarks: form.remarks,. Interpret it in the enclosing object, props or type definition.
386	`retailerEmail: route.params.store.email,`	Sets/declares the named object property or style/type member: retailerEmail: route.params.store.email,. Interpret it in the enclosing object, props or type definition.
387	`outletName: route.params.store.name,`	Sets/declares the named object property or style/type member: outletName: route.params.store.name,. Interpret it in the enclosing object, props or type definition.
388	`items: lines,`	Sets/declares the named object property or style/type member: items: lines,. Interpret it in the enclosing object, props or type definition.
389	`totalAmount: total,`	Sets/declares the named object property or style/type member: totalAmount: total,. Interpret it in the enclosing object, props or type definition.
390	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
391	`setCompleted(true);`	Continues the surrounding declaration/expression or text: setCompleted(true);. Read it with the preceding opening statement (});); it is not a standalone business operation.
392	`await clearVisitDraft(route.params.store.id);`	Waits for this asynchronous operation before continuing: await clearVisitDraft(route.params.store.id);. The returned result/error must still be handled.
393	`setAction(null);`	Continues the surrounding declaration/expression or text: setAction(null);. Read it with the preceding opening statement (await clearVisitDraft(route.params.store.id);); it is not a standalone business operation.

Line	Source code	Explanation / reading note
394	`setCompletionMessage("Visit completed and saved in Salesforce.");`	Continues the surrounding declaration/expression or text: setCompletionMessage("Visit completed and saved in Salesforce.");. Read it with the preceding opening statement (setAction(null);); it is not a standalone business operation.
395	`Alert.alert(`	Calls the named method: Alert.alert(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
396	`"Visit completed successfully",`	Continues the surrounding declaration/expression or text: "Visit completed successfully",. Read it with the preceding opening statement (Alert.alert(); it is not a standalone business operation.
397	`completion.retailerEmailSent`	Continues the surrounding declaration/expression or text: completion.retailerEmailSent. Read it with the preceding opening statement ("Visit completed successfully",); it is not a standalone business operation.
398	`? "The visit and order were saved in Salesforce, and the retailer email was sent."`	Continues the surrounding declaration/expression or text: ? "The visit and order were saved in Salesforce, and the retailer email was sent.". Read it with the preceding opening statement (completion.retailerEmailSent); it is not a standalone business operation.
399	`: completion.retailerEmailError`	Continues the surrounding declaration/expression or text: : completion.retailerEmailError. Read it with the preceding opening statement (? "The visit and order were saved in Salesforce, and the retailer email was sent."); it is not a standalone business operation.
400	`? `The visit and order were saved in Salesforce. Email was not sent: ${completion.retailerEmailError}``	Continues the surrounding declaration/expression or text: ? `The visit and order were saved in Salesforce. Email was not sent: ${completion.retailerEmailError}`. Read it with the preceding opening statement (: completion.retailerEmailError); it is not a standalone business operation.
401	`: "The visit and order were saved in Salesforce. You can now share the PDF or Excel file through WhatsApp or email.",`	Continues the surrounding declaration/expression or text: : "The visit and order were saved in Salesforce. You can now share the PDF or Excel file through WhatsApp or email.",. Read it with the preceding opening statement (? `The visit and order were saved in Salesforce. Email was not sent: ${completion.retailerEmailError}`); it is not a standalone business operation.
402	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
403	`} catch (e: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.

Line	Source code	Explanation / reading note
404	`setCompletionError(e.message || "Unable to complete the visit. Please try again.");`	Continues the surrounding declaration/expression or text: setCompletionError(e.message || "Unable to complete the visit. Please try again.");. Read it with the preceding opening statement (} catch (e: any) {); it is not a standalone business operation.
405	`Alert.alert(`	Calls the named method: Alert.alert(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
406	`"Checkout failed",`	Continues the surrounding declaration/expression or text: "Checkout failed",. Read it with the preceding opening statement (Alert.alert(); it is not a standalone business operation.
407	`e.message || "Unable to complete the visit. Please try again.",`	Continues the surrounding declaration/expression or text: e.message || "Unable to complete the visit. Please try again.",. Read it with the preceding opening statement ("Checkout failed",); it is not a standalone business operation.
408	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
409	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
410	`setIsCompleting(false);`	Continues the surrounding declaration/expression or text: setIsCompleting(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
411	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
412	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
413	`const share = async (kind: "pdf" | "excel") => {`	Declares/initializes local data used by the surrounding operation: const share = async (kind: "pdf" | "excel") => {. Collection contents and assignments below determine its purpose.
414	`const token = await import("@react-native-async-storage/async-storage").then((m) =>`	Waits for this asynchronous operation before continuing: const token = await import("@react-native-async-storage/async-storage").then((m) =>. The returned result/error must still be handled.
415	`m.default.getItem("token"),`	Calls the named method: m.default.getItem("token"),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
416	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
417	`const apiBase = process.env.EXPO_PUBLIC_API_URL || "http://localhost:4000/api";`	Declares/initializes local data used by the surrounding operation: const apiBase = process.env.EXPO_PUBLIC_API_URL || "http://localhost:4000/api";. Collection contents and assignments below determine its purpose.
418	`const url = `${apiBase}/documents/${kind}/${visit.id}`;`	Declares/initializes local data used by the surrounding operation: const url = `${apiBase}/documents/${kind}/${visit.id}`;. Collection contents and assignments below determine its purpose.
419	`const extension = kind === "pdf" ? "pdf" : "xlsx";`	Declares/initializes local data used by the surrounding operation: const extension = kind === "pdf" ? "pdf" : "xlsx";. Collection contents and assignments below determine its purpose.
420	`const fileName = `${route.params.store.code}-visit-${Date.now()}.${extension}`;`	Declares/initializes local data used by the surrounding operation: const fileName = `${route.params.store.code}-visit-${Date.now()}.${extension}`;. Collection contents and assignments below determine its purpose.
421	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
422	`if (Platform.OS === "web") {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (Platform.OS === "web") {.
423	`const response = await fetch(url, { headers: { Authorization: `Bearer ${token}` } });`	Invokes the external-data boundary: const response = await fetch(url, { headers: { Authorization: `Bearer ${token}` } });. Await/result checks determine whether the operation is confirmed.
424	`if (!response.ok)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!response.ok).
425	`throw new Error(`	Stops this execution path with a validation/error exception: throw new Error(. The caller/catch block decides how it is reported.
426	`(await response.json().catch(() => null))?.message || "Document generation failed",`	Waits for this asynchronous operation before continuing: (await response.json().catch(() => null))?.message || "Document generation failed",. The returned result/error must still be handled.
427	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
428	`const documentBlob = await response.blob();`	Waits for this asynchronous operation before continuing: const documentBlob = await response.blob();. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
429	`const documentFile = new File([documentBlob], fileName, { type: documentBlob.type });`	Declares/initializes local data used by the surrounding operation: const documentFile = new File([documentBlob], fileName, { type: documentBlob.type });. Collection contents and assignments below determine its purpose.
430	`const browserNavigator: any = navigator;`	Declares/initializes local data used by the surrounding operation: const browserNavigator: any = navigator;. Collection contents and assignments below determine its purpose.
431	`if (browserNavigator.share && browserNavigator.canShare?.({ files: [documentFile] })) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (browserNavigator.share && browserNavigator.canShare?.({ files: [documentFile] })) {.
432	`await browserNavigator.share({`	Waits for this asynchronous operation before continuing: await browserNavigator.share({. The returned result/error must still be handled.
433	`title: \`${route.params.store.name} visit ${kind.toUpperCase()}\`,`	Sets/declares the named object property or style/type member: title: `${route.params.store.name} visit ${kind.toUpperCase()}`,. Interpret it in the enclosing object, props or type definition.
434	`text: \`SFA visit document for ${route.params.store.name}. Choose WhatsApp or Mail to send it.\`,`	Sets/declares the named object property or style/type member: text: `SFA visit document for ${route.params.store.name}. Choose WhatsApp or Mail to send it.`,. Interpret it in the enclosing object, props or type definition.
435	`files: [documentFile],`	Sets/declares the named object property or style/type member: files: [documentFile],. Interpret it in the enclosing object, props or type definition.
436	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
437	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
438	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
439	`const objectUrl = URL.createObjectURL(documentBlob);`	Declares/initializes local data used by the surrounding operation: const objectUrl = URL.createObjectURL(documentBlob);. Collection contents and assignments below determine its purpose.
440	`const anchor = document.createElement("a");`	Declares/initializes local data used by the surrounding operation: const anchor = document.createElement("a");. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
441	`anchor.href = objectUrl;`	Assigns the right-hand expression to the named variable/property: anchor.href = objectUrl;. This is in-memory unless it is later persisted by an explicit call.
442	`anchor.download = fileName;`	Assigns the right-hand expression to the named variable/property: anchor.download = fileName;. This is in-memory unless it is later persisted by an explicit call.
443	`anchor.click();`	Calls the named method: anchor.click();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
444	`URL.revokeObjectURL(objectUrl);`	Calls the named method: URL.revokeObjectURL(objectUrl);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
445	`Alert.alert(`	Calls the named method: Alert.alert(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
446	`"Document downloaded",`	Continues the surrounding declaration/expression or text: "Document downloaded",. Read it with the preceding opening statement (Alert.alert(); it is not a standalone business operation.
447	`` `${fileName} was downloaded. Attach it in WhatsApp or email.`, ``	Continues the surrounding declaration/expression or text: `${fileName} was downloaded. Attach it in WhatsApp or email.`,. Read it with the preceding opening statement ("Document downloaded",); it is not a standalone business operation.
448	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
449	`} else {`	Alternative branch taken when the preceding condition is false.
450	`` const uri = `${FileSystem.cacheDirectory}${fileName}`; ``	Declares/initializes local data used by the surrounding operation: const uri = `${FileSystem.cacheDirectory}${fileName}`;. Collection contents and assignments below determine its purpose.
451	`const result = await FileSystem.downloadAsync(url, uri, {`	Waits for this asynchronous operation before continuing: const result = await FileSystem.downloadAsync(url, uri, {. The returned result/error must still be handled.
452	`` headers: { Authorization: `Bearer ${token}` }, ``	Sets/declares the named object property or style/type member: headers: { Authorization: `Bearer ${token}` },. Interpret it in the enclosing object, props or type definition.
453	`sessionType: FileSystem.FileSystemSessionType.BACKGROUND,`	Sets/declares the named object property or style/type member: sessionType: FileSystem.FileSystemSessionType.BACKGROUND,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
454	`md5: false,`	Sets/declares the named object property or style/type member: md5: false,. Interpret it in the enclosing object, props or type definition.
455	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
456	`if (!(await Sharing.isAvailableAsync()))`	Waits for this asynchronous operation before continuing: if (!(await Sharing.isAvailableAsync())). The returned result/error must still be handled.
457	`throw new Error("Sharing is not available on this device");`	Stops this execution path with a validation/error exception: throw new Error("Sharing is not available on this device");. The caller/catch block decides how it is reported.
458	`await Sharing.shareAsync(result.uri, {`	Waits for this asynchronous operation before continuing: await Sharing.shareAsync(result.uri, {. The returned result/error must still be handled.
459	`dialogTitle: \`Send ${kind.toUpperCase()} using WhatsApp or Mail\`,`	Sets/declares the named object property or style/type member: dialogTitle: `Send ${kind.toUpperCase()} using WhatsApp or Mail`,. Interpret it in the enclosing object, props or type definition.
460	`mimeType:`	Sets/declares the named object property or style/type member: mimeType:. Interpret it in the enclosing object, props or type definition.
461	`kind === "pdf"`	Continues the surrounding declaration/expression or text: kind === "pdf". Read it with the preceding opening statement (mimeType:); it is not a standalone business operation.
462	`? "application/pdf"`	Continues the surrounding declaration/expression or text: ? "application/pdf". Read it with the preceding opening statement (kind === "pdf"); it is not a standalone business operation.
463	`: "application/vnd.openxmlformats-officedocument.spreadsheetml.sheet",`	Continues the surrounding declaration/expression or text: : "application/vnd.openxmlformats-officedocument.spreadsheetml.sheet",. Read it with the preceding opening statement (? "application/pdf"); it is not a standalone business operation.
464	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
465	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
466	`} catch (error: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.

Line	Source code	Explanation / reading note
467	`if (error?.name === "AbortError") return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (error?.name === "AbortError") return;.
468	`Alert.alert("Document unavailable", error.message);`	Calls the named method: Alert.alert("Document unavailable", error.message);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
469	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
470	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
471	`if (!visit)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!visit).
472	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
473	`<View style={s.center}>`	Renders/opens a UI element or component: <View style={s.center}>. Props and child content below determine appearance and interactions.
474	`<Text>{startError || "Starting secure visit…"}</Text>`	Renders/opens a UI element or component: <Text>{startError || "Starting secure visit…"}</Text>. Props and child content below determine appearance and interactions.
475	`{!!startError && <Button title="TRY AGAIN" onPress={startVisit} />}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
476	`</View>`	Closes the UI element/component opened above.
477	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
478	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
479	`<ScrollView style={s.root} contentContainerStyle={{ padding: 16 }}>`	Renders/opens a UI element or component: <ScrollView style={s.root} contentContainerStyle={{ padding: 16 }}>. Props and child content below determine appearance and interactions.
480	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
481	`<Label>In outlet · {route.params.distance} m verified</Label>`	Renders/opens a UI element or component: <Label>In outlet · {route.params.distance} m verified</Label>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
482	`<Text style={s.store}>{route.params.store.name}</Text>`	Renders/opens a UI element or component: <Text style={s.store}>{route.params.store.name}</Text>. Props and child content below determine appearance and interactions.
483	`<Text style={s.sub}>`	Renders/opens a UI element or component: <Text style={s.sub}>. Props and child content below determine appearance and interactions.
484	`{route.params.store.code} · {new Date().toLocaleString("en-IN")}`	Continues the surrounding declaration/expression or text: {route.params.store.code} · {new Date().toLocaleString("en-IN")}. Read it with the preceding opening statement (<Text style={s.sub}>); it is not a standalone business operation.
485	`</Text>`	Closes the UI element/component opened above.
486	`</Card>`	Closes the UI element/component opened above.
487	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
488	`title={refreshing ? "REFRESHING…" : "REFRESH SALESFORCE DATA"}`	Assigns the right-hand expression to the named variable/property: title={refreshing ? "REFRESHING…" : "REFRESH SALESFORCE DATA"}. This is in-memory unless it is later persisted by an explicit call.
489	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.
490	`onPress={refreshRecords}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
491	`disabled={refreshing || isSaving || isCompleting}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
492	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (disabled={refreshing || isSaving || isCompleting}); it is not a standalone business operation.
493	`{!!saveMessage && <Text style={s.completionSuccess}>{saveMessage}</Text>}`	Assigns the right-hand expression to the named variable/property: {!!saveMessage && <Text style={s.completionSuccess}>{saveMessage}</Text>}. This is in-memory unless it is later persisted by an explicit call.
494	`{!!saveError && <Text style={s.completionError}>{saveError}</Text>}`	Assigns the right-hand expression to the named variable/property: {!!saveError && <Text style={s.completionError}>{saveError}</Text>}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
495	`{!completed && (`	Continues the surrounding declaration/expression or text: {!completed && (. Read it with the preceding opening statement ({!!saveError && <Text style={s.completionError}>{saveError}</Text>}); it is not a standalone business operation.
496	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
497	`<Text style={s.heading}>In-visit actions</Text>`	Renders/opens a UI element or component: <Text style={s.heading}>In-visit actions</Text>. Props and child content below determine appearance and interactions.
498	`<View style={s.grid}>`	Renders/opens a UI element or component: <View style={s.grid}>. Props and child content below determine appearance and interactions.
499	`{[`	Continues the surrounding declaration/expression or text: {[. Read it with the preceding opening statement (<View style={s.grid}>); it is not a standalone business operation.
500	`["1", "Take Order", () => setAction("order")],`	Continues the surrounding declaration/expression or text: ["1", "Take Order", () => setAction("order")],. Read it with the preceding opening statement ({[); it is not a standalone business operation.
501	`["2", "Return", () => setAction("return")],`	Continues the surrounding declaration/expression or text: ["2", "Return", () => setAction("return")],. Read it with the preceding opening statement (["1", "Take Order", () => setAction("order")],); it is not a standalone business operation.
502	`["3", "Competitor", () => setAction("competitor")],`	Continues the surrounding declaration/expression or text: ["3", "Competitor", () => setAction("competitor")],. Read it with the preceding opening statement (["2", "Return", () => setAction("return")],); it is not a standalone business operation.
503	`["4", "Stock Check", () => setAction("stock")],`	Continues the surrounding declaration/expression or text: ["4", "Stock Check", () => setAction("stock")],. Read it with the preceding opening statement (["3", "Competitor", () => setAction("competitor")],); it is not a standalone business operation.
504	`["5", "Tickets", () => setAction("ticket")],`	Continues the surrounding declaration/expression or text: ["5", "Tickets", () => setAction("ticket")],. Read it with the preceding opening statement (["4", "Stock Check", () => setAction("stock")],); it is not a standalone business operation.
505	`["6", "Schemes", () => setShowSchemes((value) => !value)],`	Continues the surrounding declaration/expression or text: ["6", "Schemes", () => setShowSchemes((value) => !value)],. Read it with the preceding opening statement (["5", "Tickets", () => setAction("ticket")],); it is not a standalone business operation.

Line	Source code	Explanation / reading note
506	`[`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (["6", "Schemes", () => setShowSchemes((value) => !value)],); it is not a standalone business operation.
507	`"7",`	Continues the surrounding declaration/expression or text: "7",. Read it with the preceding opening statement ([]; it is not a standalone business operation.
508	`"Navigate",`	Continues the surrounding declaration/expression or text: "Navigate",. Read it with the preceding opening statement ("7",); it is not a standalone business operation.
509	`() =>`	Continues the surrounding declaration/expression or text: () =>. Read it with the preceding opening statement ("Navigate",); it is not a standalone business operation.
510	`Linking.openURL(`	Calls the named method: Linking.openURL(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
511	`` `https://www.google.com/maps/dir/?api=1&destination=${route.params.store.latitude},${route.params.store.longitude}`, ``	Assigns the right-hand expression to the named variable/property: `https://www.google.com/maps/dir/?api=1&destination=${route.params.store.latitude},${route.params.store.longitude}` ,. This is in-memory unless it is later persisted by an explicit call.
512	`).catch(() =>`	Continues the surrounding declaration/expression or text:).catch(() =>. Read it with the preceding opening statement (`https://www.google.com/maps/dir/?api=1&destination=${route.params.store.latitude},${route.params.store.longitude}`,); it is not a standalone business operation.
513	`Alert.alert("Maps unavailable", "Please open your maps application."),`	Calls the named method: Alert.alert("Maps unavailable", "Please open your maps application."),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
514	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
515	`],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
516	`[`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement ( ],); it is not a standalone business operation.
517	`"8",`	Continues the surrounding declaration/expression or text: "8",. Read it with the preceding opening statement ([]; it is not a standalone business operation.

Line	Source code	Explanation / reading note
518	`"Share Order",`	Continues the surrounding declaration/expression or text: "Share Order",. Read it with the preceding opening statement ("8",); it is not a standalone business operation.
519	`() =>`	Continues the surrounding declaration/expression or text: () =>. Read it with the preceding opening statement ("Share Order",); it is not a standalone business operation.
520	`lines.length`	Continues the surrounding declaration/expression or text: lines.length. Read it with the preceding opening statement (() =>); it is not a standalone business operation.
521	`? share("pdf")`	Continues the surrounding declaration/expression or text: ? share("pdf"). Read it with the preceding opening statement (lines.length); it is not a standalone business operation.
522	`: Alert.alert("No order", "Create an order before sharing it."),`	Calls the named method: : Alert.alert("No order", "Create an order before sharing it."),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
523	`],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
524	`["9", "Checkout", checkout],`	Continues the surrounding declaration/expression or text: ["9", "Checkout", checkout],. Read it with the preceding opening statement ( ],); it is not a standalone business operation.
525	`["10", "Asset Survey", () => setAction("asset")],`	Continues the surrounding declaration/expression or text: ["10", "Asset Survey", () => setAction("asset")],. Read it with the preceding opening statement (["9", "Checkout", checkout],); it is not a standalone business operation.
526	`[`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement (["10", "Asset Survey", () => setAction("asset")],); it is not a standalone business operation.
527	`"11",`	Continues the surrounding declaration/expression or text: "11",. Read it with the preceding opening statement ([]; it is not a standalone business operation.
528	`"Survey & Merchandising",`	Continues the surrounding declaration/expression or text: "Survey & Merchandising",. Read it with the preceding opening statement ("11",); it is not a standalone business operation.
529	`() =>`	Continues the surrounding declaration/expression or text: () =>. Read it with the preceding opening statement ("Survey & Merchandising",); it is not a standalone business operation.
530	`navigation.navigate("Survey", {`	Calls the named method: navigation.navigate("Survey", {. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
531	`store: route.params.store,`	Sets/declares the named object property or style/type member: store: route.params.store,. Interpret it in the enclosing object, props or type definition.
532	`visitId: visit.id,`	Sets/declares the named object property or style/type member: visitId: visit.id,. Interpret it in the enclosing object, props or type definition.
533	`location: route.params.location,`	Sets/declares the named object property or style/type member: location: route.params.location,. Interpret it in the enclosing object, props or type definition.
534	`}),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
535	`],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
536	`].map(([number, label, handler]) => (`	Transforms/selects/aggregates collection values with the callback shown here:].map(([number, label, handler]) => (. Read the callback body and result assignment together.
537	`<Text key={String(label)} style={s.actionTile} onPress={handler as () => void}>`	Renders/opens a UI element or component: <Text key={String(label)} style={s.actionTile} onPress={handler as () => void}>. Props and child content below determine appearance and interactions.
538	`<Text style={s.actionNumber}>{number as string}</Text>`	Renders/opens a UI element or component: <Text style={s.actionNumber}>{number as string}</Text>. Props and child content below determine appearance and interactions.
539	`{"\n"}`	Continues the surrounding declaration/expression or text: {"\n"}. Read it with the preceding opening statement (<Text style={s.actionNumber}>{number as string}</Text>); it is not a standalone business operation.
540	`{label as string}`	Continues the surrounding declaration/expression or text: {label as string}. Read it with the preceding opening statement ({"\n"}); it is not a standalone business operation.
541	`</Text>`	Closes the UI element/component opened above.
542	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
543	`</View>`	Closes the UI element/component opened above.
544	`</>`	Closes the UI element/component opened above.
545	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
546	`{showSchemes && (`	Continues the surrounding declaration/expression or text: {showSchemes && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
547	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
548	`<Label>Product-specific schemes</Label>`	Renders/opens a UI element or component: <Label>Product-specific schemes</Label>. Props and child content below determine appearance and interactions.
549	`{products`	Continues the surrounding declaration/expression or text: {products. Read it with the preceding opening statement (<Label>Product-specific schemes</Label>); it is not a standalone business operation.
550	`.filter((product) => product.schemes?.length)`	Transforms/selects/aggregates collection values with the callback shown here: .filter((product) => product.schemes?.length). Read the callback body and result assignment together.
551	`.map((product) => (`	Transforms/selects/aggregates collection values with the callback shown here: .map((product) => (. Read the callback body and result assignment together.
552	`<View key={product.id}>`	Renders/opens a UI element or component: <View key={product.id}>. Props and child content below determine appearance and interactions.
553	`<Text style={s.productName}>{product.name}</Text>`	Renders/opens a UI element or component: <Text style={s.productName}>{product.name}</Text>. Props and child content below determine appearance and interactions.
554	`{product.schemes?.map((scheme) => (`	Transforms/selects/aggregates collection values with the callback shown here: {product.schemes?.map((scheme) => (. Read the callback body and result assignment together.
555	`<Text key={scheme.id} style={s.sub}>`	Renders/opens a UI element or component: <Text key={scheme.id} style={s.sub}>. Props and child content below determine appearance and interactions.
556	`{scheme.name} · Minimum {scheme.minimumQuantity} · {scheme.discountPercent}%`	Continues the surrounding declaration/expression or text: {scheme.name} · Minimum {scheme.minimumQuantity} · {scheme.discountPercent}%. Read it with the preceding opening statement (<Text key={scheme.id} style={s.sub}>); it is not a standalone business operation.
557	`discount`	Continues the surrounding declaration/expression or text: discount. Read it with the preceding opening statement ({scheme.name} · Minimum {scheme.minimumQuantity} · {scheme.discountPercent}%); it is not a standalone business operation.

Line	Source code	Explanation / reading note
558	`</Text>`	Closes the UI element/component opened above.
559	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
560	`</View>`	Closes the UI element/component opened above.
561	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
562	`{!products.some((product) => product.schemes?.length) && (`	Transforms/selects/aggregates collection values with the callback shown here: {!products.some((product) => product.schemes?.length) && (. Read the callback body and result assignment together.
563	`<Text>No applicable schemes.</Text>`	Renders/opens a UI element or component: <Text>No applicable schemes.</Text>. Props and child content below determine appearance and interactions.
564	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
565	`</Card>`	Closes the UI element/component opened above.
566	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
567	`{action && (`	Continues the surrounding declaration/expression or text: {action && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
568	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
569	`<Text style={s.formTitle}>{action.toUpperCase()}</Text>`	Renders/opens a UI element or component: <Text style={s.formTitle}>{action.toUpperCase()}</Text>. Props and child content below determine appearance and interactions.
570	`{action === "order" && (`	Continues the surrounding declaration/expression or text: {action === "order" && (. Read it with the preceding opening statement (<Text style={s.formTitle}>{action.toUpperCase()}</Text>); it is not a standalone business operation.
571	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
572	`<Text style={s.orderHelp}>`	Renders/opens a UI element or component: <Text style={s.orderHelp}>. Props and child content below determine appearance and interactions.
573	`Choose a Salesforce-controlled configuration, then select products for this outlet.`	Continues the surrounding declaration/expression or text: Choose a Salesforce-controlled configuration, then select products for this outlet.. Read it with the preceding opening statement (<Text style={s.orderHelp}>); it is not a standalone business operation.
574	`</Text>`	Closes the UI element/component opened above.
575	`<View style={s.tabRow}>`	Renders/opens a UI element or component: <View style={s.tabRow}>. Props and child content below determine appearance and interactions.
576	`{(["All Products", "Must Sell", "Focus Sell", "Suggested Sell"] as OrderView[]).map(`	Transforms/selects/aggregates collection values with the callback shown here: {(["All Products", "Must Sell", "Focus Sell", "Suggested Sell"] as OrderView[]).map(. Read the callback body and result assignment together.
577	`(view) => (`	Continues the surrounding declaration/expression or text: (view) => (. Read it with the preceding opening statement ({(["All Products", "Must Sell", "Focus Sell", "Suggested Sell"] as OrderView[]).map(); it is not a standalone business operation.
578	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
579	`key={view}`	Assigns the right-hand expression to the named variable/property: key={view}. This is in-memory unless it is later persisted by an explicit call.
580	`style={[s.tab, orderView === view && s.tabActive]}`	Assigns the right-hand expression to the named variable/property: style={[s.tab, orderView === view && s.tabActive]}. This is in-memory unless it is later persisted by an explicit call.
581	`onPress={() => selectView(view)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
582	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (onPress={() => selectView(view)}); it is not a standalone business operation.
583	`<Text style={[s.tabText, orderView === view && s.tabTextActive]}>{view}</Text>`	Renders/opens a UI element or component: <Text style={[s.tabText, orderView === view && s.tabTextActive]}>{view}</Text>. Props and child content below determine appearance and interactions.
584	`</Pressable>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
585	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
586	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
587	`</View>`	Closes the UI element/component opened above.
588	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
589	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
590	`placeholder="Search product, SKU or brand"`	Assigns the right-hand expression to the named variable/property: placeholder="Search product, SKU or brand". This is in-memory unless it is later persisted by an explicit call.
591	`value={productSearch}`	Assigns the right-hand expression to the named variable/property: value={productSearch}. This is in-memory unless it is later persisted by an explicit call.
592	`onChangeText={setProductSearch}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
593	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={setProductSearch}); it is not a standalone business operation.
594	`<Label>Selected product details</Label>`	Renders/opens a UI element or component: <Label>Selected product details</Label>. Props and child content below determine appearance and interactions.
595	`<ProductIdentityFields product={selectedProduct} />`	Renders/opens a UI element or component: <ProductIdentityFields product={selectedProduct} />. Props and child content below determine appearance and interactions.
596	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
597	`title={showProductFilters ? "HIDE PRODUCT FILTERS" : "FILTER PRODUCTS"}`	Assigns the right-hand expression to the named variable/property: title={showProductFilters ? "HIDE PRODUCT FILTERS" : "FILTER PRODUCTS"}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
598	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.
599	`onPress={() => setShowProductFilters((value) => !value)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
600	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setShowProductFilters((value) => !value)}); it is not a standalone business operation.
601	`{showProductFilters && (`	Continues the surrounding declaration/expression or text: {showProductFilters && (. Read it with the preceding opening statement (/>); it is not a standalone business operation.
602	`<View style={s.filterRow}>`	Renders/opens a UI element or component: <View style={s.filterRow}>. Props and child content below determine appearance and interactions.
603	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
604	`style={s.filter}`	Assigns the right-hand expression to the named variable/property: style={s.filter}. This is in-memory unless it is later persisted by an explicit call.
605	`onPress={() => cycleFilter(brands, brandFilter, setBrandFilter)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
606	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (onPress={() => cycleFilter(brands, brandFilter, setBrandFilter)}); it is not a standalone business operation.
607	`<Text style={s.filterLabel}>FILTER BY BRAND</Text>`	Renders/opens a UI element or component: <Text style={s.filterLabel}>FILTER BY BRAND</Text>. Props and child content below determine appearance and interactions.
608	`<Text style={s.filterValue}>{brandFilter}</Text>`	Renders/opens a UI element or component: <Text style={s.filterValue}>{brandFilter}</Text>. Props and child content below determine appearance and interactions.
609	`</Pressable>`	Closes the UI element/component opened above.
610	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
611	`style={s.filter}`	Assigns the right-hand expression to the named variable/property: style={s.filter}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
612	`onPress={() => cycleFilter(subBrands, subBrandFilter, setSubBrandFilter)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
613	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (onPress={() => cycleFilter(subBrands, subBrandFilter, setSubBrandFilter)}); it is not a standalone business operation.
614	`<Text style={s.filterLabel}>FILTER BY SUB-BRAND</Text>`	Renders/opens a UI element or component: <Text style={s.filterLabel}>FILTER BY SUB-BRAND</Text>. Props and child content below determine appearance and interactions.
615	`<Text style={s.filterValue}>{subBrandFilter}</Text>`	Renders/opens a UI element or component: <Text style={s.filterValue}>{subBrandFilter}</Text>. Props and child content below determine appearance and interactions.
616	`</Pressable>`	Closes the UI element/component opened above.
617	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
618	`style={s.filter}`	Assigns the right-hand expression to the named variable/property: style={s.filter}. This is in-memory unless it is later persisted by an explicit call.
619	`onPress={() => cycleFilter(aliases, aliasFilter, setAliasFilter)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
620	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (onPress={() => cycleFilter(aliases, aliasFilter, setAliasFilter)}); it is not a standalone business operation.
621	`<Text style={s.filterLabel}>FILTER BY ALIAS</Text>`	Renders/opens a UI element or component: <Text style={s.filterLabel}>FILTER BY ALIAS</Text>. Props and child content below determine appearance and interactions.
622	`<Text style={s.filterValue}>{aliasFilter}</Text>`	Renders/opens a UI element or component: <Text style={s.filterValue}>{aliasFilter}</Text>. Props and child content below determine appearance and interactions.
623	`</Pressable>`	Closes the UI element/component opened above.
624	`</View>`	Closes the UI element/component opened above.
625	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
626	`{!selectedProduct ? (`	Continues the surrounding declaration/expression or text: {!selectedProduct ? (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
627	`<Text style={s.sub}>No products match this configuration and filter.</Text>`	Renders/opens a UI element or component: <Text style={s.sub}>No products match this configuration and filter.</Text>. Props and child content below determine appearance and interactions.
628	`) : (`	Continues the surrounding declaration/expression or text:) : (. Read it with the preceding opening statement (<Text style={s.sub}>No products match this configuration and filter.</Text>); it is not a standalone business operation.
629	`<Card style={s.productCard}>`	Renders/opens a UI element or component: <Card style={s.productCard}>. Props and child content below determine appearance and interactions.
630	`<View style={s.productTop}>`	Renders/opens a UI element or component: <View style={s.productTop}>. Props and child content below determine appearance and interactions.
631	`<Text style={s.productName}>{selectedProduct.name}</Text>`	Renders/opens a UI element or component: <Text style={s.productName}>{selectedProduct.name}</Text>. Props and child content below determine appearance and interactions.
632	`<Text style={s.configuration}>`	Renders/opens a UI element or component: <Text style={s.configuration}>. Props and child content below determine appearance and interactions.
633	`{selectedProduct.configurations`	Continues the surrounding declaration/expression or text: {selectedProduct.configurations. Read it with the preceding opening statement (<Text style={s.configuration}>); it is not a standalone business operation.
634	`?.map((configuration) => configuration.type)`	Transforms/selects/aggregates collection values with the callback shown here: ?.map((configuration) => configuration.type). Read the callback body and result assignment together.
635	`.join(" · ") ||`	Continues the surrounding declaration/expression or text: .join(" · ") ||. Read it with the preceding opening statement (?.map((configuration) => configuration.type)); it is not a standalone business operation.
636	`selectedProduct.configuration ||`	Continues the surrounding declaration/expression or text: selectedProduct.configuration ||. Read it with the preceding opening statement (.join(" · ") ||); it is not a standalone business operation.

Line	Source code	Explanation / reading note
637	`"Standard"}`	Continues the surrounding declaration/expression or text: "Standard"}. Read it with the preceding opening statement (selectedProduct.configuration ||); it is not a standalone business operation.
638	`</Text>`	Closes the UI element/component opened above.
639	`</View>`	Closes the UI element/component opened above.
640	`<Text style={s.sub}>{selectedProduct.code}</Text>`	Renders/opens a UI element or component: <Text style={s.sub}>{selectedProduct.code}</Text>. Props and child content below determine appearance and interactions.
641	`<Text style={s.productMeta}>`	Renders/opens a UI element or component: <Text style={s.productMeta}>. Props and child content below determine appearance and interactions.
642	`Price <Money value={selectedProduct.price} /> · Stock {selectedProduct.stock} ·`	Assigns the right-hand expression to the named variable/property: Price <Money value={selectedProduct.price} /> · Stock {selectedProduct.stock} ·. This is in-memory unless it is later persisted by an explicit call.
643	`Previously purchased {selectedProduct.previousQuantity || 0}`	Continues the surrounding declaration/expression or text: Previously purchased {selectedProduct.previousQuantity || 0}. Read it with the preceding opening statement (Price <Money value={selectedProduct.price} /> · Stock {selectedProduct.stock} ·); it is not a standalone business operation.
644	`</Text>`	Closes the UI element/component opened above.
645	`{!!(selectedConfiguration || selectedProduct.configurationName) && (`	Continues the surrounding declaration/expression or text: {!!(selectedConfiguration || selectedProduct.configurationName) && (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
646	`<Text style={s.suggestion}>`	Renders/opens a UI element or component: <Text style={s.suggestion}>. Props and child content below determine appearance and interactions.
647	`{selectedConfiguration?.name || selectedProduct.configurationName} · Minimum{" "}`	Continues the surrounding declaration/expression or text: {selectedConfiguration?.name || selectedProduct.configurationName} · Minimum{" "}. Read it with the preceding opening statement (<Text style={s.suggestion}>); it is not a standalone business operation.
648	`{selectedConfiguration?.minimumQuantity ||`	Continues the surrounding declaration/expression or text: {selectedConfiguration?.minimumQuantity ||. Read it with the preceding opening statement ({selectedConfiguration?.name || selectedProduct.configurationName} · Minimum{" "}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
649	`selectedProduct.minimumQuantity ||`	Continues the surrounding declaration/expression or text: selectedProduct.minimumQuantity ||. Read it with the preceding opening statement ({selectedConfiguration?.minimumQuantity ||); it is not a standalone business operation.
650	`1}`	Continues the surrounding declaration/expression or text: 1}. Read it with the preceding opening statement (selectedProduct.minimumQuantity ||); it is not a standalone business operation.
651	`{selectedConfiguration?.targetQuantity || selectedProduct.targetQuantity`	Continues the surrounding declaration/expression or text: {selectedConfiguration?.targetQuantity || selectedProduct.targetQuantity. Read it with the preceding opening statement (1}); it is not a standalone business operation.
652	`? ` · Target ${selectedConfiguration?.targetQuantity || selectedProduct.targetQuantity}`	Continues the surrounding declaration/expression or text: ? ` · Target ${selectedConfiguration?.targetQuantity || selectedProduct.targetQuantity}`. Read it with the preceding opening statement ({selectedConfiguration?.targetQuantity || selectedProduct.targetQuantity); it is not a standalone business operation.
653	`: ""}`	Continues the surrounding declaration/expression or text: : ""}. Read it with the preceding opening statement (? ` · Target ${selectedConfiguration?.targetQuantity || selectedProduct.targetQuantity}`); it is not a standalone business operation.
654	`{selectedConfiguration?.geography`	Continues the surrounding declaration/expression or text: {selectedConfiguration?.geography. Read it with the preceding opening statement (: ""}); it is not a standalone business operation.
655	`? ` · ${selectedConfiguration.geography}`	Continues the surrounding declaration/expression or text: ? ` · ${selectedConfiguration.geography}`. Read it with the preceding opening statement ({selectedConfiguration?.geography); it is not a standalone business operation.
656	`: ""}`	Continues the surrounding declaration/expression or text: : ""}. Read it with the preceding opening statement (? ` · ${selectedConfiguration.geography}`); it is not a standalone business operation.
657	`{selectedConfiguration?.channel &&`	Continues the surrounding declaration/expression or text: {selectedConfiguration?.channel &&. Read it with the preceding opening statement (: ""}); it is not a standalone business operation.
658	`selectedConfiguration.channel !== "All Channels"`	Continues the surrounding declaration/expression or text: selectedConfiguration.channel !== "All Channels". Read it with the preceding opening statement ({selectedConfiguration?.channel &&); it is not a standalone business operation.

Line	Source code	Explanation / reading note
659	`? ` · ${selectedConfiguration.channel}``	Continues the surrounding declaration/expression or text: ? ` · ${selectedConfiguration.channel}`. Read it with the preceding opening statement (selectedConfiguration.channel !== "All Channels"); it is not a standalone business operation.
660	`: ""}`	Continues the surrounding declaration/expression or text: : ""}. Read it with the preceding opening statement (? ` · ${selectedConfiguration.channel}`); it is not a standalone business operation.
661	`</Text>`	Closes the UI element/component opened above.
662	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
663	`{!!selectedProduct.suggestionSource && (`	Continues the surrounding declaration/expression or text: {!!selectedProduct.suggestionSource && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
664	`<Text style={s.suggestion}>{selectedProduct.suggestionSource}</Text>`	Renders/opens a UI element or component: <Text style={s.suggestion}>{selectedProduct.suggestionSource}</Text>. Props and child content below determine appearance and interactions.
665	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
666	`{!!selectedProduct.lastFiveOrders?.length && (`	Continues the surrounding declaration/expression or text: {!!selectedProduct.lastFiveOrders?.length && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
667	`<View style={s.history}>`	Renders/opens a UI element or component: <View style={s.history}>. Props and child content below determine appearance and interactions.
668	`<Label>LAST FIVE ORDER HISTORY</Label>`	Renders/opens a UI element or component: <Label>LAST FIVE ORDER HISTORY</Label>. Props and child content below determine appearance and interactions.
669	`{selectedProduct.lastFiveOrders.map((history) => (`	Transforms/selects/aggregates collection values with the callback shown here: {selectedProduct.lastFiveOrders.map((history) => (. Read the callback body and result assignment together.
670	`<Text key={`${history.orderId}-${history.orderDate}`} style={s.historyLine}>`	Renders/opens a UI element or component: <Text key={`${history.orderId}-${history.orderDate}`} style={s.historyLine}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
671	`{history.orderNumber || "Order"} ·{" "}`	Continues the surrounding declaration/expression or text: {history.orderNumber || "Order"} ·{" "}. Read it with the preceding opening statement (<Text key={`${history.orderId}-${history.orderDate}`} style={s.historyLine}>); it is not a standalone business operation.
672	`{history.orderDate || "Date unavailable"} · Qty {history.quantity}`	Continues the surrounding declaration/expression or text: {history.orderDate || "Date unavailable"} · Qty {history.quantity}. Read it with the preceding opening statement ({history.orderNumber || "Order"} ·{" "}); it is not a standalone business operation.
673	`</Text>`	Closes the UI element/component opened above.
674	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
675	`</View>`	Closes the UI element/component opened above.
676	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
677	`</Card>`	Closes the UI element/component opened above.
678	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
679	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
680	`title="NEXT PRODUCT"`	Assigns the right-hand expression to the named variable/property: title="NEXT PRODUCT". This is in-memory unless it is later persisted by an explicit call.
681	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.
682	`onPress={() => {`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
683	`const next = nextProduct(visibleProducts, selectedProduct?.id);`	Declares/initializes local data used by the surrounding operation: const next = nextProduct(visibleProducts, selectedProduct?.id);. Collection contents and assignments below determine its purpose.
684	`if (!next) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!next) return;.

Line	Source code	Explanation / reading note
685	`update("productId", next.id);`	Continues the surrounding declaration/expression or text: update("productId", next.id);. Read it with the preceding opening statement (if (!next) return;); it is not a standalone business operation.
686	`update("schemeId", "");`	Continues the surrounding declaration/expression or text: update("schemeId", "");. Read it with the preceding opening statement (update("productId", next.id);); it is not a standalone business operation.
687	`update("refusalNotes", "");`	Continues the surrounding declaration/expression or text: update("refusalNotes", "");. Read it with the preceding opening statement (update("schemeId", "");); it is not a standalone business operation.
688	`setSelectedRefusalReason("");`	Continues the surrounding declaration/expression or text: setSelectedRefusalReason("");. Read it with the preceding opening statement (update("refusalNotes", "");); it is not a standalone business operation.
689	`}}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
690	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}}); it is not a standalone business operation.
691	`<Label>AVAILABLE SCHEMES FOR THIS PRODUCT</Label>`	Renders/opens a UI element or component: <Label>AVAILABLE SCHEMES FOR THIS PRODUCT</Label>. Props and child content below determine appearance and interactions.
692	`{!selectedProduct?.schemes?.length ? (`	Continues the surrounding declaration/expression or text: {!selectedProduct?.schemes?.length ? (. Read it with the preceding opening statement (<Label>AVAILABLE SCHEMES FOR THIS PRODUCT</Label>); it is not a standalone business operation.
693	`<Text style={s.sub}>No active scheme is applicable to this product.</Text>`	Renders/opens a UI element or component: <Text style={s.sub}>No active scheme is applicable to this product.</Text>. Props and child content below determine appearance and interactions.
694	`) : (`	Continues the surrounding declaration/expression or text:) : (. Read it with the preceding opening statement (<Text style={s.sub}>No active scheme is applicable to this product.</Text>); it is not a standalone business operation.
695	`selectedProduct.schemes.map((scheme) => (`	Transforms/selects/aggregates collection values with the callback shown here: selectedProduct.schemes.map((scheme) => (. Read the callback body and result assignment together.

Line	Source code	Explanation / reading note
696	`<Text`	Renders/opens a UI element or component: <Text. Props and child content below determine appearance and interactions.
697	`key={scheme.id}`	Assigns the right-hand expression to the named variable/property: key={scheme.id}. This is in-memory unless it is later persisted by an explicit call.
698	`style={[s.schemeCard, form.schemeId === scheme.id && s.schemeSelected]}`	Assigns the right-hand expression to the named variable/property: style={[s.schemeCard, form.schemeId === scheme.id && s.schemeSelected]}. This is in-memory unless it is later persisted by an explicit call.
699	`onPress={() => update("schemeId", form.schemeId === scheme.id ? "" : scheme.id)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
700	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (onPress={() => update("schemeId", form.schemeId === scheme.id ? "" : scheme.id)}); it is not a standalone business operation.
701	`{form.schemeId === scheme.id ? "✓ " : ""}`	Continues the surrounding declaration/expression or text: {form.schemeId === scheme.id ? "✓ " : ""}. Read it with the preceding opening statement (>); it is not a standalone business operation.
702	`{scheme.name}`	Continues the surrounding declaration/expression or text: {scheme.name}. Read it with the preceding opening statement ({form.schemeId === scheme.id ? "✓ " : ""}); it is not a standalone business operation.
703	`{"\n"}`	Continues the surrounding declaration/expression or text: {"\n"}. Read it with the preceding opening statement ({scheme.name}); it is not a standalone business operation.
704	`<Text style={s.schemeDetail}>`	Renders/opens a UI element or component: <Text style={s.schemeDetail}>. Props and child content below determine appearance and interactions.
705	`{scheme.type || "Scheme"} · Min {scheme.minimumQuantity}`	Continues the surrounding declaration/expression or text: {scheme.type || "Scheme"} · Min {scheme.minimumQuantity}. Read it with the preceding opening statement (<Text style={s.schemeDetail}>); it is not a standalone business operation.
706	`{scheme.discountPercent ? ` · ${scheme.discountPercent}% discount` : ""}`	Continues the surrounding declaration/expression or text: {scheme.discountPercent ? ` · ${scheme.discountPercent}% discount` : ""}. Read it with the preceding opening statement ({scheme.type || "Scheme"} · Min {scheme.minimumQuantity}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
707	`{scheme.freeQuantity ? ` · ${scheme.freeQuantity} free` : ""}`	Continues the surrounding declaration/expression or text: {scheme.freeQuantity ? ` · ${scheme.freeQuantity} free` : ""}. Read it with the preceding opening statement ({scheme.discountPercent ? ` · ${scheme.discountPercent}% discount` : ""}); it is not a standalone business operation.
708	`</Text>`	Closes the UI element/component opened above.
709	`</Text>`	Closes the UI element/component opened above.
710	`))`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
711	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
712	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
713	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
714	`keyboardType="numeric"`	Assigns the right-hand expression to the named variable/property: keyboardType="numeric". This is in-memory unless it is later persisted by an explicit call.
715	`label="Quantity"`	Assigns the right-hand expression to the named variable/property: label="Quantity". This is in-memory unless it is later persisted by an explicit call.
716	`placeholder="e.g. 10"`	Assigns the right-hand expression to the named variable/property: placeholder="e.g. 10". This is in-memory unless it is later persisted by an explicit call.
717	`value={form.quantity}`	Assigns the right-hand expression to the named variable/property: value={form.quantity}. This is in-memory unless it is later persisted by an explicit call.
718	`onChangeText={(v) => update("quantity", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
719	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("quantity", v)}); it is not a standalone business operation.
720	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
721	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
722	`keyboardType="numeric"`	Assigns the right-hand expression to the named variable/property: keyboardType="numeric". This is in-memory unless it is later persisted by an explicit call.
723	`label="Discount (₹)"`	Assigns the right-hand expression to the named variable/property: label="Discount (₹)". This is in-memory unless it is later persisted by an explicit call.
724	`placeholder="e.g. 0"`	Assigns the right-hand expression to the named variable/property: placeholder="e.g. 0". This is in-memory unless it is later persisted by an explicit call.
725	`value={form.discount}`	Assigns the right-hand expression to the named variable/property: value={form.discount}. This is in-memory unless it is later persisted by an explicit call.
726	`onChangeText={(v) => update("discount", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
727	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("discount", v)}); it is not a standalone business operation.
728	`{(selectedProduct?.configuration === "Must Sell" ||`	Continues the surrounding declaration/expression or text: {(selectedProduct?.configuration === "Must Sell" ||. Read it with the preceding opening statement (/>); it is not a standalone business operation.
729	`selectedProduct?.configurations?.some(`	Transforms/selects/aggregates collection values with the callback shown here: selectedProduct?.configurations?.some(. Read the callback body and result assignment together.
730	`(configuration) => configuration.type === "Must Sell",`	Continues the surrounding declaration/expression or text: (configuration) => configuration.type === "Must Sell",. Read it with the preceding opening statement (selectedProduct?.configurations?.some(); it is not a standalone business operation.
731	`)) &&`	Continues the surrounding declaration/expression or text:)) &&. Read it with the preceding opening statement ((configuration) => configuration.type === "Must Sell",); it is not a standalone business operation.
732	`!lines.some((line) => line.productId === selectedProduct.id) &&`	Transforms/selects/aggregates collection values with the callback shown here: !lines.some((line) => line.productId === selectedProduct.id) &&. Read the callback body and result assignment together.

Line	Source code	Explanation / reading note
733	`!refusedProductIds.includes(selectedProduct.id) && (`	Calls the named method: !refusedProductIds.includes(selectedProduct.id) && (. Its implementation defines the side effect/result; use the symbol/file index to follow it.
734	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
735	`<Label>RETAILER DECLINED THIS MUST SELL PRODUCT</Label>`	Renders/opens a UI element or component: <Label>RETAILER DECLINED THIS MUST SELL PRODUCT</Label>. Props and child content below determine appearance and interactions.
736	`<View style={s.reasonGrid}>`	Renders/opens a UI element or component: <View style={s.reasonGrid}>. Props and child content below determine appearance and interactions.
737	`{refusalReasons.map((reason) => {`	Transforms/selects/aggregates collection values with the callback shown here: {refusalReasons.map((reason) => {. Read the callback body and result assignment together.
738	`const isSelected = selectedRefusalReason === reason;`	Declares/initializes local data used by the surrounding operation: const isSelected = selectedRefusalReason === reason;. Collection contents and assignments below determine its purpose.
739	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
740	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
741	`key={reason}`	Assigns the right-hand expression to the named variable/property: key={reason}. This is in-memory unless it is later persisted by an explicit call.
742	`style={[s.reason, isSelected && s.reasonSelected]}`	Assigns the right-hand expression to the named variable/property: style={[s.reason, isSelected && s.reasonSelected]}. This is in-memory unless it is later persisted by an explicit call.
743	`onPress={() => selectRefusalReason(reason)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
744	`accessibilityRole="button"`	Assigns the right-hand expression to the named variable/property: accessibilityRole="button". This is in-memory unless it is later persisted by an explicit call.
745	`accessibilityState={{ selected: isSelected }}`	Assigns the right-hand expression to the named variable/property: accessibilityState={{ selected: isSelected }}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
746	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (accessibilityState={{ selected: isSelected }}); it is not a standalone business operation.
747	`<Text style={[s.reasonText, isSelected && s.reasonTextSelected]}>`	Renders/opens a UI element or component: <Text style={[s.reasonText, isSelected && s.reasonTextSelected]}>. Props and child content below determine appearance and interactions.
748	`{isSelected ? "✓ " : ""}`	Continues the surrounding declaration/expression or text: {isSelected ? "✓ " : ""}. Read it with the preceding opening statement (<Text style={[s.reasonText, isSelected && s.reasonTextSelected]}>); it is not a standalone business operation.
749	`{reason}`	Continues the surrounding declaration/expression or text: {reason}. Read it with the preceding opening statement ({isSelected ? "✓ " : ""}); it is not a standalone business operation.
750	`</Text>`	Closes the UI element/component opened above.
751	`</Pressable>`	Closes the UI element/component opened above.
752	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
753	`})}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
754	`</View>`	Closes the UI element/component opened above.
755	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
756	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
757	`placeholder="Optional refusal notes"`	Assigns the right-hand expression to the named variable/property: placeholder="Optional refusal notes". This is in-memory unless it is later persisted by an explicit call.
758	`value={form.refusalNotes}`	Assigns the right-hand expression to the named variable/property: value={form.refusalNotes}. This is in-memory unless it is later persisted by an explicit call.
759	`onChangeText={(value) => update("refusalNotes", value)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.

Line	Source code	Explanation / reading note
760	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(value) => update("refusalNotes", value)}); it is not a standalone business operation.
761	`</>`	Closes the UI element/component opened above.
762	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
763	`</>`	Closes the UI element/component opened above.
764	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
765	`{action === "return" && (`	Continues the surrounding declaration/expression or text: {action === "return" && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
766	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
767	`<ProductIdentityFields`	Renders/opens a UI element or component: <ProductIdentityFields. Props and child content below determine appearance and interactions.
768	`product={products.find((p) => p.id === (form.productId || products[0]?.id))}`	Transforms/selects/aggregates collection values with the callback shown here: product={products.find((p) => p.id === (form.productId || products[0]?.id))}. Read the callback body and result assignment together.
769	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (product={products.find((p) => p.id === (form.productId || products[0]?.id))}); it is not a standalone business operation.
770	`<Text style={s.sub}>`	Renders/opens a UI element or component: <Text style={s.sub}>. Props and child content below determine appearance and interactions.
771	`Product: {products.find((p) => p.id === (form.productId || products[0]?.id))?.name}`	Sets/declares the named object property or style/type member: Product: {products.find((p) => p.id === (form.productId || products[0]?.id))?.name}. Interpret it in the enclosing object, props or type definition.
772	`</Text>`	Closes the UI element/component opened above.
773	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
774	`title="NEXT PRODUCT"`	Assigns the right-hand expression to the named variable/property: title="NEXT PRODUCT". This is in-memory unless it is later persisted by an explicit call.
775	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.
776	`onPress={() => {`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
777	`if (!products.length) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!products.length) return;.
778	`const index = products.findIndex(`	Declares/initializes local data used by the surrounding operation: const index = products.findIndex(. Collection contents and assignments below determine its purpose.
779	`(p) => p.id === (form.productId || products[0]?.id),`	Continues the surrounding declaration/expression or text: (p) => p.id === (form.productId || products[0]?.id),. Read it with the preceding opening statement (const index = products.findIndex(); it is not a standalone business operation.
780	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
781	`update("productId", products[(index + 1) % products.length].id);`	Continues the surrounding declaration/expression or text: update("productId", products[(index + 1) % products.length].id);. Read it with the preceding opening statement ( );); it is not a standalone business operation.
782	`}}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
783	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}}); it is not a standalone business operation.
784	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
785	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
786	`keyboardType="numeric"`	Assigns the right-hand expression to the named variable/property: keyboardType="numeric". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
787	`placeholder="Return quantity"`	Assigns the right-hand expression to the named variable/property: placeholder="Return quantity". This is in-memory unless it is later persisted by an explicit call.
788	`onChangeText={(v) => update("quantity", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
789	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("quantity", v)}); it is not a standalone business operation.
790	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
791	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
792	`placeholder="Reason: Damaged / Expired / Wrong Supply / Other"`	Assigns the right-hand expression to the named variable/property: placeholder="Reason: Damaged / Expired / Wrong Supply / Other". This is in-memory unless it is later persisted by an explicit call.
793	`onChangeText={(v) => update("reason", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
794	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("reason", v)}); it is not a standalone business operation.
795	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
796	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
797	`placeholder="Manufacturing date (YYYY-MM-DD)"`	Assigns the right-hand expression to the named variable/property: placeholder="Manufacturing date (YYYY-MM-DD)". This is in-memory unless it is later persisted by an explicit call.
798	`onChangeText={(v) => update("manufacturingDate", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.

Line	Source code	Explanation / reading note
799	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("manufacturingDate", v)}); it is not a standalone business operation.
800	`</>`	Closes the UI element/component opened above.
801	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
802	`{action === "stock" && (`	Continues the surrounding declaration/expression or text: {action === "stock" && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
803	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
804	`<ProductIdentityFields`	Renders/opens a UI element or component: <ProductIdentityFields. Props and child content below determine appearance and interactions.
805	`product={products.find((p) => p.id === (form.productId || products[0]?.id))}`	Transforms/selects/aggregates collection values with the callback shown here: product={products.find((p) => p.id === (form.productId || products[0]?.id))}. Read the callback body and result assignment together.
806	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (product={products.find((p) => p.id === (form.productId || products[0]?.id))}); it is not a standalone business operation.
807	`<Text style={s.sub}>`	Renders/opens a UI element or component: <Text style={s.sub}>. Props and child content below determine appearance and interactions.
808	`Product: {products.find((p) => p.id === (form.productId || products[0]?.id))?.name}`	Sets/declares the named object property or style/type member: Product: {products.find((p) => p.id === (form.productId || products[0]?.id))?.name}. Interpret it in the enclosing object, props or type definition.
809	`</Text>`	Closes the UI element/component opened above.
810	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
811	`title="NEXT PRODUCT"`	Assigns the right-hand expression to the named variable/property: title="NEXT PRODUCT". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
812	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.
813	`onPress={() => {`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
814	`if (!products.length) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!products.length) return;.
815	`const index = products.findIndex(`	Declares/initializes local data used by the surrounding operation: const index = products.findIndex(. Collection contents and assignments below determine its purpose.
816	`(p) => p.id === (form.productId || products[0]?.id),`	Continues the surrounding declaration/expression or text: (p) => p.id === (form.productId || products[0]?.id),. Read it with the preceding opening statement (const index = products.findIndex(); it is not a standalone business operation.
817	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
818	`update("productId", products[(index + 1) % products.length].id);`	Continues the surrounding declaration/expression or text: update("productId", products[(index + 1) % products.length].id);. Read it with the preceding opening statement ( );); it is not a standalone business operation.
819	`}}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
820	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}}); it is not a standalone business operation.
821	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
822	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
823	`keyboardType="numeric"`	Assigns the right-hand expression to the named variable/property: keyboardType="numeric". This is in-memory unless it is later persisted by an explicit call.
824	`placeholder="Shelf quantity"`	Assigns the right-hand expression to the named variable/property: placeholder="Shelf quantity". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
825	`onChangeText={(v) => update("quantity", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
826	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("quantity", v)}); it is not a standalone business operation.
827	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
828	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
829	`placeholder="Manufacturing date (YYYY-MM-DD)"`	Assigns the right-hand expression to the named variable/property: placeholder="Manufacturing date (YYYY-MM-DD)". This is in-memory unless it is later persisted by an explicit call.
830	`onChangeText={(v) => update("manufacturingDate", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
831	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("manufacturingDate", v)}); it is not a standalone business operation.
832	`</>`	Closes the UI element/component opened above.
833	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
834	`{action === "asset" && (`	Continues the surrounding declaration/expression or text: {action === "asset" && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
835	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
836	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
837	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
838	`placeholder="Asset code"`	Assigns the right-hand expression to the named variable/property: placeholder="Asset code". This is in-memory unless it is later persisted by an explicit call.
839	`onChangeText={(v) => update("assetCode", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
840	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("assetCode", v)}); it is not a standalone business operation.
841	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
842	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
843	`placeholder="Asset name"`	Assigns the right-hand expression to the named variable/property: placeholder="Asset name". This is in-memory unless it is later persisted by an explicit call.
844	`onChangeText={(v) => update("assetName", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
845	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("assetName", v)}); it is not a standalone business operation.
846	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
847	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
848	`placeholder="Status: Working / Needs Service / Damaged / Missing"`	Assigns the right-hand expression to the named variable/property: placeholder="Status: Working / Needs Service / Damaged / Missing". This is in-memory unless it is later persisted by an explicit call.
849	`onChangeText={(v) => update("status", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
850	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("status", v)}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
851	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
852	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
853	`placeholder="Given date (YYYY-MM-DD)"`	Assigns the right-hand expression to the named variable/property: placeholder="Given date (YYYY-MM-DD)". This is in-memory unless it is later persisted by an explicit call.
854	`onChangeText={(v) => update("givenDate", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
855	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("givenDate", v)}); it is not a standalone business operation.
856	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
857	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
858	`placeholder="Picture URL"`	Assigns the right-hand expression to the named variable/property: placeholder="Picture URL". This is in-memory unless it is later persisted by an explicit call.
859	`onChangeText={(v) => update("pictureUrl", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
860	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("pictureUrl", v)}); it is not a standalone business operation.
861	`</>`	Closes the UI element/component opened above.
862	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
863	`{action === "competitor" && (`	Continues the surrounding declaration/expression or text: {action === "competitor" && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
864	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
865	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
866	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
867	`placeholder="Competitor name"`	Assigns the right-hand expression to the named variable/property: placeholder="Competitor name". This is in-memory unless it is later persisted by an explicit call.
868	`onChangeText={(v) => update("competitorName", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
869	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("competitorName", v)}); it is not a standalone business operation.
870	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
871	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
872	`placeholder="Company"`	Assigns the right-hand expression to the named variable/property: placeholder="Company". This is in-memory unless it is later persisted by an explicit call.
873	`onChangeText={(v) => update("company", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
874	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("company", v)}); it is not a standalone business operation.
875	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
876	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
877	`keyboardType="numeric"`	Assigns the right-hand expression to the named variable/property: keyboardType="numeric". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
878	`placeholder="MRP ₹"`	Assigns the right-hand expression to the named variable/property: placeholder="MRP ₹". This is in-memory unless it is later persisted by an explicit call.
879	`onChangeText={(v) => update("mrp", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
880	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("mrp", v)}); it is not a standalone business operation.
881	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
882	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
883	`keyboardType="numeric"`	Assigns the right-hand expression to the named variable/property: keyboardType="numeric". This is in-memory unless it is later persisted by an explicit call.
884	`placeholder="Retail buying price ₹"`	Assigns the right-hand expression to the named variable/property: placeholder="Retail buying price ₹". This is in-memory unless it is later persisted by an explicit call.
885	`onChangeText={(v) => update("rbp", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
886	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("rbp", v)}); it is not a standalone business operation.
887	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
888	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
889	`placeholder="Promotion / Scheme"`	Assigns the right-hand expression to the named variable/property: placeholder="Promotion / Scheme". This is in-memory unless it is later persisted by an explicit call.
890	`onChangeText={(v) => update("promotion", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.

Line	Source code	Explanation / reading note
891	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("promotion", v)}); it is not a standalone business operation.
892	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
893	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
894	`placeholder="Remarks"`	Assigns the right-hand expression to the named variable/property: placeholder="Remarks". This is in-memory unless it is later persisted by an explicit call.
895	`onChangeText={(v) => update("remarks", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
896	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("remarks", v)}); it is not a standalone business operation.
897	`</>`	Closes the UI element/component opened above.
898	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
899	`{action === "ticket" && (`	Continues the surrounding declaration/expression or text: {action === "ticket" && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
900	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
901	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
902	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
903	`placeholder="Ticket subject"`	Assigns the right-hand expression to the named variable/property: placeholder="Ticket subject". This is in-memory unless it is later persisted by an explicit call.
904	`onChangeText={(v) => update("subject", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.

Line	Source code	Explanation / reading note
905	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("subject", v)}); it is not a standalone business operation.
906	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
907	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
908	`multiline`	Continues the surrounding declaration/expression or text: multiline. Read it with the preceding opening statement (style={s.input}); it is not a standalone business operation.
909	`placeholder="Description and remarks"`	Assigns the right-hand expression to the named variable/property: placeholder="Description and remarks". This is in-memory unless it is later persisted by an explicit call.
910	`onChangeText={(v) => update("description", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
911	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("description", v)}); it is not a standalone business operation.
912	`</>`	Closes the UI element/component opened above.
913	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
914	`{action === "revisit" && (`	Continues the surrounding declaration/expression or text: {action === "revisit" && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
915	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
916	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
917	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
918	`placeholder="Follow-up type"`	Assigns the right-hand expression to the named variable/property: placeholder="Follow-up type". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
919	`onChangeText={(v) => update("type", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
920	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("type", v)}); it is not a standalone business operation.
921	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
922	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
923	`placeholder="Remarks"`	Assigns the right-hand expression to the named variable/property: placeholder="Remarks". This is in-memory unless it is later persisted by an explicit call.
924	`onChangeText={(v) => update("remarks", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
925	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("remarks", v)}); it is not a standalone business operation.
926	`<VisitField`	Renders/opens a UI element or component: <VisitField. Props and child content below determine appearance and interactions.
927	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
928	`placeholder="Next follow-up date/time"`	Assigns the right-hand expression to the named variable/property: placeholder="Next follow-up date/time". This is in-memory unless it is later persisted by an explicit call.
929	`onChangeText={(v) => update("followUp", v)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
930	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={(v) => update("followUp", v)}); it is not a standalone business operation.
931	`</>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
932	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
933	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
934	`title={isSaving ? "SAVING…" : "SAVE ACTION"}`	Assigns the right-hand expression to the named variable/property: title={isSaving ? "SAVING…" : "SAVE ACTION"}. This is in-memory unless it is later persisted by an explicit call.
935	`onPress={save}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
936	`disabled={isSaving || isCompleting}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
937	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (disabled={isSaving || isCompleting}); it is not a standalone business operation.
938	`<Button title="CANCEL" kind="secondary" onPress={() => setAction(null)} />`	Renders/opens a UI element or component: <Button title="CANCEL" kind="secondary" onPress={() => setAction(null)} />. Props and child content below determine appearance and interactions.
939	`</Card>`	Closes the UI element/component opened above.
940	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
941	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
942	`<Label>Visit summary</Label>`	Renders/opens a UI element or component: <Label>Visit summary</Label>. Props and child content below determine appearance and interactions.
943	`<Text>Order lines: {lines.length}</Text>`	Renders/opens a UI element or component: <Text>Order lines: {lines.length}</Text>. Props and child content below determine appearance and interactions.
944	`<Text>Returns: {returns.length}</Text>`	Renders/opens a UI element or component: <Text>Returns: {returns.length}</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
945	`<Text>Competitor activities: {competitors.length}</Text>`	Renders/opens a UI element or component: <Text>Competitor activities: {competitors.length}</Text>. Props and child content below determine appearance and interactions.
946	`<Text>Tickets: {tickets.length}</Text>`	Renders/opens a UI element or component: <Text>Tickets: {tickets.length}</Text>. Props and child content below determine appearance and interactions.
947	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
948	`Stock checks: {visit.stocks?.length || 0} · Asset surveys: {visit.assets?.length || 0}`	Continues the surrounding declaration/expression or text: Stock checks: {visit.stocks?.length || 0} · Asset surveys: {visit.assets?.length || 0}. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
949	`</Text>`	Closes the UI element/component opened above.
950	`{lines.map((line, index) => (`	Transforms/selects/aggregates collection values with the callback shown here: {lines.map((line, index) => (. Read the callback body and result assignment together.
951	`<Text key={`${line.productId}-${index}`} style={s.sub}>`	Renders/opens a UI element or component: <Text key={`${line.productId}-${index}`} style={s.sub}>. Props and child content below determine appearance and interactions.
952	`{line.productName} · Qty {line.quantity} · {line.schemeName || "No scheme"} · ₹`	Continues the surrounding declaration/expression or text: {line.productName} · Qty {line.quantity} · {line.schemeName || "No scheme"} · ₹. Read it with the preceding opening statement (<Text key={`${line.productId}-${index}`} style={s.sub}>); it is not a standalone business operation.
953	`{line.amount}`	Continues the surrounding declaration/expression or text: {line.amount}. Read it with the preceding opening statement ({line.productName} · Qty {line.quantity} · {line.schemeName || "No scheme"} · ₹); it is not a standalone business operation.
954	`</Text>`	Closes the UI element/component opened above.
955	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
956	`{!completed && !visit.orderSubmitted && lines.length > 0 && (`	Continues the surrounding declaration/expression or text: {!completed && !visit.orderSubmitted && lines.length > 0 && (. Read it with the preceding opening statement ( ))}); it is not a standalone business operation.
957	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
958	`title="SAVE DRAFT TO SALESFORCE"`	Assigns the right-hand expression to the named variable/property: title="SAVE DRAFT TO SALESFORCE". This is in-memory unless it is later persisted by an explicit call.
959	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.
960	`disabled={isSaving || isCompleting}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
961	`onPress={async () => {`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
962	`setIsSaving(true);`	Continues the surrounding declaration/expression or text: setIsSaving(true);. Read it with the preceding opening statement (onPress={async () => {); it is not a standalone business operation.
963	`setSaveError("");`	Continues the surrounding declaration/expression or text: setSaveError("");. Read it with the preceding opening statement (setIsSaving(true);); it is not a standalone business operation.
964	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
965	`await saveDraft();`	Waits for this asynchronous operation before continuing: await saveDraft();. The returned result/error must still be handled.
966	`} catch (e: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
967	`setSaveError(e.message);`	Continues the surrounding declaration/expression or text: setSaveError(e.message);. Read it with the preceding opening statement (} catch (e: any) {); it is not a standalone business operation.
968	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
969	`setIsSaving(false);`	Continues the surrounding declaration/expression or text: setIsSaving(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
970	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
971	`}}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
972	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}}); it is not a standalone business operation.
973	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
974	`<Text style={s.total}>`	Renders/opens a UI element or component: <Text style={s.total}>. Props and child content below determine appearance and interactions.
975	`Order total: <Money value={total} />`	Assigns the right-hand expression to the named variable/property: Order total: <Money value={total} />. This is in-memory unless it is later persisted by an explicit call.
976	`</Text>`	Closes the UI element/component opened above.
977	`{!completed ? (`	Continues the surrounding declaration/expression or text: {!completed ? (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
978	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
979	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
980	`title={isCompleting ? "COMPLETING VISIT…" : "COMPLETE VISIT"}`	Assigns the right-hand expression to the named variable/property: title={isCompleting ? "COMPLETING VISIT…" : "COMPLETE VISIT"}. This is in-memory unless it is later persisted by an explicit call.
981	`onPress={checkout}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
982	`disabled={isCompleting || isSaving}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
983	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (disabled={isCompleting || isSaving}); it is not a standalone business operation.
984	`{!!completionError && <Text style={s.completionError}>{completionError}</Text>}`	Assigns the right-hand expression to the named variable/property: {!!completionError && <Text style={s.completionError}>{completionError}</Text>}. This is in-memory unless it is later persisted by an explicit call.
985	`</>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
986	`) : (`	Continues the surrounding declaration/expression or text:) : (. Read it with the preceding opening statement (</>); it is not a standalone business operation.
987	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
988	`{!!completionMessage && <Text style={s.completionSuccess}>{completionMessage}</Text>}`	Assigns the right-hand expression to the named variable/property: {!!completionMessage && <Text style={s.completionSuccess}>{completionMessage}</Text>}. This is in-memory unless it is later persisted by an explicit call.
989	`<Button title="SEND PDF · WHATSAPP / MAIL" onPress={() => share("pdf")} />`	Renders/opens a UI element or component: <Button title="SEND PDF · WHATSAPP / MAIL" onPress={() => share("pdf")} />. Props and child content below determine appearance and interactions.
990	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
991	`title="SEND EXCEL · WHATSAPP / MAIL"`	Assigns the right-hand expression to the named variable/property: title="SEND EXCEL · WHATSAPP / MAIL". This is in-memory unless it is later persisted by an explicit call.
992	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.
993	`onPress={() => share("excel")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
994	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => share("excel")}); it is not a standalone business operation.
995	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
996	`title="EXIT OUTLET"`	Assigns the right-hand expression to the named variable/property: title="EXIT OUTLET". This is in-memory unless it is later persisted by an explicit call.
997	`kind="secondary"`	Assigns the right-hand expression to the named variable/property: kind="secondary". This is in-memory unless it is later persisted by an explicit call.
998	`onPress={() => navigation.navigate("Main")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.

Line	Source code	Explanation / reading note
999	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => navigation.navigate("Main")}); it is not a standalone business operation.
1000	`</>`	Closes the UI element/component opened above.
1001	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1002	`</Card>`	Closes the UI element/component opened above.
1003	`</ScrollView>`	Closes the UI element/component opened above.
1004	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1005	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1006	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
1007	`root: { flex: 1, backgroundColor: colors.surface },`	Sets/declares the named object property or style/type member: root: { flex: 1, backgroundColor: colors.surface },. Interpret it in the enclosing object, props or type definition.
1008	`center: { flex: 1, justifyContent: "center", alignItems: "center" },`	Sets/declares the named object property or style/type member: center: { flex: 1, justifyContent: "center", alignItems: "center" },. Interpret it in the enclosing object, props or type definition.
1009	`store: { fontSize: 23, fontWeight: "900", color: colors.ink, marginTop: 6 },`	Sets/declares the named object property or style/type member: store: { fontSize: 23, fontWeight: "900", color: colors.ink, marginTop: 6 },. Interpret it in the enclosing object, props or type definition.
1010	`sub: { color: colors.muted, marginVertical: 5 },`	Sets/declares the named object property or style/type member: sub: { color: colors.muted, marginVertical: 5 },. Interpret it in the enclosing object, props or type definition.
1011	`heading: {`	Sets/declares the named object property or style/type member: heading: {. Interpret it in the enclosing object, props or type definition.
1012	`fontSize: 20,`	Sets/declares the named object property or style/type member: fontSize: 20,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1013	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
1014	`    color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
1015	`    marginBottom: 8,`	Sets/declares the named object property or style/type member: marginBottom: 8,. Interpret it in the enclosing object, props or type definition.
1016	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1017	`  grid: {`	Sets/declares the named object property or style/type member: grid: {. Interpret it in the enclosing object, props or type definition.
1018	`    marginBottom: 12,`	Sets/declares the named object property or style/type member: marginBottom: 12,. Interpret it in the enclosing object, props or type definition.
1019	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
1020	`    flexWrap: "wrap",`	Sets/declares the named object property or style/type member: flexWrap: "wrap",. Interpret it in the enclosing object, props or type definition.
1021	`    justifyContent: "space-between",`	Sets/declares the named object property or style/type member: justifyContent: "space-between",. Interpret it in the enclosing object, props or type definition.
1022	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1023	`  actionTile: {`	Sets/declares the named object property or style/type member: actionTile: {. Interpret it in the enclosing object, props or type definition.
1024	`    width: "31%",`	Sets/declares the named object property or style/type member: width: "31%",. Interpret it in the enclosing object, props or type definition.
1025	`    minHeight: 82,`	Sets/declares the named object property or style/type member: minHeight: 82,. Interpret it in the enclosing object, props or type definition.
1026	`    marginBottom: 10,`	Sets/declares the named object property or style/type member: marginBottom: 10,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1027	`paddingVertical: 14,`	Sets/declares the named object property or style/type member: paddingVertical: 14,. Interpret it in the enclosing object, props or type definition.
1028	`paddingHorizontal: 5,`	Sets/declares the named object property or style/type member: paddingHorizontal: 5,. Interpret it in the enclosing object, props or type definition.
1029	`backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
1030	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
1031	`borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
1032	`borderRadius: 14,`	Sets/declares the named object property or style/type member: borderRadius: 14,. Interpret it in the enclosing object, props or type definition.
1033	`textAlign: "center",`	Sets/declares the named object property or style/type member: textAlign: "center",. Interpret it in the enclosing object, props or type definition.
1034	`color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
1035	`fontSize: 11,`	Sets/declares the named object property or style/type member: fontSize: 11,. Interpret it in the enclosing object, props or type definition.
1036	`fontWeight: "800",`	Sets/declares the named object property or style/type member: fontWeight: "800",. Interpret it in the enclosing object, props or type definition.
1037	`overflow: "hidden",`	Sets/declares the named object property or style/type member: overflow: "hidden",. Interpret it in the enclosing object, props or type definition.
1038	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1039	`actionNumber: { color: colors.brand, fontSize: 18, fontWeight: "900" },`	Sets/declares the named object property or style/type member: actionNumber: { color: colors.brand, fontSize: 18, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
1040	`formTitle: {`	Sets/declares the named object property or style/type member: formTitle: {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1041	`    fontSize: 18,`	Sets/declares the named object property or style/type member: fontSize: 18,. Interpret it in the enclosing object, props or type definition.
1042	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
1043	`    color: colors.brand,`	Sets/declares the named object property or style/type member: color: colors.brand,. Interpret it in the enclosing object, props or type definition.
1044	`    marginBottom: 8,`	Sets/declares the named object property or style/type member: marginBottom: 8,. Interpret it in the enclosing object, props or type definition.
1045	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1046	`  input: {`	Sets/declares the named object property or style/type member: input: {. Interpret it in the enclosing object, props or type definition.
1047	`    borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
1048	`    borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
1049	`    borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
1050	`    padding: 12,`	Sets/declares the named object property or style/type member: padding: 12,. Interpret it in the enclosing object, props or type definition.
1051	`    marginVertical: 5,`	Sets/declares the named object property or style/type member: marginVertical: 5,. Interpret it in the enclosing object, props or type definition.
1052	`    backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
1053	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1054	`  total: {`	Sets/declares the named object property or style/type member: total: {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1055	`    fontSize: 18,`	Sets/declares the named object property or style/type member: fontSize: 18,. Interpret it in the enclosing object, props or type definition.
1056	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
1057	`    color: colors.brand,`	Sets/declares the named object property or style/type member: color: colors.brand,. Interpret it in the enclosing object, props or type definition.
1058	`    marginVertical: 10,`	Sets/declares the named object property or style/type member: marginVertical: 10,. Interpret it in the enclosing object, props or type definition.
1059	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1060	`  schemeCard: {`	Sets/declares the named object property or style/type member: schemeCard: {. Interpret it in the enclosing object, props or type definition.
1061	`    borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
1062	`    borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
1063	`    borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
1064	`    padding: 12,`	Sets/declares the named object property or style/type member: padding: 12,. Interpret it in the enclosing object, props or type definition.
1065	`    marginVertical: 5,`	Sets/declares the named object property or style/type member: marginVertical: 5,. Interpret it in the enclosing object, props or type definition.
1066	`    color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
1067	`    fontWeight: "800",`	Sets/declares the named object property or style/type member: fontWeight: "800",. Interpret it in the enclosing object, props or type definition.
1068	`    backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1069	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1070	`  schemeSelected: { borderColor: colors.brand, backgroundColor: "#E7F5F3" },`	Sets/declares the named object property or style/type member: schemeSelected: { borderColor: colors.brand, backgroundColor: "#E7F5F3" },. Interpret it in the enclosing object, props or type definition.
1071	`  schemeDetail: { color: colors.muted, fontWeight: "500", fontSize: 12 },`	Sets/declares the named object property or style/type member: schemeDetail: { color: colors.muted, fontWeight: "500", fontSize: 12 },. Interpret it in the enclosing object, props or type definition.
1072	`  orderHelp: { color: colors.muted, marginBottom: 10 },`	Sets/declares the named object property or style/type member: orderHelp: { color: colors.muted, marginBottom: 10 },. Interpret it in the enclosing object, props or type definition.
1073	`  tabRow: { flexDirection: "row", flexWrap: "wrap", gap: 6, marginBottom: 8 },`	Sets/declares the named object property or style/type member: tabRow: { flexDirection: "row", flexWrap: "wrap", gap: 6, marginBottom: 8 },. Interpret it in the enclosing object, props or type definition.
1074	`  tab: {`	Sets/declares the named object property or style/type member: tab: {. Interpret it in the enclosing object, props or type definition.
1075	`    paddingVertical: 9,`	Sets/declares the named object property or style/type member: paddingVertical: 9,. Interpret it in the enclosing object, props or type definition.
1076	`    paddingHorizontal: 12,`	Sets/declares the named object property or style/type member: paddingHorizontal: 12,. Interpret it in the enclosing object, props or type definition.
1077	`    borderRadius: 18,`	Sets/declares the named object property or style/type member: borderRadius: 18,. Interpret it in the enclosing object, props or type definition.
1078	`    borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
1079	`    borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
1080	`    backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
1081	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1082	`tabActive: { backgroundColor: colors.brand, borderColor: colors.brand },`	Sets/declares the named object property or style/type member: tabActive: { backgroundColor: colors.brand, borderColor: colors.brand },. Interpret it in the enclosing object, props or type definition.
1083	`tabText: { fontSize: 11, fontWeight: "800", color: colors.ink },`	Sets/declares the named object property or style/type member: tabText: { fontSize: 11, fontWeight: "800", color: colors.ink },. Interpret it in the enclosing object, props or type definition.
1084	`tabTextActive: { color: "white" },`	Sets/declares the named object property or style/type member: tabTextActive: { color: "white" },. Interpret it in the enclosing object, props or type definition.
1085	`filterRow: { flexDirection: "row", gap: 6, marginVertical: 6 },`	Sets/declares the named object property or style/type member: filterRow: { flexDirection: "row", gap: 6, marginVertical: 6 },. Interpret it in the enclosing object, props or type definition.
1086	`filter: {`	Sets/declares the named object property or style/type member: filter: {. Interpret it in the enclosing object, props or type definition.
1087	`flex: 1,`	Sets/declares the named object property or style/type member: flex: 1,. Interpret it in the enclosing object, props or type definition.
1088	`padding: 9,`	Sets/declares the named object property or style/type member: padding: 9,. Interpret it in the enclosing object, props or type definition.
1089	`borderRadius: 10,`	Sets/declares the named object property or style/type member: borderRadius: 10,. Interpret it in the enclosing object, props or type definition.
1090	`backgroundColor: "#F4F7F5",`	Sets/declares the named object property or style/type member: backgroundColor: "#F4F7F5",. Interpret it in the enclosing object, props or type definition.
1091	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
1092	`borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
1093	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1094	`filterLabel: { fontSize: 8, fontWeight: "900", color: colors.muted },`	Sets/declares the named object property or style/type member: filterLabel: { fontSize: 8, fontWeight: "900", color: colors.muted },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1095	`  filterValue: { fontSize: 10, fontWeight: "800", color: colors.ink, marginTop: 3 },`	Sets/declares the named object property or style/type member: filterValue: { fontSize: 10, fontWeight: "800", color: colors.ink, marginTop: 3 },. Interpret it in the enclosing object, props or type definition.
1096	`  productCard: { marginVertical: 8, borderLeftWidth: 4, borderLeftColor: colors.brand },`	Sets/declares the named object property or style/type member: productCard: { marginVertical: 8, borderLeftWidth: 4, borderLeftColor: colors.brand },. Interpret it in the enclosing object, props or type definition.
1097	`  productTop: {`	Sets/declares the named object property or style/type member: productTop: {. Interpret it in the enclosing object, props or type definition.
1098	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
1099	`    justifyContent: "space-between",`	Sets/declares the named object property or style/type member: justifyContent: "space-between",. Interpret it in the enclosing object, props or type definition.
1100	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
1101	`    gap: 8,`	Sets/declares the named object property or style/type member: gap: 8,. Interpret it in the enclosing object, props or type definition.
1102	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1103	`  productName: { flex: 1, fontSize: 17, fontWeight: "900", color: colors.ink },`	Sets/declares the named object property or style/type member: productName: { flex: 1, fontSize: 17, fontWeight: "900", color: colors.ink },. Interpret it in the enclosing object, props or type definition.
1104	`  configuration: {`	Sets/declares the named object property or style/type member: configuration: {. Interpret it in the enclosing object, props or type definition.
1105	`    fontSize: 9,`	Sets/declares the named object property or style/type member: fontSize: 9,. Interpret it in the enclosing object, props or type definition.
1106	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
1107	`    color: colors.brand,`	Sets/declares the named object property or style/type member: color: colors.brand,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1108	`backgroundColor: "#E7F5F3",`	Sets/declares the named object property or style/type member: backgroundColor: "#E7F5F3",. Interpret it in the enclosing object, props or type definition.
1109	`padding: 6,`	Sets/declares the named object property or style/type member: padding: 6,. Interpret it in the enclosing object, props or type definition.
1110	`borderRadius: 10,`	Sets/declares the named object property or style/type member: borderRadius: 10,. Interpret it in the enclosing object, props or type definition.
1111	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1112	`productMeta: { fontSize: 12, fontWeight: "700", color: colors.ink, marginTop: 6 },`	Sets/declares the named object property or style/type member: productMeta: { fontSize: 12, fontWeight: "700", color: colors.ink, marginTop: 6 },. Interpret it in the enclosing object, props or type definition.
1113	`suggestion: { fontSize: 11, color: colors.blue, fontWeight: "700", marginTop: 5 },`	Sets/declares the named object property or style/type member: suggestion: { fontSize: 11, color: colors.blue, fontWeight: "700", marginTop: 5 },. Interpret it in the enclosing object, props or type definition.
1114	`history: { marginTop: 10, paddingTop: 8, borderTopWidth: 1, borderTopColor: colors.border },`	Sets/declares the named object property or style/type member: history: { marginTop: 10, paddingTop: 8, borderTopWidth: 1, borderTopColor: colors.border },. Interpret it in the enclosing object, props or type definition.
1115	`historyLine: { fontSize: 11, color: colors.muted, marginTop: 3 },`	Sets/declares the named object property or style/type member: historyLine: { fontSize: 11, color: colors.muted, marginTop: 3 },. Interpret it in the enclosing object, props or type definition.
1116	`reasonGrid: { flexDirection: "row", flexWrap: "wrap", gap: 6, marginVertical: 6 },`	Sets/declares the named object property or style/type member: reasonGrid: { flexDirection: "row", flexWrap: "wrap", gap: 6, marginVertical: 6 },. Interpret it in the enclosing object, props or type definition.
1117	`reason: {`	Sets/declares the named object property or style/type member: reason: {. Interpret it in the enclosing object, props or type definition.
1118	`paddingVertical: 9,`	Sets/declares the named object property or style/type member: paddingVertical: 9,. Interpret it in the enclosing object, props or type definition.
1119	`paddingHorizontal: 10,`	Sets/declares the named object property or style/type member: paddingHorizontal: 10,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1120	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
1121	`borderColor: colors.warning,`	Sets/declares the named object property or style/type member: borderColor: colors.warning,. Interpret it in the enclosing object, props or type definition.
1122	`borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
1123	`backgroundColor: "#FFF8E7",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFF8E7",. Interpret it in the enclosing object, props or type definition.
1124	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1125	`reasonText: { fontSize: 10, fontWeight: "800", color: colors.ink },`	Sets/declares the named object property or style/type member: reasonText: { fontSize: 10, fontWeight: "800", color: colors.ink },. Interpret it in the enclosing object, props or type definition.
1126	`reasonSelected: { backgroundColor: colors.warning, borderColor: colors.warning },`	Sets/declares the named object property or style/type member: reasonSelected: { backgroundColor: colors.warning, borderColor: colors.warning },. Interpret it in the enclosing object, props or type definition.
1127	`reasonTextSelected: { color: "white" },`	Sets/declares the named object property or style/type member: reasonTextSelected: { color: "white" },. Interpret it in the enclosing object, props or type definition.
1128	`completionSuccess: {`	Sets/declares the named object property or style/type member: completionSuccess: {. Interpret it in the enclosing object, props or type definition.
1129	`color: colors.brand,`	Sets/declares the named object property or style/type member: color: colors.brand,. Interpret it in the enclosing object, props or type definition.
1130	`fontWeight: "800",`	Sets/declares the named object property or style/type member: fontWeight: "800",. Interpret it in the enclosing object, props or type definition.
1131	`textAlign: "center",`	Sets/declares the named object property or style/type member: textAlign: "center",. Interpret it in the enclosing object, props or type definition.
1132	`marginVertical: 8,`	Sets/declares the named object property or style/type member: marginVertical: 8,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1133	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1134	`  completionError: {`	Sets/declares the named object property or style/type member: completionError: {. Interpret it in the enclosing object, props or type definition.
1135	`    color: colors.danger,`	Sets/declares the named object property or style/type member: color: colors.danger,. Interpret it in the enclosing object, props or type definition.
1136	`    fontWeight: "800",`	Sets/declares the named object property or style/type member: fontWeight: "800",. Interpret it in the enclosing object, props or type definition.
1137	`    textAlign: "center",`	Sets/declares the named object property or style/type member: textAlign: "center",. Interpret it in the enclosing object, props or type definition.
1138	`    marginVertical: 8,`	Sets/declares the named object property or style/type member: marginVertical: 8,. Interpret it in the enclosing object, props or type definition.
1139	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1140	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/storage/primaryQueue.test.ts

Regression tests for primaryQueue. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

67 numbered source lines | SHA-256 7eb4a12277558a64c917a87cd093152330062993d3295ae1f0438797345b643f

Line	Source code	Explanation / reading note
1	`import { beforeEach, describe, it, expect, vi } from "vitest";`	Imports dependencies/types used below: import { beforeEach, describe, it, expect, vi } from "vitest";. Importing a function does not call it.
2	`const memory = vi.hoisted(() => new Map<string, string>());`	Declares/initializes local data used by the surrounding operation: const memory = vi.hoisted(() => new Map<string, string>());. Collection contents and assignments below determine its purpose.
3	`const post = vi.hoisted(() => vi.fn());`	Declares/initializes local data used by the surrounding operation: const post = vi.hoisted(() => vi.fn());. Collection contents and assignments below determine its purpose.
4	`vi.mock("@react-native-async-storage/async-storage", () => ({`	Calls the named method: vi.mock("@react-native-async-storage/async-storage", () => ({. Its implementation defines the side effect/result; use the symbol/file index to follow it.
5	`  default: {`	Sets/declares the named object property or style/type member: default: {. Interpret it in the enclosing object, props or type definition.
6	`    getItem: async (key: string) => memory.get(key) || null,`	Sets/declares the named object property or style/type member: getItem: async (key: string) => memory.get(key) || null,. Interpret it in the enclosing object, props or type definition.
7	`    setItem: async (key: string, value: string) => {`	Sets/declares the named object property or style/type member: setItem: async (key: string, value: string) => {. Interpret it in the enclosing object, props or type definition.
8	`      memory.set(key, value);`	Calls the named method: memory.set(key, value);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
9	`    },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`    getAllKeys: async () => [...memory.keys()],`	Sets/declares the named object property or style/type member: getAllKeys: async () => [...memory.keys()],. Interpret it in the enclosing object, props or type definition.
11	`    multiGet: async (keys: string[]) => keys.map((key) => [key, memory.get(key)]),`	Sets/declares the named object property or style/type member: multiGet: async (keys: string[]) => keys.map((key) => [key, memory.get(key)]),. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
12	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13	`}));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
14	`vi.mock("../api/client", () => ({ post }));`	Calls the named method: vi.mock("../api/client", () => ({ post }));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
15	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.
16	`  savePrimary,`	Continues the surrounding declaration/expression or text: savePrimary,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
17	`  syncPrimary,`	Continues the surrounding declaration/expression or text: syncPrimary,. Read it with the preceding opening statement (savePrimary,); it is not a standalone business operation.
18	`  primaryPending,`	Continues the surrounding declaration/expression or text: primaryPending,. Read it with the preceding opening statement (syncPrimary,); it is not a standalone business operation.
19	`  primaryPendingCount,`	Continues the surrounding declaration/expression or text: primaryPendingCount,. Read it with the preceding opening statement (primaryPending,); it is not a standalone business operation.
20	`  discardRejectedPrimary,`	Continues the surrounding declaration/expression or text: discardRejectedPrimary,. Read it with the preceding opening statement (primaryPendingCount,); it is not a standalone business operation.
21	`  primaryRequestKey,`	Continues the surrounding declaration/expression or text: primaryRequestKey,. Read it with the preceding opening statement (discardRejectedPrimary,); it is not a standalone business operation.
22	`} from "./primaryQueue";`	Completes the dependency import and identifies the module supplying those names.
23	`describe("employee primary offline queue", () => {`	Continues the surrounding declaration/expression or text: describe("employee primary offline queue", () => {. Read it with the preceding opening statement (} from "./primaryQueue";); it is not a standalone business operation.
24	`  beforeEach(() => {`	Continues the surrounding declaration/expression or text: beforeEach(() => {. Read it with the preceding opening statement (describe("employee primary offline queue", () => {); it is not a standalone business operation.

Line	Source code	Explanation / reading note
25	`    memory.clear();`	Calls the named method: memory.clear();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
26	`    post.mockReset();`	Calls the named method: post.mockReset();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
27	`    memory.set("currentUser", JSON.stringify({ employeeId: "employee-a" }));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
28	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`  const body = () => ({`	Declares/initializes local data used by the surrounding operation: const body = () => ({. Collection contents and assignments below determine its purpose.
30	`    action: "primaryOrder" as const,`	Sets/declares the named object property or style/type member: action: "primaryOrder" as const,. Interpret it in the enclosing object, props or type definition.
31	`    requestKey: primaryRequestKey(),`	Sets/declares the named object property or style/type member: requestKey: primaryRequestKey(),. Interpret it in the enclosing object, props or type definition.
32	`    lines: [{ productId: "product", cases: 2 }],`	Sets/declares the named object property or style/type member: lines: [{ productId: "product", cases: 2 }],. Interpret it in the enclosing object, props or type definition.
33	`    notes: "",`	Sets/declares the named object property or style/type member: notes: "",. Interpret it in the enclosing object, props or type definition.
34	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`  it("persists before transmission and retries with exactly the same key", async () => {`	Continues the surrounding declaration/expression or text: it("persists before transmission and retries with exactly the same key", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
36	`    const payload = body();`	Declares/initializes local data used by the surrounding operation: const payload = body();. Collection contents and assignments below determine its purpose.
37	`    await savePrimary("employee-a", payload);`	Waits for this asynchronous operation before continuing: await savePrimary("employee-a", payload);. The returned result/error must still be handled.
38	`    post.mockRejectedValueOnce(Object.assign(new Error("Network unavailable"), { status: 502 }));`	Calls the named method: post.mockRejectedValueOnce(Object.assign(new Error("Network unavailable"), { status: 502 }));. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
39	`    await expect(syncPrimary("employee-a")).rejects.toThrow("Network unavailable");`	Test assertion comparing an expected outcome to actual behavior: await expect(syncPrimary("employee-a")).rejects.toThrow("Network unavailable");. A mismatch fails the test.
40	`    expect(await primaryPendingCount()).toBe(1);`	Test assertion comparing an expected outcome to actual behavior: expect(await primaryPendingCount()).toBe(1);. A mismatch fails the test.
41	`    post.mockResolvedValueOnce({ id: "saved", status: "Submitted" });`	Calls the named method: post.mockResolvedValueOnce({ id: "saved", status: "Submitted" });. Its implementation defines the side effect/result; use the symbol/file index to follow it.
42	`    await syncPrimary("employee-a");`	Waits for this asynchronous operation before continuing: await syncPrimary("employee-a");. The returned result/error must still be handled.
43	`    expect(post.mock.calls[0][1]).toEqual(payload);`	Test assertion comparing an expected outcome to actual behavior: expect(post.mock.calls[0][1]).toEqual(payload);. A mismatch fails the test.
44	`    expect(post.mock.calls[1][1]).toEqual(payload);`	Test assertion comparing an expected outcome to actual behavior: expect(post.mock.calls[1][1]).toEqual(payload);. A mismatch fails the test.
45	`    expect(await primaryPending("employee-a")).toHaveLength(0);`	Test assertion comparing an expected outcome to actual behavior: expect(await primaryPending("employee-a")).toHaveLength(0);. A mismatch fails the test.
46	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`  it("cannot submit another employee’s queued work", async () => {`	Continues the surrounding declaration/expression or text: it("cannot submit another employee’s queued work", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
48	`    await savePrimary("employee-a", body());`	Waits for this asynchronous operation before continuing: await savePrimary("employee-a", body());. The returned result/error must still be handled.
49	`    memory.set("currentUser", JSON.stringify({ employeeId: "employee-b" }));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
50	`    await expect(syncPrimary("employee-a")).rejects.toThrow("employee who saved");`	Test assertion comparing an expected outcome to actual behavior: await expect(syncPrimary("employee-a")).rejects.toThrow("employee who saved");. A mismatch fails the test.
51	`    expect(post).not.toHaveBeenCalled();`	Test assertion comparing an expected outcome to actual behavior: expect(post).not.toHaveBeenCalled();. A mismatch fails the test.

Line	Source code	Explanation / reading note
52	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
53	`  it("retains ambiguous failures but permits removing confirmed rejected requests", async () => {`	Continues the surrounding declaration/expression or text: it("retains ambiguous failures but permits removing confirmed rejected requests", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
54	`    const payload = body();`	Declares/initializes local data used by the surrounding operation: const payload = body();. Collection contents and assignments below determine its purpose.
55	`    await savePrimary("employee-a", payload);`	Waits for this asynchronous operation before continuing: await savePrimary("employee-a", payload);. The returned result/error must still be handled.
56	`    post.mockRejectedValueOnce(Object.assign(new Error("Invalid quantity"), { status: 400 }));`	Calls the named method: post.mockRejectedValueOnce(Object.assign(new Error("Invalid quantity"), { status: 400 }));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
57	`    await expect(syncPrimary("employee-a")).rejects.toThrow();`	Test assertion comparing an expected outcome to actual behavior: await expect(syncPrimary("employee-a")).rejects.toThrow();. A mismatch fails the test.
58	`    await syncPrimary("employee-a");`	Waits for this asynchronous operation before continuing: await syncPrimary("employee-a");. The returned result/error must still be handled.
59	`    expect(post).toHaveBeenCalledTimes(1);`	Test assertion comparing an expected outcome to actual behavior: expect(post).toHaveBeenCalledTimes(1);. A mismatch fails the test.
60	`    await discardRejectedPrimary("employee-a", payload.requestKey);`	Waits for this asynchronous operation before continuing: await discardRejectedPrimary("employee-a", payload.requestKey);. The returned result/error must still be handled.
61	`    expect(await primaryPendingCount()).toBe(0);`	Test assertion comparing an expected outcome to actual behavior: expect(await primaryPendingCount()).toBe(0);. A mismatch fails the test.
62	`    const other = body();`	Declares/initializes local data used by the surrounding operation: const other = body();. Collection contents and assignments below determine its purpose.
63	`    await savePrimary("employee-a", other);`	Waits for this asynchronous operation before continuing: await savePrimary("employee-a", other);. The returned result/error must still be handled.
64	`    await discardRejectedPrimary("employee-a", other.requestKey);`	Waits for this asynchronous operation before continuing: await discardRejectedPrimary("employee-a", other.requestKey);. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
65	`    expect(await primaryPendingCount()).toBe(1);`	Test assertion comparing an expected outcome to actual behavior: expect(await primaryPendingCount()).toBe(1);. A mismatch fails the test.
66	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
67	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/storage/primaryQueue.ts

Employee-scoped durable primary-transaction retry storage with stable request keys; separate from the generic SFA action queue.

74 numbered source lines | SHA-256 77307859677b4bfd25e773a1892760102962c389db3b91454a4188909d96e995

Line	Source code	Explanation / reading note
1	`import AsyncStorage from "@react-native-async-storage/async-storage";`	Imports dependencies/types used below: import AsyncStorage from "@react-native-async-storage/async-storage";. Importing a function does not call it.
2	`import { post } from "../api/client";`	Imports dependencies/types used below: import { post } from "../api/client";. Importing a function does not call it.
3		Blank line separating logical sections; no executable operation.
4	`export type PrimaryPending = {`	Defines a compile-time data contract: export type PrimaryPending = {. TypeScript types do not validate untrusted runtime JSON by themselves.
5	`  requestKey: string;`	Sets/declares the named object property or style/type member: requestKey: string;. Interpret it in the enclosing object, props or type definition.
6	`  action: "primaryOrder" | "primaryReturn";`	Sets/declares the named object property or style/type member: action: "primaryOrder" | "primaryReturn";. Interpret it in the enclosing object, props or type definition.
7	`  lines: any[];`	Sets/declares the named object property or style/type member: lines: any[];. Interpret it in the enclosing object, props or type definition.
8	`  notes: string;`	Sets/declares the named object property or style/type member: notes: string;. Interpret it in the enclosing object, props or type definition.
9	`  error?: string;`	Sets/declares the named object property or style/type member: error?: string;. Interpret it in the enclosing object, props or type definition.
10	`  status?: number;`	Sets/declares the named object property or style/type member: status?: number;. Interpret it in the enclosing object, props or type definition.
11	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
12	`const prefix = "sfa-primary-pending:";`	Declares/initializes local data used by the surrounding operation: const prefix = "sfa-primary-pending:";. Collection contents and assignments below determine its purpose.
13	`let syncing = false;`	Declares/initializes local data used by the surrounding operation: let syncing = false;. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
14	`export async function employeeId() {`	Declares a callable function/method: export async function employeeId() {. Parameters supply its inputs; the following block implements the operation.
15	`  const user = JSON.parse((await AsyncStorage.getItem("currentUser")) || "null");`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
16	`  if (!user?.employeeId) throw new Error("Sign in as an employee first.");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!user?.employeeId) throw new Error("Sign in as an employee first.");.
17	`  return user.employeeId as string;`	Returns user.employeeId as string to the caller (or begins returned UI markup) and ends this execution path.
18	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`export const primaryPending = async (id: string): Promise<PrimaryPending[]> =>`	Assigns the right-hand expression to the named variable/property: export const primaryPending = async (id: string): Promise<PrimaryPending[]> =>. This is in-memory unless it is later persisted by an explicit call.
20	`  JSON.parse((await AsyncStorage.getItem(prefix + id)) || "[]");`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
21	`export async function savePrimary(id: string, body: PrimaryPending) {`	Declares a callable function/method: export async function savePrimary(id: string, body: PrimaryPending) {. Parameters supply its inputs; the following block implements the operation.
22	`  if (syncing) throw new Error("Please wait for synchronization.");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (syncing) throw new Error("Please wait for synchronization.");.
23	`  const rows = await primaryPending(id);`	Waits for this asynchronous operation before continuing: const rows = await primaryPending(id);. The returned result/error must still be handled.
24	`  rows.push(body);`	Calls the named method: rows.push(body);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
25	`  await AsyncStorage.setItem(prefix + id, JSON.stringify(rows));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
26	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
27	`export async function discardRejectedPrimary(id: string, key: string) {`	Declares a callable function/method: export async function discardRejectedPrimary(id: string, key: string) {. Parameters supply its inputs; the following block implements the operation.
28	`  if (syncing) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (syncing) return;.
29	`  const rows = await primaryPending(id);`	Waits for this asynchronous operation before continuing: const rows = await primaryPending(id);. The returned result/error must still be handled.
30	`  await AsyncStorage.setItem(`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
31	`    prefix + id,`	Continues the surrounding declaration/expression or text: prefix + id,. Read it with the preceding opening statement (await AsyncStorage.setItem(); it is not a standalone business operation.
32	`    JSON.stringify(rows.filter((row) => row.requestKey !== key || row.status !== 400)),`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
33	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`export async function primaryPendingCount() {`	Declares a callable function/method: export async function primaryPendingCount() {. Parameters supply its inputs; the following block implements the operation.
36	`  const keys = (await AsyncStorage.getAllKeys()).filter((key) => key.startsWith(prefix));`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
37	`  if (!keys.length) return 0;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!keys.length) return 0;.
38	`  return (await AsyncStorage.multiGet(keys)).reduce(`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
39	`    (sum, [, value]) => sum + JSON.parse(value || "[]").length,`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
40	`    0,`	Continues the surrounding declaration/expression or text: 0,. Read it with the preceding opening statement ((sum, [, value]) => sum + JSON.parse(value || "[]").length,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
41	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43	`export async function syncPrimary(id: string) {`	Declares a callable function/method: export async function syncPrimary(id: string) {. Parameters supply its inputs; the following block implements the operation.
44	`  if (syncing) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (syncing) return;.
45	`  syncing = true;`	Assigns the right-hand expression to the named variable/property: syncing = true;. This is in-memory unless it is later persisted by an explicit call.
46	`  try {`	Starts operations whose failure is handled by the following catch/finally blocks.
47	`    if ((await employeeId()) !== id)`	Waits for this asynchronous operation before continuing: if ((await employeeId()) !== id). The returned result/error must still be handled.
48	`      throw new Error("Sign in as the employee who saved these requests.");`	Stops this execution path with a validation/error exception: throw new Error("Sign in as the employee who saved these requests.");. The caller/catch block decides how it is reported.
49	`    const rows = await primaryPending(id);`	Waits for this asynchronous operation before continuing: const rows = await primaryPending(id);. The returned result/error must still be handled.
50	`    while (rows.length) {`	Repeats work over the specified records/items or while this condition holds: while (rows.length) {. Check where queries/writes occur relative to the loop.
51	`      const row = rows[0];`	Declares/initializes local data used by the surrounding operation: const row = rows[0];. Collection contents and assignments below determine its purpose.
52	`      if (row.status === 400) break;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (row.status === 400) break;.
53	`      try {`	Starts operations whose failure is handled by the following catch/finally blocks.
54	`        const { error, status, ...body } = row;`	Declares/initializes local data used by the surrounding operation: const { error, status, ...body } = row;. Collection contents and assignments below determine its purpose.
55	`        await post("/primary/submit", body);`	Waits for this asynchronous operation before continuing: await post("/primary/submit", body);. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
56	`rows.shift();`	Calls the named method: rows.shift();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
57	`} catch (error: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
58	`row.error = error.message;`	Assigns the right-hand expression to the named variable/property: row.error = error.message;. This is in-memory unless it is later persisted by an explicit call.
59	`row.status = error.status;`	Assigns the right-hand expression to the named variable/property: row.status = error.status;. This is in-memory unless it is later persisted by an explicit call.
60	`await AsyncStorage.setItem(prefix + id, JSON.stringify(rows));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
61	`throw error;`	Stops this execution path with a validation/error exception: throw error;. The caller/catch block decides how it is reported.
62	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
63	`await AsyncStorage.setItem(prefix + id, JSON.stringify(rows));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
64	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
65	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
66	`syncing = false;`	Assigns the right-hand expression to the named variable/property: syncing = false;. This is in-memory unless it is later persisted by an explicit call.
67	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
68	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
69	`// Correlation key only, not an authentication secret.`	Developer comment/documentation: Correlation key only, not an authentication secret. It is not executed.
70	`export const primaryRequestKey = () =>`	Assigns the right-hand expression to the named variable/property: export const primaryRequestKey = () =>. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
71	`  "xxxxxxxx-xxxx-4xxx-yxxx-xxxxxxxxxxxx".replace(/[xy]/g, (c) => {`	Continues the surrounding declaration/expression or text: "xxxxxxxx-xxxx-4xxx-yxxx-xxxxxxxxxxxx".replace(/[xy]/g, (c) => {. Read it with the preceding opening statement (export const primaryRequestKey = () =>); it is not a standalone business operation.
72	`    const n = Math.floor(Math.random() * 16);`	Declares/initializes local data used by the surrounding operation: const n = Math.floor(Math.random() * 16);. Collection contents and assignments below determine its purpose.
73	`    return (c === "x" ? n : (n & 3) | 8).toString(16);`	Returns (c === "x" ? n : (n & 3) | 8).toString(16) to the caller (or begins returned UI markup) and ends this execution path.
74	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/storage/session.test.ts

Regression tests for session. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

44 numbered source lines | SHA-256 bb9a90eaa8bed2411d611e495fa46e750814cd326eec8a9ce77166878af67acb

Line	Source code	Explanation / reading note
1	`import { beforeEach, describe, expect, it, vi } from "vitest";`	Imports dependencies/types used below: import { beforeEach, describe, expect, it, vi } from "vitest";. Importing a function does not call it.
2		Blank line separating logical sections; no executable operation.
3	`const storage = vi.hoisted(() => ({ getAllKeys: vi.fn(), multiRemove: vi.fn() }));`	Declares/initializes local data used by the surrounding operation: const storage = vi.hoisted(() => ({ getAllKeys: vi.fn(), multiRemove: vi.fn() }));. Collection contents and assignments below determine its purpose.
4	`const pendingCount = vi.hoisted(() => vi.fn());`	Declares/initializes local data used by the surrounding operation: const pendingCount = vi.hoisted(() => vi.fn());. Collection contents and assignments below determine its purpose.
5	`vi.mock("@react-native-async-storage/async-storage", () => ({ default: storage }));`	Calls the named method: vi.mock("@react-native-async-storage/async-storage", () => ({ default: storage }));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
6	`vi.mock("./syncQueue", () => ({ pendingCount }));`	Calls the named method: vi.mock("./syncQueue", () => ({ pendingCount }));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
7	`import { logOut } from "./session";`	Imports dependencies/types used below: import { logOut } from "./session";. Importing a function does not call it.
8		Blank line separating logical sections; no executable operation.
9	`describe("log out", () => {`	Continues the surrounding declaration/expression or text: describe("log out", () => {. Read it with the preceding opening statement; it is not a standalone business operation.
10	`  beforeEach(() => {`	Continues the surrounding declaration/expression or text: beforeEach(() => {. Read it with the preceding opening statement (describe("log out", () => {); it is not a standalone business operation.
11	`    vi.resetAllMocks();`	Calls the named method: vi.resetAllMocks();. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
12	`    pendingCount.mockResolvedValue(0);`	Calls the named method: pendingCount.mockResolvedValue(0);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
13	`    storage.getAllKeys.mockResolvedValue([`	Calls the named method: storage.getAllKeys.mockResolvedValue([. Its implementation defines the side effect/result; use the symbol/file index to follow it.
14	`      "token",`	Continues the surrounding declaration/expression or text: "token",. Read it with the preceding opening statement (storage.getAllKeys.mockResolvedValue([); it is not a standalone business operation.
15	`      "currentUser",`	Continues the surrounding declaration/expression or text: "currentUser",. Read it with the preceding opening statement ("token",); it is not a standalone business operation.
16	`      "sfa-api-cache:old:/products",`	Continues the surrounding declaration/expression or text: "sfa-api-cache:old:/products",. Read it with the preceding opening statement ("currentUser",); it is not a standalone business operation.
17	`      "sfa-pending-sync",`	Continues the surrounding declaration/expression or text: "sfa-pending-sync",. Read it with the preceding opening statement ("sfa-api-cache:old:/products",); it is not a standalone business operation.
18	`      "preference",`	Continues the surrounding declaration/expression or text: "preference",. Read it with the preceding opening statement ("sfa-pending-sync",); it is not a standalone business operation.
19	`    ]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20	`    storage.multiRemove.mockResolvedValue(undefined);`	Calls the named method: storage.multiRemove.mockResolvedValue(undefined);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
21	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
22	`  it("removes credentials and cached records, preserving unrelated settings", async () => {`	Continues the surrounding declaration/expression or text: it("removes credentials and cached records, preserving unrelated settings", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
23	`    await logOut();`	Waits for this asynchronous operation before continuing: await logOut();. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
24	`    expect(storage.multiRemove).toHaveBeenCalledWith([`	Test assertion comparing an expected outcome to actual behavior: expect(storage.multiRemove).toHaveBeenCalledWith([. A mismatch fails the test.
25	`      "token",`	Continues the surrounding declaration/expression or text: "token",. Read it with the preceding opening statement (expect(storage.multiRemove).toHaveBeenCalledWith([); it is not a standalone business operation.
26	`      "currentUser",`	Continues the surrounding declaration/expression or text: "currentUser",. Read it with the preceding opening statement ("token",); it is not a standalone business operation.
27	`      "sfa-api-cache:old:/products",`	Continues the surrounding declaration/expression or text: "sfa-api-cache:old:/products",. Read it with the preceding opening statement ("currentUser",); it is not a standalone business operation.
28	`    ]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`  it("keeps the session and offline work when changes are waiting to sync", async () => {`	Continues the surrounding declaration/expression or text: it("keeps the session and offline work when changes are waiting to sync", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
31	`    pendingCount.mockResolvedValue(2);`	Calls the named method: pendingCount.mockResolvedValue(2);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
32	`    await expect(logOut()).rejects.toThrow("unsynced changes");`	Test assertion comparing an expected outcome to actual behavior: await expect(logOut()).rejects.toThrow("unsynced changes");. A mismatch fails the test.
33	`    expect(storage.multiRemove).not.toHaveBeenCalled();`	Test assertion comparing an expected outcome to actual behavior: expect(storage.multiRemove).not.toHaveBeenCalled();. A mismatch fails the test.
34	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`  it("does not claim success when storage fails", async () => {`	Continues the surrounding declaration/expression or text: it("does not claim success when storage fails", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.

Line	Source code	Explanation / reading note
36	`    storage.multiRemove.mockRejectedValue(new Error("Storage unavailable"));`	Calls the named method: storage.multiRemove.mockRejectedValue(new Error("Storage unavailable"));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
37	`    await expect(logOut()).rejects.toThrow("Storage unavailable");`	Test assertion comparing an expected outcome to actual behavior: await expect(logOut()).rejects.toThrow("Storage unavailable");. A mismatch fails the test.
38	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	`  it("fails safely when the queue cannot be inspected", async () => {`	Continues the surrounding declaration/expression or text: it("fails safely when the queue cannot be inspected", async () => {. Read it with the preceding opening statement (});); it is not a standalone business operation.
40	`    pendingCount.mockRejectedValue(new Error("Unreadable queue"));`	Calls the named method: pendingCount.mockRejectedValue(new Error("Unreadable queue"));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
41	`    await expect(logOut()).rejects.toThrow("Unreadable queue");`	Test assertion comparing an expected outcome to actual behavior: await expect(logOut()).rejects.toThrow("Unreadable queue");. A mismatch fails the test.
42	`    expect(storage.multiRemove).not.toHaveBeenCalled();`	Test assertion comparing an expected outcome to actual behavior: expect(storage.multiRemove).not.toHaveBeenCalled();. A mismatch fails the test.
43	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/storage/session.ts

Employee session persistence/clear helpers used by authentication and account switching.

19 numbered source lines | SHA-256 fe323fb1e8e32fa4998d49a5b069e1458ddbc32abaa72ce5795787317c380f00

Line	Source code	Explanation / reading note
1	`import AsyncStorage from "@react-native-async-storage/async-storage";`	Imports dependencies/types used below: import AsyncStorage from "@react-native-async-storage/async-storage";. Importing a function does not call it.
2	`import { pendingCount } from "./syncQueue";`	Imports dependencies/types used below: import { pendingCount } from "./syncQueue";. Importing a function does not call it.
3	`import { primaryPendingCount } from "./primaryQueue";`	Imports dependencies/types used below: import { primaryPendingCount } from "./primaryQueue";. Importing a function does not call it.
4		Blank line separating logical sections; no executable operation.
5	`/** Keep offline work with its current employee until it reaches Salesforce. */`	Developer comment/documentation: Keep offline work with its current employee until it reaches Salesforce. */ It is not executed.
6	`export async function logOut() {`	Declares a callable function/method: export async function logOut() {. Parameters supply its inputs; the following block implements the operation.
7	`  if (await primaryPendingCount())`	Waits for this asynchronous operation before continuing: if (await primaryPendingCount()). The returned result/error must still be handled.
8	`    throw new Error(`	Stops this execution path with a validation/error exception: throw new Error(. The caller/catch block decides how it is reported.
9	`      "Open Primary orders / returns and sync or review pending primary requests before logging out.",`	Continues the surrounding declaration/expression or text: "Open Primary orders / returns and sync or review pending primary requests before logging out.",. Read it with the preceding opening statement (throw new Error(); it is not a standalone business operation.
10	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
11	`  if (await pendingCount()) {`	Waits for this asynchronous operation before continuing: if (await pendingCount()) {. The returned result/error must still be handled.
12	`    throw new Error(`	Stops this execution path with a validation/error exception: throw new Error(. The caller/catch block decides how it is reported.

Line	Source code	Explanation / reading note
13	`"You have unsynced changes. Connect to the internet and tap Sync changes before logging out.",`	Continues the surrounding declaration/expression or text: "You have unsynced changes. Connect to the internet and tap Sync changes before logging out.",. Read it with the preceding opening statement (throw new Error(); it is not a standalone business operation.
14	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
15	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
16	`const keys = await AsyncStorage.getAllKeys();`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
17	`const cachedRecords = keys.filter((key) => key.startsWith("sfa-api-cache:"));`	Declares/initializes local data used by the surrounding operation: const cachedRecords = keys.filter((key) => key.startsWith("sfa-api-cache:"));. Collection contents and assignments below determine its purpose.
18	`await AsyncStorage.multiRemove(["token", "currentUser", ...cachedRecords]);`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
19	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/storage/syncQueue.ts

Generic SFA AsyncStorage retry queue: request IDs, dependencies, attempts and maximum retry handling. Review global key/account isolation and concurrent flush behavior before production.

79 numbered source lines | SHA-256 b05ce33d5afa65c56e7d46ea0119bcdcb7d8d692e197c3b6fa37251328204456

Line	Source code	Explanation / reading note
1	`import AsyncStorage from "@react-native-async-storage/async-storage";`	Imports dependencies/types used below: import AsyncStorage from "@react-native-async-storage/async-storage";. Importing a function does not call it.
2	`import NetInfo from "@react-native-community/netinfo";`	Imports dependencies/types used below: import NetInfo from "@react-native-community/netinfo";. Importing a function does not call it.
3	`import { post } from "../api/client";`	Imports dependencies/types used below: import { post } from "../api/client";. Importing a function does not call it.
4	`const KEY = "sfa-pending-sync";`	Declares/initializes local data used by the surrounding operation: const KEY = "sfa-pending-sync";. Collection contents and assignments below determine its purpose.
5	`export type Queued = {`	Defines a compile-time data contract: export type Queued = {. TypeScript types do not validate untrusted runtime JSON by themselves.
6	`  id: string;`	Sets/declares the named object property or style/type member: id: string;. Interpret it in the enclosing object, props or type definition.
7	`  path: string;`	Sets/declares the named object property or style/type member: path: string;. Interpret it in the enclosing object, props or type definition.
8	`  payload: any;`	Sets/declares the named object property or style/type member: payload: any;. Interpret it in the enclosing object, props or type definition.
9	`  attempts: number;`	Sets/declares the named object property or style/type member: attempts: number;. Interpret it in the enclosing object, props or type definition.
10	`  operation: string;`	Sets/declares the named object property or style/type member: operation: string;. Interpret it in the enclosing object, props or type definition.
11	`  createdAt: string;`	Sets/declares the named object property or style/type member: createdAt: string;. Interpret it in the enclosing object, props or type definition.
12	`  dependsOn: string[];`	Sets/declares the named object property or style/type member: dependsOn: string[];. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
13	`  lastError?: string;`	Sets/declares the named object property or style/type member: lastError?: string;. Interpret it in the enclosing object, props or type definition.
14	`  status: "PENDING" | "FAILED";`	Sets/declares the named object property or style/type member: status: "PENDING" | "FAILED";. Interpret it in the enclosing object, props or type definition.
15	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
16	`const MAX_ATTEMPTS = 5;`	Declares/initializes local data used by the surrounding operation: const MAX_ATTEMPTS = 5;. Collection contents and assignments below determine its purpose.
17	`export async function enqueue(`	Declares a callable function/method: export async function enqueue(. Parameters supply its inputs; the following block implements the operation.
18	`  path: string,`	Sets/declares the named object property or style/type member: path: string,. Interpret it in the enclosing object, props or type definition.
19	`  payload: any,`	Sets/declares the named object property or style/type member: payload: any,. Interpret it in the enclosing object, props or type definition.
20	`  options: { operation?: string; dependsOn?: string[] } = {},`	Sets/declares the named object property or style/type member: options: { operation?: string; dependsOn?: string[] } = {},. Interpret it in the enclosing object, props or type definition.
21	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (options: { operation?: string; dependsOn?: string[] } = {},); it is not a standalone business operation.
22	`  const rows: Queued[] = JSON.parse((await AsyncStorage.getItem(KEY)) || "[]");`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
23	`  const id = payload.requestId || `${Date.now()}-${Math.random().toString(36).slice(2)}`;`	Declares/initializes local data used by the surrounding operation: const id = payload.requestId || `${Date.now()}-${Math.random().toString(36).slice(2)}`;. Collection contents and assignments below determine its purpose.
24	`  if (rows.some((row) => row.id === id)) return id;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (rows.some((row) => row.id === id)) return id;.
25	`  rows.push({`	Calls the named method: rows.push({. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
26	`    id,`	Continues the surrounding declaration/expression or text: id,. Read it with the preceding opening statement (rows.push({); it is not a standalone business operation.
27	`    path,`	Continues the surrounding declaration/expression or text: path,. Read it with the preceding opening statement (id,); it is not a standalone business operation.
28	`    payload: { ...payload, requestId: id },`	Sets/declares the named object property or style/type member: payload: { ...payload, requestId: id },. Interpret it in the enclosing object, props or type definition.
29	`    attempts: 0,`	Sets/declares the named object property or style/type member: attempts: 0,. Interpret it in the enclosing object, props or type definition.
30	`    operation: options.operation || path,`	Sets/declares the named object property or style/type member: operation: options.operation || path,. Interpret it in the enclosing object, props or type definition.
31	`    createdAt: new Date().toISOString(),`	Sets/declares the named object property or style/type member: createdAt: new Date().toISOString(),. Interpret it in the enclosing object, props or type definition.
32	`    dependsOn: options.dependsOn || [],`	Sets/declares the named object property or style/type member: dependsOn: options.dependsOn || [],. Interpret it in the enclosing object, props or type definition.
33	`    status: "PENDING",`	Sets/declares the named object property or style/type member: status: "PENDING",. Interpret it in the enclosing object, props or type definition.
34	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`  await AsyncStorage.setItem(KEY, JSON.stringify(rows));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
36	`  return id;`	Returns id to the caller (or begins returned UI markup) and ends this execution path.
37	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`export async function pendingCount() {`	Declares a callable function/method: export async function pendingCount() {. Parameters supply its inputs; the following block implements the operation.
39	`  return JSON.parse((await AsyncStorage.getItem(KEY)) || "[]").length as number;`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
40	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
41	`export async function flushQueue() {`	Declares a callable function/method: export async function flushQueue() {. Parameters supply its inputs; the following block implements the operation.
42	`  if (!(await NetInfo.fetch()).isConnected) return { synced: 0, failed: await pendingCount() };`	Invokes the external-data boundary: if (!(await NetInfo.fetch()).isConnected) return { synced: 0, failed: await pendingCount() };. Await/result checks determine whether the operation is confirmed.
43	`  const rows: Queued[] = JSON.parse((await AsyncStorage.getItem(KEY)) || "[]"),`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
44	`    failed: Queued[] = [],`	Sets/declares the named object property or style/type member: failed: Queued[] = [],. Interpret it in the enclosing object, props or type definition.
45	`    syncedIds = new Set<string>();`	Assigns the right-hand expression to the named variable/property: syncedIds = new Set<string>();. This is in-memory unless it is later persisted by an explicit call.
46	`  let synced = 0;`	Declares/initializes local data used by the surrounding operation: let synced = 0;. Collection contents and assignments below determine its purpose.
47	`  for (const row of rows) {`	Repeats work over the specified records/items or while this condition holds: for (const row of rows) {. Check where queries/writes occur relative to the loop.
48	`    if (row.dependsOn?.some((dependency) => !syncedIds.has(dependency))) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (row.dependsOn?.some((dependency) => !syncedIds.has(dependency))) {.
49	`      failed.push({`	Calls the named method: failed.push({. Its implementation defines the side effect/result; use the symbol/file index to follow it.
50	`        ...row,`	Continues the surrounding declaration/expression or text: ...row,. Read it with the preceding opening statement (failed.push({); it is not a standalone business operation.
51	`        status: "PENDING",`	Sets/declares the named object property or style/type member: status: "PENDING",. Interpret it in the enclosing object, props or type definition.
52	`        lastError: "Waiting for a dependent record to synchronize",`	Sets/declares the named object property or style/type member: lastError: "Waiting for a dependent record to synchronize",. Interpret it in the enclosing object, props or type definition.
53	`      });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
54	`      continue;`	Skips the remainder of the current loop iteration and moves to the next item.
55	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
56	`    if (row.attempts >= MAX_ATTEMPTS) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (row.attempts >= MAX_ATTEMPTS) {.
57	`      failed.push({`	Calls the named method: failed.push({. Its implementation defines the side effect/result; use the symbol/file index to follow it.
58	`        ...row,`	Continues the surrounding declaration/expression or text: ...row,. Read it with the preceding opening statement (failed.push({); it is not a standalone business operation.
59	`        status: "FAILED",`	Sets/declares the named object property or style/type member: status: "FAILED",. Interpret it in the enclosing object, props or type definition.
60	`        lastError: row.lastError || "Maximum retry count reached",`	Sets/declares the named object property or style/type member: lastError: row.lastError || "Maximum retry count reached",. Interpret it in the enclosing object, props or type definition.
61	`      });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
62	`      continue;`	Skips the remainder of the current loop iteration and moves to the next item.
63	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
64	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
65	`      await post(row.path, row.payload);`	Waits for this asynchronous operation before continuing: await post(row.path, row.payload);. The returned result/error must still be handled.
66	`      synced++;`	Continues the surrounding declaration/expression or text: synced++;. Read it with the preceding opening statement (await post(row.path, row.payload);); it is not a standalone business operation.
67	`      syncedIds.add(row.id);`	Calls the named method: syncedIds.add(row.id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
68	`    } catch (reason: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.

Line	Source code	Explanation / reading note
69	`failed.push({`	Calls the named method: failed.push({. Its implementation defines the side effect/result; use the symbol/file index to follow it.
70	`...row,`	Continues the surrounding declaration/expression or text: ...row,. Read it with the preceding opening statement (failed.push({); it is not a standalone business operation.
71	`attempts: row.attempts + 1,`	Sets/declares the named object property or style/type member: attempts: row.attempts + 1,. Interpret it in the enclosing object, props or type definition.
72	`status: row.attempts + 1 >= MAX_ATTEMPTS ? "FAILED" : "PENDING",`	Sets/declares the named object property or style/type member: status: row.attempts + 1 >= MAX_ATTEMPTS ? "FAILED" : "PENDING",. Interpret it in the enclosing object, props or type definition.
73	`lastError: reason?.message || "Synchronization failed",`	Sets/declares the named object property or style/type member: lastError: reason?.message || "Synchronization failed",. Interpret it in the enclosing object, props or type definition.
74	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
75	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
76	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
77	`await AsyncStorage.setItem(KEY, JSON.stringify(failed));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
78	`return { synced, failed: failed.length };`	Returns { synced, failed: failed.length } to the caller (or begins returned UI markup) and ends this execution path.
79	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/storage/visitDraft.ts

Persists local visit order drafts and dirty state so unsaved work can be recovered.

18 numbered source lines | SHA-256 7bbc32ecac0e0b13003d15cc30a2245ec27330411b949466ce7ba4f59e53ce7c

Line	Source code	Explanation / reading note
1	`import AsyncStorage from "@react-native-async-storage/async-storage";`	Imports dependencies/types used below: import AsyncStorage from "@react-native-async-storage/async-storage";. Importing a function does not call it.
2	`import type { OrderLine } from "../types";`	Imports dependencies/types used below: import type { OrderLine } from "../types";. Importing a function does not call it.
3		Blank line separating logical sections; no executable operation.
4	`export type VisitDraft = { items: OrderLine[]; dirty: boolean };`	Defines a compile-time data contract: export type VisitDraft = { items: OrderLine[]; dirty: boolean };. TypeScript types do not validate untrusted runtime JSON by themselves.
5	`async function key(storeId: string) {`	Declares a callable function/method: async function key(storeId: string) {. Parameters supply its inputs; the following block implements the operation.
6	`  const user = JSON.parse((await AsyncStorage.getItem("currentUser")) || "{}");`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
7	`  if (!user.employeeId) throw new Error("Please sign in again before saving a visit.");`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!user.employeeId) throw new Error("Please sign in again before saving a visit.");.
8	`  return \`sfa-visit-draft:${user.employeeId}:${storeId}\`;`	Returns `sfa-visit-draft:${user.employeeId}:${storeId}` to the caller (or begins returned UI markup) and ends this execution path.
9	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`export async function readVisitDraft(storeId: string): Promise<VisitDraft | null> {`	Declares a callable function/method: export async function readVisitDraft(storeId: string): Promise<VisitDraft | null> {. Parameters supply its inputs; the following block implements the operation.
11	`  return JSON.parse((await AsyncStorage.getItem(await key(storeId))) || "null");`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
12	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
13	`export async function writeVisitDraft(storeId: string, items: OrderLine[], dirty: boolean) {`	Declares a callable function/method: export async function writeVisitDraft(storeId: string, items: OrderLine[], dirty: boolean) {. Parameters supply its inputs; the following block implements the operation.
14	`  await AsyncStorage.setItem(await key(storeId), JSON.stringify({ items, dirty }));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
15	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
16	`export async function clearVisitDraft(storeId: string) {`	Declares a callable function/method: export async function clearVisitDraft(storeId: string) {. Parameters supply its inputs; the following block implements the operation.
17	`  await AsyncStorage.removeItem(await key(storeId));`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
18	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/types/index.ts

First-party sfa mobile file: index. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

133 numbered source lines | SHA-256 6c12a27237a12d01e11a1ab6bb7a2f6bfc2a439172d68e68e0dca4417288ceb2

Line	Source code	Explanation / reading note
1	`export type Store = {`	Defines a compile-time data contract: export type Store = {. TypeScript types do not validate untrusted runtime JSON by themselves.
2	`  id: string;`	Sets/declares the named object property or style/type member: id: string;. Interpret it in the enclosing object, props or type definition.
3	`  beatId: string;`	Sets/declares the named object property or style/type member: beatId: string;. Interpret it in the enclosing object, props or type definition.
4	`  name: string;`	Sets/declares the named object property or style/type member: name: string;. Interpret it in the enclosing object, props or type definition.
5	`  code: string;`	Sets/declares the named object property or style/type member: code: string;. Interpret it in the enclosing object, props or type definition.
6	`  address: string;`	Sets/declares the named object property or style/type member: address: string;. Interpret it in the enclosing object, props or type definition.
7	`  contact: string;`	Sets/declares the named object property or style/type member: contact: string;. Interpret it in the enclosing object, props or type definition.
8	`  status: string;`	Sets/declares the named object property or style/type member: status: string;. Interpret it in the enclosing object, props or type definition.
9	`  lastVisit: string;`	Sets/declares the named object property or style/type member: lastVisit: string;. Interpret it in the enclosing object, props or type definition.
10	`  lastOrder: number;`	Sets/declares the named object property or style/type member: lastOrder: number;. Interpret it in the enclosing object, props or type definition.
11	`  latitude: number;`	Sets/declares the named object property or style/type member: latitude: number;. Interpret it in the enclosing object, props or type definition.
12	`  longitude: number;`	Sets/declares the named object property or style/type member: longitude: number;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
13	`  distance?: number;`	Sets/declares the named object property or style/type member: distance?: number;. Interpret it in the enclosing object, props or type definition.
14	`  beatName?: string;`	Sets/declares the named object property or style/type member: beatName?: string;. Interpret it in the enclosing object, props or type definition.
15	`  owner?: string;`	Sets/declares the named object property or style/type member: owner?: string;. Interpret it in the enclosing object, props or type definition.
16	`  phone?: string;`	Sets/declares the named object property or style/type member: phone?: string;. Interpret it in the enclosing object, props or type definition.
17	`  email?: string;`	Sets/declares the named object property or style/type member: email?: string;. Interpret it in the enclosing object, props or type definition.
18	`  type?: string;`	Sets/declares the named object property or style/type member: type?: string;. Interpret it in the enclosing object, props or type definition.
19	`  geography?: string;`	Sets/declares the named object property or style/type member: geography?: string;. Interpret it in the enclosing object, props or type definition.
20	`  active?: boolean;`	Sets/declares the named object property or style/type member: active?: boolean;. Interpret it in the enclosing object, props or type definition.
21	`  outstandingAmount?: number;`	Sets/declares the named object property or style/type member: outstandingAmount?: number;. Interpret it in the enclosing object, props or type definition.
22	`  locationStatus?: string;`	Sets/declares the named object property or style/type member: locationStatus?: string;. Interpret it in the enclosing object, props or type definition.
23	`  visitCount?: number;`	Sets/declares the named object property or style/type member: visitCount?: number;. Interpret it in the enclosing object, props or type definition.
24	`  lastVisitLocation?: { latitude: number; longitude: number } | null;`	Sets/declares the named object property or style/type member: lastVisitLocation?: { latitude: number; longitude: number } | null;. Interpret it in the enclosing object, props or type definition.
25	`  recentVisits?: Array<{`	Sets/declares the named object property or style/type member: recentVisits?: Array<{. Interpret it in the enclosing object, props or type definition.
26	`    id: string;`	Sets/declares the named object property or style/type member: id: string;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
27	`visitNumber?: string;`	Sets/declares the named object property or style/type member: visitNumber?: string;. Interpret it in the enclosing object, props or type definition.
28	`date?: string;`	Sets/declares the named object property or style/type member: date?: string;. Interpret it in the enclosing object, props or type definition.
29	`status?: string;`	Sets/declares the named object property or style/type member: status?: string;. Interpret it in the enclosing object, props or type definition.
30	`checkInTime?: string;`	Sets/declares the named object property or style/type member: checkInTime?: string;. Interpret it in the enclosing object, props or type definition.
31	`checkOutTime?: string;`	Sets/declares the named object property or style/type member: checkOutTime?: string;. Interpret it in the enclosing object, props or type definition.
32	`durationMinutes?: number;`	Sets/declares the named object property or style/type member: durationMinutes?: number;. Interpret it in the enclosing object, props or type definition.
33	`checkInLocation?: { latitude: number; longitude: number } | null;`	Sets/declares the named object property or style/type member: checkInLocation?: { latitude: number; longitude: number } | null;. Interpret it in the enclosing object, props or type definition.
34	`checkOutLocation?: { latitude: number; longitude: number } | null;`	Sets/declares the named object property or style/type member: checkOutLocation?: { latitude: number; longitude: number } | null;. Interpret it in the enclosing object, props or type definition.
35	`}>;`	Continues the surrounding declaration/expression or text: }>;. Read it with the preceding opening statement (checkOutLocation?: { latitude: number; longitude: number } | null;); it is not a standalone business operation.
36	`orderCount?: number;`	Sets/declares the named object property or style/type member: orderCount?: number;. Interpret it in the enclosing object, props or type definition.
37	`lastOrderDate?: string | null;`	Sets/declares the named object property or style/type member: lastOrderDate?: string | null;. Interpret it in the enclosing object, props or type definition.
38	`lastOrderAmount?: number;`	Sets/declares the named object property or style/type member: lastOrderAmount?: number;. Interpret it in the enclosing object, props or type definition.
39	`totalOrderAmount?: number;`	Sets/declares the named object property or style/type member: totalOrderAmount?: number;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
40	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
41	`export type Beat = {`	Defines a compile-time data contract: export type Beat = {. TypeScript types do not validate untrusted runtime JSON by themselves.
42	`  id: string;`	Sets/declares the named object property or style/type member: id: string;. Interpret it in the enclosing object, props or type definition.
43	`  name: string;`	Sets/declares the named object property or style/type member: name: string;. Interpret it in the enclosing object, props or type definition.
44	`  stores: number;`	Sets/declares the named object property or style/type member: stores: number;. Interpret it in the enclosing object, props or type definition.
45	`  completed: number;`	Sets/declares the named object property or style/type member: completed: number;. Interpret it in the enclosing object, props or type definition.
46	`  pending: number;`	Sets/declares the named object property or style/type member: pending: number;. Interpret it in the enclosing object, props or type definition.
47	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48	`export type Product = {`	Defines a compile-time data contract: export type Product = {. TypeScript types do not validate untrusted runtime JSON by themselves.
49	`  id: string;`	Sets/declares the named object property or style/type member: id: string;. Interpret it in the enclosing object, props or type definition.
50	`  name: string;`	Sets/declares the named object property or style/type member: name: string;. Interpret it in the enclosing object, props or type definition.
51	`  code: string;`	Sets/declares the named object property or style/type member: code: string;. Interpret it in the enclosing object, props or type definition.
52	`  price: number;`	Sets/declares the named object property or style/type member: price: number;. Interpret it in the enclosing object, props or type definition.
53	`  stock: number;`	Sets/declares the named object property or style/type member: stock: number;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
54	`  brand?: string;`	Sets/declares the named object property or style/type member: brand?: string;. Interpret it in the enclosing object, props or type definition.
55	`  subBrand?: string;`	Sets/declares the named object property or style/type member: subBrand?: string;. Interpret it in the enclosing object, props or type definition.
56	`  brandAlias?: string;`	Sets/declares the named object property or style/type member: brandAlias?: string;. Interpret it in the enclosing object, props or type definition.
57	`  configuration?: "Must Sell" | "Focus Sell" | "Suggested Sell" | "Standard";`	Sets/declares the named object property or style/type member: configuration?: "Must Sell" | "Focus Sell" | "Suggested Sell" | "Standard";. Interpret it in the enclosing object, props or type definition.
58	`  configurationId?: string;`	Sets/declares the named object property or style/type member: configurationId?: string;. Interpret it in the enclosing object, props or type definition.
59	`  configurationName?: string;`	Sets/declares the named object property or style/type member: configurationName?: string;. Interpret it in the enclosing object, props or type definition.
60	`  minimumQuantity?: number;`	Sets/declares the named object property or style/type member: minimumQuantity?: number;. Interpret it in the enclosing object, props or type definition.
61	`  targetQuantity?: number;`	Sets/declares the named object property or style/type member: targetQuantity?: number;. Interpret it in the enclosing object, props or type definition.
62	`  configurationStartDate?: string;`	Sets/declares the named object property or style/type member: configurationStartDate?: string;. Interpret it in the enclosing object, props or type definition.
63	`  configurationEndDate?: string;`	Sets/declares the named object property or style/type member: configurationEndDate?: string;. Interpret it in the enclosing object, props or type definition.
64	`  configurations?: Array<{`	Sets/declares the named object property or style/type member: configurations?: Array<{. Interpret it in the enclosing object, props or type definition.
65	`    id: string;`	Sets/declares the named object property or style/type member: id: string;. Interpret it in the enclosing object, props or type definition.
66	`    name: string;`	Sets/declares the named object property or style/type member: name: string;. Interpret it in the enclosing object, props or type definition.
67	`    type: "Must Sell" | "Focus Sell" | "Suggested Sell";`	Sets/declares the named object property or style/type member: type: "Must Sell" | "Focus Sell" | "Suggested Sell";. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
68	`    minimumQuantity: number;`	Sets/declares the named object property or style/type member: minimumQuantity: number;. Interpret it in the enclosing object, props or type definition.
69	`    targetQuantity: number;`	Sets/declares the named object property or style/type member: targetQuantity: number;. Interpret it in the enclosing object, props or type definition.
70	`    geography?: string;`	Sets/declares the named object property or style/type member: geography?: string;. Interpret it in the enclosing object, props or type definition.
71	`    channel?: string;`	Sets/declares the named object property or style/type member: channel?: string;. Interpret it in the enclosing object, props or type definition.
72	`  }>;`	Continues the surrounding declaration/expression or text: }>;. Read it with the preceding opening statement (channel?: string;); it is not a standalone business operation.
73	`  suggestionSource?: string;`	Sets/declares the named object property or style/type member: suggestionSource?: string;. Interpret it in the enclosing object, props or type definition.
74	`  previousQuantity?: number;`	Sets/declares the named object property or style/type member: previousQuantity?: number;. Interpret it in the enclosing object, props or type definition.
75	`  lastFiveOrders?: Array<{`	Sets/declares the named object property or style/type member: lastFiveOrders?: Array<{. Interpret it in the enclosing object, props or type definition.
76	`    orderId: string;`	Sets/declares the named object property or style/type member: orderId: string;. Interpret it in the enclosing object, props or type definition.
77	`    orderNumber?: string;`	Sets/declares the named object property or style/type member: orderNumber?: string;. Interpret it in the enclosing object, props or type definition.
78	`    orderDate?: string;`	Sets/declares the named object property or style/type member: orderDate?: string;. Interpret it in the enclosing object, props or type definition.
79	`    quantity: number;`	Sets/declares the named object property or style/type member: quantity: number;. Interpret it in the enclosing object, props or type definition.
80	`  }>;`	Continues the surrounding declaration/expression or text: }>;. Read it with the preceding opening statement (quantity: number;); it is not a standalone business operation.
81	`  packSize?: string;`	Sets/declares the named object property or style/type member: packSize?: string;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
82	`  mrp?: number;`	Sets/declares the named object property or style/type member: mrp?: number;. Interpret it in the enclosing object, props or type definition.
83	`  retailerPrice?: number;`	Sets/declares the named object property or style/type member: retailerPrice?: number;. Interpret it in the enclosing object, props or type definition.
84	`  gstPercent?: number;`	Sets/declares the named object property or style/type member: gstPercent?: number;. Interpret it in the enclosing object, props or type definition.
85	`  unitsPerCase?: number;`	Sets/declares the named object property or style/type member: unitsPerCase?: number;. Interpret it in the enclosing object, props or type definition.
86	`  active?: boolean;`	Sets/declares the named object property or style/type member: active?: boolean;. Interpret it in the enclosing object, props or type definition.
87	`  schemes?: ProductScheme[];`	Sets/declares the named object property or style/type member: schemes?: ProductScheme[];. Interpret it in the enclosing object, props or type definition.
88	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
89	`export type ProductScheme = {`	Defines a compile-time data contract: export type ProductScheme = {. TypeScript types do not validate untrusted runtime JSON by themselves.
90	`  id: string;`	Sets/declares the named object property or style/type member: id: string;. Interpret it in the enclosing object, props or type definition.
91	`  name: string;`	Sets/declares the named object property or style/type member: name: string;. Interpret it in the enclosing object, props or type definition.
92	`  code?: string;`	Sets/declares the named object property or style/type member: code?: string;. Interpret it in the enclosing object, props or type definition.
93	`  type?: string;`	Sets/declares the named object property or style/type member: type?: string;. Interpret it in the enclosing object, props or type definition.
94	`  description?: string;`	Sets/declares the named object property or style/type member: description?: string;. Interpret it in the enclosing object, props or type definition.
95	`  discountPercent: number;`	Sets/declares the named object property or style/type member: discountPercent: number;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
96	`  minimumQuantity: number;`	Sets/declares the named object property or style/type member: minimumQuantity: number;. Interpret it in the enclosing object, props or type definition.
97	`  freeQuantity: number;`	Sets/declares the named object property or style/type member: freeQuantity: number;. Interpret it in the enclosing object, props or type definition.
98	`  endDate?: string;`	Sets/declares the named object property or style/type member: endDate?: string;. Interpret it in the enclosing object, props or type definition.
99	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
100	`export type OrderLine = {`	Defines a compile-time data contract: export type OrderLine = {. TypeScript types do not validate untrusted runtime JSON by themselves.
101	`  productId: string;`	Sets/declares the named object property or style/type member: productId: string;. Interpret it in the enclosing object, props or type definition.
102	`  productName: string;`	Sets/declares the named object property or style/type member: productName: string;. Interpret it in the enclosing object, props or type definition.
103	`  quantity: number;`	Sets/declares the named object property or style/type member: quantity: number;. Interpret it in the enclosing object, props or type definition.
104	`  unitPrice: number;`	Sets/declares the named object property or style/type member: unitPrice: number;. Interpret it in the enclosing object, props or type definition.
105	`  discount: number;`	Sets/declares the named object property or style/type member: discount: number;. Interpret it in the enclosing object, props or type definition.
106	`  amount: number;`	Sets/declares the named object property or style/type member: amount: number;. Interpret it in the enclosing object, props or type definition.
107	`  schemeId?: string;`	Sets/declares the named object property or style/type member: schemeId?: string;. Interpret it in the enclosing object, props or type definition.
108	`  schemeName?: string;`	Sets/declares the named object property or style/type member: schemeName?: string;. Interpret it in the enclosing object, props or type definition.
109	`  configurationId?: string;`	Sets/declares the named object property or style/type member: configurationId?: string;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
110	`  configurationType?: string;`	Sets/declares the named object property or style/type member: configurationType?: string;. Interpret it in the enclosing object, props or type definition.
111	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
112	`export type RootStack = {`	Defines a compile-time data contract: export type RootStack = {. TypeScript types do not validate untrusted runtime JSON by themselves.
113	`  Primary: undefined;`	Sets/declares the named object property or style/type member: Primary: undefined;. Interpret it in the enclosing object, props or type definition.
114	`  Login: undefined;`	Sets/declares the named object property or style/type member: Login: undefined;. Interpret it in the enclosing object, props or type definition.
115	`  Main: undefined;`	Sets/declares the named object property or style/type member: Main: undefined;. Interpret it in the enclosing object, props or type definition.
116	`  Beats: undefined;`	Sets/declares the named object property or style/type member: Beats: undefined;. Interpret it in the enclosing object, props or type definition.
117	`  Stores: { beat: Beat };`	Sets/declares the named object property or style/type member: Stores: { beat: Beat };. Interpret it in the enclosing object, props or type definition.
118	`  StoreGate: { store: Store };`	Sets/declares the named object property or style/type member: StoreGate: { store: Store };. Interpret it in the enclosing object, props or type definition.
119	`  Visit: {`	Sets/declares the named object property or style/type member: Visit: {. Interpret it in the enclosing object, props or type definition.
120	`    store: Store;`	Sets/declares the named object property or style/type member: store: Store;. Interpret it in the enclosing object, props or type definition.
121	`    location: { latitude: number; longitude: number };`	Sets/declares the named object property or style/type member: location: { latitude: number; longitude: number };. Interpret it in the enclosing object, props or type definition.
122	`    distance: number;`	Sets/declares the named object property or style/type member: distance: number;. Interpret it in the enclosing object, props or type definition.
123	`  };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
124	`  Orders: undefined;`	Sets/declares the named object property or style/type member: Orders: undefined;. Interpret it in the enclosing object, props or type definition.
125	`  Products: undefined;`	Sets/declares the named object property or style/type member: Products: undefined;. Interpret it in the enclosing object, props or type definition.
126	`  More: undefined;`	Sets/declares the named object property or style/type member: More: undefined;. Interpret it in the enclosing object, props or type definition.
127	`  Outlets: undefined;`	Sets/declares the named object property or style/type member: Outlets: undefined;. Interpret it in the enclosing object, props or type definition.
128	`  OutletMap: undefined;`	Sets/declares the named object property or style/type member: OutletMap: undefined;. Interpret it in the enclosing object, props or type definition.
129	`  ModuleList: { moduleName: string; title: string };`	Sets/declares the named object property or style/type member: ModuleList: { moduleName: string; title: string };. Interpret it in the enclosing object, props or type definition.
130	`  Expenses: undefined;`	Sets/declares the named object property or style/type member: Expenses: undefined;. Interpret it in the enclosing object, props or type definition.
131	`  Day: undefined;`	Sets/declares the named object property or style/type member: Day: undefined;. Interpret it in the enclosing object, props or type definition.
132	`  Survey: { store: Store; visitId: string; location: { latitude: number; longitude: number } };`	Sets/declares the named object property or style/type member: Survey: { store: Store; visitId: string; location: { latitude: number; longitude: number } };. Interpret it in the enclosing object, props or type definition.
133	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/utils/distance.test.ts

Regression tests for distance. Fixture setup creates inputs, the action invokes behavior, and assertions compare actual results to expected outcomes. Tests with stubs do not verify the real mail provider or Salesforce transport.

18 numbered source lines | SHA-256 a5e7bb0707288f52462682c4f65c100303b64b721818d86ab11337cc1226b11e

Line	Source code	Explanation / reading note
1	`import { describe, it, expect } from "vitest";`	Imports dependencies/types used below: import { describe, it, expect } from "vitest";. Importing a function does not call it.
2	`import { distanceInMeters } from "./distance";`	Imports dependencies/types used below: import { distanceInMeters } from "./distance";. Importing a function does not call it.
3	`describe("distance validation", () => {`	Continues the surrounding declaration/expression or text: describe("distance validation", () => {. Read it with the preceding opening statement (import { distanceInMeters } from "./distance";); it is not a standalone business operation.
4	`  it("accepts a nearby position", () =>`	Continues the surrounding declaration/expression or text: it("accepts a nearby position", () =>. Read it with the preceding opening statement (describe("distance validation", () => {); it is not a standalone business operation.
5	`    expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
6	`      distanceInMeters(`	Continues the surrounding declaration/expression or text: distanceInMeters(. Read it with the preceding opening statement (expect(); it is not a standalone business operation.
7	`        { latitude: 12.9719, longitude: 77.5949 },`	Continues the surrounding declaration/expression or text: { latitude: 12.9719, longitude: 77.5949 },. Read it with the preceding opening statement (distanceInMeters(); it is not a standalone business operation.
8	`        { latitude: 12.97191, longitude: 77.59491 },`	Continues the surrounding declaration/expression or text: { latitude: 12.97191, longitude: 77.59491 },. Read it with the preceding opening statement ({ latitude: 12.9719, longitude: 77.5949 },); it is not a standalone business operation.
9	`      ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`    ).toBeLessThan(100));`	Continues the surrounding declaration/expression or text:).toBeLessThan(100));. Read it with the preceding opening statement ( ),); it is not a standalone business operation.

Line	Source code	Explanation / reading note
11	`  it("rejects a distant position", () =>`	Continues the surrounding declaration/expression or text: it("rejects a distant position", () =>. Read it with the preceding opening statement ( ).toBeLessThan(100));); it is not a standalone business operation.
12	`    expect(`	Test assertion comparing an expected outcome to actual behavior: expect(. A mismatch fails the test.
13	`      distanceInMeters(`	Continues the surrounding declaration/expression or text: distanceInMeters(. Read it with the preceding opening statement (expect(); it is not a standalone business operation.
14	`        { latitude: 12.9719, longitude: 77.5949 },`	Continues the surrounding declaration/expression or text: { latitude: 12.9719, longitude: 77.5949 },. Read it with the preceding opening statement (distanceInMeters(); it is not a standalone business operation.
15	`        { latitude: 12.981, longitude: 77.61 },`	Continues the surrounding declaration/expression or text: { latitude: 12.981, longitude: 77.61 },. Read it with the preceding opening statement ({ latitude: 12.9719, longitude: 77.5949 },); it is not a standalone business operation.
16	`      ),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`    ).toBeGreaterThan(100));`	Continues the surrounding declaration/expression or text:).toBeGreaterThan(100));. Read it with the preceding opening statement ( ),); it is not a standalone business operation.
18	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/utils/distance.ts

Haversine coordinate distance calculation in metres used for visit radius decisions.

13 numbered source lines | SHA-256 f8a1736aa4ba2da4cb5572ddf32652bfa528d38cbe9dfd95e4322fa0e7adcea0

Line	Source code	Explanation / reading note
1	`const rad = (v: number) => (v * Math.PI) / 180;`	Declares/initializes local data used by the surrounding operation: const rad = (v: number) => (v * Math.PI) / 180;. Collection contents and assignments below determine its purpose.
2	`export function distanceInMeters(`	Declares a callable function/method: export function distanceInMeters(. Parameters supply its inputs; the following block implements the operation.
3	`  a: { latitude: number; longitude: number },`	Sets/declares the named object property or style/type member: a: { latitude: number; longitude: number },. Interpret it in the enclosing object, props or type definition.
4	`  b: { latitude: number; longitude: number },`	Sets/declares the named object property or style/type member: b: { latitude: number; longitude: number },. Interpret it in the enclosing object, props or type definition.
5	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (b: { latitude: number; longitude: number },); it is not a standalone business operation.
6	`  const r = 6371000,`	Declares/initializes local data used by the surrounding operation: const r = 6371000,. Collection contents and assignments below determine its purpose.
7	`    dLat = rad(b.latitude - a.latitude),`	Assigns the right-hand expression to the named variable/property: dLat = rad(b.latitude - a.latitude),. This is in-memory unless it is later persisted by an explicit call.
8	`    dLon = rad(b.longitude - a.longitude),`	Assigns the right-hand expression to the named variable/property: dLon = rad(b.longitude - a.longitude),. This is in-memory unless it is later persisted by an explicit call.
9	`    x =`	Continues the surrounding declaration/expression or text: x =. Read it with the preceding opening statement (dLon = rad(b.longitude - a.longitude),); it is not a standalone business operation.
10	`      Math.sin(dLat / 2) ** 2 +`	Calls the named method: Math.sin(dLat / 2) ** 2 +. Its implementation defines the side effect/result; use the symbol/file index to follow it.
11	`      Math.cos(rad(a.latitude)) * Math.cos(rad(b.latitude)) * Math.sin(dLon / 2) ** 2;`	Calls the named method: Math.cos(rad(a.latitude)) * Math.cos(rad(b.latitude)) * Math.sin(dLon / 2) ** 2;. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
12	`  return Math.round(r * 2 * Math.atan2(Math.sqrt(x), Math.sqrt(1 - x)));`	Returns Math.round(r * 2 * Math.atan2(Math.sqrt(x), Math.sqrt(1 - x))) to the caller (or begins returned UI markup) and ends this execution path.
13	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/src/utils/productSelection.ts

Selects the next product from the visible product set and handles boundaries without carrying the previous selection incorrectly.

9 numbered source lines | SHA-256 d176b04b01192eb9063c1d29814266b3e4baf5a62996f4e481735bd07eb615d2

Line	Source code	Explanation / reading note
1	`/** Advance within the current filtered list; never copy the previous product's metadata. */`	Developer comment/documentation: Advance within the current filtered list; never copy the previous product's metadata. */ It is not executed.
2	`export function nextProduct<T extends { id: string }>(`	Declares a callable function/method: export function nextProduct<T extends { id: string }>(. Parameters supply its inputs; the following block implements the operation.
3	`  products: T[],`	Sets/declares the named object property or style/type member: products: T[],. Interpret it in the enclosing object, props or type definition.
4	`  currentId?: string,`	Sets/declares the named object property or style/type member: currentId?: string,. Interpret it in the enclosing object, props or type definition.
5	`): T | undefined {`	Continues the surrounding declaration/expression or text:): T | undefined {. Read it with the preceding opening statement (currentId?: string,); it is not a standalone business operation.
6	`  if (!products.length) return undefined;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!products.length) return undefined;.
7	`  const currentIndex = products.findIndex((product) => product.id === currentId);`	Declares/initializes local data used by the surrounding operation: const currentIndex = products.findIndex((product) => product.id === currentId);. Collection contents and assignments below determine its purpose.
8	`  return products[(currentIndex + 1) % products.length];`	Returns products[(currentIndex + 1) % products.length] to the caller (or begins returned UI markup) and ends this execution path.
9	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

DMS portal & mobile

12 files. Expand this area in the PDF bookmarks to jump to an individual file.

dms-mobile/App.tsx

DMS entry component that mounts DmsApp.

1 numbered source lines | SHA-256 f778eceb2821407f3cc4fb20de2c65f5bc12b58468fc9808a24f8699c0511852

Line	Source code	Explanation / reading note
1	`export { default } from "./src/DmsApp";`	Continues the surrounding declaration/expression or text: export { default } from "./src/DmsApp";. Read it with the preceding opening statement; it is not a standalone business operation.

dms-mobile/src/DmsApp.tsx

DMS state coordinator: restores session/snapshot/queue, performs authentication and polling, guards stale responses, queues commands, renders orders/returns/receipts/stock/tickets and handles logout.

1476 numbered source lines | SHA-256 c42c35caa3cb4d6b0c10975048a05fd3c4d87f0eaa521751c6e3ed33083855ce

Line	Source code	Explanation / reading note
1	`import React, { useEffect, useRef, useState } from "react";`	Imports dependencies/types used below: import React, { useEffect, useRef, useState } from "react";. Importing a function does not call it.
2	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.
3	`  AppState,`	Continues the surrounding declaration/expression or text: AppState,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
4	`  Platform,`	Continues the surrounding declaration/expression or text: Platform,. Read it with the preceding opening statement (AppState,); it is not a standalone business operation.
5	`  SafeAreaView,`	Continues the surrounding declaration/expression or text: SafeAreaView,. Read it with the preceding opening statement (Platform,); it is not a standalone business operation.
6	`  ScrollView,`	Continues the surrounding declaration/expression or text: ScrollView,. Read it with the preceding opening statement (SafeAreaView,); it is not a standalone business operation.
7	`  View,`	Continues the surrounding declaration/expression or text: View,. Read it with the preceding opening statement (ScrollView,); it is not a standalone business operation.
8	`  Text,`	Continues the surrounding declaration/expression or text: Text,. Read it with the preceding opening statement (View,); it is not a standalone business operation.
9	`  TextInput,`	Continues the surrounding declaration/expression or text: TextInput,. Read it with the preceding opening statement (Text,); it is not a standalone business operation.
10	`  Pressable,`	Continues the surrounding declaration/expression or text: Pressable,. Read it with the preceding opening statement (TextInput,); it is not a standalone business operation.
11	`  StyleSheet,`	Continues the surrounding declaration/expression or text: StyleSheet,. Read it with the preceding opening statement (Pressable,); it is not a standalone business operation.
12	`} from "react-native";`	Completes the dependency import and identifies the module supplying those names.

Line	Source code	Explanation / reading note
13	`import * as Crypto from "expo-crypto";`	Imports dependencies/types used below: import * as Crypto from "expo-crypto";. Importing a function does not call it.
14	`import { request, ApiError } from "./api";`	Imports dependencies/types used below: import { request, ApiError } from "./api";. Importing a function does not call it.
15	`import { colors } from "./theme";`	Imports dependencies/types used below: import { colors } from "./theme";. Importing a function does not call it.
16	`import { validateGoodsReceipt } from "./goodsReceipt";`	Imports dependencies/types used below: import { validateGoodsReceipt } from "./goodsReceipt";. Importing a function does not call it.
17	`import PurchasesSalesDashboard from "./components/PurchasesSalesDashboard";`	Imports dependencies/types used below: import PurchasesSalesDashboard from "./components/PurchasesSalesDashboard";. Importing a function does not call it.
18	`import ManagementReports from "./components/ManagementReports";`	Imports dependencies/types used below: import ManagementReports from "./components/ManagementReports";. Importing a function does not call it.
19	`import PrimaryOrderForm from "./components/PrimaryOrderForm";`	Imports dependencies/types used below: import PrimaryOrderForm from "./components/PrimaryOrderForm";. Importing a function does not call it.
20	`import PortalFrame from "./components/PortalFrame";`	Imports dependencies/types used below: import PortalFrame from "./components/PortalFrame";. Importing a function does not call it.
21	`import BrandLogo from "./components/BrandLogo";`	Imports dependencies/types used below: import BrandLogo from "./components/BrandLogo";. Importing a function does not call it.
22	`import { MetricCard, MenuItem } from "./components/Workspace";`	Imports dependencies/types used below: import { MetricCard, MenuItem } from "./components/Workspace";. Importing a function does not call it.
23	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.
24	`  Session,`	Continues the surrounding declaration/expression or text: Session,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
25	`  Pending,`	Continues the surrounding declaration/expression or text: Pending,. Read it with the preceding opening statement (Session,); it is not a standalone business operation.
26	`  readSession,`	Continues the surrounding declaration/expression or text: readSession,. Read it with the preceding opening statement (Pending,); it is not a standalone business operation.
27	`  saveSession,`	Continues the surrounding declaration/expression or text: saveSession,. Read it with the preceding opening statement (readSession,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
28	`  readSnapshot,`	Continues the surrounding declaration/expression or text: readSnapshot,. Read it with the preceding opening statement (saveSession,); it is not a standalone business operation.
29	`  saveSnapshot,`	Continues the surrounding declaration/expression or text: saveSnapshot,. Read it with the preceding opening statement (readSnapshot,); it is not a standalone business operation.
30	`  readPending,`	Continues the surrounding declaration/expression or text: readPending,. Read it with the preceding opening statement (saveSnapshot,); it is not a standalone business operation.
31	`  savePending,`	Continues the surrounding declaration/expression or text: savePending,. Read it with the preceding opening statement (readPending,); it is not a standalone business operation.
32	`} from "./storage";`	Completes the dependency import and identifies the module supplying those names.
33		Blank line separating logical sections; no executable operation.
34	`type Row = Record<string, any>;`	Defines a compile-time data contract: type Row = Record<string, any>;. TypeScript types do not validate untrusted runtime JSON by themselves.
35	`type Snapshot = {`	Defines a compile-time data contract: type Snapshot = {. TypeScript types do not validate untrusted runtime JSON by themselves.
36	`  distributor: Row;`	Sets/declares the named object property or style/type member: distributor: Row;. Interpret it in the enclosing object, props or type definition.
37	`  retrievedAt: string;`	Sets/declares the named object property or style/type member: retrievedAt: string;. Interpret it in the enclosing object, props or type definition.
38	`  truncatedLists: string[];`	Sets/declares the named object property or style/type member: truncatedLists: string[];. Interpret it in the enclosing object, props or type definition.
39	`  [key: string]: any;`	Continues the surrounding declaration/expression or text: [key: string]: any;. Read it with the preceding opening statement (truncatedLists: string[];); it is not a standalone business operation.
40	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
41	`const money = (value: any) => `₹${Number(value || 0).toFixed(2)}`;`	Declares/initializes local data used by the surrounding operation: const money = (value: any) => `₹${Number(value || 0).toFixed(2)}`;. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
42	`const sum = (rows: Row[], field: string) =>`	Declares/initializes local data used by the surrounding operation: const sum = (rows: Row[], field: string) =>. Collection contents and assignments below determine its purpose.
43	`  rows.reduce((total, row) => total + Number(row[field] || 0), 0);`	Transforms/selects/aggregates collection values with the callback shown here: rows.reduce((total, row) => total + Number(row[field] || 0), 0);. Read the callback body and result assignment together.
44		Blank line separating logical sections; no executable operation.
45	`function Field({`	Declares a callable function/method: function Field({. Parameters supply its inputs; the following block implements the operation.
46	`  label,`	Continues the surrounding declaration/expression or text: label,. Read it with the preceding opening statement (function Field({); it is not a standalone business operation.
47	`  value,`	Continues the surrounding declaration/expression or text: value,. Read it with the preceding opening statement (label,); it is not a standalone business operation.
48	`  onChange,`	Continues the surrounding declaration/expression or text: onChange,. Read it with the preceding opening statement (value,); it is not a standalone business operation.
49	`  numeric = false,`	Assigns the right-hand expression to the named variable/property: numeric = false,. This is in-memory unless it is later persisted by an explicit call.
50	`  multiline = false,`	Assigns the right-hand expression to the named variable/property: multiline = false,. This is in-memory unless it is later persisted by an explicit call.
51	`}: {`	Continues the surrounding declaration/expression or text: }: {. Read it with the preceding opening statement (multiline = false,); it is not a standalone business operation.
52	`  label: string;`	Sets/declares the named object property or style/type member: label: string;. Interpret it in the enclosing object, props or type definition.
53	`  value: string;`	Sets/declares the named object property or style/type member: value: string;. Interpret it in the enclosing object, props or type definition.
54	`  onChange: (value: string) => void;`	Sets/declares the named object property or style/type member: onChange: (value: string) => void;. Interpret it in the enclosing object, props or type definition.
55	`  numeric?: boolean;`	Sets/declares the named object property or style/type member: numeric?: boolean;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
56	`  multiline?: boolean;`	Sets/declares the named object property or style/type member: multiline?: boolean;. Interpret it in the enclosing object, props or type definition.
57	`}) {`	Continues the surrounding declaration/expression or text: }) {. Read it with the preceding opening statement (multiline?: boolean;); it is not a standalone business operation.
58	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
59	`    <View>`	Renders/opens a UI element or component: <View>. Props and child content below determine appearance and interactions.
60	`      <Text style={styles.label}>{label}</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>{label}</Text>. Props and child content below determine appearance and interactions.
61	`      <TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
62	`        accessibilityLabel={label}`	Assigns the right-hand expression to the named variable/property: accessibilityLabel={label}. This is in-memory unless it is later persisted by an explicit call.
63	`        value={value}`	Assigns the right-hand expression to the named variable/property: value={value}. This is in-memory unless it is later persisted by an explicit call.
64	`        onChangeText={onChange}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
65	`        placeholder={label}`	Assigns the right-hand expression to the named variable/property: placeholder={label}. This is in-memory unless it is later persisted by an explicit call.
66	`        placeholderTextColor="#607970"`	Assigns the right-hand expression to the named variable/property: placeholderTextColor="#607970". This is in-memory unless it is later persisted by an explicit call.
67	`        keyboardType={numeric ? "numeric" : "default"}`	Assigns the right-hand expression to the named variable/property: keyboardType={numeric ? "numeric" : "default"}. This is in-memory unless it is later persisted by an explicit call.
68	`        autoCapitalize="none"`	Assigns the right-hand expression to the named variable/property: autoCapitalize="none". This is in-memory unless it is later persisted by an explicit call.
69	`        multiline={multiline}`	Assigns the right-hand expression to the named variable/property: multiline={multiline}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
70	`style={[styles.input, multiline && { minHeight: 90, textAlignVertical: "top" }]}`	Assigns the right-hand expression to the named variable/property: style={[styles.input, multiline && { minHeight: 90, textAlignVertical: "top" }]}. This is in-memory unless it is later persisted by an explicit call.
71	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (style={[styles.input, multiline && { minHeight: 90, textAlignVertical: "top" }]}); it is not a standalone business operation.
72	`</View>`	Closes the UI element/component opened above.
73	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
74	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
75	`function Button({`	Declares a callable function/method: function Button({. Parameters supply its inputs; the following block implements the operation.
76	`title,`	Continues the surrounding declaration/expression or text: title,. Read it with the preceding opening statement (function Button({); it is not a standalone business operation.
77	`onPress,`	Continues the surrounding declaration/expression or text: onPress,. Read it with the preceding opening statement (title,); it is not a standalone business operation.
78	`disabled = false,`	Assigns the right-hand expression to the named variable/property: disabled = false,. This is in-memory unless it is later persisted by an explicit call.
79	`secondary = false,`	Assigns the right-hand expression to the named variable/property: secondary = false,. This is in-memory unless it is later persisted by an explicit call.
80	`}: {`	Continues the surrounding declaration/expression or text: }: {. Read it with the preceding opening statement (secondary = false,); it is not a standalone business operation.
81	`title: string;`	Sets/declares the named object property or style/type member: title: string;. Interpret it in the enclosing object, props or type definition.
82	`onPress: () => void;`	Sets/declares the named object property or style/type member: onPress: () => void;. Interpret it in the enclosing object, props or type definition.
83	`disabled?: boolean;`	Sets/declares the named object property or style/type member: disabled?: boolean;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
84	`  secondary?: boolean;`	Sets/declares the named object property or style/type member: secondary?: boolean;. Interpret it in the enclosing object, props or type definition.
85	`}) {`	Continues the surrounding declaration/expression or text: }) {. Read it with the preceding opening statement (secondary?: boolean;); it is not a standalone business operation.
86	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
87	`    <Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
88	`      accessibilityRole="button"`	Assigns the right-hand expression to the named variable/property: accessibilityRole="button". This is in-memory unless it is later persisted by an explicit call.
89	`      accessibilityState={{ disabled }}`	Assigns the right-hand expression to the named variable/property: accessibilityState={{ disabled }}. This is in-memory unless it is later persisted by an explicit call.
90	`      disabled={disabled}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
91	`      onPress={onPress}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
92	`      style={[styles.button, secondary && styles.secondary, disabled && { opacity: 0.5 }]}`	Assigns the right-hand expression to the named variable/property: style={[styles.button, secondary && styles.secondary, disabled && { opacity: 0.5 }]}. This is in-memory unless it is later persisted by an explicit call.
93	`    >`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (style={[styles.button, secondary && styles.secondary, disabled && { opacity: 0.5 }]}); it is not a standalone business operation.
94	`      <Text style={[styles.buttonText, secondary && { color: "#19463e" }]}>{title}</Text>`	Renders/opens a UI element or component: <Text style={[styles.buttonText, secondary && { color: "#19463e" }]}>{title}</Text>. Props and child content below determine appearance and interactions.
95	`    </Pressable>`	Closes the UI element/component opened above.
96	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
97	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
98	`const Card = ({ children }: { children: React.ReactNode }) => (`	Declares/initializes local data used by the surrounding operation: const Card = ({ children }: { children: React.ReactNode }) => (. Collection contents and assignments below determine its purpose.
99	`  <View style={styles.card}>{children}</View>`	Renders/opens a UI element or component: <View style={styles.card}>{children}</View>. Props and child content below determine appearance and interactions.
100	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
101		Blank line separating logical sections; no executable operation.
102	`export default function DmsApp() {`	Declares a callable function/method: export default function DmsApp() {. Parameters supply its inputs; the following block implements the operation.
103	`  const [session, setSession] = useState<Session | null>(null),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
104	`    [data, setData] = useState<Snapshot | null>(null);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
105	`  const [pending, setPending] = useState<Pending[]>([]),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
106	`    [tab, setTab] = useState("Home");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
107	`  const [email, setEmail] = useState(""),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
108	`    [code, setCode] = useState(""),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
109	`    [sent, setSent] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
110	`  const [busy, setBusy] = useState(false),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
111	`    [notice, setNotice] = useState(""),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.

Line	Source code	Explanation / reading note
112	`  [offline, setOffline] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
113	`const [subject, setSubject] = useState(""),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
114	`  [category, setCategory] = useState("Product"),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
115	`  [description, setDescription] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
116	`const [notes, setNotes] = useState<Record<string, string>>({}),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
117	`  [receipt, setReceipt] = useState<Row | null>(null);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
118	`const [cases, setCases] = useState(""),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
119	`  [batch, setBatch] = useState(""),`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
120	`  [expiry, setExpiry] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
121	`const [confirm, setConfirm] = useState<{`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
122	`  label: string;`	Sets/declares the named object property or style/type member: label: string;. Interpret it in the enclosing object, props or type definition.
123	`  path: string;`	Sets/declares the named object property or style/type member: path: string;. Interpret it in the enclosing object, props or type definition.
124	`  body: Record<string, unknown>;`	Sets/declares the named object property or style/type member: body: Record<string, unknown>;. Interpret it in the enclosing object, props or type definition.
125	`  replacesKey?: string;`	Sets/declares the named object property or style/type member: replacesKey?: string;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
126	`} | null>(null);`	Continues the surrounding declaration/expression or text: } | null>(null);. Read it with the preceding opening statement (replacesKey?: string;); it is not a standalone business operation.
127	`const lock = useRef(false);`	Stores a mutable value across renders without causing a re-render, such as a stable request key or sync lock.
128	`const scrollRef = useRef<ScrollView>(null);`	Stores a mutable value across renders without causing a re-render, such as a stable request key or sync lock.
129	`const [placingOrder, setPlacingOrder] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
130	`// Retain the distributor identity and queue while showing the original login.`	Developer comment/documentation: Retain the distributor identity and queue while showing the original login. It is not executed.
131	`const [needsSignIn, setNeedsSignIn] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
132	`const [resendSeconds, setResendSeconds] = useState(0);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
133	`const [receiptError, setReceiptError] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
134	`const [savedReceiptId, setSavedReceiptId] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
135	`const [loggingOut, setLoggingOut] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
136	`const [returnType, setReturnType] = useState<"Primary" | "Secondary">("Primary");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
137	`// Ignore late UI results from a session that has been signed out/replaced.`	Developer comment/documentation: Ignore late UI results from a session that has been signed out/replaced. It is not executed.
138	`const sessionGeneration = useRef(0);`	Stores a mutable value across renders without causing a re-render, such as a stable request key or sync lock.
139	`const logoutLock = useRef(false);`	Stores a mutable value across renders without causing a re-render, such as a stable request key or sync lock.

Line	Source code	Explanation / reading note
140	`  const showSignIn = !session || needsSignIn;`	Declares/initializes local data used by the surrounding operation: const showSignIn = !session || needsSignIn;. Collection contents and assignments below determine its purpose.
141	`  useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.
142	`    if (!resendSeconds) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!resendSeconds) return;.
143	`    const timer = setTimeout(() => setResendSeconds((value) => Math.max(0, value - 1)), 1000);`	Schedules periodic/delayed work. The delay and cleanup determine refresh/retry behavior; it is not immediate server push.
144	`    return () => clearTimeout(timer);`	Cancels a timer/listener to prevent stale updates after cleanup or screen changes.
145	`  }, [resendSeconds]);`	Continues the surrounding declaration/expression or text: }, [resendSeconds]);. Read it with the preceding opening statement (return () => clearTimeout(timer);); it is not a standalone business operation.
146	`  const lastReports = useRef<{ id: string; value: any; at: number } | null>(null);`	Stores a mutable value across renders without causing a re-render, such as a stable request key or sync lock.
147		Blank line separating logical sections; no executable operation.
148	`  useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.
149	`    void readSession()`	Continues the surrounding declaration/expression or text: void readSession(). Read it with the preceding opening statement (useEffect(() => {); it is not a standalone business operation.
150	`      .then(async (saved) => {`	Continues the surrounding declaration/expression or text: .then(async (saved) => {. Read it with the preceding opening statement (void readSession()); it is not a standalone business operation.
151	`        if (saved) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (saved) {.
152	`          setOffline(true);`	Continues the surrounding declaration/expression or text: setOffline(true);. Read it with the preceding opening statement (if (saved) {); it is not a standalone business operation.

Line	Source code	Explanation / reading note
153	`setSession(saved);`	Continues the surrounding declaration/expression or text: setSession(saved);. Read it with the preceding opening statement (setOffline(true);); it is not a standalone business operation.
154	`setData(await readSnapshot(saved.id));`	Waits for this asynchronous operation before continuing: setData(await readSnapshot(saved.id));. The returned result/error must still be handled.
155	`setPending(await readPending(saved.id));`	Waits for this asynchronous operation before continuing: setPending(await readPending(saved.id));. The returned result/error must still be handled.
156	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
157	`})`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
158	`.catch(() => setNotice("Could not load this device’s saved session."));`	Continues the surrounding declaration/expression or text: .catch(() => setNotice("Could not load this device’s saved session."));. Read it with the preceding opening statement (})); it is not a standalone business operation.
159	`}, []);`	Continues the surrounding declaration/expression or text: }, []);. Read it with the preceding opening statement (.catch(() => setNotice("Could not load this device’s saved session."));); it is not a standalone business operation.
160	`async function sync(current = session, refreshReports = true) {`	Declares a callable function/method: async function sync(current = session, refreshReports = true) {. Parameters supply its inputs; the following block implements the operation.
161	`if (!current || lock.current || logoutLock.current) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!current || lock.current || logoutLock.current) return;.
162	`const generation = sessionGeneration.current;`	Declares/initializes local data used by the surrounding operation: const generation = sessionGeneration.current;. Collection contents and assignments below determine its purpose.
163	`const isCurrent = () => generation === sessionGeneration.current;`	Declares/initializes local data used by the surrounding operation: const isCurrent = () => generation === sessionGeneration.current;. Collection contents and assignments below determine its purpose.
164	`lock.current = true;`	Assigns the right-hand expression to the named variable/property: lock.current = true;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
165	`    setBusy(true);`	Continues the surrounding declaration/expression or text: setBusy(true);. Read it with the preceding opening statement (lock.current = true;); it is not a standalone business operation.
166	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
167	`      const queue = await readPending(current.id);`	Waits for this asynchronous operation before continuing: const queue = await readPending(current.id);. The returned result/error must still be handled.
168	`      if (!isCurrent()) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!isCurrent()) return;.
169	`      while (queue.length) {`	Repeats work over the specified records/items or while this condition holds: while (queue.length) {. Check where queries/writes occur relative to the loop.
170	`        const first = queue[0];`	Declares/initializes local data used by the surrounding operation: const first = queue[0];. Collection contents and assignments below determine its purpose.
171	`        if (first.status === 400) break;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (first.status === 400) break;.
172	`        try {`	Starts operations whose failure is handled by the following catch/finally blocks.
173	`          const saved = await request(first.path, current.token, first.body);`	Waits for this asynchronous operation before continuing: const saved = await request(first.path, current.token, first.body);. The returned result/error must still be handled.
174	`          if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
175	`            isCurrent() &&`	Continues the surrounding declaration/expression or text: isCurrent() &&. Read it with the preceding opening statement (if (); it is not a standalone business operation.
176	`            first.body.action === "receiveGoods" &&`	Continues the surrounding declaration/expression or text: first.body.action === "receiveGoods" &&. Read it with the preceding opening statement (isCurrent() &&); it is not a standalone business operation.
177	`            saved?.status === "Received" &&`	Continues the surrounding declaration/expression or text: saved?.status === "Received" &&. Read it with the preceding opening statement (first.body.action === "receiveGoods" &&); it is not a standalone business operation.
178	`            saved?.id`	Continues the surrounding declaration/expression or text: saved?.id. Read it with the preceding opening statement (saved?.status === "Received" &&); it is not a standalone business operation.

Line	Source code	Explanation / reading note
179	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
180	`setSavedReceiptId(saved.id);`	Continues the surrounding declaration/expression or text: setSavedReceiptId(saved.id);. Read it with the preceding opening statement ( )); it is not a standalone business operation.
181	`queue.shift();`	Calls the named method: queue.shift();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
182	`await savePending(current.id, queue);`	Waits for this asynchronous operation before continuing: await savePending(current.id, queue);. The returned result/error must still be handled.
183	`if (!isCurrent()) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!isCurrent()) return;.
184	`setPending([...queue]);`	Continues the surrounding declaration/expression or text: setPending([...queue]);. Read it with the preceding opening statement (if (!isCurrent()) return;); it is not a standalone business operation.
185	`} catch (error: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
186	`first.error = error.message;`	Assigns the right-hand expression to the named variable/property: first.error = error.message;. This is in-memory unless it is later persisted by an explicit call.
187	`first.status = error.status;`	Assigns the right-hand expression to the named variable/property: first.status = error.status;. This is in-memory unless it is later persisted by an explicit call.
188	`await savePending(current.id, queue);`	Waits for this asynchronous operation before continuing: await savePending(current.id, queue);. The returned result/error must still be handled.
189	`if (!isCurrent()) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!isCurrent()) return;.
190	`setPending([...queue]);`	Continues the surrounding declaration/expression or text: setPending([...queue]);. Read it with the preceding opening statement (if (!isCurrent()) return;); it is not a standalone business operation.
191	`if (error.status === 400) break;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (error.status === 400) break;.

Line	Source code	Explanation / reading note
192	`throw error;`	Stops this execution path with a validation/error exception: throw error;. The caller/catch block decides how it is reported.
193	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
194	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
195	`const snapshot = await request("/overview", current.token);`	Waits for this asynchronous operation before continuing: const snapshot = await request("/overview", current.token);. The returned result/error must still be handled.
196	`if (!isCurrent()) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!isCurrent()) return;.
197	`// Reports are heavier than activity lists. Refresh at least once per minute.`	Developer comment/documentation: Reports are heavier than activity lists. Refresh at least once per minute. It is not executed.
198	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
199	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
200	`refreshReports ||`	Continues the surrounding declaration/expression or text: refreshReports ||. Read it with the preceding opening statement (if (); it is not a standalone business operation.
201	`lastReports.current?.id !== current.id ||`	Continues the surrounding declaration/expression or text: lastReports.current?.id !== current.id ||. Read it with the preceding opening statement (refreshReports ||); it is not a standalone business operation.
202	`Date.now() - lastReports.current.at > 60000`	Declares/initializes local data used by the surrounding operation: Date.now() - lastReports.current.at > 60000. Collection contents and assignments below determine its purpose.
203	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (Date.now() - lastReports.current.at > 60000); it is not a standalone business operation.
204	`const reports = await request("/reports", current.token);`	Waits for this asynchronous operation before continuing: const reports = await request("/reports", current.token);. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
205	`if (!isCurrent()) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!isCurrent()) return;.
206	`lastReports.current = {`	Assigns the right-hand expression to the named variable/property: lastReports.current = {. This is in-memory unless it is later persisted by an explicit call.
207	`id: current.id,`	Sets/declares the named object property or style/type member: id: current.id,. Interpret it in the enclosing object, props or type definition.
208	`value: reports,`	Sets/declares the named object property or style/type member: value: reports,. Interpret it in the enclosing object, props or type definition.
209	`at: Date.now(),`	Sets/declares the named object property or style/type member: at: Date.now(),. Interpret it in the enclosing object, props or type definition.
210	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
211	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
212	`snapshot.reports = lastReports.current?.value;`	Assigns the right-hand expression to the named variable/property: snapshot.reports = lastReports.current?.value;. This is in-memory unless it is later persisted by an explicit call.
213	`} catch (error: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
214	`const cached = await readSnapshot(current.id);`	Waits for this asynchronous operation before continuing: const cached = await readSnapshot(current.id);. The returned result/error must still be handled.
215	`if (!isCurrent()) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!isCurrent()) return;.
216	`snapshot.reports = cached?.reports;`	Assigns the right-hand expression to the named variable/property: snapshot.reports = cached?.reports;. This is in-memory unless it is later persisted by an explicit call.
217	`snapshot.reportError = `Reports could not refresh: ${error.message}. Any report shown is the last saved calculation.`;`	Assigns the right-hand expression to the named variable/property: snapshot.reportError = `Reports could not refresh: ${error.message}. Any report shown is the last saved calculation.`;. This is in-memory unless it is later persisted by an explicit call.
218	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
219	`await saveSnapshot(current.id, snapshot);`	Waits for this asynchronous operation before continuing: await saveSnapshot(current.id, snapshot);. The returned result/error must still be handled.
220	`if (!isCurrent()) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!isCurrent()) return;.
221	`setData(snapshot);`	Continues the surrounding declaration/expression or text: setData(snapshot);. Read it with the preceding opening statement (if (!isCurrent()) return;); it is not a standalone business operation.
222	`setOffline(false);`	Continues the surrounding declaration/expression or text: setOffline(false);. Read it with the preceding opening statement (setData(snapshot);); it is not a standalone business operation.
223	`setNotice(`	Continues the surrounding declaration/expression or text: setNotice(. Read it with the preceding opening statement (setOffline(false);); it is not a standalone business operation.
224	`queue.length`	Continues the surrounding declaration/expression or text: queue.length. Read it with the preceding opening statement (setNotice(); it is not a standalone business operation.
225	`? `Not saved: ${queue[0].label}. ${queue[0].error || "Pending synchronization."} Open More → Sync centre to review.``	Continues the surrounding declaration/expression or text: ? `Not saved: ${queue[0].label}. ${queue[0].error || "Pending synchronization."} Open More → Sync centre to review.`. Read it with the preceding opening statement (queue.length); it is not a standalone business operation.
226	`: "Salesforce data refreshed.",`	Continues the surrounding declaration/expression or text: : "Salesforce data refreshed.",. Read it with the preceding opening statement (? `Not saved: ${queue[0].label}. ${queue[0].error || "Pending synchronization."} Open More → Sync centre to review.`); it is not a standalone business operation.
227	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
228	`} catch (error: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
229	`if (!isCurrent()) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!isCurrent()) return;.
230	`setOffline(true);`	Continues the surrounding declaration/expression or text: setOffline(true);. Read it with the preceding opening statement (if (!isCurrent()) return;); it is not a standalone business operation.

Line	Source code	Explanation / reading note
231	`setNotice(error.message);`	Continues the surrounding declaration/expression or text: setNotice(error.message);. Read it with the preceding opening statement (setOffline(true);); it is not a standalone business operation.
232	`if (error instanceof ApiError && (error.status === 401 || error.status === 403)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (error instanceof ApiError && (error.status === 401 || error.status === 403)) {.
233	`setNeedsSignIn(true);`	Continues the surrounding declaration/expression or text: setNeedsSignIn(true);. Read it with the preceding opening statement (if (error instanceof ApiError && (error.status === 401 || error.status === 403)) {); it is not a standalone business operation.
234	`setNotice(`	Continues the surrounding declaration/expression or text: setNotice(. Read it with the preceding opening statement (setNeedsSignIn(true);); it is not a standalone business operation.
235	`"Your session needs renewal. Sign in with the same distributor email; queued work stays linked to that distributor.",`	Continues the surrounding declaration/expression or text: "Your session needs renewal. Sign in with the same distributor email; queued work stays linked to that distributor.",. Read it with the preceding opening statement (setNotice(); it is not a standalone business operation.
236	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
237	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
238	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
239	`lock.current = false;`	Assigns the right-hand expression to the named variable/property: lock.current = false;. This is in-memory unless it is later persisted by an explicit call.
240	`if (isCurrent()) setBusy(false);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (isCurrent()) setBusy(false);.
241	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
242	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
243	`useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.

Line	Source code	Explanation / reading note
244	`    if (!session || needsSignIn) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!session || needsSignIn) return;.
245	`    void sync(session);`	Continues the surrounding declaration/expression or text: void sync(session);. Read it with the preceding opening statement (if (!session || needsSignIn) return;); it is not a standalone business operation.
246	`    const timer = setInterval(() => {`	Schedules periodic/delayed work. The delay and cleanup determine refresh/retry behavior; it is not immediate server push.
247	`      if (AppState.currentState === "active") void sync(session, false);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (AppState.currentState === "active") void sync(session, false);.
248	`    }, 20000);`	Continues the surrounding declaration/expression or text: }, 20000);. Read it with the preceding opening statement (if (AppState.currentState === "active") void sync(session, false);); it is not a standalone business operation.
249	`    const listener = AppState.addEventListener("change", (state) => {`	Declares/initializes local data used by the surrounding operation: const listener = AppState.addEventListener("change", (state) => {. Collection contents and assignments below determine its purpose.
250	`      if (state === "active") void sync(session);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (state === "active") void sync(session);.
251	`    });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
252	`    return () => {`	Returns () => { to the caller (or begins returned UI markup) and ends this execution path.
253	`      clearInterval(timer);`	Cancels a timer/listener to prevent stale updates after cleanup or screen changes.
254	`      listener.remove();`	Cancels a timer/listener to prevent stale updates after cleanup or screen changes.
255	`    };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
256	`  }, [session?.id, session?.token, needsSignIn]);`	Continues the surrounding declaration/expression or text: }, [session?.id, session?.token, needsSignIn]);. Read it with the preceding opening statement (};); it is not a standalone business operation.
257	`  async function login(resend = false) {`	Declares a callable function/method: async function login(resend = false) {. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
258	`    if (busy) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (busy) return;.
259	`    if ((!sent || resend) && resendSeconds > 0) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ((!sent || resend) && resendSeconds > 0) return;.
260	`    setBusy(true);`	Continues the surrounding declaration/expression or text: setBusy(true);. Read it with the preceding opening statement (if ((!sent || resend) && resendSeconds > 0) return;); it is not a standalone business operation.
261	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
262	`      if (!sent || resend) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!sent || resend) {.
263	`        await request("/auth/request-code", "", { email });`	Waits for this asynchronous operation before continuing: await request("/auth/request-code", "", { email });. The returned result/error must still be handled.
264	`        setSent(true);`	Continues the surrounding declaration/expression or text: setSent(true);. Read it with the preceding opening statement (await request("/auth/request-code", "", { email });); it is not a standalone business operation.
265	`        setCode("");`	Continues the surrounding declaration/expression or text: setCode("");. Read it with the preceding opening statement (setSent(true);); it is not a standalone business operation.
266	`        setResendSeconds(60);`	Continues the surrounding declaration/expression or text: setResendSeconds(60);. Read it with the preceding opening statement (setCode("");); it is not a standalone business operation.
267	`        setNotice(`	Continues the surrounding declaration/expression or text: setNotice(. Read it with the preceding opening statement (setResendSeconds(60);); it is not a standalone business operation.
268	`          "Code requested. If this email matches an active distributor, Salesforce has accepted a new code email. Check Inbox and Spam. Use only the latest code; it expires in 10 minutes.",`	Continues the surrounding declaration/expression or text: "Code requested. If this email matches an active distributor, Salesforce has accepted a new code email. Check Inbox and Spam. Use only the latest code; it expires in 10 minutes.",. Read it with the preceding opening statement (setNotice(); it is not a standalone business operation.
269	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
270	`      } else {`	Alternative branch taken when the preceding condition is false.

Line	Source code	Explanation / reading note
271	`const result = await request("/auth/verify-code", "", { email, code });`	Waits for this asynchronous operation before continuing: const result = await request("/auth/verify-code", "", { email, code });. The returned result/error must still be handled.
272	`if (session && session.id !== result.user.id && (await readPending(session.id)).length)`	Waits for this asynchronous operation before continuing: if (session && session.id !== result.user.id && (await readPending(session.id)).length). The returned result/error must still be handled.
273	`throw new Error("Renew with the same distributor email while changes are pending.");`	Stops this execution path with a validation/error exception: throw new Error("Renew with the same distributor email while changes are pending.");. The caller/catch block decides how it is reported.
274	`const current: Session = {`	Declares/initializes local data used by the surrounding operation: const current: Session = {. Collection contents and assignments below determine its purpose.
275	`token: result.token,`	Sets/declares the named object property or style/type member: token: result.token,. Interpret it in the enclosing object, props or type definition.
276	`id: result.user.id,`	Sets/declares the named object property or style/type member: id: result.user.id,. Interpret it in the enclosing object, props or type definition.
277	`name: result.user.name,`	Sets/declares the named object property or style/type member: name: result.user.name,. Interpret it in the enclosing object, props or type definition.
278	`expiresAt: Date.now() + 8 * 3600_000,`	Sets/declares the named object property or style/type member: expiresAt: Date.now() + 8 * 3600_000,. Interpret it in the enclosing object, props or type definition.
279	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
280	`await saveSession(current);`	Waits for this asynchronous operation before continuing: await saveSession(current);. The returned result/error must still be handled.
281	`sessionGeneration.current++;`	Continues the surrounding declaration/expression or text: sessionGeneration.current++;. Read it with the preceding opening statement (await saveSession(current);); it is not a standalone business operation.
282	`setData(await readSnapshot(current.id));`	Waits for this asynchronous operation before continuing: setData(await readSnapshot(current.id));. The returned result/error must still be handled.
283	`setPending(await readPending(current.id));`	Waits for this asynchronous operation before continuing: setPending(await readPending(current.id));. The returned result/error must still be handled.

Line	Source code	Explanation / reading note
284	`lastReports.current = null;`	Assigns the right-hand expression to the named variable/property: lastReports.current = null;. This is in-memory unless it is later persisted by an explicit call.
285	`setOffline(true);`	Continues the surrounding declaration/expression or text: setOffline(true);. Read it with the preceding opening statement (lastReports.current = null;); it is not a standalone business operation.
286	`setNeedsSignIn(false);`	Continues the surrounding declaration/expression or text: setNeedsSignIn(false);. Read it with the preceding opening statement (setOffline(true);); it is not a standalone business operation.
287	`setSavedReceiptId("");`	Continues the surrounding declaration/expression or text: setSavedReceiptId("");. Read it with the preceding opening statement (setNeedsSignIn(false);); it is not a standalone business operation.
288	`setTab("Home");`	Continues the surrounding declaration/expression or text: setTab("Home");. Read it with the preceding opening statement (setSavedReceiptId("");); it is not a standalone business operation.
289	`setSession(current);`	Continues the surrounding declaration/expression or text: setSession(current);. Read it with the preceding opening statement (setTab("Home");); it is not a standalone business operation.
290	`setCode("");`	Continues the surrounding declaration/expression or text: setCode("");. Read it with the preceding opening statement (setSession(current);); it is not a standalone business operation.
291	`setSent(false);`	Continues the surrounding declaration/expression or text: setSent(false);. Read it with the preceding opening statement (setCode("");); it is not a standalone business operation.
292	`setNotice("Signed in. Refreshing Salesforce data…");`	Continues the surrounding declaration/expression or text: setNotice("Signed in. Refreshing Salesforce data…");. Read it with the preceding opening statement (setSent(false);); it is not a standalone business operation.
293	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
294	`} catch (error: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.

Line	Source code	Explanation / reading note
295	`setNotice(`	Continues the surrounding declaration/expression or text: setNotice(. Read it with the preceding opening statement (} catch (error: any) {); it is not a standalone business operation.
296	`error instanceof ApiError && error.status === 429`	Continues the surrounding declaration/expression or text: error instanceof ApiError && error.status === 429. Read it with the preceding opening statement (setNotice(); it is not a standalone business operation.
297	`? "Too many code requests. If you already received a code, choose ‘I already received a code’ below. Otherwise wait before requesting another."`	Continues the surrounding declaration/expression or text: ? "Too many code requests. If you already received a code, choose ‘I already received a code’ below. Otherwise wait before requesting another.". Read it with the preceding opening statement (error instanceof ApiError && error.status === 429); it is not a standalone business operation.
298	`: error.message,`	Continues the surrounding declaration/expression or text: : error.message,. Read it with the preceding opening statement (? "Too many code requests. If you already received a code, choose ‘I already received a code’ below. Otherwise wait before requesting another."); it is not a standalone business operation.
299	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
300	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
301	`setBusy(false);`	Continues the surrounding declaration/expression or text: setBusy(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
302	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
303	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
304	`async function enqueue() {`	Declares a callable function/method: async function enqueue() {. Parameters supply its inputs; the following block implements the operation.
305	`if (!session || !confirm || lock.current || logoutLock.current) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!session || !confirm || lock.current || logoutLock.current) return;.
306	`const generation = sessionGeneration.current;`	Declares/initializes local data used by the surrounding operation: const generation = sessionGeneration.current;. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
307	`    lock.current = true;`	Assigns the right-hand expression to the named variable/property: lock.current = true;. This is in-memory unless it is later persisted by an explicit call.
308	`    setBusy(true);`	Continues the surrounding declaration/expression or text: setBusy(true);. Read it with the preceding opening statement (lock.current = true;); it is not a standalone business operation.
309	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
310	`      const queue = await readPending(session.id);`	Waits for this asynchronous operation before continuing: const queue = await readPending(session.id);. The returned result/error must still be handled.
311	`      const replaceIndex = confirm.replacesKey`	Declares/initializes local data used by the surrounding operation: const replaceIndex = confirm.replacesKey. Collection contents and assignments below determine its purpose.
312	`        ? queue.findIndex((item) => item.key === confirm.replacesKey)`	Calls the named method: ? queue.findIndex((item) => item.key === confirm.replacesKey). Its implementation defines the side effect/result; use the symbol/file index to follow it.
313	`        : -1;`	Continues the surrounding declaration/expression or text: : -1;. Read it with the preceding opening statement (? queue.findIndex((item) => item.key === confirm.replacesKey)); it is not a standalone business operation.
314	`      if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
315	`        confirm.replacesKey &&`	Continues the surrounding declaration/expression or text: confirm.replacesKey &&. Read it with the preceding opening statement (if (); it is not a standalone business operation.
316	`        (replaceIndex < 0 ||`	Continues the surrounding declaration/expression or text: (replaceIndex < 0 ||. Read it with the preceding opening statement (confirm.replacesKey &&); it is not a standalone business operation.
317	`          queue[replaceIndex].status !== 400 ||`	Continues the surrounding declaration/expression or text: queue[replaceIndex].status !== 400 ||. Read it with the preceding opening statement ((replaceIndex < 0 ||); it is not a standalone business operation.
318	`          queue[replaceIndex].body.action !== "receiveGoods" ||`	Continues the surrounding declaration/expression or text: queue[replaceIndex].body.action !== "receiveGoods" ||. Read it with the preceding opening statement (queue[replaceIndex].status !== 400 ||); it is not a standalone business operation.
Line	**Source code**	**Explanation / reading note**
319	`          queue[replaceIndex].body.recordId !== confirm.body.recordId)`	Continues the surrounding declaration/expression or text: queue[replaceIndex].body.recordId !== confirm.body.recordId). Read it with the preceding opening statement (

Line	Source code	Explanation / reading note
		queue[replaceIndex].body.action !== "receiveGoods" ||); it is not a standalone business operation.
320	`      )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
321	`        throw new Error(`	Stops this execution path with a validation/error exception: throw new Error(. The caller/catch block decides how it is reported.
322	`          "This rejected receipt has changed. Refresh and review it again before saving.",`	Continues the surrounding declaration/expression or text: "This rejected receipt has changed. Refresh and review it again before saving.",. Read it with the preceding opening statement (throw new Error(); it is not a standalone business operation.
323	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
324	`      const key = confirm.replacesKey || Crypto.randomUUID();`	Declares/initializes local data used by the surrounding operation: const key = confirm.replacesKey || Crypto.randomUUID();. Collection contents and assignments below determine its purpose.
325	`      // Persist before sending. A lost response can safely retry the same request key.`	Developer comment/documentation: Persist before sending. A lost response can safely retry the same request key. It is not executed.
326	`      const updated = {`	Declares/initializes local data used by the surrounding operation: const updated = {. Collection contents and assignments below determine its purpose.
327	`        key,`	Continues the surrounding declaration/expression or text: key,. Read it with the preceding opening statement (const updated = {}; it is not a standalone business operation.
328	`        path: confirm.path,`	Sets/declares the named object property or style/type member: path: confirm.path,. Interpret it in the enclosing object, props or type definition.
329	`        label: confirm.label,`	Sets/declares the named object property or style/type member: label: confirm.label,. Interpret it in the enclosing object, props or type definition.
330	`        body: { ...confirm.body, requestKey: key },`	Sets/declares the named object property or style/type member: body: { ...confirm.body, requestKey: key },. Interpret it in the enclosing object, props or type definition.
331	`      };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
332	`if (replaceIndex >= 0) queue[replaceIndex] = updated;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (replaceIndex >= 0) queue[replaceIndex] = updated;.
333	`else queue.push(updated);`	Alternative branch taken when the preceding condition is false.
334	`await savePending(session.id, queue);`	Waits for this asynchronous operation before continuing: await savePending(session.id, queue);. The returned result/error must still be handled.
335	`if (generation !== sessionGeneration.current) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (generation !== sessionGeneration.current) return;.
336	`setPending(queue);`	Continues the surrounding declaration/expression or text: setPending(queue);. Read it with the preceding opening statement (if (generation !== sessionGeneration.current) return;); it is not a standalone business operation.
337	`setConfirm(null);`	Continues the surrounding declaration/expression or text: setConfirm(null);. Read it with the preceding opening statement (setPending(queue);); it is not a standalone business operation.
338	`setReceipt(null);`	Continues the surrounding declaration/expression or text: setReceipt(null);. Read it with the preceding opening statement (setConfirm(null);); it is not a standalone business operation.
339	`if (confirm.path === "/primary/orders") setPlacingOrder(false);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (confirm.path === "/primary/orders") setPlacingOrder(false);.
340	`if (confirm.path === "/tickets") {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (confirm.path === "/tickets") {.
341	`  setSubject("");`	Continues the surrounding declaration/expression or text: setSubject("");. Read it with the preceding opening statement (if (confirm.path === "/tickets") {); it is not a standalone business operation.
342	`  setDescription("");`	Continues the surrounding declaration/expression or text: setDescription("");. Read it with the preceding opening statement (setSubject("");); it is not a standalone business operation.
343	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
344	`setNotice("Saved on this device. Awaiting Salesforce confirmation.");`	Continues the surrounding declaration/expression or text: setNotice("Saved on this device. Awaiting Salesforce confirmation.");. Read it with the preceding opening statement (}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
345	`    } catch {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
346	`      if (generation === sessionGeneration.current)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (generation === sessionGeneration.current).
347	`        setNotice("Could not save on this device. Nothing was submitted.");`	Continues the surrounding declaration/expression or text: setNotice("Could not save on this device. Nothing was submitted.");. Read it with the preceding opening statement (if (generation === sessionGeneration.current)); it is not a standalone business operation.
348	`    } finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
349	`      lock.current = false;`	Assigns the right-hand expression to the named variable/property: lock.current = false;. This is in-memory unless it is later persisted by an explicit call.
350	`      if (generation === sessionGeneration.current) setBusy(false);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (generation === sessionGeneration.current) setBusy(false);.
351	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
352	`    if (generation === sessionGeneration.current) await sync();`	Waits for this asynchronous operation before continuing: if (generation === sessionGeneration.current) await sync();. The returned result/error must still be handled.
353	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
354	`  async function logout() {`	Declares a callable function/method: async function logout() {. Parameters supply its inputs; the following block implements the operation.
355	`    if (!session || logoutLock.current) return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!session || logoutLock.current) return;.
356	`    logoutLock.current = true;`	Assigns the right-hand expression to the named variable/property: logoutLock.current = true;. This is in-memory unless it is later persisted by an explicit call.
357	`    setLoggingOut(true);`	Continues the surrounding declaration/expression or text: setLoggingOut(true);. Read it with the preceding opening statement (logoutLock.current = true;); it is not a standalone business operation.

Line	Source code	Explanation / reading note
358	`sessionGeneration.current++;`	Continues the surrounding declaration/expression or text: sessionGeneration.current++;. Read it with the preceding opening statement (setLoggingOut(true);); it is not a standalone business operation.
359	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
360	`// Remove credentials only. Snapshot/outbox remain keyed by distributor ID.`	Developer comment/documentation: Remove credentials only. Snapshot/outbox remain keyed by distributor ID. It is not executed.
361	`// An already-sent request may finish, but cannot update another login's UI.`	Developer comment/documentation: An already-sent request may finish, but cannot update another login's UI. It is not executed.
362	`await saveSession(null);`	Waits for this asynchronous operation before continuing: await saveSession(null);. The returned result/error must still be handled.
363	`setSession(null);`	Continues the surrounding declaration/expression or text: setSession(null);. Read it with the preceding opening statement (await saveSession(null);); it is not a standalone business operation.
364	`setNeedsSignIn(false);`	Continues the surrounding declaration/expression or text: setNeedsSignIn(false);. Read it with the preceding opening statement (setSession(null);); it is not a standalone business operation.
365	`setData(null);`	Continues the surrounding declaration/expression or text: setData(null);. Read it with the preceding opening statement (setNeedsSignIn(false);); it is not a standalone business operation.
366	`setPending([]);`	Continues the surrounding declaration/expression or text: setPending([]);. Read it with the preceding opening statement (setData(null);); it is not a standalone business operation.
367	`setSavedReceiptId("");`	Continues the surrounding declaration/expression or text: setSavedReceiptId("");. Read it with the preceding opening statement (setPending([]);); it is not a standalone business operation.
368	`setReceiptError("");`	Continues the surrounding declaration/expression or text: setReceiptError("");. Read it with the preceding opening statement (setSavedReceiptId("");); it is not a standalone business operation.
369	`lastReports.current = null;`	Assigns the right-hand expression to the named variable/property: lastReports.current = null;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
370	`setEmail("");`	Continues the surrounding declaration/expression or text: setEmail("");. Read it with the preceding opening statement (lastReports.current = null;); it is not a standalone business operation.
371	`setCode("");`	Continues the surrounding declaration/expression or text: setCode("");. Read it with the preceding opening statement (setEmail("");); it is not a standalone business operation.
372	`setSent(false);`	Continues the surrounding declaration/expression or text: setSent(false);. Read it with the preceding opening statement (setCode("");); it is not a standalone business operation.
373	`setResendSeconds(0);`	Continues the surrounding declaration/expression or text: setResendSeconds(0);. Read it with the preceding opening statement (setSent(false);); it is not a standalone business operation.
374	`setConfirm(null);`	Continues the surrounding declaration/expression or text: setConfirm(null);. Read it with the preceding opening statement (setResendSeconds(0);); it is not a standalone business operation.
375	`setReceipt(null);`	Continues the surrounding declaration/expression or text: setReceipt(null);. Read it with the preceding opening statement (setConfirm(null);); it is not a standalone business operation.
376	`setCases("");`	Continues the surrounding declaration/expression or text: setCases("");. Read it with the preceding opening statement (setReceipt(null);); it is not a standalone business operation.
377	`setBatch("");`	Continues the surrounding declaration/expression or text: setBatch("");. Read it with the preceding opening statement (setCases("");); it is not a standalone business operation.
378	`setExpiry("");`	Continues the surrounding declaration/expression or text: setExpiry("");. Read it with the preceding opening statement (setBatch("");); it is not a standalone business operation.
379	`setSubject("");`	Continues the surrounding declaration/expression or text: setSubject("");. Read it with the preceding opening statement (setExpiry("");); it is not a standalone business operation.
380	`setDescription("");`	Continues the surrounding declaration/expression or text: setDescription("");. Read it with the preceding opening statement (setSubject("");); it is not a standalone business operation.
381	`setCategory("Product");`	Continues the surrounding declaration/expression or text: setCategory("Product");. Read it with the preceding opening statement (setDescription("");); it is not a standalone business operation.

Line	Source code	Explanation / reading note
382	`setNotes({});`	Continues the surrounding declaration/expression or text: setNotes({});. Read it with the preceding opening statement (setCategory("Product");); it is not a standalone business operation.
383	`setPlacingOrder(false);`	Continues the surrounding declaration/expression or text: setPlacingOrder(false);. Read it with the preceding opening statement (setNotes({});); it is not a standalone business operation.
384	`setTab("Home");`	Continues the surrounding declaration/expression or text: setTab("Home");. Read it with the preceding opening statement (setPlacingOrder(false);); it is not a standalone business operation.
385	`setOffline(false);`	Continues the surrounding declaration/expression or text: setOffline(false);. Read it with the preceding opening statement (setTab("Home");); it is not a standalone business operation.
386	`setNotice(`	Continues the surrounding declaration/expression or text: setNotice(. Read it with the preceding opening statement (setOffline(false);); it is not a standalone business operation.
387	`"Signed out. Any pending changes remain saved for the previous distributor. Sign in to that same account to sync them.",`	Continues the surrounding declaration/expression or text: "Signed out. Any pending changes remain saved for the previous distributor. Sign in to that same account to sync them.",. Read it with the preceding opening statement (setNotice(); it is not a standalone business operation.
388	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
389	`} catch {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
390	`setNotice("Could not remove the saved sign-in from this device. Please try Log out again.");`	Continues the surrounding declaration/expression or text: setNotice("Could not remove the saved sign-in from this device. Please try Log out again.");. Read it with the preceding opening statement (} catch {); it is not a standalone business operation.
391	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
392	`setBusy(false);`	Continues the surrounding declaration/expression or text: setBusy(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
393	`logoutLock.current = false;`	Assigns the right-hand expression to the named variable/property: logoutLock.current = false;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
394	`setLoggingOut(false);`	Continues the surrounding declaration/expression or text: setLoggingOut(false);. Read it with the preceding opening statement (logoutLock.current = false;); it is not a standalone business operation.
395	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
396	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
397	`function decide(row: Row, action: string, decision: string) {`	Declares a callable function/method: function decide(row: Row, action: string, decision: string) {. Parameters supply its inputs; the following block implements the operation.
398	`if (decision === "Rejected" && !notes[row.Id]?.trim()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (decision === "Rejected" && !notes[row.Id]?.trim()) {.
399	`setNotice("Enter a rejection reason first.");`	Continues the surrounding declaration/expression or text: setNotice("Enter a rejection reason first.");. Read it with the preceding opening statement (if (decision === "Rejected" && !notes[row.Id]?.trim()) {); it is not a standalone business operation.
400	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
401	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
402	`setConfirm({`	Continues the surrounding declaration/expression or text: setConfirm({. Read it with the preceding opening statement (}); it is not a standalone business operation.
403	`label: \`${decision === "Approved" ? "Approve" : "Reject"} ${row.Name}\`,`	Sets/declares the named object property or style/type member: label: `${decision === "Approved" ? "Approve" : "Reject"} ${row.Name}`,. Interpret it in the enclosing object, props or type definition.
404	`path: "/transactions",`	Sets/declares the named object property or style/type member: path: "/transactions",. Interpret it in the enclosing object, props or type definition.
405	`body: { action, recordId: row.Id, decision, notes: notes[row.Id] || "" },`	Sets/declares the named object property or style/type member: body: { action, recordId: row.Id, decision, notes: notes[row.Id] || "" },. Interpret it in the enclosing object, props or type definition.
406	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
407	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
408	`  const rows = (name: string): Row[] => data?.[name] || [];`	Declares/initializes local data used by the surrounding operation: const rows = (name: string): Row[] => data?.[name] || [];. Collection contents and assignments below determine its purpose.
409	`  const hasPending = (id: string) => pending.some((item) => item.body.recordId === id);`	Declares/initializes local data used by the surrounding operation: const hasPending = (id: string) => pending.some((item) => item.body.recordId === id);. Collection contents and assignments below determine its purpose.
410	`  const rejectedReceipt = (id: string, kind: string) =>`	Declares/initializes local data used by the surrounding operation: const rejectedReceipt = (id: string, kind: string) =>. Collection contents and assignments below determine its purpose.
411	`    pending.find(`	Transforms/selects/aggregates collection values with the callback shown here: pending.find(. Read the callback body and result assignment together.
412	`      (item) =>`	Continues the surrounding declaration/expression or text: (item) =>. Read it with the preceding opening statement (pending.find(); it is not a standalone business operation.
413	`        item.status === 400 &&`	Continues the surrounding declaration/expression or text: item.status === 400 &&. Read it with the preceding opening statement ((item) =>); it is not a standalone business operation.
414	`        item.body.action === "receiveGoods" &&`	Continues the surrounding declaration/expression or text: item.body.action === "receiveGoods" &&. Read it with the preceding opening statement (item.status === 400 &&); it is not a standalone business operation.
415	`        item.body.recordId === id &&`	Continues the surrounding declaration/expression or text: item.body.recordId === id &&. Read it with the preceding opening statement (item.body.action === "receiveGoods" &&); it is not a standalone business operation.
416	`        (item.body.receiptKind || "Paid") === kind,`	Continues the surrounding declaration/expression or text: (item.body.receiptKind || "Paid") === kind,. Read it with the preceding opening statement (item.body.recordId === id &&); it is not a standalone business operation.
417	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
418	`  function openReceipt(line: Row, kind: string) {`	Declares a callable function/method: function openReceipt(line: Row, kind: string) {. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
419	`const rejected = rejectedReceipt(line.Id, kind);`	Declares/initializes local data used by the surrounding operation: const rejected = rejectedReceipt(line.Id, kind);. Collection contents and assignments below determine its purpose.
420	`setReceipt({ ...line, receiptKind: kind, correctionKey: rejected?.key });`	Continues the surrounding declaration/expression or text: setReceipt({ ...line, receiptKind: kind, correctionKey: rejected?.key });. Read it with the preceding opening statement (const rejected = rejectedReceipt(line.Id, kind);); it is not a standalone business operation.
421	`setCases(rejected ? String(rejected.body.cases ?? "") : "");`	Continues the surrounding declaration/expression or text: setCases(rejected ? String(rejected.body.cases ?? "") : "");. Read it with the preceding opening statement (setReceipt({ ...line, receiptKind: kind, correctionKey: rejected?.key });); it is not a standalone business operation.
422	`setBatch(rejected ? String(rejected.body.batch ?? "") : "");`	Continues the surrounding declaration/expression or text: setBatch(rejected ? String(rejected.body.batch ?? "") : "");. Read it with the preceding opening statement (setCases(rejected ? String(rejected.body.cases ?? "") : "");); it is not a standalone business operation.
423	`setExpiry(rejected ? String(rejected.body.expiry ?? "") : "");`	Continues the surrounding declaration/expression or text: setExpiry(rejected ? String(rejected.body.expiry ?? "") : "");. Read it with the preceding opening statement (setBatch(rejected ? String(rejected.body.batch ?? "") : "");); it is not a standalone business operation.
424	`setReceiptError(rejected?.error || "");`	Continues the surrounding declaration/expression or text: setReceiptError(rejected?.error || "");. Read it with the preceding opening statement (setExpiry(rejected ? String(rejected.body.expiry ?? "") : "");); it is not a standalone business operation.
425	`setConfirm(null);`	Continues the surrounding declaration/expression or text: setConfirm(null);. Read it with the preceding opening statement (setReceiptError(rejected?.error || "");); it is not a standalone business operation.
426	`setTab("Primary");`	Continues the surrounding declaration/expression or text: setTab("Primary");. Read it with the preceding opening statement (setConfirm(null);); it is not a standalone business operation.
427	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
428	`const decisionButtons = (row: Row, action: string) => (`	Declares/initializes local data used by the surrounding operation: const decisionButtons = (row: Row, action: string) => (. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
429	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
430	`<Field`	Renders/opens a UI element or component: <Field. Props and child content below determine appearance and interactions.
431	`label="Decision notes — required for rejection"`	Assigns the right-hand expression to the named variable/property: label="Decision notes - required for rejection". This is in-memory unless it is later persisted by an explicit call.
432	`value={notes[row.Id] || ""}`	Assigns the right-hand expression to the named variable/property: value={notes[row.Id] || ""}. This is in-memory unless it is later persisted by an explicit call.
433	`onChange={(value) => setNotes((old) => ({ ...old, [row.Id]: value }))}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
434	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChange={(value) => setNotes((old) => ({ ...old, [row.Id]: value }))}); it is not a standalone business operation.
435	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
436	`title={hasPending(row.Id) ? "Decision waiting to sync" : "Approve"}`	Assigns the right-hand expression to the named variable/property: title={hasPending(row.Id) ? "Decision waiting to sync" : "Approve"}. This is in-memory unless it is later persisted by an explicit call.
437	`disabled={busy || hasPending(row.Id)}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
438	`onPress={() => decide(row, action, "Approved")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
439	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => decide(row, action, "Approved")}); it is not a standalone business operation.
440	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
441	`title="Reject"`	Assigns the right-hand expression to the named variable/property: title="Reject". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
442	`secondary`	Continues the surrounding declaration/expression or text: secondary. Read it with the preceding opening statement (title="Reject"); it is not a standalone business operation.
443	`disabled={busy || hasPending(row.Id)}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
444	`onPress={() => decide(row, action, "Rejected")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
445	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => decide(row, action, "Rejected")}); it is not a standalone business operation.
446	`</>`	Closes the UI element/component opened above.
447	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
448	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
449	`<SafeAreaView style={styles.safe}>`	Renders/opens a UI element or component: <SafeAreaView style={styles.safe}>. Props and child content below determine appearance and interactions.
450	`<PortalFrame`	Renders/opens a UI element or component: <PortalFrame. Props and child content below determine appearance and interactions.
451	`signedIn={!showSignIn}`	Assigns the right-hand expression to the named variable/property: signedIn={!showSignIn}. This is in-memory unless it is later persisted by an explicit call.
452	`tab={tab}`	Assigns the right-hand expression to the named variable/property: tab={tab}. This is in-memory unless it is later persisted by an explicit call.
453	`name={session?.name || "Distributor"}`	Assigns the right-hand expression to the named variable/property: name={session?.name || "Distributor"}. This is in-memory unless it is later persisted by an explicit call.
454	`pending={pending.length}`	Assigns the right-hand expression to the named variable/property: pending={pending.length}. This is in-memory unless it is later persisted by an explicit call.
455	`busy={busy}`	Assigns the right-hand expression to the named variable/property: busy={busy}. This is in-memory unless it is later persisted by an explicit call.
456	`loggingOut={loggingOut}`	Assigns the right-hand expression to the named variable/property: loggingOut={loggingOut}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
457	`onSelect={setTab}`	Assigns the right-hand expression to the named variable/property: onSelect={setTab}. This is in-memory unless it is later persisted by an explicit call.
458	`onRefresh={() => void sync()}`	Assigns the right-hand expression to the named variable/property: onRefresh={() => void sync()}. This is in-memory unless it is later persisted by an explicit call.
459	`onLogout={() => void logout()}`	Assigns the right-hand expression to the named variable/property: onLogout={() => void logout()}. This is in-memory unless it is later persisted by an explicit call.
460	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (onLogout={() => void logout()}); it is not a standalone business operation.
461	`<ScrollView`	Renders/opens a UI element or component: <ScrollView. Props and child content below determine appearance and interactions.
462	`ref={scrollRef}`	Assigns the right-hand expression to the named variable/property: ref={scrollRef}. This is in-memory unless it is later persisted by an explicit call.
463	`key={showSignIn ? "login" : tab}`	Assigns the right-hand expression to the named variable/property: key={showSignIn ? "login" : tab}. This is in-memory unless it is later persisted by an explicit call.
464	`contentContainerStyle={styles.page}`	Assigns the right-hand expression to the named variable/property: contentContainerStyle={styles.page}. This is in-memory unless it is later persisted by an explicit call.
465	`keyboardShouldPersistTaps="handled"`	Assigns the right-hand expression to the named variable/property: keyboardShouldPersistTaps="handled". This is in-memory unless it is later persisted by an explicit call.
466	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (keyboardShouldPersistTaps="handled"); it is not a standalone business operation.
467	`{(showSignIn || tab === "Home") && (`	Continues the surrounding declaration/expression or text: {(showSignIn || tab === "Home") && (. Read it with the preceding opening statement (>); it is not a standalone business operation.
468	`<View style={[styles.header, showSignIn && styles.loginHero]}>`	Renders/opens a UI element or component: <View style={[styles.header, showSignIn && styles.loginHero]}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
469	`{showSignIn && (`	Continues the surrounding declaration/expression or text: {showSignIn && (. Read it with the preceding opening statement (<View style={[styles.header, showSignIn && styles.loginHero]}>); it is not a standalone business operation.
470	`<View style={{ marginBottom: 20 }}>`	Renders/opens a UI element or component: <View style={{ marginBottom: 20 }}>. Props and child content below determine appearance and interactions.
471	`<BrandLogo width={132} />`	Renders/opens a UI element or component: <BrandLogo width={132} />. Props and child content below determine appearance and interactions.
472	`</View>`	Closes the UI element/component opened above.
473	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
474	`<Text style={styles.eyebrow}>`	Renders/opens a UI element or component: <Text style={styles.eyebrow}>. Props and child content below determine appearance and interactions.
475	`{showSignIn ? "DISTRIBUTOR PORTAL" : "DISTRIBUTOR HUB"}`	Continues the surrounding declaration/expression or text: {showSignIn ? "DISTRIBUTOR PORTAL" : "DISTRIBUTOR HUB"}. Read it with the preceding opening statement (<Text style={styles.eyebrow}>); it is not a standalone business operation.
476	`</Text>`	Closes the UI element/component opened above.
477	`<Text style={styles.title}>`	Renders/opens a UI element or component: <Text style={styles.title}>. Props and child content below determine appearance and interactions.
478	`{showSignIn ? "Your distribution workspace" : session?.name}`	Continues the surrounding declaration/expression or text: {showSignIn ? "Your distribution workspace" : session?.name}. Read it with the preceding opening statement (<Text style={styles.title}>); it is not a standalone business operation.
479	`</Text>`	Closes the UI element/component opened above.
480	`<Text style={styles.white}>`	Renders/opens a UI element or component: <Text style={styles.white}>. Props and child content below determine appearance and interactions.
481	`{!showSignIn`	Continues the surrounding declaration/expression or text: {!showSignIn. Read it with the preceding opening statement (<Text style={styles.white}>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
482	`? "Orders · Stock · Support"`	Continues the surrounding declaration/expression or text: ? "Orders · Stock · Support". Read it with the preceding opening statement ({!showSignIn); it is not a standalone business operation.
483	`: "Manage your orders, monitor stock and stay connected to your outlets."}`	Continues the surrounding declaration/expression or text: : "Manage your orders, monitor stock and stay connected to your outlets."}. Read it with the preceding opening statement (? "Orders · Stock · Support"); it is not a standalone business operation.
484	`</Text>`	Closes the UI element/component opened above.
485	`{!showSignIn && (`	Continues the surrounding declaration/expression or text: {!showSignIn && (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
486	`<View style={styles.heroFooter}>`	Renders/opens a UI element or component: <View style={styles.heroFooter}>. Props and child content below determine appearance and interactions.
487	`<Text style={styles.white}>`	Renders/opens a UI element or component: <Text style={styles.white}>. Props and child content below determine appearance and interactions.
488	`Company officer: {data?.distributor.Officer__r?.Name || "Not assigned"}`	Continues the surrounding declaration/expression or text: Company officer: {data?.distributor.Officer__r?.Name || "Not assigned"}. Read it with the preceding opening statement (<Text style={styles.white}>); it is not a standalone business operation.
489	`</Text>`	Closes the UI element/component opened above.
490	`<Text style={styles.date}>`	Renders/opens a UI element or component: <Text style={styles.date}>. Props and child content below determine appearance and interactions.
491	`{new Date().toLocaleDateString("en-IN", {`	Continues the surrounding declaration/expression or text: {new Date().toLocaleDateString("en-IN", {. Read it with the preceding opening statement (<Text style={styles.date}>); it is not a standalone business operation.
492	`day: "numeric",`	Sets/declares the named object property or style/type member: day: "numeric",. Interpret it in the enclosing object, props or type definition.
493	`month: "short",`	Sets/declares the named object property or style/type member: month: "short",. Interpret it in the enclosing object, props or type definition.
494	`year: "numeric",`	Sets/declares the named object property or style/type member: year: "numeric",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
495	`})}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
496	`</Text>`	Closes the UI element/component opened above.
497	`</View>`	Closes the UI element/component opened above.
498	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
499	`</View>`	Closes the UI element/component opened above.
500	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
501	`{!!notice && (`	Continues the surrounding declaration/expression or text: {!!notice && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
502	`<Text accessibilityRole="alert" style={styles.notice}>`	Renders/opens a UI element or component: <Text accessibilityRole="alert" style={styles.notice}>. Props and child content below determine appearance and interactions.
503	`{notice}`	Continues the surrounding declaration/expression or text: {notice}. Read it with the preceding opening statement (<Text accessibilityRole="alert" style={styles.notice}>); it is not a standalone business operation.
504	`</Text>`	Closes the UI element/component opened above.
505	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
506	`{!showSignIn && offline && tab !== "Sync" && (`	Continues the surrounding declaration/expression or text: {!showSignIn && offline && tab !== "Sync" && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
507	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
508	`title="Open sync and sign-in"`	Assigns the right-hand expression to the named variable/property: title="Open sync and sign-in". This is in-memory unless it is later persisted by an explicit call.
509	`secondary`	Continues the surrounding declaration/expression or text: secondary. Read it with the preceding opening statement (title="Open sync and sign-in"); it is not a standalone business operation.

Line	Source code	Explanation / reading note
510	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
511	`onPress={() => setTab("Sync")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
512	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setTab("Sync")}); it is not a standalone business operation.
513	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
514	`{showSignIn ? (`	Continues the surrounding declaration/expression or text: {showSignIn ? (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
515	`<View style={[styles.card, styles.loginCard, !!notice && { marginTop: 0 }]}>`	Renders/opens a UI element or component: <View style={[styles.card, styles.loginCard, !!notice && { marginTop: 0 }]}>. Props and child content below determine appearance and interactions.
516	`<Text style={styles.heading}>Distributor sign in</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>Distributor sign in</Text>. Props and child content below determine appearance and interactions.
517	`<Text style={styles.copy}>`	Renders/opens a UI element or component: <Text style={styles.copy}>. Props and child content below determine appearance and interactions.
518	`Use the email linked to your distributor record in Salesforce.`	Continues the surrounding declaration/expression or text: Use the email linked to your distributor record in Salesforce.. Read it with the preceding opening statement (<Text style={styles.copy}>); it is not a standalone business operation.
519	`</Text>`	Closes the UI element/component opened above.
520	`<Field label="Distributor login email" value={email} onChange={setEmail} />`	Renders/opens a UI element or component: <Field label="Distributor login email" value={email} onChange={setEmail} />. Props and child content below determine appearance and interactions.
521	`{sent && <Field label="Six-digit code" value={code} onChange={setCode} numeric />}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
522	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
523	`title={`	Assigns the right-hand expression to the named variable/property: title={. This is in-memory unless it is later persisted by an explicit call.
524	`busy`	Continues the surrounding declaration/expression or text: busy. Read it with the preceding opening statement (title={); it is not a standalone business operation.
525	`? "Please wait…"`	Continues the surrounding declaration/expression or text: ? "Please wait…". Read it with the preceding opening statement (busy); it is not a standalone business operation.
526	`: sent`	Continues the surrounding declaration/expression or text: : sent. Read it with the preceding opening statement (? "Please wait…"); it is not a standalone business operation.
527	`? "Verify and sign in"`	Continues the surrounding declaration/expression or text: ? "Verify and sign in". Read it with the preceding opening statement (: sent); it is not a standalone business operation.
528	`: resendSeconds > 0`	Continues the surrounding declaration/expression or text: : resendSeconds > 0. Read it with the preceding opening statement (? "Verify and sign in"); it is not a standalone business operation.
529	`? \`Request a new code in ${resendSeconds}s\``	Continues the surrounding declaration/expression or text: ? `Request a new code in ${resendSeconds}s`. Read it with the preceding opening statement (: resendSeconds > 0); it is not a standalone business operation.
530	`: "Email my sign-in code"`	Continues the surrounding declaration/expression or text: : "Email my sign-in code". Read it with the preceding opening statement (? `Request a new code in ${resendSeconds}s`); it is not a standalone business operation.
531	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
532	`disabled={busy || (!sent && resendSeconds > 0)}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
533	`onPress={() => void login()}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
534	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => void login()}); it is not a standalone business operation.
535	`{!sent && (`	Continues the surrounding declaration/expression or text: {!sent && (. Read it with the preceding opening statement (/>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
536	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
537	`title="I already received a code"`	Assigns the right-hand expression to the named variable/property: title="I already received a code". This is in-memory unless it is later persisted by an explicit call.
538	`secondary`	Continues the surrounding declaration/expression or text: secondary. Read it with the preceding opening statement (title="I already received a code"); it is not a standalone business operation.
539	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
540	`onPress={() => {`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
541	`setSent(true);`	Continues the surrounding declaration/expression or text: setSent(true);. Read it with the preceding opening statement (onPress={() => {); it is not a standalone business operation.
542	`setNotice(`	Continues the surrounding declaration/expression or text: setNotice(. Read it with the preceding opening statement (setSent(true);); it is not a standalone business operation.
543	`"Enter your distributor email and the latest six-digit code from your inbox. Codes expire after 10 minutes.",`	Continues the surrounding declaration/expression or text: "Enter your distributor email and the latest six-digit code from your inbox. Codes expire after 10 minutes.",. Read it with the preceding opening statement (setNotice(); it is not a standalone business operation.
544	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
545	`}}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
546	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}}); it is not a standalone business operation.
547	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
548	`{sent && (`	Continues the surrounding declaration/expression or text: {sent && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
549	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
550	`title={resendSeconds > 0 ? \`Resend code in ${resendSeconds}s\` : "Send a new code"}`	Assigns the right-hand expression to the named variable/property: title={resendSeconds > 0 ? `Resend code in ${resendSeconds}s` : "Send a new code"}. This is in-memory unless it is later persisted by an explicit call.
551	`secondary`	Continues the surrounding declaration/expression or text: secondary. Read it with the preceding opening statement (title={resendSeconds > 0 ? `Resend code in ${resendSeconds}s` : "Send a new code"}); it is not a standalone business operation.
552	`disabled={busy || resendSeconds > 0}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
553	`onPress={() => void login(true)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
554	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => void login(true)}); it is not a standalone business operation.
555	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
556	`{sent && (`	Continues the surrounding declaration/expression or text: {sent && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
557	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
558	`title="Change email address"`	Assigns the right-hand expression to the named variable/property: title="Change email address". This is in-memory unless it is later persisted by an explicit call.
559	`secondary`	Continues the surrounding declaration/expression or text: secondary. Read it with the preceding opening statement (title="Change email address"); it is not a standalone business operation.
560	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
561	`onPress={() => {`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.

Line	Source code	Explanation / reading note
562	`setSent(false);`	Continues the surrounding declaration/expression or text: setSent(false);. Read it with the preceding opening statement (onPress={() => {}; it is not a standalone business operation.
563	`setCode("");`	Continues the surrounding declaration/expression or text: setCode("");. Read it with the preceding opening statement (setSent(false);); it is not a standalone business operation.
564	`}}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
565	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}}); it is not a standalone business operation.
566	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
567	`<Text style={styles.security}>`	Renders/opens a UI element or component: <Text style={styles.security}>. Props and child content below determine appearance and interactions.
568	`Your sign-in gives access only to your distributor’s records. A connection is`	Continues the surrounding declaration/expression or text: Your sign-in gives access only to your distributor’s records. A connection is. Read it with the preceding opening statement (<Text style={styles.security}>); it is not a standalone business operation.
569	`required to receive your code.`	Continues the surrounding declaration/expression or text: required to receive your code.. Read it with the preceding opening statement (Your sign-in gives access only to your distributor’s records. A connection is); it is not a standalone business operation.
570	`</Text>`	Closes the UI element/component opened above.
571	`</View>`	Closes the UI element/component opened above.
572	`) : (`	Continues the surrounding declaration/expression or text:) : (. Read it with the preceding opening statement (</View>); it is not a standalone business operation.
573	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
574	`{tab !== "Home" && (`	Continues the surrounding declaration/expression or text: {tab !== "Home" && (. Read it with the preceding opening statement (<>); it is not a standalone business operation.
575	`<Text style={styles.screenTitle}>`	Renders/opens a UI element or component: <Text style={styles.screenTitle}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
576	`{["Primary", "Secondary"].includes(tab)`	Continues the surrounding declaration/expression or text: {["Primary", "Secondary"].includes(tab). Read it with the preceding opening statement (<Text style={styles.screenTitle}>); it is not a standalone business operation.
577	`? "Orders"`	Continues the surrounding declaration/expression or text: ? "Orders". Read it with the preceding opening statement ({["Primary", "Secondary"].includes(tab)); it is not a standalone business operation.
578	`: tab === "Inventory"`	Continues the surrounding declaration/expression or text: : tab === "Inventory". Read it with the preceding opening statement (? "Orders"); it is not a standalone business operation.
579	`? "Inventory"`	Continues the surrounding declaration/expression or text: ? "Inventory". Read it with the preceding opening statement (: tab === "Inventory"); it is not a standalone business operation.
580	`: tab === "Sync"`	Continues the surrounding declaration/expression or text: : tab === "Sync". Read it with the preceding opening statement (? "Inventory"); it is not a standalone business operation.
581	`? "Sync centre"`	Continues the surrounding declaration/expression or text: ? "Sync centre". Read it with the preceding opening statement (: tab === "Sync"); it is not a standalone business operation.
582	`: tab}`	Continues the surrounding declaration/expression or text: : tab}. Read it with the preceding opening statement (? "Sync centre"); it is not a standalone business operation.
583	`</Text>`	Closes the UI element/component opened above.
584	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
585	`<View style={styles.syncBar}>`	Renders/opens a UI element or component: <View style={styles.syncBar}>. Props and child content below determine appearance and interactions.
586	`<Text style={styles.syncText}>`	Renders/opens a UI element or component: <Text style={styles.syncText}>. Props and child content below determine appearance and interactions.
587	`{offline ? "Offline / last saved data" : "Salesforce snapshot"}`	Continues the surrounding declaration/expression or text: {offline ? "Offline / last saved data" : "Salesforce snapshot"}. Read it with the preceding opening statement (<Text style={styles.syncText}>); it is not a standalone business operation.
Line	**Source code**	**Explanation / reading note**
588	`{data ? ` · ${new Date(data.retrievedAt).toLocaleString()}` : ""} ·{" "}`	Continues the surrounding declaration/expression or text: {data ? ` · ${new Date(data.retrievedAt).toLocaleString()}` : ""} ·{" "}. Read it with the preceding opening

Line	Source code	Explanation / reading note
		statement ({offline ? "Offline / last saved data" : "Salesforce snapshot"}); it is not a standalone business operation.
589	`{pending.length} pending`	Continues the surrounding declaration/expression or text: {pending.length} pending. Read it with the preceding opening statement ({data ? ` · ${new Date(data.retrievedAt).toLocaleString()}` : ""} ·{" "}); it is not a standalone business operation.
590	`</Text>`	Closes the UI element/component opened above.
591	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
592	`accessibilityRole="button"`	Assigns the right-hand expression to the named variable/property: accessibilityRole="button". This is in-memory unless it is later persisted by an explicit call.
593	`accessibilityLabel="Refresh and sync"`	Assigns the right-hand expression to the named variable/property: accessibilityLabel="Refresh and sync". This is in-memory unless it is later persisted by an explicit call.
594	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
595	`onPress={() => void sync()}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
596	`style={styles.refresh}`	Assigns the right-hand expression to the named variable/property: style={styles.refresh}. This is in-memory unless it is later persisted by an explicit call.
597	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (style={styles.refresh}); it is not a standalone business operation.
598	`<Text style={styles.refreshText}>{busy ? "Syncing…" : "↻ Sync"}</Text>`	Renders/opens a UI element or component: <Text style={styles.refreshText}>{busy ? "Syncing…" : "↻ Sync"}</Text>. Props and child content below determine appearance and interactions.
599	`</Pressable>`	Closes the UI element/component opened above.
600	`</View>`	Closes the UI element/component opened above.
601	`{tab === "Home" && (`	Continues the surrounding declaration/expression or text: {tab === "Home" && (. Read it with the preceding opening statement (</View>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
602	`<Text style={styles.smallCopy}>`	Renders/opens a UI element or component: <Text style={styles.smallCopy}>. Props and child content below determine appearance and interactions.
603	`SFA records refresh automatically while this app is open and online. Offline`	Continues the surrounding declaration/expression or text: SFA records refresh automatically while this app is open and online. Offline. Read it with the preceding opening statement (<Text style={styles.smallCopy}>); it is not a standalone business operation.
604	`drafts appear after the employee syncs them to Salesforce.`	Continues the surrounding declaration/expression or text: drafts appear after the employee syncs them to Salesforce.. Read it with the preceding opening statement (SFA records refresh automatically while this app is open and online. Offline); it is not a standalone business operation.
605	`</Text>`	Closes the UI element/component opened above.
606	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
607	`{["Primary", "Secondary"].includes(tab) && (`	Continues the surrounding declaration/expression or text: {["Primary", "Secondary"].includes(tab) && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
608	`<View style={styles.tabs}>`	Renders/opens a UI element or component: <View style={styles.tabs}>. Props and child content below determine appearance and interactions.
609	`{["Primary", "Secondary"].map((name) => (`	Transforms/selects/aggregates collection values with the callback shown here: {["Primary", "Secondary"].map((name) => (. Read the callback body and result assignment together.
610	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
611	`key={name}`	Assigns the right-hand expression to the named variable/property: key={name}. This is in-memory unless it is later persisted by an explicit call.
612	`accessibilityRole="button"`	Assigns the right-hand expression to the named variable/property: accessibilityRole="button". This is in-memory unless it is later persisted by an explicit call.
613	`accessibilityState={{ selected: tab === name }}`	Assigns the right-hand expression to the named variable/property: accessibilityState={{ selected: tab === name }}. This is in-memory unless it is later persisted by an explicit call.
614	`onPress={() => setTab(name)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.

Line	Source code	Explanation / reading note
615	`style={[styles.tab, tab === name && styles.selected]}`	Assigns the right-hand expression to the named variable/property: style={[styles.tab, tab === name && styles.selected]}. This is in-memory unless it is later persisted by an explicit call.
616	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (style={[styles.tab, tab === name && styles.selected]}); it is not a standalone business operation.
617	`<Text style={{ color: tab === name ? "white" : "#19463e" }}>`	Renders/opens a UI element or component: <Text style={{ color: tab === name ? "white" : "#19463e" }}>. Props and child content below determine appearance and interactions.
618	`{name} orders`	Continues the surrounding declaration/expression or text: {name} orders. Read it with the preceding opening statement (<Text style={{ color: tab === name ? "white" : "#19463e" }}>); it is not a standalone business operation.
619	`</Text>`	Closes the UI element/component opened above.
620	`</Pressable>`	Closes the UI element/component opened above.
621	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
622	`</View>`	Closes the UI element/component opened above.
623	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
624	`{tab === "More" && (`	Continues the surrounding declaration/expression or text: {tab === "More" && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
625	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
626	`<Text style={styles.copy}>Manage your distribution workspace</Text>`	Renders/opens a UI element or component: <Text style={styles.copy}>Manage your distribution workspace</Text>. Props and child content below determine appearance and interactions.
627	`<MenuItem`	Renders/opens a UI element or component: <MenuItem. Props and child content below determine appearance and interactions.
628	`title="Dashboard and reports"`	Assigns the right-hand expression to the named variable/property: title="Dashboard and reports". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
629	`description={`	Assigns the right-hand expression to the named variable/property: description={. This is in-memory unless it is later persisted by an explicit call.
630	`Platform.OS === "web"`	Continues the surrounding declaration/expression or text: Platform.OS === "web". Read it with the preceding opening statement (description={); it is not a standalone business operation.
631	`? "Beat productivity, outlet coverage and stock"`	Continues the surrounding declaration/expression or text: ? "Beat productivity, outlet coverage and stock". Read it with the preceding opening statement (Platform.OS === "web"); it is not a standalone business operation.
632	`: "Sales targets, beat productivity, coverage and stock"`	Continues the surrounding declaration/expression or text: : "Sales targets, beat productivity, coverage and stock". Read it with the preceding opening statement (? "Beat productivity, outlet coverage and stock"); it is not a standalone business operation.
633	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
634	`icon="▥"`	Assigns the right-hand expression to the named variable/property: icon="▥". This is in-memory unless it is later persisted by an explicit call.
635	`onPress={() => setTab("Reports")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
636	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setTab("Reports")}); it is not a standalone business operation.
637	`<MenuItem`	Renders/opens a UI element or component: <MenuItem. Props and child content below determine appearance and interactions.
638	`title="Outlet assets"`	Assigns the right-hand expression to the named variable/property: title="Outlet assets". This is in-memory unless it is later persisted by an explicit call.
639	`description="Asset records captured by employees in SFA"`	Assigns the right-hand expression to the named variable/property: description="Asset records captured by employees in SFA". This is in-memory unless it is later persisted by an explicit call.
640	`icon="▣"`	Assigns the right-hand expression to the named variable/property: icon="▣". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
641	`onPress={() => setTab("Assets")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
642	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setTab("Assets")}); it is not a standalone business operation.
643	`<MenuItem`	Renders/opens a UI element or component: <MenuItem. Props and child content below determine appearance and interactions.
644	`title="Returns"`	Assigns the right-hand expression to the named variable/property: title="Returns". This is in-memory unless it is later persisted by an explicit call.
645	`description="Primary and secondary returns"`	Assigns the right-hand expression to the named variable/property: description="Primary and secondary returns". This is in-memory unless it is later persisted by an explicit call.
646	`icon="↩"`	Assigns the right-hand expression to the named variable/property: icon="↩". This is in-memory unless it is later persisted by an explicit call.
647	`onPress={() => setTab("Returns")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
648	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setTab("Returns")}); it is not a standalone business operation.
649	`<MenuItem`	Renders/opens a UI element or component: <MenuItem. Props and child content below determine appearance and interactions.
650	`title="Support tickets"`	Assigns the right-hand expression to the named variable/property: title="Support tickets". This is in-memory unless it is later persisted by an explicit call.
651	`description="Raise a request and view updates"`	Assigns the right-hand expression to the named variable/property: description="Raise a request and view updates". This is in-memory unless it is later persisted by an explicit call.
652	`icon="☷"`	Assigns the right-hand expression to the named variable/property: icon="☷". This is in-memory unless it is later persisted by an explicit call.
653	`onPress={() => setTab("Tickets")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.

Line	Source code	Explanation / reading note
654	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setTab("Tickets")}); it is not a standalone business operation.
655	`<MenuItem`	Renders/opens a UI element or component: <MenuItem. Props and child content below determine appearance and interactions.
656	`title="Stock checks"`	Assigns the right-hand expression to the named variable/property: title="Stock checks". This is in-memory unless it is later persisted by an explicit call.
657	`description="View outlet stock observations"`	Assigns the right-hand expression to the named variable/property: description="View outlet stock observations". This is in-memory unless it is later persisted by an explicit call.
658	`icon="▦"`	Assigns the right-hand expression to the named variable/property: icon="▦". This is in-memory unless it is later persisted by an explicit call.
659	`onPress={() => setTab("Stock checks")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
660	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setTab("Stock checks")}); it is not a standalone business operation.
661	`<MenuItem`	Renders/opens a UI element or component: <MenuItem. Props and child content below determine appearance and interactions.
662	`title="Sync centre"`	Assigns the right-hand expression to the named variable/property: title="Sync centre". This is in-memory unless it is later persisted by an explicit call.
663	`description={`${pending.length} pending changes · review connection and sync`}`	Assigns the right-hand expression to the named variable/property: description={`${pending.length} pending changes · review connection and sync`}. This is in-memory unless it is later persisted by an explicit call.
664	`icon="↻"`	Assigns the right-hand expression to the named variable/property: icon="↻". This is in-memory unless it is later persisted by an explicit call.
665	`onPress={() => setTab("Sync")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
666	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setTab("Sync")}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
667	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
668	`title={loggingOut ? "Signing out…" : "Log out"}`	Assigns the right-hand expression to the named variable/property: title={loggingOut ? "Signing out…" : "Log out"}. This is in-memory unless it is later persisted by an explicit call.
669	`secondary`	Continues the surrounding declaration/expression or text: secondary. Read it with the preceding opening statement (title={loggingOut ? "Signing out…" : "Log out"}); it is not a standalone business operation.
670	`disabled={loggingOut}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
671	`onPress={() => void logout()}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
672	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => void logout()}); it is not a standalone business operation.
673	`</>`	Closes the UI element/component opened above.
674	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
675	`{data &&`	Continues the surrounding declaration/expression or text: {data &&. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
676	`!offline &&`	Continues the surrounding declaration/expression or text: !offline &&. Read it with the preceding opening statement ({data &&); it is not a standalone business operation.
677	`["Primary", "Secondary", "Inventory", "Outlets", "Stock checks", "Assets"].includes(`	Continues the surrounding declaration/expression or text: ["Primary", "Secondary", "Inventory", "Outlets", "Stock checks", "Assets"].includes(. Read it with the preceding opening statement (!offline &&); it is not a standalone business operation.
678	`tab,`	Continues the surrounding declaration/expression or text: tab,. Read it with the preceding opening statement (["Primary", "Secondary", "Inventory", "Outlets", "Stock checks", "Assets"].includes(); it is not a standalone business operation.
679	`) &&`	Continues the surrounding declaration/expression or text:) &&. Read it with the preceding opening statement (tab,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
680	`!rows(`	Continues the surrounding declaration/expression or text: !rows(. Read it with the preceding opening statement ( ) &&); it is not a standalone business operation.
681	`(`	Continues the surrounding declaration/expression or text: (. Read it with the preceding opening statement (!rows(); it is not a standalone business operation.
682	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement ((); it is not a standalone business operation.
683	`Primary: "primaryOrders",`	Sets/declares the named object property or style/type member: Primary: "primaryOrders",. Interpret it in the enclosing object, props or type definition.
684	`Secondary: "secondaryOrders",`	Sets/declares the named object property or style/type member: Secondary: "secondaryOrders",. Interpret it in the enclosing object, props or type definition.
685	`Inventory: "inventory",`	Sets/declares the named object property or style/type member: Inventory: "inventory",. Interpret it in the enclosing object, props or type definition.
686	`Outlets: "outlets",`	Sets/declares the named object property or style/type member: Outlets: "outlets",. Interpret it in the enclosing object, props or type definition.
687	`"Stock checks": "stockChecks",`	Continues the surrounding declaration/expression or text: "Stock checks": "stockChecks",. Read it with the preceding opening statement (Outlets: "outlets",); it is not a standalone business operation.
688	`Assets: "assets",`	Sets/declares the named object property or style/type member: Assets: "assets",. Interpret it in the enclosing object, props or type definition.
689	`} as Record<string, string>`	Continues the surrounding declaration/expression or text: } as Record<string, string>. Read it with the preceding opening statement (Assets: "assets",); it is not a standalone business operation.
690	`)[tab],`	Continues the surrounding declaration/expression or text:)[tab],. Read it with the preceding opening statement (} as Record<string, string>); it is not a standalone business operation.
691	`).length && (`	Continues the surrounding declaration/expression or text:).length && (. Read it with the preceding opening statement ( )[tab],); it is not a standalone business operation.
692	`<Text style={styles.notice}>`	Renders/opens a UI element or component: <Text style={styles.notice}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
693	`No {tab.toLowerCase()} records are currently linked to this distributor in`	Calls the named method: No {tab.toLowerCase()} records are currently linked to this distributor in. Its implementation defines the side effect/result; use the symbol/file index to follow it.
694	`Salesforce.`	Continues the surrounding declaration/expression or text: Salesforce.. Read it with the preceding opening statement (No {tab.toLowerCase()} records are currently linked to this distributor in); it is not a standalone business operation.
695	`</Text>`	Closes the UI element/component opened above.
696	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
697	`{confirm && (`	Continues the surrounding declaration/expression or text: {confirm && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
698	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
699	`<Text style={styles.heading}>Confirm: {confirm.label}</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>Confirm: {confirm.label}</Text>. Props and child content below determine appearance and interactions.
700	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
701	`The request will be saved locally, then submitted to Salesforce. It is not`	Continues the surrounding declaration/expression or text: The request will be saved locally, then submitted to Salesforce. It is not. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
702	`complete until Salesforce confirms it.`	Continues the surrounding declaration/expression or text: complete until Salesforce confirms it.. Read it with the preceding opening statement (The request will be saved locally, then submitted to Salesforce. It is not); it is not a standalone business operation.
703	`</Text>`	Closes the UI element/component opened above.
704	`<Button title="Confirm and save" disabled={busy} onPress={() => void enqueue()} />`	Renders/opens a UI element or component: <Button title="Confirm and save" disabled={busy} onPress={() => void enqueue()} />. Props and child content below determine appearance and interactions.
705	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
706	`title="Cancel"`	Assigns the right-hand expression to the named variable/property: title="Cancel". This is in-memory unless it is later persisted by an explicit call.
707	`secondary`	Continues the surrounding declaration/expression or text: secondary. Read it with the preceding opening statement (title="Cancel"); it is not a standalone business operation.
708	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
709	`onPress={() => setConfirm(null)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
710	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setConfirm(null)}); it is not a standalone business operation.
711	`</Card>`	Closes the UI element/component opened above.
712	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
713	`{!!data?.truncatedLists?.length && (`	Continues the surrounding declaration/expression or text: {!!data?.truncatedLists?.length && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
714	`<Text style={styles.notice}>`	Renders/opens a UI element or component: <Text style={styles.notice}>. Props and child content below determine appearance and interactions.
715	`Some lists show only the latest 200 records: {data.truncatedLists.join(", ")}.`	Calls the named method: Some lists show only the latest 200 records: {data.truncatedLists.join(", ")}.. Its implementation defines the side effect/result; use the symbol/file index to follow it.
716	`List counts and the order pipeline cover downloaded records only. Purchased vs`	Continues the surrounding declaration/expression or text: List counts and the order pipeline cover downloaded records only. Purchased vs. Read it with the preceding opening statement (Some lists show only the latest 200 records: {data.truncatedLists.join(", ")}.); it is not a standalone business operation.
717	`sold is aggregated separately across posted records.`	Continues the surrounding declaration/expression or text: sold is aggregated separately across posted records.. Read it with the preceding opening statement (List counts and the order pipeline cover downloaded records only. Purchased vs); it is not a standalone business operation.

Line	Source code	Explanation / reading note
718	`</Text>`	Closes the UI element/component opened above.
719	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
720	`{tab === "Home" && (`	Continues the surrounding declaration/expression or text: {tab === "Home" && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
721	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
722	`{!!data?.reportError && <Text style={styles.notice}>{data.reportError}</Text>}`	Assigns the right-hand expression to the named variable/property: {!!data?.reportError && <Text style={styles.notice}>{data.reportError}</Text>}. This is in-memory unless it is later persisted by an explicit call.
723	`<ManagementReports data={data?.reports} onOpen={() => setTab("Reports")} />`	Renders/opens a UI element or component: <ManagementReports data={data?.reports} onOpen={() => setTab("Reports")} />. Props and child content below determine appearance and interactions.
724	`<PurchasesSalesDashboard data={data?.dashboard} />`	Renders/opens a UI element or component: <PurchasesSalesDashboard data={data?.dashboard} />. Props and child content below determine appearance and interactions.
725	`<Text style={styles.screenTitle}>Business overview</Text>`	Renders/opens a UI element or component: <Text style={styles.screenTitle}>Business overview</Text>. Props and child content below determine appearance and interactions.
726	`<Text style={styles.copy}>Summary of the records in your latest download</Text>`	Renders/opens a UI element or component: <Text style={styles.copy}>Summary of the records in your latest download</Text>. Props and child content below determine appearance and interactions.
727	`<View style={styles.metricGrid}>`	Renders/opens a UI element or component: <View style={styles.metricGrid}>. Props and child content below determine appearance and interactions.
728	`<MetricCard`	Renders/opens a UI element or component: <MetricCard. Props and child content below determine appearance and interactions.
729	`icon="目"`	Assigns the right-hand expression to the named variable/property: icon="目". This is in-memory unless it is later persisted by an explicit call.
730	`label="Primary orders"`	Assigns the right-hand expression to the named variable/property: label="Primary orders". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
731	`value={data ? rows("primaryOrders").length : "—"}`	Assigns the right-hand expression to the named variable/property: value={data ? rows("primaryOrders").length : " - "}. This is in-memory unless it is later persisted by an explicit call.
732	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (value={data ? rows("primaryOrders").length : " - "}); it is not a standalone business operation.
733	`<MetricCard`	Renders/opens a UI element or component: <MetricCard. Props and child content below determine appearance and interactions.
734	`icon="◷"`	Assigns the right-hand expression to the named variable/property: icon="◷". This is in-memory unless it is later persisted by an explicit call.
735	`label="Approved outlet orders"`	Assigns the right-hand expression to the named variable/property: label="Approved outlet orders". This is in-memory unless it is later persisted by an explicit call.
736	`value={`	Assigns the right-hand expression to the named variable/property: value={. This is in-memory unless it is later persisted by an explicit call.
737	`data`	Continues the surrounding declaration/expression or text: data. Read it with the preceding opening statement (value={); it is not a standalone business operation.
738	`? rows("secondaryOrders").filter(`	Transforms/selects/aggregates collection values with the callback shown here: ? rows("secondaryOrders").filter(. Read the callback body and result assignment together.
739	`(row) => row.DMS_Status__c === "Approved",`	Continues the surrounding declaration/expression or text: (row) => row.DMS_Status__c === "Approved",. Read it with the preceding opening statement (? rows("secondaryOrders").filter(); it is not a standalone business operation.
740	`).length`	Continues the surrounding declaration/expression or text:).length. Read it with the preceding opening statement ((row) => row.DMS_Status__c === "Approved",); it is not a standalone business operation.
741	`: "—"`	Continues the surrounding declaration/expression or text: : " - ". Read it with the preceding opening statement ( ).length); it is not a standalone business operation.
742	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
743	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
744	`<MetricCard`	Renders/opens a UI element or component: <MetricCard. Props and child content below determine appearance and interactions.
745	`icon="◎"`	Assigns the right-hand expression to the named variable/property: icon="◎". This is in-memory unless it is later persisted by an explicit call.
746	`label="Linked outlets"`	Assigns the right-hand expression to the named variable/property: label="Linked outlets". This is in-memory unless it is later persisted by an explicit call.
747	`value={data ? rows("outlets").length : "—"}`	Assigns the right-hand expression to the named variable/property: value={data ? rows("outlets").length : " - "}. This is in-memory unless it is later persisted by an explicit call.
748	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (value={data ? rows("outlets").length : " - "}); it is not a standalone business operation.
749	`<MetricCard`	Renders/opens a UI element or component: <MetricCard. Props and child content below determine appearance and interactions.
750	`icon="▦"`	Assigns the right-hand expression to the named variable/property: icon="▦". This is in-memory unless it is later persisted by an explicit call.
751	`label="Low-stock batches"`	Assigns the right-hand expression to the named variable/property: label="Low-stock batches". This is in-memory unless it is later persisted by an explicit call.
752	`value={`	Assigns the right-hand expression to the named variable/property: value={. This is in-memory unless it is later persisted by an explicit call.
753	`data ? rows("inventory").filter((row) => row.Low_Stock__c).length : "—"`	Transforms/selects/aggregates collection values with the callback shown here: data ? rows("inventory").filter((row) => row.Low_Stock__c).length : " - ". Read the callback body and result assignment together.
754	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
755	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}); it is not a standalone business operation.
756	`</View>`	Closes the UI element/component opened above.
757	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
758	`<Text style={styles.sectionLabel}>PRIMARY ORDER PIPELINE</Text>`	Renders/opens a UI element or component: <Text style={styles.sectionLabel}>PRIMARY ORDER PIPELINE</Text>. Props and child content below determine appearance and interactions.
759	`<Text style={styles.amount}>`	Renders/opens a UI element or component: <Text style={styles.amount}>. Props and child content below determine appearance and interactions.
760	`{data`	Continues the surrounding declaration/expression or text: {data. Read it with the preceding opening statement (<Text style={styles.amount}>); it is not a standalone business operation.
761	`? money(`	Continues the surrounding declaration/expression or text: ? money(. Read it with the preceding opening statement ({data); it is not a standalone business operation.
762	`sum(`	Continues the surrounding declaration/expression or text: sum(. Read it with the preceding opening statement (? money(); it is not a standalone business operation.
763	`rows("primaryOrders").filter((row) => row.Status__c !== "Rejected"),`	Transforms/selects/aggregates collection values with the callback shown here: rows("primaryOrders").filter((row) => row.Status__c !== "Rejected"),. Read the callback body and result assignment together.
764	`"Total_Amount__c",`	Continues the surrounding declaration/expression or text: "Total_Amount__c",. Read it with the preceding opening statement (rows("primaryOrders").filter((row) => row.Status__c !== "Rejected"),); it is not a standalone business operation.
765	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
766	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
767	`: "—"}`	Continues the surrounding declaration/expression or text: : " - "}. Read it with the preceding opening statement ( )); it is not a standalone business operation.
768	`</Text>`	Closes the UI element/component opened above.
769	`<Text style={styles.smallCopy}>`	Renders/opens a UI element or component: <Text style={styles.smallCopy}>. Props and child content below determine appearance and interactions.
770	`Value of non-rejected orders in the downloaded list. This is not received`	Continues the surrounding declaration/expression or text: Value of non-rejected orders in the downloaded list. This is not received. Read it with the preceding opening statement (<Text style={styles.smallCopy}>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
771	`stock or sales revenue.`	Continues the surrounding declaration/expression or text: stock or sales revenue.. Read it with the preceding opening statement (Value of non-rejected orders in the downloaded list. This is not received); it is not a standalone business operation.
772	`</Text>`	Closes the UI element/component opened above.
773	`</Card>`	Closes the UI element/component opened above.
774	`<Text style={styles.heading}>Quick actions</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>Quick actions</Text>. Props and child content below determine appearance and interactions.
775	`<MenuItem`	Renders/opens a UI element or component: <MenuItem. Props and child content below determine appearance and interactions.
776	`title="View outlet orders"`	Assigns the right-hand expression to the named variable/property: title="View outlet orders". This is in-memory unless it is later persisted by an explicit call.
777	`description="View automatically approved secondary orders"`	Assigns the right-hand expression to the named variable/property: description="View automatically approved secondary orders". This is in-memory unless it is later persisted by an explicit call.
778	`icon="目"`	Assigns the right-hand expression to the named variable/property: icon="目". This is in-memory unless it is later persisted by an explicit call.
779	`onPress={() => setTab("Secondary")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
780	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setTab("Secondary")}); it is not a standalone business operation.
781	`<MenuItem`	Renders/opens a UI element or component: <MenuItem. Props and child content below determine appearance and interactions.
782	`title="Check inventory"`	Assigns the right-hand expression to the named variable/property: title="Check inventory". This is in-memory unless it is later persisted by an explicit call.
783	`description={`	Assigns the right-hand expression to the named variable/property: description={. This is in-memory unless it is later persisted by an explicit call.
784	`data`	Continues the surrounding declaration/expression or text: data. Read it with the preceding opening statement (description={); it is not a standalone business operation.

Line	Source code	Explanation / reading note
785	`? `${rows("inventory").filter((row) => row.Expired__c).length} expired batches · review stock availability``	Transforms/selects/aggregates collection values with the callback shown here: ? `${rows("inventory").filter((row) => row.Expired__c).length} expired batches · review stock availability`. Read the callback body and result assignment together.
786	`: "Review stock availability and expiry"`	Continues the surrounding declaration/expression or text: : "Review stock availability and expiry". Read it with the preceding opening statement (? `${rows("inventory").filter((row) => row.Expired__c).length} expired batches · review stock availability`); it is not a standalone business operation.
787	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
788	`icon="▦"`	Assigns the right-hand expression to the named variable/property: icon="▦". This is in-memory unless it is later persisted by an explicit call.
789	`onPress={() => setTab("Inventory")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
790	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setTab("Inventory")}); it is not a standalone business operation.
791	`</>`	Closes the UI element/component opened above.
792	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
793	`{tab === "Primary" && (`	Continues the surrounding declaration/expression or text: {tab === "Primary" && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
794	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
795	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
796	`title={placingOrder ? "Close order form" : "Place Primary Order"}`	Assigns the right-hand expression to the named variable/property: title={placingOrder ? "Close order form" : "Place Primary Order"}. This is in-memory unless it is later persisted by an explicit call.
797	`disabled={busy || !!confirm}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.

Line	Source code	Explanation / reading note
798	`onPress={() => setPlacingOrder(!placingOrder)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
799	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setPlacingOrder(!placingOrder)}); it is not a standalone business operation.
800	`{placingOrder && (`	Continues the surrounding declaration/expression or text: {placingOrder && (. Read it with the preceding opening statement (/>); it is not a standalone business operation.
801	`<PrimaryOrderForm`	Renders/opens a UI element or component: <PrimaryOrderForm. Props and child content below determine appearance and interactions.
802	`token={session.token}`	Assigns the right-hand expression to the named variable/property: token={session.token}. This is in-memory unless it is later persisted by an explicit call.
803	`disabled={busy || !!confirm}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
804	`onSignIn={() => {`	Assigns the right-hand expression to the named variable/property: onSignIn={() => {. This is in-memory unless it is later persisted by an explicit call.
805	`setOffline(true);`	Continues the surrounding declaration/expression or text: setOffline(true);. Read it with the preceding opening statement (onSignIn={() => {); it is not a standalone business operation.
806	`setNeedsSignIn(true);`	Continues the surrounding declaration/expression or text: setNeedsSignIn(true);. Read it with the preceding opening statement (setOffline(true);); it is not a standalone business operation.
807	`}}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
808	`onReview={(body, summary) => {`	Assigns the right-hand expression to the named variable/property: onReview={(body, summary) => {. This is in-memory unless it is later persisted by an explicit call.
809	`setConfirm({`	Continues the surrounding declaration/expression or text: setConfirm({. Read it with the preceding opening statement (onReview={(body, summary) => {); it is not a standalone business operation.
810	`label: `Submit to ${data?.distributor.Officer__r?.Name || "company officer"}: ${summary}`,`	Sets/declares the named object property or style/type member: label: `Submit to ${data?.distributor.Officer__r?.Name || "company officer"}: ${summary}`,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
811	`path: "/primary/orders",`	Sets/declares the named object property or style/type member: path: "/primary/orders",. Interpret it in the enclosing object, props or type definition.
812	`body,`	Continues the surrounding declaration/expression or text: body,. Read it with the preceding opening statement (path: "/primary/orders",); it is not a standalone business operation.
813	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
814	`scrollRef.current?.scrollTo({ y: 0, animated: true });`	Continues the surrounding declaration/expression or text: scrollRef.current?.scrollTo({ y: 0, animated: true });. Read it with the preceding opening statement (});); it is not a standalone business operation.
815	`}}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
816	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}}); it is not a standalone business operation.
817	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
818	`<Text style={styles.heading}>Primary orders — distributor and employee</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>Primary orders - distributor and employee</Text>. Props and child content below determine appearance and interactions.
819	`{rows("primaryOrders").map((row) => (`	Transforms/selects/aggregates collection values with the callback shown here: {rows("primaryOrders").map((row) => (. Read the callback body and result assignment together.
820	`<Card key={row.Id}>`	Renders/opens a UI element or component: <Card key={row.Id}>. Props and child content below determine appearance and interactions.
821	`<Text style={styles.heading}>`	Renders/opens a UI element or component: <Text style={styles.heading}>. Props and child content below determine appearance and interactions.
822	`{row.Name} · {row.Status__c}`	Continues the surrounding declaration/expression or text: {row.Name} · {row.Status__c}. Read it with the preceding opening statement (<Text style={styles.heading}>); it is not a standalone business operation.
823	`</Text>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
824	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
825	`{row.Order_Source__c === "Distributor DMS"`	Continues the surrounding declaration/expression or text: {row.Order_Source__c === "Distributor DMS". Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
826	`? "Placed by distributor"`	Continues the surrounding declaration/expression or text: ? "Placed by distributor". Read it with the preceding opening statement ({row.Order_Source__c === "Distributor DMS"); it is not a standalone business operation.
827	`: row.Employee__r?.Name || "Employee SFA"}{" "}`	Continues the surrounding declaration/expression or text: : row.Employee__r?.Name || "Employee SFA"}{" "}. Read it with the preceding opening statement (? "Placed by distributor"); it is not a standalone business operation.
828	`· {money(row.Total_Amount__c)}`	Continues the surrounding declaration/expression or text: · {money(row.Total_Amount__c)}. Read it with the preceding opening statement (: row.Employee__r?.Name || "Employee SFA"}{" "}); it is not a standalone business operation.
829	`</Text>`	Closes the UI element/component opened above.
830	`{row.Order_Lines__r?.records?.map((line: Row) => (`	Transforms/selects/aggregates collection values with the callback shown here: {row.Order_Lines__r?.records?.map((line: Row) => (. Read the callback body and result assignment together.
831	`<View key={line.Id}>`	Renders/opens a UI element or component: <View key={line.Id}>. Props and child content below determine appearance and interactions.
832	`<Text style={styles.label}>`	Renders/opens a UI element or component: <Text style={styles.label}>. Props and child content below determine appearance and interactions.
833	`{line.Product__r?.Name}: {line.Cases__c} cases ×{" "}`	Continues the surrounding declaration/expression or text: {line.Product__r?.Name}: {line.Cases__c} cases ×{" "}. Read it with the preceding opening statement (<Text style={styles.label}>); it is not a standalone business operation.
834	`{money(line.Case_Price__c)}`	Continues the surrounding declaration/expression or text: {money(line.Case_Price__c)}. Read it with the preceding opening statement ({line.Product__r?.Name}: {line.Cases__c} cases ×{" "}); it is not a standalone business operation.
835	`</Text>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
836	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
837	`{line.Pieces_Per_Case__c} pieces per case · Net{" "}`	Continues the surrounding declaration/expression or text: {line.Pieces_Per_Case__c} pieces per case · Net{" "}. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
838	`{money(line.Net_Amount__c)}`	Continues the surrounding declaration/expression or text: {money(line.Net_Amount__c)}. Read it with the preceding opening statement ({line.Pieces_Per_Case__c} pieces per case · Net{" "}); it is not a standalone business operation.
839	`</Text>`	Closes the UI element/component opened above.
840	`{!!line.Scheme__r?.Name && (`	Continues the surrounding declaration/expression or text: {!!line.Scheme__r?.Name && (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
841	`<Text style={styles.label}>`	Renders/opens a UI element or component: <Text style={styles.label}>. Props and child content below determine appearance and interactions.
842	`Scheme: {line.Scheme__r.Name} · Discount{" "}`	Sets/declares the named object property or style/type member: Scheme: {line.Scheme__r.Name} · Discount{" "}. Interpret it in the enclosing object, props or type definition.
843	`{money(line.Discount_Amount__c)} · {line.Free_Cases__c || 0} free`	Continues the surrounding declaration/expression or text: {money(line.Discount_Amount__c)} · {line.Free_Cases__c || 0} free. Read it with the preceding opening statement (Scheme: {line.Scheme__r.Name} · Discount{" "}); it is not a standalone business operation.
844	`cases of {line.Free_Product__r?.Name || line.Product__r?.Name}`	Continues the surrounding declaration/expression or text: cases of {line.Free_Product__r?.Name || line.Product__r?.Name}. Read it with the preceding opening statement ({money(line.Discount_Amount__c)} · {line.Free_Cases__c || 0} free); it is not a standalone business operation.
845	`</Text>`	Closes the UI element/component opened above.
846	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
847	`{!!line.Free_Gift__c && (`	Continues the surrounding declaration/expression or text: {!!line.Free_Gift__c && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
848	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
849	`Gift: {line.Free_Gift__c} × {line.Gift_Quantity__c || 0}`	Sets/declares the named object property or style/type member: Gift: {line.Free_Gift__c} × {line.Gift_Quantity__c || 0}. Interpret it in the enclosing object, props or type definition.
850	`</Text>`	Closes the UI element/component opened above.
851	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
852	`{row.Status__c === "Approved" && (`	Continues the surrounding declaration/expression or text: {row.Status__c === "Approved" && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
853	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
854	`title={`	Assigns the right-hand expression to the named variable/property: title={. This is in-memory unless it is later persisted by an explicit call.
855	`rejectedReceipt(line.Id, "Paid")`	Continues the surrounding declaration/expression or text: rejectedReceipt(line.Id, "Paid"). Read it with the preceding opening statement (title={); it is not a standalone business operation.
856	`? "Correct rejected receipt"`	Continues the surrounding declaration/expression or text: ? "Correct rejected receipt". Read it with the preceding opening statement (rejectedReceipt(line.Id, "Paid")); it is not a standalone business operation.
857	`: "Receive goods for this line"`	Continues the surrounding declaration/expression or text: : "Receive goods for this line". Read it with the preceding opening statement (? "Correct rejected receipt"); it is not a standalone business operation.
858	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
859	`secondary`	Continues the surrounding declaration/expression or text: secondary. Read it with the preceding opening statement (}); it is not a standalone business operation.
860	`disabled={`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.

Line	Source code	Explanation / reading note
861	`loggingOut ||`	Continues the surrounding declaration/expression or text: loggingOut ||. Read it with the preceding opening statement (disabled={}; it is not a standalone business operation.
862	`(hasPending(line.Id) && !rejectedReceipt(line.Id, "Paid"))`	Continues the surrounding declaration/expression or text: (hasPending(line.Id) && !rejectedReceipt(line.Id, "Paid")). Read it with the preceding opening statement (loggingOut ||); it is not a standalone business operation.
863	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
864	`onPress={() => openReceipt(line, "Paid")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
865	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => openReceipt(line, "Paid")}); it is not a standalone business operation.
866	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
867	`{row.Status__c === "Approved" && Number(line.Free_Cases__c) > 0 && (`	Continues the surrounding declaration/expression or text: {row.Status__c === "Approved" && Number(line.Free_Cases__c) > 0 && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
868	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
869	`title={`	Assigns the right-hand expression to the named variable/property: title={. This is in-memory unless it is later persisted by an explicit call.
870	`rejectedReceipt(line.Id, "Free")`	Continues the surrounding declaration/expression or text: rejectedReceipt(line.Id, "Free"). Read it with the preceding opening statement (title={}; it is not a standalone business operation.
871	`? "Correct rejected free receipt"`	Continues the surrounding declaration/expression or text: ? "Correct rejected free receipt". Read it with the preceding opening statement (rejectedReceipt(line.Id, "Free")); it is not a standalone business operation.
872	`: `Receive free cases – ${line.Free_Product__r?.Name || line.Product__r?.Name}``	Continues the surrounding declaration/expression or text: : `Receive free cases - ${line.Free_Product__r?.Name || line.Product__r?.Name}`. Read it with the preceding opening statement (? "Correct rejected free receipt"); it is not a standalone business operation.

Line	Source code	Explanation / reading note
873	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
874	`secondary`	Continues the surrounding declaration/expression or text: secondary. Read it with the preceding opening statement (}); it is not a standalone business operation.
875	`disabled={`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
876	`loggingOut ||`	Continues the surrounding declaration/expression or text: loggingOut ||. Read it with the preceding opening statement (disabled={); it is not a standalone business operation.
877	`(hasPending(line.Id) && !rejectedReceipt(line.Id, "Free"))`	Continues the surrounding declaration/expression or text: (hasPending(line.Id) && !rejectedReceipt(line.Id, "Free")). Read it with the preceding opening statement (loggingOut ||); it is not a standalone business operation.
878	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
879	`onPress={() => openReceipt(line, "Free")}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
880	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => openReceipt(line, "Free")}); it is not a standalone business operation.
881	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
882	`</View>`	Closes the UI element/component opened above.
883	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
884	`</Card>`	Closes the UI element/component opened above.
885	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
886	`{receipt && (`	Continues the surrounding declaration/expression or text: {receipt && (. Read it with the preceding opening statement ( ))}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
887	`<View`	Renders/opens a UI element or component: <View. Props and child content below determine appearance and interactions.
888	`key={`${receipt.Id}-${receipt.receiptKind}`}`	Assigns the right-hand expression to the named variable/property: key={`${receipt.Id}-${receipt.receiptKind}`}. This is in-memory unless it is later persisted by an explicit call.
889	`onLayout={() => scrollRef.current?.scrollToEnd({ animated: true })}`	Assigns the right-hand expression to the named variable/property: onLayout={() => scrollRef.current?.scrollToEnd({ animated: true })}. This is in-memory unless it is later persisted by an explicit call.
890	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (onLayout={() => scrollRef.current?.scrollToEnd({ animated: true })}); it is not a standalone business operation.
891	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
892	`<Text style={styles.heading}>`	Renders/opens a UI element or component: <Text style={styles.heading}>. Props and child content below determine appearance and interactions.
893	`{receipt.receiptKind} goods receipt:{" "}`	Continues the surrounding declaration/expression or text: {receipt.receiptKind} goods receipt:{" "}. Read it with the preceding opening statement (<Text style={styles.heading}>); it is not a standalone business operation.
894	`{receipt.receiptKind === "Free"`	Continues the surrounding declaration/expression or text: {receipt.receiptKind === "Free". Read it with the preceding opening statement ({receipt.receiptKind} goods receipt:{" "}); it is not a standalone business operation.
895	`? receipt.Free_Product__r?.Name`	Continues the surrounding declaration/expression or text: ? receipt.Free_Product__r?.Name. Read it with the preceding opening statement ({receipt.receiptKind === "Free"); it is not a standalone business operation.
896	`: receipt.Product__r?.Name}`	Continues the surrounding declaration/expression or text: : receipt.Product__r?.Name}. Read it with the preceding opening statement (? receipt.Free_Product__r?.Name); it is not a standalone business operation.
897	`</Text>`	Closes the UI element/component opened above.
898	`{!!receipt.correctionKey && (`	Continues the surrounding declaration/expression or text: {!!receipt.correctionKey && (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
899	`<Text style={styles.notice}>`	Renders/opens a UI element or component: <Text style={styles.notice}>. Props and child content below determine appearance and interactions.
900	`Correct the details below. Your rejected request stays saved until you`	Continues the surrounding declaration/expression or text: Correct the details below. Your rejected request stays saved until you. Read it with the preceding opening statement (<Text style={styles.notice}>); it is not a standalone business operation.
901	`confirm its replacement. No duplicate request will be added.`	Continues the surrounding declaration/expression or text: confirm its replacement. No duplicate request will be added.. Read it with the preceding opening statement (Correct the details below. Your rejected request stays saved until you); it is not a standalone business operation.
902	`</Text>`	Closes the UI element/component opened above.
903	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
904	`<Text style={styles.label}>`	Renders/opens a UI element or component: <Text style={styles.label}>. Props and child content below determine appearance and interactions.
905	`Approved {receipt.receiptKind === "Free" ? "free" : "paid"} quantity:{" "}`	Continues the surrounding declaration/expression or text: Approved {receipt.receiptKind === "Free" ? "free" : "paid"} quantity:{" "}. Read it with the preceding opening statement (<Text style={styles.label}>); it is not a standalone business operation.
906	`{Number(`	Continues the surrounding declaration/expression or text: {Number(. Read it with the preceding opening statement (Approved {receipt.receiptKind === "Free" ? "free" : "paid"} quantity:{" "}); it is not a standalone business operation.
907	`receipt.receiptKind === "Free"`	Continues the surrounding declaration/expression or text: receipt.receiptKind === "Free". Read it with the preceding opening statement ({Number(); it is not a standalone business operation.
908	`? receipt.Free_Cases__c`	Continues the surrounding declaration/expression or text: ? receipt.Free_Cases__c. Read it with the preceding opening statement (receipt.receiptKind === "Free"); it is not a standalone business operation.
909	`: receipt.Cases__c,`	Continues the surrounding declaration/expression or text: : receipt.Cases__c,. Read it with the preceding opening statement (? receipt.Free_Cases__c); it is not a standalone business operation.

Line	Source code	Explanation / reading note
910	) || 0}{" "}	Continues the surrounding declaration/expression or text:) || 0}{" "}. Read it with the preceding opening statement (: receipt.Cases__c,); it is not a standalone business operation.
911	case(s).	Continues the surrounding declaration/expression or text: case(s).. Read it with the preceding opening statement ( ) || 0}{" "}); it is not a standalone business operation.
912	</Text>	Closes the UI element/component opened above.
913	<Text style={styles.smallCopy}>	Renders/opens a UI element or component: <Text style={styles.smallCopy}>. Props and child content below determine appearance and interactions.
914	Enter the actual delivered cases, not pieces. Previous receipts reduce the	Continues the surrounding declaration/expression or text: Enter the actual delivered cases, not pieces. Previous receipts reduce the. Read it with the preceding opening statement (<Text style={styles.smallCopy}>); it is not a standalone business operation.
915	remaining quantity; Salesforce checks this again when saving.	Continues the surrounding declaration/expression or text: remaining quantity; Salesforce checks this again when saving.. Read it with the preceding opening statement (Enter the actual delivered cases, not pieces. Previous receipts reduce the); it is not a standalone business operation.
916	</Text>	Closes the UI element/component opened above.
917	<Field	Renders/opens a UI element or component: <Field. Props and child content below determine appearance and interactions.
918	label="Received cases — whole number"	Assigns the right-hand expression to the named variable/property: label="Received cases - whole number". This is in-memory unless it is later persisted by an explicit call.
919	value={cases}	Assigns the right-hand expression to the named variable/property: value={cases}. This is in-memory unless it is later persisted by an explicit call.
920	onChange={setCases}	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
921	numeric	Continues the surrounding declaration/expression or text: numeric. Read it with the preceding opening statement (onChange={setCases}); it is not a standalone business operation.
922	/>	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (numeric); it is not a standalone business operation.

Line	Source code	Explanation / reading note
923	`<Field label="Batch number" value={batch} onChange={setBatch} />`	Renders/opens a UI element or component: <Field label="Batch number" value={batch} onChange={setBatch} />. Props and child content below determine appearance and interactions.
924	`<Field`	Renders/opens a UI element or component: <Field. Props and child content below determine appearance and interactions.
925	`label="Expiry date (YYYY-MM-DD or DD-MM-YYYY)"`	Assigns the right-hand expression to the named variable/property: label="Expiry date (YYYY-MM-DD or DD-MM-YYYY)". This is in-memory unless it is later persisted by an explicit call.
926	`value={expiry}`	Assigns the right-hand expression to the named variable/property: value={expiry}. This is in-memory unless it is later persisted by an explicit call.
927	`onChange={setExpiry}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
928	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChange={setExpiry}); it is not a standalone business operation.
929	`<Text style={styles.smallCopy}>`	Renders/opens a UI element or component: <Text style={styles.smallCopy}>. Props and child content below determine appearance and interactions.
930	`Example: 2026-12-14 or 14-12-2026. Review first, then Confirm and save to`	Sets/declares the named object property or style/type member: Example: 2026-12-14 or 14-12-2026. Review first, then Confirm and save to. Interpret it in the enclosing object, props or type definition.
931	`create the receipt in Salesforce.`	Continues the surrounding declaration/expression or text: create the receipt in Salesforce.. Read it with the preceding opening statement (Example: 2026-12-14 or 14-12-2026. Review first, then Confirm and save to); it is not a standalone business operation.
932	`</Text>`	Closes the UI element/component opened above.
933	`{!!receiptError && (`	Continues the surrounding declaration/expression or text: {!!receiptError && (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
934	`<Text accessibilityRole="alert" style={styles.notice}>`	Renders/opens a UI element or component: <Text accessibilityRole="alert" style={styles.notice}>. Props and child content below determine appearance and interactions.
935	`{receiptError}`	Continues the surrounding declaration/expression or text: {receiptError}. Read it with the preceding opening statement (<Text accessibilityRole="alert" style={styles.notice}>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
936	`</Text>`	Closes the UI element/component opened above.
937	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
938	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
939	`title="Review goods receipt"`	Assigns the right-hand expression to the named variable/property: title="Review goods receipt". This is in-memory unless it is later persisted by an explicit call.
940	`disabled={loggingOut}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
941	`onPress={() => {`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
942	`const validated = validateGoodsReceipt(`	Declares/initializes local data used by the surrounding operation: const validated = validateGoodsReceipt(. Collection contents and assignments below determine its purpose.
943	`cases,`	Continues the surrounding declaration/expression or text: cases,. Read it with the preceding opening statement (const validated = validateGoodsReceipt(); it is not a standalone business operation.
944	`batch,`	Continues the surrounding declaration/expression or text: batch,. Read it with the preceding opening statement (cases,); it is not a standalone business operation.
945	`expiry,`	Continues the surrounding declaration/expression or text: expiry,. Read it with the preceding opening statement (batch,); it is not a standalone business operation.
946	`Number(`	Continues the surrounding declaration/expression or text: Number(. Read it with the preceding opening statement (expiry,); it is not a standalone business operation.
947	`receipt.receiptKind === "Free"`	Continues the surrounding declaration/expression or text: receipt.receiptKind === "Free". Read it with the preceding opening statement (Number(); it is not a standalone business operation.
948	`? receipt.Free_Cases__c`	Continues the surrounding declaration/expression or text: ? receipt.Free_Cases__c. Read it with the preceding opening statement (receipt.receiptKind === "Free"); it is not a standalone business operation.

Line	Source code	Explanation / reading note
949	`: receipt.Cases__c,`	Continues the surrounding declaration/expression or text: : receipt.Cases__c,. Read it with the preceding opening statement (? receipt.Free_Cases__c); it is not a standalone business operation.
950	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
951	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
952	`if (!validated.value) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!validated.value) {.
953	`setReceiptError(validated.error || "Check the receipt details.");`	Continues the surrounding declaration/expression or text: setReceiptError(validated.error || "Check the receipt details.");. Read it with the preceding opening statement (if (!validated.value) {); it is not a standalone business operation.
954	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
955	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
956	`setReceiptError("");`	Continues the surrounding declaration/expression or text: setReceiptError("");. Read it with the preceding opening statement (}); it is not a standalone business operation.
957	`setExpiry(validated.value.expiry);`	Continues the surrounding declaration/expression or text: setExpiry(validated.value.expiry);. Read it with the preceding opening statement (setReceiptError("");); it is not a standalone business operation.
958	`setConfirm({`	Continues the surrounding declaration/expression or text: setConfirm({. Read it with the preceding opening statement (setExpiry(validated.value.expiry);); it is not a standalone business operation.
959	`label: \`Receive ${validated.value.cases} case(s), batch ${validated.value.batch}, expiry ${validated.value.expiry} and increase stock\`,`	Sets/declares the named object property or style/type member: label: `Receive ${validated.value.cases} case(s), batch ${validated.value.batch}, expiry ${validated.value.expiry} and increase stock`,. Interpret it in the enclosing object, props or type definition.
960	`path: "/transactions",`	Sets/declares the named object property or style/type member: path: "/transactions",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
961	`replacesKey: receipt.correctionKey,`	Sets/declares the named object property or style/type member: replacesKey: receipt.correctionKey,. Interpret it in the enclosing object, props or type definition.
962	`body: {`	Sets/declares the named object property or style/type member: body: {. Interpret it in the enclosing object, props or type definition.
963	`action: "receiveGoods",`	Sets/declares the named object property or style/type member: action: "receiveGoods",. Interpret it in the enclosing object, props or type definition.
964	`receiptKind: receipt.receiptKind,`	Sets/declares the named object property or style/type member: receiptKind: receipt.receiptKind,. Interpret it in the enclosing object, props or type definition.
965	`recordId: receipt.Id,`	Sets/declares the named object property or style/type member: recordId: receipt.Id,. Interpret it in the enclosing object, props or type definition.
966	`...validated.value,`	Continues the surrounding declaration/expression or text: ...validated.value,. Read it with the preceding opening statement (recordId: receipt.Id,); it is not a standalone business operation.
967	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
968	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
969	`scrollRef.current?.scrollTo({ y: 0, animated: true });`	Continues the surrounding declaration/expression or text: scrollRef.current?.scrollTo({ y: 0, animated: true });. Read it with the preceding opening statement (});); it is not a standalone business operation.
970	`}}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
971	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}}); it is not a standalone business operation.
972	`</Card>`	Closes the UI element/component opened above.
973	`</View>`	Closes the UI element/component opened above.
974	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
975	`<Text style={styles.heading}>Goods receipts saved in Salesforce</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>Goods receipts saved in Salesforce</Text>. Props and child content below determine appearance and interactions.
976	`{!!savedReceiptId && (`	Continues the surrounding declaration/expression or text: {!!savedReceiptId && (. Read it with the preceding opening statement (<Text style={styles.heading}>Goods receipts saved in Salesforce</Text>); it is not a standalone business operation.
977	`<Text style={styles.notice}>`	Renders/opens a UI element or component: <Text style={styles.notice}>. Props and child content below determine appearance and interactions.
978	`Salesforce confirmed receipt{" "}`	Continues the surrounding declaration/expression or text: Salesforce confirmed receipt{" "}. Read it with the preceding opening statement (<Text style={styles.notice}>); it is not a standalone business operation.
979	`{rows("receipts").find((row) => row.Id === savedReceiptId)?.Name ||`	Transforms/selects/aggregates collection values with the callback shown here: {rows("receipts").find((row) => row.Id === savedReceiptId)?.Name ||. Read the callback body and result assignment together.
980	`savedReceiptId}`	Continues the surrounding declaration/expression or text: savedReceiptId}. Read it with the preceding opening statement ({rows("receipts").find((row) => row.Id === savedReceiptId)?.Name ||); it is not a standalone business operation.
981	`. Open Goods Receipts → All Goods Receipts in Salesforce to view it.`	Continues the surrounding declaration/expression or text: . Open Goods Receipts → All Goods Receipts in Salesforce to view it.. Read it with the preceding opening statement (savedReceiptId}); it is not a standalone business operation.
982	`</Text>`	Closes the UI element/component opened above.
983	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
984	`{rows("receipts").map((row) => (`	Transforms/selects/aggregates collection values with the callback shown here: {rows("receipts").map((row) => (. Read the callback body and result assignment together.
985	`<Card key={row.Id}>`	Renders/opens a UI element or component: <Card key={row.Id}>. Props and child content below determine appearance and interactions.
986	`<Text style={styles.heading}>`	Renders/opens a UI element or component: <Text style={styles.heading}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
987	`{row.Name} · {row.Status__c}`	Continues the surrounding declaration/expression or text: {row.Name} · {row.Status__c}. Read it with the preceding opening statement (<Text style={styles.heading}>); it is not a standalone business operation.
988	`</Text>`	Closes the UI element/component opened above.
989	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
990	`{row.Received_Date__c || "Not received yet"} · {row.Total_Pieces__c || 0}{" "}`	Continues the surrounding declaration/expression or text: {row.Received_Date__c || "Not received yet"} · {row.Total_Pieces__c || 0}{" "}. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
991	`pieces · {money(row.Total_Value__c)}`	Continues the surrounding declaration/expression or text: pieces · {money(row.Total_Value__c)}. Read it with the preceding opening statement ({row.Received_Date__c || "Not received yet"} · {row.Total_Pieces__c || 0}{" "}); it is not a standalone business operation.
992	`</Text>`	Closes the UI element/component opened above.
993	`</Card>`	Closes the UI element/component opened above.
994	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
995	`</>`	Closes the UI element/component opened above.
996	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
997	`{tab === "Secondary" &&`	Continues the surrounding declaration/expression or text: {tab === "Secondary" &&. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
998	`rows("secondaryOrders").map((row) => (`	Transforms/selects/aggregates collection values with the callback shown here: rows("secondaryOrders").map((row) => (. Read the callback body and result assignment together.
999	`<Card key={row.Id}>`	Renders/opens a UI element or component: <Card key={row.Id}>. Props and child content below determine appearance and interactions.
1000	`<Text style={styles.heading}>`	Renders/opens a UI element or component: <Text style={styles.heading}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
1001	`{row.Name} · {row.DMS_Status__c || "Pending"}`	Continues the surrounding declaration/expression or text: {row.Name} · {row.DMS_Status__c || "Pending"}. Read it with the preceding opening statement (<Text style={styles.heading}>); it is not a standalone business operation.
1002	`</Text>`	Closes the UI element/component opened above.
1003	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
1004	`{row.Retailer__r?.Name} · {money(row.Total_Amount__c)}`	Continues the surrounding declaration/expression or text: {row.Retailer__r?.Name} · {money(row.Total_Amount__c)}. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
1005	`</Text>`	Closes the UI element/component opened above.
1006	`{row.lines?.map((line: Row) => (`	Transforms/selects/aggregates collection values with the callback shown here: {row.lines?.map((line: Row) => (. Read the callback body and result assignment together.
1007	`<Text key={line.Id} style={styles.label}>`	Renders/opens a UI element or component: <Text key={line.Id} style={styles.label}>. Props and child content below determine appearance and interactions.
1008	`{line.Product__r?.Name}: {line.Piece_Quantity__c} pieces ·{" "}`	Continues the surrounding declaration/expression or text: {line.Product__r?.Name}: {line.Piece_Quantity__c} pieces ·{" "}. Read it with the preceding opening statement (<Text key={line.Id} style={styles.label}>); it is not a standalone business operation.
1009	`{money(line.Line_Amount__c)}`	Continues the surrounding declaration/expression or text: {money(line.Line_Amount__c)}. Read it with the preceding opening statement ({line.Product__r?.Name}: {line.Piece_Quantity__c} pieces ·{" "}); it is not a standalone business operation.
1010	`</Text>`	Closes the UI element/component opened above.
1011	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1012	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
1013	`{row.DMS_Decision_Notes__c ||`	Continues the surrounding declaration/expression or text: {row.DMS_Decision_Notes__c ||. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1014	`(row.DMS_Status__c === "Approved"`	Continues the surrounding declaration/expression or text: (row.DMS_Status__c === "Approved". Read it with the preceding opening statement ({row.DMS_Decision_Notes__c ||); it is not a standalone business operation.
1015	`? "Approved in Salesforce."`	Continues the surrounding declaration/expression or text: ? "Approved in Salesforce.". Read it with the preceding opening statement ((row.DMS_Status__c === "Approved"); it is not a standalone business operation.
1016	`: row.DMS_Status__c === "Rejected"`	Continues the surrounding declaration/expression or text: : row.DMS_Status__c === "Rejected". Read it with the preceding opening statement (? "Approved in Salesforce."); it is not a standalone business operation.
1017	`? "Previously rejected order."`	Continues the surrounding declaration/expression or text: ? "Previously rejected order.". Read it with the preceding opening statement (: row.DMS_Status__c === "Rejected"); it is not a standalone business operation.
1018	`: "Awaiting Salesforce automatic approval. Refresh to check the saved status.")}`	Continues the surrounding declaration/expression or text: : "Awaiting Salesforce automatic approval. Refresh to check the saved status.")}. Read it with the preceding opening statement (? "Previously rejected order."); it is not a standalone business operation.
1019	`</Text>`	Closes the UI element/component opened above.
1020	`</Card>`	Closes the UI element/component opened above.
1021	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1022	`{tab === "Returns" && (`	Continues the surrounding declaration/expression or text: {tab === "Returns" && (. Read it with the preceding opening statement ( ))}); it is not a standalone business operation.
1023	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
1024	`<View style={styles.tabs}>`	Renders/opens a UI element or component: <View style={styles.tabs}>. Props and child content below determine appearance and interactions.
1025	`{(["Primary", "Secondary"] as const).map((kind) => (`	Transforms/selects/aggregates collection values with the callback shown here: {(["Primary", "Secondary"] as const).map((kind) => (. Read the callback body and result assignment together.
1026	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
1027	`key={kind}`	Assigns the right-hand expression to the named variable/property: key={kind}. This is in-memory unless it is later persisted by an explicit call.
1028	`accessibilityRole="button"`	Assigns the right-hand expression to the named variable/property: accessibilityRole="button". This is in-memory unless it is later persisted by an explicit call.
1029	`accessibilityLabel={kind + " returns"}`	Assigns the right-hand expression to the named variable/property: accessibilityLabel={kind + " returns"}. This is in-memory unless it is later persisted by an explicit call.
1030	`accessibilityState={{ selected: returnType === kind }}`	Assigns the right-hand expression to the named variable/property: accessibilityState={{ selected: returnType === kind }}. This is in-memory unless it is later persisted by an explicit call.
1031	`onPress={() => setReturnType(kind)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
1032	`style={[styles.tab, returnType === kind && styles.selected]}`	Assigns the right-hand expression to the named variable/property: style={[styles.tab, returnType === kind && styles.selected]}. This is in-memory unless it is later persisted by an explicit call.
1033	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (style={[styles.tab, returnType === kind && styles.selected]}); it is not a standalone business operation.
1034	`<Text style={{ color: returnType === kind ? "white" : "#19463e" }}>`	Renders/opens a UI element or component: <Text style={{ color: returnType === kind ? "white" : "#19463e" }}>. Props and child content below determine appearance and interactions.
1035	`{kind} returns`	Continues the surrounding declaration/expression or text: {kind} returns. Read it with the preceding opening statement (<Text style={{ color: returnType === kind ? "white" : "#19463e" }}>); it is not a standalone business operation.
1036	`</Text>`	Closes the UI element/component opened above.
1037	`</Pressable>`	Closes the UI element/component opened above.
1038	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1039	`</View>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
1040	`{returnType === "Secondary" && (`	Continues the surrounding declaration/expression or text: {returnType === "Secondary" && (. Read it with the preceding opening statement (</View>); it is not a standalone business operation.
1041	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
1042	`<Text style={styles.heading}>Secondary returns — outlets to distributor</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>Secondary returns - outlets to distributor</Text>. Props and child content below determine appearance and interactions.
1043	`<Text style={styles.copy}>`	Renders/opens a UI element or component: <Text style={styles.copy}>. Props and child content below determine appearance and interactions.
1044	`Outlet returns recorded in pieces. Distributor approval applies.`	Continues the surrounding declaration/expression or text: Outlet returns recorded in pieces. Distributor approval applies.. Read it with the preceding opening statement (<Text style={styles.copy}>); it is not a standalone business operation.
1045	`</Text>`	Closes the UI element/component opened above.
1046	`{data && rows("returns").length === 0 && (`	Continues the surrounding declaration/expression or text: {data && rows("returns").length === 0 && (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
1047	`<Text style={styles.notice}>`	Renders/opens a UI element or component: <Text style={styles.notice}>. Props and child content below determine appearance and interactions.
1048	`No secondary returns in the latest Salesforce download for this`	Continues the surrounding declaration/expression or text: No secondary returns in the latest Salesforce download for this. Read it with the preceding opening statement (<Text style={styles.notice}>); it is not a standalone business operation.
1049	`distributor.`	Continues the surrounding declaration/expression or text: distributor.. Read it with the preceding opening statement (No secondary returns in the latest Salesforce download for this); it is not a standalone business operation.
1050	`</Text>`	Closes the UI element/component opened above.
1051	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1052	`{rows("returns").map((row) => (`	Transforms/selects/aggregates collection values with the callback shown here: {rows("returns").map((row) => (. Read the callback body and result assignment together.

Line	Source code	Explanation / reading note
1053	`<Card key={row.Id}>`	Renders/opens a UI element or component: <Card key={row.Id}>. Props and child content below determine appearance and interactions.
1054	`<Text style={styles.heading}>`	Renders/opens a UI element or component: <Text style={styles.heading}>. Props and child content below determine appearance and interactions.
1055	`{row.Name} · {row.DMS_Status__c}`	Continues the surrounding declaration/expression or text: {row.Name} · {row.DMS_Status__c}. Read it with the preceding opening statement (<Text style={styles.heading}>); it is not a standalone business operation.
1056	`</Text>`	Closes the UI element/component opened above.
1057	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
1058	`{row.Outlet__r?.Name} · {row.Product__r?.Name} · {row.Quantity__c}{" "}`	Continues the surrounding declaration/expression or text: {row.Outlet__r?.Name} · {row.Product__r?.Name} · {row.Quantity__c}{" "}. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
1059	`pieces`	Continues the surrounding declaration/expression or text: pieces. Read it with the preceding opening statement ({row.Outlet__r?.Name} · {row.Product__r?.Name} · {row.Quantity__c}{" "}); it is not a standalone business operation.
1060	`</Text>`	Closes the UI element/component opened above.
1061	`<Text>{row.Return_Reason__c}</Text>`	Renders/opens a UI element or component: <Text>{row.Return_Reason__c}</Text>. Props and child content below determine appearance and interactions.
1062	`{(!row.DMS_Status__c || row.DMS_Status__c === "Pending") &&`	Continues the surrounding declaration/expression or text: {(!row.DMS_Status__c || row.DMS_Status__c === "Pending") &&. Read it with the preceding opening statement (<Text>{row.Return_Reason__c}</Text>); it is not a standalone business operation.
1063	`decisionButtons(row, "returnDecision")}`	Continues the surrounding declaration/expression or text: decisionButtons(row, "returnDecision")}. Read it with the preceding opening statement ({(!row.DMS_Status__c || row.DMS_Status__c === "Pending") &&); it is not a standalone business operation.
1064	`</Card>`	Closes the UI element/component opened above.
1065	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1066	`</>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
1067	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1068	`{returnType === "Primary" && (`	Continues the surrounding declaration/expression or text: {returnType === "Primary" && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
1069	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
1070	`<Text style={styles.heading}>Primary returns — company officer approval</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>Primary returns - company officer approval</Text>. Props and child content below determine appearance and interactions.
1071	`<Text style={styles.copy}>`	Renders/opens a UI element or component: <Text style={styles.copy}>. Props and child content below determine appearance and interactions.
1072	`Distributor returns to the manufacturing company, recorded in cases. The`	Continues the surrounding declaration/expression or text: Distributor returns to the manufacturing company, recorded in cases. The. Read it with the preceding opening statement (<Text style={styles.copy}>); it is not a standalone business operation.
1073	`Distributor Officer approves or rejects them.`	Continues the surrounding declaration/expression or text: Distributor Officer approves or rejects them.. Read it with the preceding opening statement (Distributor returns to the manufacturing company, recorded in cases. The); it is not a standalone business operation.
1074	`</Text>`	Closes the UI element/component opened above.
1075	`{data && rows("primaryReturns").length === 0 && (`	Continues the surrounding declaration/expression or text: {data && rows("primaryReturns").length === 0 && (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
1076	`<Text style={styles.notice}>`	Renders/opens a UI element or component: <Text style={styles.notice}>. Props and child content below determine appearance and interactions.
1077	`No primary returns in the latest Salesforce download for this distributor.`	Continues the surrounding declaration/expression or text: No primary returns in the latest Salesforce download for this distributor.. Read it with the preceding opening statement (<Text style={styles.notice}>); it is not a standalone business operation.
1078	`</Text>`	Closes the UI element/component opened above.
1079	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1080	`{rows("primaryReturns").map((row) => (`	Transforms/selects/aggregates collection values with the callback shown here: {rows("primaryReturns").map((row) => (. Read the callback body and result assignment together.
1081	`<Card key={row.Id}>`	Renders/opens a UI element or component: <Card key={row.Id}>. Props and child content below determine appearance and interactions.
1082	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
1083	`{row.Name} · {row.Status__c}`	Continues the surrounding declaration/expression or text: {row.Name} · {row.Status__c}. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
1084	`</Text>`	Closes the UI element/component opened above.
1085	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
1086	`{row.Employee__r?.Name} · {row.Total_Cases__c} cases ·{" "}`	Continues the surrounding declaration/expression or text: {row.Employee__r?.Name} · {row.Total_Cases__c} cases ·{" "}. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
1087	`{money(row.Total_Amount__c)}`	Continues the surrounding declaration/expression or text: {money(row.Total_Amount__c)}. Read it with the preceding opening statement ({row.Employee__r?.Name} · {row.Total_Cases__c} cases ·{" "}); it is not a standalone business operation.
1088	`</Text>`	Closes the UI element/component opened above.
1089	`</Card>`	Closes the UI element/component opened above.
1090	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1091	`</>`	Closes the UI element/component opened above.
1092	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1093	`</>`	Closes the UI element/component opened above.
1094	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1095	`{tab === "Reports" && (`	Continues the surrounding declaration/expression or text: {tab === "Reports" && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
1096	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
1097	`{!!data?.reportError && <Text style={styles.notice}>{data.reportError}</Text>}`	Assigns the right-hand expression to the named variable/property: {!!data?.reportError && <Text style={styles.notice}>{data.reportError}</Text>}. This is in-memory unless it is later persisted by an explicit call.
1098	`<ManagementReports data={data?.reports} detailed />`	Renders/opens a UI element or component: <ManagementReports data={data?.reports} detailed />. Props and child content below determine appearance and interactions.
1099	`</>`	Closes the UI element/component opened above.
1100	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1101	`{tab === "Assets" &&`	Continues the surrounding declaration/expression or text: {tab === "Assets" &&. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
1102	`rows("assets").map((row) => (`	Transforms/selects/aggregates collection values with the callback shown here: rows("assets").map((row) => (. Read the callback body and result assignment together.
1103	`<Card key={row.Id}>`	Renders/opens a UI element or component: <Card key={row.Id}>. Props and child content below determine appearance and interactions.
1104	`<Text style={styles.heading}>{row.Asset_Name__c || row.Name}</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>{row.Asset_Name__c || row.Name}</Text>. Props and child content below determine appearance and interactions.
1105	`<Text>Outlet: {row.Outlet__r?.Name || "Not assigned"}</Text>`	Renders/opens a UI element or component: <Text>Outlet: {row.Outlet__r?.Name || "Not assigned"}</Text>. Props and child content below determine appearance and interactions.
1106	`<Text>Asset code: {row.Asset_Code__c || "Not recorded"}</Text>`	Renders/opens a UI element or component: <Text>Asset code: {row.Asset_Code__c || "Not recorded"}</Text>. Props and child content below determine appearance and interactions.
1107	`<Text>Status: {row.Status__c || "Not recorded"}</Text>`	Renders/opens a UI element or component: <Text>Status: {row.Status__c || "Not recorded"}</Text>. Props and child content below determine appearance and interactions.
1108	`<Text>Given date: {row.Given_Date__c || "Not recorded"}</Text>`	Renders/opens a UI element or component: <Text>Given date: {row.Given_Date__c || "Not recorded"}</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
1109	`<Text>Employee: {row.Visit__r?.Employee__r?.Name || "Not recorded"}</Text>`	Renders/opens a UI element or component: <Text>Employee: {row.Visit__r?.Employee__r?.Name || "Not recorded"}</Text>. Props and child content below determine appearance and interactions.
1110	`</Card>`	Closes the UI element/component opened above.
1111	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1112	`{tab === "Inventory" &&`	Continues the surrounding declaration/expression or text: {tab === "Inventory" &&. Read it with the preceding opening statement ( ))}); it is not a standalone business operation.
1113	`rows("inventory").map((row) => (`	Transforms/selects/aggregates collection values with the callback shown here: rows("inventory").map((row) => (. Read the callback body and result assignment together.
1114	`<Card key={row.Id}>`	Renders/opens a UI element or component: <Card key={row.Id}>. Props and child content below determine appearance and interactions.
1115	`<Text style={styles.heading}>{row.Product__r?.Name}</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>{row.Product__r?.Name}</Text>. Props and child content below determine appearance and interactions.
1116	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
1117	`Batch: {row.Batch_Number__c || "Not recorded"} · Expiry:{" "}`	Sets/declares the named object property or style/type member: Batch: {row.Batch_Number__c || "Not recorded"} · Expiry:{" "}. Interpret it in the enclosing object, props or type definition.
1118	`{row.Expiry_Date__c || "Not recorded"}`	Continues the surrounding declaration/expression or text: {row.Expiry_Date__c || "Not recorded"}. Read it with the preceding opening statement (Batch: {row.Batch_Number__c || "Not recorded"} · Expiry:{" "}); it is not a standalone business operation.
1119	`</Text>`	Closes the UI element/component opened above.
1120	`<Text style={styles.metric}>`	Renders/opens a UI element or component: <Text style={styles.metric}>. Props and child content below determine appearance and interactions.
1121	`{row.Available_Pieces__c} available / {row.On_Hand_Pieces__c} on hand`	Continues the surrounding declaration/expression or text: {row.Available_Pieces__c} available / {row.On_Hand_Pieces__c} on hand. Read it with the preceding opening statement (<Text style={styles.metric}>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1122	`</Text>`	Closes the UI element/component opened above.
1123	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
1124	`{row.Expired__c`	Continues the surrounding declaration/expression or text: {row.Expired__c. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
1125	`? "EXPIRED — do not sell"`	Continues the surrounding declaration/expression or text: ? "EXPIRED - do not sell". Read it with the preceding opening statement ({row.Expired__c); it is not a standalone business operation.
1126	`: row.Low_Stock__c`	Continues the surrounding declaration/expression or text: : row.Low_Stock__c. Read it with the preceding opening statement (? "EXPIRED - do not sell"); it is not a standalone business operation.
1127	`? "LOW STOCK — replenishment needed"`	Continues the surrounding declaration/expression or text: ? "LOW STOCK - replenishment needed". Read it with the preceding opening statement (: row.Low_Stock__c); it is not a standalone business operation.
1128	`: "Stock available"}`	Continues the surrounding declaration/expression or text: : "Stock available"}. Read it with the preceding opening statement (? "LOW STOCK - replenishment needed"); it is not a standalone business operation.
1129	`</Text>`	Closes the UI element/component opened above.
1130	`</Card>`	Closes the UI element/component opened above.
1131	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1132	`{tab === "Tickets" && (`	Continues the surrounding declaration/expression or text: {tab === "Tickets" && (. Read it with the preceding opening statement ( ))}); it is not a standalone business operation.
1133	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
1134	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
1135	`<Text style={styles.heading}>Raise a support ticket</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>Raise a support ticket</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
1136	`<Text>Handled by your company officer / Salesforce administrator.</Text>`	Renders/opens a UI element or component: <Text>Handled by your company officer / Salesforce administrator.</Text>. Props and child content below determine appearance and interactions.
1137	`<Text style={styles.smallCopy}>`	Renders/opens a UI element or component: <Text style={styles.smallCopy}>. Props and child content below determine appearance and interactions.
1138	`Open → In Progress (approved) → Closed (resolved), or Rejected with a reason.`	Continues the surrounding declaration/expression or text: Open → In Progress (approved) → Closed (resolved), or Rejected with a reason.. Read it with the preceding opening statement (<Text style={styles.smallCopy}>); it is not a standalone business operation.
1139	`</Text>`	Closes the UI element/component opened above.
1140	`<View style={styles.tabs}>`	Renders/opens a UI element or component: <View style={styles.tabs}>. Props and child content below determine appearance and interactions.
1141	`{["Product", "Portal", "Delivery"].map((value) => (`	Transforms/selects/aggregates collection values with the callback shown here: {["Product", "Portal", "Delivery"].map((value) => (. Read the callback body and result assignment together.
1142	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
1143	`key={value}`	Assigns the right-hand expression to the named variable/property: key={value}. This is in-memory unless it is later persisted by an explicit call.
1144	`title={value}`	Assigns the right-hand expression to the named variable/property: title={value}. This is in-memory unless it is later persisted by an explicit call.
1145	`secondary={category !== value}`	Assigns the right-hand expression to the named variable/property: secondary={category !== value}. This is in-memory unless it is later persisted by an explicit call.
1146	`onPress={() => setCategory(value)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
1147	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setCategory(value)}); it is not a standalone business operation.
1148	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1149	`</View>`	Closes the UI element/component opened above.
1150	`<Field label="Subject" value={subject} onChange={setSubject} />`	Renders/opens a UI element or component: <Field label="Subject" value={subject} onChange={setSubject} />. Props and child content below determine appearance and interactions.
1151	`<Field`	Renders/opens a UI element or component: <Field. Props and child content below determine appearance and interactions.
1152	`label="Issue description"`	Assigns the right-hand expression to the named variable/property: label="Issue description". This is in-memory unless it is later persisted by an explicit call.
1153	`value={description}`	Assigns the right-hand expression to the named variable/property: value={description}. This is in-memory unless it is later persisted by an explicit call.
1154	`onChange={setDescription}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
1155	`multiline`	Continues the surrounding declaration/expression or text: multiline. Read it with the preceding opening statement (onChange={setDescription}); it is not a standalone business operation.
1156	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (multiline); it is not a standalone business operation.
1157	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
1158	`title="Review ticket"`	Assigns the right-hand expression to the named variable/property: title="Review ticket". This is in-memory unless it is later persisted by an explicit call.
1159	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
1160	`onPress={() => {`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
1161	`if (!subject.trim() || !description.trim()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!subject.trim() || !description.trim()) {.

Line	Source code	Explanation / reading note
1162	`setNotice("Enter the subject and description.");`	Continues the surrounding declaration/expression or text: setNotice("Enter the subject and description.");. Read it with the preceding opening statement (if (!subject.trim() || !description.trim()) {); it is not a standalone business operation.
1163	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
1164	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1165	`setConfirm({`	Continues the surrounding declaration/expression or text: setConfirm({. Read it with the preceding opening statement (}); it is not a standalone business operation.
1166	`label: "Create support ticket",`	Sets/declares the named object property or style/type member: label: "Create support ticket",. Interpret it in the enclosing object, props or type definition.
1167	`path: "/tickets",`	Sets/declares the named object property or style/type member: path: "/tickets",. Interpret it in the enclosing object, props or type definition.
1168	`body: {`	Sets/declares the named object property or style/type member: body: {. Interpret it in the enclosing object, props or type definition.
1169	`subject: subject.trim(),`	Sets/declares the named object property or style/type member: subject: subject.trim(),. Interpret it in the enclosing object, props or type definition.
1170	`category,`	Continues the surrounding declaration/expression or text: category,. Read it with the preceding opening statement (subject: subject.trim(),); it is not a standalone business operation.
1171	`description: description.trim(),`	Sets/declares the named object property or style/type member: description: description.trim(),. Interpret it in the enclosing object, props or type definition.
1172	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1173	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1174	`}}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1175	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1176	`</Card>`	Closes the UI element/component opened above.
1177	`{rows("tickets").map((row) => (`	Transforms/selects/aggregates collection values with the callback shown here: {rows("tickets").map((row) => (. Read the callback body and result assignment together.
1178	`<Card key={row.Id}>`	Renders/opens a UI element or component: <Card key={row.Id}>. Props and child content below determine appearance and interactions.
1179	`<Text style={styles.heading}>`	Renders/opens a UI element or component: <Text style={styles.heading}>. Props and child content below determine appearance and interactions.
1180	`{row.Name} · {row.Status__c}`	Continues the surrounding declaration/expression or text: {row.Name} · {row.Status__c}. Read it with the preceding opening statement (<Text style={styles.heading}>); it is not a standalone business operation.
1181	`</Text>`	Closes the UI element/component opened above.
1182	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
1183	`{row.Category__c}: {row.Subject__c}`	Continues the surrounding declaration/expression or text: {row.Category__c}: {row.Subject__c}. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
1184	`</Text>`	Closes the UI element/component opened above.
1185	`<Text>{row.Description__c}</Text>`	Renders/opens a UI element or component: <Text>{row.Description__c}</Text>. Props and child content below determine appearance and interactions.
1186	`<Text style={styles.label}>`	Renders/opens a UI element or component: <Text style={styles.label}>. Props and child content below determine appearance and interactions.
1187	`Officer: {row.Officer__r?.Name || "Not assigned"} ·{" "}`	Sets/declares the named object property or style/type member: Officer: {row.Officer__r?.Name || "Not assigned"} ·{" "}. Interpret it in the enclosing object, props or type definition.
1188	`{row.Resolution__c || "Awaiting resolution"}`	Continues the surrounding declaration/expression or text: {row.Resolution__c || "Awaiting resolution"}. Read it with the preceding opening statement (Officer: {row.Officer__r?.Name || "Not assigned"} ·{" "}); it is not a standalone business operation.
1189	`</Text>`	Closes the UI element/component opened above.
1190	`</Card>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
1191	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1192	`<Text style={styles.heading}>Outlet tickets from SFA</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>Outlet tickets from SFA</Text>. Props and child content below determine appearance and interactions.
1193	`{rows("outletTickets").map((row) => (`	Transforms/selects/aggregates collection values with the callback shown here: {rows("outletTickets").map((row) => (. Read the callback body and result assignment together.
1194	`<Card key={row.Id}>`	Renders/opens a UI element or component: <Card key={row.Id}>. Props and child content below determine appearance and interactions.
1195	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
1196	`{row.Outlet__r?.Name}: {row.Subject__c}`	Continues the surrounding declaration/expression or text: {row.Outlet__r?.Name}: {row.Subject__c}. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
1197	`</Text>`	Closes the UI element/component opened above.
1198	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
1199	`{row.Status__c} · {row.Description__c}`	Continues the surrounding declaration/expression or text: {row.Status__c} · {row.Description__c}. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
1200	`</Text>`	Closes the UI element/component opened above.
1201	`</Card>`	Closes the UI element/component opened above.
1202	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1203	`</>`	Closes the UI element/component opened above.
1204	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1205	`{tab === "Outlets" &&`	Continues the surrounding declaration/expression or text: {tab === "Outlets" &&. Read it with the preceding opening statement ( )}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
1206	`rows("outlets").map((row) => (`	Transforms/selects/aggregates collection values with the callback shown here: rows("outlets").map((row) => (. Read the callback body and result assignment together.
1207	`<Card key={row.Id}>`	Renders/opens a UI element or component: <Card key={row.Id}>. Props and child content below determine appearance and interactions.
1208	`<Text style={styles.heading}>{row.Name}</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>{row.Name}</Text>. Props and child content below determine appearance and interactions.
1209	`<Text>Beat: {row.Beat__r?.Name || "Not assigned"}</Text>`	Renders/opens a UI element or component: <Text>Beat: {row.Beat__r?.Name || "Not assigned"}</Text>. Props and child content below determine appearance and interactions.
1210	`<Text>{row.Active__c ? "Active" : "Inactive"}</Text>`	Renders/opens a UI element or component: <Text>{row.Active__c ? "Active" : "Inactive"}</Text>. Props and child content below determine appearance and interactions.
1211	`</Card>`	Closes the UI element/component opened above.
1212	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1213	`{tab === "Stock checks" &&`	Continues the surrounding declaration/expression or text: {tab === "Stock checks" &&. Read it with the preceding opening statement ( ))}); it is not a standalone business operation.
1214	`rows("stockChecks").map((row) => (`	Transforms/selects/aggregates collection values with the callback shown here: rows("stockChecks").map((row) => (. Read the callback body and result assignment together.
1215	`<Card key={row.Id}>`	Renders/opens a UI element or component: <Card key={row.Id}>. Props and child content below determine appearance and interactions.
1216	`<Text style={styles.heading}>{row.Outlet__r?.Name}</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>{row.Outlet__r?.Name}</Text>. Props and child content below determine appearance and interactions.
1217	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
1218	`{row.Product__r?.Name}: {row.Quantity__c} pieces`	Continues the surrounding declaration/expression or text: {row.Product__r?.Name}: {row.Quantity__c} pieces. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
1219	`</Text>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
1220	`<Text>{new Date(row.CreatedDate).toLocaleString()}</Text>`	Renders/opens a UI element or component: <Text>{new Date(row.CreatedDate).toLocaleString()}</Text>. Props and child content below determine appearance and interactions.
1221	`</Card>`	Closes the UI element/component opened above.
1222	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1223	`{tab === "Sync" && (`	Continues the surrounding declaration/expression or text: {tab === "Sync" && (. Read it with the preceding opening statement ( ))}); it is not a standalone business operation.
1224	`<Card>`	Renders/opens a UI element or component: <Card>. Props and child content below determine appearance and interactions.
1225	`<Text style={styles.heading}>Pending changes: {pending.length}</Text>`	Renders/opens a UI element or component: <Text style={styles.heading}>Pending changes: {pending.length}</Text>. Props and child content below determine appearance and interactions.
1226	`{pending.map((row) => (`	Transforms/selects/aggregates collection values with the callback shown here: {pending.map((row) => (. Read the callback body and result assignment together.
1227	`<View key={row.key}>`	Renders/opens a UI element or component: <View key={row.key}>. Props and child content below determine appearance and interactions.
1228	`<Text style={styles.label}>{row.label}</Text>`	Renders/opens a UI element or component: <Text style={styles.label}>{row.label}</Text>. Props and child content below determine appearance and interactions.
1229	`<Text>{row.error || "Waiting for connection"}</Text>`	Renders/opens a UI element or component: <Text>{row.error || "Waiting for connection"}</Text>. Props and child content below determine appearance and interactions.
1230	`{row.status === 400 && (`	Continues the surrounding declaration/expression or text: {row.status === 400 && (. Read it with the preceding opening statement (<Text>{row.error || "Waiting for connection"}</Text>); it is not a standalone business operation.
1231	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
1232	`title="Remove rejected request — then correct and resubmit"`	Assigns the right-hand expression to the named variable/property: title="Remove rejected request - then correct and resubmit". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
1233	`secondary`	Continues the surrounding declaration/expression or text: secondary. Read it with the preceding opening statement (title="Remove rejected request - then correct and resubmit"); it is not a standalone business operation.
1234	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
1235	`onPress={() =>`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
1236	`void (async () => {`	Continues the surrounding declaration/expression or text: void (async () => {. Read it with the preceding opening statement (onPress={() =>); it is not a standalone business operation.
1237	`const remaining = (await readPending(session.id)).filter(`	Waits for this asynchronous operation before continuing: const remaining = (await readPending(session.id)).filter(. The returned result/error must still be handled.
1238	`(item) => item.key !== row.key,`	Continues the surrounding declaration/expression or text: (item) => item.key !== row.key,. Read it with the preceding opening statement (const remaining = (await readPending(session.id)).filter(); it is not a standalone business operation.
1239	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1240	`await savePending(session.id, remaining);`	Waits for this asynchronous operation before continuing: await savePending(session.id, remaining);. The returned result/error must still be handled.
1241	`setPending(remaining);`	Continues the surrounding declaration/expression or text: setPending(remaining);. Read it with the preceding opening statement (await savePending(session.id, remaining);); it is not a standalone business operation.
1242	`setNotice(`	Continues the surrounding declaration/expression or text: setNotice(. Read it with the preceding opening statement (setPending(remaining);); it is not a standalone business operation.
1243	`"Removed only the request Salesforce rejected. No Salesforce record was deleted.",`	Continues the surrounding declaration/expression or text: "Removed only the request Salesforce rejected. No Salesforce record was deleted.",. Read it with the preceding opening statement (setNotice(); it is not a standalone business operation.
1244	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1245	`})()`	Continues the surrounding declaration/expression or text: })(). Read it with the preceding opening statement ( );); it is not a standalone business operation.
1246	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1247	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}); it is not a standalone business operation.
1248	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1249	`</View>`	Closes the UI element/component opened above.
1250	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1251	`<Text>`	Renders/opens a UI element or component: <Text>. Props and child content below determine appearance and interactions.
1252	`Queued work is scoped to your distributor. A rejected request remains here for`	Continues the surrounding declaration/expression or text: Queued work is scoped to your distributor. A rejected request remains here for. Read it with the preceding opening statement (<Text>); it is not a standalone business operation.
1253	`review; it is never shown as saved in Salesforce.`	Continues the surrounding declaration/expression or text: review; it is never shown as saved in Salesforce.. Read it with the preceding opening statement (Queued work is scoped to your distributor. A rejected request remains here for); it is not a standalone business operation.
1254	`</Text>`	Closes the UI element/component opened above.
1255	`{offline && (`	Continues the surrounding declaration/expression or text: {offline && (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
1256	`<Button`	Renders/opens a UI element or component: <Button. Props and child content below determine appearance and interactions.
1257	`title="Sign in again"`	Assigns the right-hand expression to the named variable/property: title="Sign in again". This is in-memory unless it is later persisted by an explicit call.
1258	`disabled={busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.

Line	Source code	Explanation / reading note
1259	`onPress={() => setNeedsSignIn(true)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
1260	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onPress={() => setNeedsSignIn(true)}); it is not a standalone business operation.
1261	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1262	`</Card>`	Closes the UI element/component opened above.
1263	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1264	`{!data && (`	Continues the surrounding declaration/expression or text: {!data && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
1265	`<Text style={styles.notice}>`	Renders/opens a UI element or component: <Text style={styles.notice}>. Props and child content below determine appearance and interactions.
1266	`No Salesforce snapshot is available yet. Sign-in and the first data download`	Continues the surrounding declaration/expression or text: No Salesforce snapshot is available yet. Sign-in and the first data download. Read it with the preceding opening statement (<Text style={styles.notice}>); it is not a standalone business operation.
1267	`require a connection.`	Continues the surrounding declaration/expression or text: require a connection.. Read it with the preceding opening statement (No Salesforce snapshot is available yet. Sign-in and the first data download); it is not a standalone business operation.
1268	`</Text>`	Closes the UI element/component opened above.
1269	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1270	`</>`	Closes the UI element/component opened above.
1271	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1272	`</ScrollView>`	Closes the UI element/component opened above.
1273	`</PortalFrame>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
1274	`    </SafeAreaView>`	Closes the UI element/component opened above.
1275	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1276	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1277		Blank line separating logical sections; no executable operation.
1278	`const styles = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const styles = StyleSheet.create({. Collection contents and assignments below determine its purpose.
1279	`  safe: { flex: 1, backgroundColor: "#F4F9F5" },`	Sets/declares the named object property or style/type member: safe: { flex: 1, backgroundColor: "#F4F9F5" },. Interpret it in the enclosing object, props or type definition.
1280	`  page: {`	Sets/declares the named object property or style/type member: page: {. Interpret it in the enclosing object, props or type definition.
1281	`    padding: 14,`	Sets/declares the named object property or style/type member: padding: 14,. Interpret it in the enclosing object, props or type definition.
1282	`    width: "100%",`	Sets/declares the named object property or style/type member: width: "100%",. Interpret it in the enclosing object, props or type definition.
1283	`    paddingBottom: 24,`	Sets/declares the named object property or style/type member: paddingBottom: 24,. Interpret it in the enclosing object, props or type definition.
1284	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1285	`  header: {`	Sets/declares the named object property or style/type member: header: {. Interpret it in the enclosing object, props or type definition.
1286	`    padding: 20,`	Sets/declares the named object property or style/type member: padding: 20,. Interpret it in the enclosing object, props or type definition.
1287	`    backgroundColor: colors.navy,`	Sets/declares the named object property or style/type member: backgroundColor: colors.navy,. Interpret it in the enclosing object, props or type definition.
1288	`    borderTopLeftRadius: 8,`	Sets/declares the named object property or style/type member: borderTopLeftRadius: 8,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1289	`    borderTopRightRadius: 28,`	Sets/declares the named object property or style/type member: borderTopRightRadius: 28,. Interpret it in the enclosing object, props or type definition.
1290	`    borderBottomLeftRadius: 28,`	Sets/declares the named object property or style/type member: borderBottomLeftRadius: 28,. Interpret it in the enclosing object, props or type definition.
1291	`    borderBottomRightRadius: 8,`	Sets/declares the named object property or style/type member: borderBottomRightRadius: 8,. Interpret it in the enclosing object, props or type definition.
1292	`    marginBottom: 16,`	Sets/declares the named object property or style/type member: marginBottom: 16,. Interpret it in the enclosing object, props or type definition.
1293	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1294	`  loginHero: { paddingTop: 26, paddingBottom: 42, borderRadius: 24 },`	Sets/declares the named object property or style/type member: loginHero: { paddingTop: 26, paddingBottom: 42, borderRadius: 24 },. Interpret it in the enclosing object, props or type definition.
1295	`  loginCard: { marginTop: -32, marginHorizontal: 8 },`	Sets/declares the named object property or style/type member: loginCard: { marginTop: -32, marginHorizontal: 8 },. Interpret it in the enclosing object, props or type definition.
1296	`  logo: {`	Sets/declares the named object property or style/type member: logo: {. Interpret it in the enclosing object, props or type definition.
1297	`    width: 56,`	Sets/declares the named object property or style/type member: width: 56,. Interpret it in the enclosing object, props or type definition.
1298	`    height: 56,`	Sets/declares the named object property or style/type member: height: 56,. Interpret it in the enclosing object, props or type definition.
1299	`    borderRadius: 18,`	Sets/declares the named object property or style/type member: borderRadius: 18,. Interpret it in the enclosing object, props or type definition.
1300	`    backgroundColor: "#16734B",`	Sets/declares the named object property or style/type member: backgroundColor: "#16734B",. Interpret it in the enclosing object, props or type definition.
1301	`    justifyContent: "center",`	Sets/declares the named object property or style/type member: justifyContent: "center",. Interpret it in the enclosing object, props or type definition.
1302	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1303	`    marginBottom: 20,`	Sets/declares the named object property or style/type member: marginBottom: 20,. Interpret it in the enclosing object, props or type definition.
1304	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1305	`  logoText: { color: colors.white, fontSize: 18, fontWeight: "900" },`	Sets/declares the named object property or style/type member: logoText: { color: colors.white, fontSize: 18, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
1306	`  heroFooter: {`	Sets/declares the named object property or style/type member: heroFooter: {. Interpret it in the enclosing object, props or type definition.
1307	`    borderTopWidth: 1,`	Sets/declares the named object property or style/type member: borderTopWidth: 1,. Interpret it in the enclosing object, props or type definition.
1308	`    borderColor: "#34635E",`	Sets/declares the named object property or style/type member: borderColor: "#34635E",. Interpret it in the enclosing object, props or type definition.
1309	`    marginTop: 16,`	Sets/declares the named object property or style/type member: marginTop: 16,. Interpret it in the enclosing object, props or type definition.
1310	`    paddingTop: 12,`	Sets/declares the named object property or style/type member: paddingTop: 12,. Interpret it in the enclosing object, props or type definition.
1311	`    gap: 10,`	Sets/declares the named object property or style/type member: gap: 10,. Interpret it in the enclosing object, props or type definition.
1312	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1313	`  date: {`	Sets/declares the named object property or style/type member: date: {. Interpret it in the enclosing object, props or type definition.
1314	`    alignSelf: "flex-start",`	Sets/declares the named object property or style/type member: alignSelf: "flex-start",. Interpret it in the enclosing object, props or type definition.
1315	`    backgroundColor: colors.gold,`	Sets/declares the named object property or style/type member: backgroundColor: colors.gold,. Interpret it in the enclosing object, props or type definition.
1316	`    color: colors.navy,`	Sets/declares the named object property or style/type member: color: colors.navy,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1317	`padding: 7,`	Sets/declares the named object property or style/type member: padding: 7,. Interpret it in the enclosing object, props or type definition.
1318	`borderRadius: 8,`	Sets/declares the named object property or style/type member: borderRadius: 8,. Interpret it in the enclosing object, props or type definition.
1319	`fontSize: 11,`	Sets/declares the named object property or style/type member: fontSize: 11,. Interpret it in the enclosing object, props or type definition.
1320	`fontWeight: "700",`	Sets/declares the named object property or style/type member: fontWeight: "700",. Interpret it in the enclosing object, props or type definition.
1321	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1322	`security: {`	Sets/declares the named object property or style/type member: security: {. Interpret it in the enclosing object, props or type definition.
1323	`color: colors.muted,`	Sets/declares the named object property or style/type member: color: colors.muted,. Interpret it in the enclosing object, props or type definition.
1324	`fontSize: 12,`	Sets/declares the named object property or style/type member: fontSize: 12,. Interpret it in the enclosing object, props or type definition.
1325	`lineHeight: 18,`	Sets/declares the named object property or style/type member: lineHeight: 18,. Interpret it in the enclosing object, props or type definition.
1326	`textAlign: "center",`	Sets/declares the named object property or style/type member: textAlign: "center",. Interpret it in the enclosing object, props or type definition.
1327	`marginTop: 20,`	Sets/declares the named object property or style/type member: marginTop: 20,. Interpret it in the enclosing object, props or type definition.
1328	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1329	`copy: { color: colors.muted, fontSize: 14, lineHeight: 21, marginBottom: 8 },`	Sets/declares the named object property or style/type member: copy: { color: colors.muted, fontSize: 14, lineHeight: 21, marginBottom: 8 },. Interpret it in the enclosing object, props or type definition.
1330	`smallCopy: {`	Sets/declares the named object property or style/type member: smallCopy: {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1331	`    color: colors.muted,`	Sets/declares the named object property or style/type member: color: colors.muted,. Interpret it in the enclosing object, props or type definition.
1332	`    fontSize: 12,`	Sets/declares the named object property or style/type member: fontSize: 12,. Interpret it in the enclosing object, props or type definition.
1333	`    lineHeight: 18,`	Sets/declares the named object property or style/type member: lineHeight: 18,. Interpret it in the enclosing object, props or type definition.
1334	`    marginTop: 14,`	Sets/declares the named object property or style/type member: marginTop: 14,. Interpret it in the enclosing object, props or type definition.
1335	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1336	`  screenTitle: {`	Sets/declares the named object property or style/type member: screenTitle: {. Interpret it in the enclosing object, props or type definition.
1337	`    color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
1338	`    fontSize: 23,`	Sets/declares the named object property or style/type member: fontSize: 23,. Interpret it in the enclosing object, props or type definition.
1339	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
1340	`    marginBottom: 8,`	Sets/declares the named object property or style/type member: marginBottom: 8,. Interpret it in the enclosing object, props or type definition.
1341	`    marginTop: 8,`	Sets/declares the named object property or style/type member: marginTop: 8,. Interpret it in the enclosing object, props or type definition.
1342	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1343	`  syncBar: {`	Sets/declares the named object property or style/type member: syncBar: {. Interpret it in the enclosing object, props or type definition.
1344	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1345	`alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
1346	`backgroundColor: "#E7F4EB",`	Sets/declares the named object property or style/type member: backgroundColor: "#E7F4EB",. Interpret it in the enclosing object, props or type definition.
1347	`borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
1348	`paddingLeft: 12,`	Sets/declares the named object property or style/type member: paddingLeft: 12,. Interpret it in the enclosing object, props or type definition.
1349	`marginBottom: 14,`	Sets/declares the named object property or style/type member: marginBottom: 14,. Interpret it in the enclosing object, props or type definition.
1350	`gap: 6,`	Sets/declares the named object property or style/type member: gap: 6,. Interpret it in the enclosing object, props or type definition.
1351	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1352	`syncText: {`	Sets/declares the named object property or style/type member: syncText: {. Interpret it in the enclosing object, props or type definition.
1353	`flex: 1,`	Sets/declares the named object property or style/type member: flex: 1,. Interpret it in the enclosing object, props or type definition.
1354	`color: colors.muted,`	Sets/declares the named object property or style/type member: color: colors.muted,. Interpret it in the enclosing object, props or type definition.
1355	`fontSize: 11,`	Sets/declares the named object property or style/type member: fontSize: 11,. Interpret it in the enclosing object, props or type definition.
1356	`lineHeight: 17,`	Sets/declares the named object property or style/type member: lineHeight: 17,. Interpret it in the enclosing object, props or type definition.
1357	`paddingVertical: 10,`	Sets/declares the named object property or style/type member: paddingVertical: 10,. Interpret it in the enclosing object, props or type definition.
1358	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1359	`  refresh: { padding: 12, minHeight: 44, justifyContent: "center" },`	Sets/declares the named object property or style/type member: refresh: { padding: 12, minHeight: 44, justifyContent: "center" },. Interpret it in the enclosing object, props or type definition.
1360	`  refreshText: { color: colors.brand, fontSize: 12, fontWeight: "800" },`	Sets/declares the named object property or style/type member: refreshText: { color: colors.brand, fontSize: 12, fontWeight: "800" },. Interpret it in the enclosing object, props or type definition.
1361	`  metricGrid: {`	Sets/declares the named object property or style/type member: metricGrid: {. Interpret it in the enclosing object, props or type definition.
1362	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
1363	`    flexWrap: "wrap",`	Sets/declares the named object property or style/type member: flexWrap: "wrap",. Interpret it in the enclosing object, props or type definition.
1364	`    justifyContent: "space-between",`	Sets/declares the named object property or style/type member: justifyContent: "space-between",. Interpret it in the enclosing object, props or type definition.
1365	`    rowGap: 12,`	Sets/declares the named object property or style/type member: rowGap: 12,. Interpret it in the enclosing object, props or type definition.
1366	`    marginVertical: 12,`	Sets/declares the named object property or style/type member: marginVertical: 12,. Interpret it in the enclosing object, props or type definition.
1367	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1368	`  sectionLabel: {`	Sets/declares the named object property or style/type member: sectionLabel: {. Interpret it in the enclosing object, props or type definition.
1369	`    color: colors.muted,`	Sets/declares the named object property or style/type member: color: colors.muted,. Interpret it in the enclosing object, props or type definition.
1370	`    fontSize: 10,`	Sets/declares the named object property or style/type member: fontSize: 10,. Interpret it in the enclosing object, props or type definition.
1371	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1372	`    letterSpacing: 0.4,`	Declares/initializes local data used by the surrounding operation: letterSpacing: 0.4,. Collection contents and assignments below determine its purpose.
1373	`    marginBottom: 8,`	Sets/declares the named object property or style/type member: marginBottom: 8,. Interpret it in the enclosing object, props or type definition.
1374	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1375	`  amount: {`	Sets/declares the named object property or style/type member: amount: {. Interpret it in the enclosing object, props or type definition.
1376	`    color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
1377	`    fontSize: 28,`	Sets/declares the named object property or style/type member: fontSize: 28,. Interpret it in the enclosing object, props or type definition.
1378	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
1379	`    marginBottom: 12,`	Sets/declares the named object property or style/type member: marginBottom: 12,. Interpret it in the enclosing object, props or type definition.
1380	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1381	`  financeRow: {`	Sets/declares the named object property or style/type member: financeRow: {. Interpret it in the enclosing object, props or type definition.
1382	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
1383	`    borderTopWidth: 1,`	Sets/declares the named object property or style/type member: borderTopWidth: 1,. Interpret it in the enclosing object, props or type definition.
1384	`    borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
1385	`    paddingTop: 16,`	Sets/declares the named object property or style/type member: paddingTop: 16,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1386	`    gap: 12,`	Sets/declares the named object property or style/type member: gap: 12,. Interpret it in the enclosing object, props or type definition.
1387	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1388	`  financeColumn: { flex: 1 },`	Sets/declares the named object property or style/type member: financeColumn: { flex: 1 },. Interpret it in the enclosing object, props or type definition.
1389	`  financeValue: { color: colors.brand, fontSize: 17, fontWeight: "800" },`	Sets/declares the named object property or style/type member: financeValue: { color: colors.brand, fontSize: 17, fontWeight: "800" },. Interpret it in the enclosing object, props or type definition.
1390	`  eyebrow: {`	Sets/declares the named object property or style/type member: eyebrow: {. Interpret it in the enclosing object, props or type definition.
1391	`    color: "#9DD9C9",`	Sets/declares the named object property or style/type member: color: "#9DD9C9",. Interpret it in the enclosing object, props or type definition.
1392	`    fontSize: 11,`	Sets/declares the named object property or style/type member: fontSize: 11,. Interpret it in the enclosing object, props or type definition.
1393	`    fontWeight: "800",`	Sets/declares the named object property or style/type member: fontWeight: "800",. Interpret it in the enclosing object, props or type definition.
1394	`    letterSpacing: 1.2,`	Declares/initializes local data used by the surrounding operation: letterSpacing: 1.2,. Collection contents and assignments below determine its purpose.
1395	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1396	`  title: {`	Sets/declares the named object property or style/type member: title: {. Interpret it in the enclosing object, props or type definition.
1397	`    color: "white",`	Sets/declares the named object property or style/type member: color: "white",. Interpret it in the enclosing object, props or type definition.
1398	`    fontSize: 28,`	Sets/declares the named object property or style/type member: fontSize: 28,. Interpret it in the enclosing object, props or type definition.
1399	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1400	`    marginVertical: 10,`	Sets/declares the named object property or style/type member: marginVertical: 10,. Interpret it in the enclosing object, props or type definition.
1401	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1402	`  white: { color: "#D8EEE8", fontSize: 13, lineHeight: 20 },`	Sets/declares the named object property or style/type member: white: { color: "#D8EEE8", fontSize: 13, lineHeight: 20 },. Interpret it in the enclosing object, props or type definition.
1403	`  card: {`	Sets/declares the named object property or style/type member: card: {. Interpret it in the enclosing object, props or type definition.
1404	`    backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
1405	`    padding: 20,`	Sets/declares the named object property or style/type member: padding: 20,. Interpret it in the enclosing object, props or type definition.
1406	`    borderRadius: 14,`	Sets/declares the named object property or style/type member: borderRadius: 14,. Interpret it in the enclosing object, props or type definition.
1407	`    marginVertical: 10,`	Sets/declares the named object property or style/type member: marginVertical: 10,. Interpret it in the enclosing object, props or type definition.
1408	`    shadowColor: colors.navy,`	Sets/declares the named object property or style/type member: shadowColor: colors.navy,. Interpret it in the enclosing object, props or type definition.
1409	`    shadowOpacity: 0.06,`	Sets/declares the named object property or style/type member: shadowOpacity: 0.06,. Interpret it in the enclosing object, props or type definition.
1410	`    shadowRadius: 10,`	Sets/declares the named object property or style/type member: shadowRadius: 10,. Interpret it in the enclosing object, props or type definition.
1411	`    shadowOffset: { width: 0, height: 3 },`	Sets/declares the named object property or style/type member: shadowOffset: { width: 0, height: 3 },. Interpret it in the enclosing object, props or type definition.
1412	`    elevation: 2,`	Sets/declares the named object property or style/type member: elevation: 2,. Interpret it in the enclosing object, props or type definition.
1413	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1414	`  heading: {`	Sets/declares the named object property or style/type member: heading: {. Interpret it in the enclosing object, props or type definition.
1415	`    fontSize: 20,`	Sets/declares the named object property or style/type member: fontSize: 20,. Interpret it in the enclosing object, props or type definition.
1416	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
1417	`    color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
1418	`    marginBottom: 10,`	Sets/declares the named object property or style/type member: marginBottom: 10,. Interpret it in the enclosing object, props or type definition.
1419	`    marginTop: 10,`	Sets/declares the named object property or style/type member: marginTop: 10,. Interpret it in the enclosing object, props or type definition.
1420	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1421	`  label: {`	Sets/declares the named object property or style/type member: label: {. Interpret it in the enclosing object, props or type definition.
1422	`    marginTop: 14,`	Sets/declares the named object property or style/type member: marginTop: 14,. Interpret it in the enclosing object, props or type definition.
1423	`    marginBottom: 7,`	Sets/declares the named object property or style/type member: marginBottom: 7,. Interpret it in the enclosing object, props or type definition.
1424	`    color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
1425	`    fontSize: 13,`	Sets/declares the named object property or style/type member: fontSize: 13,. Interpret it in the enclosing object, props or type definition.
1426	`    fontWeight: "700",`	Sets/declares the named object property or style/type member: fontWeight: "700",. Interpret it in the enclosing object, props or type definition.
1427	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
1428	`  input: {`	Sets/declares the named object property or style/type member: input: {. Interpret it in the enclosing object, props or type definition.
1429	`    padding: 14,`	Sets/declares the named object property or style/type member: padding: 14,. Interpret it in the enclosing object, props or type definition.
1430	`    borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
1431	`    borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
1432	`    borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
1433	`    color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
1434	`    fontSize: 16,`	Sets/declares the named object property or style/type member: fontSize: 16,. Interpret it in the enclosing object, props or type definition.
1435	`    minHeight: 52,`	Sets/declares the named object property or style/type member: minHeight: 52,. Interpret it in the enclosing object, props or type definition.
1436	`    backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
1437	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1438	`  button: {`	Sets/declares the named object property or style/type member: button: {. Interpret it in the enclosing object, props or type definition.
1439	`    padding: 15,`	Sets/declares the named object property or style/type member: padding: 15,. Interpret it in the enclosing object, props or type definition.
1440	`    minHeight: 48,`	Sets/declares the named object property or style/type member: minHeight: 48,. Interpret it in the enclosing object, props or type definition.
1441	`    borderRadius: 14,`	Sets/declares the named object property or style/type member: borderRadius: 14,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1442	`backgroundColor: colors.brand,`	Sets/declares the named object property or style/type member: backgroundColor: colors.brand,. Interpret it in the enclosing object, props or type definition.
1443	`marginTop: 12,`	Sets/declares the named object property or style/type member: marginTop: 12,. Interpret it in the enclosing object, props or type definition.
1444	`alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
1445	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1446	`secondary: {`	Sets/declares the named object property or style/type member: secondary: {. Interpret it in the enclosing object, props or type definition.
1447	`backgroundColor: colors.white,`	Sets/declares the named object property or style/type member: backgroundColor: colors.white,. Interpret it in the enclosing object, props or type definition.
1448	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
1449	`borderColor: colors.brand,`	Sets/declares the named object property or style/type member: borderColor: colors.brand,. Interpret it in the enclosing object, props or type definition.
1450	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1451	`buttonText: {`	Sets/declares the named object property or style/type member: buttonText: {. Interpret it in the enclosing object, props or type definition.
1452	`color: "white",`	Sets/declares the named object property or style/type member: color: "white",. Interpret it in the enclosing object, props or type definition.
1453	`fontWeight: "800",`	Sets/declares the named object property or style/type member: fontWeight: "800",. Interpret it in the enclosing object, props or type definition.
1454	`fontSize: 13,`	Sets/declares the named object property or style/type member: fontSize: 13,. Interpret it in the enclosing object, props or type definition.
1455	`textAlign: "center",`	Sets/declares the named object property or style/type member: textAlign: "center",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1456	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1457	`  notice: {`	Sets/declares the named object property or style/type member: notice: {. Interpret it in the enclosing object, props or type definition.
1458	`    padding: 14,`	Sets/declares the named object property or style/type member: padding: 14,. Interpret it in the enclosing object, props or type definition.
1459	`    backgroundColor: "#E7F4EB",`	Sets/declares the named object property or style/type member: backgroundColor: "#E7F4EB",. Interpret it in the enclosing object, props or type definition.
1460	`    color: "#173D2D",`	Sets/declares the named object property or style/type member: color: "#173D2D",. Interpret it in the enclosing object, props or type definition.
1461	`    marginBottom: 12,`	Sets/declares the named object property or style/type member: marginBottom: 12,. Interpret it in the enclosing object, props or type definition.
1462	`    lineHeight: 22,`	Sets/declares the named object property or style/type member: lineHeight: 22,. Interpret it in the enclosing object, props or type definition.
1463	`    borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
1464	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1465	`  tabs: { flexDirection: "row", flexWrap: "wrap", gap: 8, marginVertical: 10 },`	Sets/declares the named object property or style/type member: tabs: { flexDirection: "row", flexWrap: "wrap", gap: 8, marginVertical: 10 },. Interpret it in the enclosing object, props or type definition.
1466	`  tab: {`	Sets/declares the named object property or style/type member: tab: {. Interpret it in the enclosing object, props or type definition.
1467	`    padding: 12,`	Sets/declares the named object property or style/type member: padding: 12,. Interpret it in the enclosing object, props or type definition.
1468	`    minHeight: 44,`	Sets/declares the named object property or style/type member: minHeight: 44,. Interpret it in the enclosing object, props or type definition.
1469	`    borderRadius: 20,`	Sets/declares the named object property or style/type member: borderRadius: 20,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
1470	`    backgroundColor: colors.white,`	Sets/declares the named object property or style/type member: backgroundColor: colors.white,. Interpret it in the enclosing object, props or type definition.
1471	`    borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
1472	`    borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
1473	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
1474	`  selected: { backgroundColor: colors.brand, borderColor: colors.brand },`	Sets/declares the named object property or style/type member: selected: { backgroundColor: colors.brand, borderColor: colors.brand },. Interpret it in the enclosing object, props or type definition.
1475	`  metric: { fontSize: 17, color: "#23483d", marginVertical: 10 },`	Sets/declares the named object property or style/type member: metric: { fontSize: 17, color: "#23483d", marginVertical: 10 },. Interpret it in the enclosing object, props or type definition.
1476	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

dms-mobile/src/api.ts

DMS HTTP client: configured backend URL, DMS path prefix, bearer token, timeout, JSON envelope validation and recoverable network errors.

49 numbered source lines | SHA-256 abf10b8828ad636fc455ddb80cd09a7e6edaa5fd6f7069f7cc89de5d650ea6b8

Line	Source code	Explanation / reading note
1	`import { Platform } from "react-native";`	Imports dependencies/types used below: import { Platform } from "react-native";. Importing a function does not call it.
2	`const configured = process.env.EXPO_PUBLIC_API_URL;`	Declares/initializes local data used by the surrounding operation: const configured = process.env.EXPO_PUBLIC_API_URL;. Collection contents and assignments below determine its purpose.
3	`const base = configured || (Platform.OS === "web" ? "http://localhost:4000/api" : "");`	Declares/initializes local data used by the surrounding operation: const base = configured || (Platform.OS === "web" ? "http://localhost:4000/api" : "");. Collection contents and assignments below determine its purpose.
4	`export class ApiError extends Error {`	Declares a class/type: export class ApiError extends Error {. Members below hold behavior and/or state.
5	`  constructor(`	Declares/initializes local data used by the surrounding operation: constructor(. Collection contents and assignments below determine its purpose.
6	`    message: string,`	Sets/declares the named object property or style/type member: message: string,. Interpret it in the enclosing object, props or type definition.
7	`    public status: number,`	Continues the surrounding declaration/expression or text: public status: number,. Read it with the preceding opening statement (message: string,); it is not a standalone business operation.
8	`  ) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (public status: number,); it is not a standalone business operation.
9	`    super(message);`	Continues the surrounding declaration/expression or text: super(message);. Read it with the preceding opening statement ( ) {); it is not a standalone business operation.
10	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
11	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
12	`export async function request(path: string, token = "", body?: unknown) {`	Declares a callable function/method: export async function request(path: string, token = "", body?: unknown) {. Parameters supply its inputs; the following block implements the operation.
13	`  if (!base)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!base).
14	`    throw new ApiError(`	Stops this execution path with a validation/error exception: throw new ApiError(. The caller/catch block decides how it is reported.
15	`      "This APK needs a reachable HTTPS backend URL. Localhost on a phone points to the phone, not your computer.",`	Continues the surrounding declaration/expression or text: "This APK needs a reachable HTTPS backend URL. Localhost on a phone points to the phone, not your computer.",. Read it with the preceding opening statement (throw new ApiError(); it is not a standalone business operation.
16	`      503,`	Continues the surrounding declaration/expression or text: 503,. Read it with the preceding opening statement ("This APK needs a reachable HTTPS backend URL. Localhost on a phone points to the phone, not your computer.",); it is not a standalone business operation.
17	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`  if (Platform.OS !== "web" && !base.startsWith("https://"))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (Platform.OS !== "web" && !base.startsWith("https://")).
19	`    throw new ApiError("Use an HTTPS API URL for the mobile build.", 503);`	Stops this execution path with a validation/error exception: throw new ApiError("Use an HTTPS API URL for the mobile build.", 503);. The caller/catch block decides how it is reported.
20	`  const controller = new AbortController();`	Declares/initializes local data used by the surrounding operation: const controller = new AbortController();. Collection contents and assignments below determine its purpose.
21	`  const timer = setTimeout(() => controller.abort(), 30000);`	Schedules periodic/delayed work. The delay and cleanup determine refresh/retry behavior; it is not immediate server push.
22	`  try {`	Starts operations whose failure is handled by the following catch/finally blocks.
23	`    const response = await fetch(`${base}/dms${path}`, {`	Invokes the external-data boundary: const response = await fetch(`${base}/dms${path}`, {. Await/result checks determine whether the operation is confirmed.
24	`      method: body ? "POST" : "GET",`	Sets/declares the named object property or style/type member: method: body ? "POST" : "GET",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
25	`signal: controller.signal,`	Sets/declares the named object property or style/type member: signal: controller.signal,. Interpret it in the enclosing object, props or type definition.
26	`headers: {`	Sets/declares the named object property or style/type member: headers: {. Interpret it in the enclosing object, props or type definition.
27	`"Content-Type": "application/json",`	Continues the surrounding declaration/expression or text: "Content-Type": "application/json",. Read it with the preceding opening statement (headers: {); it is not a standalone business operation.
28	`...(token ? { Authorization: `Bearer ${token}` } : {}),`	Continues the surrounding declaration/expression or text: ...(token ? { Authorization: `Bearer ${token}` } : {}),. Read it with the preceding opening statement ("Content-Type": "application/json",); it is not a standalone business operation.
29	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`...(body ? { body: JSON.stringify(body) } : {}),`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
31	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`const json = await response.json().catch(() => null);`	Waits for this asynchronous operation before continuing: const json = await response.json().catch(() => null);. The returned result/error must still be handled.
33	`if (!response.ok || !json?.success)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!response.ok || !json?.success).
34	`throw new ApiError(`	Stops this execution path with a validation/error exception: throw new ApiError(. The caller/catch block decides how it is reported.
35	`json?.message ||`	Continues the surrounding declaration/expression or text: json?.message ||. Read it with the preceding opening statement (throw new ApiError(); it is not a standalone business operation.
36	`"The server returned an unreadable response. Your pending work is retained.",`	Continues the surrounding declaration/expression or text: "The server returned an unreadable response. Your pending work is retained.",. Read it with the preceding opening statement (json?.message ||); it is not a standalone business operation.
37	`response.status,`	Continues the surrounding declaration/expression or text: response.status,. Read it with the preceding opening statement ("The server returned an unreadable response. Your pending work is retained.",); it is not a standalone business operation.

Line	Source code	Explanation / reading note
38	`      );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	`    return json.data;`	Returns json.data to the caller (or begins returned UI markup) and ends this execution path.
40	`  } catch (error) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
41	`    if (error instanceof ApiError) throw error;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (error instanceof ApiError) throw error;.
42	`    throw new ApiError(`	Stops this execution path with a validation/error exception: throw new ApiError(. The caller/catch block decides how it is reported.
43	`      "Cannot reach the server. Showing saved data; pending changes remain on this device.",`	Continues the surrounding declaration/expression or text: "Cannot reach the server. Showing saved data; pending changes remain on this device.",. Read it with the preceding opening statement (throw new ApiError(); it is not a standalone business operation.
44	`      0,`	Continues the surrounding declaration/expression or text: 0,. Read it with the preceding opening statement ("Cannot reach the server. Showing saved data; pending changes remain on this device.",); it is not a standalone business operation.
45	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
46	`  } finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
47	`    clearTimeout(timer);`	Cancels a timer/listener to prevent stale updates after cleanup or screen changes.
48	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

dms-mobile/src/components/BrandLogo.tsx

Presents the supplied Nestlé asset with predictable contain sizing. It does not alter credentials or data ownership.

14 numbered source lines | SHA-256 a822cb97392aefcc76a6e23a19119b91aaf87fd3b04b172fd8b4ab99ba802ba8

Line	Source code	Explanation / reading note
1	`import React from "react";`	Imports dependencies/types used below: import React from "react";. Importing a function does not call it.
2	`import { Image } from "react-native";`	Imports dependencies/types used below: import { Image } from "react-native";. Importing a function does not call it.
3		Blank line separating logical sections; no executable operation.
4	`// Use the supplied artwork unchanged, with space around the complete wordmark.`	Developer comment/documentation: Use the supplied artwork unchanged, with space around the complete wordmark. It is not executed.
5	`export default function BrandLogo({ width = 84 }: { width?: number }) {`	Declares a callable function/method: export default function BrandLogo({ width = 84 }: { width?: number }) {. Parameters supply its inputs; the following block implements the operation.
6	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
7	`    <Image`	Renders/opens a UI element or component: <Image. Props and child content below determine appearance and interactions.
8	`      source={require("../../assets/nestle-logo.png")}`	Assigns the right-hand expression to the named variable/property: source={require("../../assets/nestle-logo.png")}. This is in-memory unless it is later persisted by an explicit call.
9	`      accessibilityLabel="Nestlé logo"`	Assigns the right-hand expression to the named variable/property: accessibilityLabel="Nestlé logo". This is in-memory unless it is later persisted by an explicit call.
10	`      resizeMode="contain"`	Assigns the right-hand expression to the named variable/property: resizeMode="contain". This is in-memory unless it is later persisted by an explicit call.
11	`      style={{ width, height: (width * 138) / 246, backgroundColor: "white", borderRadius: 4 }}`	Assigns the right-hand expression to the named variable/property: style={{ width, height: (width * 138) / 246, backgroundColor: "white", borderRadius: 4 }}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
12	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (style={{ width, height: (width * 138) / 246, backgroundColor: "white", borderRadius: 4 }}); it is not a standalone business operation.
13	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
14	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

dms-mobile/src/components/ManagementReports.tsx

Renders calculated report data, periods and missing-target states. The web branch hides sales-vs-target; underlying query logic is separate.

230 numbered source lines | SHA-256 86c9f85a7516518d0640f8de4b842188e8eb1ee70d8b4ab12a31ccbcb5c4a837

Line	Source code	Explanation / reading note
1	`import React from "react";`	Imports dependencies/types used below: import React from "react";. Importing a function does not call it.
2	`import { View, Text, Pressable, StyleSheet, Platform } from "react-native";`	Imports dependencies/types used below: import { View, Text, Pressable, StyleSheet, Platform } from "react-native";. Importing a function does not call it.
3	`import { colors as c } from "../theme";`	Imports dependencies/types used below: import { colors as c } from "../theme";. Importing a function does not call it.
4	`const money = (value: number) =>`	Declares/initializes local data used by the surrounding operation: const money = (value: number) =>. Collection contents and assignments below determine its purpose.
5	`  `₹${Number(value || 0).toLocaleString("en-IN", { maximumFractionDigits: 2 })}`;`	Continues the surrounding declaration/expression or text: `₹${Number(value || 0).toLocaleString("en-IN", { maximumFractionDigits: 2 })}`;. Read it with the preceding opening statement (const money = (value: number) =>); it is not a standalone business operation.
6	`const rate = (value: number | null) => (value === null ? "—" : `${value}%`);`	Declares/initializes local data used by the surrounding operation: const rate = (value: number | null) => (value === null ? " - " : `${value}%`);. Collection contents and assignments below determine its purpose.
7	`function Progress({ value }: { value: number | null }) {`	Declares a callable function/method: function Progress({ value }: { value: number | null }) {. Parameters supply its inputs; the following block implements the operation.
8	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
9	`    <View style={s.track}>`	Renders/opens a UI element or component: <View style={s.track}>. Props and child content below determine appearance and interactions.
10	`      <View style={[s.fill, { width: `${Math.min(100, Math.max(0, value || 0))}%` }]} />`	Renders/opens a UI element or component: <View style={[s.fill, { width: `${Math.min(100, Math.max(0, value || 0))}%` }]} />. Props and child content below determine appearance and interactions.
11	`    </View>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
12	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
14	`export default function ManagementReports({`	Declares a callable function/method: export default function ManagementReports({. Parameters supply its inputs; the following block implements the operation.
15	`  data,`	Continues the surrounding declaration/expression or text: data,. Read it with the preceding opening statement (export default function ManagementReports({); it is not a standalone business operation.
16	`  detailed = false,`	Assigns the right-hand expression to the named variable/property: detailed = false,. This is in-memory unless it is later persisted by an explicit call.
17	`  onOpen,`	Continues the surrounding declaration/expression or text: onOpen,. Read it with the preceding opening statement (detailed = false,); it is not a standalone business operation.
18	`}: {`	Continues the surrounding declaration/expression or text: }: {. Read it with the preceding opening statement (onOpen,); it is not a standalone business operation.
19	`  data?: any;`	Sets/declares the named object property or style/type member: data?: any;. Interpret it in the enclosing object, props or type definition.
20	`  detailed?: boolean;`	Sets/declares the named object property or style/type member: detailed?: boolean;. Interpret it in the enclosing object, props or type definition.
21	`  onOpen?: () => void;`	Sets/declares the named object property or style/type member: onOpen?: () => void;. Interpret it in the enclosing object, props or type definition.
22	`}) {`	Continues the surrounding declaration/expression or text: }) {. Read it with the preceding opening statement (onOpen?: () => void;); it is not a standalone business operation.
23	`  if (!data)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!data).
24	`    return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
25	`      <View style={s.card}>`	Renders/opens a UI element or component: <View style={s.card}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
26	`<Text style={s.title}>Dashboard and reports</Text>`	Renders/opens a UI element or component: <Text style={s.title}>Dashboard and reports</Text>. Props and child content below determine appearance and interactions.
27	`<Text style={s.muted}>`	Renders/opens a UI element or component: <Text style={s.muted}>. Props and child content below determine appearance and interactions.
28	`Reports have not loaded. Connect and sync to read Salesforce data.`	Continues the surrounding declaration/expression or text: Reports have not loaded. Connect and sync to read Salesforce data.. Read it with the preceding opening statement (<Text style={s.muted}>); it is not a standalone business operation.
29	`</Text>`	Closes the UI element/component opened above.
30	`</View>`	Closes the UI element/component opened above.
31	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`const { sales, beats, coverage, stock, period } = data;`	Declares/initializes local data used by the surrounding operation: const { sales, beats, coverage, stock, period } = data;. Collection contents and assignments below determine its purpose.
33	`// Sales vs target belongs in mobile, not the distributor web portal.`	Developer comment/documentation: Sales vs target belongs in mobile, not the distributor web portal. It is not executed.
34	`const showSalesTarget = Platform.OS !== "web";`	Declares/initializes local data used by the surrounding operation: const showSalesTarget = Platform.OS !== "web";. Collection contents and assignments below determine its purpose.
35	`const desktopSummary = Platform.OS === "web" && !detailed;`	Declares/initializes local data used by the surrounding operation: const desktopSummary = Platform.OS === "web" && !detailed;. Collection contents and assignments below determine its purpose.
36	`const reportCardStyle = [s.card, desktopSummary && s.desktopCard];`	Declares/initializes local data used by the surrounding operation: const reportCardStyle = [s.card, desktopSummary && s.desktopCard];. Collection contents and assignments below determine its purpose.
37	`const visited = beats.reduce((sum: number, row: any) => sum + row.visited, 0);`	Declares/initializes local data used by the surrounding operation: const visited = beats.reduce((sum: number, row: any) => sum + row.visited, 0);. Collection contents and assignments below determine its purpose.
38	`const planned = beats.reduce((sum: number, row: any) => sum + row.planned, 0);`	Declares/initializes local data used by the surrounding operation: const planned = beats.reduce((sum: number, row: any) => sum + row.planned, 0);. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
39	`  const productive = beats.reduce((sum: number, row: any) => sum + row.productive, 0);`	Declares/initializes local data used by the surrounding operation: const productive = beats.reduce((sum: number, row: any) => sum + row.productive, 0);. Collection contents and assignments below determine its purpose.
40	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
41	`    <View>`	Renders/opens a UI element or component: <View>. Props and child content below determine appearance and interactions.
42	`      <Text style={s.title}>Dashboard and reports</Text>`	Renders/opens a UI element or component: <Text style={s.title}>Dashboard and reports</Text>. Props and child content below determine appearance and interactions.
43	`      <Text style={s.muted}>`	Renders/opens a UI element or component: <Text style={s.muted}>. Props and child content below determine appearance and interactions.
44	`        {period.start} to {period.today} · India time`	Continues the surrounding declaration/expression or text: {period.start} to {period.today} · India time. Read it with the preceding opening statement (<Text style={s.muted}>); it is not a standalone business operation.
45	`      </Text>`	Closes the UI element/component opened above.
46	`      <Text style={s.small}>Calculated: {new Date(data.calculatedAt).toLocaleString()}</Text>`	Renders/opens a UI element or component: <Text style={s.small}>Calculated: {new Date(data.calculatedAt).toLocaleString()}</Text>. Props and child content below determine appearance and interactions.
47	`      <View style={desktopSummary && s.desktopGrid}>`	Renders/opens a UI element or component: <View style={desktopSummary && s.desktopGrid}>. Props and child content below determine appearance and interactions.
48	`        {showSalesTarget && (`	Continues the surrounding declaration/expression or text: {showSalesTarget && (. Read it with the preceding opening statement (<View style={desktopSummary && s.desktopGrid}>); it is not a standalone business operation.
49	`          <View style={reportCardStyle}>`	Renders/opens a UI element or component: <View style={reportCardStyle}>. Props and child content below determine appearance and interactions.
50	`            <Text style={s.label}>SALES VS TARGET</Text>`	Renders/opens a UI element or component: <Text style={s.label}>SALES VS TARGET</Text>. Props and child content below determine appearance and interactions.
51	`            <Text style={s.value}>{money(sales.current)}</Text>`	Renders/opens a UI element or component: <Text style={s.value}>{money(sales.current)}</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
52	`<Text style={s.muted}>Booked secondary sales this month</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>Booked secondary sales this month</Text>. Props and child content below determine appearance and interactions.
53	`<Progress value={sales.achievement} />`	Renders/opens a UI element or component: <Progress value={sales.achievement} />. Props and child content below determine appearance and interactions.
54	`<Text style={s.line}>`	Renders/opens a UI element or component: <Text style={s.line}>. Props and child content below determine appearance and interactions.
55	`{sales.target === null`	Continues the surrounding declaration/expression or text: {sales.target === null. Read it with the preceding opening statement (<Text style={s.line}>); it is not a standalone business operation.
56	`? "Target not configured in Salesforce"`	Continues the surrounding declaration/expression or text: ? "Target not configured in Salesforce". Read it with the preceding opening statement ({sales.target === null); it is not a standalone business operation.
57	`: `${money(sales.target)} target · ${rate(sales.achievement)} achieved`}`	Continues the surrounding declaration/expression or text: : `${money(sales.target)} target · ${rate(sales.achievement)} achieved`}. Read it with the preceding opening statement (? "Target not configured in Salesforce"); it is not a standalone business operation.
58	`</Text>`	Closes the UI element/component opened above.
59	`<Text style={s.small}>`	Renders/opens a UI element or component: <Text style={s.small}>. Props and child content below determine appearance and interactions.
60	`Last month: {money(sales.previous)}`	Continues the surrounding declaration/expression or text: Last month: {money(sales.previous)}. Read it with the preceding opening statement (<Text style={s.small}>); it is not a standalone business operation.
61	`{sales.previousTarget !== null`	Continues the surrounding declaration/expression or text: {sales.previousTarget !== null. Read it with the preceding opening statement (Last month: {money(sales.previous)}); it is not a standalone business operation.
62	`? ` / ${money(sales.previousTarget)} target``	Continues the surrounding declaration/expression or text: ? ` / ${money(sales.previousTarget)} target`. Read it with the preceding opening statement ({sales.previousTarget !== null); it is not a standalone business operation.
63	`: " · Target not configured"}`	Continues the surrounding declaration/expression or text: : " · Target not configured"}. Read it with the preceding opening statement (? ` / ${money(sales.previousTarget)} target`); it is not a standalone business operation.

Line	Source code	Explanation / reading note
64	`</Text>`	Closes the UI element/component opened above.
65	`{detailed && (`	Continues the surrounding declaration/expression or text: {detailed && (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
66	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
67	`<Text style={s.small}>{sales.basis}</Text>`	Renders/opens a UI element or component: <Text style={s.small}>{sales.basis}</Text>. Props and child content below determine appearance and interactions.
68	`{[`	Continues the surrounding declaration/expression or text: {[. Read it with the preceding opening statement (<Text style={s.small}>{sales.basis}</Text>); it is not a standalone business operation.
69	`["byEmployee", "By employee"],`	Continues the surrounding declaration/expression or text: ["byEmployee", "By employee"],. Read it with the preceding opening statement ({[); it is not a standalone business operation.
70	`["byArea", "By area"],`	Continues the surrounding declaration/expression or text: ["byArea", "By area"],. Read it with the preceding opening statement (["byEmployee", "By employee"],); it is not a standalone business operation.
71	`["byProduct", "By product"],`	Continues the surrounding declaration/expression or text: ["byProduct", "By product"],. Read it with the preceding opening statement (["byArea", "By area"],); it is not a standalone business operation.
72	`].map(([key, label]) => (`	Transforms/selects/aggregates collection values with the callback shown here:].map(([key, label]) => (. Read the callback body and result assignment together.
73	`<View key={key}>`	Renders/opens a UI element or component: <View key={key}>. Props and child content below determine appearance and interactions.
74	`<Text style={s.subtitle}>{label}</Text>`	Renders/opens a UI element or component: <Text style={s.subtitle}>{label}</Text>. Props and child content below determine appearance and interactions.
75	`{!sales[key].length && (`	Continues the surrounding declaration/expression or text: {!sales[key].length && (. Read it with the preceding opening statement (<Text style={s.subtitle}>{label}</Text>); it is not a standalone business operation.
76	`<Text style={s.muted}>No booked sales or configured targets.</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>No booked sales or configured targets.</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
77	)}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
78	{sales[key].map((row: any) => (	Transforms/selects/aggregates collection values with the callback shown here: {sales[key].map((row: any) => (. Read the callback body and result assignment together.
79	<View style={s.row} key={row.id}>	Renders/opens a UI element or component: <View style={s.row} key={row.id}>. Props and child content below determine appearance and interactions.
80	<Text style={s.name}>{row.name}</Text>	Renders/opens a UI element or component: <Text style={s.name}>{row.name}</Text>. Props and child content below determine appearance and interactions.
81	<Text style={s.line}>	Renders/opens a UI element or component: <Text style={s.line}>. Props and child content below determine appearance and interactions.
82	This month {money(row.current)} · Last month {money(row.previous)}	Continues the surrounding declaration/expression or text: This month {money(row.current)} · Last month {money(row.previous)}. Read it with the preceding opening statement (<Text style={s.line}>); it is not a standalone business operation.
83	</Text>	Closes the UI element/component opened above.
84	<Text style={s.small}>	Renders/opens a UI element or component: <Text style={s.small}>. Props and child content below determine appearance and interactions.
85	{row.target === null	Continues the surrounding declaration/expression or text: {row.target === null. Read it with the preceding opening statement (<Text style={s.small}>); it is not a standalone business operation.
86	? "Target not configured"	Continues the surrounding declaration/expression or text: ? "Target not configured". Read it with the preceding opening statement ({row.target === null); it is not a standalone business operation.
87	: `Target ${money(row.target)} · ${rate(row.achievement)}`}	Continues the surrounding declaration/expression or text: : `Target ${money(row.target)} · ${rate(row.achievement)}`}. Read it with the preceding opening statement (? "Target not configured"); it is not a standalone business operation.
88	</Text>	Closes the UI element/component opened above.
89	</View>	Closes the UI element/component opened above.
90	))}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
91	`</View>`	Closes the UI element/component opened above.
92	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
93	`</>`	Closes the UI element/component opened above.
94	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
95	`</View>`	Closes the UI element/component opened above.
96	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
97	`<View style={reportCardStyle}>`	Renders/opens a UI element or component: <View style={reportCardStyle}>. Props and child content below determine appearance and interactions.
98	`<Text style={s.label}>BEAT PRODUCTIVITY</Text>`	Renders/opens a UI element or component: <Text style={s.label}>BEAT PRODUCTIVITY</Text>. Props and child content below determine appearance and interactions.
99	`<Text style={s.value}>`	Renders/opens a UI element or component: <Text style={s.value}>. Props and child content below determine appearance and interactions.
100	`{visited} visited / {planned} planned`	Continues the surrounding declaration/expression or text: {visited} visited / {planned} planned. Read it with the preceding opening statement (<Text style={s.value}>); it is not a standalone business operation.
101	`</Text>`	Closes the UI element/component opened above.
102	`<Text style={s.line}>{productive} visited outlets placed an order</Text>`	Renders/opens a UI element or component: <Text style={s.line}>{productive} visited outlets placed an order</Text>. Props and child content below determine appearance and interactions.
103	`{detailed && (`	Continues the surrounding declaration/expression or text: {detailed && (. Read it with the preceding opening statement (<Text style={s.line}>{productive} visited outlets placed an order</Text>); it is not a standalone business operation.
104	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
105	`<Text style={s.small}>{data.definitions.beats}</Text>`	Renders/opens a UI element or component: <Text style={s.small}>{data.definitions.beats}</Text>. Props and child content below determine appearance and interactions.
106	`{beats.map((row: any) => (`	Transforms/selects/aggregates collection values with the callback shown here: {beats.map((row: any) => (. Read the callback body and result assignment together.
107	`<View style={s.row} key={row.id}>`	Renders/opens a UI element or component: <View style={s.row} key={row.id}>. Props and child content below determine appearance and interactions.
108	`<Text style={s.name}>{row.name}</Text>`	Renders/opens a UI element or component: <Text style={s.name}>{row.name}</Text>. Props and child content below determine appearance and interactions.
109	`<Text style={s.line}>`	Renders/opens a UI element or component: <Text style={s.line}>. Props and child content below determine appearance and interactions.
110	`{row.assigned} assigned · {row.planned} planned · {row.visited} visited`	Continues the surrounding declaration/expression or text: {row.assigned} assigned · {row.planned} planned · {row.visited} visited. Read it with the preceding opening statement (<Text style={s.line}>); it is not a standalone business operation.
111	`</Text>`	Closes the UI element/component opened above.
112	`<Text style={s.small}>`	Renders/opens a UI element or component: <Text style={s.small}>. Props and child content below determine appearance and interactions.
113	`{row.productive} productive · {rate(row.productivity)} of visited outlets`	Continues the surrounding declaration/expression or text: {row.productive} productive · {rate(row.productivity)} of visited outlets. Read it with the preceding opening statement (<Text style={s.small}>); it is not a standalone business operation.
114	`</Text>`	Closes the UI element/component opened above.
115	`</View>`	Closes the UI element/component opened above.
116	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
117	`</>`	Closes the UI element/component opened above.
118	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
119	`</View>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
120	`<View style={reportCardStyle}>`	Renders/opens a UI element or component: <View style={reportCardStyle}>. Props and child content below determine appearance and interactions.
121	`<Text style={s.label}>OUTLET COVERAGE</Text>`	Renders/opens a UI element or component: <Text style={s.label}>OUTLET COVERAGE</Text>. Props and child content below determine appearance and interactions.
122	`<Text style={s.value}>{rate(coverage.percent)}</Text>`	Renders/opens a UI element or component: <Text style={s.value}>{rate(coverage.percent)}</Text>. Props and child content below determine appearance and interactions.
123	`<Text style={s.line}>`	Renders/opens a UI element or component: <Text style={s.line}>. Props and child content below determine appearance and interactions.
124	`{coverage.buyers} active buyers / {coverage.outlets} active assigned outlets`	Continues the surrounding declaration/expression or text: {coverage.buyers} active buyers / {coverage.outlets} active assigned outlets. Read it with the preceding opening statement (<Text style={s.line}>); it is not a standalone business operation.
125	`</Text>`	Closes the UI element/component opened above.
126	`<Progress value={coverage.percent} />`	Renders/opens a UI element or component: <Progress value={coverage.percent} />. Props and child content below determine appearance and interactions.
127	`{detailed && (`	Continues the surrounding declaration/expression or text: {detailed && (. Read it with the preceding opening statement (<Progress value={coverage.percent} />); it is not a standalone business operation.
128	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
129	`<Text style={s.small}>{data.definitions.coverage}</Text>`	Renders/opens a UI element or component: <Text style={s.small}>{data.definitions.coverage}</Text>. Props and child content below determine appearance and interactions.
130	`{coverage.areas.map((row: any) => (`	Transforms/selects/aggregates collection values with the callback shown here: {coverage.areas.map((row: any) => (. Read the callback body and result assignment together.
131	`<View style={s.row} key={row.id}>`	Renders/opens a UI element or component: <View style={s.row} key={row.id}>. Props and child content below determine appearance and interactions.
132	`<Text style={s.name}>{row.name}</Text>`	Renders/opens a UI element or component: <Text style={s.name}>{row.name}</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
133	`<Text style={s.line}>`	Renders/opens a UI element or component: <Text style={s.line}>. Props and child content below determine appearance and interactions.
134	`{row.buyers} buyers / {row.outlets} outlets · {rate(row.percent)}`	Continues the surrounding declaration/expression or text: {row.buyers} buyers / {row.outlets} outlets · {rate(row.percent)}. Read it with the preceding opening statement (<Text style={s.line}>); it is not a standalone business operation.
135	`</Text>`	Closes the UI element/component opened above.
136	`</View>`	Closes the UI element/component opened above.
137	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
138	`</>`	Closes the UI element/component opened above.
139	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
140	`</View>`	Closes the UI element/component opened above.
141	`<View style={reportCardStyle}>`	Renders/opens a UI element or component: <View style={reportCardStyle}>. Props and child content below determine appearance and interactions.
142	`<Text style={s.label}>DISTRIBUTOR STOCK</Text>`	Renders/opens a UI element or component: <Text style={s.label}>DISTRIBUTOR STOCK</Text>. Props and child content below determine appearance and interactions.
143	`<Text style={s.value}>{stock.onHand} pieces</Text>`	Renders/opens a UI element or component: <Text style={s.value}>{stock.onHand} pieces</Text>. Props and child content below determine appearance and interactions.
144	`<Text style={s.line}>`	Renders/opens a UI element or component: <Text style={s.line}>. Props and child content below determine appearance and interactions.
145	`{stock.available} available · {stock.nearExpiry} near-expiry batches`	Continues the surrounding declaration/expression or text: {stock.available} available · {stock.nearExpiry} near-expiry batches. Read it with the preceding opening statement (<Text style={s.line}>); it is not a standalone business operation.
146	`</Text>`	Closes the UI element/component opened above.
147	`<Text style={s.small}>`	Renders/opens a UI element or component: <Text style={s.small}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
148	`{stock.expired} expired · {stock.noRecentSales} batches with no invoice movement in 30`	Continues the surrounding declaration/expression or text: {stock.expired} expired · {stock.noRecentSales} batches with no invoice movement in 30. Read it with the preceding opening statement (<Text style={s.small}>); it is not a standalone business operation.
149	`days`	Continues the surrounding declaration/expression or text: days. Read it with the preceding opening statement ({stock.expired} expired · {stock.noRecentSales} batches with no invoice movement in 30); it is not a standalone business operation.
150	`</Text>`	Closes the UI element/component opened above.
151	`{detailed && (`	Continues the surrounding declaration/expression or text: {detailed && (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
152	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
153	`<Text style={s.small}>{data.definitions.stock}</Text>`	Renders/opens a UI element or component: <Text style={s.small}>{data.definitions.stock}</Text>. Props and child content below determine appearance and interactions.
154	`{!stock.batches.length && (`	Continues the surrounding declaration/expression or text: {!stock.batches.length && (. Read it with the preceding opening statement (<Text style={s.small}>{data.definitions.stock}</Text>); it is not a standalone business operation.
155	`<Text style={s.muted}>No distributor inventory recorded.</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>No distributor inventory recorded.</Text>. Props and child content below determine appearance and interactions.
156	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
157	`{stock.batches.map((row: any) => (`	Transforms/selects/aggregates collection values with the callback shown here: {stock.batches.map((row: any) => (. Read the callback body and result assignment together.
158	`<View style={s.row} key={row.Id}>`	Renders/opens a UI element or component: <View style={s.row} key={row.Id}>. Props and child content below determine appearance and interactions.
159	`<Text style={s.name}>{row.Product__r?.Name}</Text>`	Renders/opens a UI element or component: <Text style={s.name}>{row.Product__r?.Name}</Text>. Props and child content below determine appearance and interactions.
160	`<Text style={s.line}>`	Renders/opens a UI element or component: <Text style={s.line}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
161	`Batch {row.Batch_Number__c || "Not recorded"} · {row.On_Hand_Pieces__c} on hand`	Continues the surrounding declaration/expression or text: Batch {row.Batch_Number__c || "Not recorded"} · {row.On_Hand_Pieces__c} on hand. Read it with the preceding opening statement (<Text style={s.line}>); it is not a standalone business operation.
162	`/ {row.Available_Pieces__c} available`	Continues the surrounding declaration/expression or text: / {row.Available_Pieces__c} available. Read it with the preceding opening statement (Batch {row.Batch_Number__c || "Not recorded"} · {row.On_Hand_Pieces__c} on hand); it is not a standalone business operation.
163	`</Text>`	Closes the UI element/component opened above.
164	`<Text style={s.small}>`	Renders/opens a UI element or component: <Text style={s.small}>. Props and child content below determine appearance and interactions.
165	`Expiry {row.Expiry_Date__c || "Not recorded"}`	Continues the surrounding declaration/expression or text: Expiry {row.Expiry_Date__c || "Not recorded"}. Read it with the preceding opening statement (<Text style={s.small}>); it is not a standalone business operation.
166	`{row.expired ? " · EXPIRED" : row.nearExpiry ? " · Near expiry" : ""}`	Continues the surrounding declaration/expression or text: {row.expired ? " · EXPIRED" : row.nearExpiry ? " · Near expiry" : ""}. Read it with the preceding opening statement (Expiry {row.Expiry_Date__c || "Not recorded"}); it is not a standalone business operation.
167	`{row.noRecentSales ? " · Review movement" : ""}`	Continues the surrounding declaration/expression or text: {row.noRecentSales ? " · Review movement" : ""}. Read it with the preceding opening statement ({row.expired ? " · EXPIRED" : row.nearExpiry ? " · Near expiry" : ""}); it is not a standalone business operation.
168	`{row.Low_Stock__c ? " · Low stock" : ""}`	Continues the surrounding declaration/expression or text: {row.Low_Stock__c ? " · Low stock" : ""}. Read it with the preceding opening statement ({row.noRecentSales ? " · Review movement" : ""}); it is not a standalone business operation.
169	`</Text>`	Closes the UI element/component opened above.
170	`</View>`	Closes the UI element/component opened above.
171	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
172	`</>`	Closes the UI element/component opened above.
173	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
174	`</View>`	Closes the UI element/component opened above.
175	`</View>`	Closes the UI element/component opened above.
176	`{!detailed && (`	Continues the surrounding declaration/expression or text: {!detailed && (. Read it with the preceding opening statement (</View>); it is not a standalone business operation.
177	`<Pressable accessibilityRole="button" onPress={onOpen} style={s.button}>`	Renders/opens a UI element or component: <Pressable accessibilityRole="button" onPress={onOpen} style={s.button}>. Props and child content below determine appearance and interactions.
178	`<Text style={s.buttonText}>View detailed reports</Text>`	Renders/opens a UI element or component: <Text style={s.buttonText}>View detailed reports</Text>. Props and child content below determine appearance and interactions.
179	`</Pressable>`	Closes the UI element/component opened above.
180	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
181	`</View>`	Closes the UI element/component opened above.
182	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
183	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
184	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
185	`desktopGrid: { flexDirection: "row", flexWrap: "wrap", gap: 16, alignItems: "stretch" },`	Sets/declares the named object property or style/type member: desktopGrid: { flexDirection: "row", flexWrap: "wrap", gap: 16, alignItems: "stretch" },. Interpret it in the enclosing object, props or type definition.
186	`desktopCard: { flexGrow: 1, flexBasis: 240, minWidth: 220 },`	Sets/declares the named object property or style/type member: desktopCard: { flexGrow: 1, flexBasis: 240, minWidth: 220 },. Interpret it in the enclosing object, props or type definition.
187	`title: { fontSize: 23, fontWeight: "900", color: c.ink, marginVertical: 10 },`	Sets/declares the named object property or style/type member: title: { fontSize: 23, fontWeight: "900", color: c.ink, marginVertical: 10 },. Interpret it in the enclosing object, props or type definition.
188	`card: {`	Sets/declares the named object property or style/type member: card: {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
189	`backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
190	`borderRadius: 20,`	Sets/declares the named object property or style/type member: borderRadius: 20,. Interpret it in the enclosing object, props or type definition.
191	`padding: 18,`	Sets/declares the named object property or style/type member: padding: 18,. Interpret it in the enclosing object, props or type definition.
192	`marginVertical: 9,`	Sets/declares the named object property or style/type member: marginVertical: 9,. Interpret it in the enclosing object, props or type definition.
193	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
194	`borderColor: c.border,`	Sets/declares the named object property or style/type member: borderColor: c.border,. Interpret it in the enclosing object, props or type definition.
195	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
196	`label: {`	Sets/declares the named object property or style/type member: label: {. Interpret it in the enclosing object, props or type definition.
197	`fontSize: 11,`	Sets/declares the named object property or style/type member: fontSize: 11,. Interpret it in the enclosing object, props or type definition.
198	`color: c.brand,`	Sets/declares the named object property or style/type member: color: c.brand,. Interpret it in the enclosing object, props or type definition.
199	`fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
200	`letterSpacing: 0.7,`	Declares/initializes local data used by the surrounding operation: letterSpacing: 0.7,. Collection contents and assignments below determine its purpose.
201	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
202	`value: { fontSize: 24, color: c.ink, fontWeight: "900", marginVertical: 12 },`	Sets/declares the named object property or style/type member: value: { fontSize: 24, color: c.ink, fontWeight: "900", marginVertical: 12 },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
203	`muted: { color: c.muted, fontSize: 13, lineHeight: 20 },`	Sets/declares the named object property or style/type member: muted: { color: c.muted, fontSize: 13, lineHeight: 20 },. Interpret it in the enclosing object, props or type definition.
204	`small: { color: c.muted, fontSize: 12, lineHeight: 18, marginTop: 8 },`	Sets/declares the named object property or style/type member: small: { color: c.muted, fontSize: 12, lineHeight: 18, marginTop: 8 },. Interpret it in the enclosing object, props or type definition.
205	`line: { color: c.ink, fontSize: 13, lineHeight: 20 },`	Sets/declares the named object property or style/type member: line: { color: c.ink, fontSize: 13, lineHeight: 20 },. Interpret it in the enclosing object, props or type definition.
206	`track: {`	Sets/declares the named object property or style/type member: track: {. Interpret it in the enclosing object, props or type definition.
207	`backgroundColor: "#E1EBE7",`	Sets/declares the named object property or style/type member: backgroundColor: "#E1EBE7",. Interpret it in the enclosing object, props or type definition.
208	`height: 8,`	Sets/declares the named object property or style/type member: height: 8,. Interpret it in the enclosing object, props or type definition.
209	`borderRadius: 5,`	Sets/declares the named object property or style/type member: borderRadius: 5,. Interpret it in the enclosing object, props or type definition.
210	`overflow: "hidden",`	Sets/declares the named object property or style/type member: overflow: "hidden",. Interpret it in the enclosing object, props or type definition.
211	`marginVertical: 12,`	Sets/declares the named object property or style/type member: marginVertical: 12,. Interpret it in the enclosing object, props or type definition.
212	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
213	`fill: { backgroundColor: c.brand, height: 8 },`	Sets/declares the named object property or style/type member: fill: { backgroundColor: c.brand, height: 8 },. Interpret it in the enclosing object, props or type definition.
214	`subtitle: { color: c.ink, fontSize: 17, fontWeight: "800", marginTop: 22 },`	Sets/declares the named object property or style/type member: subtitle: { color: c.ink, fontSize: 17, fontWeight: "800", marginTop: 22 },. Interpret it in the enclosing object, props or type definition.
215	`row: {`	Sets/declares the named object property or style/type member: row: {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
216	`    borderTopWidth: 1,`	Sets/declares the named object property or style/type member: borderTopWidth: 1,. Interpret it in the enclosing object, props or type definition.
217	`    borderColor: c.border,`	Sets/declares the named object property or style/type member: borderColor: c.border,. Interpret it in the enclosing object, props or type definition.
218	`    paddingTop: 12,`	Sets/declares the named object property or style/type member: paddingTop: 12,. Interpret it in the enclosing object, props or type definition.
219	`    marginTop: 12,`	Sets/declares the named object property or style/type member: marginTop: 12,. Interpret it in the enclosing object, props or type definition.
220	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
221	`  name: { color: c.ink, fontSize: 14, fontWeight: "700", marginBottom: 5 },`	Sets/declares the named object property or style/type member: name: { color: c.ink, fontSize: 14, fontWeight: "700", marginBottom: 5 },. Interpret it in the enclosing object, props or type definition.
222	`  button: {`	Sets/declares the named object property or style/type member: button: {. Interpret it in the enclosing object, props or type definition.
223	`    padding: 16,`	Sets/declares the named object property or style/type member: padding: 16,. Interpret it in the enclosing object, props or type definition.
224	`    borderRadius: 14,`	Sets/declares the named object property or style/type member: borderRadius: 14,. Interpret it in the enclosing object, props or type definition.
225	`    backgroundColor: c.brand,`	Sets/declares the named object property or style/type member: backgroundColor: c.brand,. Interpret it in the enclosing object, props or type definition.
226	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
227	`    marginVertical: 10,`	Sets/declares the named object property or style/type member: marginVertical: 10,. Interpret it in the enclosing object, props or type definition.
228	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
229	`  buttonText: { color: "white", fontWeight: "800" },`	Sets/declares the named object property or style/type member: buttonText: { color: "white", fontWeight: "800" },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
230	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

dms-mobile/src/components/PortalFrame.tsx

Responsive full-desktop sidebar/header shell and narrow-screen navigation around the same workspace content. Presentation layer, not Salesforce authorization.

264 numbered source lines | SHA-256 7b1dca9f1ecd1001bfc956fe94cba0840f1e6fed438474b4b7914a02300464de

Line	Source code	Explanation / reading note
1	`import React, { useState } from "react";`	Imports dependencies/types used below: import React, { useState } from "react";. Importing a function does not call it.
2	`import {`	Imports dependencies/types used below: import {. Importing a function does not call it.
3	`  Platform,`	Continues the surrounding declaration/expression or text: Platform,. Read it with the preceding opening statement (import {); it is not a standalone business operation.
4	`  Pressable,`	Continues the surrounding declaration/expression or text: Pressable,. Read it with the preceding opening statement (Platform,); it is not a standalone business operation.
5	`  ScrollView,`	Continues the surrounding declaration/expression or text: ScrollView,. Read it with the preceding opening statement (Pressable,); it is not a standalone business operation.
6	`  StyleSheet,`	Continues the surrounding declaration/expression or text: StyleSheet,. Read it with the preceding opening statement (ScrollView,); it is not a standalone business operation.
7	`  Text,`	Continues the surrounding declaration/expression or text: Text,. Read it with the preceding opening statement (StyleSheet,); it is not a standalone business operation.
8	`  View,`	Continues the surrounding declaration/expression or text: View,. Read it with the preceding opening statement (Text,); it is not a standalone business operation.
9	`  useWindowDimensions,`	Continues the surrounding declaration/expression or text: useWindowDimensions,. Read it with the preceding opening statement (View,); it is not a standalone business operation.
10	`} from "react-native";`	Completes the dependency import and identifies the module supplying those names.
11	`import { BrandHeader, BottomNavigation } from "./Workspace";`	Imports dependencies/types used below: import { BrandHeader, BottomNavigation } from "./Workspace";. Importing a function does not call it.
12	`import BrandLogo from "./BrandLogo";`	Imports dependencies/types used below: import BrandLogo from "./BrandLogo";. Importing a function does not call it.
13		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
14	`// Presentation only: every destination reuses an existing DMS screen/handler.`	Developer comment/documentation: Presentation only: every destination reuses an existing DMS screen/handler. It is not executed.
15	`export const portalLinks = [`	Assigns the right-hand expression to the named variable/property: export const portalLinks = [. This is in-memory unless it is later persisted by an explicit call.
16	`  ["Home", "Dashboard", "▦"],`	Continues the surrounding declaration/expression or text: ["Home", "Dashboard", "▦"],. Read it with the preceding opening statement (export const portalLinks = []; it is not a standalone business operation.
17	`  ["Primary", "Primary orders", "▤"],`	Continues the surrounding declaration/expression or text: ["Primary", "Primary orders", "▤"],. Read it with the preceding opening statement (["Home", "Dashboard", "▦"],); it is not a standalone business operation.
18	`  ["Secondary", "Secondary orders", "▤"],`	Continues the surrounding declaration/expression or text: ["Secondary", "Secondary orders", "▤"],. Read it with the preceding opening statement (["Primary", "Primary orders", "▤"],); it is not a standalone business operation.
19	`  ["Outlets", "Outlets", "◎"],`	Continues the surrounding declaration/expression or text: ["Outlets", "Outlets", "◎"],. Read it with the preceding opening statement (["Secondary", "Secondary orders", "▤"],); it is not a standalone business operation.
20	`  ["Inventory", "Stock & inventory", "▥"],`	Continues the surrounding declaration/expression or text: ["Inventory", "Stock & inventory", "▥"],. Read it with the preceding opening statement (["Outlets", "Outlets", "◎"],); it is not a standalone business operation.
21	`  ["Reports", "Dashboard & reports", "▧"],`	Continues the surrounding declaration/expression or text: ["Reports", "Dashboard & reports", "▧"],. Read it with the preceding opening statement (["Inventory", "Stock & inventory", "▥"],); it is not a standalone business operation.
22	`  ["Returns", "Returns", "↩"],`	Continues the surrounding declaration/expression or text: ["Returns", "Returns", "↩"],. Read it with the preceding opening statement (["Reports", "Dashboard & reports", "▧"],); it is not a standalone business operation.
23	`  ["Tickets", "Support tickets", "☷"],`	Continues the surrounding declaration/expression or text: ["Tickets", "Support tickets", "☷"],. Read it with the preceding opening statement (["Returns", "Returns", "↩"],); it is not a standalone business operation.
24	`  ["Assets", "Outlet assets", "□"],`	Continues the surrounding declaration/expression or text: ["Assets", "Outlet assets", "□"],. Read it with the preceding opening statement (["Tickets", "Support tickets", "☷"],); it is not a standalone business operation.

Line	Source code	Explanation / reading note
25	`  ["Stock checks", "Stock checks", "▦"],`	Continues the surrounding declaration/expression or text: ["Stock checks", "Stock checks", "▦"],. Read it with the preceding opening statement (["Assets", "Outlet assets", "□"],); it is not a standalone business operation.
26	`  ["Sync", "Sync centre", "↻"],`	Continues the surrounding declaration/expression or text: ["Sync", "Sync centre", "↻"],. Read it with the preceding opening statement (["Stock checks", "Stock checks", "▦"],); it is not a standalone business operation.
27	`  ["More", "More", "•••"],`	Continues the surrounding declaration/expression or text: ["More", "More", "•••"],. Read it with the preceding opening statement (["Sync", "Sync centre", "↻"],); it is not a standalone business operation.
28	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29		Blank line separating logical sections; no executable operation.
30	`type Props = {`	Defines a compile-time data contract: type Props = {. TypeScript types do not validate untrusted runtime JSON by themselves.
31	`  children: React.ReactNode;`	Sets/declares the named object property or style/type member: children: React.ReactNode;. Interpret it in the enclosing object, props or type definition.
32	`  signedIn: boolean;`	Sets/declares the named object property or style/type member: signedIn: boolean;. Interpret it in the enclosing object, props or type definition.
33	`  tab: string;`	Sets/declares the named object property or style/type member: tab: string;. Interpret it in the enclosing object, props or type definition.
34	`  name: string;`	Sets/declares the named object property or style/type member: name: string;. Interpret it in the enclosing object, props or type definition.
35	`  pending: number;`	Sets/declares the named object property or style/type member: pending: number;. Interpret it in the enclosing object, props or type definition.
36	`  busy: boolean;`	Sets/declares the named object property or style/type member: busy: boolean;. Interpret it in the enclosing object, props or type definition.
37	`  loggingOut: boolean;`	Sets/declares the named object property or style/type member: loggingOut: boolean;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
38	`  onSelect: (tab: string) => void;`	Sets/declares the named object property or style/type member: onSelect: (tab: string) => void;. Interpret it in the enclosing object, props or type definition.
39	`  onRefresh: () => void;`	Sets/declares the named object property or style/type member: onRefresh: () => void;. Interpret it in the enclosing object, props or type definition.
40	`  onLogout: () => void;`	Sets/declares the named object property or style/type member: onLogout: () => void;. Interpret it in the enclosing object, props or type definition.
41	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42		Blank line separating logical sections; no executable operation.
43	`export default function PortalFrame(p: Props) {`	Declares a callable function/method: export default function PortalFrame(p: Props) {. Parameters supply its inputs; the following block implements the operation.
44	`  const { width } = useWindowDimensions();`	Declares/initializes local data used by the surrounding operation: const { width } = useWindowDimensions();. Collection contents and assignments below determine its purpose.
45	`  const [collapsed, setCollapsed] = useState(width < 900);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
46	`  // The browser is always a desktop workspace, including Codex side panels.`	Developer comment/documentation: The browser is always a desktop workspace, including Codex side panels. It is not executed.
47	`  // Only the native Android/iOS builds use the phone navigation.`	Developer comment/documentation: Only the native Android/iOS builds use the phone navigation. It is not executed.
48	`  const desktop = Platform.OS === "web";`	Declares/initializes local data used by the surrounding operation: const desktop = Platform.OS === "web";. Collection contents and assignments below determine its purpose.
49	`  if (!desktop)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!desktop).
50	`    return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
51	`      <View style={s.mobile}>`	Renders/opens a UI element or component: <View style={s.mobile}>. Props and child content below determine appearance and interactions.
52	`        <BrandHeader />`	Renders/opens a UI element or component: <BrandHeader />. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
53	`{p.children}`	Continues the surrounding declaration/expression or text: {p.children}. Read it with the preceding opening statement (<BrandHeader />); it is not a standalone business operation.
54	`{p.signedIn && <BottomNavigation tab={p.tab} onSelect={p.onSelect} />}`	Assigns the right-hand expression to the named variable/property: {p.signedIn && <BottomNavigation tab={p.tab} onSelect={p.onSelect} />}. This is in-memory unless it is later persisted by an explicit call.
55	`</View>`	Closes the UI element/component opened above.
56	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`const title = portalLinks.find(([key]) => key === p.tab)?.[1] || "Distributor portal";`	Declares/initializes local data used by the surrounding operation: const title = portalLinks.find(([key]) => key === p.tab)?.[1] || "Distributor portal";. Collection contents and assignments below determine its purpose.
58	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
59	`<View style={s.desktop}>`	Renders/opens a UI element or component: <View style={s.desktop}>. Props and child content below determine appearance and interactions.
60	`{p.signedIn && (`	Continues the surrounding declaration/expression or text: {p.signedIn && (. Read it with the preceding opening statement (<View style={s.desktop}>); it is not a standalone business operation.
61	`<View style={[s.sidebar, collapsed && s.sidebarCollapsed]}>`	Renders/opens a UI element or component: <View style={[s.sidebar, collapsed && s.sidebarCollapsed]}>. Props and child content below determine appearance and interactions.
62	`<View style={[s.brand, collapsed && { paddingHorizontal: 8 }]}>`	Renders/opens a UI element or component: <View style={[s.brand, collapsed && { paddingHorizontal: 8 }]}>. Props and child content below determine appearance and interactions.
63	`<BrandLogo width={collapsed ? 60 : 82} />`	Renders/opens a UI element or component: <BrandLogo width={collapsed ? 60 : 82} />. Props and child content below determine appearance and interactions.
64	`{!collapsed && (`	Continues the surrounding declaration/expression or text: {!collapsed && (. Read it with the preceding opening statement (<BrandLogo width={collapsed ? 60 : 82} />); it is not a standalone business operation.
65	`<View style={{ flex: 1 }}>`	Renders/opens a UI element or component: <View style={{ flex: 1 }}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
66	`<Text style={s.wordmark}>DMS</Text>`	Renders/opens a UI element or component: <Text style={s.wordmark}>DMS</Text>. Props and child content below determine appearance and interactions.
67	`<Text style={s.caption}>DISTRIBUTOR PORTAL</Text>`	Renders/opens a UI element or component: <Text style={s.caption}>DISTRIBUTOR PORTAL</Text>. Props and child content below determine appearance and interactions.
68	`</View>`	Closes the UI element/component opened above.
69	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
70	`</View>`	Closes the UI element/component opened above.
71	`<ScrollView contentContainerStyle={s.links}>`	Renders/opens a UI element or component: <ScrollView contentContainerStyle={s.links}>. Props and child content below determine appearance and interactions.
72	`{!collapsed && <Text style={s.group}>WORKSPACE</Text>}`	Assigns the right-hand expression to the named variable/property: {!collapsed && <Text style={s.group}>WORKSPACE</Text>}. This is in-memory unless it is later persisted by an explicit call.
73	`{portalLinks.map(([key, label, icon]) => (`	Transforms/selects/aggregates collection values with the callback shown here: {portalLinks.map(([key, label, icon]) => (. Read the callback body and result assignment together.
74	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
75	`key={key}`	Assigns the right-hand expression to the named variable/property: key={key}. This is in-memory unless it is later persisted by an explicit call.
76	`accessibilityRole="button"`	Assigns the right-hand expression to the named variable/property: accessibilityRole="button". This is in-memory unless it is later persisted by an explicit call.
77	`accessibilityLabel={label}`	Assigns the right-hand expression to the named variable/property: accessibilityLabel={label}. This is in-memory unless it is later persisted by an explicit call.
78	`accessibilityState={{ selected: p.tab === key }}`	Assigns the right-hand expression to the named variable/property: accessibilityState={{ selected: p.tab === key }}. This is in-memory unless it is later persisted by an explicit call.
79	`onPress={() => p.onSelect(key)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.

Line	Source code	Explanation / reading note
80	`style={[s.link, p.tab === key && s.selected]}`	Assigns the right-hand expression to the named variable/property: style={[s.link, p.tab === key && s.selected]}. This is in-memory unless it is later persisted by an explicit call.
81	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (style={[s.link, p.tab === key && s.selected]}); it is not a standalone business operation.
82	`<Text style={[s.icon, p.tab === key && s.selectedText]}>{icon}</Text>`	Renders/opens a UI element or component: <Text style={[s.icon, p.tab === key && s.selectedText]}>{icon}</Text>. Props and child content below determine appearance and interactions.
83	`{!collapsed && (`	Continues the surrounding declaration/expression or text: {!collapsed && (. Read it with the preceding opening statement (<Text style={[s.icon, p.tab === key && s.selectedText]}>{icon}</Text>); it is not a standalone business operation.
84	`<Text style={[s.linkText, p.tab === key && s.selectedText]}>{label}</Text>`	Renders/opens a UI element or component: <Text style={[s.linkText, p.tab === key && s.selectedText]}>{label}</Text>. Props and child content below determine appearance and interactions.
85	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
86	`</Pressable>`	Closes the UI element/component opened above.
87	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
88	`</ScrollView>`	Closes the UI element/component opened above.
89	`{!collapsed && (`	Continues the surrounding declaration/expression or text: {!collapsed && (. Read it with the preceding opening statement (</ScrollView>); it is not a standalone business operation.
90	`<View style={s.account}>`	Renders/opens a UI element or component: <View style={s.account}>. Props and child content below determine appearance and interactions.
91	`<Text style={s.accountName}>{p.name}</Text>`	Renders/opens a UI element or component: <Text style={s.accountName}>{p.name}</Text>. Props and child content below determine appearance and interactions.
92	`<Text style={s.caption}>`	Renders/opens a UI element or component: <Text style={s.caption}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
93	`{p.pending} pending change{p.pending === 1 ? "" : "s"}`	Continues the surrounding declaration/expression or text: {p.pending} pending change{p.pending === 1 ? "" : "s"}. Read it with the preceding opening statement (<Text style={s.caption}>); it is not a standalone business operation.
94	`</Text>`	Closes the UI element/component opened above.
95	`</View>`	Closes the UI element/component opened above.
96	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
97	`</View>`	Closes the UI element/component opened above.
98	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
99	`<View style={s.main}>`	Renders/opens a UI element or component: <View style={s.main}>. Props and child content below determine appearance and interactions.
100	`<View style={s.topbar}>`	Renders/opens a UI element or component: <View style={s.topbar}>. Props and child content below determine appearance and interactions.
101	`{p.signedIn ? (`	Continues the surrounding declaration/expression or text: {p.signedIn ? (. Read it with the preceding opening statement (<View style={s.topbar}>); it is not a standalone business operation.
102	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
103	`accessibilityRole="button"`	Assigns the right-hand expression to the named variable/property: accessibilityRole="button". This is in-memory unless it is later persisted by an explicit call.
104	`accessibilityLabel={collapsed ? "Expand sidebar" : "Collapse sidebar"}`	Assigns the right-hand expression to the named variable/property: accessibilityLabel={collapsed ? "Expand sidebar" : "Collapse sidebar"}. This is in-memory unless it is later persisted by an explicit call.
105	`onPress={() => setCollapsed(!collapsed)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
106	`style={s.tool}`	Assigns the right-hand expression to the named variable/property: style={s.tool}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
107	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (style={s.tool}); it is not a standalone business operation.
108	`<Text style={s.toolText}>☰</Text>`	Renders/opens a UI element or component: <Text style={s.toolText}>☰</Text>. Props and child content below determine appearance and interactions.
109	`</Pressable>`	Closes the UI element/component opened above.
110	`) : (`	Continues the surrounding declaration/expression or text:) : (. Read it with the preceding opening statement (</Pressable>); it is not a standalone business operation.
111	`<BrandLogo />`	Renders/opens a UI element or component: <BrandLogo />. Props and child content below determine appearance and interactions.
112	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
113	`<Text style={s.pageTitle}>{p.signedIn ? title : "DMS Distributor Portal"}</Text>`	Renders/opens a UI element or component: <Text style={s.pageTitle}>{p.signedIn ? title : "DMS Distributor Portal"}</Text>. Props and child content below determine appearance and interactions.
114	`<Text style={s.date}>`	Renders/opens a UI element or component: <Text style={s.date}>. Props and child content below determine appearance and interactions.
115	`{new Date().toLocaleDateString("en-IN", {`	Continues the surrounding declaration/expression or text: {new Date().toLocaleDateString("en-IN", {. Read it with the preceding opening statement (<Text style={s.date}>); it is not a standalone business operation.
116	`day: "numeric",`	Sets/declares the named object property or style/type member: day: "numeric",. Interpret it in the enclosing object, props or type definition.
117	`month: "short",`	Sets/declares the named object property or style/type member: month: "short",. Interpret it in the enclosing object, props or type definition.
118	`year: "numeric",`	Sets/declares the named object property or style/type member: year: "numeric",. Interpret it in the enclosing object, props or type definition.
119	`})}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
120	`</Text>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
121	`{p.signedIn && (`	Continues the surrounding declaration/expression or text: {p.signedIn && (. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
122	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
123	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
124	`accessibilityRole="button"`	Assigns the right-hand expression to the named variable/property: accessibilityRole="button". This is in-memory unless it is later persisted by an explicit call.
125	`accessibilityLabel="Refresh portal data"`	Assigns the right-hand expression to the named variable/property: accessibilityLabel="Refresh portal data". This is in-memory unless it is later persisted by an explicit call.
126	`accessibilityState={{ disabled: p.busy }}`	Assigns the right-hand expression to the named variable/property: accessibilityState={{ disabled: p.busy }}. This is in-memory unless it is later persisted by an explicit call.
127	`disabled={p.busy}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
128	`onPress={p.onRefresh}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
129	`style={[s.tool, p.busy && s.dim]}`	Assigns the right-hand expression to the named variable/property: style={[s.tool, p.busy && s.dim]}. This is in-memory unless it is later persisted by an explicit call.
130	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (style={[s.tool, p.busy && s.dim]}); it is not a standalone business operation.
131	`<Text style={s.toolText}>↻</Text>`	Renders/opens a UI element or component: <Text style={s.toolText}>↻</Text>. Props and child content below determine appearance and interactions.
132	`</Pressable>`	Closes the UI element/component opened above.
133	`<View style={s.identity}>`	Renders/opens a UI element or component: <View style={s.identity}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
134	`<Text style={s.avatar}>{p.name.trim().charAt(0).toUpperCase() || "D"}</Text>`	Renders/opens a UI element or component: <Text style={s.avatar}>{p.name.trim().charAt(0).toUpperCase() || "D"}</Text>. Props and child content below determine appearance and interactions.
135	`<View>`	Renders/opens a UI element or component: <View>. Props and child content below determine appearance and interactions.
136	`<Text style={s.accountName}>{p.name}</Text>`	Renders/opens a UI element or component: <Text style={s.accountName}>{p.name}</Text>. Props and child content below determine appearance and interactions.
137	`<Text style={s.caption}>Distributor</Text>`	Renders/opens a UI element or component: <Text style={s.caption}>Distributor</Text>. Props and child content below determine appearance and interactions.
138	`</View>`	Closes the UI element/component opened above.
139	`</View>`	Closes the UI element/component opened above.
140	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
141	`accessibilityRole="button"`	Assigns the right-hand expression to the named variable/property: accessibilityRole="button". This is in-memory unless it is later persisted by an explicit call.
142	`accessibilityLabel="Log out of distributor"`	Assigns the right-hand expression to the named variable/property: accessibilityLabel="Log out of distributor". This is in-memory unless it is later persisted by an explicit call.
143	`accessibilityState={{ disabled: p.loggingOut }}`	Assigns the right-hand expression to the named variable/property: accessibilityState={{ disabled: p.loggingOut }}. This is in-memory unless it is later persisted by an explicit call.
144	`disabled={p.loggingOut}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
145	`onPress={p.onLogout}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
146	`style={s.tool}`	Assigns the right-hand expression to the named variable/property: style={s.tool}. This is in-memory unless it is later persisted by an explicit call.
147	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (style={s.tool}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
148	`<Text style={s.logout}>{p.loggingOut ? "Signing out…" : "Log out"}</Text>`	Renders/opens a UI element or component: <Text style={s.logout}>{p.loggingOut ? "Signing out…" : "Log out"}</Text>. Props and child content below determine appearance and interactions.
149	`</Pressable>`	Closes the UI element/component opened above.
150	`</>`	Closes the UI element/component opened above.
151	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
152	`</View>`	Closes the UI element/component opened above.
153	`<View style={[s.content, !p.signedIn && s.login]}>{p.children}</View>`	Renders/opens a UI element or component: <View style={[s.content, !p.signedIn && s.login]}>{p.children}</View>. Props and child content below determine appearance and interactions.
154	`{p.signedIn && (`	Continues the surrounding declaration/expression or text: {p.signedIn && (. Read it with the preceding opening statement (<View style={[s.content, !p.signedIn && s.login]}>{p.children}</View>); it is not a standalone business operation.
155	`<Text style={s.footer}>`	Renders/opens a UI element or component: <Text style={s.footer}>. Props and child content below determine appearance and interactions.
156	`Salesforce records for the signed-in distributor · Review synchronization status in Sync`	Continues the surrounding declaration/expression or text: Salesforce records for the signed-in distributor · Review synchronization status in Sync. Read it with the preceding opening statement (<Text style={s.footer}>); it is not a standalone business operation.
157	`centre`	Continues the surrounding declaration/expression or text: centre. Read it with the preceding opening statement (Salesforce records for the signed-in distributor · Review synchronization status in Sync); it is not a standalone business operation.
158	`</Text>`	Closes the UI element/component opened above.
159	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
160	`</View>`	Closes the UI element/component opened above.
161	`</View>`	Closes the UI element/component opened above.
162	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
163	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
164	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
165	`  desktop: {`	Sets/declares the named object property or style/type member: desktop: {. Interpret it in the enclosing object, props or type definition.
166	`    flex: 1,`	Sets/declares the named object property or style/type member: flex: 1,. Interpret it in the enclosing object, props or type definition.
167	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
168	`    width: "100%",`	Sets/declares the named object property or style/type member: width: "100%",. Interpret it in the enclosing object, props or type definition.
169	`    height: "100%",`	Sets/declares the named object property or style/type member: height: "100%",. Interpret it in the enclosing object, props or type definition.
170	`    alignSelf: "stretch",`	Sets/declares the named object property or style/type member: alignSelf: "stretch",. Interpret it in the enclosing object, props or type definition.
171	`    backgroundColor: "#F4F9F5",`	Sets/declares the named object property or style/type member: backgroundColor: "#F4F9F5",. Interpret it in the enclosing object, props or type definition.
172	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
173	`  mobile: {`	Sets/declares the named object property or style/type member: mobile: {. Interpret it in the enclosing object, props or type definition.
174	`    flex: 1,`	Sets/declares the named object property or style/type member: flex: 1,. Interpret it in the enclosing object, props or type definition.
175	`    width: "100%",`	Sets/declares the named object property or style/type member: width: "100%",. Interpret it in the enclosing object, props or type definition.
176	`    maxWidth: 600,`	Sets/declares the named object property or style/type member: maxWidth: 600,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
177	`alignSelf: "center",`	Sets/declares the named object property or style/type member: alignSelf: "center",. Interpret it in the enclosing object, props or type definition.
178	`backgroundColor: "#F4F9F5",`	Sets/declares the named object property or style/type member: backgroundColor: "#F4F9F5",. Interpret it in the enclosing object, props or type definition.
179	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
180	`sidebar: { width: 232, backgroundColor: "white", borderRightWidth: 1, borderColor: "#D8E7DC" },`	Sets/declares the named object property or style/type member: sidebar: { width: 232, backgroundColor: "white", borderRightWidth: 1, borderColor: "#D8E7DC" },. Interpret it in the enclosing object, props or type definition.
181	`sidebarCollapsed: { width: 76 },`	Sets/declares the named object property or style/type member: sidebarCollapsed: { width: 76 },. Interpret it in the enclosing object, props or type definition.
182	`brand: {`	Sets/declares the named object property or style/type member: brand: {. Interpret it in the enclosing object, props or type definition.
183	`height: 82,`	Sets/declares the named object property or style/type member: height: 82,. Interpret it in the enclosing object, props or type definition.
184	`flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
185	`alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
186	`paddingHorizontal: 20,`	Sets/declares the named object property or style/type member: paddingHorizontal: 20,. Interpret it in the enclosing object, props or type definition.
187	`gap: 10,`	Sets/declares the named object property or style/type member: gap: 10,. Interpret it in the enclosing object, props or type definition.
188	`borderBottomWidth: 1,`	Sets/declares the named object property or style/type member: borderBottomWidth: 1,. Interpret it in the enclosing object, props or type definition.
189	`borderColor: "#EAF3ED",`	Sets/declares the named object property or style/type member: borderColor: "#EAF3ED",. Interpret it in the enclosing object, props or type definition.
190	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
191	`  logo: {`	Sets/declares the named object property or style/type member: logo: {. Interpret it in the enclosing object, props or type definition.
192	`    width: 36,`	Sets/declares the named object property or style/type member: width: 36,. Interpret it in the enclosing object, props or type definition.
193	`    height: 38,`	Sets/declares the named object property or style/type member: height: 38,. Interpret it in the enclosing object, props or type definition.
194	`    borderRadius: 11,`	Sets/declares the named object property or style/type member: borderRadius: 11,. Interpret it in the enclosing object, props or type definition.
195	`    backgroundColor: "#16734B",`	Sets/declares the named object property or style/type member: backgroundColor: "#16734B",. Interpret it in the enclosing object, props or type definition.
196	`    color: "white",`	Sets/declares the named object property or style/type member: color: "white",. Interpret it in the enclosing object, props or type definition.
197	`    fontSize: 23,`	Sets/declares the named object property or style/type member: fontSize: 23,. Interpret it in the enclosing object, props or type definition.
198	`    fontWeight: "800",`	Sets/declares the named object property or style/type member: fontWeight: "800",. Interpret it in the enclosing object, props or type definition.
199	`    textAlign: "center",`	Sets/declares the named object property or style/type member: textAlign: "center",. Interpret it in the enclosing object, props or type definition.
200	`    lineHeight: 38,`	Sets/declares the named object property or style/type member: lineHeight: 38,. Interpret it in the enclosing object, props or type definition.
201	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
202	`  wordmark: { fontSize: 18, color: "#173D2D", fontWeight: "800" },`	Sets/declares the named object property or style/type member: wordmark: { fontSize: 18, color: "#173D2D", fontWeight: "800" },. Interpret it in the enclosing object, props or type definition.
203	`  caption: { fontSize: 10, color: "#547264", marginTop: 4 },`	Sets/declares the named object property or style/type member: caption: { fontSize: 10, color: "#547264", marginTop: 4 },. Interpret it in the enclosing object, props or type definition.
204	`  links: { padding: 12, gap: 4 },`	Sets/declares the named object property or style/type member: links: { padding: 12, gap: 4 },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
205	`  group: { fontSize: 10, letterSpacing: 1.5, color: "#547264", fontWeight: "700", padding: 12 },`	Sets/declares the named object property or style/type member: group: { fontSize: 10, letterSpacing: 1.5, color: "#547264", fontWeight: "700", padding: 12 },. Interpret it in the enclosing object, props or type definition.
206	`  link: {`	Sets/declares the named object property or style/type member: link: {. Interpret it in the enclosing object, props or type definition.
207	`    minHeight: 44,`	Sets/declares the named object property or style/type member: minHeight: 44,. Interpret it in the enclosing object, props or type definition.
208	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
209	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
210	`    paddingHorizontal: 12,`	Sets/declares the named object property or style/type member: paddingHorizontal: 12,. Interpret it in the enclosing object, props or type definition.
211	`    gap: 12,`	Sets/declares the named object property or style/type member: gap: 12,. Interpret it in the enclosing object, props or type definition.
212	`    borderRadius: 9,`	Sets/declares the named object property or style/type member: borderRadius: 9,. Interpret it in the enclosing object, props or type definition.
213	`    borderLeftWidth: 3,`	Sets/declares the named object property or style/type member: borderLeftWidth: 3,. Interpret it in the enclosing object, props or type definition.
214	`    borderLeftColor: "transparent",`	Sets/declares the named object property or style/type member: borderLeftColor: "transparent",. Interpret it in the enclosing object, props or type definition.
215	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
216	`  selected: { backgroundColor: "#E7F4EB", borderLeftColor: "#16734B" },`	Sets/declares the named object property or style/type member: selected: { backgroundColor: "#E7F4EB", borderLeftColor: "#16734B" },. Interpret it in the enclosing object, props or type definition.
217	`  selectedText: { color: "#12613F" },`	Sets/declares the named object property or style/type member: selectedText: { color: "#12613F" },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
218	`  icon: { fontSize: 18, color: "#547264", width: 20, textAlign: "center" },`	Sets/declares the named object property or style/type member: icon: { fontSize: 18, color: "#547264", width: 20, textAlign: "center" },. Interpret it in the enclosing object, props or type definition.
219	`  linkText: { fontSize: 12, color: "#315D46", fontWeight: "600", flexShrink: 1 },`	Sets/declares the named object property or style/type member: linkText: { fontSize: 12, color: "#315D46", fontWeight: "600", flexShrink: 1 },. Interpret it in the enclosing object, props or type definition.
220	`  account: { margin: 12, padding: 12, borderWidth: 1, borderColor: "#D8E7DC", borderRadius: 10 },`	Sets/declares the named object property or style/type member: account: { margin: 12, padding: 12, borderWidth: 1, borderColor: "#D8E7DC", borderRadius: 10 },. Interpret it in the enclosing object, props or type definition.
221	`  accountName: { fontSize: 12, fontWeight: "700", color: "#173D2D" },`	Sets/declares the named object property or style/type member: accountName: { fontSize: 12, fontWeight: "700", color: "#173D2D" },. Interpret it in the enclosing object, props or type definition.
222	`  main: { flex: 1, minWidth: 0 },`	Sets/declares the named object property or style/type member: main: { flex: 1, minWidth: 0 },. Interpret it in the enclosing object, props or type definition.
223	`  topbar: {`	Sets/declares the named object property or style/type member: topbar: {. Interpret it in the enclosing object, props or type definition.
224	`    minHeight: 76,`	Sets/declares the named object property or style/type member: minHeight: 76,. Interpret it in the enclosing object, props or type definition.
225	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
226	`    flexWrap: "wrap",`	Sets/declares the named object property or style/type member: flexWrap: "wrap",. Interpret it in the enclosing object, props or type definition.
227	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
228	`    gap: 14,`	Sets/declares the named object property or style/type member: gap: 14,. Interpret it in the enclosing object, props or type definition.
229	`    paddingHorizontal: 24,`	Sets/declares the named object property or style/type member: paddingHorizontal: 24,. Interpret it in the enclosing object, props or type definition.
230	`    paddingVertical: 12,`	Sets/declares the named object property or style/type member: paddingVertical: 12,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
231	`backgroundColor: "white",`	Sets/declares the named object property or style/type member: backgroundColor: "white",. Interpret it in the enclosing object, props or type definition.
232	`borderBottomWidth: 1,`	Sets/declares the named object property or style/type member: borderBottomWidth: 1,. Interpret it in the enclosing object, props or type definition.
233	`borderColor: "#D8E7DC",`	Sets/declares the named object property or style/type member: borderColor: "#D8E7DC",. Interpret it in the enclosing object, props or type definition.
234	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
235	`pageTitle: { fontSize: 16, fontWeight: "700", color: "#173D2D", flex: 1 },`	Sets/declares the named object property or style/type member: pageTitle: { fontSize: 16, fontWeight: "700", color: "#173D2D", flex: 1 },. Interpret it in the enclosing object, props or type definition.
236	`date: { fontSize: 11, color: "#547264" },`	Sets/declares the named object property or style/type member: date: { fontSize: 11, color: "#547264" },. Interpret it in the enclosing object, props or type definition.
237	`tool: {`	Sets/declares the named object property or style/type member: tool: {. Interpret it in the enclosing object, props or type definition.
238	`minHeight: 38,`	Sets/declares the named object property or style/type member: minHeight: 38,. Interpret it in the enclosing object, props or type definition.
239	`minWidth: 38,`	Sets/declares the named object property or style/type member: minWidth: 38,. Interpret it in the enclosing object, props or type definition.
240	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
241	`borderColor: "#D8E7DC",`	Sets/declares the named object property or style/type member: borderColor: "#D8E7DC",. Interpret it in the enclosing object, props or type definition.
242	`borderRadius: 9,`	Sets/declares the named object property or style/type member: borderRadius: 9,. Interpret it in the enclosing object, props or type definition.
243	`justifyContent: "center",`	Sets/declares the named object property or style/type member: justifyContent: "center",. Interpret it in the enclosing object, props or type definition.
244	`alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
245	`paddingHorizontal: 9,`	Sets/declares the named object property or style/type member: paddingHorizontal: 9,. Interpret it in the enclosing object, props or type definition.
246	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
247	`toolText: { fontSize: 19, color: "#547264" },`	Sets/declares the named object property or style/type member: toolText: { fontSize: 19, color: "#547264" },. Interpret it in the enclosing object, props or type definition.
248	`logout: { fontSize: 12, color: "#315D46", fontWeight: "600" },`	Sets/declares the named object property or style/type member: logout: { fontSize: 12, color: "#315D46", fontWeight: "600" },. Interpret it in the enclosing object, props or type definition.
249	`dim: { opacity: 0.45 },`	Sets/declares the named object property or style/type member: dim: { opacity: 0.45 },. Interpret it in the enclosing object, props or type definition.
250	`identity: { flexDirection: "row", alignItems: "center", gap: 9, maxWidth: 230 },`	Sets/declares the named object property or style/type member: identity: { flexDirection: "row", alignItems: "center", gap: 9, maxWidth: 230 },. Interpret it in the enclosing object, props or type definition.
251	`avatar: {`	Sets/declares the named object property or style/type member: avatar: {. Interpret it in the enclosing object, props or type definition.
252	`width: 34,`	Sets/declares the named object property or style/type member: width: 34,. Interpret it in the enclosing object, props or type definition.
253	`height: 34,`	Sets/declares the named object property or style/type member: height: 34,. Interpret it in the enclosing object, props or type definition.
254	`borderRadius: 17,`	Sets/declares the named object property or style/type member: borderRadius: 17,. Interpret it in the enclosing object, props or type definition.
255	`lineHeight: 34,`	Sets/declares the named object property or style/type member: lineHeight: 34,. Interpret it in the enclosing object, props or type definition.
256	`textAlign: "center",`	Sets/declares the named object property or style/type member: textAlign: "center",. Interpret it in the enclosing object, props or type definition.
257	`backgroundColor: "#E7F4EB",`	Sets/declares the named object property or style/type member: backgroundColor: "#E7F4EB",. Interpret it in the enclosing object, props or type definition.
258	`color: "#16734B",`	Sets/declares the named object property or style/type member: color: "#16734B",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
259	`    fontWeight: "700",`	Sets/declares the named object property or style/type member: fontWeight: "700",. Interpret it in the enclosing object, props or type definition.
260	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
261	`  content: { flex: 1, minHeight: 0, width: "100%", paddingHorizontal: 12, paddingTop: 10 },`	Sets/declares the named object property or style/type member: content: { flex: 1, minHeight: 0, width: "100%", paddingHorizontal: 12, paddingTop: 10 },. Interpret it in the enclosing object, props or type definition.
262	`  login: { alignSelf: "stretch", paddingTop: 30 },`	Sets/declares the named object property or style/type member: login: { alignSelf: "stretch", paddingTop: 30 },. Interpret it in the enclosing object, props or type definition.
263	`  footer: { fontSize: 10, color: "#547264", textAlign: "center", padding: 10 },`	Sets/declares the named object property or style/type member: footer: { fontSize: 10, color: "#547264", textAlign: "center", padding: 10 },. Interpret it in the enclosing object, props or type definition.
264	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

dms-mobile/src/components/PrimaryOrderForm.tsx

Catalogue loading, selected products, whole-case quantity and scheme validation, review payload and submit callback. Final pricing/approval is still server-owned.

326 numbered source lines | SHA-256 8cc3082fb0818dfc6679c0c52a51208d01e52ae89660a33304151ea8621e598c

Line	Source code	Explanation / reading note
1	`import React, { useEffect, useState } from "react";`	Imports dependencies/types used below: import React, { useEffect, useState } from "react";. Importing a function does not call it.
2	`import { View, Text, TextInput, Pressable, StyleSheet } from "react-native";`	Imports dependencies/types used below: import { View, Text, TextInput, Pressable, StyleSheet } from "react-native";. Importing a function does not call it.
3	`import { request } from "../api";`	Imports dependencies/types used below: import { request } from "../api";. Importing a function does not call it.
4	`import { colors } from "../theme";`	Imports dependencies/types used below: import { colors } from "../theme";. Importing a function does not call it.
5		Blank line separating logical sections; no executable operation.
6	`type Row = Record<string, any>;`	Defines a compile-time data contract: type Row = Record<string, any>;. TypeScript types do not validate untrusted runtime JSON by themselves.
7	`type Selection = { cases: string; schemeId?: string };`	Defines a compile-time data contract: type Selection = { cases: string; schemeId?: string };. TypeScript types do not validate untrusted runtime JSON by themselves.
8	`export default function PrimaryOrderForm({`	Declares a callable function/method: export default function PrimaryOrderForm({. Parameters supply its inputs; the following block implements the operation.
9	`  token,`	Continues the surrounding declaration/expression or text: token,. Read it with the preceding opening statement (export default function PrimaryOrderForm({); it is not a standalone business operation.
10	`  disabled,`	Continues the surrounding declaration/expression or text: disabled,. Read it with the preceding opening statement (token,); it is not a standalone business operation.
11	`  onReview,`	Continues the surrounding declaration/expression or text: onReview,. Read it with the preceding opening statement (disabled,); it is not a standalone business operation.
12	`  onSignIn,`	Continues the surrounding declaration/expression or text: onSignIn,. Read it with the preceding opening statement (onReview,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
13	`}: {`	Continues the surrounding declaration/expression or text: }: {. Read it with the preceding opening statement (onSignIn,); it is not a standalone business operation.
14	`  token: string;`	Sets/declares the named object property or style/type member: token: string;. Interpret it in the enclosing object, props or type definition.
15	`  disabled: boolean;`	Sets/declares the named object property or style/type member: disabled: boolean;. Interpret it in the enclosing object, props or type definition.
16	`  onReview: (body: Record<string, unknown>, summary: string) => void;`	Sets/declares the named object property or style/type member: onReview: (body: Record<string, unknown>, summary: string) => void;. Interpret it in the enclosing object, props or type definition.
17	`  onSignIn?: () => void;`	Sets/declares the named object property or style/type member: onSignIn?: () => void;. Interpret it in the enclosing object, props or type definition.
18	`}) {`	Continues the surrounding declaration/expression or text: }) {. Read it with the preceding opening statement (onSignIn?: () => void;); it is not a standalone business operation.
19	`  const [catalogue, setCatalogue] = useState<Row | null>(null);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
20	`  const [error, setError] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
21	`  const [search, setSearch] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
22	`  const [notes, setNotes] = useState("");`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
23	`  const [selected, setSelected] = useState<Record<string, Selection>>({});`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
24	`  const [loading, setLoading] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
25	`  const [needsSignIn, setNeedsSignIn] = useState(false);`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
26	`  async function load() {`	Declares a callable function/method: async function load() {. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
27	`    setLoading(true);`	Continues the surrounding declaration/expression or text: setLoading(true);. Read it with the preceding opening statement (async function load() {); it is not a standalone business operation.
28	`    setError("");`	Continues the surrounding declaration/expression or text: setError("");. Read it with the preceding opening statement (setLoading(true);); it is not a standalone business operation.
29	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
30	`      setCatalogue(await request("/primary/catalogue", token));`	Waits for this asynchronous operation before continuing: setCatalogue(await request("/primary/catalogue", token));. The returned result/error must still be handled.
31	`      setNeedsSignIn(false);`	Continues the surrounding declaration/expression or text: setNeedsSignIn(false);. Read it with the preceding opening statement (setCatalogue(await request("/primary/catalogue", token));); it is not a standalone business operation.
32	`    } catch (failure: any) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
33	`      setCatalogue(null);`	Continues the surrounding declaration/expression or text: setCatalogue(null);. Read it with the preceding opening statement (} catch (failure: any) {); it is not a standalone business operation.
34	`      setError(failure.message);`	Continues the surrounding declaration/expression or text: setError(failure.message);. Read it with the preceding opening statement (setCatalogue(null);); it is not a standalone business operation.
35	`      setNeedsSignIn(failure.status === 401 || failure.status === 403);`	Continues the surrounding declaration/expression or text: setNeedsSignIn(failure.status === 401 || failure.status === 403);. Read it with the preceding opening statement (setError(failure.message);); it is not a standalone business operation.
36	`    } finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
37	`      setLoading(false);`	Continues the surrounding declaration/expression or text: setLoading(false);. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.
38	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
40	`  useEffect(() => {`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.
41	`    void load();`	Continues the surrounding declaration/expression or text: void load();. Read it with the preceding opening statement (useEffect(() => {); it is not a standalone business operation.
42	`  }, [token]);`	Continues the surrounding declaration/expression or text: }, [token]);. Read it with the preceding opening statement (void load();); it is not a standalone business operation.
43	`  const products: Row[] = catalogue?.products || [];`	Declares/initializes local data used by the surrounding operation: const products: Row[] = catalogue?.products || [];. Collection contents and assignments below determine its purpose.
44	`  const chosen = products.filter((p) => selected[p.Id]);`	Declares/initializes local data used by the surrounding operation: const chosen = products.filter((p) => selected[p.Id]);. Collection contents and assignments below determine its purpose.
45	`  const configured = (p: Row) =>`	Declares/initializes local data used by the surrounding operation: const configured = (p: Row) =>. Collection contents and assignments below determine its purpose.
46	`    Number(p.DMS_Case_Price__c) > 0 &&`	Continues the surrounding declaration/expression or text: Number(p.DMS_Case_Price__c) > 0 &&. Read it with the preceding opening statement (const configured = (p: Row) =>); it is not a standalone business operation.
47	`    Number.isInteger(Number(p.Units_Per_Case__c)) &&`	Calls the named method: Number.isInteger(Number(p.Units_Per_Case__c)) &&. Its implementation defines the side effect/result; use the symbol/file index to follow it.
48	`    Number(p.Units_Per_Case__c) > 0;`	Continues the surrounding declaration/expression or text: Number(p.Units_Per_Case__c) > 0;. Read it with the preceding opening statement (Number.isInteger(Number(p.Units_Per_Case__c)) &&); it is not a standalone business operation.
49	`  const button = (title: string, action: () => void, blocked = false, checked = false) => (`	Declares/initializes local data used by the surrounding operation: const button = (title: string, action: () => void, blocked = false, checked = false) => (. Collection contents and assignments below determine its purpose.
50	`    <Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
51	`      accessibilityRole="button"`	Assigns the right-hand expression to the named variable/property: accessibilityRole="button". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
52	`accessibilityState={{ disabled: blocked, selected: checked }}`	Assigns the right-hand expression to the named variable/property: accessibilityState={{ disabled: blocked, selected: checked }}. This is in-memory unless it is later persisted by an explicit call.
53	`disabled={blocked}`	Controls whether this button/input accepts interaction. Evaluate this expression when diagnosing an unclickable control.
54	`onPress={action}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
55	`style={[s.button, checked && s.selected, blocked && { opacity: 0.5 }]}`	Assigns the right-hand expression to the named variable/property: style={[s.button, checked && s.selected, blocked && { opacity: 0.5 }]}. This is in-memory unless it is later persisted by an explicit call.
56	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (style={[s.button, checked && s.selected, blocked && { opacity: 0.5 }]}); it is not a standalone business operation.
57	`<Text style={[s.buttonText, checked && { color: colors.white }]}>{title}</Text>`	Renders/opens a UI element or component: <Text style={[s.buttonText, checked && { color: colors.white }]}>{title}</Text>. Props and child content below determine appearance and interactions.
58	`</Pressable>`	Closes the UI element/component opened above.
59	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
60	`function review() {`	Declares a callable function/method: function review() {. Parameters supply its inputs; the following block implements the operation.
61	`if (!chosen.length || chosen.length > 50 || chosen.length !== Object.keys(selected).length) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!chosen.length || chosen.length > 50 || chosen.length !== Object.keys(selected).length) {.
62	`setError(`	Continues the surrounding declaration/expression or text: setError(. Read it with the preceding opening statement (if (!chosen.length || chosen.length > 50 || chosen.length !== Object.keys(selected).length) {); it is not a standalone business operation.
63	`"Select between 1 and 50 current products. A removed product requires reopening the form.",`	Continues the surrounding declaration/expression or text: "Select between 1 and 50 current products. A removed product requires reopening the form.",. Read it with the preceding opening statement (setError(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
64	`      );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
65	`      return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
66	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
67	`    const lines = [];`	Declares/initializes local data used by the surrounding operation: const lines = [];. Collection contents and assignments below determine its purpose.
68	`    for (const product of chosen) {`	Repeats work over the specified records/items or while this condition holds: for (const product of chosen) {. Check where queries/writes occur relative to the loop.
69	`      const input = selected[product.Id],`	Declares/initializes local data used by the surrounding operation: const input = selected[product.Id],. Collection contents and assignments below determine its purpose.
70	`        cases = Number(input.cases);`	Assigns the right-hand expression to the named variable/property: cases = Number(input.cases);. This is in-memory unless it is later persisted by an explicit call.
71	`      if (!configured(product) || !Number.isInteger(cases) || cases <= 0 || cases > 100000) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!configured(product) || !Number.isInteger(cases) || cases <= 0 || cases > 100000) {.
72	`        setError(`	Continues the surrounding declaration/expression or text: setError(. Read it with the preceding opening statement (if (!configured(product) || !Number.isInteger(cases) || cases <= 0 || cases > 100000) {); it is not a standalone business operation.
73	`          \`${product.Name}: enter 1–100000 whole cases and ensure case pricing is configured.\`,`	Continues the surrounding declaration/expression or text: `${product.Name}: enter 1-100000 whole cases and ensure case pricing is configured.`,. Read it with the preceding opening statement (setError(); it is not a standalone business operation.
74	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
75	`        return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
76	`      }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
77	`const scheme = product.schemes?.find((row: Row) => row.Id === input.schemeId);`	Declares/initializes local data used by the surrounding operation: const scheme = product.schemes?.find((row: Row) => row.Id === input.schemeId);. Collection contents and assignments below determine its purpose.
78	`if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
79	`input.schemeId &&`	Continues the surrounding declaration/expression or text: input.schemeId &&. Read it with the preceding opening statement (if (); it is not a standalone business operation.
80	`(!scheme || cases < Number(scheme.Minimum_Cases__c) || Number(scheme.Minimum_Cases__c) <= 0)`	Continues the surrounding declaration/expression or text: (!scheme || cases < Number(scheme.Minimum_Cases__c) || Number(scheme.Minimum_Cases__c) <= 0). Read it with the preceding opening statement (input.schemeId &&); it is not a standalone business operation.
81	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement ((!scheme || cases < Number(scheme.Minimum_Cases__c) || Number(scheme.Minimum_Cases__c) <= 0)); it is not a standalone business operation.
82	`setError(`${product.Name}: meet the scheme minimum or select No scheme.`);`	Continues the surrounding declaration/expression or text: setError(`${product.Name}: meet the scheme minimum or select No scheme.`);. Read it with the preceding opening statement ( ) {}; it is not a standalone business operation.
83	`return;`	Returns to the caller (or begins returned UI markup) and ends this execution path.
84	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
85	`lines.push({`	Calls the named method: lines.push({. Its implementation defines the side effect/result; use the symbol/file index to follow it.
86	`productId: product.Id,`	Sets/declares the named object property or style/type member: productId: product.Id,. Interpret it in the enclosing object, props or type definition.
87	`cases,`	Continues the surrounding declaration/expression or text: cases,. Read it with the preceding opening statement (productId: product.Id,); it is not a standalone business operation.
88	`...(input.schemeId ? { schemeId: input.schemeId } : {}),`	Continues the surrounding declaration/expression or text: ...(input.schemeId ? { schemeId: input.schemeId } : {}),. Read it with the preceding opening statement (cases,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
89	`      });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
90	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
91	`    setError("");`	Continues the surrounding declaration/expression or text: setError("");. Read it with the preceding opening statement (}); it is not a standalone business operation.
92	`    onReview(`	Continues the surrounding declaration/expression or text: onReview(. Read it with the preceding opening statement (setError("");); it is not a standalone business operation.
93	`      { lines, notes: notes.trim() },`	Calls the named method: { lines, notes: notes.trim() },. Its implementation defines the side effect/result; use the symbol/file index to follow it.
94	`      chosen`	Continues the surrounding declaration/expression or text: chosen. Read it with the preceding opening statement ({ lines, notes: notes.trim() },); it is not a standalone business operation.
95	`        .map((p) => {`	Transforms/selects/aggregates collection values with the callback shown here: .map((p) => {. Read the callback body and result assignment together.
96	`          const selection = selected[p.Id],`	Declares/initializes local data used by the surrounding operation: const selection = selected[p.Id],. Collection contents and assignments below determine its purpose.
97	`            scheme = p.schemes?.find((row: Row) => row.Id === selection.schemeId);`	Transforms/selects/aggregates collection values with the callback shown here: scheme = p.schemes?.find((row: Row) => row.Id === selection.schemeId);. Read the callback body and result assignment together.
98	`          return `${p.Name}: ${selection.cases} cases (${scheme?.Name || "No scheme"})`;`	Returns `${p.Name}: ${selection.cases} cases (${scheme?.Name || "No scheme"})` to the caller (or begins returned UI markup) and ends this execution path.
99	`        })`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
100	`        .join("; "),`	Continues the surrounding declaration/expression or text: .join("; "),. Read it with the preceding opening statement (})); it is not a standalone business operation.
101	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
102	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
103	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
104	`    <View style={s.card}>`	Renders/opens a UI element or component: <View style={s.card}>. Props and child content below determine appearance and interactions.
105	`      <Text style={s.heading}>Place Primary Order</Text>`	Renders/opens a UI element or component: <Text style={s.heading}>Place Primary Order</Text>. Props and child content below determine appearance and interactions.
106	`      <Text style={s.copy}>`	Renders/opens a UI element or component: <Text style={s.copy}>. Props and child content below determine appearance and interactions.
107	`        Order for {catalogue?.distributor?.Name || "your distributor"} in whole cases. Company`	Continues the surrounding declaration/expression or text: Order for {catalogue?.distributor?.Name || "your distributor"} in whole cases. Company. Read it with the preceding opening statement (<Text style={s.copy}>); it is not a standalone business operation.
108	`        officer:{" "}`	Sets/declares the named object property or style/type member: officer:{" "}. Interpret it in the enclosing object, props or type definition.
109	`        {catalogue`	Continues the surrounding declaration/expression or text: {catalogue. Read it with the preceding opening statement (officer:{" "}); it is not a standalone business operation.
110	`          ? catalogue.distributor?.Officer__r?.Name || "Not assigned"`	Continues the surrounding declaration/expression or text: ? catalogue.distributor?.Officer__r?.Name || "Not assigned". Read it with the preceding opening statement ({catalogue); it is not a standalone business operation.
111	`          : "sign in and refresh to load"}`	Continues the surrounding declaration/expression or text: : "sign in and refresh to load"}. Read it with the preceding opening statement (? catalogue.distributor?.Officer__r?.Name || "Not assigned"); it is not a standalone business operation.
112	`        .`	Continues the surrounding declaration/expression or text: .. Read it with the preceding opening statement (: "sign in and refresh to load"}); it is not a standalone business operation.
113	`      </Text>`	Closes the UI element/component opened above.
114	`      <Text style={s.copy}>`	Renders/opens a UI element or component: <Text style={s.copy}>. Props and child content below determine appearance and interactions.
115	`        Salesforce confirms prices, discounts, free cases and approval. Submission does not increase`	Continues the surrounding declaration/expression or text: Salesforce confirms prices, discounts, free cases and approval. Submission does not increase. Read it with the preceding opening statement (<Text style={s.copy}>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
116	`stock; receive goods only after approval and delivery.`	Continues the surrounding declaration/expression or text: stock; receive goods only after approval and delivery.. Read it with the preceding opening statement (Salesforce confirms prices, discounts, free cases and approval. Submission does not increase); it is not a standalone business operation.
117	`</Text>`	Closes the UI element/component opened above.
118	`{button(`	Continues the surrounding declaration/expression or text: {button(. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
119	`loading ? "Loading catalogue…" : "Refresh products and schemes",`	Continues the surrounding declaration/expression or text: loading ? "Loading catalogue…" : "Refresh products and schemes",. Read it with the preceding opening statement ({button(); it is not a standalone business operation.
120	`() => void load(),`	Continues the surrounding declaration/expression or text: () => void load(),. Read it with the preceding opening statement (loading ? "Loading catalogue…" : "Refresh products and schemes",); it is not a standalone business operation.
121	`loading || disabled,`	Continues the surrounding declaration/expression or text: loading || disabled,. Read it with the preceding opening statement (() => void load(),); it is not a standalone business operation.
122	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
123	`{!!error && (`	Continues the surrounding declaration/expression or text: {!!error && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
124	`<Text accessibilityRole="alert" style={s.error}>`	Renders/opens a UI element or component: <Text accessibilityRole="alert" style={s.error}>. Props and child content below determine appearance and interactions.
125	`{error}`	Continues the surrounding declaration/expression or text: {error}. Read it with the preceding opening statement (<Text accessibilityRole="alert" style={s.error}>); it is not a standalone business operation.
126	`</Text>`	Closes the UI element/component opened above.
127	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
128	`{needsSignIn && onSignIn && (`	Continues the surrounding declaration/expression or text: {needsSignIn && onSignIn && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.

Line	Source code	Explanation / reading note
129	`        <>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
130	`          <Text style={s.copy}>`	Renders/opens a UI element or component: <Text style={s.copy}>. Props and child content below determine appearance and interactions.
131	`            Renew your distributor sign-in to load Salesforce orders and products. Saved pending`	Continues the surrounding declaration/expression or text: Renew your distributor sign-in to load Salesforce orders and products. Saved pending. Read it with the preceding opening statement (<Text style={s.copy}>); it is not a standalone business operation.
132	`            work stays on this device.`	Continues the surrounding declaration/expression or text: work stays on this device.. Read it with the preceding opening statement (Renew your distributor sign-in to load Salesforce orders and products. Saved pending); it is not a standalone business operation.
133	`          </Text>`	Closes the UI element/component opened above.
134	`          {button("Sign in again", onSignIn, disabled)}`	Continues the surrounding declaration/expression or text: {button("Sign in again", onSignIn, disabled)}. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
135	`        </>`	Closes the UI element/component opened above.
136	`      )}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
137	`      {catalogue && (`	Continues the surrounding declaration/expression or text: {catalogue && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
138	`        <>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
139	`          {!catalogue.distributor?.Officer__r?.IsActive && (`	Continues the surrounding declaration/expression or text: {!catalogue.distributor?.Officer__r?.IsActive && (. Read it with the preceding opening statement (<>); it is not a standalone business operation.
140	`            <Text style={s.error}>`	Renders/opens a UI element or component: <Text style={s.error}>. Props and child content below determine appearance and interactions.
141	`              An active company officer must be assigned in Salesforce before ordering.`	Continues the surrounding declaration/expression or text: An active company officer must be assigned in Salesforce before ordering.. Read it with the preceding opening statement (<Text style={s.error}>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
142	`</Text>`	Closes the UI element/component opened above.
143	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
144	`{!!products.length && !products.some(configured) && (`	Transforms/selects/aggregates collection values with the callback shown here: {!!products.length && !products.some(configured) && (. Read the callback body and result assignment together.
145	`<Text style={s.error}>`	Renders/opens a UI element or component: <Text style={s.error}>. Props and child content below determine appearance and interactions.
146	`No products are ready for primary ordering. Set Primary Case Price and Units Per Case`	Continues the surrounding declaration/expression or text: No products are ready for primary ordering. Set Primary Case Price and Units Per Case. Read it with the preceding opening statement (<Text style={s.error}>); it is not a standalone business operation.
147	`on the Salesforce products first.`	Continues the surrounding declaration/expression or text: on the Salesforce products first.. Read it with the preceding opening statement (No products are ready for primary ordering. Set Primary Case Price and Units Per Case); it is not a standalone business operation.
148	`</Text>`	Closes the UI element/component opened above.
149	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
150	`{!products.length && (`	Continues the surrounding declaration/expression or text: {!products.length && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
151	`<Text style={s.copy}>No active sellable products in Salesforce.</Text>`	Renders/opens a UI element or component: <Text style={s.copy}>No active sellable products in Salesforce.</Text>. Props and child content below determine appearance and interactions.
152	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
153	`<Text style={s.label}>Search product or code</Text>`	Renders/opens a UI element or component: <Text style={s.label}>Search product or code</Text>. Props and child content below determine appearance and interactions.
154	`<TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
155	`accessibilityLabel="Search primary products"`	Assigns the right-hand expression to the named variable/property: accessibilityLabel="Search primary products". This is in-memory unless it is later persisted by an explicit call.
156	`placeholder="Product name or code"`	Assigns the right-hand expression to the named variable/property: placeholder="Product name or code". This is in-memory unless it is later persisted by an explicit call.
157	`placeholderTextColor={colors.muted}`	Assigns the right-hand expression to the named variable/property: placeholderTextColor={colors.muted}. This is in-memory unless it is later persisted by an explicit call.
158	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
159	`value={search}`	Assigns the right-hand expression to the named variable/property: value={search}. This is in-memory unless it is later persisted by an explicit call.
160	`onChangeText={setSearch}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
161	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (onChangeText={setSearch}); it is not a standalone business operation.
162	`{products`	Continues the surrounding declaration/expression or text: {products. Read it with the preceding opening statement (/>); it is not a standalone business operation.
163	`.filter((p) =>`	Transforms/selects/aggregates collection values with the callback shown here: .filter((p) =>. Read the callback body and result assignment together.
164	`` `${p.Name} ${p.Product_Code__c || ""}`.toLowerCase().includes(search.toLowerCase()), ``	Calls the named method: `${p.Name} ${p.Product_Code__c || ""}`.toLowerCase().includes(search.toLowerCase()),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
165	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
166	`.map((product) => {`	Transforms/selects/aggregates collection values with the callback shown here: .map((product) => {. Read the callback body and result assignment together.
167	`const selection = selected[product.Id];`	Declares/initializes local data used by the surrounding operation: const selection = selected[product.Id];. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
168	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
169	`<View key={product.Id} style={s.product}>`	Renders/opens a UI element or component: <View key={product.Id} style={s.product}>. Props and child content below determine appearance and interactions.
170	`<Text style={s.name}>{product.Name}</Text>`	Renders/opens a UI element or component: <Text style={s.name}>{product.Name}</Text>. Props and child content below determine appearance and interactions.
171	`<Text style={s.copy}>`	Renders/opens a UI element or component: <Text style={s.copy}>. Props and child content below determine appearance and interactions.
172	`{configured(product)`	Continues the surrounding declaration/expression or text: {configured(product). Read it with the preceding opening statement (<Text style={s.copy}>); it is not a standalone business operation.
173	`? ₹${Number(product.DMS_Case_Price__c).toFixed(2)} / case · ${product.Units_Per_Case__c} pieces / case · GST ${product.GST_Percent__c || 0}%`	Continues the surrounding declaration/expression or text: ? `₹${Number(product.DMS_Case_Price__c).toFixed(2)} / case · ${product.Units_Per_Case__c} pieces / case · GST ${product.GST_Percent__c || 0}%`. Read it with the preceding opening statement ({configured(product)); it is not a standalone business operation.
174	`: "Primary case price / pieces per case needs Salesforce configuration"}`	Continues the surrounding declaration/expression or text: : "Primary case price / pieces per case needs Salesforce configuration"}. Read it with the preceding opening statement (? `₹${Number(product.DMS_Case_Price__c).toFixed(2)} / case · ${product.Units_Per_Case__c} pieces / case · GST ${product.GST_Percent__c || 0}%`); it is not a standalone business operation.
175	`</Text>`	Closes the UI element/component opened above.
176	`{button(`	Continues the surrounding declaration/expression or text: {button(. Read it with the preceding opening statement (</Text>); it is not a standalone business operation.
177	`selection ? "Remove product" : "Add product",`	Continues the surrounding declaration/expression or text: selection ? "Remove product" : "Add product",. Read it with the preceding opening statement ({button(); it is not a standalone business operation.
178	`() =>`	Continues the surrounding declaration/expression or text: () =>. Read it with the preceding opening statement (selection ? "Remove product" : "Add product",); it is not a standalone business operation.
179	`setSelected((old) => {`	Continues the surrounding declaration/expression or text: setSelected((old) => {. Read it with the preceding opening statement (() =>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
180	`const next = { ...old };`	Declares/initializes local data used by the surrounding operation: const next = { ...old };. Collection contents and assignments below determine its purpose.
181	`if (next[product.Id]) delete next[product.Id];`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (next[product.Id]) delete next[product.Id];.
182	`else next[product.Id] = { cases: "1" };`	Alternative branch taken when the preceding condition is false.
183	`return next;`	Returns next to the caller (or begins returned UI markup) and ends this execution path.
184	`}),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
185	`disabled || !configured(product),`	Continues the surrounding declaration/expression or text: disabled || !configured(product),. Read it with the preceding opening statement (}),); it is not a standalone business operation.
186	`!!selection,`	Continues the surrounding declaration/expression or text: !!selection,. Read it with the preceding opening statement (disabled || !configured(product),); it is not a standalone business operation.
187	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
188	`{selection && (`	Continues the surrounding declaration/expression or text: {selection && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
189	`<>`	Renders/opens a UI element or component: <>. Props and child content below determine appearance and interactions.
190	`<Text style={s.label}>Quantity (whole cases)</Text>`	Renders/opens a UI element or component: <Text style={s.label}>Quantity (whole cases)</Text>. Props and child content below determine appearance and interactions.
191	`<TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
192	`accessibilityLabel={`${product.Name} cases`}`	Assigns the right-hand expression to the named variable/property: accessibilityLabel={`${product.Name} cases`}. This is in-memory unless it is later persisted by an explicit call.
193	`keyboardType="number-pad"`	Assigns the right-hand expression to the named variable/property: keyboardType="number-pad". This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
194	`value={selection.cases}`	Assigns the right-hand expression to the named variable/property: value={selection.cases}. This is in-memory unless it is later persisted by an explicit call.
195	`editable={!disabled}`	Assigns the right-hand expression to the named variable/property: editable={!disabled}. This is in-memory unless it is later persisted by an explicit call.
196	`placeholder="Enter cases"`	Assigns the right-hand expression to the named variable/property: placeholder="Enter cases". This is in-memory unless it is later persisted by an explicit call.
197	`placeholderTextColor={colors.muted}`	Assigns the right-hand expression to the named variable/property: placeholderTextColor={colors.muted}. This is in-memory unless it is later persisted by an explicit call.
198	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
199	`onChangeText={(cases) =>`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
200	`setSelected((old) => ({`	Continues the surrounding declaration/expression or text: setSelected((old) => ({. Read it with the preceding opening statement (onChangeText={(cases) =>); it is not a standalone business operation.
201	`...old,`	Continues the surrounding declaration/expression or text: ...old,. Read it with the preceding opening statement (setSelected((old) => ({); it is not a standalone business operation.
202	`[product.Id]: { ...old[product.Id], cases },`	Continues the surrounding declaration/expression or text: [product.Id]: { ...old[product.Id], cases },. Read it with the preceding opening statement (...old,); it is not a standalone business operation.
203	`}))`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
204	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
205	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (}); it is not a standalone business operation.
206	`<Text style={s.label}>Applicable Primary schemes</Text>`	Renders/opens a UI element or component: <Text style={s.label}>Applicable Primary schemes</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
207	{button(	Continues the surrounding declaration/expression or text: {button(. Read it with the preceding opening statement (<Text style={s.label}>Applicable Primary schemes</Text>); it is not a standalone business operation.
208	"No scheme",	Continues the surrounding declaration/expression or text: "No scheme",. Read it with the preceding opening statement ({button(); it is not a standalone business operation.
209	() =>	Continues the surrounding declaration/expression or text: () =>. Read it with the preceding opening statement ("No scheme",); it is not a standalone business operation.
210	setSelected((old) => ({	Continues the surrounding declaration/expression or text: setSelected((old) => ({. Read it with the preceding opening statement (() =>); it is not a standalone business operation.
211	...old,	Continues the surrounding declaration/expression or text: ...old,. Read it with the preceding opening statement (setSelected((old) => ({); it is not a standalone business operation.
212	[product.Id]: { ...old[product.Id], schemeId: undefined },	Continues the surrounding declaration/expression or text: [product.Id]: { ...old[product.Id], schemeId: undefined },. Read it with the preceding opening statement (...old,); it is not a standalone business operation.
213	})),	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
214	disabled,	Continues the surrounding declaration/expression or text: disabled,. Read it with the preceding opening statement (})),); it is not a standalone business operation.
215	!selection.schemeId,	Continues the surrounding declaration/expression or text: !selection.schemeId,. Read it with the preceding opening statement (disabled,); it is not a standalone business operation.
216	)}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
217	{!product.schemes?.length && (	Continues the surrounding declaration/expression or text: {!product.schemes?.length && (. Read it with the preceding opening statement ( )}); it is not a standalone business operation.
218	<Text style={s.copy}>	Renders/opens a UI element or component: <Text style={s.copy}>. Props and child content below determine appearance and interactions.
219	No active Primary scheme applies to this product and distributor	Continues the surrounding declaration/expression or text: No active Primary scheme applies to this product and distributor. Read it with the preceding opening statement (<Text style={s.copy}>); it is not a standalone business operation.

Line	Source code	Explanation / reading note
220	`geography.`	Continues the surrounding declaration/expression or text: geography.. Read it with the preceding opening statement (No active Primary scheme applies to this product and distributor); it is not a standalone business operation.
221	`</Text>`	Closes the UI element/component opened above.
222	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
223	`{product.schemes?.map((scheme: Row) => (`	Transforms/selects/aggregates collection values with the callback shown here: {product.schemes?.map((scheme: Row) => (. Read the callback body and result assignment together.
224	`<View key={scheme.Id}>`	Renders/opens a UI element or component: <View key={scheme.Id}>. Props and child content below determine appearance and interactions.
225	`{button(`	Continues the surrounding declaration/expression or text: {button(. Read it with the preceding opening statement (<View key={scheme.Id}>); it is not a standalone business operation.
226	`scheme.Name,`	Continues the surrounding declaration/expression or text: scheme.Name,. Read it with the preceding opening statement ({button(); it is not a standalone business operation.
227	`() =>`	Continues the surrounding declaration/expression or text: () =>. Read it with the preceding opening statement (scheme.Name,); it is not a standalone business operation.
228	`setSelected((old) => ({`	Continues the surrounding declaration/expression or text: setSelected((old) => ({. Read it with the preceding opening statement (() =>); it is not a standalone business operation.
229	`...old,`	Continues the surrounding declaration/expression or text: ...old,. Read it with the preceding opening statement (setSelected((old) => ({); it is not a standalone business operation.
230	`[product.Id]: { ...old[product.Id], schemeId: scheme.Id },`	Continues the surrounding declaration/expression or text: [product.Id]: { ...old[product.Id], schemeId: scheme.Id },. Read it with the preceding opening statement (...old,); it is not a standalone business operation.
231	`})),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
232	`disabled ||`	Continues the surrounding declaration/expression or text: disabled ||. Read it with the preceding opening statement (})),); it is not a standalone business operation.

Line	Source code	Explanation / reading note
233	`Number(scheme.Minimum_Cases__c) <= 0 ||`	Continues the surrounding declaration/expression or text: Number(scheme.Minimum_Cases__c) <= 0 ||. Read it with the preceding opening statement (disabled ||); it is not a standalone business operation.
234	`Number(selection.cases) < Number(scheme.Minimum_Cases__c),`	Continues the surrounding declaration/expression or text: Number(selection.cases) < Number(scheme.Minimum_Cases__c),. Read it with the preceding opening statement (Number(scheme.Minimum_Cases__c) <= 0 ||); it is not a standalone business operation.
235	`selection.schemeId === scheme.Id,`	Continues the surrounding declaration/expression or text: selection.schemeId === scheme.Id,. Read it with the preceding opening statement (Number(selection.cases) < Number(scheme.Minimum_Cases__c),); it is not a standalone business operation.
236	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
237	`<Text style={s.copy}>`	Renders/opens a UI element or component: <Text style={s.copy}>. Props and child content below determine appearance and interactions.
238	`Minimum {scheme.Minimum_Cases__c || "not configured"} cases ·{" "}`	Continues the surrounding declaration/expression or text: Minimum {scheme.Minimum_Cases__c || "not configured"} cases ·{" "}. Read it with the preceding opening statement (<Text style={s.copy}>); it is not a standalone business operation.
239	`{scheme.Discount_Percent__c || 0}% discount · ₹`	Continues the surrounding declaration/expression or text: {scheme.Discount_Percent__c || 0}% discount · ₹. Read it with the preceding opening statement (Minimum {scheme.Minimum_Cases__c || "not configured"} cases ·{" "}); it is not a standalone business operation.
240	`{scheme.Discount_Amount__c || 0} discount / buy block ·{" "}`	Continues the surrounding declaration/expression or text: {scheme.Discount_Amount__c || 0} discount / buy block ·{" "}. Read it with the preceding opening statement ({scheme.Discount_Percent__c || 0}% discount · ₹); it is not a standalone business operation.
241	`{scheme.Free_Cases__c || 0} free cases of{" "}`	Continues the surrounding declaration/expression or text: {scheme.Free_Cases__c || 0} free cases of{" "}. Read it with the preceding opening statement ({scheme.Discount_Amount__c || 0} discount / buy block ·{" "}); it is not a standalone business operation.
242	`{scheme.Free_Product__r?.Name || product.Name} / buy block`	Continues the surrounding declaration/expression or text: {scheme.Free_Product__r?.Name || product.Name} / buy block. Read it with the preceding opening statement ({scheme.Free_Cases__c || 0} free cases of{" "}); it is not a standalone business operation.
243	`{scheme.Free_Gift__c`	Continues the surrounding declaration/expression or text: {scheme.Free_Gift__c. Read it with the preceding opening statement ({scheme.Free_Product__r?.Name || product.Name} / buy block); it is not a standalone business operation.

Line	Source code	Explanation / reading note
244	`? ` · ${scheme.Gift_Quantity__c || 0} × ${scheme.Free_Gift__c} / buy block``	Continues the surrounding declaration/expression or text: ? ` · ${scheme.Gift_Quantity__c || 0} × ${scheme.Free_Gift__c} / buy block`. Read it with the preceding opening statement ({scheme.Free_Gift__c); it is not a standalone business operation.
245	`: ""}`	Continues the surrounding declaration/expression or text: : ""}. Read it with the preceding opening statement (? ` · ${scheme.Gift_Quantity__c || 0} × ${scheme.Free_Gift__c} / buy block`); it is not a standalone business operation.
246	`</Text>`	Closes the UI element/component opened above.
247	`</View>`	Closes the UI element/component opened above.
248	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
249	`</>`	Closes the UI element/component opened above.
250	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
251	`</View>`	Closes the UI element/component opened above.
252	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
253	`})}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
254	`<Text style={s.label}>Selected products: {chosen.length}</Text>`	Renders/opens a UI element or component: <Text style={s.label}>Selected products: {chosen.length}</Text>. Props and child content below determine appearance and interactions.
255	`{chosen.map((p) => (`	Transforms/selects/aggregates collection values with the callback shown here: {chosen.map((p) => (. Read the callback body and result assignment together.
256	`<Text key={p.Id} style={s.copy}>`	Renders/opens a UI element or component: <Text key={p.Id} style={s.copy}>. Props and child content below determine appearance and interactions.
257	`{p.Name}: {selected[p.Id].cases || "0"} cases`	Continues the surrounding declaration/expression or text: {p.Name}: {selected[p.Id].cases || "0"} cases. Read it with the preceding opening statement (<Text key={p.Id} style={s.copy}>); it is not a standalone business operation.
258	`</Text>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
259	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
260	`<Text style={s.copy}>`	Renders/opens a UI element or component: <Text style={s.copy}>. Props and child content below determine appearance and interactions.
261	`Base value before scheme discounts and GST: ₹`	Continues the surrounding declaration/expression or text: Base value before scheme discounts and GST: ₹. Read it with the preceding opening statement (<Text style={s.copy}>); it is not a standalone business operation.
262	`{chosen`	Continues the surrounding declaration/expression or text: {chosen. Read it with the preceding opening statement (Base value before scheme discounts and GST: ₹); it is not a standalone business operation.
263	`.reduce(`	Transforms/selects/aggregates collection values with the callback shown here: .reduce(. Read the callback body and result assignment together.
264	`(sum, p) =>`	Continues the surrounding declaration/expression or text: (sum, p) =>. Read it with the preceding opening statement (.reduce(); it is not a standalone business operation.
265	`sum + (Number(selected[p.Id].cases) || 0) * Number(p.DMS_Case_Price__c || 0),`	Continues the surrounding declaration/expression or text: sum + (Number(selected[p.Id].cases) || 0) * Number(p.DMS_Case_Price__c || 0),. Read it with the preceding opening statement ((sum, p) =>); it is not a standalone business operation.
266	`0,`	Continues the surrounding declaration/expression or text: 0,. Read it with the preceding opening statement (sum + (Number(selected[p.Id].cases) || 0) * Number(p.DMS_Case_Price__c || 0),); it is not a standalone business operation.
267	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
268	`.toFixed(2)}`	Continues the surrounding declaration/expression or text: .toFixed(2)}. Read it with the preceding opening statement ( )); it is not a standalone business operation.
269	`. Final payable value is calculated by Salesforce on submission.`	Continues the surrounding declaration/expression or text: . Final payable value is calculated by Salesforce on submission.. Read it with the preceding opening statement (.toFixed(2)}); it is not a standalone business operation.
270	`</Text>`	Closes the UI element/component opened above.
271	`<Text style={s.label}>Order notes (optional)</Text>`	Renders/opens a UI element or component: <Text style={s.label}>Order notes (optional)</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
272	`<TextInput`	Renders/opens a UI element or component: <TextInput. Props and child content below determine appearance and interactions.
273	`accessibilityLabel="Primary order notes"`	Assigns the right-hand expression to the named variable/property: accessibilityLabel="Primary order notes". This is in-memory unless it is later persisted by an explicit call.
274	`multiline`	Continues the surrounding declaration/expression or text: multiline. Read it with the preceding opening statement (accessibilityLabel="Primary order notes"); it is not a standalone business operation.
275	`maxLength={1000}`	Assigns the right-hand expression to the named variable/property: maxLength={1000}. This is in-memory unless it is later persisted by an explicit call.
276	`value={notes}`	Assigns the right-hand expression to the named variable/property: value={notes}. This is in-memory unless it is later persisted by an explicit call.
277	`onChangeText={setNotes}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
278	`editable={!disabled}`	Assigns the right-hand expression to the named variable/property: editable={!disabled}. This is in-memory unless it is later persisted by an explicit call.
279	`placeholder="Delivery instructions or remarks"`	Assigns the right-hand expression to the named variable/property: placeholder="Delivery instructions or remarks". This is in-memory unless it is later persisted by an explicit call.
280	`placeholderTextColor={colors.muted}`	Assigns the right-hand expression to the named variable/property: placeholderTextColor={colors.muted}. This is in-memory unless it is later persisted by an explicit call.
281	`style={s.input}`	Assigns the right-hand expression to the named variable/property: style={s.input}. This is in-memory unless it is later persisted by an explicit call.
282	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement (style={s.input}); it is not a standalone business operation.
283	`{button(`	Continues the surrounding declaration/expression or text: {button(. Read it with the preceding opening statement (/>); it is not a standalone business operation.
284	`"Review order for approval",`	Continues the surrounding declaration/expression or text: "Review order for approval",. Read it with the preceding opening statement ({button(); it is not a standalone business operation.

Line	Source code	Explanation / reading note
285	`review,`	Continues the surrounding declaration/expression or text: review,. Read it with the preceding opening statement ("Review order for approval",); it is not a standalone business operation.
286	`disabled || loading || !chosen.length || !catalogue.distributor?.Officer__r?.IsActive,`	Continues the surrounding declaration/expression or text: disabled || loading || !chosen.length || !catalogue.distributor?.Officer__r?.IsActive,. Read it with the preceding opening statement (review,); it is not a standalone business operation.
287	`true,`	Continues the surrounding declaration/expression or text: true,. Read it with the preceding opening statement (disabled || loading || !chosen.length || !catalogue.distributor?.Officer__r?.IsActive,); it is not a standalone business operation.
288	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
289	`</>`	Closes the UI element/component opened above.
290	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
291	`</View>`	Closes the UI element/component opened above.
292	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
293	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
294	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
295	`card: { padding: 18, borderRadius: 22, backgroundColor: colors.white, marginVertical: 12 },`	Sets/declares the named object property or style/type member: card: { padding: 18, borderRadius: 22, backgroundColor: colors.white, marginVertical: 12 },. Interpret it in the enclosing object, props or type definition.
296	`heading: { fontSize: 21, fontWeight: "900", color: colors.ink, marginBottom: 10 },`	Sets/declares the named object property or style/type member: heading: { fontSize: 21, fontWeight: "900", color: colors.ink, marginBottom: 10 },. Interpret it in the enclosing object, props or type definition.
297	`name: { fontSize: 17, fontWeight: "800", color: colors.ink },`	Sets/declares the named object property or style/type member: name: { fontSize: 17, fontWeight: "800", color: colors.ink },. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
298	`  label: { fontSize: 13, color: colors.ink, fontWeight: "700", marginVertical: 8 },`	Sets/declares the named object property or style/type member: label: { fontSize: 13, color: colors.ink, fontWeight: "700", marginVertical: 8 },. Interpret it in the enclosing object, props or type definition.
299	`  copy: { fontSize: 13, color: colors.muted, lineHeight: 20, marginVertical: 6 },`	Sets/declares the named object property or style/type member: copy: { fontSize: 13, color: colors.muted, lineHeight: 20, marginVertical: 6 },. Interpret it in the enclosing object, props or type definition.
300	`  input: {`	Sets/declares the named object property or style/type member: input: {. Interpret it in the enclosing object, props or type definition.
301	`    borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
302	`    borderColor: colors.border,`	Sets/declares the named object property or style/type member: borderColor: colors.border,. Interpret it in the enclosing object, props or type definition.
303	`    borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
304	`    padding: 14,`	Sets/declares the named object property or style/type member: padding: 14,. Interpret it in the enclosing object, props or type definition.
305	`    minHeight: 50,`	Sets/declares the named object property or style/type member: minHeight: 50,. Interpret it in the enclosing object, props or type definition.
306	`    color: colors.ink,`	Sets/declares the named object property or style/type member: color: colors.ink,. Interpret it in the enclosing object, props or type definition.
307	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
308	`  product: { borderTopWidth: 1, borderColor: colors.border, marginTop: 18, paddingTop: 18 },`	Sets/declares the named object property or style/type member: product: { borderTopWidth: 1, borderColor: colors.border, marginTop: 18, paddingTop: 18 },. Interpret it in the enclosing object, props or type definition.
309	`  button: {`	Sets/declares the named object property or style/type member: button: {. Interpret it in the enclosing object, props or type definition.
310	`    borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
311	`borderColor: colors.brand,`	Sets/declares the named object property or style/type member: borderColor: colors.brand,. Interpret it in the enclosing object, props or type definition.
312	`borderRadius: 14,`	Sets/declares the named object property or style/type member: borderRadius: 14,. Interpret it in the enclosing object, props or type definition.
313	`padding: 13,`	Sets/declares the named object property or style/type member: padding: 13,. Interpret it in the enclosing object, props or type definition.
314	`minHeight: 48,`	Sets/declares the named object property or style/type member: minHeight: 48,. Interpret it in the enclosing object, props or type definition.
315	`marginVertical: 6,`	Sets/declares the named object property or style/type member: marginVertical: 6,. Interpret it in the enclosing object, props or type definition.
316	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
317	`selected: { backgroundColor: colors.brand },`	Sets/declares the named object property or style/type member: selected: { backgroundColor: colors.brand },. Interpret it in the enclosing object, props or type definition.
318	`buttonText: { color: colors.brand, fontWeight: "800", textAlign: "center" },`	Sets/declares the named object property or style/type member: buttonText: { color: colors.brand, fontWeight: "800", textAlign: "center" },. Interpret it in the enclosing object, props or type definition.
319	`error: {`	Sets/declares the named object property or style/type member: error: {. Interpret it in the enclosing object, props or type definition.
320	`backgroundColor: "#E7F4EB",`	Sets/declares the named object property or style/type member: backgroundColor: "#E7F4EB",. Interpret it in the enclosing object, props or type definition.
321	`color: "#173D2D",`	Sets/declares the named object property or style/type member: color: "#173D2D",. Interpret it in the enclosing object, props or type definition.
322	`padding: 12,`	Sets/declares the named object property or style/type member: padding: 12,. Interpret it in the enclosing object, props or type definition.
323	`borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
324	`marginVertical: 8,`	Sets/declares the named object property or style/type member: marginVertical: 8,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
325	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
326	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

dms-mobile/src/components/PurchasesSalesDashboard.tsx

Presents purchased/sold figures supplied by the backend; does not create receipts, invoices or stock movements.

117 numbered source lines | SHA-256 4b31f1f892f6f646429e8142e0ad58ba5c4fa097226dcefb411af691f547fd20

Line	Source code	Explanation / reading note
1	`import React from "react";`	Imports dependencies/types used below: import React from "react";. Importing a function does not call it.
2	`import { StyleSheet, Text, View } from "react-native";`	Imports dependencies/types used below: import { StyleSheet, Text, View } from "react-native";. Importing a function does not call it.
3	`import { colors as c } from "../theme";`	Imports dependencies/types used below: import { colors as c } from "../theme";. Importing a function does not call it.
4		Blank line separating logical sections; no executable operation.
5	`type Month = {`	Defines a compile-time data contract: type Month = {. TypeScript types do not validate untrusted runtime JSON by themselves.
6	`  label: string;`	Sets/declares the named object property or style/type member: label: string;. Interpret it in the enclosing object, props or type definition.
7	`  year: number;`	Sets/declares the named object property or style/type member: year: number;. Interpret it in the enclosing object, props or type definition.
8	`  month: number;`	Sets/declares the named object property or style/type member: month: number;. Interpret it in the enclosing object, props or type definition.
9	`  purchased: number;`	Sets/declares the named object property or style/type member: purchased: number;. Interpret it in the enclosing object, props or type definition.
10	`  sold: number;`	Sets/declares the named object property or style/type member: sold: number;. Interpret it in the enclosing object, props or type definition.
11	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
12	`export type Dashboard = {`	Defines a compile-time data contract: export type Dashboard = {. TypeScript types do not validate untrusted runtime JSON by themselves.
13	`  purchased: number;`	Sets/declares the named object property or style/type member: purchased: number;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
14	`  sold: number;`	Sets/declares the named object property or style/type member: sold: number;. Interpret it in the enclosing object, props or type definition.
15	`  months: Month[];`	Sets/declares the named object property or style/type member: months: Month[];. Interpret it in the enclosing object, props or type definition.
16	`  basis: string;`	Sets/declares the named object property or style/type member: basis: string;. Interpret it in the enclosing object, props or type definition.
17	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`const money = (value: number) =>`	Declares/initializes local data used by the surrounding operation: const money = (value: number) =>. Collection contents and assignments below determine its purpose.
19	`  \`₹${Number(value).toLocaleString("en-IN", { maximumFractionDigits: 2 })}\`;`	Continues the surrounding declaration/expression or text: `₹${Number(value).toLocaleString("en-IN", { maximumFractionDigits: 2 })}`;. Read it with the preceding opening statement (const money = (value: number) =>); it is not a standalone business operation.
20		Blank line separating logical sections; no executable operation.
21	`/** Accessible labels contain the values: colour and bar length are supplementary. */`	Developer comment/documentation: Accessible labels contain the values: colour and bar length are supplementary. */ It is not executed.
22	`export default function PurchasesSalesDashboard({ data }: { data?: Dashboard }) {`	Declares a callable function/method: export default function PurchasesSalesDashboard({ data }: { data?: Dashboard }) {. Parameters supply its inputs; the following block implements the operation.
23	`  const maximum = Math.max(1, ...(data?.months || []).flatMap((row) => [row.purchased, row.sold]));`	Declares/initializes local data used by the surrounding operation: const maximum = Math.max(1, ...(data?.months || []).flatMap((row) => [row.purchased, row.sold]));. Collection contents and assignments below determine its purpose.
24	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
25	`    <View style={s.card}>`	Renders/opens a UI element or component: <View style={s.card}>. Props and child content below determine appearance and interactions.
26	`      <Text style={s.heading}>Purchased vs sold</Text>`	Renders/opens a UI element or component: <Text style={s.heading}>Purchased vs sold</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
27	`<Text style={s.copy}>All-time posted values</Text>`	Renders/opens a UI element or component: <Text style={s.copy}>All-time posted values</Text>. Props and child content below determine appearance and interactions.
28	`<View style={s.totals}>`	Renders/opens a UI element or component: <View style={s.totals}>. Props and child content below determine appearance and interactions.
29	`<View style={s.total}>`	Renders/opens a UI element or component: <View style={s.total}>. Props and child content below determine appearance and interactions.
30	`<Text style={s.label}>PURCHASED</Text>`	Renders/opens a UI element or component: <Text style={s.label}>PURCHASED</Text>. Props and child content below determine appearance and interactions.
31	`<Text style={s.value}>{data ? money(data.purchased) : "—"}</Text>`	Renders/opens a UI element or component: <Text style={s.value}>{data ? money(data.purchased) : " - "}</Text>. Props and child content below determine appearance and interactions.
32	`<Text style={s.copy}>Received goods cost</Text>`	Renders/opens a UI element or component: <Text style={s.copy}>Received goods cost</Text>. Props and child content below determine appearance and interactions.
33	`</View>`	Closes the UI element/component opened above.
34	`<View style={s.total}>`	Renders/opens a UI element or component: <View style={s.total}>. Props and child content below determine appearance and interactions.
35	`<Text style={s.label}>SOLD</Text>`	Renders/opens a UI element or component: <Text style={s.label}>SOLD</Text>. Props and child content below determine appearance and interactions.
36	`<Text style={[s.value, { color: c.accent }]}>{data ? money(data.sold) : "—"}</Text>`	Renders/opens a UI element or component: <Text style={[s.value, { color: c.accent }]}>{data ? money(data.sold) : " - "}</Text>. Props and child content below determine appearance and interactions.
37	`<Text style={s.copy}>Issued sales invoices</Text>`	Renders/opens a UI element or component: <Text style={s.copy}>Issued sales invoices</Text>. Props and child content below determine appearance and interactions.
38	`</View>`	Closes the UI element/component opened above.
39	`</View>`	Closes the UI element/component opened above.
40	`<Text style={s.label}>LAST 6 CALENDAR MONTHS</Text>`	Renders/opens a UI element or component: <Text style={s.label}>LAST 6 CALENDAR MONTHS</Text>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
41	`{!data && (`	Continues the surrounding declaration/expression or text: {!data && (. Read it with the preceding opening statement (<Text style={s.label}>LAST 6 CALENDAR MONTHS</Text>); it is not a standalone business operation.
42	`<Text style={s.copy}>Sync to download your dashboard. No estimated sales are shown.</Text>`	Renders/opens a UI element or component: <Text style={s.copy}>Sync to download your dashboard. No estimated sales are shown.</Text>. Props and child content below determine appearance and interactions.
43	`)}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44	`{data?.months.map((row) => (`	Transforms/selects/aggregates collection values with the callback shown here: {data?.months.map((row) => (. Read the callback body and result assignment together.
45	`<View key={`${row.year}-${row.month}`} style={s.month}>`	Renders/opens a UI element or component: <View key={`${row.year}-${row.month}`} style={s.month}>. Props and child content below determine appearance and interactions.
46	`<Text style={s.monthTitle}>{row.label}</Text>`	Renders/opens a UI element or component: <Text style={s.monthTitle}>{row.label}</Text>. Props and child content below determine appearance and interactions.
47	`{(`	Continues the surrounding declaration/expression or text: {(. Read it with the preceding opening statement (<Text style={s.monthTitle}>{row.label}</Text>); it is not a standalone business operation.
48	`[`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement ({(); it is not a standalone business operation.
49	`["Purchased", row.purchased, c.brand],`	Continues the surrounding declaration/expression or text: ["Purchased", row.purchased, c.brand],. Read it with the preceding opening statement ([]); it is not a standalone business operation.
50	`["Sold", row.sold, c.accent],`	Continues the surrounding declaration/expression or text: ["Sold", row.sold, c.accent],. Read it with the preceding opening statement (["Purchased", row.purchased, c.brand],); it is not a standalone business operation.
51	`] as const`	Continues the surrounding declaration/expression or text:] as const. Read it with the preceding opening statement (["Sold", row.sold, c.accent],); it is not a standalone business operation.
52	`).map(([label, value, color]) => (`	Transforms/selects/aggregates collection values with the callback shown here:).map(([label, value, color]) => (. Read the callback body and result assignment together.

Line	Source code	Explanation / reading note
53	`<View key={label} accessibilityLabel={`${row.label} ${label}: ${money(value)}`}>`	Renders/opens a UI element or component: <View key={label} accessibilityLabel={`${row.label} ${label}: ${money(value)}`}>. Props and child content below determine appearance and interactions.
54	`<View style={s.line}>`	Renders/opens a UI element or component: <View style={s.line}>. Props and child content below determine appearance and interactions.
55	`<Text style={s.copy}>{label}</Text>`	Renders/opens a UI element or component: <Text style={s.copy}>{label}</Text>. Props and child content below determine appearance and interactions.
56	`<Text style={s.money}>{money(value)}</Text>`	Renders/opens a UI element or component: <Text style={s.money}>{money(value)}</Text>. Props and child content below determine appearance and interactions.
57	`</View>`	Closes the UI element/component opened above.
58	`<View style={s.track}>`	Renders/opens a UI element or component: <View style={s.track}>. Props and child content below determine appearance and interactions.
59	`<View`	Renders/opens a UI element or component: <View. Props and child content below determine appearance and interactions.
60	`style={[`	Assigns the right-hand expression to the named variable/property: style={[. This is in-memory unless it is later persisted by an explicit call.
61	`s.bar,`	Continues the surrounding declaration/expression or text: s.bar,. Read it with the preceding opening statement (style={[); it is not a standalone business operation.
62	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (s.bar,); it is not a standalone business operation.
63	`width: `${(Math.max(0, value) / maximum) * 100}%`,`	Sets/declares the named object property or style/type member: width: `${(Math.max(0, value) / maximum) * 100}%`,. Interpret it in the enclosing object, props or type definition.
64	`backgroundColor: color,`	Sets/declares the named object property or style/type member: backgroundColor: color,. Interpret it in the enclosing object, props or type definition.
65	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
66	`]}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
67	`/>`	Continues the surrounding declaration/expression or text: />. Read it with the preceding opening statement ( ]}); it is not a standalone business operation.
68	`</View>`	Closes the UI element/component opened above.
69	`</View>`	Closes the UI element/component opened above.
70	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
71	`</View>`	Closes the UI element/component opened above.
72	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
73	`<Text style={s.copy}>`	Renders/opens a UI element or component: <Text style={s.copy}>. Props and child content below determine appearance and interactions.
74	`{data?.basis || "Approval is not a receipt or a sale."} Pending and rejected orders are`	Continues the surrounding declaration/expression or text: {data?.basis || "Approval is not a receipt or a sale."} Pending and rejected orders are. Read it with the preceding opening statement (<Text style={s.copy}>); it is not a standalone business operation.
75	`excluded.`	Continues the surrounding declaration/expression or text: excluded.. Read it with the preceding opening statement ({data?.basis || "Approval is not a receipt or a sale."} Pending and rejected orders are); it is not a standalone business operation.
76	`</Text>`	Closes the UI element/component opened above.
77	`</View>`	Closes the UI element/component opened above.
78	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
79	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
80	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
81	`card: {`	Sets/declares the named object property or style/type member: card: {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
82	`backgroundColor: c.white,`	Sets/declares the named object property or style/type member: backgroundColor: c.white,. Interpret it in the enclosing object, props or type definition.
83	`borderRadius: 22,`	Sets/declares the named object property or style/type member: borderRadius: 22,. Interpret it in the enclosing object, props or type definition.
84	`padding: 20,`	Sets/declares the named object property or style/type member: padding: 20,. Interpret it in the enclosing object, props or type definition.
85	`marginVertical: 12,`	Sets/declares the named object property or style/type member: marginVertical: 12,. Interpret it in the enclosing object, props or type definition.
86	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
87	`heading: { fontSize: 21, fontWeight: "900", color: c.ink, marginBottom: 6 },`	Sets/declares the named object property or style/type member: heading: { fontSize: 21, fontWeight: "900", color: c.ink, marginBottom: 6 },. Interpret it in the enclosing object, props or type definition.
88	`copy: { fontSize: 12, color: c.muted, lineHeight: 18 },`	Sets/declares the named object property or style/type member: copy: { fontSize: 12, color: c.muted, lineHeight: 18 },. Interpret it in the enclosing object, props or type definition.
89	`totals: { flexDirection: "row", gap: 12, marginVertical: 20 },`	Sets/declares the named object property or style/type member: totals: { flexDirection: "row", gap: 12, marginVertical: 20 },. Interpret it in the enclosing object, props or type definition.
90	`total: { flex: 1 },`	Sets/declares the named object property or style/type member: total: { flex: 1 },. Interpret it in the enclosing object, props or type definition.
91	`label: {`	Sets/declares the named object property or style/type member: label: {. Interpret it in the enclosing object, props or type definition.
92	`fontSize: 10,`	Sets/declares the named object property or style/type member: fontSize: 10,. Interpret it in the enclosing object, props or type definition.
93	`fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
94	`color: c.muted,`	Sets/declares the named object property or style/type member: color: c.muted,. Interpret it in the enclosing object, props or type definition.
95	`letterSpacing: 0.5,`	Declares/initializes local data used by the surrounding operation: letterSpacing: 0.5,. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
96	`marginBottom: 7,`	Sets/declares the named object property or style/type member: marginBottom: 7,. Interpret it in the enclosing object, props or type definition.
97	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
98	`value: { fontSize: 23, fontWeight: "900", color: c.brand, marginBottom: 4 },`	Sets/declares the named object property or style/type member: value: { fontSize: 23, fontWeight: "900", color: c.brand, marginBottom: 4 },. Interpret it in the enclosing object, props or type definition.
99	`month: { marginBottom: 16 },`	Sets/declares the named object property or style/type member: month: { marginBottom: 16 },. Interpret it in the enclosing object, props or type definition.
100	`monthTitle: {`	Sets/declares the named object property or style/type member: monthTitle: {. Interpret it in the enclosing object, props or type definition.
101	`fontSize: 13,`	Sets/declares the named object property or style/type member: fontSize: 13,. Interpret it in the enclosing object, props or type definition.
102	`fontWeight: "800",`	Sets/declares the named object property or style/type member: fontWeight: "800",. Interpret it in the enclosing object, props or type definition.
103	`color: c.ink,`	Sets/declares the named object property or style/type member: color: c.ink,. Interpret it in the enclosing object, props or type definition.
104	`marginBottom: 6,`	Sets/declares the named object property or style/type member: marginBottom: 6,. Interpret it in the enclosing object, props or type definition.
105	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
106	`line: { flexDirection: "row", justifyContent: "space-between" },`	Sets/declares the named object property or style/type member: line: { flexDirection: "row", justifyContent: "space-between" },. Interpret it in the enclosing object, props or type definition.
107	`money: { fontSize: 12, fontWeight: "700", color: c.ink },`	Sets/declares the named object property or style/type member: money: { fontSize: 12, fontWeight: "700", color: c.ink },. Interpret it in the enclosing object, props or type definition.
108	`track: {`	Sets/declares the named object property or style/type member: track: {. Interpret it in the enclosing object, props or type definition.
109	`height: 8,`	Sets/declares the named object property or style/type member: height: 8,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
110	`    backgroundColor: c.surface,`	Sets/declares the named object property or style/type member: backgroundColor: c.surface,. Interpret it in the enclosing object, props or type definition.
111	`    borderRadius: 4,`	Sets/declares the named object property or style/type member: borderRadius: 4,. Interpret it in the enclosing object, props or type definition.
112	`    marginTop: 3,`	Sets/declares the named object property or style/type member: marginTop: 3,. Interpret it in the enclosing object, props or type definition.
113	`    marginBottom: 6,`	Sets/declares the named object property or style/type member: marginBottom: 6,. Interpret it in the enclosing object, props or type definition.
114	`    overflow: "hidden",`	Sets/declares the named object property or style/type member: overflow: "hidden",. Interpret it in the enclosing object, props or type definition.
115	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
116	`  bar: { height: 8, borderRadius: 4 },`	Sets/declares the named object property or style/type member: bar: { height: 8, borderRadius: 4 },. Interpret it in the enclosing object, props or type definition.
117	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

dms-mobile/src/components/Workspace.tsx

Defines navigable workspace destinations and contextual presentation. Routing a screen is different from authorization to its data.

205 numbered source lines | SHA-256 c8922c463cfb6342fccdbc19e62994340055b36e3219d934aef6262484d8fb25

Line	Source code	Explanation / reading note
1	`import React from "react";`	Imports dependencies/types used below: import React from "react";. Importing a function does not call it.
2	`import { Pressable, StyleSheet, Text, View } from "react-native";`	Imports dependencies/types used below: import { Pressable, StyleSheet, Text, View } from "react-native";. Importing a function does not call it.
3	`import { colors as c } from "../theme";`	Imports dependencies/types used below: import { colors as c } from "../theme";. Importing a function does not call it.
4	`import BrandLogo from "./BrandLogo";`	Imports dependencies/types used below: import BrandLogo from "./BrandLogo";. Importing a function does not call it.
5		Blank line separating logical sections; no executable operation.
6	`export function BrandHeader() {`	Declares a callable function/method: export function BrandHeader() {. Parameters supply its inputs; the following block implements the operation.
7	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
8	`    <View style={s.brand}>`	Renders/opens a UI element or component: <View style={s.brand}>. Props and child content below determine appearance and interactions.
9	`      <View style={{ marginRight: 10 }}>`	Renders/opens a UI element or component: <View style={{ marginRight: 10 }}>. Props and child content below determine appearance and interactions.
10	`        <BrandLogo width={70} />`	Renders/opens a UI element or component: <BrandLogo width={70} />. Props and child content below determine appearance and interactions.
11	`      </View>`	Closes the UI element/component opened above.
12	`      <Text style={s.brandTitle}>DMS PORTAL</Text>`	Renders/opens a UI element or component: <Text style={s.brandTitle}>DMS PORTAL</Text>. Props and child content below determine appearance and interactions.
13	`      <Text style={s.badge}>DISTRIBUTOR</Text>`	Renders/opens a UI element or component: <Text style={s.badge}>DISTRIBUTOR</Text>. Props and child content below determine appearance and interactions.
14	`    </View>`	Closes the UI element/component opened above.

Line	Source code	Explanation / reading note
15	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
16	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17		Blank line separating logical sections; no executable operation.
18	`export function BottomNavigation({`	Declares a callable function/method: export function BottomNavigation({. Parameters supply its inputs; the following block implements the operation.
19	`  tab,`	Continues the surrounding declaration/expression or text: tab,. Read it with the preceding opening statement (export function BottomNavigation({); it is not a standalone business operation.
20	`  onSelect,`	Continues the surrounding declaration/expression or text: onSelect,. Read it with the preceding opening statement (tab,); it is not a standalone business operation.
21	`}: {`	Continues the surrounding declaration/expression or text: }: {. Read it with the preceding opening statement (onSelect,); it is not a standalone business operation.
22	`  tab: string;`	Sets/declares the named object property or style/type member: tab: string;. Interpret it in the enclosing object, props or type definition.
23	`  onSelect: (tab: string) => void;`	Sets/declares the named object property or style/type member: onSelect: (tab: string) => void;. Interpret it in the enclosing object, props or type definition.
24	`}) {`	Continues the surrounding declaration/expression or text: }) {. Read it with the preceding opening statement (onSelect: (tab: string) => void;); it is not a standalone business operation.
25	`  const active = ["Primary", "Secondary"].includes(tab)`	Declares/initializes local data used by the surrounding operation: const active = ["Primary", "Secondary"].includes(tab). Collection contents and assignments below determine its purpose.
26	`    ? "Primary"`	Continues the surrounding declaration/expression or text: ? "Primary". Read it with the preceding opening statement (const active = ["Primary", "Secondary"].includes(tab)); it is not a standalone business operation.
27	`    : ["Home", "Inventory", "Outlets"].includes(tab)`	Continues the surrounding declaration/expression or text: : ["Home", "Inventory", "Outlets"].includes(tab). Read it with the preceding opening statement (? "Primary"); it is not a standalone business operation.

Line	Source code	Explanation / reading note
28	`? tab`	Continues the surrounding declaration/expression or text: ? tab. Read it with the preceding opening statement (: ["Home", "Inventory", "Outlets"].includes(tab)); it is not a standalone business operation.
29	`: "More";`	Continues the surrounding declaration/expression or text: : "More";. Read it with the preceding opening statement (? tab); it is not a standalone business operation.
30	`return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
31	`<View style={s.navigation}>`	Renders/opens a UI element or component: <View style={s.navigation}>. Props and child content below determine appearance and interactions.
32	`{[`	Continues the surrounding declaration/expression or text: {[. Read it with the preceding opening statement (<View style={s.navigation}>); it is not a standalone business operation.
33	`["Home", "⌂", "Home"],`	Continues the surrounding declaration/expression or text: ["Home", "⌂", "Home"],. Read it with the preceding opening statement ({[); it is not a standalone business operation.
34	`["Primary", "▤", "Orders"],`	Continues the surrounding declaration/expression or text: ["Primary", "▤", "Orders"],. Read it with the preceding opening statement (["Home", "⌂", "Home"],); it is not a standalone business operation.
35	`["Inventory", "▦", "Stock"],`	Continues the surrounding declaration/expression or text: ["Inventory", "▦", "Stock"],. Read it with the preceding opening statement (["Primary", "▤", "Orders"],); it is not a standalone business operation.
36	`["Outlets", "◎", "Outlets"],`	Continues the surrounding declaration/expression or text: ["Outlets", "◎", "Outlets"],. Read it with the preceding opening statement (["Inventory", "▦", "Stock"],); it is not a standalone business operation.
37	`["More", "•••", "More"],`	Continues the surrounding declaration/expression or text: ["More", "•••", "More"],. Read it with the preceding opening statement (["Outlets", "◎", "Outlets"],); it is not a standalone business operation.
38	`].map(([key, icon, label]) => (`	Transforms/selects/aggregates collection values with the callback shown here:].map(([key, icon, label]) => (. Read the callback body and result assignment together.
39	`<Pressable`	Renders/opens a UI element or component: <Pressable. Props and child content below determine appearance and interactions.
40	`key={key}`	Assigns the right-hand expression to the named variable/property: key={key}. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
41	`accessibilityRole="button"`	Assigns the right-hand expression to the named variable/property: accessibilityRole="button". This is in-memory unless it is later persisted by an explicit call.
42	`accessibilityLabel={label}`	Assigns the right-hand expression to the named variable/property: accessibilityLabel={label}. This is in-memory unless it is later persisted by an explicit call.
43	`accessibilityState={{ selected: active === key }}`	Assigns the right-hand expression to the named variable/property: accessibilityState={{ selected: active === key }}. This is in-memory unless it is later persisted by an explicit call.
44	`onPress={() => onSelect(key)}`	Binds a UI interaction to the referenced handler; trace that handler to see whether it edits state, validates or calls the backend.
45	`style={s.navItem}`	Assigns the right-hand expression to the named variable/property: style={s.navItem}. This is in-memory unless it is later persisted by an explicit call.
46	`>`	Continues the surrounding declaration/expression or text: >. Read it with the preceding opening statement (style={s.navItem}); it is not a standalone business operation.
47	`<Text style={[s.navIcon, active === key && s.active]}>{icon}</Text>`	Renders/opens a UI element or component: <Text style={[s.navIcon, active === key && s.active]}>{icon}</Text>. Props and child content below determine appearance and interactions.
48	`<Text style={[s.navLabel, active === key && s.active]}>{label}</Text>`	Renders/opens a UI element or component: <Text style={[s.navLabel, active === key && s.active]}>{label}</Text>. Props and child content below determine appearance and interactions.
49	`</Pressable>`	Closes the UI element/component opened above.
50	`))}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
51	`</View>`	Closes the UI element/component opened above.
52	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
53	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
54		Blank line separating logical sections; no executable operation.
55	`export function MetricCard({`	Declares a callable function/method: export function MetricCard({. Parameters supply its inputs; the following block implements the operation.

Line	Source code	Explanation / reading note
56	`  label,`	Continues the surrounding declaration/expression or text: label,. Read it with the preceding opening statement (export function MetricCard({); it is not a standalone business operation.
57	`  value,`	Continues the surrounding declaration/expression or text: value,. Read it with the preceding opening statement (label,); it is not a standalone business operation.
58	`  icon,`	Continues the surrounding declaration/expression or text: icon,. Read it with the preceding opening statement (value,); it is not a standalone business operation.
59	`}: {`	Continues the surrounding declaration/expression or text: }: {. Read it with the preceding opening statement (icon,); it is not a standalone business operation.
60	`  label: string;`	Sets/declares the named object property or style/type member: label: string;. Interpret it in the enclosing object, props or type definition.
61	`  value: string | number;`	Sets/declares the named object property or style/type member: value: string | number;. Interpret it in the enclosing object, props or type definition.
62	`  icon: string;`	Sets/declares the named object property or style/type member: icon: string;. Interpret it in the enclosing object, props or type definition.
63	`}) {`	Continues the surrounding declaration/expression or text: }) {. Read it with the preceding opening statement (icon: string;); it is not a standalone business operation.
64	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
65	`    <View style={s.metric}>`	Renders/opens a UI element or component: <View style={s.metric}>. Props and child content below determine appearance and interactions.
66	`      <Text style={s.metricIcon}>{icon}</Text>`	Renders/opens a UI element or component: <Text style={s.metricIcon}>{icon}</Text>. Props and child content below determine appearance and interactions.
67	`      <Text style={s.metricValue}>{value}</Text>`	Renders/opens a UI element or component: <Text style={s.metricValue}>{value}</Text>. Props and child content below determine appearance and interactions.
68	`      <Text style={s.muted}>{label}</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>{label}</Text>. Props and child content below determine appearance and interactions.
69	`    </View>`	Closes the UI element/component opened above.
70	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
71	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
72		Blank line separating logical sections; no executable operation.
73	`export function MenuItem({`	Declares a callable function/method: export function MenuItem({. Parameters supply its inputs; the following block implements the operation.
74	`  title,`	Continues the surrounding declaration/expression or text: title,. Read it with the preceding opening statement (export function MenuItem({); it is not a standalone business operation.
75	`  description,`	Continues the surrounding declaration/expression or text: description,. Read it with the preceding opening statement (title,); it is not a standalone business operation.
76	`  icon,`	Continues the surrounding declaration/expression or text: icon,. Read it with the preceding opening statement (description,); it is not a standalone business operation.
77	`  onPress,`	Continues the surrounding declaration/expression or text: onPress,. Read it with the preceding opening statement (icon,); it is not a standalone business operation.
78	`}: {`	Continues the surrounding declaration/expression or text: }: {. Read it with the preceding opening statement (onPress,); it is not a standalone business operation.
79	`  title: string;`	Sets/declares the named object property or style/type member: title: string;. Interpret it in the enclosing object, props or type definition.
80	`  description: string;`	Sets/declares the named object property or style/type member: description: string;. Interpret it in the enclosing object, props or type definition.
81	`  icon: string;`	Sets/declares the named object property or style/type member: icon: string;. Interpret it in the enclosing object, props or type definition.
82	`  onPress: () => void;`	Sets/declares the named object property or style/type member: onPress: () => void;. Interpret it in the enclosing object, props or type definition.
83	`}) {`	Continues the surrounding declaration/expression or text: }) {. Read it with the preceding opening statement (onPress: () => void;); it is not a standalone business operation.
84	`  return (`	Returns (to the caller (or begins returned UI markup) and ends this execution path.
85	`    <Pressable accessibilityRole="button" onPress={onPress} style={s.menu}>`	Renders/opens a UI element or component: <Pressable accessibilityRole="button" onPress={onPress} style={s.menu}>. Props and child content below determine appearance and interactions.

Line	Source code	Explanation / reading note
86	`<Text style={s.menuIcon}>{icon}</Text>`	Renders/opens a UI element or component: <Text style={s.menuIcon}>{icon}</Text>. Props and child content below determine appearance and interactions.
87	`<View style={{ flex: 1 }}>`	Renders/opens a UI element or component: <View style={{ flex: 1 }}>. Props and child content below determine appearance and interactions.
88	`<Text style={s.menuTitle}>{title}</Text>`	Renders/opens a UI element or component: <Text style={s.menuTitle}>{title}</Text>. Props and child content below determine appearance and interactions.
89	`<Text style={s.muted}>{description}</Text>`	Renders/opens a UI element or component: <Text style={s.muted}>{description}</Text>. Props and child content below determine appearance and interactions.
90	`</View>`	Closes the UI element/component opened above.
91	`<Text style={s.chevron}>›</Text>`	Renders/opens a UI element or component: <Text style={s.chevron}>›</Text>. Props and child content below determine appearance and interactions.
92	`</Pressable>`	Closes the UI element/component opened above.
93	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
94	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
95		Blank line separating logical sections; no executable operation.
96	`const s = StyleSheet.create({`	Declares/initializes local data used by the surrounding operation: const s = StyleSheet.create({. Collection contents and assignments below determine its purpose.
97	`brand: {`	Sets/declares the named object property or style/type member: brand: {. Interpret it in the enclosing object, props or type definition.
98	`minHeight: 66,`	Sets/declares the named object property or style/type member: minHeight: 66,. Interpret it in the enclosing object, props or type definition.
99	`backgroundColor: c.navy,`	Sets/declares the named object property or style/type member: backgroundColor: c.navy,. Interpret it in the enclosing object, props or type definition.
100	`flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
101	`alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
102	`paddingHorizontal: 18,`	Sets/declares the named object property or style/type member: paddingHorizontal: 18,. Interpret it in the enclosing object, props or type definition.
103	`borderBottomRightRadius: 26,`	Sets/declares the named object property or style/type member: borderBottomRightRadius: 26,. Interpret it in the enclosing object, props or type definition.
104	`gap: 8,`	Sets/declares the named object property or style/type member: gap: 8,. Interpret it in the enclosing object, props or type definition.
105	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
106	`brandIcon: { color: c.gold, fontSize: 22 },`	Sets/declares the named object property or style/type member: brandIcon: { color: c.gold, fontSize: 22 },. Interpret it in the enclosing object, props or type definition.
107	`brandTitle: {`	Sets/declares the named object property or style/type member: brandTitle: {. Interpret it in the enclosing object, props or type definition.
108	`color: "#FFFFFF",`	Sets/declares the named object property or style/type member: color: "#FFFFFF",. Interpret it in the enclosing object, props or type definition.
109	`fontSize: 18,`	Sets/declares the named object property or style/type member: fontSize: 18,. Interpret it in the enclosing object, props or type definition.
110	`fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
111	`flex: 1,`	Sets/declares the named object property or style/type member: flex: 1,. Interpret it in the enclosing object, props or type definition.
112	`letterSpacing: 0.5,`	Declares/initializes local data used by the surrounding operation: letterSpacing: 0.5,. Collection contents and assignments below determine its purpose.
113	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
114	`badge: {`	Sets/declares the named object property or style/type member: badge: {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
115	`color: c.navy,`	Sets/declares the named object property or style/type member: color: c.navy,. Interpret it in the enclosing object, props or type definition.
116	`backgroundColor: c.gold,`	Sets/declares the named object property or style/type member: backgroundColor: c.gold,. Interpret it in the enclosing object, props or type definition.
117	`paddingHorizontal: 9,`	Sets/declares the named object property or style/type member: paddingHorizontal: 9,. Interpret it in the enclosing object, props or type definition.
118	`paddingVertical: 8,`	Sets/declares the named object property or style/type member: paddingVertical: 8,. Interpret it in the enclosing object, props or type definition.
119	`borderRadius: 8,`	Sets/declares the named object property or style/type member: borderRadius: 8,. Interpret it in the enclosing object, props or type definition.
120	`fontSize: 9,`	Sets/declares the named object property or style/type member: fontSize: 9,. Interpret it in the enclosing object, props or type definition.
121	`fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
122	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
123	`navigation: {`	Sets/declares the named object property or style/type member: navigation: {. Interpret it in the enclosing object, props or type definition.
124	`minHeight: 70,`	Sets/declares the named object property or style/type member: minHeight: 70,. Interpret it in the enclosing object, props or type definition.
125	`flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
126	`width: "94%",`	Sets/declares the named object property or style/type member: width: "94%",. Interpret it in the enclosing object, props or type definition.
127	`alignSelf: "center",`	Sets/declares the named object property or style/type member: alignSelf: "center",. Interpret it in the enclosing object, props or type definition.
128	`backgroundColor: "#FFFFFF",`	Sets/declares the named object property or style/type member: backgroundColor: "#FFFFFF",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
129	`    borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
130	`    borderColor: c.border,`	Sets/declares the named object property or style/type member: borderColor: c.border,. Interpret it in the enclosing object, props or type definition.
131	`    borderRadius: 22,`	Sets/declares the named object property or style/type member: borderRadius: 22,. Interpret it in the enclosing object, props or type definition.
132	`    paddingVertical: 7,`	Sets/declares the named object property or style/type member: paddingVertical: 7,. Interpret it in the enclosing object, props or type definition.
133	`    marginBottom: 8,`	Sets/declares the named object property or style/type member: marginBottom: 8,. Interpret it in the enclosing object, props or type definition.
134	`    shadowColor: c.navy,`	Sets/declares the named object property or style/type member: shadowColor: c.navy,. Interpret it in the enclosing object, props or type definition.
135	`    shadowOpacity: 0.14,`	Sets/declares the named object property or style/type member: shadowOpacity: 0.14,. Interpret it in the enclosing object, props or type definition.
136	`    shadowRadius: 12,`	Sets/declares the named object property or style/type member: shadowRadius: 12,. Interpret it in the enclosing object, props or type definition.
137	`    shadowOffset: { width: 0, height: 3 },`	Sets/declares the named object property or style/type member: shadowOffset: { width: 0, height: 3 },. Interpret it in the enclosing object, props or type definition.
138	`    elevation: 8,`	Sets/declares the named object property or style/type member: elevation: 8,. Interpret it in the enclosing object, props or type definition.
139	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
140	`  navItem: {`	Sets/declares the named object property or style/type member: navItem: {. Interpret it in the enclosing object, props or type definition.
141	`    flex: 1,`	Sets/declares the named object property or style/type member: flex: 1,. Interpret it in the enclosing object, props or type definition.
142	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
143	`justifyContent: "center",`	Sets/declares the named object property or style/type member: justifyContent: "center",. Interpret it in the enclosing object, props or type definition.
144	`minHeight: 48,`	Sets/declares the named object property or style/type member: minHeight: 48,. Interpret it in the enclosing object, props or type definition.
145	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
146	`navIcon: { color: c.muted, fontSize: 21, fontWeight: "900" },`	Sets/declares the named object property or style/type member: navIcon: { color: c.muted, fontSize: 21, fontWeight: "900" },. Interpret it in the enclosing object, props or type definition.
147	`navLabel: { color: c.muted, fontSize: 10, fontWeight: "700", marginTop: 3 },`	Sets/declares the named object property or style/type member: navLabel: { color: c.muted, fontSize: 10, fontWeight: "700", marginTop: 3 },. Interpret it in the enclosing object, props or type definition.
148	`active: { color: c.accent },`	Sets/declares the named object property or style/type member: active: { color: c.accent },. Interpret it in the enclosing object, props or type definition.
149	`metric: {`	Sets/declares the named object property or style/type member: metric: {. Interpret it in the enclosing object, props or type definition.
150	`width: "48%",`	Sets/declares the named object property or style/type member: width: "48%",. Interpret it in the enclosing object, props or type definition.
151	`backgroundColor: c.white,`	Sets/declares the named object property or style/type member: backgroundColor: c.white,. Interpret it in the enclosing object, props or type definition.
152	`padding: 15,`	Sets/declares the named object property or style/type member: padding: 15,. Interpret it in the enclosing object, props or type definition.
153	`borderRadius: 22,`	Sets/declares the named object property or style/type member: borderRadius: 22,. Interpret it in the enclosing object, props or type definition.
154	`borderTopWidth: 3,`	Sets/declares the named object property or style/type member: borderTopWidth: 3,. Interpret it in the enclosing object, props or type definition.
155	`borderTopColor: "#9DD9C9",`	Sets/declares the named object property or style/type member: borderTopColor: "#9DD9C9",. Interpret it in the enclosing object, props or type definition.
156	`minHeight: 142,`	Sets/declares the named object property or style/type member: minHeight: 142,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
157	`    shadowColor: c.navy,`	Sets/declares the named object property or style/type member: shadowColor: c.navy,. Interpret it in the enclosing object, props or type definition.
158	`    shadowOpacity: 0.05,`	Sets/declares the named object property or style/type member: shadowOpacity: 0.05,. Interpret it in the enclosing object, props or type definition.
159	`    shadowRadius: 8,`	Sets/declares the named object property or style/type member: shadowRadius: 8,. Interpret it in the enclosing object, props or type definition.
160	`    shadowOffset: { width: 0, height: 3 },`	Sets/declares the named object property or style/type member: shadowOffset: { width: 0, height: 3 },. Interpret it in the enclosing object, props or type definition.
161	`    elevation: 2,`	Sets/declares the named object property or style/type member: elevation: 2,. Interpret it in the enclosing object, props or type definition.
162	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
163	`  metricIcon: {`	Sets/declares the named object property or style/type member: metricIcon: {. Interpret it in the enclosing object, props or type definition.
164	`    color: c.brand,`	Sets/declares the named object property or style/type member: color: c.brand,. Interpret it in the enclosing object, props or type definition.
165	`    backgroundColor: c.mint,`	Sets/declares the named object property or style/type member: backgroundColor: c.mint,. Interpret it in the enclosing object, props or type definition.
166	`    width: 34,`	Sets/declares the named object property or style/type member: width: 34,. Interpret it in the enclosing object, props or type definition.
167	`    height: 34,`	Sets/declares the named object property or style/type member: height: 34,. Interpret it in the enclosing object, props or type definition.
168	`    borderRadius: 17,`	Sets/declares the named object property or style/type member: borderRadius: 17,. Interpret it in the enclosing object, props or type definition.
169	`    textAlign: "center",`	Sets/declares the named object property or style/type member: textAlign: "center",. Interpret it in the enclosing object, props or type definition.
170	`    lineHeight: 34,`	Sets/declares the named object property or style/type member: lineHeight: 34,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
171	`    fontSize: 18,`	Sets/declares the named object property or style/type member: fontSize: 18,. Interpret it in the enclosing object, props or type definition.
172	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
173	`  metricValue: {`	Sets/declares the named object property or style/type member: metricValue: {. Interpret it in the enclosing object, props or type definition.
174	`    fontSize: 24,`	Sets/declares the named object property or style/type member: fontSize: 24,. Interpret it in the enclosing object, props or type definition.
175	`    fontWeight: "900",`	Sets/declares the named object property or style/type member: fontWeight: "900",. Interpret it in the enclosing object, props or type definition.
176	`    color: c.ink,`	Sets/declares the named object property or style/type member: color: c.ink,. Interpret it in the enclosing object, props or type definition.
177	`    marginTop: 10,`	Sets/declares the named object property or style/type member: marginTop: 10,. Interpret it in the enclosing object, props or type definition.
178	`    marginBottom: 4,`	Sets/declares the named object property or style/type member: marginBottom: 4,. Interpret it in the enclosing object, props or type definition.
179	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
180	`  muted: { color: c.muted, fontSize: 12, lineHeight: 18 },`	Sets/declares the named object property or style/type member: muted: { color: c.muted, fontSize: 12, lineHeight: 18 },. Interpret it in the enclosing object, props or type definition.
181	`  menu: {`	Sets/declares the named object property or style/type member: menu: {. Interpret it in the enclosing object, props or type definition.
182	`    flexDirection: "row",`	Sets/declares the named object property or style/type member: flexDirection: "row",. Interpret it in the enclosing object, props or type definition.
183	`    alignItems: "center",`	Sets/declares the named object property or style/type member: alignItems: "center",. Interpret it in the enclosing object, props or type definition.
184	`    gap: 12,`	Sets/declares the named object property or style/type member: gap: 12,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
185	`backgroundColor: c.white,`	Sets/declares the named object property or style/type member: backgroundColor: c.white,. Interpret it in the enclosing object, props or type definition.
186	`borderRadius: 18,`	Sets/declares the named object property or style/type member: borderRadius: 18,. Interpret it in the enclosing object, props or type definition.
187	`padding: 16,`	Sets/declares the named object property or style/type member: padding: 16,. Interpret it in the enclosing object, props or type definition.
188	`marginVertical: 6,`	Sets/declares the named object property or style/type member: marginVertical: 6,. Interpret it in the enclosing object, props or type definition.
189	`minHeight: 76,`	Sets/declares the named object property or style/type member: minHeight: 76,. Interpret it in the enclosing object, props or type definition.
190	`borderWidth: 1,`	Sets/declares the named object property or style/type member: borderWidth: 1,. Interpret it in the enclosing object, props or type definition.
191	`borderColor: c.border,`	Sets/declares the named object property or style/type member: borderColor: c.border,. Interpret it in the enclosing object, props or type definition.
192	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
193	`menuIcon: {`	Sets/declares the named object property or style/type member: menuIcon: {. Interpret it in the enclosing object, props or type definition.
194	`fontSize: 22,`	Sets/declares the named object property or style/type member: fontSize: 22,. Interpret it in the enclosing object, props or type definition.
195	`color: c.brand,`	Sets/declares the named object property or style/type member: color: c.brand,. Interpret it in the enclosing object, props or type definition.
196	`backgroundColor: c.mint,`	Sets/declares the named object property or style/type member: backgroundColor: c.mint,. Interpret it in the enclosing object, props or type definition.
197	`width: 40,`	Sets/declares the named object property or style/type member: width: 40,. Interpret it in the enclosing object, props or type definition.
198	`height: 40,`	Sets/declares the named object property or style/type member: height: 40,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
199	`    lineHeight: 40,`	Sets/declares the named object property or style/type member: lineHeight: 40,. Interpret it in the enclosing object, props or type definition.
200	`    textAlign: "center",`	Sets/declares the named object property or style/type member: textAlign: "center",. Interpret it in the enclosing object, props or type definition.
201	`    borderRadius: 12,`	Sets/declares the named object property or style/type member: borderRadius: 12,. Interpret it in the enclosing object, props or type definition.
202	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
203	`  menuTitle: { color: c.ink, fontSize: 15, fontWeight: "800", marginBottom: 3 },`	Sets/declares the named object property or style/type member: menuTitle: { color: c.ink, fontSize: 15, fontWeight: "800", marginBottom: 3 },. Interpret it in the enclosing object, props or type definition.
204	`  chevron: { color: c.muted, fontSize: 25 },`	Sets/declares the named object property or style/type member: chevron: { color: c.muted, fontSize: 25 },. Interpret it in the enclosing object, props or type definition.
205	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

dms-mobile/src/goodsReceipt.ts

Parses ISO or unambiguous day-first dates, rejects impossible dates, and validates whole cases/batch/approved quantity before confirmation. Salesforce rechecks previous receipts and expiry.

44 numbered source lines | SHA-256 c723f1c3ffb8ce7acf61c4a82299a23e80e1feabc0afb70bb6b7f6a4741a2b9a

Line	Source code	Explanation / reading note
1	`/** Accept the displayed ISO format and the unambiguous Indian day-first format. */`	Developer comment/documentation: Accept the displayed ISO format and the unambiguous Indian day-first format. */ It is not executed.
2	`export function receiptExpiry(value: string): string | null {`	Declares a callable function/method: export function receiptExpiry(value: string): string | null {. Parameters supply its inputs; the following block implements the operation.
3	`  const text = value.trim();`	Declares/initializes local data used by the surrounding operation: const text = value.trim();. Collection contents and assignments below determine its purpose.
4	`  const iso = /^(\d{4})-(\d{2})-(\d{2})$/.exec(text);`	Declares/initializes local data used by the surrounding operation: const iso = /^(\d{4})-(\d{2})-(\d{2})$/.exec(text);. Collection contents and assignments below determine its purpose.
5	`  const dayFirst = /^(\d{2})-(\d{2})-(\d{4})$/.exec(text);`	Declares/initializes local data used by the surrounding operation: const dayFirst = /^(\d{2})-(\d{2})-(\d{4})$/.exec(text);. Collection contents and assignments below determine its purpose.
6	`  if (!iso && !dayFirst) return null;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!iso && !dayFirst) return null;.
7	`  const [year, month, day] = iso`	Declares/initializes local data used by the surrounding operation: const [year, month, day] = iso. Collection contents and assignments below determine its purpose.
8	`    ? [Number(iso[1]), Number(iso[2]), Number(iso[3])]`	Continues the surrounding declaration/expression or text: ? [Number(iso[1]), Number(iso[2]), Number(iso[3])]. Read it with the preceding opening statement (const [year, month, day] = iso); it is not a standalone business operation.
9	`    : [Number(dayFirst![3]), Number(dayFirst![2]), Number(dayFirst![1])];`	Continues the surrounding declaration/expression or text: : [Number(dayFirst![3]), Number(dayFirst![2]), Number(dayFirst![1])];. Read it with the preceding opening statement (? [Number(iso[1]), Number(iso[2]), Number(iso[3])]); it is not a standalone business operation.
10	`  if (year < 1900 || month < 1 || month > 12 || day < 1) return null;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (year < 1900 || month < 1 || month > 12 || day < 1) return null;.

Line	Source code	Explanation / reading note
11	`  const date = new Date(Date.UTC(year, month - 1, day));`	Declares/initializes local data used by the surrounding operation: const date = new Date(Date.UTC(year, month - 1, day));. Collection contents and assignments below determine its purpose.
12	`  if (`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (.
13	`    date.getUTCFullYear() !== year ||`	Calls the named method: date.getUTCFullYear() !== year ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
14	`    date.getUTCMonth() !== month - 1 ||`	Calls the named method: date.getUTCMonth() !== month - 1 ||. Its implementation defines the side effect/result; use the symbol/file index to follow it.
15	`    date.getUTCDate() !== day`	Calls the named method: date.getUTCDate() !== day. Its implementation defines the side effect/result; use the symbol/file index to follow it.
16	`  )`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`    return null;`	Returns null to the caller (or begins returned UI markup) and ends this execution path.
18	`  return `${year}-${String(month).padStart(2, "0")}-${String(day).padStart(2, "0")}`;`	Returns `${year}-${String(month).padStart(2, "0")}-${String(day).padStart(2, "0")}` to the caller (or begins returned UI markup) and ends this execution path.
19	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20		Blank line separating logical sections; no executable operation.
21	`export function validateGoodsReceipt(`	Declares a callable function/method: export function validateGoodsReceipt(. Parameters supply its inputs; the following block implements the operation.
22	`  cases: string,`	Sets/declares the named object property or style/type member: cases: string,. Interpret it in the enclosing object, props or type definition.
23	`  batch: string,`	Sets/declares the named object property or style/type member: batch: string,. Interpret it in the enclosing object, props or type definition.
24	`  expiry: string,`	Sets/declares the named object property or style/type member: expiry: string,. Interpret it in the enclosing object, props or type definition.
25	`  approvedCases?: number,`	Sets/declares the named object property or style/type member: approvedCases?: number,. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
26	`) {`	Continues the surrounding declaration/expression or text:) {. Read it with the preceding opening statement (approvedCases?: number,); it is not a standalone business operation.
27	`  const quantity = Number(cases);`	Declares/initializes local data used by the surrounding operation: const quantity = Number(cases);. Collection contents and assignments below determine its purpose.
28	`  if (!Number.isInteger(quantity) || quantity <= 0 || quantity > 100000)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!Number.isInteger(quantity) || quantity <= 0 || quantity > 100000).
29	`    return { error: "Enter received cases as a whole number between 1 and 100,000." };`	Returns { error: "Enter received cases as a whole number between 1 and 100,000." } to the caller (or begins returned UI markup) and ends this execution path.
30	`  if (approvedCases !== undefined && (!Number.isFinite(approvedCases) || approvedCases <= 0))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (approvedCases !== undefined && (!Number.isFinite(approvedCases) || approvedCases <= 0)).
31	`    return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
32	`      error:`	Sets/declares the named object property or style/type member: error:. Interpret it in the enclosing object, props or type definition.
33	`        "No approved cases are available for this receipt. Refresh the order before continuing.",`	Continues the surrounding declaration/expression or text: "No approved cases are available for this receipt. Refresh the order before continuing.",. Read it with the preceding opening statement (error:); it is not a standalone business operation.
34	`    };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`  if (approvedCases !== undefined && quantity > approvedCases)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (approvedCases !== undefined && quantity > approvedCases).
36	`    return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
37	`      error: \`This order approves ${approvedCases} case(s), but you entered ${quantity}. Enter only the cases actually delivered, within the approved quantity. Salesforce also checks any previous receipts.\`,`	Sets/declares the named object property or style/type member: error: `This order approves ${approvedCases} case(s), but you entered ${quantity}. Enter only the cases actually delivered, within the approved quantity. Salesforce also checks any previous receipts.`. Interpret it in the enclosing object, props or type definition.
38	`    };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
39	`  if (!batch.trim() || batch.trim().length > 80)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!batch.trim() || batch.trim().length > 80).
40	`    return { error: "Enter a batch number of 1–80 characters." };`	Returns { error: "Enter a batch number of 1-80 characters." } to the caller (or begins returned UI markup) and ends this execution path.
41	`  const date = receiptExpiry(expiry);`	Declares/initializes local data used by the surrounding operation: const date = receiptExpiry(expiry);. Collection contents and assignments below determine its purpose.
42	`  if (!date) return { error: "Enter a valid expiry date, for example 2026-12-14 or 14-12-2026." };`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!date) return { error: "Enter a valid expiry date, for example 2026-12-14 or 14-12-2026." };.
43	`  return { value: { cases: quantity, batch: batch.trim(), expiry: date } };`	Returns { value: { cases: quantity, batch: batch.trim(), expiry: date } } to the caller (or begins returned UI markup) and ends this execution path.
44	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

dms-mobile/src/storage.ts

DMS persistence helpers: platform-appropriate session storage and distributor-specific snapshot/pending keys. Storage itself does not send records to Salesforce.

56 numbered source lines | SHA-256 c35ae2ef6dd25ed7f9bd30d0d89fb8a98453a43395b4c016f65d3a3335934023

Line	Source code	Explanation / reading note
1	`import AsyncStorage from "@react-native-async-storage/async-storage";`	Imports dependencies/types used below: import AsyncStorage from "@react-native-async-storage/async-storage";. Importing a function does not call it.
2	`import * as SecureStore from "expo-secure-store";`	Imports dependencies/types used below: import * as SecureStore from "expo-secure-store";. Importing a function does not call it.
3	`import { Platform } from "react-native";`	Imports dependencies/types used below: import { Platform } from "react-native";. Importing a function does not call it.
4		Blank line separating logical sections; no executable operation.
5	`export type Session = {`	Defines a compile-time data contract: export type Session = {. TypeScript types do not validate untrusted runtime JSON by themselves.
6	`  token: string;`	Sets/declares the named object property or style/type member: token: string;. Interpret it in the enclosing object, props or type definition.
7	`  id: string;`	Sets/declares the named object property or style/type member: id: string;. Interpret it in the enclosing object, props or type definition.
8	`  name: string;`	Sets/declares the named object property or style/type member: name: string;. Interpret it in the enclosing object, props or type definition.
9	`  expiresAt: number;`	Sets/declares the named object property or style/type member: expiresAt: number;. Interpret it in the enclosing object, props or type definition.
10	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
11	`export type Pending = {`	Defines a compile-time data contract: export type Pending = {. TypeScript types do not validate untrusted runtime JSON by themselves.
12	`  key: string;`	Sets/declares the named object property or style/type member: key: string;. Interpret it in the enclosing object, props or type definition.
13	`  path: string;`	Sets/declares the named object property or style/type member: path: string;. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
14	`  body: Record<string, unknown>;`	Sets/declares the named object property or style/type member: body: Record<string, unknown>;. Interpret it in the enclosing object, props or type definition.
15	`  label: string;`	Sets/declares the named object property or style/type member: label: string;. Interpret it in the enclosing object, props or type definition.
16	`  error?: string;`	Sets/declares the named object property or style/type member: error?: string;. Interpret it in the enclosing object, props or type definition.
17	`  status?: number;`	Sets/declares the named object property or style/type member: status?: number;. Interpret it in the enclosing object, props or type definition.
18	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`const sessionKey = "dms-session-v2";`	Declares/initializes local data used by the surrounding operation: const sessionKey = "dms-session-v2";. Collection contents and assignments below determine its purpose.
20	`const key = (id: string, kind: string) => `dms-v2:${id}:${kind}`;`	Declares/initializes local data used by the surrounding operation: const key = (id: string, kind: string) => `dms-v2:${id}:${kind}`;. Collection contents and assignments below determine its purpose.
21	`export async function readSession(): Promise<Session | null> {`	Declares a callable function/method: export async function readSession(): Promise<Session | null> {. Parameters supply its inputs; the following block implements the operation.
22	`  const raw =`	Declares/initializes local data used by the surrounding operation: const raw =. Collection contents and assignments below determine its purpose.
23	`    Platform.OS === "web"`	Continues the surrounding declaration/expression or text: Platform.OS === "web". Read it with the preceding opening statement (const raw =); it is not a standalone business operation.
24	`      ? await AsyncStorage.getItem(sessionKey)`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
25	`      : await SecureStore.getItemAsync(sessionKey);`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
26	`  if (!raw) return null;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!raw) return null;.
27	`  try {`	Starts operations whose failure is handled by the following catch/finally blocks.

Line	Source code	Explanation / reading note
28	`    return JSON.parse(raw);`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
29	`  } catch {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
30	`    return null;`	Returns null to the caller (or begins returned UI markup) and ends this execution path.
31	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`export async function saveSession(session: Session | null) {`	Declares a callable function/method: export async function saveSession(session: Session | null) {. Parameters supply its inputs; the following block implements the operation.
34	`  if (Platform.OS === "web") {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (Platform.OS === "web") {.
35	`    if (session) await AsyncStorage.setItem(sessionKey, JSON.stringify(session));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
36	`    else await AsyncStorage.removeItem(sessionKey);`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
37	`  } else if (session) await SecureStore.setItemAsync(sessionKey, JSON.stringify(session));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
38	`  else await SecureStore.deleteItemAsync(sessionKey);`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
39	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
40	`export async function readSnapshot(id: string) {`	Declares a callable function/method: export async function readSnapshot(id: string) {. Parameters supply its inputs; the following block implements the operation.
41	`  const raw = await AsyncStorage.getItem(key(id, "snapshot"));`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
42	`  return raw ? JSON.parse(raw) : null;`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.

Line	Source code	Explanation / reading note
43	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44	`export async function saveSnapshot(id: string, data: unknown) {`	Declares a callable function/method: export async function saveSnapshot(id: string, data: unknown) {. Parameters supply its inputs; the following block implements the operation.
45	`  await AsyncStorage.setItem(key(id, "snapshot"), JSON.stringify(data));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
46	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`export async function readPending(id: string): Promise<Pending[]> {`	Declares a callable function/method: export async function readPending(id: string): Promise<Pending[]> {. Parameters supply its inputs; the following block implements the operation.
48	`  const raw = await AsyncStorage.getItem(key(id, "pending"));`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
49	`  return raw ? JSON.parse(raw) : [];`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
50	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
51	`export async function savePending(id: string, rows: Pending[]) {`	Declares a callable function/method: export async function savePending(id: string, rows: Pending[]) {. Parameters supply its inputs; the following block implements the operation.
52	`  await AsyncStorage.setItem(key(id, "pending"), JSON.stringify(rows));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.
53	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
54	`export async function clearSnapshot(id: string) {`	Declares a callable function/method: export async function clearSnapshot(id: string) {. Parameters supply its inputs; the following block implements the operation.
55	`  await AsyncStorage.removeItem(key(id, "snapshot"));`	Reads/writes device/browser storage, not Salesforce. Inspect the key to see whether it is scoped to the current account.
56	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

dms-mobile/src/theme.ts

Shared presentation tokens such as colors, spacing and typography. Changing these affects appearance, not business record persistence.

13 numbered source lines | SHA-256 646186040462baefa139668d20ce7466cf967002c2ea311fb36e279c9ecf5b39

Line	Source code	Explanation / reading note
1	`// DMS-only portal palette. SFA theme and application remain independent.`	Developer comment/documentation: DMS-only portal palette. SFA theme and application remain independent. It is not executed.
2	`export const colors = {`	Assigns the right-hand expression to the named variable/property: export const colors = {. This is in-memory unless it is later persisted by an explicit call.
3	`  navy: "#124737",`	Sets/declares the named object property or style/type member: navy: "#124737",. Interpret it in the enclosing object, props or type definition.
4	`  brand: "#16734B",`	Sets/declares the named object property or style/type member: brand: "#16734B",. Interpret it in the enclosing object, props or type definition.
5	`  accent: "#16734B",`	Sets/declares the named object property or style/type member: accent: "#16734B",. Interpret it in the enclosing object, props or type definition.
6	`  ink: "#173D2D",`	Sets/declares the named object property or style/type member: ink: "#173D2D",. Interpret it in the enclosing object, props or type definition.
7	`  muted: "#547264",`	Sets/declares the named object property or style/type member: muted: "#547264",. Interpret it in the enclosing object, props or type definition.
8	`  surface: "#F4F9F5",`	Sets/declares the named object property or style/type member: surface: "#F4F9F5",. Interpret it in the enclosing object, props or type definition.
9	`  white: "#FFFFFF",`	Sets/declares the named object property or style/type member: white: "#FFFFFF",. Interpret it in the enclosing object, props or type definition.
10	`  border: "#D8E7DC",`	Sets/declares the named object property or style/type member: border: "#D8E7DC",. Interpret it in the enclosing object, props or type definition.
11	`  mint: "#E7F4EB",`	Sets/declares the named object property or style/type member: mint: "#E7F4EB",. Interpret it in the enclosing object, props or type definition.
12	`  gold: "#E7F4EB",`	Sets/declares the named object property or style/type member: gold: "#E7F4EB",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
13	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Salesforce metadata

761 files. Expand this area in the PDF bookmarks to jump to an individual file.

force-app/main/default/applications/DMS_Management.app-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

33 numbered source lines | SHA-256 dd75c7726aad08990a174fc745baed6394e5db91ad6c7ef85f29155e783c95e1

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomApplication xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomApplication block; child elements specify its configuration.
3	`    <brand>`	Opens the brand block; child elements specify its configuration.
4	`        <headerColor>#16734B</headerColor>`	Sets header Color in the enclosing configuration to #16734B.
5	`        <logo>NestleBrandLogo</logo>`	Sets logo in the enclosing configuration to NestleBrandLogo.
6	`        <logoVersion>1</logoVersion>`	Sets logo Version in the enclosing configuration to 1.
7	`        <shouldOverrideOrgTheme>true</shouldOverrideOrgTheme>`	Sets should Override Org Theme in the enclosing configuration to true.
8	`    </brand>`	Closes the brand configuration block.
9	`    <description>Salesforce records for distributor orders, receipts, stock, invoices, returns and credit notes. Mobile integration and automatic stock posting are not part of this schema release.</description>`	Sets description in the enclosing configuration to Salesforce records for distributor orders, receipts, stock, invoices, returns and credit notes. Mobile integration and automatic stock posting are not part of this schema release..
10	`    <formFactors>Large</formFactors>`	Sets form Factors in the enclosing configuration to Large.
11	`    <isNavAutoTempTabsDisabled>false</isNavAutoTempTabsDisabled>`	Sets is Nav Auto Temp Tabs Disabled in the enclosing configuration to false.
12	`    <isNavPersonalizationDisabled>false</isNavPersonalizationDisabled>`	Sets is Nav Personalization Disabled in the enclosing configuration to false.
13	`    <isNavTabPersistenceDisabled>false</isNavTabPersistenceDisabled>`	Sets is Nav Tab Persistence Disabled in the enclosing configuration to false.
14	`    <isOmniPinnedViewEnabled>false</isOmniPinnedViewEnabled>`	Sets is Omni Pinned View Enabled in the enclosing configuration to false.
15	`    <label>DMS Management</label>`	Sets human-readable Salesforce UI label to DMS Management.
16	`    <navType>Standard</navType>`	Sets nav Type in the enclosing configuration to Standard.
17	`    <tabs>DMS_Distributor__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Distributor__c.
18	`    <tabs>DMS_Sales_Target__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Sales_Target__c.

Line	Source code	Explanation / reading note
19	`<tabs>DMS_Support_Ticket__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Support_Ticket__c.
20	`<tabs>DMS_Distributor_Survey__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Distributor_Survey__c.
21	`<tabs>DMS_Primary_Order__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Primary_Order__c.
22	`<tabs>DMS_Goods_Receipt__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Goods_Receipt__c.
23	`<tabs>DMS_Inventory__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Inventory__c.
24	`<tabs>DMS_Invoice__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Invoice__c.
25	`<tabs>DMS_Primary_Return__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Primary_Return__c.
26	`<tabs>DMS_Credit_Note__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Credit_Note__c.
27	`<tabs>Retailer__c</tabs>`	Sets tabs in the enclosing configuration to Retailer__c.
28	`<tabs>Product__c</tabs>`	Sets tabs in the enclosing configuration to Product__c.
29	`<tabs>Scheme__c</tabs>`	Sets tabs in the enclosing configuration to Scheme__c.
30	`<tabs>Sales_Order__c</tabs>`	Sets tabs in the enclosing configuration to Sales_Order__c.
31	`<tabs>Product_Return__c</tabs>`	Sets tabs in the enclosing configuration to Product_Return__c.
32	`<uiType>Lightning</uiType>`	Sets ui Type in the enclosing configuration to Lightning.
33	`</CustomApplication>`	Closes the CustomApplication configuration block.

force-app/main/default/applications/SFA_Mobile.app-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

43 numbered source lines | SHA-256 d5983e393305c23fe00166f53705f54c8a97f96a5430946dc3d5ccdaa126dfc8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomApplication xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomApplication block; child elements specify its configuration.
3	`    <brand>`	Opens the brand block; child elements specify its configuration.
4	`        <headerColor>#0B5CAB</headerColor>`	Sets header Color in the enclosing configuration to #0B5CAB.
5	`        <logo>NestleBrandLogo</logo>`	Sets logo in the enclosing configuration to NestleBrandLogo.
6	`        <logoVersion>1</logoVersion>`	Sets logo Version in the enclosing configuration to 1.
7	`        <shouldOverrideOrgTheme>true</shouldOverrideOrgTheme>`	Sets should Override Org Theme in the enclosing configuration to true.
8	`    </brand>`	Closes the brand configuration block.
9	`    <description>Mobile-first Sales Force Automation application for attendance, route visits, orders and schemes.</description>`	Sets description in the enclosing configuration to Mobile-first Sales Force Automation application for attendance, route visits, orders and schemes..
10	`    <formFactors>Small</formFactors>`	Sets form Factors in the enclosing configuration to Small.
11	`    <formFactors>Large</formFactors>`	Sets form Factors in the enclosing configuration to Large.
12	`    <isNavAutoTempTabsDisabled>false</isNavAutoTempTabsDisabled>`	Sets is Nav Auto Temp Tabs Disabled in the enclosing configuration to false.
13	`    <isNavPersonalizationDisabled>false</isNavPersonalizationDisabled>`	Sets is Nav Personalization Disabled in the enclosing configuration to false.
14	`    <isNavTabPersistenceDisabled>false</isNavTabPersistenceDisabled>`	Sets is Nav Tab Persistence Disabled in the enclosing configuration to false.
15	`    <isOmniPinnedViewEnabled>false</isOmniPinnedViewEnabled>`	Sets is Omni Pinned View Enabled in the enclosing configuration to false.
16	`    <label>SFA Mobile</label>`	Sets human-readable Salesforce UI label to SFA Mobile.
17	`    <navType>Standard</navType>`	Sets nav Type in the enclosing configuration to Standard.
18	`    <tabs>Employee__c</tabs>`	Sets tabs in the enclosing configuration to Employee__c.

Line	Source code	Explanation / reading note
19	`<tabs>Geography__c</tabs>`	Sets tabs in the enclosing configuration to Geography__c.
20	`<tabs>Attendance__c</tabs>`	Sets tabs in the enclosing configuration to Attendance__c.
21	`<tabs>Expense_Policy__c</tabs>`	Sets tabs in the enclosing configuration to Expense_Policy__c.
22	`<tabs>Expense_Claim__c</tabs>`	Sets tabs in the enclosing configuration to Expense_Claim__c.
23	`<tabs>Beat__c</tabs>`	Sets tabs in the enclosing configuration to Beat__c.
24	`<tabs>Distributor_Outlet_Allocation__c</tabs>`	Sets tabs in the enclosing configuration to Distributor_Outlet_Allocation__c.
25	`<tabs>Permanent_Journey_Plan__c</tabs>`	Sets tabs in the enclosing configuration to Permanent_Journey_Plan__c.
26	`<tabs>PJP_Planner</tabs>`	Sets tabs in the enclosing configuration to PJP_Planner.
27	`<tabs>Retailer__c</tabs>`	Sets tabs in the enclosing configuration to Retailer__c.
28	`<tabs>Visit__c</tabs>`	Sets tabs in the enclosing configuration to Visit__c.
29	`<tabs>Asset_Survey__c</tabs>`	Sets tabs in the enclosing configuration to Asset_Survey__c.
30	`<tabs>Survey__c</tabs>`	Sets tabs in the enclosing configuration to Survey__c.
31	`<tabs>Survey_Response__c</tabs>`	Sets tabs in the enclosing configuration to Survey_Response__c.
32	`<tabs>Competitor_Activity__c</tabs>`	Sets tabs in the enclosing configuration to Competitor_Activity__c.
33	`<tabs>SFA_Ticket__c</tabs>`	Sets tabs in the enclosing configuration to SFA_Ticket__c.
34	`<tabs>Stock_Check__c</tabs>`	Sets tabs in the enclosing configuration to Stock_Check__c.
35	`<tabs>Product_Return__c</tabs>`	Sets tabs in the enclosing configuration to Product_Return__c.
36	`<tabs>Leave_Request__c</tabs>`	Sets tabs in the enclosing configuration to Leave_Request__c.
37	`<tabs>Product__c</tabs>`	Sets tabs in the enclosing configuration to Product__c.
38	`<tabs>Product_Sales_Configuration__c</tabs>`	Sets tabs in the enclosing configuration to Product_Sales_Configuration__c.
39	`<tabs>Scheme__c</tabs>`	Sets tabs in the enclosing configuration to Scheme__c.
40	`<tabs>Sales_Order__c</tabs>`	Sets tabs in the enclosing configuration to Sales_Order__c.

Line	Source code	Explanation / reading note
41	`    <tabs>Order_Item__c</tabs>`	Sets tabs in the enclosing configuration to Order_Item__c.
42	`    <uiType>Lightning</uiType>`	Sets ui Type in the enclosing configuration to Lightning.
43	`</CustomApplication>`	Closes the CustomApplication configuration block.

force-app/main/default/approvalProcesses/DMS_Primary_Order__c.Company_Officer_Approval.approvalProcess-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 32a1504e988ef33a98966fd9199735354070l5f454b6540de966f42e3cda637f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApprovalProcess xmlns="http://soap.sforce.com/2006/04/metadata"><active>true</active><allowRecall>false</allowRecall><allowedSubmitters><type>allInternalUsers</type></allowedSubmitters><approvalPageFields><field>Name</field><field>Distributor__c</field><field>Employee__c</field><field>Total_Amount__c</field></approvalPageFields><approvalStep><allowDelegate>false</allowDelegate><assignedApprover><approver><name>Officer__c</name><type>relatedUserField</type></approver><whenMultipleApprovers>FirstResponse</whenMultipleApprovers></assignedApprover><label>Company Distributor Officer</label><name>Officer_Review</name><rejectBehavior><type>RejectRequest</type></rejectBehavior></approvalStep><enableMobileDeviceAccess>true</enableMobileDeviceAccess><entryCriteria><formula>AND(ISPICKVAL(Status__c, 'Draft'), NOT(ISBLANK(Officer__c)))</formula></entryCriteria><finalApprovalActions><action><name>Set_Approved</name><type>FieldUpdate</type></action></finalApprovalActions><finalApprovalRecordLock>true</finalApprovalRecordLock><finalRejectionActions><action><name>Set_Rejected</name><type>FieldUpdate</type></action></finalRejectionActions><finalRejectionRecordLock>true</finalRejectionRecordLock><initialSubmissionActions><action><name>Set_Submitted</name><type>FieldUpdate</type></action></initialSubmissionActions><label>Company Officer Approval</label><processOrder>1</processOrder><recordEditability>AdminOnly</recordEditability><showApprovalHistory>true</showApprovalHistory></ApprovalProcess>`	Sets Approval Process in the enclosing configuration to <active>true</active><allowRecall>false</allowRecall><allowedSubmitters><type>allInternalUsers</type></allowedSubmitters><approvalPageFields><field>Name</field><field>Distributor__c</field><field>Empl.

force-app/main/default/approvalProcesses/DMS_Primary_Return__c.Company_Officer_Return_Approval.approvalProcess-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

16 numbered source lines | SHA-256 1f8b2cfed3a6dcd5e36eaded697bce339ec1c6313e946044911265c00480c772

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ApprovalProcess xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ApprovalProcess block; child elements specify its configuration.
3	`<active>true</active><allowRecall>false</allowRecall>`	Opens the active block; child elements specify its configuration.
4	`<allowedSubmitters><type>allInternalUsers</type></allowedSubmitters>`	Sets allowed Submitters in the enclosing configuration to <type>allInternalUsers</type>.
5	`<approvalPageFields><field>Name</field><field>Distributor__c</field><field>Employee__c</field><field>Total_Cases__c</field><field>Total_Amount__c</field></approvalPageFields>`	Sets approval Page Fields in the enclosing configuration to <field>Name</field><field>Distributor__c</field><field>Employee__c</field><field>Total_Cases__c</field><field>Total_Amount__c</field>.
6	`<approvalStep><allowDelegate>false</allowDelegate><assignedApprover><approver><name>Officer__c</name><type>relatedUserField</type></approver><whenMultipleApprovers>FirstResponse</whenMultipleApprovers></assignedApprover><label>Company Distributor Officer</label><name>Officer_Review</name></approvalStep>`	Sets approval Step in the enclosing configuration to <allowDelegate>false</allowDelegate><assignedApprover><approver><name>Officer__c</name><type>relatedUserField</type></approver><whenMultipleApprovers>FirstResponse</whenMultipleApprovers></assignedApp.
7	`<enableMobileDeviceAccess>true</enableMobileDeviceAccess>`	Sets enable Mobile Device Access in the enclosing configuration to true.
8	`<entryCriteria><formula>AND(ISPICKVAL(Status__c, 'Draft'), NOT(ISBLANK(Officer__c)), Total_Cases__c > 0)</formula></entryCriteria>`	Sets entry Criteria in the enclosing configuration to <formula>AND(ISPICKVAL(Status__c, 'Draft'), NOT(ISBLANK(Officer__c)), Total_Cases__c > 0)</formula>.
9	`<finalApprovalActions><action><name>Set_Approved</name><type>FieldUpdate</type></action></finalApprovalActions>`	Sets final Approval Actions in the enclosing configuration to <action><name>Set_Approved</name><type>FieldUpdate</type></action>.
10	`<finalApprovalRecordLock>true</finalApprovalRecordLock>`	Sets final Approval Record Lock in the enclosing configuration to true.
11	`<finalRejectionActions><action><name>Set_Rejected</name><type>FieldUpdate</type></action></finalRejectionActions>`	Sets final Rejection Actions in the enclosing configuration to <action><name>Set_Rejected</name><type>FieldUpdate</type></action>.
12	`<finalRejectionRecordLock>true</finalRejectionRecordLock>`	Sets final Rejection Record Lock in the enclosing configuration to true.
13	`<initialSubmissionActions><action><name>Set_Submitted</name><type>FieldUpdate</type></action></initialSubmissionActions>`	Sets initial Submission Actions in the enclosing configuration to <action><name>Set_Submitted</name><type>FieldUpdate</type></action>.

Line	Source code	Explanation / reading note
14	`<label>Company Officer Return Approval</label><processOrder>1</processOrder>`	Opens the label block; child elements specify its configuration.
15	`<recordEditability>AdminOnly</recordEditability><showApprovalHistory>true</showApprovalHistory>`	Opens the recordEditability block; child elements specify its configuration.
16	`</ApprovalProcess>`	Closes the ApprovalProcess configuration block.

force-app/main/default/contentassets/NestleBrandLogo.asset-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

14 numbered source lines | SHA-256 9133786c141ca97771d904c6647f87df0e4344cae5ac7d750a00f2079764e543

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ContentAsset xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ContentAsset block; child elements specify its configuration.
3	`    <language>en_US</language>`	Sets language in the enclosing configuration to en_US.
4	`    <masterLabel>Nestle Brand Logo</masterLabel>`	Sets master Label in the enclosing configuration to Nestle Brand Logo.
5	`    <relationships>`	Opens the relationships block; child elements specify its configuration.
6	`        <organization><access>VIEWER</access></organization>`	Sets organization in the enclosing configuration to <access>VIEWER</access>.
7	`    </relationships>`	Closes the relationships configuration block.
8	`    <versions>`	Opens the versions block; child elements specify its configuration.
9	`        <version>`	Opens the version block; child elements specify its configuration.
10	`            <number>1</number>`	Sets number in the enclosing configuration to 1.
11	`            <pathOnClient>nestle-logo.png</pathOnClient>`	Sets path On Client in the enclosing configuration to nestle-logo.png.
12	`        </version>`	Closes the version configuration block.
13	`    </versions>`	Closes the versions configuration block.
14	`</ContentAsset>`	Closes the ContentAsset configuration block.

force-app/main/default/customPermissions/DMS_Manage_Tickets.customPermission-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 238ff905cee353a8fb187d7ca2f4783f718bbe5a869d4503783b5dc7acc9fd6a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomPermission xmlns="http://soap.sforce.com/2006/04/metadata"><description>Authorises company support administrators to manage DMS tickets they can access.</description><label>Manage DMS Support Tickets</label></CustomPermission>`	Sets Custom Permission in the enclosing configuration to <description>Authorises company support administrators to manage DMS tickets they can access.</description><label>Manage DMS Support Tickets</label>.

force-app/main/default/customPermissions/DMS_Trusted_Backend.customPermission-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 1d1997d641da51cdaa47e12d4096fd8678638b6af8a221420428b48191a146f4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomPermission xmlns="http://soap.sforce.com/2006/04/metadata"><description>Only the server integration user may invoke DMS transactions on behalf of authenticated application identities. Never assign to distributor users.</description><label>DMS Trusted Backend</label></CustomPermission>`	Sets Custom Permission in the enclosing configuration to <description>Only the server integration user may invoke DMS transactions on behalf of authenticated application identities. Never assign to distributor users.</description><label>DMS Trusted Backend<.

force-app/main/default/layouts/Asset_Survey__c-Asset Survey Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

4 numbered source lines | SHA-256 231b578ef23128ddef690608bfa8eed083eed49e06a134f2ab8364b6ae743329

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata"><layoutSections><customLabel >true</customLabel><detailHeading>true</detailHeading><editHeading ><label>Asset Survey Information</label><layoutColumns>`	Opens the Layout block; child elements specify its configuration.
3	`<layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems><layoutIt ems><behavior>Required</behavior><field>Asset_Name__c</field></layoutItems><layoutIt ems><behavior>Required</behavior><field>Asset_Code__c</field></layoutItems><layoutIt ems><behavior>Edit</behavior><field>Status__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Na me</field></layoutItems><layoutItems><behavior>Required</behavior><field>Asset_Name_ _c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Asset.
4	`</layoutColumns><layoutColumns><layoutItems><behavior>Required</behavior><field>Outl et__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Visit__c</fi eld></layoutItems><layoutItems><behavior>Edit</behavior><field>Given_Date__c</field> </layoutItems><layoutItems><behavior>Edit</behavior><field>Picture_URL__c</field></l ayoutItems></layoutColumns><style>TwoColumnsTopToBottom</style></layoutSections><lay outSections><customLabel>false</customLabel><detailHeading>false</detailHeading><edi tHeading>false</editHeading><layoutColumns/><style>CustomLinks</style></layoutSectio ns><showHighlightsPanel>true</showHighlightsPanel></Layout>`	Closes the layoutColumns configuration block.

force-app/main/default/layouts/Attendance__c-Attendance Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

81 numbered source lines | SHA-256 060d4f36d54bc2b6b7dd64d5f4e7ea829c86e1dd9fec0f6269ce15bc3c330784

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.
5	`        <detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
6	`        <editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
7	`        <label>Attendance Information</label>`	Sets human-readable Salesforce UI label to Attendance Information.
8	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
9	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
10	`                <behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
11	`                <field>Attendance_Date__c</field>`	Sets field API name configured in this entry to Attendance_Date__c.
12	`            </layoutItems>`	Closes the layoutItems configuration block.
13	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
14	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
15	`                <field>Sales_Representative__c</field>`	Sets field API name configured in this entry to Sales_Representative__c.
16	`            </layoutItems>`	Closes the layoutItems configuration block.
17	`            <layoutItems><behavior>Edit</behavior><field>Employee__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Employee__c</field>.
18	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.

Line	Source code	Explanation / reading note
19	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
20	`<field>Status__c</field>`	Sets field API name configured in this entry to Status__c.
21	`</layoutItems>`	Closes the layoutItems configuration block.
22	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
23	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
24	`<field>Start_Time__c</field>`	Sets field API name configured in this entry to Start_Time__c.
25	`</layoutItems>`	Closes the layoutItems configuration block.
26	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
27	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
28	`<field>Start_Latitude__c</field>`	Sets field API name configured in this entry to Start_Latitude__c.
29	`</layoutItems>`	Closes the layoutItems configuration block.
30	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
31	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
32	`<field>Start_Longitude__c</field>`	Sets field API name configured in this entry to Start_Longitude__c.
33	`</layoutItems>`	Closes the layoutItems configuration block.
34	`<layoutItems><behavior>Edit</behavior><field>Transport_Mode__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Transport_Mode__c</field>.
35	`<layoutItems><behavior>Edit</behavior><field>Vehicle_Ownership__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Vehicle_Ownership__c</field>.
36	`<layoutItems><behavior>Edit</behavior><field>Planned_Activity__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Planned_Activity__c</field>.
37	`<layoutItems><behavior>Edit</behavior><field>Start_Odometer__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Start_Odometer__c</field>.

Line	Source code	Explanation / reading note
38	`<layoutItems><behavior>Edit</behavior><field>Odometer_Entry_Mode__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Odometer_Entry_Mode__c</field>.
39	`</layoutColumns>`	Closes the layoutColumns configuration block.
40	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
41	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
42	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
43	`<field>End_Time__c</field>`	Sets field API name configured in this entry to End_Time__c.
44	`</layoutItems>`	Closes the layoutItems configuration block.
45	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
46	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
47	`<field>End_Latitude__c</field>`	Sets field API name configured in this entry to End_Latitude__c.
48	`</layoutItems>`	Closes the layoutItems configuration block.
49	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
50	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
51	`<field>End_Longitude__c</field>`	Sets field API name configured in this entry to End_Longitude__c.
52	`</layoutItems>`	Closes the layoutItems configuration block.
53	`<layoutItems><behavior>Edit</behavior><field>End_Odometer__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>End_Odometer__c</field>.
54	`<layoutItems><behavior>Readonly</behavior><field>Distance_Travelled_Km__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Distance_Travelled_Km__c</field>.
55	`<layoutItems><behavior>Edit</behavior><field>Travel_Rate_Per_Km__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Travel_Rate_Per_Km__c</field>.
56	`<layoutItems><behavior>Readonly</behavior><field>Travel_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Travel_Amount__c</field>.

Line	Source code	Explanation / reading note
57	`<layoutItems><behavior>Edit</behavior><field>Odometer_Evidence_URL__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Odometer_Evidence_URL__c</field>.
58	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
59	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
60	`<field>Selfie_Content_Document_Id__c</field>`	Sets field API name configured in this entry to Selfie_Content_Document_Id__c.
61	`</layoutItems>`	Closes the layoutItems configuration block.
62	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
63	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
64	`<field>Offline_Key__c</field>`	Sets field API name configured in this entry to Offline_Key__c.
65	`</layoutItems>`	Closes the layoutItems configuration block.
66	`</layoutColumns>`	Closes the layoutColumns configuration block.
67	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
68	`</layoutSections>`	Closes the layoutSections configuration block.
69	`<layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
70	`<customLabel>false</customLabel>`	Sets custom Label in the enclosing configuration to false.
71	`<detailHeading>false</detailHeading>`	Sets detail Heading in the enclosing configuration to false.
72	`<editHeading>false</editHeading>`	Sets edit Heading in the enclosing configuration to false.
73	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
74	`<style>CustomLinks</style>`	Sets style in the enclosing configuration to CustomLinks.
75	`</layoutSections>`	Closes the layoutSections configuration block.
76	`<showEmailCheckbox>false</showEmailCheckbox>`	Sets show Email Checkbox in the enclosing configuration to false.
77	`<showHighlightsPanel>true</showHighlightsPanel>`	Sets show Highlights Panel in the enclosing configuration to true.

Line	Source code	Explanation / reading note
78	`<showInteractionLogPanel>false</showInteractionLogPanel>`	Sets show Interaction Log Panel in the enclosing configuration to false.
79	`<showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox>`	Sets show Run Assignment Rules Checkbox in the enclosing configuration to false.
80	`<showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Sets show Submit And Attach Button in the enclosing configuration to false.
81	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/Beat__c-Beat Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

76 numbered source lines | SHA-256 1d2256a79551eb12a776d58e45dd13e527132e9152b39dcb15d2dd1407891429

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.
5	`        <detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
6	`        <editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
7	`        <label>Beat Information</label>`	Sets human-readable Salesforce UI label to Beat Information.
8	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
9	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
10	`                <behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
11	`                <field>Name</field>`	Sets field API name configured in this entry to Name.
12	`            </layoutItems>`	Closes the layoutItems configuration block.
13	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
14	`                <behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.
15	`                <field>Beat_ID__c</field>`	Sets field API name configured in this entry to Beat_ID__c.
16	`            </layoutItems>`	Closes the layoutItems configuration block.
17	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
18	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
19	`                <field>Assigned_Employee__c</field>`	Sets field API name configured in this entry to Assigned_Employee__c.

Line	Source code	Explanation / reading note
20	`            </layoutItems>`	Closes the layoutItems configuration block.
21	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
22	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
23	`                <field>Sales_Representative__c</field>`	Sets field API name configured in this entry to Sales_Representative__c.
24	`            </layoutItems>`	Closes the layoutItems configuration block.
25	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
26	`                <behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.
27	`                <field>Outlet_Names__c</field>`	Sets field API name configured in this entry to Outlet_Names__c.
28	`            </layoutItems>`	Closes the layoutItems configuration block.
29	`        </layoutColumns>`	Closes the layoutColumns configuration block.
30	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
31	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
32	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
33	`                <field>Distributor__c</field>`	Sets field API name configured in this entry to Distributor__c.
34	`            </layoutItems>`	Closes the layoutItems configuration block.
35	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
36	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
37	`                <field>Geography__c</field>`	Sets field API name configured in this entry to Geography__c.
38	`            </layoutItems>`	Closes the layoutItems configuration block.
39	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
40	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
41	`                <field>Active__c</field>`	Sets field API name configured in this entry to Active__c.

Line	Source code	Explanation / reading note
42	`</layoutItems>`	Closes the layoutItems configuration block.
43	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
44	`<behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.
45	`<field>Outlet_Count__c</field>`	Sets field API name configured in this entry to Outlet_Count__c.
46	`</layoutItems>`	Closes the layoutItems configuration block.
47	`</layoutColumns>`	Closes the layoutColumns configuration block.
48	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
49	`</layoutSections>`	Closes the layoutSections configuration block.
50	`<layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
51	`<customLabel>false</customLabel>`	Sets custom Label in the enclosing configuration to false.
52	`<detailHeading>false</detailHeading>`	Sets detail Heading in the enclosing configuration to false.
53	`<editHeading>false</editHeading>`	Sets edit Heading in the enclosing configuration to false.
54	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
55	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
56	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
57	`<style>CustomLinks</style>`	Sets style in the enclosing configuration to CustomLinks.
58	`</layoutSections>`	Closes the layoutSections configuration block.
59	`<platformActionList>`	Opens the platformActionList block; child elements specify its configuration.
60	`<actionListContext>Record</actionListContext>`	Sets action List Context in the enclosing configuration to Record.
61	`<platformActionListItems>`	Opens the platformActionListItems block; child elements specify its configuration.
62	`<actionName>Beat__c.Select_Outlets</actionName>`	Sets action Name in the enclosing configuration to Beat__c.Select_Outlets.
63	`<actionType>QuickAction</actionType>`	Sets action Type in the enclosing configuration to QuickAction.

Line	Source code	Explanation / reading note
64	`<sortOrder>0</sortOrder>`	Sets sort Order in the enclosing configuration to 0.
65	`</platformActionListItems>`	Closes the platformActionListItems configuration block.
66	`</platformActionList>`	Closes the platformActionList configuration block.
67	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
68	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
69	`<relatedList>Retailer__c.Beat__c</relatedList>`	Sets related List in the enclosing configuration to Retailer__c.Beat__c.
70	`</relatedLists>`	Closes the relatedLists configuration block.
71	`<showEmailCheckbox>false</showEmailCheckbox>`	Sets show Email Checkbox in the enclosing configuration to false.
72	`<showHighlightsPanel>true</showHighlightsPanel>`	Sets show Highlights Panel in the enclosing configuration to true.
73	`<showInteractionLogPanel>false</showInteractionLogPanel>`	Sets show Interaction Log Panel in the enclosing configuration to false.
74	`<showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox>`	Sets show Run Assignment Rules Checkbox in the enclosing configuration to false.
75	`<showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Sets show Submit And Attach Button in the enclosing configuration to false.
76	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/Competitor_Activity__c-Competitor Activity Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

4 numbered source lines | SHA-256 740cd545220f37d3649b8797ed5092109d2319e0dad467680829b8e273f1edc5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata"><layoutSections><customLabel >true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading ><label>Competitor Activity Information</label><layoutColumns>`	Opens the Layout block; child elements specify its configuration.
3	`<layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems><layoutIt ems><behavior>Required</behavior><field>Competitor_Name__c</field></layoutItems><lay outItems><behavior>Edit</behavior><field>Company__c</field></layoutItems><layoutItem s><behavior>Edit</behavior><field>Scheme_Details__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Na me</field></layoutItems><layoutItems><behavior>Required</behavior><field>Competitor_N ame__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Comp.
4	`</layoutColumns><layoutColumns><layoutItems><behavior>Required</behavior><field>Outl et__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Visit__c</fi eld></layoutItems><layoutItems><behavior>Edit</behavior><field>MRP__c</field></layou tItems><layoutItems><behavior>Edit</behavior><field>RBP__c</field></layoutItems><lay outItems><behavior>Edit</behavior><field>Image_URL__c</field></layoutItems></layoutC olumns><style>TwoColumnsTopToBottom</style></layoutSections><layoutSections><customL abel>false</customLabel><detailHeading>false</detailHeading><editHeading>false</edit Heading><layoutColumns/><style>CustomLinks</style></layoutSections><showHighlightsPa nel>true</showHighlightsPanel></Layout>`	Closes the layoutColumns configuration block.

force-app/main/default/layouts/DMS_Credit_Note_Line__c-Credit Note Line Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

25 numbered source lines | SHA-256 b538cdef90ac81ba243ee5fe3c29d1bbc14d83febf4efb1eddbf72ec6705bc78

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Credit Note Line Information</label>`	Opens the customLabel block; child elements specify its configuration.
5	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
6	`            <layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Name</field>.
7	`            <layoutItems><behavior>Required</behavior><field>Credit_Note__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Credit_Note__c</field>.
8	`            <layoutItems><behavior>Edit</behavior><field>Invoice_Line__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Invoice_Line__c</field>.
9	`            <layoutItems><behavior>Edit</behavior><field>Quantity__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Quantity__c</field>.
10	`            <layoutItems><behavior>Readonly</behavior><field>Tax_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Tax_Amount__c</field>.
11	`            <layoutItems><behavior>Readonly</behavior><field>Total_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Total_Amount__c</field>.
12	`        </layoutColumns>`	Closes the layoutColumns configuration block.
13	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
14	`            <layoutItems><behavior>Edit</behavior><field>Product__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Product__c</field>.

Line	Source code	Explanation / reading note
15	`<layoutItems><behavior>Edit</behavior><field>Description__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Description__c</field>.
16	`<layoutItems><behavior>Readonly</behavior><field>Net_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Net_Amount__c</field>.
17	`<layoutItems><behavior>Edit</behavior><field>Quantity_Unit__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Quantity_Unit__c</field>.
18	`<layoutItems><behavior>Edit</behavior><field>Tax_Percent__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Tax_Percent__c</field>.
19	`<layoutItems><behavior>Edit</behavior><field>Unit_Credit__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Unit_Credit__c</field>.
20	`</layoutColumns>`	Closes the layoutColumns configuration block.
21	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
22	`</layoutSections>`	Closes the layoutSections configuration block.
23		Blank line separating logical sections; no executable operation.
24	`<showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Opens the showEmailCheckbox block; child elements specify its configuration.
25	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/DMS_Credit_Note__c-Credit Note Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

26 numbered source lines | SHA-256 3a8edb6e71b7701cfadfe5d4665190187f0e332a8c61f25c498071b9ce40a686

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Credit Note Information</label>`	Opens the customLabel block; child elements specify its configuration.
5	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
6	`            <layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Name</field>.
7	`            <layoutItems><behavior>Edit</behavior><field>Status__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Status__c</field>.
8	`            <layoutItems><behavior>Edit</behavior><field>Invoice__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Invoice__c</field>.
9	`            <layoutItems><behavior>Edit</behavior><field>Outlet__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Outlet__c</field>.
10	`            <layoutItems><behavior>Edit</behavior><field>Reason__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Reason__c</field>.
11	`            <layoutItems><behavior>Edit</behavior><field>Scheme__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Scheme__c</field>.
12	`            <layoutItems><behavior>Readonly</behavior><field>Total_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Total_Amount__c</field>.
13	`        </layoutColumns>`	Closes the layoutColumns configuration block.
14	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.

Line	Source code	Explanation / reading note
15	`<layoutItems><behavior>Required</behavior><field>Distributor__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Distributor__c</field>.
16	`<layoutItems><behavior>Edit</behavior><field>Credit_Date__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Credit_Date__c</field>.
17	`<layoutItems><behavior>Edit</behavior><field>Notes__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Notes__c</field>.
18	`<layoutItems><behavior>Edit</behavior><field>Primary_Return__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Primary_Return__c</field>.
19	`<layoutItems><behavior>Edit</behavior><field>Sales_Channel__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Sales_Channel__c</field>.
20	`<layoutItems><behavior>Edit</behavior><field>Secondary_Return__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Secondary_Return__c</field>.
21	`</layoutColumns>`	Closes the layoutColumns configuration block.
22	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
23	`</layoutSections>`	Closes the layoutSections configuration block.
24	`<relatedLists><fields>NAME</fields><fields>Product__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Credit_Note_Line__c.Credit_Note__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Product__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Credit_Note_Line__c.Credit_Note__c</relatedList>.
25	`<showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Opens the showEmailCheckbox block; child elements specify its configuration.
26	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/DMS_Distributor_Survey__c-Distributor Survey Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 bccfd7be1acce60a0dedeca331e3e1a9d842fe7585e2cb9f0066a47cb57e29f9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata"><layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Monthly product survey</label><layoutColumns><layoutItems><behavior>Edit</behavior><field>Distributor__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Product__c</field></layoutItems><layoutItems><behavior>Readonly</behavior><field>Officer__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Visit_Date__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Stock_Cases__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Demand_Notes__c</field></layoutItems><layoutItems><behavior>Readonly</behavior><field>Next_Visit_Due__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Movement__c</field></layoutItems></layoutColumns><style>OneColumn</style></layoutSections></Layout>`	Sets Layout in the enclosing configuration to <layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Monthly product survey</label><layoutColumns><layoutItems><behavior>Edit</behavi.

force-app/main/default/layouts/DMS_Distributor__c-DMS Distributor Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

152 numbered source lines | SHA-256 ece71d8c3bdbb05a230f3fb88098885d4eb4586b30cd4e2793a68adb586f8b34

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.
5	`        <detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
6	`        <editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
7	`        <label>DMS Distributor Information</label>`	Sets human-readable Salesforce UI label to DMS Distributor Information.
8	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
9	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
10	`                <behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
11	`                <field>Name</field>`	Sets field API name configured in this entry to Name.
12	`            </layoutItems>`	Closes the layoutItems configuration block.
13	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
14	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
15	`                <field>Active__c</field>`	Sets field API name configured in this entry to Active__c.
16	`            </layoutItems>`	Closes the layoutItems configuration block.
17	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
18	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
19	`                <field>Discontinued__c</field>`	Sets field API name configured in this entry to Discontinued__c.

Line	Source code	Explanation / reading note
20	`</layoutItems>`	Closes the layoutItems configuration block.
21	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
22	`<behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.
23	`<field>Distributor_Status__c</field>`	Sets field API name configured in this entry to Distributor_Status__c.
24	`</layoutItems>`	Closes the layoutItems configuration block.
25	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
26	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
27	`<field>Distributor_Code__c</field>`	Sets field API name configured in this entry to Distributor_Code__c.
28	`</layoutItems>`	Closes the layoutItems configuration block.
29	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
30	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
31	`<field>GSTIN__c</field>`	Sets field API name configured in this entry to GSTIN__c.
32	`</layoutItems>`	Closes the layoutItems configuration block.
33	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
34	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
35	`<field>Login_Email__c</field>`	Sets field API name configured in this entry to Login_Email__c.
36	`</layoutItems>`	Closes the layoutItems configuration block.
37	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
38	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
39	`<field>Partner_Type__c</field>`	Sets field API name configured in this entry to Partner_Type__c.
40	`</layoutItems>`	Closes the layoutItems configuration block.
41	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.

Line	Source code	Explanation / reading note
42	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
43	`<field>Employee_Allocation_Order__c</field>`	Sets field API name configured in this entry to Employee_Allocation_Order__c.
44	`</layoutItems>`	Closes the layoutItems configuration block.
45	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
46	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
47	`<field>Salesforce_User__c</field>`	Sets field API name configured in this entry to Salesforce_User__c.
48	`</layoutItems>`	Closes the layoutItems configuration block.
49	`</layoutColumns>`	Closes the layoutColumns configuration block.
50	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
51	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
52	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
53	`<field>Officer__c</field>`	Sets field API name configured in this entry to Officer__c.
54	`</layoutItems>`	Closes the layoutItems configuration block.
55	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
56	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
57	`<field>Address__c</field>`	Sets field API name configured in this entry to Address__c.
58	`</layoutItems>`	Closes the layoutItems configuration block.
59	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
60	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
61	`<field>Credit_Limit__c</field>`	Sets field API name configured in this entry to Credit_Limit__c.
62	`</layoutItems>`	Closes the layoutItems configuration block.
63	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.

Line	Source code	Explanation / reading note
64	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
65	`<field>Geography__c</field>`	Sets field API name configured in this entry to Geography__c.
66	`</layoutItems>`	Closes the layoutItems configuration block.
67	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
68	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
69	`<field>Location__c</field>`	Sets field API name configured in this entry to Location__c.
70	`</layoutItems>`	Closes the layoutItems configuration block.
71	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
72	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
73	`<field>Phone__c</field>`	Sets field API name configured in this entry to Phone__c.
74	`</layoutItems>`	Closes the layoutItems configuration block.
75	`</layoutColumns>`	Closes the layoutColumns configuration block.
76	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
77	`</layoutSections>`	Closes the layoutSections configuration block.
78	`<layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
79	`<customLabel>false</customLabel>`	Sets custom Label in the enclosing configuration to false.
80	`<detailHeading>false</detailHeading>`	Sets detail Heading in the enclosing configuration to false.
81	`<editHeading>false</editHeading>`	Sets edit Heading in the enclosing configuration to false.
82	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
83	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
84	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
85	`<style>CustomLinks</style>`	Sets style in the enclosing configuration to CustomLinks.

Line	Source code	Explanation / reading note
86	`    </layoutSections>`	Closes the layoutSections configuration block.
87	`    <relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
88	`        <fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
89	`        <fields>Employee_Code__c</fields>`	Sets fields in the enclosing configuration to Employee_Code__c.
90	`        <fields>Active__c</fields>`	Sets fields in the enclosing configuration to Active__c.
91	`        <relatedList>Employee__c.DMS_Distributor__c</relatedList>`	Sets related List in the enclosing configuration to Employee__c.DMS_Distributor__c.
92	`    </relatedLists>`	Closes the relatedLists configuration block.
93	`    <relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
94	`        <fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
95	`        <fields>Status__c</fields>`	Sets fields in the enclosing configuration to Status__c.
96	`        <relatedList>DMS_Goods_Receipt__c.Distributor__c</relatedList>`	Sets related List in the enclosing configuration to DMS_Goods_Receipt__c.Distributor__c.
97	`    </relatedLists>`	Closes the relatedLists configuration block.
98	`    <relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
99	`        <fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
100	`        <fields>Status__c</fields>`	Sets fields in the enclosing configuration to Status__c.
101	`        <fields>Total_Amount__c</fields>`	Sets fields in the enclosing configuration to Total_Amount__c.
102	`        <relatedList>DMS_Credit_Note__c.Distributor__c</relatedList>`	Sets related List in the enclosing configuration to DMS_Credit_Note__c.Distributor__c.
103	`    </relatedLists>`	Closes the relatedLists configuration block.
104	`    <relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
105	`        <fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
106	`        <fields>Status__c</fields>`	Sets fields in the enclosing configuration to Status__c.
107	`        <fields>Total_Amount__c</fields>`	Sets fields in the enclosing configuration to Total_Amount__c.

Line	Source code	Explanation / reading note
108	`<relatedList>DMS_Primary_Return__c.Distributor__c</relatedList>`	Sets related List in the enclosing configuration to DMS_Primary_Return__c.Distributor__c.
109	`</relatedLists>`	Closes the relatedLists configuration block.
110	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
111	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
112	`<fields>Product__c</fields>`	Sets fields in the enclosing configuration to Product__c.
113	`<relatedList>DMS_Inventory__c.Distributor__c</relatedList>`	Sets related List in the enclosing configuration to DMS_Inventory__c.Distributor__c.
114	`</relatedLists>`	Closes the relatedLists configuration block.
115	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
116	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
117	`<fields>Status__c</fields>`	Sets fields in the enclosing configuration to Status__c.
118	`<fields>Total_Amount__c</fields>`	Sets fields in the enclosing configuration to Total_Amount__c.
119	`<relatedList>DMS_Invoice__c.Distributor__c</relatedList>`	Sets related List in the enclosing configuration to DMS_Invoice__c.Distributor__c.
120	`</relatedLists>`	Closes the relatedLists configuration block.
121	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
122	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
123	`<fields>Status__c</fields>`	Sets fields in the enclosing configuration to Status__c.
124	`<fields>Total_Amount__c</fields>`	Sets fields in the enclosing configuration to Total_Amount__c.
125	`<relatedList>DMS_Primary_Order__c.Distributor__c</relatedList>`	Sets related List in the enclosing configuration to DMS_Primary_Order__c.Distributor__c.
126	`</relatedLists>`	Closes the relatedLists configuration block.
127	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
128	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
129	`<relatedList>Product_Return__c.DMS_Distributor__c</relatedList>`	Sets related List in the enclosing configuration to Product_Return__c.DMS_Distributor__c.

Line	Source code	Explanation / reading note
130	`</relatedLists>`	Closes the relatedLists configuration block.
131	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
132	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
133	`<relatedList>Retailer__c.DMS_Distributor__c</relatedList>`	Sets related List in the enclosing configuration to Retailer__c.DMS_Distributor__c.
134	`</relatedLists>`	Closes the relatedLists configuration block.
135	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
136	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
137	`<relatedList>Sales_Order__c.DMS_Distributor__c</relatedList>`	Sets related List in the enclosing configuration to Sales_Order__c.DMS_Distributor__c.
138	`</relatedLists>`	Closes the relatedLists configuration block.
139	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
140	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
141	`<fields>Visit_Date__c</fields>`	Sets fields in the enclosing configuration to Visit_Date__c.
142	`<fields>Product__c</fields>`	Sets fields in the enclosing configuration to Product__c.
143	`<fields>Movement__c</fields>`	Sets fields in the enclosing configuration to Movement__c.
144	`<fields>Next_Visit_Due__c</fields>`	Sets fields in the enclosing configuration to Next_Visit_Due__c.
145	`<relatedList>DMS_Distributor_Survey__c.Distributor__c</relatedList>`	Sets related List in the enclosing configuration to DMS_Distributor_Survey__c.Distributor__c.
146	`</relatedLists>`	Closes the relatedLists configuration block.
147	`<showEmailCheckbox>false</showEmailCheckbox>`	Sets show Email Checkbox in the enclosing configuration to false.
148	`<showHighlightsPanel>true</showHighlightsPanel>`	Sets show Highlights Panel in the enclosing configuration to true.
149	`<showInteractionLogPanel>false</showInteractionLogPanel>`	Sets show Interaction Log Panel in the enclosing configuration to false.
150	`<showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox>`	Sets show Run Assignment Rules Checkbox in the enclosing configuration to false.
151	`<showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Sets show Submit And Attach Button in the enclosing configuration to false.

Line	Source code	Explanation / reading note
152	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/DMS_Goods_Receipt_Line__c-Goods Receipt Line Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

26 numbered source lines | SHA-256 090e6c9dc631fcf4310c1c12fabe1079305d365b1eb3b4d8ae793e8368657647

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Goods Receipt Line Information</label>`	Opens the customLabel block; child elements specify its configuration.
5	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
6	`            <layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Name</field>.
7	`            <layoutItems><behavior>Edit</behavior><field>Batch_Number__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Batch_Number__c</field>.
8	`            <layoutItems><behavior>Edit</behavior><field>Expiry_Date__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Expiry_Date__c</field>.
9	`            <layoutItems><behavior>Required</behavior><field>Goods_Receipt__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Goods_Receipt__c</field>.
10	`            <layoutItems><behavior>Edit</behavior><field>Pieces_Per_Case__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Pieces_Per_Case__c</field>.
11	`            <layoutItems><behavior>Edit</behavior><field>Received_Cases__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Received_Cases__c</field>.
12	`            <layoutItems><behavior>Readonly</behavior><field>Received_Value__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Received_Value__c</field>.
13	`        </layoutColumns>`	Closes the layoutColumns configuration block.
14	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.

Line	Source code	Explanation / reading note
15	`<layoutItems><behavior>Required</behavior><field>Product__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Product__c</field>.
16	`<layoutItems><behavior>Edit</behavior><field>Case_Cost__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Case_Cost__c</field>.
17	`<layoutItems><behavior>Edit</behavior><field>Free_Cases__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Free_Cases__c</field>.
18	`<layoutItems><behavior>Edit</behavior><field>Manufacturing_Date__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Manufacturing_Date__c</field>.
19	`<layoutItems><behavior>Edit</behavior><field>Primary_Order_Line__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Primary_Order_Line__c</field>.
20	`<layoutItems><behavior>Readonly</behavior><field>Received_Pieces__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Received_Pieces__c</field>.
21	`</layoutColumns>`	Closes the layoutColumns configuration block.
22	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
23	`</layoutSections>`	Closes the layoutSections configuration block.
24	`<relatedLists><fields>NAME</fields><fields>Product__c</fields><fields>Cases__c</fields><relatedList>DMS_Primary_Return_Line__c.Receipt_Line__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Product__c</fields><fields>Cases__c</fields><relatedList>DMS_Primary_Return_Line__c.Receipt_Line__c</relatedList>.
25	`<showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Opens the showEmailCheckbox block; child elements specify its configuration.
26	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/DMS_Goods_Receipt__c-Goods Receipt Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

23 numbered source lines | SHA-256 e1b7cb6b39a6552def786e31c96e3eb99b552cee85eaed24f70eff495ca79ac3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Goods Receipt Information</label>`	Opens the customLabel block; child elements specify its configuration.
5	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
6	`            <layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Name</field>.
7	`            <layoutItems><behavior>Edit</behavior><field>Status__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Status__c</field>.
8	`            <layoutItems><behavior>Edit</behavior><field>Notes__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Notes__c</field>.
9	`            <layoutItems><behavior>Edit</behavior><field>Received_Date__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Received_Date__c</field>.
10	`            <layoutItems><behavior>Readonly</behavior><field>Total_Pieces__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Total_Pieces__c</field>.
11	`        </layoutColumns>`	Closes the layoutColumns configuration block.
12	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
13	`            <layoutItems><behavior>Required</behavior><field>Distributor__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Distributor__c</field>.
14	`            <layoutItems><behavior>Required</behavior><field>Primary_Order__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Primary_Order__c</field>.

Line	Source code	Explanation / reading note
15	`<layoutItems><behavior>Edit</behavior><field>Received_By__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Received_By__c</field>.
16	`<layoutItems><behavior>Edit</behavior><field>Supplier_Invoice_Number__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Supplier_Invoice_Number__c</field>.
17	`<layoutItems><behavior>Readonly</behavior><field>Total_Value__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Total_Value__c</field>.
18	`</layoutColumns>`	Closes the layoutColumns configuration block.
19	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
20	`</layoutSections>`	Closes the layoutSections configuration block.
21	`<relatedLists><fields>NAME</fields><fields>Product__c</fields><relatedList>DMS_Goods_Receipt_Line__c.Goods_Receipt__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Product__c</fields><relatedList>DMS_Goods_Receipt_Line__c.Goods_Receipt__c</relatedList>.
22	`<showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Opens the showEmailCheckbox block; child elements specify its configuration.
23	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/DMS_Inventory__c-Distributor Inventory Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

27 numbered source lines | SHA-256 79e3827149a5f4db6f8d5021c99c48cc2b8ecaab98f945b09c163b99b246cf51

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Distributor Inventory Information</label>`	Opens the customLabel block; child elements specify its configuration.
5	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
6	`            <layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Name</field>.
7	`            <layoutItems><behavior>Required</behavior><field>Product__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Product__c</field>.
8	`            <layoutItems><behavior>Edit</behavior><field>Batch_Number__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Batch_Number__c</field>.
9	`            <layoutItems><behavior>Edit</behavior><field>Expiry_Date__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Expiry_Date__c</field>.
10	`            <layoutItems><behavior>Readonly</behavior><field>Low_Stock__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Low_Stock__c</field>.
11	`            <layoutItems><behavior>Edit</behavior><field>On_Hand_Pieces__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>On_Hand_Pieces__c</field>.
12	`            <layoutItems><behavior>Edit</behavior><field>Reserved_Pieces__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Reserved_Pieces__c</field>.
13	`        </layoutColumns>`	Closes the layoutColumns configuration block.
14	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.

Line	Source code	Explanation / reading note
15	`<layoutItems><behavior>Required</behavior><field>Distributor__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Distributor__c</field>.
16	`<layoutItems><behavior>Readonly</behavior><field>Available_Pieces__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Available_Pieces__c</field>.
17	`<layoutItems><behavior>Readonly</behavior><field>Expired__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Expired__c</field>.
18	`<layoutItems><behavior>Edit</behavior><field>Last_Stock_Update__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Last_Stock_Update__c</field>.
19	`<layoutItems><behavior>Edit</behavior><field>Manufacturing_Date__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Manufacturing_Date__c</field>.
20	`<layoutItems><behavior>Edit</behavior><field>Reorder_Level_Pieces__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Reorder_Level_Pieces__c</field>.
21	`<layoutItems><behavior>Edit</behavior><field>Warehouse__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Warehouse__c</field>.
22	`</layoutColumns>`	Closes the layoutColumns configuration block.
23	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
24	`</layoutSections>`	Closes the layoutSections configuration block.
25	`<relatedLists><fields>NAME</fields><fields>Product__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Invoice_Line__c.Inventory__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Product__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Invoice_Line__c.Inventory__c</relatedList>.
26	`<showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Opens the showEmailCheckbox block; child elements specify its configuration.
27	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/DMS_Invoice_Line__c-DMS Invoice Line Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

31 numbered source lines | SHA-256 09c13e969615b67f639add5400bb6a3fb56f12ec04a01798f16cdf4403e1aca3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>DMS Invoice Line Information</label>`	Opens the customLabel block; child elements specify its configuration.
5	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
6	`            <layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Name</field>.
7	`            <layoutItems><behavior>Edit</behavior><field>Batch_Number__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Batch_Number__c</field>.
8	`            <layoutItems><behavior>Edit</behavior><field>Expiry_Date__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Expiry_Date__c</field>.
9	`            <layoutItems><behavior>Readonly</behavior><field>Gross_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Gross_Amount__c</field>.
10	`            <layoutItems><behavior>Required</behavior><field>Invoice__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Invoice__c</field>.
11	`            <layoutItems><behavior>Edit</behavior><field>Quantity_Pieces__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Quantity_Pieces__c</field>.
12	`            <layoutItems><behavior>Readonly</behavior><field>Stock_Out_Pieces__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Stock_Out_Pieces__c</field>.
13	`            <layoutItems><behavior>Edit</behavior><field>Tax_Percent__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Tax_Percent__c</field>.
14	`            <layoutItems><behavior>Edit</behavior><field>Unit_Price__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Unit_Price__c</field>.

Line	Source code	Explanation / reading note
15	`</layoutColumns>`	Closes the layoutColumns configuration block.
16	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
17	`<layoutItems><behavior>Required</behavior><field>Product__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Product__c</field>.
18	`<layoutItems><behavior>Edit</behavior><field>Discount_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Discount_Amount__c</field>.
19	`<layoutItems><behavior>Edit</behavior><field>Free_Pieces__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Free_Pieces__c</field>.
20	`<layoutItems><behavior>Edit</behavior><field>Inventory__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Inventory__c</field>.
21	`<layoutItems><behavior>Edit</behavior><field>Order_Item__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Order_Item__c</field>.
22	`<layoutItems><behavior>Edit</behavior><field>Scheme__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Scheme__c</field>.
23	`<layoutItems><behavior>Readonly</behavior><field>Tax_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Tax_Amount__c</field>.
24	`<layoutItems><behavior>Readonly</behavior><field>Total_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Total_Amount__c</field>.
25	`</layoutColumns>`	Closes the layoutColumns configuration block.
26	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
27	`</layoutSections>`	Closes the layoutSections configuration block.
28	`<relatedLists><fields>NAME</fields><fields>Product__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Credit_Note_Line__c.Invoice_Line__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Product__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Credit_Note_Line__c.Invoice_Line__c</relatedList>.
29	`<relatedLists><fields>NAME</fields><relatedList>Product_Return__c.Invoice_Line__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><relatedList>Product_Return__c.Invoice_Line__c</relatedList>.

Line	Source code	Explanation / reading note
30	`<showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Opens the showEmailCheckbox block; child elements specify its configuration.
31	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/DMS_Invoice__c-DMS Invoice Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

29 numbered source lines | SHA-256 292e9d41b021deae4de0239a556ff24707b996cc32f107f57a1c94248656af95

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>DMS Invoice Information</label>`	Opens the customLabel block; child elements specify its configuration.
5	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
6	`            <layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Name</field>.
7	`            <layoutItems><behavior>Edit</behavior><field>Status__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Status__c</field>.
8	`            <layoutItems><behavior>Readonly</behavior><field>Discount_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Discount_Amount__c</field>.
9	`            <layoutItems><behavior>Readonly</behavior><field>Gross_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Gross_Amount__c</field>.
10	`            <layoutItems><behavior>Edit</behavior><field>Notes__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Notes__c</field>.
11	`            <layoutItems><behavior>Edit</behavior><field>Paid_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Paid_Amount__c</field>.
12	`            <layoutItems><behavior>Required</behavior><field>Sales_Order__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Sales_Order__c</field>.
13	`            <layoutItems><behavior>Readonly</behavior><field>Total_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Total_Amount__c</field>.
14	`        </layoutColumns>`	Closes the layoutColumns configuration block.

Line	Source code	Explanation / reading note
15	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
16	`<layoutItems><behavior>Required</behavior><field>Distributor__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Distributor__c</field>.
17	`<layoutItems><behavior>Readonly</behavior><field>Balance_Due__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Balance_Due__c</field>.
18	`<layoutItems><behavior>Edit</behavior><field>Due_Date__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Due_Date__c</field>.
19	`<layoutItems><behavior>Edit</behavior><field>Invoice_Date__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Invoice_Date__c</field>.
20	`<layoutItems><behavior>Required</behavior><field>Outlet__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Outlet__c</field>.
21	`<layoutItems><behavior>Edit</behavior><field>Payment_Status__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Payment_Status__c</field>.
22	`<layoutItems><behavior>Readonly</behavior><field>Tax_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Tax_Amount__c</field>.
23	`</layoutColumns>`	Closes the layoutColumns configuration block.
24	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
25	`</layoutSections>`	Closes the layoutSections configuration block.
26	`<relatedLists><fields>NAME</fields><fields>Status__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Credit_Note__c.Invoice__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Status__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Credit_Note__c.Invoice__c</relatedList>.
27	`<relatedLists><fields>NAME</fields><fields>Product__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Invoice_Line__c.Invoice__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Product__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Invoice_Line__c.Invoice__c</relatedList>.
28	`<showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Opens the showEmailCheckbox block; child elements specify its configuration.
29	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/DMS_Primary_Order_Line__c-Primary Order Line Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

30 numbered source lines | SHA-256 e3cf20da80d82186d990e7a9e1d20e4da207d2a744391dc838f970e8f579d45e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Primary Order Line Information</label>`	Opens the customLabel block; child elements specify its configuration.
5	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
6	`            <layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Name</field>.
7	`            <layoutItems><behavior>Edit</behavior><field>Product__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Product__c</field>.
8	`            <layoutItems><behavior>Edit</behavior><field>Cases__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Cases__c</field>.
9	`            <layoutItems><behavior>Edit</behavior><field>Free_Cases__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Free_Cases__c</field>.
10	`            <layoutItems><behavior>Readonly</behavior><field>Free_Product__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Free_Product__c</field>.
11	`            <layoutItems><behavior>Readonly</behavior><field>Free_Pieces_Per_Case__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Free_Pieces_Per_Case__c</field>.
12	`            <layoutItems><behavior>Edit</behavior><field>Gift_Quantity__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Gift_Quantity__c</field>.
13	`            <layoutItems><behavior>Readonly</behavior><field>Net_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Net_Amount__c</field>.
14	`            <layoutItems><behavior>Edit</behavior><field>Scheme__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Scheme__c</field>.

Line	Source code	Explanation / reading note
15	`<layoutItems><behavior>Readonly</behavior><field>Total_Pieces__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Total_Pieces__c</field>.
16	`</layoutColumns>`	Closes the layoutColumns configuration block.
17	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
18	`<layoutItems><behavior>Edit</behavior><field>Order__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Order__c</field>.
19	`<layoutItems><behavior>Edit</behavior><field>Case_Price__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Case_Price__c</field>.
20	`<layoutItems><behavior>Edit</behavior><field>Discount_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Discount_Amount__c</field>.
21	`<layoutItems><behavior>Edit</behavior><field>Free_Gift__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Free_Gift__c</field>.
22	`<layoutItems><behavior>Readonly</behavior><field>Line_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Line_Amount__c</field>.
23	`<layoutItems><behavior>Edit</behavior><field>Pieces_Per_Case__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Pieces_Per_Case__c</field>.
24	`<layoutItems><behavior>Edit</behavior><field>Tax_Percent__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Tax_Percent__c</field>.
25	`</layoutColumns>`	Closes the layoutColumns configuration block.
26	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
27	`</layoutSections>`	Closes the layoutSections configuration block.
28	`<relatedLists><fields>NAME</fields><fields>Product__c</fields><relatedList>DMS_Goods_Receipt_Line__c.Primary_Order_Line__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Product__c</fields><relatedList>DMS_Goods_Receipt_Line__c.Primary_Order_Line__c</relatedList>.
29	`<showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Opens the showEmailCheckbox block; child elements specify its configuration.
30	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/DMS_Primary_Order__c-Primary Order Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

28 numbered source lines | SHA-256 c7a154912fff723b21b52dad08c57da15eccd7c8b23722a18af736f926659fde

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Primary Order Information</label>`	Opens the customLabel block; child elements specify its configuration.
5	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
6	`            <layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Name</field>.
7	`            <layoutItems><behavior>Edit</behavior><field>Employee__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Employee__c</field>.
8	`            <layoutItems><behavior>Readonly</behavior><field>Order_Source__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Order_Source__c</field>.
9	`            <layoutItems><behavior>Edit</behavior><field>Status__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Status__c</field>.
10	`            <layoutItems><behavior>Edit</behavior><field>Fulfilment_Status__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Fulfilment_Status__c</field>.
11	`            <layoutItems><behavior>Edit</behavior><field>Order_Date__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Order_Date__c</field>.
12	`            <layoutItems><behavior>Edit</behavior><field>Request_Key__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Request_Key__c</field>.
13	`        </layoutColumns>`	Closes the layoutColumns configuration block.
14	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.

Line	Source code	Explanation / reading note
15	`<layoutItems><behavior>Edit</behavior><field>Distributor__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Distributor__c</field>.
16	`<layoutItems><behavior>Edit</behavior><field>Officer__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Officer__c</field>.
17	`<layoutItems><behavior>Edit</behavior><field>Expected_Delivery_Date__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Expected_Delivery_Date__c</field>.
18	`<layoutItems><behavior>Edit</behavior><field>Notes__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Notes__c</field>.
19	`<layoutItems><behavior>Edit</behavior><field>Rejection_Reason__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Rejection_Reason__c</field>.
20	`<layoutItems><behavior>Edit</behavior><field>Total_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Total_Amount__c</field>.
21	`</layoutColumns>`	Closes the layoutColumns configuration block.
22	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
23	`</layoutSections>`	Closes the layoutSections configuration block.
24	`<relatedLists><fields>NAME</fields><fields>Status__c</fields><relatedList>DMS_Goods_Receipt__c.Primary_Order__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Status__c</fields><relatedList>DMS_Goods_Receipt__c.Primary_Order__c</relatedList>.
25	`<relatedLists><fields>NAME</fields><fields>Status__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Primary_Return__c.Primary_Order__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Status__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Primary_Return__c.Primary_Order__c</relatedList>.
26	`<relatedLists><fields>NAME</fields><fields>Product__c</fields><fields>Cases__c</fields><relatedList>DMS_Primary_Order_Line__c.Order__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Product__c</fields><fields>Cases__c</fields><relatedList>DMS_Primary_Order_Line__c.Order__c</relatedList>.
27	`<showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Opens the showEmailCheckbox block; child elements specify its configuration.
28	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/DMS_Primary_Return_Line__c-Primary Return Line Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

26 numbered source lines | SHA-256 3e2e9e68b33bbf0d990bbd0721c16f5bca4c3957ec3aad75a3a763e209871675

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Primary Return Line Information</label>`	Opens the customLabel block; child elements specify its configuration.
5	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
6	`            <layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Name</field>.
7	`            <layoutItems><behavior>Edit</behavior><field>Batch_Number__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Batch_Number__c</field>.
8	`            <layoutItems><behavior>Edit</behavior><field>Cases__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Cases__c</field>.
9	`            <layoutItems><behavior>Edit</behavior><field>Notes__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Notes__c</field>.
10	`            <layoutItems><behavior>Required</behavior><field>Primary_Return__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Primary_Return__c</field>.
11	`            <layoutItems><behavior>Edit</behavior><field>Receipt_Line__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Receipt_Line__c</field>.
12	`            <layoutItems><behavior>Readonly</behavior><field>Total_Pieces__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Total_Pieces__c</field>.
13	`        </layoutColumns>`	Closes the layoutColumns configuration block.
14	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.

Line	Source code	Explanation / reading note
15	`<layoutItems><behavior>Required</behavior><field>Product__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Product__c</field>.
16	`<layoutItems><behavior>Edit</behavior><field>Case_Value__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Case_Value__c</field>.
17	`<layoutItems><behavior>Edit</behavior><field>Expiry_Date__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Expiry_Date__c</field>.
18	`<layoutItems><behavior>Edit</behavior><field>Pieces_Per_Case__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Pieces_Per_Case__c</field>.
19	`<layoutItems><behavior>Edit</behavior><field>Reason__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Reason__c</field>.
20	`<layoutItems><behavior>Readonly</behavior><field>Return_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Return_Amount__c</field>.
21	`</layoutColumns>`	Closes the layoutColumns configuration block.
22	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
23	`</layoutSections>`	Closes the layoutSections configuration block.
24		Blank line separating logical sections; no executable operation.
25	`<showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Opens the showEmailCheckbox block; child elements specify its configuration.
26	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/DMS_Primary_Return__c-Primary Return Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

25 numbered source lines | SHA-256 3f368ffa13383d22f64d3fc6497d0abd12803c721c18fb5dde109dea44bfa505

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Primary Return Information</label>`	Opens the customLabel block; child elements specify its configuration.
5	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
6	`            <layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Name</field>.
7	`            <layoutItems><behavior>Required</behavior><field>Employee__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Employee__c</field>.
8	`            <layoutItems><behavior>Edit</behavior><field>Status__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Status__c</field>.
9	`            <layoutItems><behavior>Edit</behavior><field>Notes__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Notes__c</field>.
10	`            <layoutItems><behavior>Edit</behavior><field>Return_Date__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Return_Date__c</field>.
11	`            <layoutItems><behavior>Readonly</behavior><field>Total_Cases__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Total_Cases__c</field>.
12	`        </layoutColumns>`	Closes the layoutColumns configuration block.
13	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
14	`            <layoutItems><behavior>Required</behavior><field>Distributor__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Distributor__c</field>.

Line	Source code	Explanation / reading note
15	`<layoutItems><behavior>Edit</behavior><field>Officer__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Officer__c</field>.
16	`<layoutItems><behavior>Edit</behavior><field>Primary_Order__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Primary_Order__c</field>.
17	`<layoutItems><behavior>Edit</behavior><field>Rejection_Reason__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Rejection_Reason__c</field>.
18	`<layoutItems><behavior>Readonly</behavior><field>Total_Amount__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Total_Amount__c</field>.
19	`</layoutColumns>`	Closes the layoutColumns configuration block.
20	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
21	`</layoutSections>`	Closes the layoutSections configuration block.
22	`<relatedLists><fields>NAME</fields><fields>Product__c</fields><fields>Cases__c</fields><relatedList>DMS_Primary_Return_Line__c.Primary_Return__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Product__c</fields><fields>Cases__c</fields><relatedList>DMS_Primary_Return_Line__c.Primary_Return__c</relatedList>.
23	`<relatedLists><fields>NAME</fields><fields>Status__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Credit_Note__c.Primary_Return__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Status__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Credit_Note__c.Primary_Return__c</relatedList>.
24	`<showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Opens the showEmailCheckbox block; child elements specify its configuration.
25	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/DMS_Sales_Target__c-Sales Target Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0330ba59a5b4cc6feeee5b3a49d8bf2351b24827603eae1357a3e1a2ccf0b771

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata"><layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Monthly Sales Target</label><layoutColumns><layoutItems><behavior>Required</behavior><field>Distributor__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Month__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Target_Amount__c</field></layoutItems></layoutColumns><layoutColumns><layoutItems><behavior>Edit</behavior><field>Employee__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Geography__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Product__c</field></layoutItems></layoutColumns><style>TwoColumnsTopToBottom</style></layoutSections></Layout>`	Sets Layout in the enclosing configuration to <layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Monthly Sales Target</label><layoutColumns><layoutItems><behavior>Required</beha.

force-app/main/default/layouts/DMS_Support_Ticket__c-DMS Support Ticket Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 c9459d9df836418a7ebfb6de645daa3ea8942fc9c9f1b7a7e387a67131f8d196

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata"><layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Ticket Information</label><layoutColumns><layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems><layoutItems><behavior>Required</behavior><field>Distributor__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Subject__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Category__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Description__c</field></layoutItems></layoutColumns><layoutColumns><layoutItems><behavior>Edit</behavior><field>Officer__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Status__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Resolution__c</field></layoutItems></layoutColumns><style>TwoColumnsTopToBottom</style></layoutSections></Layout>`	Sets Layout in the enclosing configuration to <layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Ticket Information</label><layoutColumns><layoutItems><behavior>Readonly</behavi.

force-app/main/default/layouts/Distributor_Outlet_Allocation__c-Distributor Outlet Allocation Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

60 numbered source lines | SHA-256 f6f7abb9d92b5dc5f9d87d9934e79c69d82227fc1d0d194c34ac985351dc9866

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.
5	`        <detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
6	`        <editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
7	`        <label>Allocation Information</label>`	Sets human-readable Salesforce UI label to Allocation Information.
8	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
9	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
10	`                <behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.
11	`                <field>Name</field>`	Sets field API name configured in this entry to Name.
12	`            </layoutItems>`	Closes the layoutItems configuration block.
13	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
14	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
15	`                <field>Distributor__c</field>`	Sets field API name configured in this entry to Distributor__c.
16	`            </layoutItems>`	Closes the layoutItems configuration block.
17	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
18	`                <behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.

Line	Source code	Explanation / reading note
19	`<field>Employee__c</field>`	Sets field API name configured in this entry to Employee__c.
20	`</layoutItems>`	Closes the layoutItems configuration block.
21	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
22	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
23	`<field>Outlet__c</field>`	Sets field API name configured in this entry to Outlet__c.
24	`</layoutItems>`	Closes the layoutItems configuration block.
25	`</layoutColumns>`	Closes the layoutColumns configuration block.
26	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
27	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
28	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
29	`<field>Beat__c</field>`	Sets field API name configured in this entry to Beat__c.
30	`</layoutItems>`	Closes the layoutItems configuration block.
31	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
32	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
33	`<field>Allocation_Status__c</field>`	Sets field API name configured in this entry to Allocation_Status__c.
34	`</layoutItems>`	Closes the layoutItems configuration block.
35	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
36	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
37	`<field>Allocation_Date__c</field>`	Sets field API name configured in this entry to Allocation_Date__c.
38	`</layoutItems>`	Closes the layoutItems configuration block.
39	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
40	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.

Line	Source code	Explanation / reading note
41	`<field>Remarks__c</field>`	Sets field API name configured in this entry to Remarks__c.
42	`</layoutItems>`	Closes the layoutItems configuration block.
43	`</layoutColumns>`	Closes the layoutColumns configuration block.
44	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
45	`</layoutSections>`	Closes the layoutSections configuration block.
46	`<layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
47	`<customLabel>false</customLabel>`	Sets custom Label in the enclosing configuration to false.
48	`<detailHeading>false</detailHeading>`	Sets detail Heading in the enclosing configuration to false.
49	`<editHeading>false</editHeading>`	Sets edit Heading in the enclosing configuration to false.
50	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
51	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
52	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
53	`<style>CustomLinks</style>`	Sets style in the enclosing configuration to CustomLinks.
54	`</layoutSections>`	Closes the layoutSections configuration block.
55	`<showEmailCheckbox>false</showEmailCheckbox>`	Sets show Email Checkbox in the enclosing configuration to false.
56	`<showHighlightsPanel>true</showHighlightsPanel>`	Sets show Highlights Panel in the enclosing configuration to true.
57	`<showInteractionLogPanel>false</showInteractionLogPanel>`	Sets show Interaction Log Panel in the enclosing configuration to false.
58	`<showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox>`	Sets show Run Assignment Rules Checkbox in the enclosing configuration to false.
59	`<showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Sets show Submit And Attach Button in the enclosing configuration to false.
60	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/Distributor__c-Distributor Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

30 numbered source lines | SHA-256 33c8a34f9364f721ff9aad2e1f5096472cc183ae8618a4fd73348cfa65958006

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Sales Representative Information</label>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
5	`            <layoutItems><behavior>Required</behavior><field>Name</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Name</field>.
6	`            <layoutItems><behavior>Readonly</behavior><field>Distributor_ID__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Distributor_ID__c</field>.
7	`            <layoutItems><behavior>Edit</behavior><field>Email__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Email__c</field>.
8	`            <layoutItems><behavior>Edit</behavior><field>Phone__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Phone__c</field>.
9	`            <layoutItems><behavior>Edit</behavior><field>Alternate_Phone__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Alternate_Phone__c</field>.
10	`        </layoutColumns>`	Closes the layoutColumns configuration block.
11	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
12	`            <layoutItems><behavior>Required</behavior><field>Status__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Status__c</field>.
13	`            <layoutItems><behavior>Edit</behavior><field>Joining_Date__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Joining_Date__c</field>.
14	`            <layoutItems><behavior>Edit</behavior><field>Address__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Address__c</field>.

Line	Source code	Explanation / reading note
15	`<layoutItems><behavior>Edit</behavior><field>Remarks__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Remarks__c</field>.
16	`</layoutColumns><style>TwoColumnsTopToBottom</style>`	Closes the layoutColumns configuration block.
17	`</layoutSections>`	Closes the layoutSections configuration block.
18	`<layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Assignment Information</label>`	Opens the layoutSections block; child elements specify its configuration.
19	`<layoutColumns><layoutItems><behavior>Required</behavior><field>Beat__c</field></layoutItems></layoutColumns><layoutColumns/><style>TwoColumnsTopToBottom</style>`	Opens the layoutColumns block; child elements specify its configuration.
20	`</layoutSections>`	Closes the layoutSections configuration block.
21	`<layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Application Access</label>`	Opens the layoutSections block; child elements specify its configuration.
22	`<layoutColumns><layoutItems><behavior>Edit</behavior><field>Login_Email__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>User__c</field></layoutItems></layoutColumns>`	Sets layout Columns in the enclosing configuration to <layoutItems><behavior>Edit</behavior><field>Login_Email__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>User__c</field></layoutItems>.
23	`<layoutColumns><layoutItems><behavior>Readonly</behavior><field>User_Status__c</field></layoutItems></layoutColumns><style>TwoColumnsTopToBottom</style>`	Opens the layoutColumns block; child elements specify its configuration.
24	`</layoutSections>`	Closes the layoutSections configuration block.
25	`<layoutSections><customLabel>false</customLabel><detailHeading>false</detailHeading><editHeading>false</editHeading><layoutColumns/><style>CustomLinks</style></layoutSections>`	Sets layout Sections in the enclosing configuration to <customLabel>false</customLabel><detailHeading>false</detailHeading><editHeading>false</editHeading><layoutColumns/><style>CustomLinks</style>.
26	`<relatedLists><fields>NAME</fields><fields>Outlet__c</fields><fields>Beat__c</fields><fields>Allocation_Status__c</fields><fields>Allocation_Date__c</fields><relatedList>Distributor_Outlet_Allocation__c.Distributor__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Outlet__c</fields><fields>Beat__c</fields><fields>Allocation_Status__c</fields><fields>Allocation_Date__c</fields><relatedList>Distributor_Outlet_Allocation__c.Distributor.
27	`<relatedLists><relatedList>RelatedActivityList</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <relatedList>RelatedActivityList</relatedList>.
28	`<relatedLists><relatedList>RelatedHistoryList</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <relatedList>RelatedHistoryList</relatedList>.

Line	Source code	Explanation / reading note
29	`<showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Opens the showEmailCheckbox block; child elements specify its configuration.
30	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/Employee__c-Employee Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

40 numbered source lines | SHA-256 3f8b9f66427381f1cf20d5a63773b702b93257685ed1e699836012f8085a8bb1

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Employee Information</label>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
5	`            <layoutItems><behavior>Required</behavior><field>Name</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Name</field>.
6	`            <layoutItems><behavior>Edit</behavior><field>Employee_Code__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Employee_Code__c</field>.
7	`            <layoutItems><behavior>Edit</behavior><field>Email__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Email__c</field>.
8	`            <layoutItems><behavior>Edit</behavior><field>Phone__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Phone__c</field>.
9	`            <layoutItems><behavior>Edit</behavior><field>Alternate_Phone__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Alternate_Phone__c</field>.
10	`            <layoutItems><behavior>Edit</behavior><field>Emergency_Contact__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Emergency_Contact__c</field>.
11	`            <layoutItems><behavior>Edit</behavior><field>Aadhaar_Number__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Aadhaar_Number__c</field>.
12	`            <layoutItems><behavior>Edit</behavior><field>PAN_Number__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>PAN_Number__c</field>.
13	`        </layoutColumns>`	Closes the layoutColumns configuration block.
14	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.

Line	Source code	Explanation / reading note
15	`<layoutItems><behavior>Readonly</behavior><field>Status__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Status__c</field>.
16	`<layoutItems><behavior>Edit</behavior><field>Active__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Active__c</field>.
17	`<layoutItems><behavior>Edit</behavior><field>Joining_Date__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Joining_Date__c</field>.
18	`<layoutItems><behavior>Edit</behavior><field>Address__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Address__c</field>.
19	`<layoutItems><behavior>Edit</behavior><field>Remarks__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Remarks__c</field>.
20	`<layoutItems><behavior>Edit</behavior><field>Profile_Photo_URL__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Profile_Photo_URL__c</field>.
21	`</layoutColumns><style>TwoColumnsTopToBottom</style>`	Closes the layoutColumns configuration block.
22	`</layoutSections>`	Closes the layoutSections configuration block.
23	`<layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Assignment Information</label>`	Opens the layoutSections block; child elements specify its configuration.
24	`<layoutColumns><layoutItems><behavior>Edit</behavior><field>Beat__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Geography__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>DMS_Distributor__c</field></layoutItems></layoutColumns>`	Sets layout Columns in the enclosing configuration to <layoutItems><behavior>Edit</behavior><field>Beat__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Geography__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>DM.
25	`<layoutColumns><layoutItems><behavior>Edit</behavior><field>Reporting_Manager__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Hierarchy_Level__c</field></layoutItems></layoutColumns><style>TwoColumnsTopToBottom</style>`	Opens the layoutColumns block; child elements specify its configuration.
26	`</layoutSections>`	Closes the layoutSections configuration block.
27	`<layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Application Access</label>`	Opens the layoutSections block; child elements specify its configuration.
28	`<layoutColumns><layoutItems><behavior>Edit</behavior><field>Application_Access_Email__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Salesforce_User__c</field></layoutItems></layoutColumns>`	Sets layout Columns in the enclosing configuration to <layoutItems><behavior>Edit</behavior><field>Application_Access_Email__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Salesforce_User__c</field></layoutItems>.

Line	Source code	Explanation / reading note
29	`<layoutColumns><layoutItems><behavior>Readonly</behavior><field>User_Status__c</field></layoutItems></layoutColumns><style>TwoColumnsTopToBottom</style>`	Opens the layoutColumns block; child elements specify its configuration.
30	`</layoutSections>`	Closes the layoutSections configuration block.
31	`<layoutSections><customLabel>false</customLabel><detailHeading>false</detailHeading><editHeading>false</editHeading><layoutColumns/><style>CustomLinks</style></layoutSections>`	Sets layout Sections in the enclosing configuration to <customLabel>false</customLabel><detailHeading>false</detailHeading><editHeading>false</editHeading><layoutColumns/><style>CustomLinks</style>.
32	`<platformActionList><actionListContext>Record</actionListContext><platformActionListItems><actionName>Employee__c.Upload_Profile_Picture</actionName><actionType>QuickAction</actionType><sortOrder>0</sortOrder></platformActionListItems></platformActionList>`	Sets platform Action List in the enclosing configuration to <actionListContext>Record</actionListContext><platformActionListItems><actionName>Employee__c.Upload_Profile_Picture</actionName><actionType>QuickAction</actionType><sortOrder>0</sortOrder></platformA.
33	`<relatedLists><fields>NAME</fields><fields>Outlet__c</fields><fields>Beat__c</fields><fields>Allocation_Status__c</fields><fields>Allocation_Date__c</fields><relatedList>Distributor_Outlet_Allocation__c.Employee__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Outlet__c</fields><fields>Beat__c</fields><fields>Allocation_Status__c</fields><fields>Allocation_Date__c</fields><relatedList>Distributor_Outlet_Allocation__c.Employee__c.
34	`<relatedLists><fields>NAME</fields><fields>Expense_Policy__c</fields><fields>Claim_Date__c</fields><fields>Amount__c</fields><fields>Status__c</fields><relatedList>Expense_Claim__c.Sales_Representative__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Expense_Policy__c</fields><fields>Claim_Date__c</fields><fields>Amount__c</fields><fields>Status__c</fields><relatedList>Expense_Claim__c.Sales_Representative__c</relatedL.
35	`<relatedLists><fields>NAME</fields><fields>Survey__c</fields><fields>Outlet__c</fields><fields>Status__c</fields><fields>Submitted_At__c</fields><relatedList>Survey_Response__c.Employee__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Survey__c</fields><fields>Outlet__c</fields><fields>Status__c</fields><fields>Submitted_At__c</fields><relatedList>Survey_Response__c.Employee__c</relatedList>.
36	`<relatedLists><fields>NAME</fields><fields>Planning_Start_Date__c</fields><fields>Planning_End_Date__c</fields><fields>Status__c</fields><fields>Approver__c</fields><fields>Approved_Outlet_Names__c</fields><relatedList>Permanent_Journey_Plan__c.Employee__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Planning_Start_Date__c</fields><fields>Planning_End_Date__c</fields><fields>Status__c</fields><fields>Approver__c</fields><fields>Approved_Outlet_Names__c</fields><related.
37	`<relatedLists><relatedList>RelatedActivityList</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <relatedList>RelatedActivityList</relatedList>.
38	`<relatedLists><relatedList>RelatedHistoryList</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <relatedList>RelatedHistoryList</relatedList>.
39	`<showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Opens the showEmailCheckbox block; child elements specify its configuration.
40	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/Expense_Claim__c-Expense Claim Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

1 numbered source lines | SHA-256 53f4809b2f26aa0e65655e196fd340dc2fb6f4a780e9c6d1398c967410317415

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><Layout xmlns="http://soap.sforce.com/2006/04/metadata"><layoutSections><customLabel>false</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Expense Claim Information</label><layoutColumns><layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Sales_Representative__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Expense_Policy__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Attendance__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Claim_Date__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Amount__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Approved_Amount__c</field></layoutItems></layoutColumns><layoutColumns><layoutItems><behavior>Edit</behavior><field>Transport_Mode__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Ownership__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Travel_Class__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Distance_Km__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Start_Odometer__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>End_Odometer__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Receipt_URL__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Status__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Remarks__c</field></layoutItems></layoutColumns><style>TwoColumnsTopToBottom</style></layoutSections><showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton></Layout>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/layouts/Expense_Policy__c-Expense Policy Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

1 numbered source lines | SHA-256 53126b8a2c27bee65d81dea70a96aa0111d31a81875ee4dee03811d5fc3b0357

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><Layout xmlns="http://soap.sforce.com/2006/04/metadata"><layoutSections><customLabel>false</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Expense Policy Information</label><layoutColumns><layoutItems><behavior>Required</behavior><field>Name</field></layoutItems><layoutItems><behavior>Required</behavior><field>Expense_Type__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Category__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Ownership__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Travel_Class__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Geography__c</field></layoutItems></layoutColumns><layoutColumns><layoutItems><behavior>Required</behavior><field>Rate_Type__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Rate__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Maximum_Amount__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Receipt_Required__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Start_Date__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>End_Date__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Active__c</field></layoutItems></layoutColumns><style>TwoColumnsTopToBottom</style></layoutSections><relatedLists><fields>NAME</fields><fields>Claim_Date__c</fields><fields>Amount__c</fields><fields>Status__c</fields><relatedList>Expense_Claim__c.Expense_Policy__c</relatedList></relatedLists><showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton></Layout>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/layouts/Geography__c-Geography Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

54 numbered source lines | SHA-256 df172b7cec5d98b26fb3cca940137b97321df12ee04acdcef634f14c1e8ce0f0

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.
5	`        <detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
6	`        <editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
7	`        <label>Geography Information</label>`	Sets human-readable Salesforce UI label to Geography Information.
8	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
9	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
10	`                <behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
11	`                <field>Name</field>`	Sets field API name configured in this entry to Name.
12	`            </layoutItems>`	Closes the layoutItems configuration block.
13	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
14	`                <behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
15	`                <field>Nation__c</field>`	Sets field API name configured in this entry to Nation__c.
16	`            </layoutItems>`	Closes the layoutItems configuration block.
17	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
18	`                <behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
19	`                <field>State__c</field>`	Sets field API name configured in this entry to State__c.

Line	Source code	Explanation / reading note
20	`            </layoutItems>`	Closes the layoutItems configuration block.
21	`        </layoutColumns>`	Closes the layoutColumns configuration block.
22	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
23	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
24	`                <behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
25	`                <field>District__c</field>`	Sets field API name configured in this entry to District__c.
26	`            </layoutItems>`	Closes the layoutItems configuration block.
27	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
28	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
29	`                <field>Town__c</field>`	Sets field API name configured in this entry to Town__c.
30	`            </layoutItems>`	Closes the layoutItems configuration block.
31	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
32	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
33	`                <field>Municipality__c</field>`	Sets field API name configured in this entry to Municipality__c.
34	`            </layoutItems>`	Closes the layoutItems configuration block.
35	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
36	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
37	`                <field>Village__c</field>`	Sets field API name configured in this entry to Village__c.
38	`            </layoutItems>`	Closes the layoutItems configuration block.
39	`        </layoutColumns>`	Closes the layoutColumns configuration block.
40	`        <style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
41	`    </layoutSections>`	Closes the layoutSections configuration block.

Line	Source code	Explanation / reading note
42	`<layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
43	`<customLabel>false</customLabel>`	Sets custom Label in the enclosing configuration to false.
44	`<detailHeading>false</detailHeading>`	Sets detail Heading in the enclosing configuration to false.
45	`<editHeading>false</editHeading>`	Sets edit Heading in the enclosing configuration to false.
46	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
47	`<style>CustomLinks</style>`	Sets style in the enclosing configuration to CustomLinks.
48	`</layoutSections>`	Closes the layoutSections configuration block.
49	`<showEmailCheckbox>false</showEmailCheckbox>`	Sets show Email Checkbox in the enclosing configuration to false.
50	`<showHighlightsPanel>true</showHighlightsPanel>`	Sets show Highlights Panel in the enclosing configuration to true.
51	`<showInteractionLogPanel>false</showInteractionLogPanel>`	Sets show Interaction Log Panel in the enclosing configuration to false.
52	`<showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox>`	Sets show Run Assignment Rules Checkbox in the enclosing configuration to false.
53	`<showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Sets show Submit And Attach Button in the enclosing configuration to false.
54	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/Leave_Request__c-Leave Request Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 5edded8b8f63196767fdfde8b524bdd22d187b87e3297272039acdcdb03fd0d0

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata"><layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Leave Request Information</label><layoutColumns><layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems><layoutItems><behavior>Required</behavior><field>Employee__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Leave_Date__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Leave_Type__c</field></layoutItems></layoutColumns><layoutColumns><layoutItems><behavior>Required</behavior><field>Status__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Approver__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Reason__c</field></layoutItems></layoutColumns><style>TwoColumnsTopToBottom</style></layoutSections><layoutSections><customLabel>false</customLabel><detailHeading>false</detailHeading><editHeading>false</editHeading><layoutColumns/><style>CustomLinks</style></layoutSections><showHighlightsPanel>true</showHighlightsPanel></Layout>`	Sets Layout in the enclosing configuration to <layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Leave Request Information</label><layoutColumns><layoutItems><behavior>Readonly<.

force-app/main/default/layouts/Order_Item__c-Order Item Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

56 numbered source lines | SHA-256 20c4dfa06645f958b846a1624844057dca2782d28bb7322f36772deceed8ee87

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>false</customLabel>`	Sets custom Label in the enclosing configuration to false.
5	`        <detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
6	`        <editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
7	`        <label>Order Item Information</label>`	Sets human-readable Salesforce UI label to Order Item Information.
8	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
9	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
10	`                <behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
11	`                <field>Sales_Order__c</field>`	Sets field API name configured in this entry to Sales_Order__c.
12	`            </layoutItems>`	Closes the layoutItems configuration block.
13	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
14	`                <behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
15	`                <field>Product__c</field>`	Sets field API name configured in this entry to Product__c.
16	`            </layoutItems>`	Closes the layoutItems configuration block.
17	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
18	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
19	`                <field>Case_Quantity__c</field>`	Sets field API name configured in this entry to Case_Quantity__c.

Line	Source code	Explanation / reading note
20	`            </layoutItems>`	Closes the layoutItems configuration block.
21	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
22	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
23	`                <field>Piece_Quantity__c</field>`	Sets field API name configured in this entry to Piece_Quantity__c.
24	`            </layoutItems>`	Closes the layoutItems configuration block.
25	`            <layoutItems><behavior>Edit</behavior><field>Product_Sales_Configuration__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Product_Sales_Configuration__c</field>.
26	`            <layoutItems><behavior>Edit</behavior><field>Scheme__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Scheme__c</field>.
27	`        </layoutColumns>`	Closes the layoutColumns configuration block.
28	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
29	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
30	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
31	`                <field>Total_Pieces__c</field>`	Sets field API name configured in this entry to Total_Pieces__c.
32	`            </layoutItems>`	Closes the layoutItems configuration block.
33	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
34	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
35	`                <field>Unit_Price__c</field>`	Sets field API name configured in this entry to Unit_Price__c.
36	`            </layoutItems>`	Closes the layoutItems configuration block.
37	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
38	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
39	`                <field>Line_Amount__c</field>`	Sets field API name configured in this entry to Line_Amount__c.
40	`            </layoutItems>`	Closes the layoutItems configuration block.

Line	Source code	Explanation / reading note
41	`        </layoutColumns>`	Closes the layoutColumns configuration block.
42	`        <style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
43	`    </layoutSections>`	Closes the layoutSections configuration block.
44	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
45	`        <customLabel>false</customLabel>`	Sets custom Label in the enclosing configuration to false.
46	`        <detailHeading>false</detailHeading>`	Sets detail Heading in the enclosing configuration to false.
47	`        <editHeading>false</editHeading>`	Sets edit Heading in the enclosing configuration to false.
48	`        <layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
49	`        <style>CustomLinks</style>`	Sets style in the enclosing configuration to CustomLinks.
50	`    </layoutSections>`	Closes the layoutSections configuration block.
51	`    <showEmailCheckbox>false</showEmailCheckbox>`	Sets show Email Checkbox in the enclosing configuration to false.
52	`    <showHighlightsPanel>true</showHighlightsPanel>`	Sets show Highlights Panel in the enclosing configuration to true.
53	`    <showInteractionLogPanel>false</showInteractionLogPanel>`	Sets show Interaction Log Panel in the enclosing configuration to false.
54	`    <showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox>`	Sets show Run Assignment Rules Checkbox in the enclosing configuration to false.
55	`    <showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Sets show Submit And Attach Button in the enclosing configuration to false.
56	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/Permanent_Journey_Plan__c-Permanent Journey Plan Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

86 numbered source lines | SHA-256 d2411aea4407bdc7919b4df16fb45638ba485b0de9d97f186bfd30b5a511c30c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.
5	`        <detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
6	`        <editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
7	`        <label>Journey Plan Information</label>`	Sets human-readable Salesforce UI label to Journey Plan Information.
8	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
9	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
10	`                <behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
11	`                <field>Planned_Date__c</field>`	Sets field API name configured in this entry to Planned_Date__c.
12	`            </layoutItems>`	Closes the layoutItems configuration block.
13	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
14	`                <behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
15	`                <field>Name</field>`	Sets field API name configured in this entry to Name.
16	`            </layoutItems>`	Closes the layoutItems configuration block.
17	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
18	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
19	`                <field>Plan_Date__c</field>`	Sets field API name configured in this entry to Plan_Date__c.

Line	Source code	Explanation / reading note
20	`</layoutItems>`	Closes the layoutItems configuration block.
21	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
22	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
23	`<field>Employee__c</field>`	Sets field API name configured in this entry to Employee__c.
24	`</layoutItems>`	Closes the layoutItems configuration block.
25	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
26	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
27	`<field>Planning_Start_Date__c</field>`	Sets field API name configured in this entry to Planning_Start_Date__c.
28	`</layoutItems>`	Closes the layoutItems configuration block.
29	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
30	`<behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.
31	`<field>Approved_Outlet_Names__c</field>`	Sets field API name configured in this entry to Approved_Outlet_Names__c.
32	`</layoutItems>`	Closes the layoutItems configuration block.
33	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
34	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
35	`<field>Beat__c</field>`	Sets field API name configured in this entry to Beat__c.
36	`</layoutItems>`	Closes the layoutItems configuration block.
37	`</layoutColumns>`	Closes the layoutColumns configuration block.
38	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
39	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
40	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
41	`<field>Approver__c</field>`	Sets field API name configured in this entry to Approver__c.

Line	Source code	Explanation / reading note
42	`</layoutItems>`	Closes the layoutItems configuration block.
43	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
44	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
45	`<field>Status__c</field>`	Sets field API name configured in this entry to Status__c.
46	`</layoutItems>`	Closes the layoutItems configuration block.
47	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
48	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
49	`<field>Rejection_Reason__c</field>`	Sets field API name configured in this entry to Rejection_Reason__c.
50	`</layoutItems>`	Closes the layoutItems configuration block.
51	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
52	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
53	`<field>Planning_End_Date__c</field>`	Sets field API name configured in this entry to Planning_End_Date__c.
54	`</layoutItems>`	Closes the layoutItems configuration block.
55	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
56	`<behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.
57	`<field>Submitted_Date__c</field>`	Sets field API name configured in this entry to Submitted_Date__c.
58	`</layoutItems>`	Closes the layoutItems configuration block.
59	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
60	`<behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.
61	`<field>Approved_Date__c</field>`	Sets field API name configured in this entry to Approved_Date__c.
62	`</layoutItems>`	Closes the layoutItems configuration block.
63	`</layoutColumns>`	Closes the layoutColumns configuration block.

Line	Source code	Explanation / reading note
64	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
65	`</layoutSections>`	Closes the layoutSections configuration block.
66	`<layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
67	`<customLabel>false</customLabel>`	Sets custom Label in the enclosing configuration to false.
68	`<detailHeading>false</detailHeading>`	Sets detail Heading in the enclosing configuration to false.
69	`<editHeading>false</editHeading>`	Sets edit Heading in the enclosing configuration to false.
70	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
71	`<style>CustomLinks</style>`	Sets style in the enclosing configuration to CustomLinks.
72	`</layoutSections>`	Closes the layoutSections configuration block.
73	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
74	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
75	`<fields>Beat__c</fields>`	Sets fields in the enclosing configuration to Beat__c.
76	`<relatedList>PJP_Selected_Beat__c.PJP__c</relatedList>`	Sets related List in the enclosing configuration to PJP_Selected_Beat__c.PJP__c.
77	`</relatedLists>`	Closes the relatedLists configuration block.
78	`<miniLayout>`	Opens the miniLayout block; child elements specify its configuration.
79	`<fields>Planned_Date__c</fields>`	Sets fields in the enclosing configuration to Planned_Date__c.
80	`</miniLayout>`	Closes the miniLayout configuration block.
81	`<showEmailCheckbox>false</showEmailCheckbox>`	Sets show Email Checkbox in the enclosing configuration to false.
82	`<showHighlightsPanel>true</showHighlightsPanel>`	Sets show Highlights Panel in the enclosing configuration to true.
83	`<showInteractionLogPanel>false</showInteractionLogPanel>`	Sets show Interaction Log Panel in the enclosing configuration to false.
84	`<showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox>`	Sets show Run Assignment Rules Checkbox in the enclosing configuration to false.
85	`<showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Sets show Submit And Attach Button in the enclosing configuration to false.

Line	Source code	Explanation / reading note
86	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/Product_Return__c-Product Return Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

69 numbered source lines | SHA-256 f13ab53a55e6bcec5e5055a60f46f4df7738a664db256df08b2aef491a7f36a5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`        <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>DMS Information</label>`	Opens the customLabel block; child elements specify its configuration.
5	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
6	`            <layoutItems><behavior>Edit</behavior><field>DMS_Distributor__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>DMS_Distributor__c</field>.
7	`            <layoutItems><behavior>Edit</behavior><field>DMS_Status__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>DMS_Status__c</field>.
8	`        </layoutColumns>`	Closes the layoutColumns configuration block.
9	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
10	`            <layoutItems><behavior>Edit</behavior><field>Invoice_Line__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Invoice_Line__c</field>.
11	`            <layoutItems><behavior>Edit</behavior><field>DMS_Decision_Notes__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>DMS_Decision_Notes__c</field>.
12	`        </layoutColumns>`	Closes the layoutColumns configuration block.
13	`        <style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
14	`    </layoutSections>`	Closes the layoutSections configuration block.
15	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
16	`        <customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.

Line	Source code	Explanation / reading note
17	`<detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
18	`<editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
19	`<label>Product Return Information</label>`	Sets human-readable Salesforce UI label to Product Return Information.
20	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
21	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
22	`<behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.
23	`<field>Name</field>`	Sets field API name configured in this entry to Name.
24	`</layoutItems>`	Closes the layoutItems configuration block.
25	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
26	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
27	`<field>Product__c</field>`	Sets field API name configured in this entry to Product__c.
28	`</layoutItems>`	Closes the layoutItems configuration block.
29	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
30	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
31	`<field>Quantity__c</field>`	Sets field API name configured in this entry to Quantity__c.
32	`</layoutItems>`	Closes the layoutItems configuration block.
33	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
34	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
35	`<field>Manufacturing_Date__c</field>`	Sets field API name configured in this entry to Manufacturing_Date__c.
36	`</layoutItems>`	Closes the layoutItems configuration block.
37	`</layoutColumns>`	Closes the layoutColumns configuration block.
38	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.

Line	Source code	Explanation / reading note
39	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
40	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
41	`<field>Outlet__c</field>`	Sets field API name configured in this entry to Outlet__c.
42	`</layoutItems>`	Closes the layoutItems configuration block.
43	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
44	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
45	`<field>Visit__c</field>`	Sets field API name configured in this entry to Visit__c.
46	`</layoutItems>`	Closes the layoutItems configuration block.
47	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
48	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
49	`<field>Return_Reason__c</field>`	Sets field API name configured in this entry to Return_Reason__c.
50	`</layoutItems>`	Closes the layoutItems configuration block.
51	`</layoutColumns>`	Closes the layoutColumns configuration block.
52	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
53	`</layoutSections>`	Closes the layoutSections configuration block.
54	`<layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
55	`<customLabel>false</customLabel>`	Sets custom Label in the enclosing configuration to false.
56	`<detailHeading>false</detailHeading>`	Sets detail Heading in the enclosing configuration to false.
57	`<editHeading>false</editHeading>`	Sets edit Heading in the enclosing configuration to false.
58	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
59	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
60	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.

Line	Source code	Explanation / reading note
61	`<style>CustomLinks</style>`	Sets style in the enclosing configuration to CustomLinks.
62	`</layoutSections>`	Closes the layoutSections configuration block.
63	`<relatedLists><fields>NAME</fields><fields>Status__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Credit_Note__c.Secondary_Return__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Status__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Credit_Note__c.Secondary_Return__c</relatedList>.
64	`<showEmailCheckbox>false</showEmailCheckbox>`	Sets show Email Checkbox in the enclosing configuration to false.
65	`<showHighlightsPanel>true</showHighlightsPanel>`	Sets show Highlights Panel in the enclosing configuration to true.
66	`<showInteractionLogPanel>false</showInteractionLogPanel>`	Sets show Interaction Log Panel in the enclosing configuration to false.
67	`<showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox>`	Sets show Run Assignment Rules Checkbox in the enclosing configuration to false.
68	`<showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Sets show Submit And Attach Button in the enclosing configuration to false.
69	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/Product_Sales_Configuration__c-Product Sales Configuration Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

8 numbered source lines | SHA-256 f44708db663b4bbb159328b6151b5eb528394125954a04c300d044f89b974323

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`<layoutSections><customLabel>false</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Product Sales Configuration Information</label><layoutColumns>`	Opens the layoutSections block; child elements specify its configuration.
4	`<layoutItems><behavior>Required</behavior><field>Name</field></layoutItems><layoutItems><behavior>Required</behavior><field>Product__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Geography__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Minimum_Quantity__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Target_Quantity__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Name</field></layoutItems><layoutItems><behavior>Required</behavior><field>Product__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Geography__c.
5	`</layoutColumns><layoutColumns><layoutItems><behavior>Required</behavior><field>Configuration_Type__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Channel__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Start_Date__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>End_Date__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Active__c</field></layoutItems></layoutColumns><style>TwoColumnsTopToBottom</style></layoutSections>`	Closes the layoutColumns configuration block.
6	`<relatedLists><fields>NAME</fields><fields>Product__c</fields><fields>Sales_Order__c</fields><fields>Piece_Quantity__c</fields><fields>Line_Amount__c</fields><relatedList>Order_Item__c.Product_Sales_Configuration__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Product__c</fields><fields>Sales_Order__c</fields><fields>Piece_Quantity__c</fields><fields>Line_Amount__c</fields><relatedList>Order_Item__c.Product_Sales_Configuration__.
7	`<showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Opens the showEmailCheckbox block; child elements specify its configuration.
8	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/Product__c-Product Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

152 numbered source lines | SHA-256 8e9c947f7235e515585e5bb2f8d1678a3f26bdc45bb81493c70fd529f226e81a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`        <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>DMS Information</label>`	Opens the customLabel block; child elements specify its configuration.
5	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
6	`            <layoutItems><behavior>Edit</behavior><field>DMS_Case_Price__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>DMS_Case_Price__c</field>.
7	`            <layoutItems><behavior>Edit</behavior><field>Pieces_Per_Box__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Pieces_Per_Box__c</field>.
8	`        </layoutColumns>`	Closes the layoutColumns configuration block.
9	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
10	`            <layoutItems><behavior>Edit</behavior><field>Boxes_Per_Case__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Boxes_Per_Case__c</field>.
11	`            <layoutItems><behavior>Readonly</behavior><field>Box_Conversion_Pieces__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Readonly</behavior><field>Box_Conversion_Pieces__c</field>.
12	`        </layoutColumns>`	Closes the layoutColumns configuration block.
13	`        <style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
14	`    </layoutSections>`	Closes the layoutSections configuration block.
15	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
16	`        <customLabel>false</customLabel>`	Sets custom Label in the enclosing configuration to false.

Line	Source code	Explanation / reading note
17	`<detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
18	`<editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
19	`<label>Product Information</label>`	Sets human-readable Salesforce UI label to Product Information.
20	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
21	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
22	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
23	`<field>Name</field>`	Sets field API name configured in this entry to Name.
24	`</layoutItems>`	Closes the layoutItems configuration block.
25	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
26	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
27	`<field>Product_Code__c</field>`	Sets field API name configured in this entry to Product_Code__c.
28	`</layoutItems>`	Closes the layoutItems configuration block.
29	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
30	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
31	`<field>Brand__c</field>`	Sets field API name configured in this entry to Brand__c.
32	`</layoutItems>`	Closes the layoutItems configuration block.
33	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
34	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
35	`<field>Variant__c</field>`	Sets field API name configured in this entry to Variant__c.
36	`</layoutItems>`	Closes the layoutItems configuration block.
37	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
38	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.

Line	Source code	Explanation / reading note
39	`<field>Flavor__c</field>`	Sets field API name configured in this entry to Flavor__c.
40	`</layoutItems>`	Closes the layoutItems configuration block.
41	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
42	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
43	`<field>Package_Type__c</field>`	Sets field API name configured in this entry to Package_Type__c.
44	`</layoutItems>`	Closes the layoutItems configuration block.
45	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
46	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
47	`<field>Units_Per_Case__c</field>`	Sets field API name configured in this entry to Units_Per_Case__c.
48	`</layoutItems>`	Closes the layoutItems configuration block.
49	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
50	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
51	`<field>Available_Stock__c</field>`	Sets field API name configured in this entry to Available_Stock__c.
52	`</layoutItems>`	Closes the layoutItems configuration block.
53	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
54	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
55	`<field>Batch_Number__c</field>`	Sets field API name configured in this entry to Batch_Number__c.
56	`</layoutItems>`	Closes the layoutItems configuration block.
57	`</layoutColumns>`	Closes the layoutColumns configuration block.
58	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
59	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
60	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.

Line	Source code	Explanation / reading note
61	`<field>MRP__c</field>`	Sets field API name configured in this entry to MRP__c.
62	`</layoutItems>`	Closes the layoutItems configuration block.
63	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
64	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
65	`<field>Retailer_Base_Price__c</field>`	Sets field API name configured in this entry to Retailer_Base_Price__c.
66	`</layoutItems>`	Closes the layoutItems configuration block.
67	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
68	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
69	`<field>Selling_Price__c</field>`	Sets field API name configured in this entry to Selling_Price__c.
70	`</layoutItems>`	Closes the layoutItems configuration block.
71	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
72	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
73	`<field>GST_Percent__c</field>`	Sets field API name configured in this entry to GST_Percent__c.
74	`</layoutItems>`	Closes the layoutItems configuration block.
75	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
76	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
77	`<field>Manufacturing_Date__c</field>`	Sets field API name configured in this entry to Manufacturing_Date__c.
78	`</layoutItems>`	Closes the layoutItems configuration block.
79	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
80	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
81	`<field>Expiry_Date__c</field>`	Sets field API name configured in this entry to Expiry_Date__c.
82	`</layoutItems>`	Closes the layoutItems configuration block.

Line	Source code	Explanation / reading note
83	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
84	`<behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.
85	`<field>Shelf_Life_Days__c</field>`	Sets field API name configured in this entry to Shelf_Life_Days__c.
86	`</layoutItems>`	Closes the layoutItems configuration block.
87	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
88	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
89	`<field>Active__c</field>`	Sets field API name configured in this entry to Active__c.
90	`</layoutItems>`	Closes the layoutItems configuration block.
91	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
92	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
93	`<field>Sellable__c</field>`	Sets field API name configured in this entry to Sellable__c.
94	`</layoutItems>`	Closes the layoutItems configuration block.
95	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
96	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
97	`<field>Returnable__c</field>`	Sets field API name configured in this entry to Returnable__c.
98	`</layoutItems>`	Closes the layoutItems configuration block.
99	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
100	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
101	`<field>Image_URL__c</field>`	Sets field API name configured in this entry to Image_URL__c.
102	`</layoutItems>`	Closes the layoutItems configuration block.
103	`</layoutColumns>`	Closes the layoutColumns configuration block.
104	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.

Line	Source code	Explanation / reading note
105	`</layoutSections>`	Closes the layoutSections configuration block.
106	`<layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
107	`<customLabel>false</customLabel>`	Sets custom Label in the enclosing configuration to false.
108	`<detailHeading>false</detailHeading>`	Sets detail Heading in the enclosing configuration to false.
109	`<editHeading>false</editHeading>`	Sets edit Heading in the enclosing configuration to false.
110	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
111	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
112	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
113	`<style>CustomLinks</style>`	Sets style in the enclosing configuration to CustomLinks.
114	`</layoutSections>`	Closes the layoutSections configuration block.
115	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
116	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
117	`<fields>Configuration_Type__c</fields>`	Sets fields in the enclosing configuration to Configuration_Type__c.
118	`<fields>Minimum_Quantity__c</fields>`	Sets fields in the enclosing configuration to Minimum_Quantity__c.
119	`<fields>Target_Quantity__c</fields>`	Sets fields in the enclosing configuration to Target_Quantity__c.
120	`<fields>Start_Date__c</fields>`	Sets fields in the enclosing configuration to Start_Date__c.
121	`<fields>End_Date__c</fields>`	Sets fields in the enclosing configuration to End_Date__c.
122	`<fields>Active__c</fields>`	Sets fields in the enclosing configuration to Active__c.
123	`<relatedList>Product_Sales_Configuration__c.Product__c</relatedList>`	Sets related List in the enclosing configuration to Product_Sales_Configuration__c.Product__c.
124	`</relatedLists>`	Closes the relatedLists configuration block.
125	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.

Line	Source code	Explanation / reading note
126	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
127	`<fields>Active__c</fields>`	Sets fields in the enclosing configuration to Active__c.
128	`<fields>Scheme__c</fields>`	Sets fields in the enclosing configuration to Scheme__c.
129	`<relatedList>Scheme_Product__c.Product__c</relatedList>`	Sets related List in the enclosing configuration to Scheme_Product__c.Product__c.
130	`</relatedLists>`	Closes the relatedLists configuration block.
131	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
132	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
133	`<fields>Scheme_Code__c</fields>`	Sets fields in the enclosing configuration to Scheme_Code__c.
134	`<fields>Product__c</fields>`	Sets fields in the enclosing configuration to Product__c.
135	`<fields>Free_Quantity__c</fields>`	Sets fields in the enclosing configuration to Free_Quantity__c.
136	`<fields>Start_Date__c</fields>`	Sets fields in the enclosing configuration to Start_Date__c.
137	`<fields>End_Date__c</fields>`	Sets fields in the enclosing configuration to End_Date__c.
138	`<fields>Active__c</fields>`	Sets fields in the enclosing configuration to Active__c.
139	`<relatedList>Scheme__c.Free_Product__c</relatedList>`	Sets related List in the enclosing configuration to Scheme__c.Free_Product__c.
140	`</relatedLists>`	Closes the relatedLists configuration block.
141	`<relatedLists><fields>NAME</fields><fields>Cases__c</fields><relatedList>DMS_Primary_Return_Line__c.Product__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Cases__c</fields><relatedList>DMS_Primary_Return_Line__c.Product__c</relatedList>.
142	`<relatedLists><fields>NAME</fields><fields>Cases__c</fields><relatedList>DMS_Primary_Order_Line__c.Product__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Cases__c</fields><relatedList>DMS_Primary_Order_Line__c.Product__c</relatedList>.
143	`<relatedLists><fields>NAME</fields><fields>Total_Amount__c</fields><relatedList>DMS_Invoice_Line__c.Product__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Total_Amount__c</fields><relatedList>DMS_Invoice_Line__c.Product__c</relatedList>.
144	`<relatedLists><fields>NAME</fields><fields>Total_Amount__c</fields><relatedList>DMS_Credit_Note_Line__c.Product__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Total_Amount__c</fields><relatedList>DMS_Credit_Note_Line__c.Product__c</relatedList>.

Line	Source code	Explanation / reading note
145	`<relatedLists><fields>NAME</fields><relatedList>DMS_Goods_Receipt_Line__c.Product__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><relatedList>DMS_Goods_Receipt_Line__c.Product__c</relatedList>.
146	`<relatedLists><fields>NAME</fields><relatedList>DMS_Inventory__c.Product__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><relatedList>DMS_Inventory__c.Product__c</relatedList>.
147	`<showEmailCheckbox>false</showEmailCheckbox>`	Sets show Email Checkbox in the enclosing configuration to false.
148	`<showHighlightsPanel>true</showHighlightsPanel>`	Sets show Highlights Panel in the enclosing configuration to true.
149	`<showInteractionLogPanel>false</showInteractionLogPanel>`	Sets show Interaction Log Panel in the enclosing configuration to false.
150	`<showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox>`	Sets show Run Assignment Rules Checkbox in the enclosing configuration to false.
151	`<showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Sets show Submit And Attach Button in the enclosing configuration to false.
152	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/Retailer__c-Retailer Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

116 numbered source lines | SHA-256 f3ad09d9643113e5fa70a8aa47150074c1f4e0cbf8973a7a62dc3889b0175285

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <excludeButtons>OpenSlackRecordChannel</excludeButtons>`	Sets exclude Buttons in the enclosing configuration to OpenSlackRecordChannel.
4	`        <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
5	`        <customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>DMS Information</label>`	Opens the customLabel block; child elements specify its configuration.
6	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
7	`            <layoutItems><behavior>Edit</behavior><field>DMS_Distributor__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>DMS_Distributor__c</field>.
8	`        </layoutColumns>`	Closes the layoutColumns configuration block.
9	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
10		Blank line separating logical sections; no executable operation.
11	`        </layoutColumns>`	Closes the layoutColumns configuration block.
12	`        <style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
13	`    </layoutSections>`	Closes the layoutSections configuration block.
14	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
15	`        <customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.
16	`        <detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
17	`        <editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
18	`        <label>Outlet Information</label>`	Sets human-readable Salesforce UI label to Outlet Information.

Line	Source code	Explanation / reading note
19	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
20	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
21	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
22	`<field>Name</field>`	Sets field API name configured in this entry to Name.
23	`</layoutItems>`	Closes the layoutItems configuration block.
24	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
25	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
26	`<field>Outlet_Owner_Name__c</field>`	Sets field API name configured in this entry to Outlet_Owner_Name__c.
27	`</layoutItems>`	Closes the layoutItems configuration block.
28	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
29	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
30	`<field>Phone__c</field>`	Sets field API name configured in this entry to Phone__c.
31	`</layoutItems>`	Closes the layoutItems configuration block.
32	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
33	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
34	`<field>Email__c</field>`	Sets field API name configured in this entry to Email__c.
35	`</layoutItems>`	Closes the layoutItems configuration block.
36	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
37	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
38	`<field>Outlet_Type__c</field>`	Sets field API name configured in this entry to Outlet_Type__c.
39	`</layoutItems>`	Closes the layoutItems configuration block.
40	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.

Line	Source code	Explanation / reading note
41	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
42	`<field>Credit_Limit__c</field>`	Sets field API name configured in this entry to Credit_Limit__c.
43	`</layoutItems>`	Closes the layoutItems configuration block.
44	`</layoutColumns>`	Closes the layoutColumns configuration block.
45	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
46	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
47	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
48	`<field>Beat__c</field>`	Sets field API name configured in this entry to Beat__c.
49	`</layoutItems>`	Closes the layoutItems configuration block.
50	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
51	`<behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.
52	`<field>Geography__c</field>`	Sets field API name configured in this entry to Geography__c.
53	`</layoutItems>`	Closes the layoutItems configuration block.
54	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
55	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
56	`<field>Geo_Location__c</field>`	Sets field API name configured in this entry to Geo_Location__c.
57	`</layoutItems>`	Closes the layoutItems configuration block.
58	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
59	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
60	`<field>Latitude__c</field>`	Sets field API name configured in this entry to Latitude__c.
61	`</layoutItems>`	Closes the layoutItems configuration block.
62	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.

Line	Source code	Explanation / reading note
63	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
64	`<field>Longitude__c</field>`	Sets field API name configured in this entry to Longitude__c.
65	`</layoutItems>`	Closes the layoutItems configuration block.
66	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
67	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
68	`<field>Address__c</field>`	Sets field API name configured in this entry to Address__c.
69	`</layoutItems>`	Closes the layoutItems configuration block.
70	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
71	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
72	`<field>Active__c</field>`	Sets field API name configured in this entry to Active__c.
73	`</layoutItems>`	Closes the layoutItems configuration block.
74	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
75	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
76	`<field>Minimum_Order_Value__c</field>`	Sets field API name configured in this entry to Minimum_Order_Value__c.
77	`</layoutItems>`	Closes the layoutItems configuration block.
78	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
79	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
80	`<field>Outstanding_Amount__c</field>`	Sets field API name configured in this entry to Outstanding_Amount__c.
81	`</layoutItems>`	Closes the layoutItems configuration block.
82	`</layoutColumns>`	Closes the layoutColumns configuration block.
83	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
84	`</layoutSections>`	Closes the layoutSections configuration block.

Line	Source code	Explanation / reading note
85	`<layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
86	`<customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.
87	`<detailHeading>false</detailHeading>`	Sets detail Heading in the enclosing configuration to false.
88	`<editHeading>false</editHeading>`	Sets edit Heading in the enclosing configuration to false.
89	`<label>Custom Links</label>`	Sets human-readable Salesforce UI label to Custom Links.
90	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
91	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
92	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
93	`<style>CustomLinks</style>`	Sets style in the enclosing configuration to CustomLinks.
94	`</layoutSections>`	Closes the layoutSections configuration block.
95	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
96	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
97	`<fields>Survey__c</fields>`	Sets fields in the enclosing configuration to Survey__c.
98	`<fields>Status__c</fields>`	Sets fields in the enclosing configuration to Status__c.
99	`<fields>Employee__c</fields>`	Sets fields in the enclosing configuration to Employee__c.
100	`<fields>Submitted_At__c</fields>`	Sets fields in the enclosing configuration to Submitted_At__c.
101	`<relatedList>Survey_Response__c.Outlet__c</relatedList>`	Sets related List in the enclosing configuration to Survey_Response__c.Outlet__c.
102	`</relatedLists>`	Closes the relatedLists configuration block.
103	`<relatedLists><fields>NAME</fields><fields>Status__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Credit_Note__c.Outlet__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Status__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Credit_Note__c.Outlet__c</relatedList>.
104	`<relatedLists><fields>NAME</fields><fields>Status__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Invoice__c.Outlet__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Status__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Invoice__c.Outlet__c</relatedList>.

Line	Source code	Explanation / reading note
105	`<showEmailCheckbox>false</showEmailCheckbox>`	Sets show Email Checkbox in the enclosing configuration to false.
106	`<showHighlightsPanel>true</showHighlightsPanel>`	Sets show Highlights Panel in the enclosing configuration to true.
107	`<showInteractionLogPanel>false</showInteractionLogPanel>`	Sets show Interaction Log Panel in the enclosing configuration to false.
108	`<showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox>`	Sets show Run Assignment Rules Checkbox in the enclosing configuration to false.
109	`<showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Sets show Submit And Attach Button in the enclosing configuration to false.
110	`<summaryLayout>`	Opens the summaryLayout block; child elements specify its configuration.
111	`<masterLabel>00hjV000003E6og</masterLabel>`	Sets master Label in the enclosing configuration to 00hjV000003E6og.
112	`<sizeX>4</sizeX>`	Sets size X in the enclosing configuration to 4.
113	`<sizeY>0</sizeY>`	Sets size Y in the enclosing configuration to 0.
114	`<summaryLayoutStyle>Default</summaryLayoutStyle>`	Sets summary Layout Style in the enclosing configuration to Default.
115	`</summaryLayout>`	Closes the summaryLayout configuration block.
116	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/SFA_Ticket__c-SFA Ticket Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 f59e4c047e2520493185ca82f20bad116d55041eb07795c94136528f1a2983c9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata"><layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Ticket Information</label><layoutColumns><layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems><layoutItems><behavior>Required</behavior><field>Subject__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Description__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Status__c</field></layoutItems></layoutColumns><layoutColumns><layoutItems><behavior>Required</behavior><field>Outlet__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Visit__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Image_URL__c</field></layoutItems></layoutColumns><style>TwoColumnsTopToBottom</style></layoutSections><layoutSections><customLabel>false</customLabel><detailHeading>false</detailHeading><editHeading>false</editHeading><layoutColumns/><style>CustomLinks</style></layoutSections><showHighlightsPanel>true</showHighlightsPanel></Layout>`	Sets Layout in the enclosing configuration to <layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Ticket Information</label><layoutColumns><layoutItems><behavior>Readonly</behavi.

force-app/main/default/layouts/Sales_Order__c-Sales Order Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

101 numbered source lines | SHA-256 cafdd08e1da7663f3047c78b80b1a90de7ac549c7d0d1c6c6fcc71631c33b3e0

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`        <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>DMS Information</label>`	Opens the customLabel block; child elements specify its configuration.
5	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
6	`            <layoutItems><behavior>Edit</behavior><field>DMS_Distributor__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>DMS_Distributor__c</field>.
7	`            <layoutItems><behavior>Edit</behavior><field>DMS_Decision_Notes__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>DMS_Decision_Notes__c</field>.
8	`        </layoutColumns>`	Closes the layoutColumns configuration block.
9	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
10	`            <layoutItems><behavior>Edit</behavior><field>DMS_Status__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>DMS_Status__c</field>.
11	`            <layoutItems><behavior>Edit</behavior><field>DMS_Decided_At__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>DMS_Decided_At__c</field>.
12	`        </layoutColumns>`	Closes the layoutColumns configuration block.
13	`        <style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
14	`    </layoutSections>`	Closes the layoutSections configuration block.
15	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
16	`        <customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.

Line	Source code	Explanation / reading note
17	`<detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
18	`<editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
19	`<label>Sales Order Information</label>`	Sets human-readable Salesforce UI label to Sales Order Information.
20	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
21	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
22	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
23	`<field>Order_Date__c</field>`	Sets field API name configured in this entry to Order_Date__c.
24	`</layoutItems>`	Closes the layoutItems configuration block.
25	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
26	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
27	`<field>Retailer__c</field>`	Sets field API name configured in this entry to Retailer__c.
28	`</layoutItems>`	Closes the layoutItems configuration block.
29	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
30	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
31	`<field>Visit__c</field>`	Sets field API name configured in this entry to Visit__c.
32	`</layoutItems>`	Closes the layoutItems configuration block.
33	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
34	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
35	`<field>Product__c</field>`	Sets field API name configured in this entry to Product__c.
36	`</layoutItems>`	Closes the layoutItems configuration block.
37	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
38	`<behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.

Line	Source code	Explanation / reading note
39	`<field>SKU__c</field>`	Sets field API name configured in this entry to SKU__c.
40	`</layoutItems>`	Closes the layoutItems configuration block.
41	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
42	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
43	`<field>Scheme_Details__c</field>`	Sets field API name configured in this entry to Scheme_Details__c.
44	`</layoutItems>`	Closes the layoutItems configuration block.
45	`</layoutColumns>`	Closes the layoutColumns configuration block.
46	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
47	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
48	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
49	`<field>Status__c</field>`	Sets field API name configured in this entry to Status__c.
50	`</layoutItems>`	Closes the layoutItems configuration block.
51	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
52	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
53	`<field>Total_Amount__c</field>`	Sets field API name configured in this entry to Total_Amount__c.
54	`</layoutItems>`	Closes the layoutItems configuration block.
55	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
56	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
57	`<field>Tax_Amount__c</field>`	Sets field API name configured in this entry to Tax_Amount__c.
58	`</layoutItems>`	Closes the layoutItems configuration block.
59	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
60	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.

Line	Source code	Explanation / reading note
61	`<field>Gross_Amount__c</field>`	Sets field API name configured in this entry to Gross_Amount__c.
62	`</layoutItems>`	Closes the layoutItems configuration block.
63	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
64	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
65	`<field>Total_Quantity__c</field>`	Sets field API name configured in this entry to Total_Quantity__c.
66	`</layoutItems>`	Closes the layoutItems configuration block.
67	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
68	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
69	`<field>Scheme_Applied__c</field>`	Sets field API name configured in this entry to Scheme_Applied__c.
70	`</layoutItems>`	Closes the layoutItems configuration block.
71	`</layoutColumns>`	Closes the layoutColumns configuration block.
72	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
73	`</layoutSections>`	Closes the layoutSections configuration block.
74	`<layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
75	`<customLabel>false</customLabel>`	Sets custom Label in the enclosing configuration to false.
76	`<detailHeading>false</detailHeading>`	Sets detail Heading in the enclosing configuration to false.
77	`<editHeading>false</editHeading>`	Sets edit Heading in the enclosing configuration to false.
78	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
79	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
80	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
81	`<style>CustomLinks</style>`	Sets style in the enclosing configuration to CustomLinks.
82	`</layoutSections>`	Closes the layoutSections configuration block.

Line	Source code	Explanation / reading note
83	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
84	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
85	`<fields>Product__c</fields>`	Sets fields in the enclosing configuration to Product__c.
86	`<fields>Product_Sales_Configuration__c</fields>`	Sets fields in the enclosing configuration to Product_Sales_Configuration__c.
87	`<fields>Scheme__c</fields>`	Sets fields in the enclosing configuration to Scheme__c.
88	`<fields>Case_Quantity__c</fields>`	Sets fields in the enclosing configuration to Case_Quantity__c.
89	`<fields>Piece_Quantity__c</fields>`	Sets fields in the enclosing configuration to Piece_Quantity__c.
90	`<fields>Total_Pieces__c</fields>`	Sets fields in the enclosing configuration to Total_Pieces__c.
91	`<fields>Unit_Price__c</fields>`	Sets fields in the enclosing configuration to Unit_Price__c.
92	`<fields>Line_Amount__c</fields>`	Sets fields in the enclosing configuration to Line_Amount__c.
93	`<relatedList>Order_Item__c.Sales_Order__c</relatedList>`	Sets related List in the enclosing configuration to Order_Item__c.Sales_Order__c.
94	`</relatedLists>`	Closes the relatedLists configuration block.
95	`<relatedLists><fields>NAME</fields><fields>Status__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Invoice__c.Sales_Order__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Status__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Invoice__c.Sales_Order__c</relatedList>.
96	`<showEmailCheckbox>false</showEmailCheckbox>`	Sets show Email Checkbox in the enclosing configuration to false.
97	`<showHighlightsPanel>true</showHighlightsPanel>`	Sets show Highlights Panel in the enclosing configuration to true.
98	`<showInteractionLogPanel>false</showInteractionLogPanel>`	Sets show Interaction Log Panel in the enclosing configuration to false.
99	`<showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox>`	Sets show Run Assignment Rules Checkbox in the enclosing configuration to false.
100	`<showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Sets show Submit And Attach Button in the enclosing configuration to false.
101	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/Scheme_Product__c-Scheme Product Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

13 numbered source lines | SHA-256 70aedd5f2736efedd843a25f5821ab11e9e0b7ed7be49da8ea5fec656609d552

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>false</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Scheme Product Information</label>`	Opens the customLabel block; child elements specify its configuration.
5	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
6	`            <layoutItems><behavior>Required</behavior><field>Scheme__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Scheme__c</field>.
7	`            <layoutItems><behavior>Required</behavior><field>Product__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Required</behavior><field>Product__c</field>.
8	`        </layoutColumns>`	Closes the layoutColumns configuration block.
9	`        <layoutColumns><layoutItems><behavior>Edit</behavior><field>Active__c</field></layoutItems></layoutColumns>`	Sets layout Columns in the enclosing configuration to <layoutItems><behavior>Edit</behavior><field>Active__c</field></layoutItems>.
10	`        <style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
11	`    </layoutSections>`	Closes the layoutSections configuration block.
12	`    <showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Opens the showEmailCheckbox block; child elements specify its configuration.
13	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/Scheme__c-Scheme Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

114 numbered source lines | SHA-256 6cf2c9444e892ac2adda638f3ccd9ffc6bf3ad57a49a4997cee03e6c34fb168e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`        <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>DMS Information</label>`	Opens the customLabel block; child elements specify its configuration.
5	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
6	`            <layoutItems><behavior>Edit</behavior><field>Sales_Channel__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Sales_Channel__c</field>.
7	`            <layoutItems><behavior>Edit</behavior><field>Free_Cases__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Free_Cases__c</field>.
8	`            <layoutItems><behavior>Edit</behavior><field>Gift_Quantity__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Gift_Quantity__c</field>.
9	`        </layoutColumns>`	Closes the layoutColumns configuration block.
10	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
11	`            <layoutItems><behavior>Edit</behavior><field>Minimum_Cases__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Minimum_Cases__c</field>.
12	`            <layoutItems><behavior>Edit</behavior><field>Free_Gift__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Free_Gift__c</field>.
13	`        </layoutColumns>`	Closes the layoutColumns configuration block.
14	`        <style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
15	`    </layoutSections>`	Closes the layoutSections configuration block.
16	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.

Line	Source code	Explanation / reading note
17	`<customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.
18	`<detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
19	`<editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
20	`<label>Scheme Information</label>`	Sets human-readable Salesforce UI label to Scheme Information.
21	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
22	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
23	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
24	`<field>Name</field>`	Sets field API name configured in this entry to Name.
25	`</layoutItems>`	Closes the layoutItems configuration block.
26	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
27	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
28	`<field>Scheme_Code__c</field>`	Sets field API name configured in this entry to Scheme_Code__c.
29	`</layoutItems>`	Closes the layoutItems configuration block.
30	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
31	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
32	`<field>Scheme_Type__c</field>`	Sets field API name configured in this entry to Scheme_Type__c.
33	`</layoutItems>`	Closes the layoutItems configuration block.
34	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
35	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
36	`<field>Description__c</field>`	Sets field API name configured in this entry to Description__c.
37	`</layoutItems>`	Closes the layoutItems configuration block.
38	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.

Line	Source code	Explanation / reading note
39	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
40	`<field>Minimum_Quantity__c</field>`	Sets field API name configured in this entry to Minimum_Quantity__c.
41	`</layoutItems>`	Closes the layoutItems configuration block.
42	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
43	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
44	`<field>Free_Quantity__c</field>`	Sets field API name configured in this entry to Free_Quantity__c.
45	`</layoutItems>`	Closes the layoutItems configuration block.
46	`</layoutColumns>`	Closes the layoutColumns configuration block.
47	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
48	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
49	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
50	`<field>Free_Product__c</field>`	Sets field API name configured in this entry to Free_Product__c.
51	`</layoutItems>`	Closes the layoutItems configuration block.
52	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
53	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
54	`<field>Discount_Percent__c</field>`	Sets field API name configured in this entry to Discount_Percent__c.
55	`</layoutItems>`	Closes the layoutItems configuration block.
56	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
57	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
58	`<field>Discount_Amount__c</field>`	Sets field API name configured in this entry to Discount_Amount__c.
59	`</layoutItems>`	Closes the layoutItems configuration block.
60	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.

Line	Source code	Explanation / reading note
61	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
62	`<field>Outlet_Type__c</field>`	Sets field API name configured in this entry to Outlet_Type__c.
63	`</layoutItems>`	Closes the layoutItems configuration block.
64	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
65	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
66	`<field>Region__c</field>`	Sets field API name configured in this entry to Region__c.
67	`</layoutItems>`	Closes the layoutItems configuration block.
68	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
69	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
70	`<field>Start_Date__c</field>`	Sets field API name configured in this entry to Start_Date__c.
71	`</layoutItems>`	Closes the layoutItems configuration block.
72	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
73	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
74	`<field>End_Date__c</field>`	Sets field API name configured in this entry to End_Date__c.
75	`</layoutItems>`	Closes the layoutItems configuration block.
76	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
77	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
78	`<field>Active__c</field>`	Sets field API name configured in this entry to Active__c.
79	`</layoutItems>`	Closes the layoutItems configuration block.
80	`</layoutColumns>`	Closes the layoutColumns configuration block.
81	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
82	`</layoutSections>`	Closes the layoutSections configuration block.

Line	Source code	Explanation / reading note
83	`<layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
84	`<customLabel>false</customLabel>`	Sets custom Label in the enclosing configuration to false.
85	`<detailHeading>false</detailHeading>`	Sets detail Heading in the enclosing configuration to false.
86	`<editHeading>false</editHeading>`	Sets edit Heading in the enclosing configuration to false.
87	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
88	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
89	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
90	`<style>CustomLinks</style>`	Sets style in the enclosing configuration to CustomLinks.
91	`</layoutSections>`	Closes the layoutSections configuration block.
92	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
93	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
94	`<fields>Product__c</fields>`	Sets fields in the enclosing configuration to Product__c.
95	`<fields>Active__c</fields>`	Sets fields in the enclosing configuration to Active__c.
96	`<relatedList>Scheme_Product__c.Scheme__c</relatedList>`	Sets related List in the enclosing configuration to Scheme_Product__c.Scheme__c.
97	`</relatedLists>`	Closes the relatedLists configuration block.
98	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
99	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
100	`<fields>Sales_Order__c</fields>`	Sets fields in the enclosing configuration to Sales_Order__c.
101	`<fields>Product__c</fields>`	Sets fields in the enclosing configuration to Product__c.
102	`<fields>Piece_Quantity__c</fields>`	Sets fields in the enclosing configuration to Piece_Quantity__c.
103	`<fields>Line_Amount__c</fields>`	Sets fields in the enclosing configuration to Line_Amount__c.
104	`<relatedList>Order_Item__c.Scheme__c</relatedList>`	Sets related List in the enclosing configuration to Order_Item__c.Scheme__c.

Line	Source code	Explanation / reading note
105	`</relatedLists>`	Closes the relatedLists configuration block.
106	`<relatedLists><fields>NAME</fields><fields>Status__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Credit_Note__c.Scheme__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Status__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Credit_Note__c.Scheme__c</relatedList>.
107	`<relatedLists><fields>NAME</fields><fields>Product__c</fields><fields>Cases__c</fields><relatedList>DMS_Primary_Order_Line__c.Scheme__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Product__c</fields><fields>Cases__c</fields><relatedList>DMS_Primary_Order_Line__c.Scheme__c</relatedList>.
108	`<relatedLists><fields>NAME</fields><fields>Product__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Invoice_Line__c.Scheme__c</relatedList></relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Product__c</fields><fields>Total_Amount__c</fields><relatedList>DMS_Invoice_Line__c.Scheme__c</relatedList>.
109	`<showEmailCheckbox>false</showEmailCheckbox>`	Sets show Email Checkbox in the enclosing configuration to false.
110	`<showHighlightsPanel>true</showHighlightsPanel>`	Sets show Highlights Panel in the enclosing configuration to true.
111	`<showInteractionLogPanel>false</showInteractionLogPanel>`	Sets show Interaction Log Panel in the enclosing configuration to false.
112	`<showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox>`	Sets show Run Assignment Rules Checkbox in the enclosing configuration to false.
113	`<showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Sets show Submit And Attach Button in the enclosing configuration to false.
114	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/layouts/Stock_Check__c-Stock Check Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 569313eeaee40e4a3ebb1594677a2620e41a42c76b277b8c7dd85656bcb63f46

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata"><layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Stock Check Information</label><layoutColumns><layoutItems><behavior>Readonly</behavior><field>Name</field></layoutItems><layoutItems><behavior>Required</behavior><field>Product__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Quantity__c</field></layoutItems></layoutColumns><layoutColumns><layoutItems><behavior>Required</behavior><field>Outlet__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Visit__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Manufacturing_Date__c</field></layoutItems></layoutColumns><style>TwoColumnsTopToBottom</style></layoutSections><layoutSections><customLabel>false</customLabel><detailHeading>false</detailHeading><editHeading>false</editHeading><layoutColumns/><style>CustomLinks</style></layoutSections><showHighlightsPanel>true</showHighlightsPanel></Layout>`	Sets Layout in the enclosing configuration to <layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Stock Check Information</label><layoutColumns><layoutItems><behavior>Readonly</b.

force-app/main/default/layouts/Survey_Answer__c-Survey Answer Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

1 numbered source lines | SHA-256 cafd8d122dac47d4cb93baaab2e670e409dbf3b04b38f43834c1cc8306512235

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><Layout xmlns="http://soap.sforce.com/2006/04/metadata"><layoutSections><customLabel>false</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Survey Answer Information</label><layoutColumns><layoutItems><behavior>Required</behavior><field>Survey_Response__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Survey_Question__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Text_Answer__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Number_Answer__c</field></layoutItems></layoutColumns><layoutColumns><layoutItems><behavior>Edit</behavior><field>Phone_Answer__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Selected_Choice__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Multiple_Choices__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Rating__c</field></layoutItems></layoutColumns><style>TwoColumnsTopToBottom</style></layoutSections><showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton></Layout>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/layouts/Survey_Question__c-Survey Question Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

1 numbered source lines | SHA-256 eca8157884b66ddf1b3312832e16435601f4bb88a90ca96196617c5b47ed4a32

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><Layout xmlns="http://soap.sforce.com/2006/04/metadata"><layoutSections><customLabel>false</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Survey Question Information</label><layoutColumns><layoutItems><behavior>Required</behavior><field>Name</field></layoutItems><layoutItems><behavior>Required</behavior><field>Survey__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Question_Type__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Options__c</field></layoutItems></layoutColumns><layoutColumns><layoutItems><behavior>Edit</behavior><field>Display_Order__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Required__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Active__c</field></layoutItems></layoutColumns><style>TwoColumnsTopToBottom</style></layoutSections><showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton></Layout>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/layouts/Survey_Response__c-Survey Response Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

1 numbered source lines | SHA-256 ed1503e0acfe68e9d833e19e2e6c5cced31fa9191bc22d1bcc651e50bbd0318d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><Layout xmlns="http://soap.sforce.com/2006/04/metadata"><layoutSections><customLabel>false</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Survey Response Information</label><layoutColumns><layoutItems><behavior>Required</behavior><field>Survey__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Outlet__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Visit__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Employee__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Status__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Overall_Rating__c</field></layoutItems></layoutColumns><layoutColumns><layoutItems><behavior>Edit</behavior><field>Started_At__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Submitted_At__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Latitude__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Longitude__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Before_Image_URL__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>After_Image_URL__c</field></layoutItems></layoutColumns><style>TwoColumnsTopToBottom</style></layoutSections><layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Remarks</label><layoutColumns><layoutItems><behavior>Edit</behavior><field>Remarks__c</field></layoutItems></layoutColumns><layoutColumns/><style>TwoColumnsTopToBottom</style></layoutSections><relatedLists><fields>NAME</fields><fields>Survey_Question__c</fields><fields>Text_Answer__c</fields><fields>Selected_Choice__c</fields><fields>Rating__c</fields><relatedList>Survey_Answer__c.Survey_Response__c</relatedList></relatedLists><showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton></Layout>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/layouts/Survey__c-Survey Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

1 numbered source lines | SHA-256 1dc0dac1a2bebea98d1fd0723bddcc7f9a9b01b950338fb65a8430c9010fb22a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><Layout xmlns="http://soap.sforce.com/2006/04/metadata"><layoutSections><customLabel>false</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Survey Information</label><layoutColumns><layoutItems><behavior>Required</behavior><field>Name</field></layoutItems><layoutItems><behavior>Required</behavior><field>Survey_Type__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Outlet_Type__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>Start_Date__c</field></layoutItems><layoutItems><behavior>Required</behavior><field>End_Date__c</field></layoutItems></layoutColumns><layoutColumns><layoutItems><behavior>Edit</behavior><field>Active__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Rating_Target__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Maximum_Rating__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Require_Before_Image__c</field></layoutItems><layoutItems><behavior>Edit</behavior><field>Require_After_Image__c</field></layoutItems></layoutColumns><style>TwoColumnsTopToBottom</style></layoutSections><layoutSections><customLabel>true</customLabel><detailHeading>true</detailHeading><editHeading>true</editHeading><label>Instructions</label><layoutColumns><layoutItems><behavior>Edit</behavior><field>Instructions__c</field></layoutItems></layoutColumns><layoutColumns/><style>TwoColumnsTopToBottom</style></layoutSections><relatedLists><fields>NAME</fields><fields>Question_Type__c</fields><fields>Display_Order__c</fields><fields>Required__c</fields><fields>Active__c</fields><relatedList>Survey_Question__c.Survey__c</relatedList></relatedLists><relatedLists><fields>NAME</fields><fields>Outlet__c</fields><fields>Employee__c</fields><fields>Status__c</fields><fields>Submitted_At__c</fields><relatedList>Survey_Response__c.Survey__c</relatedList></relatedLists><showEmailCheckbox>false</showEmailCheckbox><showHighlightsPanel>true</showHighlightsPanel><showInteractionLogPanel>false</showInteractionLogPanel><showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox><showSubmitAndAttachButton>false</showSubmitAndAttachButton></Layout>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/layouts/Visit__c-Visit Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

160 numbered source lines | SHA-256 882d8888baa64542d35b36e6c2097ae200e61173a329b74232b2652ec071df49

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.
5	`        <detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
6	`        <editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
7	`        <label>Visit Information</label>`	Sets human-readable Salesforce UI label to Visit Information.
8	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
9	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
10	`                <behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
11	`                <field>Name</field>`	Sets field API name configured in this entry to Name.
12	`            </layoutItems>`	Closes the layoutItems configuration block.
13	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
14	`                <behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.
15	`                <field>Visit_Number__c</field>`	Sets field API name configured in this entry to Visit_Number__c.
16	`            </layoutItems>`	Closes the layoutItems configuration block.
17	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
18	`                <behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
19	`                <field>Visit_Date__c</field>`	Sets field API name configured in this entry to Visit_Date__c.

Line	Source code	Explanation / reading note
20	`</layoutItems>`	Closes the layoutItems configuration block.
21	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
22	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
23	`<field>Employee__c</field>`	Sets field API name configured in this entry to Employee__c.
24	`</layoutItems>`	Closes the layoutItems configuration block.
25	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
26	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
27	`<field>Sales_Representative__c</field>`	Sets field API name configured in this entry to Sales_Representative__c.
28	`</layoutItems>`	Closes the layoutItems configuration block.
29	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
30	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
31	`<field>Status__c</field>`	Sets field API name configured in this entry to Status__c.
32	`</layoutItems>`	Closes the layoutItems configuration block.
33	`</layoutColumns>`	Closes the layoutColumns configuration block.
34	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
35	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
36	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
37	`<field>Permanent_Journey_Plan__c</field>`	Sets field API name configured in this entry to Permanent_Journey_Plan__c.
38	`</layoutItems>`	Closes the layoutItems configuration block.
39	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
40	`<behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
41	`<field>Retailer__c</field>`	Sets field API name configured in this entry to Retailer__c.

Line	Source code	Explanation / reading note
42	`            </layoutItems>`	Closes the layoutItems configuration block.
43	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
44	`                <behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.
45	`                <field>Outlet_Name__c</field>`	Sets field API name configured in this entry to Outlet_Name__c.
46	`            </layoutItems>`	Closes the layoutItems configuration block.
47	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
48	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
49	`                <field>Outlet_Geo_Location__c</field>`	Sets field API name configured in this entry to Outlet_Geo_Location__c.
50	`            </layoutItems>`	Closes the layoutItems configuration block.
51	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
52	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
53	`                <field>Notes__c</field>`	Sets field API name configured in this entry to Notes__c.
54	`            </layoutItems>`	Closes the layoutItems configuration block.
55	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
56	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
57	`                <field>Missed_Reason__c</field>`	Sets field API name configured in this entry to Missed_Reason__c.
58	`            </layoutItems>`	Closes the layoutItems configuration block.
59	`        </layoutColumns>`	Closes the layoutColumns configuration block.
60	`        <style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
61	`    </layoutSections>`	Closes the layoutSections configuration block.
62	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
63	`        <customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.

Line	Source code	Explanation / reading note
64	`<detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
65	`<editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
66	`<label>Outlet and Order Summary</label>`	Sets human-readable Salesforce UI label to Outlet and Order Summary.
67	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
68	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
69	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
70	`<field>Previous_Order_Date__c</field>`	Sets field API name configured in this entry to Previous_Order_Date__c.
71	`</layoutItems>`	Closes the layoutItems configuration block.
72	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
73	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
74	`<field>Previous_Order_Value__c</field>`	Sets field API name configured in this entry to Previous_Order_Value__c.
75	`</layoutItems>`	Closes the layoutItems configuration block.
76	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
77	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
78	`<field>Order_Gross_Amount__c</field>`	Sets field API name configured in this entry to Order_Gross_Amount__c.
79	`</layoutItems>`	Closes the layoutItems configuration block.
80	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
81	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
82	`<field>Order_Tax__c</field>`	Sets field API name configured in this entry to Order_Tax__c.
83	`</layoutItems>`	Closes the layoutItems configuration block.
84	`</layoutColumns>`	Closes the layoutColumns configuration block.
85	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.

Line	Source code	Explanation / reading note
86	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
87	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
88	`<field>Order_Total__c</field>`	Sets field API name configured in this entry to Order_Total__c.
89	`</layoutItems>`	Closes the layoutItems configuration block.
90	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
91	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
92	`<field>Order_Total_Quantity__c</field>`	Sets field API name configured in this entry to Order_Total_Quantity__c.
93	`</layoutItems>`	Closes the layoutItems configuration block.
94	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
95	`<behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.
96	`<field>Duration_Minutes__c</field>`	Sets field API name configured in this entry to Duration_Minutes__c.
97	`</layoutItems>`	Closes the layoutItems configuration block.
98	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
99	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
100	`<field>Offline_Key__c</field>`	Sets field API name configured in this entry to Offline_Key__c.
101	`</layoutItems>`	Closes the layoutItems configuration block.
102	`</layoutColumns>`	Closes the layoutColumns configuration block.
103	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
104	`</layoutSections>`	Closes the layoutSections configuration block.
105	`<layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
106	`<customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.
107	`<detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.

Line	Source code	Explanation / reading note
108	`<editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
109	`<label>Check-In and Check-Out</label>`	Sets human-readable Salesforce UI label to Check-In and Check-Out.
110	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
111	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
112	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
113	`<field>Check_In_Time__c</field>`	Sets field API name configured in this entry to Check_In_Time__c.
114	`</layoutItems>`	Closes the layoutItems configuration block.
115	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
116	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
117	`<field>Check_In_Latitude__c</field>`	Sets field API name configured in this entry to Check_In_Latitude__c.
118	`</layoutItems>`	Closes the layoutItems configuration block.
119	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
120	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
121	`<field>Check_In_Longitude__c</field>`	Sets field API name configured in this entry to Check_In_Longitude__c.
122	`</layoutItems>`	Closes the layoutItems configuration block.
123	`</layoutColumns>`	Closes the layoutColumns configuration block.
124	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
125	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
126	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
127	`<field>Check_Out_Time__c</field>`	Sets field API name configured in this entry to Check_Out_Time__c.
128	`</layoutItems>`	Closes the layoutItems configuration block.
129	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.

Line	Source code	Explanation / reading note
130	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
131	`<field>Check_Out_Latitude__c</field>`	Sets field API name configured in this entry to Check_Out_Latitude__c.
132	`</layoutItems>`	Closes the layoutItems configuration block.
133	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
134	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
135	`<field>Check_Out_Longitude__c</field>`	Sets field API name configured in this entry to Check_Out_Longitude__c.
136	`</layoutItems>`	Closes the layoutItems configuration block.
137	`</layoutColumns>`	Closes the layoutColumns configuration block.
138	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
139	`</layoutSections>`	Closes the layoutSections configuration block.
140	`<layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
141	`<customLabel>false</customLabel>`	Sets custom Label in the enclosing configuration to false.
142	`<detailHeading>false</detailHeading>`	Sets detail Heading in the enclosing configuration to false.
143	`<editHeading>false</editHeading>`	Sets edit Heading in the enclosing configuration to false.
144	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
145	`<style>CustomLinks</style>`	Sets style in the enclosing configuration to CustomLinks.
146	`</layoutSections>`	Closes the layoutSections configuration block.
147	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
148	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
149	`<fields>Survey__c</fields>`	Sets fields in the enclosing configuration to Survey__c.
150	`<fields>Status__c</fields>`	Sets fields in the enclosing configuration to Status__c.
151	`<fields>Employee__c</fields>`	Sets fields in the enclosing configuration to Employee__c.

Line	Source code	Explanation / reading note
152	`<fields>Submitted_At__c</fields>`	Sets fields in the enclosing configuration to Submitted_At__c.
153	`<relatedList>Survey_Response__c.Visit__c</relatedList>`	Sets related List in the enclosing configuration to Survey_Response__c.Visit__c.
154	`</relatedLists>`	Closes the relatedLists configuration block.
155	`<showEmailCheckbox>false</showEmailCheckbox>`	Sets show Email Checkbox in the enclosing configuration to false.
156	`<showHighlightsPanel>true</showHighlightsPanel>`	Sets show Highlights Panel in the enclosing configuration to true.
157	`<showInteractionLogPanel>false</showInteractionLogPanel>`	Sets show Interaction Log Panel in the enclosing configuration to false.
158	`<showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox>`	Sets show Run Assignment Rules Checkbox in the enclosing configuration to false.
159	`<showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Sets show Submit And Attach Button in the enclosing configuration to false.
160	`</Layout>`	Closes the Layout configuration block.

force-app/main/default/notificationtypes/PJP_Approval_Notification.notiftype-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

8 numbered source lines | SHA-256 6bf5ff7032d6592ccf2c1ffc90dc845749fee09dc35fca4c8abb6bb644ba466a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomNotificationType xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomNotificationType block; child elements specify its configuration.
3	`    <customNotifTypeName>PJP Approval Notification</customNotifTypeName>`	Sets custom Notif Type Name in the enclosing configuration to PJP Approval Notification.
4	`    <desktop>true</desktop>`	Sets desktop in the enclosing configuration to true.
5	`    <masterLabel>PJP Approval Notification</masterLabel>`	Sets master Label in the enclosing configuration to PJP Approval Notification.
6	`    <mobile>true</mobile>`	Sets mobile in the enclosing configuration to true.
7	`    <slack>false</slack>`	Sets slack in the enclosing configuration to false.
8	`</CustomNotificationType>`	Closes the CustomNotificationType configuration block.

force-app/main/default/objects/Asset_Survey__c/Asset_Survey__c.object-meta.xml

Salesforce metadata for Asset_Survey__c/Asset_Survey__c.object-meta.xml. Label: Asset Survey. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 34526c7050986cec506e4833a4cde5fa6f8edfa713f63201ecfee01245997942

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus><description>Assets observed at an outlet during a field visit.</description>`	Opens the deploymentStatus block; child elements specify its configuration.
4	`    <enableActivities>true</enableActivities><enableHistory>true</enableHistory><enableReports>true</enableReports><enableSearch>true</enableSearch>`	Opens the enableActivities block; child elements specify its configuration.
5	`    <label>Asset Survey</label><pluralLabel>Asset Surveys</pluralLabel><sharingModel>ReadWrite</sharingModel>`	Opens the label block; child elements specify its configuration.
6	`    <nameField><displayFormat>AS-{00000}</displayFormat><label>Asset Survey Number</label><type>AutoNumber</type></nameField>`	Sets name Field in the enclosing configuration to <displayFormat>AS-{00000}</displayFormat><label>Asset Survey Number</label><type>AutoNumber</type>.
7	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Asset_Survey__c/fields/Asset_Code__c.field-meta.xml

Salesforce metadata for Asset_Survey__c/fields/Asset_Code__c.field-meta.xml. Label: Asset Code. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 23360b7a4f9ea22826f5cfcca26663d7bd554f908a1d1f06f7d58dd14e07b949

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Asset_Code__c</fullName><label>Asset Code</label><length>40</length><required>true</required><type>Text</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Asset_Survey__c/fields/Asset_Name__c.field-meta.xml

Salesforce metadata for Asset_Survey__c/fields/Asset_Name__c.field-meta.xml. Label: Asset Name. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 95229de0996e662a3b6807c01914a9677a93e528a3d1521759ab8edc9686107a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Asset_Name__c</fullName><label>Asset Name</label><length>120</length><required>true</required><type>Text</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Asset_Survey__c/fields/Given_Date__c.field-meta.xml

Salesforce metadata for Asset_Survey__c/fields/Given_Date__c.field-meta.xml. Label: Given Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 d4fc0f4833047c2dbcf7ffb3bf7c243d27aea12f048e8844cca9684d7d89b7c5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Given_Date__c</fullName><label>Given Date</label><type>Date</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Asset_Survey__c/fields/Mobile_Request_Key__c.field-meta.xml

Salesforce metadata for Asset_Survey__c/fields/Mobile_Request_Key__c.field-meta.xml. Label: Mobile Request Key. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 b6b2d4cbefd91ed82aaf2e4d6e9fceb5bd820fb8c44d3ed95161c16674ea6025

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Mobile_Request_Key__c</fullName>`	Sets API identifier used by metadata deployment and code references to Mobile_Request_Key__c.
4	`    <caseSensitive>true</caseSensitive>`	Sets case Sensitive in the enclosing configuration to true.
5	`    <externalId>true</externalId>`	Sets whether the field is eligible for external-key matching to true.
6	`    <label>Mobile Request Key</label>`	Sets human-readable Salesforce UI label to Mobile Request Key.
7	`    <length>150</length>`	Sets maximum text length to 150.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>true</unique>`	Sets whether duplicate stored values are rejected to true.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Asset_Survey__c/fields/Outlet__c.field-meta.xml

Salesforce metadata for Asset_Survey__c/fields/Outlet__c.field-meta.xml. Label: Outlet. Type: Lookup. Relationship target: Retailer__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 af1cfb3dbe607239eb3d4afabafb48e3afebcbed33504759031bd354f0a9b3aa

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Outlet__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Outlet</label><referenceTo>Retailer__c</referenceTo><relationshipLabel>Asset Surveys</relationshipLabel><relationshipName>Asset_Surveys</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Asset_Survey__c/fields/Picture_URL__c.field-meta.xml

Salesforce metadata for Asset_Survey__c/fields/Picture_URL__c.field-meta.xml. Label: Picture URL. Type: Url. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 e0d70f577e4545aaa1a2f1b5e6d06e7c114a6807694a34fc48208b6ef6e46bcd

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Picture_URL__c</fullName><label>Picture URL</label><type>Url</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Asset_Survey__c/fields/Status__c.field-meta.xml

Salesforce metadata for Asset_Survey__c/fields/Status__c.field-meta.xml. Label: Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 399c9c0f5ae202fc217baef89eb16bfe59fb9377c5abe6b28327f751d26f7db6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Status__c</fullName><label>Status</label><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Working</fullName><default>true</default><label>Working</label></value><value><fullName>Needs Service</fullName><default>false</default><label>Needs Service</label></value><value><fullName>Damaged</fullName><default>false</default><label>Damaged</label></value><value><fullName>Missing</fullName><default>false</default><label>Missing</label></value></valueSetDefinition></valueSet></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Asset_Survey__c/fields/Visit__c.field-meta.xml

Salesforce metadata for Asset_Survey__c/fields/Visit__c.field-meta.xml. Label: Visit. Type: Lookup. Relationship target: Visit__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 8f9acb80082a81eace8361470c0411f34831f1b7446352a24921a5055a944e3e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Visit__c</fullName><deleteConstraint>SetNull</deleteConstraint><label>Visit</label><referenceTo>Visit__c</referenceTo><relationshipLabel>Asset Surveys</relationshipLabel><relationshipName>Asset_Surveys</relationshipName><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Asset_Survey__c/listViews/All_Asset_Surveys.listView-meta.xml

Salesforce metadata for Asset_Survey__c/listViews/All_Asset_Surveys.listView-meta.xml. Label: All Asset Surveys. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 6037cb34d1520826fafaeeb8cfa7f660a32689b34e5437db0901105bbd4d8cdf

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><ListView xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>All_Asset_Surveys</fullName><columns>NAME</columns><columns>Asset_Name__c</columns><columns>Asset_Code__c</columns><columns>Status__c</columns><columns>Outlet__c</columns><filterScope>Everything</filterScope><label>All Asset Surveys</label></ListView>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Attendance__c/Attendance__c.object-meta.xml

Salesforce metadata for Attendance__c/Attendance__c.object-meta.xml. Label: Attendance. Type: Default. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

168 numbered source lines | SHA-256 ae26d97382d92b7591accec87630819a50db8a99ce27a157b283029090324919

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
4	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
5	`        <type>Default</type>`	Sets field/storage type to Default.
6	`    </actionOverrides>`	Closes the actionOverrides configuration block.
7	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
8	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
9	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
10	`        <type>Default</type>`	Sets field/storage type to Default.
11	`    </actionOverrides>`	Closes the actionOverrides configuration block.
12	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
13	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
14	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
15	`        <type>Default</type>`	Sets field/storage type to Default.
16	`    </actionOverrides>`	Closes the actionOverrides configuration block.
17	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
18	`        <actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.

Line	Source code	Explanation / reading note
19	`<type>Default</type>`	Sets field/storage type to Default.
20	`</actionOverrides>`	Closes the actionOverrides configuration block.
21	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
22	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
23	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
24	`<type>Default</type>`	Sets field/storage type to Default.
25	`</actionOverrides>`	Closes the actionOverrides configuration block.
26	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
27	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
28	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
29	`<type>Default</type>`	Sets field/storage type to Default.
30	`</actionOverrides>`	Closes the actionOverrides configuration block.
31	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
32	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
33	`<type>Default</type>`	Sets field/storage type to Default.
34	`</actionOverrides>`	Closes the actionOverrides configuration block.
35	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
36	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
37	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
38	`<type>Default</type>`	Sets field/storage type to Default.
39	`</actionOverrides>`	Closes the actionOverrides configuration block.
40	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.

Line	Source code	Explanation / reading note
41	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
42	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
43	`<type>Default</type>`	Sets field/storage type to Default.
44	`</actionOverrides>`	Closes the actionOverrides configuration block.
45	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
46	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
47	`<type>Default</type>`	Sets field/storage type to Default.
48	`</actionOverrides>`	Closes the actionOverrides configuration block.
49	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
50	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
51	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
52	`<type>Default</type>`	Sets field/storage type to Default.
53	`</actionOverrides>`	Closes the actionOverrides configuration block.
54	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
55	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
56	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
57	`<type>Default</type>`	Sets field/storage type to Default.
58	`</actionOverrides>`	Closes the actionOverrides configuration block.
59	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
60	`<actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
61	`<type>Default</type>`	Sets field/storage type to Default.
62	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
63	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
64	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
65	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
66	`        <type>Default</type>`	Sets field/storage type to Default.
67	`    </actionOverrides>`	Closes the actionOverrides configuration block.
68	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
69	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
70	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
71	`        <type>Default</type>`	Sets field/storage type to Default.
72	`    </actionOverrides>`	Closes the actionOverrides configuration block.
73	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
74	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
75	`        <type>Default</type>`	Sets field/storage type to Default.
76	`    </actionOverrides>`	Closes the actionOverrides configuration block.
77	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
78	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
79	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
80	`        <type>Default</type>`	Sets field/storage type to Default.
81	`    </actionOverrides>`	Closes the actionOverrides configuration block.
82	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
83	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
84	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.

Line	Source code	Explanation / reading note
85	`<type>Default</type>`	Sets field/storage type to Default.
86	`</actionOverrides>`	Closes the actionOverrides configuration block.
87	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
88	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
89	`<type>Default</type>`	Sets field/storage type to Default.
90	`</actionOverrides>`	Closes the actionOverrides configuration block.
91	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
92	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
93	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
94	`<type>Default</type>`	Sets field/storage type to Default.
95	`</actionOverrides>`	Closes the actionOverrides configuration block.
96	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
97	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
98	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
99	`<type>Default</type>`	Sets field/storage type to Default.
100	`</actionOverrides>`	Closes the actionOverrides configuration block.
101	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
102	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
103	`<type>Default</type>`	Sets field/storage type to Default.
104	`</actionOverrides>`	Closes the actionOverrides configuration block.
105	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
106	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.

Line	Source code	Explanation / reading note
107	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
108	`<type>Default</type>`	Sets field/storage type to Default.
109	`</actionOverrides>`	Closes the actionOverrides configuration block.
110	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
111	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
112	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
113	`<type>Default</type>`	Sets field/storage type to Default.
114	`</actionOverrides>`	Closes the actionOverrides configuration block.
115	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
116	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
117	`<type>Default</type>`	Sets field/storage type to Default.
118	`</actionOverrides>`	Closes the actionOverrides configuration block.
119	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
120	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
121	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
122	`<type>Default</type>`	Sets field/storage type to Default.
123	`</actionOverrides>`	Closes the actionOverrides configuration block.
124	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
125	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
126	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
127	`<type>Default</type>`	Sets field/storage type to Default.
128	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
129	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
130	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
131	`<type>Default</type>`	Sets field/storage type to Default.
132	`</actionOverrides>`	Closes the actionOverrides configuration block.
133	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
134	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
135	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
136	`<type>Default</type>`	Sets field/storage type to Default.
137	`</actionOverrides>`	Closes the actionOverrides configuration block.
138	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
139	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
140	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
141	`<type>Default</type>`	Sets field/storage type to Default.
142	`</actionOverrides>`	Closes the actionOverrides configuration block.
143	`<allowInChatterGroups>false</allowInChatterGroups>`	Sets allow In Chatter Groups in the enclosing configuration to false.
144	`<compactLayoutAssignment>SYSTEM</compactLayoutAssignment>`	Sets compact Layout Assignment in the enclosing configuration to SYSTEM.
145	`<deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
146	`<description>Sales representative day start and end.</description>`	Sets description in the enclosing configuration to Sales representative day start and end..
147	`<enableActivities>false</enableActivities>`	Sets enable Activities in the enclosing configuration to false.
148	`<enableBulkApi>true</enableBulkApi>`	Sets enable Bulk Api in the enclosing configuration to true.
149	`<enableFeeds>false</enableFeeds>`	Sets enable Feeds in the enclosing configuration to false.
150	`<enableHistory>true</enableHistory>`	Sets enable History in the enclosing configuration to true.

Line	Source code	Explanation / reading note
151	`<enableLicensing>false</enableLicensing>`	Sets enable Licensing in the enclosing configuration to false.
152	`<enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
153	`<enableSearch>true</enableSearch>`	Sets enable Search in the enclosing configuration to true.
154	`<enableSharing>true</enableSharing>`	Sets enable Sharing in the enclosing configuration to true.
155	`<enableStreamingApi>true</enableStreamingApi>`	Sets enable Streaming Api in the enclosing configuration to true.
156	`<externalSharingModel>Private</externalSharingModel>`	Sets external Sharing Model in the enclosing configuration to Private.
157	`<label>Attendance</label>`	Sets human-readable Salesforce UI label to Attendance.
158	`<nameField>`	Opens the nameField block; child elements specify its configuration.
159	`<displayFormat>ATT-{00000}</displayFormat>`	Sets display Format in the enclosing configuration to ATT-{00000}.
160	`<label>Attendance Number</label>`	Sets human-readable Salesforce UI label to Attendance Number.
161	`<trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
162	`<type>AutoNumber</type>`	Sets field/storage type to AutoNumber.
163	`</nameField>`	Closes the nameField configuration block.
164	`<pluralLabel>Attendance</pluralLabel>`	Sets plural Label in the enclosing configuration to Attendance.
165	`<searchLayouts></searchLayouts>`	Sets search Layouts in the enclosing configuration to .
166	`<sharingModel>ReadWrite</sharingModel>`	Sets record sharing baseline to ReadWrite.
167	`<visibility>Public</visibility>`	Sets visibility in the enclosing configuration to Public.
168	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Attendance__c/fields/Attendance_Date__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Attendance_Date__c.field-meta.xml. Label: Attendance Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 74f718edca74a5603635577fa591c32938ba400c03240f9df0d9b68589112f4d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Attendance_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Attendance_Date__c.
4	`    <label>Attendance Date</label>`	Sets human-readable Salesforce UI label to Attendance Date.
5	`    <required>true</required>`	Sets whether a value is mandatory to true.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>Date</type>`	Sets field/storage type to Date.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Attendance__c/fields/Distance_Travelled_Km__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Distance_Travelled_Km__c.field-meta.xml. Label: Distance Travelled (KM). Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 82e09bf3ace43f8ff23e86cd5084d04249c4e01a41741a52b3b670efd36a1b6d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Distance_Travelled_Km__c</fullName>`	Sets API identifier used by metadata deployment and code references to Distance_Travelled_Km__c.
4	`    <description>Automatically calculated from the end odometer minus the start odometer.</description>`	Sets description in the enclosing configuration to Automatically calculated from the end odometer minus the start odometer..
5	`    <formula>IF(OR(ISBLANK(Start_Odometer__c), ISBLANK(End_Odometer__c)), NULL, End_Odometer__c - Start_Odometer__c)</formula>`	Sets formula expression evaluated by Salesforce to IF(OR(ISBLANK(Start_Odometer__c), ISBLANK(End_Odometer__c)), NULL, End_Odometer__c - Start_Odometer__c).
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Distance Travelled (KM)</label>`	Sets human-readable Salesforce UI label to Distance Travelled (KM).
8	`    <precision>10</precision>`	Sets maximum numeric precision to 10.
9	`    <scale>1</scale>`	Sets decimal places to 1.
10	`    <type>Number</type>`	Sets field/storage type to Number.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Attendance__c/fields/Employee__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Employee__c.field-meta.xml. Label: Employee. Type: Lookup. Relationship target: Employee__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 23aa7079eaface0abf1f4a4025bdadca419355066e941f3451dd852ab87ce21f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Employee__c</fullName>`	Sets API identifier used by metadata deployment and code references to Employee__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Employee</label>`	Sets human-readable Salesforce UI label to Employee.
6	`    <referenceTo>Employee__c</referenceTo>`	Sets object referenced by this relationship to Employee__c.
7	`    <relationshipLabel>Attendance Records</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Attendance Records.
8	`    <relationshipName>Attendance_Records</relationshipName>`	Sets relationship API traversal name to Attendance_Records.
9	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Attendance__c/fields/End_Latitude__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/End_Latitude__c.field-meta.xml. Label: End Latitude. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 628e3d522176d728b24ec0cc3332b2919498ec3f66a2f72223cb9e75a99e94d5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>End_Latitude__c</fullName>`	Sets API identifier used by metadata deployment and code references to End_Latitude__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>End Latitude</label>`	Sets human-readable Salesforce UI label to End Latitude.
6	`    <precision>10</precision>`	Sets maximum numeric precision to 10.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>6</scale>`	Sets decimal places to 6.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Attendance__c/fields/End_Longitude__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/End_Longitude__c.field-meta.xml. Label: End Longitude. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 ef2d64ed289a10977b77e3020a9cb5e1f755f7d7078b4a869318398885cf164d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>End_Longitude__c</fullName>`	Sets API identifier used by metadata deployment and code references to End_Longitude__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>End Longitude</label>`	Sets human-readable Salesforce UI label to End Longitude.
6	`    <precision>10</precision>`	Sets maximum numeric precision to 10.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>6</scale>`	Sets decimal places to 6.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Attendance__c/fields/End_Odometer__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/End_Odometer__c.field-meta.xml. Label: End Odometer. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 eb25793e52818d0798ddcfa54d9e0ff1874319149c2ad13e6ba80ab40ebe330a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>End_Odometer__c</fullName> <label>End Odometer</label><precision>10</precision><scale>1</scale><type>Number</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Attendance__c/fields/End_Time__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/End_Time__c.field-meta.xml. Label: End Time. Type: DateTime. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 50f969e08c506ec7022c214561cea6c53e9639bfa60569ec6e5fe7618e32d046

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>End_Time__c</fullName>`	Sets API identifier used by metadata deployment and code references to End_Time__c.
4	`    <label>End Time</label>`	Sets human-readable Salesforce UI label to End Time.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>DateTime</type>`	Sets field/storage type to DateTime.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Attendance__c/fields/Odometer_Entry_Mode__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Odometer_Entry_Mode__c.field-meta.xml. Label: Odometer Entry Mode. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 7809ff22bc4f14a7e2528ef3b99d437cb4f69f1ccbe732971380cbf17d0b2292

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Odometer_Entry_Mode__c</fullName>`	Sets API identifier used by metadata deployment and code references to Odometer_Entry_Mode__c.
4	`    <label>Odometer Entry Mode</label>`	Sets human-readable Salesforce UI label to Odometer Entry Mode.
5	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
6	`    <valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted>`	Opens the valueSet block; child elements specify its configuration.
7	`        <value><fullName>Manual</fullName><default>true</default><label>Manual Entry</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Manual</fullName><default>true</default><label>Manual Entry</label>.
8	`        <value><fullName>GPS Assisted</fullName><default>false</default><label>GPS Assisted + Manual Reading</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>GPS Assisted</fullName><default>false</default><label>GPS Assisted + Manual Reading</label>.
9	`    </valueSetDefinition></valueSet>`	Closes the valueSetDefinition configuration block.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Attendance__c/fields/Odometer_Evidence_URL__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Odometer_Evidence_URL__c.field-meta.xml. Label: Odometer Evidence URL. Type: Url. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 f188440a310a8c30b32739b41156be1d1d6374f580d72667e566c367840aff1c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Odometer_Evidence_URL__c</fullName><label>Odometer Evidence URL</label><type>Url</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Attendance__c/fields/Offline_Key__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Offline_Key__c.field-meta.xml. Label: Offline Key. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 b915b0ef2dab613369e0d4815d673adec6c907cddf2b5d82bf52d58e8a4ae622

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Offline_Key__c</fullName>`	Sets API identifier used by metadata deployment and code references to Offline_Key__c.
4	`    <caseSensitive>false</caseSensitive>`	Sets case Sensitive in the enclosing configuration to false.
5	`    <externalId>true</externalId>`	Sets whether the field is eligible for external-key matching to true.
6	`    <label>Offline Key</label>`	Sets human-readable Salesforce UI label to Offline Key.
7	`    <length>80</length>`	Sets maximum text length to 80.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Text</type>`	Sets field/storage type to Text.
12	`    <unique>true</unique>`	Sets whether duplicate stored values are rejected to true.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Attendance__c/fields/Planned_Activity__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Planned_Activity__c.field-meta.xml. Label: Planned Activity. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 de046f770f8391ad6dde45168a4ef934cd9b55950d70e2a9e1130759bb2171f3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Planned_Activity__c</fullName><label>Planned Activity</label><length>80</length><type>Text</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Attendance__c/fields/Sales_Representative__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Sales_Representative__c.field-meta.xml. Label: Sales Representative. Type: Lookup. Relationship target: User. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 f5b9e6123a2ccae3ce17b28e3e05e1b18360828d244a62c6ce682acb93f8a807

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Sales_Representative__c</fullName>`	Sets API identifier used by metadata deployment and code references to Sales_Representative__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Sales Representative</label>`	Sets human-readable Salesforce UI label to Sales Representative.
6	`    <referenceTo>User</referenceTo>`	Sets object referenced by this relationship to User.
7	`    <relationshipLabel>Attendance</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Attendance.
8	`    <relationshipName>Attendance</relationshipName>`	Sets relationship API traversal name to Attendance.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Attendance__c/fields/Selfie_Content_Document_Id__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Selfie_Content_Document_Id__c.field-meta.xml. Label: Selfie Content Document Id. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 faa1582eeac57bdb2ecb3d1f01c02628daca100b655dbba024db9a1de111ebf3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Selfie_Content_Document_Id__c</fullName>`	Sets API identifier used by metadata deployment and code references to Selfie_Content_Document_Id__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Selfie Content Document Id</label>`	Sets human-readable Salesforce UI label to Selfie Content Document Id.
6	`    <length>255</length>`	Sets maximum text length to 255.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Text</type>`	Sets field/storage type to Text.
11	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Attendance__c/fields/Start_Latitude__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Start_Latitude__c.field-meta.xml. Label: Start Latitude. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 cdab5d9cf5702616781a8316463e3488f116e596c258fbd27206d374d4597633

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Start_Latitude__c</fullName>`	Sets API identifier used by metadata deployment and code references to Start_Latitude__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Start Latitude</label>`	Sets human-readable Salesforce UI label to Start Latitude.
6	`    <precision>10</precision>`	Sets maximum numeric precision to 10.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>6</scale>`	Sets decimal places to 6.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Attendance__c/fields/Start_Longitude__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Start_Longitude__c.field-meta.xml. Label: Start Longitude. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 35890883d52940232444c78d1d6a7d3f807413b397a5c19757c18eeb188e2acc

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Start_Longitude__c</fullName>`	Sets API identifier used by metadata deployment and code references to Start_Longitude__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Start Longitude</label>`	Sets human-readable Salesforce UI label to Start Longitude.
6	`    <precision>10</precision>`	Sets maximum numeric precision to 10.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>6</scale>`	Sets decimal places to 6.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Attendance__c/fields/Start_Odometer__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Start_Odometer__c.field-meta.xml. Label: Start Odometer. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 4754165bfc8bfa2ce1486d7154f5c7f46400f008f31bca856f48e3048ac595f2

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Start_Odometer__c</fullName><label>Start Odometer</label><precision>10</precision><scale>1</scale><type>Number</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Attendance__c/fields/Start_Time__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Start_Time__c.field-meta.xml. Label: Start Time. Type: DateTime. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 2e2cbcc5ebd7b2627afa0a6a7b72692a79ae01e4f7ca9d8e5f97026ba69d8adc

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Start_Time__c</fullName>`	Sets API identifier used by metadata deployment and code references to Start_Time__c.
4	`    <label>Start Time</label>`	Sets human-readable Salesforce UI label to Start Time.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>DateTime</type>`	Sets field/storage type to DateTime.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Attendance__c/fields/Status__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Status__c.field-meta.xml. Label: Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

31 numbered source lines | SHA-256 2e5842beb0563c0f0ffe3742021f6fac7d2bfcfdc1f215b939eae4c843aae39b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Status__c</fullName>`	Sets API identifier used by metadata deployment and code references to Status__c.
4	`    <label>Status</label>`	Sets human-readable Salesforce UI label to Status.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
9	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
10	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
11	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
12	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
13	`            <value>`	Opens the value block; child elements specify its configuration.
14	`                <fullName>Started</fullName>`	Sets API identifier used by metadata deployment and code references to Started.
15	`                <default>true</default>`	Sets whether this option is the default to true.
16	`                <label>Started</label>`	Sets human-readable Salesforce UI label to Started.
17	`            </value>`	Closes the value configuration block.
18	`            <value>`	Opens the value block; child elements specify its configuration.

Line	Source code	Explanation / reading note
19	`<fullName>Completed</fullName>`	Sets API identifier used by metadata deployment and code references to Completed.
20	`<default>false</default>`	Sets whether this option is the default to false.
21	`<label>Completed</label>`	Sets human-readable Salesforce UI label to Completed.
22	`</value>`	Closes the value configuration block.
23	`<value>`	Opens the value block; child elements specify its configuration.
24	`<fullName>Present</fullName>`	Sets API identifier used by metadata deployment and code references to Present.
25	`<default>false</default>`	Sets whether this option is the default to false.
26	`<isActive>false</isActive>`	Sets is Active in the enclosing configuration to false.
27	`<label>Present</label>`	Sets human-readable Salesforce UI label to Present.
28	`</value>`	Closes the value configuration block.
29	`</valueSetDefinition>`	Closes the valueSetDefinition configuration block.
30	`</valueSet>`	Closes the valueSet configuration block.
31	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Attendance__c/fields/Transport_Mode__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Transport_Mode__c.field-meta.xml. Label: Transport Mode. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 a22bdd48c84dc098258f5ff1a06183e33be670e9719498d289762c1dcf26f4ef

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Transport_Mode__c</fullName><label>Transport Mode</label><length>80</length><type>Text</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Attendance__c/fields/Travel_Amount__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Travel_Amount__c.field-meta.xml. Label: Total Travel Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 c000a683ca6892425e41e0752c4fea70e9187f92227cdd677d0663f223135e91

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Travel_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Travel_Amount__c.
4	`    <description>Salesforce-calculated travel reimbursement: odometer distance multiplied by the applicable per-kilometre rate.</description>`	Sets description in the enclosing configuration to Salesforce-calculated travel reimbursement: odometer distance multiplied by the applicable per-kilometre rate..
5	`    <formula>IF(OR(ISBLANK(Distance_Travelled_Km__c), ISBLANK(Travel_Rate_Per_Km__c)), 0, Distance_Travelled_Km__c * Travel_Rate_Per_Km__c)</formula>`	Sets formula expression evaluated by Salesforce to IF(OR(ISBLANK(Distance_Travelled_Km__c), ISBLANK(Travel_Rate_Per_Km__c)), 0, Distance_Travelled_Km__c * Travel_Rate_Per_Km__c).
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Total Travel Amount</label>`	Sets human-readable Salesforce UI label to Total Travel Amount.
8	`    <precision>16</precision><scale>2</scale><type>Currency</type>`	Opens the precision block; child elements specify its configuration.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Attendance__c/fields/Travel_Rate_Per_Km__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Travel_Rate_Per_Km__c.field-meta.xml. Label: Travel Rate Per KM. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

6 numbered source lines | SHA-256 422660e8cf7ffcb79b24793af130b836084fbbdd7610fe9d25a729afa836d45a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Travel_Rate_Per_Km__c</fullName>`	Sets API identifier used by metadata deployment and code references to Travel_Rate_Per_Km__c.
4	`    <label>Travel Rate Per KM</label>`	Sets human-readable Salesforce UI label to Travel Rate Per KM.
5	`    <precision>16</precision><scale>2</scale><type>Currency</type>`	Opens the precision block; child elements specify its configuration.
6	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Attendance__c/fields/Vehicle_Ownership__c.field-meta.xml

Salesforce metadata for Attendance__c/fields/Vehicle_Ownership__c.field-meta.xml. Label: Vehicle Ownership. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 88c783d3fc6ce6d658a46900f33d13edebd406a77c1707bb69606281774ed1c1

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Vehicle_Ownership__c</fullName><label>Vehicle Ownership</label><length>40</length><type>Text</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Attendance__c/listViews/All_Attendance.listView-meta.xml

Salesforce metadata for Attendance__c/listViews/All_Attendance.listView-meta.xml. Label: All Attendance. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 8665e500181b925cf370536552a59d4baa41cdda41989bb8e34372e65e06ab59

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Attendance</fullName>`	Sets API identifier used by metadata deployment and code references to All_Attendance.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Attendance_Date__c</columns>`	Sets columns in the enclosing configuration to Attendance_Date__c.
6	`    <columns>Sales_Representative__c</columns>`	Sets columns in the enclosing configuration to Sales_Representative__c.
7	`    <columns>Start_Odometer__c</columns>`	Sets columns in the enclosing configuration to Start_Odometer__c.
8	`    <columns>End_Odometer__c</columns>`	Sets columns in the enclosing configuration to End_Odometer__c.
9	`    <columns>Distance_Travelled_Km__c</columns>`	Sets columns in the enclosing configuration to Distance_Travelled_Km__c.
10	`    <columns>Status__c</columns>`	Sets columns in the enclosing configuration to Status__c.
11	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
12	`    <label>All Attendance</label>`	Sets human-readable Salesforce UI label to All Attendance.
13	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Attendance__c/validationRules/End_Odometer_Cannot_Be_Lower.validationRule-meta.xml

Salesforce metadata for Attendance__c/validationRules/End_Odometer_Cannot_Be_Lower.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 6545e59551d1c190f018ebf87cad1b7fbb0fe8688795599a7c34eebfd55c1a2a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>End_Odometer_Cannot_Be_Lower</fullName>`	Sets API identifier used by metadata deployment and code references to End_Odometer_Cannot_Be_Lower.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(NOT(ISBLANK(Start_Odometer__c)), NOT(ISBLANK(End_Odometer__c)), End_Odometer__c < Start_Odometer__c)</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(Start_Odometer__c)), NOT(ISBLANK(End_Odometer__c)), End_Odometer__c < Start_Odometer__c).
6	`    <errorDisplayField>End_Odometer__c</errorDisplayField>`	Sets error Display Field in the enclosing configuration to End_Odometer__c.
7	`    <errorMessage>End odometer cannot be lower than start odometer.</errorMessage>`	Sets message displayed when the rule fails to End odometer cannot be lower than start odometer..
8	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/Attendance__c/validationRules/End_Odometer_Must_Not_Be_Lower.validationRule-meta.xml

Salesforce metadata for Attendance__c/validationRules/End_Odometer_Must_Not_Be_Lower.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 9c19d3bc610de9d97e256cea42d85489179bde35ff584ab580e8c155fec62e7d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>End_Odometer_Must_Not_Be_Lower</fullName>`	Sets API identifier used by metadata deployment and code references to End_Odometer_Must_Not_Be_Lower.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <description>Prevents a negative travelled-distance calculation.</description>`	Sets description in the enclosing configuration to Prevents a negative travelled-distance calculation..
6	`    <errorConditionFormula>AND(NOT(ISBLANK(Start_Odometer__c)), NOT(ISBLANK(End_Odometer__c)), End_Odometer__c < Start_Odometer__c)</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(Start_Odometer__c)), NOT(ISBLANK(End_Odometer__c)), End_Odometer__c < Start_Odometer__c).
7	`    <errorDisplayField>End_Odometer__c</errorDisplayField>`	Sets error Display Field in the enclosing configuration to End_Odometer__c.
8	`    <errorMessage>End Odometer must be greater than or equal to Start Odometer.</errorMessage>`	Sets message displayed when the rule fails to End Odometer must be greater than or equal to Start Odometer..
9	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/Beat__c/Beat__c.object-meta.xml

Salesforce metadata for Beat__c/Beat__c.object-meta.xml. Label: Beat. Type: Default. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

167 numbered source lines | SHA-256 0c32dde566a61e1f2e17e660e7342ea385a0ea23e326aa8fca138cbb8b3b07c6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
4	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
5	`        <type>Default</type>`	Sets field/storage type to Default.
6	`    </actionOverrides>`	Closes the actionOverrides configuration block.
7	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
8	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
9	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
10	`        <type>Default</type>`	Sets field/storage type to Default.
11	`    </actionOverrides>`	Closes the actionOverrides configuration block.
12	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
13	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
14	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
15	`        <type>Default</type>`	Sets field/storage type to Default.
16	`    </actionOverrides>`	Closes the actionOverrides configuration block.
17	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
18	`        <actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.

Line	Source code	Explanation / reading note
19	`<type>Default</type>`	Sets field/storage type to Default.
20	`</actionOverrides>`	Closes the actionOverrides configuration block.
21	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
22	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
23	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
24	`<type>Default</type>`	Sets field/storage type to Default.
25	`</actionOverrides>`	Closes the actionOverrides configuration block.
26	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
27	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
28	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
29	`<type>Default</type>`	Sets field/storage type to Default.
30	`</actionOverrides>`	Closes the actionOverrides configuration block.
31	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
32	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
33	`<type>Default</type>`	Sets field/storage type to Default.
34	`</actionOverrides>`	Closes the actionOverrides configuration block.
35	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
36	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
37	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
38	`<type>Default</type>`	Sets field/storage type to Default.
39	`</actionOverrides>`	Closes the actionOverrides configuration block.
40	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.

Line	Source code	Explanation / reading note
41	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
42	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
43	`<type>Default</type>`	Sets field/storage type to Default.
44	`</actionOverrides>`	Closes the actionOverrides configuration block.
45	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
46	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
47	`<type>Default</type>`	Sets field/storage type to Default.
48	`</actionOverrides>`	Closes the actionOverrides configuration block.
49	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
50	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
51	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
52	`<type>Default</type>`	Sets field/storage type to Default.
53	`</actionOverrides>`	Closes the actionOverrides configuration block.
54	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
55	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
56	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
57	`<type>Default</type>`	Sets field/storage type to Default.
58	`</actionOverrides>`	Closes the actionOverrides configuration block.
59	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
60	`<actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
61	`<type>Default</type>`	Sets field/storage type to Default.
62	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
63	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
64	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
65	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
66	`        <type>Default</type>`	Sets field/storage type to Default.
67	`    </actionOverrides>`	Closes the actionOverrides configuration block.
68	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
69	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
70	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
71	`        <type>Default</type>`	Sets field/storage type to Default.
72	`    </actionOverrides>`	Closes the actionOverrides configuration block.
73	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
74	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
75	`        <type>Default</type>`	Sets field/storage type to Default.
76	`    </actionOverrides>`	Closes the actionOverrides configuration block.
77	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
78	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
79	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
80	`        <type>Default</type>`	Sets field/storage type to Default.
81	`    </actionOverrides>`	Closes the actionOverrides configuration block.
82	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
83	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
84	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.

Line	Source code	Explanation / reading note
85	`<type>Default</type>`	Sets field/storage type to Default.
86	`</actionOverrides>`	Closes the actionOverrides configuration block.
87	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
88	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
89	`<type>Default</type>`	Sets field/storage type to Default.
90	`</actionOverrides>`	Closes the actionOverrides configuration block.
91	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
92	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
93	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
94	`<type>Default</type>`	Sets field/storage type to Default.
95	`</actionOverrides>`	Closes the actionOverrides configuration block.
96	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
97	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
98	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
99	`<type>Default</type>`	Sets field/storage type to Default.
100	`</actionOverrides>`	Closes the actionOverrides configuration block.
101	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
102	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
103	`<type>Default</type>`	Sets field/storage type to Default.
104	`</actionOverrides>`	Closes the actionOverrides configuration block.
105	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
106	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.

Line	Source code	Explanation / reading note
107	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
108	`<type>Default</type>`	Sets field/storage type to Default.
109	`</actionOverrides>`	Closes the actionOverrides configuration block.
110	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
111	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
112	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
113	`<type>Default</type>`	Sets field/storage type to Default.
114	`</actionOverrides>`	Closes the actionOverrides configuration block.
115	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
116	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
117	`<type>Default</type>`	Sets field/storage type to Default.
118	`</actionOverrides>`	Closes the actionOverrides configuration block.
119	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
120	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
121	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
122	`<type>Default</type>`	Sets field/storage type to Default.
123	`</actionOverrides>`	Closes the actionOverrides configuration block.
124	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
125	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
126	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
127	`<type>Default</type>`	Sets field/storage type to Default.
128	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
129	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
130	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
131	`<type>Default</type>`	Sets field/storage type to Default.
132	`</actionOverrides>`	Closes the actionOverrides configuration block.
133	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
134	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
135	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
136	`<type>Default</type>`	Sets field/storage type to Default.
137	`</actionOverrides>`	Closes the actionOverrides configuration block.
138	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
139	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
140	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
141	`<type>Default</type>`	Sets field/storage type to Default.
142	`</actionOverrides>`	Closes the actionOverrides configuration block.
143	`<allowInChatterGroups>false</allowInChatterGroups>`	Sets allow In Chatter Groups in the enclosing configuration to false.
144	`<compactLayoutAssignment>SYSTEM</compactLayoutAssignment>`	Sets compact Layout Assignment in the enclosing configuration to SYSTEM.
145	`<deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
146	`<description>Fixed route of retailers assigned to a sales representative.</description>`	Sets description in the enclosing configuration to Fixed route of retailers assigned to a sales representative..
147	`<enableActivities>false</enableActivities>`	Sets enable Activities in the enclosing configuration to false.
148	`<enableBulkApi>true</enableBulkApi>`	Sets enable Bulk Api in the enclosing configuration to true.
149	`<enableFeeds>false</enableFeeds>`	Sets enable Feeds in the enclosing configuration to false.

Line	Source code	Explanation / reading note
150	`    <enableHistory>true</enableHistory>`	Sets enable History in the enclosing configuration to true.
151	`    <enableLicensing>false</enableLicensing>`	Sets enable Licensing in the enclosing configuration to false.
152	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
153	`    <enableSearch>true</enableSearch>`	Sets enable Search in the enclosing configuration to true.
154	`    <enableSharing>true</enableSharing>`	Sets enable Sharing in the enclosing configuration to true.
155	`    <enableStreamingApi>true</enableStreamingApi>`	Sets enable Streaming Api in the enclosing configuration to true.
156	`    <externalSharingModel>Private</externalSharingModel>`	Sets external Sharing Model in the enclosing configuration to Private.
157	`    <label>Beat</label>`	Sets human-readable Salesforce UI label to Beat.
158	`    <nameField>`	Opens the nameField block; child elements specify its configuration.
159	`        <label>Beat Name</label>`	Sets human-readable Salesforce UI label to Beat Name.
160	`        <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
161	`        <type>Text</type>`	Sets field/storage type to Text.
162	`    </nameField>`	Closes the nameField configuration block.
163	`    <pluralLabel>Beats</pluralLabel>`	Sets plural Label in the enclosing configuration to Beats.
164	`    <searchLayouts></searchLayouts>`	Sets search Layouts in the enclosing configuration to .
165	`    <sharingModel>ReadWrite</sharingModel>`	Sets record sharing baseline to ReadWrite.
166	`    <visibility>Public</visibility>`	Sets visibility in the enclosing configuration to Public.
167	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Beat__c/fields/Active__c.field-meta.xml

Salesforce metadata for Beat__c/fields/Active__c.field-meta.xml. Label: Active. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 d51fccf84f7c172d6677ceaca3da42a7c4fd9999169cd005749aaf59761bb11f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Active__c</fullName>`	Sets API identifier used by metadata deployment and code references to Active__c.
4	`    <defaultValue>true</defaultValue>`	Sets initial value expression to true.
5	`    <label>Active</label>`	Sets human-readable Salesforce UI label to Active.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>Checkbox</type>`	Sets field/storage type to Checkbox.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Beat__c/fields/Assigned_Employee__c.field-meta.xml

Salesforce metadata for Beat__c/fields/Assigned_Employee__c.field-meta.xml. Label: Beat Assigned To. Type: Lookup. Relationship target: Employee__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 515dfecd314a3e495faba61d29182a5b8245169305a314f7bf540a367467bb9b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Assigned_Employee__c</fullName>`	Sets API identifier used by metadata deployment and code references to Assigned_Employee__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Beat Assigned To</label>`	Sets human-readable Salesforce UI label to Beat Assigned To.
6	`    <referenceTo>Employee__c</referenceTo>`	Sets object referenced by this relationship to Employee__c.
7	`    <relationshipLabel>Assigned Beats</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Assigned Beats.
8	`    <relationshipName>Assigned_Beats</relationshipName>`	Sets relationship API traversal name to Assigned_Beats.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Beat__c/fields/Beat_ID__c.field-meta.xml

Salesforce metadata for Beat__c/fields/Beat_ID__c.field-meta.xml. Label: Beat ID. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 32b3deb2cdf35811b6c5e5966bc6072ae8476fc50ad9e383b0ca11e9de37fe1e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Beat_ID__c</fullName>`	Sets API identifier used by metadata deployment and code references to Beat_ID__c.
4	`    <displayFormat>BEAT-{0000}</displayFormat>`	Sets display Format in the enclosing configuration to BEAT-{0000}.
5	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
6	`    <label>Beat ID</label>`	Sets human-readable Salesforce UI label to Beat ID.
7	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>AutoNumber</type>`	Sets field/storage type to AutoNumber.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Beat__c/fields/Distributor__c.field-meta.xml

Salesforce metadata for Beat__c/fields/Distributor__c.field-meta.xml. Label: Sales Representative. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 ed0c9f9926f08324820e85e8ed55147fbf4ae59248020af254331f862ca30d6d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Distributor__c</fullName>`	Sets API identifier used by metadata deployment and code references to Distributor__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Sales Representative</label>`	Sets human-readable Salesforce UI label to Sales Representative.
6	`    <length>150</length>`	Sets maximum text length to 150.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Text</type>`	Sets field/storage type to Text.
11	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Beat__c/fields/Geography__c.field-meta.xml

Salesforce metadata for Beat__c/fields/Geography__c.field-meta.xml. Label: Geography. Type: Lookup. Relationship target: Geography__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 8c6f4bb0592bccdf4cf5ca1f62bf3c20a6ad9648a8fd222a61aa2e29a6e751a6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Geography__c</fullName>`	Sets API identifier used by metadata deployment and code references to Geography__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Geography</label>`	Sets human-readable Salesforce UI label to Geography.
6	`    <referenceTo>Geography__c</referenceTo>`	Sets object referenced by this relationship to Geography__c.
7	`    <relationshipLabel>Beats</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Beats.
8	`    <relationshipName>Beats</relationshipName>`	Sets relationship API traversal name to Beats.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Beat__c/fields/Outlet_Count__c.field-meta.xml

Salesforce metadata for Beat__c/fields/Outlet_Count__c.field-meta.xml. Label: Outlet Count. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

14 numbered source lines | SHA-256 b71a4baefcac313f5037f062be19ec3a41fa40a2da933f5ffcb2a7ad2863297c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Outlet_Count__c</fullName>`	Sets API identifier used by metadata deployment and code references to Outlet_Count__c.
4	`    <defaultValue>0</defaultValue>`	Sets initial value expression to 0.
5	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
6	`    <label>Outlet Count</label>`	Sets human-readable Salesforce UI label to Outlet Count.
7	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <scale>0</scale>`	Sets decimal places to 0.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Number</type>`	Sets field/storage type to Number.
13	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
14	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Beat__c/fields/Outlet_Names__c.field-meta.xml

Salesforce metadata for Beat__c/fields/Outlet_Names__c.field-meta.xml. Label: Outlet Names. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 1a91b184a9a92482bb501dca3f2f3145079fef207b7279e080aab70d84465a62

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Outlet_Names__c</fullName>`	Sets API identifier used by metadata deployment and code references to Outlet_Names__c.
4	`    <description>Readable names of the outlets currently assigned to this Beat. Maintained automatically.</description>`	Sets description in the enclosing configuration to Readable names of the outlets currently assigned to this Beat. Maintained automatically..
5	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
6	`    <label>Outlet Names</label>`	Sets human-readable Salesforce UI label to Outlet Names.
7	`    <length>255</length>`	Sets maximum text length to 255.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Text</type>`	Sets field/storage type to Text.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Beat__c/fields/Sales_Representative__c.field-meta.xml

Salesforce metadata for Beat__c/fields/Sales_Representative__c.field-meta.xml. Label: Sales Representative. Type: Lookup. Relationship target: User. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 7bd94f8d71a1377ab9280d67c091097f72a2c42e0f2ca3491da7370bfbfe7141

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Sales_Representative__c</fullName>`	Sets API identifier used by metadata deployment and code references to Sales_Representative__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Sales Representative</label>`	Sets human-readable Salesforce UI label to Sales Representative.
6	`    <referenceTo>User</referenceTo>`	Sets object referenced by this relationship to User.
7	`    <relationshipLabel>Assigned Beats</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Assigned Beats.
8	`    <relationshipName>Assigned_Beats</relationshipName>`	Sets relationship API traversal name to Assigned_Beats.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Beat__c/listViews/All_Beats.listView-meta.xml

Salesforce metadata for Beat__c/listViews/All_Beats.listView-meta.xml. Label: All Beats. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 363399eb2682a9f47bb2863ffabb763d9efe006d5b357705ff769375cac8ded5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Beats</fullName>`	Sets API identifier used by metadata deployment and code references to All_Beats.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Beat_ID__c</columns>`	Sets columns in the enclosing configuration to Beat_ID__c.
6	`    <columns>Assigned_Employee__c</columns>`	Sets columns in the enclosing configuration to Assigned_Employee__c.
7	`    <columns>Geography__c</columns>`	Sets columns in the enclosing configuration to Geography__c.
8	`    <columns>Outlet_Names__c</columns>`	Sets columns in the enclosing configuration to Outlet_Names__c.
9	`    <columns>Active__c</columns>`	Sets columns in the enclosing configuration to Active__c.
10	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
11	`    <label>All Beats</label>`	Sets human-readable Salesforce UI label to All Beats.
12	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Beat__c/validationRules/Active_Beat_Requires_Employee.validationRule-meta.xml

Salesforce metadata for Beat__c/validationRules/Active_Beat_Requires_Employee.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 208742a87e186fac11e81fdc4d267b86224ac6b8d1b6cc6f70a9dd8548bc9f54

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Active_Beat_Requires_Employee</fullName>`	Sets API identifier used by metadata deployment and code references to Active_Beat_Requires_Employee.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(Active__c, ISBLANK(Assigned_Employee__c))</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(Active__c, ISBLANK(Assigned_Employee__c)).
6	`    <errorDisplayField>Assigned_Employee__c</errorDisplayField>`	Sets error Display Field in the enclosing configuration to Assigned_Employee__c.
7	`    <errorMessage>An active Beat must have an assigned employee.</errorMessage>`	Sets message displayed when the rule fails to An active Beat must have an assigned employee..
8	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/Competitor_Activity__c/Competitor_Activity__c.object-meta.xml

Salesforce metadata for Competitor_Activity__c/Competitor_Activity__c.object-meta.xml. Label: Competitor Activity. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 3412c2a530a2f4631ff54796b197f3b5a4d2b115ac70a08cc82586109fe80168

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus><description>Competitor pricing, schemes and evidence captured at an outlet.</description>`	Opens the deploymentStatus block; child elements specify its configuration.
4	`    <enableActivities>true</enableActivities><enableHistory>true</enableHistory><enableReports>true</enableReports><enableSearch>true</enableSearch>`	Opens the enableActivities block; child elements specify its configuration.
5	`    <label>Competitor Activity</label><pluralLabel>Competitor Activities</pluralLabel><sharingModel>ReadWrite</sharingModel>`	Opens the label block; child elements specify its configuration.
6	`    <nameField><displayFormat>CA-{00000}</displayFormat><label>Activity Number</label><type>AutoNumber</type></nameField>`	Sets name Field in the enclosing configuration to <displayFormat>CA-{00000}</displayFormat><label>Activity Number</label><type>AutoNumber</type>.
7	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Competitor_Activity__c/fields/Company__c.field-meta.xml

Salesforce metadata for Competitor_Activity__c/fields/Company__c.field-meta.xml. Label: Company. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 89a2a66fe03f144c5950cf4ba5ceeeffdc9ea6059919bc6ced8538c36b04d168

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Company__c</fullName><label>Company</label><length>120</length><type>Text</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Competitor_Activity__c/fields/Competitor_Name__c.field-meta.xml

Salesforce metadata for Competitor_Activity__c/fields/Competitor_Name__c.field-meta.xml. Label: Competitor Name. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 65a08136d4d781682902f6a75a497d043c7a7543c542db9a490955d2a62006ec

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Competitor_Name__c</fullName><label>Competitor Name</label><length>120</length><required>true</required><type>Text</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Competitor_Activity__c/fields/Image_URL__c.field-meta.xml

Salesforce metadata for Competitor_Activity__c/fields/Image_URL__c.field-meta.xml. Label: Image URL. Type: Url. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 bfca5b1c1430057a15f5553839bb9564c85b0852d1859bfbd785982cc0841a36

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Image_URL__c</fullName><label>Image URL</label><type>Url</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Competitor_Activity__c/fields/MRP__c.field-meta.xml

Salesforce metadata for Competitor_Activity__c/fields/MRP__c.field-meta.xml. Label: MRP. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 bd7768ad0b66b70d0aec50d618ab1196e9a85f6d4e4d8a3ec0fe83c91bbbbcc7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>MRP__c</fullName><label>MRP</label><precision>16</precision><scale>2</scale><type>Currency</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Competitor_Activity__c/fields/Mobile_Request_Key__c.field-meta.xml

Salesforce metadata for Competitor_Activity__c/fields/Mobile_Request_Key__c.field-meta.xml. Label: Mobile Request Key. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 b6b2d4cbefd91ed82aaf2e4d6e9fceb5bd820fb8c44d3ed95161c16674ea6025

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Mobile_Request_Key__c</fullName>`	Sets API identifier used by metadata deployment and code references to Mobile_Request_Key__c.
4	`    <caseSensitive>true</caseSensitive>`	Sets case Sensitive in the enclosing configuration to true.
5	`    <externalId>true</externalId>`	Sets whether the field is eligible for external-key matching to true.
6	`    <label>Mobile Request Key</label>`	Sets human-readable Salesforce UI label to Mobile Request Key.
7	`    <length>150</length>`	Sets maximum text length to 150.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>true</unique>`	Sets whether duplicate stored values are rejected to true.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Competitor_Activity__c/fields/Outlet__c.field-meta.xml

Salesforce metadata for Competitor_Activity__c/fields/Outlet__c.field-meta.xml. Label: Outlet. Type: Lookup. Relationship target: Retailer__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 280cbcd8a49d3ebe36e820c72252b8b6e8dbd75cd2efd5fa9322b7921a8c23d2

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Outlet__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Outlet</label><referenceTo>Retailer__c</referenceTo><relationshipLabel>Competitor Activities</relationshipLabel><relationshipName>Competitor_Activities</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Competitor_Activity__c/fields/RBP__c.field-meta.xml

Salesforce metadata for Competitor_Activity__c/fields/RBP__c.field-meta.xml. Label: RBP. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 a5788252ff1d5d51230d0d1020ba56a0344cda79f62ca8b9e6f621ee342cae15

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>RBP__c</fullName><label>RBP</label><precision>16</precision><scale>2</scale><type>Currency</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Competitor_Activity__c/fields/Scheme_Details__c.field-meta.xml

Salesforce metadata for Competitor_Activity__c/fields/Scheme_Details__c.field-meta.xml. Label: Scheme Details. Type: TextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 5c33aed14fb4f982b0f3349b6c4acd53bdbee63013cae423c37dd13aa2a55e7e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Scheme_Details__c</fullName><label>Scheme Details</label><type>TextArea</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Competitor_Activity__c/fields/Visit__c.field-meta.xml

Salesforce metadata for Competitor_Activity__c/fields/Visit__c.field-meta.xml. Label: Visit. Type: Lookup. Relationship target: Visit__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 b1a563109ebe396c4b5bd67b04347baf9048a51a6c63800002e5da179eec584d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Visit__c</fullName><deleteConstraint>SetNull</deleteConstraint><label>Visit</label><referenceTo>Visit__c</referenceTo><relationshipLabel>Competitor Activities</relationshipLabel><relationshipName>Competitor_Activities</relationshipName><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Competitor_Activity__c/listViews/All_Competitor_Activities.listView-meta.xml

Salesforce metadata for Competitor_Activity__c/listViews/All_Competitor_Activities.listView-meta.xml. Label: All Competitor Activities. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 f795d5d67b884210217fa84054a6af7f3a23bf259bda487a2ac7d008e5c2ec18

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><ListView xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>All_Competitor_Activities</fullName><columns>NAME</columns><columns>Competitor_Name__c</columns><columns>Company__c</columns><columns>MRP__c</columns><columns>RBP__c</columns><columns>Outlet__c</columns><filterScope>Everything</filterScope><label>All Competitor Activities</label></ListView>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/DMS_Allocation_State__c/DMS_Allocation_State__c.object-meta.xml

Salesforce metadata for DMS_Allocation_State__c/DMS_Allocation_State__c.object-meta.xml. Label: DMS Allocation State. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

4 numbered source lines | SHA-256 d42caa45efda93a3710dafb59e97cf50d583240d5e203fd43baa7f05fe8cae31

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`<deploymentStatus>Deployed</deploymentStatus><description>Internal locked singleton cursor for employee allocation. Do not reset during normal use.</description><label>DMS Allocation State</label><nameField><label>Allocation State Name</label><type>Text</type></nameField><pluralLabel>DMS Allocation States</pluralLabel><sharingModel>Private</sharingModel>`	Opens the deploymentStatus block; child elements specify its configuration.
4	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/DMS_Allocation_State__c/fields/Allocation_Key__c.field-meta.xml

Salesforce metadata for DMS_Allocation_State__c/fields/Allocation_Key__c.field-meta.xml. Label: Allocation Key. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 917009355b7bce868e3a2d0e0ef067bce96f9100ea53578a25ece65bb3806b1a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Allocation_Key__c</fullName><caseSensitive>false</caseSensitive><externalId>true</externalId><label>Allocation Key</label><length>80</length><required>true</required><type>Text</type><unique>true</unique></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Allocation_Key__c</fullName><caseSensitive>false</caseSensitive><externalId>true</externalId><label>Allocation Key</label><length>80</length><required>true</required><type>Text</type><unique.

force-app/main/default/objects/DMS_Allocation_State__c/fields/Last_Allocated_Order__c.field-meta.xml

Salesforce metadata for DMS_Allocation_State__c/fields/Last_Allocated_Order__c.field-meta.xml. Label: Last Allocated Order. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 ee193d12052a9d22c2d95457b60dc13c510e91bdad09c6c2a04cae0acc66d623

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Last_Allocated_Order__c</fullName><defaultValue>0</defaultValue><label>Last Allocated Order</label><precision>3</precision><required>true</required><scale>0</scale><type>Number</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Last_Allocated_Order__c</fullName><defaultValue>0</defaultValue><label>Last Allocated Order</label><precision>3</precision><required>true</required><scale>0</scale><type>Number</type>.

force-app/main/default/objects/DMS_Credit_Note_Line__c/DMS_Credit_Note_Line__c.object-meta.xml

Salesforce metadata for DMS_Credit_Note_Line__c/DMS_Credit_Note_Line__c.object-meta.xml. Label: Credit Note Line. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 8d4e31f768d615a5b9a32b66f0ad47fc6c1f3b094a2a21d3af582923f7644097

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
4	`    <description>Credit Note Line records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled.</description>`	Sets description in the enclosing configuration to Credit Note Line records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled..
5	`    <enableActivities>true</enableActivities>`	Sets enable Activities in the enclosing configuration to true.
6	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
7	`    <label>Credit Note Line</label>`	Sets human-readable Salesforce UI label to Credit Note Line.
8	`    <nameField><displayFormat>CNL-{000000}</displayFormat><label>Credit Note Line Number</label><type>AutoNumber</type></nameField>`	Sets name Field in the enclosing configuration to <displayFormat>CNL-{000000}</displayFormat><label>Credit Note Line Number</label><type>AutoNumber</type>.
9	`    <pluralLabel>Credit Note Lines</pluralLabel>`	Sets plural Label in the enclosing configuration to Credit Note Lines.
10	`    <sharingModel>ControlledByParent</sharingModel>`	Sets record sharing baseline to ControlledByParent.
11	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/DMS_Credit_Note_Line__c/fields/Credit_Note__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note_Line__c/fields/Credit_Note__c.field-meta.xml. Label: Credit Note. Type: MasterDetail. Relationship target: DMS_Credit_Note__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 d823ebfc322d32aaab1aebb79df617ef516d79a4b4c11cd9b244535ca91a3f93

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Credit_Note__c</fullName>`	Sets API identifier used by metadata deployment and code references to Credit_Note__c.
4	`    <description>Credit Note. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Credit Note. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Credit Note</label>`	Sets human-readable Salesforce UI label to Credit Note.
6	`    <referenceTo>DMS_Credit_Note__c</referenceTo>`	Sets object referenced by this relationship to DMS_Credit_Note__c.
7	`    <relationshipLabel>Credit Lines</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Credit Lines.
8	`    <relationshipName>Credit_Lines</relationshipName>`	Sets relationship API traversal name to Credit_Lines.
9	`    <relationshipOrder>0</relationshipOrder>`	Sets relationship Order in the enclosing configuration to 0.
10	`    <reparentableMasterDetail>false</reparentableMasterDetail>`	Sets reparentable Master Detail in the enclosing configuration to false.
11	`    <type>MasterDetail</type>`	Sets field/storage type to MasterDetail.
12	`    <writeRequiresMasterRead>false</writeRequiresMasterRead>`	Sets write Requires Master Read in the enclosing configuration to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note_Line__c/fields/Description__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note_Line__c/fields/Description__c.field-meta.xml. Label: Description. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 177ba6444214f2334a2a399de8216b6bfedfbaed476763c1cd8eed3f73402eaa

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Description__c</fullName>`	Sets API identifier used by metadata deployment and code references to Description__c.
4	`    <description>Description. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Description. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Description</label>`	Sets human-readable Salesforce UI label to Description.
6	`    <length>255</length>`	Sets maximum text length to 255.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note_Line__c/fields/Invoice_Line__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note_Line__c/fields/Invoice_Line__c.field-meta.xml. Label: Original Invoice Line. Type: Lookup. Relationship target: DMS_Invoice_Line__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 3918261ea1b2b316f5cd771a7d98f886af3d59839aaa8fe928b9f09b7d25e98d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Invoice_Line__c</fullName>`	Sets API identifier used by metadata deployment and code references to Invoice_Line__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Original Invoice Line. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Original Invoice Line. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Original Invoice Line</label>`	Sets human-readable Salesforce UI label to Original Invoice Line.
7	`    <referenceTo>DMS_Invoice_Line__c</referenceTo>`	Sets object referenced by this relationship to DMS_Invoice_Line__c.
8	`    <relationshipLabel>Credit Lines</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Credit Lines.
9	`    <relationshipName>Credit_Lines</relationshipName>`	Sets relationship API traversal name to Credit_Lines.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note_Line__c/fields/Net_Amount__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note_Line__c/fields/Net_Amount__c.field-meta.xml. Label: Net Credit. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 190afc7c17f09d2d64d365c82d86a5aeb5ae978d2438fc732ac988151d8a137e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Net_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Net_Amount__c.
4	`    <description>Net Credit. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Net Credit. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>ROUND(Quantity__c * Unit_Credit__c, 2)</formula>`	Sets formula expression evaluated by Salesforce to ROUND(Quantity__c * Unit_Credit__c, 2).
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Net Credit</label>`	Sets human-readable Salesforce UI label to Net Credit.
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <scale>2</scale>`	Sets decimal places to 2.
10	`    <type>Currency</type>`	Sets field/storage type to Currency.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note_Line__c/fields/Product__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note_Line__c/fields/Product__c.field-meta.xml. Label: Product. Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 e37cd0fc462996db3061762f5e02533a180f1b6b28b21e95640e2f1bda33d3d8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Product__c</fullName>`	Sets API identifier used by metadata deployment and code references to Product__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Product. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Product. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Product</label>`	Sets human-readable Salesforce UI label to Product.
7	`    <referenceTo>Product__c</referenceTo>`	Sets object referenced by this relationship to Product__c.
8	`    <relationshipLabel>DMS Credit Lines</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Credit Lines.
9	`    <relationshipName>DMS_Credit_Lines</relationshipName>`	Sets relationship API traversal name to DMS_Credit_Lines.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note_Line__c/fields/Quantity_Unit__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note_Line__c/fields/Quantity_Unit__c.field-meta.xml. Label: Quantity Unit. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

17 numbered source lines | SHA-256 cef22fab4b5c40daae3f5a8862302cb15bee16cc8b217f4b055a35212dfa6c1f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Quantity_Unit__c</fullName>`	Sets API identifier used by metadata deployment and code references to Quantity_Unit__c.
4	`    <description>Quantity Unit. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Quantity Unit. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Quantity Unit</label>`	Sets human-readable Salesforce UI label to Quantity Unit.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value><fullName>Case</fullName><default>true</default><label>Case</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Case</fullName><default>true</default><label>Case</label>.
13	`            <value><fullName>Piece</fullName><default>false</default><label>Piece</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Piece</fullName><default>false</default><label>Piece</label>.
14	`            <value><fullName>Adjustment</fullName><default>false</default><label>Adjustment</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Adjustment</fullName><default>false</default><label>Adjustment</label>.
15	`        </valueSetDefinition>`	Closes the valueSetDefinition configuration block.
16	`    </valueSet>`	Closes the valueSet configuration block.

Line	Source code	Explanation / reading note
17	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note_Line__c/fields/Quantity__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note_Line__c/fields/Quantity__c.field-meta.xml. Label: Quantity. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 e3c08ee5a7559eb68f3c9b6dc5673239e690c83c32cf19ed63a93f36686950c2

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Quantity__c</fullName>`	Sets API identifier used by metadata deployment and code references to Quantity__c.
4	`    <description>Quantity. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Quantity. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Quantity</label>`	Sets human-readable Salesforce UI label to Quantity.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note_Line__c/fields/Tax_Amount__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note_Line__c/fields/Tax_Amount__c.field-meta.xml. Label: Tax Credit. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 0dbb5ef1795434dfbbee0b142482b44cd0780d5c8803ae1aef6e0ccc7d284748

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Tax_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Tax_Amount__c.
4	`    <description>Tax Credit. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Tax Credit. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>ROUND(Net_Amount__c * BLANKVALUE(Tax_Percent__c, 0) / 100, 2)</formula>`	Sets formula expression evaluated by Salesforce to ROUND(Net_Amount__c * BLANKVALUE(Tax_Percent__c, 0) / 100, 2).
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Tax Credit</label>`	Sets human-readable Salesforce UI label to Tax Credit.
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <scale>2</scale>`	Sets decimal places to 2.
10	`    <type>Currency</type>`	Sets field/storage type to Currency.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note_Line__c/fields/Tax_Percent__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note_Line__c/fields/Tax_Percent__c.field-meta.xml. Label: Tax Percent. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 1da70f9b40e71ebc8de6f7d58d6d2324d7f3140d0dc053a41975b9c0a27df994

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Tax_Percent__c</fullName>`	Sets API identifier used by metadata deployment and code references to Tax_Percent__c.
4	`    <description>Tax Percent. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Tax Percent. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Tax Percent</label>`	Sets human-readable Salesforce UI label to Tax Percent.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>2</scale>`	Sets decimal places to 2.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note_Line__c/fields/Total_Amount__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note_Line__c/fields/Total_Amount__c.field-meta.xml. Label: Total Credit. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 48f218a8c8b14f1d905c233432aafe49cc216338b3fa6aa9d5c1e6320bb11fab

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Total_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Total_Amount__c.
4	`    <description>Total Credit. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Total Credit. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>Net_Amount__c + Tax_Amount__c</formula>`	Sets formula expression evaluated by Salesforce to Net_Amount__c + Tax_Amount__c.
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Total Credit</label>`	Sets human-readable Salesforce UI label to Total Credit.
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <scale>2</scale>`	Sets decimal places to 2.
10	`    <type>Currency</type>`	Sets field/storage type to Currency.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note_Line__c/fields/Unit_Credit__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note_Line__c/fields/Unit_Credit__c.field-meta.xml. Label: Credit Per Unit. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 6eda86d5a59db2d68bca63218156bdc5d01cadcccbfda9519d3e79faf8ab04bb

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Unit_Credit__c</fullName>`	Sets API identifier used by metadata deployment and code references to Unit_Credit__c.
4	`    <description>Credit Per Unit. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Credit Per Unit. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Credit Per Unit</label>`	Sets human-readable Salesforce UI label to Credit Per Unit.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>2</scale>`	Sets decimal places to 2.
9	`    <type>Currency</type>`	Sets field/storage type to Currency.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note_Line__c/listViews/All_Records.listView-meta.xml

Salesforce metadata for DMS_Credit_Note_Line__c/listViews/All_Records.listView-meta.xml. Label: All Credit Note Lines. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 b16d1e3123888e0a5caea869b40810346cabcbd35f73eb60ea1dada03394896e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Records</fullName>`	Sets API identifier used by metadata deployment and code references to All_Records.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Product__c</columns>`	Sets columns in the enclosing configuration to Product__c.
6	`    <columns>Total_Amount__c</columns>`	Sets columns in the enclosing configuration to Total_Amount__c.
7	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
8	`    <label>All Credit Note Lines</label>`	Sets human-readable Salesforce UI label to All Credit Note Lines.
9	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/DMS_Credit_Note_Line__c/validationRules/Credit_Amounts_Valid.validationRule-meta.xml

Salesforce metadata for DMS_Credit_Note_Line__c/validationRules/Credit_Amounts_Valid.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 aa7eecc4d544f43c887f552169254f55bb2d37b71cfdadceba82b11a701bc4c0

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Credit_Amounts_Valid</fullName>`	Sets API identifier used by metadata deployment and code references to Credit_Amounts_Valid.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>OR(ISBLANK(Quantity__c), Quantity__c <= 0, ISBLANK(Unit_Credit__c), Unit_Credit__c < 0, Tax_Percent__c < 0, Tax_Percent__c > 100)</errorConditionFormula>`	Sets condition that makes this validation rule fail to OR(ISBLANK(Quantity__c), Quantity__c <= 0, ISBLANK(Unit_Credit__c), Unit_Credit__c < 0, Tax_Percent__c < 0, Tax_Percent__c > 100).
6	`    <errorMessage>Enter a positive quantity, nonnegative unit credit and tax from zero to 100.</errorMessage>`	Sets message displayed when the rule fails to Enter a positive quantity, nonnegative unit credit and tax from zero to 100..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Credit_Note__c/DMS_Credit_Note__c.object-meta.xml

Salesforce metadata for DMS_Credit_Note__c/DMS_Credit_Note__c.object-meta.xml. Label: Credit Note. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 c9dabbfdb89fbed42c81ae50c610ca6654a7d8531145c2150f695ad563994065

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
4	`    <description>Credit Note records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled.</description>`	Sets description in the enclosing configuration to Credit Note records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled..
5	`    <enableActivities>true</enableActivities>`	Sets enable Activities in the enclosing configuration to true.
6	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
7	`    <label>Credit Note</label>`	Sets human-readable Salesforce UI label to Credit Note.
8	`    <nameField><displayFormat>CN-{000000}</displayFormat><label>Credit Note Number</label><type>AutoNumber</type></nameField>`	Sets name Field in the enclosing configuration to <displayFormat>CN-{000000}</displayFormat><label>Credit Note Number</label><type>AutoNumber</type>.
9	`    <pluralLabel>Credit Notes</pluralLabel>`	Sets plural Label in the enclosing configuration to Credit Notes.
10	`    <sharingModel>Private</sharingModel>`	Sets record sharing baseline to Private.
11	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/DMS_Credit_Note__c/fields/Credit_Date__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note__c/fields/Credit_Date__c.field-meta.xml. Label: Credit Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 53ba99988d652dc2fc81d7abef2d1537389958e50e4fec543b512f7425520237

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Credit_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Credit_Date__c.
4	`    <description>Credit Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Credit Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Credit Date</label>`	Sets human-readable Salesforce UI label to Credit Date.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note__c/fields/Distributor__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note__c/fields/Distributor__c.field-meta.xml. Label: DMS Distributor. Type: Lookup. Relationship target: DMS_Distributor__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 70056e338abcd68ebee5ffc28707cc1c5affa17c09802298a3c2ecbfd136a362

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Distributor__c</fullName>`	Sets API identifier used by metadata deployment and code references to Distributor__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>DMS Distributor. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to DMS Distributor. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>DMS Distributor</label>`	Sets human-readable Salesforce UI label to DMS Distributor.
7	`    <referenceTo>DMS_Distributor__c</referenceTo>`	Sets object referenced by this relationship to DMS_Distributor__c.
8	`    <relationshipLabel>Credit Notes</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Credit Notes.
9	`    <relationshipName>Credit_Notes</relationshipName>`	Sets relationship API traversal name to Credit_Notes.
10	`    <required>true</required>`	Sets whether a value is mandatory to true.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note__c/fields/Invoice__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note__c/fields/Invoice__c.field-meta.xml. Label: Secondary Invoice. Type: Lookup. Relationship target: DMS_Invoice__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 4561dfc377ed4c6289b84dc76835cac3e0c090f5393337c1a2a28dfd719853ed

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Invoice__c</fullName>`	Sets API identifier used by metadata deployment and code references to Invoice__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Secondary Invoice. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Secondary Invoice. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Secondary Invoice</label>`	Sets human-readable Salesforce UI label to Secondary Invoice.
7	`    <referenceTo>DMS_Invoice__c</referenceTo>`	Sets object referenced by this relationship to DMS_Invoice__c.
8	`    <relationshipLabel>Credit Notes</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Credit Notes.
9	`    <relationshipName>Credit_Notes</relationshipName>`	Sets relationship API traversal name to Credit_Notes.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note__c/fields/Notes__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note__c/fields/Notes__c.field-meta.xml. Label: Notes. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 5602c0c76c49595c769bab38f74fa6fd0bdf1b12ba897c06c29e068fd2dc7d3b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Notes__c</fullName>`	Sets API identifier used by metadata deployment and code references to Notes__c.
4	`    <description>Notes. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Notes. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Notes</label>`	Sets human-readable Salesforce UI label to Notes.
6	`    <length>255</length>`	Sets maximum text length to 255.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note__c/fields/Outlet__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note__c/fields/Outlet__c.field-meta.xml. Label: Outlet. Type: Lookup. Relationship target: Retailer__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 0b782a1dba777198e0780d510113ea32785d1c741217306ad3fa78549c7428fa

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Outlet__c</fullName>`	Sets API identifier used by metadata deployment and code references to Outlet__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Outlet. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Outlet. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Outlet</label>`	Sets human-readable Salesforce UI label to Outlet.
7	`    <referenceTo>Retailer__c</referenceTo>`	Sets object referenced by this relationship to Retailer__c.
8	`    <relationshipLabel>DMS Credit Notes</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Credit Notes.
9	`    <relationshipName>DMS_Credit_Notes</relationshipName>`	Sets relationship API traversal name to DMS_Credit_Notes.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note__c/fields/Primary_Return__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note__c/fields/Primary_Return__c.field-meta.xml. Label: Primary Return. Type: Lookup. Relationship target: DMS_Primary_Return__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 d25c5a590bb8479af247d8f353c0a84315d0f47143b94dafcfc13efe16ad08df

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Primary_Return__c</fullName>`	Sets API identifier used by metadata deployment and code references to Primary_Return__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Primary Return. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Primary Return. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Primary Return</label>`	Sets human-readable Salesforce UI label to Primary Return.
7	`    <referenceTo>DMS_Primary_Return__c</referenceTo>`	Sets object referenced by this relationship to DMS_Primary_Return__c.
8	`    <relationshipLabel>Credit Notes</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Credit Notes.
9	`    <relationshipName>Credit_Notes</relationshipName>`	Sets relationship API traversal name to Credit_Notes.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note__c/fields/Reason__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note__c/fields/Reason__c.field-meta.xml. Label: Credit Reason. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

18 numbered source lines | SHA-256 d2196c185cd2b0630d04c51365f60dc12766950a0b7c4597da123216c49e46ed

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Reason__c</fullName>`	Sets API identifier used by metadata deployment and code references to Reason__c.
4	`    <description>Credit Reason. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Credit Reason. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Credit Reason</label>`	Sets human-readable Salesforce UI label to Credit Reason.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value><fullName>Return</fullName><default>true</default><label>Return</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Return</fullName><default>true</default><label>Return</label>.
13	`            <value><fullName>Scheme Claim</fullName><default>false</default><label>Scheme Claim</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Scheme Claim</fullName><default>false</default><label>Scheme Claim</label>.
14	`            <value><fullName>Price Correction</fullName><default>false</default><label>Price Correction</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Price Correction</fullName><default>false</default><label>Price Correction</label>.
15	`            <value><fullName>Other</fullName><default>false</default><label>Other</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Other</fullName><default>false</default><label>Other</label>.

Line	Source code	Explanation / reading note
16	`        </valueSetDefinition>`	Closes the valueSetDefinition configuration block.
17	`    </valueSet>`	Closes the valueSet configuration block.
18	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note__c/fields/Sales_Channel__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note__c/fields/Sales_Channel__c.field-meta.xml. Label: Sales Channel. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

16 numbered source lines | SHA-256 b5249b43ff0e3c262b6b4437cd194ba01078b0dc1619ee34a957345841b28512

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Sales_Channel__c</fullName>`	Sets API identifier used by metadata deployment and code references to Sales_Channel__c.
4	`    <description>Sales Channel. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Sales Channel. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Sales Channel</label>`	Sets human-readable Salesforce UI label to Sales Channel.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value><fullName>Primary</fullName><default>true</default><label>Primary</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Primary</fullName><default>true</default><label>Primary</label>.
13	`            <value><fullName>Secondary</fullName><default>false</default><label>Secondary</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Secondary</fullName><default>false</default><label>Secondary</label>.
14	`        </valueSetDefinition>`	Closes the valueSetDefinition configuration block.
15	`    </valueSet>`	Closes the valueSet configuration block.
16	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note__c/fields/Scheme__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note__c/fields/Scheme__c.field-meta.xml. Label: Scheme. Type: Lookup. Relationship target: Scheme__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 c68fb7a371e527bb318add96bf69ff5cc335f933bcd4a2cd0fd377f7a6e2ec93

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Scheme__c</fullName>`	Sets API identifier used by metadata deployment and code references to Scheme__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Scheme. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Scheme. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Scheme</label>`	Sets human-readable Salesforce UI label to Scheme.
7	`    <referenceTo>Scheme__c</referenceTo>`	Sets object referenced by this relationship to Scheme__c.
8	`    <relationshipLabel>DMS Credit Notes</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Credit Notes.
9	`    <relationshipName>DMS_Credit_Notes</relationshipName>`	Sets relationship API traversal name to DMS_Credit_Notes.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note__c/fields/Secondary_Return__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note__c/fields/Secondary_Return__c.field-meta.xml. Label: Secondary Return. Type: Lookup. Relationship target: Product_Return__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 158212c43faa7c38c008a2a4586f20e999468fa3ce61c363a8cbd4e229f6c93c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Secondary_Return__c</fullName>`	Sets API identifier used by metadata deployment and code references to Secondary_Return__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Secondary Return. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Secondary Return. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Secondary Return</label>`	Sets human-readable Salesforce UI label to Secondary Return.
7	`    <referenceTo>Product_Return__c</referenceTo>`	Sets object referenced by this relationship to Product_Return__c.
8	`    <relationshipLabel>DMS Credit Notes</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Credit Notes.
9	`    <relationshipName>DMS_Credit_Notes</relationshipName>`	Sets relationship API traversal name to DMS_Credit_Notes.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note__c/fields/Status__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note__c/fields/Status__c.field-meta.xml. Label: Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

17 numbered source lines | SHA-256 bef6cfa3c97b806134046e4df208590a24e81598de8ff3cfcd3514cb47872593

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Status__c</fullName>`	Sets API identifier used by metadata deployment and code references to Status__c.
4	`    <description>Status. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Status. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Status</label>`	Sets human-readable Salesforce UI label to Status.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value><fullName>Draft</fullName><default>true</default><label>Draft</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Draft</fullName><default>true</default><label>Draft</label>.
13	`            <value><fullName>Issued</fullName><default>false</default><label>Issued</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Issued</fullName><default>false</default><label>Issued</label>.
14	`            <value><fullName>Cancelled</fullName><default>false</default><label>Cancelled</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Cancelled</fullName><default>false</default><label>Cancelled</label>.
15	`        </valueSetDefinition>`	Closes the valueSetDefinition configuration block.
16	`    </valueSet>`	Closes the valueSet configuration block.

Line	Source code	Explanation / reading note
17	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note__c/fields/Total_Amount__c.field-meta.xml

Salesforce metadata for DMS_Credit_Note__c/fields/Total_Amount__c.field-meta.xml. Label: Total Credit Amount. Type: Summary. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 6618b4bcc97eead3cc2e9e3b315710e001116920fce24ccc229d12640fc479c1

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Total_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Total_Amount__c.
4	`    <description>Total Credit Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records.</description>`	Sets description in the enclosing configuration to Total Credit Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records..
5	`    <label>Total Credit Amount</label>`	Sets human-readable Salesforce UI label to Total Credit Amount.
6	`    <summarizedField>DMS_Credit_Note_Line__c.Total_Amount__c</summarizedField>`	Sets summarized Field in the enclosing configuration to DMS_Credit_Note_Line__c.Total_Amount__c.
7	`    <summaryForeignKey>DMS_Credit_Note_Line__c.Credit_Note__c</summaryForeignKey>`	Sets summary Foreign Key in the enclosing configuration to DMS_Credit_Note_Line__c.Credit_Note__c.
8	`    <summaryOperation>sum</summaryOperation>`	Sets summary Operation in the enclosing configuration to sum.
9	`    <type>Summary</type>`	Sets field/storage type to Summary.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Credit_Note__c/listViews/All_Records.listView-meta.xml

Salesforce metadata for DMS_Credit_Note__c/listViews/All_Records.listView-meta.xml. Label: All Credit Notes. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 5cbc9e3f34cf4f306a3f26a4bb111c5f4a9ca607e0307d97cea9b09e185560d5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Records</fullName>`	Sets API identifier used by metadata deployment and code references to All_Records.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Distributor__c</columns>`	Sets columns in the enclosing configuration to Distributor__c.
6	`    <columns>Status__c</columns>`	Sets columns in the enclosing configuration to Status__c.
7	`    <columns>Total_Amount__c</columns>`	Sets columns in the enclosing configuration to Total_Amount__c.
8	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
9	`    <label>All Credit Notes</label>`	Sets human-readable Salesforce UI label to All Credit Notes.
10	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/DMS_Credit_Note__c/validationRules/Credit_Channel_And_Recipient.validationRule-meta.xml

Salesforce metadata for DMS_Credit_Note__c/validationRules/Credit_Channel_And_Recipient.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 dc19aa22e98e281f24f526c631a32c53a83e9b0d8706bcf6d47b28006312a7be

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Credit_Channel_And_Recipient</fullName>`	Sets API identifier used by metadata deployment and code references to Credit_Channel_And_Recipient.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	` <errorConditionFormula>OR(AND(ISPICKVAL(Sales_Channel__c,'Secondary'), ISBLANK(Outlet__c)), AND(ISPICKVAL(Sales_Channel__c,'Primary'), OR(NOT(ISBLANK(Outlet__c)),NOT(ISBLANK(Secondary_Return__c)),NOT(ISBLANK(Invoice__c)))), AND(ISPICKVAL(Sales_Channel__c,'Secondary'), NOT(ISBLANK(Primary_Return__c))))</errorConditionFormula>`	Sets condition that makes this validation rule fail to OR(AND(ISPICKVAL(Sales_Channel__c,'Secondary'), ISBLANK(Outlet__c)), AND(ISPICKVAL(Sales_Channel__c,'Primary'), OR(NOT(ISBLANK(Outlet__c)),NOT(ISBLANK(Secondary_Return__c)),NOT(ISBLANK(Invoice__c)))),.
6	`    <errorMessage>Primary credits are for the distributor; secondary credits require an outlet and cannot reference a primary return.</errorMessage>`	Sets message displayed when the rule fails to Primary credits are for the distributor; secondary credits require an outlet and cannot reference a primary return..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Credit_Note__c/validationRules/Credit_Source_Matches.validationRule-meta.xml

Salesforce metadata for DMS_Credit_Note__c/validationRules/Credit_Source_Matches.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 6b7ed303f8be9ee1d77e790eb57fdc9804781c077ccc891c3bbcf00e00e4adee

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Credit_Source_Matches</fullName>`	Sets API identifier used by metadata deployment and code references to Credit_Source_Matches.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	` <errorConditionFormula>OR(AND(NOT(ISBLANK(Invoice__c)), OR(Distributor__c <> Invoice__r.Distributor__c, Outlet__c <> Invoice__r.Outlet__c)), AND(NOT(ISBLANK(Primary_Return__c)), Distributor__c <> Primary_Return__r.Distributor__c), AND(NOT(ISBLANK(Secondary_Return__c)), Outlet__c <> Secondary_Return__r.Outlet__c))</errorConditionFormula>`	Sets condition that makes this validation rule fail to OR(AND(NOT(ISBLANK(Invoice__c)), OR(Distributor__c <> Invoice__r.Distributor__c, Outlet__c <> Invoice__r.Outlet__c)), AND(NOT(ISBLANK(Primary_Return__c)), Distributor__c <> Primary_R.
6	`    <errorMessage>The source invoice or return must match the credit recipient.</errorMessage>`	Sets message displayed when the rule fails to The source invoice or return must match the credit recipient..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Distributor_Survey__c/DMS_Distributor_Survey__c.object-meta.xml

Salesforce metadata for DMS_Distributor_Survey__c/DMS_Distributor_Survey__c.object-meta.xml. Label: Distributor Survey. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 8e5cceae8b21d0505ef2f6aa914571202e40d81e02a0ea1a8e9a8d60d0347c83

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata"><deploymentStatus>Deployed</deploymentStatus><description>Company officer's monthly distributor product observations.</description><enableActivities>true</enableActivities><enableReports>true</enableReports><label>Distributor Survey</label><nameField><displayFormat>DS-{00000}</displayFormat><label>Survey Number</label><type>AutoNumber</type></nameField><pluralLabel>Distributor Surveys</pluralLabel><sharingModel>Private</sharingModel></CustomObject>`	Sets Custom Object in the enclosing configuration to <deploymentStatus>Deployed</deploymentStatus><description>Company officer's monthly distributor product observations.</description><enableActivities>true</enableActivities><enableReports>true</enableR.

force-app/main/default/objects/DMS_Distributor_Survey__c/fields/Demand_Notes__c.field-meta.xml

Salesforce metadata for DMS_Distributor_Survey__c/fields/Demand_Notes__c.field-meta.xml. Label: Product Movement and Demand. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 908160b27691428a5242d7f3d575ab6d1bf9ac87ee06afca9b90e649b011c490

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Demand_Notes__c</fullName><label>Product Movement and Demand</label><length>32000</length><type>LongTextArea</type><visibleLines>4</visibleLines></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Demand_Notes__c</fullName><label>Product Movement and Demand</label><length>32000</length><type>LongTextArea</type><visibleLines>4</visibleLines>.

force-app/main/default/objects/DMS_Distributor_Survey__c/fields/Distributor__c.field-meta.xml

Salesforce metadata for DMS_Distributor_Survey__c/fields/Distributor__c.field-meta.xml. Label: Distributor. Type: Lookup. Relationship target: DMS_Distributor__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 68e498752364e3f258629a229f27a0f3fd0128f6b4c107c2c24a724b2b295697

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><deleteConstraint>Restrict</deleteConstraint><fullName>Distributor__c</fullName><label>Distributor</label><referenceTo>DMS_Distributor__c</referenceTo><relationshipLabel>Monthly Product Surveys</relationshipLabel><relationshipName>Monthly_Product_Surveys</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <deleteConstraint>Restrict</deleteConstraint><fullName>Distributor__c</fullName><label>Distributor</label><referenceTo>DMS_Distributor__c</referenceTo><relationshipLabel>Monthly Product Surveys</relat.

force-app/main/default/objects/DMS_Distributor_Survey__c/fields/Movement__c.field-meta.xml

Salesforce metadata for DMS_Distributor_Survey__c/fields/Movement__c.field-meta.xml. Label: Product Movement. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 eef79609f9fa1a116351e7615796a77d183bd97acabb1710cd0c49ea501f6dea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Movement__c</fullName><label>Product Movement</label><required>true</required><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Fast Moving</fullName><default>false</default><label>Fast Moving</label></value><value><fullName>Normal</fullName><default>false</default><label>Normal</label></value><value><fullName>Slow Moving</fullName><default>false</default><label>Slow Moving</label></value><value><fullName>No Demand</fullName><default>false</default><label>No Demand</label></value></valueSetDefinition></valueSet></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Movement__c</fullName><label>Product Movement</label><required>true</required><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fu.

force-app/main/default/objects/DMS_Distributor_Survey__c/fields/Next_Visit_Due__c.field-meta.xml

Salesforce metadata for DMS_Distributor_Survey__c/fields/Next_Visit_Due__c.field-meta.xml. Label: Next Monthly Visit Due. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 d8111f692f1db7f3a286bd9d4f0c2fb58c75f8c5c52ae80b8ba286a6ca1cc515

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><formula>ADDMONTHS(Visit_Date__c,1)</formula><formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs><fullName>Next_Visit_Due__c</fullName><label>Next Monthly Visit Due</label><type>Date</type></CustomField>`	Sets Custom Field in the enclosing configuration to <formula>ADDMONTHS(Visit_Date__c,1)</formula><formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs><fullName>Next_Visit_Due__c</fullName><label>Next Monthly Visit Due</label><type>Date</type>.

force-app/main/default/objects/DMS_Distributor_Survey__c/fields/Officer__c.field-meta.xml

Salesforce metadata for DMS_Distributor_Survey__c/fields/Officer__c.field-meta.xml. Label: Surveying Company Officer. Type: Lookup. Relationship target: User. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 dd28e955ef7a1f3afbf39341ff2b62439332b2292584060a3e60650914872744

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><deleteConstraint>SetNull</deleteConstraint><fullName>Officer__c</fullName><label>Surveying Company Officer</label><referenceTo>User</referenceTo><relationshipLabel>Distributor Surveys</relationshipLabel><relationshipName>Distributor_Surveys</relationshipName><required>false</required><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <deleteConstraint>SetNull</deleteConstraint><fullName>Officer__c</fullName><label>Surveying Company Officer</label><referenceTo>User</referenceTo><relationshipLabel>Distributor Surveys</relationshipLa.

force-app/main/default/objects/DMS_Distributor_Survey__c/fields/Product__c.field-meta.xml

Salesforce metadata for DMS_Distributor_Survey__c/fields/Product__c.field-meta.xml. Label: Product. Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 612c4c1cd34d0c16df99d94a47616c90058cdfa6f090d0167aeb62abd17bf128

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><deleteConstraint>Restrict</deleteConstraint><fullName>Product__c</fullName><label>Product</label><referenceTo>Product__c</referenceTo><relationshipLabel>Distributor Surveys</relationshipLabel><relationshipName>Distributor_Surveys</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <deleteConstraint>Restrict</deleteConstraint><fullName>Product__c</fullName><label>Product</label><referenceTo>Product__c</referenceTo><relationshipLabel>Distributor Surveys</relationshipLabel><relati.

force-app/main/default/objects/DMS_Distributor_Survey__c/fields/Stock_Cases__c.field-meta.xml

Salesforce metadata for DMS_Distributor_Survey__c/fields/Stock_Cases__c.field-meta.xml. Label: Observed Stock (Cases). Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 30fac41be4b3a5d030150cd728cc89ab0f8fd148c4b98975dc056b1d92118605

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Stock_Cases__c</fullName><label>Observed Stock (Cases)</label><precision>12</precision><required>true</required><scale>0</scale><type>Number</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Stock_Cases__c</fullName><label>Observed Stock (Cases)</label><precision>12</precision><required>true</required><scale>0</scale><type>Number</type>.

force-app/main/default/objects/DMS_Distributor_Survey__c/fields/Visit_Date__c.field-meta.xml

Salesforce metadata for DMS_Distributor_Survey__c/fields/Visit_Date__c.field-meta.xml. Label: Visit Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 7aabd4095ada7e6bf50a376a0b45b24b7ff8f012f8cef78f1926350410e45db8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><defaultValue>TODAY()</defaultValue><fullName>Visit_Date__c</fullName><label>Visit Date</label><required>true</required><type>Date</type></CustomField>`	Sets Custom Field in the enclosing configuration to <defaultValue>TODAY()</defaultValue><fullName>Visit_Date__c</fullName><label>Visit Date</label><required>true</required><type>Date</type>.

force-app/main/default/objects/DMS_Distributor_Survey__c/listViews/All_Surveys.listView-meta.xml

Salesforce metadata for DMS_Distributor_Survey__c/listViews/All_Surveys.listView-meta.xml. Label: All Distributor Surveys. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 08b2f0a8cfc90553cb3f827057b5e226d72381b0acea9fc674438f1c120559ce

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>All_Surveys</fullName><columns>NAME</columns><columns>Distributor__c</columns><columns>Product__c</columns><columns>Officer__c</columns><columns>Visit_Date__c</columns><columns>Movement__c</columns><columns>Next_Visit_Due__c</columns><filterScope>Everything</filterScope><label>All Distributor Surveys</label></ListView>`	Sets List View in the enclosing configuration to <fullName>All_Surveys</fullName><columns>NAME</columns><columns>Distributor__c</columns><columns>Product__c</columns><columns>Officer__c</columns><columns>Visit_Date__c</columns><columns>Movement__c</.

force-app/main/default/objects/DMS_Distributor_Survey__c/validationRules/Valid_Visit.validationRule-meta.xml

Salesforce metadata for DMS_Distributor_Survey__c/validationRules/Valid_Visit.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 d3ff00afb2b1c9920abcfbb7aa31ceba3e0258a9f5f4ed2b6fdb3a8de5d09b64

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Valid_Visit</fullName><active>true</active><errorConditionFormula>OR(Visit_Date__c > TODAY(), Stock_Cases__c < 0, ISBLANK(Demand_Notes__c))</errorConditionFormula><errorMessage>Enter a current/past visit date, non-negative stock and product movement/demand notes.</errorMessage></ValidationRule>`	Sets Validation Rule in the enclosing configuration to <fullName>Valid_Visit</fullName><active>true</active><errorConditionFormula>OR(Visit_Date__c > TODAY(), Stock_Cases__c < 0, ISBLANK(Demand_Notes__c))</errorConditionFormula><errorMessage>Enter a.

force-app/main/default/objects/DMS_Distributor__c/DMS_Distributor__c.object-meta.xml

Salesforce metadata for DMS_Distributor__c/DMS_Distributor__c.object-meta.xml. Label: DMS Distributor. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 a1246aabad08db9fff72b284e333ff186dfc95449dcb0d4291060a2b71c7eccc

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata"><deploymentStatus>Deployed</deploymentStatus><enableActivities>true</enableActivities><enableReports>true</enableReports><label>DMS Distributor</label><nameField><label>Distributor Name</label><type>Text</type></nameField><pluralLabel>DMS Distributors</pluralLabel><sharingModel>Private</sharingModel></CustomObject>`	Sets Custom Object in the enclosing configuration to <deploymentStatus>Deployed</deploymentStatus><enableActivities>true</enableActivities><enableReports>true</enableReports><label>DMS Distributor</label><nameField><label>Distributor Name</label><type>T.

force-app/main/default/objects/DMS_Distributor__c/fields/Active__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/Active__c.field-meta.xml. Label: Active. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 9d9eeab927b8476d1b7877f717294f38fe150fd9cc0255ff501a7053072fcca5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Active__c</fullName><label>Active</label><defaultValue>false</defaultValue><type>Checkbox</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Active__c</fullName><label>Active</label><defaultValue>false</defaultValue><type>Checkbox</type>.

force-app/main/default/objects/DMS_Distributor__c/fields/Address__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/Address__c.field-meta.xml. Label: Address. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 407bcabc588bef5e3e19db8adcdeabf2b98e29c6066a19506591f3284bf7e7bb

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Address__c</fullName><label>Address</label><length>255</length><type>Text</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Address__c</fullName><label>Address</label><length>255</length><type>Text</type>.

force-app/main/default/objects/DMS_Distributor__c/fields/Assigned_Employee__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/Assigned_Employee__c.field-meta.xml. Label: Assigned Employee. Type: Lookup. Relationship target: Employee__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 ee077fdbf79b6ad12f7cb494fb1dca0c1de926bfe42c73272bf13fe56b0f2705

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Assigned_Employee__c</fullName>`	Sets API identifier used by metadata deployment and code references to Assigned_Employee__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Assigned Employee. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Assigned Employee. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Assigned Employee</label>`	Sets human-readable Salesforce UI label to Assigned Employee.
7	`    <referenceTo>Employee__c</referenceTo>`	Sets object referenced by this relationship to Employee__c.
8	`    <relationshipLabel>DMS Distributors</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Distributors.
9	`    <relationshipName>DMS_Distributors</relationshipName>`	Sets relationship API traversal name to DMS_Distributors.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Distributor__c/fields/Credit_Limit__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/Credit_Limit__c.field-meta.xml. Label: Credit Limit. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 b41ea6f755a5d313623d99b363063672bc7b1f38ba776a70911f67bbf8eca13c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Credit_Limit__c</fullName>`	Sets API identifier used by metadata deployment and code references to Credit_Limit__c.
4	`    <description>Credit Limit. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Credit Limit. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Credit Limit</label>`	Sets human-readable Salesforce UI label to Credit Limit.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>2</scale>`	Sets decimal places to 2.
9	`    <type>Currency</type>`	Sets field/storage type to Currency.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Distributor__c/fields/Discontinued__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/Discontinued__c.field-meta.xml. Label: Discontinued. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 26db8f91366c76a520804486353ed0cb8b31ca5a88af5eed9be4cd741dc7e846

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Discontinued__c</fullName>`	Sets API identifier used by metadata deployment and code references to Discontinued__c.
4	`    <defaultValue>false</defaultValue>`	Sets initial value expression to false.
5	`    <description>Marks a distributor as discontinued without deleting its history. Saving this checkbox clears Active and prevents DMS access through existing active-distributor checks.</description>`	Sets description in the enclosing configuration to Marks a distributor as discontinued without deleting its history. Saving this checkbox clears Active and prevents DMS access through existing active-distributor checks..
6	`    <inlineHelpText>Select and save to discontinue this distributor. To reactivate, clear Discontinued and explicitly select Active.</inlineHelpText>`	Sets inline Help Text in the enclosing configuration to Select and save to discontinue this distributor. To reactivate, clear Discontinued and explicitly select Active..
7	`    <label>Discontinued</label>`	Sets human-readable Salesforce UI label to Discontinued.
8	`    <type>Checkbox</type>`	Sets field/storage type to Checkbox.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Distributor__c/fields/Distributor_Code__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/Distributor_Code__c.field-meta.xml. Label: Distributor Code. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 c573346beb3f4128c3661bff6cce33fbec8a94d7217f29fcae412a5d3b18d8ab

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Distributor_Code__c</fullName>`	Sets API identifier used by metadata deployment and code references to Distributor_Code__c.
4	`    <description>Distributor Code. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Distributor Code. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Distributor Code</label>`	Sets human-readable Salesforce UI label to Distributor Code.
6	`    <length>40</length>`	Sets maximum text length to 40.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Distributor__c/fields/Distributor_Status__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/Distributor_Status__c.field-meta.xml. Label: Distributor Status. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 cf917307c626a20ed26cd1d7ad4148e09907fbe30e78d48892348f70b250d39e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Distributor_Status__c</fullName>`	Sets API identifier used by metadata deployment and code references to Distributor_Status__c.
4	`    <description>Read-only lifecycle message based on the Discontinued and Active fields.</description>`	Sets description in the enclosing configuration to Read-only lifecycle message based on the Discontinued and Active fields..
5	`    <formula>IF(Discontinued__c, "Distributor is discontinued", IF(Active__c, "Active", "Inactive"))</formula>`	Sets formula expression evaluated by Salesforce to IF(Discontinued__c, "Distributor is discontinued", IF(Active__c, "Active", "Inactive")).
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Distributor Status</label>`	Sets human-readable Salesforce UI label to Distributor Status.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Distributor__c/fields/Employee_Allocation_Order__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/Employee_Allocation_Order__c.field-meta.xml. Label: Employee Allocation Order. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 1242e48c24023c8fbd2c68358f3e5e3f96fb8e268cbe86401cb0497a4aec796e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Employee_Allocation_Order__c</fullName><description>Unique positive round-robin sequence. Blank excludes the distributor; inactive distributors are skipped.</description><externalId>false</externalId><label>Employee Allocation Order</label><precision>3</precision><required>false</required><scale>0</scale><type>Number</type><unique>true</unique></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Employee_Allocation_Order__c</fullName><description>Unique positive round-robin sequence. Blank excludes the distributor; inactive distributors are skipped.</description><externalId>false</e.

force-app/main/default/objects/DMS_Distributor__c/fields/GSTIN__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/GSTIN__c.field-meta.xml. Label: GSTIN. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 8330e3d402b27a420c02dc8fea6c1a676ca9feb78d7d3916e0f41dfff81e6f13

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>GSTIN__c</fullName>`	Sets API identifier used by metadata deployment and code references to GSTIN__c.
4	`    <description>GSTIN. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to GSTIN. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>GSTIN</label>`	Sets human-readable Salesforce UI label to GSTIN.
6	`    <length>15</length>`	Sets maximum text length to 15.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Distributor__c/fields/Geography__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/Geography__c.field-meta.xml. Label: Geography. Type: Lookup. Relationship target: Geography__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 dc4d2470b38f5071b9e062f07818cf806b8cbb4eab435e2d46d1056d032ea021

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Geography__c</fullName>`	Sets API identifier used by metadata deployment and code references to Geography__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Geography. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Geography. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Geography</label>`	Sets human-readable Salesforce UI label to Geography.
7	`    <referenceTo>Geography__c</referenceTo>`	Sets object referenced by this relationship to Geography__c.
8	`    <relationshipLabel>DMS Distributors</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Distributors.
9	`    <relationshipName>DMS_Distributors</relationshipName>`	Sets relationship API traversal name to DMS_Distributors.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Distributor__c/fields/Location__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/Location__c.field-meta.xml. Label: Distributor Location. Type: Location. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 f7f642e1c6c1284975e15e70490316b291d53b97ed4241fe1b902edae0777c91

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Location__c</fullName>`	Sets API identifier used by metadata deployment and code references to Location__c.
4	`    <description>Distributor Location. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Distributor Location. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Distributor Location</label>`	Sets human-readable Salesforce UI label to Distributor Location.
6	`    <scale>7</scale>`	Sets decimal places to 7.
7	`    <displayLocationInDecimal>true</displayLocationInDecimal>`	Sets display Location In Decimal in the enclosing configuration to true.
8	`    <type>Location</type>`	Sets field/storage type to Location.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Distributor__c/fields/Login_Email__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/Login_Email__c.field-meta.xml. Label: DMS Login Email. Type: Email. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 a791e99959da6927dd5828c2ac09e355f2e7a4b458713fa2afc011834ccf5010

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Login_Email__c</fullName><label>DMS Login Email</label><type>Email</type><unique>true</unique></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Login_Email__c</fullName><label>DMS Login Email</label><type>Email</type><unique>true</unique>.

force-app/main/default/objects/DMS_Distributor__c/fields/Officer__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/Officer__c.field-meta.xml. Label: Distributor Officer. Type: Lookup. Relationship target: User. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 72cb63ceb946f2ff8f4e2152683071e23ef41b21d7859a9ac2e2652d74592ba8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Officer__c</fullName><label>Distributor Officer</label><deleteConstraint>SetNull</deleteConstraint><referenceTo>User</referenceTo><relationshipLabel>DMS Distributors</relationshipLabel><relationshipName>DMS_Distributors</relationshipName><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Officer__c</fullName><label>Distributor Officer</label><deleteConstraint>SetNull</deleteConstraint><referenceTo>User</referenceTo><relationshipLabel>DMS Distributors</relationshipLabel><rela.

force-app/main/default/objects/DMS_Distributor__c/fields/Parent_Distributor__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/Parent_Distributor__c.field-meta.xml. Label: Super Stockist. Type: Lookup. Relationship target: DMS_Distributor__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 d749b05df14ef4a99162d177c7a6a6e07206070529bfcb5399c63e18703c9199

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Parent_Distributor__c</fullName>`	Sets API identifier used by metadata deployment and code references to Parent_Distributor__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <description>Super Stockist. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Super Stockist. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Super Stockist</label>`	Sets human-readable Salesforce UI label to Super Stockist.
7	`    <referenceTo>DMS_Distributor__c</referenceTo>`	Sets object referenced by this relationship to DMS_Distributor__c.
8	`    <relationshipLabel>Child Distributors</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Child Distributors.
9	`    <relationshipName>Child_Distributors</relationshipName>`	Sets relationship API traversal name to Child_Distributors.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Distributor__c/fields/Partner_Type__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/Partner_Type__c.field-meta.xml. Label: Partner Type. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

16 numbered source lines | SHA-256 76e85f58621105c5121f9847eb39b67c49052a7243b4fb9392ac00fab5aaeab7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Partner_Type__c</fullName>`	Sets API identifier used by metadata deployment and code references to Partner_Type__c.
4	`    <description>Partner Type. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Partner Type. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Partner Type</label>`	Sets human-readable Salesforce UI label to Partner Type.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value><fullName>Distributor</fullName><default>true</default><label>Distributor</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Distributor</fullName><default>true</default><label>Distributor</label>.
13	`            <value><fullName>Super Stockist</fullName><default>false</default><label>Super Stockist</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Super Stockist</fullName><default>false</default><label>Super Stockist</label>.
14	`        </valueSetDefinition>`	Closes the valueSetDefinition configuration block.
15	`    </valueSet>`	Closes the valueSet configuration block.
16	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Distributor__c/fields/Phone__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/Phone__c.field-meta.xml. Label: Phone. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 f0f555867d1e0240a1505650732647ac138bddf337c88c6b8e516df643aa52f2

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Phone__c</fullName><label>Phone</label><length>40</length><type>Text</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Phone__c</fullName><label>Phone</label><length>40</length><type>Text</type>.

force-app/main/default/objects/DMS_Distributor__c/fields/Salesforce_User__c.field-meta.xml

Salesforce metadata for DMS_Distributor__c/fields/Salesforce_User__c.field-meta.xml. Label: Distributor Salesforce User. Type: Lookup. Relationship target: User. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 b56319a728a25ca8fccdbaf838f982197fb2d6c92ec465d2646a86c74d99851c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Salesforce_User__c</fullName><deleteConstraint>SetNull</deleteConstraint><description>Distributor login, separate from the company officer. Linking does not grant record access.</description><label>Distributor Salesforce User</label><referenceTo>User</referenceTo><relationshipLabel>Linked DMS Distributors</relationshipLabel><relationshipName>Linked_DMS_Distributors</relationshipName><required>false</required><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Salesforce_User__c</fullName><deleteConstraint>SetNull</deleteConstraint><description>Distributor login, separate from the company officer. Linking does not grant record access.</description.

force-app/main/default/objects/DMS_Distributor__c/listViews/All_Records.listView-meta.xml

Salesforce metadata for DMS_Distributor__c/listViews/All_Records.listView-meta.xml. Label: All DMS Distributors. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 2cac1f84c4f223b16f98da5a893a197df227209dd6d755d900b6d75f9b65158f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Records</fullName>`	Sets API identifier used by metadata deployment and code references to All_Records.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
6	`    <label>All DMS Distributors</label>`	Sets human-readable Salesforce UI label to All DMS Distributors.
7	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/DMS_Goods_Receipt_Line__c.object-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/DMS_Goods_Receipt_Line__c.object-meta.xml. Label: Goods Receipt Line. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 c64ea58b2fc906d6e8dbb00c14ccfa7939045c2810345ba8f6b3193b313d194e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
4	`    <description>Goods Receipt Line records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled.</description>`	Sets description in the enclosing configuration to Goods Receipt Line records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled..
5	`    <enableActivities>true</enableActivities>`	Sets enable Activities in the enclosing configuration to true.
6	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
7	`    <label>Goods Receipt Line</label>`	Sets human-readable Salesforce UI label to Goods Receipt Line.
8	`    <nameField><displayFormat>GRNL-{000000}</displayFormat><label>Goods Receipt Line Number</label><type>AutoNumber</type></nameField>`	Sets name Field in the enclosing configuration to <displayFormat>GRNL-{000000}</displayFormat><label>Goods Receipt Line Number</label><type>AutoNumber</type>.
9	`    <pluralLabel>Goods Receipt Lines</pluralLabel>`	Sets plural Label in the enclosing configuration to Goods Receipt Lines.
10	`    <sharingModel>ControlledByParent</sharingModel>`	Sets record sharing baseline to ControlledByParent.
11	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/fields/Batch_Number__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/fields/Batch_Number__c.field-meta.xml. Label: Batch Number. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 f05dda749504ee6039563070da3126119a952359eae257b45567c06431af62f6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Batch_Number__c</fullName>`	Sets API identifier used by metadata deployment and code references to Batch_Number__c.
4	`    <description>Batch Number. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Batch Number. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Batch Number</label>`	Sets human-readable Salesforce UI label to Batch Number.
6	`    <length>80</length>`	Sets maximum text length to 80.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/fields/Case_Cost__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/fields/Case_Cost__c.field-meta.xml. Label: Cost Per Case. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 0854fd6b351297bef0eab65609a2060907a742297795c0f26316dc7b65b90622

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Case_Cost__c</fullName>`	Sets API identifier used by metadata deployment and code references to Case_Cost__c.
4	`    <description>Cost Per Case. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Cost Per Case. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Cost Per Case</label>`	Sets human-readable Salesforce UI label to Cost Per Case.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>2</scale>`	Sets decimal places to 2.
9	`    <type>Currency</type>`	Sets field/storage type to Currency.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/fields/Expiry_Date__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/fields/Expiry_Date__c.field-meta.xml. Label: Expiry Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 a3b29a5e8033da371749dad52ff3a8687435c0ed24c9283b45a875e7c3b4adf6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Expiry_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Expiry_Date__c.
4	`    <description>Expiry Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Expiry Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Expiry Date</label>`	Sets human-readable Salesforce UI label to Expiry Date.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/fields/Free_Cases__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/fields/Free_Cases__c.field-meta.xml. Label: Free Cases. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 f53069a355ba55a12a029427a6da74f03015cf05bc1ba8e8a7aa863e7a5c9e01

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Free_Cases__c</fullName>`	Sets API identifier used by metadata deployment and code references to Free_Cases__c.
4	`    <description>Free Cases. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Free Cases. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Free Cases</label>`	Sets human-readable Salesforce UI label to Free Cases.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/fields/Goods_Receipt__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/fields/Goods_Receipt__c.field-meta.xml. Label: Goods Receipt. Type: MasterDetail. Relationship target: DMS_Goods_Receipt__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 f79d13d62ce68ce7a6ca33035db86ee912ce4598e6ccf3023171200e63bd24fe

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Goods_Receipt__c</fullName>`	Sets API identifier used by metadata deployment and code references to Goods_Receipt__c.
4	`    <description>Goods Receipt. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Goods Receipt. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Goods Receipt</label>`	Sets human-readable Salesforce UI label to Goods Receipt.
6	`    <referenceTo>DMS_Goods_Receipt__c</referenceTo>`	Sets object referenced by this relationship to DMS_Goods_Receipt__c.
7	`    <relationshipLabel>Receipt Lines</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Receipt Lines.
8	`    <relationshipName>Receipt_Lines</relationshipName>`	Sets relationship API traversal name to Receipt_Lines.
9	`    <relationshipOrder>0</relationshipOrder>`	Sets relationship Order in the enclosing configuration to 0.
10	`    <reparentableMasterDetail>false</reparentableMasterDetail>`	Sets reparentable Master Detail in the enclosing configuration to false.
11	`    <type>MasterDetail</type>`	Sets field/storage type to MasterDetail.
12	`    <writeRequiresMasterRead>false</writeRequiresMasterRead>`	Sets write Requires Master Read in the enclosing configuration to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/fields/Manufacturing_Date__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/fields/Manufacturing_Date__c.field-meta.xml. Label: Manufacturing Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 8a74527d8f9f94d2709ea412b9f38fc109816235ceeebf5c02f81351a08818b9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Manufacturing_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Manufacturing_Date__c.
4	`    <description>Manufacturing Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Manufacturing Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Manufacturing Date</label>`	Sets human-readable Salesforce UI label to Manufacturing Date.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/fields/Pieces_Per_Case__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/fields/Pieces_Per_Case__c.field-meta.xml. Label: Pieces Per Case. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 f318e8b201ac06aac6fc1707edb619712ed972ff3a56ffed0d2562d982373a1a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Pieces_Per_Case__c</fullName>`	Sets API identifier used by metadata deployment and code references to Pieces_Per_Case__c.
4	`    <description>Pieces Per Case. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Pieces Per Case. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Pieces Per Case</label>`	Sets human-readable Salesforce UI label to Pieces Per Case.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/fields/Primary_Order_Line__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/fields/Primary_Order_Line__c.field-meta.xml. Label: Primary Order Line. Type: Lookup. Relationship target: DMS_Primary_Order_Line__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 e18c71593ce0cb12ee553cc4fc8c5c1ff51c5c01a9aec069c191385ce19f5cd5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Primary_Order_Line__c</fullName>`	Sets API identifier used by metadata deployment and code references to Primary_Order_Line__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Primary Order Line. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Primary Order Line. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Primary Order Line</label>`	Sets human-readable Salesforce UI label to Primary Order Line.
7	`    <referenceTo>DMS_Primary_Order_Line__c</referenceTo>`	Sets object referenced by this relationship to DMS_Primary_Order_Line__c.
8	`    <relationshipLabel>Receipt Lines</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Receipt Lines.
9	`    <relationshipName>Receipt_Lines</relationshipName>`	Sets relationship API traversal name to Receipt_Lines.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/fields/Product__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/fields/Product__c.field-meta.xml. Label: Product. Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 e03198d4af8b59546856091b33fff78aee8191fa49cb84eb1024960c45e18f21

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Product__c</fullName>`	Sets API identifier used by metadata deployment and code references to Product__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Product. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Product. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Product</label>`	Sets human-readable Salesforce UI label to Product.
7	`    <referenceTo>Product__c</referenceTo>`	Sets object referenced by this relationship to Product__c.
8	`    <relationshipLabel>DMS Receipt Lines</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Receipt Lines.
9	`    <relationshipName>DMS_Receipt_Lines</relationshipName>`	Sets relationship API traversal name to DMS_Receipt_Lines.
10	`    <required>true</required>`	Sets whether a value is mandatory to true.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/fields/Received_Cases__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/fields/Received_Cases__c.field-meta.xml. Label: Received Cases. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 f09dfca4cccf5ba818ad9a260da16d49754bb9cf2d8938a6888da6e4ab64e613

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Received_Cases__c</fullName>`	Sets API identifier used by metadata deployment and code references to Received_Cases__c.
4	`    <description>Received Cases. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Received Cases. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Received Cases</label>`	Sets human-readable Salesforce UI label to Received Cases.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/fields/Received_Pieces__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/fields/Received_Pieces__c.field-meta.xml. Label: Received Pieces. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 af3cd22caee9efa35ca1896d5599b1d43b8e7da47618158016447ae494845121

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Received_Pieces__c</fullName>`	Sets API identifier used by metadata deployment and code references to Received_Pieces__c.
4	`    <description>Received Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Received Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>(Received_Cases__c + BLANKVALUE(Free_Cases__c, 0)) * Pieces_Per_Case__c</formula>`	Sets formula expression evaluated by Salesforce to (Received_Cases__c + BLANKVALUE(Free_Cases__c, 0)) * Pieces_Per_Case__c.
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Received Pieces</label>`	Sets human-readable Salesforce UI label to Received Pieces.
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <scale>0</scale>`	Sets decimal places to 0.
10	`    <type>Number</type>`	Sets field/storage type to Number.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/fields/Received_Value__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/fields/Received_Value__c.field-meta.xml. Label: Received Value. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 c3c91f0f37563791afe586b9107b28b2bc4b400147854bfcaf8babb4d7d661b5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Received_Value__c</fullName>`	Sets API identifier used by metadata deployment and code references to Received_Value__c.
4	`    <description>Received Value. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Received Value. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>ROUND(Received_Cases__c * Case_Cost__c, 2)</formula>`	Sets formula expression evaluated by Salesforce to ROUND(Received_Cases__c * Case_Cost__c, 2).
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Received Value</label>`	Sets human-readable Salesforce UI label to Received Value.
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <scale>2</scale>`	Sets decimal places to 2.
10	`    <type>Currency</type>`	Sets field/storage type to Currency.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/listViews/All_Records.listView-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/listViews/All_Records.listView-meta.xml. Label: All Goods Receipt Lines. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 3698e3bc72de95a936d283b3b7fe8fef055ee2d61dab9c68356e9a0cd01a26a1

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Records</fullName>`	Sets API identifier used by metadata deployment and code references to All_Records.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Product__c</columns>`	Sets columns in the enclosing configuration to Product__c.
6	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
7	`    <label>All Goods Receipt Lines</label>`	Sets human-readable Salesforce UI label to All Goods Receipt Lines.
8	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/validationRules/Expiry_After_Manufacture.validationRule-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/validationRules/Expiry_After_Manufacture.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 f27377251c782fa1494bde44eabb08819afc7d630092d0bd8924d1fd1e49d935

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Expiry_After_Manufacture</fullName>`	Sets API identifier used by metadata deployment and code references to Expiry_After_Manufacture.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(NOT(ISBLANK(Manufacturing_Date__c)), NOT(ISBLANK(Expiry_Date__c)), Expiry_Date__c < Manufacturing_Date__c)</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(Manufacturing_Date__c)), NOT(ISBLANK(Expiry_Date__c)), Expiry_Date__c < Manufacturing_Date__c).
6	`    <errorMessage>Expiry date cannot precede manufacturing date.</errorMessage>`	Sets message displayed when the rule fails to Expiry date cannot precede manufacturing date..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/validationRules/Original_Line_Matches.validationRule-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/validationRules/Original_Line_Matches.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 9e5055e21b46d5b3c6e13e323c01b33f75e255c76cd8e488bc38711d926cfa53

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Original_Line_Matches</fullName>`	Sets API identifier used by metadata deployment and code references to Original_Line_Matches.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	` <errorConditionFormula>AND(NOT(ISBLANK(Primary_Order_Line__c)), OR(IF(AND(Received_Cases__c = 0, Free_Cases__c > 0), Product__c <> Primary_Order_Line__r.Free_Product__c, Product__c <> Primary_Order_Line__r.Product__c), Goods_Receipt__r.Primary_Order__c <> Primary_Order_Line__r.Order__c))</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(Primary_Order_Line__c)), OR(IF(AND(Received_Cases__c = 0, Free_Cases__c > 0), Product__c <> Primary_Order_Line__r.Free_Product__c, Product__c <> Primary_Order_Line__r.Pr.
6	`    <errorMessage>The product and original order line must belong to the receipt's primary order.</errorMessage>`	Sets message displayed when the rule fails to The product and original order line must belong to the receipt's primary order..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Goods_Receipt_Line__c/validationRules/Valid_Receipt_Quantities.validationRule-meta.xml

Salesforce metadata for DMS_Goods_Receipt_Line__c/validationRules/Valid_Receipt_Quantities.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 4598592041d3605a5838cf3c038ae380610880c0c969d2c34164934f34264826

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Valid_Receipt_Quantities</fullName>`	Sets API identifier used by metadata deployment and code references to Valid_Receipt_Quantities.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	` <errorConditionFormula>OR(ISBLANK(Received_Cases__c), Received_Cases__c < 0, Free_Cases__c < 0, Received_Cases__c + BLANKVALUE(Free_Cases__c,0) <= 0, MOD(Received_Cases__c,1) <> 0, MOD(BLANKVALUE(Free_Cases__c,0),1) <> 0, ISBLANK(Pieces_Per_Case__c), Pieces_Per_Case__c <= 0, Case_Cost__c < 0)</errorConditionFormula>`	Sets condition that makes this validation rule fail to OR(ISBLANK(Received_Cases__c), Received_Cases__c < 0, Free_Cases__c < 0, Received_Cases__c + BLANKVALUE(Free_Cases__c,0) <= 0, MOD(Received_Cases__c,1) <> 0, MOD(BLANKVALUE(Free_Cases__.
6	`    <errorMessage>Enter positive received cases and pieces per case. Free cases and cost cannot be negative.</errorMessage>`	Sets message displayed when the rule fails to Enter positive received cases and pieces per case. Free cases and cost cannot be negative..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Goods_Receipt__c/DMS_Goods_Receipt__c.object-meta.xml

Salesforce metadata for DMS_Goods_Receipt__c/DMS_Goods_Receipt__c.object-meta.xml. Label: Goods Receipt. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 28bd3f3d39fd5af0e5eb68a72662e10dba262666bb61d41b28776ecf410f2bfa

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
4	`    <description>Goods Receipt records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled.</description>`	Sets description in the enclosing configuration to Goods Receipt records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled..
5	`    <enableActivities>true</enableActivities>`	Sets enable Activities in the enclosing configuration to true.
6	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
7	`    <label>Goods Receipt</label>`	Sets human-readable Salesforce UI label to Goods Receipt.
8	`    <nameField><displayFormat>GRN-{000000}</displayFormat><label>Goods Receipt Number</label><type>AutoNumber</type></nameField>`	Sets name Field in the enclosing configuration to <displayFormat>GRN-{000000}</displayFormat><label>Goods Receipt Number</label><type>AutoNumber</type>.
9	`    <pluralLabel>Goods Receipts</pluralLabel>`	Sets plural Label in the enclosing configuration to Goods Receipts.
10	`    <sharingModel>Private</sharingModel>`	Sets record sharing baseline to Private.
11	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/DMS_Goods_Receipt__c/fields/Distributor__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt__c/fields/Distributor__c.field-meta.xml. Label: DMS Distributor. Type: Lookup. Relationship target: DMS_Distributor__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 01f1b4fc9bdb644ca902201972de8021b3456c759bec8a36d71aea529a87e719

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Distributor__c</fullName>`	Sets API identifier used by metadata deployment and code references to Distributor__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>DMS Distributor. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to DMS Distributor. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>DMS Distributor</label>`	Sets human-readable Salesforce UI label to DMS Distributor.
7	`    <referenceTo>DMS_Distributor__c</referenceTo>`	Sets object referenced by this relationship to DMS_Distributor__c.
8	`    <relationshipLabel>Goods Receipts</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Goods Receipts.
9	`    <relationshipName>Goods_Receipts</relationshipName>`	Sets relationship API traversal name to Goods_Receipts.
10	`    <required>true</required>`	Sets whether a value is mandatory to true.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt__c/fields/Notes__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt__c/fields/Notes__c.field-meta.xml. Label: Notes. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 5602c0c76c49595c769bab38f74fa6fd0bdf1b12ba897c06c29e068fd2dc7d3b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Notes__c</fullName>`	Sets API identifier used by metadata deployment and code references to Notes__c.
4	`    <description>Notes. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Notes. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Notes</label>`	Sets human-readable Salesforce UI label to Notes.
6	`    <length>255</length>`	Sets maximum text length to 255.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt__c/fields/Primary_Order__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt__c/fields/Primary_Order__c.field-meta.xml. Label: Primary Order. Type: Lookup. Relationship target: DMS_Primary_Order__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 de9a8138b2345215cc322fe9a1325dee4c50f794d7e258a87a03ad3978d6508a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Primary_Order__c</fullName>`	Sets API identifier used by metadata deployment and code references to Primary_Order__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Primary Order. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Primary Order. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Primary Order</label>`	Sets human-readable Salesforce UI label to Primary Order.
7	`    <referenceTo>DMS_Primary_Order__c</referenceTo>`	Sets object referenced by this relationship to DMS_Primary_Order__c.
8	`    <relationshipLabel>Goods Receipts</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Goods Receipts.
9	`    <relationshipName>Goods_Receipts</relationshipName>`	Sets relationship API traversal name to Goods_Receipts.
10	`    <required>true</required>`	Sets whether a value is mandatory to true.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt__c/fields/Received_By__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt__c/fields/Received_By__c.field-meta.xml. Label: Received By. Type: Lookup. Relationship target: User. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 ef3c2cfcd5322d3b465fbcf51d03e42d50ba5b91675b0c393e09a2c819131321

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Received_By__c</fullName>`	Sets API identifier used by metadata deployment and code references to Received_By__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <description>Received By. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Received By. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Received By</label>`	Sets human-readable Salesforce UI label to Received By.
7	`    <referenceTo>User</referenceTo>`	Sets object referenced by this relationship to User.
8	`    <relationshipLabel>DMS Goods Receipts</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Goods Receipts.
9	`    <relationshipName>DMS_Goods_Receipts</relationshipName>`	Sets relationship API traversal name to DMS_Goods_Receipts.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt__c/fields/Received_Date__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt__c/fields/Received_Date__c.field-meta.xml. Label: Received Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 1735fd3e8ecb90257166e0422c8a9388edd20b9a2a036efbc7938aa32f727987

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Received_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Received_Date__c.
4	`    <description>Received Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Received Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Received Date</label>`	Sets human-readable Salesforce UI label to Received Date.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt__c/fields/Request_Key__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt__c/fields/Request_Key__c.field-meta.xml. Label: Mobile Request Key. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 793da5e622fec232c56178f8153edb66707d858bb509e0946d9a3c01d1b95570

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Request_Key__c</fullName><label>Mobile Request Key</label><externalId>true</externalId><length>100</length><type>Text</type><unique>true</unique></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Request_Key__c</fullName><label>Mobile Request Key</label><externalId>true</externalId><length>100</length><type>Text</type><unique>true</unique>.

force-app/main/default/objects/DMS_Goods_Receipt__c/fields/Status__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt__c/fields/Status__c.field-meta.xml. Label: Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

17 numbered source lines | SHA-256 4e2feb9bfcd599bc298e057cc663fd3522aa2411ed1d13d5d4efd05007d089dd

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Status__c</fullName>`	Sets API identifier used by metadata deployment and code references to Status__c.
4	`    <description>Status. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Status. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Status</label>`	Sets human-readable Salesforce UI label to Status.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value><fullName>Draft</fullName><default>true</default><label>Draft</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Draft</fullName><default>true</default><label>Draft</label>.
13	`            <value><fullName>Received</fullName><default>false</default><label>Received</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Received</fullName><default>false</default><label>Received</label>.
14	`            <value><fullName>Cancelled</fullName><default>false</default><label>Cancelled</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Cancelled</fullName><default>false</default><label>Cancelled</label>.
15	`        </valueSetDefinition>`	Closes the valueSetDefinition configuration block.
16	`    </valueSet>`	Closes the valueSet configuration block.

Line	Source code	Explanation / reading note
17	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt__c/fields/Supplier_Invoice_Number__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt__c/fields/Supplier_Invoice_Number__c.field-meta.xml. Label: Supplier Invoice Number. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 29d1dbbf6af6ab4b2f2c98148d588999dea014e34ba4cad6188c60d95e4f89a6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Supplier_Invoice_Number__c</fullName>`	Sets API identifier used by metadata deployment and code references to Supplier_Invoice_Number__c.
4	`    <description>Supplier Invoice Number. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Supplier Invoice Number. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Supplier Invoice Number</label>`	Sets human-readable Salesforce UI label to Supplier Invoice Number.
6	`    <length>80</length>`	Sets maximum text length to 80.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt__c/fields/Total_Pieces__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt__c/fields/Total_Pieces__c.field-meta.xml. Label: Total Received Pieces. Type: Summary. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 590660adf798d576309805652bad9e35013d33112b0765baae01592aaea5a325

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Total_Pieces__c</fullName>`	Sets API identifier used by metadata deployment and code references to Total_Pieces__c.
4	`    <description>Total Received Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records.</description>`	Sets description in the enclosing configuration to Total Received Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records..
5	`    <label>Total Received Pieces</label>`	Sets human-readable Salesforce UI label to Total Received Pieces.
6	`    <summarizedField>DMS_Goods_Receipt_Line__c.Received_Pieces__c</summarizedField>`	Sets summarized Field in the enclosing configuration to DMS_Goods_Receipt_Line__c.Received_Pieces__c.
7	`    <summaryForeignKey>DMS_Goods_Receipt_Line__c.Goods_Receipt__c</summaryForeignKey>`	Sets summary Foreign Key in the enclosing configuration to DMS_Goods_Receipt_Line__c.Goods_Receipt__c.
8	`    <summaryOperation>sum</summaryOperation>`	Sets summary Operation in the enclosing configuration to sum.
9	`    <type>Summary</type>`	Sets field/storage type to Summary.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt__c/fields/Total_Value__c.field-meta.xml

Salesforce metadata for DMS_Goods_Receipt__c/fields/Total_Value__c.field-meta.xml. Label: Total Received Value. Type: Summary. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 8b9938b4de257572ad7dc480a7e5e1af967b1119947ebc01feedd69aee517c74

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Total_Value__c</fullName>`	Sets API identifier used by metadata deployment and code references to Total_Value__c.
4	`    <description>Total Received Value. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records.</description>`	Sets description in the enclosing configuration to Total Received Value. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records..
5	`    <label>Total Received Value</label>`	Sets human-readable Salesforce UI label to Total Received Value.
6	`    <summarizedField>DMS_Goods_Receipt_Line__c.Received_Value__c</summarizedField>`	Sets summarized Field in the enclosing configuration to DMS_Goods_Receipt_Line__c.Received_Value__c.
7	`    <summaryForeignKey>DMS_Goods_Receipt_Line__c.Goods_Receipt__c</summaryForeignKey>`	Sets summary Foreign Key in the enclosing configuration to DMS_Goods_Receipt_Line__c.Goods_Receipt__c.
8	`    <summaryOperation>sum</summaryOperation>`	Sets summary Operation in the enclosing configuration to sum.
9	`    <type>Summary</type>`	Sets field/storage type to Summary.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Goods_Receipt__c/listViews/All_Records.listView-meta.xml

Salesforce metadata for DMS_Goods_Receipt__c/listViews/All_Records.listView-meta.xml. Label: All Goods Receipts. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 dbfb09d18a5eb3cf6955a7524d0f16a27ceaeeb1b703a91de5236efc256685bc

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Records</fullName>`	Sets API identifier used by metadata deployment and code references to All_Records.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Distributor__c</columns>`	Sets columns in the enclosing configuration to Distributor__c.
6	`    <columns>Status__c</columns>`	Sets columns in the enclosing configuration to Status__c.
7	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
8	`    <label>All Goods Receipts</label>`	Sets human-readable Salesforce UI label to All Goods Receipts.
9	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/DMS_Goods_Receipt__c/validationRules/Distributor_Matches_Order.validationRule-meta.xml

Salesforce metadata for DMS_Goods_Receipt__c/validationRules/Distributor_Matches_Order.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 1c283b300bfceb09c4b2ce2995d4afa74bc82473091ad9c404fd96a8e695e936

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Distributor_Matches_Order</fullName>`	Sets API identifier used by metadata deployment and code references to Distributor_Matches_Order.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>Distributor__c <> Primary_Order__r.Distributor__c</errorConditionFormula>`	Sets condition that makes this validation rule fail to Distributor__c <> Primary_Order__r.Distributor__c.
6	`    <errorMessage>Select the distributor on the original primary order.</errorMessage>`	Sets message displayed when the rule fails to Select the distributor on the original primary order..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Inventory__c/DMS_Inventory__c.object-meta.xml

Salesforce metadata for DMS_Inventory__c/DMS_Inventory__c.object-meta.xml. Label: Distributor Inventory. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 74f54a8482d321f0b15909444ce1107fcdf2ba62e7fa2bc43733335a39d81e88

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
4	`    <description>Distributor Inventory records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled.</description>`	Sets description in the enclosing configuration to Distributor Inventory records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled..
5	`    <enableActivities>true</enableActivities>`	Sets enable Activities in the enclosing configuration to true.
6	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
7	`    <label>Distributor Inventory</label>`	Sets human-readable Salesforce UI label to Distributor Inventory.
8	`    <nameField><displayFormat>INVST-{000000}</displayFormat><label>Distributor Inventory Number</label><type>AutoNumber</type></nameField>`	Sets name Field in the enclosing configuration to <displayFormat>INVST-{000000}</displayFormat><label>Distributor Inventory Number</label><type>AutoNumber</type>.
9	`    <pluralLabel>Distributor Inventory</pluralLabel>`	Sets plural Label in the enclosing configuration to Distributor Inventory.
10	`    <sharingModel>Private</sharingModel>`	Sets record sharing baseline to Private.
11	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/DMS_Inventory__c/fields/Available_Pieces__c.field-meta.xml

Salesforce metadata for DMS_Inventory__c/fields/Available_Pieces__c.field-meta.xml. Label: Available Pieces. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 dc8a8e15ea298688b2c40f4118f504f55c9b21c3e126c36ec73ca371aebd12aa

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Available_Pieces__c</fullName>`	Sets API identifier used by metadata deployment and code references to Available_Pieces__c.
4	`    <description>Available Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Available Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>On_Hand_Pieces__c - BLANKVALUE(Reserved_Pieces__c, 0)</formula>`	Sets formula expression evaluated by Salesforce to On_Hand_Pieces__c - BLANKVALUE(Reserved_Pieces__c, 0).
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Available Pieces</label>`	Sets human-readable Salesforce UI label to Available Pieces.
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <scale>0</scale>`	Sets decimal places to 0.
10	`    <type>Number</type>`	Sets field/storage type to Number.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Inventory__c/fields/Batch_Number__c.field-meta.xml

Salesforce metadata for DMS_Inventory__c/fields/Batch_Number__c.field-meta.xml. Label: Batch Number. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 f05dda749504ee6039563070da3126119a952359eae257b45567c06431af62f6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Batch_Number__c</fullName>`	Sets API identifier used by metadata deployment and code references to Batch_Number__c.
4	`    <description>Batch Number. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Batch Number. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Batch Number</label>`	Sets human-readable Salesforce UI label to Batch Number.
6	`    <length>80</length>`	Sets maximum text length to 80.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Inventory__c/fields/Distributor__c.field-meta.xml

Salesforce metadata for DMS_Inventory__c/fields/Distributor__c.field-meta.xml. Label: DMS Distributor. Type: Lookup. Relationship target: DMS_Distributor__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 ac24133054a4c60776092598aacb2b43117a69d73e5ff470e4fda09480205297

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Distributor__c</fullName>`	Sets API identifier used by metadata deployment and code references to Distributor__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>DMS Distributor. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to DMS Distributor. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>DMS Distributor</label>`	Sets human-readable Salesforce UI label to DMS Distributor.
7	`    <referenceTo>DMS_Distributor__c</referenceTo>`	Sets object referenced by this relationship to DMS_Distributor__c.
8	`    <relationshipLabel>Inventory</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Inventory.
9	`    <relationshipName>Inventory</relationshipName>`	Sets relationship API traversal name to Inventory.
10	`    <required>true</required>`	Sets whether a value is mandatory to true.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Inventory__c/fields/Expired__c.field-meta.xml

Salesforce metadata for DMS_Inventory__c/fields/Expired__c.field-meta.xml. Label: Expired. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 eee69b461e9811a0e23cdbace6910f52aee3e8bf618a2459d1477e06a7b0833e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Expired__c</fullName>`	Sets API identifier used by metadata deployment and code references to Expired__c.
4	`    <description>Expired. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Expired. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>AND(NOT(ISBLANK(Expiry_Date__c)), Expiry_Date__c < TODAY())</formula>`	Sets formula expression evaluated by Salesforce to AND(NOT(ISBLANK(Expiry_Date__c)), Expiry_Date__c < TODAY()).
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Expired</label>`	Sets human-readable Salesforce UI label to Expired.
8	`    <type>Checkbox</type>`	Sets field/storage type to Checkbox.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Inventory__c/fields/Expiry_Date__c.field-meta.xml

Salesforce metadata for DMS_Inventory__c/fields/Expiry_Date__c.field-meta.xml. Label: Expiry Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 a3b29a5e8033da371749dad52ff3a8687435c0ed24c9283b45a875e7c3b4adf6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Expiry_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Expiry_Date__c.
4	`    <description>Expiry Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Expiry Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Expiry Date</label>`	Sets human-readable Salesforce UI label to Expiry Date.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Inventory__c/fields/Last_Stock_Update__c.field-meta.xml

Salesforce metadata for DMS_Inventory__c/fields/Last_Stock_Update__c.field-meta.xml. Label: Last Stock Update. Type: DateTime. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 e30da7f11b3afc3d22ea92bf805ad307ed09834edf8e782789474cc3162e7aa0

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Last_Stock_Update__c</fullName>`	Sets API identifier used by metadata deployment and code references to Last_Stock_Update__c.
4	`    <description>Last Stock Update. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Last Stock Update. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Last Stock Update</label>`	Sets human-readable Salesforce UI label to Last Stock Update.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>DateTime</type>`	Sets field/storage type to DateTime.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Inventory__c/fields/Low_Stock__c.field-meta.xml

Salesforce metadata for DMS_Inventory__c/fields/Low_Stock__c.field-meta.xml. Label: Low Stock. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 ba5a0e8164ff40ed6cd21d26d9ad288636ade92ea8190890239d8ed8a484a7c0

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Low_Stock__c</fullName>`	Sets API identifier used by metadata deployment and code references to Low_Stock__c.
4	`    <description>Low Stock. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Low Stock. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>Available_Pieces__c <= BLANKVALUE(Reorder_Level_Pieces__c, 0)</formula>`	Sets formula expression evaluated by Salesforce to Available_Pieces__c <= BLANKVALUE(Reorder_Level_Pieces__c, 0).
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Low Stock</label>`	Sets human-readable Salesforce UI label to Low Stock.
8	`    <type>Checkbox</type>`	Sets field/storage type to Checkbox.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Inventory__c/fields/Manufacturing_Date__c.field-meta.xml

Salesforce metadata for DMS_Inventory__c/fields/Manufacturing_Date__c.field-meta.xml. Label: Manufacturing Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 8a74527d8f9f94d2709ea412b9f38fc109816235ceeebf5c02f81351a08818b9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Manufacturing_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Manufacturing_Date__c.
4	`    <description>Manufacturing Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Manufacturing Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Manufacturing Date</label>`	Sets human-readable Salesforce UI label to Manufacturing Date.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Inventory__c/fields/On_Hand_Pieces__c.field-meta.xml

Salesforce metadata for DMS_Inventory__c/fields/On_Hand_Pieces__c.field-meta.xml. Label: On Hand Pieces. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 306e577acdfedbb322ed74ab5e82f41fd9d074c2dd705ed2614383297bb37b50

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>On_Hand_Pieces__c</fullName>`	Sets API identifier used by metadata deployment and code references to On_Hand_Pieces__c.
4	`    <description>On Hand Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to On Hand Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>On Hand Pieces</label>`	Sets human-readable Salesforce UI label to On Hand Pieces.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Inventory__c/fields/Product__c.field-meta.xml

Salesforce metadata for DMS_Inventory__c/fields/Product__c.field-meta.xml. Label: Product. Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 25ea6b7bb109362ffdaaf00d087950bb498915c5136ddab263834f451b627506

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Product__c</fullName>`	Sets API identifier used by metadata deployment and code references to Product__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Product. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Product. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Product</label>`	Sets human-readable Salesforce UI label to Product.
7	`    <referenceTo>Product__c</referenceTo>`	Sets object referenced by this relationship to Product__c.
8	`    <relationshipLabel>DMS Inventory</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Inventory.
9	`    <relationshipName>DMS_Inventory</relationshipName>`	Sets relationship API traversal name to DMS_Inventory.
10	`    <required>true</required>`	Sets whether a value is mandatory to true.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Inventory__c/fields/Reorder_Level_Pieces__c.field-meta.xml

Salesforce metadata for DMS_Inventory__c/fields/Reorder_Level_Pieces__c.field-meta.xml. Label: Reorder Level Pieces. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 c88376f4761e16cfcf9bcf7e3ea859ceefd4233140b41d940794c1b6e008e36b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Reorder_Level_Pieces__c</fullName>`	Sets API identifier used by metadata deployment and code references to Reorder_Level_Pieces__c.
4	`    <description>Reorder Level Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Reorder Level Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Reorder Level Pieces</label>`	Sets human-readable Salesforce UI label to Reorder Level Pieces.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Inventory__c/fields/Reserved_Pieces__c.field-meta.xml

Salesforce metadata for DMS_Inventory__c/fields/Reserved_Pieces__c.field-meta.xml. Label: Reserved Pieces. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 6469087762215bb9d4598ea92e9f9a740ed1a8144ba680742ce6f782b594f23e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Reserved_Pieces__c</fullName>`	Sets API identifier used by metadata deployment and code references to Reserved_Pieces__c.
4	`    <description>Reserved Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Reserved Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Reserved Pieces</label>`	Sets human-readable Salesforce UI label to Reserved Pieces.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Inventory__c/fields/Warehouse__c.field-meta.xml

Salesforce metadata for DMS_Inventory__c/fields/Warehouse__c.field-meta.xml. Label: Warehouse. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 7fdb87c7a70974052de24b7f7450c993c4cfaba4d8df4a875889a943801e81d9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Warehouse__c</fullName>`	Sets API identifier used by metadata deployment and code references to Warehouse__c.
4	`    <description>Warehouse. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Warehouse. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Warehouse</label>`	Sets human-readable Salesforce UI label to Warehouse.
6	`    <length>120</length>`	Sets maximum text length to 120.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Inventory__c/listViews/All_Records.listView-meta.xml

Salesforce metadata for DMS_Inventory__c/listViews/All_Records.listView-meta.xml. Label: All Distributor Inventory. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 47b9a05abcdee9910467a733225a641d400a5768a52b2266844f4dd4c2b1d08f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Records</fullName>`	Sets API identifier used by metadata deployment and code references to All_Records.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Distributor__c</columns>`	Sets columns in the enclosing configuration to Distributor__c.
6	`    <columns>Product__c</columns>`	Sets columns in the enclosing configuration to Product__c.
7	`    <columns>Batch_Number__c</columns>`	Sets columns in the enclosing configuration to Batch_Number__c.
8	`    <columns>On_Hand_Pieces__c</columns>`	Sets columns in the enclosing configuration to On_Hand_Pieces__c.
9	`    <columns>Available_Pieces__c</columns>`	Sets columns in the enclosing configuration to Available_Pieces__c.
10	`    <columns>Expiry_Date__c</columns>`	Sets columns in the enclosing configuration to Expiry_Date__c.
11	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
12	`    <label>All Distributor Inventory</label>`	Sets human-readable Salesforce UI label to All Distributor Inventory.
13	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/DMS_Inventory__c/validationRules/Expiry_After_Manufacture.validationRule-meta.xml

Salesforce metadata for DMS_Inventory__c/validationRules/Expiry_After_Manufacture.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 f27377251c782fa1494bde44eabb08819afc7d630092d0bd8924d1fd1e49d935

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Expiry_After_Manufacture</fullName>`	Sets API identifier used by metadata deployment and code references to Expiry_After_Manufacture.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(NOT(ISBLANK(Manufacturing_Date__c)), NOT(ISBLANK(Expiry_Date__c)), Expiry_Date__c < Manufacturing_Date__c)</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(Manufacturing_Date__c)), NOT(ISBLANK(Expiry_Date__c)), Expiry_Date__c < Manufacturing_Date__c).
6	`    <errorMessage>Expiry date cannot precede manufacturing date.</errorMessage>`	Sets message displayed when the rule fails to Expiry date cannot precede manufacturing date..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Inventory__c/validationRules/Stock_Quantities_Valid.validationRule-meta.xml

Salesforce metadata for DMS_Inventory__c/validationRules/Stock_Quantities_Valid.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 97ead9ed8d4f337134564b76ceabd6d4378ed5e194f218051638c73f6c657076

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Stock_Quantities_Valid</fullName>`	Sets API identifier used by metadata deployment and code references to Stock_Quantities_Valid.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>OR(On_Hand_Pieces__c < 0, Reserved_Pieces__c < 0, Reserved_Pieces__c > On_Hand_Pieces__c, Reorder_Level_Pieces__c < 0)</errorConditionFormula>`	Sets condition that makes this validation rule fail to OR(On_Hand_Pieces__c < 0, Reserved_Pieces__c < 0, Reserved_Pieces__c > On_Hand_Pieces__c, Reorder_Level_Pieces__c < 0).
6	`    <errorMessage>Stock cannot be negative and reserved pieces cannot exceed on-hand pieces.</errorMessage>`	Sets message displayed when the rule fails to Stock cannot be negative and reserved pieces cannot exceed on-hand pieces..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/DMS_Invoice_Line__c.object-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/DMS_Invoice_Line__c.object-meta.xml. Label: DMS Invoice Line. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 8c95766111fccdfb42011e8501e07ee224eb7f13c0af53f44393b2c3ee5108e3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
4	`    <description>DMS Invoice Line records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled.</description>`	Sets description in the enclosing configuration to DMS Invoice Line records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled..
5	`    <enableActivities>true</enableActivities>`	Sets enable Activities in the enclosing configuration to true.
6	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
7	`    <label>DMS Invoice Line</label>`	Sets human-readable Salesforce UI label to DMS Invoice Line.
8	`    <nameField><displayFormat>INVL-{000000}</displayFormat><label>DMS Invoice Line Number</label><type>AutoNumber</type></nameField>`	Sets name Field in the enclosing configuration to <displayFormat>INVL-{000000}</displayFormat><label>DMS Invoice Line Number</label><type>AutoNumber</type>.
9	`    <pluralLabel>DMS Invoice Lines</pluralLabel>`	Sets plural Label in the enclosing configuration to DMS Invoice Lines.
10	`    <sharingModel>ControlledByParent</sharingModel>`	Sets record sharing baseline to ControlledByParent.
11	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/fields/Batch_Number__c.field-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/fields/Batch_Number__c.field-meta.xml. Label: Batch Number. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 f05dda749504ee6039563070da3126119a952359eae257b45567c06431af62f6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Batch_Number__c</fullName>`	Sets API identifier used by metadata deployment and code references to Batch_Number__c.
4	`    <description>Batch Number. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Batch Number. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Batch Number</label>`	Sets human-readable Salesforce UI label to Batch Number.
6	`    <length>80</length>`	Sets maximum text length to 80.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/fields/Discount_Amount__c.field-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/fields/Discount_Amount__c.field-meta.xml. Label: Line Discount Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 cdfef123fdc85671c9197db0fc342f0cb69fee5a21b2a817640523a3b0385a63

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Discount_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Discount_Amount__c.
4	`    <description>Line Discount Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Line Discount Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Line Discount Amount</label>`	Sets human-readable Salesforce UI label to Line Discount Amount.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>2</scale>`	Sets decimal places to 2.
9	`    <type>Currency</type>`	Sets field/storage type to Currency.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/fields/Expiry_Date__c.field-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/fields/Expiry_Date__c.field-meta.xml. Label: Expiry Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 a3b29a5e8033da371749dad52ff3a8687435c0ed24c9283b45a875e7c3b4adf6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Expiry_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Expiry_Date__c.
4	`    <description>Expiry Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Expiry Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Expiry Date</label>`	Sets human-readable Salesforce UI label to Expiry Date.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/fields/Free_Pieces__c.field-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/fields/Free_Pieces__c.field-meta.xml. Label: Free Pieces. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 9879342a688441b455dc3986b69764901f42760f9793e1fed118a6132f61b9a0

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Free_Pieces__c</fullName>`	Sets API identifier used by metadata deployment and code references to Free_Pieces__c.
4	`    <description>Free Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Free Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Free Pieces</label>`	Sets human-readable Salesforce UI label to Free Pieces.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/fields/Gross_Amount__c.field-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/fields/Gross_Amount__c.field-meta.xml. Label: Gross Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 f4240d2d0e6dc9f87068562ea8a9f12586d841b88725c717cef496a6d45f3374

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Gross_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Gross_Amount__c.
4	`    <description>Gross Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Gross Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>ROUND(Quantity_Pieces__c * Unit_Price__c, 2)</formula>`	Sets formula expression evaluated by Salesforce to ROUND(Quantity_Pieces__c * Unit_Price__c, 2).
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Gross Amount</label>`	Sets human-readable Salesforce UI label to Gross Amount.
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <scale>2</scale>`	Sets decimal places to 2.
10	`    <type>Currency</type>`	Sets field/storage type to Currency.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/fields/Inventory__c.field-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/fields/Inventory__c.field-meta.xml. Label: Distributor Inventory. Type: Lookup. Relationship target: DMS_Inventory__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 1c8d4c68f483aba689e81750c9f48ce357876ce570fda636bcbfdfba62f94402

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Inventory__c</fullName>`	Sets API identifier used by metadata deployment and code references to Inventory__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Distributor Inventory. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Distributor Inventory. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Distributor Inventory</label>`	Sets human-readable Salesforce UI label to Distributor Inventory.
7	`    <referenceTo>DMS_Inventory__c</referenceTo>`	Sets object referenced by this relationship to DMS_Inventory__c.
8	`    <relationshipLabel>Invoice Lines</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Invoice Lines.
9	`    <relationshipName>Invoice_Lines</relationshipName>`	Sets relationship API traversal name to Invoice_Lines.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/fields/Invoice__c.field-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/fields/Invoice__c.field-meta.xml. Label: Invoice. Type: MasterDetail. Relationship target: DMS_Invoice__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 1420ae7b3d62be4512621981ec53ea907d0832b094ff2eefd09697ccd51beff2

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Invoice__c</fullName>`	Sets API identifier used by metadata deployment and code references to Invoice__c.
4	`    <description>Invoice. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Invoice. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Invoice</label>`	Sets human-readable Salesforce UI label to Invoice.
6	`    <referenceTo>DMS_Invoice__c</referenceTo>`	Sets object referenced by this relationship to DMS_Invoice__c.
7	`    <relationshipLabel>Invoice Lines</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Invoice Lines.
8	`    <relationshipName>Invoice_Lines</relationshipName>`	Sets relationship API traversal name to Invoice_Lines.
9	`    <relationshipOrder>0</relationshipOrder>`	Sets relationship Order in the enclosing configuration to 0.
10	`    <reparentableMasterDetail>false</reparentableMasterDetail>`	Sets reparentable Master Detail in the enclosing configuration to false.
11	`    <type>MasterDetail</type>`	Sets field/storage type to MasterDetail.
12	`    <writeRequiresMasterRead>false</writeRequiresMasterRead>`	Sets write Requires Master Read in the enclosing configuration to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/fields/Order_Item__c.field-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/fields/Order_Item__c.field-meta.xml. Label: Order Item. Type: Lookup. Relationship target: Order_Item__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 d9682140d1ceb743b888ae358580afccc17782ce9272cdd64f098d6d468f4a70

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Order_Item__c</fullName>`	Sets API identifier used by metadata deployment and code references to Order_Item__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Order Item. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Order Item. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Order Item</label>`	Sets human-readable Salesforce UI label to Order Item.
7	`    <referenceTo>Order_Item__c</referenceTo>`	Sets object referenced by this relationship to Order_Item__c.
8	`    <relationshipLabel>DMS Invoice Lines</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Invoice Lines.
9	`    <relationshipName>DMS_Invoice_Lines</relationshipName>`	Sets relationship API traversal name to DMS_Invoice_Lines.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/fields/Product__c.field-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/fields/Product__c.field-meta.xml. Label: Product. Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 2c56f038eab93000d8567e07de793675303e36013ac74da4fb56bc543a2528cc

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Product__c</fullName>`	Sets API identifier used by metadata deployment and code references to Product__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Product. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Product. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Product</label>`	Sets human-readable Salesforce UI label to Product.
7	`    <referenceTo>Product__c</referenceTo>`	Sets object referenced by this relationship to Product__c.
8	`    <relationshipLabel>DMS Invoice Lines</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Invoice Lines.
9	`    <relationshipName>DMS_Invoice_Lines</relationshipName>`	Sets relationship API traversal name to DMS_Invoice_Lines.
10	`    <required>true</required>`	Sets whether a value is mandatory to true.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/fields/Quantity_Pieces__c.field-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/fields/Quantity_Pieces__c.field-meta.xml. Label: Billed Pieces. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 0dbfdd67ecc54b3bbafd27a79236ac8eed8882f2213e7237a4de1d72d6bcd085

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Quantity_Pieces__c</fullName>`	Sets API identifier used by metadata deployment and code references to Quantity_Pieces__c.
4	`    <description>Billed Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Billed Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Billed Pieces</label>`	Sets human-readable Salesforce UI label to Billed Pieces.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/fields/Scheme__c.field-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/fields/Scheme__c.field-meta.xml. Label: Scheme. Type: Lookup. Relationship target: Scheme__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 281ffaf49b5010f8b6f38ce69a03e3888ab31b0ed6fcca36148d053e44bd77ae

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Scheme__c</fullName>`	Sets API identifier used by metadata deployment and code references to Scheme__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Scheme. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Scheme. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Scheme</label>`	Sets human-readable Salesforce UI label to Scheme.
7	`    <referenceTo>Scheme__c</referenceTo>`	Sets object referenced by this relationship to Scheme__c.
8	`    <relationshipLabel>DMS Invoice Lines</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Invoice Lines.
9	`    <relationshipName>DMS_Invoice_Lines</relationshipName>`	Sets relationship API traversal name to DMS_Invoice_Lines.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/fields/Stock_Out_Pieces__c.field-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/fields/Stock_Out_Pieces__c.field-meta.xml. Label: Stock Out Pieces. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 848c3adbc180e30fcb19db2768e92aa8555f719161bc8471e2e6b8a480881663

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Stock_Out_Pieces__c</fullName>`	Sets API identifier used by metadata deployment and code references to Stock_Out_Pieces__c.
4	`    <description>Stock Out Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Stock Out Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>Quantity_Pieces__c + BLANKVALUE(Free_Pieces__c, 0)</formula>`	Sets formula expression evaluated by Salesforce to Quantity_Pieces__c + BLANKVALUE(Free_Pieces__c, 0).
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Stock Out Pieces</label>`	Sets human-readable Salesforce UI label to Stock Out Pieces.
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <scale>0</scale>`	Sets decimal places to 0.
10	`    <type>Number</type>`	Sets field/storage type to Number.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/fields/Tax_Amount__c.field-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/fields/Tax_Amount__c.field-meta.xml. Label: Tax Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 17b82d984eafadcd638c2eb36c60d8be23caef51bf2852b1309b5de20bc93325

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Tax_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Tax_Amount__c.
4	`    <description>Tax Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Tax Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>ROUND((Gross_Amount__c - BLANKVALUE(Discount_Amount__c, 0)) * BLANKVALUE(Tax_Percent__c, 0) / 100, 2)</formula>`	Sets formula expression evaluated by Salesforce to ROUND((Gross_Amount__c - BLANKVALUE(Discount_Amount__c, 0)) * BLANKVALUE(Tax_Percent__c, 0) / 100, 2).
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Tax Amount</label>`	Sets human-readable Salesforce UI label to Tax Amount.
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <scale>2</scale>`	Sets decimal places to 2.
10	`    <type>Currency</type>`	Sets field/storage type to Currency.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/fields/Tax_Percent__c.field-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/fields/Tax_Percent__c.field-meta.xml. Label: Tax Percent. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 1da70f9b40e71ebc8de6f7d58d6d2324d7f3140d0dc053a41975b9c0a27df994

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Tax_Percent__c</fullName>`	Sets API identifier used by metadata deployment and code references to Tax_Percent__c.
4	`    <description>Tax Percent. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Tax Percent. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Tax Percent</label>`	Sets human-readable Salesforce UI label to Tax Percent.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>2</scale>`	Sets decimal places to 2.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/fields/Total_Amount__c.field-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/fields/Total_Amount__c.field-meta.xml. Label: Line Total. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 5470359daf67ab7921ec1624d7b111028ccf93d6a9c24aa67e24150018b9f455

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Total_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Total_Amount__c.
4	`    <description>Line Total. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Line Total. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>Gross_Amount__c - BLANKVALUE(Discount_Amount__c, 0) + Tax_Amount__c</formula>`	Sets formula expression evaluated by Salesforce to Gross_Amount__c - BLANKVALUE(Discount_Amount__c, 0) + Tax_Amount__c.
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Line Total</label>`	Sets human-readable Salesforce UI label to Line Total.
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <scale>2</scale>`	Sets decimal places to 2.
10	`    <type>Currency</type>`	Sets field/storage type to Currency.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/fields/Unit_Price__c.field-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/fields/Unit_Price__c.field-meta.xml. Label: Price Per Piece. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 9e95a78dec6ec756562bc978c4f12ac3b837722e5e7de543be59bd6dd41bd74f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Unit_Price__c</fullName>`	Sets API identifier used by metadata deployment and code references to Unit_Price__c.
4	`    <description>Price Per Piece. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Price Per Piece. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Price Per Piece</label>`	Sets human-readable Salesforce UI label to Price Per Piece.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>2</scale>`	Sets decimal places to 2.
9	`    <type>Currency</type>`	Sets field/storage type to Currency.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/listViews/All_Records.listView-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/listViews/All_Records.listView-meta.xml. Label: All DMS Invoice Lines. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 f04427f148f37d2ed7113cee7f80d1e15e5c7ba75030c57500b5488b95f4a349

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Records</fullName>`	Sets API identifier used by metadata deployment and code references to All_Records.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Product__c</columns>`	Sets columns in the enclosing configuration to Product__c.
6	`    <columns>Total_Amount__c</columns>`	Sets columns in the enclosing configuration to Total_Amount__c.
7	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
8	`    <label>All DMS Invoice Lines</label>`	Sets human-readable Salesforce UI label to All DMS Invoice Lines.
9	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/validationRules/Original_Line_And_Stock_Match.validationRule-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/validationRules/Original_Line_And_Stock_Match.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 47e49cac3c17621a3efaa9d4f450a63a08237a47c9b77f37957fc5ae59e4f4cd

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Original_Line_And_Stock_Match</fullName>`	Sets API identifier used by metadata deployment and code references to Original_Line_And_Stock_Match.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	` <errorConditionFormula>OR(AND(NOT(ISBLANK(Order_Item__c)), OR(Product__c <> Order_Item__r.Product__c, Invoice__r.Sales_Order__c <> Order_Item__r.Sales_Order__c)), AND(NOT(ISBLANK(Inventory__c)), OR(Product__c <> Inventory__r.Product__c, Invoice__r.Distributor__c <> Inventory__r.Distributor__c)))</errorConditionFormula>`	Sets condition that makes this validation rule fail to OR(AND(NOT(ISBLANK(Order_Item__c)), OR(Product__c <> Order_Item__r.Product__c, Invoice__r.Sales_Order__c <> Order_Item__r.Sales_Order__c)), AND(NOT(ISBLANK(Inventory__c)), OR(Product__c &l.
6	`    <errorMessage>The order item and stock must match this product, sales order and distributor.</errorMessage>`	Sets message displayed when the rule fails to The order item and stock must match this product, sales order and distributor..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Invoice_Line__c/validationRules/Valid_Line_Amounts.validationRule-meta.xml

Salesforce metadata for DMS_Invoice_Line__c/validationRules/Valid_Line_Amounts.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 a6ff9710e94781e6d8d12f346692b39b276614e4eaec778d38a663bb91df293d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Valid_Line_Amounts</fullName>`	Sets API identifier used by metadata deployment and code references to Valid_Line_Amounts.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>OR(ISBLANK(Quantity_Pieces__c), Quantity_Pieces__c <= 0, Free_Pieces__c < 0, ISBLANK(Unit_Price__c), Unit_Price__c < 0, Discount_Amount__c < 0, Discount_Amount__c > Gross_Amount__c, Tax_Percent__c < 0, Tax_Percent__c > 100)</errorConditionFormula>`	Sets condition that makes this validation rule fail to OR(ISBLANK(Quantity_Pieces__c), Quantity_Pieces__c <= 0, Free_Pieces__c < 0, ISBLANK(Unit_Price__c), Unit_Price__c < 0, Discount_Amount__c < 0, Discount_Amount__c > Gross_Amount__c, Tax.
6	`    <errorMessage>Enter positive billed pieces, a price, and valid discounts and tax (0 to 100).</errorMessage>`	Sets message displayed when the rule fails to Enter positive billed pieces, a price, and valid discounts and tax (0 to 100)..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Invoice__c/DMS_Invoice__c.object-meta.xml

Salesforce metadata for DMS_Invoice__c/DMS_Invoice__c.object-meta.xml. Label: DMS Invoice. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 ee207e72c35aa99b2c9bed093e4952e322d1682c13a6e6952a7d3b9b17a9b2bf

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
4	`    <description>DMS Invoice records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled.</description>`	Sets description in the enclosing configuration to DMS Invoice records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled..
5	`    <enableActivities>true</enableActivities>`	Sets enable Activities in the enclosing configuration to true.
6	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
7	`    <label>DMS Invoice</label>`	Sets human-readable Salesforce UI label to DMS Invoice.
8	`    <nameField><displayFormat>INV-{000000}</displayFormat><label>DMS Invoice Number</label><type>AutoNumber</type></nameField>`	Sets name Field in the enclosing configuration to <displayFormat>INV-{000000}</displayFormat><label>DMS Invoice Number</label><type>AutoNumber</type>.
9	`    <pluralLabel>DMS Invoices</pluralLabel>`	Sets plural Label in the enclosing configuration to DMS Invoices.
10	`    <sharingModel>Private</sharingModel>`	Sets record sharing baseline to Private.
11	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/DMS_Invoice__c/fields/Balance_Due__c.field-meta.xml

Salesforce metadata for DMS_Invoice__c/fields/Balance_Due__c.field-meta.xml. Label: Balance Due. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 46ce31238904a446c534717754ff9bf29677dd757dd4c4fadc6035dec9553121

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Balance_Due__c</fullName>`	Sets API identifier used by metadata deployment and code references to Balance_Due__c.
4	`    <description>Balance Due. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Balance Due. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>Total_Amount__c - BLANKVALUE(Paid_Amount__c, 0)</formula>`	Sets formula expression evaluated by Salesforce to Total_Amount__c - BLANKVALUE(Paid_Amount__c, 0).
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Balance Due</label>`	Sets human-readable Salesforce UI label to Balance Due.
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <scale>2</scale>`	Sets decimal places to 2.
10	`    <type>Currency</type>`	Sets field/storage type to Currency.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice__c/fields/Discount_Amount__c.field-meta.xml

Salesforce metadata for DMS_Invoice__c/fields/Discount_Amount__c.field-meta.xml. Label: Discount Amount. Type: Summary. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 f6fafce8319a4b7fe7b3fd1de63d3d9ef47a7d4a25c3846341ddc5feec6983d7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Discount_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Discount_Amount__c.
4	`    <description>Discount Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records.</description>`	Sets description in the enclosing configuration to Discount Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records..
5	`    <label>Discount Amount</label>`	Sets human-readable Salesforce UI label to Discount Amount.
6	`    <summarizedField>DMS_Invoice_Line__c.Discount_Amount__c</summarizedField>`	Sets summarized Field in the enclosing configuration to DMS_Invoice_Line__c.Discount_Amount__c.
7	`    <summaryForeignKey>DMS_Invoice_Line__c.Invoice__c</summaryForeignKey>`	Sets summary Foreign Key in the enclosing configuration to DMS_Invoice_Line__c.Invoice__c.
8	`    <summaryOperation>sum</summaryOperation>`	Sets summary Operation in the enclosing configuration to sum.
9	`    <type>Summary</type>`	Sets field/storage type to Summary.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice__c/fields/Distributor__c.field-meta.xml

Salesforce metadata for DMS_Invoice__c/fields/Distributor__c.field-meta.xml. Label: DMS Distributor. Type: Lookup. Relationship target: DMS_Distributor__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 5633776aee0b27188b5d2f3bfc082d73b2243fef1b6e50935c8447a9fb67fa24

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Distributor__c</fullName>`	Sets API identifier used by metadata deployment and code references to Distributor__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>DMS Distributor. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to DMS Distributor. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>DMS Distributor</label>`	Sets human-readable Salesforce UI label to DMS Distributor.
7	`    <referenceTo>DMS_Distributor__c</referenceTo>`	Sets object referenced by this relationship to DMS_Distributor__c.
8	`    <relationshipLabel>Invoices</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Invoices.
9	`    <relationshipName>Invoices</relationshipName>`	Sets relationship API traversal name to Invoices.
10	`    <required>true</required>`	Sets whether a value is mandatory to true.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice__c/fields/Due_Date__c.field-meta.xml

Salesforce metadata for DMS_Invoice__c/fields/Due_Date__c.field-meta.xml. Label: Due Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 b48fc038046109c76c372831b5511e1fc2260c8cdd4069a0b050e7ef01268fdd

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Due_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Due_Date__c.
4	`    <description>Due Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Due Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Due Date</label>`	Sets human-readable Salesforce UI label to Due Date.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice__c/fields/Gross_Amount__c.field-meta.xml

Salesforce metadata for DMS_Invoice__c/fields/Gross_Amount__c.field-meta.xml. Label: Gross Amount. Type: Summary. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 9a892f2b453c17c4dc782d437b7d75f5147a2ca81a255030451c41169b52fc7d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Gross_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Gross_Amount__c.
4	`    <description>Gross Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records.</description>`	Sets description in the enclosing configuration to Gross Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records..
5	`    <label>Gross Amount</label>`	Sets human-readable Salesforce UI label to Gross Amount.
6	`    <summarizedField>DMS_Invoice_Line__c.Gross_Amount__c</summarizedField>`	Sets summarized Field in the enclosing configuration to DMS_Invoice_Line__c.Gross_Amount__c.
7	`    <summaryForeignKey>DMS_Invoice_Line__c.Invoice__c</summaryForeignKey>`	Sets summary Foreign Key in the enclosing configuration to DMS_Invoice_Line__c.Invoice__c.
8	`    <summaryOperation>sum</summaryOperation>`	Sets summary Operation in the enclosing configuration to sum.
9	`    <type>Summary</type>`	Sets field/storage type to Summary.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice__c/fields/Invoice_Date__c.field-meta.xml

Salesforce metadata for DMS_Invoice__c/fields/Invoice_Date__c.field-meta.xml. Label: Invoice Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 7747bb32fb2283e3379c01628d8f2d8060f7d47885ff50ad2c8236a9ac619e4e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Invoice_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Invoice_Date__c.
4	`    <description>Invoice Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Invoice Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Invoice Date</label>`	Sets human-readable Salesforce UI label to Invoice Date.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice__c/fields/Notes__c.field-meta.xml

Salesforce metadata for DMS_Invoice__c/fields/Notes__c.field-meta.xml. Label: Notes. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 5602c0c76c49595c769bab38f74fa6fd0bdf1b12ba897c06c29e068fd2dc7d3b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Notes__c</fullName>`	Sets API identifier used by metadata deployment and code references to Notes__c.
4	`    <description>Notes. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Notes. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Notes</label>`	Sets human-readable Salesforce UI label to Notes.
6	`    <length>255</length>`	Sets maximum text length to 255.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice__c/fields/Outlet__c.field-meta.xml

Salesforce metadata for DMS_Invoice__c/fields/Outlet__c.field-meta.xml. Label: Outlet. Type: Lookup. Relationship target: Retailer__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 b67d41d95a014b33964bbbc8391417984e5546c85b38145c140504b75e9db15a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Outlet__c</fullName>`	Sets API identifier used by metadata deployment and code references to Outlet__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Outlet. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Outlet. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Outlet</label>`	Sets human-readable Salesforce UI label to Outlet.
7	`    <referenceTo>Retailer__c</referenceTo>`	Sets object referenced by this relationship to Retailer__c.
8	`    <relationshipLabel>DMS Invoices</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Invoices.
9	`    <relationshipName>DMS_Invoices</relationshipName>`	Sets relationship API traversal name to DMS_Invoices.
10	`    <required>true</required>`	Sets whether a value is mandatory to true.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice__c/fields/Paid_Amount__c.field-meta.xml

Salesforce metadata for DMS_Invoice__c/fields/Paid_Amount__c.field-meta.xml. Label: Paid Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 4da624add020d5cf0503b09ae80f9205fe617661fdd4b909d144135c850f4350

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Paid_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Paid_Amount__c.
4	`    <description>Paid Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Paid Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Paid Amount</label>`	Sets human-readable Salesforce UI label to Paid Amount.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>2</scale>`	Sets decimal places to 2.
9	`    <type>Currency</type>`	Sets field/storage type to Currency.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice__c/fields/Payment_Status__c.field-meta.xml

Salesforce metadata for DMS_Invoice__c/fields/Payment_Status__c.field-meta.xml. Label: Payment Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

17 numbered source lines | SHA-256 9c0444febed9faf27c62fffb56a346f2226cb5f972439fcce2ce3e48d67062aa

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Payment_Status__c</fullName>`	Sets API identifier used by metadata deployment and code references to Payment_Status__c.
4	`    <description>Payment Status. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Payment Status. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Payment Status</label>`	Sets human-readable Salesforce UI label to Payment Status.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value><fullName>Unpaid</fullName><default>true</default><label>Unpaid</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Unpaid</fullName><default>true</default><label>Unpaid</label>.
13	`            <value><fullName>Partially Paid</fullName><default>false</default><label>Partially Paid</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Partially Paid</fullName><default>false</default><label>Partially Paid</label>.
14	`            <value><fullName>Paid</fullName><default>false</default><label>Paid</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Paid</fullName><default>false</default><label>Paid</label>.
15	`        </valueSetDefinition>`	Closes the valueSetDefinition configuration block.

Line	Source code	Explanation / reading note
16	`    </valueSet>`	Closes the valueSet configuration block.
17	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice__c/fields/Sales_Order__c.field-meta.xml

Salesforce metadata for DMS_Invoice__c/fields/Sales_Order__c.field-meta.xml. Label: Secondary Sales Order. Type: Lookup. Relationship target: Sales_Order__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 242cfd0e69afc458ddb8b8a4fb856c857ce6383b35cd6c3b157f84dd82f9c0c6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Sales_Order__c</fullName>`	Sets API identifier used by metadata deployment and code references to Sales_Order__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Secondary Sales Order. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Secondary Sales Order. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Secondary Sales Order</label>`	Sets human-readable Salesforce UI label to Secondary Sales Order.
7	`    <referenceTo>Sales_Order__c</referenceTo>`	Sets object referenced by this relationship to Sales_Order__c.
8	`    <relationshipLabel>DMS Invoices</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Invoices.
9	`    <relationshipName>DMS_Invoices</relationshipName>`	Sets relationship API traversal name to DMS_Invoices.
10	`    <required>true</required>`	Sets whether a value is mandatory to true.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice__c/fields/Status__c.field-meta.xml

Salesforce metadata for DMS_Invoice__c/fields/Status__c.field-meta.xml. Label: Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

17 numbered source lines | SHA-256 bef6cfa3c97b806134046e4df208590a24e81598de8ff3cfcd3514cb47872593

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Status__c</fullName>`	Sets API identifier used by metadata deployment and code references to Status__c.
4	`    <description>Status. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Status. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Status</label>`	Sets human-readable Salesforce UI label to Status.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value><fullName>Draft</fullName><default>true</default><label>Draft</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Draft</fullName><default>true</default><label>Draft</label>.
13	`            <value><fullName>Issued</fullName><default>false</default><label>Issued</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Issued</fullName><default>false</default><label>Issued</label>.
14	`            <value><fullName>Cancelled</fullName><default>false</default><label>Cancelled</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Cancelled</fullName><default>false</default><label>Cancelled</label>.
15	`        </valueSetDefinition>`	Closes the valueSetDefinition configuration block.
16	`    </valueSet>`	Closes the valueSet configuration block.

Line	Source code	Explanation / reading note
17	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice__c/fields/Tax_Amount__c.field-meta.xml

Salesforce metadata for DMS_Invoice__c/fields/Tax_Amount__c.field-meta.xml. Label: Tax Amount. Type: Summary. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 d92bbb4e99bd3dacb821763b5510501628d1ec187fa4dd054c71d5e8334d90cc

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Tax_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Tax_Amount__c.
4	`    <description>Tax Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records.</description>`	Sets description in the enclosing configuration to Tax Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records..
5	`    <label>Tax Amount</label>`	Sets human-readable Salesforce UI label to Tax Amount.
6	`    <summarizedField>DMS_Invoice_Line__c.Tax_Amount__c</summarizedField>`	Sets summarized Field in the enclosing configuration to DMS_Invoice_Line__c.Tax_Amount__c.
7	`    <summaryForeignKey>DMS_Invoice_Line__c.Invoice__c</summaryForeignKey>`	Sets summary Foreign Key in the enclosing configuration to DMS_Invoice_Line__c.Invoice__c.
8	`    <summaryOperation>sum</summaryOperation>`	Sets summary Operation in the enclosing configuration to sum.
9	`    <type>Summary</type>`	Sets field/storage type to Summary.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice__c/fields/Total_Amount__c.field-meta.xml

Salesforce metadata for DMS_Invoice__c/fields/Total_Amount__c.field-meta.xml. Label: Invoice Total. Type: Summary. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 8ecef7dcc56b0f52d7d25f5e1b07e023ade2ab7c9f440475770fed5ce2172a44

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Total_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Total_Amount__c.
4	`    <description>Invoice Total. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records.</description>`	Sets description in the enclosing configuration to Invoice Total. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records..
5	`    <label>Invoice Total</label>`	Sets human-readable Salesforce UI label to Invoice Total.
6	`    <summarizedField>DMS_Invoice_Line__c.Total_Amount__c</summarizedField>`	Sets summarized Field in the enclosing configuration to DMS_Invoice_Line__c.Total_Amount__c.
7	`    <summaryForeignKey>DMS_Invoice_Line__c.Invoice__c</summaryForeignKey>`	Sets summary Foreign Key in the enclosing configuration to DMS_Invoice_Line__c.Invoice__c.
8	`    <summaryOperation>sum</summaryOperation>`	Sets summary Operation in the enclosing configuration to sum.
9	`    <type>Summary</type>`	Sets field/storage type to Summary.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Invoice__c/listViews/All_Records.listView-meta.xml

Salesforce metadata for DMS_Invoice__c/listViews/All_Records.listView-meta.xml. Label: All DMS Invoices. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 0341d889817268e0343c6ac9a9fd4d154b7bc8750f45b71e66c54065ed4f1edb

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Records</fullName>`	Sets API identifier used by metadata deployment and code references to All_Records.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Distributor__c</columns>`	Sets columns in the enclosing configuration to Distributor__c.
6	`    <columns>Status__c</columns>`	Sets columns in the enclosing configuration to Status__c.
7	`    <columns>Total_Amount__c</columns>`	Sets columns in the enclosing configuration to Total_Amount__c.
8	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
9	`    <label>All DMS Invoices</label>`	Sets human-readable Salesforce UI label to All DMS Invoices.
10	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/DMS_Invoice__c/validationRules/Order_Outlet_And_Distributor_Match.validationRule-meta.xml

Salesforce metadata for DMS_Invoice__c/validationRules/Order_Outlet_And_Distributor_Match.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 a1f0688f8a89434f283002aa26c8a171cad0f948840f4f9e37693b3f0aa265ea

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Order_Outlet_And_Distributor_Match</fullName>`	Sets API identifier used by metadata deployment and code references to Order_Outlet_And_Distributor_Match.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>OR(Outlet__c <> Sales_Order__r.Retailer__c, AND(NOT(ISBLANK(Sales_Order__r.DMS_Distributor__c)), Distributor__c <> Sales_Order__r.DMS_Distributor__c))</errorConditionFormula>`	Sets condition that makes this validation rule fail to OR(Outlet__c <> Sales_Order__r.Retailer__c, AND(NOT(ISBLANK(Sales_Order__r.DMS_Distributor__c)), Distributor__c <> Sales_Order__r.DMS_Distributor__c)).
6	`    <errorMessage>The invoice must use the outlet and assigned distributor from the sales order.</errorMessage>`	Sets message displayed when the rule fails to The invoice must use the outlet and assigned distributor from the sales order..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Invoice__c/validationRules/Payment_And_Dates_Valid.validationRule-meta.xml

Salesforce metadata for DMS_Invoice__c/validationRules/Payment_And_Dates_Valid.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 5dc9816c248d11d411fb3491f60932d32da1093c30cd76387a2ff1f0f8414540

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Payment_And_Dates_Valid</fullName>`	Sets API identifier used by metadata deployment and code references to Payment_And_Dates_Valid.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>OR(Paid_Amount__c < 0, Paid_Amount__c > Total_Amount__c, AND(NOT(ISBLANK(Due_Date__c)), NOT(ISBLANK(Invoice_Date__c)), Due_Date__c < Invoice_Date__c))</errorConditionFormula>`	Sets condition that makes this validation rule fail to OR(Paid_Amount__c < 0, Paid_Amount__c > Total_Amount__c, AND(NOT(ISBLANK(Due_Date__c)), NOT(ISBLANK(Invoice_Date__c)), Due_Date__c < Invoice_Date__c)).
6	`    <errorMessage>Paid amount must be between zero and invoice total; due date cannot precede invoice date.</errorMessage>`	Sets message displayed when the rule fails to Paid amount must be between zero and invoice total; due date cannot precede invoice date..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Primary_Order_Line__c/DMS_Primary_Order_Line__c.object-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/DMS_Primary_Order_Line__c.object-meta.xml. Label: Primary Order Line. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 fd80248ef8d70b0e026a79b5cff63b05a3361853460834e7f61b7696e659cf22

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata"><deploymentStatus>Deployed</deploymentStatus><enableActivities>true</enableActivities><enableReports>true</enableReports><label>Primary Order Line</label><nameField><displayFormat>POL-{000000}</displayFormat><label>Primary Order Line Number</label><type>AutoNumber</type></nameField><pluralLabel>Primary Order Lines</pluralLabel><sharingModel>Private</sharingModel></CustomObject>`	Sets Custom Object in the enclosing configuration to <deploymentStatus>Deployed</deploymentStatus><enableActivities>true</enableActivities><enableReports>true</enableReports><label>Primary Order Line</label><nameField><displayFormat>POL-{000000}</displa.

force-app/main/default/objects/DMS_Primary_Order_Line__c/fields/Case_Price__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/fields/Case_Price__c.field-meta.xml. Label: Case Price. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 d497070c514a351796cbd2aa9d29af791e17c904c3bba00809c23ad8e3e60915

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Case_Price__c</fullName><label>Case Price</label><precision>18</precision><scale>2</scale><type>Currency</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Case_Price__c</fullName><label>Case Price</label><precision>18</precision><scale>2</scale><type>Currency</type>.

force-app/main/default/objects/DMS_Primary_Order_Line__c/fields/Cases__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/fields/Cases__c.field-meta.xml. Label: Cases. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 3a76609e92eaaacedc8a69bb5b9d826c2a086c8687bb7348dfd7be598499623a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Cases__c</fullName><label>Cases</label><precision>18</precision><scale>0</scale><type>Number</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Cases__c</fullName><label>Cases</label><precision>18</precision><scale>0</scale><type>Number</type>.

force-app/main/default/objects/DMS_Primary_Order_Line__c/fields/Discount_Amount__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/fields/Discount_Amount__c.field-meta.xml. Label: Line Discount Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 cdfef123fdc85671c9197db0fc342f0cb69fee5a21b2a817640523a3b0385a63

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Discount_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Discount_Amount__c.
4	`    <description>Line Discount Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Line Discount Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Line Discount Amount</label>`	Sets human-readable Salesforce UI label to Line Discount Amount.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>2</scale>`	Sets decimal places to 2.
9	`    <type>Currency</type>`	Sets field/storage type to Currency.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Order_Line__c/fields/Free_Cases__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/fields/Free_Cases__c.field-meta.xml. Label: Free Cases. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 f53069a355ba55a12a029427a6da74f03015cf05bc1ba8e8a7aa863e7a5c9e01

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Free_Cases__c</fullName>`	Sets API identifier used by metadata deployment and code references to Free_Cases__c.
4	`    <description>Free Cases. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Free Cases. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Free Cases</label>`	Sets human-readable Salesforce UI label to Free Cases.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Order_Line__c/fields/Free_Gift__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/fields/Free_Gift__c.field-meta.xml. Label: Free Gift. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 c4cc837efc986f516ca053c3942bd4fb060784fba2e76e655a8d80ab534a0286

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Free_Gift__c</fullName>`	Sets API identifier used by metadata deployment and code references to Free_Gift__c.
4	`    <description>Free Gift. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Free Gift. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Free Gift</label>`	Sets human-readable Salesforce UI label to Free Gift.
6	`    <length>120</length>`	Sets maximum text length to 120.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Order_Line__c/fields/Free_Pieces_Per_Case__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/fields/Free_Pieces_Per_Case__c.field-meta.xml. Label: Free Pieces Per Case. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 63ba1ec09f36354a128779c84e47b0eedbd558ca2c432d9a3086b9634ef55bcf

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Free_Pieces_Per_Case__c</fullName><description>Free-product conversion at order time.</description><label>Free Pieces Per Case</label><precision>10</precision><scale>0</scale><type>Number</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Free_Pieces_Per_Case__c</fullName><description>Free-product conversion at order time.</description><label>Free Pieces Per Case</label><precision>10</precision><scale>0</scale><type>Number</t.

force-app/main/default/objects/DMS_Primary_Order_Line__c/fields/Free_Product__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/fields/Free_Product__c.field-meta.xml. Label: Free Product. Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 bf21e29397951170d7264aba50bbe5caba2d77bf540506d3c2c4654102881380

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Free_Product__c</fullName><deleteConstraint>Restrict</deleteConstraint><description>Free product snapshotted from the scheme.</description><label>Free Product</label><referenceTo>Product__c</referenceTo><relationshipLabel>Primary Free Product Lines</relationshipLabel><relationshipName>Primary_Free_Product_Lines</relationshipName><required>false</required><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Free_Product__c</fullName><deleteConstraint>Restrict</deleteConstraint><description>Free product snapshotted from the scheme.</description><label>Free Product</label><referenceTo>Product__c<.

force-app/main/default/objects/DMS_Primary_Order_Line__c/fields/Gift_Quantity__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/fields/Gift_Quantity__c.field-meta.xml. Label: Gift Quantity. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 8066eb4e7b0ce9a8c6254cb5e02dc278120a4cb5e09b8763b4fed9430156b82c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Gift_Quantity__c</fullName>`	Sets API identifier used by metadata deployment and code references to Gift_Quantity__c.
4	`    <description>Gift Quantity. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Gift Quantity. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Gift Quantity</label>`	Sets human-readable Salesforce UI label to Gift Quantity.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Order_Line__c/fields/Line_Amount__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/fields/Line_Amount__c.field-meta.xml. Label: Line Total. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 cd2bde65c96b1f1b9ed21710755f8d418ecdc87217a167b5ad463c22c0869ff5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Line_Amount__c</fullName><label>Line Total</label><formula>ROUND(Cases__c * Case_Price__c * (1 + Tax_Percent__c / 100), 2)</formula><formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs><precision>18</precision><scale>2</scale><type>Currency</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Line_Amount__c</fullName><label>Line Total</label><formula>ROUND(Cases__c * Case_Price__c * (1 + Tax_Percent__c / 100), 2)</formula><formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs><p.

force-app/main/default/objects/DMS_Primary_Order_Line__c/fields/Net_Amount__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/fields/Net_Amount__c.field-meta.xml. Label: Net Line Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 96ee9279a8ff57bacadd23f6abe8783d74e33a07bfbc79774c6fb5525165e125

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Net_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Net_Amount__c.
4	`    <description>Net Line Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Net Line Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>ROUND((Cases__c * Case_Price__c - BLANKVALUE(Discount_Amount__c, 0)) * (1 + BLANKVALUE(Tax_Percent__c, 0) / 100), 2)</formula>`	Sets formula expression evaluated by Salesforce to ROUND((Cases__c * Case_Price__c - BLANKVALUE(Discount_Amount__c, 0)) * (1 + BLANKVALUE(Tax_Percent__c, 0) / 100), 2).
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Net Line Amount</label>`	Sets human-readable Salesforce UI label to Net Line Amount.
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <scale>2</scale>`	Sets decimal places to 2.
10	`    <type>Currency</type>`	Sets field/storage type to Currency.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Order_Line__c/fields/Order__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/fields/Order__c.field-meta.xml. Label: Primary Order. Type: Lookup. Relationship target: DMS_Primary_Order__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 9d889a042f40788f47712ff36a34d0e8360bf2705f1b71407dca3e5a6767adcc

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Order__c</fullName><label>Primary Order</label><deleteConstraint>Restrict</deleteConstraint><referenceTo>DMS_Primary_Order__c</referenceTo><relationshipLabel>Order Lines</relationshipLabel><relationshipName>Order_Lines</relationshipName><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Order__c</fullName><label>Primary Order</label><deleteConstraint>Restrict</deleteConstraint><referenceTo>DMS_Primary_Order__c</referenceTo><relationshipLabel>Order Lines</relationshipLabel><.

force-app/main/default/objects/DMS_Primary_Order_Line__c/fields/Pieces_Per_Case__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/fields/Pieces_Per_Case__c.field-meta.xml. Label: Pieces per Case. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 77e8034543ff4adce727b54d16d21fab8cc9c34a1ad71c98ccf78b79c3599321

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Pieces_Per_Case__c</fullName><label>Pieces per Case</label><precision>18</precision><scale>0</scale><type>Number</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Pieces_Per_Case__c</fullName><label>Pieces per Case</label><precision>18</precision><scale>0</scale><type>Number</type>.

force-app/main/default/objects/DMS_Primary_Order_Line__c/fields/Product__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/fields/Product__c.field-meta.xml. Label: Product. Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 942cb982be2b3e62186b3d3e3ada5914d689918766056325bb5a2b782b8b9c09

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Product__c</fullName><label>Product</label><deleteConstraint>Restrict</deleteConstraint><referenceTo>Product__c</referenceTo><relationshipLabel>Primary Order Lines</relationshipLabel><relationshipName>Primary_Order_Lines</relationshipName><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Product__c</fullName><label>Product</label><deleteConstraint>Restrict</deleteConstraint><referenceTo>Product__c</referenceTo><relationshipLabel>Primary Order Lines</relationshipLabel><relati.

force-app/main/default/objects/DMS_Primary_Order_Line__c/fields/Scheme__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/fields/Scheme__c.field-meta.xml. Label: Primary Scheme. Type: Lookup. Relationship target: Scheme__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 c6900d7248698daed879607a60ea00a973aebcc7d6601ffc568a26ef07af6189

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Scheme__c</fullName>`	Sets API identifier used by metadata deployment and code references to Scheme__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Primary Scheme. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Primary Scheme. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Primary Scheme</label>`	Sets human-readable Salesforce UI label to Primary Scheme.
7	`    <referenceTo>Scheme__c</referenceTo>`	Sets object referenced by this relationship to Scheme__c.
8	`    <relationshipLabel>Primary Order Lines</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Primary Order Lines.
9	`    <relationshipName>Primary_Order_Lines</relationshipName>`	Sets relationship API traversal name to Primary_Order_Lines.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Order_Line__c/fields/Tax_Percent__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/fields/Tax_Percent__c.field-meta.xml. Label: Tax Percent. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 174abf9d88cba499b5306098b9714f4b77dc8a6284ee0967d1d6eaf238078412

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Tax_Percent__c</fullName><label>Tax Percent</label><precision>18</precision><scale>2</scale><type>Number</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Tax_Percent__c</fullName><label>Tax Percent</label><precision>18</precision><scale>2</scale><type>Number</type>.

force-app/main/default/objects/DMS_Primary_Order_Line__c/fields/Total_Pieces__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/fields/Total_Pieces__c.field-meta.xml. Label: Total Pieces. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 d9cb58c9f2a8a2ca81b8a500aebaa521751df6865b8460025c51fb34ba1b2d81

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Total_Pieces__c</fullName>`	Sets API identifier used by metadata deployment and code references to Total_Pieces__c.
4	`    <description>Total Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Total Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>Cases__c * Pieces_Per_Case__c + BLANKVALUE(Free_Cases__c, 0) * IF(Free_Pieces_Per_Case__c > 0, Free_Pieces_Per_Case__c, Pieces_Per_Case__c)</formula>`	Sets formula expression evaluated by Salesforce to Cases__c * Pieces_Per_Case__c + BLANKVALUE(Free_Cases__c, 0) * IF(Free_Pieces_Per_Case__c > 0, Free_Pieces_Per_Case__c, Pieces_Per_Case__c).
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Total Pieces</label>`	Sets human-readable Salesforce UI label to Total Pieces.
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <scale>0</scale>`	Sets decimal places to 0.
10	`    <type>Number</type>`	Sets field/storage type to Number.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Order_Line__c/listViews/All_Records.listView-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/listViews/All_Records.listView-meta.xml. Label: All Primary Order Lines. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 97fd39e1712a0bd797eae9fb447c2915122d82fe19cfbbc29bc00d27a8d35ac3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Records</fullName>`	Sets API identifier used by metadata deployment and code references to All_Records.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Product__c</columns>`	Sets columns in the enclosing configuration to Product__c.
6	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
7	`    <label>All Primary Order Lines</label>`	Sets human-readable Salesforce UI label to All Primary Order Lines.
8	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/DMS_Primary_Order_Line__c/sharingReasons/Officer_Access__c.sharingReason-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/sharingReasons/Officer_Access__c.sharingReason-meta.xml. Label: Company Officer Access. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 fc5ec892cbcfcdeec580c4e115c7bd05304555f8738e39422b9f458923e30c4e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<SharingReason xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Officer_Access__c</fullName><label>Company Officer Access</label></SharingReason>`	Sets Sharing Reason in the enclosing configuration to <fullName>Officer_Access__c</fullName><label>Company Officer Access</label>.

force-app/main/default/objects/DMS_Primary_Order_Line__c/validationRules/Discount_And_Free_Goods_Valid.validationRule-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/validationRules/Discount_And_Free_Goods_Valid.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 106b61c558a217d793bda589b867d05b630bafbb9f52c689668d9047b893c0ee

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Discount_And_Free_Goods_Valid</fullName>`	Sets API identifier used by metadata deployment and code references to Discount_And_Free_Goods_Valid.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>OR(Discount_Amount__c < 0, Discount_Amount__c > Cases__c * Case_Price__c, Free_Cases__c < 0, Gift_Quantity__c < 0)</errorConditionFormula>`	Sets condition that makes this validation rule fail to OR(Discount_Amount__c < 0, Discount_Amount__c > Cases__c * Case_Price__c, Free_Cases__c < 0, Gift_Quantity__c < 0).
6	`    <errorMessage>Discount cannot exceed the gross line value. Free quantities cannot be negative.</errorMessage>`	Sets message displayed when the rule fails to Discount cannot exceed the gross line value. Free quantities cannot be negative..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Primary_Order_Line__c/validationRules/Primary_Scheme_Only.validationRule-meta.xml

Salesforce metadata for DMS_Primary_Order_Line__c/validationRules/Primary_Scheme_Only.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 06b71545d25d02f1837466c0fdf063872e9524fa6e61b5e214d87b8ea608853c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Primary_Scheme_Only</fullName>`	Sets API identifier used by metadata deployment and code references to Primary_Scheme_Only.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(NOT(ISBLANK(Scheme__c)), NOT(ISPICKVAL(Scheme__r.Sales_Channel__c, 'Primary')))</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(Scheme__c)), NOT(ISPICKVAL(Scheme__r.Sales_Channel__c, 'Primary'))).
6	`    <errorMessage>Select a scheme classified as Primary.</errorMessage>`	Sets message displayed when the rule fails to Select a scheme classified as Primary..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Primary_Order__c/DMS_Primary_Order__c.object-meta.xml

Salesforce metadata for DMS_Primary_Order__c/DMS_Primary_Order__c.object-meta.xml. Label: Primary Order. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 152bc56f7a372255afd55581a8b71d4608f20dc83df496ca086642b5c573a344

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata"><deploymentStatus>Deployed</deploymentStatus><enableActivities>true</enableActivities><enableReports>true</enableReports><label>Primary Order</label><nameField><displayFormat>PO-{000000}</displayFormat><label>Primary Order Number</label><type>AutoNumber</type></nameField><pluralLabel>Primary Orders</pluralLabel><sharingModel>Private</sharingModel></CustomObject>`	Sets Custom Object in the enclosing configuration to <deploymentStatus>Deployed</deploymentStatus><enableActivities>true</enableActivities><enableReports>true</enableReports><label>Primary Order</label><nameField><displayFormat>PO-{000000}</displayForma.

force-app/main/default/objects/DMS_Primary_Order__c/fields/Distributor__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order__c/fields/Distributor__c.field-meta.xml. Label: Distributor. Type: Lookup. Relationship target: DMS_Distributor__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 14ffa25c2fdb9ad4a63d39e8aaa4d304ee85fd73219bce1d7eb9cbd712246a1b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Distributor__c</fullName><label>Distributor</label><deleteConstraint>Restrict</deleteConstraint><referenceTo>DMS_Distributor__c</referenceTo><relationshipLabel>Primary Orders</relationshipLabel><relationshipName>Primary_Orders</relationshipName><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Distributor__c</fullName><label>Distributor</label><deleteConstraint>Restrict</deleteConstraint><referenceTo>DMS_Distributor__c</referenceTo><relationshipLabel>Primary Orders</relationshipLa.

force-app/main/default/objects/DMS_Primary_Order__c/fields/Employee__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order__c/fields/Employee__c.field-meta.xml. Label: Employee. Type: Lookup. Relationship target: Employee__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 f5d65e64f8ad0ed66d7a77c5ea6b2c5cc78ca5a5464d2d61789cd4f23d6fe725

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Employee__c</fullName><label>Employee</label><deleteConstraint>Restrict</deleteConstraint><referenceTo>Employee__c</referenceTo><relationshipLabel>Primary Orders</relationshipLabel><relationshipName>Primary_Orders</relationshipName><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Employee__c</fullName><label>Employee</label><deleteConstraint>Restrict</deleteConstraint><referenceTo>Employee__c</referenceTo><relationshipLabel>Primary Orders</relationshipLabel><relation.

force-app/main/default/objects/DMS_Primary_Order__c/fields/Expected_Delivery_Date__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order__c/fields/Expected_Delivery_Date__c.field-meta.xml. Label: Expected Delivery Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 be128f7abada19dca69c734509cfafb056cb20ce59438834422c52535aeb7f12

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Expected_Delivery_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Expected_Delivery_Date__c.
4	`    <description>Expected Delivery Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Expected Delivery Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Expected Delivery Date</label>`	Sets human-readable Salesforce UI label to Expected Delivery Date.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Order__c/fields/Fulfilment_Status__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order__c/fields/Fulfilment_Status__c.field-meta.xml. Label: Fulfilment Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

19 numbered source lines | SHA-256 f6a74b6f3994b796c7d4a6c71bd351f3249c7afe74822c5bda53c3e416179717

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Fulfilment_Status__c</fullName>`	Sets API identifier used by metadata deployment and code references to Fulfilment_Status__c.
4	`    <description>Fulfilment Status. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Fulfilment Status. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Fulfilment Status</label>`	Sets human-readable Salesforce UI label to Fulfilment Status.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value><fullName>Not Dispatched</fullName><default>true</default><label>Not Dispatched</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Not Dispatched</fullName><default>true</default><label>Not Dispatched</label>.
13	`            <value><fullName>Partially Dispatched</fullName><default>false</default><label>Partially Dispatched</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Partially Dispatched</fullName><default>false</default><label>Partially Dispatched</label>.
14	`            <value><fullName>Dispatched</fullName><default>false</default><label>Dispatched</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Dispatched</fullName><default>false</default><label>Dispatched</label>.
15	`            <value><fullName>Partially Received</fullName><default>false</default><label>Partially Received</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Partially Received</fullName><default>false</default><label>Partially Received</label>.

Line	Source code	Explanation / reading note
16	`<value><fullName>Received</fullName><default>false</default><label>Received</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Received</fullName><default>false</default><label>Received</label>.
17	`</valueSetDefinition>`	Closes the valueSetDefinition configuration block.
18	`</valueSet>`	Closes the valueSet configuration block.
19	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Order__c/fields/Notes__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order__c/fields/Notes__c.field-meta.xml. Label: Order Notes. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 69cda3d8c43c486966a23c2d161102dc00f8ffc403aebe71fd24e52e39e8a17a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Notes__c</fullName><label>Order Notes</label><length>255</length><type>Text</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Notes__c</fullName><label>Order Notes</label><length>255</length><type>Text</type>.

force-app/main/default/objects/DMS_Primary_Order__c/fields/Officer__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order__c/fields/Officer__c.field-meta.xml. Label: Approver. Type: Lookup. Relationship target: User. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 6df1e68195fe46e09e09d8f7ca6303842bf499f228a0f50e7620cad5fa91cf8e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Officer__c</fullName><label>Approver</label><deleteConstraint>SetNull</deleteConstraint><referenceTo>User</referenceTo><relationshipLabel>Primary Approvals</relationshipLabel><relationshipName>Primary_Approvals</relationshipName><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Officer__c</fullName><label>Approver</label><deleteConstraint>SetNull</deleteConstraint><referenceTo>User</referenceTo><relationshipLabel>Primary Approvals</relationshipLabel><relationshipNa.

force-app/main/default/objects/DMS_Primary_Order__c/fields/Order_Date__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order__c/fields/Order_Date__c.field-meta.xml. Label: Order Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 b381450bb5ec000cbf85df4cf063f31bfcc432746f8195afe89987bb6f10a275

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Order_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Order_Date__c.
4	`    <description>Order Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Order Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Order Date</label>`	Sets human-readable Salesforce UI label to Order Date.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Order__c/fields/Order_Source__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order__c/fields/Order_Source__c.field-meta.xml. Label: Order Source. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 b4236d6cd38f126ddc26180ed43e0a0184c0292be471fcf113b462e72890f834

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`  <fullName>Order_Source__c</fullName><label>Order Source</label>`	Opens the fullName block; child elements specify its configuration.
4	`  <description>Distinguishes employee SFA orders from distributor self-service orders. Distributor orders intentionally have no Employee.</description>`	Sets description in the enclosing configuration to Distinguishes employee SFA orders from distributor self-service orders. Distributor orders intentionally have no Employee..
5	`  <type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted>`	Opens the type block; child elements specify its configuration.
6	`    <value><fullName>Employee SFA</fullName><default>true</default><label>Employee SFA</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Employee SFA</fullName><default>true</default><label>Employee SFA</label>.
7	`    <value><fullName>Distributor DMS</fullName><default>false</default><label>Distributor DMS</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Distributor DMS</fullName><default>false</default><label>Distributor DMS</label>.
8	`  </valueSetDefinition></valueSet>`	Closes the valueSetDefinition configuration block.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Order__c/fields/Rejection_Reason__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order__c/fields/Rejection_Reason__c.field-meta.xml. Label: Rejection Reason. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 479beeb5408fdc628f01683f5714bb14775d7a9bf7e77ce30358bbd58a58f0b7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Rejection_Reason__c</fullName>`	Sets API identifier used by metadata deployment and code references to Rejection_Reason__c.
4	`    <description>Rejection Reason. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Rejection Reason. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Rejection Reason</label>`	Sets human-readable Salesforce UI label to Rejection Reason.
6	`    <length>255</length>`	Sets maximum text length to 255.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Order__c/fields/Request_Hash__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order__c/fields/Request_Hash__c.field-meta.xml. Label: Request Payload Hash. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 f3b55d4c7c85c7f0c3d05a96d23fec05a4a79bbce17de474e97b3a3c4e2b29b1

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Request_Hash__c</fullName><label>Request Payload Hash</label><length>64</length><type>Text</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Request_Hash__c</fullName><label>Request Payload Hash</label><length>64</length><type>Text</type>.

force-app/main/default/objects/DMS_Primary_Order__c/fields/Request_Key__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order__c/fields/Request_Key__c.field-meta.xml. Label: Mobile Request Key. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 ee8e94ed977579965da98a2e5de10e496e630765c8f11e53aa876e960059e9c3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Request_Key__c</fullName><label>Mobile Request Key</label><externalId>true</externalId><length>80</length><type>Text</type><unique>true</unique></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Request_Key__c</fullName><label>Mobile Request Key</label><externalId>true</externalId><length>80</length><type>Text</type><unique>true</unique>.

force-app/main/default/objects/DMS_Primary_Order__c/fields/Status__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order__c/fields/Status__c.field-meta.xml. Label: Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 fd30c6334d0d67e2b6aa36df425be0e078f2b9d3cf4d741e38e808e311749e05

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Status__c</fullName><label>Status</label><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Draft</fullName><default>true</default><label>Draft</label></value><value><fullName>Submitted</fullName><default>false</default><label>Submitted</label></value><value><fullName>Approved</fullName><default>false</default><label>Approved</label></value><value><fullName>Rejected</fullName><default>false</default><label>Rejected</label></value></valueSetDefinition></valueSet></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Status__c</fullName><label>Status</label><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Draft</fullName><default>true<.

force-app/main/default/objects/DMS_Primary_Order__c/fields/Total_Amount__c.field-meta.xml

Salesforce metadata for DMS_Primary_Order__c/fields/Total_Amount__c.field-meta.xml. Label: Total Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 fa2d07aa9fd6ad78d98604621317df0af9794daa4abd3039379068ff0666a3f3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Total_Amount__c</fullName><label>Total Amount</label><precision>18</precision><scale>2</scale><type>Currency</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Total_Amount__c</fullName><label>Total Amount</label><precision>18</precision><scale>2</scale><type>Currency</type>.

force-app/main/default/objects/DMS_Primary_Order__c/listViews/All_Records.listView-meta.xml

Salesforce metadata for DMS_Primary_Order__c/listViews/All_Records.listView-meta.xml. Label: All Primary Orders. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 2e92669690d39e2beb5583f22b37f4432dec2619ea2a2107cdb9795bfcd8ccfb

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Records</fullName>`	Sets API identifier used by metadata deployment and code references to All_Records.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Distributor__c</columns>`	Sets columns in the enclosing configuration to Distributor__c.
6	`    <columns>Status__c</columns>`	Sets columns in the enclosing configuration to Status__c.
7	`    <columns>Total_Amount__c</columns>`	Sets columns in the enclosing configuration to Total_Amount__c.
8	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
9	`    <label>All Primary Orders</label>`	Sets human-readable Salesforce UI label to All Primary Orders.
10	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/DMS_Primary_Order__c/sharingReasons/Officer_Access__c.sharingReason-meta.xml

Salesforce metadata for DMS_Primary_Order__c/sharingReasons/Officer_Access__c.sharingReason-meta.xml. Label: Company Officer Access. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 fc5ec892cbcfcdeec580c4e115c7bd05304555f8738e39422b9f458923e30c4e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<SharingReason xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Officer_Access__c</fullName><label>Company Officer Access</label></SharingReason>`	Sets Sharing Reason in the enclosing configuration to <fullName>Officer_Access__c</fullName><label>Company Officer Access</label>.

force-app/main/default/objects/DMS_Primary_Return_Line__c/DMS_Primary_Return_Line__c.object-meta.xml

Salesforce metadata for DMS_Primary_Return_Line__c/DMS_Primary_Return_Line__c.object-meta.xml. Label: Primary Return Line. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 9d6d4f193022891aebd8de52f74c4ecda8c7d89ad416cf7a8d6ae191590e86d6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
4	`    <description>Primary Return Line records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled.</description>`	Sets description in the enclosing configuration to Primary Return Line records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled..
5	`    <enableActivities>true</enableActivities>`	Sets enable Activities in the enclosing configuration to true.
6	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
7	`    <label>Primary Return Line</label>`	Sets human-readable Salesforce UI label to Primary Return Line.
8	`    <nameField><displayFormat>PRL-{000000}</displayFormat><label>Primary Return Line Number</label><type>AutoNumber</type></nameField>`	Sets name Field in the enclosing configuration to <displayFormat>PRL-{000000}</displayFormat><label>Primary Return Line Number</label><type>AutoNumber</type>.
9	`    <pluralLabel>Primary Return Lines</pluralLabel>`	Sets plural Label in the enclosing configuration to Primary Return Lines.
10	`    <sharingModel>ControlledByParent</sharingModel>`	Sets record sharing baseline to ControlledByParent.
11	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/DMS_Primary_Return_Line__c/fields/Batch_Number__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return_Line__c/fields/Batch_Number__c.field-meta.xml. Label: Batch Number. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 f05dda749504ee6039563070da3126119a952359eae257b45567c06431af62f6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Batch_Number__c</fullName>`	Sets API identifier used by metadata deployment and code references to Batch_Number__c.
4	`    <description>Batch Number. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Batch Number. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Batch Number</label>`	Sets human-readable Salesforce UI label to Batch Number.
6	`    <length>80</length>`	Sets maximum text length to 80.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return_Line__c/fields/Case_Value__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return_Line__c/fields/Case_Value__c.field-meta.xml. Label: Value Per Case. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 c5b22db00132f65a3ad93acf8449dcedaa453507efa524a486cb06cac5cfd57f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Case_Value__c</fullName>`	Sets API identifier used by metadata deployment and code references to Case_Value__c.
4	`    <description>Value Per Case. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Value Per Case. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Value Per Case</label>`	Sets human-readable Salesforce UI label to Value Per Case.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>2</scale>`	Sets decimal places to 2.
9	`    <type>Currency</type>`	Sets field/storage type to Currency.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return_Line__c/fields/Cases__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return_Line__c/fields/Cases__c.field-meta.xml. Label: Return Cases. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 6ea741c33f783029d3e5f976b5e72bc028e3c2b3b3da15fe5655d91f479372c4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Cases__c</fullName>`	Sets API identifier used by metadata deployment and code references to Cases__c.
4	`    <description>Return Cases. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Return Cases. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Return Cases</label>`	Sets human-readable Salesforce UI label to Return Cases.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return_Line__c/fields/Expiry_Date__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return_Line__c/fields/Expiry_Date__c.field-meta.xml. Label: Expiry Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 a3b29a5e8033da371749dad52ff3a8687435c0ed24c9283b45a875e7c3b4adf6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Expiry_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Expiry_Date__c.
4	`    <description>Expiry Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Expiry Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Expiry Date</label>`	Sets human-readable Salesforce UI label to Expiry Date.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return_Line__c/fields/Notes__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return_Line__c/fields/Notes__c.field-meta.xml. Label: Return Details. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 d1c96dcb26dc2cadb46891819451906c0aa35162e5c5200c618ffd54b0514431

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Notes__c</fullName>`	Sets API identifier used by metadata deployment and code references to Notes__c.
4	`    <description>Return Details. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Return Details. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Return Details</label>`	Sets human-readable Salesforce UI label to Return Details.
6	`    <length>255</length>`	Sets maximum text length to 255.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return_Line__c/fields/Pieces_Per_Case__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return_Line__c/fields/Pieces_Per_Case__c.field-meta.xml. Label: Pieces Per Case. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 f318e8b201ac06aac6fc1707edb619712ed972ff3a56ffed0d2562d982373a1a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Pieces_Per_Case__c</fullName>`	Sets API identifier used by metadata deployment and code references to Pieces_Per_Case__c.
4	`    <description>Pieces Per Case. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Pieces Per Case. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Pieces Per Case</label>`	Sets human-readable Salesforce UI label to Pieces Per Case.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return_Line__c/fields/Primary_Return__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return_Line__c/fields/Primary_Return__c.field-meta.xml. Label: Primary Return. Type: MasterDetail. Relationship target: DMS_Primary_Return__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 4bac37abd3e5b663bce15332a797f23fdfd03d6240b5ccbc2eddc4dc8fb1ecb8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Primary_Return__c</fullName>`	Sets API identifier used by metadata deployment and code references to Primary_Return__c.
4	`    <description>Primary Return. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Primary Return. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Primary Return</label>`	Sets human-readable Salesforce UI label to Primary Return.
6	`    <referenceTo>DMS_Primary_Return__c</referenceTo>`	Sets object referenced by this relationship to DMS_Primary_Return__c.
7	`    <relationshipLabel>Return Lines</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Return Lines.
8	`    <relationshipName>Return_Lines</relationshipName>`	Sets relationship API traversal name to Return_Lines.
9	`    <relationshipOrder>0</relationshipOrder>`	Sets relationship Order in the enclosing configuration to 0.
10	`    <reparentableMasterDetail>false</reparentableMasterDetail>`	Sets reparentable Master Detail in the enclosing configuration to false.
11	`    <type>MasterDetail</type>`	Sets field/storage type to MasterDetail.
12	`    <writeRequiresMasterRead>false</writeRequiresMasterRead>`	Sets write Requires Master Read in the enclosing configuration to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return_Line__c/fields/Product__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return_Line__c/fields/Product__c.field-meta.xml. Label: Product. Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 d3a66eb0487a31a58f9b649353b3c5770b71d1c03cdc6df7df8b58527c74670a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Product__c</fullName>`	Sets API identifier used by metadata deployment and code references to Product__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Product. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Product. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Product</label>`	Sets human-readable Salesforce UI label to Product.
7	`    <referenceTo>Product__c</referenceTo>`	Sets object referenced by this relationship to Product__c.
8	`    <relationshipLabel>DMS Primary Return Lines</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Primary Return Lines.
9	`    <relationshipName>DMS_Primary_Return_Lines</relationshipName>`	Sets relationship API traversal name to DMS_Primary_Return_Lines.
10	`    <required>true</required>`	Sets whether a value is mandatory to true.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return_Line__c/fields/Reason__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return_Line__c/fields/Reason__c.field-meta.xml. Label: Return Reason. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

19 numbered source lines | SHA-256 b3ed2b36cc5759ff18f468a0cf96642845f02f7b6210711b3543f74872bcc6bf

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Reason__c</fullName>`	Sets API identifier used by metadata deployment and code references to Reason__c.
4	`    <description>Return Reason. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Return Reason. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Return Reason</label>`	Sets human-readable Salesforce UI label to Return Reason.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value><fullName>Damaged</fullName><default>true</default><label>Damaged</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Damaged</fullName><default>true</default><label>Damaged</label>.
13	`            <value><fullName>Expired</fullName><default>false</default><label>Expired</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Expired</fullName><default>false</default><label>Expired</label>.
14	`            <value><fullName>Delayed Delivery</fullName><default>false</default><label>Delayed Delivery</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Delayed Delivery</fullName><default>false</default><label>Delayed Delivery</label>.
15	`            <value><fullName>No Demand</fullName><default>false</default><label>No Demand</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>No Demand</fullName><default>false</default><label>No Demand</label>.

Line	Source code	Explanation / reading note
16	`<value><fullName>Other</fullName><default>false</default><label>Other</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Other</fullName><default>false</default><label>Other</label>.
17	`</valueSetDefinition>`	Closes the valueSetDefinition configuration block.
18	`</valueSet>`	Closes the valueSet configuration block.
19	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return_Line__c/fields/Receipt_Line__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return_Line__c/fields/Receipt_Line__c.field-meta.xml. Label: Original Receipt Line. Type: Lookup. Relationship target: DMS_Goods_Receipt_Line__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 a861568ec1bc24abfc038abc66e3c79a948ddb5602f43d971316a8b9effbfbe2

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Receipt_Line__c</fullName>`	Sets API identifier used by metadata deployment and code references to Receipt_Line__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Original Receipt Line. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Original Receipt Line. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Original Receipt Line</label>`	Sets human-readable Salesforce UI label to Original Receipt Line.
7	`    <referenceTo>DMS_Goods_Receipt_Line__c</referenceTo>`	Sets object referenced by this relationship to DMS_Goods_Receipt_Line__c.
8	`    <relationshipLabel>Primary Return Lines</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Primary Return Lines.
9	`    <relationshipName>Primary_Return_Lines</relationshipName>`	Sets relationship API traversal name to Primary_Return_Lines.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return_Line__c/fields/Return_Amount__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return_Line__c/fields/Return_Amount__c.field-meta.xml. Label: Return Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 ec92243ccaf8261dccfddbb80edc7dd4676b29f4087b75d18eae885d22d3aafd

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Return_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Return_Amount__c.
4	`    <description>Return Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Return Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>ROUND(Cases__c * Case_Value__c, 2)</formula>`	Sets formula expression evaluated by Salesforce to ROUND(Cases__c * Case_Value__c, 2).
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Return Amount</label>`	Sets human-readable Salesforce UI label to Return Amount.
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <scale>2</scale>`	Sets decimal places to 2.
10	`    <type>Currency</type>`	Sets field/storage type to Currency.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return_Line__c/fields/Total_Pieces__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return_Line__c/fields/Total_Pieces__c.field-meta.xml. Label: Return Pieces. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 365c06e0f57e7cbd50f4757078186cda4cd3c7aad0c972bfb4ba08c5a1563eac

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Total_Pieces__c</fullName>`	Sets API identifier used by metadata deployment and code references to Total_Pieces__c.
4	`    <description>Return Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Return Pieces. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>Cases__c * Pieces_Per_Case__c</formula>`	Sets formula expression evaluated by Salesforce to Cases__c * Pieces_Per_Case__c.
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Return Pieces</label>`	Sets human-readable Salesforce UI label to Return Pieces.
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <scale>0</scale>`	Sets decimal places to 0.
10	`    <type>Number</type>`	Sets field/storage type to Number.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return_Line__c/listViews/All_Records.listView-meta.xml

Salesforce metadata for DMS_Primary_Return_Line__c/listViews/All_Records.listView-meta.xml. Label: All Primary Return Lines. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 dbba93530c5f2ebf2e48ee390f85c0384a7e2edbca48419b03a9562e539f173a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Records</fullName>`	Sets API identifier used by metadata deployment and code references to All_Records.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Product__c</columns>`	Sets columns in the enclosing configuration to Product__c.
6	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
7	`    <label>All Primary Return Lines</label>`	Sets human-readable Salesforce UI label to All Primary Return Lines.
8	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/DMS_Primary_Return_Line__c/validationRules/Receipt_Matches_Return.validationRule-meta.xml

Salesforce metadata for DMS_Primary_Return_Line__c/validationRules/Receipt_Matches_Return.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 0523272415c20dc040a5d7b41dcd5c5cabe505559e8068f8680e89c7fc51d327

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Receipt_Matches_Return</fullName>`	Sets API identifier used by metadata deployment and code references to Receipt_Matches_Return.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(NOT(ISBLANK(Receipt_Line__c)), OR(Product__c <> Receipt_Line__r.Product__c, Primary_Return__r.Distributor__c <> Receipt_Line__r.Goods_Receipt__r.Distributor__c))</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(Receipt_Line__c)), OR(Product__c <> Receipt_Line__r.Product__c, Primary_Return__r.Distributor__c <> Receipt_Line__r.Goods_Receipt__r.Distributor__c)).
6	`    <errorMessage>The original receipt line must match this product and distributor.</errorMessage>`	Sets message displayed when the rule fails to The original receipt line must match this product and distributor..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Primary_Return_Line__c/validationRules/Return_Quantities_And_Reason.validationRule-meta.xml

Salesforce metadata for DMS_Primary_Return_Line__c/validationRules/Return_Quantities_And_Reason.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 e23abd4464dd19155324748a068321d3e432d2df9641f15e9987baecad5e0282

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Return_Quantities_And_Reason</fullName>`	Sets API identifier used by metadata deployment and code references to Return_Quantities_And_Reason.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>OR(ISBLANK(Cases__c), Cases__c <= 0, ISBLANK(Pieces_Per_Case__c), Pieces_Per_Case__c <= 0, Case_Value__c < 0, ISBLANK(TEXT(Reason__c)), AND(ISPICKVAL(Reason__c,'Other'), ISBLANK(Notes__c)))</errorConditionFormula>`	Sets condition that makes this validation rule fail to OR(ISBLANK(Cases__c), Cases__c <= 0, ISBLANK(Pieces_Per_Case__c), Pieces_Per_Case__c <= 0, Case_Value__c < 0, ISBLANK(TEXT(Reason__c)), AND(ISPICKVAL(Reason__c,'Other'), ISBLANK(Notes__c))).
6	`    <errorMessage>Enter return cases, pieces per case and reason. Explain Other in Return Details.</errorMessage>`	Sets message displayed when the rule fails to Enter return cases, pieces per case and reason. Explain Other in Return Details..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Primary_Return__c/DMS_Primary_Return__c.object-meta.xml

Salesforce metadata for DMS_Primary_Return__c/DMS_Primary_Return__c.object-meta.xml. Label: Primary Return. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 d1fd004634d97127ef40ec4fb0844ce51208d59d82ecd2861c010ea09fe96759

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
4	`    <description>Primary Return records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled.</description>`	Sets description in the enclosing configuration to Primary Return records for distributor management. This release provides schema and calculations only; no stock-posting automation is enabled..
5	`    <enableActivities>true</enableActivities>`	Sets enable Activities in the enclosing configuration to true.
6	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
7	`    <label>Primary Return</label>`	Sets human-readable Salesforce UI label to Primary Return.
8	`    <nameField><displayFormat>PR-{000000}</displayFormat><label>Primary Return Number</label><type>AutoNumber</type></nameField>`	Sets name Field in the enclosing configuration to <displayFormat>PR-{000000}</displayFormat><label>Primary Return Number</label><type>AutoNumber</type>.
9	`    <pluralLabel>Primary Returns</pluralLabel>`	Sets plural Label in the enclosing configuration to Primary Returns.
10	`    <sharingModel>Private</sharingModel>`	Sets record sharing baseline to Private.
11	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/DMS_Primary_Return__c/fields/Distributor__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return__c/fields/Distributor__c.field-meta.xml. Label: DMS Distributor. Type: Lookup. Relationship target: DMS_Distributor__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 41f75eb300132141ae51a0fa426b0f8766d971fccd89497a0a8bd5728974482a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Distributor__c</fullName>`	Sets API identifier used by metadata deployment and code references to Distributor__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>DMS Distributor. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to DMS Distributor. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>DMS Distributor</label>`	Sets human-readable Salesforce UI label to DMS Distributor.
7	`    <referenceTo>DMS_Distributor__c</referenceTo>`	Sets object referenced by this relationship to DMS_Distributor__c.
8	`    <relationshipLabel>Primary Returns</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Primary Returns.
9	`    <relationshipName>Primary_Returns</relationshipName>`	Sets relationship API traversal name to Primary_Returns.
10	`    <required>true</required>`	Sets whether a value is mandatory to true.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return__c/fields/Employee__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return__c/fields/Employee__c.field-meta.xml. Label: Employee. Type: Lookup. Relationship target: Employee__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 a2b6c502e717c19e35bbf8a058636e36afb9f897a148c34c12599b74e1d522c2

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Employee__c</fullName>`	Sets API identifier used by metadata deployment and code references to Employee__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Employee. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Employee. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Employee</label>`	Sets human-readable Salesforce UI label to Employee.
7	`    <referenceTo>Employee__c</referenceTo>`	Sets object referenced by this relationship to Employee__c.
8	`    <relationshipLabel>DMS Primary Returns</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Primary Returns.
9	`    <relationshipName>DMS_Primary_Returns</relationshipName>`	Sets relationship API traversal name to DMS_Primary_Returns.
10	`    <required>true</required>`	Sets whether a value is mandatory to true.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return__c/fields/Notes__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return__c/fields/Notes__c.field-meta.xml. Label: Notes. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 5602c0c76c49595c769bab38f74fa6fd0bdf1b12ba897c06c29e068fd2dc7d3b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Notes__c</fullName>`	Sets API identifier used by metadata deployment and code references to Notes__c.
4	`    <description>Notes. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Notes. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Notes</label>`	Sets human-readable Salesforce UI label to Notes.
6	`    <length>255</length>`	Sets maximum text length to 255.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return__c/fields/Officer__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return__c/fields/Officer__c.field-meta.xml. Label: Company Distributor Officer. Type: Lookup. Relationship target: User. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 95413d6fb58d15a59e8995e114009481ed64535879c69bacb603061e102943bc

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Officer__c</fullName>`	Sets API identifier used by metadata deployment and code references to Officer__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <description>Company Distributor Officer. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Company Distributor Officer. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Company Distributor Officer</label>`	Sets human-readable Salesforce UI label to Company Distributor Officer.
7	`    <referenceTo>User</referenceTo>`	Sets object referenced by this relationship to User.
8	`    <relationshipLabel>DMS Primary Returns</relationshipLabel>`	Sets relationship Label in the enclosing configuration to DMS Primary Returns.
9	`    <relationshipName>DMS_Primary_Returns</relationshipName>`	Sets relationship API traversal name to DMS_Primary_Returns.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return__c/fields/Primary_Order__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return__c/fields/Primary_Order__c.field-meta.xml. Label: Original Primary Order. Type: Lookup. Relationship target: DMS_Primary_Order__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 1899a606f0ac97975bb16bdd48efc9fbb210fb9d78f7507c5353fc1b887c055d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Primary_Order__c</fullName>`	Sets API identifier used by metadata deployment and code references to Primary_Order__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Original Primary Order. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Original Primary Order. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Original Primary Order</label>`	Sets human-readable Salesforce UI label to Original Primary Order.
7	`    <referenceTo>DMS_Primary_Order__c</referenceTo>`	Sets object referenced by this relationship to DMS_Primary_Order__c.
8	`    <relationshipLabel>Primary Returns</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Primary Returns.
9	`    <relationshipName>Primary_Returns</relationshipName>`	Sets relationship API traversal name to Primary_Returns.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return__c/fields/Rejection_Reason__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return__c/fields/Rejection_Reason__c.field-meta.xml. Label: Rejection Reason. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 479beeb5408fdc628f01683f5714bb14775d7a9bf7e77ce30358bbd58a58f0b7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Rejection_Reason__c</fullName>`	Sets API identifier used by metadata deployment and code references to Rejection_Reason__c.
4	`    <description>Rejection Reason. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Rejection Reason. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Rejection Reason</label>`	Sets human-readable Salesforce UI label to Rejection Reason.
6	`    <length>255</length>`	Sets maximum text length to 255.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return__c/fields/Request_Hash__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return__c/fields/Request_Hash__c.field-meta.xml. Label: Request Payload Hash. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 f3b55d4c7c85c7f0c3d05a96d23fec05a4a79bbce17de474e97b3a3c4e2b29b1

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Request_Hash__c</fullName><label>Request Payload Hash</label><length>64</length><type>Text</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Request_Hash__c</fullName><label>Request Payload Hash</label><length>64</length><type>Text</type>.

force-app/main/default/objects/DMS_Primary_Return__c/fields/Request_Key__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return__c/fields/Request_Key__c.field-meta.xml. Label: Mobile Request Key. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 793da5e622fec232c56178f8153edb66707d858bb509e0946d9a3c01d1b95570

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Request_Key__c</fullName><label>Mobile Request Key</label><externalId>true</externalId><length>100</length><type>Text</type><unique>true</unique></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Request_Key__c</fullName><label>Mobile Request Key</label><externalId>true</externalId><length>100</length><type>Text</type><unique>true</unique>.

force-app/main/default/objects/DMS_Primary_Return__c/fields/Return_Date__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return__c/fields/Return_Date__c.field-meta.xml. Label: Return Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 cdaf8a7b40f80430b7b0aa10415af198fd174c8f91ee35f501379cab10dbc3ab

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Return_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Return_Date__c.
4	`    <description>Return Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Return Date. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Return Date</label>`	Sets human-readable Salesforce UI label to Return Date.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return__c/fields/Status__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return__c/fields/Status__c.field-meta.xml. Label: Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

18 numbered source lines | SHA-256 f2a12482cd08fe47fb56643276a8916c8a2bf424837d6137109666a80d89c75c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Status__c</fullName>`	Sets API identifier used by metadata deployment and code references to Status__c.
4	`    <description>Status. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Status. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Status</label>`	Sets human-readable Salesforce UI label to Status.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value><fullName>Draft</fullName><default>true</default><label>Draft</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Draft</fullName><default>true</default><label>Draft</label>.
13	`            <value><fullName>Submitted</fullName><default>false</default><label>Submitted</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Submitted</fullName><default>false</default><label>Submitted</label>.
14	`            <value><fullName>Approved</fullName><default>false</default><label>Approved</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Approved</fullName><default>false</default><label>Approved</label>.
15	`            <value><fullName>Rejected</fullName><default>false</default><label>Rejected</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Rejected</fullName><default>false</default><label>Rejected</label>.

Line	Source code	Explanation / reading note
16	`        </valueSetDefinition>`	Closes the valueSetDefinition configuration block.
17	`    </valueSet>`	Closes the valueSet configuration block.
18	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return__c/fields/Total_Amount__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return__c/fields/Total_Amount__c.field-meta.xml. Label: Total Return Amount. Type: Summary. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 86543dc5748a48de3aae74ad56a10ec84e0588f680268ade118565c873598bbe

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Total_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Total_Amount__c.
4	`    <description>Total Return Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records.</description>`	Sets description in the enclosing configuration to Total Return Amount. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records..
5	`    <label>Total Return Amount</label>`	Sets human-readable Salesforce UI label to Total Return Amount.
6	`    <summarizedField>DMS_Primary_Return_Line__c.Return_Amount__c</summarizedField>`	Sets summarized Field in the enclosing configuration to DMS_Primary_Return_Line__c.Return_Amount__c.
7	`    <summaryForeignKey>DMS_Primary_Return_Line__c.Primary_Return__c</summaryForeignKey>`	Sets summary Foreign Key in the enclosing configuration to DMS_Primary_Return_Line__c.Primary_Return__c.
8	`    <summaryOperation>sum</summaryOperation>`	Sets summary Operation in the enclosing configuration to sum.
9	`    <type>Summary</type>`	Sets field/storage type to Summary.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return__c/fields/Total_Cases__c.field-meta.xml

Salesforce metadata for DMS_Primary_Return__c/fields/Total_Cases__c.field-meta.xml. Label: Total Return Cases. Type: Summary. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 4516f77679f87e287d14f25ed661c42e41294977fa24c630e0b3ca3a94ddef1f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Total_Cases__c</fullName>`	Sets API identifier used by metadata deployment and code references to Total_Cases__c.
4	`    <description>Total Return Cases. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records.</description>`	Sets description in the enclosing configuration to Total Return Cases. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated from related line records..
5	`    <label>Total Return Cases</label>`	Sets human-readable Salesforce UI label to Total Return Cases.
6	`    <summarizedField>DMS_Primary_Return_Line__c.Cases__c</summarizedField>`	Sets summarized Field in the enclosing configuration to DMS_Primary_Return_Line__c.Cases__c.
7	`    <summaryForeignKey>DMS_Primary_Return_Line__c.Primary_Return__c</summaryForeignKey>`	Sets summary Foreign Key in the enclosing configuration to DMS_Primary_Return_Line__c.Primary_Return__c.
8	`    <summaryOperation>sum</summaryOperation>`	Sets summary Operation in the enclosing configuration to sum.
9	`    <type>Summary</type>`	Sets field/storage type to Summary.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/DMS_Primary_Return__c/listViews/All_Records.listView-meta.xml

Salesforce metadata for DMS_Primary_Return__c/listViews/All_Records.listView-meta.xml. Label: All Primary Returns. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 39d728162fae31a8e2a63d6274c048dbc432705041dfbbd507c4aafd9c3a9caf

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Records</fullName>`	Sets API identifier used by metadata deployment and code references to All_Records.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Distributor__c</columns>`	Sets columns in the enclosing configuration to Distributor__c.
6	`    <columns>Status__c</columns>`	Sets columns in the enclosing configuration to Status__c.
7	`    <columns>Total_Amount__c</columns>`	Sets columns in the enclosing configuration to Total_Amount__c.
8	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
9	`    <label>All Primary Returns</label>`	Sets human-readable Salesforce UI label to All Primary Returns.
10	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/DMS_Primary_Return__c/sharingReasons/Officer_Access__c.sharingReason-meta.xml

Salesforce metadata for DMS_Primary_Return__c/sharingReasons/Officer_Access__c.sharingReason-meta.xml. Label: Company Officer Access. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 fc5ec892cbcfcdeec580c4e115c7bd05304555f8738e39422b9f458923e30c4e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<SharingReason xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Officer_Access__c</fullName><label>Company Officer Access</label></SharingReason>`	Sets Sharing Reason in the enclosing configuration to <fullName>Officer_Access__c</fullName><label>Company Officer Access</label>.

force-app/main/default/objects/DMS_Primary_Return__c/validationRules/Officer_And_Rejection_Required.validationRule-meta.xml

Salesforce metadata for DMS_Primary_Return__c/validationRules/Officer_And_Rejection_Required.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 3a95894390a76f85362a43c2d5945bb1cf43d895f736b40a0991ecaff03299fa

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Officer_And_Rejection_Required</fullName>`	Sets API identifier used by metadata deployment and code references to Officer_And_Rejection_Required.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>OR(AND(ISPICKVAL(Status__c, 'Submitted'), ISBLANK(Officer__c)), AND(ISPICKVAL(Status__c, 'Rejected'), ISBLANK(Rejection_Reason__c)))</errorConditionFormula>`	Sets condition that makes this validation rule fail to OR(AND(ISPICKVAL(Status__c, 'Submitted'), ISBLANK(Officer__c)), AND(ISPICKVAL(Status__c, 'Rejected'), ISBLANK(Rejection_Reason__c))).
6	`    <errorMessage>Select a company officer before submission and enter a reason when rejecting.</errorMessage>`	Sets message displayed when the rule fails to Select a company officer before submission and enter a reason when rejecting..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Primary_Return__c/validationRules/Return_Order_Matches_Distributor.validationRule-meta.xml

Salesforce metadata for DMS_Primary_Return__c/validationRules/Return_Order_Matches_Distributor.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 d67a17a3e44f8be38538bc891396a6caaf3db52bae9166a298cd07fdc51795f9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Return_Order_Matches_Distributor</fullName>`	Sets API identifier used by metadata deployment and code references to Return_Order_Matches_Distributor.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(NOT(ISBLANK(Primary_Order__c)), Distributor__c <> Primary_Order__r.Distributor__c)</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(Primary_Order__c)), Distributor__c <> Primary_Order__r.Distributor__c).
6	`    <errorMessage>The original order must belong to this distributor.</errorMessage>`	Sets message displayed when the rule fails to The original order must belong to this distributor..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/DMS_Sales_Target__c/DMS_Sales_Target__c.object-meta.xml

Salesforce metadata for DMS_Sales_Target__c/DMS_Sales_Target__c.object-meta.xml. Label: DMS Sales Target. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 731d75f126e1f4ad6345fab022dac93d77b62868d5df7bafd598f128ebc0438d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata"><deploymentStatus>Deployed</deploymentStatus><description>Monthly booked secondary sales targets. Set one overall target and optional independent employee, area or product targets. Do not sum the separate breakdown targets.</description><enableReports>true</enableReports><label>DMS Sales Target</label><nameField><displayFormat>TGT-{00000}</displayFormat><label>Target Number</label><type>AutoNumber</type></nameField><pluralLabel>DMS Sales Targets</pluralLabel><sharingModel>Private</sharingModel></CustomObject>`	Sets Custom Object in the enclosing configuration to <deploymentStatus>Deployed</deploymentStatus><description>Monthly booked secondary sales targets. Set one overall target and optional independent employee, area or product targets. Do not sum the sepa.

force-app/main/default/objects/DMS_Sales_Target__c/fields/Distributor__c.field-meta.xml

Salesforce metadata for DMS_Sales_Target__c/fields/Distributor__c.field-meta.xml. Label: Distributor. Type: Lookup. Relationship target: DMS_Distributor__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 51a9ecd622fa53df29963bccfaa85b015a278ac0e871ceab1d63185300c97358

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Distributor__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Distributor</label><referenceTo>DMS_Distributor__c</referenceTo><relationshipLabel>Sales Targets</relationshipLabel><relationshipName>Sales_Targets</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Distributor__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Distributor</label><referenceTo>DMS_Distributor__c</referenceTo><relationshipLabel>Sales Targets</relationshipLab.

force-app/main/default/objects/DMS_Sales_Target__c/fields/Employee__c.field-meta.xml

Salesforce metadata for DMS_Sales_Target__c/fields/Employee__c.field-meta.xml. Label: Employee (optional). Type: Lookup. Relationship target: Employee__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 ff4b925300f3d09507aefbe1f2b9e0227e587989da8a3b4b9430528a61dc05b5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Employee__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Employee (optional)</label><referenceTo>Employee__c</referenceTo><relationshipName>DMS_Sales_Targets</relationshipName><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Employee__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Employee (optional)</label><referenceTo>Employee__c</referenceTo><relationshipName>DMS_Sales_Targets</relationshipNa.

force-app/main/default/objects/DMS_Sales_Target__c/fields/Geography__c.field-meta.xml

Salesforce metadata for DMS_Sales_Target__c/fields/Geography__c.field-meta.xml. Label: Area (optional). Type: Lookup. Relationship target: Geography__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 7b6ba2040fb70fe9b308896b379e3c3d8fa14cba868d7fa4947d03388acb7a3c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Geography__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Area (optional)</label><referenceTo>Geography__c</referenceTo><relationshipName>DMS_Sales_Targets</relationshipName><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Geography__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Area (optional)</label><referenceTo>Geography__c</referenceTo><relationshipName>DMS_Sales_Targets</relationshipName>.

force-app/main/default/objects/DMS_Sales_Target__c/fields/Month__c.field-meta.xml

Salesforce metadata for DMS_Sales_Target__c/fields/Month__c.field-meta.xml. Label: Month. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 553e3a28f42768ba0a1ff473226cc90e9b78e6634f9fdb4fca9e1d078286733d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Month__c</fullName><description>First date of the target calendar month.</description><label>Month</label><required>true</required><type>Date</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Month__c</fullName><description>First date of the target calendar month.</description><label>Month</label><required>true</required><type>Date</type>.

force-app/main/default/objects/DMS_Sales_Target__c/fields/Product__c.field-meta.xml

Salesforce metadata for DMS_Sales_Target__c/fields/Product__c.field-meta.xml. Label: Product (optional). Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 b772522686cc962676e3f4c94390cdb5ed11d8b94d585cf9f78e037209ec71c8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Product__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Product (optional)</label><referenceTo>Product__c</referenceTo><relationshipName>DMS_Sales_Targets</relationshipName><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Product__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Product (optional)</label><referenceTo>Product__c</referenceTo><relationshipName>DMS_Sales_Targets</relationshipName>.

force-app/main/default/objects/DMS_Sales_Target__c/fields/Target_Amount__c.field-meta.xml

Salesforce metadata for DMS_Sales_Target__c/fields/Target_Amount__c.field-meta.xml. Label: Target Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 835c59a8197bb894b79e6cab0c9c2b0889edbd16c5e35a49bb58f102030d901d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Target_Amount__c</fullName><label>Target Amount</label><precision>18</precision><required>true</required><scale>2</scale><type>Currency</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Target_Amount__c</fullName><label>Target Amount</label><precision>18</precision><required>true</required><scale>2</scale><type>Currency</type>.

force-app/main/default/objects/DMS_Sales_Target__c/fields/Unique_Key__c.field-meta.xml

Salesforce metadata for DMS_Sales_Target__c/fields/Unique_Key__c.field-meta.xml. Label: Unique Target Key. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 1e6b017afa25b82f4b760747c5969c0cbfaffccee2b9bb89b6901014c7750a7f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Unique_Key__c</fullName><caseSensitive>false</caseSensitive><description>Generated from distributor, month and optional dimension. Prevents duplicate targets.</description><externalId>true</externalId><label>Unique Target Key</label><length>150</length><type>Text</type><unique>true</unique></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Unique_Key__c</fullName><caseSensitive>false</caseSensitive><description>Generated from distributor, month and optional dimension. Prevents duplicate targets.</description><externalId>true</.

force-app/main/default/objects/DMS_Sales_Target__c/listViews/All_Targets.listView-meta.xml

Salesforce metadata for DMS_Sales_Target__c/listViews/All_Targets.listView-meta.xml. Label: All Sales Targets. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 f8b38bf00d362c092f2af0606e1df974435d5a53d478dfca5c3c2fd661ccfc1c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>All_Targets</fullName><columns>NAME</columns><columns>Distributor__c</columns><columns>Month__c</columns><columns>Target_Amount__c</columns><columns>Employee__c</columns><columns>Geography__c</columns><columns>Product__c</columns><filterScope>Everything</filterScope><label>All Sales Targets</label></ListView>`	Sets List View in the enclosing configuration to <fullName>All_Targets</fullName><columns>NAME</columns><columns>Distributor__c</columns><columns>Month__c</columns><columns>Target_Amount__c</columns><columns>Employee__c</columns><columns>Geography__.

force-app/main/default/objects/DMS_Sales_Target__c/validationRules/Valid_Month_And_Scope.validationRule-meta.xml

Salesforce metadata for DMS_Sales_Target__c/validationRules/Valid_Month_And_Scope.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 12e1627531ac60efd453fe70d3f4996f1934adfe8ea2bf8c2a69f6bd2c87e832

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Valid_Month_And_Scope</fullName><active>true</active><errorConditionFormula>OR(DAY(Month__c) != 1, Target_Amount__c <= 0, IF(ISBLANK(Employee__c),0,1)+IF(ISBLANK(Geography__c),0,1)+IF(ISBLANK(Product__c),0,1) > 1)</errorConditionFormula><errorMessage>Use the first day of the month, a positive target, and at most one breakdown (employee, area or product). Leave all breakdowns blank for the overall distributor target.</errorMessage></ValidationRule>`	Sets Validation Rule in the enclosing configuration to <fullName>Valid_Month_And_Scope</fullName><active>true</active><errorConditionFormula>OR(DAY(Month__c) != 1, Target_Amount__c <= 0, IF(ISBLANK(Employee__c),0,1)+IF(ISBLANK(Geography__c),0,1)+IF(ISB.

force-app/main/default/objects/DMS_Support_Ticket__c/DMS_Support_Ticket__c.object-meta.xml

Salesforce metadata for DMS_Support_Ticket__c/DMS_Support_Ticket__c.object-meta.xml. Label: DMS Support Ticket. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 926109af25dffaf723237508a28796c97f6450e80e4979ea39a1c63aa3bbcd80

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata"><deploymentStatus>Deployed</deploymentStatus><enableActivities>true</enableActivities><enableHistory>true</enableHistory><enableReports>true</enableReports><label>DMS Support Ticket</label><nameField><displayFormat>DMS-T-{00000}</displayFormat><label>Ticket Number</label><type>AutoNumber</type></nameField><pluralLabel>DMS Support Tickets</pluralLabel><sharingModel>Private</sharingModel></CustomObject>`	Sets Custom Object in the enclosing configuration to <deploymentStatus>Deployed</deploymentStatus><enableActivities>true</enableActivities><enableHistory>true</enableHistory><enableReports>true</enableReports><label>DMS Support Ticket</label><nameField>.

force-app/main/default/objects/DMS_Support_Ticket__c/fields/Category__c.field-meta.xml

Salesforce metadata for DMS_Support_Ticket__c/fields/Category__c.field-meta.xml. Label: Issue Category. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 07a7b1f8292a69e0619059e60d4ed12890a73a114583f1fab1dd715c5e0bd2d5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Category__c</fullName><label>Issue Category</label><required>true</required><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Product</fullName><default>true</default><label>Product</label></value><value><fullName>Portal</fullName><default>false</default><label>Portal</label></value><value><fullName>Delivery</fullName><default>false</default><label>Delivery</label></value></valueSetDefinition></valueSet></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Category__c</fullName><label>Issue Category</label><required>true</required><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><full.

force-app/main/default/objects/DMS_Support_Ticket__c/fields/Description__c.field-meta.xml

Salesforce metadata for DMS_Support_Ticket__c/fields/Description__c.field-meta.xml. Label: Description. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 154e825faffa82c493e796d65af848795a2bede2f889c9bdce975ada37e49568

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Description__c</fullName><label>Description</label><length>32000</length><type>LongTextArea</type><visibleLines>5</visibleLines></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Description__c</fullName><label>Description</label><length>32000</length><type>LongTextArea</type><visibleLines>5</visibleLines>.

force-app/main/default/objects/DMS_Support_Ticket__c/fields/Distributor__c.field-meta.xml

Salesforce metadata for DMS_Support_Ticket__c/fields/Distributor__c.field-meta.xml. Label: Distributor. Type: Lookup. Relationship target: DMS_Distributor__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 a60b2bc46abc5c125555b6b2b83c75b97a17d7055d76570205627317f78909ee

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Distributor__c</fullName><label>Distributor</label><deleteConstraint>Restrict</deleteConstraint><referenceTo>DMS_Distributor__c</referenceTo><relationshipLabel>Support Tickets</relationshipLabel><relationshipName>Support_Tickets</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Distributor__c</fullName><label>Distributor</label><deleteConstraint>Restrict</deleteConstraint><referenceTo>DMS_Distributor__c</referenceTo><relationshipLabel>Support Tickets</relationshipL.

force-app/main/default/objects/DMS_Support_Ticket__c/fields/Officer__c.field-meta.xml

Salesforce metadata for DMS_Support_Ticket__c/fields/Officer__c.field-meta.xml. Label: Assigned Company Officer. Type: Lookup. Relationship target: User. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 e26435aff2ecd61c50c7f5dc92aabb15ff185b2d73284bead2a16667d8c8dffc

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Officer__c</fullName><label>Assigned Company Officer</label><deleteConstraint>SetNull</deleteConstraint><referenceTo>User</referenceTo><relationshipName>DMS_Support_Tickets</relationshipName><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Officer__c</fullName><label>Assigned Company Officer</label><deleteConstraint>SetNull</deleteConstraint><referenceTo>User</referenceTo><relationshipName>DMS_Support_Tickets</relationshipName.

force-app/main/default/objects/DMS_Support_Ticket__c/fields/Request_Key__c.field-meta.xml

Salesforce metadata for DMS_Support_Ticket__c/fields/Request_Key__c.field-meta.xml. Label: Mobile Request Key. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 793da5e622fec232c56178f8153edb66707d858bb509e0946d9a3c01d1b95570

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Request_Key__c</fullName><label>Mobile Request Key</label><externalId>true</externalId><length>100</length><type>Text</type><unique>true</unique></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Request_Key__c</fullName><label>Mobile Request Key</label><externalId>true</externalId><length>100</length><type>Text</type><unique>true</unique>.

force-app/main/default/objects/DMS_Support_Ticket__c/fields/Resolution__c.field-meta.xml

Salesforce metadata for DMS_Support_Ticket__c/fields/Resolution__c.field-meta.xml. Label: Resolution / Rejection Reason. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 87fc31c7580f326855446d14313aa16134b02a0ea49b878b94150a44621cd983

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Resolution__c</fullName><label>Resolution / Rejection Reason</label><length>32000</length><type>LongTextArea</type><visibleLines>3</visibleLines></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Resolution__c</fullName><label>Resolution / Rejection Reason</label><length>32000</length><type>LongTextArea</type><visibleLines>3</visibleLines>.

force-app/main/default/objects/DMS_Support_Ticket__c/fields/Status__c.field-meta.xml

Salesforce metadata for DMS_Support_Ticket__c/fields/Status__c.field-meta.xml. Label: Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 e12fbc45ea2993601fe2dc60ce6fa932e88d7366c63d1ae73aa27df26036241b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Status__c</fullName><label>Status</label><required>true</required><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Open</fullName><default>true</default><label>Open</label></value><value><fullName>In Progress</fullName><default>false</default><label>In Progress</label></value><value><fullName>Closed</fullName><default>false</default><label>Closed</label></value><value><fullName>Rejected</fullName><default>false</default><label>Rejected</label></value></valueSetDefinition></valueSet></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Status__c</fullName><label>Status</label><required>true</required><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Open<.

force-app/main/default/objects/DMS_Support_Ticket__c/fields/Subject__c.field-meta.xml

Salesforce metadata for DMS_Support_Ticket__c/fields/Subject__c.field-meta.xml. Label: Subject. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 7bf21b8ee8cd29a865c8ff6ecca7f6b3f17c1d4fd6741171ea66e5b98de54bd6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Subject__c</fullName><label>Subject</label><length>180</length><required>true</required><type>Text</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Subject__c</fullName><label>Subject</label><length>180</length><required>true</required><type>Text</type>.

force-app/main/default/objects/DMS_Support_Ticket__c/listViews/All_Tickets.listView-meta.xml

Salesforce metadata for DMS_Support_Ticket__c/listViews/All_Tickets.listView-meta.xml. Label: All Tickets. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 323aed1f7efc728a5a220c0b3d32d31314db0a083c852123fbf226d1e6cdcccb

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>All_Tickets</fullName><columns>NAME</columns><columns>Distributor__c</columns><columns>Subject__c</columns><columns>Status__c</columns><columns>Officer__c</columns><filterScope>Everything</filterScope><label>All Tickets</label></ListView>`	Sets List View in the enclosing configuration to <fullName>All_Tickets</fullName><columns>NAME</columns><columns>Distributor__c</columns><columns>Subject__c</columns><columns>Status__c</columns><columns>Officer__c</columns><filterScope>Everything</f.

force-app/main/default/objects/Distributor_Outlet_Allocation__c/Distributor_Outlet_Allocation__c.object-meta.xml

Salesforce metadata for Distributor_Outlet_Allocation__c/Distributor_Outlet_Allocation__c.object-meta.xml. Label: Employee Outlet Allocation. Type: Default. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

168 numbered source lines | SHA-256 f17908baafc9f6499175958d5473ac04cb1d01125a0eeee826e7966719d84d76

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
4	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
5	`        <type>Default</type>`	Sets field/storage type to Default.
6	`    </actionOverrides>`	Closes the actionOverrides configuration block.
7	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
8	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
9	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
10	`        <type>Default</type>`	Sets field/storage type to Default.
11	`    </actionOverrides>`	Closes the actionOverrides configuration block.
12	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
13	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
14	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
15	`        <type>Default</type>`	Sets field/storage type to Default.
16	`    </actionOverrides>`	Closes the actionOverrides configuration block.
17	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
18	`        <actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.

Line	Source code	Explanation / reading note
19	`<type>Default</type>`	Sets field/storage type to Default.
20	`</actionOverrides>`	Closes the actionOverrides configuration block.
21	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
22	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
23	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
24	`<type>Default</type>`	Sets field/storage type to Default.
25	`</actionOverrides>`	Closes the actionOverrides configuration block.
26	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
27	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
28	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
29	`<type>Default</type>`	Sets field/storage type to Default.
30	`</actionOverrides>`	Closes the actionOverrides configuration block.
31	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
32	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
33	`<type>Default</type>`	Sets field/storage type to Default.
34	`</actionOverrides>`	Closes the actionOverrides configuration block.
35	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
36	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
37	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
38	`<type>Default</type>`	Sets field/storage type to Default.
39	`</actionOverrides>`	Closes the actionOverrides configuration block.
40	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.

Line	Source code	Explanation / reading note
41	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
42	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
43	`<type>Default</type>`	Sets field/storage type to Default.
44	`</actionOverrides>`	Closes the actionOverrides configuration block.
45	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
46	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
47	`<type>Default</type>`	Sets field/storage type to Default.
48	`</actionOverrides>`	Closes the actionOverrides configuration block.
49	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
50	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
51	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
52	`<type>Default</type>`	Sets field/storage type to Default.
53	`</actionOverrides>`	Closes the actionOverrides configuration block.
54	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
55	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
56	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
57	`<type>Default</type>`	Sets field/storage type to Default.
58	`</actionOverrides>`	Closes the actionOverrides configuration block.
59	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
60	`<actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
61	`<type>Default</type>`	Sets field/storage type to Default.
62	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
63	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
64	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
65	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
66	`        <type>Default</type>`	Sets field/storage type to Default.
67	`    </actionOverrides>`	Closes the actionOverrides configuration block.
68	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
69	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
70	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
71	`        <type>Default</type>`	Sets field/storage type to Default.
72	`    </actionOverrides>`	Closes the actionOverrides configuration block.
73	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
74	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
75	`        <type>Default</type>`	Sets field/storage type to Default.
76	`    </actionOverrides>`	Closes the actionOverrides configuration block.
77	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
78	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
79	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
80	`        <type>Default</type>`	Sets field/storage type to Default.
81	`    </actionOverrides>`	Closes the actionOverrides configuration block.
82	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
83	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
84	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.

Line	Source code	Explanation / reading note
85	`<type>Default</type>`	Sets field/storage type to Default.
86	`</actionOverrides>`	Closes the actionOverrides configuration block.
87	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
88	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
89	`<type>Default</type>`	Sets field/storage type to Default.
90	`</actionOverrides>`	Closes the actionOverrides configuration block.
91	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
92	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
93	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
94	`<type>Default</type>`	Sets field/storage type to Default.
95	`</actionOverrides>`	Closes the actionOverrides configuration block.
96	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
97	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
98	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
99	`<type>Default</type>`	Sets field/storage type to Default.
100	`</actionOverrides>`	Closes the actionOverrides configuration block.
101	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
102	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
103	`<type>Default</type>`	Sets field/storage type to Default.
104	`</actionOverrides>`	Closes the actionOverrides configuration block.
105	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
106	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.

Line	Source code	Explanation / reading note
107	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
108	`<type>Default</type>`	Sets field/storage type to Default.
109	`</actionOverrides>`	Closes the actionOverrides configuration block.
110	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
111	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
112	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
113	`<type>Default</type>`	Sets field/storage type to Default.
114	`</actionOverrides>`	Closes the actionOverrides configuration block.
115	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
116	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
117	`<type>Default</type>`	Sets field/storage type to Default.
118	`</actionOverrides>`	Closes the actionOverrides configuration block.
119	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
120	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
121	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
122	`<type>Default</type>`	Sets field/storage type to Default.
123	`</actionOverrides>`	Closes the actionOverrides configuration block.
124	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
125	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
126	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
127	`<type>Default</type>`	Sets field/storage type to Default.
128	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
129	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
130	`        <actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
131	`        <type>Default</type>`	Sets field/storage type to Default.
132	`    </actionOverrides>`	Closes the actionOverrides configuration block.
133	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
134	`        <actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
135	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
136	`        <type>Default</type>`	Sets field/storage type to Default.
137	`    </actionOverrides>`	Closes the actionOverrides configuration block.
138	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
139	`        <actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
140	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
141	`        <type>Default</type>`	Sets field/storage type to Default.
142	`    </actionOverrides>`	Closes the actionOverrides configuration block.
143	`    <allowInChatterGroups>false</allowInChatterGroups>`	Sets allow In Chatter Groups in the enclosing configuration to false.
144	`    <compactLayoutAssignment>SYSTEM</compactLayoutAssignment>`	Sets compact Layout Assignment in the enclosing configuration to SYSTEM.
145	`    <deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
146	`    <description>Connects an employee to an outlet within the assigned beat.</description>`	Sets description in the enclosing configuration to Connects an employee to an outlet within the assigned beat..
147	`    <enableActivities>false</enableActivities>`	Sets enable Activities in the enclosing configuration to false.
148	`    <enableBulkApi>true</enableBulkApi>`	Sets enable Bulk Api in the enclosing configuration to true.
149	`    <enableFeeds>false</enableFeeds>`	Sets enable Feeds in the enclosing configuration to false.

Line	Source code	Explanation / reading note
150	`    <enableHistory>true</enableHistory>`	Sets enable History in the enclosing configuration to true.
151	`    <enableLicensing>false</enableLicensing>`	Sets enable Licensing in the enclosing configuration to false.
152	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
153	`    <enableSearch>true</enableSearch>`	Sets enable Search in the enclosing configuration to true.
154	`    <enableSharing>true</enableSharing>`	Sets enable Sharing in the enclosing configuration to true.
155	`    <enableStreamingApi>true</enableStreamingApi>`	Sets enable Streaming Api in the enclosing configuration to true.
156	`    <externalSharingModel>Private</externalSharingModel>`	Sets external Sharing Model in the enclosing configuration to Private.
157	`    <label>Employee Outlet Allocation</label>`	Sets human-readable Salesforce UI label to Employee Outlet Allocation.
158	`    <nameField>`	Opens the nameField block; child elements specify its configuration.
159	`        <displayFormat>ALLOC-{0000}</displayFormat>`	Sets display Format in the enclosing configuration to ALLOC-{0000}.
160	`        <label>Allocation Name</label>`	Sets human-readable Salesforce UI label to Allocation Name.
161	`        <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
162	`        <type>AutoNumber</type>`	Sets field/storage type to AutoNumber.
163	`    </nameField>`	Closes the nameField configuration block.
164	`    <pluralLabel>Employee Outlet Allocations</pluralLabel>`	Sets plural Label in the enclosing configuration to Employee Outlet Allocations.
165	`    <searchLayouts></searchLayouts>`	Sets search Layouts in the enclosing configuration to .
166	`    <sharingModel>ReadWrite</sharingModel>`	Sets record sharing baseline to ReadWrite.
167	`    <visibility>Public</visibility>`	Sets visibility in the enclosing configuration to Public.
168	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Distributor_Outlet_Allocation__c/fields/Allocation_Date__c.field-meta.xml

Salesforce metadata for Distributor_Outlet_Allocation__c/fields/Allocation_Date__c.field-meta.xml. Label: Allocation Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 d8b5578f78db0ce6f5800ba32e0ba9bd9616b6c29c5bd78896e950b3985b0c87

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Allocation_Date__c</fullName><defaultValue>TODAY()</defaultValue><label>Allocation Date</label><required>true</required><trackHistory>true</trackHistory><type>Date</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Allocation_Date__c</fullName><defaultValue>TODAY()</defaultValue><label>Allocation Date</label><required>true</required><trackHistory>true</trackHistory><type>Date</type>.

force-app/main/default/objects/Distributor_Outlet_Allocation__c/fields/Allocation_Status__c.field-meta.xml

Salesforce metadata for Distributor_Outlet_Allocation__c/fields/Allocation_Status__c.field-meta.xml. Label: Allocation Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 e5d7bf6ab996fd8bc606ed816bb795a7196eaca9a450c1576738ebe288813b8b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Allocation_Status__c</fullName><label>Allocation Status</label><required>true</required><trackHistory>true</trackHistory><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Active</fullName><default>true</default><label>Active</label></value><value><fullName>Inactive</fullName><default>false</default><label>Inactive</label></value></valueSetDefinition></valueSet></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Allocation_Status__c</fullName><label>Allocation Status</label><required>true</required><trackHistory>true</trackHistory><type>Picklist</type><valueSet><restricted>true</restricted><valueSet.

force-app/main/default/objects/Distributor_Outlet_Allocation__c/fields/Beat__c.field-meta.xml

Salesforce metadata for Distributor_Outlet_Allocation__c/fields/Beat__c.field-meta.xml. Label: Beat. Type: Lookup. Relationship target: Beat__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 8bd62207fed869235e340c52c1c5fd0df266100aeded156f2dd78f9e4cd6dd93

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Beat__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Beat</label><referenceTo>Beat__c</referenceTo><relationshipLabel>Distributor Outlet Allocations</relationshipLabel><relationshipName>Distributor_Outlet_Allocations</relationshipName><required>true</required><trackHistory>true</trackHistory><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Beat__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Beat</label><referenceTo>Beat__c</referenceTo><relationshipLabel>Distributor Outlet Allocations</relationshipLabel><rela.

force-app/main/default/objects/Distributor_Outlet_Allocation__c/fields/Distributor__c.field-meta.xml

Salesforce metadata for Distributor_Outlet_Allocation__c/fields/Distributor__c.field-meta.xml. Label: Sales Representative. Type: Lookup. Relationship target: Distributor__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

19 numbered source lines | SHA-256 14d716eb49d3f481f6ab37cbf342e1dd5092158069eb9d0b7b1de63611d9f660

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Distributor__c</fullName>`	Sets API identifier used by metadata deployment and code references to Distributor__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Sales Representative</label>`	Sets human-readable Salesforce UI label to Sales Representative.
6	`    <lookupFilter>`	Opens the lookupFilter block; child elements specify its configuration.
7	`        <active>true</active>`	Sets whether the rule/component is enabled to true.
8	`        <booleanFilter>1</booleanFilter>`	Sets boolean Filter in the enclosing configuration to 1.
9	`        <filterItems><field>Distributor__c.Beat__c</field><operation><valueField>$Source.Beat__c</valueField></filterItems>`	Sets filter Items in the enclosing configuration to <field>Distributor__c.Beat__c</field><operation>equals</operation><valueField>$Source.Beat__c</valueField>.
10	`        <infoMessage>Select a sales representative belonging to the selected Beat.</infoMessage>`	Sets info Message in the enclosing configuration to Select a sales representative belonging to the selected Beat..
11	`        <isOptional>false</isOptional>`	Sets is Optional in the enclosing configuration to false.
12	`    </lookupFilter>`	Closes the lookupFilter configuration block.
13	`    <referenceTo>Distributor__c</referenceTo>`	Sets object referenced by this relationship to Distributor__c.
14	`    <relationshipLabel>Outlet Allocations</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Outlet Allocations.
15	`    <relationshipName>Outlet_Allocations</relationshipName>`	Sets relationship API traversal name to Outlet_Allocations.
16	`    <required>false</required>`	Sets whether a value is mandatory to false.
17	`    <trackHistory>true</trackHistory>`	Sets track History in the enclosing configuration to true.

Line	Source code	Explanation / reading note
18	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
19	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Distributor_Outlet_Allocation__c/fields/Employee__c.field-meta.xml

Salesforce metadata for Distributor_Outlet_Allocation__c/fields/Employee__c.field-meta.xml. Label: Employee. Type: Lookup. Relationship target: Employee__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

17 numbered source lines | SHA-256 66f943d1223bfe7a10aaef15835c47bfcc18255f461500ba97c65600feb4f636

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Employee__c</fullName>`	Sets API identifier used by metadata deployment and code references to Employee__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Employee</label>`	Sets human-readable Salesforce UI label to Employee.
6	`    <lookupFilter>`	Opens the lookupFilter block; child elements specify its configuration.
7	`        <active>true</active>`	Sets whether the rule/component is enabled to true.
8	`        <booleanFilter>1</booleanFilter>`	Sets boolean Filter in the enclosing configuration to 1.
9	`        <filterItems><field>Employee__c.Active__c</field><operation>equals</operation><value>true</value></filterItems>`	Sets filter Items in the enclosing configuration to <field>Employee__c.Active__c</field><operation>equals</operation><value>true</value>.
10	`        <infoMessage>Select an active employee. Approved PJPs can allocate outlets from multiple beats.</infoMessage>`	Sets info Message in the enclosing configuration to Select an active employee. Approved PJPs can allocate outlets from multiple beats..
11	`        <isOptional>false</isOptional>`	Sets is Optional in the enclosing configuration to false.
12	`    </lookupFilter>`	Closes the lookupFilter configuration block.
13	`    <referenceTo>Employee__c</referenceTo>`	Sets object referenced by this relationship to Employee__c.
14	`    <relationshipLabel>Outlet Allocations</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Outlet Allocations.
15	`    <relationshipName>Outlet_Allocations</relationshipName>`	Sets relationship API traversal name to Outlet_Allocations.
16	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
17	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Distributor_Outlet_Allocation__c/fields/Outlet__c.field-meta.xml

Salesforce metadata for Distributor_Outlet_Allocation__c/fields/Outlet__c.field-meta.xml. Label: Outlet. Type: Lookup. Relationship target: Retailer__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

28 numbered source lines | SHA-256 da669548f071b2243fed9eb36b40777a8aee04200d091cb8d546534c07fae8ab

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Outlet__c</fullName>`	Sets API identifier used by metadata deployment and code references to Outlet__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <label>Outlet</label>`	Sets human-readable Salesforce UI label to Outlet.
6	`    <lookupFilter>`	Opens the lookupFilter block; child elements specify its configuration.
7	`        <active>true</active>`	Sets whether the rule/component is enabled to true.
8	`        <booleanFilter>1 AND 2</booleanFilter>`	Sets boolean Filter in the enclosing configuration to 1 AND 2.
9	`        <filterItems>`	Opens the filterItems block; child elements specify its configuration.
10	`            <field>Retailer__c.Beat__c</field>`	Sets field API name configured in this entry to Retailer__c.Beat__c.
11	`            <operation>equals</operation>`	Sets operation in the enclosing configuration to equals.
12	`            <valueField>$Source.Beat__c</valueField>`	Sets value Field in the enclosing configuration to $Source.Beat__c.
13	`        </filterItems>`	Closes the filterItems configuration block.
14	`        <filterItems>`	Opens the filterItems block; child elements specify its configuration.
15	`            <field>Retailer__c.Active__c</field>`	Sets field API name configured in this entry to Retailer__c.Active__c.
16	`            <operation>equals</operation>`	Sets operation in the enclosing configuration to equals.
17	`            <value>true</value>`	Sets configured value in the surrounding metadata entry to true.
18	`        </filterItems>`	Closes the filterItems configuration block.

Line	Source code	Explanation / reading note
19	`<infoMessage>Select an active outlet belonging to the selected Beat.</infoMessage>`	Sets info Message in the enclosing configuration to Select an active outlet belonging to the selected Beat..
20	`<isOptional>false</isOptional>`	Sets is Optional in the enclosing configuration to false.
21	`</lookupFilter>`	Closes the lookupFilter configuration block.
22	`<referenceTo>Retailer__c</referenceTo>`	Sets object referenced by this relationship to Retailer__c.
23	`<relationshipLabel>Distributor Allocations</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Distributor Allocations.
24	`<relationshipName>Distributor_Allocations</relationshipName>`	Sets relationship API traversal name to Distributor_Allocations.
25	`<required>true</required>`	Sets whether a value is mandatory to true.
26	`<trackHistory>true</trackHistory>`	Sets track History in the enclosing configuration to true.
27	`<type>Lookup</type>`	Sets field/storage type to Lookup.
28	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Distributor_Outlet_Allocation__c/fields/Remarks__c.field-meta.xml

Salesforce metadata for Distributor_Outlet_Allocation__c/fields/Remarks__c.field-meta.xml. Label: Remarks. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 f3e2a8f4063453cec18a5fbfc262f2bea726bec3036a0c0222a131197986069c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Remarks__c</fullName><label>Remarks</label><length>1000</length><trackHistory>true</trackHistory><type>LongTextArea</type><visibleLines>4</visibleLines></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Remarks__c</fullName><label>Remarks</label><length>1000</length><trackHistory>true</trackHistory><type>LongTextArea</type><visibleLines>4</visibleLines>.

force-app/main/default/objects/Distributor_Outlet_Allocation__c/listViews/Active_Allocations.listView-meta.xml

Salesforce metadata for Distributor_Outlet_Allocation__c/listViews/Active_Allocations.listView-meta.xml. Label: Active Allocations. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 97f9b6bfcb1ba573b14b111c5439e3bc984c3a173afa48ee5e0716641030393b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Active_Allocations</fullName><columns>NAME</columns><columns>Distributor__c</columns><columns>Outlet__c</columns><columns>Beat__c</columns><columns>Allocation_Date__c</columns><columns>Allocation_Status__c</columns><filterScope>Everything</filterScope><filters><field>Allocation_Status__c</field><operation>equals</operation><value>Active</value></filters><label>Active Allocations</label></ListView>`	Sets List View in the enclosing configuration to <fullName>Active_Allocations</fullName><columns>NAME</columns><columns>Distributor__c</columns><columns>Outlet__c</columns><columns>Beat__c</columns><columns>Allocation_Date__c</columns><columns>Alloc.

force-app/main/default/objects/Distributor_Outlet_Allocation__c/listViews/All_Allocations.listView-meta.xml

Salesforce metadata for Distributor_Outlet_Allocation__c/listViews/All_Allocations.listView-meta.xml. Label: All Sales Rep Outlet Allocations. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

14 numbered source lines | SHA-256 d5548c1652ae3d052fd53c8d7b6984825bda57587877993c6c3209a919ee0675

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Allocations</fullName>`	Sets API identifier used by metadata deployment and code references to All_Allocations.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Distributor__c</columns>`	Sets columns in the enclosing configuration to Distributor__c.
6	`    <columns>Employee__c</columns>`	Sets columns in the enclosing configuration to Employee__c.
7	`    <columns>Outlet__c</columns>`	Sets columns in the enclosing configuration to Outlet__c.
8	`    <columns>Beat__c</columns>`	Sets columns in the enclosing configuration to Beat__c.
9	`    <columns>Allocation_Date__c</columns>`	Sets columns in the enclosing configuration to Allocation_Date__c.
10	`    <columns>Allocation_Status__c</columns>`	Sets columns in the enclosing configuration to Allocation_Status__c.
11	`    <columns>Remarks__c</columns>`	Sets columns in the enclosing configuration to Remarks__c.
12	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
13	`    <label>All Sales Rep Outlet Allocations</label>`	Sets human-readable Salesforce UI label to All Sales Rep Outlet Allocations.
14	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Distributor_Outlet_Allocation__c/validationRules/Beat_Must_Match_Distributor_And_Outlet.validationRule-meta.xml

Salesforce metadata for Distributor_Outlet_Allocation__c/validationRules/Beat_Must_Match_Distributor_And_Outlet.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 fe74884ea941471b8a6d6d1ecaefeeee9c587c3fcf8aa2a5f5efb5cd1e62c1af

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Beat_Must_Match_Distributor_And_Outlet</fullName><active>true</active>`	Opens the fullName block; child elements specify its configuration.
4	`    <description>Keep the outlet and any optional legacy representative in the allocation beat.</description>`	Sets description in the enclosing configuration to Keep the outlet and any optional legacy representative in the allocation beat..
5	`    <errorConditionFormula>OR(Beat__c <> Outlet__r.Beat__c, AND(NOT(ISBLANK(Distributor__c)), Beat__c <> Distributor__r.Beat__c))</errorConditionFormula>`	Sets condition that makes this validation rule fail to OR(Beat__c <> Outlet__r.Beat__c, AND(NOT(ISBLANK(Distributor__c)), Beat__c <> Distributor__r.Beat__c)).
6	`    <errorDisplayField>Beat__c</errorDisplayField>`	Sets error Display Field in the enclosing configuration to Beat__c.
7	`    <errorMessage>The Outlet and Allocation must belong to the same Beat. If a Sales Representative is selected, their Beat must also match.</errorMessage>`	Sets message displayed when the rule fails to The Outlet and Allocation must belong to the same Beat. If a Sales Representative is selected, their Beat must also match..
8	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/Distributor_Outlet_Allocation__c/validationRules/Employee_Or_Representative_Required.validationRule-meta.xml

Salesforce metadata for Distributor_Outlet_Allocation__c/validationRules/Employee_Or_Representative_Required.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 45f8dacd5a4dd537096bafc711c3b8662a6d566f131a462b7d9a5ece9ffecb55

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Employee_Or_Representative_Required</fullName><active>true</active>`	Opens the fullName block; child elements specify its configuration.
4	`    <errorConditionFormula>AND(ISBLANK(Employee__c), ISBLANK(Distributor__c))</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(ISBLANK(Employee__c), ISBLANK(Distributor__c)).
5	`    <errorDisplayField>Employee__c</errorDisplayField>`	Sets error Display Field in the enclosing configuration to Employee__c.
6	`    <errorMessage>Select an Employee for this outlet allocation.</errorMessage>`	Sets message displayed when the rule fails to Select an Employee for this outlet allocation..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/Distributor__c/Distributor__c.object-meta.xml

Salesforce metadata for Distributor__c/Distributor__c.object-meta.xml. Label: Sales Representative. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

25 numbered source lines | SHA-256 5ef85046248a070f3ae6f6a9dab1c996fc9a9ab107ee47fa7620597c44b5b250

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <allowInChatterGroups>false</allowInChatterGroups>`	Sets allow In Chatter Groups in the enclosing configuration to false.
4	`    <deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
5	`    <description>Sales representative responsible for outlets allocated under an assigned sales beat.</description>`	Sets description in the enclosing configuration to Sales representative responsible for outlets allocated under an assigned sales beat..
6	`    <enableActivities>true</enableActivities>`	Sets enable Activities in the enclosing configuration to true.
7	`    <enableBulkApi>true</enableBulkApi>`	Sets enable Bulk Api in the enclosing configuration to true.
8	`    <enableFeeds>false</enableFeeds>`	Sets enable Feeds in the enclosing configuration to false.
9	`    <enableHistory>true</enableHistory>`	Sets enable History in the enclosing configuration to true.
10	`    <enableLicensing>false</enableLicensing>`	Sets enable Licensing in the enclosing configuration to false.
11	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
12	`    <enableSearch>true</enableSearch>`	Sets enable Search in the enclosing configuration to true.
13	`    <enableSharing>true</enableSharing>`	Sets enable Sharing in the enclosing configuration to true.
14	`    <enableStreamingApi>true</enableStreamingApi>`	Sets enable Streaming Api in the enclosing configuration to true.
15	`    <externalSharingModel>Private</externalSharingModel>`	Sets external Sharing Model in the enclosing configuration to Private.
16	`    <label>Sales Representative</label>`	Sets human-readable Salesforce UI label to Sales Representative.
17	`    <nameField>`	Opens the nameField block; child elements specify its configuration.
18	`        <label>Sales Representative Name</label>`	Sets human-readable Salesforce UI label to Sales Representative Name.

Line	Source code	Explanation / reading note
19	`<trackHistory>true</trackHistory>`	Sets track History in the enclosing configuration to true.
20	`<type>Text</type>`	Sets field/storage type to Text.
21	`</nameField>`	Closes the nameField configuration block.
22	`<pluralLabel>Sales Representatives</pluralLabel>`	Sets plural Label in the enclosing configuration to Sales Representatives.
23	`<sharingModel>ReadWrite</sharingModel>`	Sets record sharing baseline to ReadWrite.
24	`<visibility>Public</visibility>`	Sets visibility in the enclosing configuration to Public.
25	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Distributor__c/fields/Address__c.field-meta.xml

Salesforce metadata for Distributor__c/fields/Address__c.field-meta.xml. Label: Address. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

4 numbered source lines | SHA-256 7c4a0368cd9af30cbc4fb62ba010c9117f24cf8a12bf24d9378eccf2ea13b2c3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`<fullName>Address__c</fullName><label>Address</label><length>500</length><trackHistory>true</trackHistory><type>LongTextArea</type><visibleLines>4</visibleLines>`	Opens the fullName block; child elements specify its configuration.
4	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Distributor__c/fields/Alternate_Phone__c.field-meta.xml

Salesforce metadata for Distributor__c/fields/Alternate_Phone__c.field-meta.xml. Label: Alternate Phone. Type: Phone. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

4 numbered source lines | SHA-256 ba092a4607b46ab52b700948ec095a6ac2d9c4091686235f79f521ca1d939255

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Alternate_Phone__c</fullName><label>Alternate Phone</label><required>false</required><trackHistory>true</trackHistory><type>Phone</type>`	Opens the fullName block; child elements specify its configuration.
4	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Distributor__c/fields/Beat__c.field-meta.xml

Salesforce metadata for Distributor__c/fields/Beat__c.field-meta.xml. Label: Beat. Type: Lookup. Relationship target: Beat__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

4 numbered source lines | SHA-256 19acf9a8c9b782b6f7871c2bdfeca5bc25ee1280099f72282922180447972713

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`<fullName>Beat__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Beat</label><referenceTo>Beat__c</referenceTo><relationshipLabel>Distributors</relationshipLabel><relationshipName>Distributors</relationshipName><required>true</required><trackHistory>true</trackHistory><type>Lookup</type>`	Opens the fullName block; child elements specify its configuration.
4	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Distributor__c/fields/Distributor_ID__c.field-meta.xml

Salesforce metadata for Distributor__c/fields/Distributor_ID__c.field-meta.xml. Label: Sales Representative ID. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 b92708b01fbfa264745c97a6355e8a2c9b2066c1bfe0231c5e9df42481c8974e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Distributor_ID__c</fullName>`	Sets API identifier used by metadata deployment and code references to Distributor_ID__c.
4	`    <displayFormat>DIST-{0000}</displayFormat>`	Sets display Format in the enclosing configuration to DIST-{0000}.
5	`    <label>Sales Representative ID</label>`	Sets human-readable Salesforce UI label to Sales Representative ID.
6	`    <startingNumber>1</startingNumber>`	Sets starting Number in the enclosing configuration to 1.
7	`    <type>AutoNumber</type>`	Sets field/storage type to AutoNumber.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Distributor__c/fields/Email__c.field-meta.xml

Salesforce metadata for Distributor__c/fields/Email__c.field-meta.xml. Label: Email. Type: Email. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

4 numbered source lines | SHA-256 ae36e4632e0a5d8694b0c26c60f8bb2261b54ec78fb8e903fc49e35b9c6cbf3f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Email__c</fullName><label>Email</label><required>false</required><trackHistory>true</trackHistory><type>Email</type>`	Opens the fullName block; child elements specify its configuration.
4	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Distributor__c/fields/Joining_Date__c.field-meta.xml

Salesforce metadata for Distributor__c/fields/Joining_Date__c.field-meta.xml. Label: Joining Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

4 numbered source lines | SHA-256 9cdabbe79027861e89e0b24442b641f1d319e83fe8a5c6645d8ddb0083c324a3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`<fullName>Joining_Date__c</fullName><label>Joining Date</label><required>false</required><trackHistory>true</trackHistory><type>Date</type>`	Opens the fullName block; child elements specify its configuration.
4	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Distributor__c/fields/Login_Email__c.field-meta.xml

Salesforce metadata for Distributor__c/fields/Login_Email__c.field-meta.xml. Label: Login Email. Type: Email. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

4 numbered source lines | SHA-256 5e2c454ea5829c946fe065ae8c4c7c86e06fc9d4f48ea2fe893e2550f9988133

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`<fullName>Login_Email__c</fullName><label>Login Email</label><required>false</required><trackHistory>true</trackHistory><type>Email</type>`	Opens the fullName block; child elements specify its configuration.
4	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Distributor__c/fields/Phone__c.field-meta.xml

Salesforce metadata for Distributor__c/fields/Phone__c.field-meta.xml. Label: Phone. Type: Phone. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

4 numbered source lines | SHA-256 20bbdbd16a2551acf0b8d959cd01a1cfd689ab93273abcaf7de4f72563fbf2d1

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`<fullName>Phone__c</fullName><label>Phone</label><required>false</required><trackHistory>true</trackHistory><type>Phone</type>`	Opens the fullName block; child elements specify its configuration.
4	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Distributor__c/fields/Remarks__c.field-meta.xml

Salesforce metadata for Distributor__c/fields/Remarks__c.field-meta.xml. Label: Remarks. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

4 numbered source lines | SHA-256 98ff7750041ef52aa9902237e6c5ac5c16ae591961112ee9b1f7f23d15607349

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Remarks__c</fullName><label>Remarks</label><length>1000</length><trackHistory>true</trackHistory><type>LongTextArea</type><visibleLines>4</visibleLines>`	Opens the fullName block; child elements specify its configuration.
4	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Distributor__c/fields/Status__c.field-meta.xml

Salesforce metadata for Distributor__c/fields/Status__c.field-meta.xml. Label: Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 4142fbf906e618cbcef1365089f5fb955c81f68c69c9f8badc0b7c024b4ecc1d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Status__c</fullName><label>Status</label><required>true</required><trackHistory>true</trackHistory><type>Picklist</type>`	Opens the fullName block; child elements specify its configuration.
4	`    <valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted>`	Opens the valueSet block; child elements specify its configuration.
5	`        <value><fullName>Pending</fullName><default>true</default><label>Pending</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Pending</fullName><default>true</default><label>Pending</label>.
6	`        <value><fullName>Active</fullName><default>false</default><label>Active</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Active</fullName><default>false</default><label>Active</label>.
7	`        <value><fullName>Inactive</fullName><default>false</default><label>Inactive</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Inactive</fullName><default>false</default><label>Inactive</label>.
8	`    </valueSetDefinition></valueSet>`	Closes the valueSetDefinition configuration block.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Distributor__c/fields/User_Status__c.field-meta.xml

Salesforce metadata for Distributor__c/fields/User_Status__c.field-meta.xml. Label: User Status. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

4 numbered source lines | SHA-256 bdba8ec71d650a4760ee42ca8846555e063433799055fa8f6dce1c20ac3ecb79

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`<fullName>User_Status__c</fullName><formula>IF(ISBLANK(User__c), "Not Linked", IF(User__r.IsActive, "Active", "Inactive"))</formula><formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs><label>User Status</label><type>Text</type>`	Opens the fullName block; child elements specify its configuration.
4	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Distributor__c/fields/User__c.field-meta.xml

Salesforce metadata for Distributor__c/fields/User__c.field-meta.xml. Label: Salesforce User. Type: Lookup. Relationship target: User. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

4 numbered source lines | SHA-256 b4f16262801a5d06d3ffba586bdba34991e3ba9f58b188f049b1ea0e258acb04

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`<fullName>User__c</fullName><deleteConstraint>SetNull</deleteConstraint><label>Salesforce User</label><referenceTo>User</referenceTo><relationshipLabel>Distributor Records</relationshipLabel><relationshipName>Distributor_Records</relationshipName><required>false</required><trackHistory>true</trackHistory><type>Lookup</type>`	Opens the fullName block; child elements specify its configuration.
4	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Distributor__c/listViews/All_Distributors.listView-meta.xml

Salesforce metadata for Distributor__c/listViews/All_Distributors.listView-meta.xml. Label: All Sales Representatives. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 570d860e95326119b6d9e53a9f810d9338c4fcc93f2f16d43541cac0808043a6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>All_Distributors</fullName><columns>NAME</columns><columns>Distributor_ID__c</columns><columns>Status__c</columns><columns>Beat__c</columns><columns>Phone__c</columns><columns>Email__c</columns><columns>User_Status__c</columns><filterScope>Everything</filterScope><label>All Sales Representatives</label></ListView>`	Sets List View in the enclosing configuration to <fullName>All_Distributors</fullName><columns>NAME</columns><columns>Distributor_ID__c</columns><columns>Status__c</columns><columns>Beat__c</columns><columns>Phone__c</columns><columns>Email__c</colu.

force-app/main/default/objects/Employee__c/Employee__c.object-meta.xml

Salesforce metadata for Employee__c/Employee__c.object-meta.xml. Label: Employee. Type: Default. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

165 numbered source lines | SHA-256 d297ed4257f78e5ee224da1a0cd775ede04850a9914316f8f47bf8b4be643a88

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
4	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
5	`        <type>Default</type>`	Sets field/storage type to Default.
6	`    </actionOverrides>`	Closes the actionOverrides configuration block.
7	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
8	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
9	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
10	`        <type>Default</type>`	Sets field/storage type to Default.
11	`    </actionOverrides>`	Closes the actionOverrides configuration block.
12	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
13	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
14	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
15	`        <type>Default</type>`	Sets field/storage type to Default.
16	`    </actionOverrides>`	Closes the actionOverrides configuration block.
17	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
18	`        <actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.

Line	Source code	Explanation / reading note
19	`<type>Default</type>`	Sets field/storage type to Default.
20	`</actionOverrides>`	Closes the actionOverrides configuration block.
21	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
22	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
23	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
24	`<type>Default</type>`	Sets field/storage type to Default.
25	`</actionOverrides>`	Closes the actionOverrides configuration block.
26	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
27	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
28	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
29	`<type>Default</type>`	Sets field/storage type to Default.
30	`</actionOverrides>`	Closes the actionOverrides configuration block.
31	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
32	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
33	`<type>Default</type>`	Sets field/storage type to Default.
34	`</actionOverrides>`	Closes the actionOverrides configuration block.
35	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
36	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
37	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
38	`<type>Default</type>`	Sets field/storage type to Default.
39	`</actionOverrides>`	Closes the actionOverrides configuration block.
40	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.

Line	Source code	Explanation / reading note
41	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
42	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
43	`<type>Default</type>`	Sets field/storage type to Default.
44	`</actionOverrides>`	Closes the actionOverrides configuration block.
45	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
46	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
47	`<type>Default</type>`	Sets field/storage type to Default.
48	`</actionOverrides>`	Closes the actionOverrides configuration block.
49	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
50	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
51	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
52	`<type>Default</type>`	Sets field/storage type to Default.
53	`</actionOverrides>`	Closes the actionOverrides configuration block.
54	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
55	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
56	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
57	`<type>Default</type>`	Sets field/storage type to Default.
58	`</actionOverrides>`	Closes the actionOverrides configuration block.
59	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
60	`<actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
61	`<type>Default</type>`	Sets field/storage type to Default.
62	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
63	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
64	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
65	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
66	`        <type>Default</type>`	Sets field/storage type to Default.
67	`    </actionOverrides>`	Closes the actionOverrides configuration block.
68	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
69	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
70	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
71	`        <type>Default</type>`	Sets field/storage type to Default.
72	`    </actionOverrides>`	Closes the actionOverrides configuration block.
73	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
74	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
75	`        <type>Default</type>`	Sets field/storage type to Default.
76	`    </actionOverrides>`	Closes the actionOverrides configuration block.
77	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
78	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
79	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
80	`        <type>Default</type>`	Sets field/storage type to Default.
81	`    </actionOverrides>`	Closes the actionOverrides configuration block.
82	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
83	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
84	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.

Line	Source code	Explanation / reading note
85	`<type>Default</type>`	Sets field/storage type to Default.
86	`</actionOverrides>`	Closes the actionOverrides configuration block.
87	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
88	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
89	`<type>Default</type>`	Sets field/storage type to Default.
90	`</actionOverrides>`	Closes the actionOverrides configuration block.
91	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
92	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
93	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
94	`<type>Default</type>`	Sets field/storage type to Default.
95	`</actionOverrides>`	Closes the actionOverrides configuration block.
96	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
97	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
98	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
99	`<type>Default</type>`	Sets field/storage type to Default.
100	`</actionOverrides>`	Closes the actionOverrides configuration block.
101	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
102	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
103	`<type>Default</type>`	Sets field/storage type to Default.
104	`</actionOverrides>`	Closes the actionOverrides configuration block.
105	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
106	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.

Line	Source code	Explanation / reading note
107	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
108	`<type>Default</type>`	Sets field/storage type to Default.
109	`</actionOverrides>`	Closes the actionOverrides configuration block.
110	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
111	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
112	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
113	`<type>Default</type>`	Sets field/storage type to Default.
114	`</actionOverrides>`	Closes the actionOverrides configuration block.
115	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
116	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
117	`<type>Default</type>`	Sets field/storage type to Default.
118	`</actionOverrides>`	Closes the actionOverrides configuration block.
119	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
120	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
121	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
122	`<type>Default</type>`	Sets field/storage type to Default.
123	`</actionOverrides>`	Closes the actionOverrides configuration block.
124	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
125	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
126	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
127	`<type>Default</type>`	Sets field/storage type to Default.
128	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
129	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
130	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
131	`<type>Default</type>`	Sets field/storage type to Default.
132	`</actionOverrides>`	Closes the actionOverrides configuration block.
133	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
134	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
135	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
136	`<type>Default</type>`	Sets field/storage type to Default.
137	`</actionOverrides>`	Closes the actionOverrides configuration block.
138	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
139	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
140	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
141	`<type>Default</type>`	Sets field/storage type to Default.
142	`</actionOverrides>`	Closes the actionOverrides configuration block.
143	`<allowInChatterGroups>false</allowInChatterGroups>`	Sets allow In Chatter Groups in the enclosing configuration to false.
144	`<compactLayoutAssignment>SYSTEM</compactLayoutAssignment>`	Sets compact Layout Assignment in the enclosing configuration to SYSTEM.
145	`<deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
146	`<enableActivities>false</enableActivities>`	Sets enable Activities in the enclosing configuration to false.
147	`<enableBulkApi>true</enableBulkApi>`	Sets enable Bulk Api in the enclosing configuration to true.
148	`<enableFeeds>false</enableFeeds>`	Sets enable Feeds in the enclosing configuration to false.
149	`<enableHistory>false</enableHistory>`	Sets enable History in the enclosing configuration to false.
150	`<enableLicensing>false</enableLicensing>`	Sets enable Licensing in the enclosing configuration to false.

Line	Source code	Explanation / reading note
151	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
152	`    <enableSearch>true</enableSearch>`	Sets enable Search in the enclosing configuration to true.
153	`    <enableSharing>true</enableSharing>`	Sets enable Sharing in the enclosing configuration to true.
154	`    <enableStreamingApi>true</enableStreamingApi>`	Sets enable Streaming Api in the enclosing configuration to true.
155	`    <externalSharingModel>Private</externalSharingModel>`	Sets external Sharing Model in the enclosing configuration to Private.
156	`    <label>Employee</label>`	Sets human-readable Salesforce UI label to Employee.
157	`    <nameField>`	Opens the nameField block; child elements specify its configuration.
158	`        <label>Employee Name</label>`	Sets human-readable Salesforce UI label to Employee Name.
159	`        <type>Text</type>`	Sets field/storage type to Text.
160	`    </nameField>`	Closes the nameField configuration block.
161	`    <pluralLabel>Employees</pluralLabel>`	Sets plural Label in the enclosing configuration to Employees.
162	`    <searchLayouts></searchLayouts>`	Sets search Layouts in the enclosing configuration to .
163	`    <sharingModel>ReadWrite</sharingModel>`	Sets record sharing baseline to ReadWrite.
164	`    <visibility>Public</visibility>`	Sets visibility in the enclosing configuration to Public.
165	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Employee__c/fields/Aadhaar_Number__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Aadhaar_Number__c.field-meta.xml. Label: Aadhaar Number. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 a79da54a774b492f127d71f41ebc962a0961ede5871e50bc9e75404ae5bb6472

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Aadhaar_Number__c</fullName>`	Sets API identifier used by metadata deployment and code references to Aadhaar_Number__c.
4	`    <caseSensitive>false</caseSensitive>`	Sets case Sensitive in the enclosing configuration to false.
5	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
6	`    <label>Aadhaar Number</label>`	Sets human-readable Salesforce UI label to Aadhaar Number.
7	`    <length>12</length>`	Sets maximum text length to 12.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Text</type>`	Sets field/storage type to Text.
11	`    <unique>true</unique>`	Sets whether duplicate stored values are rejected to true.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Employee__c/fields/Active__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Active__c.field-meta.xml. Label: Active. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 060f7b862ff091ad95099edea7943558e1cc28cb467ce0bc808fe410c0617d35

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Active__c</fullName>`	Sets API identifier used by metadata deployment and code references to Active__c.
4	`    <defaultValue>true</defaultValue>`	Sets initial value expression to true.
5	`    <label>Active</label>`	Sets human-readable Salesforce UI label to Active.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Checkbox</type>`	Sets field/storage type to Checkbox.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Employee__c/fields/Address__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Address__c.field-meta.xml. Label: Address. Type: TextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

6 numbered source lines | SHA-256 7806d538e5cccafc55cae3e4230ba35b9882a04e7ac990c9919fa21921d5cf56

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Address__c</fullName>`	Sets API identifier used by metadata deployment and code references to Address__c.
4	`    <label>Address</label>`	Sets human-readable Salesforce UI label to Address.
5	`    <type>TextArea</type>`	Sets field/storage type to TextArea.
6	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Employee__c/fields/Alternate_Phone__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Alternate_Phone__c.field-meta.xml. Label: Alternate Phone. Type: Phone. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 bce5e68a5dc6fcc73730e3f00441e445a92c5f6f9a29ed05d06e33feef92eae9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Alternate_Phone__c</fullName><label>Alternate Phone</label><type>Phone</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Employee__c/fields/Application_Access_Email__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Application_Access_Email__c.field-meta.xml. Label: Application Access Email. Type: Email. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 39c9f2012757bef552b53eec69e1a628434d3033ea59c8b74895b69eda215040

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Application_Access_Email__c</fullName>`	Sets API identifier used by metadata deployment and code references to Application_Access_Email__c.
4	`    <description>Email used to receive the SFA Mobile invitation and verification codes. When blank, the employee Email is used.</description>`	Sets description in the enclosing configuration to Email used to receive the SFA Mobile invitation and verification codes. When blank, the employee Email is used..
5	`    <label>Application Access Email</label>`	Sets human-readable Salesforce UI label to Application Access Email.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Email</type>`	Sets field/storage type to Email.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Employee__c/fields/Beat__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Beat__c.field-meta.xml. Label: Beat. Type: Lookup. Relationship target: Beat__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 0d0bd7fe662e314a1a9dc3a41399280b9c7d01b367f3f562af526f595e2b5fdc

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Beat__c</fullName><deleteConstraint>SetNull</deleteConstraint><label>Beat</label><referenceTo>Beat__c</referenceTo><relationshipLabel>Employees</relationshipLabel><relationshipName>Employees</relationshipName><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Employee__c/fields/DMS_Distributor__c.field-meta.xml

Salesforce metadata for Employee__c/fields/DMS_Distributor__c.field-meta.xml. Label: DMS Distributor. Type: Lookup. Relationship target: DMS_Distributor__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 2ca5d507c0c641ccd4a7288ae1ae1019bda8333981f56616396156f4340c8f4a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>DMS_Distributor__c</fullName><deleteConstraint>Restrict</deleteConstraint><description>Automatically allocated on employee creation; explicit manual assignments are preserved.</description><label>DMS Distributor</label><referenceTo>DMS_Distributor__c</referenceTo><relationshipLabel>Employees</relationshipLabel><relationshipName>Employees</relationshipName><required>false</required><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>DMS_Distributor__c</fullName><deleteConstraint>Restrict</deleteConstraint><description>Automatically allocated on employee creation; explicit manual assignments are preserved.</description><.

force-app/main/default/objects/Employee__c/fields/Email__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Email__c.field-meta.xml. Label: Email. Type: Email. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 81edc778cfd1386e47242b288b3791770d569d1d33741a2c2a81fa60affe0b0d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Email__c</fullName>`	Sets API identifier used by metadata deployment and code references to Email__c.
4	`    <label>Email</label>`	Sets human-readable Salesforce UI label to Email.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <type>Email</type>`	Sets field/storage type to Email.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Employee__c/fields/Emergency_Contact__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Emergency_Contact__c.field-meta.xml. Label: Emergency Contact. Type: Phone. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 31132d1833fa0fb62c7733faca7eb6c74e01c599fd19ee1d0c186d6fc1077c35

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Emergency_Contact__c</fullName>`	Sets API identifier used by metadata deployment and code references to Emergency_Contact__c.
4	`    <label>Emergency Contact</label>`	Sets human-readable Salesforce UI label to Emergency Contact.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Phone</type>`	Sets field/storage type to Phone.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Employee__c/fields/Employee_Code__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Employee_Code__c.field-meta.xml. Label: Employee Code. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 980793996ab35daba03b0dafcd8f19802565d500e09703cee8336644c6d93012

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Employee_Code__c</fullName>`	Sets API identifier used by metadata deployment and code references to Employee_Code__c.
4	`    <caseSensitive>false</caseSensitive>`	Sets case Sensitive in the enclosing configuration to false.
5	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
6	`    <label>Employee Code</label>`	Sets human-readable Salesforce UI label to Employee Code.
7	`    <length>20</length>`	Sets maximum text length to 20.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Text</type>`	Sets field/storage type to Text.
11	`    <unique>true</unique>`	Sets whether duplicate stored values are rejected to true.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Employee__c/fields/Geography__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Geography__c.field-meta.xml. Label: Geography. Type: Lookup. Relationship target: Geography__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 44e90d7767dfed381511570bada48b4bb66900bad89b8426846a9f998add8bb7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Geography__c</fullName>`	Sets API identifier used by metadata deployment and code references to Geography__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Geography</label>`	Sets human-readable Salesforce UI label to Geography.
6	`    <referenceTo>Geography__c</referenceTo>`	Sets object referenced by this relationship to Geography__c.
7	`    <relationshipLabel>Employees</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Employees.
8	`    <relationshipName>Employees</relationshipName>`	Sets relationship API traversal name to Employees.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Employee__c/fields/Hierarchy_Level__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Hierarchy_Level__c.field-meta.xml. Label: Hierarchy Level. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

59 numbered source lines | SHA-256 f252825af33f2ffee748b2266d91a75731b8a939077d64f66f5f50cf802b0f2b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Hierarchy_Level__c</fullName>`	Sets API identifier used by metadata deployment and code references to Hierarchy_Level__c.
4	`    <label>Hierarchy Level</label>`	Sets human-readable Salesforce UI label to Hierarchy Level.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value>`	Opens the value block; child elements specify its configuration.
13	`                <fullName>L1</fullName>`	Sets API identifier used by metadata deployment and code references to L1.
14	`                <default>true</default>`	Sets whether this option is the default to true.
15	`                <label>L1</label>`	Sets human-readable Salesforce UI label to L1.
16	`            </value>`	Closes the value configuration block.
17	`            <value>`	Opens the value block; child elements specify its configuration.
18	`                <fullName>L2</fullName>`	Sets API identifier used by metadata deployment and code references to L2.

Line	Source code	Explanation / reading note
19	`<default>false</default>`	Sets whether this option is the default to false.
20	`<label>L2</label>`	Sets human-readable Salesforce UI label to L2.
21	`</value>`	Closes the value configuration block.
22	`<value>`	Opens the value block; child elements specify its configuration.
23	`<fullName>L3</fullName>`	Sets API identifier used by metadata deployment and code references to L3.
24	`<default>false</default>`	Sets whether this option is the default to false.
25	`<label>L3</label>`	Sets human-readable Salesforce UI label to L3.
26	`</value>`	Closes the value configuration block.
27	`<value>`	Opens the value block; child elements specify its configuration.
28	`<fullName>L4</fullName>`	Sets API identifier used by metadata deployment and code references to L4.
29	`<default>false</default>`	Sets whether this option is the default to false.
30	`<label>L4</label>`	Sets human-readable Salesforce UI label to L4.
31	`</value>`	Closes the value configuration block.
32	`<value>`	Opens the value block; child elements specify its configuration.
33	`<fullName>L5</fullName>`	Sets API identifier used by metadata deployment and code references to L5.
34	`<default>false</default>`	Sets whether this option is the default to false.
35	`<label>L5</label>`	Sets human-readable Salesforce UI label to L5.
36	`</value>`	Closes the value configuration block.
37	`<value>`	Opens the value block; child elements specify its configuration.
38	`<fullName>L6</fullName>`	Sets API identifier used by metadata deployment and code references to L6.
39	`<default>false</default>`	Sets whether this option is the default to false.
40	`<label>L6</label>`	Sets human-readable Salesforce UI label to L6.

Line	Source code	Explanation / reading note
41	`            </value>`	Closes the value configuration block.
42	`            <value>`	Opens the value block; child elements specify its configuration.
43	`                <fullName>L7</fullName>`	Sets API identifier used by metadata deployment and code references to L7.
44	`                <default>false</default>`	Sets whether this option is the default to false.
45	`                <label>L7</label>`	Sets human-readable Salesforce UI label to L7.
46	`            </value>`	Closes the value configuration block.
47	`            <value>`	Opens the value block; child elements specify its configuration.
48	`                <fullName>L8</fullName>`	Sets API identifier used by metadata deployment and code references to L8.
49	`                <default>false</default>`	Sets whether this option is the default to false.
50	`                <label>L8</label>`	Sets human-readable Salesforce UI label to L8.
51	`            </value>`	Closes the value configuration block.
52	`            <value>`	Opens the value block; child elements specify its configuration.
53	`                <fullName>L9</fullName>`	Sets API identifier used by metadata deployment and code references to L9.
54	`                <default>false</default>`	Sets whether this option is the default to false.
55	`                <label>L9</label>`	Sets human-readable Salesforce UI label to L9.
56	`            </value>`	Closes the value configuration block.
57	`        </valueSetDefinition>`	Closes the valueSetDefinition configuration block.
58	`    </valueSet>`	Closes the valueSet configuration block.
59	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Employee__c/fields/Joining_Date__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Joining_Date__c.field-meta.xml. Label: Joining Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 7ef81327d8dfb287e2f2a9ab24fb84ed7336366c14136fa6c247711154772e7a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Joining_Date__c</fullName> <label>Joining Date</label><type>Date</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Employee__c/fields/Login_Email__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Login_Email__c.field-meta.xml. Label: Login Email. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 33b695ee349d1c976ab83a99c6f6095edbe8bafc8e24288bbd7e754db2cec209

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Login_Email__c</fullName><formula>Email__c</formula><formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs><label>Login Email</label><type>Text</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Employee__c/fields/PAN_Number__c.field-meta.xml

Salesforce metadata for Employee__c/fields/PAN_Number__c.field-meta.xml. Label: PAN Number. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 3f49c44fcbe92927b8232a4b57478f06f8658c7bb5ab0b195e4771e5a25fe457

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>PAN_Number__c</fullName>`	Sets API identifier used by metadata deployment and code references to PAN_Number__c.
4	`    <caseSensitive>false</caseSensitive>`	Sets case Sensitive in the enclosing configuration to false.
5	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
6	`    <label>PAN Number</label>`	Sets human-readable Salesforce UI label to PAN Number.
7	`    <length>10</length>`	Sets maximum text length to 10.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Text</type>`	Sets field/storage type to Text.
11	`    <unique>true</unique>`	Sets whether duplicate stored values are rejected to true.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Employee__c/fields/Phone__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Phone__c.field-meta.xml. Label: Phone Number. Type: Phone. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 4b4f9ab50a631d9e3c6054b7b37a62e5605a8ce39df96a1192a55d26cca7a74b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Phone__c</fullName>`	Sets API identifier used by metadata deployment and code references to Phone__c.
4	`    <label>Phone Number</label>`	Sets human-readable Salesforce UI label to Phone Number.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Phone</type>`	Sets field/storage type to Phone.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Employee__c/fields/Profile_Photo_URL__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Profile_Photo_URL__c.field-meta.xml. Label: Profile Photo URL. Type: Url. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 5c375954a7d9584be5b8da2fd783310ce91dfba6d061b302a9fd3ed69d98ff71

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Profile_Photo_URL__c</fullName>`	Sets API identifier used by metadata deployment and code references to Profile_Photo_URL__c.
4	`    <label>Profile Photo URL</label>`	Sets human-readable Salesforce UI label to Profile Photo URL.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Url</type>`	Sets field/storage type to Url.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Employee__c/fields/Remarks__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Remarks__c.field-meta.xml. Label: Remarks. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 70c7c5e8ffd5626f7cfd88e13fe305146347c87b1edf60abe044e847a13ea19b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Remarks__c</fullName><label>Remarks</label><length>32768</length><type>LongTextArea</type><visibleLines>4</visibleLines></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Employee__c/fields/Reporting_Manager__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Reporting_Manager__c.field-meta.xml. Label: Reporting Manager. Type: Lookup. Relationship target: Employee__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 bc19b9a764edb2e194e4172e71039cb07be8001bce6df6a5fb986ff936ae2fed

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Reporting_Manager__c</fullName>`	Sets API identifier used by metadata deployment and code references to Reporting_Manager__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Reporting Manager</label>`	Sets human-readable Salesforce UI label to Reporting Manager.
6	`    <referenceTo>Employee__c</referenceTo>`	Sets object referenced by this relationship to Employee__c.
7	`    <relationshipLabel>Direct Reports</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Direct Reports.
8	`    <relationshipName>Direct_Reports</relationshipName>`	Sets relationship API traversal name to Direct_Reports.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Employee__c/fields/Salesforce_User__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Salesforce_User__c.field-meta.xml. Label: Salesforce User. Type: Lookup. Relationship target: User. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 1bf9d104c943512346083132d99bdfb750f054de7b4c718e04368b6167e9a9ed

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Salesforce_User__c</fullName>`	Sets API identifier used by metadata deployment and code references to Salesforce_User__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Salesforce User</label>`	Sets human-readable Salesforce UI label to Salesforce User.
6	`    <referenceTo>User</referenceTo>`	Sets object referenced by this relationship to User.
7	`    <relationshipLabel>Employees</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Employees.
8	`    <relationshipName>Employees</relationshipName>`	Sets relationship API traversal name to Employees.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Employee__c/fields/Status__c.field-meta.xml

Salesforce metadata for Employee__c/fields/Status__c.field-meta.xml. Label: Status. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 9f4b394c647b0364e918d0b5b1d767271adcc6b3595b69d24b8ba4a89b5cf1e3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Status__c</fullName><formula>IF(Active__c, "Active", "Inactive")</formula><formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs><label>Status</label><type>Text</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Employee__c/fields/User_Status__c.field-meta.xml

Salesforce metadata for Employee__c/fields/User_Status__c.field-meta.xml. Label: User Status. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 f3d4886fa215d0c44b0ad04fc2265078340c2694e1d47f414e9dc7eb4c9ad5e0

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>User_Status__c</fullName><formula>IF(ISBLANK(Salesforce_User__c), "Not Linked", IF(Salesforce_User__r.IsActive, "Active", "Inactive"))</formula><formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs><label>User Status</label><type>Text</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Employee__c/listViews/All_Employees.listView-meta.xml

Salesforce metadata for Employee__c/listViews/All_Employees.listView-meta.xml. Label: All Employees. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

18 numbered source lines | SHA-256 a93d1ddab07aad1a28939d8743c43397c8b5efaa65d97f953758fd3f7d4ffbc0

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Employees</fullName>`	Sets API identifier used by metadata deployment and code references to All_Employees.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Employee_Code__c</columns>`	Sets columns in the enclosing configuration to Employee_Code__c.
6	`    <columns>Email__c</columns>`	Sets columns in the enclosing configuration to Email__c.
7	`    <columns>Phone__c</columns>`	Sets columns in the enclosing configuration to Phone__c.
8	`    <columns>Status__c</columns>`	Sets columns in the enclosing configuration to Status__c.
9	`    <columns>Joining_Date__c</columns>`	Sets columns in the enclosing configuration to Joining_Date__c.
10	`    <columns>Beat__c</columns>`	Sets columns in the enclosing configuration to Beat__c.
11	`    <columns>Salesforce_User__c</columns>`	Sets columns in the enclosing configuration to Salesforce_User__c.
12	`    <columns>Reporting_Manager__c</columns>`	Sets columns in the enclosing configuration to Reporting_Manager__c.
13	`    <columns>Hierarchy_Level__c</columns>`	Sets columns in the enclosing configuration to Hierarchy_Level__c.
14	`    <columns>Geography__c</columns>`	Sets columns in the enclosing configuration to Geography__c.
15	`    <columns>Active__c</columns>`	Sets columns in the enclosing configuration to Active__c.
16	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
17	`    <label>All Employees</label>`	Sets human-readable Salesforce UI label to All Employees.
18	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Employee__c/validationRules/Aadhaar_Must_Be_12_Digits.validationRule-meta.xml

Salesforce metadata for Employee__c/validationRules/Aadhaar_Must_Be_12_Digits.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 e06c349a0593d1b24d89a5dfb14912514d86281c7d0949aa63ee37775e15ae47

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Aadhaar_Must_Be_12_Digits</fullName>`	Sets API identifier used by metadata deployment and code references to Aadhaar_Must_Be_12_Digits.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(NOT(ISBLANK(Aadhaar_Number__c)), NOT(REGEX(Aadhaar_Number__c, "[0-9]{12}")))</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(Aadhaar_Number__c)), NOT(REGEX(Aadhaar_Number__c, "[0-9]{12}"))).
6	`    <errorDisplayField>Aadhaar_Number__c</errorDisplayField>`	Sets error Display Field in the enclosing configuration to Aadhaar_Number__c.
7	`    <errorMessage>Enter exactly 12 digits for Aadhaar.</errorMessage>`	Sets message displayed when the rule fails to Enter exactly 12 digits for Aadhaar..
8	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/Employee__c/validationRules/Emergency_Contact_Must_Be_10_Digits.validationRule-meta.xml

Salesforce metadata for Employee__c/validationRules/Emergency_Contact_Must_Be_10_Digits.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 f3c691a054bf829378d0e430340c03273c7b8f172377a4261266a02fe593dfb5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Emergency_Contact_Must_Be_10_Digits</fullName>`	Sets API identifier used by metadata deployment and code references to Emergency_Contact_Must_Be_10_Digits.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(NOT(ISBLANK(Emergency_Contact__c)), NOT(REGEX(Emergency_Contact__c, "^[0-9]{10}$")))</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(Emergency_Contact__c)), NOT(REGEX(Emergency_Contact__c, "^[0-9]{10}$"))).
6	`    <errorDisplayField>Emergency_Contact__c</errorDisplayField>`	Sets error Display Field in the enclosing configuration to Emergency_Contact__c.
7	`    <errorMessage>Emergency contact must contain exactly 10 digits.</errorMessage>`	Sets message displayed when the rule fails to Emergency contact must contain exactly 10 digits..
8	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/Employee__c/validationRules/PAN_Must_Be_10_Characters.validationRule-meta.xml

Salesforce metadata for Employee__c/validationRules/PAN_Must_Be_10_Characters.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 381affddb9052a91cbfeb3ace693d72ad4fed0a084971d1567d9426a192d192f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>PAN_Must_Be_10_Characters</fullName>`	Sets API identifier used by metadata deployment and code references to PAN_Must_Be_10_Characters.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(NOT(ISBLANK(PAN_Number__c)), LEN(PAN_Number__c) <> 10)</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(PAN_Number__c)), LEN(PAN_Number__c) <> 10).
6	`    <errorDisplayField>PAN_Number__c</errorDisplayField>`	Sets error Display Field in the enclosing configuration to PAN_Number__c.
7	`    <errorMessage>Enter exactly 10 characters for PAN.</errorMessage>`	Sets message displayed when the rule fails to Enter exactly 10 characters for PAN..
8	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/Employee__c/validationRules/PAN_Must_Be_Valid.validationRule-meta.xml

Salesforce metadata for Employee__c/validationRules/PAN_Must_Be_Valid.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 ee57252c0346329b060fae95a815781b1285590ed54f7594aab838cb02fbfcc4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>PAN_Must_Be_Valid</fullName>`	Sets API identifier used by metadata deployment and code references to PAN_Must_Be_Valid.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(NOT(ISBLANK(PAN_Number__c)), NOT(REGEX(UPPER(PAN_Number__c), "^[A-Z]{5}[0-9]{4}[A-Z]$")))</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(PAN_Number__c)), NOT(REGEX(UPPER(PAN_Number__c), "^[A-Z]{5}[0-9]{4}[A-Z]$"))).
6	`    <errorDisplayField>PAN_Number__c</errorDisplayField>`	Sets error Display Field in the enclosing configuration to PAN_Number__c.
7	`    <errorMessage>PAN must use the standard format: five letters, four digits and one letter.</errorMessage>`	Sets message displayed when the rule fails to PAN must use the standard format: five letters, four digits and one letter..
8	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/Employee__c/validationRules/Phone_Is_Required.validationRule-meta.xml

Salesforce metadata for Employee__c/validationRules/Phone_Is_Required.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 7bdd385631cfacea02fcc9d6ec65f9f06423d7190afee6fd281dc9666ee2e423

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Phone_Is_Required</fullName>`	Sets API identifier used by metadata deployment and code references to Phone_Is_Required.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>ISBLANK(Phone__c)</errorConditionFormula>`	Sets condition that makes this validation rule fail to ISBLANK(Phone__c).
6	`    <errorDisplayField>Phone__c</errorDisplayField>`	Sets error Display Field in the enclosing configuration to Phone__c.
7	`    <errorMessage>Phone Number is required.</errorMessage>`	Sets message displayed when the rule fails to Phone Number is required..
8	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/Employee__c/validationRules/Phone_Must_Be_10_Digits.validationRule-meta.xml

Salesforce metadata for Employee__c/validationRules/Phone_Must_Be_10_Digits.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 c23d8870e105301b26dcc3b36043961be9c0cd2e79a01b74441cd534f95b3047

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Phone_Must_Be_10_Digits</fullName>`	Sets API identifier used by metadata deployment and code references to Phone_Must_Be_10_Digits.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(NOT(ISBLANK(Phone__c)), NOT(REGEX(Phone__c, "^[0-9]{10}$")))</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(Phone__c)), NOT(REGEX(Phone__c, "^[0-9]{10}$"))).
6	`    <errorDisplayField>Phone__c</errorDisplayField>`	Sets error Display Field in the enclosing configuration to Phone__c.
7	`    <errorMessage>Phone number must contain exactly 10 digits.</errorMessage>`	Sets message displayed when the rule fails to Phone number must contain exactly 10 digits..
8	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/Expense_Claim__c/Expense_Claim__c.object-meta.xml

Salesforce metadata for Expense_Claim__c/Expense_Claim__c.object-meta.xml. Label: Expense Claim. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 b597746f170ce1cf4486f8fba6a53223aa906be3fc13c737a855523dc8e7d228

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata"><deploymentStatus>Deployed</deploymentStatus><description>Mobile travel and daily allowance claims submitted against an Expense Policy.</description><enableActivities>true</enableActivities><enableFeeds>false</enableFeeds><enableHistory>true</enableHistory><enableReports>true</enableReports><label>Expense Claim</label><pluralLabel>Expense Claims</pluralLabel><nameField><displayFormat>EXP-{00000}</displayFormat><label>Expense Claim Number</label><type>AutoNumber</type></nameField><sharingModel>ReadWrite</sharingModel></CustomObject>`	Sets Custom Object in the enclosing configuration to <deploymentStatus>Deployed</deploymentStatus><description>Mobile travel and daily allowance claims submitted against an Expense Policy.</description><enableActivities>true</enableActivities><enableFee.

force-app/main/default/objects/Expense_Claim__c/fields/Amount__c.field-meta.xml

Salesforce metadata for Expense_Claim__c/fields/Amount__c.field-meta.xml. Label: Claimed Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 af2349b759c16bb0d99d0c890da69b3f6a34a011351c8712035f604e86a2a136

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Amount__c</fullName><label>Claimed Amount</label><precision>16</precision><required>true</required><scale>2</scale><type>Currency</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Claim__c/fields/Approved_Amount__c.field-meta.xml

Salesforce metadata for Expense_Claim__c/fields/Approved_Amount__c.field-meta.xml. Label: Approved Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 d61061833dfa933761e154df31c12c916ac89c2be1647cf7eed9decf3728ac49

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Approved_Amount__c</fullName><label>Approved Amount</label><precision>16</precision><scale>2</scale><type>Currency</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Claim__c/fields/Attendance__c.field-meta.xml

Salesforce metadata for Expense_Claim__c/fields/Attendance__c.field-meta.xml. Label: Attendance. Type: Lookup. Relationship target: Attendance__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 bec5c83e71820b4a06fed14029985a338e4e5cfb0a2c737abcde3c9ddb03ed91

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Attendance__c</fullName><deleteConstraint>SetNull</deleteConstraint><label>Attendance</label><referenceTo>Attendance__c</referenceTo><relationshipLabel>Expense Claims</relationshipLabel><relationshipName>Expense_Claims</relationshipName><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Claim__c/fields/Claim_Date__c.field-meta.xml

Salesforce metadata for Expense_Claim__c/fields/Claim_Date__c.field-meta.xml. Label: Claim Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 67077c220f8065ca83e3dcbc4f436b98dfe1be3eeedd6f20b6a4a30101821b4d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Claim_Date__c</fullName><defaultValue>TODAY()</defaultValue><label>Claim Date</label><required>true</required><type>Date</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Claim__c/fields/Distance_Km__c.field-meta.xml

Salesforce metadata for Expense_Claim__c/fields/Distance_Km__c.field-meta.xml. Label: Distance (KM). Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 3062a3d7f01d8a22d1e43fe8a78bf9ef2164575dbebd127c6ef51b7ab6f49c1f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Distance_Km__c</fullName><label>Distance (KM)</label><precision>10</precision><scale>2</scale><type>Number</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Claim__c/fields/End_Odometer__c.field-meta.xml

Salesforce metadata for Expense_Claim__c/fields/End_Odometer__c.field-meta.xml. Label: End Odometer. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 eb25793e52818d0798ddcfa54d9e0ff1874319149c2ad13e6ba80ab40ebe330a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>End_Odometer__c</fullName> <label>End Odometer</label><precision>10</precision><scale>1</scale><type>Number</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Claim__c/fields/Expense_Policy__c.field-meta.xml

Salesforce metadata for Expense_Claim__c/fields/Expense_Policy__c.field-meta.xml. Label: Expense Policy. Type: Lookup. Relationship target: Expense_Policy__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 7f3cb59f12fd78f4058d89a6798520dad050ff634d812b8719aba2c89629efb8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Expense_Policy__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Expense Policy</label><referenceTo>Expense_Policy__c</referenceTo><relationshipLabel>Expense Claims</relationshipLabel><relationshipName>Expense_Claims</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Claim__c/fields/Ownership__c.field-meta.xml

Salesforce metadata for Expense_Claim__c/fields/Ownership__c.field-meta.xml. Label: Vehicle Ownership. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 dbacdbb4087708d691dc504982025f2d61cff9a4426ab2f2536b62849ca60dda

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Ownership__c</fullName><label>Vehicle Ownership</label><length>40</length><type>Text</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Claim__c/fields/Receipt_URL__c.field-meta.xml

Salesforce metadata for Expense_Claim__c/fields/Receipt_URL__c.field-meta.xml. Label: Receipt / Evidence URL. Type: Url. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 ab455a153b657c32111189321880e3122ff6214c2fe9f4f85934531514a64f06

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Receipt_URL__c</fullName><label>Receipt / Evidence URL</label><type>Url</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Claim__c/fields/Remarks__c.field-meta.xml

Salesforce metadata for Expense_Claim__c/fields/Remarks__c.field-meta.xml. Label: Remarks. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 2725895472b42f05636ccaebe8f6f942d664b8a5b5752e08a2ff8cf33cbba94b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Remarks__c</fullName><label>Remarks</label><length>32768</length><type>LongTextArea</type><visibleLines>3</visibleLines></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Claim__c/fields/Sales_Representative__c.field-meta.xml

Salesforce metadata for Expense_Claim__c/fields/Sales_Representative__c.field-meta.xml. Label: Sales Representative. Type: Lookup. Relationship target: Employee__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 98bebe4e687317c4f9a965eded11e970afcf6f18fd0cf87d20b90f391f4907d7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Sales_Representative__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Sales Representative</label><referenceTo>Employee__c</referenceTo><relationshipLabel>Expense Claims</relationshipLabel><relationshipName>Expense_Claims</relationshipName><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Claim__c/fields/Start_Odometer__c.field-meta.xml

Salesforce metadata for Expense_Claim__c/fields/Start_Odometer__c.field-meta.xml. Label: Start Odometer. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 4754165bfc8bfa2ce1486d7154f5c7f46400f008f31bca856f48e3048ac595f2

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Start_Odometer__c</fullName><label>Start Odometer</label><precision>10</precision><scale>1</scale><type>Number</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Claim__c/fields/Status__c.field-meta.xml

Salesforce metadata for Expense_Claim__c/fields/Status__c.field-meta.xml. Label: Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 6734a2b01e13837ab6ab476f2a6e525026d19acf4552fcf9ef69cdd1b12a6fc0

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Status__c</fullName><label>Status</label><required>true</required><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Submitted</fullName><default>true</default><label>Submitted</label></value><value><fullName>Approved</fullName><default>false</default><label>Approved</label></value><value><fullName>Rejected</fullName><default>false</default><label>Rejected</label></value><value><fullName>Paid</fullName><default>false</default><label>Paid</label></value></valueSetDefinition></valueSet></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Claim__c/fields/Transport_Mode__c.field-meta.xml

Salesforce metadata for Expense_Claim__c/fields/Transport_Mode__c.field-meta.xml. Label: Transport Mode. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 a22bdd48c84dc098258f5ff1a06183e33be670e9719498d289762c1dcf26f4ef

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Transport_Mode__c</fullName><label>Transport Mode</label><length>80</length><type>Text</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Claim__c/fields/Travel_Class__c.field-meta.xml

Salesforce metadata for Expense_Claim__c/fields/Travel_Class__c.field-meta.xml. Label: Travel Class. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 d6ebddba8ccbf76de06a4254d661d83bcc4936b4ef0802feb968f0615754211e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Travel_Class__c</fullName> <label>Travel Class</label><length>80</length><type>Text</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Claim__c/listViews/All_Expense_Claims.listView-meta.xml

Salesforce metadata for Expense_Claim__c/listViews/All_Expense_Claims.listView-meta.xml. Label: All Expense Claims. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

14 numbered source lines | SHA-256 55fffda77bb60daa75ff3fa21d4c5f7da8caec86954be101c2db7db09d3cf254

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Expense_Claims</fullName>`	Sets API identifier used by metadata deployment and code references to All_Expense_Claims.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Sales_Representative__c</columns>`	Sets columns in the enclosing configuration to Sales_Representative__c.
6	`    <columns>Expense_Policy__c</columns>`	Sets columns in the enclosing configuration to Expense_Policy__c.
7	`    <columns>Claim_Date__c</columns>`	Sets columns in the enclosing configuration to Claim_Date__c.
8	`    <columns>Amount__c</columns>`	Sets columns in the enclosing configuration to Amount__c.
9	`    <columns>Approved_Amount__c</columns>`	Sets columns in the enclosing configuration to Approved_Amount__c.
10	`    <columns>Distance_Km__c</columns>`	Sets columns in the enclosing configuration to Distance_Km__c.
11	`    <columns>Status__c</columns>`	Sets columns in the enclosing configuration to Status__c.
12	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
13	`    <label>All Expense Claims</label>`	Sets human-readable Salesforce UI label to All Expense Claims.
14	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Expense_Claim__c/listViews/Submitted_Expense_Claims.listView-meta.xml

Salesforce metadata for Expense_Claim__c/listViews/Submitted_Expense_Claims.listView-meta.xml. Label: Submitted Expense Claims. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

14 numbered source lines | SHA-256 c183bee905af5c87a5fafca37a14ddf9362540f12e2e158888d6a2c3199fa733

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>Submitted_Expense_Claims</fullName>`	Sets API identifier used by metadata deployment and code references to Submitted_Expense_Claims.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Sales_Representative__c</columns>`	Sets columns in the enclosing configuration to Sales_Representative__c.
6	`    <columns>Expense_Policy__c</columns>`	Sets columns in the enclosing configuration to Expense_Policy__c.
7	`    <columns>Claim_Date__c</columns>`	Sets columns in the enclosing configuration to Claim_Date__c.
8	`    <columns>Amount__c</columns>`	Sets columns in the enclosing configuration to Amount__c.
9	`    <columns>Receipt_URL__c</columns>`	Sets columns in the enclosing configuration to Receipt_URL__c.
10	`    <columns>Status__c</columns>`	Sets columns in the enclosing configuration to Status__c.
11	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
12	`    <filters><field>Status__c</field><operation>equals</operation><value>Submitted</value></filters>`	Sets filters in the enclosing configuration to <field>Status__c</field><operation>equals</operation><value>Submitted</value>.
13	`    <label>Submitted Expense Claims</label>`	Sets human-readable Salesforce UI label to Submitted Expense Claims.
14	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Expense_Policy__c/Expense_Policy__c.object-meta.xml

Salesforce metadata for Expense_Policy__c/Expense_Policy__c.object-meta.xml. Label: Expense Policy. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

6 numbered source lines | SHA-256 476b889c8686145ea65a5f18d7fe3f2e816b39b667932902d16433952a664a96

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus><description>Salesforce-controlled travel and daily allowance limits used by the SFA mobile app.</description>`	Opens the deploymentStatus block; child elements specify its configuration.
4	`    <enableActivities>true</enableActivities><enableFeeds>false</enableFeeds><enableHistory>true</enableHistory><enableReports>true</enableReports>`	Opens the enableActivities block; child elements specify its configuration.
5	`    <label>Expense Policy</label><pluralLabel>Expense Policies</pluralLabel><nameField><label>Expense Policy Name</label><type>Text</type></nameField><sharingModel>ReadWrite</sharingModel>`	Opens the label block; child elements specify its configuration.
6	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Expense_Policy__c/fields/Active__c.field-meta.xml

Salesforce metadata for Expense_Policy__c/fields/Active__c.field-meta.xml. Label: Active. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 0e3c0a96745e26e619cf7fb6c6dacb31c76ee49a2a1671ca70ff896753fc0cd4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Active__c</fullName><defaultValue>true</defaultValue><label>Active</label><type>Checkbox</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Policy__c/fields/Category__c.field-meta.xml

Salesforce metadata for Expense_Policy__c/fields/Category__c.field-meta.xml. Label: Category. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 b44c4e0cc440e9ad96bb5d06910ff40e8141173979f47de05b3cb02dec060dfe

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Category__c</fullName><label>Category</label><required>true</required><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Two Wheeler</fullName><default>false</default><label>Two Wheeler</label></value><value><fullName>Four Wheeler</fullName><default>false</default><label>Four Wheeler</label></value><value><fullName>Auto</fullName><default>false</default><label>Auto / Three Wheeler</label></value><value><fullName>Bus</fullName><default>false</default><label>Bus</label></value><value><fullName>Train</fullName><default>false</default><label>Train</label></value><value><fullName>Flight</fullName><default>false</default><label>Flight</label></value><value><fullName>Half Day Allowance</fullName><default>false</default><label>Half Day Allowance</label></value><value><fullName>Full Day Allowance</fullName><default>false</default><label>Full Day Allowance</label></value><value><fullName>Food</fullName><default>false</default><label>Food</label></value><value><fullName>Mobile Internet</fullName><default>false</default><label>Mobile Internet</label></value><value><fullName>Petrol</fullName><default>false</default><label>Petrol</label></value><value><fullName>Stay</fullName><default>false</default><label>Stay</label></value></valueSetDefinition></valueSet></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Policy__c/fields/End_Date__c.field-meta.xml

Salesforce metadata for Expense_Policy__c/fields/End_Date__c.field-meta.xml. Label: End Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 6dec48a19d6be49d9c97562ce6c0c7d142820915e9c5cffe29a4a93170362f5e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>End_Date__c</fullName><label>End Date</label><type>Date</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Policy__c/fields/Expense_Type__c.field-meta.xml

Salesforce metadata for Expense_Policy__c/fields/Expense_Type__c.field-meta.xml. Label: Expense Type. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 1288b9750deb0fe83a15e46e7a0292aa5834e1b8a3dc6ff4df34506b7fa47ca7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Expense_Type__c</fullName> <label>Expense Type</label><required>true</required><type>Picklist</type><valueSet>< restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullNa me>Travel Allowance</fullName><default>true</default><label>Travel Allowance</label></value><value><fullName>Daily Allowance</fullName><default>false</default><label>Daily Allowance</label></value></valueSetDefinition></valueSet></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Policy__c/fields/Geography__c.field-meta.xml

Salesforce metadata for Expense_Policy__c/fields/Geography__c.field-meta.xml. Label: Geography. Type: Lookup. Relationship target: Geography__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 87a980095f5aca420a512e6cbf0eac7ee2f45336931910656161e048b35bf1c2

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Geography__c</fullName><deleteConstraint>SetNull</deleteConstraint><label>Geography</label><referenceTo>Geography__c</referenceTo><relationshipLabel>Expense Policies</relationshipLabel><relationshipName>Expense_Policies</relationshipName><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Policy__c/fields/Maximum_Amount__c.field-meta.xml

Salesforce metadata for Expense_Policy__c/fields/Maximum_Amount__c.field-meta.xml. Label: Maximum Claim Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 caec6f6f087848d7c47b001fe20dad16a88dd48d904c63ff5c6c66a79a0b07e5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Maximum_Amount__c</fullName><label>Maximum Claim Amount</label><precision>16</precision><scale>2</scale><type>Currency</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Policy__c/fields/Ownership__c.field-meta.xml

Salesforce metadata for Expense_Policy__c/fields/Ownership__c.field-meta.xml. Label: Vehicle Ownership. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 76483a27fe8a980d6f899bf53f1a3e56f3d42578bac86b6d40341d32b43b1044

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Ownership__c</fullName><label>Vehicle Ownership</label><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Not Applicable</fullName><default>true</default><label>Not Applicable</label></value><value><fullName>Own</fullName><default>false</default><label>Own</label></value><value><fullName>Rented</fullName><default>false</default><label>Rented</label></value></valueSetDefinition></valueSet></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Policy__c/fields/Rate_Type__c.field-meta.xml

Salesforce metadata for Expense_Policy__c/fields/Rate_Type__c.field-meta.xml. Label: Rate Type. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 581921c455d8d143e85247117c53a206c2f77d43e7c8f5dd31e7512c9a8681f1

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Rate_Type__c</fullName><label>Rate Type</label><required>true</required><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Per Kilometer</fullName><default>false</default><label>Per Kilometer</label></value><value><fullName>Per Trip</fullName><default>false</default><label>Per Trip</label></value><value><fullName>Per Day</fullName><default>true</default><label>Per Day</label></value><value><fullName>Per Meal</fullName><default>false</default><label>Per Meal</label></value><value><fullName>Per Month</fullName><default>false</default><label>Per Month</label></value><value><fullName>Actual</fullName><default>false</default><label>Actual</label></value></valueSetDefinition></valueSet></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Policy__c/fields/Rate__c.field-meta.xml

Salesforce metadata for Expense_Policy__c/fields/Rate__c.field-meta.xml. Label: Rate. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 0ca04b281f88154b76cb18cb37cea8eaf2dd9bd4e02ae8695a53f002a4e8bd59

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Rate__c</fullName><label>Rate</label><precision>16</precision><scale>2</scale><type>Currency</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Policy__c/fields/Receipt_Required__c.field-meta.xml

Salesforce metadata for Expense_Policy__c/fields/Receipt_Required__c.field-meta.xml. Label: Receipt Required. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 4a9a295ed35591688987279878e0f384aabdd4343156b2536c88520ea504ddcd

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Receipt_Required__c</fullName><defaultValue>false</defaultValue><label>Receipt Required</label><type>Checkbox</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Policy__c/fields/Start_Date__c.field-meta.xml

Salesforce metadata for Expense_Policy__c/fields/Start_Date__c.field-meta.xml. Label: Start Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 194c11145c7cc472a85d4845b6d200b28d3e84632d3d119bac08e04bdf46bcbc

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Start_Date__c</fullName><label>Start Date</label><required>true</required><type>Date</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Policy__c/fields/Travel_Class__c.field-meta.xml

Salesforce metadata for Expense_Policy__c/fields/Travel_Class__c.field-meta.xml. Label: Travel Class. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 d6ebddba8ccbf76de06a4254d661d83bcc4936b4ef0802feb968f0615754211e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Travel_Class__c</fullName> <label>Travel Class</label><length>80</length><type>Text</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Expense_Policy__c/listViews/Active_Expense_Policies.listView-meta.xml

Salesforce metadata for Expense_Policy__c/listViews/Active_Expense_Policies.listView-meta.xml. Label: Active Expense Policies. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

17 numbered source lines | SHA-256 705ad208bef709d6ec9ce20341f79b1d972cb96d89b60ef2ca9e22ad8fe617c7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>Active_Expense_Policies</fullName>`	Sets API identifier used by metadata deployment and code references to Active_Expense_Policies.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Expense_Type__c</columns>`	Sets columns in the enclosing configuration to Expense_Type__c.
6	`    <columns>Category__c</columns>`	Sets columns in the enclosing configuration to Category__c.
7	`    <columns>Rate_Type__c</columns>`	Sets columns in the enclosing configuration to Rate_Type__c.
8	`    <columns>Rate__c</columns>`	Sets columns in the enclosing configuration to Rate__c.
9	`    <columns>Maximum_Amount__c</columns>`	Sets columns in the enclosing configuration to Maximum_Amount__c.
10	`    <columns>Receipt_Required__c</columns>`	Sets columns in the enclosing configuration to Receipt_Required__c.
11	`    <columns>Geography__c</columns>`	Sets columns in the enclosing configuration to Geography__c.
12	`    <columns>Start_Date__c</columns>`	Sets columns in the enclosing configuration to Start_Date__c.
13	`    <columns>End_Date__c</columns>`	Sets columns in the enclosing configuration to End_Date__c.
14	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
15	`    <filters><field>Active__c</field><operation>equals</operation><value>1</value></filters>`	Sets filters in the enclosing configuration to <field>Active__c</field><operation>equals</operation><value>1</value>.
16	`    <label>Active Expense Policies</label>`	Sets human-readable Salesforce UI label to Active Expense Policies.
17	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Expense_Policy__c/listViews/All_Expense_Policies.listView-meta.xml

Salesforce metadata for Expense_Policy__c/listViews/All_Expense_Policies.listView-meta.xml. Label: All Expense Policies. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

16 numbered source lines | SHA-256 01e84ac29ba099209dda93d1c5d6db9fdd012ca98df5ceb16325f30dfda21bc2

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Expense_Policies</fullName>`	Sets API identifier used by metadata deployment and code references to All_Expense_Policies.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Expense_Type__c</columns>`	Sets columns in the enclosing configuration to Expense_Type__c.
6	`    <columns>Category__c</columns>`	Sets columns in the enclosing configuration to Category__c.
7	`    <columns>Ownership__c</columns>`	Sets columns in the enclosing configuration to Ownership__c.
8	`    <columns>Travel_Class__c</columns>`	Sets columns in the enclosing configuration to Travel_Class__c.
9	`    <columns>Rate_Type__c</columns>`	Sets columns in the enclosing configuration to Rate_Type__c.
10	`    <columns>Rate__c</columns>`	Sets columns in the enclosing configuration to Rate__c.
11	`    <columns>Maximum_Amount__c</columns>`	Sets columns in the enclosing configuration to Maximum_Amount__c.
12	`    <columns>Geography__c</columns>`	Sets columns in the enclosing configuration to Geography__c.
13	`    <columns>Active__c</columns>`	Sets columns in the enclosing configuration to Active__c.
14	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
15	`    <label>All Expense Policies</label>`	Sets human-readable Salesforce UI label to All Expense Policies.
16	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Geography__c/Geography__c.object-meta.xml

Salesforce metadata for Geography__c/Geography__c.object-meta.xml. Label: Geography. Type: Default. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

165 numbered source lines | SHA-256 d60813daceb80e7e30863b5b5d49cfa8d07b2fe03d219cde75f26d2e70184cb1

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
4	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
5	`        <type>Default</type>`	Sets field/storage type to Default.
6	`    </actionOverrides>`	Closes the actionOverrides configuration block.
7	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
8	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
9	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
10	`        <type>Default</type>`	Sets field/storage type to Default.
11	`    </actionOverrides>`	Closes the actionOverrides configuration block.
12	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
13	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
14	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
15	`        <type>Default</type>`	Sets field/storage type to Default.
16	`    </actionOverrides>`	Closes the actionOverrides configuration block.
17	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
18	`        <actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.

Line	Source code	Explanation / reading note
19	`<type>Default</type>`	Sets field/storage type to Default.
20	`</actionOverrides>`	Closes the actionOverrides configuration block.
21	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
22	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
23	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
24	`<type>Default</type>`	Sets field/storage type to Default.
25	`</actionOverrides>`	Closes the actionOverrides configuration block.
26	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
27	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
28	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
29	`<type>Default</type>`	Sets field/storage type to Default.
30	`</actionOverrides>`	Closes the actionOverrides configuration block.
31	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
32	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
33	`<type>Default</type>`	Sets field/storage type to Default.
34	`</actionOverrides>`	Closes the actionOverrides configuration block.
35	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
36	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
37	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
38	`<type>Default</type>`	Sets field/storage type to Default.
39	`</actionOverrides>`	Closes the actionOverrides configuration block.
40	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.

Line	Source code	Explanation / reading note
41	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
42	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
43	`<type>Default</type>`	Sets field/storage type to Default.
44	`</actionOverrides>`	Closes the actionOverrides configuration block.
45	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
46	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
47	`<type>Default</type>`	Sets field/storage type to Default.
48	`</actionOverrides>`	Closes the actionOverrides configuration block.
49	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
50	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
51	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
52	`<type>Default</type>`	Sets field/storage type to Default.
53	`</actionOverrides>`	Closes the actionOverrides configuration block.
54	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
55	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
56	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
57	`<type>Default</type>`	Sets field/storage type to Default.
58	`</actionOverrides>`	Closes the actionOverrides configuration block.
59	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
60	`<actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
61	`<type>Default</type>`	Sets field/storage type to Default.
62	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
63	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
64	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
65	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
66	`        <type>Default</type>`	Sets field/storage type to Default.
67	`    </actionOverrides>`	Closes the actionOverrides configuration block.
68	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
69	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
70	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
71	`        <type>Default</type>`	Sets field/storage type to Default.
72	`    </actionOverrides>`	Closes the actionOverrides configuration block.
73	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
74	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
75	`        <type>Default</type>`	Sets field/storage type to Default.
76	`    </actionOverrides>`	Closes the actionOverrides configuration block.
77	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
78	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
79	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
80	`        <type>Default</type>`	Sets field/storage type to Default.
81	`    </actionOverrides>`	Closes the actionOverrides configuration block.
82	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
83	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
84	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.

Line	Source code	Explanation / reading note
85	`<type>Default</type>`	Sets field/storage type to Default.
86	`</actionOverrides>`	Closes the actionOverrides configuration block.
87	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
88	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
89	`<type>Default</type>`	Sets field/storage type to Default.
90	`</actionOverrides>`	Closes the actionOverrides configuration block.
91	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
92	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
93	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
94	`<type>Default</type>`	Sets field/storage type to Default.
95	`</actionOverrides>`	Closes the actionOverrides configuration block.
96	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
97	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
98	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
99	`<type>Default</type>`	Sets field/storage type to Default.
100	`</actionOverrides>`	Closes the actionOverrides configuration block.
101	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
102	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
103	`<type>Default</type>`	Sets field/storage type to Default.
104	`</actionOverrides>`	Closes the actionOverrides configuration block.
105	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
106	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.

Line	Source code	Explanation / reading note
107	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
108	`        <type>Default</type>`	Sets field/storage type to Default.
109	`    </actionOverrides>`	Closes the actionOverrides configuration block.
110	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
111	`        <actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
112	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
113	`        <type>Default</type>`	Sets field/storage type to Default.
114	`    </actionOverrides>`	Closes the actionOverrides configuration block.
115	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
116	`        <actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
117	`        <type>Default</type>`	Sets field/storage type to Default.
118	`    </actionOverrides>`	Closes the actionOverrides configuration block.
119	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
120	`        <actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
121	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
122	`        <type>Default</type>`	Sets field/storage type to Default.
123	`    </actionOverrides>`	Closes the actionOverrides configuration block.
124	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
125	`        <actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
126	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
127	`        <type>Default</type>`	Sets field/storage type to Default.
128	`    </actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
129	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
130	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
131	`<type>Default</type>`	Sets field/storage type to Default.
132	`</actionOverrides>`	Closes the actionOverrides configuration block.
133	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
134	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
135	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
136	`<type>Default</type>`	Sets field/storage type to Default.
137	`</actionOverrides>`	Closes the actionOverrides configuration block.
138	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
139	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
140	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
141	`<type>Default</type>`	Sets field/storage type to Default.
142	`</actionOverrides>`	Closes the actionOverrides configuration block.
143	`<allowInChatterGroups>false</allowInChatterGroups>`	Sets allow In Chatter Groups in the enclosing configuration to false.
144	`<compactLayoutAssignment>SYSTEM</compactLayoutAssignment>`	Sets compact Layout Assignment in the enclosing configuration to SYSTEM.
145	`<deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
146	`<enableActivities>false</enableActivities>`	Sets enable Activities in the enclosing configuration to false.
147	`<enableBulkApi>true</enableBulkApi>`	Sets enable Bulk Api in the enclosing configuration to true.
148	`<enableFeeds>false</enableFeeds>`	Sets enable Feeds in the enclosing configuration to false.
149	`<enableHistory>false</enableHistory>`	Sets enable History in the enclosing configuration to false.
150	`<enableLicensing>false</enableLicensing>`	Sets enable Licensing in the enclosing configuration to false.

Line	Source code	Explanation / reading note
151	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
152	`    <enableSearch>true</enableSearch>`	Sets enable Search in the enclosing configuration to true.
153	`    <enableSharing>true</enableSharing>`	Sets enable Sharing in the enclosing configuration to true.
154	`    <enableStreamingApi>true</enableStreamingApi>`	Sets enable Streaming Api in the enclosing configuration to true.
155	`    <externalSharingModel>Private</externalSharingModel>`	Sets external Sharing Model in the enclosing configuration to Private.
156	`    <label>Geography</label>`	Sets human-readable Salesforce UI label to Geography.
157	`    <nameField>`	Opens the nameField block; child elements specify its configuration.
158	`        <label>Geography Name</label>`	Sets human-readable Salesforce UI label to Geography Name.
159	`        <type>Text</type>`	Sets field/storage type to Text.
160	`    </nameField>`	Closes the nameField configuration block.
161	`    <pluralLabel>Geographies</pluralLabel>`	Sets plural Label in the enclosing configuration to Geographies.
162	`    <searchLayouts></searchLayouts>`	Sets search Layouts in the enclosing configuration to .
163	`    <sharingModel>ReadWrite</sharingModel>`	Sets record sharing baseline to ReadWrite.
164	`    <visibility>Public</visibility>`	Sets visibility in the enclosing configuration to Public.
165	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Geography__c/fields/District__c.field-meta.xml

Salesforce metadata for Geography__c/fields/District__c.field-meta.xml. Label: District. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

51 numbered source lines | SHA-256 68eb407b0cdcfb074c78a7b601d8760ef37a870b0842a43733429a19ac710ca3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>District__c</fullName>`	Sets API identifier used by metadata deployment and code references to District__c.
4	`    <label>District</label>`	Sets human-readable Salesforce UI label to District.
5	`    <required>true</required>`	Sets whether a value is mandatory to true.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <controllingField>State__c</controllingField>`	Sets controlling Field in the enclosing configuration to State__c.
10	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
11	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
12	`            <sorted>true</sorted>`	Sets sorted in the enclosing configuration to true.
13	`            <value>`	Opens the value block; child elements specify its configuration.
14	`                <fullName>Bengaluru Rural</fullName>`	Sets API identifier used by metadata deployment and code references to Bengaluru Rural.
15	`                <default>false</default>`	Sets whether this option is the default to false.
16	`                <label>Bengaluru Rural</label>`	Sets human-readable Salesforce UI label to Bengaluru Rural.
17	`            </value>`	Closes the value configuration block.
18	`            <value>`	Opens the value block; child elements specify its configuration.

Line	Source code	Explanation / reading note
19	`<fullName>Bengaluru Urban</fullName>`	Sets API identifier used by metadata deployment and code references to Bengaluru Urban.
20	`<default>false</default>`	Sets whether this option is the default to false.
21	`<label>Bengaluru Urban</label>`	Sets human-readable Salesforce UI label to Bengaluru Urban.
22	`</value>`	Closes the value configuration block.
23	`<value>`	Opens the value block; child elements specify its configuration.
24	`<fullName>Mysuru</fullName>`	Sets API identifier used by metadata deployment and code references to Mysuru.
25	`<default>false</default>`	Sets whether this option is the default to false.
26	`<label>Mysuru</label>`	Sets human-readable Salesforce UI label to Mysuru.
27	`</value>`	Closes the value configuration block.
28	`<value>`	Opens the value block; child elements specify its configuration.
29	`<fullName>Tumakuru</fullName>`	Sets API identifier used by metadata deployment and code references to Tumakuru.
30	`<default>false</default>`	Sets whether this option is the default to false.
31	`<label>Tumakuru</label>`	Sets human-readable Salesforce UI label to Tumakuru.
32	`</value>`	Closes the value configuration block.
33	`</valueSetDefinition>`	Closes the valueSetDefinition configuration block.
34	`<valueSettings>`	Opens the valueSettings block; child elements specify its configuration.
35	`<controllingFieldValue>Karnataka</controllingFieldValue>`	Sets controlling Field Value in the enclosing configuration to Karnataka.
36	`<valueName>Bengaluru Rural</valueName>`	Sets value Name in the enclosing configuration to Bengaluru Rural.
37	`</valueSettings>`	Closes the valueSettings configuration block.
38	`<valueSettings>`	Opens the valueSettings block; child elements specify its configuration.
39	`<controllingFieldValue>Karnataka</controllingFieldValue>`	Sets controlling Field Value in the enclosing configuration to Karnataka.
40	`<valueName>Bengaluru Urban</valueName>`	Sets value Name in the enclosing configuration to Bengaluru Urban.

Line	Source code	Explanation / reading note
41	`        </valueSettings>`	Closes the valueSettings configuration block.
42	`        <valueSettings>`	Opens the valueSettings block; child elements specify its configuration.
43	`            <controllingFieldValue>Karnataka</controllingFieldValue>`	Sets controlling Field Value in the enclosing configuration to Karnataka.
44	`            <valueName>Mysuru</valueName>`	Sets value Name in the enclosing configuration to Mysuru.
45	`        </valueSettings>`	Closes the valueSettings configuration block.
46	`        <valueSettings>`	Opens the valueSettings block; child elements specify its configuration.
47	`            <controllingFieldValue>Karnataka</controllingFieldValue>`	Sets controlling Field Value in the enclosing configuration to Karnataka.
48	`            <valueName>Tumakuru</valueName>`	Sets value Name in the enclosing configuration to Tumakuru.
49	`        </valueSettings>`	Closes the valueSettings configuration block.
50	`    </valueSet>`	Closes the valueSet configuration block.
51	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Geography__c/fields/Municipality__c.field-meta.xml

Salesforce metadata for Geography__c/fields/Municipality__c.field-meta.xml. Label: Municipality. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 bfebabd17f93c8b56537050aaf81e98335509fa2e23930ebfe4fcbfc27bd0962

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Municipality__c</fullName>`	Sets API identifier used by metadata deployment and code references to Municipality__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Municipality</label>`	Sets human-readable Salesforce UI label to Municipality.
6	`    <length>100</length>`	Sets maximum text length to 100.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Geography__c/fields/Nation__c.field-meta.xml

Salesforce metadata for Geography__c/fields/Nation__c.field-meta.xml. Label: Nation. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

19 numbered source lines | SHA-256 ffc9efb1346bee3d732d61d3a6f988d0403a5fb800b3ff96b221e62d3a8ebf8d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Nation__c</fullName>`	Sets API identifier used by metadata deployment and code references to Nation__c.
4	`    <label>Nation</label>`	Sets human-readable Salesforce UI label to Nation.
5	`    <required>true</required>`	Sets whether a value is mandatory to true.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value>`	Opens the value block; child elements specify its configuration.
13	`                <fullName>India</fullName>`	Sets API identifier used by metadata deployment and code references to India.
14	`                <default>true</default>`	Sets whether this option is the default to true.
15	`                <label>India</label>`	Sets human-readable Salesforce UI label to India.
16	`            </value>`	Closes the value configuration block.
17	`        </valueSetDefinition>`	Closes the valueSetDefinition configuration block.
18	`    </valueSet>`	Closes the valueSet configuration block.

Line	Source code	Explanation / reading note
19	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Geography__c/fields/State__c.field-meta.xml

Salesforce metadata for Geography__c/fields/State__c.field-meta.xml. Label: State. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

24 numbered source lines | SHA-256 d469f943684903bb6f90f090f2b2bd8c8edb8a62a3c690a659872c3a45f0dd8e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>State__c</fullName>`	Sets API identifier used by metadata deployment and code references to State__c.
4	`    <label>State</label>`	Sets human-readable Salesforce UI label to State.
5	`    <required>true</required>`	Sets whether a value is mandatory to true.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <controllingField>Nation__c</controllingField>`	Sets controlling Field in the enclosing configuration to Nation__c.
10	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
11	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
12	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
13	`            <value>`	Opens the value block; child elements specify its configuration.
14	`                <fullName>Karnataka</fullName>`	Sets API identifier used by metadata deployment and code references to Karnataka.
15	`                <default>false</default>`	Sets whether this option is the default to false.
16	`                <label>Karnataka</label>`	Sets human-readable Salesforce UI label to Karnataka.
17	`            </value>`	Closes the value configuration block.
18	`        </valueSetDefinition>`	Closes the valueSetDefinition configuration block.

Line	Source code	Explanation / reading note
19	`<valueSettings>`	Opens the valueSettings block; child elements specify its configuration.
20	`<controllingFieldValue>India</controllingFieldValue>`	Sets controlling Field Value in the enclosing configuration to India.
21	`<valueName>Karnataka</valueName>`	Sets value Name in the enclosing configuration to Karnataka.
22	`</valueSettings>`	Closes the valueSettings configuration block.
23	`</valueSet>`	Closes the valueSet configuration block.
24	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Geography__c/fields/Town__c.field-meta.xml

Salesforce metadata for Geography__c/fields/Town__c.field-meta.xml. Label: Town. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 381a511854d9407382c6a37b98f086708e2ccc782e6f53624130d77120b53cac

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Town__c</fullName>`	Sets API identifier used by metadata deployment and code references to Town__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Town</label>`	Sets human-readable Salesforce UI label to Town.
6	`    <length>100</length>`	Sets maximum text length to 100.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Geography__c/fields/Village__c.field-meta.xml

Salesforce metadata for Geography__c/fields/Village__c.field-meta.xml. Label: Village. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 bd51ad88509b691b11d8177ca3bc880c49a5dcdea09a0803a53749c17ac066f0

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Village__c</fullName>`	Sets API identifier used by metadata deployment and code references to Village__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Village</label>`	Sets human-readable Salesforce UI label to Village.
6	`    <length>100</length>`	Sets maximum text length to 100.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Geography__c/listViews/All_Geographies.listView-meta.xml

Salesforce metadata for Geography__c/listViews/All_Geographies.listView-meta.xml. Label: All Geographies. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 764632d100da9fbaf2a6ed20f79761f4964af62dad2b5e3b0d46e06020e5188b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Geographies</fullName>`	Sets API identifier used by metadata deployment and code references to All_Geographies.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
6	`    <label>All Geographies</label>`	Sets human-readable Salesforce UI label to All Geographies.
7	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Leave_Request__c/Leave_Request__c.object-meta.xml

Salesforce metadata for Leave_Request__c/Leave_Request__c.object-meta.xml. Label: Leave Request. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 efefeb2e1ed66a6c37831951679f2531c07d3c4c1b8ddb1f64a8b51dc2f0dde6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus><description>Leave request submitted by a field employee for manager approval.</description>`	Opens the deploymentStatus block; child elements specify its configuration.
4	`    <enableActivities>true</enableActivities><enableHistory>true</enableHistory><enableReports>true</enableReports><enableSearch>true</enableSearch>`	Opens the enableActivities block; child elements specify its configuration.
5	`    <label>Leave Request</label><pluralLabel>Leave Requests</pluralLabel><sharingModel>ReadWrite</sharingModel>`	Opens the label block; child elements specify its configuration.
6	`    <nameField><displayFormat>LR-{00000}</displayFormat><label>Leave Request Number</label><type>AutoNumber</type></nameField>`	Sets name Field in the enclosing configuration to <displayFormat>LR-{00000}</displayFormat><label>Leave Request Number</label><type>AutoNumber</type>.
7	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Leave_Request__c/fields/Approver__c.field-meta.xml

Salesforce metadata for Leave_Request__c/fields/Approver__c.field-meta.xml. Label: Approver. Type: Lookup. Relationship target: Employee__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 9d8825cc675cbdab9d2dea29d850ca726b6b0740bd27d9347166364432eb07c9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Approver__c</fullName><deleteConstraint>SetNull</deleteConstraint><label>Approver</label><referenceTo>Employee__c</referenceTo><relationshipLabel>Leave Requests to Approve</relationshipLabel><relationshipName>Leave_Requests_To_Approve</relationshipName><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Leave_Request__c/fields/Employee__c.field-meta.xml

Salesforce metadata for Leave_Request__c/fields/Employee__c.field-meta.xml. Label: Employee. Type: Lookup. Relationship target: Employee__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 2ad32ff8d4cadc347d0debce2580c89688b1733697439af084665baac12fe7ff

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Employee__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Employee</label><referenceTo>Employee__c</referenceTo><relationshipLabel>Leave Requests</relationshipLabel><relationshipName>Leave_Requests</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Leave_Request__c/fields/Leave_Date__c.field-meta.xml

Salesforce metadata for Leave_Request__c/fields/Leave_Date__c.field-meta.xml. Label: Leave Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 afd881c76daa8efb6fb9cff1eb9287676e0882ac0a1aa957cbb834ab50e14dcf

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Leave_Date__c</fullName><label>Leave Date</label><required>true</required><type>Date</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Leave_Request__c/fields/Leave_Type__c.field-meta.xml

Salesforce metadata for Leave_Request__c/fields/Leave_Type__c.field-meta.xml. Label: Leave Type. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 21b88a185760360e9187e69218e54d0ceab9c0882e65f2c12d54d5397541bba7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Leave_Type__c</fullName><label>Leave Type</label><required>true</required><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Casual Leave</fullName><default>false</default><label>Casual Leave</label></value><value><fullName>Sick Leave</fullName><default>false</default><label>Sick Leave</label></value><value><fullName>Earned Leave</fullName><default>false</default><label>Earned Leave</label></value><value><fullName>Unpaid Leave</fullName><default>false</default><label>Unpaid Leave</label></value></valueSetDefinition></valueSet></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Leave_Request__c/fields/Reason__c.field-meta.xml

Salesforce metadata for Leave_Request__c/fields/Reason__c.field-meta.xml. Label: Reason. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 cc9c80228d3c956ca03629ee75c29e74942d8a0c216b560307a9dc3043d19f60

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Reason__c</fullName><label>Reason</label><length>1000</length><visibleLines>3</visibleLines><type>LongTextArea</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Leave_Request__c/fields/Status__c.field-meta.xml

Salesforce metadata for Leave_Request__c/fields/Status__c.field-meta.xml. Label: Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 12283ef09a5f3132a661d9a36ee4d1631bd39e54535fc550bb88f9a8f747e610

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Status__c</fullName><label>Status</label><required>true</required><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Pending</fullName><default>true</default><label>Pending</label></value><value><fullName>Approved</fullName><default>false</default><label>Approved</label></value><value><fullName>Rejected</fullName><default>false</default><label>Rejected</label></value><value><fullName>On Hold</fullName><default>false</default><label>On Hold</label></value></valueSetDefinition></valueSet></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Leave_Request__c/listViews/All_Leave_Requests.listView-meta.xml

Salesforce metadata for Leave_Request__c/listViews/All_Leave_Requests.listView-meta.xml. Label: All Leave Requests. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 d0de4bdd2a498607d3d1256abc7709a7cf8e963eddf28a2d2b9065cd43688e70

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><ListView xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>All_Leave_Requests</fullName><columns>NAME</columns><columns>Employee__c</columns><columns>Leave_Date__c</columns><columns>Leave_Type__c</columns><columns>Status__c</columns><columns>Approver__c</columns><filterScope>Everything</filterScope><label>All Leave Requests</label></ListView>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Order_Item__c/Order_Item__c.object-meta.xml

Salesforce metadata for Order_Item__c/Order_Item__c.object-meta.xml. Label: Order Item. Type: Default. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

166 numbered source lines | SHA-256 2483bcec3b10573c570c880b511e2d4b3b07827d4175bd5d4984020783edff35

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
4	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
5	`        <type>Default</type>`	Sets field/storage type to Default.
6	`    </actionOverrides>`	Closes the actionOverrides configuration block.
7	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
8	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
9	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
10	`        <type>Default</type>`	Sets field/storage type to Default.
11	`    </actionOverrides>`	Closes the actionOverrides configuration block.
12	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
13	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
14	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
15	`        <type>Default</type>`	Sets field/storage type to Default.
16	`    </actionOverrides>`	Closes the actionOverrides configuration block.
17	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
18	`        <actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.

Line	Source code	Explanation / reading note
19	`<type>Default</type>`	Sets field/storage type to Default.
20	`</actionOverrides>`	Closes the actionOverrides configuration block.
21	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
22	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
23	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
24	`<type>Default</type>`	Sets field/storage type to Default.
25	`</actionOverrides>`	Closes the actionOverrides configuration block.
26	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
27	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
28	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
29	`<type>Default</type>`	Sets field/storage type to Default.
30	`</actionOverrides>`	Closes the actionOverrides configuration block.
31	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
32	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
33	`<type>Default</type>`	Sets field/storage type to Default.
34	`</actionOverrides>`	Closes the actionOverrides configuration block.
35	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
36	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
37	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
38	`<type>Default</type>`	Sets field/storage type to Default.
39	`</actionOverrides>`	Closes the actionOverrides configuration block.
40	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.

Line	Source code	Explanation / reading note
41	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
42	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
43	`<type>Default</type>`	Sets field/storage type to Default.
44	`</actionOverrides>`	Closes the actionOverrides configuration block.
45	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
46	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
47	`<type>Default</type>`	Sets field/storage type to Default.
48	`</actionOverrides>`	Closes the actionOverrides configuration block.
49	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
50	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
51	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
52	`<type>Default</type>`	Sets field/storage type to Default.
53	`</actionOverrides>`	Closes the actionOverrides configuration block.
54	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
55	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
56	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
57	`<type>Default</type>`	Sets field/storage type to Default.
58	`</actionOverrides>`	Closes the actionOverrides configuration block.
59	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
60	`<actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
61	`<type>Default</type>`	Sets field/storage type to Default.
62	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
63	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
64	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
65	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
66	`        <type>Default</type>`	Sets field/storage type to Default.
67	`    </actionOverrides>`	Closes the actionOverrides configuration block.
68	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
69	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
70	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
71	`        <type>Default</type>`	Sets field/storage type to Default.
72	`    </actionOverrides>`	Closes the actionOverrides configuration block.
73	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
74	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
75	`        <type>Default</type>`	Sets field/storage type to Default.
76	`    </actionOverrides>`	Closes the actionOverrides configuration block.
77	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
78	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
79	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
80	`        <type>Default</type>`	Sets field/storage type to Default.
81	`    </actionOverrides>`	Closes the actionOverrides configuration block.
82	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
83	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
84	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.

Line	Source code	Explanation / reading note
85	`<type>Default</type>`	Sets field/storage type to Default.
86	`</actionOverrides>`	Closes the actionOverrides configuration block.
87	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
88	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
89	`<type>Default</type>`	Sets field/storage type to Default.
90	`</actionOverrides>`	Closes the actionOverrides configuration block.
91	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
92	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
93	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
94	`<type>Default</type>`	Sets field/storage type to Default.
95	`</actionOverrides>`	Closes the actionOverrides configuration block.
96	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
97	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
98	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
99	`<type>Default</type>`	Sets field/storage type to Default.
100	`</actionOverrides>`	Closes the actionOverrides configuration block.
101	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
102	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
103	`<type>Default</type>`	Sets field/storage type to Default.
104	`</actionOverrides>`	Closes the actionOverrides configuration block.
105	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
106	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.

Line	Source code	Explanation / reading note
107	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
108	`<type>Default</type>`	Sets field/storage type to Default.
109	`</actionOverrides>`	Closes the actionOverrides configuration block.
110	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
111	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
112	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
113	`<type>Default</type>`	Sets field/storage type to Default.
114	`</actionOverrides>`	Closes the actionOverrides configuration block.
115	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
116	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
117	`<type>Default</type>`	Sets field/storage type to Default.
118	`</actionOverrides>`	Closes the actionOverrides configuration block.
119	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
120	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
121	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
122	`<type>Default</type>`	Sets field/storage type to Default.
123	`</actionOverrides>`	Closes the actionOverrides configuration block.
124	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
125	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
126	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
127	`<type>Default</type>`	Sets field/storage type to Default.
128	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
129	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
130	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
131	`<type>Default</type>`	Sets field/storage type to Default.
132	`</actionOverrides>`	Closes the actionOverrides configuration block.
133	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
134	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
135	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
136	`<type>Default</type>`	Sets field/storage type to Default.
137	`</actionOverrides>`	Closes the actionOverrides configuration block.
138	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
139	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
140	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
141	`<type>Default</type>`	Sets field/storage type to Default.
142	`</actionOverrides>`	Closes the actionOverrides configuration block.
143	`<allowInChatterGroups>false</allowInChatterGroups>`	Sets allow In Chatter Groups in the enclosing configuration to false.
144	`<compactLayoutAssignment>SYSTEM</compactLayoutAssignment>`	Sets compact Layout Assignment in the enclosing configuration to SYSTEM.
145	`<deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
146	`<enableActivities>false</enableActivities>`	Sets enable Activities in the enclosing configuration to false.
147	`<enableBulkApi>true</enableBulkApi>`	Sets enable Bulk Api in the enclosing configuration to true.
148	`<enableFeeds>false</enableFeeds>`	Sets enable Feeds in the enclosing configuration to false.
149	`<enableHistory>false</enableHistory>`	Sets enable History in the enclosing configuration to false.
150	`<enableLicensing>false</enableLicensing>`	Sets enable Licensing in the enclosing configuration to false.

Line	Source code	Explanation / reading note
151	`<enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
152	`<enableSearch>false</enableSearch>`	Sets enable Search in the enclosing configuration to false.
153	`<enableSharing>true</enableSharing>`	Sets enable Sharing in the enclosing configuration to true.
154	`<enableStreamingApi>true</enableStreamingApi>`	Sets enable Streaming Api in the enclosing configuration to true.
155	`<externalSharingModel>ControlledByParent</externalSharingModel>`	Sets external Sharing Model in the enclosing configuration to ControlledByParent.
156	`<label>Order Item</label>`	Sets human-readable Salesforce UI label to Order Item.
157	`<nameField>`	Opens the nameField block; child elements specify its configuration.
158	`<displayFormat>OI-{00000}</displayFormat>`	Sets display Format in the enclosing configuration to OI-{00000}.
159	`<label>Order Item Number</label>`	Sets human-readable Salesforce UI label to Order Item Number.
160	`<type>AutoNumber</type>`	Sets field/storage type to AutoNumber.
161	`</nameField>`	Closes the nameField configuration block.
162	`<pluralLabel>Order Items</pluralLabel>`	Sets plural Label in the enclosing configuration to Order Items.
163	`<searchLayouts></searchLayouts>`	Sets search Layouts in the enclosing configuration to .
164	`<sharingModel>ControlledByParent</sharingModel>`	Sets record sharing baseline to ControlledByParent.
165	`<visibility>Public</visibility>`	Sets visibility in the enclosing configuration to Public.
166	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Order_Item__c/fields/Case_Quantity__c.field-meta.xml

Salesforce metadata for Order_Item__c/fields/Case_Quantity__c.field-meta.xml. Label: Case Quantity. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 e37124fb56fb8b15c13cd29799297ce11390f3e51e52db88c37ff682aaee1d72

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Case_Quantity__c</fullName>`	Sets API identifier used by metadata deployment and code references to Case_Quantity__c.
4	`    <defaultValue>0</defaultValue>`	Sets initial value expression to 0.
5	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
6	`    <label>Case Quantity</label>`	Sets human-readable Salesforce UI label to Case Quantity.
7	`    <precision>8</precision>`	Sets maximum numeric precision to 8.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <scale>0</scale>`	Sets decimal places to 0.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Order_Item__c/fields/Line_Amount__c.field-meta.xml

Salesforce metadata for Order_Item__c/fields/Line_Amount__c.field-meta.xml. Label: Line Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 9f27d917e822a5ce2ddb12f9adbd55ec14a75580bf2c971b531e12e68565e99e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Line_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Line_Amount__c.
4	`    <label>Line Amount</label>`	Sets human-readable Salesforce UI label to Line Amount.
5	`    <precision>16</precision>`	Sets maximum numeric precision to 16.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <scale>2</scale>`	Sets decimal places to 2.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Currency</type>`	Sets field/storage type to Currency.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Order_Item__c/fields/Piece_Quantity__c.field-meta.xml

Salesforce metadata for Order_Item__c/fields/Piece_Quantity__c.field-meta.xml. Label: Piece Quantity. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 2243d8d1a35cd454ee81cb8359bcb3807bccb013e9f8d60df7ce8f4f24874858

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Piece_Quantity__c</fullName>`	Sets API identifier used by metadata deployment and code references to Piece_Quantity__c.
4	`    <defaultValue>0</defaultValue>`	Sets initial value expression to 0.
5	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
6	`    <label>Piece Quantity</label>`	Sets human-readable Salesforce UI label to Piece Quantity.
7	`    <precision>8</precision>`	Sets maximum numeric precision to 8.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <scale>0</scale>`	Sets decimal places to 0.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Order_Item__c/fields/Product_Sales_Configuration__c.field-meta.xml

Salesforce metadata for Order_Item__c/fields/Product_Sales_Configuration__c.field-meta.xml. Label: Product Sales Configuration. Type: Lookup. Relationship target: Product_Sales_Configuration__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 7bcc77d9f48ce2e81e3e3321494c48d74e55967c2546c369c3ec6e51d65e42a9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Product_Sales_Configuration__c</fullName><deleteConstraint>SetNull</deleteConstraint><label>Product Sales Configuration</label><referenceTo>Product_Sales_Configuration__c</referenceTo><relationshipLabel>Ordered Products</relationshipLabel><relationshipName>Ordered_Products</relationshipName><required>false</required><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Product_Sales_Configuration__c</fullName><deleteConstraint>SetNull</deleteConstraint><label>Product Sales Configuration</label><referenceTo>Product_Sales_Configuration__c</referenceTo><relat.

force-app/main/default/objects/Order_Item__c/fields/Product__c.field-meta.xml

Salesforce metadata for Order_Item__c/fields/Product__c.field-meta.xml. Label: Product. Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 7609483e96dbe7ca04a941abf5e66efe773a13eec605135bdda70058ac92172b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Product__c</fullName>`	Sets API identifier used by metadata deployment and code references to Product__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <label>Product</label>`	Sets human-readable Salesforce UI label to Product.
6	`    <referenceTo>Product__c</referenceTo>`	Sets object referenced by this relationship to Product__c.
7	`    <relationshipLabel>Order Items</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Order Items.
8	`    <relationshipName>Order_Items</relationshipName>`	Sets relationship API traversal name to Order_Items.
9	`    <required>true</required>`	Sets whether a value is mandatory to true.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Order_Item__c/fields/Sales_Order__c.field-meta.xml

Salesforce metadata for Order_Item__c/fields/Sales_Order__c.field-meta.xml. Label: Sales Order. Type: MasterDetail. Relationship target: Sales_Order__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 2829c8e0af5beb3317a175ce627a7f83e153e5d85d78127a71afeea8dc23098d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Sales_Order__c</fullName>`	Sets API identifier used by metadata deployment and code references to Sales_Order__c.
4	`    <label>Sales Order</label>`	Sets human-readable Salesforce UI label to Sales Order.
5	`    <referenceTo>Sales_Order__c</referenceTo>`	Sets object referenced by this relationship to Sales_Order__c.
6	`    <relationshipLabel>Order Items</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Order Items.
7	`    <relationshipName>Order_Items</relationshipName>`	Sets relationship API traversal name to Order_Items.
8	`    <relationshipOrder>0</relationshipOrder>`	Sets relationship Order in the enclosing configuration to 0.
9	`    <reparentableMasterDetail>false</reparentableMasterDetail>`	Sets reparentable Master Detail in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>MasterDetail</type>`	Sets field/storage type to MasterDetail.
12	`    <writeRequiresMasterRead>false</writeRequiresMasterRead>`	Sets write Requires Master Read in the enclosing configuration to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Order_Item__c/fields/Scheme__c.field-meta.xml

Salesforce metadata for Order_Item__c/fields/Scheme__c.field-meta.xml. Label: Applied Scheme. Type: Lookup. Relationship target: Scheme__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 47e6d6cd72a2480b2793b28fb6b3bddea564c81d1af5783b2907e2a22dce6905

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Scheme__c</fullName>`	Sets API identifier used by metadata deployment and code references to Scheme__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <description>The scheme selected in the application for this specific ordered product.</description>`	Sets description in the enclosing configuration to The scheme selected in the application for this specific ordered product..
6	`    <label>Applied Scheme</label>`	Sets human-readable Salesforce UI label to Applied Scheme.
7	`    <referenceTo>Scheme__c</referenceTo>`	Sets object referenced by this relationship to Scheme__c.
8	`    <relationshipLabel>Order Items</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Order Items.
9	`    <relationshipName>Order_Items</relationshipName>`	Sets relationship API traversal name to Order_Items.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Order_Item__c/fields/Total_Pieces__c.field-meta.xml

Salesforce metadata for Order_Item__c/fields/Total_Pieces__c.field-meta.xml. Label: Total Pieces. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 a1cda71f0c1372dfc850c5cc1ef4821cdd46241a770268e4dadc2f910769c636

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Total_Pieces__c</fullName>`	Sets API identifier used by metadata deployment and code references to Total_Pieces__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Total Pieces</label>`	Sets human-readable Salesforce UI label to Total Pieces.
6	`    <precision>12</precision>`	Sets maximum numeric precision to 12.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Number</type>`	Sets field/storage type to Number.
11	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Order_Item__c/fields/Unit_Price__c.field-meta.xml

Salesforce metadata for Order_Item__c/fields/Unit_Price__c.field-meta.xml. Label: Unit Price. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 1b739c342097ce457b585d993ebfc7ac21c78224d578fb513a437cad988161af

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Unit_Price__c</fullName>`	Sets API identifier used by metadata deployment and code references to Unit_Price__c.
4	`    <label>Unit Price</label>`	Sets human-readable Salesforce UI label to Unit Price.
5	`    <precision>16</precision>`	Sets maximum numeric precision to 16.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <scale>2</scale>`	Sets decimal places to 2.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Currency</type>`	Sets field/storage type to Currency.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Order_Item__c/listViews/All_Order_Items.listView-meta.xml

Salesforce metadata for Order_Item__c/listViews/All_Order_Items.listView-meta.xml. Label: All Order Items. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 ec534e3cee586fac8abbc067fa7bf725eaceedc8ac051492f3de0493c036d632

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Order_Items</fullName>`	Sets API identifier used by metadata deployment and code references to All_Order_Items.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
6	`    <label>All Order Items</label>`	Sets human-readable Salesforce UI label to All Order Items.
7	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Order_Item__c/validationRules/No_Primary_Scheme.validationRule-meta.xml

Salesforce metadata for Order_Item__c/validationRules/No_Primary_Scheme.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 0b90ad1284867bbb4c418a8894a7078f62ce7fb4ad8ea4bacfe2f72c87157a95

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>No_Primary_Scheme</fullName><active>true</active><errorConditionFormula>AND(NOT(ISBLANK(Scheme__c)), ISPICKVAL(Scheme__r.Sales_Channel__c, 'Primary'), OR(ISNEW(), ISCHANGED(Scheme__c)))</errorConditionFormula><errorMessage>Primary case schemes cannot be used on secondary outlet order items. Select a Secondary scheme.</errorMessage></ValidationRule>`	Sets Validation Rule in the enclosing configuration to <fullName>No_Primary_Scheme</fullName><active>true</active><errorConditionFormula>AND(NOT(ISBLANK(Scheme__c)), ISPICKVAL(Scheme__r.Sales_Channel__c, 'Primary'), OR(ISNEW(), ISCHANGED(Scheme__c)))</err.

force-app/main/default/objects/PJP_Selected_Beat__c/PJP_Selected_Beat__c.object-meta.xml

Salesforce metadata for PJP_Selected_Beat__c/PJP_Selected_Beat__c.object-meta.xml. Label: PJP Selected Beat. Type: Default. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

167 numbered source lines | SHA-256 5352c4d2c8794c6e6321f271e57b202ab500e51fa6a74f5501a48e9be88d48a5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
4	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
5	`        <type>Default</type>`	Sets field/storage type to Default.
6	`    </actionOverrides>`	Closes the actionOverrides configuration block.
7	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
8	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
9	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
10	`        <type>Default</type>`	Sets field/storage type to Default.
11	`    </actionOverrides>`	Closes the actionOverrides configuration block.
12	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
13	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
14	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
15	`        <type>Default</type>`	Sets field/storage type to Default.
16	`    </actionOverrides>`	Closes the actionOverrides configuration block.
17	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
18	`        <actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.

Line	Source code	Explanation / reading note
19	`<type>Default</type>`	Sets field/storage type to Default.
20	`</actionOverrides>`	Closes the actionOverrides configuration block.
21	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
22	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
23	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
24	`<type>Default</type>`	Sets field/storage type to Default.
25	`</actionOverrides>`	Closes the actionOverrides configuration block.
26	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
27	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
28	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
29	`<type>Default</type>`	Sets field/storage type to Default.
30	`</actionOverrides>`	Closes the actionOverrides configuration block.
31	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
32	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
33	`<type>Default</type>`	Sets field/storage type to Default.
34	`</actionOverrides>`	Closes the actionOverrides configuration block.
35	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
36	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
37	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
38	`<type>Default</type>`	Sets field/storage type to Default.
39	`</actionOverrides>`	Closes the actionOverrides configuration block.
40	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.

Line	Source code	Explanation / reading note
41	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
42	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
43	`<type>Default</type>`	Sets field/storage type to Default.
44	`</actionOverrides>`	Closes the actionOverrides configuration block.
45	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
46	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
47	`<type>Default</type>`	Sets field/storage type to Default.
48	`</actionOverrides>`	Closes the actionOverrides configuration block.
49	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
50	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
51	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
52	`<type>Default</type>`	Sets field/storage type to Default.
53	`</actionOverrides>`	Closes the actionOverrides configuration block.
54	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
55	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
56	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
57	`<type>Default</type>`	Sets field/storage type to Default.
58	`</actionOverrides>`	Closes the actionOverrides configuration block.
59	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
60	`<actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
61	`<type>Default</type>`	Sets field/storage type to Default.
62	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
63	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
64	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
65	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
66	`        <type>Default</type>`	Sets field/storage type to Default.
67	`    </actionOverrides>`	Closes the actionOverrides configuration block.
68	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
69	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
70	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
71	`        <type>Default</type>`	Sets field/storage type to Default.
72	`    </actionOverrides>`	Closes the actionOverrides configuration block.
73	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
74	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
75	`        <type>Default</type>`	Sets field/storage type to Default.
76	`    </actionOverrides>`	Closes the actionOverrides configuration block.
77	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
78	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
79	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
80	`        <type>Default</type>`	Sets field/storage type to Default.
81	`    </actionOverrides>`	Closes the actionOverrides configuration block.
82	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
83	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
84	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.

Line	Source code	Explanation / reading note
85	`<type>Default</type>`	Sets field/storage type to Default.
86	`</actionOverrides>`	Closes the actionOverrides configuration block.
87	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
88	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
89	`<type>Default</type>`	Sets field/storage type to Default.
90	`</actionOverrides>`	Closes the actionOverrides configuration block.
91	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
92	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
93	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
94	`<type>Default</type>`	Sets field/storage type to Default.
95	`</actionOverrides>`	Closes the actionOverrides configuration block.
96	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
97	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
98	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
99	`<type>Default</type>`	Sets field/storage type to Default.
100	`</actionOverrides>`	Closes the actionOverrides configuration block.
101	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
102	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
103	`<type>Default</type>`	Sets field/storage type to Default.
104	`</actionOverrides>`	Closes the actionOverrides configuration block.
105	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
106	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.

Line	Source code	Explanation / reading note
107	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
108	`<type>Default</type>`	Sets field/storage type to Default.
109	`</actionOverrides>`	Closes the actionOverrides configuration block.
110	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
111	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
112	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
113	`<type>Default</type>`	Sets field/storage type to Default.
114	`</actionOverrides>`	Closes the actionOverrides configuration block.
115	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
116	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
117	`<type>Default</type>`	Sets field/storage type to Default.
118	`</actionOverrides>`	Closes the actionOverrides configuration block.
119	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
120	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
121	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
122	`<type>Default</type>`	Sets field/storage type to Default.
123	`</actionOverrides>`	Closes the actionOverrides configuration block.
124	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
125	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
126	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
127	`<type>Default</type>`	Sets field/storage type to Default.
128	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
129	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
130	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
131	`<type>Default</type>`	Sets field/storage type to Default.
132	`</actionOverrides>`	Closes the actionOverrides configuration block.
133	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
134	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
135	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
136	`<type>Default</type>`	Sets field/storage type to Default.
137	`</actionOverrides>`	Closes the actionOverrides configuration block.
138	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
139	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
140	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
141	`<type>Default</type>`	Sets field/storage type to Default.
142	`</actionOverrides>`	Closes the actionOverrides configuration block.
143	`<allowInChatterGroups>false</allowInChatterGroups>`	Sets allow In Chatter Groups in the enclosing configuration to false.
144	`<compactLayoutAssignment>SYSTEM</compactLayoutAssignment>`	Sets compact Layout Assignment in the enclosing configuration to SYSTEM.
145	`<deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
146	`<description>Authorized beats selected for a Phase 1 PJP.</description>`	Sets description in the enclosing configuration to Authorized beats selected for a Phase 1 PJP..
147	`<enableActivities>false</enableActivities>`	Sets enable Activities in the enclosing configuration to false.
148	`<enableBulkApi>true</enableBulkApi>`	Sets enable Bulk Api in the enclosing configuration to true.
149	`<enableFeeds>false</enableFeeds>`	Sets enable Feeds in the enclosing configuration to false.

Line	Source code	Explanation / reading note
150	`    <enableHistory>false</enableHistory>`	Sets enable History in the enclosing configuration to false.
151	`    <enableLicensing>false</enableLicensing>`	Sets enable Licensing in the enclosing configuration to false.
152	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
153	`    <enableSearch>true</enableSearch>`	Sets enable Search in the enclosing configuration to true.
154	`    <enableSharing>true</enableSharing>`	Sets enable Sharing in the enclosing configuration to true.
155	`    <enableStreamingApi>true</enableStreamingApi>`	Sets enable Streaming Api in the enclosing configuration to true.
156	`    <externalSharingModel>ControlledByParent</externalSharingModel>`	Sets external Sharing Model in the enclosing configuration to ControlledByParent.
157	`    <label>PJP Selected Beat</label>`	Sets human-readable Salesforce UI label to PJP Selected Beat.
158	`    <nameField>`	Opens the nameField block; child elements specify its configuration.
159	`        <displayFormat>PJP-BEAT-{0000}</displayFormat>`	Sets display Format in the enclosing configuration to PJP-BEAT-{0000}.
160	`        <label>Selection Number</label>`	Sets human-readable Salesforce UI label to Selection Number.
161	`        <type>AutoNumber</type>`	Sets field/storage type to AutoNumber.
162	`    </nameField>`	Closes the nameField configuration block.
163	`    <pluralLabel>PJP Selected Beats</pluralLabel>`	Sets plural Label in the enclosing configuration to PJP Selected Beats.
164	`    <searchLayouts></searchLayouts>`	Sets search Layouts in the enclosing configuration to .
165	`    <sharingModel>ControlledByParent</sharingModel>`	Sets record sharing baseline to ControlledByParent.
166	`    <visibility>Public</visibility>`	Sets visibility in the enclosing configuration to Public.
167	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/PJP_Selected_Beat__c/fields/Beat__c.field-meta.xml

Salesforce metadata for PJP_Selected_Beat__c/fields/Beat__c.field-meta.xml. Label: Beat. Type: Lookup. Relationship target: Beat__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 c7234d2339516b50ecbb8e3494c88316c868ce4b33476f83debdfe91bd35c034

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Beat__c</fullName>`	Sets API identifier used by metadata deployment and code references to Beat__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <label>Beat</label>`	Sets human-readable Salesforce UI label to Beat.
6	`    <referenceTo>Beat__c</referenceTo>`	Sets object referenced by this relationship to Beat__c.
7	`    <relationshipLabel>PJP Selections</relationshipLabel>`	Sets relationship Label in the enclosing configuration to PJP Selections.
8	`    <relationshipName>PJP_Selections</relationshipName>`	Sets relationship API traversal name to PJP_Selections.
9	`    <required>true</required>`	Sets whether a value is mandatory to true.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/PJP_Selected_Beat__c/fields/PJP__c.field-meta.xml

Salesforce metadata for PJP_Selected_Beat__c/fields/PJP__c.field-meta.xml. Label: PJP. Type: MasterDetail. Relationship target: Permanent_Journey_Plan__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 b958899b8981947fc55efa69383719e15f95fc76788a9f3260163de9492afad9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>PJP__c</fullName>`	Sets API identifier used by metadata deployment and code references to PJP__c.
4	`    <label>PJP</label>`	Sets human-readable Salesforce UI label to PJP.
5	`    <referenceTo>Permanent_Journey_Plan__c</referenceTo>`	Sets object referenced by this relationship to Permanent_Journey_Plan__c.
6	`    <relationshipLabel>Selected Beats</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Selected Beats.
7	`    <relationshipName>Selected_Beats</relationshipName>`	Sets relationship API traversal name to Selected_Beats.
8	`    <relationshipOrder>0</relationshipOrder>`	Sets relationship Order in the enclosing configuration to 0.
9	`    <reparentableMasterDetail>false</reparentableMasterDetail>`	Sets reparentable Master Detail in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>MasterDetail</type>`	Sets field/storage type to MasterDetail.
12	`    <writeRequiresMasterRead>false</writeRequiresMasterRead>`	Sets write Requires Master Read in the enclosing configuration to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/PJP_Selected_Beat__c/fields/Unique_Key__c.field-meta.xml

Salesforce metadata for PJP_Selected_Beat__c/fields/Unique_Key__c.field-meta.xml. Label: Unique PJP Beat Key. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 590abfd32dc0c67cae51a5816b86e32cec846d2d51a53187a0041f51819d04a5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Unique_Key__c</fullName>`	Sets API identifier used by metadata deployment and code references to Unique_Key__c.
4	`    <caseSensitive>false</caseSensitive>`	Sets case Sensitive in the enclosing configuration to false.
5	`    <externalId>true</externalId>`	Sets whether the field is eligible for external-key matching to true.
6	`    <label>Unique PJP Beat Key</label>`	Sets human-readable Salesforce UI label to Unique PJP Beat Key.
7	`    <length>80</length>`	Sets maximum text length to 80.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Text</type>`	Sets field/storage type to Text.
11	`    <unique>true</unique>`	Sets whether duplicate stored values are rejected to true.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/PJP_Selected_Beat__c/listViews/All_PJP_Selected_Beats.listView-meta.xml

Salesforce metadata for PJP_Selected_Beat__c/listViews/All_PJP_Selected_Beats.listView-meta.xml. Label: All PJP Selected Beats. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 6fb2bd45f53afe06a2f86e56a783ae41f6eef85e18fa504393e6611af7b58fc1

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_PJP_Selected_Beats</fullName>`	Sets API identifier used by metadata deployment and code references to All_PJP_Selected_Beats.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>PJP__c</columns>`	Sets columns in the enclosing configuration to PJP__c.
6	`    <columns>Beat__c</columns>`	Sets columns in the enclosing configuration to Beat__c.
7	`    <columns>Unique_Key__c</columns>`	Sets columns in the enclosing configuration to Unique_Key__c.
8	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
9	`    <label>All PJP Selected Beats</label>`	Sets human-readable Salesforce UI label to All PJP Selected Beats.
10	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/Permanent_Journey_Plan__c.object-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/Permanent_Journey_Plan__c.object-meta.xml. Label: Permanent Journey Plan. Type: Default. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

167 numbered source lines | SHA-256 a54606799f4a9090c935de1c7239fbed316ea81ee880a690d20d53eddfc1273f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
4	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
5	`        <type>Default</type>`	Sets field/storage type to Default.
6	`    </actionOverrides>`	Closes the actionOverrides configuration block.
7	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
8	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
9	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
10	`        <type>Default</type>`	Sets field/storage type to Default.
11	`    </actionOverrides>`	Closes the actionOverrides configuration block.
12	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
13	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
14	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
15	`        <type>Default</type>`	Sets field/storage type to Default.
16	`    </actionOverrides>`	Closes the actionOverrides configuration block.
17	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
18	`        <actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.

Line	Source code	Explanation / reading note
19	`<type>Default</type>`	Sets field/storage type to Default.
20	`</actionOverrides>`	Closes the actionOverrides configuration block.
21	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
22	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
23	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
24	`<type>Default</type>`	Sets field/storage type to Default.
25	`</actionOverrides>`	Closes the actionOverrides configuration block.
26	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
27	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
28	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
29	`<type>Default</type>`	Sets field/storage type to Default.
30	`</actionOverrides>`	Closes the actionOverrides configuration block.
31	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
32	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
33	`<type>Default</type>`	Sets field/storage type to Default.
34	`</actionOverrides>`	Closes the actionOverrides configuration block.
35	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
36	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
37	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
38	`<type>Default</type>`	Sets field/storage type to Default.
39	`</actionOverrides>`	Closes the actionOverrides configuration block.
40	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.

Line	Source code	Explanation / reading note
41	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
42	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
43	`<type>Default</type>`	Sets field/storage type to Default.
44	`</actionOverrides>`	Closes the actionOverrides configuration block.
45	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
46	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
47	`<type>Default</type>`	Sets field/storage type to Default.
48	`</actionOverrides>`	Closes the actionOverrides configuration block.
49	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
50	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
51	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
52	`<type>Default</type>`	Sets field/storage type to Default.
53	`</actionOverrides>`	Closes the actionOverrides configuration block.
54	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
55	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
56	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
57	`<type>Default</type>`	Sets field/storage type to Default.
58	`</actionOverrides>`	Closes the actionOverrides configuration block.
59	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
60	`<actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
61	`<type>Default</type>`	Sets field/storage type to Default.
62	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
63	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
64	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
65	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
66	`        <type>Default</type>`	Sets field/storage type to Default.
67	`    </actionOverrides>`	Closes the actionOverrides configuration block.
68	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
69	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
70	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
71	`        <type>Default</type>`	Sets field/storage type to Default.
72	`    </actionOverrides>`	Closes the actionOverrides configuration block.
73	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
74	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
75	`        <type>Default</type>`	Sets field/storage type to Default.
76	`    </actionOverrides>`	Closes the actionOverrides configuration block.
77	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
78	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
79	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
80	`        <type>Default</type>`	Sets field/storage type to Default.
81	`    </actionOverrides>`	Closes the actionOverrides configuration block.
82	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
83	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
84	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.

Line	Source code	Explanation / reading note
85	`<type>Default</type>`	Sets field/storage type to Default.
86	`</actionOverrides>`	Closes the actionOverrides configuration block.
87	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
88	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
89	`<type>Default</type>`	Sets field/storage type to Default.
90	`</actionOverrides>`	Closes the actionOverrides configuration block.
91	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
92	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
93	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
94	`<type>Default</type>`	Sets field/storage type to Default.
95	`</actionOverrides>`	Closes the actionOverrides configuration block.
96	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
97	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
98	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
99	`<type>Default</type>`	Sets field/storage type to Default.
100	`</actionOverrides>`	Closes the actionOverrides configuration block.
101	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
102	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
103	`<type>Default</type>`	Sets field/storage type to Default.
104	`</actionOverrides>`	Closes the actionOverrides configuration block.
105	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
106	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.

Line	Source code	Explanation / reading note
107	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
108	`<type>Default</type>`	Sets field/storage type to Default.
109	`</actionOverrides>`	Closes the actionOverrides configuration block.
110	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
111	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
112	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
113	`<type>Default</type>`	Sets field/storage type to Default.
114	`</actionOverrides>`	Closes the actionOverrides configuration block.
115	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
116	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
117	`<type>Default</type>`	Sets field/storage type to Default.
118	`</actionOverrides>`	Closes the actionOverrides configuration block.
119	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
120	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
121	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
122	`<type>Default</type>`	Sets field/storage type to Default.
123	`</actionOverrides>`	Closes the actionOverrides configuration block.
124	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
125	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
126	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
127	`<type>Default</type>`	Sets field/storage type to Default.
128	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
129	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
130	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
131	`<type>Default</type>`	Sets field/storage type to Default.
132	`</actionOverrides>`	Closes the actionOverrides configuration block.
133	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
134	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
135	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
136	`<type>Default</type>`	Sets field/storage type to Default.
137	`</actionOverrides>`	Closes the actionOverrides configuration block.
138	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
139	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
140	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
141	`<type>Default</type>`	Sets field/storage type to Default.
142	`</actionOverrides>`	Closes the actionOverrides configuration block.
143	`<allowInChatterGroups>false</allowInChatterGroups>`	Sets allow In Chatter Groups in the enclosing configuration to false.
144	`<compactLayoutAssignment>SYSTEM</compactLayoutAssignment>`	Sets compact Layout Assignment in the enclosing configuration to SYSTEM.
145	`<deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
146	`<description>Daily beat assignment for a sales representative.</description>`	Sets description in the enclosing configuration to Daily beat assignment for a sales representative..
147	`<enableActivities>false</enableActivities>`	Sets enable Activities in the enclosing configuration to false.
148	`<enableBulkApi>true</enableBulkApi>`	Sets enable Bulk Api in the enclosing configuration to true.
149	`<enableFeeds>false</enableFeeds>`	Sets enable Feeds in the enclosing configuration to false.

Line	Source code	Explanation / reading note
150	`    <enableHistory>true</enableHistory>`	Sets enable History in the enclosing configuration to true.
151	`    <enableLicensing>false</enableLicensing>`	Sets enable Licensing in the enclosing configuration to false.
152	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
153	`    <enableSearch>true</enableSearch>`	Sets enable Search in the enclosing configuration to true.
154	`    <enableSharing>true</enableSharing>`	Sets enable Sharing in the enclosing configuration to true.
155	`    <enableStreamingApi>true</enableStreamingApi>`	Sets enable Streaming Api in the enclosing configuration to true.
156	`    <externalSharingModel>Private</externalSharingModel>`	Sets external Sharing Model in the enclosing configuration to Private.
157	`    <label>Permanent Journey Plan</label>`	Sets human-readable Salesforce UI label to Permanent Journey Plan.
158	`    <nameField>`	Opens the nameField block; child elements specify its configuration.
159	`        <label>Journey Plan Name</label>`	Sets human-readable Salesforce UI label to Journey Plan Name.
160	`        <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
161	`        <type>Text</type>`	Sets field/storage type to Text.
162	`    </nameField>`	Closes the nameField configuration block.
163	`    <pluralLabel>Permanent Journey Plans</pluralLabel>`	Sets plural Label in the enclosing configuration to Permanent Journey Plans.
164	`    <searchLayouts></searchLayouts>`	Sets search Layouts in the enclosing configuration to .
165	`    <sharingModel>ReadWrite</sharingModel>`	Sets record sharing baseline to ReadWrite.
166	`    <visibility>Public</visibility>`	Sets visibility in the enclosing configuration to Public.
167	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Approved_By__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Approved_By__c.field-meta.xml. Label: Approved By. Type: Lookup. Relationship target: User. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 12e4af2e14961d603d8b25765c6ca149114260e5f71d57c7152773cafbf8ade6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Approved_By__c</fullName>`	Sets API identifier used by metadata deployment and code references to Approved_By__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Approved By</label>`	Sets human-readable Salesforce UI label to Approved By.
6	`    <referenceTo>User</referenceTo>`	Sets object referenced by this relationship to User.
7	`    <relationshipName>Approved_PJPs</relationshipName>`	Sets relationship API traversal name to Approved_PJPs.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Approved_Date__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Approved_Date__c.field-meta.xml. Label: Approved Date. Type: DateTime. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 fca8f9ca355ee725dd3fd6e78aad8354551c86b5a16d6731d646a53690cd4b7f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Approved_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Approved_Date__c.
4	`    <label>Approved Date</label>`	Sets human-readable Salesforce UI label to Approved Date.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>DateTime</type>`	Sets field/storage type to DateTime.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Approved_Outlet_Names__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Approved_Outlet_Names__c.field-meta.xml. Label: Approved Outlets. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 5b4f23c8ebf6e07bfb4d0fda62c690fd9e14dc13d6e2d7f7e269fcb32fa4308a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Approved_Outlet_Names__c</fullName>`	Sets API identifier used by metadata deployment and code references to Approved_Outlet_Names__c.
4	`    <description>Outlet names covered by the selected Beats when the PJP is approved.</description>`	Sets description in the enclosing configuration to Outlet names covered by the selected Beats when the PJP is approved..
5	`    <label>Approved Outlets</label>`	Sets human-readable Salesforce UI label to Approved Outlets.
6	`    <length>255</length>`	Sets maximum text length to 255.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Approver__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Approver__c.field-meta.xml. Label: Approver. Type: Lookup. Relationship target: Employee__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 7419feb1b8d6776c4f17b273d6a39a60880d7ecb086998dbae4f4c5753a7bc8f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Approver__c</fullName>`	Sets API identifier used by metadata deployment and code references to Approver__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Approver</label>`	Sets human-readable Salesforce UI label to Approver.
6	`    <referenceTo>Employee__c</referenceTo>`	Sets object referenced by this relationship to Employee__c.
7	`    <relationshipLabel>Plans To Approve</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Plans To Approve.
8	`    <relationshipName>Plans_To_Approve</relationshipName>`	Sets relationship API traversal name to Plans_To_Approve.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Beat__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Beat__c.field-meta.xml. Label: Beat. Type: Lookup. Relationship target: Beat__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 83bec83a29a0da821e07cfa37654d0c6f19fa53ab743109977dc2f8f2ef942f3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Beat__c</fullName>`	Sets API identifier used by metadata deployment and code references to Beat__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <label>Beat</label>`	Sets human-readable Salesforce UI label to Beat.
6	`    <referenceTo>Beat__c</referenceTo>`	Sets object referenced by this relationship to Beat__c.
7	`    <relationshipLabel>Journey Plans</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Journey Plans.
8	`    <relationshipName>Journey_Plans</relationshipName>`	Sets relationship API traversal name to Journey_Plans.
9	`    <required>true</required>`	Sets whether a value is mandatory to true.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Employee__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Employee__c.field-meta.xml. Label: Employee. Type: Lookup. Relationship target: Employee__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 e3a7439196b1200c51ea6afa6fb21ed609f6195e9d2a683d222e146f28973ff6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Employee__c</fullName>`	Sets API identifier used by metadata deployment and code references to Employee__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Employee</label>`	Sets human-readable Salesforce UI label to Employee.
6	`    <referenceTo>Employee__c</referenceTo>`	Sets object referenced by this relationship to Employee__c.
7	`    <relationshipLabel>Permanent Journey Plans</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Permanent Journey Plans.
8	`    <relationshipName>Permanent_Journey_Plans</relationshipName>`	Sets relationship API traversal name to Permanent_Journey_Plans.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Plan_Date__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Plan_Date__c.field-meta.xml. Label: Plan Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 e6192e5c3fda823acbcfcdb23bfbc3011ffa5ae6961bf0135ea2e0d5af2eacf5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Plan_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Plan_Date__c.
4	`    <label>Plan Date</label>`	Sets human-readable Salesforce UI label to Plan Date.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>Date</type>`	Sets field/storage type to Date.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Planned_Date__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Planned_Date__c.field-meta.xml. Label: Planned Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 2363ea0e83828b777f50170e2d5fde24d462b90a6373374ebcf26fcad2efd9f4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Planned_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Planned_Date__c.
4	`    <label>Planned Date</label>`	Sets human-readable Salesforce UI label to Planned Date.
5	`    <required>true</required>`	Sets whether a value is mandatory to true.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>Date</type>`	Sets field/storage type to Date.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Planning_End_Date__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Planning_End_Date__c.field-meta.xml. Label: Planning End Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 ff061e1713fdc7c33d7eb23e1c6832e058bfaa651db0b04f24140445b53f6287

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Planning_End_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Planning_End_Date__c.
4	`    <label>Planning End Date</label>`	Sets human-readable Salesforce UI label to Planning End Date.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>Date</type>`	Sets field/storage type to Date.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Planning_Start_Date__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Planning_Start_Date__c.field-meta.xml. Label: Planning Start Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 6372274d9e569286d4a6164e763573f75ca50335f9ff9e5efebf65471135cb4c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Planning_Start_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Planning_Start_Date__c.
4	`    <label>Planning Start Date</label>`	Sets human-readable Salesforce UI label to Planning Start Date.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>Date</type>`	Sets field/storage type to Date.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Rejected_By__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Rejected_By__c.field-meta.xml. Label: Rejected By. Type: Lookup. Relationship target: User. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 c789e3c294557234f9848abcdf8586bffd14b69ad6093556535ccb37af712415

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Rejected_By__c</fullName>`	Sets API identifier used by metadata deployment and code references to Rejected_By__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Rejected By</label>`	Sets human-readable Salesforce UI label to Rejected By.
6	`    <referenceTo>User</referenceTo>`	Sets object referenced by this relationship to User.
7	`    <relationshipName>Rejected_PJPs</relationshipName>`	Sets relationship API traversal name to Rejected_PJPs.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Rejected_Date__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Rejected_Date__c.field-meta.xml. Label: Rejected Date. Type: DateTime. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 eee28d7bb6fd9af1f7dc0178f9b74d308834249ef34e442013edfa463a2e775a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Rejected_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Rejected_Date__c.
4	`    <label>Rejected Date</label>`	Sets human-readable Salesforce UI label to Rejected Date.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>DateTime</type>`	Sets field/storage type to DateTime.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Rejection_Reason__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Rejection_Reason__c.field-meta.xml. Label: Rejection Reason. Type: TextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 318fa6f0e104c9186f19b54f04b59442bfff339d8008de87d1a84168e64d92d3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Rejection_Reason__c</fullName>`	Sets API identifier used by metadata deployment and code references to Rejection_Reason__c.
4	`    <label>Rejection Reason</label>`	Sets human-readable Salesforce UI label to Rejection Reason.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>TextArea</type>`	Sets field/storage type to TextArea.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Sales_Representative__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Sales_Representative__c.field-meta.xml. Label: Sales Representative. Type: Lookup. Relationship target: User. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 2a3213fb6c9bfe749e21adf46614db6fd4787b22429308e8a78866d8d868bc7a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Sales_Representative__c</fullName>`	Sets API identifier used by metadata deployment and code references to Sales_Representative__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Sales Representative</label>`	Sets human-readable Salesforce UI label to Sales Representative.
6	`    <referenceTo>User</referenceTo>`	Sets object referenced by this relationship to User.
7	`    <relationshipLabel>Journey Plans</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Journey Plans.
8	`    <relationshipName>Journey_Plans</relationshipName>`	Sets relationship API traversal name to Journey_Plans.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Status__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Status__c.field-meta.xml. Label: Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

45 numbered source lines | SHA-256 e1a71da3bcd7c7fb82dc88aa88feb2bbf8d2647cff4ca8ab3c53093480244b31

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Status__c</fullName>`	Sets API identifier used by metadata deployment and code references to Status__c.
4	`    <label>Status</label>`	Sets human-readable Salesforce UI label to Status.
5	`    <required>true</required>`	Sets whether a value is mandatory to true.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
9	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
10	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
11	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
12	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
13	`            <value>`	Opens the value block; child elements specify its configuration.
14	`                <fullName>Draft</fullName>`	Sets API identifier used by metadata deployment and code references to Draft.
15	`                <default>true</default>`	Sets whether this option is the default to true.
16	`                <label>Draft</label>`	Sets human-readable Salesforce UI label to Draft.
17	`            </value>`	Closes the value configuration block.
18	`            <value>`	Opens the value block; child elements specify its configuration.

Line	Source code	Explanation / reading note
19	`<fullName>Pending</fullName>`	Sets API identifier used by metadata deployment and code references to Pending.
20	`<default>false</default>`	Sets whether this option is the default to false.
21	`<label>Pending</label>`	Sets human-readable Salesforce UI label to Pending.
22	`</value>`	Closes the value configuration block.
23	`<value>`	Opens the value block; child elements specify its configuration.
24	`<fullName>Submitted</fullName>`	Sets API identifier used by metadata deployment and code references to Submitted.
25	`<default>false</default>`	Sets whether this option is the default to false.
26	`<label>Submitted</label>`	Sets human-readable Salesforce UI label to Submitted.
27	`</value>`	Closes the value configuration block.
28	`<value>`	Opens the value block; child elements specify its configuration.
29	`<fullName>Approved</fullName>`	Sets API identifier used by metadata deployment and code references to Approved.
30	`<default>false</default>`	Sets whether this option is the default to false.
31	`<label>Approved</label>`	Sets human-readable Salesforce UI label to Approved.
32	`</value>`	Closes the value configuration block.
33	`<value>`	Opens the value block; child elements specify its configuration.
34	`<fullName>Rejected</fullName>`	Sets API identifier used by metadata deployment and code references to Rejected.
35	`<default>false</default>`	Sets whether this option is the default to false.
36	`<label>Rejected</label>`	Sets human-readable Salesforce UI label to Rejected.
37	`</value>`	Closes the value configuration block.
38	`<value>`	Opens the value block; child elements specify its configuration.
39	`<fullName>Cancelled</fullName>`	Sets API identifier used by metadata deployment and code references to Cancelled.
40	`<default>false</default>`	Sets whether this option is the default to false.

Line	Source code	Explanation / reading note
41	`<label>Cancelled</label>`	Sets human-readable Salesforce UI label to Cancelled.
42	`</value>`	Closes the value configuration block.
43	`</valueSetDefinition>`	Closes the valueSetDefinition configuration block.
44	`</valueSet>`	Closes the valueSet configuration block.
45	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Submitted_By__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Submitted_By__c.field-meta.xml. Label: Submitted By. Type: Lookup. Relationship target: User. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 db46ce708648cb344e91981fa23419147051a62bf2fb076dba135a18980498a9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Submitted_By__c</fullName>`	Sets API identifier used by metadata deployment and code references to Submitted_By__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Submitted By</label>`	Sets human-readable Salesforce UI label to Submitted By.
6	`    <referenceTo>User</referenceTo>`	Sets object referenced by this relationship to User.
7	`    <relationshipName>Submitted_PJPs</relationshipName>`	Sets relationship API traversal name to Submitted_PJPs.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/fields/Submitted_Date__c.field-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/fields/Submitted_Date__c.field-meta.xml. Label: Submitted Date. Type: DateTime. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 42d477ac932b5929fec61e2fddbef4117799212bd156452a0e19a9b2ed6d590c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Submitted_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Submitted_Date__c.
4	`    <label>Submitted Date</label>`	Sets human-readable Salesforce UI label to Submitted Date.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>DateTime</type>`	Sets field/storage type to DateTime.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/listViews/All_Permanent_Journey_Plans.listView-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/listViews/All_Permanent_Journey_Plans.listView-meta.xml. Label: All Permanent Journey Plans. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 fc471cbdba0898ddc9853a3852d27fd80dd06fc0cbed2c47ffe0e27787389f06

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Permanent_Journey_Plans</fullName>`	Sets API identifier used by metadata deployment and code references to All_Permanent_Journey_Plans.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Employee__c</columns>`	Sets columns in the enclosing configuration to Employee__c.
6	`    <columns>Planning_Start_Date__c</columns>`	Sets columns in the enclosing configuration to Planning_Start_Date__c.
7	`    <columns>Planning_End_Date__c</columns>`	Sets columns in the enclosing configuration to Planning_End_Date__c.
8	`    <columns>Status__c</columns>`	Sets columns in the enclosing configuration to Status__c.
9	`    <columns>Approver__c</columns>`	Sets columns in the enclosing configuration to Approver__c.
10	`    <columns>Submitted_Date__c</columns>`	Sets columns in the enclosing configuration to Submitted_Date__c.
11	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
12	`    <label>All Permanent Journey Plans</label>`	Sets human-readable Salesforce UI label to All Permanent Journey Plans.
13	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Permanent_Journey_Plan__c/validationRules/Planning_Dates_Are_Valid.validationRule-meta.xml

Salesforce metadata for Permanent_Journey_Plan__c/validationRules/Planning_Dates_Are_Valid.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 2ffbe2a5846ed0b3f2766f9c15ca8741617342ad094694040afaa5c2bd8655b3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Planning_Dates_Are_Valid</fullName>`	Sets API identifier used by metadata deployment and code references to Planning_Dates_Are_Valid.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(NOT(ISBLANK(Planning_Start_Date__c)), NOT(ISBLANK(Planning_End_Date__c)), Planning_End_Date__c < Planning_Start_Date__c)</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(Planning_Start_Date__c)), NOT(ISBLANK(Planning_End_Date__c)), Planning_End_Date__c < Planning_Start_Date__c).
6	`    <errorDisplayField>Planning_End_Date__c</errorDisplayField>`	Sets error Display Field in the enclosing configuration to Planning_End_Date__c.
7	`    <errorMessage>Planning End Date cannot be before Planning Start Date.</errorMessage>`	Sets message displayed when the rule fails to Planning End Date cannot be before Planning Start Date..
8	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/Product_Refusal__c/Product_Refusal__c.object-meta.xml

Salesforce metadata for Product_Refusal__c/Product_Refusal__c.object-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 c330e4bf674a46bf28666280014c38e3098aebda616245cd3d524e5ac765c452

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata"></CustomObject>`	Sets Custom Object in the enclosing configuration to .

force-app/main/default/objects/Product_Refusal__c/fields/Employee__c.field-meta.xml

Salesforce metadata for Product_Refusal__c/fields/Employee__c.field-meta.xml. Label: Employee. Type: Lookup. Relationship target: Employee__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 8f392c72b4791d796c50ebb01cebda205e7e5f59ced90798be83f07b7c2f52a7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Employee__c</fullName>`	Sets API identifier used by metadata deployment and code references to Employee__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Employee</label>`	Sets human-readable Salesforce UI label to Employee.
6	`    <referenceTo>Employee__c</referenceTo>`	Sets object referenced by this relationship to Employee__c.
7	`    <relationshipLabel>Product Refusals</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Product Refusals.
8	`    <relationshipName>Product_Refusals</relationshipName>`	Sets relationship API traversal name to Product_Refusals.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product_Refusal__c/fields/Notes__c.field-meta.xml

Salesforce metadata for Product_Refusal__c/fields/Notes__c.field-meta.xml. Label: Refusal Notes. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 46e47296ac83ce6f99f4e74ec45ae409e6d509e9d2eec4026df3f2001b838791

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Notes__c</fullName>`	Sets API identifier used by metadata deployment and code references to Notes__c.
4	`    <label>Refusal Notes</label>`	Sets human-readable Salesforce UI label to Refusal Notes.
5	`    <length>32768</length>`	Sets maximum text length to 32768.
6	`    <type>LongTextArea</type>`	Sets field/storage type to LongTextArea.
7	`    <visibleLines>3</visibleLines>`	Sets visible Lines in the enclosing configuration to 3.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product_Refusal__c/fields/Refused_At__c.field-meta.xml

Salesforce metadata for Product_Refusal__c/fields/Refused_At__c.field-meta.xml. Label: Refused At. Type: DateTime. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

6 numbered source lines | SHA-256 738cf0c82190216ba863d170223a3bcb3d37242b6325d995a30ec5caca8f22e2

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Refused_At__c</fullName>`	Sets API identifier used by metadata deployment and code references to Refused_At__c.
4	`    <label>Refused At</label>`	Sets human-readable Salesforce UI label to Refused At.
5	`    <type>DateTime</type>`	Sets field/storage type to DateTime.
6	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product_Refusal__c/fields/Sales_Representative__c.field-meta.xml

Salesforce metadata for Product_Refusal__c/fields/Sales_Representative__c.field-meta.xml. Label: Sales Representative. Type: Lookup. Relationship target: Distributor__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 13680dd2739dd480a322dd05a3feff4213dd07ed57cf42968fd4e67543d95f80

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Sales_Representative__c</fullName>`	Sets API identifier used by metadata deployment and code references to Sales_Representative__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <label>Sales Representative</label>`	Sets human-readable Salesforce UI label to Sales Representative.
6	`    <referenceTo>Distributor__c</referenceTo>`	Sets object referenced by this relationship to Distributor__c.
7	`    <relationshipLabel>Product Refusals</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Product Refusals.
8	`    <relationshipName>Product_Refusals</relationshipName>`	Sets relationship API traversal name to Product_Refusals.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product_Refusal__c/validationRules/Employee_or_Representative_Required.validationRule-meta.xml

Salesforce metadata for Product_Refusal__c/validationRules/Employee_or_Representative_Required.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 5d50238dd069191106edd67ddfee7dcd3f847689efe403c1eecd2ed8b6802d78

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Employee_or_Representative_Required</fullName>`	Sets API identifier used by metadata deployment and code references to Employee_or_Representative_Required.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(ISBLANK(Employee__c), ISBLANK(Sales_Representative__c))</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(ISBLANK(Employee__c), ISBLANK(Sales_Representative__c)).
6	`    <errorMessage>Select the Employee or Sales Representative who recorded this refusal.</errorMessage>`	Sets message displayed when the rule fails to Select the Employee or Sales Representative who recorded this refusal..
7	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/Product_Return__c/Product_Return__c.object-meta.xml

Salesforce metadata for Product_Return__c/Product_Return__c.object-meta.xml. Label: Product Return. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 7064210c8558c24592f0d78f4373c2a2aa5751ca320c104c70c64c8826181790

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus><description>Products returned by an outlet with quantity and reason.</description>`	Opens the deploymentStatus block; child elements specify its configuration.
4	`    <enableActivities>true</enableActivities><enableHistory>true</enableHistory><enableReports>true</enableReports><enableSearch>true</enableSearch>`	Opens the enableActivities block; child elements specify its configuration.
5	`    <label>Product Return</label><pluralLabel>Product Returns</pluralLabel><sharingModel>ReadWrite</sharingModel>`	Opens the label block; child elements specify its configuration.
6	`    <nameField><displayFormat>RET-{00000}</displayFormat><label>Return Number</label><type>AutoNumber</type></nameField>`	Sets name Field in the enclosing configuration to <displayFormat>RET-{00000}</displayFormat><label>Return Number</label><type>AutoNumber</type>.
7	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Product_Return__c/fields/DMS_Decision_Notes__c.field-meta.xml

Salesforce metadata for Product_Return__c/fields/DMS_Decision_Notes__c.field-meta.xml. Label: Distributor Decision Notes. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 bc9b97941c2557aa265159f9024c1d1a449f9f2cb9ffe67a385c347dff438c30

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>DMS_Decision_Notes__c</fullName>`	Sets API identifier used by metadata deployment and code references to DMS_Decision_Notes__c.
4	`    <description>Distributor Decision Notes. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Distributor Decision Notes. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Distributor Decision Notes</label>`	Sets human-readable Salesforce UI label to Distributor Decision Notes.
6	`    <length>255</length>`	Sets maximum text length to 255.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product_Return__c/fields/DMS_Distributor__c.field-meta.xml

Salesforce metadata for Product_Return__c/fields/DMS_Distributor__c.field-meta.xml. Label: DMS Distributor. Type: Lookup. Relationship target: DMS_Distributor__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 44b639d8efa6ddc9598bf8e80e7b18a89b7f343fbb10a7f4b5651a2ce1fc7e12

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>DMS_Distributor__c</fullName>`	Sets API identifier used by metadata deployment and code references to DMS_Distributor__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>DMS Distributor. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to DMS Distributor. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>DMS Distributor</label>`	Sets human-readable Salesforce UI label to DMS Distributor.
7	`    <referenceTo>DMS_Distributor__c</referenceTo>`	Sets object referenced by this relationship to DMS_Distributor__c.
8	`    <relationshipLabel>Secondary Returns</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Secondary Returns.
9	`    <relationshipName>Secondary_Returns</relationshipName>`	Sets relationship API traversal name to Secondary_Returns.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product_Return__c/fields/DMS_Status__c.field-meta.xml

Salesforce metadata for Product_Return__c/fields/DMS_Status__c.field-meta.xml. Label: Distributor Decision. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

17 numbered source lines | SHA-256 83d6cb78075a8b80f808f967dd5b5965d266ef40ec79312c01f642df6e1be998

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>DMS_Status__c</fullName>`	Sets API identifier used by metadata deployment and code references to DMS_Status__c.
4	`    <description>Distributor Decision. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Distributor Decision. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Distributor Decision</label>`	Sets human-readable Salesforce UI label to Distributor Decision.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value><fullName>Pending</fullName><default>true</default><label>Pending</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Pending</fullName><default>true</default><label>Pending</label>.
13	`            <value><fullName>Approved</fullName><default>false</default><label>Approved</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Approved</fullName><default>false</default><label>Approved</label>.
14	`            <value><fullName>Rejected</fullName><default>false</default><label>Rejected</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Rejected</fullName><default>false</default><label>Rejected</label>.
15	`        </valueSetDefinition>`	Closes the valueSetDefinition configuration block.
16	`    </valueSet>`	Closes the valueSet configuration block.

Line	Source code	Explanation / reading note
17	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product_Return__c/fields/Invoice_Line__c.field-meta.xml

Salesforce metadata for Product_Return__c/fields/Invoice_Line__c.field-meta.xml. Label: Original Invoice Line. Type: Lookup. Relationship target: DMS_Invoice_Line__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 0a66fe2823218af6a707ec75fe06e651c6977f04f44b5059f0549c27ea8475d8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Invoice_Line__c</fullName>`	Sets API identifier used by metadata deployment and code references to Invoice_Line__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <description>Original Invoice Line. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Original Invoice Line. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
6	`    <label>Original Invoice Line</label>`	Sets human-readable Salesforce UI label to Original Invoice Line.
7	`    <referenceTo>DMS_Invoice_Line__c</referenceTo>`	Sets object referenced by this relationship to DMS_Invoice_Line__c.
8	`    <relationshipLabel>Secondary Returns</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Secondary Returns.
9	`    <relationshipName>Secondary_Returns</relationshipName>`	Sets relationship API traversal name to Secondary_Returns.
10	`    <required>false</required>`	Sets whether a value is mandatory to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product_Return__c/fields/Manufacturing_Date__c.field-meta.xml

Salesforce metadata for Product_Return__c/fields/Manufacturing_Date__c.field-meta.xml. Label: Manufacturing Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 885da69f90c57293602164c0b1c12444862e52141f5773b9f133b4f7a3426d8b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Manufacturing_Date__c</fullName><label>Manufacturing Date</label><type>Date</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Product_Return__c/fields/Mobile_Request_Key__c.field-meta.xml

Salesforce metadata for Product_Return__c/fields/Mobile_Request_Key__c.field-meta.xml. Label: Mobile Request Key. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 b6b2d4cbefd91ed82aaf2e4d6e9fceb5bd820fb8c44d3ed95161c16674ea6025

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Mobile_Request_Key__c</fullName>`	Sets API identifier used by metadata deployment and code references to Mobile_Request_Key__c.
4	`    <caseSensitive>true</caseSensitive>`	Sets case Sensitive in the enclosing configuration to true.
5	`    <externalId>true</externalId>`	Sets whether the field is eligible for external-key matching to true.
6	`    <label>Mobile Request Key</label>`	Sets human-readable Salesforce UI label to Mobile Request Key.
7	`    <length>150</length>`	Sets maximum text length to 150.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>true</unique>`	Sets whether duplicate stored values are rejected to true.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product_Return__c/fields/Outlet__c.field-meta.xml

Salesforce metadata for Product_Return__c/fields/Outlet__c.field-meta.xml. Label: Outlet. Type: Lookup. Relationship target: Retailer__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 2aff70563dae78c5ec8697192b8ad3e9dbd0e98c8b2f84c52b7913b74afcd653

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Outlet__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Outlet</label><referenceTo>Retailer__c</referenceTo><relationshipLabel>Product Returns</relationshipLabel><relationshipName>Product_Returns</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Product_Return__c/fields/Product__c.field-meta.xml

Salesforce metadata for Product_Return__c/fields/Product__c.field-meta.xml. Label: Product. Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 ddf1558b9f8af59af7a5efe9b55aa04ed9c44e7ba403367be4f3005889750985

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Product__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Product</label><referenceTo>Product__c</referenceTo><relationshipLabel>Product Returns</relationshipLabel><relationshipName>Product_Returns</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Product_Return__c/fields/Quantity__c.field-meta.xml

Salesforce metadata for Product_Return__c/fields/Quantity__c.field-meta.xml. Label: Quantity. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 27548c3c6e52bf6df3965724e3f217579f85a71dc25b502a785afb4c7941c6cf

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Quantity__c</fullName><label>Quantity</label><precision>12</precision><scale>0</scale><required>true</required><type>Number</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Product_Return__c/fields/Return_Reason__c.field-meta.xml

Salesforce metadata for Product_Return__c/fields/Return_Reason__c.field-meta.xml. Label: Return Reason. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

47 numbered source lines | SHA-256 ecb3642c159ed85782facccf672df2dbe8975c9b635ebf7a8b74122da5fa381d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Return_Reason__c</fullName>`	Sets API identifier used by metadata deployment and code references to Return_Reason__c.
4	`    <label>Return Reason</label>`	Sets human-readable Salesforce UI label to Return Reason.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
9	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
10	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
11	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
12	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
13	`            <value>`	Opens the value block; child elements specify its configuration.
14	`                <fullName>Expired</fullName>`	Sets API identifier used by metadata deployment and code references to Expired.
15	`                <default>false</default>`	Sets whether this option is the default to false.
16	`                <label>Expired</label>`	Sets human-readable Salesforce UI label to Expired.
17	`            </value>`	Closes the value configuration block.
18	`            <value>`	Opens the value block; child elements specify its configuration.

Line	Source code	Explanation / reading note
19	`<fullName>Damaged</fullName>`	Sets API identifier used by metadata deployment and code references to Damaged.
20	`<default>false</default>`	Sets whether this option is the default to false.
21	`<label>Damaged</label>`	Sets human-readable Salesforce UI label to Damaged.
22	`</value>`	Closes the value configuration block.
23	`<value>`	Opens the value block; child elements specify its configuration.
24	`<fullName>Near Expiry</fullName>`	Sets API identifier used by metadata deployment and code references to Near Expiry.
25	`<default>false</default>`	Sets whether this option is the default to false.
26	`<label>Near Expiry</label>`	Sets human-readable Salesforce UI label to Near Expiry.
27	`</value>`	Closes the value configuration block.
28	`<value>`	Opens the value block; child elements specify its configuration.
29	`<fullName>Wrong Supply</fullName>`	Sets API identifier used by metadata deployment and code references to Wrong Supply.
30	`<default>false</default>`	Sets whether this option is the default to false.
31	`<label>Wrong Supply</label>`	Sets human-readable Salesforce UI label to Wrong Supply.
32	`</value>`	Closes the value configuration block.
33	`<value>`	Opens the value block; child elements specify its configuration.
34	`<fullName>Quality Issue</fullName>`	Sets API identifier used by metadata deployment and code references to Quality Issue.
35	`<default>false</default>`	Sets whether this option is the default to false.
36	`<label>Quality Issue</label>`	Sets human-readable Salesforce UI label to Quality Issue.
37	`</value>`	Closes the value configuration block.
38	`<value>`	Opens the value block; child elements specify its configuration.
39	`<fullName>Other</fullName>`	Sets API identifier used by metadata deployment and code references to Other.
40	`<default>false</default>`	Sets whether this option is the default to false.

Line	Source code	Explanation / reading note
41	`<label>Other</label>`	Sets human-readable Salesforce UI label to Other.
42	`</value>`	Closes the value configuration block.
43	`<value><fullName>Delayed Delivery</fullName><default>false</default><label>Delayed Delivery</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Delayed Delivery</fullName><default>false</default><label>Delayed Delivery</label>.
44	`<value><fullName>No Demand</fullName><default>false</default><label>No Demand</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>No Demand</fullName><default>false</default><label>No Demand</label>.
45	`</valueSetDefinition>`	Closes the valueSetDefinition configuration block.
46	`</valueSet>`	Closes the valueSet configuration block.
47	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product_Return__c/fields/Visit__c.field-meta.xml

Salesforce metadata for Product_Return__c/fields/Visit__c.field-meta.xml. Label: Visit. Type: Lookup. Relationship target: Visit__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 d795fbd5e2ad72e98cdd2c9d94b752b18b2d190c3605f031380a26633c9bf176

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Visit__c</fullName><deleteConstraint>SetNull</deleteConstraint><label>Visit</label><referenceTo>Visit__c</referenceTo><relationshipLabel>Product Returns</relationshipLabel><relationshipName>Product_Returns</relationshipName><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Product_Return__c/listViews/All_Product_Returns.listView-meta.xml

Salesforce metadata for Product_Return__c/listViews/All_Product_Returns.listView-meta.xml. Label: All Product Returns. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 e4e0046dffe4f868b77ff27e5c2987631969ed1cfb54eabfb94bc0b9dc5c0962

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><ListView xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>All_Product_Returns</fullName><columns>NAME</columns><columns>Product__c</columns><columns>Quantity__c</columns><columns>Return_Reason__c</columns><columns>Outlet__c</columns><filterScope>Everything</filterScope><label>All Product Returns</label></ListView>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Product_Sales_Configuration__c/Product_Sales_Configuration__c.object-meta.xml

Salesforce metadata for Product_Sales_Configuration__c/Product_Sales_Configuration__c.object-meta.xml. Label: Product Sales Configuration. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 bc1dc32956ed4c278de52e9691168c7a13b32d246cae05eeeb73375ef258d4fa

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
4	`    <description>Controls whether a product is Must Sell, Focus Sell, or Suggested Sell for the mobile ordering experience.</description>`	Sets description in the enclosing configuration to Controls whether a product is Must Sell, Focus Sell, or Suggested Sell for the mobile ordering experience..
5	`    <enableActivities>true</enableActivities>`	Sets enable Activities in the enclosing configuration to true.
6	`    <enableFeeds>false</enableFeeds>`	Sets enable Feeds in the enclosing configuration to false.
7	`    <enableHistory>true</enableHistory>`	Sets enable History in the enclosing configuration to true.
8	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
9	`    <label>Product Sales Configuration</label>`	Sets human-readable Salesforce UI label to Product Sales Configuration.
10	`    <nameField><label>Product Sales Configuration Name</label><type>Text</type></nameField>`	Sets name Field in the enclosing configuration to <label>Product Sales Configuration Name</label><type>Text</type>.
11	`    <pluralLabel>Product Sales Configurations</pluralLabel>`	Sets plural Label in the enclosing configuration to Product Sales Configurations.
12	`    <sharingModel>ReadWrite</sharingModel>`	Sets record sharing baseline to ReadWrite.
13	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Product_Sales_Configuration__c/fields/Active__c.field-meta.xml

Salesforce metadata for Product_Sales_Configuration__c/fields/Active__c.field-meta.xml. Label: Active. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 650c476447435ac6acb6cee5d82322915bc02b5c3b49a264ca0ad020e9145382

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Active__c</fullName><defaultValue>true</defaultValue><label>Active</label><type>Checkbox</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Active__c</fullName><defaultValue>true</defaultValue><label>Active</label><type>Checkbox</type>.

force-app/main/default/objects/Product_Sales_Configuration__c/fields/Channel__c.field-meta.xml

Salesforce metadata for Product_Sales_Configuration__c/fields/Channel__c.field-meta.xml. Label: Channel. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

14 numbered source lines | SHA-256 f45baff7bc3361b1c6de67b8625b6a40029537850849d8c6eba6933fd60c4980

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Channel__c</fullName>`	Sets API identifier used by metadata deployment and code references to Channel__c.
4	`    <description>Optional outlet channel scope. Leave All Channels for a universal configuration.</description>`	Sets description in the enclosing configuration to Optional outlet channel scope. Leave All Channels for a universal configuration..
5	`    <label>Channel</label>`	Sets human-readable Salesforce UI label to Channel.
6	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
7	`    <valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted>`	Opens the valueSet block; child elements specify its configuration.
8	`        <value><fullName>All Channels</fullName><default>true</default><label>All Channels</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>All Channels</fullName><default>true</default><label>All Channels</label>.
9	`        <value><fullName>GT</fullName><default>false</default><label>GT</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>GT</fullName><default>false</default><label>GT</label>.
10	`        <value><fullName>MT</fullName><default>false</default><label>MT</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>MT</fullName><default>false</default><label>MT</label>.
11	`        <value><fullName>General Trade</fullName><default>false</default><label>General Trade</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>General Trade</fullName><default>false</default><label>General Trade</label>.
12	`        <value><fullName>Modern Trade</fullName><default>false</default><label>Modern Trade</label></value>`	Sets configured value in the surrounding metadata entry to <fullName>Modern Trade</fullName><default>false</default><label>Modern Trade</label>.
13	`    </valueSetDefinition></valueSet>`	Closes the valueSetDefinition configuration block.
14	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product_Sales_Configuration__c/fields/Configuration_Type__c.field-meta.xml

Salesforce metadata for Product_Sales_Configuration__c/fields/Configuration_Type__c.field-meta.xml. Label: Configuration Type. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 f9ce2cf5a2aaec290e26485215faf01c10b858d829d94cb9cb0b8ee9dfc7b099

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Configuration_Type__c</fullName><label>Configuration Type</label><required>true</required><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Must Sell</fullName><default>false</default><label>Must Sell</label></value><value><fullName>Focus Sell</fullName><default>false</default><label>Focus Sell</label></value><value><fullName>Suggested Sell</fullName><default>false</default><label>Suggested Sell</label></value></valueSetDefinition></valueSet></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Configuration_Type__c</fullName><label>Configuration Type</label><required>true</required><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorte.

force-app/main/default/objects/Product_Sales_Configuration__c/fields/End_Date__c.field-meta.xml

Salesforce metadata for Product_Sales_Configuration__c/fields/End_Date__c.field-meta.xml. Label: End Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 b21dc94c1bfb023f832d4f90fd52bfaae15f15c5f7c9dce486507e62192d32fa

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>End_Date__c</fullName><label>End Date</label><type>Date</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>End_Date__c</fullName><label>End Date</label><type>Date</type>.

force-app/main/default/objects/Product_Sales_Configuration__c/fields/Geography__c.field-meta.xml

Salesforce metadata for Product_Sales_Configuration__c/fields/Geography__c.field-meta.xml. Label: Geography. Type: Lookup. Relationship target: Geography__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 7c88be8781654dba5035a00255c8f234537e29124a902f6923b6615ff0c53ff5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Geography__c</fullName>`	Sets API identifier used by metadata deployment and code references to Geography__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <description>Optional geography scope. Leave blank when the configuration applies everywhere.</description>`	Sets description in the enclosing configuration to Optional geography scope. Leave blank when the configuration applies everywhere..
6	`    <label>Geography</label>`	Sets human-readable Salesforce UI label to Geography.
7	`    <referenceTo>Geography__c</referenceTo>`	Sets object referenced by this relationship to Geography__c.
8	`    <relationshipLabel>Product Sales Configurations</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Product Sales Configurations.
9	`    <relationshipName>Product_Sales_Configurations</relationshipName>`	Sets relationship API traversal name to Product_Sales_Configurations.
10	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product_Sales_Configuration__c/fields/Minimum_Quantity__c.field-meta.xml

Salesforce metadata for Product_Sales_Configuration__c/fields/Minimum_Quantity__c.field-meta.xml. Label: Minimum Quantity. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 6f1f57ebb5ed43da92dab2598ca3d37ff39cc513766810117e180112ad18561a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Minimum_Quantity__c</fullName><defaultValue>1</defaultValue><label>Minimum Quantity</label><precision>18</precision><scale>0</scale><type>Number</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Minimum_Quantity__c</fullName><defaultValue>1</defaultValue><label>Minimum Quantity</label><precision>18</precision><scale>0</scale><type>Number</type>.

force-app/main/default/objects/Product_Sales_Configuration__c/fields/Product__c.field-meta.xml

Salesforce metadata for Product_Sales_Configuration__c/fields/Product__c.field-meta.xml. Label: Product. Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 927f0b8129beb02371b441dd2421b7e6502c955546f37db3e7a798b9df2dd9a4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Product__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Product</label><referenceTo>Product__c</referenceTo><relationshipLabel>Sales Configurations</relationshipLabel><relationshipName>Sales_Configurations</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Product__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Product</label><referenceTo>Product__c</referenceTo><relationshipLabel>Sales Configurations</relationshipLabel><relat.

force-app/main/default/objects/Product_Sales_Configuration__c/fields/Start_Date__c.field-meta.xml

Salesforce metadata for Product_Sales_Configuration__c/fields/Start_Date__c.field-meta.xml. Label: Start Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 58d70dad04e0701992941b3a2f75c901d2bd460191e5c2936cbdd912059d1793

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Start_Date__c</fullName><label>Start Date</label><required>true</required><type>Date</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Start_Date__c</fullName><label>Start Date</label><required>true</required><type>Date</type>.

force-app/main/default/objects/Product_Sales_Configuration__c/fields/Target_Quantity__c.field-meta.xml

Salesforce metadata for Product_Sales_Configuration__c/fields/Target_Quantity__c.field-meta.xml. Label: Target Quantity. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 0efd0476bcecccdef64b685acd692abe958ec7ed40823a4a2120d5a87d57aa20

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Target_Quantity__c</fullName><label>Target Quantity</label><precision>18</precision><scale>0</scale><type>Number</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Target_Quantity__c</fullName><label>Target Quantity</label><precision>18</precision><scale>0</scale><type>Number</type>.

force-app/main/default/objects/Product_Sales_Configuration__c/listViews/All_Product_Sales_Configurations.listView-meta.xml

Salesforce metadata for Product_Sales_Configuration__c/listViews/All_Product_Sales_Configurations.listView-meta.xml. Label: All Product Sales Configurations. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

16 numbered source lines | SHA-256 192898aaa983a005b8cbb68d40c78aec3d88d0a81e50ab581538c93e9cd64c12

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Product_Sales_Configurations</fullName>`	Sets API identifier used by metadata deployment and code references to All_Product_Sales_Configurations.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Product__c</columns>`	Sets columns in the enclosing configuration to Product__c.
6	`    <columns>Configuration_Type__c</columns>`	Sets columns in the enclosing configuration to Configuration_Type__c.
7	`    <columns>Minimum_Quantity__c</columns>`	Sets columns in the enclosing configuration to Minimum_Quantity__c.
8	`    <columns>Target_Quantity__c</columns>`	Sets columns in the enclosing configuration to Target_Quantity__c.
9	`    <columns>Geography__c</columns>`	Sets columns in the enclosing configuration to Geography__c.
10	`    <columns>Channel__c</columns>`	Sets columns in the enclosing configuration to Channel__c.
11	`    <columns>Start_Date__c</columns>`	Sets columns in the enclosing configuration to Start_Date__c.
12	`    <columns>End_Date__c</columns>`	Sets columns in the enclosing configuration to End_Date__c.
13	`    <columns>Active__c</columns>`	Sets columns in the enclosing configuration to Active__c.
14	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
15	`    <label>All Product Sales Configurations</label>`	Sets human-readable Salesforce UI label to All Product Sales Configurations.
16	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Product__c/Product__c.object-meta.xml

Salesforce metadata for Product__c/Product__c.object-meta.xml. Label: Product. Type: Default. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

166 numbered source lines | SHA-256 e56958ac518c4b5f1ac961c34499295d75ada62b050e723792bb108495f21886

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
4	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
5	`        <type>Default</type>`	Sets field/storage type to Default.
6	`    </actionOverrides>`	Closes the actionOverrides configuration block.
7	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
8	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
9	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
10	`        <type>Default</type>`	Sets field/storage type to Default.
11	`    </actionOverrides>`	Closes the actionOverrides configuration block.
12	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
13	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
14	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
15	`        <type>Default</type>`	Sets field/storage type to Default.
16	`    </actionOverrides>`	Closes the actionOverrides configuration block.
17	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
18	`        <actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.

Line	Source code	Explanation / reading note
19	`<type>Default</type>`	Sets field/storage type to Default.
20	`</actionOverrides>`	Closes the actionOverrides configuration block.
21	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
22	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
23	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
24	`<type>Default</type>`	Sets field/storage type to Default.
25	`</actionOverrides>`	Closes the actionOverrides configuration block.
26	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
27	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
28	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
29	`<type>Default</type>`	Sets field/storage type to Default.
30	`</actionOverrides>`	Closes the actionOverrides configuration block.
31	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
32	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
33	`<type>Default</type>`	Sets field/storage type to Default.
34	`</actionOverrides>`	Closes the actionOverrides configuration block.
35	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
36	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
37	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
38	`<type>Default</type>`	Sets field/storage type to Default.
39	`</actionOverrides>`	Closes the actionOverrides configuration block.
40	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.

Line	Source code	Explanation / reading note
41	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
42	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
43	`<type>Default</type>`	Sets field/storage type to Default.
44	`</actionOverrides>`	Closes the actionOverrides configuration block.
45	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
46	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
47	`<type>Default</type>`	Sets field/storage type to Default.
48	`</actionOverrides>`	Closes the actionOverrides configuration block.
49	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
50	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
51	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
52	`<type>Default</type>`	Sets field/storage type to Default.
53	`</actionOverrides>`	Closes the actionOverrides configuration block.
54	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
55	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
56	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
57	`<type>Default</type>`	Sets field/storage type to Default.
58	`</actionOverrides>`	Closes the actionOverrides configuration block.
59	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
60	`<actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
61	`<type>Default</type>`	Sets field/storage type to Default.
62	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
63	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
64	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
65	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
66	`        <type>Default</type>`	Sets field/storage type to Default.
67	`    </actionOverrides>`	Closes the actionOverrides configuration block.
68	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
69	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
70	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
71	`        <type>Default</type>`	Sets field/storage type to Default.
72	`    </actionOverrides>`	Closes the actionOverrides configuration block.
73	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
74	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
75	`        <type>Default</type>`	Sets field/storage type to Default.
76	`    </actionOverrides>`	Closes the actionOverrides configuration block.
77	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
78	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
79	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
80	`        <type>Default</type>`	Sets field/storage type to Default.
81	`    </actionOverrides>`	Closes the actionOverrides configuration block.
82	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
83	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
84	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.

Line	Source code	Explanation / reading note
85	`<type>Default</type>`	Sets field/storage type to Default.
86	`</actionOverrides>`	Closes the actionOverrides configuration block.
87	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
88	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
89	`<type>Default</type>`	Sets field/storage type to Default.
90	`</actionOverrides>`	Closes the actionOverrides configuration block.
91	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
92	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
93	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
94	`<type>Default</type>`	Sets field/storage type to Default.
95	`</actionOverrides>`	Closes the actionOverrides configuration block.
96	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
97	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
98	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
99	`<type>Default</type>`	Sets field/storage type to Default.
100	`</actionOverrides>`	Closes the actionOverrides configuration block.
101	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
102	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
103	`<type>Default</type>`	Sets field/storage type to Default.
104	`</actionOverrides>`	Closes the actionOverrides configuration block.
105	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
106	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.

Line	Source code	Explanation / reading note
107	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
108	`        <type>Default</type>`	Sets field/storage type to Default.
109	`    </actionOverrides>`	Closes the actionOverrides configuration block.
110	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
111	`        <actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
112	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
113	`        <type>Default</type>`	Sets field/storage type to Default.
114	`    </actionOverrides>`	Closes the actionOverrides configuration block.
115	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
116	`        <actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
117	`        <type>Default</type>`	Sets field/storage type to Default.
118	`    </actionOverrides>`	Closes the actionOverrides configuration block.
119	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
120	`        <actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
121	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
122	`        <type>Default</type>`	Sets field/storage type to Default.
123	`    </actionOverrides>`	Closes the actionOverrides configuration block.
124	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
125	`        <actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
126	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
127	`        <type>Default</type>`	Sets field/storage type to Default.
128	`    </actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
129	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
130	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
131	`<type>Default</type>`	Sets field/storage type to Default.
132	`</actionOverrides>`	Closes the actionOverrides configuration block.
133	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
134	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
135	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
136	`<type>Default</type>`	Sets field/storage type to Default.
137	`</actionOverrides>`	Closes the actionOverrides configuration block.
138	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
139	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
140	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
141	`<type>Default</type>`	Sets field/storage type to Default.
142	`</actionOverrides>`	Closes the actionOverrides configuration block.
143	`<allowInChatterGroups>false</allowInChatterGroups>`	Sets allow In Chatter Groups in the enclosing configuration to false.
144	`<compactLayoutAssignment>SYSTEM</compactLayoutAssignment>`	Sets compact Layout Assignment in the enclosing configuration to SYSTEM.
145	`<deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
146	`<description>Product master used for mobile order capture and unit conversion.</description>`	Sets description in the enclosing configuration to Product master used for mobile order capture and unit conversion..
147	`<enableActivities>true</enableActivities>`	Sets enable Activities in the enclosing configuration to true.
148	`<enableBulkApi>true</enableBulkApi>`	Sets enable Bulk Api in the enclosing configuration to true.
149	`<enableFeeds>false</enableFeeds>`	Sets enable Feeds in the enclosing configuration to false.

Line	Source code	Explanation / reading note
150	`    <enableHistory>false</enableHistory>`	Sets enable History in the enclosing configuration to false.
151	`    <enableLicensing>false</enableLicensing>`	Sets enable Licensing in the enclosing configuration to false.
152	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
153	`    <enableSearch>false</enableSearch>`	Sets enable Search in the enclosing configuration to false.
154	`    <enableSharing>true</enableSharing>`	Sets enable Sharing in the enclosing configuration to true.
155	`    <enableStreamingApi>true</enableStreamingApi>`	Sets enable Streaming Api in the enclosing configuration to true.
156	`    <externalSharingModel>Private</externalSharingModel>`	Sets external Sharing Model in the enclosing configuration to Private.
157	`    <label>Product</label>`	Sets human-readable Salesforce UI label to Product.
158	`    <nameField>`	Opens the nameField block; child elements specify its configuration.
159	`        <label>Product Name</label>`	Sets human-readable Salesforce UI label to Product Name.
160	`        <type>Text</type>`	Sets field/storage type to Text.
161	`    </nameField>`	Closes the nameField configuration block.
162	`    <pluralLabel>Products</pluralLabel>`	Sets plural Label in the enclosing configuration to Products.
163	`    <searchLayouts></searchLayouts>`	Sets search Layouts in the enclosing configuration to .
164	`    <sharingModel>ReadWrite</sharingModel>`	Sets record sharing baseline to ReadWrite.
165	`    <visibility>Public</visibility>`	Sets visibility in the enclosing configuration to Public.
166	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Product__c/fields/Active__c.field-meta.xml

Salesforce metadata for Product__c/fields/Active__c.field-meta.xml. Label: Active. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 060f7b862ff091ad95099edea7943558e1cc28cb467ce0bc808fe410c0617d35

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Active__c</fullName>`	Sets API identifier used by metadata deployment and code references to Active__c.
4	`    <defaultValue>true</defaultValue>`	Sets initial value expression to true.
5	`    <label>Active</label>`	Sets human-readable Salesforce UI label to Active.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Checkbox</type>`	Sets field/storage type to Checkbox.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Available_Stock__c.field-meta.xml

Salesforce metadata for Product__c/fields/Available_Stock__c.field-meta.xml. Label: Available Stock (Pieces). Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 d0320cea3e4c743d177ba4b7e697c0339748fdf81abbaf29d61c29ea050febdb

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Available_Stock__c</fullName>`	Sets API identifier used by metadata deployment and code references to Available_Stock__c.
4	`    <defaultValue>0</defaultValue>`	Sets initial value expression to 0.
5	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
6	`    <label>Available Stock (Pieces)</label>`	Sets human-readable Salesforce UI label to Available Stock (Pieces).
7	`    <precision>16</precision>`	Sets maximum numeric precision to 16.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <scale>0</scale>`	Sets decimal places to 0.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Batch_Number__c.field-meta.xml

Salesforce metadata for Product__c/fields/Batch_Number__c.field-meta.xml. Label: Batch Number. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 84007d87df24d5a979298ba044fa82f86709d4dcc5e47932f15a9ae46d5deaee

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Batch_Number__c</fullName>`	Sets API identifier used by metadata deployment and code references to Batch_Number__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Batch Number</label>`	Sets human-readable Salesforce UI label to Batch Number.
6	`    <length>40</length>`	Sets maximum text length to 40.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Box_Conversion_Pieces__c.field-meta.xml

Salesforce metadata for Product__c/fields/Box_Conversion_Pieces__c.field-meta.xml. Label: Pieces From Box Conversion. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 f03e3b52773709b1b56ea7755b97decb3590f2f5be1d2bd3df9e185d43de85c3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Box_Conversion_Pieces__c</fullName>`	Sets API identifier used by metadata deployment and code references to Box_Conversion_Pieces__c.
4	`    <description>Pieces From Box Conversion. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce.</description>`	Sets description in the enclosing configuration to Pieces From Box Conversion. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Calculated in Salesforce..
5	`    <formula>Boxes_Per_Case__c * Pieces_Per_Box__c</formula>`	Sets formula expression evaluated by Salesforce to Boxes_Per_Case__c * Pieces_Per_Box__c.
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Pieces From Box Conversion</label>`	Sets human-readable Salesforce UI label to Pieces From Box Conversion.
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <scale>0</scale>`	Sets decimal places to 0.
10	`    <type>Number</type>`	Sets field/storage type to Number.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Boxes_Per_Case__c.field-meta.xml

Salesforce metadata for Product__c/fields/Boxes_Per_Case__c.field-meta.xml. Label: Boxes Per Case. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 d1e30917c8498730683f72c714e08ac71c51e8518f321dc02dab642ab2ec5f7d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Boxes_Per_Case__c</fullName>`	Sets API identifier used by metadata deployment and code references to Boxes_Per_Case__c.
4	`    <description>Boxes Per Case. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Boxes Per Case. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Boxes Per Case</label>`	Sets human-readable Salesforce UI label to Boxes Per Case.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Brand_Alias__c.field-meta.xml

Salesforce metadata for Product__c/fields/Brand_Alias__c.field-meta.xml. Label: Brand Alias. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 d1abc5dd76d9f01e6779d35874ea1fc8b64f7e845823e214d7e32aeacd0f2f12

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Brand_Alias__c</fullName>`	Sets API identifier used by metadata deployment and code references to Brand_Alias__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Brand Alias</label>`	Sets human-readable Salesforce UI label to Brand Alias.
6	`    <length>100</length>`	Sets maximum text length to 100.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Brand__c.field-meta.xml

Salesforce metadata for Product__c/fields/Brand__c.field-meta.xml. Label: Brand. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 b06cc9724df7772f812603bd15015fba9be3f6db7883e1eedae54810a6f6ab48

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Brand__c</fullName>`	Sets API identifier used by metadata deployment and code references to Brand__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Brand</label>`	Sets human-readable Salesforce UI label to Brand.
6	`    <length>80</length>`	Sets maximum text length to 80.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/DMS_Case_Price__c.field-meta.xml

Salesforce metadata for Product__c/fields/DMS_Case_Price__c.field-meta.xml. Label: Primary Case Price. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 be3ca3d5c6ff44ebb56543ad081290290c29f93b87c824851b7d23b100e17d7c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>DMS_Case_Price__c</fullName><label>Primary Case Price</label><precision>18</precision><scale>2</scale><type>Currency</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>DMS_Case_Price__c</fullName><label>Primary Case Price</label><precision>18</precision><scale>2</scale><type>Currency</type>.

force-app/main/default/objects/Product__c/fields/Expiry_Date__c.field-meta.xml

Salesforce metadata for Product__c/fields/Expiry_Date__c.field-meta.xml. Label: Expiry Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 0ab309bdf0ac8c14ab07176953083d4a2108f06ce3b51efd0cb76ebce9c32e67

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Expiry_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Expiry_Date__c.
4	`    <label>Expiry Date</label>`	Sets human-readable Salesforce UI label to Expiry Date.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Flavor__c.field-meta.xml

Salesforce metadata for Product__c/fields/Flavor__c.field-meta.xml. Label: Flavor. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 28774c26db48396266c956da9a3aa3ba1f694ed945ec2aa933149032e125a749

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Flavor__c</fullName>`	Sets API identifier used by metadata deployment and code references to Flavor__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Flavor</label>`	Sets human-readable Salesforce UI label to Flavor.
6	`    <length>80</length>`	Sets maximum text length to 80.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/GST_Percent__c.field-meta.xml

Salesforce metadata for Product__c/fields/GST_Percent__c.field-meta.xml. Label: GST Percent. Type: Percent. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 0c41443ddd27b3bddf32dbc1454fabefc5b99f34d097875c71ec59d0767dbd31

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>GST_Percent__c</fullName>`	Sets API identifier used by metadata deployment and code references to GST_Percent__c.
4	`    <defaultValue>0</defaultValue>`	Sets initial value expression to 0.
5	`    <label>GST Percent</label>`	Sets human-readable Salesforce UI label to GST Percent.
6	`    <precision>5</precision>`	Sets maximum numeric precision to 5.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>2</scale>`	Sets decimal places to 2.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Percent</type>`	Sets field/storage type to Percent.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Image_URL__c.field-meta.xml

Salesforce metadata for Product__c/fields/Image_URL__c.field-meta.xml. Label: Image URL. Type: Url. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 ce12521ed42fc6080fed8f257ccc9b5a0cd51ee61e5341655902350e97037c74

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Image_URL__c</fullName>`	Sets API identifier used by metadata deployment and code references to Image_URL__c.
4	`    <label>Image URL</label>`	Sets human-readable Salesforce UI label to Image URL.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Url</type>`	Sets field/storage type to Url.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/MRP__c.field-meta.xml

Salesforce metadata for Product__c/fields/MRP__c.field-meta.xml. Label: MRP. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 00f050f4e2add04af54de10de3662320fcd89a12f4ef78bbabc8c8c2a9c86eee

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>MRP__c</fullName>`	Sets API identifier used by metadata deployment and code references to MRP__c.
4	`    <label>MRP</label>`	Sets human-readable Salesforce UI label to MRP.
5	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
6	`    <required>true</required>`	Sets whether a value is mandatory to true.
7	`    <scale>2</scale>`	Sets decimal places to 2.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Currency</type>`	Sets field/storage type to Currency.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Manufacturing_Date__c.field-meta.xml

Salesforce metadata for Product__c/fields/Manufacturing_Date__c.field-meta.xml. Label: Manufacturing Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 2ed3c72804ab17a78030e8d7936dd744632938b61d0061c57ccdc3c949fec045

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Manufacturing_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Manufacturing_Date__c.
4	`    <label>Manufacturing Date</label>`	Sets human-readable Salesforce UI label to Manufacturing Date.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Package_Type__c.field-meta.xml

Salesforce metadata for Product__c/fields/Package_Type__c.field-meta.xml. Label: Package Type. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

34 numbered source lines | SHA-256 e191192741b10204c04d4f9d66a8c94e9d2411ae51abfcd99f82b442e6ec0f8b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Package_Type__c</fullName>`	Sets API identifier used by metadata deployment and code references to Package_Type__c.
4	`    <label>Package Type</label>`	Sets human-readable Salesforce UI label to Package Type.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value>`	Opens the value block; child elements specify its configuration.
13	`                <fullName>Packet</fullName>`	Sets API identifier used by metadata deployment and code references to Packet.
14	`                <default>true</default>`	Sets whether this option is the default to true.
15	`                <label>Packet</label>`	Sets human-readable Salesforce UI label to Packet.
16	`            </value>`	Closes the value configuration block.
17	`            <value>`	Opens the value block; child elements specify its configuration.
18	`                <fullName>Box</fullName>`	Sets API identifier used by metadata deployment and code references to Box.

Line	Source code	Explanation / reading note
19	`<default>false</default>`	Sets whether this option is the default to false.
20	`<label>Box</label>`	Sets human-readable Salesforce UI label to Box.
21	`</value>`	Closes the value configuration block.
22	`<value>`	Opens the value block; child elements specify its configuration.
23	`<fullName>Case</fullName>`	Sets API identifier used by metadata deployment and code references to Case.
24	`<default>false</default>`	Sets whether this option is the default to false.
25	`<label>Case</label>`	Sets human-readable Salesforce UI label to Case.
26	`</value>`	Closes the value configuration block.
27	`<value>`	Opens the value block; child elements specify its configuration.
28	`<fullName>Piece</fullName>`	Sets API identifier used by metadata deployment and code references to Piece.
29	`<default>false</default>`	Sets whether this option is the default to false.
30	`<label>Piece</label>`	Sets human-readable Salesforce UI label to Piece.
31	`</value>`	Closes the value configuration block.
32	`</valueSetDefinition>`	Closes the valueSetDefinition configuration block.
33	`</valueSet>`	Closes the valueSet configuration block.
34	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Pieces_Per_Box__c.field-meta.xml

Salesforce metadata for Product__c/fields/Pieces_Per_Box__c.field-meta.xml. Label: Pieces Per Box. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 cafaad7aac3d31ffb910251e2cb87e85352c1ef043a82fef926d06a2ebf34d01

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Pieces_Per_Box__c</fullName>`	Sets API identifier used by metadata deployment and code references to Pieces_Per_Box__c.
4	`    <description>Pieces Per Box. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Pieces Per Box. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Pieces Per Box</label>`	Sets human-readable Salesforce UI label to Pieces Per Box.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Product_Code__c.field-meta.xml

Salesforce metadata for Product__c/fields/Product_Code__c.field-meta.xml. Label: Product Code. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 daa19fbc94847cde150d2adcf79569b40868f4ff12547a48ca549a12a45ea966

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Product_Code__c</fullName>`	Sets API identifier used by metadata deployment and code references to Product_Code__c.
4	`    <caseSensitive>false</caseSensitive>`	Sets case Sensitive in the enclosing configuration to false.
5	`    <externalId>true</externalId>`	Sets whether the field is eligible for external-key matching to true.
6	`    <label>Product Code</label>`	Sets human-readable Salesforce UI label to Product Code.
7	`    <length>40</length>`	Sets maximum text length to 40.
8	`    <required>true</required>`	Sets whether a value is mandatory to true.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Text</type>`	Sets field/storage type to Text.
11	`    <unique>true</unique>`	Sets whether duplicate stored values are rejected to true.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Retailer_Base_Price__c.field-meta.xml

Salesforce metadata for Product__c/fields/Retailer_Base_Price__c.field-meta.xml. Label: Retailer Base Price. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 571f39160cffd05c61b31ad6af98d4dbfd746187ce3a5d70bc356261de51ff2d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Retailer_Base_Price__c</fullName>`	Sets API identifier used by metadata deployment and code references to Retailer_Base_Price__c.
4	`    <label>Retailer Base Price</label>`	Sets human-readable Salesforce UI label to Retailer Base Price.
5	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
6	`    <required>true</required>`	Sets whether a value is mandatory to true.
7	`    <scale>2</scale>`	Sets decimal places to 2.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Currency</type>`	Sets field/storage type to Currency.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Returnable__c.field-meta.xml

Salesforce metadata for Product__c/fields/Returnable__c.field-meta.xml. Label: Returnable. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 d658b9613f487d8add41f3a9912acb7489d9022925e2862a8006932967aa73a9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Returnable__c</fullName>`	Sets API identifier used by metadata deployment and code references to Returnable__c.
4	`    <defaultValue>false</defaultValue>`	Sets initial value expression to false.
5	`    <label>Returnable</label>`	Sets human-readable Salesforce UI label to Returnable.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Checkbox</type>`	Sets field/storage type to Checkbox.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Sellable__c.field-meta.xml

Salesforce metadata for Product__c/fields/Sellable__c.field-meta.xml. Label: Sellable. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 5f205e60899dba4a17de41b692bbd65bb27437ded3326d5cd5b33761f142f2dc

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Sellable__c</fullName>`	Sets API identifier used by metadata deployment and code references to Sellable__c.
4	`    <defaultValue>true</defaultValue>`	Sets initial value expression to true.
5	`    <label>Sellable</label>`	Sets human-readable Salesforce UI label to Sellable.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Checkbox</type>`	Sets field/storage type to Checkbox.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Selling_Price__c.field-meta.xml

Salesforce metadata for Product__c/fields/Selling_Price__c.field-meta.xml. Label: Selling Price Per Piece. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 036b958722499c2a79101bfe504ca187cc4c491cb259e682be43b553f8be305b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Selling_Price__c</fullName>`	Sets API identifier used by metadata deployment and code references to Selling_Price__c.
4	`    <label>Selling Price Per Piece</label>`	Sets human-readable Salesforce UI label to Selling Price Per Piece.
5	`    <precision>16</precision>`	Sets maximum numeric precision to 16.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <scale>2</scale>`	Sets decimal places to 2.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Currency</type>`	Sets field/storage type to Currency.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Shelf_Life_Days__c.field-meta.xml

Salesforce metadata for Product__c/fields/Shelf_Life_Days__c.field-meta.xml. Label: Shelf Life (Days). Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

14 numbered source lines | SHA-256 3027bd1c1da1ad681c72566393ca780aaa6bc8cbed9fa1322e999793dc6e2f36

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Shelf_Life_Days__c</fullName>`	Sets API identifier used by metadata deployment and code references to Shelf_Life_Days__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <formula>Expiry_Date__c - Manufacturing_Date__c</formula>`	Sets formula expression evaluated by Salesforce to Expiry_Date__c - Manufacturing_Date__c.
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Shelf Life (Days)</label>`	Sets human-readable Salesforce UI label to Shelf Life (Days).
8	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <scale>0</scale>`	Sets decimal places to 0.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Number</type>`	Sets field/storage type to Number.
13	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
14	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Sub_Brand__c.field-meta.xml

Salesforce metadata for Product__c/fields/Sub_Brand__c.field-meta.xml. Label: Sub Brand. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 7cc71c92f3acdde85f1a062586144c53edf6b9c8d26d913e6ed38dd49831a0c5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Sub_Brand__c</fullName>`	Sets API identifier used by metadata deployment and code references to Sub_Brand__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Sub Brand</label>`	Sets human-readable Salesforce UI label to Sub Brand.
6	`    <length>100</length>`	Sets maximum text length to 100.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Units_Per_Case__c.field-meta.xml

Salesforce metadata for Product__c/fields/Units_Per_Case__c.field-meta.xml. Label: Pieces Per Case. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 fa139db3ac09d286f6430d899aaa2cd3d66575ecdba4558b4d11557669b407a8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Units_Per_Case__c</fullName>`	Sets API identifier used by metadata deployment and code references to Units_Per_Case__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Pieces Per Case</label>`	Sets human-readable Salesforce UI label to Pieces Per Case.
6	`    <precision>8</precision>`	Sets maximum numeric precision to 8.
7	`    <required>true</required>`	Sets whether a value is mandatory to true.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Number</type>`	Sets field/storage type to Number.
11	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/fields/Variant__c.field-meta.xml

Salesforce metadata for Product__c/fields/Variant__c.field-meta.xml. Label: Variant. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 21c88d7127a2f397261f1c4f078c9cc5586fb4795f351da4de506d89117e5a7a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Variant__c</fullName>`	Sets API identifier used by metadata deployment and code references to Variant__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Variant</label>`	Sets human-readable Salesforce UI label to Variant.
6	`    <length>80</length>`	Sets maximum text length to 80.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Product__c/listViews/All_Products.listView-meta.xml

Salesforce metadata for Product__c/listViews/All_Products.listView-meta.xml. Label: All Products. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 a9929b571b5b09c0976580bed218198f33b53e90048858cc8ae29a0d7fc48b5a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Products</fullName>`	Sets API identifier used by metadata deployment and code references to All_Products.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
6	`    <label>All Products</label>`	Sets human-readable Salesforce UI label to All Products.
7	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Retailer__c/Retailer__c.object-meta.xml

Salesforce metadata for Retailer__c/Retailer__c.object-meta.xml. Label: Outlet. Type: Default. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

167 numbered source lines | SHA-256 a47c0d5283949862618ffd4ed2b592700d4afbcb9fa133e29b4417de1769df08

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
4	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
5	`        <type>Default</type>`	Sets field/storage type to Default.
6	`    </actionOverrides>`	Closes the actionOverrides configuration block.
7	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
8	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
9	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
10	`        <type>Default</type>`	Sets field/storage type to Default.
11	`    </actionOverrides>`	Closes the actionOverrides configuration block.
12	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
13	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
14	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
15	`        <type>Default</type>`	Sets field/storage type to Default.
16	`    </actionOverrides>`	Closes the actionOverrides configuration block.
17	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
18	`        <actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.

Line	Source code	Explanation / reading note
19	`<type>Default</type>`	Sets field/storage type to Default.
20	`</actionOverrides>`	Closes the actionOverrides configuration block.
21	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
22	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
23	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
24	`<type>Default</type>`	Sets field/storage type to Default.
25	`</actionOverrides>`	Closes the actionOverrides configuration block.
26	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
27	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
28	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
29	`<type>Default</type>`	Sets field/storage type to Default.
30	`</actionOverrides>`	Closes the actionOverrides configuration block.
31	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
32	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
33	`<type>Default</type>`	Sets field/storage type to Default.
34	`</actionOverrides>`	Closes the actionOverrides configuration block.
35	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
36	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
37	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
38	`<type>Default</type>`	Sets field/storage type to Default.
39	`</actionOverrides>`	Closes the actionOverrides configuration block.
40	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.

Line	Source code	Explanation / reading note
41	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
42	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
43	`<type>Default</type>`	Sets field/storage type to Default.
44	`</actionOverrides>`	Closes the actionOverrides configuration block.
45	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
46	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
47	`<type>Default</type>`	Sets field/storage type to Default.
48	`</actionOverrides>`	Closes the actionOverrides configuration block.
49	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
50	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
51	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
52	`<type>Default</type>`	Sets field/storage type to Default.
53	`</actionOverrides>`	Closes the actionOverrides configuration block.
54	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
55	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
56	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
57	`<type>Default</type>`	Sets field/storage type to Default.
58	`</actionOverrides>`	Closes the actionOverrides configuration block.
59	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
60	`<actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
61	`<type>Default</type>`	Sets field/storage type to Default.
62	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
63	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
64	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
65	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
66	`        <type>Default</type>`	Sets field/storage type to Default.
67	`    </actionOverrides>`	Closes the actionOverrides configuration block.
68	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
69	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
70	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
71	`        <type>Default</type>`	Sets field/storage type to Default.
72	`    </actionOverrides>`	Closes the actionOverrides configuration block.
73	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
74	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
75	`        <type>Default</type>`	Sets field/storage type to Default.
76	`    </actionOverrides>`	Closes the actionOverrides configuration block.
77	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
78	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
79	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
80	`        <type>Default</type>`	Sets field/storage type to Default.
81	`    </actionOverrides>`	Closes the actionOverrides configuration block.
82	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
83	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
84	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.

Line	Source code	Explanation / reading note
85	`<type>Default</type>`	Sets field/storage type to Default.
86	`</actionOverrides>`	Closes the actionOverrides configuration block.
87	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
88	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
89	`<type>Default</type>`	Sets field/storage type to Default.
90	`</actionOverrides>`	Closes the actionOverrides configuration block.
91	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
92	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
93	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
94	`<type>Default</type>`	Sets field/storage type to Default.
95	`</actionOverrides>`	Closes the actionOverrides configuration block.
96	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
97	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
98	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
99	`<type>Default</type>`	Sets field/storage type to Default.
100	`</actionOverrides>`	Closes the actionOverrides configuration block.
101	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
102	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
103	`<type>Default</type>`	Sets field/storage type to Default.
104	`</actionOverrides>`	Closes the actionOverrides configuration block.
105	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
106	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.

Line	Source code	Explanation / reading note
107	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
108	`<type>Default</type>`	Sets field/storage type to Default.
109	`</actionOverrides>`	Closes the actionOverrides configuration block.
110	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
111	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
112	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
113	`<type>Default</type>`	Sets field/storage type to Default.
114	`</actionOverrides>`	Closes the actionOverrides configuration block.
115	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
116	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
117	`<type>Default</type>`	Sets field/storage type to Default.
118	`</actionOverrides>`	Closes the actionOverrides configuration block.
119	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
120	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
121	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
122	`<type>Default</type>`	Sets field/storage type to Default.
123	`</actionOverrides>`	Closes the actionOverrides configuration block.
124	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
125	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
126	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
127	`<type>Default</type>`	Sets field/storage type to Default.
128	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
129	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
130	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
131	`<type>Default</type>`	Sets field/storage type to Default.
132	`</actionOverrides>`	Closes the actionOverrides configuration block.
133	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
134	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
135	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
136	`<type>Default</type>`	Sets field/storage type to Default.
137	`</actionOverrides>`	Closes the actionOverrides configuration block.
138	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
139	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
140	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
141	`<type>Default</type>`	Sets field/storage type to Default.
142	`</actionOverrides>`	Closes the actionOverrides configuration block.
143	`<allowInChatterGroups>false</allowInChatterGroups>`	Sets allow In Chatter Groups in the enclosing configuration to false.
144	`<compactLayoutAssignment>SYSTEM</compactLayoutAssignment>`	Sets compact Layout Assignment in the enclosing configuration to SYSTEM.
145	`<deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
146	`<description>Retail outlet visited by a field sales representative.</description>`	Sets description in the enclosing configuration to Retail outlet visited by a field sales representative..
147	`<enableActivities>false</enableActivities>`	Sets enable Activities in the enclosing configuration to false.
148	`<enableBulkApi>true</enableBulkApi>`	Sets enable Bulk Api in the enclosing configuration to true.
149	`<enableFeeds>false</enableFeeds>`	Sets enable Feeds in the enclosing configuration to false.

Line	Source code	Explanation / reading note
150	`    <enableHistory>true</enableHistory>`	Sets enable History in the enclosing configuration to true.
151	`    <enableLicensing>false</enableLicensing>`	Sets enable Licensing in the enclosing configuration to false.
152	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
153	`    <enableSearch>true</enableSearch>`	Sets enable Search in the enclosing configuration to true.
154	`    <enableSharing>true</enableSharing>`	Sets enable Sharing in the enclosing configuration to true.
155	`    <enableStreamingApi>true</enableStreamingApi>`	Sets enable Streaming Api in the enclosing configuration to true.
156	`    <externalSharingModel>Private</externalSharingModel>`	Sets external Sharing Model in the enclosing configuration to Private.
157	`    <label>Outlet</label>`	Sets human-readable Salesforce UI label to Outlet.
158	`    <nameField>`	Opens the nameField block; child elements specify its configuration.
159	`        <label>Retailer Name</label>`	Sets human-readable Salesforce UI label to Retailer Name.
160	`        <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
161	`        <type>Text</type>`	Sets field/storage type to Text.
162	`    </nameField>`	Closes the nameField configuration block.
163	`    <pluralLabel>Outlets</pluralLabel>`	Sets plural Label in the enclosing configuration to Outlets.
164	`    <searchLayouts></searchLayouts>`	Sets search Layouts in the enclosing configuration to .
165	`    <sharingModel>ReadWrite</sharingModel>`	Sets record sharing baseline to ReadWrite.
166	`    <visibility>Public</visibility>`	Sets visibility in the enclosing configuration to Public.
167	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Retailer__c/fields/Aadhaar_Number__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/Aadhaar_Number__c.field-meta.xml. Label: Aadhaar Number. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 dd20c42ad84f1bdec276904e99733675627eb95cc3e5279206b6cb80350aa322

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Aadhaar_Number__c</fullName>`	Sets API identifier used by metadata deployment and code references to Aadhaar_Number__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Aadhaar Number</label>`	Sets human-readable Salesforce UI label to Aadhaar Number.
6	`    <length>12</length>`	Sets maximum text length to 12.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Text</type>`	Sets field/storage type to Text.
11	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/fields/Active__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/Active__c.field-meta.xml. Label: Active. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 d51fccf84f7c172d6677ceaca3da42a7c4fd9999169cd005749aaf59761bb11f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Active__c</fullName>`	Sets API identifier used by metadata deployment and code references to Active__c.
4	`    <defaultValue>true</defaultValue>`	Sets initial value expression to true.
5	`    <label>Active</label>`	Sets human-readable Salesforce UI label to Active.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>Checkbox</type>`	Sets field/storage type to Checkbox.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/fields/Address__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/Address__c.field-meta.xml. Label: Address. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 0e5f6eaed85a8ae04eac0ffb9f19d4120390e65dbf4a45fef6c33a62a5893202

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Address__c</fullName>`	Sets API identifier used by metadata deployment and code references to Address__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Address</label>`	Sets human-readable Salesforce UI label to Address.
6	`    <length>255</length>`	Sets maximum text length to 255.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Text</type>`	Sets field/storage type to Text.
11	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/fields/Beat__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/Beat__c.field-meta.xml. Label: Beat. Type: Lookup. Relationship target: Beat__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 d3f8e4d76e690887f8234df20f61e3dd327c89ec151f0c3336742e35cca0379c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Beat__c</fullName>`	Sets API identifier used by metadata deployment and code references to Beat__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <label>Beat</label>`	Sets human-readable Salesforce UI label to Beat.
6	`    <referenceTo>Beat__c</referenceTo>`	Sets object referenced by this relationship to Beat__c.
7	`    <relationshipLabel>Retailers</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Retailers.
8	`    <relationshipName>Retailers</relationshipName>`	Sets relationship API traversal name to Retailers.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/fields/Credit_Limit__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/Credit_Limit__c.field-meta.xml. Label: Credit Limit. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 e5623f92a0ce5dd1d38075a6f70251368877b2f940843e82e521780087b69b73

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Credit_Limit__c</fullName>`	Sets API identifier used by metadata deployment and code references to Credit_Limit__c.
4	`    <defaultValue>0</defaultValue>`	Sets initial value expression to 0.
5	`    <label>Credit Limit</label>`	Sets human-readable Salesforce UI label to Credit Limit.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>2</scale>`	Sets decimal places to 2.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Currency</type>`	Sets field/storage type to Currency.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/fields/DMS_Distributor__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/DMS_Distributor__c.field-meta.xml. Label: DMS Distributor. Type: Lookup. Relationship target: DMS_Distributor__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 fe6ad36e61bbb3015e6c5a6ff758a1a649e1dc9eaacb176e7a423f6789d9947d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>DMS_Distributor__c</fullName><label>DMS Distributor</label><deleteConstraint>Restrict</deleteConstraint><referenceTo>DMS_Distributor__c</referenceTo><relationshipLabel>Outlets</relationshipLabel><relationshipName>Outlets</relationshipName><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>DMS_Distributor__c</fullName><label>DMS Distributor</label><deleteConstraint>Restrict</deleteConstraint><referenceTo>DMS_Distributor__c</referenceTo><relationshipLabel>Outlets</relationshipL.

force-app/main/default/objects/Retailer__c/fields/Distributor__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/Distributor__c.field-meta.xml. Label: Sales Representative. Type: Lookup. Relationship target: Account. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 0ac6b59236904267b1dbf54db5b0b614ea3c34c24fdd22a5001bdabdc178c838

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Distributor__c</fullName>`	Sets API identifier used by metadata deployment and code references to Distributor__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Sales Representative</label>`	Sets human-readable Salesforce UI label to Sales Representative.
6	`    <referenceTo>Account</referenceTo>`	Sets object referenced by this relationship to Account.
7	`    <relationshipLabel>Sales Representative Outlets</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Sales Representative Outlets.
8	`    <relationshipName>Distributor_Outlets</relationshipName>`	Sets relationship API traversal name to Distributor_Outlets.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/fields/Email__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/Email__c.field-meta.xml. Label: Email. Type: Email. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 ab76313958c47d9d21c149ce095750cc55d2d6f69850b1fbd3d520315ae3904e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Email__c</fullName>`	Sets API identifier used by metadata deployment and code references to Email__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Email</label>`	Sets human-readable Salesforce UI label to Email.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Email</type>`	Sets field/storage type to Email.
10	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/fields/Geo_Location__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/Geo_Location__c.field-meta.xml. Label: Geolocation. Type: Location. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 d9b6706ebe23f540dc18466debfe4ab69bbc44af667ace4bae64563228d871a3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Geo_Location__c</fullName>`	Sets API identifier used by metadata deployment and code references to Geo_Location__c.
4	`    <displayLocationInDecimal>true</displayLocationInDecimal>`	Sets display Location In Decimal in the enclosing configuration to true.
5	`    <label>Geolocation</label>`	Sets human-readable Salesforce UI label to Geolocation.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <scale>6</scale>`	Sets decimal places to 6.
8	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Location</type>`	Sets field/storage type to Location.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/fields/Geography__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/Geography__c.field-meta.xml. Label: Geography. Type: Lookup. Relationship target: Geography__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 15fe14a8e7ceb43ec86c416b3b5b9c156d4b1c5de7a2dabaa968012e3090e016

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Geography__c</fullName>`	Sets API identifier used by metadata deployment and code references to Geography__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Geography</label>`	Sets human-readable Salesforce UI label to Geography.
6	`    <referenceTo>Geography__c</referenceTo>`	Sets object referenced by this relationship to Geography__c.
7	`    <relationshipLabel>Outlets</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Outlets.
8	`    <relationshipName>Outlets</relationshipName>`	Sets relationship API traversal name to Outlets.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/fields/Latitude__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/Latitude__c.field-meta.xml. Label: Latitude. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 45f149b6b5c7c17a1c3549133448cc1dc5a601a6cf8db7fb963f8a2009b59d0f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Latitude__c</fullName>`	Sets API identifier used by metadata deployment and code references to Latitude__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Latitude</label>`	Sets human-readable Salesforce UI label to Latitude.
6	`    <precision>10</precision>`	Sets maximum numeric precision to 10.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>6</scale>`	Sets decimal places to 6.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/fields/Longitude__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/Longitude__c.field-meta.xml. Label: Longitude. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 6accb642b3703220023a612f965639cb3d9b6c4927cd1e815c6897ad13532b75

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Longitude__c</fullName>`	Sets API identifier used by metadata deployment and code references to Longitude__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Longitude</label>`	Sets human-readable Salesforce UI label to Longitude.
6	`    <precision>10</precision>`	Sets maximum numeric precision to 10.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>6</scale>`	Sets decimal places to 6.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/fields/Minimum_Order_Value__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/Minimum_Order_Value__c.field-meta.xml. Label: Minimum Order Value. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 da67082c30fb30e41b3482ebc6be46930c3f5145feb20bc2c80fc7344824f7aa

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Minimum_Order_Value__c</fullName>`	Sets API identifier used by metadata deployment and code references to Minimum_Order_Value__c.
4	`    <defaultValue>0</defaultValue>`	Sets initial value expression to 0.
5	`    <label>Minimum Order Value</label>`	Sets human-readable Salesforce UI label to Minimum Order Value.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>2</scale>`	Sets decimal places to 2.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Currency</type>`	Sets field/storage type to Currency.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/fields/Outlet_Owner_Name__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/Outlet_Owner_Name__c.field-meta.xml. Label: Outlet Owner Name. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 355544ecaac88f962a306351d7dc5c99cf5247261f2e146e153342515095d0e8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Outlet_Owner_Name__c</fullName>`	Sets API identifier used by metadata deployment and code references to Outlet_Owner_Name__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Outlet Owner Name</label>`	Sets human-readable Salesforce UI label to Outlet Owner Name.
6	`    <length>100</length>`	Sets maximum text length to 100.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Text</type>`	Sets field/storage type to Text.
11	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/fields/Outlet_Type__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/Outlet_Type__c.field-meta.xml. Label: Outlet Type. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

40 numbered source lines | SHA-256 e2997c0e4ae77ea9c06400184cac014886321d1244a33ac79ab6b86332333aa1

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Outlet_Type__c</fullName>`	Sets API identifier used by metadata deployment and code references to Outlet_Type__c.
4	`    <label>Outlet Type</label>`	Sets human-readable Salesforce UI label to Outlet Type.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
9	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
10	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
11	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
12	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
13	`            <value>`	Opens the value block; child elements specify its configuration.
14	`                <fullName>Grocery</fullName>`	Sets API identifier used by metadata deployment and code references to Grocery.
15	`                <default>true</default>`	Sets whether this option is the default to true.
16	`                <label>Grocery</label>`	Sets human-readable Salesforce UI label to Grocery.
17	`            </value>`	Closes the value configuration block.
18	`            <value>`	Opens the value block; child elements specify its configuration.

Line	Source code	Explanation / reading note
19	`<fullName>Medical</fullName>`	Sets API identifier used by metadata deployment and code references to Medical.
20	`<default>false</default>`	Sets whether this option is the default to false.
21	`<label>Medical</label>`	Sets human-readable Salesforce UI label to Medical.
22	`</value>`	Closes the value configuration block.
23	`<value>`	Opens the value block; child elements specify its configuration.
24	`<fullName>Hardware</fullName>`	Sets API identifier used by metadata deployment and code references to Hardware.
25	`<default>false</default>`	Sets whether this option is the default to false.
26	`<label>Hardware</label>`	Sets human-readable Salesforce UI label to Hardware.
27	`</value>`	Closes the value configuration block.
28	`<value>`	Opens the value block; child elements specify its configuration.
29	`<fullName>Supermarket</fullName>`	Sets API identifier used by metadata deployment and code references to Supermarket.
30	`<default>false</default>`	Sets whether this option is the default to false.
31	`<label>Supermarket</label>`	Sets human-readable Salesforce UI label to Supermarket.
32	`</value>`	Closes the value configuration block.
33	`<value>`	Opens the value block; child elements specify its configuration.
34	`<fullName>Other</fullName>`	Sets API identifier used by metadata deployment and code references to Other.
35	`<default>false</default>`	Sets whether this option is the default to false.
36	`<label>Other</label>`	Sets human-readable Salesforce UI label to Other.
37	`</value>`	Closes the value configuration block.
38	`</valueSetDefinition>`	Closes the valueSetDefinition configuration block.
39	`</valueSet>`	Closes the valueSet configuration block.
40	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/fields/Outstanding_Amount__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/Outstanding_Amount__c.field-meta.xml. Label: Outstanding Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 98682afe08cd98c6c8b74e07437e828ec3873738d4a7caa3ae806da33b9cd91d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Outstanding_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Outstanding_Amount__c.
4	`    <defaultValue>0</defaultValue>`	Sets initial value expression to 0.
5	`    <label>Outstanding Amount</label>`	Sets human-readable Salesforce UI label to Outstanding Amount.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>2</scale>`	Sets decimal places to 2.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Currency</type>`	Sets field/storage type to Currency.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/fields/PAN_Number__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/PAN_Number__c.field-meta.xml. Label: PAN Number. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 b6ca8d1b50d4beda309c72d2cfe1870186f8dec88998723e30f9fca92c1d3dbd

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>PAN_Number__c</fullName>`	Sets API identifier used by metadata deployment and code references to PAN_Number__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>PAN Number</label>`	Sets human-readable Salesforce UI label to PAN Number.
6	`    <length>10</length>`	Sets maximum text length to 10.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Text</type>`	Sets field/storage type to Text.
11	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/fields/Phone__c.field-meta.xml

Salesforce metadata for Retailer__c/fields/Phone__c.field-meta.xml. Label: Phone. Type: Phone. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 9faa269ddb03e38d3f898f89e14ac982fdd6c74d411a58037a2d14433ae37990

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Phone__c</fullName>`	Sets API identifier used by metadata deployment and code references to Phone__c.
4	`    <label>Phone</label>`	Sets human-readable Salesforce UI label to Phone.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>Phone</type>`	Sets field/storage type to Phone.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Retailer__c/listViews/All_Outlets.listView-meta.xml

Salesforce metadata for Retailer__c/listViews/All_Outlets.listView-meta.xml. Label: All Outlets. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 e12f59c909ef026b3fc403f9594aa1a0cf1194207e981390be0340b804c2fd8e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Outlets</fullName>`	Sets API identifier used by metadata deployment and code references to All_Outlets.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Outlet_Owner_Name__c</columns>`	Sets columns in the enclosing configuration to Outlet_Owner_Name__c.
6	`    <columns>Phone__c</columns>`	Sets columns in the enclosing configuration to Phone__c.
7	`    <columns>Geography__c</columns>`	Sets columns in the enclosing configuration to Geography__c.
8	`    <columns>Beat__c</columns>`	Sets columns in the enclosing configuration to Beat__c.
9	`    <columns>Active__c</columns>`	Sets columns in the enclosing configuration to Active__c.
10	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
11	`    <label>All Outlets</label>`	Sets human-readable Salesforce UI label to All Outlets.
12	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Retailer__c/validationRules/Outlet_Aadhaar_Must_Be_12_Digits.validationRule-meta.xml

Salesforce metadata for Retailer__c/validationRules/Outlet_Aadhaar_Must_Be_12_Digits.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 509967577180f0eeae60d3f8e68865231212c39024255a55d27fa9265058a46f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Outlet_Aadhaar_Must_Be_12_Digits</fullName>`	Sets API identifier used by metadata deployment and code references to Outlet_Aadhaar_Must_Be_12_Digits.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(NOT(ISBLANK(Aadhaar_Number__c)), NOT(REGEX(Aadhaar_Number__c, "^[0-9]{12}$")))</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(Aadhaar_Number__c)), NOT(REGEX(Aadhaar_Number__c, "^[0-9]{12}$"))).
6	`    <errorDisplayField>Aadhaar_Number__c</errorDisplayField>`	Sets error Display Field in the enclosing configuration to Aadhaar_Number__c.
7	`    <errorMessage>Aadhaar number must contain exactly 12 digits.</errorMessage>`	Sets message displayed when the rule fails to Aadhaar number must contain exactly 12 digits..
8	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/Retailer__c/validationRules/Outlet_PAN_Must_Be_Valid.validationRule-meta.xml

Salesforce metadata for Retailer__c/validationRules/Outlet_PAN_Must_Be_Valid.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 5614292c652301b4033d50b5caf1be4e35c9bbc89970e135096bcdb5a9be2232

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Outlet_PAN_Must_Be_Valid</fullName>`	Sets API identifier used by metadata deployment and code references to Outlet_PAN_Must_Be_Valid.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(NOT(ISBLANK(PAN_Number__c)), NOT(REGEX(UPPER(PAN_Number__c), "^[A-Z]{5}[0-9]{4}[A-Z]$")))</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(PAN_Number__c)), NOT(REGEX(UPPER(PAN_Number__c), "^[A-Z]{5}[0-9]{4}[A-Z]$"))).
6	`    <errorDisplayField>PAN_Number__c</errorDisplayField>`	Sets error Display Field in the enclosing configuration to PAN_Number__c.
7	`    <errorMessage>PAN must use the standard format: five letters, four digits and one letter.</errorMessage>`	Sets message displayed when the rule fails to PAN must use the standard format: five letters, four digits and one letter..
8	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/Retailer__c/validationRules/Outlet_Phone_Must_Be_10_Digits.validationRule-meta.xml

Salesforce metadata for Retailer__c/validationRules/Outlet_Phone_Must_Be_10_Digits.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 f9c7ef7db04b88bad18810ffdbc90ccdea3986f77b633cb7fc02cab3b3a31eff

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ValidationRule block; child elements specify its configuration.
3	`    <fullName>Outlet_Phone_Must_Be_10_Digits</fullName>`	Sets API identifier used by metadata deployment and code references to Outlet_Phone_Must_Be_10_Digits.
4	`    <active>true</active>`	Sets whether the rule/component is enabled to true.
5	`    <errorConditionFormula>AND(NOT(ISBLANK(Phone__c)), NOT(REGEX(Phone__c, "^[0-9]{10}$")))</errorConditionFormula>`	Sets condition that makes this validation rule fail to AND(NOT(ISBLANK(Phone__c)), NOT(REGEX(Phone__c, "^[0-9]{10}$"))).
6	`    <errorDisplayField>Phone__c</errorDisplayField>`	Sets error Display Field in the enclosing configuration to Phone__c.
7	`    <errorMessage>Contact number must contain exactly 10 digits.</errorMessage>`	Sets message displayed when the rule fails to Contact number must contain exactly 10 digits..
8	`</ValidationRule>`	Closes the ValidationRule configuration block.

force-app/main/default/objects/SFA_Ticket__c/SFA_Ticket__c.object-meta.xml

Salesforce metadata for SFA_Ticket__c/SFA_Ticket__c.object-meta.xml. Label: SFA Ticket. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 93432504f3020accb49bf8bc02b6596c7acc5e856c598af2e759d6713c3daef9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus><description>Outlet issue or service request raised by a sales representative.</description>`	Opens the deploymentStatus block; child elements specify its configuration.
4	`    <enableActivities>true</enableActivities><enableHistory>true</enableHistory><enableReports>true</enableReports><enableSearch>true</enableSearch>`	Opens the enableActivities block; child elements specify its configuration.
5	`    <label>SFA Ticket</label><pluralLabel>SFA Tickets</pluralLabel><sharingModel>ReadWrite</sharingModel>`	Opens the label block; child elements specify its configuration.
6	`    <nameField><displayFormat>TKT-{00000}</displayFormat><label>Ticket Number</label><type>AutoNumber</type></nameField>`	Sets name Field in the enclosing configuration to <displayFormat>TKT-{00000}</displayFormat><label>Ticket Number</label><type>AutoNumber</type>.
7	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/SFA_Ticket__c/fields/Description__c.field-meta.xml

Salesforce metadata for SFA_Ticket__c/fields/Description__c.field-meta.xml. Label: Description. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 ca95d6fbd599b16f410db7506066c88ce32c40676fdf0ad07facf9d0e0ad8154

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Description__c</fullName><label>Description</label><length>32768</length><visibleLines>4</visibleLines><type>LongTextArea</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/SFA_Ticket__c/fields/Image_URL__c.field-meta.xml

Salesforce metadata for SFA_Ticket__c/fields/Image_URL__c.field-meta.xml. Label: Image URL. Type: Url. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 bfca5b1c1430057a15f5553839bb9564c85b0852d1859bfbd785982cc0841a36

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Image_URL__c</fullName><label>Image URL</label><type>Url</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/SFA_Ticket__c/fields/Mobile_Request_Key__c.field-meta.xml

Salesforce metadata for SFA_Ticket__c/fields/Mobile_Request_Key__c.field-meta.xml. Label: Mobile Request Key. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 b6b2d4cbefd91ed82aaf2e4d6e9fceb5bd820fb8c44d3ed95161c16674ea6025

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Mobile_Request_Key__c</fullName>`	Sets API identifier used by metadata deployment and code references to Mobile_Request_Key__c.
4	`    <caseSensitive>true</caseSensitive>`	Sets case Sensitive in the enclosing configuration to true.
5	`    <externalId>true</externalId>`	Sets whether the field is eligible for external-key matching to true.
6	`    <label>Mobile Request Key</label>`	Sets human-readable Salesforce UI label to Mobile Request Key.
7	`    <length>150</length>`	Sets maximum text length to 150.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>true</unique>`	Sets whether duplicate stored values are rejected to true.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/SFA_Ticket__c/fields/Outlet__c.field-meta.xml

Salesforce metadata for SFA_Ticket__c/fields/Outlet__c.field-meta.xml. Label: Outlet. Type: Lookup. Relationship target: Retailer__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 271f8c8ff52c97defa2f20dbb2b93b64fe0cbb2e8772aa0b3d7a7570275384ed

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Outlet__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Outlet</label><referenceTo>Retailer__c</referenceTo><relationshipLabel>SFA Tickets</relationshipLabel><relationshipName>SFA_Tickets</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/SFA_Ticket__c/fields/Status__c.field-meta.xml

Salesforce metadata for SFA_Ticket__c/fields/Status__c.field-meta.xml. Label: Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 afc4c9bcfe16f195a8dfe39e291f3d3f61e8efd39d7de59501c8239db385b164

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Status__c</fullName><label>Status</label><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Open</fullName><default>true</default><label>Open</label></value><value><fullName>In Progress</fullName><default>false</default><label>In Progress</label></value><value><fullName>Resolved</fullName><default>false</default><label>Resolved</label></value></valueSetDefinition></valueSet></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/SFA_Ticket__c/fields/Subject__c.field-meta.xml

Salesforce metadata for SFA_Ticket__c/fields/Subject__c.field-meta.xml. Label: Ticket Subject. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 006330db9a3c4f431dad98c165271fece96c91fbba3809e3aa1f86a868bfd772

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Subject__c</fullName><label>Ticket Subject</label><length>180</length><required>true</required><type>Text</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/SFA_Ticket__c/fields/Visit__c.field-meta.xml

Salesforce metadata for SFA_Ticket__c/fields/Visit__c.field-meta.xml. Label: Visit. Type: Lookup. Relationship target: Visit__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 73ead1afc13cc6bc3cbe38ed1602356af464585f6202a3640b7a9d820ee84034

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Visit__c</fullName><deleteConstraint>SetNull</deleteConstraint><label>Visit</label><referenceTo>Visit__c</referenceTo><relationshipLabel>SFA Tickets</relationshipLabel><relationshipName>SFA_Tickets</relationshipName><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/SFA_Ticket__c/listViews/All_SFA_Tickets.listView-meta.xml

Salesforce metadata for SFA_Ticket__c/listViews/All_SFA_Tickets.listView-meta.xml. Label: All SFA Tickets. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 c196317426042eb8b678c79fbdc17e62d49bf30fafe3ebe155e08f2c624c3ba9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><ListView xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>All_SFA_Tickets</fullName><columns>NAME</columns><columns>Subject__c</columns><columns>Status__c</columns><columns>Outlet__c</columns><filterScope>Everything</filterScope><label>All SFA Tickets</label></ListView>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Sales_Order__c/Sales_Order__c.object-meta.xml

Salesforce metadata for Sales_Order__c/Sales_Order__c.object-meta.xml. Label: Sales Order. Type: Default. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

166 numbered source lines | SHA-256 f241f39740d642f404272e3e9f108db0ad76c2def7f1d063d78545fdf6662004

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
4	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
5	`        <type>Default</type>`	Sets field/storage type to Default.
6	`    </actionOverrides>`	Closes the actionOverrides configuration block.
7	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
8	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
9	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
10	`        <type>Default</type>`	Sets field/storage type to Default.
11	`    </actionOverrides>`	Closes the actionOverrides configuration block.
12	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
13	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
14	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
15	`        <type>Default</type>`	Sets field/storage type to Default.
16	`    </actionOverrides>`	Closes the actionOverrides configuration block.
17	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
18	`        <actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.

Line	Source code	Explanation / reading note
19	`<type>Default</type>`	Sets field/storage type to Default.
20	`</actionOverrides>`	Closes the actionOverrides configuration block.
21	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
22	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
23	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
24	`<type>Default</type>`	Sets field/storage type to Default.
25	`</actionOverrides>`	Closes the actionOverrides configuration block.
26	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
27	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
28	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
29	`<type>Default</type>`	Sets field/storage type to Default.
30	`</actionOverrides>`	Closes the actionOverrides configuration block.
31	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
32	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
33	`<type>Default</type>`	Sets field/storage type to Default.
34	`</actionOverrides>`	Closes the actionOverrides configuration block.
35	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
36	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
37	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
38	`<type>Default</type>`	Sets field/storage type to Default.
39	`</actionOverrides>`	Closes the actionOverrides configuration block.
40	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.

Line	Source code	Explanation / reading note
41	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
42	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
43	`<type>Default</type>`	Sets field/storage type to Default.
44	`</actionOverrides>`	Closes the actionOverrides configuration block.
45	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
46	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
47	`<type>Default</type>`	Sets field/storage type to Default.
48	`</actionOverrides>`	Closes the actionOverrides configuration block.
49	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
50	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
51	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
52	`<type>Default</type>`	Sets field/storage type to Default.
53	`</actionOverrides>`	Closes the actionOverrides configuration block.
54	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
55	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
56	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
57	`<type>Default</type>`	Sets field/storage type to Default.
58	`</actionOverrides>`	Closes the actionOverrides configuration block.
59	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
60	`<actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
61	`<type>Default</type>`	Sets field/storage type to Default.
62	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
63	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
64	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
65	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
66	`        <type>Default</type>`	Sets field/storage type to Default.
67	`    </actionOverrides>`	Closes the actionOverrides configuration block.
68	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
69	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
70	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
71	`        <type>Default</type>`	Sets field/storage type to Default.
72	`    </actionOverrides>`	Closes the actionOverrides configuration block.
73	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
74	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
75	`        <type>Default</type>`	Sets field/storage type to Default.
76	`    </actionOverrides>`	Closes the actionOverrides configuration block.
77	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
78	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
79	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
80	`        <type>Default</type>`	Sets field/storage type to Default.
81	`    </actionOverrides>`	Closes the actionOverrides configuration block.
82	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
83	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
84	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.

Line	Source code	Explanation / reading note
85	`<type>Default</type>`	Sets field/storage type to Default.
86	`</actionOverrides>`	Closes the actionOverrides configuration block.
87	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
88	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
89	`<type>Default</type>`	Sets field/storage type to Default.
90	`</actionOverrides>`	Closes the actionOverrides configuration block.
91	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
92	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
93	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
94	`<type>Default</type>`	Sets field/storage type to Default.
95	`</actionOverrides>`	Closes the actionOverrides configuration block.
96	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
97	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
98	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
99	`<type>Default</type>`	Sets field/storage type to Default.
100	`</actionOverrides>`	Closes the actionOverrides configuration block.
101	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
102	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
103	`<type>Default</type>`	Sets field/storage type to Default.
104	`</actionOverrides>`	Closes the actionOverrides configuration block.
105	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
106	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.

Line	Source code	Explanation / reading note
107	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
108	`<type>Default</type>`	Sets field/storage type to Default.
109	`</actionOverrides>`	Closes the actionOverrides configuration block.
110	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
111	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
112	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
113	`<type>Default</type>`	Sets field/storage type to Default.
114	`</actionOverrides>`	Closes the actionOverrides configuration block.
115	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
116	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
117	`<type>Default</type>`	Sets field/storage type to Default.
118	`</actionOverrides>`	Closes the actionOverrides configuration block.
119	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
120	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
121	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
122	`<type>Default</type>`	Sets field/storage type to Default.
123	`</actionOverrides>`	Closes the actionOverrides configuration block.
124	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
125	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
126	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
127	`<type>Default</type>`	Sets field/storage type to Default.
128	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
129	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
130	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
131	`<type>Default</type>`	Sets field/storage type to Default.
132	`</actionOverrides>`	Closes the actionOverrides configuration block.
133	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
134	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
135	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
136	`<type>Default</type>`	Sets field/storage type to Default.
137	`</actionOverrides>`	Closes the actionOverrides configuration block.
138	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
139	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
140	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
141	`<type>Default</type>`	Sets field/storage type to Default.
142	`</actionOverrides>`	Closes the actionOverrides configuration block.
143	`<allowInChatterGroups>false</allowInChatterGroups>`	Sets allow In Chatter Groups in the enclosing configuration to false.
144	`<compactLayoutAssignment>SYSTEM</compactLayoutAssignment>`	Sets compact Layout Assignment in the enclosing configuration to SYSTEM.
145	`<deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
146	`<enableActivities>false</enableActivities>`	Sets enable Activities in the enclosing configuration to false.
147	`<enableBulkApi>true</enableBulkApi>`	Sets enable Bulk Api in the enclosing configuration to true.
148	`<enableFeeds>false</enableFeeds>`	Sets enable Feeds in the enclosing configuration to false.
149	`<enableHistory>false</enableHistory>`	Sets enable History in the enclosing configuration to false.
150	`<enableLicensing>false</enableLicensing>`	Sets enable Licensing in the enclosing configuration to false.

Line	Source code	Explanation / reading note
151	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
152	`    <enableSearch>false</enableSearch>`	Sets enable Search in the enclosing configuration to false.
153	`    <enableSharing>true</enableSharing>`	Sets enable Sharing in the enclosing configuration to true.
154	`    <enableStreamingApi>true</enableStreamingApi>`	Sets enable Streaming Api in the enclosing configuration to true.
155	`    <externalSharingModel>Private</externalSharingModel>`	Sets external Sharing Model in the enclosing configuration to Private.
156	`    <label>Sales Order</label>`	Sets human-readable Salesforce UI label to Sales Order.
157	`    <nameField>`	Opens the nameField block; child elements specify its configuration.
158	`        <displayFormat>SO-{00000}</displayFormat>`	Sets display Format in the enclosing configuration to SO-{00000}.
159	`        <label>Order Number</label>`	Sets human-readable Salesforce UI label to Order Number.
160	`        <type>AutoNumber</type>`	Sets field/storage type to AutoNumber.
161	`    </nameField>`	Closes the nameField configuration block.
162	`    <pluralLabel>Sales Orders</pluralLabel>`	Sets plural Label in the enclosing configuration to Sales Orders.
163	`    <searchLayouts></searchLayouts>`	Sets search Layouts in the enclosing configuration to .
164	`    <sharingModel>ReadWrite</sharingModel>`	Sets record sharing baseline to ReadWrite.
165	`    <visibility>Public</visibility>`	Sets visibility in the enclosing configuration to Public.
166	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Sales_Order__c/fields/DMS_Decided_At__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/DMS_Decided_At__c.field-meta.xml. Label: Distributor Decision Time. Type: DateTime. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 e9405d4621f427f2091cd440f160d9abaa2c5da63f12094c64352482cdc4eb45

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>DMS_Decided_At__c</fullName><label>Distributor Decision Time</label><type>DateTime</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>DMS_Decided_At__c</fullName><label>Distributor Decision Time</label><type>DateTime</type>.

force-app/main/default/objects/Sales_Order__c/fields/DMS_Decision_Notes__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/DMS_Decision_Notes__c.field-meta.xml. Label: Distributor Decision Notes. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 85fc51e21258933f586041acc21106accfb9f6f44ca9169e0dcb12e479b94f8a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>DMS_Decision_Notes__c</fullName><label>Distributor Decision Notes</label><length>255</length><type>Text</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>DMS_Decision_Notes__c</fullName><label>Distributor Decision Notes</label><length>255</length><type>Text</type>.

force-app/main/default/objects/Sales_Order__c/fields/DMS_Distributor__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/DMS_Distributor__c.field-meta.xml. Label: DMS Distributor. Type: Lookup. Relationship target: DMS_Distributor__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 263c4c5e47956f69b8a6b5efb23d7eb82ddc62f4369bf5b48f5ffa53a73180a6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>DMS_Distributor__c</fullName><label>DMS Distributor</label><deleteConstraint>Restrict</deleteConstraint><referenceTo>DMS_Distributor__c</referenceTo><relationshipLabel>Secondary Orders</relationshipLabel><relationshipName>Secondary_Orders</relationshipName><type>Lookup</type></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>DMS_Distributor__c</fullName><label>DMS Distributor</label><deleteConstraint>Restrict</deleteConstraint><referenceTo>DMS_Distributor__c</referenceTo><relationshipLabel>Secondary Orders</rela.

force-app/main/default/objects/Sales_Order__c/fields/DMS_Status__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/DMS_Status__c.field-meta.xml. Label: Distributor Decision. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 e0af4ddbac572817cbef43eec355e7e824dbe6e8c2c5a78b1ba54ee2669cdf60

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>DMS_Status__c</fullName><label>Distributor Decision</label><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Pending</fullName><default>true</default><label>Pending</label></value><value><fullName>Approved</fullName><default>false</default><label>Approved</label></value><value><fullName>Rejected</fullName><default>false</default><label>Rejected</label></value></valueSetDefinition></valueSet></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>DMS_Status__c</fullName><label>Distributor Decision</label><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Pending</ful.

force-app/main/default/objects/Sales_Order__c/fields/Gross_Amount__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/Gross_Amount__c.field-meta.xml. Label: Gross Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 3e196c30c8fc65db113511fad16d92a923c7e933d2a9b56132fad7f5e6a0d9d8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Gross_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Gross_Amount__c.
4	`    <label>Gross Amount</label>`	Sets human-readable Salesforce UI label to Gross Amount.
5	`    <precision>16</precision>`	Sets maximum numeric precision to 16.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <scale>2</scale>`	Sets decimal places to 2.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Currency</type>`	Sets field/storage type to Currency.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Sales_Order__c/fields/Mobile_Request_Key__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/Mobile_Request_Key__c.field-meta.xml. Label: Mobile Request Key. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 ee9b9897fdc7d5ea460548fea3fc49b0d0681e0ffa19e507a4d28b6962e5aaf2

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Mobile_Request_Key__c</fullName>`	Sets API identifier used by metadata deployment and code references to Mobile_Request_Key__c.
4	`    <caseSensitive>true</caseSensitive>`	Sets case Sensitive in the enclosing configuration to true.
5	`    <description>Unique mobile visit checkout key. Prevents duplicate orders when a connection drops after saving.</description>`	Sets description in the enclosing configuration to Unique mobile visit checkout key. Prevents duplicate orders when a connection drops after saving..
6	`    <externalId>true</externalId>`	Sets whether the field is eligible for external-key matching to true.
7	`    <label>Mobile Request Key</label>`	Sets human-readable Salesforce UI label to Mobile Request Key.
8	`    <length>80</length>`	Sets maximum text length to 80.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <type>Text</type>`	Sets field/storage type to Text.
11	`    <unique>true</unique>`	Sets whether duplicate stored values are rejected to true.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Sales_Order__c/fields/Order_Date__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/Order_Date__c.field-meta.xml. Label: Order Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 1503b07a0b3e0e8e6fae046350a19bc2dc7b48d1bfca516355578eeabb364e9a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Order_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Order_Date__c.
4	`    <label>Order Date</label>`	Sets human-readable Salesforce UI label to Order Date.
5	`    <required>true</required>`	Sets whether a value is mandatory to true.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Sales_Order__c/fields/Product__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/Product__c.field-meta.xml. Label: Product Name. Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 b31e3666091b491149e1558106375d29f035d777e91c507a8f6b227db0561321

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Product__c</fullName>`	Sets API identifier used by metadata deployment and code references to Product__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Product Name</label>`	Sets human-readable Salesforce UI label to Product Name.
6	`    <referenceTo>Product__c</referenceTo>`	Sets object referenced by this relationship to Product__c.
7	`    <relationshipLabel>Sales Orders</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Sales Orders.
8	`    <relationshipName>Sales_Orders</relationshipName>`	Sets relationship API traversal name to Sales_Orders.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Sales_Order__c/fields/Retailer__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/Retailer__c.field-meta.xml. Label: Retailer. Type: Lookup. Relationship target: Retailer__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 989a0d279015d0358f53bd0c4e472577be62e99325182cb801d829b0076d7a9c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Retailer__c</fullName>`	Sets API identifier used by metadata deployment and code references to Retailer__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <label>Retailer</label>`	Sets human-readable Salesforce UI label to Retailer.
6	`    <referenceTo>Retailer__c</referenceTo>`	Sets object referenced by this relationship to Retailer__c.
7	`    <relationshipLabel>Sales Orders</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Sales Orders.
8	`    <relationshipName>Sales_Orders</relationshipName>`	Sets relationship API traversal name to Sales_Orders.
9	`    <required>true</required>`	Sets whether a value is mandatory to true.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Sales_Order__c/fields/SKU__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/SKU__c.field-meta.xml. Label: SKU. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 439685a408a3c583f05b158829fd8bc001a86b99fc9efee8fe7e4b37a88ef63c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>SKU__c</fullName>`	Sets API identifier used by metadata deployment and code references to SKU__c.
4	`    <description>Automatically displays the selected product code.</description>`	Sets description in the enclosing configuration to Automatically displays the selected product code..
5	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
6	`    <formula>Product__r.Product_Code__c</formula>`	Sets formula expression evaluated by Salesforce to Product__r.Product_Code__c.
7	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
8	`    <label>SKU</label>`	Sets human-readable Salesforce UI label to SKU.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Text</type>`	Sets field/storage type to Text.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Sales_Order__c/fields/Scheme_Applied__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/Scheme_Applied__c.field-meta.xml. Label: Scheme Applied. Type: Lookup. Relationship target: Scheme__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 5e405c72c6a6ab4ba885b1777e291475c74247206892a5471123a68750cc8ff7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Scheme_Applied__c</fullName>`	Sets API identifier used by metadata deployment and code references to Scheme_Applied__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Scheme Applied</label>`	Sets human-readable Salesforce UI label to Scheme Applied.
6	`    <referenceTo>Scheme__c</referenceTo>`	Sets object referenced by this relationship to Scheme__c.
7	`    <relationshipLabel>Sales Orders</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Sales Orders.
8	`    <relationshipName>Sales_Orders</relationshipName>`	Sets relationship API traversal name to Sales_Orders.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Sales_Order__c/fields/Scheme_Details__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/Scheme_Details__c.field-meta.xml. Label: Schemes (Any). Type: TextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 31f8738625baa900e13f9ef940adce9bfa9df2dd3f2640e980d504320593081c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Scheme_Details__c</fullName>`	Sets API identifier used by metadata deployment and code references to Scheme_Details__c.
4	`    <label>Schemes (Any)</label>`	Sets human-readable Salesforce UI label to Schemes (Any).
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>TextArea</type>`	Sets field/storage type to TextArea.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Sales_Order__c/fields/Status__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/Status__c.field-meta.xml. Label: Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

34 numbered source lines | SHA-256 f2002e8b13486c602c94ecdbbbf9b23645031b4250d896036bbbac1c093a0af8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Status__c</fullName>`	Sets API identifier used by metadata deployment and code references to Status__c.
4	`    <label>Status</label>`	Sets human-readable Salesforce UI label to Status.
5	`    <required>true</required>`	Sets whether a value is mandatory to true.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value>`	Opens the value block; child elements specify its configuration.
13	`                <fullName>Draft</fullName>`	Sets API identifier used by metadata deployment and code references to Draft.
14	`                <default>true</default>`	Sets whether this option is the default to true.
15	`                <label>Draft</label>`	Sets human-readable Salesforce UI label to Draft.
16	`            </value>`	Closes the value configuration block.
17	`            <value>`	Opens the value block; child elements specify its configuration.
18	`                <fullName>Submitted</fullName>`	Sets API identifier used by metadata deployment and code references to Submitted.

Line	Source code	Explanation / reading note
19	`<default>false</default>`	Sets whether this option is the default to false.
20	`<label>Submitted</label>`	Sets human-readable Salesforce UI label to Submitted.
21	`</value>`	Closes the value configuration block.
22	`<value>`	Opens the value block; child elements specify its configuration.
23	`<fullName>Fulfilled</fullName>`	Sets API identifier used by metadata deployment and code references to Fulfilled.
24	`<default>false</default>`	Sets whether this option is the default to false.
25	`<label>Fulfilled</label>`	Sets human-readable Salesforce UI label to Fulfilled.
26	`</value>`	Closes the value configuration block.
27	`<value>`	Opens the value block; child elements specify its configuration.
28	`<fullName>Cancelled</fullName>`	Sets API identifier used by metadata deployment and code references to Cancelled.
29	`<default>false</default>`	Sets whether this option is the default to false.
30	`<label>Cancelled</label>`	Sets human-readable Salesforce UI label to Cancelled.
31	`</value>`	Closes the value configuration block.
32	`</valueSetDefinition>`	Closes the valueSetDefinition configuration block.
33	`</valueSet>`	Closes the valueSet configuration block.
34	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Sales_Order__c/fields/Tax_Amount__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/Tax_Amount__c.field-meta.xml. Label: Tax Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 3c7284ee73825f286cc6a4d7b129c90a1217d2a855f142740fefb292753e5218

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Tax_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Tax_Amount__c.
4	`    <label>Tax Amount</label>`	Sets human-readable Salesforce UI label to Tax Amount.
5	`    <precision>16</precision>`	Sets maximum numeric precision to 16.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <scale>2</scale>`	Sets decimal places to 2.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Currency</type>`	Sets field/storage type to Currency.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Sales_Order__c/fields/Total_Amount__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/Total_Amount__c.field-meta.xml. Label: Total Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 f5242790e1009643ce3b7d3791cb2594a0d9b9ccd2aa2d5e7a171ae35453ccc6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Total_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Total_Amount__c.
4	`    <label>Total Amount</label>`	Sets human-readable Salesforce UI label to Total Amount.
5	`    <precision>16</precision>`	Sets maximum numeric precision to 16.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <scale>2</scale>`	Sets decimal places to 2.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Currency</type>`	Sets field/storage type to Currency.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Sales_Order__c/fields/Total_Quantity__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/Total_Quantity__c.field-meta.xml. Label: Total Quantity. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 1a86be3b77bcbd88a358da9f89e92ea48993553fc13ebf1fe3ef61e18e0640c2

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Total_Quantity__c</fullName>`	Sets API identifier used by metadata deployment and code references to Total_Quantity__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Total Quantity</label>`	Sets human-readable Salesforce UI label to Total Quantity.
6	`    <precision>16</precision>`	Sets maximum numeric precision to 16.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Number</type>`	Sets field/storage type to Number.
11	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Sales_Order__c/fields/Visit__c.field-meta.xml

Salesforce metadata for Sales_Order__c/fields/Visit__c.field-meta.xml. Label: Visit. Type: Lookup. Relationship target: Visit__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 9f3f95e3cb391534d88d68a94272e053eb9b17e4280e02327f3d72a7f3a9b372

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Visit__c</fullName>`	Sets API identifier used by metadata deployment and code references to Visit__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <label>Visit</label>`	Sets human-readable Salesforce UI label to Visit.
6	`    <referenceTo>Visit__c</referenceTo>`	Sets object referenced by this relationship to Visit__c.
7	`    <relationshipLabel>Sales Orders</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Sales Orders.
8	`    <relationshipName>Sales_Orders</relationshipName>`	Sets relationship API traversal name to Sales_Orders.
9	`    <required>true</required>`	Sets whether a value is mandatory to true.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Sales_Order__c/listViews/All_Sales_Orders.listView-meta.xml

Salesforce metadata for Sales_Order__c/listViews/All_Sales_Orders.listView-meta.xml. Label: All Sales Orders. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 096822009e76e56944982565ccd764b2062648f90b228e94623f23dba2f85aee

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Sales_Orders</fullName>`	Sets API identifier used by metadata deployment and code references to All_Sales_Orders.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
6	`    <label>All Sales Orders</label>`	Sets human-readable Salesforce UI label to All Sales Orders.
7	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Scheme_Product__c/Scheme_Product__c.object-meta.xml

Salesforce metadata for Scheme_Product__c/Scheme_Product__c.object-meta.xml. Label: Scheme Product. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

22 numbered source lines | SHA-256 2401ad62b043b29352c84efce14fea70085a13793fa9a5a798d01f04e7832c5f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
4	`    <description>Many-to-many assignment connecting each sales scheme to one or more eligible products.</description>`	Sets description in the enclosing configuration to Many-to-many assignment connecting each sales scheme to one or more eligible products..
5	`    <enableActivities>false</enableActivities>`	Sets enable Activities in the enclosing configuration to false.
6	`    <enableBulkApi>true</enableBulkApi>`	Sets enable Bulk Api in the enclosing configuration to true.
7	`    <enableFeeds>false</enableFeeds>`	Sets enable Feeds in the enclosing configuration to false.
8	`    <enableHistory>true</enableHistory>`	Sets enable History in the enclosing configuration to true.
9	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
10	`    <enableSearch>true</enableSearch>`	Sets enable Search in the enclosing configuration to true.
11	`    <enableSharing>true</enableSharing>`	Sets enable Sharing in the enclosing configuration to true.
12	`    <enableStreamingApi>true</enableStreamingApi>`	Sets enable Streaming Api in the enclosing configuration to true.
13	`    <label>Scheme Product</label>`	Sets human-readable Salesforce UI label to Scheme Product.
14	`    <nameField>`	Opens the nameField block; child elements specify its configuration.
15	`        <displayFormat>SP-{00000}</displayFormat>`	Sets display Format in the enclosing configuration to SP-{00000}.
16	`        <label>Scheme Product Number</label>`	Sets human-readable Salesforce UI label to Scheme Product Number.
17	`        <type>AutoNumber</type>`	Sets field/storage type to AutoNumber.
18	`    </nameField>`	Closes the nameField configuration block.

Line	Source code	Explanation / reading note
19	`    <pluralLabel>Scheme Products</pluralLabel>`	Sets plural Label in the enclosing configuration to Scheme Products.
20	`    <sharingModel>ControlledByParent</sharingModel>`	Sets record sharing baseline to ControlledByParent.
21	`    <visibility>Public</visibility>`	Sets visibility in the enclosing configuration to Public.
22	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Scheme_Product__c/fields/Active__c.field-meta.xml

Salesforce metadata for Scheme_Product__c/fields/Active__c.field-meta.xml. Label: Active. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 519cbd922f65c20396da4c758b38658af1b30995481b22b1845d7242b9176dc7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Active__c</fullName>`	Sets API identifier used by metadata deployment and code references to Active__c.
4	`    <defaultValue>true</defaultValue>`	Sets initial value expression to true.
5	`    <label>Active</label>`	Sets human-readable Salesforce UI label to Active.
6	`    <type>Checkbox</type>`	Sets field/storage type to Checkbox.
7	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme_Product__c/fields/Product__c.field-meta.xml

Salesforce metadata for Scheme_Product__c/fields/Product__c.field-meta.xml. Label: Product. Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 cc0dfa48851a07bb22d37c0ae9c28b8744dfbfe195430df10bf3e361cee5c701

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Product__c</fullName>`	Sets API identifier used by metadata deployment and code references to Product__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <label>Product</label>`	Sets human-readable Salesforce UI label to Product.
6	`    <referenceTo>Product__c</referenceTo>`	Sets object referenced by this relationship to Product__c.
7	`    <relationshipLabel>Product Schemes</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Product Schemes.
8	`    <relationshipName>Product_Schemes</relationshipName>`	Sets relationship API traversal name to Product_Schemes.
9	`    <required>true</required>`	Sets whether a value is mandatory to true.
10	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme_Product__c/fields/Scheme__c.field-meta.xml

Salesforce metadata for Scheme_Product__c/fields/Scheme__c.field-meta.xml. Label: Scheme. Type: MasterDetail. Relationship target: Scheme__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 2e2c915566af42964e00c96aa37f27dea06847f14a21e64ad9e3141e6a9ffbcc

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Scheme__c</fullName>`	Sets API identifier used by metadata deployment and code references to Scheme__c.
4	`    <label>Scheme</label>`	Sets human-readable Salesforce UI label to Scheme.
5	`    <referenceTo>Scheme__c</referenceTo>`	Sets object referenced by this relationship to Scheme__c.
6	`    <relationshipLabel>Scheme Products</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Scheme Products.
7	`    <relationshipName>Scheme_Products</relationshipName>`	Sets relationship API traversal name to Scheme_Products.
8	`    <reparentableMasterDetail>true</reparentableMasterDetail>`	Sets reparentable Master Detail in the enclosing configuration to true.
9	`    <type>MasterDetail</type>`	Sets field/storage type to MasterDetail.
10	`    <writeRequiresMasterRead>false</writeRequiresMasterRead>`	Sets write Requires Master Read in the enclosing configuration to false.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme_Product__c/listViews/All_Scheme_Products.listView-meta.xml

Salesforce metadata for Scheme_Product__c/listViews/All_Scheme_Products.listView-meta.xml. Label: All Scheme Products. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 ec3cf213cbae49ee0e9984aebee5c413b8921209191c4c6b48dcf1d849c2d871

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Scheme_Products</fullName>`	Sets API identifier used by metadata deployment and code references to All_Scheme_Products.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <columns>Scheme__c</columns>`	Sets columns in the enclosing configuration to Scheme__c.
6	`    <columns>Product__c</columns>`	Sets columns in the enclosing configuration to Product__c.
7	`    <columns>Active__c</columns>`	Sets columns in the enclosing configuration to Active__c.
8	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
9	`    <label>All Scheme Products</label>`	Sets human-readable Salesforce UI label to All Scheme Products.
10	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Scheme__c/Scheme__c.object-meta.xml

Salesforce metadata for Scheme__c/Scheme__c.object-meta.xml. Label: Scheme. Type: Default. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

166 numbered source lines | SHA-256 ce88e88c0d5abcac351d98b31a3c7fdb24de239a02e7605ef4fa82a5b8e67f29

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
4	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
5	`        <type>Default</type>`	Sets field/storage type to Default.
6	`    </actionOverrides>`	Closes the actionOverrides configuration block.
7	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
8	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
9	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
10	`        <type>Default</type>`	Sets field/storage type to Default.
11	`    </actionOverrides>`	Closes the actionOverrides configuration block.
12	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
13	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
14	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
15	`        <type>Default</type>`	Sets field/storage type to Default.
16	`    </actionOverrides>`	Closes the actionOverrides configuration block.
17	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
18	`        <actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.

Line	Source code	Explanation / reading note
19	`<type>Default</type>`	Sets field/storage type to Default.
20	`</actionOverrides>`	Closes the actionOverrides configuration block.
21	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
22	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
23	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
24	`<type>Default</type>`	Sets field/storage type to Default.
25	`</actionOverrides>`	Closes the actionOverrides configuration block.
26	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
27	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
28	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
29	`<type>Default</type>`	Sets field/storage type to Default.
30	`</actionOverrides>`	Closes the actionOverrides configuration block.
31	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
32	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
33	`<type>Default</type>`	Sets field/storage type to Default.
34	`</actionOverrides>`	Closes the actionOverrides configuration block.
35	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
36	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
37	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
38	`<type>Default</type>`	Sets field/storage type to Default.
39	`</actionOverrides>`	Closes the actionOverrides configuration block.
40	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.

Line	Source code	Explanation / reading note
41	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
42	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
43	`<type>Default</type>`	Sets field/storage type to Default.
44	`</actionOverrides>`	Closes the actionOverrides configuration block.
45	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
46	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
47	`<type>Default</type>`	Sets field/storage type to Default.
48	`</actionOverrides>`	Closes the actionOverrides configuration block.
49	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
50	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
51	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
52	`<type>Default</type>`	Sets field/storage type to Default.
53	`</actionOverrides>`	Closes the actionOverrides configuration block.
54	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
55	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
56	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
57	`<type>Default</type>`	Sets field/storage type to Default.
58	`</actionOverrides>`	Closes the actionOverrides configuration block.
59	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
60	`<actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
61	`<type>Default</type>`	Sets field/storage type to Default.
62	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
63	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
64	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
65	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
66	`        <type>Default</type>`	Sets field/storage type to Default.
67	`    </actionOverrides>`	Closes the actionOverrides configuration block.
68	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
69	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
70	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
71	`        <type>Default</type>`	Sets field/storage type to Default.
72	`    </actionOverrides>`	Closes the actionOverrides configuration block.
73	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
74	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
75	`        <type>Default</type>`	Sets field/storage type to Default.
76	`    </actionOverrides>`	Closes the actionOverrides configuration block.
77	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
78	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
79	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
80	`        <type>Default</type>`	Sets field/storage type to Default.
81	`    </actionOverrides>`	Closes the actionOverrides configuration block.
82	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
83	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
84	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.

Line	Source code	Explanation / reading note
85	`<type>Default</type>`	Sets field/storage type to Default.
86	`</actionOverrides>`	Closes the actionOverrides configuration block.
87	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
88	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
89	`<type>Default</type>`	Sets field/storage type to Default.
90	`</actionOverrides>`	Closes the actionOverrides configuration block.
91	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
92	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
93	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
94	`<type>Default</type>`	Sets field/storage type to Default.
95	`</actionOverrides>`	Closes the actionOverrides configuration block.
96	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
97	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
98	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
99	`<type>Default</type>`	Sets field/storage type to Default.
100	`</actionOverrides>`	Closes the actionOverrides configuration block.
101	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
102	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
103	`<type>Default</type>`	Sets field/storage type to Default.
104	`</actionOverrides>`	Closes the actionOverrides configuration block.
105	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
106	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.

Line	Source code	Explanation / reading note
107	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
108	`<type>Default</type>`	Sets field/storage type to Default.
109	`</actionOverrides>`	Closes the actionOverrides configuration block.
110	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
111	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
112	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
113	`<type>Default</type>`	Sets field/storage type to Default.
114	`</actionOverrides>`	Closes the actionOverrides configuration block.
115	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
116	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
117	`<type>Default</type>`	Sets field/storage type to Default.
118	`</actionOverrides>`	Closes the actionOverrides configuration block.
119	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
120	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
121	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
122	`<type>Default</type>`	Sets field/storage type to Default.
123	`</actionOverrides>`	Closes the actionOverrides configuration block.
124	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
125	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
126	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
127	`<type>Default</type>`	Sets field/storage type to Default.
128	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
129	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
130	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
131	`<type>Default</type>`	Sets field/storage type to Default.
132	`</actionOverrides>`	Closes the actionOverrides configuration block.
133	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
134	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
135	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
136	`<type>Default</type>`	Sets field/storage type to Default.
137	`</actionOverrides>`	Closes the actionOverrides configuration block.
138	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
139	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
140	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
141	`<type>Default</type>`	Sets field/storage type to Default.
142	`</actionOverrides>`	Closes the actionOverrides configuration block.
143	`<allowInChatterGroups>false</allowInChatterGroups>`	Sets allow In Chatter Groups in the enclosing configuration to false.
144	`<compactLayoutAssignment>SYSTEM</compactLayoutAssignment>`	Sets compact Layout Assignment in the enclosing configuration to SYSTEM.
145	`<deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
146	`<description>Sales schemes available to retailers during order capture.</description>`	Sets description in the enclosing configuration to Sales schemes available to retailers during order capture..
147	`<enableActivities>false</enableActivities>`	Sets enable Activities in the enclosing configuration to false.
148	`<enableBulkApi>true</enableBulkApi>`	Sets enable Bulk Api in the enclosing configuration to true.
149	`<enableFeeds>false</enableFeeds>`	Sets enable Feeds in the enclosing configuration to false.

Line	Source code	Explanation / reading note
150	`    <enableHistory>false</enableHistory>`	Sets enable History in the enclosing configuration to false.
151	`    <enableLicensing>false</enableLicensing>`	Sets enable Licensing in the enclosing configuration to false.
152	`    <enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
153	`    <enableSearch>false</enableSearch>`	Sets enable Search in the enclosing configuration to false.
154	`    <enableSharing>true</enableSharing>`	Sets enable Sharing in the enclosing configuration to true.
155	`    <enableStreamingApi>true</enableStreamingApi>`	Sets enable Streaming Api in the enclosing configuration to true.
156	`    <externalSharingModel>Private</externalSharingModel>`	Sets external Sharing Model in the enclosing configuration to Private.
157	`    <label>Scheme</label>`	Sets human-readable Salesforce UI label to Scheme.
158	`    <nameField>`	Opens the nameField block; child elements specify its configuration.
159	`        <label>Scheme Name</label>`	Sets human-readable Salesforce UI label to Scheme Name.
160	`        <type>Text</type>`	Sets field/storage type to Text.
161	`    </nameField>`	Closes the nameField configuration block.
162	`    <pluralLabel>Schemes</pluralLabel>`	Sets plural Label in the enclosing configuration to Schemes.
163	`    <searchLayouts></searchLayouts>`	Sets search Layouts in the enclosing configuration to .
164	`    <sharingModel>ReadWrite</sharingModel>`	Sets record sharing baseline to ReadWrite.
165	`    <visibility>Public</visibility>`	Sets visibility in the enclosing configuration to Public.
166	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Scheme__c/fields/Active__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Active__c.field-meta.xml. Label: Active. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 060f7b862ff091ad95099edea7943558e1cc28cb467ce0bc808fe410c0617d35

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Active__c</fullName>`	Sets API identifier used by metadata deployment and code references to Active__c.
4	`    <defaultValue>true</defaultValue>`	Sets initial value expression to true.
5	`    <label>Active</label>`	Sets human-readable Salesforce UI label to Active.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Checkbox</type>`	Sets field/storage type to Checkbox.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/Description__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Description__c.field-meta.xml. Label: Offer Description. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 9d0d21d09700360fa0507c15e09f17fb269e7467dfc33d8e7401f4af95f8adbf

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Description__c</fullName>`	Sets API identifier used by metadata deployment and code references to Description__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Offer Description</label>`	Sets human-readable Salesforce UI label to Offer Description.
6	`    <length>255</length>`	Sets maximum text length to 255.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/Discount_Amount__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Discount_Amount__c.field-meta.xml. Label: Discount Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 d43f76b64602331b9625e87ab6b23071887c976a4475ea5ba5cc7b3ab24b1547

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Discount_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Discount_Amount__c.
4	`    <defaultValue>0</defaultValue>`	Sets initial value expression to 0.
5	`    <label>Discount Amount</label>`	Sets human-readable Salesforce UI label to Discount Amount.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>2</scale>`	Sets decimal places to 2.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Currency</type>`	Sets field/storage type to Currency.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/Discount_Percent__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Discount_Percent__c.field-meta.xml. Label: Discount Percent. Type: Percent. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 9eda943f8639fda25465372bc08f231bdfc1c6010d8f7fa10a219e1c726dec8f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Discount_Percent__c</fullName>`	Sets API identifier used by metadata deployment and code references to Discount_Percent__c.
4	`    <defaultValue>0</defaultValue>`	Sets initial value expression to 0.
5	`    <label>Discount Percent</label>`	Sets human-readable Salesforce UI label to Discount Percent.
6	`    <precision>5</precision>`	Sets maximum numeric precision to 5.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>2</scale>`	Sets decimal places to 2.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Percent</type>`	Sets field/storage type to Percent.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/End_Date__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/End_Date__c.field-meta.xml. Label: End Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 f86b06f3e3d4031a4d75046c9724c5c512ca9ddfee2833958b46eb5dfe36bf8f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>End_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to End_Date__c.
4	`    <label>End Date</label>`	Sets human-readable Salesforce UI label to End Date.
5	`    <required>true</required>`	Sets whether a value is mandatory to true.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/Free_Cases__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Free_Cases__c.field-meta.xml. Label: Free Cases. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 f53069a355ba55a12a029427a6da74f03015cf05bc1ba8e8a7aa863e7a5c9e01

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Free_Cases__c</fullName>`	Sets API identifier used by metadata deployment and code references to Free_Cases__c.
4	`    <description>Free Cases. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Free Cases. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Free Cases</label>`	Sets human-readable Salesforce UI label to Free Cases.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/Free_Gift__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Free_Gift__c.field-meta.xml. Label: Free Gift. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 c4cc837efc986f516ca053c3942bd4fb060784fba2e76e655a8d80ab534a0286

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Free_Gift__c</fullName>`	Sets API identifier used by metadata deployment and code references to Free_Gift__c.
4	`    <description>Free Gift. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Free Gift. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Free Gift</label>`	Sets human-readable Salesforce UI label to Free Gift.
6	`    <length>120</length>`	Sets maximum text length to 120.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <type>Text</type>`	Sets field/storage type to Text.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/Free_Product__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Free_Product__c.field-meta.xml. Label: Free Product. Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 eeeb240e3aeae13aefce4e8d435cf89721a0c17c6250202af4fb639687bceef6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Free_Product__c</fullName>`	Sets API identifier used by metadata deployment and code references to Free_Product__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Free Product</label>`	Sets human-readable Salesforce UI label to Free Product.
6	`    <referenceTo>Product__c</referenceTo>`	Sets object referenced by this relationship to Product__c.
7	`    <relationshipLabel>Free Product Schemes</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Free Product Schemes.
8	`    <relationshipName>Free_Product_Schemes</relationshipName>`	Sets relationship API traversal name to Free_Product_Schemes.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/Free_Quantity__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Free_Quantity__c.field-meta.xml. Label: Free Quantity. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 816f048de25ecd90dd31f85a474d7308f52615b110d2718b5ddff3717990b6b5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Free_Quantity__c</fullName>`	Sets API identifier used by metadata deployment and code references to Free_Quantity__c.
4	`    <defaultValue>0</defaultValue>`	Sets initial value expression to 0.
5	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
6	`    <label>Free Quantity</label>`	Sets human-readable Salesforce UI label to Free Quantity.
7	`    <precision>8</precision>`	Sets maximum numeric precision to 8.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <scale>0</scale>`	Sets decimal places to 0.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/Gift_Quantity__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Gift_Quantity__c.field-meta.xml. Label: Gift Quantity. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 8066eb4e7b0ce9a8c6254cb5e02dc278120a4cb5e09b8763b4fed9430156b82c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Gift_Quantity__c</fullName>`	Sets API identifier used by metadata deployment and code references to Gift_Quantity__c.
4	`    <description>Gift Quantity. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Gift Quantity. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Gift Quantity</label>`	Sets human-readable Salesforce UI label to Gift Quantity.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/Minimum_Cases__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Minimum_Cases__c.field-meta.xml. Label: Minimum Cases. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 546d6e318ab2da12d346d89e2ef42bf05249cc5532789d7ae750630dd6326df7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Minimum_Cases__c</fullName>`	Sets API identifier used by metadata deployment and code references to Minimum_Cases__c.
4	`    <description>Minimum Cases. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field.</description>`	Sets description in the enclosing configuration to Minimum Cases. DMS schema from the October 15 mentor recordings and SFA & DMS deck. Inventory posting and application sync are separate automation, not performed by this field..
5	`    <label>Minimum Cases</label>`	Sets human-readable Salesforce UI label to Minimum Cases.
6	`    <precision>18</precision>`	Sets maximum numeric precision to 18.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <type>Number</type>`	Sets field/storage type to Number.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/Minimum_Quantity__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Minimum_Quantity__c.field-meta.xml. Label: Minimum Quantity. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 fbf69cc4daf2cc59876ce5f298f04fb2b56ed9d3789a5f217bbf430a0949ed03

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Minimum_Quantity__c</fullName>`	Sets API identifier used by metadata deployment and code references to Minimum_Quantity__c.
4	`    <defaultValue>1</defaultValue>`	Sets initial value expression to 1.
5	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
6	`    <label>Minimum Quantity</label>`	Sets human-readable Salesforce UI label to Minimum Quantity.
7	`    <precision>8</precision>`	Sets maximum numeric precision to 8.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <scale>0</scale>`	Sets decimal places to 0.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/Outlet_Type__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Outlet_Type__c.field-meta.xml. Label: Outlet Type. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 08054b7ed6d3967c120bd1f6a910eb0426e3874e204e0d76e7a667978dd77982

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Outlet_Type__c</fullName>`	Sets API identifier used by metadata deployment and code references to Outlet_Type__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Outlet Type</label>`	Sets human-readable Salesforce UI label to Outlet Type.
6	`    <length>80</length>`	Sets maximum text length to 80.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/Product__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Product__c.field-meta.xml. Label: Product. Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 a08ade0881b23b40c21c04b1a23fb69a2cbe14ed94ec24965ffdb402f1a7647a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Product__c</fullName>`	Sets API identifier used by metadata deployment and code references to Product__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Product</label>`	Sets human-readable Salesforce UI label to Product.
6	`    <referenceTo>Product__c</referenceTo>`	Sets object referenced by this relationship to Product__c.
7	`    <relationshipLabel>Schemes</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Schemes.
8	`    <relationshipName>Schemes</relationshipName>`	Sets relationship API traversal name to Schemes.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/Region__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Region__c.field-meta.xml. Label: Region. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 cb094559293317c607ab7f7e9f87b0d3f468de18a076b451188e78ab58513df4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Region__c</fullName>`	Sets API identifier used by metadata deployment and code references to Region__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Region</label>`	Sets human-readable Salesforce UI label to Region.
6	`    <length>100</length>`	Sets maximum text length to 100.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/Sales_Channel__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Sales_Channel__c.field-meta.xml. Label: Primary or Secondary. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

2 numbered source lines | SHA-256 dc3ecde525ed098b509e95348771145a3ee909166f9367ae1b13e93fc0e22fc4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Sales_Channel__c</fullName><label>Primary or Secondary</label><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Primary</fullName><default>false</default><label>Primary</label></value><value><fullName>Secondary</fullName><default>true</default><label>Secondary</label></value></valueSetDefinition></valueSet></CustomField>`	Sets Custom Field in the enclosing configuration to <fullName>Sales_Channel__c</fullName><label>Primary or Secondary</label><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Primary</.

force-app/main/default/objects/Scheme__c/fields/Scheme_Code__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Scheme_Code__c.field-meta.xml. Label: Scheme Code. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 76a8069a5aabf71352bc83795691720295cf0aa4a4424db921c053b5224f267b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Scheme_Code__c</fullName>`	Sets API identifier used by metadata deployment and code references to Scheme_Code__c.
4	`    <caseSensitive>false</caseSensitive>`	Sets case Sensitive in the enclosing configuration to false.
5	`    <externalId>true</externalId>`	Sets whether the field is eligible for external-key matching to true.
6	`    <label>Scheme Code</label>`	Sets human-readable Salesforce UI label to Scheme Code.
7	`    <length>40</length>`	Sets maximum text length to 40.
8	`    <required>true</required>`	Sets whether a value is mandatory to true.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Text</type>`	Sets field/storage type to Text.
11	`    <unique>true</unique>`	Sets whether duplicate stored values are rejected to true.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/Scheme_Type__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Scheme_Type__c.field-meta.xml. Label: Scheme Type. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

63 numbered source lines | SHA-256 cda3c7f3d16d5971689663f6be8be638ea3dea9c3d650e0903c6c1d987a9e51d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Scheme_Type__c</fullName>`	Sets API identifier used by metadata deployment and code references to Scheme_Type__c.
4	`    <label>Scheme Type</label>`	Sets human-readable Salesforce UI label to Scheme Type.
5	`    <required>true</required>`	Sets whether a value is mandatory to true.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
8	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
9	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
10	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
11	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
12	`            <value>`	Opens the value block; child elements specify its configuration.
13	`                <fullName>Same Product Free</fullName>`	Sets API identifier used by metadata deployment and code references to Same Product Free.
14	`                <default>false</default>`	Sets whether this option is the default to false.
15	`                <label>Same Product Free</label>`	Sets human-readable Salesforce UI label to Same Product Free.
16	`            </value>`	Closes the value configuration block.
17	`            <value>`	Opens the value block; child elements specify its configuration.

Line	Source code	Explanation / reading note
18	`<fullName>Non-listed Product Free</fullName>`	Sets API identifier used by metadata deployment and code references to Non-listed Product Free.
19	`<default>false</default>`	Sets whether this option is the default to false.
20	`<label>Non-listed Product Free</label>`	Sets human-readable Salesforce UI label to Non-listed Product Free.
21	`</value>`	Closes the value configuration block.
22	`<value>`	Opens the value block; child elements specify its configuration.
23	`<fullName>Different Listed Product Free</fullName>`	Sets API identifier used by metadata deployment and code references to Different Listed Product Free.
24	`<default>false</default>`	Sets whether this option is the default to false.
25	`<label>Different Listed Product Free</label>`	Sets human-readable Salesforce UI label to Different Listed Product Free.
26	`</value>`	Closes the value configuration block.
27	`<value>`	Opens the value block; child elements specify its configuration.
28	`<fullName>Slab Discount</fullName>`	Sets API identifier used by metadata deployment and code references to Slab Discount.
29	`<default>false</default>`	Sets whether this option is the default to false.
30	`<label>Slab Discount</label>`	Sets human-readable Salesforce UI label to Slab Discount.
31	`</value>`	Closes the value configuration block.
32	`<value>`	Opens the value block; child elements specify its configuration.
33	`<fullName>Bundle</fullName>`	Sets API identifier used by metadata deployment and code references to Bundle.
34	`<default>false</default>`	Sets whether this option is the default to false.
35	`<label>Bundle</label>`	Sets human-readable Salesforce UI label to Bundle.
36	`</value>`	Closes the value configuration block.
37	`<value>`	Opens the value block; child elements specify its configuration.
38	`<fullName>Amount Discount</fullName>`	Sets API identifier used by metadata deployment and code references to Amount Discount.

Line	Source code	Explanation / reading note
39	`<default>false</default>`	Sets whether this option is the default to false.
40	`<isActive>false</isActive>`	Sets is Active in the enclosing configuration to false.
41	`<label>Amount Discount</label>`	Sets human-readable Salesforce UI label to Amount Discount.
42	`</value>`	Closes the value configuration block.
43	`<value>`	Opens the value block; child elements specify its configuration.
44	`<fullName>Different Product Free</fullName>`	Sets API identifier used by metadata deployment and code references to Different Product Free.
45	`<default>false</default>`	Sets whether this option is the default to false.
46	`<isActive>false</isActive>`	Sets is Active in the enclosing configuration to false.
47	`<label>Different Product Free</label>`	Sets human-readable Salesforce UI label to Different Product Free.
48	`</value>`	Closes the value configuration block.
49	`<value>`	Opens the value block; child elements specify its configuration.
50	`<fullName>Percentage Discount</fullName>`	Sets API identifier used by metadata deployment and code references to Percentage Discount.
51	`<default>false</default>`	Sets whether this option is the default to false.
52	`<isActive>false</isActive>`	Sets is Active in the enclosing configuration to false.
53	`<label>Percentage Discount</label>`	Sets human-readable Salesforce UI label to Percentage Discount.
54	`</value>`	Closes the value configuration block.
55	`<value>`	Opens the value block; child elements specify its configuration.
56	`<fullName>Slab</fullName>`	Sets API identifier used by metadata deployment and code references to Slab.
57	`<default>false</default>`	Sets whether this option is the default to false.
58	`<isActive>false</isActive>`	Sets is Active in the enclosing configuration to false.
59	`<label>Slab</label>`	Sets human-readable Salesforce UI label to Slab.

Line	Source code	Explanation / reading note
60	`            </value>`	Closes the value configuration block.
61	`        </valueSetDefinition>`	Closes the valueSetDefinition configuration block.
62	`    </valueSet>`	Closes the valueSet configuration block.
63	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/fields/Start_Date__c.field-meta.xml

Salesforce metadata for Scheme__c/fields/Start_Date__c.field-meta.xml. Label: Start Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

8 numbered source lines | SHA-256 8479ccb16342b12a3fa0ccba7397f11ecfad4cf1f9d3ba01ae7ea5d9384bdd3a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Start_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Start_Date__c.
4	`    <label>Start Date</label>`	Sets human-readable Salesforce UI label to Start Date.
5	`    <required>true</required>`	Sets whether a value is mandatory to true.
6	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
7	`    <type>Date</type>`	Sets field/storage type to Date.
8	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Scheme__c/listViews/All_Schemes.listView-meta.xml

Salesforce metadata for Scheme__c/listViews/All_Schemes.listView-meta.xml. Label: All Schemes. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 fac4fc9c9d3132d1b51c8f0b4d49f5004e5ccce93e6ee4a264f96c3671d3cb7e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Schemes</fullName>`	Sets API identifier used by metadata deployment and code references to All_Schemes.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
6	`    <label>All Schemes</label>`	Sets human-readable Salesforce UI label to All Schemes.
7	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/objects/Stock_Check__c/Stock_Check__c.object-meta.xml

Salesforce metadata for Stock_Check__c/Stock_Check__c.object-meta.xml. Label: Stock Check. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 04f17e819d592bc0355534c929ad63e0052b74937eed79f6ebfb0248f4be3500

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <deploymentStatus>Deployed</deploymentStatus><description>Physical product stock counted during an outlet visit.</description>`	Opens the deploymentStatus block; child elements specify its configuration.
4	`    <enableActivities>true</enableActivities><enableHistory>true</enableHistory><enableReports>true</enableReports><enableSearch>true</enableSearch>`	Opens the enableActivities block; child elements specify its configuration.
5	`    <label>Stock Check</label><pluralLabel>Stock Checks</pluralLabel><sharingModel>ReadWrite</sharingModel>`	Opens the label block; child elements specify its configuration.
6	`    <nameField><displayFormat>SC-{00000}</displayFormat><label>Stock Check Number</label><type>AutoNumber</type></nameField>`	Sets name Field in the enclosing configuration to <displayFormat>SC-{00000}</displayFormat><label>Stock Check Number</label><type>AutoNumber</type>.
7	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Stock_Check__c/fields/Manufacturing_Date__c.field-meta.xml

Salesforce metadata for Stock_Check__c/fields/Manufacturing_Date__c.field-meta.xml. Label: Manufacturing Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 885da69f90c57293602164c0b1c12444862e52141f5773b9f133b4f7a3426d8b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Manufacturing_Date__c</fullName><label>Manufacturing Date</label><type>Date</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Stock_Check__c/fields/Mobile_Request_Key__c.field-meta.xml

Salesforce metadata for Stock_Check__c/fields/Mobile_Request_Key__c.field-meta.xml. Label: Mobile Request Key. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 b6b2d4cbefd91ed82aaf2e4d6e9fceb5bd820fb8c44d3ed95161c16674ea6025

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Mobile_Request_Key__c</fullName>`	Sets API identifier used by metadata deployment and code references to Mobile_Request_Key__c.
4	`    <caseSensitive>true</caseSensitive>`	Sets case Sensitive in the enclosing configuration to true.
5	`    <externalId>true</externalId>`	Sets whether the field is eligible for external-key matching to true.
6	`    <label>Mobile Request Key</label>`	Sets human-readable Salesforce UI label to Mobile Request Key.
7	`    <length>150</length>`	Sets maximum text length to 150.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <type>Text</type>`	Sets field/storage type to Text.
10	`    <unique>true</unique>`	Sets whether duplicate stored values are rejected to true.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Stock_Check__c/fields/Outlet__c.field-meta.xml

Salesforce metadata for Stock_Check__c/fields/Outlet__c.field-meta.xml. Label: Outlet. Type: Lookup. Relationship target: Retailer__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 c6a6cdf5d81f085704e461c6d022720ff1d7b70ffd260f5297cc2708f5bc566f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Outlet__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Outlet</label><referenceTo>Retailer__c</referenceTo><relationshipLabel>Stock Checks</relationshipLabel><relationshipName>Stock_Checks</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Stock_Check__c/fields/Product__c.field-meta.xml

Salesforce metadata for Stock_Check__c/fields/Product__c.field-meta.xml. Label: Product. Type: Lookup. Relationship target: Product__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 151d3941bdf83541d289d6ada89ccf55e76d55f9f6e9c6b539ae7b3bd90faec8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Product__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Product</label><referenceTo>Product__c</referenceTo><relationshipLabel>Stock Checks</relationshipLabel><relationshipName>Stock_Checks</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Stock_Check__c/fields/Quantity__c.field-meta.xml

Salesforce metadata for Stock_Check__c/fields/Quantity__c.field-meta.xml. Label: Quantity. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 27548c3c6e52bf6df3965724e3f217579f85a71dc25b502a785afb4c7941c6cf

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Quantity__c</fullName><label>Quantity</label><precision>12</precision><scale>0</scale><required>true</required><type>Number</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Stock_Check__c/fields/Visit__c.field-meta.xml

Salesforce metadata for Stock_Check__c/fields/Visit__c.field-meta.xml. Label: Visit. Type: Lookup. Relationship target: Visit__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 a18e8eab2b48a1749909415e8c6bdf1e746e261bdb8c708176223daea76a6123

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Visit__c</fullName><deleteConstraint>SetNull</deleteConstraint><label>Visit</label><referenceTo>Visit__c</referenceTo><relationshipLabel>Stock Checks</relationshipLabel><relationshipName>Stock_Checks</relationshipName><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Stock_Check__c/listViews/All_Stock_Checks.listView-meta.xml

Salesforce metadata for Stock_Check__c/listViews/All_Stock_Checks.listView-meta.xml. Label: All Stock Checks. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 68bd336b02980aefa3fdd0907810a36f56a1b70a4b6f8a0757d697aae4764715

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><ListView xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>All_Stock_Checks</fullName><columns>NAME</columns><columns>Product__c</columns><columns>Quantity__c</columns><columns>Manufacturing_Date__c</columns><columns>Outlet__c</columns><filterScope>Everything</filterScope><label>All Stock Checks</label></ListView>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Answer__c/Survey_Answer__c.object-meta.xml

Salesforce metadata for Survey_Answer__c/Survey_Answer__c.object-meta.xml. Label: Survey Answer. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 d601cb5b7bf5fe5630a603553d561140fdbf8e87ce2dbe5e949371cb5bf9e52a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomObject xmlns="http://soap.sforce.com/2006/04/metadata"><deploymentStatus>Deployed</deploymentStatus><description>Answer to one dynamically configured survey question.</description><enableBulkApi>true</enableBulkApi><enableReports>true</enableReports><label>Survey Answer</label><nameField><displayFormat>SA-{00000}</displayFormat><label>Survey Answer Number</label><type>AutoNumber</type></nameField><pluralLabel>Survey Answers</pluralLabel><sharingModel>ControlledByParent</sharingModel><visibility>Public</visibility></CustomObject>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Answer__c/fields/Multiple_Choices__c.field-meta.xml

Salesforce metadata for Survey_Answer__c/fields/Multiple_Choices__c.field-meta.xml. Label: Multiple Choices. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 d5a683cd978992d63e124269d1e923a61f699527bed6efda0107b475da1ba8b0

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Multiple_Choices__c</fullName><label>Multiple Choices</label><length>1000</length><visibleLines>3</visibleLines><type>LongTextArea</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Answer__c/fields/Number_Answer__c.field-meta.xml

Salesforce metadata for Survey_Answer__c/fields/Number_Answer__c.field-meta.xml. Label: Number Answer. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 e7a82d0cf681145e18edc15bb8b8676607f5b380c42d7bb2f5cbee8f28b6c04a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Number_Answer__c</fullName><label>Number Answer</label><precision>18</precision><scale>2</scale><type>Number</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Answer__c/fields/Phone_Answer__c.field-meta.xml

Salesforce metadata for Survey_Answer__c/fields/Phone_Answer__c.field-meta.xml. Label: Phone Answer. Type: Phone. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 e67121bf36760e58b10beb92e69540527051855a1583a77bccb79a3f845dad1c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Phone_Answer__c</fullName> <label>Phone Answer</label><type>Phone</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Answer__c/fields/Rating__c.field-meta.xml

Salesforce metadata for Survey_Answer__c/fields/Rating__c.field-meta.xml. Label: Rating. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 6163b3aa3830ead13836489dc58667f33352403c7cd490d754059a9946ecf6a8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Rating__c</fullName><label>Rating</label><precision>2</precision><scale>0</scale><type>Number</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Answer__c/fields/Selected_Choice__c.field-meta.xml

Salesforce metadata for Survey_Answer__c/fields/Selected_Choice__c.field-meta.xml. Label: Selected Choice. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 47a833df6b0f94e63d5f1d2043da72fdfd0eb77559c355e01c2d43247924c4b7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Selected_Choice__c</fullName><label>Selected Choice</label><length>255</length><type>Text</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Answer__c/fields/Survey_Question__c.field-meta.xml

Salesforce metadata for Survey_Answer__c/fields/Survey_Question__c.field-meta.xml. Label: Survey Question. Type: Lookup. Relationship target: Survey_Question__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 2fe1ec673ee148af91cd308e13489a4f99c4ce7d282dbc30a6c324f079369781

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Survey_Question__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Survey Question</label><referenceTo>Survey_Question__c</referenceTo><relationshipLabel>Survey Answers</relationshipLabel><relationshipName>Survey_Answers</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Answer__c/fields/Survey_Response__c.field-meta.xml

Salesforce metadata for Survey_Answer__c/fields/Survey_Response__c.field-meta.xml. Label: Survey Response. Type: MasterDetail. Relationship target: Survey_Response__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 ee81ec024dcc2d46a14d91a4576f296692212c2c65ee844a3a0af0b3a7c36f98

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Survey_Response__c</fullName><label>Survey Response</label><referenceTo>Survey_Response__c</referenceTo><relationshipLabel>Survey Answers</relationshipLabel><relationshipName>Survey_Answers</relationshipName><reparentableMasterDetail>true</reparentableMasterDetail><type>MasterDetail</type><writeRequiresMasterRead>false</writeRequiresMasterRead></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Answer__c/fields/Text_Answer__c.field-meta.xml

Salesforce metadata for Survey_Answer__c/fields/Text_Answer__c.field-meta.xml. Label: Text Answer. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 9488b2f0d8ccf55c2d2cfa5816750ba17cf790f837e6c5b8c6759f01b63c1671

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Text_Answer__c</fullName><label>Text Answer</label><length>32768</length><visibleLines>3</visibleLines><type>LongTextArea</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Question__c/Survey_Question__c.object-meta.xml

Salesforce metadata for Survey_Question__c/Survey_Question__c.object-meta.xml. Label: Survey Question. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 d032b4e39f8e2b64f6e4b7063c212802fb377e328fd838667d2ba03872ed64d4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomObject xmlns="http://soap.sforce.com/2006/04/metadata"><deploymentStatus>Deployed</deploymentStatus><description>Dynamic question configured under a survey.</description><enableBulkApi>true</enableBulkApi><enableReports>true</enableReports><enableSearch>true</enableSearch><label>Survey Question</label><nameField><label>Question Text</label><type>Text</type></nameField><pluralLabel>Survey Questions</pluralLabel><sharingModel>ControlledByParent</sharingModel><visibility>Public</visibility></CustomObject>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Question__c/fields/Active__c.field-meta.xml

Salesforce metadata for Survey_Question__c/fields/Active__c.field-meta.xml. Label: Active. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 0e3c0a96745e26e619cf7fb6c6dacb31c76ee49a2a1671ca70ff896753fc0cd4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Active__c</fullName><defaultValue>true</defaultValue><label>Active</label><type>Checkbox</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Question__c/fields/Display_Order__c.field-meta.xml

Salesforce metadata for Survey_Question__c/fields/Display_Order__c.field-meta.xml. Label: Display Order. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 9fc782f2e0be0c4e64f81133f7748bafa8b3a653efaf002ea148e2410bb9a022

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Display_Order__c</fullName><defaultValue>1</defaultValue><label>Display Order</label><precision>4</precision><scale>0</scale><type>Number</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Question__c/fields/Options__c.field-meta.xml

Salesforce metadata for Survey_Question__c/fields/Options__c.field-meta.xml. Label: Options. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 2d24dccf6d021a77587caa5e60d1a5be7263e9ef26109c09134d8ccffe85afb0

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Options__c</fullName><description>Enter selectable options separated by a semicolon.</description><label>Options</label><length>1000</length><visibleLines>3</visibleLines><type>LongTextArea</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Question__c/fields/Question_Type__c.field-meta.xml

Salesforce metadata for Survey_Question__c/fields/Question_Type__c.field-meta.xml. Label: Question Type. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 51466fadda7e3999e20776ca10d217225a484c6f0684739aada2a42df657d7c9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Question_Type__c</fullName><label>Question Type</label><required>true</required><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Single Choice</fullName><default>true</default><label>Single Choice</label></value><value><fullName>Multiple Choice</fullName><default>false</default><label>Multiple Choice</label></value><value><fullName>Text</fullName><default>false</default><label>Text</label></value><value><fullName>Number</fullName><default>false</default><label>Number</label></value><value><fullName>Phone</fullName><default>false</default><label>Phone</label></value><value><fullName>Rating</fullName><default>false</default><label>Rating</label></value></valueSetDefinition></valueSet></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Question__c/fields/Required__c.field-meta.xml

Salesforce metadata for Survey_Question__c/fields/Required__c.field-meta.xml. Label: Required. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 efe2538decb75b9b24cec4e33779c36ba1f901f341fcc8ed5b482e47ac7fca64

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Required__c</fullName><defaultValue>false</defaultValue><label>Required</label><type>Checkbox</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Question__c/fields/Survey__c.field-meta.xml

Salesforce metadata for Survey_Question__c/fields/Survey__c.field-meta.xml. Label: Survey. Type: MasterDetail. Relationship target: Survey__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 11a58f3c586585c432d7e5cf4bc30c5024625939b6168e2ff2f16eedd54901d4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Survey__c</fullName><label>Survey</label><referenceTo>Survey__c</referenceTo><relationshipLabel>Survey Questions</relationshipLabel><relationshipName>Survey_Questions</relationshipName><reparentableMasterDetail>true</reparentableMasterDetail><type>MasterDetail</type><writeRequiresMasterRead>false</writeRequiresMasterRead></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Response__c/Survey_Response__c.object-meta.xml

Salesforce metadata for Survey_Response__c/Survey_Response__c.object-meta.xml. Label: Survey Response. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 a1ae9373d9b4bc60bb6117176cbc9720005a128ec2b886d1d872c89cedcfee42

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomObject xmlns="http://soap.sforce.com/2006/04/metadata"><deploymentStatus>Deployed</deploymentStatus><description>Completed or draft outlet survey submitted by an employee.</description><enableBulkApi>true</enableBulkApi><enableReports>true</enableReports><enableSearch>true</enableSearch><enableSharing>true</enableSharing><label>Survey Response</label><nameField><displayFormat>SR-{00000}</displayFormat><label>Survey Response Number</label><type>AutoNumber</type></nameField><pluralLabel>Survey Responses</pluralLabel><sharingModel>ReadWrite</sharingModel><visibility>Public</visibility></CustomObject>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Response__c/fields/After_Image_URL__c.field-meta.xml

Salesforce metadata for Survey_Response__c/fields/After_Image_URL__c.field-meta.xml. Label: After Image URL. Type: Url. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 deeac19f71328afba3997843d05105531cd1391c059079a175f22051a6659f56

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>After_Image_URL__c</fullName><label>After Image URL</label><type>Url</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Response__c/fields/Before_Image_URL__c.field-meta.xml

Salesforce metadata for Survey_Response__c/fields/Before_Image_URL__c.field-meta.xml. Label: Before Image URL. Type: Url. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 1cac745d5deeb9f612cab7bcee85b17f4dfce654cec341a1b9ac8a59f447eaef

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Before_Image_URL__c</fullName><label>Before Image URL</label><type>Url</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Response__c/fields/Employee__c.field-meta.xml

Salesforce metadata for Survey_Response__c/fields/Employee__c.field-meta.xml. Label: Employee. Type: Lookup. Relationship target: Employee__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 94a0d6656625b2c9e4784e78878f54fc111634ba354ddfb4722f98438a7124ad

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Employee__c</fullName><deleteConstraint>SetNull</deleteConstraint><label>Employee</label><referenceTo>Employee__c</referenceTo><relationshipLabel>Survey Responses</relationshipLabel><relationshipName>Survey_Responses</relationshipName><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Response__c/fields/Latitude__c.field-meta.xml

Salesforce metadata for Survey_Response__c/fields/Latitude__c.field-meta.xml. Label: Latitude. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 f19396a4c5456b62b6281068053805f5637b676157012dfe721452ff336ffd58

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Latitude__c</fullName><label>Latitude</label><precision>10</precision><scale>7</scale><type>Number</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Response__c/fields/Longitude__c.field-meta.xml

Salesforce metadata for Survey_Response__c/fields/Longitude__c.field-meta.xml. Label: Longitude. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 28d7b08ad559e21a700913fb5e0c74703de59269d5296e45b221151a447744bb

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Longitude__c</fullName><label>Longitude</label><precision>10</precision><scale>7</scale><type>Number</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Response__c/fields/Outlet__c.field-meta.xml

Salesforce metadata for Survey_Response__c/fields/Outlet__c.field-meta.xml. Label: Outlet. Type: Lookup. Relationship target: Retailer__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 744edf4222200e1fc9cbb6415ea2edeaa5b81ab093b6108a0f6964fd65806c46

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Outlet__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Outlet</label><referenceTo>Retailer__c</referenceTo><relationshipLabel>Survey Responses</relationshipLabel><relationshipName>Survey_Responses</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Response__c/fields/Overall_Rating__c.field-meta.xml

Salesforce metadata for Survey_Response__c/fields/Overall_Rating__c.field-meta.xml. Label: Overall Rating. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 68339d2c9f8deee2ffac715162c81961c5fae638d7e8989a336bccb8e7439bfa

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Overall_Rating__c</fullName><label>Overall Rating</label><precision>2</precision><scale>0</scale><type>Number</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Response__c/fields/Remarks__c.field-meta.xml

Salesforce metadata for Survey_Response__c/fields/Remarks__c.field-meta.xml. Label: Remarks. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 e1bc028f680f0a7cd2c2a6214167c2990111ea0ece74f1af7d202aa848e56c03

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Remarks__c</fullName><label>Remarks</label><length>32768</length><visibleLines>3</visibleLines><type>LongTextArea</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Response__c/fields/Started_At__c.field-meta.xml

Salesforce metadata for Survey_Response__c/fields/Started_At__c.field-meta.xml. Label: Started At. Type: DateTime. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 f5bcaad1d06e68501382b5a33cc16e393282cc5dd5f5b545be091abf521aa67d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Started_At__c</fullName><label>Started At</label><type>DateTime</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Response__c/fields/Status__c.field-meta.xml

Salesforce metadata for Survey_Response__c/fields/Status__c.field-meta.xml. Label: Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 eb78bbff80ecc980098a1e8f68ef9f4a5c2a3148a65e1f6352c12538bc1be225

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Status__c</fullName><label>Status</label><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Draft</fullName><default>true</default><label>Draft</label></value><value><fullName>In Progress</fullName><default>false</default><label>In Progress</label></value><value><fullName>Completed</fullName><default>false</default><label>Completed</label></value></valueSetDefinition></valueSet></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Response__c/fields/Submitted_At__c.field-meta.xml

Salesforce metadata for Survey_Response__c/fields/Submitted_At__c.field-meta.xml. Label: Submitted At. Type: DateTime. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 2ad90bb03392dabaa94c018a79e31025b4cfc8716bf09d1b610354cab10ab571

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Submitted_At__c</fullName> <label>Submitted At</label><type>DateTime</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Response__c/fields/Survey__c.field-meta.xml

Salesforce metadata for Survey_Response__c/fields/Survey__c.field-meta.xml. Label: Survey. Type: Lookup. Relationship target: Survey__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 6cba3181eb9b81007ddd141e7b0aa959779936e636f2a9a1226906419c4308b5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Survey__c</fullName><deleteConstraint>Restrict</deleteConstraint><label>Survey</label><referenceTo>Survey__c</referenceTo><relationshipLabel>Survey Responses</relationshipLabel><relationshipName>Survey_Responses</relationshipName><required>true</required><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Response__c/fields/Visit__c.field-meta.xml

Salesforce metadata for Survey_Response__c/fields/Visit__c.field-meta.xml. Label: Visit. Type: Lookup. Relationship target: Visit__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 994751b80d7b2500f17e783a3c367296c4a63b72299715ff5ed31c71ee3bf5da

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Visit__c</fullName><deleteConstraint>SetNull</deleteConstraint><label>Visit</label><referenceTo>Visit__c</referenceTo><relationshipLabel>Survey Responses</relationshipLabel><relationshipName>Survey_Responses</relationshipName><type>Lookup</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey_Response__c/listViews/All_Survey_Responses.listView-meta.xml

Salesforce metadata for Survey_Response__c/listViews/All_Survey_Responses.listView-meta.xml. Label: All Survey Responses. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 78775be11b669c73cd599ec941e8dbdee5767c8dbd4a05e737be701135b60c1a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><ListView xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>All_Survey_Responses</fullName><columns>NAME</columns><columns>Survey__c</columns><columns>Outlet__c</columns><columns>Employee__c</columns><columns>Status__c</columns><columns>Submitted_At__c</columns><filterScope>Everything</filterScope><label>All Survey Responses</label></ListView>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey__c/Survey__c.object-meta.xml

Salesforce metadata for Survey__c/Survey__c.object-meta.xml. Label: Survey. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 bd5a4d55537a1d10f9dd3e366758bc18093b586fbf0f90cee154aff6ae1db7f5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomObject xmlns="http://soap.sforce.com/2006/04/metadata"><deploymentStatus>Deployed</deploymentStatus><description>Salesforce-controlled outlet survey configuration.</description><enableBulkApi>true</enableBulkApi><enableReports>true</enableReports><enableSearch>true</enableSearch><enableSharing>true</enableSharing><label>Survey</label><nameField><label>Survey Name</label><type>Text</type></nameField><pluralLabel>Surveys</pluralLabel><sharingModel>ReadWrite</sharingModel><visibility>Public</visibility></CustomObject>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey__c/fields/Active__c.field-meta.xml

Salesforce metadata for Survey__c/fields/Active__c.field-meta.xml. Label: Active. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 0e3c0a96745e26e619cf7fb6c6dacb31c76ee49a2a1671ca70ff896753fc0cd4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Active__c</fullName><defaultValue>true</defaultValue><label>Active</label><type>Checkbox</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey__c/fields/End_Date__c.field-meta.xml

Salesforce metadata for Survey__c/fields/End_Date__c.field-meta.xml. Label: End Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 7aad041fa5aedf048f74f009dc7e3026ce3a53817536ae7a56d8162053c2b909

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>End_Date__c</fullName><label>End Date</label><required>true</required><type>Date</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey__c/fields/Instructions__c.field-meta.xml

Salesforce metadata for Survey__c/fields/Instructions__c.field-meta.xml. Label: Instructions. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 ee961285e6a72c9abc436a1add1163ffeb8a9b407043c771896de24666ca72c4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Instructions__c</fullName> <label>Instructions</label><length>32768</length><visibleLines>4</visibleLines><type >LongTextArea</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey__c/fields/Maximum_Rating__c.field-meta.xml

Salesforce metadata for Survey__c/fields/Maximum_Rating__c.field-meta.xml. Label: Maximum Rating. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 ef0f645dc7d4a596120794e6b9ff6cf13d7082bd769e722324cf2bea61ef411f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Maximum_Rating__c</fullName><defaultValue>5</defaultValue><label>Maximum Rating</label><precision>2</precision><scale>0</scale><type>Number</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey__c/fields/Outlet_Type__c.field-meta.xml

Salesforce metadata for Survey__c/fields/Outlet_Type__c.field-meta.xml. Label: Outlet Type. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 fe743d3e260c51a4598d4e3ead39de405340b5576e02207190b147ccdac2d72a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Outlet_Type__c</fullName><label>Outlet Type</label><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>All</fullName><default>true</default><label>All</label></value><value><fullName>Grocery</fullName><default>false</default><label>Grocery</label></value><value><fullName>Cosmetics</fullName><default>false</default><label>Cosmetics</label></value><value><fullName>Pan Shop</fullName><default>false</default><label>Pan Shop</label></value><value><fullName>Medical</fullName><default>false</default><label>Medical</label></value><value><fullName>General Trade</fullName><default>false</default><label>General Trade</label></value><value><fullName>Modern Trade</fullName><default>false</default><label>Modern Trade</label></value></valueSetDefinition></valueSet></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey__c/fields/Rating_Target__c.field-meta.xml

Salesforce metadata for Survey__c/fields/Rating_Target__c.field-meta.xml. Label: Rating Target. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 5201668961b6ad2f4ef2264699f1433fcf7ec8b50ce1e4ac351b043f970a1741

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Rating_Target__c</fullName><label>Rating Target</label><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Product</fullName><default>false</default><label>Product</label></value><value><fullName>Outlet</fullName><default>true</default><label>Outlet</label></value><value><fullName>Manager</fullName><default>false</default><label>Manager</label></value><value><fullName>Outlet Owner</fullName><default>false</default><label>Outlet Owner</label></value></valueSetDefinition></valueSet></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey__c/fields/Require_After_Image__c.field-meta.xml

Salesforce metadata for Survey__c/fields/Require_After_Image__c.field-meta.xml. Label: Require After Image. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 b1355d5920c6b626bc309b7a1a1a2f8c495cdcc1f22a93dc6438d1f64bec09f9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Require_After_Image__c</fullName><defaultValue>false</defaultValue><label>Require After Image</label><type>Checkbox</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey__c/fields/Require_Before_Image__c.field-meta.xml

Salesforce metadata for Survey__c/fields/Require_Before_Image__c.field-meta.xml. Label: Require Before Image. Type: Checkbox. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 ef3271e875609be1b9f26c4033b7c4ece5571a3fff259a50f0368bde224b1164

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Require_Before_Image__c</fullName><defaultValue>false</defaultValue><label>Require Before Image</label><type>Checkbox</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey__c/fields/Start_Date__c.field-meta.xml

Salesforce metadata for Survey__c/fields/Start_Date__c.field-meta.xml. Label: Start Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 194c11145c7cc472a85d4845b6d200b28d3e84632d3d119bac08e04bdf46bcbc

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Start_Date__c</fullName><label>Start Date</label><required>true</required><type>Date</type></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey__c/fields/Survey_Type__c.field-meta.xml

Salesforce metadata for Survey__c/fields/Survey_Type__c.field-meta.xml. Label: Survey Type. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 b37195ac46b1f5d4b6039589c078ba8e3074c2bbd4168bd17978d7b180af7069

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomField xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>Survey_Type__c</fullName><label>Survey Type</label><required>true</required><type>Picklist</type><valueSet><restricted>true</restricted><valueSetDefinition><sorted>false</sorted><value><fullName>Image Upload</fullName><default>false</default><label>Image Upload</label></value><value><fullName>Rating</fullName><default>false</default><label>Rating</label></value><value><fullName>Questionnaire</fullName><default>true</default><label>Questionnaire</label></value></valueSetDefinition></valueSet></CustomField>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey__c/listViews/All_Surveys.listView-meta.xml

Salesforce metadata for Survey__c/listViews/All_Surveys.listView-meta.xml. Label: All Surveys. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 664effda2d0bcfb5544c59bf1709f6c11751b86b5872a08e79cb24d64d1a8ded

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><ListView xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>All_Surveys</fullName><columns>NAME</columns><columns>Survey_Type__c</columns><columns>Outlet_Type__c</columns><columns>Start_Date__c</columns><columns>End_Date__c</columns><columns>Active__c</columns><filterScope>Everything</filterScope><label>All Surveys</label></ListView>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Survey__c/validationRules/End_Date_After_Start.validationRule-meta.xml

Salesforce metadata for Survey__c/validationRules/End_Date_After_Start.validationRule-meta.xml. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

1 numbered source lines | SHA-256 f1a692f595f713eae5e62e67a7e25b00a6e00134d0525d8b1d92a0eef8d240db

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><ValidationRule xmlns="http://soap.sforce.com/2006/04/metadata"><fullName>End_Date_After_Start</fullName><active>true</active><errorConditionFormula>End_Date__c < Start_Date__c</errorConditionFormula><errorMessage>End Date cannot be earlier than Start Date.</errorMessage></ValidationRule>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/objects/Visit__c/Visit__c.object-meta.xml

Salesforce metadata for Visit__c/Visit__c.object-meta.xml. Label: Visit. Type: Default. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

167 numbered source lines | SHA-256 3b021c4f3c554d70ec41b2a7d9e3234fe46ecd6e79a30324f580198e334d287d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomObject xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomObject block; child elements specify its configuration.
3	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
4	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
5	`        <type>Default</type>`	Sets field/storage type to Default.
6	`    </actionOverrides>`	Closes the actionOverrides configuration block.
7	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
8	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
9	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
10	`        <type>Default</type>`	Sets field/storage type to Default.
11	`    </actionOverrides>`	Closes the actionOverrides configuration block.
12	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
13	`        <actionName>Accept</actionName>`	Sets action Name in the enclosing configuration to Accept.
14	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
15	`        <type>Default</type>`	Sets field/storage type to Default.
16	`    </actionOverrides>`	Closes the actionOverrides configuration block.
17	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
18	`        <actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.

Line	Source code	Explanation / reading note
19	`<type>Default</type>`	Sets field/storage type to Default.
20	`</actionOverrides>`	Closes the actionOverrides configuration block.
21	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
22	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
23	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
24	`<type>Default</type>`	Sets field/storage type to Default.
25	`</actionOverrides>`	Closes the actionOverrides configuration block.
26	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
27	`<actionName>CancelEdit</actionName>`	Sets action Name in the enclosing configuration to CancelEdit.
28	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
29	`<type>Default</type>`	Sets field/storage type to Default.
30	`</actionOverrides>`	Closes the actionOverrides configuration block.
31	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
32	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
33	`<type>Default</type>`	Sets field/storage type to Default.
34	`</actionOverrides>`	Closes the actionOverrides configuration block.
35	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
36	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
37	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
38	`<type>Default</type>`	Sets field/storage type to Default.
39	`</actionOverrides>`	Closes the actionOverrides configuration block.
40	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.

Line	Source code	Explanation / reading note
41	`<actionName>Clone</actionName>`	Sets action Name in the enclosing configuration to Clone.
42	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
43	`<type>Default</type>`	Sets field/storage type to Default.
44	`</actionOverrides>`	Closes the actionOverrides configuration block.
45	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
46	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
47	`<type>Default</type>`	Sets field/storage type to Default.
48	`</actionOverrides>`	Closes the actionOverrides configuration block.
49	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
50	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
51	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
52	`<type>Default</type>`	Sets field/storage type to Default.
53	`</actionOverrides>`	Closes the actionOverrides configuration block.
54	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
55	`<actionName>Delete</actionName>`	Sets action Name in the enclosing configuration to Delete.
56	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
57	`<type>Default</type>`	Sets field/storage type to Default.
58	`</actionOverrides>`	Closes the actionOverrides configuration block.
59	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
60	`<actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
61	`<type>Default</type>`	Sets field/storage type to Default.
62	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
63	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
64	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
65	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
66	`        <type>Default</type>`	Sets field/storage type to Default.
67	`    </actionOverrides>`	Closes the actionOverrides configuration block.
68	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
69	`        <actionName>Edit</actionName>`	Sets action Name in the enclosing configuration to Edit.
70	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
71	`        <type>Default</type>`	Sets field/storage type to Default.
72	`    </actionOverrides>`	Closes the actionOverrides configuration block.
73	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
74	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
75	`        <type>Default</type>`	Sets field/storage type to Default.
76	`    </actionOverrides>`	Closes the actionOverrides configuration block.
77	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
78	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
79	`        <formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
80	`        <type>Default</type>`	Sets field/storage type to Default.
81	`    </actionOverrides>`	Closes the actionOverrides configuration block.
82	`    <actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
83	`        <actionName>List</actionName>`	Sets action Name in the enclosing configuration to List.
84	`        <formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.

Line	Source code	Explanation / reading note
85	`<type>Default</type>`	Sets field/storage type to Default.
86	`</actionOverrides>`	Closes the actionOverrides configuration block.
87	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
88	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
89	`<type>Default</type>`	Sets field/storage type to Default.
90	`</actionOverrides>`	Closes the actionOverrides configuration block.
91	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
92	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
93	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
94	`<type>Default</type>`	Sets field/storage type to Default.
95	`</actionOverrides>`	Closes the actionOverrides configuration block.
96	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
97	`<actionName>New</actionName>`	Sets action Name in the enclosing configuration to New.
98	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
99	`<type>Default</type>`	Sets field/storage type to Default.
100	`</actionOverrides>`	Closes the actionOverrides configuration block.
101	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
102	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
103	`<type>Default</type>`	Sets field/storage type to Default.
104	`</actionOverrides>`	Closes the actionOverrides configuration block.
105	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
106	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.

Line	Source code	Explanation / reading note
107	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
108	`<type>Default</type>`	Sets field/storage type to Default.
109	`</actionOverrides>`	Closes the actionOverrides configuration block.
110	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
111	`<actionName>SaveEdit</actionName>`	Sets action Name in the enclosing configuration to SaveEdit.
112	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
113	`<type>Default</type>`	Sets field/storage type to Default.
114	`</actionOverrides>`	Closes the actionOverrides configuration block.
115	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
116	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
117	`<type>Default</type>`	Sets field/storage type to Default.
118	`</actionOverrides>`	Closes the actionOverrides configuration block.
119	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
120	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
121	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
122	`<type>Default</type>`	Sets field/storage type to Default.
123	`</actionOverrides>`	Closes the actionOverrides configuration block.
124	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
125	`<actionName>Tab</actionName>`	Sets action Name in the enclosing configuration to Tab.
126	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
127	`<type>Default</type>`	Sets field/storage type to Default.
128	`</actionOverrides>`	Closes the actionOverrides configuration block.

Line	Source code	Explanation / reading note
129	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
130	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
131	`<type>Default</type>`	Sets field/storage type to Default.
132	`</actionOverrides>`	Closes the actionOverrides configuration block.
133	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
134	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
135	`<formFactor>Large</formFactor>`	Sets form Factor in the enclosing configuration to Large.
136	`<type>Default</type>`	Sets field/storage type to Default.
137	`</actionOverrides>`	Closes the actionOverrides configuration block.
138	`<actionOverrides>`	Opens the actionOverrides block; child elements specify its configuration.
139	`<actionName>View</actionName>`	Sets action Name in the enclosing configuration to View.
140	`<formFactor>Small</formFactor>`	Sets form Factor in the enclosing configuration to Small.
141	`<type>Default</type>`	Sets field/storage type to Default.
142	`</actionOverrides>`	Closes the actionOverrides configuration block.
143	`<allowInChatterGroups>false</allowInChatterGroups>`	Sets allow In Chatter Groups in the enclosing configuration to false.
144	`<compactLayoutAssignment>SYSTEM</compactLayoutAssignment>`	Sets compact Layout Assignment in the enclosing configuration to SYSTEM.
145	`<deploymentStatus>Deployed</deploymentStatus>`	Sets deployment Status in the enclosing configuration to Deployed.
146	`<description>Planned or completed retailer visit.</description>`	Sets description in the enclosing configuration to Planned or completed retailer visit..
147	`<enableActivities>false</enableActivities>`	Sets enable Activities in the enclosing configuration to false.
148	`<enableBulkApi>true</enableBulkApi>`	Sets enable Bulk Api in the enclosing configuration to true.
149	`<enableFeeds>false</enableFeeds>`	Sets enable Feeds in the enclosing configuration to false.
150	`<enableHistory>true</enableHistory>`	Sets enable History in the enclosing configuration to true.

Line	Source code	Explanation / reading note
151	`<enableLicensing>false</enableLicensing>`	Sets enable Licensing in the enclosing configuration to false.
152	`<enableReports>true</enableReports>`	Sets enable Reports in the enclosing configuration to true.
153	`<enableSearch>true</enableSearch>`	Sets enable Search in the enclosing configuration to true.
154	`<enableSharing>true</enableSharing>`	Sets enable Sharing in the enclosing configuration to true.
155	`<enableStreamingApi>true</enableStreamingApi>`	Sets enable Streaming Api in the enclosing configuration to true.
156	`<externalSharingModel>Private</externalSharingModel>`	Sets external Sharing Model in the enclosing configuration to Private.
157	`<label>Visit</label>`	Sets human-readable Salesforce UI label to Visit.
158	`<nameField>`	Opens the nameField block; child elements specify its configuration.
159	`<label>Visit Name</label>`	Sets human-readable Salesforce UI label to Visit Name.
160	`<trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
161	`<type>Text</type>`	Sets field/storage type to Text.
162	`</nameField>`	Closes the nameField configuration block.
163	`<pluralLabel>Visits</pluralLabel>`	Sets plural Label in the enclosing configuration to Visits.
164	`<searchLayouts></searchLayouts>`	Sets search Layouts in the enclosing configuration to .
165	`<sharingModel>ReadWrite</sharingModel>`	Sets record sharing baseline to ReadWrite.
166	`<visibility>Public</visibility>`	Sets visibility in the enclosing configuration to Public.
167	`</CustomObject>`	Closes the CustomObject configuration block.

force-app/main/default/objects/Visit__c/fields/Check_In_Latitude__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Check_In_Latitude__c.field-meta.xml. Label: Check-In Latitude. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 7bba6755f10c9365cb0c129330b1b4069434b9f7cb9815e49ced67e427edbddd

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Check_In_Latitude__c</fullName>`	Sets API identifier used by metadata deployment and code references to Check_In_Latitude__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Check-In Latitude</label>`	Sets human-readable Salesforce UI label to Check-In Latitude.
6	`    <precision>10</precision>`	Sets maximum numeric precision to 10.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>6</scale>`	Sets decimal places to 6.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Check_In_Longitude__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Check_In_Longitude__c.field-meta.xml. Label: Check-In Longitude. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 faacf3f02fa9b3b28368de46a44fa23d3e88b8c7c5964e68c528473a95b2aea6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Check_In_Longitude__c</fullName>`	Sets API identifier used by metadata deployment and code references to Check_In_Longitude__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Check-In Longitude</label>`	Sets human-readable Salesforce UI label to Check-In Longitude.
6	`    <precision>10</precision>`	Sets maximum numeric precision to 10.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>6</scale>`	Sets decimal places to 6.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Check_In_Time__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Check_In_Time__c.field-meta.xml. Label: Check-In Time. Type: DateTime. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 6dff8c8215da8a1f3f3155e953f429e75da58790ea72ff2637a474d4aa92927f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Check_In_Time__c</fullName>`	Sets API identifier used by metadata deployment and code references to Check_In_Time__c.
4	`    <label>Check-In Time</label>`	Sets human-readable Salesforce UI label to Check-In Time.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>DateTime</type>`	Sets field/storage type to DateTime.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Check_Out_Latitude__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Check_Out_Latitude__c.field-meta.xml. Label: Check-Out Latitude. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 2b8d62c473232ff9eb95fcbbf9709ecabb68b3733091ed184f2682c0b80d46ec

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Check_Out_Latitude__c</fullName>`	Sets API identifier used by metadata deployment and code references to Check_Out_Latitude__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Check-Out Latitude</label>`	Sets human-readable Salesforce UI label to Check-Out Latitude.
6	`    <precision>10</precision>`	Sets maximum numeric precision to 10.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>6</scale>`	Sets decimal places to 6.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Check_Out_Longitude__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Check_Out_Longitude__c.field-meta.xml. Label: Check-Out Longitude. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 2c7d4d56b99415438e07ac9f6e55bd39b57139718d836a2c0f9047e5910b7694

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Check_Out_Longitude__c</fullName>`	Sets API identifier used by metadata deployment and code references to Check_Out_Longitude__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Check-Out Longitude</label>`	Sets human-readable Salesforce UI label to Check-Out Longitude.
6	`    <precision>10</precision>`	Sets maximum numeric precision to 10.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>6</scale>`	Sets decimal places to 6.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Check_Out_Time__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Check_Out_Time__c.field-meta.xml. Label: Check-Out Time. Type: DateTime. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 e831fab9a10d7ce0b2c6dd39b3c6f0d91d6a1ec9599d51d5ee37189b77da3732

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Check_Out_Time__c</fullName>`	Sets API identifier used by metadata deployment and code references to Check_Out_Time__c.
4	`    <label>Check-Out Time</label>`	Sets human-readable Salesforce UI label to Check-Out Time.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>DateTime</type>`	Sets field/storage type to DateTime.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Duration_Minutes__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Duration_Minutes__c.field-meta.xml. Label: Duration Minutes. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 6771bf947a586ed075eeaf5fe16f15253fae101f961e44bc84ad383e2174372b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Duration_Minutes__c</fullName>`	Sets API identifier used by metadata deployment and code references to Duration_Minutes__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Duration Minutes</label>`	Sets human-readable Salesforce UI label to Duration Minutes.
6	`    <precision>8</precision>`	Sets maximum numeric precision to 8.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Employee__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Employee__c.field-meta.xml. Label: Employee. Type: Lookup. Relationship target: Employee__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 6a433e484260cc50f8f4c38da73ea084273de39c6ce830391b1c0b0e1bd29945

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Employee__c</fullName>`	Sets API identifier used by metadata deployment and code references to Employee__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Employee</label>`	Sets human-readable Salesforce UI label to Employee.
6	`    <referenceTo>Employee__c</referenceTo>`	Sets object referenced by this relationship to Employee__c.
7	`    <relationshipLabel>Visits</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Visits.
8	`    <relationshipName>Visits</relationshipName>`	Sets relationship API traversal name to Visits.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Missed_Reason__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Missed_Reason__c.field-meta.xml. Label: Missed Visit Reason. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

12 numbered source lines | SHA-256 91e66932838c10d7d4077b02aae51e0f6926ee7c00c3de0f5cb8c43119a4c5d7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Missed_Reason__c</fullName>`	Sets API identifier used by metadata deployment and code references to Missed_Reason__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Missed Visit Reason</label>`	Sets human-readable Salesforce UI label to Missed Visit Reason.
6	`    <length>255</length>`	Sets maximum text length to 255.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Text</type>`	Sets field/storage type to Text.
11	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
12	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Mobile_Order_Draft__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Mobile_Order_Draft__c.field-meta.xml. Label: Mobile Order Draft. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 8ad6891f90a36e7d6df1bbe461f404ce0f6f1ddb64d72c9b697b37dd6c4545f9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Mobile_Order_Draft__c</fullName>`	Sets API identifier used by metadata deployment and code references to Mobile_Order_Draft__c.
4	`    <description>Recoverable mobile order draft. Final order prices and eligibility are validated by the backend.</description>`	Sets description in the enclosing configuration to Recoverable mobile order draft. Final order prices and eligibility are validated by the backend..
5	`    <label>Mobile Order Draft</label>`	Sets human-readable Salesforce UI label to Mobile Order Draft.
6	`    <length>131072</length>`	Sets maximum text length to 131072.
7	`    <type>LongTextArea</type>`	Sets field/storage type to LongTextArea.
8	`    <visibleLines>3</visibleLines>`	Sets visible Lines in the enclosing configuration to 3.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Notes__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Notes__c.field-meta.xml. Label: Notes. Type: LongTextArea. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 fa2b34285590d190b4c5c759a6a722b8c9ba665a05c281c71c4a578b1708c819

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Notes__c</fullName>`	Sets API identifier used by metadata deployment and code references to Notes__c.
4	`    <label>Notes</label>`	Sets human-readable Salesforce UI label to Notes.
5	`    <length>4000</length>`	Sets maximum text length to 4000.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>LongTextArea</type>`	Sets field/storage type to LongTextArea.
9	`    <visibleLines>4</visibleLines>`	Sets visible Lines in the enclosing configuration to 4.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Offline_Key__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Offline_Key__c.field-meta.xml. Label: Offline Key. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 b915b0ef2dab613369e0d4815d673adec6c907cddf2b5d82bf52d58e8a4ae622

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Offline_Key__c</fullName>`	Sets API identifier used by metadata deployment and code references to Offline_Key__c.
4	`    <caseSensitive>false</caseSensitive>`	Sets case Sensitive in the enclosing configuration to false.
5	`    <externalId>true</externalId>`	Sets whether the field is eligible for external-key matching to true.
6	`    <label>Offline Key</label>`	Sets human-readable Salesforce UI label to Offline Key.
7	`    <length>80</length>`	Sets maximum text length to 80.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Text</type>`	Sets field/storage type to Text.
12	`    <unique>true</unique>`	Sets whether duplicate stored values are rejected to true.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Order_Gross_Amount__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Order_Gross_Amount__c.field-meta.xml. Label: Order Gross Amount. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 585d79a46eb32a5fff0b3e5510c077202d198bf087a5347896e4fbc51b07dc1b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Order_Gross_Amount__c</fullName>`	Sets API identifier used by metadata deployment and code references to Order_Gross_Amount__c.
4	`    <label>Order Gross Amount</label>`	Sets human-readable Salesforce UI label to Order Gross Amount.
5	`    <precision>16</precision>`	Sets maximum numeric precision to 16.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <scale>2</scale>`	Sets decimal places to 2.
8	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Currency</type>`	Sets field/storage type to Currency.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Order_Tax__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Order_Tax__c.field-meta.xml. Label: Order Tax. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 643513456c5f6dab2dc99ff09ddab442479796a85f98709cd44cd3e9af3627f4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Order_Tax__c</fullName>`	Sets API identifier used by metadata deployment and code references to Order_Tax__c.
4	`    <label>Order Tax</label>`	Sets human-readable Salesforce UI label to Order Tax.
5	`    <precision>16</precision>`	Sets maximum numeric precision to 16.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <scale>2</scale>`	Sets decimal places to 2.
8	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Currency</type>`	Sets field/storage type to Currency.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Order_Total_Quantity__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Order_Total_Quantity__c.field-meta.xml. Label: Order Total Quantity. Type: Number. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 91e8ef0fd7291113cb2f040bf1f30ad26cca6712223064772ef1316093d9e490

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Order_Total_Quantity__c</fullName>`	Sets API identifier used by metadata deployment and code references to Order_Total_Quantity__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <label>Order Total Quantity</label>`	Sets human-readable Salesforce UI label to Order Total Quantity.
6	`    <precision>12</precision>`	Sets maximum numeric precision to 12.
7	`    <required>false</required>`	Sets whether a value is mandatory to false.
8	`    <scale>0</scale>`	Sets decimal places to 0.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Number</type>`	Sets field/storage type to Number.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Order_Total__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Order_Total__c.field-meta.xml. Label: Order Total. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 1322f773456a1e1411ddea625a22121e112dd6bf240aa701804c6a0c1873ed11

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Order_Total__c</fullName>`	Sets API identifier used by metadata deployment and code references to Order_Total__c.
4	`    <label>Order Total</label>`	Sets human-readable Salesforce UI label to Order Total.
5	`    <precision>16</precision>`	Sets maximum numeric precision to 16.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <scale>2</scale>`	Sets decimal places to 2.
8	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Currency</type>`	Sets field/storage type to Currency.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Outlet_Geo_Location__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Outlet_Geo_Location__c.field-meta.xml. Label: Outlet Geo Location. Type: Location. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 5406fa265f28f1af43ad97ab148773c2824ca7b67d73b02ab010df0d159e372b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Outlet_Geo_Location__c</fullName>`	Sets API identifier used by metadata deployment and code references to Outlet_Geo_Location__c.
4	`    <displayLocationInDecimal>true</displayLocationInDecimal>`	Sets display Location In Decimal in the enclosing configuration to true.
5	`    <label>Outlet Geo Location</label>`	Sets human-readable Salesforce UI label to Outlet Geo Location.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <scale>6</scale>`	Sets decimal places to 6.
8	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Location</type>`	Sets field/storage type to Location.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Outlet_Name__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Outlet_Name__c.field-meta.xml. Label: Outlet Name. Type: Text. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 f6960dd8f5898ab6a9da75d6ab3c90a502131e10966eb6e22aa4606a22cbd0bf

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Outlet_Name__c</fullName>`	Sets API identifier used by metadata deployment and code references to Outlet_Name__c.
4	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
5	`    <formula>Retailer__r.Name</formula>`	Sets formula expression evaluated by Salesforce to Retailer__r.Name.
6	`    <formulaTreatBlanksAs>BlankAsZero</formulaTreatBlanksAs>`	Sets formula Treat Blanks As in the enclosing configuration to BlankAsZero.
7	`    <label>Outlet Name</label>`	Sets human-readable Salesforce UI label to Outlet Name.
8	`    <required>false</required>`	Sets whether a value is mandatory to false.
9	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
10	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
11	`    <type>Text</type>`	Sets field/storage type to Text.
12	`    <unique>false</unique>`	Sets whether duplicate stored values are rejected to false.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Permanent_Journey_Plan__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Permanent_Journey_Plan__c.field-meta.xml. Label: Permanent Journey Plan. Type: Lookup. Relationship target: Permanent_Journey_Plan__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 a1553b714e78066b57f584386bafc3f1fb5f5ea1180249c0a33dbb692bd87cbe

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Permanent_Journey_Plan__c</fullName>`	Sets API identifier used by metadata deployment and code references to Permanent_Journey_Plan__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <label>Permanent Journey Plan</label>`	Sets human-readable Salesforce UI label to Permanent Journey Plan.
6	`    <referenceTo>Permanent_Journey_Plan__c</referenceTo>`	Sets object referenced by this relationship to Permanent_Journey_Plan__c.
7	`    <relationshipLabel>Visits</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Visits.
8	`    <relationshipName>Visits</relationshipName>`	Sets relationship API traversal name to Visits.
9	`    <required>true</required>`	Sets whether a value is mandatory to true.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Previous_Order_Date__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Previous_Order_Date__c.field-meta.xml. Label: Previous Order Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 fa92c692faf17bcc1ca2aa59d646b1ddb6402f3c6076f9977456b0de0bdf0140

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Previous_Order_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Previous_Order_Date__c.
4	`    <label>Previous Order Date</label>`	Sets human-readable Salesforce UI label to Previous Order Date.
5	`    <required>false</required>`	Sets whether a value is mandatory to false.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>Date</type>`	Sets field/storage type to Date.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Previous_Order_Value__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Previous_Order_Value__c.field-meta.xml. Label: Previous Order Value. Type: Currency. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

11 numbered source lines | SHA-256 b6496b744be1a7912526da25c40ab4b8232e7e924964c75774b793bbac35259d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Previous_Order_Value__c</fullName>`	Sets API identifier used by metadata deployment and code references to Previous_Order_Value__c.
4	`    <label>Previous Order Value</label>`	Sets human-readable Salesforce UI label to Previous Order Value.
5	`    <precision>16</precision>`	Sets maximum numeric precision to 16.
6	`    <required>false</required>`	Sets whether a value is mandatory to false.
7	`    <scale>2</scale>`	Sets decimal places to 2.
8	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
9	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
10	`    <type>Currency</type>`	Sets field/storage type to Currency.
11	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Retailer__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Retailer__c.field-meta.xml. Label: Retailer. Type: Lookup. Relationship target: Retailer__c. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 091e1427bafcff4dcc3782e32b6462e7f52b45753bd95972daa90d684a79b007

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Retailer__c</fullName>`	Sets API identifier used by metadata deployment and code references to Retailer__c.
4	`    <deleteConstraint>Restrict</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to Restrict.
5	`    <label>Retailer</label>`	Sets human-readable Salesforce UI label to Retailer.
6	`    <referenceTo>Retailer__c</referenceTo>`	Sets object referenced by this relationship to Retailer__c.
7	`    <relationshipLabel>Visits</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Visits.
8	`    <relationshipName>Visits</relationshipName>`	Sets relationship API traversal name to Visits.
9	`    <required>true</required>`	Sets whether a value is mandatory to true.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Sales_Representative__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Sales_Representative__c.field-meta.xml. Label: Sales Representative. Type: Lookup. Relationship target: User. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

13 numbered source lines | SHA-256 e988a3eaec393c54c5ff051575604d7af975945aae65bca08cb9aabb045883db

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Sales_Representative__c</fullName>`	Sets API identifier used by metadata deployment and code references to Sales_Representative__c.
4	`    <deleteConstraint>SetNull</deleteConstraint>`	Sets delete Constraint in the enclosing configuration to SetNull.
5	`    <label>Sales Representative</label>`	Sets human-readable Salesforce UI label to Sales Representative.
6	`    <referenceTo>User</referenceTo>`	Sets object referenced by this relationship to User.
7	`    <relationshipLabel>Visits</relationshipLabel>`	Sets relationship Label in the enclosing configuration to Visits.
8	`    <relationshipName>Visits</relationshipName>`	Sets relationship API traversal name to Visits.
9	`    <required>false</required>`	Sets whether a value is mandatory to false.
10	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
11	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
12	`    <type>Lookup</type>`	Sets field/storage type to Lookup.
13	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Status__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Status__c.field-meta.xml. Label: Status. Type: Picklist. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

40 numbered source lines | SHA-256 bccb0b580ad0c8c710f89230046afa46f38a9e4c18c5c30941138d7bad0d850b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Status__c</fullName>`	Sets API identifier used by metadata deployment and code references to Status__c.
4	`    <label>Status</label>`	Sets human-readable Salesforce UI label to Status.
5	`    <required>true</required>`	Sets whether a value is mandatory to true.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>Picklist</type>`	Sets field/storage type to Picklist.
9	`    <valueSet>`	Opens the valueSet block; child elements specify its configuration.
10	`        <restricted>true</restricted>`	Sets restricted in the enclosing configuration to true.
11	`        <valueSetDefinition>`	Opens the valueSetDefinition block; child elements specify its configuration.
12	`            <sorted>false</sorted>`	Sets sorted in the enclosing configuration to false.
13	`            <value>`	Opens the value block; child elements specify its configuration.
14	`                <fullName>Planned</fullName>`	Sets API identifier used by metadata deployment and code references to Planned.
15	`                <default>true</default>`	Sets whether this option is the default to true.
16	`                <label>Planned</label>`	Sets human-readable Salesforce UI label to Planned.
17	`            </value>`	Closes the value configuration block.
18	`            <value>`	Opens the value block; child elements specify its configuration.

Line	Source code	Explanation / reading note
19	`<fullName>Checked In</fullName>`	Sets API identifier used by metadata deployment and code references to Checked In.
20	`<default>false</default>`	Sets whether this option is the default to false.
21	`<label>Checked In</label>`	Sets human-readable Salesforce UI label to Checked In.
22	`</value>`	Closes the value configuration block.
23	`<value>`	Opens the value block; child elements specify its configuration.
24	`<fullName>Completed</fullName>`	Sets API identifier used by metadata deployment and code references to Completed.
25	`<default>false</default>`	Sets whether this option is the default to false.
26	`<label>Completed</label>`	Sets human-readable Salesforce UI label to Completed.
27	`</value>`	Closes the value configuration block.
28	`<value>`	Opens the value block; child elements specify its configuration.
29	`<fullName>Missed</fullName>`	Sets API identifier used by metadata deployment and code references to Missed.
30	`<default>false</default>`	Sets whether this option is the default to false.
31	`<label>Missed</label>`	Sets human-readable Salesforce UI label to Missed.
32	`</value>`	Closes the value configuration block.
33	`<value>`	Opens the value block; child elements specify its configuration.
34	`<fullName>Cancelled</fullName>`	Sets API identifier used by metadata deployment and code references to Cancelled.
35	`<default>false</default>`	Sets whether this option is the default to false.
36	`<label>Cancelled</label>`	Sets human-readable Salesforce UI label to Cancelled.
37	`</value>`	Closes the value configuration block.
38	`</valueSetDefinition>`	Closes the valueSetDefinition configuration block.
39	`</valueSet>`	Closes the valueSet configuration block.
40	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Visit_Date__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Visit_Date__c.field-meta.xml. Label: Visit Date. Type: Date. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

9 numbered source lines | SHA-256 211212ab645dbd02c3b48c4179ef2d5c85ba672bde37485d76d8057cb490af3a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Visit_Date__c</fullName>`	Sets API identifier used by metadata deployment and code references to Visit_Date__c.
4	`    <label>Visit Date</label>`	Sets human-readable Salesforce UI label to Visit Date.
5	`    <required>true</required>`	Sets whether a value is mandatory to true.
6	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
7	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
8	`    <type>Date</type>`	Sets field/storage type to Date.
9	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/fields/Visit_Number__c.field-meta.xml

Salesforce metadata for Visit__c/fields/Visit_Number__c.field-meta.xml. Label: Visit Number. Type: AutoNumber. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

10 numbered source lines | SHA-256 a0904fe664530f618281659e6b9cd4c44c24e9a341a3c0a437ef73128c69e6f3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomField xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomField block; child elements specify its configuration.
3	`    <fullName>Visit_Number__c</fullName>`	Sets API identifier used by metadata deployment and code references to Visit_Number__c.
4	`    <displayFormat>VIS-{0000}</displayFormat>`	Sets display Format in the enclosing configuration to VIS-{0000}.
5	`    <externalId>false</externalId>`	Sets whether the field is eligible for external-key matching to false.
6	`    <label>Visit Number</label>`	Sets human-readable Salesforce UI label to Visit Number.
7	`    <trackHistory>false</trackHistory>`	Sets track History in the enclosing configuration to false.
8	`    <trackTrending>false</trackTrending>`	Sets track Trending in the enclosing configuration to false.
9	`    <type>AutoNumber</type>`	Sets field/storage type to AutoNumber.
10	`</CustomField>`	Closes the CustomField configuration block.

force-app/main/default/objects/Visit__c/listViews/All_Visits.listView-meta.xml

Salesforce metadata for Visit__c/listViews/All_Visits.listView-meta.xml. Label: All Visits. Declarative configuration, not sequential Apex execution. Formulas, validation and defaults can affect saves made by either client.

7 numbered source lines | SHA-256 e169f8fc606238859e44d16ead4110634d82cb3980ccad17bc0cfd6387fe6249

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<ListView xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the ListView block; child elements specify its configuration.
3	`    <fullName>All_Visits</fullName>`	Sets API identifier used by metadata deployment and code references to All_Visits.
4	`    <columns>NAME</columns>`	Sets columns in the enclosing configuration to NAME.
5	`    <filterScope>Everything</filterScope>`	Sets filter Scope in the enclosing configuration to Everything.
6	`    <label>All Visits</label>`	Sets human-readable Salesforce UI label to All Visits.
7	`</ListView>`	Closes the ListView configuration block.

force-app/main/default/permissionsets/DMS_Allocation_Admin.permissionset-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

8 numbered source lines | SHA-256 5058995b8730f92b1d211d57f9f2a377b56ae78a8bce02fe4b53ecee6ccc019a

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<PermissionSet xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the PermissionSet block; child elements specify its configuration.
3	`    <description>Field access for managing distributor allocation and linking distributor logins. Does not grant a distributor login or broader record access.</description>`	Sets description in the enclosing configuration to Field access for managing distributor allocation and linking distributor logins. Does not grant a distributor login or broader record access..
4	`    <fieldPermissions><editable>true</editable><field>DMS_Distributor__c.Employee_Allocation_Order__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Distributor__c.Employee_Allocation_Order__c</field><readable>true</readable>.
5	`    <fieldPermissions><editable>true</editable><field>DMS_Distributor__c.Salesforce_User__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Distributor__c.Salesforce_User__c</field><readable>true</readable>.
6	`    <fieldPermissions><editable>true</editable><field>Employee__c.DMS_Distributor__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Employee__c.DMS_Distributor__c</field><readable>true</readable>.
7	`    <label>DMS Allocation Admin</label>`	Sets human-readable Salesforce UI label to DMS Allocation Admin.
8	`</PermissionSet>`	Closes the PermissionSet configuration block.

force-app/main/default/permissionsets/DMS_Backend_Transactions.permissionset-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 9cc62bb5c51872ba8bfecf627c987d5bd8fe34ee913d55f4c075ceae3569d395

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<PermissionSet xmlns="http://soap.sforce.com/2006/04/metadata"><classAccesses><apexClass>DmsPortalApi</apexClass><enabled>true</enabled></classAccesses><customPermissions><enabled>true</enabled><name>DMS_Trusted_Backend</name></customPermissions><description>Trusted server transaction entry only. Do not assign to mobile end users.</description><fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Free_Product__c</field><readable>true</readable></fieldPermissions>`	Opens the PermissionSet block; child elements specify its configuration.
3	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Free_Pieces_Per_Case__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Free_Pieces_Per_Case__c</field><readable>true</readable>.
4	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order__c.Order_Source__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order__c.Order_Source__c</field><readable>true</readable>.
5	`<label>DMS Backend Transactions</label></PermissionSet>`	Opens the label block; child elements specify its configuration.

force-app/main/default/permissionsets/DMS_Configuration_Admin.permissionset-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

184 numbered source lines | SHA-256 96abb0255561fe7d0014c3bfc6124ef06da0f2ef7e10b50881cf864200c7f13d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<PermissionSet xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the PermissionSet block; child elements specify its configuration.
3	`    <applicationVisibilities><application>DMS_Management</application><visible>true</visible></applicationVisibilities>`	Sets application Visibilities in the enclosing configuration to <application>DMS_Management</application><visible>true</visible>.
4	`    <description>DMS schema configuration access. Assign only to approved administrators. Does not grant Apex endpoints, mass data access, or distributor portal access.</description>`	Sets description in the enclosing configuration to DMS schema configuration access. Assign only to approved administrators. Does not grant Apex endpoints, mass data access, or distributor portal access..
5	`    <fieldPermissions><editable>true</editable><field>DMS_Primary_Return_Line__c.Batch_Number__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Return_Line__c.Batch_Number__c</field><readable>true</readable>.
6	`    <fieldPermissions><editable>true</editable><field>DMS_Primary_Return_Line__c.Case_Value__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Return_Line__c.Case_Value__c</field><readable>true</readable>.
7	`    <fieldPermissions><editable>true</editable><field>DMS_Primary_Return_Line__c.Cases__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Return_Line__c.Cases__c</field><readable>true</readable>.
8	`    <fieldPermissions><editable>true</editable><field>DMS_Primary_Return_Line__c.Expiry_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Return_Line__c.Expiry_Date__c</field><readable>true</readable>.
9	`    <fieldPermissions><editable>true</editable><field>DMS_Primary_Return_Line__c.Notes__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Return_Line__c.Notes__c</field><readable>true</readable>.
10	`    <fieldPermissions><editable>true</editable><field>DMS_Primary_Return_Line__c.Pieces_Per_Case__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Return_Line__c.Pieces_Per_Case__c</field><readable>true</readable>.
11	`    <fieldPermissions><editable>true</editable><field>DMS_Primary_Return_Line__c.Reason__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Return_Line__c.Reason__c</field><readable>true</readable>.
12	`    <fieldPermissions><editable>true</editable><field>DMS_Primary_Return_Line__c.Receipt_Line__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Return_Line__c.Receipt_Line__c</field><readable>true</readable>.
13	`    <fieldPermissions><editable>false</editable><field>DMS_Primary_Return_Line__c.Return_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return_Line__c.Return_Amount__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
14	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return_Line__c.Total_Pieces__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return_Line__c.Total_Pieces__c</field><readable>true</readable>.
15	`<fieldPermissions><editable>true</editable><field>DMS_Goods_Receipt__c.Notes__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Goods_Receipt__c.Notes__c</field><readable>true</readable>.
16	`<fieldPermissions><editable>true</editable><field>DMS_Goods_Receipt__c.Received_By__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Goods_Receipt__c.Received_By__c</field><readable>true</readable>.
17	`<fieldPermissions><editable>true</editable><field>DMS_Goods_Receipt__c.Received_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Goods_Receipt__c.Received_Date__c</field><readable>true</readable>.
18	`<fieldPermissions><editable>true</editable><field>DMS_Goods_Receipt__c.Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Goods_Receipt__c.Status__c</field><readable>true</readable>.
19	`<fieldPermissions><editable>true</editable><field>DMS_Goods_Receipt__c.Supplier_Invoice_Number__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Goods_Receipt__c.Supplier_Invoice_Number__c</field><readable>true</readable>.
20	`<fieldPermissions><editable>false</editable><field>DMS_Goods_Receipt__c.Total_Pieces__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Goods_Receipt__c.Total_Pieces__c</field><readable>true</readable>.
21	`<fieldPermissions><editable>false</editable><field>DMS_Goods_Receipt__c.Total_Value__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Goods_Receipt__c.Total_Value__c</field><readable>true</readable>.
22	`<fieldPermissions><editable>true</editable><field>DMS_Distributor__c.Active__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Distributor__c.Active__c</field><readable>true</readable>.
23	`<fieldPermissions><editable>true</editable><field>DMS_Distributor__c.Address__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Distributor__c.Address__c</field><readable>true</readable>.
24	`<fieldPermissions><editable>true</editable><field>DMS_Distributor__c.Assigned_Employee__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Distributor__c.Assigned_Employee__c</field><readable>true</readable>.
25	`<fieldPermissions><editable>true</editable><field>DMS_Distributor__c.Credit_Limit__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Distributor__c.Credit_Limit__c</field><readable>true</readable>.
26	`<fieldPermissions><editable>true</editable><field>DMS_Distributor__c.Distributor_Code__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Distributor__c.Distributor_Code__c</field><readable>true</readable>.
27	`<fieldPermissions><editable>true</editable><field>DMS_Distributor__c.Geography__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Distributor__c.Geography__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
28	`<fieldPermissions><editable>true</editable><field>DMS_Distributor__c.GSTIN__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Distributor__c.GSTIN__c</field><readable>true</readable>.
29	`<fieldPermissions><editable>true</editable><field>DMS_Distributor__c.Location__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Distributor__c.Location__c</field><readable>true</readable>.
30	`<fieldPermissions><editable>true</editable><field>DMS_Distributor__c.Login_Email__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Distributor__c.Login_Email__c</field><readable>true</readable>.
31	`<fieldPermissions><editable>true</editable><field>DMS_Distributor__c.Officer__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Distributor__c.Officer__c</field><readable>true</readable>.
32	`<fieldPermissions><editable>true</editable><field>DMS_Distributor__c.Parent_Distributor__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Distributor__c.Parent_Distributor__c</field><readable>true</readable>.
33	`<fieldPermissions><editable>true</editable><field>DMS_Distributor__c.Partner_Type__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Distributor__c.Partner_Type__c</field><readable>true</readable>.
34	`<fieldPermissions><editable>true</editable><field>DMS_Distributor__c.Phone__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Distributor__c.Phone__c</field><readable>true</readable>.
35	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note__c.Credit_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note__c.Credit_Date__c</field><readable>true</readable>.
36	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note__c.Invoice__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note__c.Invoice__c</field><readable>true</readable>.
37	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note__c.Notes__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note__c.Notes__c</field><readable>true</readable>.
38	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note__c.Outlet__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note__c.Outlet__c</field><readable>true</readable>.
39	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note__c.Primary_Return__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note__c.Primary_Return__c</field><readable>true</readable>.
40	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note__c.Reason__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note__c.Reason__c</field><readable>true</readable>.
41	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note__c.Sales_Channel__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note__c.Sales_Channel__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
42	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note__c.Scheme__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note__c.Scheme__c</field><readable>true</readable>.
43	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note__c.Secondary_Return__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note__c.Secondary_Return__c</field><readable>true</readable>.
44	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note__c.Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note__c.Status__c</field><readable>true</readable>.
45	`<fieldPermissions><editable>false</editable><field>DMS_Credit_Note__c.Total_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Credit_Note__c.Total_Amount__c</field><readable>true</readable>.
46	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Return__c.Notes__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Return__c.Notes__c</field><readable>true</readable>.
47	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Return__c.Officer__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Return__c.Officer__c</field><readable>true</readable>.
48	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Return__c.Primary_Order__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Return__c.Primary_Order__c</field><readable>true</readable>.
49	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Return__c.Rejection_Reason__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Return__c.Rejection_Reason__c</field><readable>true</readable>.
50	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Return__c.Return_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Return__c.Return_Date__c</field><readable>true</readable>.
51	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Return__c.Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Return__c.Status__c</field><readable>true</readable>.
52	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return__c.Total_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return__c.Total_Amount__c</field><readable>true</readable>.
53	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return__c.Total_Cases__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return__c.Total_Cases__c</field><readable>true</readable>.
54	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order_Line__c.Case_Price__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order_Line__c.Case_Price__c</field><readable>true</readable>.
55	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order_Line__c.Cases__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order_Line__c.Cases__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
56	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order_Line__c.Discount_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order_Line__c.Discount_Amount__c</field><readable>true</readable>.
57	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order_Line__c.Free_Cases__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order_Line__c.Free_Cases__c</field><readable>true</readable>.
58	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order_Line__c.Free_Gift__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order_Line__c.Free_Gift__c</field><readable>true</readable>.
59	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order_Line__c.Gift_Quantity__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order_Line__c.Gift_Quantity__c</field><readable>true</readable>.
60	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Line_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Line_Amount__c</field><readable>true</readable>.
61	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Net_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Net_Amount__c</field><readable>true</readable>.
62	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order_Line__c.Order__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order_Line__c.Order__c</field><readable>true</readable>.
63	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order_Line__c.Pieces_Per_Case__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order_Line__c.Pieces_Per_Case__c</field><readable>true</readable>.
64	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order_Line__c.Product__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order_Line__c.Product__c</field><readable>true</readable>.
65	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order_Line__c.Scheme__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order_Line__c.Scheme__c</field><readable>true</readable>.
66	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order_Line__c.Tax_Percent__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order_Line__c.Tax_Percent__c</field><readable>true</readable>.
67	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Total_Pieces__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Total_Pieces__c</field><readable>true</readable>.
68	`<fieldPermissions><editable>true</editable><field>DMS_Invoice_Line__c.Batch_Number__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Invoice_Line__c.Batch_Number__c</field><readable>true</readable>.
69	`<fieldPermissions><editable>true</editable><field>DMS_Invoice_Line__c.Discount_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Invoice_Line__c.Discount_Amount__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
70	`<fieldPermissions><editable>true</editable><field>DMS_Invoice_Line__c.Expiry_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Invoice_Line__c.Expiry_Date__c</field><readable>true</readable>.
71	`<fieldPermissions><editable>true</editable><field>DMS_Invoice_Line__c.Free_Pieces__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Invoice_Line__c.Free_Pieces__c</field><readable>true</readable>.
72	`<fieldPermissions><editable>false</editable><field>DMS_Invoice_Line__c.Gross_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Invoice_Line__c.Gross_Amount__c</field><readable>true</readable>.
73	`<fieldPermissions><editable>true</editable><field>DMS_Invoice_Line__c.Inventory__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Invoice_Line__c.Inventory__c</field><readable>true</readable>.
74	`<fieldPermissions><editable>true</editable><field>DMS_Invoice_Line__c.Order_Item__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Invoice_Line__c.Order_Item__c</field><readable>true</readable>.
75	`<fieldPermissions><editable>true</editable><field>DMS_Invoice_Line__c.Quantity_Pieces__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Invoice_Line__c.Quantity_Pieces__c</field><readable>true</readable>.
76	`<fieldPermissions><editable>true</editable><field>DMS_Invoice_Line__c.Scheme__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Invoice_Line__c.Scheme__c</field><readable>true</readable>.
77	`<fieldPermissions><editable>false</editable><field>DMS_Invoice_Line__c.Stock_Out_Pieces__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Invoice_Line__c.Stock_Out_Pieces__c</field><readable>true</readable>.
78	`<fieldPermissions><editable>false</editable><field>DMS_Invoice_Line__c.Tax_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Invoice_Line__c.Tax_Amount__c</field><readable>true</readable>.
79	`<fieldPermissions><editable>true</editable><field>DMS_Invoice_Line__c.Tax_Percent__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Invoice_Line__c.Tax_Percent__c</field><readable>true</readable>.
80	`<fieldPermissions><editable>false</editable><field>DMS_Invoice_Line__c.Total_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Invoice_Line__c.Total_Amount__c</field><readable>true</readable>.
81	`<fieldPermissions><editable>true</editable><field>DMS_Invoice_Line__c.Unit_Price__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Invoice_Line__c.Unit_Price__c</field><readable>true</readable>.
82	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note_Line__c.Description__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note_Line__c.Description__c</field><readable>true</readable>.
83	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note_Line__c.Invoice_Line__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note_Line__c.Invoice_Line__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
84	`<fieldPermissions><editable>false</editable><field>DMS_Credit_Note_Line__c.Net_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Credit_Note_Line__c.Net_Amount__c</field><readable>true</readable>.
85	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note_Line__c.Product__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note_Line__c.Product__c</field><readable>true</readable>.
86	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note_Line__c.Quantity__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note_Line__c.Quantity__c</field><readable>true</readable>.
87	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note_Line__c.Quantity_Unit__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note_Line__c.Quantity_Unit__c</field><readable>true</readable>.
88	`<fieldPermissions><editable>false</editable><field>DMS_Credit_Note_Line__c.Tax_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Credit_Note_Line__c.Tax_Amount__c</field><readable>true</readable>.
89	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note_Line__c.Tax_Percent__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note_Line__c.Tax_Percent__c</field><readable>true</readable>.
90	`<fieldPermissions><editable>false</editable><field>DMS_Credit_Note_Line__c.Total_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Credit_Note_Line__c.Total_Amount__c</field><readable>true</readable>.
91	`<fieldPermissions><editable>true</editable><field>DMS_Credit_Note_Line__c.Unit_Credit__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Credit_Note_Line__c.Unit_Credit__c</field><readable>true</readable>.
92	`<fieldPermissions><editable>true</editable><field>DMS_Goods_Receipt_Line__c.Batch_Number__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Goods_Receipt_Line__c.Batch_Number__c</field><readable>true</readable>.
93	`<fieldPermissions><editable>true</editable><field>DMS_Goods_Receipt_Line__c.Case_Cost__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Goods_Receipt_Line__c.Case_Cost__c</field><readable>true</readable>.
94	`<fieldPermissions><editable>true</editable><field>DMS_Goods_Receipt_Line__c.Expiry_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Goods_Receipt_Line__c.Expiry_Date__c</field><readable>true</readable>.
95	`<fieldPermissions><editable>true</editable><field>DMS_Goods_Receipt_Line__c.Free_Cases__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Goods_Receipt_Line__c.Free_Cases__c</field><readable>true</readable>.
96	`<fieldPermissions><editable>true</editable><field>DMS_Goods_Receipt_Line__c.Manufacturing_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Goods_Receipt_Line__c.Manufacturing_Date__c</field><readable>true</readable>.
97	`<fieldPermissions><editable>true</editable><field>DMS_Goods_Receipt_Line__c.Pieces_Per_Case__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Goods_Receipt_Line__c.Pieces_Per_Case__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
98	`<fieldPermissions><editable>true</editable><field>DMS_Goods_Receipt_Line__c.Primary_Order_Line__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Goods_Receipt_Line__c.Primary_Order_Line__c</field><readable>true</readable>.
99	`<fieldPermissions><editable>true</editable><field>DMS_Goods_Receipt_Line__c.Received_Cases__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Goods_Receipt_Line__c.Received_Cases__c</field><readable>true</readable>.
100	`<fieldPermissions><editable>false</editable><field>DMS_Goods_Receipt_Line__c.Received_Pieces__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Goods_Receipt_Line__c.Received_Pieces__c</field><readable>true</readable>.
101	`<fieldPermissions><editable>false</editable><field>DMS_Goods_Receipt_Line__c.Received_Value__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Goods_Receipt_Line__c.Received_Value__c</field><readable>true</readable>.
102	`<fieldPermissions><editable>false</editable><field>DMS_Inventory__c.Available_Pieces__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Inventory__c.Available_Pieces__c</field><readable>true</readable>.
103	`<fieldPermissions><editable>true</editable><field>DMS_Inventory__c.Batch_Number__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Inventory__c.Batch_Number__c</field><readable>true</readable>.
104	`<fieldPermissions><editable>false</editable><field>DMS_Inventory__c.Expired__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Inventory__c.Expired__c</field><readable>true</readable>.
105	`<fieldPermissions><editable>true</editable><field>DMS_Inventory__c.Expiry_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Inventory__c.Expiry_Date__c</field><readable>true</readable>.
106	`<fieldPermissions><editable>true</editable><field>DMS_Inventory__c.Last_Stock_Update__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Inventory__c.Last_Stock_Update__c</field><readable>true</readable>.
107	`<fieldPermissions><editable>false</editable><field>DMS_Inventory__c.Low_Stock__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Inventory__c.Low_Stock__c</field><readable>true</readable>.
108	`<fieldPermissions><editable>true</editable><field>DMS_Inventory__c.Manufacturing_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Inventory__c.Manufacturing_Date__c</field><readable>true</readable>.
109	`<fieldPermissions><editable>true</editable><field>DMS_Inventory__c.On_Hand_Pieces__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Inventory__c.On_Hand_Pieces__c</field><readable>true</readable>.
110	`<fieldPermissions><editable>true</editable><field>DMS_Inventory__c.Reorder_Level_Pieces__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Inventory__c.Reorder_Level_Pieces__c</field><readable>true</readable>.
111	`<fieldPermissions><editable>true</editable><field>DMS_Inventory__c.Reserved_Pieces__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Inventory__c.Reserved_Pieces__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
112	`<fieldPermissions><editable>true</editable><field>DMS_Inventory__c.Warehouse__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Inventory__c.Warehouse__c</field><readable>true</readable>.
113	`<fieldPermissions><editable>false</editable><field>DMS_Invoice__c.Balance_Due__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Invoice__c.Balance_Due__c</field><readable>true</readable>.
114	`<fieldPermissions><editable>false</editable><field>DMS_Invoice__c.Discount_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Invoice__c.Discount_Amount__c</field><readable>true</readable>.
115	`<fieldPermissions><editable>true</editable><field>DMS_Invoice__c.Due_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Invoice__c.Due_Date__c</field><readable>true</readable>.
116	`<fieldPermissions><editable>false</editable><field>DMS_Invoice__c.Gross_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Invoice__c.Gross_Amount__c</field><readable>true</readable>.
117	`<fieldPermissions><editable>true</editable><field>DMS_Invoice__c.Invoice_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Invoice__c.Invoice_Date__c</field><readable>true</readable>.
118	`<fieldPermissions><editable>true</editable><field>DMS_Invoice__c.Notes__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Invoice__c.Notes__c</field><readable>true</readable>.
119	`<fieldPermissions><editable>true</editable><field>DMS_Invoice__c.Paid_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Invoice__c.Paid_Amount__c</field><readable>true</readable>.
120	`<fieldPermissions><editable>true</editable><field>DMS_Invoice__c.Payment_Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Invoice__c.Payment_Status__c</field><readable>true</readable>.
121	`<fieldPermissions><editable>true</editable><field>DMS_Invoice__c.Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Invoice__c.Status__c</field><readable>true</readable>.
122	`<fieldPermissions><editable>false</editable><field>DMS_Invoice__c.Tax_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Invoice__c.Tax_Amount__c</field><readable>true</readable>.
123	`<fieldPermissions><editable>false</editable><field>DMS_Invoice__c.Total_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Invoice__c.Total_Amount__c</field><readable>true</readable>.
124	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order__c.Distributor__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order__c.Distributor__c</field><readable>true</readable>.
125	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order__c.Employee__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order__c.Employee__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
126	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order__c.Expected_Delivery_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order__c.Expected_Delivery_Date__c</field><readable>true</readable>.
127	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order__c.Fulfilment_Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order__c.Fulfilment_Status__c</field><readable>true</readable>.
128	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order__c.Notes__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order__c.Notes__c</field><readable>true</readable>.
129	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order__c.Officer__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order__c.Officer__c</field><readable>true</readable>.
130	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order__c.Order_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order__c.Order_Date__c</field><readable>true</readable>.
131	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order__c.Rejection_Reason__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order__c.Rejection_Reason__c</field><readable>true</readable>.
132	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order__c.Request_Key__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order__c.Request_Key__c</field><readable>true</readable>.
133	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order__c.Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order__c.Status__c</field><readable>true</readable>.
134	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order__c.Total_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order__c.Total_Amount__c</field><readable>true</readable>.
135	`<fieldPermissions><editable>true</editable><field>Product__c.Boxes_Per_Case__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product__c.Boxes_Per_Case__c</field><readable>true</readable>.
136	`<fieldPermissions><editable>true</editable><field>Product__c.Pieces_Per_Box__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product__c.Pieces_Per_Box__c</field><readable>true</readable>.
137	`<fieldPermissions><editable>false</editable><field>Product__c.Box_Conversion_Pieces__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Box_Conversion_Pieces__c</field><readable>true</readable>.
138	`<fieldPermissions><editable>true</editable><field>Product__c.DMS_Case_Price__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product__c.DMS_Case_Price__c</field><readable>true</readable>.
139	`<fieldPermissions><editable>true</editable><field>Scheme__c.Minimum_Cases__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Scheme__c.Minimum_Cases__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
140	`<fieldPermissions><editable>true</editable><field>Scheme__c.Free_Cases__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Scheme__c.Free_Cases__c</field><readable>true</readable>.
141	`<fieldPermissions><editable>true</editable><field>Scheme__c.Free_Gift__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Scheme__c.Free_Gift__c</field><readable>true</readable>.
142	`<fieldPermissions><editable>true</editable><field>Scheme__c.Gift_Quantity__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Scheme__c.Gift_Quantity__c</field><readable>true</readable>.
143	`<fieldPermissions><editable>true</editable><field>Scheme__c.Sales_Channel__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Scheme__c.Sales_Channel__c</field><readable>true</readable>.
144	`<fieldPermissions><editable>true</editable><field>Product_Return__c.DMS_Distributor__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product_Return__c.DMS_Distributor__c</field><readable>true</readable>.
145	`<fieldPermissions><editable>true</editable><field>Product_Return__c.Invoice_Line__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product_Return__c.Invoice_Line__c</field><readable>true</readable>.
146	`<fieldPermissions><editable>true</editable><field>Product_Return__c.DMS_Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product_Return__c.DMS_Status__c</field><readable>true</readable>.
147	`<fieldPermissions><editable>true</editable><field>Product_Return__c.DMS_Decision_Notes__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product_Return__c.DMS_Decision_Notes__c</field><readable>true</readable>.
148	`<fieldPermissions><editable>true</editable><field>Retailer__c.DMS_Distributor__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Retailer__c.DMS_Distributor__c</field><readable>true</readable>.
149	`<fieldPermissions><editable>true</editable><field>Sales_Order__c.DMS_Distributor__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Sales_Order__c.DMS_Distributor__c</field><readable>true</readable>.
150	`<fieldPermissions><editable>true</editable><field>Sales_Order__c.DMS_Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Sales_Order__c.DMS_Status__c</field><readable>true</readable>.
151	`<fieldPermissions><editable>true</editable><field>Sales_Order__c.DMS_Decision_Notes__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Sales_Order__c.DMS_Decision_Notes__c</field><readable>true</readable>.
152	`<fieldPermissions><editable>true</editable><field>Sales_Order__c.DMS_Decided_At__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Sales_Order__c.DMS_Decided_At__c</field><readable>true</readable>.
153	`<hasActivationRequired>false</hasActivationRequired>`	Sets has Activation Required in the enclosing configuration to false.
154	`<label>DMS Configuration Administrator</label>`	Sets human-readable Salesforce UI label to DMS Configuration Administrator.

Line	Source code	Explanation / reading note
155	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Primary_Return_Line__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Primary_Return_Line__c</objec.
156	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Goods_Receipt__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Goods_Receipt__c</object><vie.
157	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Distributor__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Distributor__c</object><viewA.
158	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Credit_Note__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Credit_Note__c</object><viewA.
159	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Primary_Return__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Primary_Return__c</object><vi.
160	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Primary_Order_Line__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Primary_Order_Line__c</object.
161	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Invoice_Line__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Invoice_Line__c</object><view.
162	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Credit_Note_Line__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Credit_Note_Line__c</object><.
163	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Goods_Receipt_Line__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Goods_Receipt_Line__c</object.

Line	Source code	Explanation / reading note
164	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Inventory__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Inventory__c</object><viewAll.
165	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Invoice__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Invoice__c</object><viewAllRe.
166	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Primary_Order__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Primary_Order__c</object><vie.
167	`<objectPermissions><allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Product__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Product__c</object><viewAllRecor.
168	`<objectPermissions><allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Scheme__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Scheme__c</object><viewAllRecord.
169	`<objectPermissions><allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Product_Return__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Product_Return__c</object><viewA.
170	`<objectPermissions><allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Retailer__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Retailer__c</object><viewAllReco.
171	`<objectPermissions><allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Sales_Order__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Sales_Order__c</object><viewAllR.
172	`<tabSettings><tab>DMS_Distributor__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Distributor__c</tab><visibility>Visible</visibility>.
173	`<tabSettings><tab>DMS_Primary_Order__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Primary_Order__c</tab><visibility>Visible</visibility>.

Line	Source code	Explanation / reading note
174	`<tabSettings><tab>DMS_Primary_Order_Line__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Primary_Order_Line__c</tab><visibility>Visible</visibility>.
175	`<tabSettings><tab>DMS_Goods_Receipt__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Goods_Receipt__c</tab><visibility>Visible</visibility>.
176	`<tabSettings><tab>DMS_Goods_Receipt_Line__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Goods_Receipt_Line__c</tab><visibility>Visible</visibility>.
177	`<tabSettings><tab>DMS_Inventory__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Inventory__c</tab><visibility>Visible</visibility>.
178	`<tabSettings><tab>DMS_Invoice__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Invoice__c</tab><visibility>Visible</visibility>.
179	`<tabSettings><tab>DMS_Invoice_Line__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Invoice_Line__c</tab><visibility>Visible</visibility>.
180	`<tabSettings><tab>DMS_Primary_Return__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Primary_Return__c</tab><visibility>Visible</visibility>.
181	`<tabSettings><tab>DMS_Primary_Return_Line__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Primary_Return_Line__c</tab><visibility>Visible</visibility>.
182	`<tabSettings><tab>DMS_Credit_Note__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Credit_Note__c</tab><visibility>Visible</visibility>.
183	`<tabSettings><tab>DMS_Credit_Note_Line__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Credit_Note_Line__c</tab><visibility>Visible</visibility>.
184	`</PermissionSet>`	Closes the PermissionSet configuration block.

force-app/main/default/permissionsets/DMS_Distributor_Lifecycle.permissionset-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

7 numbered source lines | SHA-256 8ae3050d18e34a8d94c681a80c2f1f9389b6fd4a0f8c450a9f50f5c16191a3e3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<PermissionSet xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the PermissionSet block; child elements specify its configuration.
3	`    <description>Manage distributor discontinuation. Does not grant object access or access to other distributors.</description>`	Sets description in the enclosing configuration to Manage distributor discontinuation. Does not grant object access or access to other distributors..
4	`    <fieldPermissions><editable>true</editable><field>DMS_Distributor__c.Discontinued__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Distributor__c.Discontinued__c</field><readable>true</readable>.
5	`    <fieldPermissions><editable>false</editable><field>DMS_Distributor__c.Distributor_Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.Distributor_Status__c</field><readable>true</readable>.
6	`    <label>DMS Distributor Lifecycle</label>`	Sets human-readable Salesforce UI label to DMS Distributor Lifecycle.
7	`</PermissionSet>`	Closes the PermissionSet configuration block.

force-app/main/default/permissionsets/DMS_Distributor_Officer.permissionset-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

100 numbered source lines | SHA-256 a0a11bd5da2a594614eb80bbaf4cdc9a2e646b276379d2523c770729ae11d329

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<PermissionSet xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the PermissionSet block; child elements specify its configuration.
3	`<applicationVisibilities><application>DMS_Management</application><visible>true</visible></applicationVisibilities>`	Sets application Visibilities in the enclosing configuration to <application>DMS_Management</application><visible>true</visible>.
4	`<description>Company officer reviews assigned primary orders and returns. No administrator or view-all privileges.</description>`	Sets description in the enclosing configuration to Company officer reviews assigned primary orders and returns. No administrator or view-all privileges..
5	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order__c.Order_Source__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order__c.Order_Source__c</field><readable>true</readable>.
6	`<fieldPermissions><editable>false</editable><field>DMS_Distributor__c.Active__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.Active__c</field><readable>true</readable>.
7	`<fieldPermissions><editable>false</editable><field>DMS_Distributor__c.Address__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.Address__c</field><readable>true</readable>.
8	`<fieldPermissions><editable>false</editable><field>DMS_Distributor__c.Login_Email__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.Login_Email__c</field><readable>true</readable>.
9	`<fieldPermissions><editable>false</editable><field>DMS_Distributor__c.Officer__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.Officer__c</field><readable>true</readable>.
10	`<fieldPermissions><editable>false</editable><field>DMS_Distributor__c.Phone__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.Phone__c</field><readable>true</readable>.
11	`<fieldPermissions><editable>false</editable><field>DMS_Distributor__c.Assigned_Employee__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.Assigned_Employee__c</field><readable>true</readable>.
12	`<fieldPermissions><editable>false</editable><field>DMS_Distributor__c.Credit_Limit__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.Credit_Limit__c</field><readable>true</readable>.
13	`<fieldPermissions><editable>false</editable><field>DMS_Distributor__c.Distributor_Code__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.Distributor_Code__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
14	`<fieldPermissions><editable>false</editable><field>DMS_Distributor__c.GSTIN__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.GSTIN__c</field><readable>true</readable>.
15	`<fieldPermissions><editable>false</editable><field>DMS_Distributor__c.Geography__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.Geography__c</field><readable>true</readable>.
16	`<fieldPermissions><editable>false</editable><field>DMS_Distributor__c.Location__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.Location__c</field><readable>true</readable>.
17	`<fieldPermissions><editable>false</editable><field>DMS_Distributor__c.Location__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.Location__c</field><readable>true</readable>.
18	`<fieldPermissions><editable>false</editable><field>DMS_Distributor__c.Parent_Distributor__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.Parent_Distributor__c</field><readable>true</readable>.
19	`<fieldPermissions><editable>false</editable><field>DMS_Distributor__c.Partner_Type__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.Partner_Type__c</field><readable>true</readable>.
20	`<fieldPermissions><editable>false</editable><field>DMS_Distributor__c.Employee_Allocation_Order__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.Employee_Allocation_Order__c</field><readable>true</readable>.
21	`<fieldPermissions><editable>false</editable><field>DMS_Distributor__c.Salesforce_User__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Distributor__c.Salesforce_User__c</field><readable>true</readable>.
22	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Case_Price__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Case_Price__c</field><readable>true</readable>.
23	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Cases__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Cases__c</field><readable>true</readable>.
24	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Order__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Order__c</field><readable>true</readable>.
25	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Pieces_Per_Case__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Pieces_Per_Case__c</field><readable>true</readable>.
26	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Product__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Product__c</field><readable>true</readable>.
27	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Tax_Percent__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Tax_Percent__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
28	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Line_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Line_Amount__c</field><readable>true</readable>.
29	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Discount_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Discount_Amount__c</field><readable>true</readable>.
30	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Free_Cases__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Free_Cases__c</field><readable>true</readable>.
31	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Free_Gift__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Free_Gift__c</field><readable>true</readable>.
32	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Gift_Quantity__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Gift_Quantity__c</field><readable>true</readable>.
33	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Scheme__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Scheme__c</field><readable>true</readable>.
34	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Net_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Net_Amount__c</field><readable>true</readable>.
35	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Total_Pieces__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Total_Pieces__c</field><readable>true</readable>.
36	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order__c.Distributor__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order__c.Distributor__c</field><readable>true</readable>.
37	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order__c.Employee__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order__c.Employee__c</field><readable>true</readable>.
38	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order__c.Notes__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order__c.Notes__c</field><readable>true</readable>.
39	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order__c.Officer__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order__c.Officer__c</field><readable>true</readable>.
40	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order__c.Request_Key__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order__c.Request_Key__c</field><readable>true</readable>.
41	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order__c.Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order__c.Status__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
42	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order__c.Total_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order__c.Total_Amount__c</field><readable>true</readable>.
43	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order__c.Expected_Delivery_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order__c.Expected_Delivery_Date__c</field><readable>true</readable>.
44	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order__c.Fulfilment_Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order__c.Fulfilment_Status__c</field><readable>true</readable>.
45	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order__c.Order_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order__c.Order_Date__c</field><readable>true</readable>.
46	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Order__c.Rejection_Reason__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Order__c.Rejection_Reason__c</field><readable>true</readable>.
47	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return_Line__c.Batch_Number__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return_Line__c.Batch_Number__c</field><readable>true</readable>.
48	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return_Line__c.Case_Value__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return_Line__c.Case_Value__c</field><readable>true</readable>.
49	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return_Line__c.Cases__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return_Line__c.Cases__c</field><readable>true</readable>.
50	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return_Line__c.Expiry_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return_Line__c.Expiry_Date__c</field><readable>true</readable>.
51	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return_Line__c.Notes__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return_Line__c.Notes__c</field><readable>true</readable>.
52	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return_Line__c.Pieces_Per_Case__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return_Line__c.Pieces_Per_Case__c</field><readable>true</readable>.
53	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return_Line__c.Reason__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return_Line__c.Reason__c</field><readable>true</readable>.
54	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return_Line__c.Receipt_Line__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return_Line__c.Receipt_Line__c</field><readable>true</readable>.
55	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return_Line__c.Return_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return_Line__c.Return_Amount__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
56	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return_Line__c.Total_Pieces__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return_Line__c.Total_Pieces__c</field><readable>true</readable>.
57	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Return__c.Notes__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Return__c.Notes__c</field><readable>true</readable>.
58	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return__c.Officer__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return__c.Officer__c</field><readable>true</readable>.
59	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return__c.Primary_Order__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return__c.Primary_Order__c</field><readable>true</readable>.
60	`<fieldPermissions><editable>true</editable><field>DMS_Primary_Return__c.Rejection_Reason__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>DMS_Primary_Return__c.Rejection_Reason__c</field><readable>true</readable>.
61	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return__c.Return_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return__c.Return_Date__c</field><readable>true</readable>.
62	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return__c.Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return__c.Status__c</field><readable>true</readable>.
63	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return__c.Total_Cases__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return__c.Total_Cases__c</field><readable>true</readable>.
64	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Return__c.Total_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Return__c.Total_Amount__c</field><readable>true</readable>.
65	`<fieldPermissions><editable>false</editable><field>Product__c.Active__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Active__c</field><readable>true</readable>.
66	`<fieldPermissions><editable>false</editable><field>Product__c.Available_Stock__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Available_Stock__c</field><readable>true</readable>.
67	`<fieldPermissions><editable>false</editable><field>Product__c.Batch_Number__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Batch_Number__c</field><readable>true</readable>.
68	`<fieldPermissions><editable>false</editable><field>Product__c.Brand__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Brand__c</field><readable>true</readable>.
69	`<fieldPermissions><editable>false</editable><field>Product__c.Expiry_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Expiry_Date__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
70	`<fieldPermissions><editable>false</editable><field>Product__c.Flavor__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Flavor__c</field><readable>true</readable>.
71	`<fieldPermissions><editable>false</editable><field>Product__c.GST_Percent__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.GST_Percent__c</field><readable>true</readable>.
72	`<fieldPermissions><editable>false</editable><field>Product__c.Image_URL__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Image_URL__c</field><readable>true</readable>.
73	`<fieldPermissions><editable>false</editable><field>Product__c.Manufacturing_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Manufacturing_Date__c</field><readable>true</readable>.
74	`<fieldPermissions><editable>false</editable><field>Product__c.Package_Type__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Package_Type__c</field><readable>true</readable>.
75	`<fieldPermissions><editable>false</editable><field>Product__c.Returnable__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Returnable__c</field><readable>true</readable>.
76	`<fieldPermissions><editable>false</editable><field>Product__c.Sellable__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Sellable__c</field><readable>true</readable>.
77	`<fieldPermissions><editable>false</editable><field>Product__c.Selling_Price__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Selling_Price__c</field><readable>true</readable>.
78	`<fieldPermissions><editable>false</editable><field>Product__c.Variant__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Variant__c</field><readable>true</readable>.
79	`<fieldPermissions><editable>false</editable><field>Product__c.Shelf_Life_Days__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Shelf_Life_Days__c</field><readable>true</readable>.
80	`<fieldPermissions><editable>false</editable><field>Product__c.Brand_Alias__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Brand_Alias__c</field><readable>true</readable>.
81	`<fieldPermissions><editable>false</editable><field>Product__c.Sub_Brand__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Sub_Brand__c</field><readable>true</readable>.
82	`<fieldPermissions><editable>false</editable><field>Product__c.DMS_Case_Price__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.DMS_Case_Price__c</field><readable>true</readable>.
83	`<fieldPermissions><editable>false</editable><field>Product__c.Boxes_Per_Case__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Boxes_Per_Case__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
84	`<fieldPermissions><editable>false</editable><field>Product__c.Pieces_Per_Box__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Pieces_Per_Box__c</field><readable>true</readable>.
85	`<fieldPermissions><editable>false</editable><field>Product__c.Box_Conversion_Pieces__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Box_Conversion_Pieces__c</field><readable>true</readable>.
86	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Free_Product__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Free_Product__c</field><readable>true</readable>.
87	`<fieldPermissions><editable>false</editable><field>DMS_Primary_Order_Line__c.Free_Pieces_Per_Case__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>DMS_Primary_Order_Line__c.Free_Pieces_Per_Case__c</field><readable>true</readable>.
88	`<label>DMS Distributor Officer</label>`	Sets human-readable Salesforce UI label to DMS Distributor Officer.
89	`<objectPermissions><allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>false</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Distributor__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>false</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Distributor__c</object><vie.
90	`<objectPermissions><allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>false</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Primary_Order_Line__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>false</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Primary_Order_Line__c</obje.
91	`<objectPermissions><allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Primary_Order__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Primary_Order__c</object><vi.
92	`<objectPermissions><allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>false</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Primary_Return_Line__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>false</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Primary_Return_Line__c</obj.
93	`<objectPermissions><allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Primary_Return__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Primary_Return__c</object><v.
94	`<objectPermissions><allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>false</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Product__c</object><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>false</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Product__c</object><viewAllReco.

Line	Source code	Explanation / reading note
95	`<tabSettings><tab>DMS_Distributor__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Distributor__c</tab><visibility>Visible</visibility>.
96	`<tabSettings><tab>DMS_Primary_Order_Line__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Primary_Order_Line__c</tab><visibility>Visible</visibility>.
97	`<tabSettings><tab>DMS_Primary_Order__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Primary_Order__c</tab><visibility>Visible</visibility>.
98	`<tabSettings><tab>DMS_Primary_Return_Line__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Primary_Return_Line__c</tab><visibility>Visible</visibility>.
99	`<tabSettings><tab>DMS_Primary_Return__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>DMS_Primary_Return__c</tab><visibility>Visible</visibility>.
100	`</PermissionSet>`	Closes the PermissionSet configuration block.

force-app/main/default/permissionsets/DMS_Monthly_Surveys.permissionset-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 48419ed19327299acd28f7060217f6dadc557c254bbb71e3fab7fd2ab3a4a298

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<PermissionSet xmlns="http://soap.sforce.com/2006/04/metadata"><fieldPermissions><editable>false</editable><field>DMS_Distributor_Survey__c.Officer__c</field><readable>true</readable></fieldPermissions><fieldPermissions><editable>true</editable><field>DMS_Distributor_Survey__c.Demand_Notes__c</field><readable>true</readable></fieldPermissions><fieldPermissions><editable>false</editable><field>DMS_Distributor_Survey__c.Next_Visit_Due__c</field><readable>true</readable></fieldPermissions><label>DMS Monthly Surveys</label><objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Distributor_Survey__c</object><viewAllRecords>false</viewAllRecords></objectPermissions><tabSettings><tab>DMS_Distributor_Survey__c</tab><visibility>Visible</visibility></tabSettings></PermissionSet>`	Sets Permission Set in the enclosing configuration to <fieldPermissions><editable>false</editable><field>DMS_Distributor_Survey__c.Officer__c</field><readable>true</readable></fieldPermissions><fieldPermissions><editable>true</editable><field>DMS_Distrib.

force-app/main/default/permissionsets/DMS_Report_Reader.permissionset-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 590af2b645586718264c0b75caef33583701052d636321d7cad0726532ec19fb

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<PermissionSet xmlns="http://soap.sforce.com/2006/04/metadata"><fieldPermissions><editable>false</editable><field>DMS_Sales_Target__c.Employee__c</field><readable>true</readable></fieldPermissions><fieldPermissions><editable>false</editable><field>DMS_Sales_Target__c.Geography__c</field><readable>true</readable></fieldPermissions><fieldPermissions><editable>false</editable><field>DMS_Sales_Target__c.Product__c</field><readable>true</readable></fieldPermissions><fieldPermissions><editable>false</editable><field>DMS_Sales_Target__c.Unique_Key__c</field><readable>true</readable></fieldPermissions><label>DMS Report Reader</label><objectPermissions><allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>false</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Sales_Target__c</object><viewAllRecords>true</viewAllRecords></objectPermissions><tabSettings><tab>DMS_Sales_Target__c</tab><visibility>Visible</visibility></tabSettings></PermissionSet>`	Sets Permission Set in the enclosing configuration to <fieldPermissions><editable>false</editable><field>DMS_Sales_Target__c.Employee__c</field><readable>true</readable></fieldPermissions><fieldPermissions><editable>false</editable><field>DMS_Sales_Targe.

force-app/main/default/permissionsets/DMS_Support_Admin.permissionset-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 a8633b3dd5102fecabebcb84fa466e998591646f95263b6d9b29702c48961d8d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<PermissionSet xmlns="http://soap.sforce.com/2006/04/metadata"><customPermissions><enabled>true</enabled><name>DMS_Manage_Tickets</name></customPermissions><fieldPermissions><editable>true</editable><field>DMS_Support_Ticket__c.Resolution__c</field><readable>true</readable></fieldPermissions><fieldPermissions><editable>false</editable><field>DMS_Support_Ticket__c.Officer__c</field><readable>true</readable></fieldPermissions><fieldPermissions><editable>false</editable><field>DMS_Support_Ticket__c.Description__c</field><readable>true</readable></fieldPermissions><label>DMS Support Administrator</label><objectPermissions><allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Support_Ticket__c</object><viewAllRecords>true</viewAllRecords></objectPermissions></PermissionSet>`	Sets Permission Set in the enclosing configuration to <customPermissions><enabled>true</enabled><name>DMS_Manage_Tickets</name></customPermissions><fieldPermissions><editable>true</editable><field>DMS_Support_Ticket__c.Resolution__c</field><readable>true.

force-app/main/default/permissionsets/DMS_Target_Manager.permissionset-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 629e2c95d621e68b53f65379b2dc3db0ce671d00beaf430dbb9277bdfc2499f2

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<PermissionSet xmlns="http://soap.sforce.com/2006/04/metadata"><fieldPermissions><editable>true</editable><field>DMS_Sales_Target__c.Employee__c</field><readable>true</readable></fieldPermissions><fieldPermissions><editable>true</editable><field>DMS_Sales_Target__c.Geography__c</field><readable>true</readable></fieldPermissions><fieldPermissions><editable>true</editable><field>DMS_Sales_Target__c.Product__c</field><readable>true</readable></fieldPermissions><fieldPermissions><editable>false</editable><field>DMS_Sales_Target__c.Unique_Key__c</field><readable>true</readable></fieldPermissions><label>DMS Target Manager</label><objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Sales_Target__c</object><viewAllRecords>true</viewAllRecords></objectPermissions><tabSettings><tab>DMS_Sales_Target__c</tab><visibility>Visible</visibility></tabSettings></PermissionSet>`	Sets Permission Set in the enclosing configuration to <fieldPermissions><editable>true</editable><field>DMS_Sales_Target__c.Employee__c</field><readable>true</readable></fieldPermissions><fieldPermissions><editable>true</editable><field>DMS_Sales_Target_.

force-app/main/default/permissionsets/DMS_Ticket_Officer.permissionset-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 c5a6e7b495f0209ec8dfe6dd40f6dec808454b54983e58757c1fa448fb0c2ede

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<PermissionSet xmlns="http://soap.sforce.com/2006/04/metadata"><fieldPermissions><editable>false</editable><field>DMS_Support_Ticket__c.Officer__c</field><readable>true</readable></fieldPermissions><fieldPermissions><editable>false</editable><field>DMS_Support_Ticket__c.Description__c</field><readable>true</readable></fieldPermissions><fieldPermissions><editable>true</editable><field>DMS_Support_Ticket__c.Resolution__c</field><readable>true</readable></fieldPermissions><label>DMS Ticket Officer</label><objectPermissions><allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>DMS_Support_Ticket__c</object><viewAllRecords>false</viewAllRecords></objectPermissions><tabSettings><tab>DMS_Support_Ticket__c</tab><visibility>Visible</visibility></tabSettings></PermissionSet>`	Sets Permission Set in the enclosing configuration to <fieldPermissions><editable>false</editable><field>DMS_Support_Ticket__c.Officer__c</field><readable>true</readable></fieldPermissions><fieldPermissions><editable>false</editable><field>DMS_Support_Ti.

force-app/main/default/permissionsets/SFA_Mobile_User.permissionset-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

896 numbered source lines | SHA-256 1f644aa42ae8e2cd6d9a0c3aa684e8ef19ccfaccf711aa923b53fb650a9e7828

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<PermissionSet xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the PermissionSet block; child elements specify its configuration.
3	`    <applicationVisibilities>`	Opens the applicationVisibilities block; child elements specify its configuration.
4	`        <application>SFA_Mobile</application>`	Sets application in the enclosing configuration to SFA_Mobile.
5	`        <visible>true</visible>`	Sets visible in the enclosing configuration to true.
6	`    </applicationVisibilities>`	Closes the applicationVisibilities configuration block.
7	`    <classAccesses>`	Opens the classAccesses block; child elements specify its configuration.
8	`        <apexClass>SfaDemoDataFactory</apexClass>`	Sets Apex class granted by this permission entry to SfaDemoDataFactory.
9	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
10	`    </classAccesses>`	Closes the classAccesses configuration block.
11	`    <classAccesses>`	Opens the classAccesses block; child elements specify its configuration.
12	`        <apexClass>SfaPhaseOnePjpController</apexClass>`	Sets Apex class granted by this permission entry to SfaPhaseOnePjpController.
13	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
14	`    </classAccesses>`	Closes the classAccesses configuration block.
15	`    <description>Access to the SFA Mobile app, its tabs, records and Apex services.</description>`	Sets description in the enclosing configuration to Access to the SFA Mobile app, its tabs, records and Apex services..
16	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
17	`        <editable>true</editable>`	Sets field edit permission to true.
18	`        <field>Employee__c.Email__c</field>`	Sets field API name configured in this entry to Employee__c.Email__c.

Line	Source code	Explanation / reading note
19	`<readable>true</readable>`	Sets field read permission to true.
20	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
21	`<fieldPermissions><editable>true</editable><field>Employee__c.Alternate_Phone__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Employee__c.Alternate_Phone__c</field><readable>true</readable>.
22	`<fieldPermissions><editable>true</editable><field>Employee__c.Address__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Employee__c.Address__c</field><readable>true</readable>.
23	`<fieldPermissions><editable>true</editable><field>Employee__c.Beat__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Employee__c.Beat__c</field><readable>true</readable>.
24	`<fieldPermissions><editable>true</editable><field>Employee__c.Joining_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Employee__c.Joining_Date__c</field><readable>true</readable>.
25	`<fieldPermissions><editable>false</editable><field>Employee__c.Login_Email__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Employee__c.Login_Email__c</field><readable>true</readable>.
26	`<fieldPermissions><editable>true</editable><field>Employee__c.Application_Access_Email__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Employee__c.Application_Access_Email__c</field><readable>true</readable>.
27	`<fieldPermissions><editable>true</editable><field>Employee__c.Remarks__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Employee__c.Remarks__c</field><readable>true</readable>.
28	`<fieldPermissions><editable>false</editable><field>Employee__c.Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Employee__c.Status__c</field><readable>true</readable>.
29	`<fieldPermissions><editable>false</editable><field>Employee__c.User_Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Employee__c.User_Status__c</field><readable>true</readable>.
30	`<fieldPermissions><editable>true</editable><field>Distributor_Outlet_Allocation__c.Employee__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Distributor_Outlet_Allocation__c.Employee__c</field><readable>true</readable>.
31	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
32	`<editable>true</editable>`	Sets field edit permission to true.
33	`<field>Attendance__c.End_Latitude__c</field>`	Sets field API name configured in this entry to Attendance__c.End_Latitude__c.
34	`<readable>true</readable>`	Sets field read permission to true.
35	`</fieldPermissions>`	Closes the fieldPermissions configuration block.

Line	Source code	Explanation / reading note
36	`<fieldPermissions><editable>false</editable><field>Attendance__c.Distance_Travelled_Km__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Attendance__c.Distance_Travelled_Km__c</field><readable>true</readable>.
37	`<fieldPermissions><editable>true</editable><field>Attendance__c.Start_Odometer__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Attendance__c.Start_Odometer__c</field><readable>true</readable>.
38	`<fieldPermissions><editable>true</editable><field>Attendance__c.End_Odometer__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Attendance__c.End_Odometer__c</field><readable>true</readable>.
39	`<fieldPermissions><editable>true</editable><field>Attendance__c.Employee__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Attendance__c.Employee__c</field><readable>true</readable>.
40	`<fieldPermissions><editable>true</editable><field>Attendance__c.Odometer_Entry_Mode__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Attendance__c.Odometer_Entry_Mode__c</field><readable>true</readable>.
41	`<fieldPermissions><editable>true</editable><field>Attendance__c.Travel_Rate_Per_Km__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Attendance__c.Travel_Rate_Per_Km__c</field><readable>true</readable>.
42	`<fieldPermissions><editable>false</editable><field>Attendance__c.Travel_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Attendance__c.Travel_Amount__c</field><readable>true</readable>.
43	`<fieldPermissions><editable>true</editable><field>Attendance__c.Odometer_Evidence_URL__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Attendance__c.Odometer_Evidence_URL__c</field><readable>true</readable>.
44	`<fieldPermissions><editable>true</editable><field>Attendance__c.Transport_Mode__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Attendance__c.Transport_Mode__c</field><readable>true</readable>.
45	`<fieldPermissions><editable>true</editable><field>Attendance__c.Vehicle_Ownership__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Attendance__c.Vehicle_Ownership__c</field><readable>true</readable>.
46	`<fieldPermissions><editable>true</editable><field>Attendance__c.Planned_Activity__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Attendance__c.Planned_Activity__c</field><readable>true</readable>.
47	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
48	`<editable>true</editable>`	Sets field edit permission to true.
49	`<field>Attendance__c.End_Longitude__c</field>`	Sets field API name configured in this entry to Attendance__c.End_Longitude__c.
50	`<readable>true</readable>`	Sets field read permission to true.
51	`</fieldPermissions>`	Closes the fieldPermissions configuration block.

Line	Source code	Explanation / reading note
52	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
53	`<editable>true</editable>`	Sets field edit permission to true.
54	`<field>Attendance__c.End_Time__c</field>`	Sets field API name configured in this entry to Attendance__c.End_Time__c.
55	`<readable>true</readable>`	Sets field read permission to true.
56	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
57	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
58	`<editable>true</editable>`	Sets field edit permission to true.
59	`<field>Attendance__c.Offline_Key__c</field>`	Sets field API name configured in this entry to Attendance__c.Offline_Key__c.
60	`<readable>true</readable>`	Sets field read permission to true.
61	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
62	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
63	`<editable>true</editable>`	Sets field edit permission to true.
64	`<field>Attendance__c.Sales_Representative__c</field>`	Sets field API name configured in this entry to Attendance__c.Sales_Representative__c.
65	`<readable>true</readable>`	Sets field read permission to true.
66	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
67	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
68	`<editable>true</editable>`	Sets field edit permission to true.
69	`<field>Attendance__c.Selfie_Content_Document_Id__c</field>`	Sets field API name configured in this entry to Attendance__c.Selfie_Content_Document_Id__c.
70	`<readable>true</readable>`	Sets field read permission to true.
71	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
72	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
73	`<editable>true</editable>`	Sets field edit permission to true.
74	`<field>Attendance__c.Start_Latitude__c</field>`	Sets field API name configured in this entry to Attendance__c.Start_Latitude__c.
75	`<readable>true</readable>`	Sets field read permission to true.
76	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
77	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
78	`<editable>true</editable>`	Sets field edit permission to true.
79	`<field>Attendance__c.Start_Longitude__c</field>`	Sets field API name configured in this entry to Attendance__c.Start_Longitude__c.
80	`<readable>true</readable>`	Sets field read permission to true.
81	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
82	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
83	`<editable>true</editable>`	Sets field edit permission to true.
84	`<field>Attendance__c.Start_Time__c</field>`	Sets field API name configured in this entry to Attendance__c.Start_Time__c.
85	`<readable>true</readable>`	Sets field read permission to true.
86	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
87	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
88	`<editable>true</editable>`	Sets field edit permission to true.
89	`<field>Attendance__c.Status__c</field>`	Sets field API name configured in this entry to Attendance__c.Status__c.
90	`<readable>true</readable>`	Sets field read permission to true.
91	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
92	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
93	`<editable>true</editable>`	Sets field edit permission to true.
94	`<field>Beat__c.Active__c</field>`	Sets field API name configured in this entry to Beat__c.Active__c.

Line	Source code	Explanation / reading note
95	`<readable>true</readable>`	Sets field read permission to true.
96	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
97	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
98	`<editable>true</editable>`	Sets field edit permission to true.
99	`<field>Beat__c.Assigned_Employee__c</field>`	Sets field API name configured in this entry to Beat__c.Assigned_Employee__c.
100	`<readable>true</readable>`	Sets field read permission to true.
101	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
102	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
103	`<editable>false</editable>`	Sets field edit permission to false.
104	`<field>Beat__c.Beat_ID__c</field>`	Sets field API name configured in this entry to Beat__c.Beat_ID__c.
105	`<readable>true</readable>`	Sets field read permission to true.
106	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
107	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
108	`<editable>true</editable>`	Sets field edit permission to true.
109	`<field>Beat__c.Distributor__c</field>`	Sets field API name configured in this entry to Beat__c.Distributor__c.
110	`<readable>true</readable>`	Sets field read permission to true.
111	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
112	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
113	`<editable>true</editable>`	Sets field edit permission to true.
114	`<field>Beat__c.Geography__c</field>`	Sets field API name configured in this entry to Beat__c.Geography__c.
115	`<readable>true</readable>`	Sets field read permission to true.
116	`</fieldPermissions>`	Closes the fieldPermissions configuration block.

Line	Source code	Explanation / reading note
117	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
118	`<editable>false</editable>`	Sets field edit permission to false.
119	`<field>Beat__c.Outlet_Count__c</field>`	Sets field API name configured in this entry to Beat__c.Outlet_Count__c.
120	`<readable>true</readable>`	Sets field read permission to true.
121	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
122	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
123	`<editable>false</editable>`	Sets field edit permission to false.
124	`<field>Beat__c.Outlet_Names__c</field>`	Sets field API name configured in this entry to Beat__c.Outlet_Names__c.
125	`<readable>true</readable>`	Sets field read permission to true.
126	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
127	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
128	`<editable>true</editable>`	Sets field edit permission to true.
129	`<field>Beat__c.Sales_Representative__c</field>`	Sets field API name configured in this entry to Beat__c.Sales_Representative__c.
130	`<readable>true</readable>`	Sets field read permission to true.
131	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
132	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
133	`<editable>true</editable>`	Sets field edit permission to true.
134	`<field>Distributor_Outlet_Allocation__c.Remarks__c</field>`	Sets field API name configured in this entry to Distributor_Outlet_Allocation__c.Remarks__c.
135	`<readable>true</readable>`	Sets field read permission to true.
136	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
137	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
138	`<editable>true</editable>`	Sets field edit permission to true.

Line	Source code	Explanation / reading note
139	`<field>Distributor__c.Address__c</field>`	Sets field API name configured in this entry to Distributor__c.Address__c.
140	`<readable>true</readable>`	Sets field read permission to true.
141	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
142	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
143	`<editable>true</editable>`	Sets field edit permission to true.
144	`<field>Distributor__c.Alternate_Phone__c</field>`	Sets field API name configured in this entry to Distributor__c.Alternate_Phone__c.
145	`<readable>true</readable>`	Sets field read permission to true.
146	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
147	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
148	`<editable>false</editable>`	Sets field edit permission to false.
149	`<field>Distributor__c.Distributor_ID__c</field>`	Sets field API name configured in this entry to Distributor__c.Distributor_ID__c.
150	`<readable>true</readable>`	Sets field read permission to true.
151	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
152	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
153	`<editable>true</editable>`	Sets field edit permission to true.
154	`<field>Distributor__c.Email__c</field>`	Sets field API name configured in this entry to Distributor__c.Email__c.
155	`<readable>true</readable>`	Sets field read permission to true.
156	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
157	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
158	`<editable>true</editable>`	Sets field edit permission to true.
159	`<field>Distributor__c.Joining_Date__c</field>`	Sets field API name configured in this entry to Distributor__c.Joining_Date__c.
160	`<readable>true</readable>`	Sets field read permission to true.

Line	Source code	Explanation / reading note
161	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
162	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
163	`<editable>true</editable>`	Sets field edit permission to true.
164	`<field>Distributor__c.Login_Email__c</field>`	Sets field API name configured in this entry to Distributor__c.Login_Email__c.
165	`<readable>true</readable>`	Sets field read permission to true.
166	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
167	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
168	`<editable>true</editable>`	Sets field edit permission to true.
169	`<field>Distributor__c.Phone__c</field>`	Sets field API name configured in this entry to Distributor__c.Phone__c.
170	`<readable>true</readable>`	Sets field read permission to true.
171	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
172	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
173	`<editable>true</editable>`	Sets field edit permission to true.
174	`<field>Distributor__c.Remarks__c</field>`	Sets field API name configured in this entry to Distributor__c.Remarks__c.
175	`<readable>true</readable>`	Sets field read permission to true.
176	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
177	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
178	`<editable>false</editable>`	Sets field edit permission to false.
179	`<field>Distributor__c.User_Status__c</field>`	Sets field API name configured in this entry to Distributor__c.User_Status__c.
180	`<readable>true</readable>`	Sets field read permission to true.
181	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
182	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
183	`<editable>true</editable>`	Sets field edit permission to true.
184	`<field>Distributor__c.User__c</field>`	Sets field API name configured in this entry to Distributor__c.User__c.
185	`<readable>true</readable>`	Sets field read permission to true.
186	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
187	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
188	`<editable>true</editable>`	Sets field edit permission to true.
189	`<field>Order_Item__c.Case_Quantity__c</field>`	Sets field API name configured in this entry to Order_Item__c.Case_Quantity__c.
190	`<readable>true</readable>`	Sets field read permission to true.
191	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
192	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
193	`<editable>true</editable>`	Sets field edit permission to true.
194	`<field>Order_Item__c.Line_Amount__c</field>`	Sets field API name configured in this entry to Order_Item__c.Line_Amount__c.
195	`<readable>true</readable>`	Sets field read permission to true.
196	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
197	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
198	`<editable>true</editable>`	Sets field edit permission to true.
199	`<field>Order_Item__c.Piece_Quantity__c</field>`	Sets field API name configured in this entry to Order_Item__c.Piece_Quantity__c.
200	`<readable>true</readable>`	Sets field read permission to true.
201	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
202	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
203	`<editable>true</editable>`	Sets field edit permission to true.
204	`<field>Order_Item__c.Total_Pieces__c</field>`	Sets field API name configured in this entry to Order_Item__c.Total_Pieces__c.

Line	Source code	Explanation / reading note
205	`<readable>true</readable>`	Sets field read permission to true.
206	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
207	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
208	`<editable>true</editable>`	Sets field edit permission to true.
209	`<field>Order_Item__c.Unit_Price__c</field>`	Sets field API name configured in this entry to Order_Item__c.Unit_Price__c.
210	`<readable>true</readable>`	Sets field read permission to true.
211	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
212	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
213	`<editable>false</editable>`	Sets field edit permission to false.
214	`<field>Permanent_Journey_Plan__c.Approved_By__c</field>`	Sets field API name configured in this entry to Permanent_Journey_Plan__c.Approved_By__c.
215	`<readable>true</readable>`	Sets field read permission to true.
216	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
217	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
218	`<editable>false</editable>`	Sets field edit permission to false.
219	`<field>Permanent_Journey_Plan__c.Approved_Date__c</field>`	Sets field API name configured in this entry to Permanent_Journey_Plan__c.Approved_Date__c.
220	`<readable>true</readable>`	Sets field read permission to true.
221	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
222	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
223	`<editable>true</editable>`	Sets field edit permission to true.
224	`<field>Permanent_Journey_Plan__c.Approver__c</field>`	Sets field API name configured in this entry to Permanent_Journey_Plan__c.Approver__c.
225	`<readable>true</readable>`	Sets field read permission to true.

Line	Source code	Explanation / reading note
226	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
227	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
228	`<editable>false</editable>`	Sets field edit permission to false.
229	`<field>Permanent_Journey_Plan__c.Approved_Outlet_Names__c</field>`	Sets field API name configured in this entry to Permanent_Journey_Plan__c.Approved_Outlet_Names__c.
230	`<readable>true</readable>`	Sets field read permission to true.
231	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
232	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
233	`<editable>true</editable>`	Sets field edit permission to true.
234	`<field>Permanent_Journey_Plan__c.Employee__c</field>`	Sets field API name configured in this entry to Permanent_Journey_Plan__c.Employee__c.
235	`<readable>true</readable>`	Sets field read permission to true.
236	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
237	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
238	`<editable>true</editable>`	Sets field edit permission to true.
239	`<field>Permanent_Journey_Plan__c.Plan_Date__c</field>`	Sets field API name configured in this entry to Permanent_Journey_Plan__c.Plan_Date__c.
240	`<readable>true</readable>`	Sets field read permission to true.
241	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
242	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
243	`<editable>true</editable>`	Sets field edit permission to true.
244	`<field>Permanent_Journey_Plan__c.Planning_End_Date__c</field>`	Sets field API name configured in this entry to Permanent_Journey_Plan__c.Planning_End_Date__c.
245	`<readable>true</readable>`	Sets field read permission to true.
246	`</fieldPermissions>`	Closes the fieldPermissions configuration block.

Line	Source code	Explanation / reading note
247	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
248	`<editable>true</editable>`	Sets field edit permission to true.
249	`<field>Permanent_Journey_Plan__c.Planning_Start_Date__c</field>`	Sets field API name configured in this entry to Permanent_Journey_Plan__c.Planning_Start_Date__c.
250	`<readable>true</readable>`	Sets field read permission to true.
251	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
252	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
253	`<editable>false</editable>`	Sets field edit permission to false.
254	`<field>Permanent_Journey_Plan__c.Rejected_By__c</field>`	Sets field API name configured in this entry to Permanent_Journey_Plan__c.Rejected_By__c.
255	`<readable>true</readable>`	Sets field read permission to true.
256	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
257	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
258	`<editable>false</editable>`	Sets field edit permission to false.
259	`<field>Permanent_Journey_Plan__c.Rejected_Date__c</field>`	Sets field API name configured in this entry to Permanent_Journey_Plan__c.Rejected_Date__c.
260	`<readable>true</readable>`	Sets field read permission to true.
261	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
262	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
263	`<editable>true</editable>`	Sets field edit permission to true.
264	`<field>Permanent_Journey_Plan__c.Rejection_Reason__c</field>`	Sets field API name configured in this entry to Permanent_Journey_Plan__c.Rejection_Reason__c.
265	`<readable>true</readable>`	Sets field read permission to true.
266	`</fieldPermissions>`	Closes the fieldPermissions configuration block.

Line	Source code	Explanation / reading note
267	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
268	`<editable>true</editable>`	Sets field edit permission to true.
269	`<field>Permanent_Journey_Plan__c.Sales_Representative__c</field>`	Sets field API name configured in this entry to Permanent_Journey_Plan__c.Sales_Representative__c.
270	`<readable>true</readable>`	Sets field read permission to true.
271	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
272	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
273	`<editable>false</editable>`	Sets field edit permission to false.
274	`<field>Permanent_Journey_Plan__c.Submitted_By__c</field>`	Sets field API name configured in this entry to Permanent_Journey_Plan__c.Submitted_By__c.
275	`<readable>true</readable>`	Sets field read permission to true.
276	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
277	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
278	`<editable>false</editable>`	Sets field edit permission to false.
279	`<field>Permanent_Journey_Plan__c.Submitted_Date__c</field>`	Sets field API name configured in this entry to Permanent_Journey_Plan__c.Submitted_Date__c.
280	`<readable>true</readable>`	Sets field read permission to true.
281	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
282	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
283	`<editable>true</editable>`	Sets field edit permission to true.
284	`<field>Product__c.Active__c</field>`	Sets field API name configured in this entry to Product__c.Active__c.
285	`<readable>true</readable>`	Sets field read permission to true.
286	`</fieldPermissions>`	Closes the fieldPermissions configuration block.

Line	Source code	Explanation / reading note
287	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
288	`<editable>true</editable>`	Sets field edit permission to true.
289	`<field>Product__c.Available_Stock__c</field>`	Sets field API name configured in this entry to Product__c.Available_Stock__c.
290	`<readable>true</readable>`	Sets field read permission to true.
291	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
292	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
293	`<editable>true</editable>`	Sets field edit permission to true.
294	`<field>Product__c.Batch_Number__c</field>`	Sets field API name configured in this entry to Product__c.Batch_Number__c.
295	`<readable>true</readable>`	Sets field read permission to true.
296	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
297	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
298	`<editable>true</editable>`	Sets field edit permission to true.
299	`<field>Product__c.Brand__c</field>`	Sets field API name configured in this entry to Product__c.Brand__c.
300	`<readable>true</readable>`	Sets field read permission to true.
301	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
302	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
303	`<editable>true</editable>`	Sets field edit permission to true.
304	`<field>Product__c.Expiry_Date__c</field>`	Sets field API name configured in this entry to Product__c.Expiry_Date__c.
305	`<readable>true</readable>`	Sets field read permission to true.
306	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
307	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
308	`<editable>true</editable>`	Sets field edit permission to true.

Line	Source code	Explanation / reading note
309	`<field>Product__c.Flavor__c</field>`	Sets field API name configured in this entry to Product__c.Flavor__c.
310	`<readable>true</readable>`	Sets field read permission to true.
311	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
312	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
313	`<editable>true</editable>`	Sets field edit permission to true.
314	`<field>Product__c.GST_Percent__c</field>`	Sets field API name configured in this entry to Product__c.GST_Percent__c.
315	`<readable>true</readable>`	Sets field read permission to true.
316	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
317	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
318	`<editable>true</editable>`	Sets field edit permission to true.
319	`<field>Product__c.Image_URL__c</field>`	Sets field API name configured in this entry to Product__c.Image_URL__c.
320	`<readable>true</readable>`	Sets field read permission to true.
321	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
322	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
323	`<editable>true</editable>`	Sets field edit permission to true.
324	`<field>Product__c.Manufacturing_Date__c</field>`	Sets field API name configured in this entry to Product__c.Manufacturing_Date__c.
325	`<readable>true</readable>`	Sets field read permission to true.
326	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
327	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
328	`<editable>true</editable>`	Sets field edit permission to true.
329	`<field>Product__c.Package_Type__c</field>`	Sets field API name configured in this entry to Product__c.Package_Type__c.
330	`<readable>true</readable>`	Sets field read permission to true.

Line	Source code	Explanation / reading note
331	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
332	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
333	`        <editable>true</editable>`	Sets field edit permission to true.
334	`        <field>Product__c.Returnable__c</field>`	Sets field API name configured in this entry to Product__c.Returnable__c.
335	`        <readable>true</readable>`	Sets field read permission to true.
336	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
337	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
338	`        <editable>true</editable>`	Sets field edit permission to true.
339	`        <field>Product__c.Sellable__c</field>`	Sets field API name configured in this entry to Product__c.Sellable__c.
340	`        <readable>true</readable>`	Sets field read permission to true.
341	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
342	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
343	`        <editable>true</editable>`	Sets field edit permission to true.
344	`        <field>Product__c.Selling_Price__c</field>`	Sets field API name configured in this entry to Product__c.Selling_Price__c.
345	`        <readable>true</readable>`	Sets field read permission to true.
346	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
347	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
348	`        <editable>false</editable>`	Sets field edit permission to false.
349	`        <field>Product__c.Shelf_Life_Days__c</field>`	Sets field API name configured in this entry to Product__c.Shelf_Life_Days__c.
350	`        <readable>true</readable>`	Sets field read permission to true.
351	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
352	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
353	`<editable>true</editable>`	Sets field edit permission to true.
354	`<field>Product__c.Variant__c</field>`	Sets field API name configured in this entry to Product__c.Variant__c.
355	`<readable>true</readable>`	Sets field read permission to true.
356	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
357	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
358	`<editable>true</editable>`	Sets field edit permission to true.
359	`<field>Retailer__c.Aadhaar_Number__c</field>`	Sets field API name configured in this entry to Retailer__c.Aadhaar_Number__c.
360	`<readable>true</readable>`	Sets field read permission to true.
361	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
362	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
363	`<editable>true</editable>`	Sets field edit permission to true.
364	`<field>Retailer__c.Active__c</field>`	Sets field API name configured in this entry to Retailer__c.Active__c.
365	`<readable>true</readable>`	Sets field read permission to true.
366	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
367	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
368	`<editable>true</editable>`	Sets field edit permission to true.
369	`<field>Retailer__c.Address__c</field>`	Sets field API name configured in this entry to Retailer__c.Address__c.
370	`<readable>true</readable>`	Sets field read permission to true.
371	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
372	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
373	`<editable>true</editable>`	Sets field edit permission to true.
374	`<field>Retailer__c.Beat__c</field>`	Sets field API name configured in this entry to Retailer__c.Beat__c.

Line	Source code	Explanation / reading note
375	`<readable>true</readable>`	Sets field read permission to true.
376	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
377	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
378	`<editable>true</editable>`	Sets field edit permission to true.
379	`<field>Retailer__c.Credit_Limit__c</field>`	Sets field API name configured in this entry to Retailer__c.Credit_Limit__c.
380	`<readable>true</readable>`	Sets field read permission to true.
381	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
382	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
383	`<editable>true</editable>`	Sets field edit permission to true.
384	`<field>Retailer__c.Distributor__c</field>`	Sets field API name configured in this entry to Retailer__c.Distributor__c.
385	`<readable>true</readable>`	Sets field read permission to true.
386	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
387	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
388	`<editable>true</editable>`	Sets field edit permission to true.
389	`<field>Retailer__c.Email__c</field>`	Sets field API name configured in this entry to Retailer__c.Email__c.
390	`<readable>true</readable>`	Sets field read permission to true.
391	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
392	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
393	`<editable>true</editable>`	Sets field edit permission to true.
394	`<field>Retailer__c.Geo_Location__c</field>`	Sets field API name configured in this entry to Retailer__c.Geo_Location__c.
395	`<readable>true</readable>`	Sets field read permission to true.
396	`</fieldPermissions>`	Closes the fieldPermissions configuration block.

Line	Source code	Explanation / reading note
397	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
398	`<editable>false</editable>`	Sets field edit permission to false.
399	`<field>Retailer__c.Geography__c</field>`	Sets field API name configured in this entry to Retailer__c.Geography__c.
400	`<readable>true</readable>`	Sets field read permission to true.
401	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
402	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
403	`<editable>true</editable>`	Sets field edit permission to true.
404	`<field>Retailer__c.Latitude__c</field>`	Sets field API name configured in this entry to Retailer__c.Latitude__c.
405	`<readable>true</readable>`	Sets field read permission to true.
406	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
407	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
408	`<editable>true</editable>`	Sets field edit permission to true.
409	`<field>Retailer__c.Longitude__c</field>`	Sets field API name configured in this entry to Retailer__c.Longitude__c.
410	`<readable>true</readable>`	Sets field read permission to true.
411	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
412	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
413	`<editable>true</editable>`	Sets field edit permission to true.
414	`<field>Retailer__c.Minimum_Order_Value__c</field>`	Sets field API name configured in this entry to Retailer__c.Minimum_Order_Value__c.
415	`<readable>true</readable>`	Sets field read permission to true.
416	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
417	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
418	`<editable>true</editable>`	Sets field edit permission to true.

Line	Source code	Explanation / reading note
419	`<field>Retailer__c.Outlet_Owner_Name__c</field>`	Sets field API name configured in this entry to Retailer__c.Outlet_Owner_Name__c.
420	`<readable>true</readable>`	Sets field read permission to true.
421	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
422	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
423	`<editable>true</editable>`	Sets field edit permission to true.
424	`<field>Retailer__c.Outlet_Type__c</field>`	Sets field API name configured in this entry to Retailer__c.Outlet_Type__c.
425	`<readable>true</readable>`	Sets field read permission to true.
426	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
427	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
428	`<editable>true</editable>`	Sets field edit permission to true.
429	`<field>Retailer__c.Outstanding_Amount__c</field>`	Sets field API name configured in this entry to Retailer__c.Outstanding_Amount__c.
430	`<readable>true</readable>`	Sets field read permission to true.
431	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
432	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
433	`<editable>true</editable>`	Sets field edit permission to true.
434	`<field>Retailer__c.PAN_Number__c</field>`	Sets field API name configured in this entry to Retailer__c.PAN_Number__c.
435	`<readable>true</readable>`	Sets field read permission to true.
436	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
437	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
438	`<editable>true</editable>`	Sets field edit permission to true.
439	`<field>Retailer__c.Phone__c</field>`	Sets field API name configured in this entry to Retailer__c.Phone__c.
440	`<readable>true</readable>`	Sets field read permission to true.

Line	Source code	Explanation / reading note
441	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
442	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
443	`        <editable>true</editable>`	Sets field edit permission to true.
444	`        <field>Sales_Order__c.Total_Amount__c</field>`	Sets field API name configured in this entry to Sales_Order__c.Total_Amount__c.
445	`        <readable>true</readable>`	Sets field read permission to true.
446	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
447	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
448	`        <editable>true</editable>`	Sets field edit permission to true.
449	`        <field>Scheme__c.Active__c</field>`	Sets field API name configured in this entry to Scheme__c.Active__c.
450	`        <readable>true</readable>`	Sets field read permission to true.
451	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
452	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
453	`        <editable>true</editable>`	Sets field edit permission to true.
454	`        <field>Scheme__c.Description__c</field>`	Sets field API name configured in this entry to Scheme__c.Description__c.
455	`        <readable>true</readable>`	Sets field read permission to true.
456	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
457	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
458	`        <editable>true</editable>`	Sets field edit permission to true.
459	`        <field>Scheme__c.Discount_Amount__c</field>`	Sets field API name configured in this entry to Scheme__c.Discount_Amount__c.
460	`        <readable>true</readable>`	Sets field read permission to true.
461	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
462	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
463	`<editable>true</editable>`	Sets field edit permission to true.
464	`<field>Scheme__c.Discount_Percent__c</field>`	Sets field API name configured in this entry to Scheme__c.Discount_Percent__c.
465	`<readable>true</readable>`	Sets field read permission to true.
466	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
467	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
468	`<editable>true</editable>`	Sets field edit permission to true.
469	`<field>Scheme__c.Free_Product__c</field>`	Sets field API name configured in this entry to Scheme__c.Free_Product__c.
470	`<readable>true</readable>`	Sets field read permission to true.
471	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
472	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
473	`<editable>true</editable>`	Sets field edit permission to true.
474	`<field>Scheme__c.Free_Quantity__c</field>`	Sets field API name configured in this entry to Scheme__c.Free_Quantity__c.
475	`<readable>true</readable>`	Sets field read permission to true.
476	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
477	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
478	`<editable>true</editable>`	Sets field edit permission to true.
479	`<field>Scheme__c.Minimum_Quantity__c</field>`	Sets field API name configured in this entry to Scheme__c.Minimum_Quantity__c.
480	`<readable>true</readable>`	Sets field read permission to true.
481	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
482	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
483	`<editable>true</editable>`	Sets field edit permission to true.
484	`<field>Scheme__c.Outlet_Type__c</field>`	Sets field API name configured in this entry to Scheme__c.Outlet_Type__c.

Line	Source code	Explanation / reading note
485	`<readable>true</readable>`	Sets field read permission to true.
486	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
487	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
488	`<editable>true</editable>`	Sets field edit permission to true.
489	`<field>Scheme__c.Product__c</field>`	Sets field API name configured in this entry to Scheme__c.Product__c.
490	`<readable>true</readable>`	Sets field read permission to true.
491	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
492	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
493	`<editable>true</editable>`	Sets field edit permission to true.
494	`<field>Scheme__c.Region__c</field>`	Sets field API name configured in this entry to Scheme__c.Region__c.
495	`<readable>true</readable>`	Sets field read permission to true.
496	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
497	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
498	`<editable>true</editable>`	Sets field edit permission to true.
499	`<field>Visit__c.Check_In_Latitude__c</field>`	Sets field API name configured in this entry to Visit__c.Check_In_Latitude__c.
500	`<readable>true</readable>`	Sets field read permission to true.
501	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
502	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
503	`<editable>true</editable>`	Sets field edit permission to true.
504	`<field>Visit__c.Check_In_Longitude__c</field>`	Sets field API name configured in this entry to Visit__c.Check_In_Longitude__c.
505	`<readable>true</readable>`	Sets field read permission to true.
506	`</fieldPermissions>`	Closes the fieldPermissions configuration block.

Line	Source code	Explanation / reading note
507	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
508	`<editable>true</editable>`	Sets field edit permission to true.
509	`<field>Visit__c.Check_In_Time__c</field>`	Sets field API name configured in this entry to Visit__c.Check_In_Time__c.
510	`<readable>true</readable>`	Sets field read permission to true.
511	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
512	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
513	`<editable>true</editable>`	Sets field edit permission to true.
514	`<field>Visit__c.Check_Out_Latitude__c</field>`	Sets field API name configured in this entry to Visit__c.Check_Out_Latitude__c.
515	`<readable>true</readable>`	Sets field read permission to true.
516	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
517	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
518	`<editable>true</editable>`	Sets field edit permission to true.
519	`<field>Visit__c.Check_Out_Longitude__c</field>`	Sets field API name configured in this entry to Visit__c.Check_Out_Longitude__c.
520	`<readable>true</readable>`	Sets field read permission to true.
521	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
522	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
523	`<editable>true</editable>`	Sets field edit permission to true.
524	`<field>Visit__c.Check_Out_Time__c</field>`	Sets field API name configured in this entry to Visit__c.Check_Out_Time__c.
525	`<readable>true</readable>`	Sets field read permission to true.
526	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
527	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
528	`<editable>true</editable>`	Sets field edit permission to true.

Line	Source code	Explanation / reading note
529	`<field>Visit__c.Duration_Minutes__c</field>`	Sets field API name configured in this entry to Visit__c.Duration_Minutes__c.
530	`<readable>true</readable>`	Sets field read permission to true.
531	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
532	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
533	`<editable>true</editable>`	Sets field edit permission to true.
534	`<field>Visit__c.Employee__c</field>`	Sets field API name configured in this entry to Visit__c.Employee__c.
535	`<readable>true</readable>`	Sets field read permission to true.
536	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
537	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
538	`<editable>true</editable>`	Sets field edit permission to true.
539	`<field>Visit__c.Missed_Reason__c</field>`	Sets field API name configured in this entry to Visit__c.Missed_Reason__c.
540	`<readable>true</readable>`	Sets field read permission to true.
541	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
542	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
543	`<editable>true</editable>`	Sets field edit permission to true.
544	`<field>Visit__c.Notes__c</field>`	Sets field API name configured in this entry to Visit__c.Notes__c.
545	`<readable>true</readable>`	Sets field read permission to true.
546	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
547	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
548	`<editable>true</editable>`	Sets field edit permission to true.
549	`<field>Visit__c.Offline_Key__c</field>`	Sets field API name configured in this entry to Visit__c.Offline_Key__c.
550	`<readable>true</readable>`	Sets field read permission to true.

Line	Source code	Explanation / reading note
551	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
552	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
553	`<editable>true</editable>`	Sets field edit permission to true.
554	`<field>Visit__c.Order_Gross_Amount__c</field>`	Sets field API name configured in this entry to Visit__c.Order_Gross_Amount__c.
555	`<readable>true</readable>`	Sets field read permission to true.
556	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
557	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
558	`<editable>true</editable>`	Sets field edit permission to true.
559	`<field>Visit__c.Order_Tax__c</field>`	Sets field API name configured in this entry to Visit__c.Order_Tax__c.
560	`<readable>true</readable>`	Sets field read permission to true.
561	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
562	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
563	`<editable>true</editable>`	Sets field edit permission to true.
564	`<field>Visit__c.Order_Total_Quantity__c</field>`	Sets field API name configured in this entry to Visit__c.Order_Total_Quantity__c.
565	`<readable>true</readable>`	Sets field read permission to true.
566	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
567	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
568	`<editable>true</editable>`	Sets field edit permission to true.
569	`<field>Visit__c.Order_Total__c</field>`	Sets field API name configured in this entry to Visit__c.Order_Total__c.
570	`<readable>true</readable>`	Sets field read permission to true.
571	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
572	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
573	`<editable>true</editable>`	Sets field edit permission to true.
574	`<field>Visit__c.Outlet_Geo_Location__c</field>`	Sets field API name configured in this entry to Visit__c.Outlet_Geo_Location__c.
575	`<readable>true</readable>`	Sets field read permission to true.
576	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
577	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
578	`<editable>false</editable>`	Sets field edit permission to false.
579	`<field>Visit__c.Outlet_Name__c</field>`	Sets field API name configured in this entry to Visit__c.Outlet_Name__c.
580	`<readable>true</readable>`	Sets field read permission to true.
581	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
582	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
583	`<editable>true</editable>`	Sets field edit permission to true.
584	`<field>Visit__c.Previous_Order_Date__c</field>`	Sets field API name configured in this entry to Visit__c.Previous_Order_Date__c.
585	`<readable>true</readable>`	Sets field read permission to true.
586	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
587	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
588	`<editable>true</editable>`	Sets field edit permission to true.
589	`<field>Visit__c.Previous_Order_Value__c</field>`	Sets field API name configured in this entry to Visit__c.Previous_Order_Value__c.
590	`<readable>true</readable>`	Sets field read permission to true.
591	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
592	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
593	`<editable>true</editable>`	Sets field edit permission to true.
594	`<field>Visit__c.Sales_Representative__c</field>`	Sets field API name configured in this entry to Visit__c.Sales_Representative__c.

Line	Source code	Explanation / reading note
595	`<readable>true</readable>`	Sets field read permission to true.
596	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
597	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
598	`<editable>false</editable>`	Sets field edit permission to false.
599	`<field>Visit__c.Visit_Number__c</field>`	Sets field API name configured in this entry to Visit__c.Visit_Number__c.
600	`<readable>true</readable>`	Sets field read permission to true.
601	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
602	`<fieldPermissions><editable>true</editable><field>Order_Item__c.Product_Sales_Configuration__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Order_Item__c.Product_Sales_Configuration__c</field><readable>true</readable>.
603	`<fieldPermissions><editable>true</editable><field>Order_Item__c.Scheme__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Order_Item__c.Scheme__c</field><readable>true</readable>.
604	`<fieldPermissions><editable>true</editable><field>Product_Sales_Configuration__c.Active__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product_Sales_Configuration__c.Active__c</field><readable>true</readable>.
605	`<fieldPermissions><editable>true</editable><field>Product_Sales_Configuration__c.End_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product_Sales_Configuration__c.End_Date__c</field><readable>true</readable>.
606	`<fieldPermissions><editable>true</editable><field>Product_Sales_Configuration__c.Minimum_Quantity__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product_Sales_Configuration__c.Minimum_Quantity__c</field><readable>true</readable>.
607	`<fieldPermissions><editable>true</editable><field>Product_Sales_Configuration__c.Target_Quantity__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product_Sales_Configuration__c.Target_Quantity__c</field><readable>true</readable>.
608	`<fieldPermissions><editable>true</editable><field>Scheme_Product__c.Active__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Scheme_Product__c.Active__c</field><readable>true</readable>.
609	`<hasActivationRequired>false</hasActivationRequired>`	Sets has Activation Required in the enclosing configuration to false.
610	`<label>SFA Mobile User</label>`	Sets human-readable Salesforce UI label to SFA Mobile User.
611	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Product_Sales_Configuration__c</object><viewAllFields>true</viewAllFields><viewAllRecords>true</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Product_Sales_Configuration__c</o.

Line	Source code	Explanation / reading note
612	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Survey__c</object><viewAllFields>true</viewAllFields><viewAllRecords>true</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Survey__c</object><viewAllFields>.
613	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Survey_Question__c</object><viewAllFields>true</viewAllFields><viewAllRecords>true</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Survey_Question__c</object><viewA.
614	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Survey_Response__c</object><viewAllFields>true</viewAllFields><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Survey_Response__c</object><viewA.
615	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Survey_Answer__c</object><viewAllFields>true</viewAllFields><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Survey_Answer__c</object><viewAll.
616	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
617	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
618	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
619	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
620	`<allowRead>true</allowRead>`	Sets object read permission to true.
621	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
622	`<object>Asset_Survey__c</object>`	Sets object API name configured in this entry to Asset_Survey__c.
623	`<viewAllFields>true</viewAllFields>`	Sets view All Fields in the enclosing configuration to true.
624	`<viewAllRecords>true</viewAllRecords>`	Sets view All Records in the enclosing configuration to true.
625	`</objectPermissions>`	Closes the objectPermissions configuration block.
626	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
627	`<allowCreate>true</allowCreate>`	Sets object create permission to true.

Line	Source code	Explanation / reading note
628	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
629	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
630	`<allowRead>true</allowRead>`	Sets object read permission to true.
631	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
632	`<object>Attendance__c</object>`	Sets object API name configured in this entry to Attendance__c.
633	`<viewAllFields>false</viewAllFields>`	Sets view All Fields in the enclosing configuration to false.
634	`<viewAllRecords>false</viewAllRecords>`	Sets view All Records in the enclosing configuration to false.
635	`</objectPermissions>`	Closes the objectPermissions configuration block.
636	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
637	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
638	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
639	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
640	`<allowRead>true</allowRead>`	Sets object read permission to true.
641	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
642	`<object>Beat__c</object>`	Sets object API name configured in this entry to Beat__c.
643	`<viewAllFields>false</viewAllFields>`	Sets view All Fields in the enclosing configuration to false.
644	`<viewAllRecords>false</viewAllRecords>`	Sets view All Records in the enclosing configuration to false.
645	`</objectPermissions>`	Closes the objectPermissions configuration block.
646	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
647	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
648	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
649	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.

Line	Source code	Explanation / reading note
650	`<allowRead>true</allowRead>`	Sets object read permission to true.
651	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
652	`<object>Competitor_Activity__c</object>`	Sets object API name configured in this entry to Competitor_Activity__c.
653	`<viewAllFields>true</viewAllFields>`	Sets view All Fields in the enclosing configuration to true.
654	`<viewAllRecords>true</viewAllRecords>`	Sets view All Records in the enclosing configuration to true.
655	`</objectPermissions>`	Closes the objectPermissions configuration block.
656	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
657	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
658	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
659	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
660	`<allowRead>true</allowRead>`	Sets object read permission to true.
661	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
662	`<object>Distributor_Outlet_Allocation__c</object>`	Sets object API name configured in this entry to Distributor_Outlet_Allocation__c.
663	`<viewAllFields>false</viewAllFields>`	Sets view All Fields in the enclosing configuration to false.
664	`<viewAllRecords>false</viewAllRecords>`	Sets view All Records in the enclosing configuration to false.
665	`</objectPermissions>`	Closes the objectPermissions configuration block.
666	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
667	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
668	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
669	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
670	`<allowRead>true</allowRead>`	Sets object read permission to true.
671	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.

Line	Source code	Explanation / reading note
672	`<object>Distributor__c</object>`	Sets object API name configured in this entry to Distributor__c.
673	`<viewAllFields>false</viewAllFields>`	Sets view All Fields in the enclosing configuration to false.
674	`<viewAllRecords>false</viewAllRecords>`	Sets view All Records in the enclosing configuration to false.
675	`</objectPermissions>`	Closes the objectPermissions configuration block.
676	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
677	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
678	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
679	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
680	`<allowRead>true</allowRead>`	Sets object read permission to true.
681	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
682	`<object>Employee__c</object>`	Sets object API name configured in this entry to Employee__c.
683	`<viewAllFields>true</viewAllFields>`	Sets view All Fields in the enclosing configuration to true.
684	`<viewAllRecords>true</viewAllRecords>`	Sets view All Records in the enclosing configuration to true.
685	`</objectPermissions>`	Closes the objectPermissions configuration block.
686	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
687	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
688	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
689	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
690	`<allowRead>true</allowRead>`	Sets object read permission to true.
691	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
692	`<object>Geography__c</object>`	Sets object API name configured in this entry to Geography__c.
693	`<viewAllFields>true</viewAllFields>`	Sets view All Fields in the enclosing configuration to true.

Line	Source code	Explanation / reading note
694	`<viewAllRecords>true</viewAllRecords>`	Sets view All Records in the enclosing configuration to true.
695	`</objectPermissions>`	Closes the objectPermissions configuration block.
696	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
697	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
698	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
699	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
700	`<allowRead>true</allowRead>`	Sets object read permission to true.
701	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
702	`<object>Leave_Request__c</object>`	Sets object API name configured in this entry to Leave_Request__c.
703	`<viewAllFields>true</viewAllFields>`	Sets view All Fields in the enclosing configuration to true.
704	`<viewAllRecords>true</viewAllRecords>`	Sets view All Records in the enclosing configuration to true.
705	`</objectPermissions>`	Closes the objectPermissions configuration block.
706	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
707	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
708	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
709	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
710	`<allowRead>true</allowRead>`	Sets object read permission to true.
711	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
712	`<object>Order_Item__c</object>`	Sets object API name configured in this entry to Order_Item__c.
713	`<viewAllFields>false</viewAllFields>`	Sets view All Fields in the enclosing configuration to false.
714	`<viewAllRecords>false</viewAllRecords>`	Sets view All Records in the enclosing configuration to false.
715	`</objectPermissions>`	Closes the objectPermissions configuration block.

Line	Source code	Explanation / reading note
716	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
717	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
718	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
719	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
720	`<allowRead>true</allowRead>`	Sets object read permission to true.
721	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
722	`<object>Permanent_Journey_Plan__c</object>`	Sets object API name configured in this entry to Permanent_Journey_Plan__c.
723	`<viewAllFields>false</viewAllFields>`	Sets view All Fields in the enclosing configuration to false.
724	`<viewAllRecords>false</viewAllRecords>`	Sets view All Records in the enclosing configuration to false.
725	`</objectPermissions>`	Closes the objectPermissions configuration block.
726	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
727	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
728	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
729	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
730	`<allowRead>true</allowRead>`	Sets object read permission to true.
731	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
732	`<object>Product_Return__c</object>`	Sets object API name configured in this entry to Product_Return__c.
733	`<viewAllFields>true</viewAllFields>`	Sets view All Fields in the enclosing configuration to true.
734	`<viewAllRecords>true</viewAllRecords>`	Sets view All Records in the enclosing configuration to true.
735	`</objectPermissions>`	Closes the objectPermissions configuration block.
736	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
737	`<allowCreate>true</allowCreate>`	Sets object create permission to true.

Line	Source code	Explanation / reading note
738	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
739	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
740	`<allowRead>true</allowRead>`	Sets object read permission to true.
741	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
742	`<object>Product__c</object>`	Sets object API name configured in this entry to Product__c.
743	`<viewAllFields>false</viewAllFields>`	Sets view All Fields in the enclosing configuration to false.
744	`<viewAllRecords>false</viewAllRecords>`	Sets view All Records in the enclosing configuration to false.
745	`</objectPermissions>`	Closes the objectPermissions configuration block.
746	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
747	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
748	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
749	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
750	`<allowRead>true</allowRead>`	Sets object read permission to true.
751	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
752	`<object>Retailer__c</object>`	Sets object API name configured in this entry to Retailer__c.
753	`<viewAllFields>false</viewAllFields>`	Sets view All Fields in the enclosing configuration to false.
754	`<viewAllRecords>false</viewAllRecords>`	Sets view All Records in the enclosing configuration to false.
755	`</objectPermissions>`	Closes the objectPermissions configuration block.
756	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
757	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
758	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
759	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.

Line	Source code	Explanation / reading note
760	`<allowRead>true</allowRead>`	Sets object read permission to true.
761	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
762	`<object>SFA_Ticket__c</object>`	Sets object API name configured in this entry to SFA_Ticket__c.
763	`<viewAllFields>true</viewAllFields>`	Sets view All Fields in the enclosing configuration to true.
764	`<viewAllRecords>true</viewAllRecords>`	Sets view All Records in the enclosing configuration to true.
765	`</objectPermissions>`	Closes the objectPermissions configuration block.
766	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
767	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
768	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
769	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
770	`<allowRead>true</allowRead>`	Sets object read permission to true.
771	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
772	`<object>Sales_Order__c</object>`	Sets object API name configured in this entry to Sales_Order__c.
773	`<viewAllFields>false</viewAllFields>`	Sets view All Fields in the enclosing configuration to false.
774	`<viewAllRecords>false</viewAllRecords>`	Sets view All Records in the enclosing configuration to false.
775	`</objectPermissions>`	Closes the objectPermissions configuration block.
776	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
777	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
778	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
779	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
780	`<allowRead>true</allowRead>`	Sets object read permission to true.
781	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.

Line	Source code	Explanation / reading note
782	`<object>Scheme__c</object>`	Sets object API name configured in this entry to Scheme__c.
783	`<viewAllFields>false</viewAllFields>`	Sets view All Fields in the enclosing configuration to false.
784	`<viewAllRecords>false</viewAllRecords>`	Sets view All Records in the enclosing configuration to false.
785	`</objectPermissions>`	Closes the objectPermissions configuration block.
786	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
787	`<allowCreate>true</allowCreate><allowDelete>true</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Scheme_Product__c</object><viewAllFields>false</viewAllFields><viewAllRecords>false</viewAllRecords>`	Opens the allowCreate block; child elements specify its configuration.
788	`</objectPermissions>`	Closes the objectPermissions configuration block.
789	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
790	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
791	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
792	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
793	`<allowRead>true</allowRead>`	Sets object read permission to true.
794	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
795	`<object>Stock_Check__c</object>`	Sets object API name configured in this entry to Stock_Check__c.
796	`<viewAllFields>true</viewAllFields>`	Sets view All Fields in the enclosing configuration to true.
797	`<viewAllRecords>true</viewAllRecords>`	Sets view All Records in the enclosing configuration to true.
798	`</objectPermissions>`	Closes the objectPermissions configuration block.
799	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
800	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
801	`<allowDelete>false</allowDelete>`	Sets object delete permission to false.
802	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.

Line	Source code	Explanation / reading note
803	`<allowRead>true</allowRead>`	Sets object read permission to true.
804	`<modifyAllRecords>false</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to false.
805	`<object>Visit__c</object>`	Sets object API name configured in this entry to Visit__c.
806	`<viewAllFields>false</viewAllFields>`	Sets view All Fields in the enclosing configuration to false.
807	`<viewAllRecords>false</viewAllRecords>`	Sets view All Records in the enclosing configuration to false.
808	`</objectPermissions>`	Closes the objectPermissions configuration block.
809	`<objectPermissions><allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>false</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Expense_Policy__c</object><viewAllFields>true</viewAllFields><viewAllRecords>true</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>false</allowCreate><allowDelete>false</allowDelete><allowEdit>false</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Expense_Policy__c</object><view.
810	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Expense_Claim__c</object><viewAllFields>true</viewAllFields><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Expense_Claim__c</object><viewAll.
811	`<tabSettings><tab>Expense_Policy__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>Expense_Policy__c</tab><visibility>Visible</visibility>.
812	`<tabSettings><tab>Expense_Claim__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>Expense_Claim__c</tab><visibility>Visible</visibility>.
813	`<tabSettings><tab>Product_Sales_Configuration__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>Product_Sales_Configuration__c</tab><visibility>Visible</visibility>.
814	`<tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
815	`<tab>Asset_Survey__c</tab>`	Sets tab in the enclosing configuration to Asset_Survey__c.
816	`<visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
817	`</tabSettings>`	Closes the tabSettings configuration block.
818	`<tabSettings><tab>Survey__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>Survey__c</tab><visibility>Visible</visibility>.

Line	Source code	Explanation / reading note
819	`<tabSettings><tab>Survey_Response__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>Survey_Response__c</tab><visibility>Visible</visibility>.
820	`<tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
821	`<tab>Attendance__c</tab>`	Sets tab in the enclosing configuration to Attendance__c.
822	`<visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
823	`</tabSettings>`	Closes the tabSettings configuration block.
824	`<tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
825	`<tab>Beat__c</tab>`	Sets tab in the enclosing configuration to Beat__c.
826	`<visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
827	`</tabSettings>`	Closes the tabSettings configuration block.
828	`<tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
829	`<tab>Competitor_Activity__c</tab>`	Sets tab in the enclosing configuration to Competitor_Activity__c.
830	`<visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
831	`</tabSettings>`	Closes the tabSettings configuration block.
832	`<tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
833	`<tab>Distributor_Outlet_Allocation__c</tab>`	Sets tab in the enclosing configuration to Distributor_Outlet_Allocation__c.
834	`<visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
835	`</tabSettings>`	Closes the tabSettings configuration block.
836	`<tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
837	`<tab>Distributor__c</tab>`	Sets tab in the enclosing configuration to Distributor__c.
838	`<visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
839	`</tabSettings>`	Closes the tabSettings configuration block.

Line	Source code	Explanation / reading note
840	`    <tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
841	`        <tab>Employee__c</tab>`	Sets tab in the enclosing configuration to Employee__c.
842	`        <visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
843	`    </tabSettings>`	Closes the tabSettings configuration block.
844	`    <tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
845	`        <tab>Geography__c</tab>`	Sets tab in the enclosing configuration to Geography__c.
846	`        <visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
847	`    </tabSettings>`	Closes the tabSettings configuration block.
848	`    <tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
849	`        <tab>Leave_Request__c</tab>`	Sets tab in the enclosing configuration to Leave_Request__c.
850	`        <visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
851	`    </tabSettings>`	Closes the tabSettings configuration block.
852	`    <tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
853	`        <tab>Order_Item__c</tab>`	Sets tab in the enclosing configuration to Order_Item__c.
854	`        <visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
855	`    </tabSettings>`	Closes the tabSettings configuration block.
856	`    <tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
857	`        <tab>PJP_Planner</tab>`	Sets tab in the enclosing configuration to PJP_Planner.
858	`        <visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
859	`    </tabSettings>`	Closes the tabSettings configuration block.
860	`    <tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
861	`        <tab>Permanent_Journey_Plan__c</tab>`	Sets tab in the enclosing configuration to Permanent_Journey_Plan__c.

Line	Source code	Explanation / reading note
862	`        <visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
863	`    </tabSettings>`	Closes the tabSettings configuration block.
864	`    <tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
865	`        <tab>Product_Return__c</tab>`	Sets tab in the enclosing configuration to Product_Return__c.
866	`        <visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
867	`    </tabSettings>`	Closes the tabSettings configuration block.
868	`    <tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
869	`        <tab>Product__c</tab>`	Sets tab in the enclosing configuration to Product__c.
870	`        <visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
871	`    </tabSettings>`	Closes the tabSettings configuration block.
872	`    <tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
873	`        <tab>Retailer__c</tab>`	Sets tab in the enclosing configuration to Retailer__c.
874	`        <visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
875	`    </tabSettings>`	Closes the tabSettings configuration block.
876	`    <tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
877	`        <tab>SFA_Ticket__c</tab>`	Sets tab in the enclosing configuration to SFA_Ticket__c.
878	`        <visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
879	`    </tabSettings>`	Closes the tabSettings configuration block.
880	`    <tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
881	`        <tab>Sales_Order__c</tab>`	Sets tab in the enclosing configuration to Sales_Order__c.
882	`        <visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
883	`    </tabSettings>`	Closes the tabSettings configuration block.

Line	Source code	Explanation / reading note
884	`    <tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
885	`        <tab>Scheme__c</tab>`	Sets tab in the enclosing configuration to Scheme__c.
886	`        <visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
887	`    </tabSettings>`	Closes the tabSettings configuration block.
888	`    <tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
889	`        <tab>Stock_Check__c</tab>`	Sets tab in the enclosing configuration to Stock_Check__c.
890	`        <visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
891	`    </tabSettings>`	Closes the tabSettings configuration block.
892	`    <tabSettings>`	Opens the tabSettings block; child elements specify its configuration.
893	`        <tab>Visit__c</tab>`	Sets tab in the enclosing configuration to Visit__c.
894	`        <visibility>Visible</visibility>`	Sets visibility in the enclosing configuration to Visible.
895	`    </tabSettings>`	Closes the tabSettings configuration block.
896	`</PermissionSet>`	Closes the PermissionSet configuration block.

force-app/main/default/permissionsets/SFA_Phase_Two_User.permissionset-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

42 numbered source lines | SHA-256 9ac62c4d35714dc690bd8038e7248ac5ec5cee85d372c4ad9551a813e797ea7e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<PermissionSet xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the PermissionSet block; child elements specify its configuration.
3	`    <applicationVisibilities><application>SFA_Mobile</application><visible>true</visible></applicationVisibilities>`	Sets application Visibilities in the enclosing configuration to <application>SFA_Mobile</application><visible>true</visible>.
4	`    <classAccesses><apexClass>SfaVisitActionsController</apexClass><enabled>true</enabled></classAccesses>`	Sets class Accesses in the enclosing configuration to <apexClass>SfaVisitActionsController</apexClass><enabled>true</enabled>.
5	`    <description>Access to the Phase 2 in-visit objects and mobile actions.</description>`	Sets description in the enclosing configuration to Access to the Phase 2 in-visit objects and mobile actions..
6	`    <fieldPermissions><editable>true</editable><field>Asset_Survey__c.Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Asset_Survey__c.Status__c</field><readable>true</readable>.
7	`    <fieldPermissions><editable>true</editable><field>Asset_Survey__c.Picture_URL__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Asset_Survey__c.Picture_URL__c</field><readable>true</readable>.
8	`    <fieldPermissions><editable>true</editable><field>Asset_Survey__c.Given_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Asset_Survey__c.Given_Date__c</field><readable>true</readable>.
9	`    <fieldPermissions><editable>true</editable><field>Competitor_Activity__c.Company__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Competitor_Activity__c.Company__c</field><readable>true</readable>.
10	`    <fieldPermissions><editable>true</editable><field>Competitor_Activity__c.MRP__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Competitor_Activity__c.MRP__c</field><readable>true</readable>.
11	`    <fieldPermissions><editable>true</editable><field>Competitor_Activity__c.RBP__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Competitor_Activity__c.RBP__c</field><readable>true</readable>.
12	`    <fieldPermissions><editable>true</editable><field>Competitor_Activity__c.Scheme_Details__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Competitor_Activity__c.Scheme_Details__c</field><readable>true</readable>.
13	`    <fieldPermissions><editable>true</editable><field>Competitor_Activity__c.Image_URL__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Competitor_Activity__c.Image_URL__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
14	`<fieldPermissions><editable>true</editable><field>Stock_Check__c.Manufacturing_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Stock_Check__c.Manufacturing_Date__c</field><readable>true</readable>.
15	`<fieldPermissions><editable>true</editable><field>SFA_Ticket__c.Description__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>SFA_Ticket__c.Description__c</field><readable>true</readable>.
16	`<fieldPermissions><editable>true</editable><field>SFA_Ticket__c.Image_URL__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>SFA_Ticket__c.Image_URL__c</field><readable>true</readable>.
17	`<fieldPermissions><editable>true</editable><field>SFA_Ticket__c.Status__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>SFA_Ticket__c.Status__c</field><readable>true</readable>.
18	`<fieldPermissions><editable>true</editable><field>Product_Return__c.Manufacturing_Date__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product_Return__c.Manufacturing_Date__c</field><readable>true</readable>.
19	`<fieldPermissions><editable>true</editable><field>Product_Return__c.Return_Reason__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product_Return__c.Return_Reason__c</field><readable>true</readable>.
20	`<fieldPermissions><editable>true</editable><field>Leave_Request__c.Approver__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Leave_Request__c.Approver__c</field><readable>true</readable>.
21	`<fieldPermissions><editable>true</editable><field>Leave_Request__c.Reason__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Leave_Request__c.Reason__c</field><readable>true</readable>.
22	`<fieldPermissions><editable>true</editable><field>Sales_Order__c.Tax_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Sales_Order__c.Tax_Amount__c</field><readable>true</readable>.
23	`<fieldPermissions><editable>true</editable><field>Sales_Order__c.Gross_Amount__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Sales_Order__c.Gross_Amount__c</field><readable>true</readable>.
24	`<fieldPermissions><editable>true</editable><field>Sales_Order__c.Total_Quantity__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Sales_Order__c.Total_Quantity__c</field><readable>true</readable>.
25	`<fieldPermissions><editable>true</editable><field>Sales_Order__c.Scheme_Applied__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Sales_Order__c.Scheme_Applied__c</field><readable>true</readable>.
26	`<fieldPermissions><editable>true</editable><field>Sales_Order__c.Product__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Sales_Order__c.Product__c</field><readable>true</readable>.
27	`<fieldPermissions><editable>false</editable><field>Sales_Order__c.SKU__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Sales_Order__c.SKU__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
28	`<fieldPermissions><editable>true</editable><field>Sales_Order__c.Scheme_Details__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Sales_Order__c.Scheme_Details__c</field><readable>true</readable>.
29	`<hasActivationRequired>false</hasActivationRequired><label>SFA Phase Two User</label>`	Opens the hasActivationRequired block; child elements specify its configuration.
30	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Asset_Survey__c</object><viewAllFields>true</viewAllFields><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Asset_Survey__c</object><viewAllF.
31	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Competitor_Activity__c</object><viewAllFields>true</viewAllFields><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Competitor_Activity__c</object><v.
32	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Stock_Check__c</object><viewAllFields>true</viewAllFields><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Stock_Check__c</object><viewAllFi.
33	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>SFA_Ticket__c</object><viewAllFields>true</viewAllFields><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>SFA_Ticket__c</object><viewAllFie.
34	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Product_Return__c</object><viewAllFields>true</viewAllFields><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Product_Return__c</object><viewAl.
35	`<objectPermissions><allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Leave_Request__c</object><viewAllFields>true</viewAllFields><viewAllRecords>false</viewAllRecords></objectPermissions>`	Sets object Permissions in the enclosing configuration to <allowCreate>true</allowCreate><allowDelete>false</allowDelete><allowEdit>true</allowEdit><allowRead>true</allowRead><modifyAllRecords>false</modifyAllRecords><object>Leave_Request__c</object><viewAll.
36	`<tabSettings><tab>Asset_Survey__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>Asset_Survey__c</tab><visibility>Visible</visibility>.
37	`<tabSettings><tab>Competitor_Activity__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>Competitor_Activity__c</tab><visibility>Visible</visibility>.
38	`<tabSettings><tab>Stock_Check__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>Stock_Check__c</tab><visibility>Visible</visibility>.

Line	Source code	Explanation / reading note
39	`<tabSettings><tab>SFA_Ticket__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>SFA_Ticket__c</tab><visibility>Visible</visibility>.
40	`<tabSettings><tab>Product_Return__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>Product_Return__c</tab><visibility>Visible</visibility>.
41	`<tabSettings><tab>Leave_Request__c</tab><visibility>Visible</visibility></tabSettings>`	Sets tab Settings in the enclosing configuration to <tab>Leave_Request__c</tab><visibility>Visible</visibility>.
42	`</PermissionSet>`	Closes the PermissionSet configuration block.

force-app/main/default/permissionsets/SFA_Product_Metadata_Read.permissionset-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

8 numbered source lines | SHA-256 2629a741884b00ccaeea4de6b5e5efd447e6e623b857db59a1deab49ac30eb54

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<PermissionSet xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the PermissionSet block; child elements specify its configuration.
3	`    <description>Read existing product brand, sub-brand and alias fields for the mobile catalogue. Does not grant edit or additional record access.</description>`	Sets description in the enclosing configuration to Read existing product brand, sub-brand and alias fields for the mobile catalogue. Does not grant edit or additional record access..
4	`    <fieldPermissions><editable>false</editable><field>Product__c.Brand__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Brand__c</field><readable>true</readable>.
5	`    <fieldPermissions><editable>false</editable><field>Product__c.Sub_Brand__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Sub_Brand__c</field><readable>true</readable>.
6	`    <fieldPermissions><editable>false</editable><field>Product__c.Brand_Alias__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>false</editable><field>Product__c.Brand_Alias__c</field><readable>true</readable>.
7	`    <label>SFA Product Metadata Read</label>`	Sets human-readable Salesforce UI label to SFA Product Metadata Read.
8	`</PermissionSet>`	Closes the PermissionSet configuration block.

force-app/main/default/permissionsets/SFA_Visit_Recovery.permissionset-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

15 numbered source lines | SHA-256 7f7cfc7ad249598692d68507c6abf2524a59acd6c0b61e7ce6eac5e45355547e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<PermissionSet xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the PermissionSet block; child elements specify its configuration.
3	`    <description>Backend access only to mobile recovery fields; existing object and record permissions remain unchanged.</description>`	Sets description in the enclosing configuration to Backend access only to mobile recovery fields; existing object and record permissions remain unchanged..
4	`    <fieldPermissions><editable>true</editable><field>Visit__c.Mobile_Order_Draft__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Visit__c.Mobile_Order_Draft__c</field><readable>true</readable>.
5	`    <fieldPermissions><editable>true</editable><field>Sales_Order__c.Mobile_Request_Key__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Sales_Order__c.Mobile_Request_Key__c</field><readable>true</readable>.
6	`    <fieldPermissions><editable>true</editable><field>Product_Refusal__c.Employee__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product_Refusal__c.Employee__c</field><readable>true</readable>.
7	`    <fieldPermissions><editable>true</editable><field>Product_Refusal__c.Notes__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product_Refusal__c.Notes__c</field><readable>true</readable>.
8	`    <fieldPermissions><editable>true</editable><field>Product_Refusal__c.Refused_At__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product_Refusal__c.Refused_At__c</field><readable>true</readable>.
9	`    <fieldPermissions><editable>true</editable><field>Product_Return__c.Mobile_Request_Key__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Product_Return__c.Mobile_Request_Key__c</field><readable>true</readable>.
10	`    <fieldPermissions><editable>true</editable><field>Competitor_Activity__c.Mobile_Request_Key__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Competitor_Activity__c.Mobile_Request_Key__c</field><readable>true</readable>.
11	`    <fieldPermissions><editable>true</editable><field>SFA_Ticket__c.Mobile_Request_Key__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>SFA_Ticket__c.Mobile_Request_Key__c</field><readable>true</readable>.
12	`    <fieldPermissions><editable>true</editable><field>Stock_Check__c.Mobile_Request_Key__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Stock_Check__c.Mobile_Request_Key__c</field><readable>true</readable>.
13	`    <fieldPermissions><editable>true</editable><field>Asset_Survey__c.Mobile_Request_Key__c</field><readable>true</readable></fieldPermissions>`	Sets field Permissions in the enclosing configuration to <editable>true</editable><field>Asset_Survey__c.Mobile_Request_Key__c</field><readable>true</readable>.

Line	Source code	Explanation / reading note
14	`    <label>SFA Visit Recovery</label>`	Sets human-readable Salesforce UI label to SFA Visit Recovery.
15	`</PermissionSet>`	Closes the PermissionSet configuration block.

force-app/main/default/profiles/Admin.profile-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

959 numbered source lines | SHA-256 fd8b41dcb948c927f56bbe551a4995f47e0fff52cac12f88a89d5f1a90ecb5cc

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Profile xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Profile block; child elements specify its configuration.
3	`    <custom>false</custom>`	Sets custom in the enclosing configuration to false.
4	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
5	`        <editable>true</editable>`	Sets field edit permission to true.
6	`        <field>Retailer__c.Aadhaar_Number__c</field>`	Sets field API name configured in this entry to Retailer__c.Aadhaar_Number__c.
7	`        <readable>true</readable>`	Sets field read permission to true.
8	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
9	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
10	`        <editable>true</editable>`	Sets field edit permission to true.
11	`        <field>Retailer__c.Active__c</field>`	Sets field API name configured in this entry to Retailer__c.Active__c.
12	`        <readable>true</readable>`	Sets field read permission to true.
13	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
14	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
15	`        <editable>true</editable>`	Sets field edit permission to true.
16	`        <field>Retailer__c.Address__c</field>`	Sets field API name configured in this entry to Retailer__c.Address__c.
17	`        <readable>true</readable>`	Sets field read permission to true.
18	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
19	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
20	`        <editable>true</editable>`	Sets field edit permission to true.
21	`        <field>Retailer__c.Beat__c</field>`	Sets field API name configured in this entry to Retailer__c.Beat__c.
22	`        <readable>true</readable>`	Sets field read permission to true.
23	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
24	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
25	`        <editable>true</editable>`	Sets field edit permission to true.
26	`        <field>Retailer__c.Credit_Limit__c</field>`	Sets field API name configured in this entry to Retailer__c.Credit_Limit__c.
27	`        <readable>true</readable>`	Sets field read permission to true.
28	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
29	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
30	`        <editable>true</editable>`	Sets field edit permission to true.
31	`        <field>Retailer__c.Distributor__c</field>`	Sets field API name configured in this entry to Retailer__c.Distributor__c.
32	`        <readable>true</readable>`	Sets field read permission to true.
33	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
34	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
35	`        <editable>true</editable>`	Sets field edit permission to true.
36	`        <field>Retailer__c.Email__c</field>`	Sets field API name configured in this entry to Retailer__c.Email__c.
37	`        <readable>true</readable>`	Sets field read permission to true.
38	`    </fieldPermissions>`	Closes the fieldPermissions configuration block.
39	`    <fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
40	`        <editable>true</editable>`	Sets field edit permission to true.
41	`        <field>Retailer__c.Geo_Location__c</field>`	Sets field API name configured in this entry to Retailer__c.Geo_Location__c.

Line	Source code	Explanation / reading note
42	`<readable>true</readable>`	Sets field read permission to true.
43	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
44	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
45	`<editable>true</editable>`	Sets field edit permission to true.
46	`<field>Retailer__c.Geography__c</field>`	Sets field API name configured in this entry to Retailer__c.Geography__c.
47	`<readable>true</readable>`	Sets field read permission to true.
48	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
49	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
50	`<editable>true</editable>`	Sets field edit permission to true.
51	`<field>Retailer__c.Latitude__c</field>`	Sets field API name configured in this entry to Retailer__c.Latitude__c.
52	`<readable>true</readable>`	Sets field read permission to true.
53	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
54	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
55	`<editable>true</editable>`	Sets field edit permission to true.
56	`<field>Retailer__c.Longitude__c</field>`	Sets field API name configured in this entry to Retailer__c.Longitude__c.
57	`<readable>true</readable>`	Sets field read permission to true.
58	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
59	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
60	`<editable>true</editable>`	Sets field edit permission to true.
61	`<field>Retailer__c.Minimum_Order_Value__c</field>`	Sets field API name configured in this entry to Retailer__c.Minimum_Order_Value__c.
62	`<readable>true</readable>`	Sets field read permission to true.
63	`</fieldPermissions>`	Closes the fieldPermissions configuration block.

Line	Source code	Explanation / reading note
64	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
65	`<editable>true</editable>`	Sets field edit permission to true.
66	`<field>Retailer__c.Outlet_Owner_Name__c</field>`	Sets field API name configured in this entry to Retailer__c.Outlet_Owner_Name__c.
67	`<readable>true</readable>`	Sets field read permission to true.
68	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
69	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
70	`<editable>true</editable>`	Sets field edit permission to true.
71	`<field>Retailer__c.Outlet_Type__c</field>`	Sets field API name configured in this entry to Retailer__c.Outlet_Type__c.
72	`<readable>true</readable>`	Sets field read permission to true.
73	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
74	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
75	`<editable>true</editable>`	Sets field edit permission to true.
76	`<field>Retailer__c.Outstanding_Amount__c</field>`	Sets field API name configured in this entry to Retailer__c.Outstanding_Amount__c.
77	`<readable>true</readable>`	Sets field read permission to true.
78	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
79	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
80	`<editable>true</editable>`	Sets field edit permission to true.
81	`<field>Retailer__c.PAN_Number__c</field>`	Sets field API name configured in this entry to Retailer__c.PAN_Number__c.
82	`<readable>true</readable>`	Sets field read permission to true.
83	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
84	`<fieldPermissions>`	Opens the fieldPermissions block; child elements specify its configuration.
85	`<editable>true</editable>`	Sets field edit permission to true.

Line	Source code	Explanation / reading note
86	`<field>Retailer__c.Phone__c</field>`	Sets field API name configured in this entry to Retailer__c.Phone__c.
87	`<readable>true</readable>`	Sets field read permission to true.
88	`</fieldPermissions>`	Closes the fieldPermissions configuration block.
89	`<objectPermissions>`	Opens the objectPermissions block; child elements specify its configuration.
90	`<allowCreate>true</allowCreate>`	Sets object create permission to true.
91	`<allowDelete>true</allowDelete>`	Sets object delete permission to true.
92	`<allowEdit>true</allowEdit>`	Sets object edit permission to true.
93	`<allowRead>true</allowRead>`	Sets object read permission to true.
94	`<modifyAllRecords>true</modifyAllRecords>`	Sets modify All Records in the enclosing configuration to true.
95	`<object>Retailer__c</object>`	Sets object API name configured in this entry to Retailer__c.
96	`<viewAllRecords>true</viewAllRecords>`	Sets view All Records in the enclosing configuration to true.
97	`</objectPermissions>`	Closes the objectPermissions configuration block.
98	`<userLicense>Salesforce</userLicense>`	Sets user License in the enclosing configuration to Salesforce.
99	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
100	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
101	`<name>AIViewInsightObjects</name>`	Sets name within the enclosing metadata component to AIViewInsightObjects.
102	`</userPermissions>`	Closes the userPermissions configuration block.
103	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
104	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
105	`<name>AcceptInboundBundling</name>`	Sets name within the enclosing metadata component to AcceptInboundBundling.
106	`</userPermissions>`	Closes the userPermissions configuration block.
107	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
108	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
109	`        <name>AccessOrchestrationObjects</name>`	Sets name within the enclosing metadata component to AccessOrchestrationObjects.
110	`    </userPermissions>`	Closes the userPermissions configuration block.
111	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
112	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
113	`        <name>ActivateContract</name>`	Sets name within the enclosing metadata component to ActivateContract.
114	`    </userPermissions>`	Closes the userPermissions configuration block.
115	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
116	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
117	`        <name>ActivateOrder</name>`	Sets name within the enclosing metadata component to ActivateOrder.
118	`    </userPermissions>`	Closes the userPermissions configuration block.
119	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
120	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
121	`        <name>ActivitiesAccess</name>`	Sets name within the enclosing metadata component to ActivitiesAccess.
122	`    </userPermissions>`	Closes the userPermissions configuration block.
123	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
124	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
125	`        <name>AddDirectMessageMembers</name>`	Sets name within the enclosing metadata component to AddDirectMessageMembers.
126	`    </userPermissions>`	Closes the userPermissions configuration block.
127	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
128	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
129	`        <name>AllowUniversalSearch</name>`	Sets name within the enclosing metadata component to AllowUniversalSearch.

Line	Source code	Explanation / reading note
130	`    </userPermissions>`	Closes the userPermissions configuration block.
131	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
132	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
133	`        <name>AllowViewKnowledge</name>`	Sets name within the enclosing metadata component to AllowViewKnowledge.
134	`    </userPermissions>`	Closes the userPermissions configuration block.
135	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
136	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
137	`        <name>ApexRestServices</name>`	Sets name within the enclosing metadata component to ApexRestServices.
138	`    </userPermissions>`	Closes the userPermissions configuration block.
139	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
140	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
141	`        <name>ApiEnabled</name>`	Sets name within the enclosing metadata component to ApiEnabled.
142	`    </userPermissions>`	Closes the userPermissions configuration block.
143	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
144	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
145	`        <name>AppFrameworkManageApp</name>`	Sets name within the enclosing metadata component to AppFrameworkManageApp.
146	`    </userPermissions>`	Closes the userPermissions configuration block.
147	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
148	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
149	`        <name>AppFrameworkManageTemplate</name>`	Sets name within the enclosing metadata component to AppFrameworkManageTemplate.
150	`    </userPermissions>`	Closes the userPermissions configuration block.
151	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
152	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
153	`        <name>ApprovalAdmin</name>`	Sets name within the enclosing metadata component to ApprovalAdmin.
154	`    </userPermissions>`	Closes the userPermissions configuration block.
155	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
156	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
157	`        <name>ApprovalDesigner</name>`	Sets name within the enclosing metadata component to ApprovalDesigner.
158	`    </userPermissions>`	Closes the userPermissions configuration block.
159	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
160	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
161	`        <name>AssignPermissionSets</name>`	Sets name within the enclosing metadata component to AssignPermissionSets.
162	`    </userPermissions>`	Closes the userPermissions configuration block.
163	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
164	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
165	`        <name>AssignTopics</name>`	Sets name within the enclosing metadata component to AssignTopics.
166	`    </userPermissions>`	Closes the userPermissions configuration block.
167	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
168	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
169	`        <name>AuthorApex</name>`	Sets name within the enclosing metadata component to AuthorApex.
170	`    </userPermissions>`	Closes the userPermissions configuration block.
171	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
172	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
173	`        <name>BulkMacrosAllowed</name>`	Sets name within the enclosing metadata component to BulkMacrosAllowed.

Line	Source code	Explanation / reading note
174	`    </userPermissions>`	Closes the userPermissions configuration block.
175	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
176	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
177	`        <name>CanAccessCE</name>`	Sets name within the enclosing metadata component to CanAccessCE.
178	`    </userPermissions>`	Closes the userPermissions configuration block.
179	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
180	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
181	`        <name>CanApproveUninstalledApps</name>`	Sets name within the enclosing metadata component to CanApproveUninstalledApps.
182	`    </userPermissions>`	Closes the userPermissions configuration block.
183	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
184	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
185	`        <name>CanInsertFeedSystemFields</name>`	Sets name within the enclosing metadata component to CanInsertFeedSystemFields.
186	`    </userPermissions>`	Closes the userPermissions configuration block.
187	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
188	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
189	`        <name>CanUseNewDashboardBuilder</name>`	Sets name within the enclosing metadata component to CanUseNewDashboardBuilder.
190	`    </userPermissions>`	Closes the userPermissions configuration block.
191	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
192	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
193	`        <name>CanVerifyComment</name>`	Sets name within the enclosing metadata component to CanVerifyComment.
194	`    </userPermissions>`	Closes the userPermissions configuration block.
195	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
196	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
197	`        <name>ChangeDashboardColors</name>`	Sets name within the enclosing metadata component to ChangeDashboardColors.
198	`    </userPermissions>`	Closes the userPermissions configuration block.
199	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
200	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
201	`        <name>ChatterEditOwnPost</name>`	Sets name within the enclosing metadata component to ChatterEditOwnPost.
202	`    </userPermissions>`	Closes the userPermissions configuration block.
203	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
204	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
205	`        <name>ChatterEditOwnRecordPost</name>`	Sets name within the enclosing metadata component to ChatterEditOwnRecordPost.
206	`    </userPermissions>`	Closes the userPermissions configuration block.
207	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
208	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
209	`        <name>ChatterFileLink</name>`	Sets name within the enclosing metadata component to ChatterFileLink.
210	`    </userPermissions>`	Closes the userPermissions configuration block.
211	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
212	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
213	`        <name>ChatterInternalUser</name>`	Sets name within the enclosing metadata component to ChatterInternalUser.
214	`    </userPermissions>`	Closes the userPermissions configuration block.
215	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
216	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
217	`        <name>ChatterInviteExternalUsers</name>`	Sets name within the enclosing metadata component to ChatterInviteExternalUsers.

Line	Source code	Explanation / reading note
218	`    </userPermissions>`	Closes the userPermissions configuration block.
219	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
220	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
221	`        <name>ChatterOwnGroups</name>`	Sets name within the enclosing metadata component to ChatterOwnGroups.
222	`    </userPermissions>`	Closes the userPermissions configuration block.
223	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
224	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
225	`        <name>ClientSecretRotation</name>`	Sets name within the enclosing metadata component to ClientSecretRotation.
226	`    </userPermissions>`	Closes the userPermissions configuration block.
227	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
228	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
229	`        <name>ConnectOrgToEnvironmentHub</name>`	Sets name within the enclosing metadata component to ConnectOrgToEnvironmentHub.
230	`    </userPermissions>`	Closes the userPermissions configuration block.
231	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
232	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
233	`        <name>ConsentApiUpdate</name>`	Sets name within the enclosing metadata component to ConsentApiUpdate.
234	`    </userPermissions>`	Closes the userPermissions configuration block.
235	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
236	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
237	`        <name>ContentAdministrator</name>`	Sets name within the enclosing metadata component to ContentAdministrator.
238	`    </userPermissions>`	Closes the userPermissions configuration block.
239	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
240	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
241	`        <name>ContentWorkspaces</name>`	Sets name within the enclosing metadata component to ContentWorkspaces.
242	`    </userPermissions>`	Closes the userPermissions configuration block.
243	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
244	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
245	`        <name>ConvertLeads</name>`	Sets name within the enclosing metadata component to ConvertLeads.
246	`    </userPermissions>`	Closes the userPermissions configuration block.
247	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
248	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
249	`        <name>CreateCustomizeDashboards</name>`	Sets name within the enclosing metadata component to CreateCustomizeDashboards.
250	`    </userPermissions>`	Closes the userPermissions configuration block.
251	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
252	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
253	`        <name>CreateCustomizeFilters</name>`	Sets name within the enclosing metadata component to CreateCustomizeFilters.
254	`    </userPermissions>`	Closes the userPermissions configuration block.
255	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
256	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
257	`        <name>CreateCustomizeReports</name>`	Sets name within the enclosing metadata component to CreateCustomizeReports.
258	`    </userPermissions>`	Closes the userPermissions configuration block.
259	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
260	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
261	`        <name>CreateDashboardFolders</name>`	Sets name within the enclosing metadata component to CreateDashboardFolders.

Line	Source code	Explanation / reading note
262	`</userPermissions>`	Closes the userPermissions configuration block.
263	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
264	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
265	`<name>CreateLtngTempFolder</name>`	Sets name within the enclosing metadata component to CreateLtngTempFolder.
266	`</userPermissions>`	Closes the userPermissions configuration block.
267	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
268	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
269	`<name>CreatePackaging</name>`	Sets name within the enclosing metadata component to CreatePackaging.
270	`</userPermissions>`	Closes the userPermissions configuration block.
271	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
272	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
273	`<name>CreateReportFolders</name>`	Sets name within the enclosing metadata component to CreateReportFolders.
274	`</userPermissions>`	Closes the userPermissions configuration block.
275	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
276	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
277	`<name>CreateTopics</name>`	Sets name within the enclosing metadata component to CreateTopics.
278	`</userPermissions>`	Closes the userPermissions configuration block.
279	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
280	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
281	`<name>CreateWorkspaces</name>`	Sets name within the enclosing metadata component to CreateWorkspaces.
282	`</userPermissions>`	Closes the userPermissions configuration block.
283	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
284	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
285	`<name>CustomizeApplication</name>`	Sets name within the enclosing metadata component to CustomizeApplication.
286	`</userPermissions>`	Closes the userPermissions configuration block.
287	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
288	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
289	`<name>DataExport</name>`	Sets name within the enclosing metadata component to DataExport.
290	`</userPermissions>`	Closes the userPermissions configuration block.
291	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
292	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
293	`<name>DelegatedTwoFactor</name>`	Sets name within the enclosing metadata component to DelegatedTwoFactor.
294	`</userPermissions>`	Closes the userPermissions configuration block.
295	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
296	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
297	`<name>DeleteActivatedContract</name>`	Sets name within the enclosing metadata component to DeleteActivatedContract.
298	`</userPermissions>`	Closes the userPermissions configuration block.
299	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
300	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
301	`<name>DeleteTopics</name>`	Sets name within the enclosing metadata component to DeleteTopics.
302	`</userPermissions>`	Closes the userPermissions configuration block.
303	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
304	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
305	`<name>DistributeFromPersWksp</name>`	Sets name within the enclosing metadata component to DistributeFromPersWksp.

Line	Source code	Explanation / reading note
306	`    </userPermissions>`	Closes the userPermissions configuration block.
307	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
308	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
309	`        <name>EditActivatedOrders</name>`	Sets name within the enclosing metadata component to EditActivatedOrders.
310	`    </userPermissions>`	Closes the userPermissions configuration block.
311	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
312	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
313	`        <name>EditBillingInfo</name>`	Sets name within the enclosing metadata component to EditBillingInfo.
314	`    </userPermissions>`	Closes the userPermissions configuration block.
315	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
316	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
317	`        <name>EditBrandTemplates</name>`	Sets name within the enclosing metadata component to EditBrandTemplates.
318	`    </userPermissions>`	Closes the userPermissions configuration block.
319	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
320	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
321	`        <name>EditCaseComments</name>`	Sets name within the enclosing metadata component to EditCaseComments.
322	`    </userPermissions>`	Closes the userPermissions configuration block.
323	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
324	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
325	`        <name>EditEvent</name>`	Sets name within the enclosing metadata component to EditEvent.
326	`    </userPermissions>`	Closes the userPermissions configuration block.
327	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
328	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
329	`        <name>EditHtmlTemplates</name>`	Sets name within the enclosing metadata component to EditHtmlTemplates.
330	`    </userPermissions>`	Closes the userPermissions configuration block.
331	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
332	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
333	`        <name>EditKnowledge</name>`	Sets name within the enclosing metadata component to EditKnowledge.
334	`    </userPermissions>`	Closes the userPermissions configuration block.
335	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
336	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
337	`        <name>EditMyDashboards</name>`	Sets name within the enclosing metadata component to EditMyDashboards.
338	`    </userPermissions>`	Closes the userPermissions configuration block.
339	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
340	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
341	`        <name>EditMyReports</name>`	Sets name within the enclosing metadata component to EditMyReports.
342	`    </userPermissions>`	Closes the userPermissions configuration block.
343	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
344	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
345	`        <name>EditOppLineItemUnitPrice</name>`	Sets name within the enclosing metadata component to EditOppLineItemUnitPrice.
346	`    </userPermissions>`	Closes the userPermissions configuration block.
347	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
348	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
349	`        <name>EditPublicDocuments</name>`	Sets name within the enclosing metadata component to EditPublicDocuments.

Line	Source code	Explanation / reading note
350	`    </userPermissions>`	Closes the userPermissions configuration block.
351	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
352	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
353	`        <name>EditPublicFilters</name>`	Sets name within the enclosing metadata component to EditPublicFilters.
354	`    </userPermissions>`	Closes the userPermissions configuration block.
355	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
356	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
357	`        <name>EditPublicTemplates</name>`	Sets name within the enclosing metadata component to EditPublicTemplates.
358	`    </userPermissions>`	Closes the userPermissions configuration block.
359	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
360	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
361	`        <name>EditReadonlyFields</name>`	Sets name within the enclosing metadata component to EditReadonlyFields.
362	`    </userPermissions>`	Closes the userPermissions configuration block.
363	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
364	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
365	`        <name>EditTask</name>`	Sets name within the enclosing metadata component to EditTask.
366	`    </userPermissions>`	Closes the userPermissions configuration block.
367	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
368	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
369	`        <name>EditTopics</name>`	Sets name within the enclosing metadata component to EditTopics.
370	`    </userPermissions>`	Closes the userPermissions configuration block.
371	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
372	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
373	`        <name>EmailMass</name>`	Sets name within the enclosing metadata component to EmailMass.
374	`    </userPermissions>`	Closes the userPermissions configuration block.
375	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
376	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
377	`        <name>EmailSingle</name>`	Sets name within the enclosing metadata component to EmailSingle.
378	`    </userPermissions>`	Closes the userPermissions configuration block.
379	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
380	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
381	`        <name>EnableCommunityAppLauncher</name>`	Sets name within the enclosing metadata component to EnableCommunityAppLauncher.
382	`    </userPermissions>`	Closes the userPermissions configuration block.
383	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
384	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
385	`        <name>EnableNotifications</name>`	Sets name within the enclosing metadata component to EnableNotifications.
386	`    </userPermissions>`	Closes the userPermissions configuration block.
387	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
388	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
389	`        <name>ExportReport</name>`	Sets name within the enclosing metadata component to ExportReport.
390	`    </userPermissions>`	Closes the userPermissions configuration block.
391	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
392	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
393	`        <name>ExternalClientAppAdmin</name>`	Sets name within the enclosing metadata component to ExternalClientAppAdmin.

Line	Source code	Explanation / reading note
394	`    </userPermissions>`	Closes the userPermissions configuration block.
395	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
396	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
397	`        <name>ExternalClientAppDeveloper</name>`	Sets name within the enclosing metadata component to ExternalClientAppDeveloper.
398	`    </userPermissions>`	Closes the userPermissions configuration block.
399	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
400	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
401	`        <name>ExternalClientAppViewer</name>`	Sets name within the enclosing metadata component to ExternalClientAppViewer.
402	`    </userPermissions>`	Closes the userPermissions configuration block.
403	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
404	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
405	`        <name>FreezeUsers</name>`	Sets name within the enclosing metadata component to FreezeUsers.
406	`    </userPermissions>`	Closes the userPermissions configuration block.
407	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
408	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
409	`        <name>GiveRecognitionBadge</name>`	Sets name within the enclosing metadata component to GiveRecognitionBadge.
410	`    </userPermissions>`	Closes the userPermissions configuration block.
411	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
412	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
413	`        <name>GrantOutboundBundling</name>`	Sets name within the enclosing metadata component to GrantOutboundBundling.
414	`    </userPermissions>`	Closes the userPermissions configuration block.
415	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
416	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
417	`        <name>ImportCustomObjects</name>`	Sets name within the enclosing metadata component to ImportCustomObjects.
418	`    </userPermissions>`	Closes the userPermissions configuration block.
419	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
420	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
421	`        <name>ImportLeads</name>`	Sets name within the enclosing metadata component to ImportLeads.
422	`    </userPermissions>`	Closes the userPermissions configuration block.
423	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
424	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
425	`        <name>ImportPersonal</name>`	Sets name within the enclosing metadata component to ImportPersonal.
426	`    </userPermissions>`	Closes the userPermissions configuration block.
427	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
428	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
429	`        <name>InstallPackaging</name>`	Sets name within the enclosing metadata component to InstallPackaging.
430	`    </userPermissions>`	Closes the userPermissions configuration block.
431	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
432	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
433	`        <name>IntegrationIntelligenceUser</name>`	Sets name within the enclosing metadata component to IntegrationIntelligenceUser.
434	`    </userPermissions>`	Closes the userPermissions configuration block.
435	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
436	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
437	`        <name>LightningConsoleAllowedForUser</name>`	Sets name within the enclosing metadata component to LightningConsoleAllowedForUser.

Line	Source code	Explanation / reading note
438	`    </userPermissions>`	Closes the userPermissions configuration block.
439	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
440	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
441	`        <name>LightningExperienceUser</name>`	Sets name within the enclosing metadata component to LightningExperienceUser.
442	`    </userPermissions>`	Closes the userPermissions configuration block.
443	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
444	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
445	`        <name>ListEmailSend</name>`	Sets name within the enclosing metadata component to ListEmailSend.
446	`    </userPermissions>`	Closes the userPermissions configuration block.
447	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
448	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
449	`        <name>ManageAnalyticSnapshots</name>`	Sets name within the enclosing metadata component to ManageAnalyticSnapshots.
450	`    </userPermissions>`	Closes the userPermissions configuration block.
451	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
452	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
453	`        <name>ManageApiNamedQueries</name>`	Sets name within the enclosing metadata component to ManageApiNamedQueries.
454	`    </userPermissions>`	Closes the userPermissions configuration block.
455	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
456	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
457	`        <name>ManageAuthProviders</name>`	Sets name within the enclosing metadata component to ManageAuthProviders.
458	`    </userPermissions>`	Closes the userPermissions configuration block.
459	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
460	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
461	`        <name>ManageBusinessHourHolidays</name>`	Sets name within the enclosing metadata component to ManageBusinessHourHolidays.
462	`    </userPermissions>`	Closes the userPermissions configuration block.
463	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
464	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
465	`        <name>ManageC360AConnections</name>`	Sets name within the enclosing metadata component to ManageC360AConnections.
466	`    </userPermissions>`	Closes the userPermissions configuration block.
467	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
468	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
469	`        <name>ManageCMS</name>`	Sets name within the enclosing metadata component to ManageCMS.
470	`    </userPermissions>`	Closes the userPermissions configuration block.
471	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
472	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
473	`        <name>ManageCallCenters</name>`	Sets name within the enclosing metadata component to ManageCallCenters.
474	`    </userPermissions>`	Closes the userPermissions configuration block.
475	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
476	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
477	`        <name>ManageCases</name>`	Sets name within the enclosing metadata component to ManageCases.
478	`    </userPermissions>`	Closes the userPermissions configuration block.
479	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
480	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
481	`        <name>ManageCategories</name>`	Sets name within the enclosing metadata component to ManageCategories.

Line	Source code	Explanation / reading note
482	`</userPermissions>`	Closes the userPermissions configuration block.
483	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
484	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
485	`<name>ManageCertificates</name>`	Sets name within the enclosing metadata component to ManageCertificates.
486	`</userPermissions>`	Closes the userPermissions configuration block.
487	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
488	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
489	`<name>ManageContentPermissions</name>`	Sets name within the enclosing metadata component to ManageContentPermissions.
490	`</userPermissions>`	Closes the userPermissions configuration block.
491	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
492	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
493	`<name>ManageContentProperties</name>`	Sets name within the enclosing metadata component to ManageContentProperties.
494	`</userPermissions>`	Closes the userPermissions configuration block.
495	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
496	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
497	`<name>ManageContentTaxonomy</name>`	Sets name within the enclosing metadata component to ManageContentTaxonomy.
498	`</userPermissions>`	Closes the userPermissions configuration block.
499	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
500	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
501	`<name>ManageContentTypes</name>`	Sets name within the enclosing metadata component to ManageContentTypes.
502	`</userPermissions>`	Closes the userPermissions configuration block.
503	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
504	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
505	`        <name>ManageCustomDomains</name>`	Sets name within the enclosing metadata component to ManageCustomDomains.
506	`    </userPermissions>`	Closes the userPermissions configuration block.
507	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
508	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
509	`        <name>ManageCustomPermissions</name>`	Sets name within the enclosing metadata component to ManageCustomPermissions.
510	`    </userPermissions>`	Closes the userPermissions configuration block.
511	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
512	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
513	`        <name>ManageCustomReportTypes</name>`	Sets name within the enclosing metadata component to ManageCustomReportTypes.
514	`    </userPermissions>`	Closes the userPermissions configuration block.
515	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
516	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
517	`        <name>ManageCustomerDataOptOut</name>`	Sets name within the enclosing metadata component to ManageCustomerDataOptOut.
518	`    </userPermissions>`	Closes the userPermissions configuration block.
519	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
520	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
521	`        <name>ManageDashbdsInPubFolders</name>`	Sets name within the enclosing metadata component to ManageDashbdsInPubFolders.
522	`    </userPermissions>`	Closes the userPermissions configuration block.
523	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
524	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
525	`        <name>ManageDataCategories</name>`	Sets name within the enclosing metadata component to ManageDataCategories.

Line	Source code	Explanation / reading note
526	`    </userPermissions>`	Closes the userPermissions configuration block.
527	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
528	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
529	`        <name>ManageDataIntegrations</name>`	Sets name within the enclosing metadata component to ManageDataIntegrations.
530	`    </userPermissions>`	Closes the userPermissions configuration block.
531	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
532	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
533	`        <name>ManageDataMaskPolicies</name>`	Sets name within the enclosing metadata component to ManageDataMaskPolicies.
534	`    </userPermissions>`	Closes the userPermissions configuration block.
535	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
536	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
537	`        <name>ManageDynamicDashboards</name>`	Sets name within the enclosing metadata component to ManageDynamicDashboards.
538	`    </userPermissions>`	Closes the userPermissions configuration block.
539	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
540	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
541	`        <name>ManageEmailClientConfig</name>`	Sets name within the enclosing metadata component to ManageEmailClientConfig.
542	`    </userPermissions>`	Closes the userPermissions configuration block.
543	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
544	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
545	`        <name>ManageEntitlements</name>`	Sets name within the enclosing metadata component to ManageEntitlements.
546	`    </userPermissions>`	Closes the userPermissions configuration block.
547	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
548	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
549	`        <name>ManageExchangeConfig</name>`	Sets name within the enclosing metadata component to ManageExchangeConfig.
550	`    </userPermissions>`	Closes the userPermissions configuration block.
551	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
552	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
553	`        <name>ManageFilesAndAttachments</name>`	Sets name within the enclosing metadata component to ManageFilesAndAttachments.
554	`    </userPermissions>`	Closes the userPermissions configuration block.
555	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
556	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
557	`        <name>ManageHealthCheck</name>`	Sets name within the enclosing metadata component to ManageHealthCheck.
558	`    </userPermissions>`	Closes the userPermissions configuration block.
559	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
560	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
561	`        <name>ManageHerokuAppLink</name>`	Sets name within the enclosing metadata component to ManageHerokuAppLink.
562	`    </userPermissions>`	Closes the userPermissions configuration block.
563	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
564	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
565	`        <name>ManageHubConnections</name>`	Sets name within the enclosing metadata component to ManageHubConnections.
566	`    </userPermissions>`	Closes the userPermissions configuration block.
567	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
568	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
569	`        <name>ManageInteraction</name>`	Sets name within the enclosing metadata component to ManageInteraction.

Line	Source code	Explanation / reading note
570	`</userPermissions>`	Closes the userPermissions configuration block.
571	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
572	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
573	`<name>ManageInternalUsers</name>`	Sets name within the enclosing metadata component to ManageInternalUsers.
574	`</userPermissions>`	Closes the userPermissions configuration block.
575	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
576	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
577	`<name>ManageIpAddresses</name>`	Sets name within the enclosing metadata component to ManageIpAddresses.
578	`</userPermissions>`	Closes the userPermissions configuration block.
579	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
580	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
581	`<name>ManageKnowledge</name>`	Sets name within the enclosing metadata component to ManageKnowledge.
582	`</userPermissions>`	Closes the userPermissions configuration block.
583	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
584	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
585	`<name>ManageKnowledgeImportExport</name>`	Sets name within the enclosing metadata component to ManageKnowledgeImportExport.
586	`</userPermissions>`	Closes the userPermissions configuration block.
587	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
588	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
589	`<name>ManageLeads</name>`	Sets name within the enclosing metadata component to ManageLeads.
590	`</userPermissions>`	Closes the userPermissions configuration block.
591	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
592	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
593	`        <name>ManageLoginAccessPolicies</name>`	Sets name within the enclosing metadata component to ManageLoginAccessPolicies.
594	`    </userPermissions>`	Closes the userPermissions configuration block.
595	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
596	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
597	`        <name>ManageMobile</name>`	Sets name within the enclosing metadata component to ManageMobile.
598	`    </userPermissions>`	Closes the userPermissions configuration block.
599	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
600	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
601	`        <name>ManageNetworks</name>`	Sets name within the enclosing metadata component to ManageNetworks.
602	`    </userPermissions>`	Closes the userPermissions configuration block.
603	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
604	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
605	`        <name>ManageOrchInstsAndWorkItems</name>`	Sets name within the enclosing metadata component to ManageOrchInstsAndWorkItems.
606	`    </userPermissions>`	Closes the userPermissions configuration block.
607	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
608	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
609	`        <name>ManagePackageLicenses</name>`	Sets name within the enclosing metadata component to ManagePackageLicenses.
610	`    </userPermissions>`	Closes the userPermissions configuration block.
611	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
612	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
613	`        <name>ManagePasswordPolicies</name>`	Sets name within the enclosing metadata component to ManagePasswordPolicies.

Line	Source code	Explanation / reading note
614	`    </userPermissions>`	Closes the userPermissions configuration block.
615	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
616	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
617	`        <name>ManageProfilesPermissionsets</name>`	Sets name within the enclosing metadata component to ManageProfilesPermissionsets.
618	`    </userPermissions>`	Closes the userPermissions configuration block.
619	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
620	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
621	`        <name>ManagePropositions</name>`	Sets name within the enclosing metadata component to ManagePropositions.
622	`    </userPermissions>`	Closes the userPermissions configuration block.
623	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
624	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
625	`        <name>ManagePvtRptsAndDashbds</name>`	Sets name within the enclosing metadata component to ManagePvtRptsAndDashbds.
626	`    </userPermissions>`	Closes the userPermissions configuration block.
627	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
628	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
629	`        <name>ManageRecommendationStrategies</name>`	Sets name within the enclosing metadata component to ManageRecommendationStrategies.
630	`    </userPermissions>`	Closes the userPermissions configuration block.
631	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
632	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
633	`        <name>ManageReleaseUpdates</name>`	Sets name within the enclosing metadata component to ManageReleaseUpdates.
634	`    </userPermissions>`	Closes the userPermissions configuration block.
635	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
636	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
637	`        <name>ManageRemoteAccess</name>`	Sets name within the enclosing metadata component to ManageRemoteAccess.
638	`    </userPermissions>`	Closes the userPermissions configuration block.
639	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
640	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
641	`        <name>ManageReportsInPubFolders</name>`	Sets name within the enclosing metadata component to ManageReportsInPubFolders.
642	`    </userPermissions>`	Closes the userPermissions configuration block.
643	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
644	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
645	`        <name>ManageRoles</name>`	Sets name within the enclosing metadata component to ManageRoles.
646	`    </userPermissions>`	Closes the userPermissions configuration block.
647	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
648	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
649	`        <name>ManageSearchPromotionRules</name>`	Sets name within the enclosing metadata component to ManageSearchPromotionRules.
650	`    </userPermissions>`	Closes the userPermissions configuration block.
651	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
652	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
653	`        <name>ManageSharing</name>`	Sets name within the enclosing metadata component to ManageSharing.
654	`    </userPermissions>`	Closes the userPermissions configuration block.
655	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
656	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
657	`        <name>ManageSolutions</name>`	Sets name within the enclosing metadata component to ManageSolutions.

Line	Source code	Explanation / reading note
658	`    </userPermissions>`	Closes the userPermissions configuration block.
659	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
660	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
661	`        <name>ManageSubscriptions</name>`	Sets name within the enclosing metadata component to ManageSubscriptions.
662	`    </userPermissions>`	Closes the userPermissions configuration block.
663	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
664	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
665	`        <name>ManageSynonyms</name>`	Sets name within the enclosing metadata component to ManageSynonyms.
666	`    </userPermissions>`	Closes the userPermissions configuration block.
667	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
668	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
669	`        <name>ManageTranslation</name>`	Sets name within the enclosing metadata component to ManageTranslation.
670	`    </userPermissions>`	Closes the userPermissions configuration block.
671	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
672	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
673	`        <name>ManageUnlistedGroups</name>`	Sets name within the enclosing metadata component to ManageUnlistedGroups.
674	`    </userPermissions>`	Closes the userPermissions configuration block.
675	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
676	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
677	`        <name>ManageUsers</name>`	Sets name within the enclosing metadata component to ManageUsers.
678	`    </userPermissions>`	Closes the userPermissions configuration block.
679	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
680	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
681	`<name>MassInlineEdit</name>`	Sets name within the enclosing metadata component to MassInlineEdit.
682	`</userPermissions>`	Closes the userPermissions configuration block.
683	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
684	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
685	`<name>MergeTopics</name>`	Sets name within the enclosing metadata component to MergeTopics.
686	`</userPermissions>`	Closes the userPermissions configuration block.
687	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
688	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
689	`<name>ModerateChatter</name>`	Sets name within the enclosing metadata component to ModerateChatter.
690	`</userPermissions>`	Closes the userPermissions configuration block.
691	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
692	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
693	`<name>ModifyAllData</name>`	Sets name within the enclosing metadata component to ModifyAllData.
694	`</userPermissions>`	Closes the userPermissions configuration block.
695	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
696	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
697	`<name>ModifyDataClassification</name>`	Sets name within the enclosing metadata component to ModifyDataClassification.
698	`</userPermissions>`	Closes the userPermissions configuration block.
699	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
700	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
701	`<name>ModifyMetadata</name>`	Sets name within the enclosing metadata component to ModifyMetadata.

Line	Source code	Explanation / reading note
702	`    </userPermissions>`	Closes the userPermissions configuration block.
703	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
704	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
705	`        <name>MonitorLoginHistory</name>`	Sets name within the enclosing metadata component to MonitorLoginHistory.
706	`    </userPermissions>`	Closes the userPermissions configuration block.
707	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
708	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
709	`        <name>NewReportBuilder</name>`	Sets name within the enclosing metadata component to NewReportBuilder.
710	`    </userPermissions>`	Closes the userPermissions configuration block.
711	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
712	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
713	`        <name>OmnichannelInventorySync</name>`	Sets name within the enclosing metadata component to OmnichannelInventorySync.
714	`    </userPermissions>`	Closes the userPermissions configuration block.
715	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
716	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
717	`        <name>Packaging2</name>`	Sets name within the enclosing metadata component to Packaging2.
718	`    </userPermissions>`	Closes the userPermissions configuration block.
719	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
720	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
721	`        <name>Packaging2Delete</name>`	Sets name within the enclosing metadata component to Packaging2Delete.
722	`    </userPermissions>`	Closes the userPermissions configuration block.
723	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.

Line	Source code	Explanation / reading note
724	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
725	`<name>PrivacyDataAccess</name>`	Sets name within the enclosing metadata component to PrivacyDataAccess.
726	`</userPermissions>`	Closes the userPermissions configuration block.
727	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
728	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
729	`<name>PublishPackaging</name>`	Sets name within the enclosing metadata component to PublishPackaging.
730	`</userPermissions>`	Closes the userPermissions configuration block.
731	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
732	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
733	`<name>QrCodeGeneratorMobilePublisherPlayground</name>`	Sets name within the enclosing metadata component to QrCodeGeneratorMobilePublisherPlayground.
734	`</userPermissions>`	Closes the userPermissions configuration block.
735	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
736	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
737	`<name>RemoveDirectMessageMembers</name>`	Sets name within the enclosing metadata component to RemoveDirectMessageMembers.
738	`</userPermissions>`	Closes the userPermissions configuration block.
739	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
740	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
741	`<name>ResetPasswords</name>`	Sets name within the enclosing metadata component to ResetPasswords.
742	`</userPermissions>`	Closes the userPermissions configuration block.
743	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
744	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.

Line	Source code	Explanation / reading note
745	`        <name>RunReports</name>`	Sets name within the enclosing metadata component to RunReports.
746	`    </userPermissions>`	Closes the userPermissions configuration block.
747	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
748	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
749	`        <name>ScheduleReports</name>`	Sets name within the enclosing metadata component to ScheduleReports.
750	`    </userPermissions>`	Closes the userPermissions configuration block.
751	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
752	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
753	`        <name>SelectFilesFromSalesforce</name>`	Sets name within the enclosing metadata component to SelectFilesFromSalesforce.
754	`    </userPermissions>`	Closes the userPermissions configuration block.
755	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
756	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
757	`        <name>SendCustomNotifications</name>`	Sets name within the enclosing metadata component to SendCustomNotifications.
758	`    </userPermissions>`	Closes the userPermissions configuration block.
759	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
760	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
761	`        <name>SendSitRequests</name>`	Sets name within the enclosing metadata component to SendSitRequests.
762	`    </userPermissions>`	Closes the userPermissions configuration block.
763	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
764	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
765	`        <name>ShareInternalArticles</name>`	Sets name within the enclosing metadata component to ShareInternalArticles.
766	`    </userPermissions>`	Closes the userPermissions configuration block.

Line	Source code	Explanation / reading note
767	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
768	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
769	`<name>ShowCompanyNameAsUserBadge</name>`	Sets name within the enclosing metadata component to ShowCompanyNameAsUserBadge.
770	`</userPermissions>`	Closes the userPermissions configuration block.
771	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
772	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
773	`<name>SolutionImport</name>`	Sets name within the enclosing metadata component to SolutionImport.
774	`</userPermissions>`	Closes the userPermissions configuration block.
775	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
776	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
777	`<name>SubmitMacrosAllowed</name>`	Sets name within the enclosing metadata component to SubmitMacrosAllowed.
778	`</userPermissions>`	Closes the userPermissions configuration block.
779	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
780	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
781	`<name>SubscribeDashboardRolesGrps</name>`	Sets name within the enclosing metadata component to SubscribeDashboardRolesGrps.
782	`</userPermissions>`	Closes the userPermissions configuration block.
783	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
784	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
785	`<name>SubscribeDashboardToOtherUsers</name>`	Sets name within the enclosing metadata component to SubscribeDashboardToOtherUsers.
786	`</userPermissions>`	Closes the userPermissions configuration block.
787	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
788	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.

Line	Source code	Explanation / reading note
789	`<name>SubscribeReportRolesGrps</name>`	Sets name within the enclosing metadata component to SubscribeReportRolesGrps.
790	`</userPermissions>`	Closes the userPermissions configuration block.
791	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
792	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
793	`<name>SubscribeReportToOtherUsers</name>`	Sets name within the enclosing metadata component to SubscribeReportToOtherUsers.
794	`</userPermissions>`	Closes the userPermissions configuration block.
795	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
796	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
797	`<name>SubscribeReportsRunAsUser</name>`	Sets name within the enclosing metadata component to SubscribeReportsRunAsUser.
798	`</userPermissions>`	Closes the userPermissions configuration block.
799	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
800	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
801	`<name>SubscribeToLightningDashboards</name>`	Sets name within the enclosing metadata component to SubscribeToLightningDashboards.
802	`</userPermissions>`	Closes the userPermissions configuration block.
803	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
804	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
805	`<name>SubscribeToLightningReports</name>`	Sets name within the enclosing metadata component to SubscribeToLightningReports.
806	`</userPermissions>`	Closes the userPermissions configuration block.
807	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
808	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
809	`<name>TerritoryOperations</name>`	Sets name within the enclosing metadata component to TerritoryOperations.
810	`</userPermissions>`	Closes the userPermissions configuration block.

Line	Source code	Explanation / reading note
811	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
812	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
813	`        <name>TransactionalEmailSend</name>`	Sets name within the enclosing metadata component to TransactionalEmailSend.
814	`    </userPermissions>`	Closes the userPermissions configuration block.
815	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
816	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
817	`        <name>TransferAnyCase</name>`	Sets name within the enclosing metadata component to TransferAnyCase.
818	`    </userPermissions>`	Closes the userPermissions configuration block.
819	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
820	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
821	`        <name>TransferAnyEntity</name>`	Sets name within the enclosing metadata component to TransferAnyEntity.
822	`    </userPermissions>`	Closes the userPermissions configuration block.
823	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
824	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
825	`        <name>TransferAnyLead</name>`	Sets name within the enclosing metadata component to TransferAnyLead.
826	`    </userPermissions>`	Closes the userPermissions configuration block.
827	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
828	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
829	`        <name>UseFulfillmentAPIs</name>`	Sets name within the enclosing metadata component to UseFulfillmentAPIs.
830	`    </userPermissions>`	Closes the userPermissions configuration block.
831	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
832	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.

Line	Source code	Explanation / reading note
833	`<name>UseOmnichannelInventoryAPIs</name>`	Sets name within the enclosing metadata component to UseOmnichannelInventoryAPIs.
834	`</userPermissions>`	Closes the userPermissions configuration block.
835	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
836	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
837	`<name>UseRegisterGuestBuyerAPI</name>`	Sets name within the enclosing metadata component to UseRegisterGuestBuyerAPI.
838	`</userPermissions>`	Closes the userPermissions configuration block.
839	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
840	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
841	`<name>UseReturnOrder</name>`	Sets name within the enclosing metadata component to UseReturnOrder.
842	`</userPermissions>`	Closes the userPermissions configuration block.
843	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
844	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
845	`<name>UseReturnOrderAPIs</name>`	Sets name within the enclosing metadata component to UseReturnOrderAPIs.
846	`</userPermissions>`	Closes the userPermissions configuration block.
847	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
848	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
849	`<name>UseTeamReassignWizards</name>`	Sets name within the enclosing metadata component to UseTeamReassignWizards.
850	`</userPermissions>`	Closes the userPermissions configuration block.
851	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
852	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
853	`<name>UseWebLink</name>`	Sets name within the enclosing metadata component to UseWebLink.
854	`</userPermissions>`	Closes the userPermissions configuration block.

Line	Source code	Explanation / reading note
855	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
856	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
857	`<name>UserHasDevOpsCore</name>`	Sets name within the enclosing metadata component to UserHasDevOpsCore.
858	`</userPermissions>`	Closes the userPermissions configuration block.
859	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
860	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
861	`<name>ViewAllData</name>`	Sets name within the enclosing metadata component to ViewAllData.
862	`</userPermissions>`	Closes the userPermissions configuration block.
863	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
864	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
865	`<name>ViewAllProfiles</name>`	Sets name within the enclosing metadata component to ViewAllProfiles.
866	`</userPermissions>`	Closes the userPermissions configuration block.
867	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
868	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
869	`<name>ViewAllUsers</name>`	Sets name within the enclosing metadata component to ViewAllUsers.
870	`</userPermissions>`	Closes the userPermissions configuration block.
871	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
872	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
873	`<name>ViewApiNamedQueries</name>`	Sets name within the enclosing metadata component to ViewApiNamedQueries.
874	`</userPermissions>`	Closes the userPermissions configuration block.
875	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
876	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.

Line	Source code	Explanation / reading note
877	`        <name>ViewClientSecret</name>`	Sets name within the enclosing metadata component to ViewClientSecret.
878	`    </userPermissions>`	Closes the userPermissions configuration block.
879	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
880	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
881	`        <name>ViewContentTaxonomy</name>`	Sets name within the enclosing metadata component to ViewContentTaxonomy.
882	`    </userPermissions>`	Closes the userPermissions configuration block.
883	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
884	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
885	`        <name>ViewDataAssessment</name>`	Sets name within the enclosing metadata component to ViewDataAssessment.
886	`    </userPermissions>`	Closes the userPermissions configuration block.
887	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
888	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
889	`        <name>ViewDataCategories</name>`	Sets name within the enclosing metadata component to ViewDataCategories.
890	`    </userPermissions>`	Closes the userPermissions configuration block.
891	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
892	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
893	`        <name>ViewDataLeakageEvents</name>`	Sets name within the enclosing metadata component to ViewDataLeakageEvents.
894	`    </userPermissions>`	Closes the userPermissions configuration block.
895	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
896	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
897	`        <name>ViewDeveloperName</name>`	Sets name within the enclosing metadata component to ViewDeveloperName.
898	`    </userPermissions>`	Closes the userPermissions configuration block.

Line	Source code	Explanation / reading note
899	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
900	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
901	`<name>ViewEventLogFiles</name>`	Sets name within the enclosing metadata component to ViewEventLogFiles.
902	`</userPermissions>`	Closes the userPermissions configuration block.
903	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
904	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
905	`<name>ViewFlowUsageAndFlowEventData</name>`	Sets name within the enclosing metadata component to ViewFlowUsageAndFlowEventData.
906	`</userPermissions>`	Closes the userPermissions configuration block.
907	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
908	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
909	`<name>ViewHealthCheck</name>`	Sets name within the enclosing metadata component to ViewHealthCheck.
910	`</userPermissions>`	Closes the userPermissions configuration block.
911	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
912	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
913	`<name>ViewHelpLink</name>`	Sets name within the enclosing metadata component to ViewHelpLink.
914	`</userPermissions>`	Closes the userPermissions configuration block.
915	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
916	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.
917	`<name>ViewLicenseUtilization</name>`	Sets name within the enclosing metadata component to ViewLicenseUtilization.
918	`</userPermissions>`	Closes the userPermissions configuration block.
919	`<userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
920	`<enabled>true</enabled>`	Sets whether this permission is enabled to true.

Line	Source code	Explanation / reading note
921	`        <name>ViewMLModels</name>`	Sets name within the enclosing metadata component to ViewMLModels.
922	`    </userPermissions>`	Closes the userPermissions configuration block.
923	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
924	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
925	`        <name>ViewMyTeamsDashboards</name>`	Sets name within the enclosing metadata component to ViewMyTeamsDashboards.
926	`    </userPermissions>`	Closes the userPermissions configuration block.
927	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
928	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
929	`        <name>ViewPlatformEvents</name>`	Sets name within the enclosing metadata component to ViewPlatformEvents.
930	`    </userPermissions>`	Closes the userPermissions configuration block.
931	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
932	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
933	`        <name>ViewPublicCapstoneFolders</name>`	Sets name within the enclosing metadata component to ViewPublicCapstoneFolders.
934	`    </userPermissions>`	Closes the userPermissions configuration block.
935	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
936	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
937	`        <name>ViewPublicDashboards</name>`	Sets name within the enclosing metadata component to ViewPublicDashboards.
938	`    </userPermissions>`	Closes the userPermissions configuration block.
939	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
940	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
941	`        <name>ViewPublicReports</name>`	Sets name within the enclosing metadata component to ViewPublicReports.
942	`    </userPermissions>`	Closes the userPermissions configuration block.

Line	Source code	Explanation / reading note
943	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
944	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
945	`        <name>ViewRoles</name>`	Sets name within the enclosing metadata component to ViewRoles.
946	`    </userPermissions>`	Closes the userPermissions configuration block.
947	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
948	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
949	`        <name>ViewSetup</name>`	Sets name within the enclosing metadata component to ViewSetup.
950	`    </userPermissions>`	Closes the userPermissions configuration block.
951	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
952	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
953	`        <name>ViewUserPII</name>`	Sets name within the enclosing metadata component to ViewUserPII.
954	`    </userPermissions>`	Closes the userPermissions configuration block.
955	`    <userPermissions>`	Opens the userPermissions block; child elements specify its configuration.
956	`        <enabled>true</enabled>`	Sets whether this permission is enabled to true.
957	`        <name>WorkCalibrationUser</name>`	Sets name within the enclosing metadata component to WorkCalibrationUser.
958	`    </userPermissions>`	Closes the userPermissions configuration block.
959	`</Profile>`	Closes the Profile configuration block.

force-app/main/default/quickActions/Beat__c.Select_Outlets.quickAction-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

8 numbered source lines | SHA-256 88157a044bea0d5a672d3634064466a58b71b2405f94203c880c3255cd52c27f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<QuickAction xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the QuickAction block; child elements specify its configuration.
3	`    <actionSubtype>ScreenAction</actionSubtype>`	Sets action Subtype in the enclosing configuration to ScreenAction.
4	`    <label>Select Outlets</label>`	Sets human-readable Salesforce UI label to Select Outlets.
5	`    <lightningWebComponent>beatOutletSelector</lightningWebComponent>`	Sets lightning Web Component in the enclosing configuration to beatOutletSelector.
6	`    <optionsCreateFeedItem>false</optionsCreateFeedItem>`	Sets options Create Feed Item in the enclosing configuration to false.
7	`    <type>LightningWebComponent</type>`	Sets field/storage type to LightningWebComponent.
8	`</QuickAction>`	Closes the QuickAction configuration block.

force-app/main/default/quickActions/Employee__c.Upload_Profile_Picture.quickAction-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

8 numbered source lines | SHA-256 4d44cfe7d38272e628b2a0c3ced33cb7810761cf6c131db744680d895f7b1329

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<QuickAction xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the QuickAction block; child elements specify its configuration.
3	`    <actionSubtype>ScreenAction</actionSubtype>`	Sets action Subtype in the enclosing configuration to ScreenAction.
4	`    <label>Upload Profile Picture</label>`	Sets human-readable Salesforce UI label to Upload Profile Picture.
5	`    <lightningWebComponent>employeeProfilePicture</lightningWebComponent>`	Sets lightning Web Component in the enclosing configuration to employeeProfilePicture.
6	`    <optionsCreateFeedItem>false</optionsCreateFeedItem>`	Sets options Create Feed Item in the enclosing configuration to false.
7	`    <type>LightningWebComponent</type>`	Sets field/storage type to LightningWebComponent.
8	`</QuickAction>`	Closes the QuickAction configuration block.

force-app/main/default/tabs/Asset_Survey__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

1 numbered source lines | SHA-256 9ea901c270487cb5dad1c32468eb9d0cfd0b73c6c88d7c30fff15e237ca746e8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom53: Bell</motif></CustomTab>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/tabs/Attendance__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 289da3d4a86bb9bc1a5d95466e1c2810d831ed1cb6f7468358f1d8cec0008790

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom18: Form</motif>`	Sets motif in the enclosing configuration to Custom18: Form.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/Beat__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 028009419296aada83ad27e467bc7aff7130c1130d579a633451ce6385ba327e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom45: Ticket</motif>`	Sets motif in the enclosing configuration to Custom45: Ticket.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/Competitor_Activity__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

1 numbered source lines | SHA-256 f924411caec4986ae392493938801f55c53137aabfe3b44b7a3390bf76635706

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom90: Scales</motif></CustomTab>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/tabs/DMS_Credit_Note_Line__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 857ee632d27e30d4ddeb23a42bda153ecdafa5a192ee32236fdf724b3aff62e4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom48: Trophy</motif>`	Sets motif in the enclosing configuration to Custom48: Trophy.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/DMS_Credit_Note__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 857ee632d27e30d4ddeb23a42bda153ecdafa5a192ee32236fdf724b3aff62e4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom48: Trophy</motif>`	Sets motif in the enclosing configuration to Custom48: Trophy.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/DMS_Distributor_Survey__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 cdbb0f144bf12394ce6918cecfaaa3a2e24c9fc164dfff8d25693624f68d54bf

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom18: Form</motif></CustomTab>`	Sets Custom Tab in the enclosing configuration to <customObject>true</customObject><motif>Custom18: Form</motif>.

force-app/main/default/tabs/DMS_Distributor__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 1f3b0f1fbc835213dccde50550a61edb76ef20d16e62fb1e2c7e3ae4912c5c7c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom48: Trophy</motif></CustomTab>`	Sets Custom Tab in the enclosing configuration to <customObject>true</customObject><motif>Custom48: Trophy</motif>.

force-app/main/default/tabs/DMS_Goods_Receipt_Line__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 857ee632d27e30d4ddeb23a42bda153ecdafa5a192ee32236fdf724b3aff62e4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom48: Trophy</motif>`	Sets motif in the enclosing configuration to Custom48: Trophy.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/DMS_Goods_Receipt__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 857ee632d27e30d4ddeb23a42bda153ecdafa5a192ee32236fdf724b3aff62e4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom48: Trophy</motif>`	Sets motif in the enclosing configuration to Custom48: Trophy.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/DMS_Inventory__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 857ee632d27e30d4ddeb23a42bda153ecdafa5a192ee32236fdf724b3aff62e4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom48: Trophy</motif>`	Sets motif in the enclosing configuration to Custom48: Trophy.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/DMS_Invoice_Line__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 857ee632d27e30d4ddeb23a42bda153ecdafa5a192ee32236fdf724b3aff62e4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom48: Trophy</motif>`	Sets motif in the enclosing configuration to Custom48: Trophy.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/DMS_Invoice__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 857ee632d27e30d4ddeb23a42bda153ecdafa5a192ee32236fdf724b3aff62e4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom48: Trophy</motif>`	Sets motif in the enclosing configuration to Custom48: Trophy.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/DMS_Primary_Order_Line__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 1f3b0f1fbc835213dccde50550a61edb76ef20d16e62fb1e2c7e3ae4912c5c7c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom48: Trophy</motif></CustomTab>`	Sets Custom Tab in the enclosing configuration to <customObject>true</customObject><motif>Custom48: Trophy</motif>.

force-app/main/default/tabs/DMS_Primary_Order__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 1f3b0f1fbc835213dccde50550a61edb76ef20d16e62fb1e2c7e3ae4912c5c7c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom48: Trophy</motif></CustomTab>`	Sets Custom Tab in the enclosing configuration to <customObject>true</customObject><motif>Custom48: Trophy</motif>.

force-app/main/default/tabs/DMS_Primary_Return_Line__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 857ee632d27e30d4ddeb23a42bda153ecdafa5a192ee32236fdf724b3aff62e4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom48: Trophy</motif>`	Sets motif in the enclosing configuration to Custom48: Trophy.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/DMS_Primary_Return__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 857ee632d27e30d4ddeb23a42bda153ecdafa5a192ee32236fdf724b3aff62e4

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom48: Trophy</motif>`	Sets motif in the enclosing configuration to Custom48: Trophy.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/DMS_Sales_Target__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 468b8c4524a7c3a8b5c980b6e582b197bbbc86a3f005907e81b47a0c392f0ed9

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom41: Stack of Cash</motif></CustomTab>`	Sets Custom Tab in the enclosing configuration to <customObject>true</customObject><motif>Custom41: Stack of Cash</motif>.

force-app/main/default/tabs/DMS_Support_Ticket__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 cdbb0f144bf12394ce6918cecfaaa3a2e24c9fc164dfff8d25693624f68d54bf

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom18: Form</motif></CustomTab>`	Sets Custom Tab in the enclosing configuration to <customObject>true</customObject><motif>Custom18: Form</motif>.

force-app/main/default/tabs/Distributor_Outlet_Allocation__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 1209621f5922443ebfd1d5241931f5ad96197071b4003202d3ab2314246fb29c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom53: Bell</motif></CustomTab>`	Sets Custom Tab in the enclosing configuration to <customObject>true</customObject><motif>Custom53: Bell</motif>.

force-app/main/default/tabs/Distributor__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 e6fa1a8715bff420d0b5222ef385ed697240ca2c7fb1bfcb6466db5b45019387

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom15: People</motif></CustomTab>`	Sets Custom Tab in the enclosing configuration to <customObject>true</customObject><motif>Custom15: People</motif>.

force-app/main/default/tabs/Employee__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 2667c6f1bdd23773340a323508560a2b11c0737d560ec4c97181562299792dc5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom20: Airplane</motif>`	Sets motif in the enclosing configuration to Custom20: Airplane.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/Expense_Claim__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

1 numbered source lines | SHA-256 769b10431fd0a61b2e582be591bb61c3c615a7137b7fd4d26e086c71c39bf0e8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom41: Cash Register</motif></CustomTab>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/tabs/Expense_Policy__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

1 numbered source lines | SHA-256 663b5a57594a008d9c7ac6c18097c477eb8a7f7d3a6317380392229364b57a4d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom56: Bottle</motif></CustomTab>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/tabs/Geography__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 1588e96dced8e80189db5c821ebb49227cdc17b0db684c9567282256fa6777b2

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom25: Alarm clock</motif>`	Sets motif in the enclosing configuration to Custom25: Alarm clock.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/Leave_Request__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

1 numbered source lines | SHA-256 0f16ea1333f5712cfa289d51d9dfd460bf983ff348c9ed0e43a9f9dc51aa4eec

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom17: Sack</motif></CustomTab>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/tabs/Order_Item__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 1726bec29685c482230bdfd6916ab401fce1277ed43132ab6985014f6fe40c98

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom19: Wrench</motif>`	Sets motif in the enclosing configuration to Custom19: Wrench.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/PJP_Planner.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

6 numbered source lines | SHA-256 8fde54f594cb67ed907c7133d341cf81d46f4b64aabf9eff75fea94f52d3d92f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <label>PJP Planner</label>`	Sets human-readable Salesforce UI label to PJP Planner.
4	`    <lwcComponent>pjpMonthlyPlanner</lwcComponent>`	Sets lwc Component in the enclosing configuration to pjpMonthlyPlanner.
5	`    <motif>Custom55: Books</motif>`	Sets motif in the enclosing configuration to Custom55: Books.
6	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/Permanent_Journey_Plan__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 cb07f3a0e813b8431ad0904e55c06963ba32eb3b01763b96967cf22260fbb619

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom56: Bottle</motif>`	Sets motif in the enclosing configuration to Custom56: Bottle.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/Product_Return__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

1 numbered source lines | SHA-256 277ad13777785c32d8505243315c9ba719e68471f61e5be5a26be7622b226651

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom14: Hands</motif></CustomTab>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/tabs/Product_Sales_Configuration__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 0514204a68ac2a723c9dee43ffd755c9bc4341070b28dae6478766fe8c8aea2f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom53: Bell</motif></CustomTab>`	Sets Custom Tab in the enclosing configuration to <customObject>true</customObject><motif>Custom53: Bell</motif>.

force-app/main/default/tabs/Product__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 0885ba34eaa703c02f7897eda73ffdd5d1b8f1e7a061d524be475f4e1773c989

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom62: Chalkboard</motif>`	Sets motif in the enclosing configuration to Custom62: Chalkboard.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/Retailer__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 0e079565fd4872b05ef8c05ba22ce18d76dd05697f7595e57d08c35f91ccc1cb

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom50: Big top</motif>`	Sets motif in the enclosing configuration to Custom50: Big top.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/SFA_Ticket__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

1 numbered source lines | SHA-256 7517ec1ce0e9e4dec75eafb90f58e11408741b4386ef40c3ceaf76f6a455a49e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom55: Books</motif></CustomTab>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/tabs/Sales_Order__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 cac42fc779bfccbdabe71336a2d0dd47d6b4461b1ab9fc0517dea08da2a35ddb

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom40: Credit card</motif>`	Sets motif in the enclosing configuration to Custom40: Credit card.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/Scheme__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 47506888a3057308e33277ceae10d133476522b63399c2ebfee17d0fa16c55b7

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom33: Desk</motif>`	Sets motif in the enclosing configuration to Custom33: Desk.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/tabs/Stock_Check__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

1 numbered source lines | SHA-256 155a2b6adb89c8d2ceacea8487453aeff3497c0e6576a4abce6d32afca640074

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom62: Chalkboard</motif></CustomTab>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/tabs/Survey_Response__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

1 numbered source lines | SHA-256 78292d714c3ca41aed2a4901b90deee502987efaee38121ee09cff1cd1f04563

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom41: Stack of Cash</motif></CustomTab>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/tabs/Survey__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

1 numbered source lines | SHA-256 59bbb91d498868efa1be6b13f96b60307fcfe973f053bfb9ccbd64b73d143c35

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?><CustomTab xmlns="http://soap.sforce.com/2006/04/metadata"><customObject>true</customObject><motif>Custom62: Chalkboard</motif></CustomTab>`	Declares XML encoding/version for the Salesforce metadata file.

force-app/main/default/tabs/Visit__c.tab-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

5 numbered source lines | SHA-256 ce7b2090550a97fc64b747ddba177717f5577c2d4905e5da49a6426b14520d9c

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomTab xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomTab block; child elements specify its configuration.
3	`    <customObject>true</customObject>`	Sets custom Object in the enclosing configuration to true.
4	`    <motif>Custom48: Trophy</motif>`	Sets motif in the enclosing configuration to Custom48: Trophy.
5	`</CustomTab>`	Closes the CustomTab configuration block.

force-app/main/default/workflows/DMS_Primary_Order__c.workflow-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

2 numbered source lines | SHA-256 91f976fb541decd2c698ee57f9b69a9d7f64df1fb75e5e6aa0cff76fc4b2ed3b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Workflow xmlns="http://soap.sforce.com/2006/04/metadata"><fieldUpdates><fullName>Set_Submitted</fullName><field>Status__c</field><literalValue>Submitted</literalValue><name>Set Submitted</name><notifyAssignee>false</notifyAssignee><operation>Literal</operation><protected>false</protected><reevaluateOnChange>false</reevaluateOnChange></fieldUpdates><fieldUpdates><fullName>Set_Approved</fullName><field>Status__c</field><literalValue>Approved</literalValue><name>Set Approved</name><notifyAssignee>false</notifyAssignee><operation>Literal</operation><protected>false</protected><reevaluateOnChange>false</reevaluateOnChange></fieldUpdates><fieldUpdates><fullName>Set_Rejected</fullName><field>Status__c</field><literalValue>Rejected</literalValue><name>Set Rejected</name><notifyAssignee>false</notifyAssignee><operation>Literal</operation><protected>false</protected><reevaluateOnChange>false</reevaluateOnChange></fieldUpdates></Workflow>`	Sets Workflow in the enclosing configuration to <fieldUpdates><fullName>Set_Submitted</fullName><field>Status__c</field><literalValue>Submitted</literalValue><name>Set Submitted</name><notifyAssignee>false</notifyAssignee><operation>Literal</operat.

force-app/main/default/workflows/DMS_Primary_Return__c.workflow-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

6 numbered source lines | SHA-256 541edd30c6a9602d539e9289ca822e9aee4ed3c92844f99e36ed052eaf0984e3

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Workflow xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Workflow block; child elements specify its configuration.
3	`<fieldUpdates><fullName>Set_Submitted</fullName><field>Status__c</field><literalValue>Submitted</literalValue><name>Set Submitted</name><notifyAssignee>false</notifyAssignee><operation>Literal</operation><protected>false</protected><reevaluateOnChange>false</reevaluateOnChange></fieldUpdates>`	Sets field update action reference to <fullName>Set_Submitted</fullName><field>Status__c</field><literalValue>Submitted</literalValue><name>Set Submitted</name><notifyAssignee>false</notifyAssignee><operation>Literal</operation><protected.
4	`<fieldUpdates><fullName>Set_Approved</fullName><field>Status__c</field><literalValue>Approved</literalValue><name>Set Approved</name><notifyAssignee>false</notifyAssignee><operation>Literal</operation><protected>false</protected><reevaluateOnChange>false</reevaluateOnChange></fieldUpdates>`	Sets field update action reference to <fullName>Set_Approved</fullName><field>Status__c</field><literalValue>Approved</literalValue><name>Set Approved</name><notifyAssignee>false</notifyAssignee><operation>Literal</operation><protected>fa.
5	`<fieldUpdates><fullName>Set_Rejected</fullName><field>Status__c</field><literalValue>Rejected</literalValue><name>Set Rejected</name><notifyAssignee>false</notifyAssignee><operation>Literal</operation><protected>false</protected><reevaluateOnChange>false</reevaluateOnChange></fieldUpdates>`	Sets field update action reference to <fullName>Set_Rejected</fullName><field>Status__c</field><literalValue>Rejected</literalValue><name>Set Rejected</name><notifyAssignee>false</notifyAssignee><operation>Literal</operation><protected>fa.
6	`</Workflow>`	Closes the Workflow configuration block.

Configuration & operations

78 files. Expand this area in the PDF bookmarks to jump to an individual file.

Authorize-GitHub-and-Sync.cmd

Operational script: Authorize Git Hub and Sync.cmd. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

38 numbered source lines | SHA-256 1492312c591cf5eff991114e10595ba860737d22e0aeb1b9453573c0e6aadbc9

Line	Source code	Explanation / reading note
1	`@echo off`	Continues the surrounding declaration/expression or text: @echo off. Read it with the preceding opening statement; it is not a standalone business operation.
2	`setlocal`	Continues the surrounding declaration/expression or text: setlocal. Read it with the preceding opening statement (@echo off); it is not a standalone business operation.
3	`cd /d "%~dp0"`	Continues the surrounding declaration/expression or text: cd /d "%~dp0". Read it with the preceding opening statement (setlocal); it is not a standalone business operation.
4		Blank line separating logical sections; no executable operation.
5	`set "GH_EXE=%~dp0work\gh-cli\bin\gh.exe"`	Assigns the right-hand expression to the named variable/property: set "GH_EXE=%~dp0work\gh-cli\bin\gh.exe". This is in-memory unless it is later persisted by an explicit call.
6		Blank line separating logical sections; no executable operation.
7	`if not exist "%GH_EXE%" (`	Continues the surrounding declaration/expression or text: if not exist "%GH_EXE%" (. Read it with the preceding opening statement; it is not a standalone business operation.
8	`    echo GitHub CLI was not found in the project tools folder.`	Continues the surrounding declaration/expression or text: echo GitHub CLI was not found in the project tools folder.. Read it with the preceding opening statement (if not exist "%GH_EXE%" (); it is not a standalone business operation.
9	`    pause`	Continues the surrounding declaration/expression or text: pause. Read it with the preceding opening statement (echo GitHub CLI was not found in the project tools folder.); it is not a standalone business operation.
10	`    exit /b 1`	Continues the surrounding declaration/expression or text: exit /b 1. Read it with the preceding opening statement (pause); it is not a standalone business operation.
11	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
12		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
13	`echo Starting secure GitHub authorization for aaish14...`	Continues the surrounding declaration/expression or text: echo Starting secure GitHub authorization for aaish14.... Read it with the preceding opening statement; it is not a standalone business operation.
14	`echo Y| "%GH_EXE%" auth login --hostname github.com --git-protocol https --web`	Continues the surrounding declaration/expression or text: echo Y| "%GH_EXE%" auth login --hostname github.com --git-protocol https --web. Read it with the preceding opening statement (echo Starting secure GitHub authorization for aaish14...); it is not a standalone business operation.
15	`if errorlevel 1 (`	Continues the surrounding declaration/expression or text: if errorlevel 1 (. Read it with the preceding opening statement (echo Y| "%GH_EXE%" auth login --hostname github.com --git-protocol https --web); it is not a standalone business operation.
16	`    echo GitHub authorization was not completed.`	Continues the surrounding declaration/expression or text: echo GitHub authorization was not completed.. Read it with the preceding opening statement (if errorlevel 1 (); it is not a standalone business operation.
17	`    pause`	Continues the surrounding declaration/expression or text: pause. Read it with the preceding opening statement (echo GitHub authorization was not completed.); it is not a standalone business operation.
18	`    exit /b 1`	Continues the surrounding declaration/expression or text: exit /b 1. Read it with the preceding opening statement (pause); it is not a standalone business operation.
19	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20		Blank line separating logical sections; no executable operation.
21	`"%GH_EXE%" auth setup-git`	Continues the surrounding declaration/expression or text: "%GH_EXE%" auth setup-git. Read it with the preceding opening statement; it is not a standalone business operation.
22	`git config core.longpaths true`	Continues the surrounding declaration/expression or text: git config core.longpaths true. Read it with the preceding opening statement ("%GH_EXE%" auth setup-git); it is not a standalone business operation.
23	`git config http.sslBackend openssl`	Continues the surrounding declaration/expression or text: git config http.sslBackend openssl. Read it with the preceding opening statement (git config core.longpaths true); it is not a standalone business operation.
24		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
25	`echo Pushing the complete SFA project to GitHub...`	Continues the surrounding declaration/expression or text: echo Pushing the complete SFA project to GitHub.... Read it with the preceding opening statement; it is not a standalone business operation.
26	`git push origin main`	Continues the surrounding declaration/expression or text: git push origin main. Read it with the preceding opening statement (echo Pushing the complete SFA project to GitHub...); it is not a standalone business operation.
27	`if errorlevel 1 (`	Continues the surrounding declaration/expression or text: if errorlevel 1 (. Read it with the preceding opening statement (git push origin main); it is not a standalone business operation.
28	`    echo The GitHub push failed. No Salesforce files were deleted.`	Continues the surrounding declaration/expression or text: echo The GitHub push failed. No Salesforce files were deleted.. Read it with the preceding opening statement (if errorlevel 1 (); it is not a standalone business operation.
29	`    pause`	Continues the surrounding declaration/expression or text: pause. Read it with the preceding opening statement (echo The GitHub push failed. No Salesforce files were deleted.); it is not a standalone business operation.
30	`    exit /b 1`	Continues the surrounding declaration/expression or text: exit /b 1. Read it with the preceding opening statement (pause); it is not a standalone business operation.
31	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32		Blank line separating logical sections; no executable operation.
33	`echo Enabling automatic Salesforce-to-GitHub synchronization every 15 minutes...`	Continues the surrounding declaration/expression or text: echo Enabling automatic Salesforce-to-GitHub synchronization every 15 minutes.... Read it with the preceding opening statement; it is not a standalone business operation.
34	`powershell.exe -NoProfile -ExecutionPolicy Bypass -File "%~dp0scripts\install-auto-sync.ps1" -Minutes 15`	Continues the surrounding declaration/expression or text: powershell.exe -NoProfile -ExecutionPolicy Bypass -File "%~dp0scripts\install-auto-sync.ps1" -Minutes 15. Read it with the preceding opening statement (echo Enabling automatic Salesforce-to-GitHub synchronization every 15 minutes...); it is not a standalone business operation.
35		Blank line separating logical sections; no executable operation.
36	`echo.`	Continues the surrounding declaration/expression or text: echo.. Read it with the preceding opening statement; it is not a standalone business operation.

Line	Source code	Explanation / reading note
37	`echo GitHub synchronization is configured successfully.`	Continues the surrounding declaration/expression or text: echo GitHub synchronization is configured successfully.. Read it with the preceding opening statement (echo.); it is not a standalone business operation.
38	`pause`	Continues the surrounding declaration/expression or text: pause. Read it with the preceding opening statement (echo GitHub synchronization is configured successfully.); it is not a standalone business operation.

Authorize-Salesforce.ps1

Operational script: Authorize Salesforce.ps1. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

19 numbered source lines | SHA-256 f6791d07d540e9b7c9fca43267b6ef4800b9765551d4aaccb2c7dfafe18d5f12

Line	Source code	Explanation / reading note
1	`$ErrorActionPreference = 'Stop'`	Assigns a PowerShell script variable: $ErrorActionPreference = 'Stop'.
2	`$env:NODE_OPTIONS = '--dns-result-order=ipv4first'`	Assigns the right-hand expression to the named variable/property: $env:NODE_OPTIONS = '--dns-result-order=ipv4first'. This is in-memory unless it is later persisted by an explicit call.
3		Blank line separating logical sections; no executable operation.
4	`$projectRoot = Split-Path -Parent $MyInvocation.MyCommand.Path`	Assigns a PowerShell script variable: $projectRoot = Split-Path -Parent $MyInvocation.MyCommand.Path.
5	`$salesforceCli = Join-Path $projectRoot '..\work\sf-cli\node_modules\.bin\sf.cmd'`	Assigns a PowerShell script variable: $salesforceCli = Join-Path $projectRoot '..\work\sf-cli\node_modules\.bin\sf.cmd'.
6		Blank line separating logical sections; no executable operation.
7	`Write-Host 'Opening Salesforce authorization for sfaNewOrg...' -ForegroundColor Cyan`	Continues the surrounding declaration/expression or text: Write-Host 'Opening Salesforce authorization for sfaNewOrg...' -ForegroundColor Cyan. Read it with the preceding opening statement; it is not a standalone business operation.
8	`& $salesforceCli org login web `	Continues the surrounding declaration/expression or text: & $salesforceCli org login web `. Read it with the preceding opening statement (Write-Host 'Opening Salesforce authorization for sfaNewOrg...' -ForegroundColor Cyan); it is not a standalone business operation.
9	`    --alias sfaNewOrg `	Continues the surrounding declaration/expression or text: --alias sfaNewOrg `. Read it with the preceding opening statement (& $salesforceCli org login web `); it is not a standalone business operation.
10	`    --instance-url 'https://orgfarm-33ef5eba22-dev-ed.develop.my.salesforce.com' `	Continues the surrounding declaration/expression or text: --instance-url 'https://orgfarm-33ef5eba22-dev-ed.develop.my.salesforce.com' `. Read it with the preceding opening statement ( --alias sfaNewOrg `); it is not a standalone business operation.
11	`    --set-default `	Continues the surrounding declaration/expression or text: --set-default `. Read it with the preceding opening statement ( --instance-url 'https://orgfarm-33ef5eba22-dev-ed.develop.my.salesforce.com' `); it is not a standalone business operation.

Line	Source code	Explanation / reading note
12	`    --browser edge`	Continues the surrounding declaration/expression or text: --browser edge. Read it with the preceding opening statement (--set-default `); it is not a standalone business operation.
13		Blank line separating logical sections; no executable operation.
14	`if ($LASTEXITCODE -ne 0) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) {.
15	`    throw 'Salesforce authorization did not complete. Please retry and finish the browser login immediately.'`	Stops this execution path with a validation/error exception: throw 'Salesforce authorization did not complete. Please retry and finish the browser login immediately.'. The caller/catch block decides how it is reported.
16	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17		Blank line separating logical sections; no executable operation.
18	`Write-Host 'Salesforce authorization completed. Return to Codex and reply: Logged in' -ForegroundColor Green`	Continues the surrounding declaration/expression or text: Write-Host 'Salesforce authorization completed. Return to Codex and reply: Logged in' -ForegroundColor Green. Read it with the preceding opening statement; it is not a standalone business operation.
19	`Read-Host 'Press Enter to close'`	Continues the surrounding declaration/expression or text: Read-Host 'Press Enter to close'. Read it with the preceding opening statement (Write-Host 'Salesforce authorization completed. Return to Codex and reply: Logged in' -ForegroundColor Green); it is not a standalone business operation.

config/dms-allocation-ui/layouts/DMS_Distributor__c-DMS Distributor Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

135 numbered source lines | SHA-256 36af53c3b6d1c6fdeba87813c23099f8c11ae85b539abf7b7605362bb392fc7e

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.
5	`        <detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
6	`        <editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
7	`        <label>DMS Distributor Information</label>`	Sets human-readable Salesforce UI label to DMS Distributor Information.
8	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
9	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
10	`                <behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
11	`                <field>Name</field>`	Sets field API name configured in this entry to Name.
12	`            </layoutItems>`	Closes the layoutItems configuration block.
13	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
14	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
15	`                <field>Active__c</field>`	Sets field API name configured in this entry to Active__c.
16	`            </layoutItems>`	Closes the layoutItems configuration block.
17	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
18	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
19	`                <field>Assigned_Employee__c</field>`	Sets field API name configured in this entry to Assigned_Employee__c.

Line	Source code	Explanation / reading note
20	`</layoutItems>`	Closes the layoutItems configuration block.
21	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
22	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
23	`<field>Distributor_Code__c</field>`	Sets field API name configured in this entry to Distributor_Code__c.
24	`</layoutItems>`	Closes the layoutItems configuration block.
25	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
26	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
27	`<field>GSTIN__c</field>`	Sets field API name configured in this entry to GSTIN__c.
28	`</layoutItems>`	Closes the layoutItems configuration block.
29	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
30	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
31	`<field>Login_Email__c</field>`	Sets field API name configured in this entry to Login_Email__c.
32	`</layoutItems>`	Closes the layoutItems configuration block.
33	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
34	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
35	`<field>Partner_Type__c</field>`	Sets field API name configured in this entry to Partner_Type__c.
36	`</layoutItems>`	Closes the layoutItems configuration block.
37	`<layoutItems><behavior>Edit</behavior><field>Employee_Allocation_Order__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Employee_Allocation_Order__c</field>.
38	`<layoutItems><behavior>Edit</behavior><field>Salesforce_User__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>Salesforce_User__c</field>.
39	`</layoutColumns>`	Closes the layoutColumns configuration block.
40	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.

Line	Source code	Explanation / reading note
41	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
42	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
43	`<field>Officer__c</field>`	Sets field API name configured in this entry to Officer__c.
44	`</layoutItems>`	Closes the layoutItems configuration block.
45	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
46	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
47	`<field>Address__c</field>`	Sets field API name configured in this entry to Address__c.
48	`</layoutItems>`	Closes the layoutItems configuration block.
49	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
50	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
51	`<field>Credit_Limit__c</field>`	Sets field API name configured in this entry to Credit_Limit__c.
52	`</layoutItems>`	Closes the layoutItems configuration block.
53	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
54	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
55	`<field>Geography__c</field>`	Sets field API name configured in this entry to Geography__c.
56	`</layoutItems>`	Closes the layoutItems configuration block.
57	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
58	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
59	`<field>Location__c</field>`	Sets field API name configured in this entry to Location__c.
60	`</layoutItems>`	Closes the layoutItems configuration block.
61	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
62	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.

Line	Source code	Explanation / reading note
63	`<field>Parent_Distributor__c</field>`	Sets field API name configured in this entry to Parent_Distributor__c.
64	`</layoutItems>`	Closes the layoutItems configuration block.
65	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
66	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
67	`<field>Phone__c</field>`	Sets field API name configured in this entry to Phone__c.
68	`</layoutItems>`	Closes the layoutItems configuration block.
69	`</layoutColumns>`	Closes the layoutColumns configuration block.
70	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
71	`</layoutSections>`	Closes the layoutSections configuration block.
72	`<layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
73	`<customLabel>false</customLabel>`	Sets custom Label in the enclosing configuration to false.
74	`<detailHeading>false</detailHeading>`	Sets detail Heading in the enclosing configuration to false.
75	`<editHeading>false</editHeading>`	Sets edit Heading in the enclosing configuration to false.
76	`<layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
77	`<style>CustomLinks</style>`	Sets style in the enclosing configuration to CustomLinks.
78	`</layoutSections>`	Closes the layoutSections configuration block.
79	`<relatedLists><fields>NAME</fields><fields>Employee_Code__c</fields><fields>Active__c</fields><relatedList>Employee__c.DMS_Distributor__c</relatedLists>`	Sets related Lists in the enclosing configuration to <fields>NAME</fields><fields>Employee_Code__c</fields><fields>Active__c</fields><relatedList>Employee__c.DMS_Distributor__c</relatedList>.
80	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
81	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
82	`<fields>Status__c</fields>`	Sets fields in the enclosing configuration to Status__c.
83	`<relatedList>DMS_Goods_Receipt__c.Distributor__c</relatedList>`	Sets related List in the enclosing configuration to DMS_Goods_Receipt__c.Distributor__c.

Line	Source code	Explanation / reading note
84	`</relatedLists>`	Closes the relatedLists configuration block.
85	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
86	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
87	`<relatedList>DMS_Distributor__c.Parent_Distributor__c</relatedList>`	Sets related List in the enclosing configuration to DMS_Distributor__c.Parent_Distributor__c.
88	`</relatedLists>`	Closes the relatedLists configuration block.
89	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
90	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
91	`<fields>Status__c</fields>`	Sets fields in the enclosing configuration to Status__c.
92	`<fields>Total_Amount__c</fields>`	Sets fields in the enclosing configuration to Total_Amount__c.
93	`<relatedList>DMS_Credit_Note__c.Distributor__c</relatedList>`	Sets related List in the enclosing configuration to DMS_Credit_Note__c.Distributor__c.
94	`</relatedLists>`	Closes the relatedLists configuration block.
95	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
96	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
97	`<fields>Status__c</fields>`	Sets fields in the enclosing configuration to Status__c.
98	`<fields>Total_Amount__c</fields>`	Sets fields in the enclosing configuration to Total_Amount__c.
99	`<relatedList>DMS_Primary_Return__c.Distributor__c</relatedList>`	Sets related List in the enclosing configuration to DMS_Primary_Return__c.Distributor__c.
100	`</relatedLists>`	Closes the relatedLists configuration block.
101	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
102	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
103	`<fields>Product__c</fields>`	Sets fields in the enclosing configuration to Product__c.
104	`<relatedList>DMS_Inventory__c.Distributor__c</relatedList>`	Sets related List in the enclosing configuration to DMS_Inventory__c.Distributor__c.
105	`</relatedLists>`	Closes the relatedLists configuration block.

Line	Source code	Explanation / reading note
106	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
107	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
108	`<fields>Status__c</fields>`	Sets fields in the enclosing configuration to Status__c.
109	`<fields>Total_Amount__c</fields>`	Sets fields in the enclosing configuration to Total_Amount__c.
110	`<relatedList>DMS_Invoice__c.Distributor__c</relatedList>`	Sets related List in the enclosing configuration to DMS_Invoice__c.Distributor__c.
111	`</relatedLists>`	Closes the relatedLists configuration block.
112	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
113	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
114	`<fields>Status__c</fields>`	Sets fields in the enclosing configuration to Status__c.
115	`<fields>Total_Amount__c</fields>`	Sets fields in the enclosing configuration to Total_Amount__c.
116	`<relatedList>DMS_Primary_Order__c.Distributor__c</relatedList>`	Sets related List in the enclosing configuration to DMS_Primary_Order__c.Distributor__c.
117	`</relatedLists>`	Closes the relatedLists configuration block.
118	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
119	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
120	`<relatedList>Product_Return__c.DMS_Distributor__c</relatedList>`	Sets related List in the enclosing configuration to Product_Return__c.DMS_Distributor__c.
121	`</relatedLists>`	Closes the relatedLists configuration block.
122	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
123	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
124	`<relatedList>Retailer__c.DMS_Distributor__c</relatedList>`	Sets related List in the enclosing configuration to Retailer__c.DMS_Distributor__c.
125	`</relatedLists>`	Closes the relatedLists configuration block.
126	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
127	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.

Line	Source code	Explanation / reading note
128	`<relatedList>Sales_Order__c.DMS_Distributor__c</relatedList>`	Sets related List in the enclosing configuration to Sales_Order__c.DMS_Distributor__c.
129	`</relatedLists>`	Closes the relatedLists configuration block.
130	`<showEmailCheckbox>false</showEmailCheckbox>`	Sets show Email Checkbox in the enclosing configuration to false.
131	`<showHighlightsPanel>true</showHighlightsPanel>`	Sets show Highlights Panel in the enclosing configuration to true.
132	`<showInteractionLogPanel>false</showInteractionLogPanel>`	Sets show Interaction Log Panel in the enclosing configuration to false.
133	`<showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox>`	Sets show Run Assignment Rules Checkbox in the enclosing configuration to false.
134	`<showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Sets show Submit And Attach Button in the enclosing configuration to false.
135	`</Layout>`	Closes the Layout configuration block.

config/dms-allocation-ui/layouts/Employee__c-Employee Layout.layout-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

176 numbered source lines | SHA-256 0f8affabf16d7fcef68e165da9873bee8703e85e60b1b2d8eecfb4ea0b6a2590

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Layout xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Layout block; child elements specify its configuration.
3	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
4	`        <customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.
5	`        <detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
6	`        <editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
7	`        <label>Employee Information</label>`	Sets human-readable Salesforce UI label to Employee Information.
8	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
9	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
10	`                <behavior>Required</behavior>`	Sets behavior in the enclosing configuration to Required.
11	`                <field>Name</field>`	Sets field API name configured in this entry to Name.
12	`            </layoutItems>`	Closes the layoutItems configuration block.
13	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
14	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
15	`                <field>Employee_Code__c</field>`	Sets field API name configured in this entry to Employee_Code__c.
16	`            </layoutItems>`	Closes the layoutItems configuration block.
17	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
18	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
19	`                <field>Email__c</field>`	Sets field API name configured in this entry to Email__c.

Line	Source code	Explanation / reading note
20	`</layoutItems>`	Closes the layoutItems configuration block.
21	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
22	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
23	`<field>Phone__c</field>`	Sets field API name configured in this entry to Phone__c.
24	`</layoutItems>`	Closes the layoutItems configuration block.
25	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
26	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
27	`<field>Alternate_Phone__c</field>`	Sets field API name configured in this entry to Alternate_Phone__c.
28	`</layoutItems>`	Closes the layoutItems configuration block.
29	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
30	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
31	`<field>Emergency_Contact__c</field>`	Sets field API name configured in this entry to Emergency_Contact__c.
32	`</layoutItems>`	Closes the layoutItems configuration block.
33	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
34	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
35	`<field>Aadhaar_Number__c</field>`	Sets field API name configured in this entry to Aadhaar_Number__c.
36	`</layoutItems>`	Closes the layoutItems configuration block.
37	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
38	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
39	`<field>PAN_Number__c</field>`	Sets field API name configured in this entry to PAN_Number__c.
40	`</layoutItems>`	Closes the layoutItems configuration block.
41	`</layoutColumns>`	Closes the layoutColumns configuration block.

Line	Source code	Explanation / reading note
42	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
43	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
44	`                <behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.
45	`                <field>Status__c</field>`	Sets field API name configured in this entry to Status__c.
46	`            </layoutItems>`	Closes the layoutItems configuration block.
47	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
48	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
49	`                <field>Active__c</field>`	Sets field API name configured in this entry to Active__c.
50	`            </layoutItems>`	Closes the layoutItems configuration block.
51	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
52	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
53	`                <field>Joining_Date__c</field>`	Sets field API name configured in this entry to Joining_Date__c.
54	`            </layoutItems>`	Closes the layoutItems configuration block.
55	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
56	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
57	`                <field>Address__c</field>`	Sets field API name configured in this entry to Address__c.
58	`            </layoutItems>`	Closes the layoutItems configuration block.
59	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
60	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
61	`                <field>Remarks__c</field>`	Sets field API name configured in this entry to Remarks__c.
62	`            </layoutItems>`	Closes the layoutItems configuration block.
63	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.

Line	Source code	Explanation / reading note
64	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
65	`<field>Profile_Photo_URL__c</field>`	Sets field API name configured in this entry to Profile_Photo_URL__c.
66	`</layoutItems>`	Closes the layoutItems configuration block.
67	`</layoutColumns>`	Closes the layoutColumns configuration block.
68	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
69	`</layoutSections>`	Closes the layoutSections configuration block.
70	`<layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
71	`<customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.
72	`<detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
73	`<editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
74	`<label>Assignment Information</label>`	Sets human-readable Salesforce UI label to Assignment Information.
75	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
76	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
77	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
78	`<field>Beat__c</field>`	Sets field API name configured in this entry to Beat__c.
79	`</layoutItems>`	Closes the layoutItems configuration block.
80	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
81	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
82	`<field>Geography__c</field>`	Sets field API name configured in this entry to Geography__c.
83	`</layoutItems>`	Closes the layoutItems configuration block.
84	`<layoutItems><behavior>Edit</behavior><field>DMS_Distributor__c</field></layoutItems>`	Sets layout Items in the enclosing configuration to <behavior>Edit</behavior><field>DMS_Distributor__c</field>.

Line	Source code	Explanation / reading note
85	`</layoutColumns>`	Closes the layoutColumns configuration block.
86	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
87	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
88	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
89	`<field>Reporting_Manager__c</field>`	Sets field API name configured in this entry to Reporting_Manager__c.
90	`</layoutItems>`	Closes the layoutItems configuration block.
91	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
92	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
93	`<field>Hierarchy_Level__c</field>`	Sets field API name configured in this entry to Hierarchy_Level__c.
94	`</layoutItems>`	Closes the layoutItems configuration block.
95	`</layoutColumns>`	Closes the layoutColumns configuration block.
96	`<style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
97	`</layoutSections>`	Closes the layoutSections configuration block.
98	`<layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
99	`<customLabel>true</customLabel>`	Sets custom Label in the enclosing configuration to true.
100	`<detailHeading>true</detailHeading>`	Sets detail Heading in the enclosing configuration to true.
101	`<editHeading>true</editHeading>`	Sets edit Heading in the enclosing configuration to true.
102	`<label>Application Access</label>`	Sets human-readable Salesforce UI label to Application Access.
103	`<layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
104	`<layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
105	`<behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
106	`<field>Application_Access_Email__c</field>`	Sets field API name configured in this entry to Application_Access_Email__c.

Line	Source code	Explanation / reading note
107	`            </layoutItems>`	Closes the layoutItems configuration block.
108	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
109	`                <behavior>Edit</behavior>`	Sets behavior in the enclosing configuration to Edit.
110	`                <field>Salesforce_User__c</field>`	Sets field API name configured in this entry to Salesforce_User__c.
111	`            </layoutItems>`	Closes the layoutItems configuration block.
112	`        </layoutColumns>`	Closes the layoutColumns configuration block.
113	`        <layoutColumns>`	Opens the layoutColumns block; child elements specify its configuration.
114	`            <layoutItems>`	Opens the layoutItems block; child elements specify its configuration.
115	`                <behavior>Readonly</behavior>`	Sets behavior in the enclosing configuration to Readonly.
116	`                <field>User_Status__c</field>`	Sets field API name configured in this entry to User_Status__c.
117	`            </layoutItems>`	Closes the layoutItems configuration block.
118	`        </layoutColumns>`	Closes the layoutColumns configuration block.
119	`        <style>TwoColumnsTopToBottom</style>`	Sets style in the enclosing configuration to TwoColumnsTopToBottom.
120	`    </layoutSections>`	Closes the layoutSections configuration block.
121	`    <layoutSections>`	Opens the layoutSections block; child elements specify its configuration.
122	`        <customLabel>false</customLabel>`	Sets custom Label in the enclosing configuration to false.
123	`        <detailHeading>false</detailHeading>`	Sets detail Heading in the enclosing configuration to false.
124	`        <editHeading>false</editHeading>`	Sets edit Heading in the enclosing configuration to false.
125	`        <layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
126	`        <layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
127	`        <layoutColumns/>`	Opens the layoutColumns block; child elements specify its configuration.
128	`        <style>CustomLinks</style>`	Sets style in the enclosing configuration to CustomLinks.

Line	Source code	Explanation / reading note
129	`</layoutSections>`	Closes the layoutSections configuration block.
130	`<platformActionList>`	Opens the platformActionList block; child elements specify its configuration.
131	`<actionListContext>Record</actionListContext>`	Sets action List Context in the enclosing configuration to Record.
132	`<platformActionListItems>`	Opens the platformActionListItems block; child elements specify its configuration.
133	`<actionName>Employee__c.Upload_Profile_Picture</actionName>`	Sets action Name in the enclosing configuration to Employee__c.Upload_Profile_Picture.
134	`<actionType>QuickAction</actionType>`	Sets action Type in the enclosing configuration to QuickAction.
135	`<sortOrder>0</sortOrder>`	Sets sort Order in the enclosing configuration to 0.
136	`</platformActionListItems>`	Closes the platformActionListItems configuration block.
137	`</platformActionList>`	Closes the platformActionList configuration block.
138	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
139	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
140	`<fields>Outlet__c</fields>`	Sets fields in the enclosing configuration to Outlet__c.
141	`<fields>Beat__c</fields>`	Sets fields in the enclosing configuration to Beat__c.
142	`<fields>Allocation_Status__c</fields>`	Sets fields in the enclosing configuration to Allocation_Status__c.
143	`<fields>Allocation_Date__c</fields>`	Sets fields in the enclosing configuration to Allocation_Date__c.
144	`<relatedList>Distributor_Outlet_Allocation__c.Employee__c</relatedList>`	Sets related List in the enclosing configuration to Distributor_Outlet_Allocation__c.Employee__c.
145	`</relatedLists>`	Closes the relatedLists configuration block.
146	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
147	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
148	`<fields>Expense_Policy__c</fields>`	Sets fields in the enclosing configuration to Expense_Policy__c.
149	`<fields>Claim_Date__c</fields>`	Sets fields in the enclosing configuration to Claim_Date__c.

Line	Source code	Explanation / reading note
150	`<fields>Amount__c</fields>`	Sets fields in the enclosing configuration to Amount__c.
151	`<fields>Status__c</fields>`	Sets fields in the enclosing configuration to Status__c.
152	`<relatedList>Expense_Claim__c.Sales_Representative__c</relatedList>`	Sets related List in the enclosing configuration to Expense_Claim__c.Sales_Representative__c.
153	`</relatedLists>`	Closes the relatedLists configuration block.
154	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
155	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
156	`<fields>Survey__c</fields>`	Sets fields in the enclosing configuration to Survey__c.
157	`<fields>Outlet__c</fields>`	Sets fields in the enclosing configuration to Outlet__c.
158	`<fields>Status__c</fields>`	Sets fields in the enclosing configuration to Status__c.
159	`<fields>Submitted_At__c</fields>`	Sets fields in the enclosing configuration to Submitted_At__c.
160	`<relatedList>Survey_Response__c.Employee__c</relatedList>`	Sets related List in the enclosing configuration to Survey_Response__c.Employee__c.
161	`</relatedLists>`	Closes the relatedLists configuration block.
162	`<relatedLists>`	Opens the relatedLists block; child elements specify its configuration.
163	`<fields>NAME</fields>`	Sets fields in the enclosing configuration to NAME.
164	`<fields>Planning_Start_Date__c</fields>`	Sets fields in the enclosing configuration to Planning_Start_Date__c.
165	`<fields>Planning_End_Date__c</fields>`	Sets fields in the enclosing configuration to Planning_End_Date__c.
166	`<fields>Status__c</fields>`	Sets fields in the enclosing configuration to Status__c.
167	`<fields>Approver__c</fields>`	Sets fields in the enclosing configuration to Approver__c.
168	`<fields>Approved_Outlet_Names__c</fields>`	Sets fields in the enclosing configuration to Approved_Outlet_Names__c.
169	`<relatedList>Permanent_Journey_Plan__c.Employee__c</relatedList>`	Sets related List in the enclosing configuration to Permanent_Journey_Plan__c.Employee__c.
170	`</relatedLists>`	Closes the relatedLists configuration block.

Line	Source code	Explanation / reading note
171	`<showEmailCheckbox>false</showEmailCheckbox>`	Sets show Email Checkbox in the enclosing configuration to false.
172	`<showHighlightsPanel>true</showHighlightsPanel>`	Sets show Highlights Panel in the enclosing configuration to true.
173	`<showInteractionLogPanel>false</showInteractionLogPanel>`	Sets show Interaction Log Panel in the enclosing configuration to false.
174	`<showRunAssignmentRulesCheckbox>false</showRunAssignmentRulesCheckbox>`	Sets show Run Assignment Rules Checkbox in the enclosing configuration to false.
175	`<showSubmitAndAttachButton>false</showSubmitAndAttachButton>`	Sets show Submit And Attach Button in the enclosing configuration to false.
176	`</Layout>`	Closes the Layout configuration block.

config/dms-portal-ui/applications/DMS_Management.app-meta.xml

Salesforce deployment metadata for this component. Defines version, availability, permissions or layout/configuration. XML elements configure platform behavior; they are not executable statements.

26 numbered source lines | SHA-256 34f6f859d57e2d1892a4ca50c698c3fc77e1b6b01598ce4c137e38b3ace65349

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<CustomApplication xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the CustomApplication block; child elements specify its configuration.
3	`    <description>Salesforce records for distributor orders, receipts, stock, invoices, returns and credit notes. Mobile integration and automatic stock posting are not part of this schema release.</description>`	Sets description in the enclosing configuration to Salesforce records for distributor orders, receipts, stock, invoices, returns and credit notes. Mobile integration and automatic stock posting are not part of this schema release..
4	`    <formFactors>Large</formFactors>`	Sets form Factors in the enclosing configuration to Large.
5	`    <isNavAutoTempTabsDisabled>false</isNavAutoTempTabsDisabled>`	Sets is Nav Auto Temp Tabs Disabled in the enclosing configuration to false.
6	`    <isNavPersonalizationDisabled>false</isNavPersonalizationDisabled>`	Sets is Nav Personalization Disabled in the enclosing configuration to false.
7	`    <isNavTabPersistenceDisabled>false</isNavTabPersistenceDisabled>`	Sets is Nav Tab Persistence Disabled in the enclosing configuration to false.
8	`    <isOmniPinnedViewEnabled>false</isOmniPinnedViewEnabled>`	Sets is Omni Pinned View Enabled in the enclosing configuration to false.
9	`    <label>DMS Management</label>`	Sets human-readable Salesforce UI label to DMS Management.
10	`    <navType>Standard</navType>`	Sets nav Type in the enclosing configuration to Standard.
11	`    <tabs>DMS_Distributor__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Distributor__c.
12	`    <tabs>DMS_Support_Ticket__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Support_Ticket__c.
13	`    <tabs>DMS_Primary_Order__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Primary_Order__c.
14	`    <tabs>DMS_Goods_Receipt__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Goods_Receipt__c.
15	`    <tabs>DMS_Inventory__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Inventory__c.
16	`    <tabs>DMS_Invoice__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Invoice__c.
17	`    <tabs>DMS_Primary_Return__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Primary_Return__c.
18	`    <tabs>DMS_Credit_Note__c</tabs>`	Sets tabs in the enclosing configuration to DMS_Credit_Note__c.

Line	Source code	Explanation / reading note
19	`    <tabs>Retailer__c</tabs>`	Sets tabs in the enclosing configuration to Retailer__c.
20	`    <tabs>Product__c</tabs>`	Sets tabs in the enclosing configuration to Product__c.
21	`    <tabs>Scheme__c</tabs>`	Sets tabs in the enclosing configuration to Scheme__c.
22	`    <tabs>Sales_Order__c</tabs>`	Sets tabs in the enclosing configuration to Sales_Order__c.
23	`    <tabs>Order_Item__c</tabs>`	Sets tabs in the enclosing configuration to Order_Item__c.
24	`    <tabs>Product_Return__c</tabs>`	Sets tabs in the enclosing configuration to Product_Return__c.
25	`    <uiType>Lightning</uiType>`	Sets ui Type in the enclosing configuration to Lightning.
26	`</CustomApplication>`	Closes the CustomApplication configuration block.

config/org-targets.json

First-party configuration & operations file: org targets.json. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

15 numbered source lines | SHA-256 a76c2c85c223c26c9f5872535d3eb9fc759955087c6d5099775e344498f549b2

Line	Source code	Explanation / reading note
1	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement; it is not a standalone business operation.
2	`  "activeTarget": {`	Continues the surrounding declaration/expression or text: "activeTarget": {. Read it with the preceding opening statement ({); it is not a standalone business operation.
3	`    "alias": "sfaNewOrg",`	Continues the surrounding declaration/expression or text: "alias": "sfaNewOrg",. Read it with the preceding opening statement ("activeTarget": {); it is not a standalone business operation.
4	`    "username": "aishwaryahs142003.6d2fd18ea3e1@agentforce.com",`	Continues the surrounding declaration/expression or text: "username": "aishwaryahs142003.6d2fd18ea3e1@agentforce.com",. Read it with the preceding opening statement ("alias": "sfaNewOrg",); it is not a standalone business operation.
5	`    "orgId": "00DjV000004opjNUAQ",`	Continues the surrounding declaration/expression or text: "orgId": "00DjV000004opjNUAQ",. Read it with the preceding opening statement ("username": "aishwaryahs142003.6d2fd18ea3e1@agentforce.com",); it is not a standalone business operation.
6	`    "instanceUrl": "https://orgfarm-33ef5eba22-dev-ed.develop.my.salesforce.com"`	Continues the surrounding declaration/expression or text: "instanceUrl": "https://orgfarm-33ef5eba22-dev-ed.develop.my.salesforce.com". Read it with the preceding opening statement ("orgId": "00DjV000004opjNUAQ",); it is not a standalone business operation.
7	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
8	`  "previousTarget": {`	Continues the surrounding declaration/expression or text: "previousTarget": {. Read it with the preceding opening statement (},); it is not a standalone business operation.
9	`    "alias": "org1",`	Continues the surrounding declaration/expression or text: "alias": "org1",. Read it with the preceding opening statement ("previousTarget": {); it is not a standalone business operation.
10	`    "username": "aishwaryahs14123.bba780a27606@agentforce.com",`	Continues the surrounding declaration/expression or text: "username": "aishwaryahs14123.bba780a27606@agentforce.com",. Read it with the preceding opening statement ("alias": "org1",); it is not a standalone business operation.

Line	Source code	Explanation / reading note
11	`"orgId": "00Dg500000F3JiEEAV",`	Continues the surrounding declaration/expression or text: "orgId": "00Dg500000F3JiEEAV",. Read it with the preceding opening statement ("username": "aishwaryahs14123.bba780a27606@agentforce.com",); it is not a standalone business operation.
12	`"instanceUrl": "https://orgfarm-b60461f024-dev-ed.develop.my.salesforce.com"`	Continues the surrounding declaration/expression or text: "instanceUrl": "https://orgfarm-b60461f024-dev-ed.develop.my.salesforce.com". Read it with the preceding opening statement ("orgId": "00Dg500000F3JiEEAV",); it is not a standalone business operation.
13	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
14	`"note": "This file contains org identifiers only. It never stores passwords or access tokens."`	Continues the surrounding declaration/expression or text: "note": "This file contains org identifiers only. It never stores passwords or access tokens.". Read it with the preceding opening statement (},); it is not a standalone business operation.
15	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

dms-mobile/Install-DmsAutoStart.ps1

Operational script: Install Dms Auto Start.ps1. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

23 numbered source lines | SHA-256 b4ddc2404a77c69bb5015bc621534b06c27c6716b88ee5e0a541fe6cb4185912

Line	Source code	Explanation / reading note
1	`# Install only current-user shortcuts; no admin rights or stored password needed.`	Developer comment/documentation: Install only current-user shortcuts; no admin rights or stored password needed. It is not executed.
2	`$ErrorActionPreference = 'Stop'`	Assigns a PowerShell script variable: $ErrorActionPreference = 'Stop'.
3	`$shellLink = New-Object -ComObject WScript.Shell`	Assigns a PowerShell script variable: $shellLink = New-Object -ComObject WScript.Shell.
4	`$powerShellExe = Join-Path $PSHOME 'powershell.exe'`	Assigns a PowerShell script variable: $powerShellExe = Join-Path $PSHOME 'powershell.exe'.
5	`foreach ($entry in @(`	Continues the surrounding declaration/expression or text: foreach ($entry in @(. Read it with the preceding opening statement ($powerShellExe = Join-Path $PSHOME 'powershell.exe'); it is not a standalone business operation.
6	`    @{ Folder = [Environment]::GetFolderPath('Startup'); Name = 'DMS Portal Auto Start.lnk'; Script = 'Keep-DmsLocalRunning.ps1' },`	Assigns the right-hand expression to the named variable/property: @{ Folder = [Environment]::GetFolderPath('Startup'); Name = 'DMS Portal Auto Start.lnk'; Script = 'Keep-DmsLocalRunning.ps1' },. This is in-memory unless it is later persisted by an explicit call.
7	`    @{ Folder = [Environment]::GetFolderPath('Desktop'); Name = 'Open DMS Portal.lnk'; Script = 'Open-DmsPortal.ps1' }`	Assigns the right-hand expression to the named variable/property: @{ Folder = [Environment]::GetFolderPath('Desktop'); Name = 'Open DMS Portal.lnk'; Script = 'Open-DmsPortal.ps1' }. This is in-memory unless it is later persisted by an explicit call.
8	`)) {`	Continues the surrounding declaration/expression or text:)) {. Read it with the preceding opening statement (@{ Folder = [Environment]::GetFolderPath('Desktop'); Name = 'Open DMS Portal.lnk'; Script = 'Open-DmsPortal.ps1' }); it is not a standalone business operation.
9	`    $shortcutPath = Join-Path $entry.Folder $entry.Name`	Assigns a PowerShell script variable: $shortcutPath = Join-Path $entry.Folder $entry.Name.
10	`    $scriptPath = Join-Path $PSScriptRoot $entry.Script`	Assigns a PowerShell script variable: $scriptPath = Join-Path $PSScriptRoot $entry.Script.
11	`    $link = $shellLink.CreateShortcut($shortcutPath)`	Assigns a PowerShell script variable: $link = $shellLink.CreateShortcut($shortcutPath).

Line	Source code	Explanation / reading note
12	`    if ((Test-Path -LiteralPath $shortcutPath) -and $link.Arguments -notlike "*$scriptPath*") {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ((Test-Path -LiteralPath $shortcutPath) -and $link.Arguments -notlike "*$scriptPath*") {.
13	`        throw "An unrelated shortcut exists at $shortcutPath. Nothing was overwritten."`	Stops this execution path with a validation/error exception: throw "An unrelated shortcut exists at $shortcutPath. Nothing was overwritten.". The caller/catch block decides how it is reported.
14	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
15	`    $link.TargetPath = $powerShellExe`	Assigns the right-hand expression to the named variable/property: $link.TargetPath = $powerShellExe. This is in-memory unless it is later persisted by an explicit call.
16	`    $link.Arguments = "-NoProfile -WindowStyle Hidden -File `"$scriptPath`""`	Assigns the right-hand expression to the named variable/property: $link.Arguments = "-NoProfile -WindowStyle Hidden -File `"$scriptPath`"". This is in-memory unless it is later persisted by an explicit call.
17	`    $link.WorkingDirectory = $PSScriptRoot`	Assigns the right-hand expression to the named variable/property: $link.WorkingDirectory = $PSScriptRoot. This is in-memory unless it is later persisted by an explicit call.
18	`    $link.WindowStyle = 7`	Assigns the right-hand expression to the named variable/property: $link.WindowStyle = 7. This is in-memory unless it is later persisted by an explicit call.
19	`    $link.Description = 'Start the local DMS portal. Does not change SFA.'`	Assigns the right-hand expression to the named variable/property: $link.Description = 'Start the local DMS portal. Does not change SFA.'. This is in-memory unless it is later persisted by an explicit call.
20	`    $link.Save()`	Calls the named method: $link.Save(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
21	`    Write-Output "Installed: $shortcutPath"`	Continues the surrounding declaration/expression or text: Write-Output "Installed: $shortcutPath". Read it with the preceding opening statement ($link.Save()); it is not a standalone business operation.
22	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
23	`Write-Output 'DMS will start at Windows sign-in. Remove DMS Portal Auto Start.lnk from your Startup folder to disable automatic startup.'`	Continues the surrounding declaration/expression or text: Write-Output 'DMS will start at Windows sign-in. Remove DMS Portal Auto Start.lnk from your Startup folder to disable automatic startup.'. Read it with the preceding opening statement (}); it is not a standalone business operation.

dms-mobile/Keep-DmsLocalRunning.ps1

Operational script: Keep Dms Local Running.ps1. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

38 numbered source lines | SHA-256 e9c35c414c1923e36f66979e85347c7cffc3321b4c6d30a9aeadf96f964af763

Line	Source code	Explanation / reading note
1	`# Per-user DMS startup/recovery. Never stops a process or touches SFA ports.`	Developer comment/documentation: Per-user DMS startup/recovery. Never stops a process or touches SFA ports. It is not executed.
2	`[CmdletBinding()]`	Continues the surrounding declaration/expression or text: [CmdletBinding()]. Read it with the preceding opening statement (# Per-user DMS startup/recovery. Never stops a process or touches SFA ports.); it is not a standalone business operation.
3	`param([switch]$Once)`	Continues the surrounding declaration/expression or text: param([switch]$Once). Read it with the preceding opening statement ([CmdletBinding()]); it is not a standalone business operation.
4	`$ErrorActionPreference = 'Stop'`	Assigns a PowerShell script variable: $ErrorActionPreference = 'Stop'.
5	`$guardianMutex = [Threading.Mutex]::new($false, 'Local\DmsPortalLocalGuardian')`	Assigns a PowerShell script variable: $guardianMutex = [Threading.Mutex]::new($false, 'Local\DmsPortalLocalGuardian').
6	`$ownsGuardian = $false`	Assigns a PowerShell script variable: $ownsGuardian = $false.
7	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
8	`    try { $ownsGuardian = $guardianMutex.WaitOne(0) }`	Starts operations whose failure is handled by the following catch/finally blocks.
9	`    catch [Threading.AbandonedMutexException] { $ownsGuardian = $true }`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
10	`    if (-not $ownsGuardian) { return }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (-not $ownsGuardian) { return }.
11	`    $runtimeFolder = Join-Path $PSScriptRoot '.runtime'`	Assigns a PowerShell script variable: $runtimeFolder = Join-Path $PSScriptRoot '.runtime'.
12	`    New-Item -ItemType Directory -Path $runtimeFolder -Force | Out-Null`	Operational command with system/filesystem/deployment effects: New-Item -ItemType Directory -Path $runtimeFolder -Force | Out-Null. Do not execute as part of simply reading this guide.

Line	Source code	Explanation / reading note
13	`    $guardianLog = Join-Path $runtimeFolder 'guardian.log'`	Assigns a PowerShell script variable: $guardianLog = Join-Path $runtimeFolder 'guardian.log'.
14	`    do {`	Continues the surrounding declaration/expression or text: do {. Read it with the preceding opening statement ($guardianLog = Join-Path $runtimeFolder 'guardian.log'); it is not a standalone business operation.
15	`        $retryDelay = 30`	Assigns a PowerShell script variable: $retryDelay = 30.
16	`        try {`	Starts operations whose failure is handled by the following catch/finally blocks.
17	`            $backendUp = @(Get-NetTCPConnection -LocalPort 4001 -State Listen -ErrorAction SilentlyContinue).Count -gt 0`	Assigns a PowerShell script variable: $backendUp = @(Get-NetTCPConnection -LocalPort 4001 -State Listen -ErrorAction SilentlyContinue).Count -gt 0.
18	`            $webUp = @(Get-NetTCPConnection -LocalPort 8082 -State Listen -ErrorAction SilentlyContinue).Count -gt 0`	Assigns a PowerShell script variable: $webUp = @(Get-NetTCPConnection -LocalPort 8082 -State Listen -ErrorAction SilentlyContinue).Count -gt 0.
19	`            if (-not $backendUp -or -not $webUp) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (-not $backendUp -or -not $webUp) {.
20	`                if ((Test-Path $guardianLog) -and (Get-Item $guardianLog).Length -gt 2MB) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ((Test-Path $guardianLog) -and (Get-Item $guardianLog).Length -gt 2MB) {.
21	`                    Move-Item -LiteralPath $guardianLog -Destination "$guardianLog.previous" -Force`	Continues the surrounding declaration/expression or text: Move-Item -LiteralPath $guardianLog -Destination "$guardianLog.previous" -Force. Read it with the preceding opening statement (if ((Test-Path $guardianLog) -and (Get-Item $guardianLog).Length -gt 2MB) {); it is not a standalone business operation.
22	`                }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
23	`                Add-Content -LiteralPath $guardianLog -Value "$(Get-Date -Format o) Starting missing DMS services."`	Continues the surrounding declaration/expression or text: Add-Content -LiteralPath $guardianLog -Value "$(Get-Date -Format o) Starting missing DMS services.". Read it with the preceding opening statement (}); it is not a standalone business operation.
24	`                & (Join-Path $PSScriptRoot 'Start-DmsLocal.ps1') -SkipSalesforceCheck -UseExistingBuild *>> $guardianLog`	Continues the surrounding declaration/expression or text: & (Join-Path $PSScriptRoot 'Start-DmsLocal.ps1') -SkipSalesforceCheck -UseExistingBuild *>> $guardianLog. Read it with the preceding opening statement (Add-Content -LiteralPath $guardianLog -Value "$(Get-Date -Format o) Starting missing DMS services."); it is not a standalone business operation.

Line	Source code	Explanation / reading note
25	`Add-Content -LiteralPath $guardianLog -Value "$(Get-Date -Format o) Local DMS services ready."`	Continues the surrounding declaration/expression or text: Add-Content -LiteralPath $guardianLog -Value "$(Get-Date -Format o) Local DMS services ready.". Read it with the preceding opening statement (& (Join-Path $PSScriptRoot 'Start-DmsLocal.ps1') -SkipSalesforceCheck -UseExistingBuild *>> $guardianLog); it is not a standalone business operation.
26	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
27	`} catch {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
28	`# Back off without killing unknown port owners or changing login security.`	Developer comment/documentation: Back off without killing unknown port owners or changing login security. It is not executed.
29	`Add-Content -LiteralPath $guardianLog -Value "$(Get-Date -Format o) Startup failed: $($_.Exception.Message)"`	Continues the surrounding declaration/expression or text: Add-Content -LiteralPath $guardianLog -Value "$(Get-Date -Format o) Startup failed: $($_.Exception.Message)". Read it with the preceding opening statement (# Back off without killing unknown port owners or changing login security.); it is not a standalone business operation.
30	`$retryDelay = 120`	Assigns a PowerShell script variable: $retryDelay = 120.
31	`if ($Once) { throw }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($Once) { throw }.
32	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`if (-not $Once) { Start-Sleep -Seconds $retryDelay }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (-not $Once) { Start-Sleep -Seconds $retryDelay }.
34	`} while (-not $Once)`	Continues the surrounding declaration/expression or text: } while (-not $Once). Read it with the preceding opening statement (if (-not $Once) { Start-Sleep -Seconds $retryDelay }); it is not a standalone business operation.
35	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
36	`if ($ownsGuardian) { $guardianMutex.ReleaseMutex() }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($ownsGuardian) { $guardianMutex.ReleaseMutex() }.
37	`$guardianMutex.Dispose()`	Calls the named method: $guardianMutex.Dispose(). Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
38	}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

dms-mobile/Open-DmsPortal.ps1

Operational script: Open Dms Portal.ps1. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

13 numbered source lines | SHA-256 6bb6afe042aac26e4fc4860b703e7187f83dfee5ffa590909847eb1fb57885dd

Line	Source code	Explanation / reading note
1	`# Desktop entry point: ensure the background guardian exists before opening DMS.`	Developer comment/documentation: Desktop entry point: ensure the background guardian exists before opening DMS. It is not executed.
2	`$ErrorActionPreference = 'Stop'`	Assigns a PowerShell script variable: $ErrorActionPreference = 'Stop'.
3	`$guardianScript = Join-Path $PSScriptRoot 'Keep-DmsLocalRunning.ps1'`	Assigns a PowerShell script variable: $guardianScript = Join-Path $PSScriptRoot 'Keep-DmsLocalRunning.ps1'.
4	`Start-Process -FilePath "$PSHOME\powershell.exe" -ArgumentList "-NoProfile -WindowStyle Hidden -File `"$guardianScript`"" -WindowStyle Hidden`	Operational command with system/filesystem/deployment effects: Start-Process -FilePath "$PSHOME\powershell.exe" -ArgumentList "-NoProfile -WindowStyle Hidden -File `"$guardianScript`"" -WindowStyle Hidden. Do not execute as part of simply reading this guide.
5	`$readyBy = (Get-Date).AddSeconds(120)`	Assigns a PowerShell script variable: $readyBy = (Get-Date).AddSeconds(120).
6	`do {`	Continues the surrounding declaration/expression or text: do {. Read it with the preceding opening statement ($readyBy = (Get-Date).AddSeconds(120)); it is not a standalone business operation.
7	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
8	`        $page = Invoke-WebRequest 'http://localhost:8082/' -UseBasicParsing -TimeoutSec 3`	Assigns a PowerShell script variable: $page = Invoke-WebRequest 'http://localhost:8082/' -UseBasicParsing -TimeoutSec 3.
9	`        if ($page.StatusCode -eq 200) { Start-Process 'http://localhost:8082/'; return }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($page.StatusCode -eq 200) { Start-Process 'http://localhost:8082/'; return }.
10	`    } catch { }`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
11	`    Start-Sleep -Seconds 2`	Continues the surrounding declaration/expression or text: Start-Sleep -Seconds 2. Read it with the preceding opening statement (} catch { }); it is not a standalone business operation.

Line	Source code	Explanation / reading note
12	`} while ((Get-Date) -lt $readyBy)`	Continues the surrounding declaration/expression or text: } while ((Get-Date) -lt $readyBy). Read it with the preceding opening statement (Start-Sleep -Seconds 2); it is not a standalone business operation.
13	`throw "DMS is still starting. Check $PSScriptRoot\.runtime\guardian.log and try again."`	Stops this execution path with a validation/error exception: throw "DMS is still starting. Check $PSScriptRoot\.runtime\guardian.log and try again.". The caller/catch block decides how it is reported.

dms-mobile/RESTART-DMS-LOCAL.cmd

Operational script: RESTART DMS LOCAL.cmd. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

11 numbered source lines | SHA-256 ae4b6d41b1fbe85d21db95d03e98022123f62bd07c7b854b7052bd2ef5cc330a

Line	Source code	Explanation / reading note
1	`@echo off`	Continues the surrounding declaration/expression or text: @echo off. Read it with the preceding opening statement; it is not a standalone business operation.
2	`setlocal`	Continues the surrounding declaration/expression or text: setlocal. Read it with the preceding opening statement (@echo off); it is not a standalone business operation.
3	`echo Restarting only DMS with the corrected Salesforce connection. SFA stays running.`	Continues the surrounding declaration/expression or text: echo Restarting only DMS with the corrected Salesforce connection. SFA stays running.. Read it with the preceding opening statement (setlocal); it is not a standalone business operation.
4	`powershell.exe -NoProfile -File "%~dp0Start-DmsLocal.ps1" -RestartBackend`	Continues the surrounding declaration/expression or text: powershell.exe -NoProfile -File "%~dp0Start-DmsLocal.ps1" -RestartBackend. Read it with the preceding opening statement (echo Restarting only DMS with the corrected Salesforce connection. SFA stays running.); it is not a standalone business operation.
5	`if errorlevel 1 (`	Continues the surrounding declaration/expression or text: if errorlevel 1 (. Read it with the preceding opening statement (powershell.exe -NoProfile -File "%~dp0Start-DmsLocal.ps1" -RestartBackend); it is not a standalone business operation.
6	`  echo Restart failed. Please share the error displayed above.`	Continues the surrounding declaration/expression or text: echo Restart failed. Please share the error displayed above.. Read it with the preceding opening statement (if errorlevel 1 (); it is not a standalone business operation.
7	`  pause`	Continues the surrounding declaration/expression or text: pause. Read it with the preceding opening statement (echo Restart failed. Please share the error displayed above.); it is not a standalone business operation.
8	`  exit /b 1`	Continues the surrounding declaration/expression or text: exit /b 1. Read it with the preceding opening statement (pause); it is not a standalone business operation.
9	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`start "" "http://localhost:8082/"`	Continues the surrounding declaration/expression or text: start "" "http://localhost:8082/". Read it with the preceding opening statement ()); it is not a standalone business operation.

Line	Source code	Explanation / reading note
11	`pause`	Continues the surrounding declaration/expression or text: pause. Read it with the preceding opening statement (start "" "http://localhost:8082/"); it is not a standalone business operation.

dms-mobile/START-DMS-LOCAL.cmd

Operational script: START DMS LOCAL.cmd. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

19 numbered source lines | SHA-256 ae196d5148e08b362296ceec01a4a8637004f417e5bd576e2abb364b09ace780

Line	Source code	Explanation / reading note
1	`@echo off`	Continues the surrounding declaration/expression or text: @echo off. Read it with the preceding opening statement; it is not a standalone business operation.
2	`setlocal`	Continues the surrounding declaration/expression or text: setlocal. Read it with the preceding opening statement (@echo off); it is not a standalone business operation.
3	`if not exist "%~dp0.runtime" mkdir "%~dp0.runtime"`	Continues the surrounding declaration/expression or text: if not exist "%~dp0.runtime" mkdir "%~dp0.runtime". Read it with the preceding opening statement (setlocal); it is not a standalone business operation.
4	`if not exist "%~dp0.runtime" (`	Continues the surrounding declaration/expression or text: if not exist "%~dp0.runtime" (. Read it with the preceding opening statement (if not exist "%~dp0.runtime" mkdir "%~dp0.runtime"); it is not a standalone business operation.
5	`  echo Cannot create the DMS startup log folder. Check folder access.`	Continues the surrounding declaration/expression or text: echo Cannot create the DMS startup log folder. Check folder access.. Read it with the preceding opening statement (if not exist "%~dp0.runtime" (); it is not a standalone business operation.
6	`  pause`	Continues the surrounding declaration/expression or text: pause. Read it with the preceding opening statement (echo Cannot create the DMS startup log folder. Check folder access.); it is not a standalone business operation.
7	`  exit /b 1`	Continues the surrounding declaration/expression or text: exit /b 1. Read it with the preceding opening statement (pause); it is not a standalone business operation.
8	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
9	`echo Starting DMS. Please keep this window open while Salesforce and the application are checked.`	Continues the surrounding declaration/expression or text: echo Starting DMS. Please keep this window open while Salesforce and the application are checked.. Read it with the preceding opening statement ()); it is not a standalone business operation.
Line	**Source code**	**Explanation / reading note**
10	`echo Startup output is saved to %~dp0.runtime\startup-last.log`	Continues the surrounding declaration/expression or text: echo Startup output is saved to %~dp0.runtime\startup-last.log. Read it with the preceding opening statement (echo Starting

Line	Source code	Explanation / reading note
		DMS. Please keep this window open while Salesforce and the application are checked.); it is not a standalone business operation.
11	`powershell.exe -NoProfile -File "%~dp0Start-DmsLocal.ps1" > "%~dp0.runtime\startup-last.log" 2>&1`	Continues the surrounding declaration/expression or text: powershell.exe -NoProfile -File "%~dp0Start-DmsLocal.ps1" > "%~dp0.runtime\startup-last.log" 2>&1. Read it with the preceding opening statement (echo Startup output is saved to %~dp0.runtime\startup-last.log); it is not a standalone business operation.
12	`if errorlevel 1 (`	Continues the surrounding declaration/expression or text: if errorlevel 1 (. Read it with the preceding opening statement (powershell.exe -NoProfile -File "%~dp0Start-DmsLocal.ps1" > "%~dp0.runtime\startup-last.log" 2>&1); it is not a standalone business operation.
13	`  type "%~dp0.runtime\startup-last.log"`	Defines a compile-time data contract: type "%~dp0.runtime\startup-last.log". TypeScript types do not validate untrusted runtime JSON by themselves.
14	`  echo DMS did not finish starting. Review the error above.`	Continues the surrounding declaration/expression or text: echo DMS did not finish starting. Review the error above.. Read it with the preceding opening statement (type "%~dp0.runtime\startup-last.log"); it is not a standalone business operation.
15	`  pause`	Continues the surrounding declaration/expression or text: pause. Read it with the preceding opening statement (echo DMS did not finish starting. Review the error above.); it is not a standalone business operation.
16	`  exit /b 1`	Continues the surrounding declaration/expression or text: exit /b 1. Read it with the preceding opening statement (pause); it is not a standalone business operation.
17	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`type "%~dp0.runtime\startup-last.log"`	Defines a compile-time data contract: type "%~dp0.runtime\startup-last.log". TypeScript types do not validate untrusted runtime JSON by themselves.
19	`start "" "http://localhost:8082/"`	Continues the surrounding declaration/expression or text: start "" "http://localhost:8082/". Read it with the preceding opening statement (type "%~dp0.runtime\startup-last.log"); it is not a standalone business operation.

dms-mobile/Start-DmsLocal.ps1

Operational script: Start Dms Local.ps1. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

142 numbered source lines | SHA-256 47a5c48b56e3fde57fb630ed101f7e768e0165329eccd986ca14a9a2f05c4ef8

Line	Source code	Explanation / reading note
1	`# Starts only DMS. Does not stop, restart or reconfigure SFA on 4000/8081.`	Developer comment/documentation: Starts only DMS. Does not stop, restart or reconfigure SFA on 4000/8081. It is not executed.
2	`[CmdletBinding()]`	Continues the surrounding declaration/expression or text: [CmdletBinding()]. Read it with the preceding opening statement (# Starts only DMS. Does not stop, restart or reconfigure SFA on 4000/8081.); it is not a standalone business operation.
3	`param([string]$SalesforceOrg = 'sfaNewOrg', [switch]$RestartBackend,`	Assigns the right-hand expression to the named variable/property: param([string]$SalesforceOrg = 'sfaNewOrg', [switch]$RestartBackend,. This is in-memory unless it is later persisted by an explicit call.
4	`    [switch]$SkipSalesforceCheck, [switch]$UseExistingBuild)`	Continues the surrounding declaration/expression or text: [switch]$SkipSalesforceCheck, [switch]$UseExistingBuild). Read it with the preceding opening statement (param([string]$SalesforceOrg = 'sfaNewOrg', [switch]$RestartBackend,); it is not a standalone business operation.
5	`$ErrorActionPreference = 'Stop'`	Assigns a PowerShell script variable: $ErrorActionPreference = 'Stop'.
6	`$dmsFolder = $PSScriptRoot`	Assigns a PowerShell script variable: $dmsFolder = $PSScriptRoot.
7	`$projectFolder = Split-Path -Parent $dmsFolder`	Assigns a PowerShell script variable: $projectFolder = Split-Path -Parent $dmsFolder.
8	`$backendFolder = Join-Path $projectFolder 'sales-rep-mobile/backend'`	Assigns a PowerShell script variable: $backendFolder = Join-Path $projectFolder 'sales-rep-mobile/backend'.
9	`$runtimeFolder = Join-Path $dmsFolder '.runtime'`	Assigns a PowerShell script variable: $runtimeFolder = Join-Path $dmsFolder '.runtime'.
10	`$nodePath = (Get-Command node.exe -ErrorAction Stop).Source`	Assigns a PowerShell script variable: $nodePath = (Get-Command node.exe -ErrorAction Stop).Source.
11	`$null = Get-Command npm.cmd -ErrorAction Stop`	Assigns a PowerShell script variable: $null = Get-Command npm.cmd -ErrorAction Stop.
12	`$salesforceCli = (Get-Command sf.cmd -ErrorAction Stop).Source`	Assigns a PowerShell script variable: $salesforceCli = (Get-Command sf.cmd -ErrorAction Stop).Source.

Line	Source code	Explanation / reading note
13		Blank line separating logical sections; no executable operation.
14	`function Get-Listener([int]$Port) {`	Declares a callable function/method: function Get-Listener([int]$Port) {. Parameters supply its inputs; the following block implements the operation.
15	`    @(Get-NetTCPConnection -State Listen -LocalPort $Port -ErrorAction SilentlyContinue)`	Continues the surrounding declaration/expression or text: @(Get-NetTCPConnection -State Listen -LocalPort $Port -ErrorAction SilentlyContinue). Read it with the preceding opening statement (function Get-Listener([int]$Port) {); it is not a standalone business operation.
16	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17		Blank line separating logical sections; no executable operation.
18	`function Wait-ForHttp([string]$Url, [int]$Seconds = 60) {`	Declares a callable function/method: function Wait-ForHttp([string]$Url, [int]$Seconds = 60) {. Parameters supply its inputs; the following block implements the operation.
19	`    $deadline = (Get-Date).AddSeconds($Seconds)`	Assigns a PowerShell script variable: $deadline = (Get-Date).AddSeconds($Seconds).
20	`    do {`	Continues the surrounding declaration/expression or text: do {. Read it with the preceding opening statement ($deadline = (Get-Date).AddSeconds($Seconds)); it is not a standalone business operation.
21	`        try {`	Starts operations whose failure is handled by the following catch/finally blocks.
22	`            $response = Invoke-WebRequest -Uri $Url -UseBasicParsing -TimeoutSec 3`	Assigns a PowerShell script variable: $response = Invoke-WebRequest -Uri $Url -UseBasicParsing -TimeoutSec 3.
23	`            if ($response.StatusCode -eq 200) { return }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($response.StatusCode -eq 200) { return }.
24	`        } catch { }`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
25	`        Start-Sleep -Seconds 1`	Continues the surrounding declaration/expression or text: Start-Sleep -Seconds 1. Read it with the preceding opening statement (} catch { }); it is not a standalone business operation.
26	`    } while ((Get-Date) -lt $deadline)`	Continues the surrounding declaration/expression or text: } while ((Get-Date) -lt $deadline). Read it with the preceding opening statement (Start-Sleep -Seconds 1); it is not a standalone business operation.
27	`    throw "Service did not become ready: $Url. Check logs in $runtimeFolder."`	Stops this execution path with a validation/error exception: throw "Service did not become ready: $Url. Check logs in $runtimeFolder.". The caller/catch block decides how it is reported.

Line	Source code	Explanation / reading note
28	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29		Blank line separating logical sections; no executable operation.
30	`$backendRunning = (Get-Listener 4001).Count -gt 0`	Assigns a PowerShell script variable: $backendRunning = (Get-Listener 4001).Count -gt 0.
31	`$webRunning = (Get-Listener 8082).Count -gt 0`	Assigns a PowerShell script variable: $webRunning = (Get-Listener 8082).Count -gt 0.
32	`# Never kill an arbitrary process occupying a port. Reuse only processes this`	Developer comment/documentation: Never kill an arbitrary process occupying a port. Reuse only processes this It is not executed.
33	`# launcher previously recorded, otherwise ask the user to inspect the conflict.`	Developer comment/documentation: launcher previously recorded, otherwise ask the user to inspect the conflict. It is not executed.
34	`foreach ($service in @(@{Port=4001; Name='backend'}, @{Port=8082; Name='web'})) {`	Assigns the right-hand expression to the named variable/property: foreach ($service in @(@{Port=4001; Name='backend'}, @{Port=8082; Name='web'})) {. This is in-memory unless it is later persisted by an explicit call.
35	`    $listeners = @(Get-Listener $service.Port)`	Assigns a PowerShell script variable: $listeners = @(Get-Listener $service.Port).
36	`    if ($listeners.Count -eq 0) { continue }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($listeners.Count -eq 0) { continue }.
37	`    $pidFile = Join-Path $runtimeFolder ($service.Name + '.pid')`	Assigns a PowerShell script variable: $pidFile = Join-Path $runtimeFolder ($service.Name + '.pid').
38	`    if (-not (Test-Path -LiteralPath $pidFile)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (-not (Test-Path -LiteralPath $pidFile)) {.
39	`        throw "Port $($service.Port) is already in use. Inspect that service before starting DMS; no process was stopped."`	Stops this execution path with a validation/error exception: throw "Port $($service.Port) is already in use. Inspect that service before starting DMS; no process was stopped.". The caller/catch block decides how it is reported.
40	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
41	`    $recorded = Get-Content -LiteralPath $pidFile -Raw | ConvertFrom-Json`	Assigns a PowerShell script variable: $recorded = Get-Content -LiteralPath $pidFile -Raw | ConvertFrom-Json.
42	`    $running = Get-Process -Id $recorded.Id -ErrorAction Stop`	Assigns a PowerShell script variable: $running = Get-Process -Id $recorded.Id -ErrorAction Stop.

Line	Source code	Explanation / reading note
43	`    if ($running.StartTime.ToUniversalTime().Ticks.ToString() -ne $recorded.StartTicks -or`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($running.StartTime.ToUniversalTime().Ticks.ToString() -ne $recorded.StartTicks -or.
44	`        @($listeners.OwningProcess | Select-Object -Unique).Count -ne 1 -or`	Continues the surrounding declaration/expression or text: @($listeners.OwningProcess \| Select-Object -Unique).Count -ne 1 -or. Read it with the preceding opening statement (if ($running.StartTime.ToUniversalTime().Ticks.ToString() -ne $recorded.StartTicks -or); it is not a standalone business operation.
45	`        $listeners[0].OwningProcess -ne $recorded.Id) {`	Continues the surrounding declaration/expression or text: $listeners[0].OwningProcess -ne $recorded.Id) {. Read it with the preceding opening statement (@($listeners.OwningProcess | Select-Object -Unique).Count -ne 1 -or); it is not a standalone business operation.
46	`        throw "Port $($service.Port) belongs to a different process. No process was stopped."`	Stops this execution path with a validation/error exception: throw "Port $($service.Port) belongs to a different process. No process was stopped.". The caller/catch block decides how it is reported.
47	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49		Blank line separating logical sections; no executable operation.
50	`if (-not $SkipSalesforceCheck) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (-not $SkipSalesforceCheck) {.
51	`Write-Host 'Checking the saved Salesforce login (no access tokens are displayed)...'`	Continues the surrounding declaration/expression or text: Write-Host 'Checking the saved Salesforce login (no access tokens are displayed)...'. Read it with the preceding opening statement (if (-not $SkipSalesforceCheck) {); it is not a standalone business operation.
52	`# Use the native Windows launcher and the CLI's structured result. A shell's`	Developer comment/documentation: Use the native Windows launcher and the CLI's structured result. A shell's It is not executed.
53	`# inherited exit-code variable is not evidence that Salesforce rejected login.`	Developer comment/documentation: inherited exit-code variable is not evidence that Salesforce rejected login. It is not executed.
54	`$sfOutput = & $salesforceCli data query --target-org $SalesforceOrg --query 'SELECT Id FROM DMS_Distributor__c LIMIT 1' --json`	Assigns a PowerShell script variable: $sfOutput = & $salesforceCli data query --target-org $SalesforceOrg --query 'SELECT Id FROM DMS_Distributor__c LIMIT 1' --json.
55	`try { $sfCheck = ($sfOutput -join [Environment]::NewLine) | ConvertFrom-Json }`	Starts operations whose failure is handled by the following catch/finally blocks.

Line	Source code	Explanation / reading note
56	`catch { throw 'Salesforce CLI did not return a readable result. Check the CLI installation and retry.' }`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
57	`if ($null -eq $sfCheck -or $null -eq $sfCheck.status -or $sfCheck.status -ne 0) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($null -eq $sfCheck -or $null -eq $sfCheck.status -or $sfCheck.status -ne 0) {.
58	`    $sfMessage = if ($sfCheck.message) { [string]$sfCheck.message } else { 'No successful query result was returned.' }`	Assigns a PowerShell script variable: $sfMessage = if ($sfCheck.message) { [string]$sfCheck.message } else { 'No successful query result was returned.' }.
59	`    throw "Salesforce check failed for $SalesforceOrg. $sfMessage"`	Stops this execution path with a validation/error exception: throw "Salesforce check failed for $SalesforceOrg. $sfMessage". The caller/catch block decides how it is reported.
60	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
61	`Write-Host 'Salesforce connection verified.'`	Continues the surrounding declaration/expression or text: Write-Host 'Salesforce connection verified.'. Read it with the preceding opening statement (}); it is not a standalone business operation.
62	`} else {`	Alternative branch taken when the preceding condition is false.
63	`    Write-Host 'Starting the local portal without requiring an online Salesforce connection. Live data still requires internet and valid Salesforce authentication.'`	Continues the surrounding declaration/expression or text: Write-Host 'Starting the local portal without requiring an online Salesforce connection. Live data still requires internet and valid Salesforce authentication.'. Read it with the preceding opening statement (} else {); it is not a standalone business operation.
64	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
65		Blank line separating logical sections; no executable operation.
66	`New-Item -ItemType Directory -Path $runtimeFolder -Force | Out-Null`	Operational command with system/filesystem/deployment effects: New-Item -ItemType Directory -Path $runtimeFolder -Force | Out-Null. Do not execute as part of simply reading this guide.
67	`# Windows encrypts this signing secret for the current Windows account. It stays`	Developer comment/documentation: Windows encrypts this signing secret for the current Windows account. It stays It is not executed.
68	`# stable between starts; it is not committed, printed or copied into the app.`	Developer comment/documentation: stable between starts; it is not committed, printed or copied into the app. It is not executed.

Line	Source code	Explanation / reading note
69	`$secretPath = Join-Path $runtimeFolder 'session-secret.dpapi'`	Assigns a PowerShell script variable: $secretPath = Join-Path $runtimeFolder 'session-secret.dpapi'.
70	`if (-not (Test-Path -LiteralPath $secretPath)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (-not (Test-Path -LiteralPath $secretPath)) {.
71	`    $randomBytes = New-Object byte[] 48`	Assigns a PowerShell script variable: $randomBytes = New-Object byte[] 48.
72	`    $generator = [System.Security.Cryptography.RandomNumberGenerator]::Create()`	Assigns a PowerShell script variable: $generator = [System.Security.Cryptography.RandomNumberGenerator]::Create().
73	`    try { $generator.GetBytes($randomBytes) } finally { $generator.Dispose() }`	Starts operations whose failure is handled by the following catch/finally blocks.
74	`    $secureSecret = ConvertTo-SecureString ([Convert]::ToBase64String($randomBytes)) -AsPlainText -Force`	Assigns a PowerShell script variable: $secureSecret = ConvertTo-SecureString ([Convert]::ToBase64String($randomBytes)) -AsPlainText -Force.
75	`    $encryptedSecret = ConvertFrom-SecureString $secureSecret`	Assigns a PowerShell script variable: $encryptedSecret = ConvertFrom-SecureString $secureSecret.
76	`    [IO.File]::WriteAllText($secretPath, $encryptedSecret)`	Continues the surrounding declaration/expression or text: [IO.File]::WriteAllText($secretPath, $encryptedSecret). Read it with the preceding opening statement ($encryptedSecret = ConvertFrom-SecureString $secureSecret); it is not a standalone business operation.
77	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
78	`$secureSecret = ConvertTo-SecureString (Get-Content -LiteralPath $secretPath -Raw)`	Assigns a PowerShell script variable: $secureSecret = ConvertTo-SecureString (Get-Content -LiteralPath $secretPath -Raw).
79	`$secretPointer = [Runtime.InteropServices.Marshal]::SecureStringToBSTR($secureSecret)`	Assigns a PowerShell script variable: $secretPointer = [Runtime.InteropServices.Marshal]::SecureStringToBSTR($secureSecret).
80	`try { $env:JWT_SECRET = [Runtime.InteropServices.Marshal]::PtrToStringBSTR($secretPointer) }`	Starts operations whose failure is handled by the following catch/finally blocks.
81	`finally { [Runtime.InteropServices.Marshal]::ZeroFreeBSTR($secretPointer) }`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
82	`$env:PORT = '4001'`	Assigns the right-hand expression to the named variable/property: $env:PORT = '4001'. This is in-memory unless it is later persisted by an explicit call.
83	`$env:USE_MOCK_DATA = 'false'`	Assigns the right-hand expression to the named variable/property: $env:USE_MOCK_DATA = 'false'. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
84	`$env:AUTH_ALLOW_TEST_CODE = 'false'`	Assigns the right-hand expression to the named variable/property: $env:AUTH_ALLOW_TEST_CODE = 'false'. This is in-memory unless it is later persisted by an explicit call.
85	`$env:SALESFORCE_ORG_ALIAS = $SalesforceOrg`	Assigns the right-hand expression to the named variable/property: $env:SALESFORCE_ORG_ALIAS = $SalesforceOrg. This is in-memory unless it is later persisted by an explicit call.
86	`$env:APP_PUBLIC_URL = 'http://localhost:8082'`	Assigns the right-hand expression to the named variable/property: $env:APP_PUBLIC_URL = 'http://localhost:8082'. This is in-memory unless it is later persisted by an explicit call.
87	`$env:EXPO_PUBLIC_API_URL = 'http://localhost:4001/api'`	Assigns the right-hand expression to the named variable/property: $env:EXPO_PUBLIC_API_URL = 'http://localhost:4001/api'. This is in-memory unless it is later persisted by an explicit call.
88		Blank line separating logical sections; no executable operation.
89	`function Start-DmsProcess([string]$Name, [string]$Folder, [string[]]$NodeArguments) {`	Declares a callable function/method: function Start-DmsProcess([string]$Name, [string]$Folder, [string[]]$NodeArguments) {. Parameters supply its inputs; the following block implements the operation.
90	`    $stamp = Get-Date -Format 'yyyyMMdd-HHmmss'`	Assigns a PowerShell script variable: $stamp = Get-Date -Format 'yyyyMMdd-HHmmss'.
91	`    $process = Start-Process -FilePath $nodePath -ArgumentList $NodeArguments -WorkingDirectory $Folder -WindowStyle Hidden -PassThru `	Assigns a PowerShell script variable: $process = Start-Process -FilePath $nodePath -ArgumentList $NodeArguments -WorkingDirectory $Folder -WindowStyle Hidden -PassThru `.
92	`        -RedirectStandardOutput (Join-Path $runtimeFolder "$Name-$stamp.out.log") `	Continues the surrounding declaration/expression or text: -RedirectStandardOutput (Join-Path $runtimeFolder "$Name-$stamp.out.log") `. Read it with the preceding opening statement ( $process = Start-Process -FilePath $nodePath -ArgumentList $NodeArguments -WorkingDirectory $Folder -WindowStyle Hidden -PassThru `); it is not a standalone business operation.
93	`        -RedirectStandardError (Join-Path $runtimeFolder "$Name-$stamp.err.log")`	Continues the surrounding declaration/expression or text: -RedirectStandardError (Join-Path $runtimeFolder "$Name-$stamp.err.log"). Read it with the preceding opening statement (-RedirectStandardOutput (Join-Path $runtimeFolder "$Name-$stamp.out.log") `); it is not a standalone business operation.
94	`    $record = @{Id=$process.Id; StartTicks=$process.StartTime.ToUniversalTime().Ticks.ToString()}`	Assigns a PowerShell script variable: $record = @{Id=$process.Id; StartTicks=$process.StartTime.ToUniversalTime().Ticks.ToString()}.

Line	Source code	Explanation / reading note
95	`    [IO.File]::WriteAllText((Join-Path $runtimeFolder "$Name.pid"), ($record | ConvertTo-Json))`	Continues the surrounding declaration/expression or text: [IO.File]::WriteAllText((Join-Path $runtimeFolder "$Name.pid"), ($record | ConvertTo-Json)). Read it with the preceding opening statement ($record = @{Id=$process.Id; StartTicks=$process.StartTime.ToUniversalTime().Ticks.ToString()}); it is not a standalone business operation.
96	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
97		Blank line separating logical sections; no executable operation.
98	`if (-not $backendRunning -or $RestartBackend) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (-not $backendRunning -or $RestartBackend) {.
99	`    Push-Location $backendFolder`	Continues the surrounding declaration/expression or text: Push-Location $backendFolder. Read it with the preceding opening statement (if (-not $backendRunning -or $RestartBackend) {); it is not a standalone business operation.
100	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
101	`        if (-not (Test-Path 'node_modules/typescript')) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (-not (Test-Path 'node_modules/typescript')) {.
102	`            & npm.cmd ci --workspaces=false --include=dev`	Assigns the right-hand expression to the named variable/property: & npm.cmd ci --workspaces=false --include=dev. This is in-memory unless it is later persisted by an explicit call.
103	`            if ($LASTEXITCODE -ne 0) { throw 'Backend dependency installation failed.' }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) { throw 'Backend dependency installation failed.' }.
104	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
105	`        if (-not $UseExistingBuild -or -not (Test-Path 'dist/server.js')) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (-not $UseExistingBuild -or -not (Test-Path 'dist/server.js')) {.
106	`            & npm.cmd run build`	Continues the surrounding declaration/expression or text: & npm.cmd run build. Read it with the preceding opening statement (if (-not $UseExistingBuild -or -not (Test-Path 'dist/server.js')) {); it is not a standalone business operation.

Line	Source code	Explanation / reading note
107	`            if ($LASTEXITCODE -ne 0) { throw 'Backend build failed.' }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) { throw 'Backend build failed.' }.
108	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
109	`    } finally { Pop-Location }`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
110	`    if ($backendRunning) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($backendRunning) {.
111	`        # Recheck ownership immediately before stopping only this launcher's DMS backend.`	Developer comment/documentation: Recheck ownership immediately before stopping only this launcher's DMS backend. It is not executed.
112	`        $recordedBackend = Get-Content -LiteralPath (Join-Path $runtimeFolder 'backend.pid') -Raw | ConvertFrom-Json`	Assigns a PowerShell script variable: $recordedBackend = Get-Content -LiteralPath (Join-Path $runtimeFolder 'backend.pid') -Raw | ConvertFrom-Json.
113	`        $backendProcess = Get-Process -Id $recordedBackend.Id -ErrorAction Stop`	Assigns a PowerShell script variable: $backendProcess = Get-Process -Id $recordedBackend.Id -ErrorAction Stop.
114	`        $backendListeners = @(Get-Listener 4001)`	Assigns a PowerShell script variable: $backendListeners = @(Get-Listener 4001).
115	`        if ($backendProcess.StartTime.ToUniversalTime().Ticks.ToString() -ne $recordedBackend.StartTicks -or`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($backendProcess.StartTime.ToUniversalTime().Ticks.ToString() -ne $recordedBackend.StartTicks -or.
116	`            $backendListeners.Count -eq 0 -or`	Continues the surrounding declaration/expression or text: $backendListeners.Count -eq 0 -or. Read it with the preceding opening statement (if ($backendProcess.StartTime.ToUniversalTime().Ticks.ToString() -ne $recordedBackend.StartTicks -or); it is not a standalone business operation.
117	`            @($backendListeners | Where-Object { $_.OwningProcess -ne $recordedBackend.Id }).Count -gt 0) {`	Continues the surrounding declaration/expression or text: @($backendListeners | Where-Object { $_.OwningProcess -ne $recordedBackend.Id }).Count -gt 0) {. Read it with the preceding opening statement ($backendListeners.Count -eq 0 -or); it is not a standalone business operation.
118	`            throw 'DMS backend ownership changed. Nothing was stopped.'`	Stops this execution path with a validation/error exception: throw 'DMS backend ownership changed. Nothing was stopped.'. The caller/catch block decides how it is reported.
119	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
120	`        Stop-Process -InputObject $backendProcess -ErrorAction Stop`	Operational command with system/filesystem/deployment effects: Stop-Process -InputObject $backendProcess -ErrorAction Stop. Do not execute as part of simply reading this guide.
121	`        Wait-Process -Id $recordedBackend.Id -Timeout 10 -ErrorAction SilentlyContinue`	Continues the surrounding declaration/expression or text: Wait-Process -Id $recordedBackend.Id -Timeout 10 -ErrorAction SilentlyContinue. Read it with the preceding opening statement (Stop-Process -InputObject $backendProcess -ErrorAction Stop); it is not a standalone business operation.
122	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
123	`    Start-DmsProcess 'backend' $backendFolder @('dist/server.js')`	Continues the surrounding declaration/expression or text: Start-DmsProcess 'backend' $backendFolder @('dist/server.js'). Read it with the preceding opening statement (}); it is not a standalone business operation.
124	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
125	`Wait-ForHttp 'http://localhost:4001/api/health'`	Continues the surrounding declaration/expression or text: Wait-ForHttp 'http://localhost:4001/api/health'. Read it with the preceding opening statement (}); it is not a standalone business operation.
126	`$health = Invoke-RestMethod 'http://localhost:4001/api/health' -TimeoutSec 5`	Assigns a PowerShell script variable: $health = Invoke-RestMethod 'http://localhost:4001/api/health' -TimeoutSec 5.
127	`if (-not $health.success -or $health.data.mockMode -ne $false) { throw 'DMS backend is not in live Salesforce mode.' }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (-not $health.success -or $health.data.mockMode -ne $false) { throw 'DMS backend is not in live Salesforce mode.' }.
128		Blank line separating logical sections; no executable operation.
129	`if (-not $webRunning) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (-not $webRunning) {.
130	`    Push-Location $dmsFolder`	Continues the surrounding declaration/expression or text: Push-Location $dmsFolder. Read it with the preceding opening statement (if (-not $webRunning) {); it is not a standalone business operation.
131	`    try {`	Starts operations whose failure is handled by the following catch/finally blocks.
132	`        if (-not (Test-Path 'node_modules/expo/bin/cli')) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (-not (Test-Path 'node_modules/expo/bin/cli')) {.

Line	Source code	Explanation / reading note
133	`& npm.cmd ci --include=dev`	Assigns the right-hand expression to the named variable/property: & npm.cmd ci --include=dev. This is in-memory unless it is later persisted by an explicit call.
134	`if ($LASTEXITCODE -ne 0) { throw 'DMS web dependency installation failed.' }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) { throw 'DMS web dependency installation failed.' }.
135	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
136	`} finally { Pop-Location }`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
137	`Start-DmsProcess 'web' $dmsFolder @('node_modules/expo/bin/cli', 'start', '--web', '--localhost', '--port', '8082')`	Continues the surrounding declaration/expression or text: Start-DmsProcess 'web' $dmsFolder @('node_modules/expo/bin/cli', 'start', '--web', '--localhost', '--port', '8082'). Read it with the preceding opening statement (} finally { Pop-Location }); it is not a standalone business operation.
138	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
139	`Wait-ForHttp 'http://localhost:8082/'`	Continues the surrounding declaration/expression or text: Wait-ForHttp 'http://localhost:8082/'. Read it with the preceding opening statement (}); it is not a standalone business operation.
140	`Write-Host 'DMS is ready at http://localhost:8082/. SFA was not changed.'`	Continues the surrounding declaration/expression or text: Write-Host 'DMS is ready at http://localhost:8082/. SFA was not changed.'. Read it with the preceding opening statement (Wait-ForHttp 'http://localhost:8082/'); it is not a standalone business operation.
141	`Write-Host 'Sign in as Distributor 1, then open Orders > Primary Orders and Refresh and sync.'`	Continues the surrounding declaration/expression or text: Write-Host 'Sign in as Distributor 1, then open Orders > Primary Orders and Refresh and sync.'. Read it with the preceding opening statement (Write-Host 'DMS is ready at http://localhost:8082/. SFA was not changed.'); it is not a standalone business operation.
142	`Write-Host 'After a computer restart, run this launcher again. Salesforce login and internet access must remain valid.'`	Continues the surrounding declaration/expression or text: Write-Host 'After a computer restart, run this launcher again. Salesforce login and internet access must remain valid.'. Read it with the preceding opening statement (Write-Host 'Sign in as Distributor 1, then open Orders > Primary Orders and Refresh and sync.'); it is not a standalone business operation.

dms-mobile/app.json

First-party configuration & operations file: app.json. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

1 numbered source lines | SHA-256 3b4dcd9db4fcb275d206f170a6491fa28a38e8d700b19ea76d49694b105144ec

Line	Source code	Explanation / reading note
1	`{"expo":{"name":"DMS Distributor","slug":"dms-distributor","version":"0.1.0","orientation":"portrait","userInterfaceStyle":"light","android":{"package":"com.aishwarya.dmsdistributor","versionCode":1},"ios":{"bundleIdentifier":"com.aishwarya.dmsdistributor"}}}`	Continues the surrounding declaration/expression or text: {"expo":{"name":"DMS Distributor","slug":"dms-distributor","version":"0.1.0","orientation":"portrait","userInterfaceStyle":"light","android":{"package":"com.aishwarya.dmsdistributor","versionCode":1},. Read it with the preceding opening statement; it is not a standalone business operation.

dms-mobile/package.json

Package manifest: runtime/dev dependencies, entry point and npm scripts. Scripts run only when invoked; a dependency declaration does not prove a feature is used.

28 numbered source lines | SHA-256 dd7207da12902f6d149200052eb82c1dc66e0bee33ee20bc16324cf20f37ad61

Line	Source code	Explanation / reading note
1	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement; it is not a standalone business operation.
2	`  "name": "dms-distributor-mobile",`	Continues the surrounding declaration/expression or text: "name": "dms-distributor-mobile",. Read it with the preceding opening statement ({); it is not a standalone business operation.
3	`  "version": "0.1.0",`	Continues the surrounding declaration/expression or text: "version": "0.1.0",. Read it with the preceding opening statement ("name": "dms-distributor-mobile",); it is not a standalone business operation.
4	`  "private": true,`	Continues the surrounding declaration/expression or text: "private": true,. Read it with the preceding opening statement ("version": "0.1.0",); it is not a standalone business operation.
5	`  "main": "node_modules/expo/AppEntry.js",`	Continues the surrounding declaration/expression or text: "main": "node_modules/expo/AppEntry.js",. Read it with the preceding opening statement ("private": true,); it is not a standalone business operation.
6	`  "scripts": {`	Continues the surrounding declaration/expression or text: "scripts": {. Read it with the preceding opening statement ("main": "node_modules/expo/AppEntry.js",); it is not a standalone business operation.
7	`    "start": "expo start --port 8082",`	Continues the surrounding declaration/expression or text: "start": "expo start --port 8082",. Read it with the preceding opening statement ("scripts": {); it is not a standalone business operation.
8	`    "web": "expo start --web --port 8082",`	Continues the surrounding declaration/expression or text: "web": "expo start --web --port 8082",. Read it with the preceding opening statement ("start": "expo start --port 8082",); it is not a standalone business operation.
9	`    "typecheck": "tsc --noEmit",`	Continues the surrounding declaration/expression or text: "typecheck": "tsc --noEmit",. Read it with the preceding opening statement ("web": "expo start --web --port 8082",); it is not a standalone business operation.
10	`    "test:ui": "node scripts/check-ui.cjs",`	Continues the surrounding declaration/expression or text: "test:ui": "node scripts/check-ui.cjs",. Read it with the preceding opening statement ("typecheck": "tsc --noEmit",); it is not a standalone business operation.

Line	Source code	Explanation / reading note
11	`"test:logout": "node scripts/check-logout.cjs",`	Continues the surrounding declaration/expression or text: "test:logout": "node scripts/check-logout.cjs",. Read it with the preceding opening statement ("test:ui": "node scripts/check-ui.cjs",); it is not a standalone business operation.
12	`"export:web": "expo export --platform web"`	Continues the surrounding declaration/expression or text: "export:web": "expo export --platform web". Read it with the preceding opening statement ("test:logout": "node scripts/check-logout.cjs",); it is not a standalone business operation.
13	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
14	`"dependencies": {`	Continues the surrounding declaration/expression or text: "dependencies": {. Read it with the preceding opening statement (},); it is not a standalone business operation.
15	`"@react-native-async-storage/async-storage": "^2.2.0",`	Continues the surrounding declaration/expression or text: "@react-native-async-storage/async-storage": "^2.2.0",. Read it with the preceding opening statement ("dependencies": {); it is not a standalone business operation.
16	`"expo": "~54.0.13",`	Continues the surrounding declaration/expression or text: "expo": "~54.0.13",. Read it with the preceding opening statement ("@react-native-async-storage/async-storage": "^2.2.0",); it is not a standalone business operation.
17	`"expo-crypto": "~15.0.9",`	Continues the surrounding declaration/expression or text: "expo-crypto": "~15.0.9",. Read it with the preceding opening statement ("expo": "~54.0.13",); it is not a standalone business operation.
18	`"expo-secure-store": "~15.0.8",`	Continues the surrounding declaration/expression or text: "expo-secure-store": "~15.0.8",. Read it with the preceding opening statement ("expo-crypto": "~15.0.9",); it is not a standalone business operation.
19	`"react": "19.1.0",`	Continues the surrounding declaration/expression or text: "react": "19.1.0",. Read it with the preceding opening statement ("expo-secure-store": "~15.0.8",); it is not a standalone business operation.
20	`"react-dom": "19.1.0",`	Continues the surrounding declaration/expression or text: "react-dom": "19.1.0",. Read it with the preceding opening statement ("react": "19.1.0",); it is not a standalone business operation.
21	`"react-native": "0.81.5",`	Continues the surrounding declaration/expression or text: "react-native": "0.81.5",. Read it with the preceding opening statement ("react-dom": "19.1.0",); it is not a standalone business operation.

Line	Source code	Explanation / reading note
22	`    "react-native-web": "~0.21.0"`	Continues the surrounding declaration/expression or text: "react-native-web": "~0.21.0". Read it with the preceding opening statement ("react-native": "0.81.5",); it is not a standalone business operation.
23	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24	`  "devDependencies": {`	Continues the surrounding declaration/expression or text: "devDependencies": {. Read it with the preceding opening statement (},); it is not a standalone business operation.
25	`    "@types/react": "~19.1.10",`	Continues the surrounding declaration/expression or text: "@types/react": "~19.1.10",. Read it with the preceding opening statement ("devDependencies": {); it is not a standalone business operation.
26	`    "typescript": "~5.9.2"`	Continues the surrounding declaration/expression or text: "typescript": "~5.9.2". Read it with the preceding opening statement ("@types/react": "~19.1.10",); it is not a standalone business operation.
27	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
28	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

dms-mobile/scripts/check-logout.cjs

Local verification script/configuration. Inspect fixture substitution and assertions to determine which behavior is checked and which external systems are not contacted.

163 numbered source lines | SHA-256 1d515102c3093c0e3f0a74e85aa24511652ead908de47a308adfae3a324d297e

Line	Source code	Explanation / reading note
1	`// Local component-handler tests only: no real credentials, email or network.`	Developer comment/documentation: Local component-handler tests only: no real credentials, email or network. It is not executed.
2	`const assert = require('node:assert/strict');`	Declares/initializes local data used by the surrounding operation: const assert = require('node:assert/strict');. Collection contents and assignments below determine its purpose.
3	`const fs = require('node:fs');`	Declares/initializes local data used by the surrounding operation: const fs = require('node:fs');. Collection contents and assignments below determine its purpose.
4	`const path = require('node:path');`	Declares/initializes local data used by the surrounding operation: const path = require('node:path');. Collection contents and assignments below determine its purpose.
5	`const Module = require('node:module');`	Declares/initializes local data used by the surrounding operation: const Module = require('node:module');. Collection contents and assignments below determine its purpose.
6	`const ts = require('typescript');`	Declares/initializes local data used by the surrounding operation: const ts = require('typescript');. Collection contents and assignments below determine its purpose.
7	`const React = require('react');`	Declares/initializes local data used by the surrounding operation: const React = require('react');. Collection contents and assignments below determine its purpose.
8	`const native = require('react-native-web');`	Declares/initializes local data used by the surrounding operation: const native = require('react-native-web');. Collection contents and assignments below determine its purpose.
9	`const root = path.resolve(__dirname, '..');`	Declares/initializes local data used by the surrounding operation: const root = path.resolve(__dirname, '..');. Collection contents and assignments below determine its purpose.
10	`let states = [], refs = [], stateIndex = 0, refIndex = 0;`	Declares/initializes local data used by the surrounding operation: let states = [], refs = [], stateIndex = 0, refIndex = 0;. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
11	`let storedSession, failStorage = false, requestHandler, calls = [];`	Declares/initializes local data used by the surrounding operation: let storedSession, failStorage = false, requestHandler, calls = [];. Collection contents and assignments below determine its purpose.
12	`const outboxes = new Map(), snapshots = new Map();`	Declares/initializes local data used by the surrounding operation: const outboxes = new Map(), snapshots = new Map();. Collection contents and assignments below determine its purpose.
13	`const cache = new Map();`	Declares/initializes local data used by the surrounding operation: const cache = new Map();. Collection contents and assignments below determine its purpose.
14	`function load(file) {`	Declares a callable function/method: function load(file) {. Parameters supply its inputs; the following block implements the operation.
15	`  if (cache.has(file)) return cache.get(file).exports;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (cache.has(file)) return cache.get(file).exports;.
16	`  const mod = new Module(file, module);`	Declares/initializes local data used by the surrounding operation: const mod = new Module(file, module);. Collection contents and assignments below determine its purpose.
17	`  mod.filename = file; mod.paths = Module._nodeModulePaths(path.dirname(file));`	Calls the named method: mod.filename = file; mod.paths = Module._nodeModulePaths(path.dirname(file));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
18	`  cache.set(file, mod);`	Calls the named method: cache.set(file, mod);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
19	`  mod.require = name => {`	Assigns the right-hand expression to the named variable/property: mod.require = name => {. This is in-memory unless it is later persisted by an explicit call.
20	`    if (name.endsWith(".png")) return {uri: "nestle-logo.png"};`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (name.endsWith(".png")) return {uri: "nestle-logo.png"};.
21	`    if (name === 'react-native') return native;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (name === 'react-native') return native;.
22	`    if (name === 'react' && file.endsWith('DmsApp.tsx')) return {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (name === 'react' && file.endsWith('DmsApp.tsx')) return {.
23	`      ...React, useEffect: () => {},`	Registers a lifecycle effect. Read its dependency array and cleanup to understand when it runs or is cancelled.

Line	Source code	Explanation / reading note
24	`useState: initial => {`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
25	`const index = stateIndex++;`	Declares/initializes local data used by the surrounding operation: const index = stateIndex++;. Collection contents and assignments below determine its purpose.
26	`if (!(index in states)) states[index] = initial;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!(index in states)) states[index] = initial;.
27	`return [states[index], value => { states[index] = typeof value === 'function' ? value(states[index]) : value; }];`	Returns [states[index], value => { states[index] = typeof value === 'function' ? value(states[index]) : value; }] to the caller (or begins returned UI markup) and ends this execution path.
28	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`useRef: initial => {`	Stores a mutable value across renders without causing a re-render, such as a stable request key or sync lock.
30	`const index = refIndex++;`	Declares/initializes local data used by the surrounding operation: const index = refIndex++;. Collection contents and assignments below determine its purpose.
31	`if (!refs[index]) refs[index] = {current: initial};`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!refs[index]) refs[index] = {current: initial};.
32	`return refs[index];`	Returns refs[index] to the caller (or begins returned UI markup) and ends this execution path.
33	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`if (name === './api') return {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (name === './api') return {.
36	`ApiError: class extends Error {},`	Declares a class/type: ApiError: class extends Error {},. Members below hold behavior and/or state.
37	`request: async (...args) => { calls.push(args); return requestHandler(...args); }`	Sets/declares the named object property or style/type member: request: async (...args) => { calls.push(args); return requestHandler(...args); }. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
38	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	`if (name === './storage') return {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (name === './storage') return {.
40	`saveSession: async value => { if (failStorage) throw Error('storage unavailable'); storedSession = value; },`	Sets/declares the named object property or style/type member: saveSession: async value => { if (failStorage) throw Error('storage unavailable'); storedSession = value; },. Interpret it in the enclosing object, props or type definition.
41	`readSession: async () => storedSession,`	Sets/declares the named object property or style/type member: readSession: async () => storedSession,. Interpret it in the enclosing object, props or type definition.
42	`readPending: async id => structuredClone(outboxes.get(id) || []),`	Sets/declares the named object property or style/type member: readPending: async id => structuredClone(outboxes.get(id) || []),. Interpret it in the enclosing object, props or type definition.
43	`savePending: async (id, value) => outboxes.set(id, structuredClone(value)),`	Sets/declares the named object property or style/type member: savePending: async (id, value) => outboxes.set(id, structuredClone(value)),. Interpret it in the enclosing object, props or type definition.
44	`readSnapshot: async id => snapshots.get(id),`	Sets/declares the named object property or style/type member: readSnapshot: async id => snapshots.get(id),. Interpret it in the enclosing object, props or type definition.
45	`saveSnapshot: async (id, value) => snapshots.set(id, value),`	Sets/declares the named object property or style/type member: saveSnapshot: async (id, value) => snapshots.set(id, value),. Interpret it in the enclosing object, props or type definition.
46	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`if (name === 'expo-crypto') return {};`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (name === 'expo-crypto') return {};.
48	`if (name.startsWith('.')) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (name.startsWith('.')) {.
49	`const base = path.resolve(path.dirname(file), name);`	Declares/initializes local data used by the surrounding operation: const base = path.resolve(path.dirname(file), name);. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
50	`for (const ext of ['.tsx', '.ts']) if (fs.existsSync(base + ext)) return load(base + ext);`	Repeats work over the specified records/items or while this condition holds: for (const ext of ['.tsx', '.ts']) if (fs.existsSync(base + ext)) return load(base + ext);. Check where queries/writes occur relative to the loop.
51	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
52	`return Module.prototype.require.call(mod, name);`	Returns Module.prototype.require.call(mod, name) to the caller (or begins returned UI markup) and ends this execution path.
53	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
54	`mod._compile(ts.transpileModule(fs.readFileSync(file, 'utf8'), {`	Calls the named method: mod._compile(ts.transpileModule(fs.readFileSync(file, 'utf8'), {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
55	`compilerOptions: {module: ts.ModuleKind.CommonJS, jsx: ts.JsxEmit.React, esModuleInterop: true, target: ts.ScriptTarget.ES2022}`	Sets/declares the named object property or style/type member: compilerOptions: {module: ts.ModuleKind.CommonJS, jsx: ts.JsxEmit.React, esModuleInterop: true, target: ts.ScriptTarget.ES2022}. Interpret it in the enclosing object, props or type definition.
56	`}).outputText, file);`	Continues the surrounding declaration/expression or text: }).outputText, file);. Read it with the preceding opening statement (compilerOptions: {module: ts.ModuleKind.CommonJS, jsx: ts.JsxEmit.React, esModuleInterop: true, target: ts.ScriptTarget.ES2022}); it is not a standalone business operation.
57	`return mod.exports;`	Returns mod.exports to the caller (or begins returned UI markup) and ends this execution path.
58	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
59	`const App = load(path.join(root, 'src/DmsApp.tsx')).default;`	Declares/initializes local data used by the surrounding operation: const App = load(path.join(root, 'src/DmsApp.tsx')).default;. Collection contents and assignments below determine its purpose.
60	`const account = {id: 'distributor-A', token: 'fixture-only-A', name: 'Fixture A'};`	Declares/initializes local data used by the surrounding operation: const account = {id: 'distributor-A', token: 'fixture-only-A', name: 'Fixture A'};. Collection contents and assignments below determine its purpose.
61	`const pending = {key: 'stable-receipt-key', path: '/transactions', label: 'Receipt', body: {action: 'receiveGoods'}};`	Declares/initializes local data used by the surrounding operation: const pending = {key: 'stable-receipt-key', path: '/transactions', label: 'Receipt', body: {action: 'receiveGoods'}};. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
62	`function reset() {`	Declares a callable function/method: function reset() {. Parameters supply its inputs; the following block implements the operation.
63	`  states = [account, {distributor: {}, retrievedAt: '2026-10-22', truncatedLists: []}, [pending], 'More'];`	Assigns the right-hand expression to the named variable/property: states = [account, {distributor: {}, retrievedAt: '2026-10-22', truncatedLists: []}, [pending], 'More'];. This is in-memory unless it is later persisted by an explicit call.
64	`  refs = []; outboxes.clear(); snapshots.clear(); calls = []; failStorage = false;`	Calls the named method: refs = []; outboxes.clear(); snapshots.clear(); calls = []; failStorage = false;. Its implementation defines the side effect/result; use the symbol/file index to follow it.
65	`  storedSession = account; outboxes.set(account.id, [pending]);`	Calls the named method: storedSession = account; outboxes.set(account.id, [pending]);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
66	`  outboxes.set('distributor-B', []);`	Calls the named method: outboxes.set('distributor-B', []);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
67	`  requestHandler = () => { throw Error('Unexpected network attempt'); };`	Assigns the right-hand expression to the named variable/property: requestHandler = () => { throw Error('Unexpected network attempt'); };. This is in-memory unless it is later persisted by an explicit call.
68	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
69	`function render() { stateIndex = 0; refIndex = 0; return App(); }`	Declares a callable function/method: function render() { stateIndex = 0; refIndex = 0; return App(); }. Parameters supply its inputs; the following block implements the operation.
70	`function find(node, predicate) {`	Declares a callable function/method: function find(node, predicate) {. Parameters supply its inputs; the following block implements the operation.
71	`  if (!node || typeof node !== 'object') return;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!node || typeof node !== 'object') return;.
72	`  if (predicate(node)) return node;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (predicate(node)) return node;.
73	`  for (const child of React.Children.toArray(node.props?.children)) {`	Repeats work over the specified records/items or while this condition holds: for (const child of React.Children.toArray(node.props?.children)) {. Check where queries/writes occur relative to the loop.
74	`    const match = find(child, predicate); if (match) return match;`	Declares/initializes local data used by the surrounding operation: const match = find(child, predicate); if (match) return match;. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
75	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
76	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
77	`const button = (tree, title) => find(tree, node => node.props?.title === title);`	Declares/initializes local data used by the surrounding operation: const button = (tree, title) => find(tree, node => node.props?.title === title);. Collection contents and assignments below determine its purpose.
78	`const flush = () => new Promise(resolve => setImmediate(resolve));`	Declares/initializes local data used by the surrounding operation: const flush = () => new Promise(resolve => setImmediate(resolve));. Collection contents and assignments below determine its purpose.
79	`function deferred() { let resolve, reject; const promise = new Promise((yes, no) => { resolve=yes; reject=no; }); return {promise, resolve, reject}; }`	Declares a callable function/method: function deferred() { let resolve, reject; const promise = new Promise((yes, no) => { resolve=yes; reject=no; }); return {promise, resolve, reject}; }. Parameters supply its inputs; the following block implements the operation.
80	`async function logout() { button(render(), 'Log out').props.onPress(); await flush(); }`	Waits for this asynchronous operation before continuing: async function logout() { button(render(), 'Log out').props.onPress(); await flush(); }. The returned result/error must still be handled.
81	`(async () => {`	Continues the surrounding declaration/expression or text: (async () => {. Read it with the preceding opening statement (async function logout() { button(render(), 'Log out').props.onPress(); await flush(); }); it is not a standalone business operation.
82	`  reset();`	Continues the surrounding declaration/expression or text: reset();. Read it with the preceding opening statement ((async () => {); it is not a standalone business operation.
83	`  states[3] = 'Returns';`	Assigns the right-hand expression to the named variable/property: states[3] = 'Returns';. This is in-memory unless it is later persisted by an explicit call.
84	`  let returnsTree = render();`	Declares/initializes local data used by the surrounding operation: let returnsTree = render();. Collection contents and assignments below determine its purpose.
85	`  assert.equal(find(returnsTree, node => node.props?.accessibilityLabel === 'Primary returns').props.accessibilityState.selected, true);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(find(returnsTree, node => node.props?.accessibilityLabel === 'Primary returns').props.accessibilityState.selected, true);. A mismatch fails the test.
86	`  find(returnsTree, node => node.props?.accessibilityLabel === 'Secondary returns').props.onPress();`	Calls the named method: find(returnsTree, node => node.props?.accessibilityLabel === 'Secondary returns').props.onPress();. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
87	`  returnsTree = render();`	Assigns the right-hand expression to the named variable/property: returnsTree = render();. This is in-memory unless it is later persisted by an explicit call.
88	`  assert.equal(find(returnsTree, node => node.props?.accessibilityLabel === ' Secondary returns').props.accessibilityState.selected, true);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(find(returnsTree, node => node.props?.accessibilityLabel === 'Secondary returns').props.accessibilityState.selected, true);. A mismatch fails the test.
89	`  find(returnsTree, node => node.props?.accessibilityLabel === 'Primary returns').props.onPress();`	Calls the named method: find(returnsTree, node => node.props?.accessibilityLabel === 'Primary returns').props.onPress();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
90	`  assert.equal(states[25], 'Primary');`	Test assertion comparing an expected outcome to actual behavior: assert.equal(states[25], 'Primary');. A mismatch fails the test.
91	`  assert.equal(calls.length, 0, 'Switching return tabs must not submit any transaction');`	Test assertion comparing an expected outcome to actual behavior: assert.equal(calls.length, 0, 'Switching return tabs must not submit any transaction');. A mismatch fails the test.
92	`  reset();`	Continues the surrounding declaration/expression or text: reset();. Read it with the preceding opening statement (assert.equal(calls.length, 0, 'Switching return tabs must not submit any transaction'););. It is not a standalone business operation.
93	`  states[7] = true; // background sync must not disable logout`	Assigns the right-hand expression to the named variable/property: states[7] = true; // background sync must not disable logout. This is in-memory unless it is later persisted by an explicit call.
94	`  assert.equal(button(render(), 'Log out').props.disabled, false);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(button(render(), 'Log out').props.disabled, false);. A mismatch fails the test.
95	`  await logout();`	Waits for this asynchronous operation before continuing: await logout();. The returned result/error must still be handled.
96	`  assert.equal(storedSession, null);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(storedSession, null);. A mismatch fails the test.
97	`  assert.equal(states[0], null); assert.equal(states[1], null);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(states[0], null); assert.equal(states[1], null);. A mismatch fails the test.
98	`  assert.deepEqual(states[2], []);`	Test assertion comparing an expected outcome to actual behavior: assert.deepEqual(states[2], []);. A mismatch fails the test.
99	`  assert.deepEqual(outboxes.get(account.id), [pending]);`	Test assertion comparing an expected outcome to actual behavior: assert.deepEqual(outboxes.get(account.id), [pending]);. A mismatch fails the test.

Line	Source code	Explanation / reading note
100	`  assert.deepEqual(outboxes.get('distributor-B'), []);`	Test assertion comparing an expected outcome to actual behavior: assert.deepEqual(outboxes.get('distributor-B'), []);. A mismatch fails the test.
101	`  assert.ok(button(render(), 'Email my sign-in code'));`	Test assertion comparing an expected outcome to actual behavior: assert.ok(button(render(), 'Email my sign-in code'));. A mismatch fails the test.
102	`  assert.match(states[8], /pending changes remain saved/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(states[8], /pending changes remain saved/);. A mismatch fails the test.
103	`  assert.equal(calls.length, 0);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(calls.length, 0);. A mismatch fails the test.
104		Blank line separating logical sections; no executable operation.
105	`  reset();`	Continues the surrounding declaration/expression or text: reset();. Read it with the preceding opening statement; it is not a standalone business operation.
106	`  failStorage = true;`	Assigns the right-hand expression to the named variable/property: failStorage = true;. This is in-memory unless it is later persisted by an explicit call.
107	`  await logout();`	Waits for this asynchronous operation before continuing: await logout();. The returned result/error must still be handled.
108	`  assert.equal(storedSession.id, account.id);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(storedSession.id, account.id);. A mismatch fails the test.
109	`  assert.equal(states[0].id, account.id);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(states[0].id, account.id);. A mismatch fails the test.
110	`  assert.match(states[8], /Could not remove the saved sign-in/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(states[8], /Could not remove the saved sign-in/);. A mismatch fails the test.
111	`  assert.deepEqual(outboxes.get(account.id), [pending]);`	Test assertion comparing an expected outcome to actual behavior: assert.deepEqual(outboxes.get(account.id), [pending]);. A mismatch fails the test.
112		Blank line separating logical sections; no executable operation.
113	`  for (const succeeds of [true, false]) {`	Repeats work over the specified records/items or while this condition holds: for (const succeeds of [true, false]) {. Check where queries/writes occur relative to the loop.
114	`    reset();`	Continues the surrounding declaration/expression or text: reset();. Read it with the preceding opening statement (for (const succeeds of [true, false]) {); it is not a standalone business operation.

Line	Source code	Explanation / reading note
115	`    const flight = deferred();`	Declares/initializes local data used by the surrounding operation: const flight = deferred();. Collection contents and assignments below determine its purpose.
116	`    requestHandler = () => flight.promise;`	Assigns the right-hand expression to the named variable/property: requestHandler = () => flight.promise;. This is in-memory unless it is later persisted by an explicit call.
117	`    find(render(), node => node.props?.accessibilityLabel === 'Refresh and sync').props.onPress();`	Calls the named method: find(render(), node => node.props?.accessibilityLabel === 'Refresh and sync').props.onPress();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
118	`    await flush();`	Waits for this asynchronous operation before continuing: await flush();. The returned result/error must still be handled.
119	`    assert.equal(calls.length, 1);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(calls.length, 1);. A mismatch fails the test.
120	`    await logout();`	Waits for this asynchronous operation before continuing: await logout();. The returned result/error must still be handled.
121	`    if (succeeds) flight.resolve({id: 'receipt-A', status: 'Received'});`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (succeeds) flight.resolve({id: 'receipt-A', status: 'Received'});.
122	`    else flight.reject(Error('Connection lost'));`	Alternative branch taken when the preceding condition is false.
123	`    await flush();`	Waits for this asynchronous operation before continuing: await flush();. The returned result/error must still be handled.
124	`    assert.equal(states[0], null); assert.equal(states[1], null);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(states[0], null); assert.equal(states[1], null);. A mismatch fails the test.
125	`    assert.deepEqual(states[2], []); assert.equal(states[23], '');`	Test assertion comparing an expected outcome to actual behavior: assert.deepEqual(states[2], []); assert.equal(states[23], '');. A mismatch fails the test.
126	`    assert.match(states[8], /Signed out/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(states[8], /Signed out/);. A mismatch fails the test.
127	`    assert.equal(calls.length, 1, 'No follow-up request after logout');`	Test assertion comparing an expected outcome to actual behavior: assert.equal(calls.length, 1, 'No follow-up request after logout');. A mismatch fails the test.
128	`    assert.equal(outboxes.get(account.id).length, succeeds ? 0 : 1);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(outboxes.get(account.id).length, succeeds ? 0 : 1);. A mismatch fails the test.

Line	Source code	Explanation / reading note
129	`    if (!succeeds) assert.equal(outboxes.get(account.id)[0].key, pending.key);`	Test assertion comparing an expected outcome to actual behavior: if (!succeeds) assert.equal(outboxes.get(account.id)[0].key, pending.key);. A mismatch fails the test.
130	`    assert.deepEqual(outboxes.get('distributor-B'), []);`	Test assertion comparing an expected outcome to actual behavior: assert.deepEqual(outboxes.get('distributor-B'), []);. A mismatch fails the test.
131	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
132	`  reset();`	Continues the surrounding declaration/expression or text: reset();. Read it with the preceding opening statement (}); it is not a standalone business operation.
133	`  const rejected = {...pending, status: 400, error: 'Received cases exceed the remaining approved quantity.',`	Declares/initializes local data used by the surrounding operation: const rejected = {...pending, status: 400, error: 'Received cases exceed the remaining approved quantity.',. Collection contents and assignments below determine its purpose.
134	`    body: {action: 'receiveGoods', recordId: 'line-A', receiptKind: 'Paid', cases: 20, batch: '100', expiry: '2026-12-14', requestKey: pending.key}};`	Sets/declares the named object property or style/type member: body: {action: 'receiveGoods', recordId: 'line-A', receiptKind: 'Paid', cases: 20, batch: '100', expiry: '2026-12-14', requestKey: pending.key}};. Interpret it in the enclosing object, props or type definition.
135	`  states[1].primaryOrders = [{Id: 'order-A', Status__c: 'Approved', Order_Lines__r: {records: [`	Assigns the right-hand expression to the named variable/property: states[1].primaryOrders = [{Id: 'order-A', Status__c: 'Approved', Order_Lines__r: {records: [. This is in-memory unless it is later persisted by an explicit call.
136	`    {Id: 'line-A', Cases__c: 1, Product__r: {Name: 'Fixture product'}}]}}];`	Continues the surrounding declaration/expression or text: {Id: 'line-A', Cases__c: 1, Product__r: {Name: 'Fixture product'}}]}}];. Read it with the preceding opening statement (states[1].primaryOrders = [{Id: 'order-A', Status__c: 'Approved', Order_Lines__r: {records: []; it is not a standalone business operation.
137	`  states[2] = [rejected]; states[3] = 'Primary'; states[7] = true;`	Assigns the right-hand expression to the named variable/property: states[2] = [rejected]; states[3] = 'Primary'; states[7] = true;. This is in-memory unless it is later persisted by an explicit call.
138	`  outboxes.set(account.id, [rejected]);`	Calls the named method: outboxes.set(account.id, [rejected]);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
139	`  const correct = button(render(), 'Correct rejected receipt');`	Declares/initializes local data used by the surrounding operation: const correct = button(render(), 'Correct rejected receipt');. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
140	`  assert.equal(correct.props.disabled, false, 'Correction remains available during refresh');`	Test assertion comparing an expected outcome to actual behavior: assert.equal(correct.props.disabled, false, 'Correction remains available during refresh');. A mismatch fails the test.
141	`  correct.props.onPress();`	Calls the named method: correct.props.onPress();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
142	`  assert.equal(states[14].correctionKey, rejected.key);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(states[14].correctionKey, rejected.key);. A mismatch fails the test.
143	`  assert.equal(states[15], '20'); assert.equal(states[16], '100'); assert.equal(states[17], '2026-12-14');`	Test assertion comparing an expected outcome to actual behavior: assert.equal(states[15], '20'); assert.equal(states[16], '100'); assert.equal(states[17], '2026-12-14');. A mismatch fails the test.
144	`  assert.deepEqual(outboxes.get(account.id), [rejected], 'Opening form must not delete pending work');`	Test assertion comparing an expected outcome to actual behavior: assert.deepEqual(outboxes.get(account.id), [rejected], 'Opening form must not delete pending work');. A mismatch fails the test.
145	`  button(render(), 'Review goods receipt').props.onPress();`	Calls the named method: button(render(), 'Review goods receipt').props.onPress();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
146	`  assert.equal(states[18], null); assert.match(states[22], /approves 1 case/);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(states[18], null); assert.match(states[22], /approves 1 case/);. A mismatch fails the test.
147	`  states[15] = '1';`	Assigns the right-hand expression to the named variable/property: states[15] = '1';. This is in-memory unless it is later persisted by an explicit call.
148	`  button(render(), 'Review goods receipt').props.onPress();`	Calls the named method: button(render(), 'Review goods receipt').props.onPress();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
149	`  assert.equal(states[18].replacesKey, rejected.key);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(states[18].replacesKey, rejected.key);. A mismatch fails the test.
150	`  assert.equal(states[18].body.cases, 1);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(states[18].body.cases, 1);. A mismatch fails the test.
151	`  assert.deepEqual(outboxes.get(account.id), [rejected], 'Review must not replace pending work before confirmation');`	Test assertion comparing an expected outcome to actual behavior: assert.deepEqual(outboxes.get(account.id), [rejected], 'Review must not replace pending work before confirmation');. A mismatch fails the test.
152	`  states[7] = false;`	Assigns the right-hand expression to the named variable/property: states[7] = false;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
153	`  const saving = deferred(); requestHandler = () => saving.promise;`	Declares/initializes local data used by the surrounding operation: const saving = deferred(); requestHandler = () => saving.promise;. Collection contents and assignments below determine its purpose.
154	`  button(render(), 'Confirm and save').props.onPress(); await flush();`	Waits for this asynchronous operation before continuing: button(render(), 'Confirm and save').props.onPress(); await flush();. The returned result/error must still be handled.
155	`  assert.equal(outboxes.get(account.id).length, 1);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(outboxes.get(account.id).length, 1);. A mismatch fails the test.
156	`  assert.equal(outboxes.get(account.id)[0].key, rejected.key);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(outboxes.get(account.id)[0].key, rejected.key);. A mismatch fails the test.
157	`  assert.equal(outboxes.get(account.id)[0].body.cases, 1);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(outboxes.get(account.id)[0].body.cases, 1);. A mismatch fails the test.
158	`  assert.equal(outboxes.get(account.id)[0].status, undefined);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(outboxes.get(account.id)[0].status, undefined);. A mismatch fails the test.
159	`  assert.equal(calls.length, 1); assert.equal(calls[0][2].requestKey, rejected.key);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(calls.length, 1); assert.equal(calls[0][2].requestKey, rejected.key);. A mismatch fails the test.
160	`  saving.reject(Error('Offline fixture')); await flush();`	Waits for this asynchronous operation before continuing: saving.reject(Error('Offline fixture')); await flush();. The returned result/error must still be handled.
161	`  assert.equal(outboxes.get(account.id).length, 1, 'Failed send retains corrected request');`	Test assertion comparing an expected outcome to actual behavior: assert.equal(outboxes.get(account.id).length, 1, 'Failed send retains corrected request');. A mismatch fails the test.
162	`  console.log('PASS: logout, account isolation, late sync, and rejected receipt correction/preservation/idempotency. No real network calls.');`	Calls the named method: console.log('PASS: logout, account isolation, late sync, and rejected receipt correction/preservation/idempotency. No real network calls.');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
163	`})().catch(error => { console.error(error); process.exitCode = 1; });`	Calls the named method: })().catch(error => { console.error(error); process.exitCode = 1; });. Its implementation defines the side effect/result; use the symbol/file index to follow it.

dms-mobile/scripts/check-ui.cjs

Local verification script/configuration. Inspect fixture substitution and assertions to determine which behavior is checked and which external systems are not contacted.

397 numbered source lines | SHA-256 8d360ae518d21d7cd10805c5170d1debc9a4f11dc8d5bf4ffc33a8c3cc837297

Line	Source code	Explanation / reading note
1	`// Read-only UI regression checks. All authentication/data dependencies are stubs;`	Developer comment/documentation: Read-only UI regression checks. All authentication/data dependencies are stubs; It is not executed.
2	`// this script never signs in, sends email, or contacts Salesforce.`	Developer comment/documentation: this script never signs in, sends email, or contacts Salesforce. It is not executed.
3	`const assert = require("node:assert/strict");`	Declares/initializes local data used by the surrounding operation: const assert = require("node:assert/strict");. Collection contents and assignments below determine its purpose.
4	`const fs = require("node:fs");`	Declares/initializes local data used by the surrounding operation: const fs = require("node:fs");. Collection contents and assignments below determine its purpose.
5	`const path = require("node:path");`	Declares/initializes local data used by the surrounding operation: const path = require("node:path");. Collection contents and assignments below determine its purpose.
6	`const Module = require("node:module");`	Declares/initializes local data used by the surrounding operation: const Module = require("node:module");. Collection contents and assignments below determine its purpose.
7	`const ts = require("typescript");`	Declares/initializes local data used by the surrounding operation: const ts = require("typescript");. Collection contents and assignments below determine its purpose.
8	`const React = require("react");`	Declares/initializes local data used by the surrounding operation: const React = require("react");. Collection contents and assignments below determine its purpose.
9	`const { renderToStaticMarkup } = require("react-dom/server");`	Declares/initializes local data used by the surrounding operation: const { renderToStaticMarkup } = require("react-dom/server");. Collection contents and assignments below determine its purpose.
10	`const native = require("react-native-web");`	Declares/initializes local data used by the surrounding operation: const native = require("react-native-web");. Collection contents and assignments below determine its purpose.
11	`const root = path.resolve(__dirname, "..");`	Declares/initializes local data used by the surrounding operation: const root = path.resolve(__dirname, "..");. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
12	`let overrides = [],`	Declares/initializes local data used by the surrounding operation: let overrides = [],. Collection contents and assignments below determine its purpose.
13	`  stateIndex = 0;`	Assigns the right-hand expression to the named variable/property: stateIndex = 0;. This is in-memory unless it is later persisted by an explicit call.
14	`let formOverrides = [], formStateIndex = 0, formError = "";`	Declares/initializes local data used by the surrounding operation: let formOverrides = [], formStateIndex = 0, formError = "";. Collection contents and assignments below determine its purpose.
15	`let portalWidth = 390;`	Declares/initializes local data used by the surrounding operation: let portalWidth = 390;. Collection contents and assignments below determine its purpose.
16	`const portalPlatform = {OS: "web"};`	Declares/initializes local data used by the surrounding operation: const portalPlatform = {OS: "web"};. Collection contents and assignments below determine its purpose.
17	`const cache = new Map();`	Declares/initializes local data used by the surrounding operation: const cache = new Map();. Collection contents and assignments below determine its purpose.
18	`function load(file) {`	Declares a callable function/method: function load(file) {. Parameters supply its inputs; the following block implements the operation.
19	`  if (cache.has(file)) return cache.get(file).exports;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (cache.has(file)) return cache.get(file).exports;.
20	`  const mod = new Module(file, module);`	Declares/initializes local data used by the surrounding operation: const mod = new Module(file, module);. Collection contents and assignments below determine its purpose.
21	`  mod.filename = file;`	Assigns the right-hand expression to the named variable/property: mod.filename = file;. This is in-memory unless it is later persisted by an explicit call.
22	`  mod.paths = Module._nodeModulePaths(path.dirname(file));`	Calls the named method: mod.paths = Module._nodeModulePaths(path.dirname(file));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
23	`  cache.set(file, mod);`	Calls the named method: cache.set(file, mod);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
24	`  mod.require = (name) => {`	Assigns the right-hand expression to the named variable/property: mod.require = (name) => {. This is in-memory unless it is later persisted by an explicit call.
25	`    if (name.endsWith(".png")) return {uri: "nestle-logo.png"};`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (name.endsWith(".png")) return {uri: "nestle-logo.png"};.

Line	Source code	Explanation / reading note
26	`    if (name === "react-native") return file.endsWith("PortalFrame.tsx")`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (name === "react-native") return file.endsWith("PortalFrame.tsx").
27	`      ? {...native, Platform: portalPlatform, useWindowDimensions: () => ({width: portalWidth, height: 900, scale: 1, fontScale: 1})} : {...native, Platform: portalPlatform};`	Continues the surrounding declaration/expression or text: ? {...native, Platform: portalPlatform, useWindowDimensions: () => ({width: portalWidth, height: 900, scale: 1, fontScale: 1})} : {...native, Platform: portalPlatform};. Read it with the preceding opening statement (if (name === "react-native") return file.endsWith("PortalFrame.tsx")); it is not a standalone business operation.
28	`    if (name === "react" && file.endsWith("PortalFrame.tsx")) return {...React, useState: initial => [initial, () => {}]};`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
29	`    if (name === "react" && file.endsWith("PrimaryOrderForm.tsx"))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (name === "react" && file.endsWith("PrimaryOrderForm.tsx")).
30	`      return { ...React, useEffect: () => {}, useState: initial => {`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
31	`        const index = formStateIndex++;`	Declares/initializes local data used by the surrounding operation: const index = formStateIndex++;. Collection contents and assignments below determine its purpose.
32	`        return [index < formOverrides.length ? formOverrides[index] : initial, value => { if(index === 1) formError = value; }];`	Returns [index < formOverrides.length ? formOverrides[index] : initial, value => { if(index === 1) formError = value; }] to the caller (or begins returned UI markup) and ends this execution path.
33	`      } };`	Continues the surrounding declaration/expression or text: } };. Read it with the preceding opening statement (return [index < formOverrides.length ? formOverrides[index] : initial, value => { if(index === 1) formError = value; }]); it is not a standalone business operation.
34	`    if (name === "react" && file.endsWith("DmsApp.tsx"))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (name === "react" && file.endsWith("DmsApp.tsx")).
35	`      return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
36	`        ...React,`	Continues the surrounding declaration/expression or text: ...React,. Read it with the preceding opening statement (return {); it is not a standalone business operation.
37	`        useState: (initial) =>`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.
38	`          React.useState(`	Declares/uses React render state. Its setter schedules a re-render; it does not save a Salesforce record by itself.

Line	Source code	Explanation / reading note
39	`stateIndex < overrides.length ? overrides[stateIndex++] : initial,`	Continues the surrounding declaration/expression or text: stateIndex < overrides.length ? overrides[stateIndex++] : initial,. Read it with the preceding opening statement (React.useState(); it is not a standalone business operation.
40	`),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
41	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42	`if (name === "./api" || name === "../api")`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (name === "./api" || name === "../api").
43	`return {`	Returns { to the caller (or begins returned UI markup) and ends this execution path.
44	`request: () => {`	Sets/declares the named object property or style/type member: request: () => {. Interpret it in the enclosing object, props or type definition.
45	`throw Error("Network calls are forbidden in UI checks");`	Stops this execution path with a validation/error exception: throw Error("Network calls are forbidden in UI checks");. The caller/catch block decides how it is reported.
46	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`ApiError: class extends Error {},`	Declares a class/type: ApiError: class extends Error {},. Members below hold behavior and/or state.
48	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49	`if (name === "./storage" || name === "expo-crypto") return {};`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (name === "./storage" || name === "expo-crypto") return {};.
50	`if (name.startsWith(".")) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (name.startsWith(".")) {.
51	`const base = path.resolve(path.dirname(file), name);`	Declares/initializes local data used by the surrounding operation: const base = path.resolve(path.dirname(file), name);. Collection contents and assignments below determine its purpose.
52	`for (const ext of [".tsx", ".ts"])`	Repeats work over the specified records/items or while this condition holds: for (const ext of [".tsx", ".ts"]). Check where queries/writes occur relative to the loop.

Line	Source code	Explanation / reading note
53	`        if (fs.existsSync(base + ext)) return load(base + ext);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (fs.existsSync(base + ext)) return load(base + ext);.
54	`      }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
55	`      return Module.prototype.require.call(mod, name);`	Returns Module.prototype.require.call(mod, name) to the caller (or begins returned UI markup) and ends this execution path.
56	`    };`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`    mod._compile(`	Calls the named method: mod._compile(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
58	`      ts.transpileModule(fs.readFileSync(file, "utf8"), {`	Calls the named method: ts.transpileModule(fs.readFileSync(file, "utf8"), {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
59	`        compilerOptions: {`	Sets/declares the named object property or style/type member: compilerOptions: {. Interpret it in the enclosing object, props or type definition.
60	`          module: ts.ModuleKind.CommonJS,`	Sets/declares the named object property or style/type member: module: ts.ModuleKind.CommonJS,. Interpret it in the enclosing object, props or type definition.
61	`          jsx: ts.JsxEmit.React,`	Sets/declares the named object property or style/type member: jsx: ts.JsxEmit.React,. Interpret it in the enclosing object, props or type definition.
62	`          esModuleInterop: true,`	Sets/declares the named object property or style/type member: esModuleInterop: true,. Interpret it in the enclosing object, props or type definition.
63	`          target: ts.ScriptTarget.ES2022,`	Sets/declares the named object property or style/type member: target: ts.ScriptTarget.ES2022,. Interpret it in the enclosing object, props or type definition.
64	`        },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
65	`      }).outputText,`	Continues the surrounding declaration/expression or text: }).outputText,. Read it with the preceding opening statement (},); it is not a standalone business operation.
66	`      file,`	Continues the surrounding declaration/expression or text: file,. Read it with the preceding opening statement (}).outputText,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
67	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
68	`  return mod.exports;`	Returns mod.exports to the caller (or begins returned UI markup) and ends this execution path.
69	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
70	`const App = load(path.join(root, "src/DmsApp.tsx")).default;`	Declares/initializes local data used by the surrounding operation: const App = load(path.join(root, "src/DmsApp.tsx")).default;. Collection contents and assignments below determine its purpose.
71	`const session = {`	Declares/initializes local data used by the surrounding operation: const session = {. Collection contents and assignments below determine its purpose.
72	`  id: "ui-only",`	Sets/declares the named object property or style/type member: id: "ui-only",. Interpret it in the enclosing object, props or type definition.
73	`  name: "Preview Distributor",`	Sets/declares the named object property or style/type member: name: "Preview Distributor",. Interpret it in the enclosing object, props or type definition.
74	`  token: "not-a-real-token",`	Sets/declares the named object property or style/type member: token: "not-a-real-token",. Interpret it in the enclosing object, props or type definition.
75	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
76	`const snapshot = {`	Declares/initializes local data used by the surrounding operation: const snapshot = {. Collection contents and assignments below determine its purpose.
77	`  distributor: { Officer__r: { Name: "Preview Officer" } },`	Sets/declares the named object property or style/type member: distributor: { Officer__r: { Name: "Preview Officer" } },. Interpret it in the enclosing object, props or type definition.
78	`  retrievedAt: "2026-10-21T10:00:00Z",`	Sets/declares the named object property or style/type member: retrievedAt: "2026-10-21T10:00:00Z",. Interpret it in the enclosing object, props or type definition.
79	`  truncatedLists: [],`	Sets/declares the named object property or style/type member: truncatedLists: [],. Interpret it in the enclosing object, props or type definition.
80	`  primaryOrders: [],`	Sets/declares the named object property or style/type member: primaryOrders: [],. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
81	`  secondaryOrders: [],`	Sets/declares the named object property or style/type member: secondaryOrders: [],. Interpret it in the enclosing object, props or type definition.
82	`  receipts: [],`	Sets/declares the named object property or style/type member: receipts: [],. Interpret it in the enclosing object, props or type definition.
83	`  invoices: [],`	Sets/declares the named object property or style/type member: invoices: [],. Interpret it in the enclosing object, props or type definition.
84	`  inventory: [],`	Sets/declares the named object property or style/type member: inventory: [],. Interpret it in the enclosing object, props or type definition.
85	`  outlets: [],`	Sets/declares the named object property or style/type member: outlets: [],. Interpret it in the enclosing object, props or type definition.
86	`  stockChecks: [],`	Sets/declares the named object property or style/type member: stockChecks: [],. Interpret it in the enclosing object, props or type definition.
87	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
88	`function render(tab, signedIn = true, data = snapshot, offline = false, needsSignIn = false, sent = false, resendSeconds = 0, extraStates = {}) {`	Declares a callable function/method: function render(tab, signedIn = true, data = snapshot, offline = false, needsSignIn = false, sent = false, resendSeconds = 0, extraStates = {}) {. Parameters supply its inputs; the following block implements the operation.
89	`  stateIndex = 0;`	Assigns the right-hand expression to the named variable/property: stateIndex = 0;. This is in-memory unless it is later persisted by an explicit call.
90	`  overrides = [signedIn ? session : null, signedIn ? data : null, [], tab, "", "", sent, false, "", offline];`	Assigns the right-hand expression to the named variable/property: overrides = [signedIn ? session : null, signedIn ? data : null, [], tab, "", "", sent, false, "", offline];. This is in-memory unless it is later persisted by an explicit call.
91	`  overrides.push("", "Product", "", {}, null, "", "", "", null, false, needsSignIn, resendSeconds);`	Calls the named method: overrides.push("", "Product", "", {}, null, "", "", "", null, false, needsSignIn, resendSeconds);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
92	`  Object.assign(overrides, extraStates);`	Calls the named method: Object.assign(overrides, extraStates);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
93	`  return renderToStaticMarkup(React.createElement(App));`	Returns renderToStaticMarkup(React.createElement(App)) to the caller (or begins returned UI markup) and ends this execution path.

Line	Source code	Explanation / reading note
94	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
95	`assert.match(render("Home", false), /Distributor login email/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Home", false), /Distributor login email/);. A mismatch fails the test.
96	`assert.match(render("Primary"), /Place Primary Order/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Primary"), /Place Primary Order/);. A mismatch fails the test.
97	`for (const status of ["Pending", "Approved", "Rejected"]) {`	Repeats work over the specified records/items or while this condition holds: for (const status of ["Pending", "Approved", "Rejected"]) {. Check where queries/writes occur relative to the loop.
98	`  const secondary = render("Secondary", true, {...snapshot,`	Declares/initializes local data used by the surrounding operation: const secondary = render("Secondary", true, {...snapshot,. Collection contents and assignments below determine its purpose.
99	`    secondaryOrders: [{Id: "so-auto", Name: "SO-AUTO-TEST", DMS_Status__c: status,`	Sets/declares the named object property or style/type member: secondaryOrders: [{Id: "so-auto", Name: "SO-AUTO-TEST", DMS_Status__c: status,. Interpret it in the enclosing object, props or type definition.
100	`      Retailer__r: {Name: "Test outlet"}, Total_Amount__c: 100,`	Sets/declares the named object property or style/type member: Retailer__r: {Name: "Test outlet"}, Total_Amount__c: 100,. Interpret it in the enclosing object, props or type definition.
101	`      lines: [{Id: "line-auto", Product__r: {Name: "Test product"}, Piece_Quantity__c: 2, Line_Amount__c: 100}]}]});`	Sets/declares the named object property or style/type member: lines: [{Id: "line-auto", Product__r: {Name: "Test product"}, Piece_Quantity__c: 2, Line_Amount__c: 100}]}]});. Interpret it in the enclosing object, props or type definition.
102	`  assert.match(secondary, new RegExp("SO-AUTO-TEST.*" + status));`	Test assertion comparing an expected outcome to actual behavior: assert.match(secondary, new RegExp("SO-AUTO-TEST.*" + status));. A mismatch fails the test.
103	`  assert.match(secondary, /Test product/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(secondary, /Test product/);. A mismatch fails the test.
104	`  assert.doesNotMatch(secondary, /Decision notes|>Approve<|>Reject</);`	Test assertion comparing an expected outcome to actual behavior: assert.doesNotMatch(secondary, /Decision notes|>Approve<|>Reject</);. A mismatch fails the test.
105	`  if (status === "Pending") assert.match(secondary, /Awaiting Salesforce automatic approval/);`	Test assertion comparing an expected outcome to actual behavior: if (status === "Pending") assert.match(secondary, /Awaiting Salesforce automatic approval/);. A mismatch fails the test.

Line	Source code	Explanation / reading note
106	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
107	`assert.match(render("Home"), /Approved outlet orders/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Home"), /Approved outlet orders/);. A mismatch fails the test.
108	`assert.doesNotMatch(render("Home"), /Outlet orders awaiting decision|record your decision/);`	Test assertion comparing an expected outcome to actual behavior: assert.doesNotMatch(render("Home"), /Outlet orders awaiting decision|record your decision/);. A mismatch fails the test.
109	`const { receiptExpiry, validateGoodsReceipt } = load(path.join(root, " src/goodsReceipt.ts"));`	Declares/initializes local data used by the surrounding operation: const { receiptExpiry, validateGoodsReceipt } = load(path.join(root, "src/goodsReceipt.ts"));. Collection contents and assignments below determine its purpose.
110	`assert.equal(receiptExpiry("14-12-2026"), "2026-12-14");`	Test assertion comparing an expected outcome to actual behavior: assert.equal(receiptExpiry("14-12-2026"), "2026-12-14");. A mismatch fails the test.
111	`assert.equal(receiptExpiry("2026-12-14"), "2026-12-14");`	Test assertion comparing an expected outcome to actual behavior: assert.equal(receiptExpiry("2026-12-14"), "2026-12-14");. A mismatch fails the test.
112	`assert.equal(receiptExpiry("29-02-2028"), "2028-02-29");`	Test assertion comparing an expected outcome to actual behavior: assert.equal(receiptExpiry("29-02-2028"), "2028-02-29");. A mismatch fails the test.
113	`for (const invalid of ["31-02-2026", "2026-02-29", "2026-13-01", "14/12/26", "", " 2026-12-00"])`	Repeats work over the specified records/items or while this condition holds: for (const invalid of ["31-02-2026", "2026-02-29", "2026-13-01", "14/12/26", "", "2026-12-00"]). Check where queries/writes occur relative to the loop.
114	`  assert.equal(receiptExpiry(invalid), null);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(receiptExpiry(invalid), null);. A mismatch fails the test.
115	`assert.deepEqual(validateGoodsReceipt("01", " 01 ", "14-12-2026").value, {cases: 1, batch: "01", expiry: "2026-12-14"});`	Test assertion comparing an expected outcome to actual behavior: assert.deepEqual(validateGoodsReceipt("01", " 01 ", "14-12-2026").value, {cases: 1, batch: "01", expiry: "2026-12-14"});. A mismatch fails the test.
116	`for (const cases of ["0", "-1", "1.5", "100001", ""])`	Repeats work over the specified records/items or while this condition holds: for (const cases of ["0", "-1", "1.5", "100001", ""]). Check where queries/writes occur relative to the loop.
117	`  assert.ok(validateGoodsReceipt(cases, "01", "2026-12-14").error);`	Test assertion comparing an expected outcome to actual behavior: assert.ok(validateGoodsReceipt(cases, "01", "2026-12-14").error);. A mismatch fails the test.
118	`assert.ok(validateGoodsReceipt("1", "", "2026-12-14").error);`	Test assertion comparing an expected outcome to actual behavior: assert.ok(validateGoodsReceipt("1", "", "2026-12-14").error);. A mismatch fails the test.

Line	Source code	Explanation / reading note
119	`assert.match(validateGoodsReceipt("20", "100", "14-12-2026", 1).error, /approves 1 case\(s\), but you entered 20/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(validateGoodsReceipt("20", "100", "14-12-2026", 1).error, /approves 1 case\(s\), but you entered 20/);. A mismatch fails the test.
120	`assert.equal(validateGoodsReceipt("1", "100", "14-12-2026", 1).value.cases, 1);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(validateGoodsReceipt("1", "100", "14-12-2026", 1).value.cases, 1);. A mismatch fails the test.
121	`for (const maximum of [0, -1, NaN]) assert.ok(validateGoodsReceipt("1", "100", "14-12-2026", maximum).error);`	Test assertion comparing an expected outcome to actual behavior: for (const maximum of [0, -1, NaN]) assert.ok(validateGoodsReceipt("1", "100", "14-12-2026", maximum).error);. A mismatch fails the test.
122	`const receiptForm = render("Primary", true, snapshot, false, false, false, 0, {`	Declares/initializes local data used by the surrounding operation: const receiptForm = render("Primary", true, snapshot, false, false, false, 0, {. Collection contents and assignments below determine its purpose.
123	`  14: {Id: "line1", receiptKind: "Paid", Product__r: {Name: "Yippee"}},`	Sets/declares the named object property or style/type member: 14: {Id: "line1", receiptKind: "Paid", Product__r: {Name: "Yippee"}},. Interpret it in the enclosing object, props or type definition.
124	`  15: "01", 16: "01", 17: "14-12-2026", 22: "Enter a valid expiry date."`	Sets/declares the named object property or style/type member: 15: "01", 16: "01", 17: "14-12-2026", 22: "Enter a valid expiry date.". Interpret it in the enclosing object, props or type definition.
125	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
126	`assert.match(receiptForm, /YYYY-MM-DD or DD-MM-YYYY/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(receiptForm, /YYYY-MM-DD or DD-MM-YYYY/);. A mismatch fails the test.
127	`assert.match(receiptForm, /Enter a valid expiry date/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(receiptForm, /Enter a valid expiry date/);. A mismatch fails the test.
128	`assert.match(receiptForm, /Confirm and save to create the receipt in Salesforce/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(receiptForm, /Confirm and save to create the receipt in Salesforce/);. A mismatch fails the test.
129	`assert.match(receiptForm, /Previous receipts reduce the remaining quantity/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(receiptForm, /Previous receipts reduce the remaining quantity/);. A mismatch fails the test.

Line	Source code	Explanation / reading note
130	`const receiptList = render("Primary", true, {...snapshot, receipts: [{Id: "grn1", Name: "GRN-TEST", Status__c: "Received", Total_Pieces__c: 72, Total_Value__c: 918}]});`	Declares/initializes local data used by the surrounding operation: const receiptList = render("Primary", true, {...snapshot, receipts: [{Id: "grn1", Name: "GRN-TEST", Status__c: "Received", Total_Pieces__c: 72, Total_Value__c: 918}]});. Collection contents and assignments below determine its purpose.
131	`assert.match(receiptList, /Goods receipts saved in Salesforce/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(receiptList, /Goods receipts saved in Salesforce/);. A mismatch fails the test.
132	`assert.match(receiptList, /GRN-TEST/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(receiptList, /GRN-TEST/);. A mismatch fails the test.
133	`assert.match(receiptList, /72 pieces/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(receiptList, /72 pieces/);. A mismatch fails the test.
134	`assert.match(render("Primary", true, snapshot, true), /Open sync and sign-in/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Primary", true, snapshot, true), /Open sync and sign-in/);. A mismatch fails the test.
135	`assert.doesNotMatch(render("Primary", true, snapshot, true), /No primary records are currently linked/);`	Test assertion comparing an expected outcome to actual behavior: assert.doesNotMatch(render("Primary", true, snapshot, true), /No primary records are currently linked/);. A mismatch fails the test.
136	`assert.match(render("Sync", true, snapshot, true), /Sign in again/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Sync", true, snapshot, true), /Sign in again/);. A mismatch fails the test.
137	`for (const tab of ["Home", "Primary", "Sync"]) {`	Repeats work over the specified records/items or while this condition holds: for (const tab of ["Home", "Primary", "Sync"]) {. Check where queries/writes occur relative to the loop.
138	`  const renewal = render(tab, true, snapshot, true, true);`	Declares/initializes local data used by the surrounding operation: const renewal = render(tab, true, snapshot, true, true);. Collection contents and assignments below determine its purpose.
139	`  assert.match(renewal, /Your distribution workspace/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(renewal, /Your distribution workspace/);. A mismatch fails the test.
140	`  assert.match(renewal, /Distributor login email/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(renewal, /Distributor login email/);. A mismatch fails the test.
141	`  assert.match(renewal, /Email my sign-in code/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(renewal, /Email my sign-in code/);. A mismatch fails the test.

Line	Source code	Explanation / reading note
142	`  assert.doesNotMatch(renewal, /Business overview|Place Primary Order|Sync centre|Preview Officer/);`	Test assertion comparing an expected outcome to actual behavior: assert.doesNotMatch(renewal, /Business overview|Place Primary Order|Sync centre|Preview Officer/);. A mismatch fails the test.
143	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
144	`assert.match(render("Home", false), /Email my sign-in code/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Home", false), /Email my sign-in code/);. A mismatch fails the test.
145	`assert.match(render("Home", false), /I already received a code/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Home", false), /I already received a code/);. A mismatch fails the test.
146	`const codeEntry = render("Home", false, null, false, false, true);`	Declares/initializes local data used by the surrounding operation: const codeEntry = render("Home", false, null, false, false, true);. Collection contents and assignments below determine its purpose.
147	`assert.match(codeEntry, /Six-digit code/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(codeEntry, /Six-digit code/);. A mismatch fails the test.
148	`assert.match(codeEntry, /Verify and sign in/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(codeEntry, /Verify and sign in/);. A mismatch fails the test.
149	`assert.match(codeEntry, /Send a new code/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(codeEntry, /Send a new code/);. A mismatch fails the test.
150	`assert.match(codeEntry, /Change email address/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(codeEntry, /Change email address/);. A mismatch fails the test.
151	`assert.match(render("Home", false, null, false, false, true, 42), /Resend code in 42s/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Home", false, null, false, false, true, 42), /Resend code in 42s/);. A mismatch fails the test.
152	`assert.doesNotMatch(codeEntry, /I already received a code/);`	Test assertion comparing an expected outcome to actual behavior: assert.doesNotMatch(codeEntry, /I already received a code/);. A mismatch fails the test.
153	`assert.match(render("Home"), /Business overview/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Home"), /Business overview/);. A mismatch fails the test.
154	`assert.match(render("Home"), /Preview Officer/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Home"), /Preview Officer/);. A mismatch fails the test.

Line	Source code	Explanation / reading note
155	`assert.match(render("Home"), /Purchased vs sold/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Home"), /Purchased vs sold/);. A mismatch fails the test.
156	`assert.match(render("Home"), /Dashboard and reports/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Home"), /Dashboard and reports/);. A mismatch fails the test.
157	`assert.match(render("More"), /Outlet assets/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("More"), /Outlet assets/);. A mismatch fails the test.
158	`assert.match(render("Assets"), /No assets records are currently linked/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Assets"), /No assets records are currently linked/);. A mismatch fails the test.
159	`assert.match(render("Reports"), /Reports have not loaded/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Reports"), /Reports have not loaded/);. A mismatch fails the test.
160	`const returnSnapshot = {...snapshot,`	Declares/initializes local data used by the surrounding operation: const returnSnapshot = {...snapshot,. Collection contents and assignments below determine its purpose.
161	`  primaryReturns: [{Id: "pr1", Name: "PRIMARY-RETURN-TEST", Status__c: "Submitted",`	Sets/declares the named object property or style/type member: primaryReturns: [{Id: "pr1", Name: "PRIMARY-RETURN-TEST", Status__c: "Submitted",. Interpret it in the enclosing object, props or type definition.
162	`    Employee__r: {Name: "Test employee"}, Total_Cases__c: 2, Total_Amount__c: 400}],`	Sets/declares the named object property or style/type member: Employee__r: {Name: "Test employee"}, Total_Cases__c: 2, Total_Amount__c: 400}],. Interpret it in the enclosing object, props or type definition.
163	`  returns: [{Id: "sr1", Name: "SECONDARY-RETURN-TEST", DMS_Status__c: "Pending",`	Sets/declares the named object property or style/type member: returns: [{Id: "sr1", Name: "SECONDARY-RETURN-TEST", DMS_Status__c: "Pending",. Interpret it in the enclosing object, props or type definition.
164	`    Outlet__r: {Name: "Test outlet"}, Product__r: {Name: "Test product"}, Quantity__c: 3,`	Sets/declares the named object property or style/type member: Outlet__r: {Name: "Test outlet"}, Product__r: {Name: "Test product"}, Quantity__c: 3,. Interpret it in the enclosing object, props or type definition.
165	`    Return_Reason__c: "Damaged"}]};`	Sets/declares the named object property or style/type member: Return_Reason__c: "Damaged"}]};. Interpret it in the enclosing object, props or type definition.
166	`const primaryReturns = render("Returns", true, returnSnapshot);`	Declares/initializes local data used by the surrounding operation: const primaryReturns = render("Returns", true, returnSnapshot);. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
167	`assert.match(primaryReturns, /Primary returns/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(primaryReturns, /Primary returns/);. A mismatch fails the test.
168	`assert.match(primaryReturns, /Secondary returns/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(primaryReturns, /Secondary returns/);. A mismatch fails the test.
169	`assert.match(primaryReturns, /PRIMARY-RETURN-TEST/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(primaryReturns, /PRIMARY-RETURN-TEST/);. A mismatch fails the test.
170	`assert.match(primaryReturns, /2 cases/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(primaryReturns, /2 cases/);. A mismatch fails the test.
171	`assert.doesNotMatch(primaryReturns, /SECONDARY-RETURN-TEST|Decision notes/);`	Test assertion comparing an expected outcome to actual behavior: assert.doesNotMatch(primaryReturns, /SECONDARY-RETURN-TEST|Decision notes/);. A mismatch fails the test.
172	`const secondaryReturns = render("Returns", true, returnSnapshot, false, false, false, 0, {25: "Secondary"});`	Declares/initializes local data used by the surrounding operation: const secondaryReturns = render("Returns", true, returnSnapshot, false, false, false, 0, {25: "Secondary"});. Collection contents and assignments below determine its purpose.
173	`assert.match(secondaryReturns, /SECONDARY-RETURN-TEST/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(secondaryReturns, /SECONDARY-RETURN-TEST/);. A mismatch fails the test.
174	`assert.match(secondaryReturns, /3 pieces/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(secondaryReturns, /3 pieces/);. A mismatch fails the test.
175	`assert.match(secondaryReturns, /Damaged/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(secondaryReturns, /Damaged/);. A mismatch fails the test.
176	`assert.match(secondaryReturns, /Approve/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(secondaryReturns, /Approve/);. A mismatch fails the test.
177	`assert.match(secondaryReturns, /Reject/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(secondaryReturns, /Reject/);. A mismatch fails the test.
178	`assert.doesNotMatch(secondaryReturns, /PRIMARY-RETURN-TEST/);`	Test assertion comparing an expected outcome to actual behavior: assert.doesNotMatch(secondaryReturns, /PRIMARY-RETURN-TEST/);. A mismatch fails the test.
179	`assert.match(render("Returns"), /No primary returns/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Returns"), /No primary returns/);. A mismatch fails the test.

Line	Source code	Explanation / reading note
180	`assert.match(render("Returns", true, snapshot, false, false, false, 0, {25: "Secondary"}), /No secondary returns/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Returns", true, snapshot, false, false, false, 0, {25: "Secondary"}), /No secondary returns/);. A mismatch fails the test.
181	`const reports = {`	Declares/initializes local data used by the surrounding operation: const reports = {. Collection contents and assignments below determine its purpose.
182	`  period: { start: "2026-10-01", today: "2026-10-21" },`	Sets/declares the named object property or style/type member: period: { start: "2026-10-01", today: "2026-10-21" },. Interpret it in the enclosing object, props or type definition.
183	`  calculatedAt: "2026-10-21T10:00:00Z",`	Sets/declares the named object property or style/type member: calculatedAt: "2026-10-21T10:00:00Z",. Interpret it in the enclosing object, props or type definition.
184	`  sales: {`	Sets/declares the named object property or style/type member: sales: {. Interpret it in the enclosing object, props or type definition.
185	`    current: 200,`	Sets/declares the named object property or style/type member: current: 200,. Interpret it in the enclosing object, props or type definition.
186	`    previous: 100,`	Sets/declares the named object property or style/type member: previous: 100,. Interpret it in the enclosing object, props or type definition.
187	`    target: 500,`	Sets/declares the named object property or style/type member: target: 500,. Interpret it in the enclosing object, props or type definition.
188	`    previousTarget: null,`	Sets/declares the named object property or style/type member: previousTarget: null,. Interpret it in the enclosing object, props or type definition.
189	`    achievement: 40,`	Sets/declares the named object property or style/type member: achievement: 40,. Interpret it in the enclosing object, props or type definition.
190	`    byEmployee: [],`	Sets/declares the named object property or style/type member: byEmployee: [],. Interpret it in the enclosing object, props or type definition.
191	`    byArea: [],`	Sets/declares the named object property or style/type member: byArea: [],. Interpret it in the enclosing object, props or type definition.
192	`    byProduct: [],`	Sets/declares the named object property or style/type member: byProduct: [],. Interpret it in the enclosing object, props or type definition.
193	`    basis: "Booked sales",`	Sets/declares the named object property or style/type member: basis: "Booked sales",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
194	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
195	`  beats: [`	Sets/declares the named object property or style/type member: beats: [. Interpret it in the enclosing object, props or type definition.
196	`    {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (beats: []); it is not a standalone business operation.
197	`      id: "beat1",`	Sets/declares the named object property or style/type member: id: "beat1",. Interpret it in the enclosing object, props or type definition.
198	`      name: "Fixture beat",`	Sets/declares the named object property or style/type member: name: "Fixture beat",. Interpret it in the enclosing object, props or type definition.
199	`      assigned: 2,`	Sets/declares the named object property or style/type member: assigned: 2,. Interpret it in the enclosing object, props or type definition.
200	`      planned: 2,`	Sets/declares the named object property or style/type member: planned: 2,. Interpret it in the enclosing object, props or type definition.
201	`      visited: 1,`	Sets/declares the named object property or style/type member: visited: 1,. Interpret it in the enclosing object, props or type definition.
202	`      productive: 1,`	Sets/declares the named object property or style/type member: productive: 1,. Interpret it in the enclosing object, props or type definition.
203	`      productivity: 100,`	Sets/declares the named object property or style/type member: productivity: 100,. Interpret it in the enclosing object, props or type definition.
204	`    },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
205	`  ],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
206	`  coverage: { buyers: 1, outlets: 2, percent: 50, areas: [] },`	Sets/declares the named object property or style/type member: coverage: { buyers: 1, outlets: 2, percent: 50, areas: [] },. Interpret it in the enclosing object, props or type definition.
207	`  stock: {`	Sets/declares the named object property or style/type member: stock: {. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
208	`    onHand: 20,`	Sets/declares the named object property or style/type member: onHand: 20,. Interpret it in the enclosing object, props or type definition.
209	`    available: 18,`	Sets/declares the named object property or style/type member: available: 18,. Interpret it in the enclosing object, props or type definition.
210	`    nearExpiry: 1,`	Sets/declares the named object property or style/type member: nearExpiry: 1,. Interpret it in the enclosing object, props or type definition.
211	`    expired: 0,`	Sets/declares the named object property or style/type member: expired: 0,. Interpret it in the enclosing object, props or type definition.
212	`    noRecentSales: 1,`	Sets/declares the named object property or style/type member: noRecentSales: 1,. Interpret it in the enclosing object, props or type definition.
213	`    batches: [],`	Sets/declares the named object property or style/type member: batches: [],. Interpret it in the enclosing object, props or type definition.
214	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
215	`  definitions: {`	Sets/declares the named object property or style/type member: definitions: {. Interpret it in the enclosing object, props or type definition.
216	`    beats: "Planned shops",`	Sets/declares the named object property or style/type member: beats: "Planned shops",. Interpret it in the enclosing object, props or type definition.
217	`    coverage: "Active buyers",`	Sets/declares the named object property or style/type member: coverage: "Active buyers",. Interpret it in the enclosing object, props or type definition.
218	`    stock: "No invoice movement",`	Sets/declares the named object property or style/type member: stock: "No invoice movement",. Interpret it in the enclosing object, props or type definition.
219	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
220	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
221	`const reportMarkup = render("Reports", true, { ...snapshot, reports });`	Declares/initializes local data used by the surrounding operation: const reportMarkup = render("Reports", true, { ...snapshot, reports });. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
222	`for (const title of [`	Repeats work over the specified records/items or while this condition holds: for (const title of [. Check where queries/writes occur relative to the loop.
223	`  "BEAT PRODUCTIVITY",`	Continues the surrounding declaration/expression or text: "BEAT PRODUCTIVITY",. Read it with the preceding opening statement (for (const title of []); it is not a standalone business operation.
224	`  "OUTLET COVERAGE",`	Continues the surrounding declaration/expression or text: "OUTLET COVERAGE",. Read it with the preceding opening statement ("BEAT PRODUCTIVITY",); it is not a standalone business operation.
225	`  "DISTRIBUTOR STOCK",`	Continues the surrounding declaration/expression or text: "DISTRIBUTOR STOCK",. Read it with the preceding opening statement ("OUTLET COVERAGE",); it is not a standalone business operation.
226	`])`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
227	`  assert.ok(reportMarkup.includes(title));`	Test assertion comparing an expected outcome to actual behavior: assert.ok(reportMarkup.includes(title));. A mismatch fails the test.
228	`for (const screen of ["Home", "Reports"]) {`	Repeats work over the specified records/items or while this condition holds: for (const screen of ["Home", "Reports"]) {. Check where queries/writes occur relative to the loop.
229	`  assert.doesNotMatch(render(screen, true, {...snapshot, reports}), /SALES VS TARGET|By employee|By area|By product|Target not configured/);`	Test assertion comparing an expected outcome to actual behavior: assert.doesNotMatch(render(screen, true, {...snapshot, reports}), /SALES VS TARGET|By employee|By area|By product|Target not configured/);. A mismatch fails the test.
230	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
231	`assert.doesNotMatch(render("More"), /Sales targets/);`	Test assertion comparing an expected outcome to actual behavior: assert.doesNotMatch(render("More"), /Sales targets/);. A mismatch fails the test.
232	`for (const platform of ["android", "ios"]) {`	Repeats work over the specified records/items or while this condition holds: for (const platform of ["android", "ios"]) {. Check where queries/writes occur relative to the loop.
233	`  portalPlatform.OS = platform;`	Assigns the right-hand expression to the named variable/property: portalPlatform.OS = platform;. This is in-memory unless it is later persisted by an explicit call.
234	`  for (const screen of ["Home", "Reports"]) {`	Repeats work over the specified records/items or while this condition holds: for (const screen of ["Home", "Reports"]) {. Check where queries/writes occur relative to the loop.

Line	Source code	Explanation / reading note
235	`    assert.match(render(screen, true, {...snapshot, reports}), /SALES VS TARGET/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render(screen, true, {...snapshot, reports}), /SALES VS TARGET/);. A mismatch fails the test.
236	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
237	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
238	`portalPlatform.OS = "web";`	Assigns the right-hand expression to the named variable/property: portalPlatform.OS = "web";. This is in-memory unless it is later persisted by an explicit call.
239	`assert.match(reportMarkup, /Fixture beat/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(reportMarkup, /Fixture beat/);. A mismatch fails the test.
240	`assert.match(`	Test assertion comparing an expected outcome to actual behavior: assert.match(. A mismatch fails the test.
241	`  render("Assets", true, {`	Continues the surrounding declaration/expression or text: render("Assets", true, {. Read it with the preceding opening statement (assert.match(); it is not a standalone business operation.
242	`    ...snapshot,`	Continues the surrounding declaration/expression or text: ...snapshot,. Read it with the preceding opening statement (render("Assets", true, {); it is not a standalone business operation.
243	`    assets: [`	Sets/declares the named object property or style/type member: assets: [. Interpret it in the enclosing object, props or type definition.
244	`      {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement (assets: []); it is not a standalone business operation.
245	`        Id: "asset1",`	Declares/initializes local data used by the surrounding operation: Id: "asset1",. Collection contents and assignments below determine its purpose.
246	`        Asset_Name__c: "Display cooler",`	Sets/declares the named object property or style/type member: Asset_Name__c: "Display cooler",. Interpret it in the enclosing object, props or type definition.
247	`        Status__c: "Working",`	Sets/declares the named object property or style/type member: Status__c: "Working",. Interpret it in the enclosing object, props or type definition.

Line	Source code	Explanation / reading note
248	`        Outlet__r: { Name: "Fixture outlet" },`	Sets/declares the named object property or style/type member: Outlet__r: { Name: "Fixture outlet" },. Interpret it in the enclosing object, props or type definition.
249	`      },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
250	`    ],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
251	`  }),`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
252	`  /Display cooler/,`	Continues the surrounding declaration/expression or text: /Display cooler/,. Read it with the preceding opening statement (}),); it is not a standalone business operation.
253	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
254	`assert.match(render("Home", true, null), /No Salesforce snapshot/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("Home", true, null), /No Salesforce snapshot/);. A mismatch fails the test.
255	`for (const tab of [`	Repeats work over the specified records/items or while this condition holds: for (const tab of [. Check where queries/writes occur relative to the loop.
256	`  "Primary",`	Continues the surrounding declaration/expression or text: "Primary",. Read it with the preceding opening statement (for (const tab of []); it is not a standalone business operation.
257	`  "Secondary",`	Continues the surrounding declaration/expression or text: "Secondary",. Read it with the preceding opening statement ("Primary",); it is not a standalone business operation.
258	`  "Inventory",`	Continues the surrounding declaration/expression or text: "Inventory",. Read it with the preceding opening statement ("Secondary",); it is not a standalone business operation.
259	`  "Outlets",`	Continues the surrounding declaration/expression or text: "Outlets",. Read it with the preceding opening statement ("Inventory",); it is not a standalone business operation.
260	`  "Stock checks",`	Continues the surrounding declaration/expression or text: "Stock checks",. Read it with the preceding opening statement ("Outlets",); it is not a standalone business operation.
261	`]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement ("Stock checks",); it is not a standalone business operation.

Line	Source code	Explanation / reading note
262	`  assert.match(render(tab), /No .* records are currently linked/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render(tab), /No .* records are currently linked/);. A mismatch fails the test.
263	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
264	`assert.match(render("More"), /Support tickets/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("More"), /Support tickets/);. A mismatch fails the test.
265	`assert.match(render("More"), /Log out/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(render("More"), /Log out/);. A mismatch fails the test.
266	`for (const tab of ["Returns", "Tickets", "Sync"])`	Repeats work over the specified records/items or while this condition holds: for (const tab of ["Returns", "Tickets", "Sync"]). Check where queries/writes occur relative to the loop.
267	`  assert.ok(render(tab).includes("DMS Distributor Portal") || render(tab).includes("DISTRIBUTOR PORTAL") || render(tab).includes("Expand sidebar"));`	Test assertion comparing an expected outcome to actual behavior: assert.ok(render(tab).includes("DMS Distributor Portal") || render(tab).includes("DISTRIBUTOR PORTAL") || render(tab).includes("Expand sidebar"));. A mismatch fails the test.
268	`const { BottomNavigation, MenuItem } = load(`	Declares/initializes local data used by the surrounding operation: const { BottomNavigation, MenuItem } = load(. Collection contents and assignments below determine its purpose.
269	`  path.join(root, "src/components/Workspace.tsx"),`	Calls the named method: path.join(root, "src/components/Workspace.tsx"),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
270	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
271	`for (const tab of [`	Repeats work over the specified records/items or while this condition holds: for (const tab of [. Check where queries/writes occur relative to the loop.
272	`  "Home",`	Continues the surrounding declaration/expression or text: "Home",. Read it with the preceding opening statement (for (const tab of []); it is not a standalone business operation.
273	`  "Primary",`	Continues the surrounding declaration/expression or text: "Primary",. Read it with the preceding opening statement ("Home",); it is not a standalone business operation.
274	`  "Secondary",`	Continues the surrounding declaration/expression or text: "Secondary",. Read it with the preceding opening statement ("Primary",); it is not a standalone business operation.

Line	Source code	Explanation / reading note
275	`  "Inventory",`	Continues the surrounding declaration/expression or text: "Inventory",. Read it with the preceding opening statement ("Secondary",); it is not a standalone business operation.
276	`  "Outlets",`	Continues the surrounding declaration/expression or text: "Outlets",. Read it with the preceding opening statement ("Inventory",); it is not a standalone business operation.
277	`  "More",`	Continues the surrounding declaration/expression or text: "More",. Read it with the preceding opening statement ("Outlets",); it is not a standalone business operation.
278	`  "Returns",`	Continues the surrounding declaration/expression or text: "Returns",. Read it with the preceding opening statement ("More",); it is not a standalone business operation.
279	`  "Tickets",`	Continues the surrounding declaration/expression or text: "Tickets",. Read it with the preceding opening statement ("Returns",); it is not a standalone business operation.
280	`  "Stock checks",`	Continues the surrounding declaration/expression or text: "Stock checks",. Read it with the preceding opening statement ("Tickets",); it is not a standalone business operation.
281	`  "Sync",`	Continues the surrounding declaration/expression or text: "Sync",. Read it with the preceding opening statement ("Stock checks",); it is not a standalone business operation.
282	`]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement ("Sync",); it is not a standalone business operation.
283	`  let target;`	Declares/initializes local data used by the surrounding operation: let target;. Collection contents and assignments below determine its purpose.
284	`  const nav = BottomNavigation({ tab, onSelect: (value) => (target = value) });`	Declares/initializes local data used by the surrounding operation: const nav = BottomNavigation({ tab, onSelect: (value) => (target = value) });. Collection contents and assignments below determine its purpose.
285	`  const items = nav.props.children;`	Declares/initializes local data used by the surrounding operation: const items = nav.props.children;. Collection contents and assignments below determine its purpose.
286	`  assert.equal(`	Test assertion comparing an expected outcome to actual behavior: assert.equal(. A mismatch fails the test.
287	`    items.filter((item) => item.props.accessibilityState.selected).length,`	Transforms/selects/aggregates collection values with the callback shown here: items.filter((item) => item.props.accessibilityState.selected).length,. Read the callback body and result assignment together.

Line	Source code	Explanation / reading note
288	`    1,`	Continues the surrounding declaration/expression or text: 1,. Read it with the preceding opening statement (items.filter((item) => item.props.accessibilityState.selected).length,); it is not a standalone business operation.
289	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
290	`  items.forEach((item) => {`	Calls the named method: items.forEach((item) => {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
291	`    item.props.onPress();`	Calls the named method: item.props.onPress();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
292	`    assert.equal(target, item.key);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(target, item.key);. A mismatch fails the test.
293	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
294	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
295	`let opened = false;`	Declares/initializes local data used by the surrounding operation: let opened = false;. Collection contents and assignments below determine its purpose.
296	`MenuItem({`	Continues the surrounding declaration/expression or text: MenuItem({. Read it with the preceding opening statement (let opened = false;); it is not a standalone business operation.
297	`  title: "Support",`	Sets/declares the named object property or style/type member: title: "Support",. Interpret it in the enclosing object, props or type definition.
298	`  description: "",`	Sets/declares the named object property or style/type member: description: "",. Interpret it in the enclosing object, props or type definition.
299	`  icon: "",`	Sets/declares the named object property or style/type member: icon: "",. Interpret it in the enclosing object, props or type definition.
300	`  onPress: () => (opened = true),`	Sets/declares the named object property or style/type member: onPress: () => (opened = true),. Interpret it in the enclosing object, props or type definition.
301	`}).props.onPress();`	Calls the named method: }).props.onPress();. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
302	`assert.ok(opened);`	Test assertion comparing an expected outcome to actual behavior: assert.ok(opened);. A mismatch fails the test.
303	`// Exercise the real form validation and review callback with synthetic catalogue data.`	Developer comment/documentation: Exercise the real form validation and review callback with synthetic catalogue data. It is not executed.
304	`const Form = load(path.join(root, "src/components/PrimaryOrderForm.tsx")).default;`	Declares/initializes local data used by the surrounding operation: const Form = load(path.join(root, "src/components/PrimaryOrderForm.tsx")).default;. Collection contents and assignments below determine its purpose.
305	`const primaryProduct = { Id: "product", Name: "Fixture cases", DMS_Case_Price__c: 100, Units_Per_Case__c: 10,`	Declares/initializes local data used by the surrounding operation: const primaryProduct = { Id: "product", Name: "Fixture cases", DMS_Case_Price__c: 100, Units_Per_Case__c: 10,. Collection contents and assignments below determine its purpose.
306	`  schemes: [{ Id: "scheme", Name: "Buy two get one", Minimum_Cases__c: 2, Free_Cases__c: 1 }] };`	Sets/declares the named object property or style/type member: schemes: [{ Id: "scheme", Name: "Buy two get one", Minimum_Cases__c: 2, Free_Cases__c: 1 }] };. Interpret it in the enclosing object, props or type definition.
307	`function form(cases = "2", price = 100) {`	Declares a callable function/method: function form(cases = "2", price = 100) {. Parameters supply its inputs; the following block implements the operation.
308	`  formStateIndex = 0; formError = "";`	Assigns the right-hand expression to the named variable/property: formStateIndex = 0; formError = "";. This is in-memory unless it is later persisted by an explicit call.
309	`  formOverrides = [{ distributor: { Name: "Fixture distributor", Officer__r: { Name: "Fixture DO", IsActive: true } }, products: [{ ...primaryProduct, DMS_Case_Price__c: price }] }, "", "", "", { product: { cases, schemeId: "scheme" } }, false];`	Assigns the right-hand expression to the named variable/property: formOverrides = [{ distributor: { Name: "Fixture distributor", Officer__r: { Name: "Fixture DO", IsActive: true } }, products: [{ ...primaryProduct, DMS_Case_Price__c: price }] }, "", "", "", { produc. This is in-memory unless it is later persisted by an explicit call.
310	`  let reviewed;`	Declares/initializes local data used by the surrounding operation: let reviewed;. Collection contents and assignments below determine its purpose.
311	`  const tree = Form({ token: "synthetic", disabled: false, onReview: body => { reviewed = body; } });`	Declares/initializes local data used by the surrounding operation: const tree = Form({ token: "synthetic", disabled: false, onReview: body => { reviewed = body; } });. Collection contents and assignments below determine its purpose.
312	`  function walk(node) {`	Declares a callable function/method: function walk(node) {. Parameters supply its inputs; the following block implements the operation.
313	`    if (!node || typeof node !== "object") return [];`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!node || typeof node !== "object") return [];.

Line	Source code	Explanation / reading note
314	`return [node, ...React.Children.toArray(node.props?.children).flatMap(walk)];`	Returns [node, ...React.Children.toArray(node.props?.children).flatMap(walk)] to the caller (or begins returned UI markup) and ends this execution path.
315	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
316	`const review = walk(tree).find(node => node.props?.onPress && node.props?.children?.props?.children === "Review order for approval");`	Declares/initializes local data used by the surrounding operation: const review = walk(tree).find(node => node.props?.onPress && node.props?.children?.props?.children === "Review order for approval");. Collection contents and assignments below determine its purpose.
317	`assert.ok(review); review.props.onPress();`	Test assertion comparing an expected outcome to actual behavior: assert.ok(review); review.props.onPress();. A mismatch fails the test.
318	`return { markup: renderToStaticMarkup(tree), reviewed };`	Returns { markup: renderToStaticMarkup(tree), reviewed } to the caller (or begins returned UI markup) and ends this execution path.
319	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
320	`const valid = form();`	Declares/initializes local data used by the surrounding operation: const valid = form();. Collection contents and assignments below determine its purpose.
321	`assert.deepEqual(valid.reviewed.lines, [{ productId: "product", cases: 2, schemeId: "scheme" }]);`	Test assertion comparing an expected outcome to actual behavior: assert.deepEqual(valid.reviewed.lines, [{ productId: "product", cases: 2, schemeId: "scheme" }]);. A mismatch fails the test.
322	`assert.match(valid.markup, /Quantity \(whole cases\)/); assert.match(valid.markup, /Applicable Primary schemes/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(valid.markup, /Quantity \(whole cases\)/); assert.match(valid.markup, /Applicable Primary schemes/);. A mismatch fails the test.
323	`assert.match(valid.markup, /Buy two get one/); assert.match(valid.markup, /Fixture DO/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(valid.markup, /Buy two get one/); assert.match(valid.markup, /Fixture DO/);. A mismatch fails the test.
324	`assert.equal(form("1").reviewed, undefined); assert.match(formError, /scheme minimum/);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(form("1").reviewed, undefined); assert.match(formError, /scheme minimum/);. A mismatch fails the test.
325	`assert.equal(form("0.5").reviewed, undefined); assert.match(formError, /whole cases/);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(form("0.5").reviewed, undefined); assert.match(formError, /whole cases/);. A mismatch fails the test.

Line	Source code	Explanation / reading note
326	`assert.equal(form("2", null).reviewed, undefined); assert.match(formError, /case pricing/);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(form("2", null).reviewed, undefined); assert.match(formError, /case pricing/);. A mismatch fails the test.
327	`formStateIndex = 0;`	Assigns the right-hand expression to the named variable/property: formStateIndex = 0;. This is in-memory unless it is later persisted by an explicit call.
328	`formOverrides = [null, "Please sign in to DMS again", "", "", {}, false, true];`	Assigns the right-hand expression to the named variable/property: formOverrides = [null, "Please sign in to DMS again", "", "", {}, false, true];. This is in-memory unless it is later persisted by an explicit call.
329	`let renewalOpened = false;`	Declares/initializes local data used by the surrounding operation: let renewalOpened = false;. Collection contents and assignments below determine its purpose.
330	`const expiredForm = Form({ token: "expired", disabled: false, onReview: () => {}, onSignIn: () => { renewalOpened = true; } });`	Declares/initializes local data used by the surrounding operation: const expiredForm = Form({ token: "expired", disabled: false, onReview: () => {}, onSignIn: () => { renewalOpened = true; } });. Collection contents and assignments below determine its purpose.
331	`function findRenewal(node) {`	Declares a callable function/method: function findRenewal(node) {. Parameters supply its inputs; the following block implements the operation.
332	`  if (!node || typeof node !== "object") return undefined;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!node || typeof node !== "object") return undefined;.
333	`  if (node.props?.onPress && node.props?.children?.props?.children === "Sign in again") return node;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (node.props?.onPress && node.props?.children?.props?.children === "Sign in again") return node;.
334	`  return React.Children.toArray(node.props?.children).map(findRenewal).find(Boolean);`	Returns React.Children.toArray(node.props?.children).map(findRenewal).find(Boolean) to the caller (or begins returned UI markup) and ends this execution path.
335	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
336	`const renewalButton = findRenewal(expiredForm);`	Declares/initializes local data used by the surrounding operation: const renewalButton = findRenewal(expiredForm);. Collection contents and assignments below determine its purpose.
337	`assert.ok(renewalButton); renewalButton.props.onPress(); assert.equal(renewalOpened, true);`	Test assertion comparing an expected outcome to actual behavior: assert.ok(renewalButton); renewalButton.props.onPress(); assert.equal(renewalOpened, true);. A mismatch fails the test.

Line	Source code	Explanation / reading note
338	`assert.match(renderToStaticMarkup(expiredForm), /Saved pending work stays on this device/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(renderToStaticMarkup(expiredForm), /Saved pending work stays on this device/);. A mismatch fails the test.
339	`console.log(`	Calls the named method: console.log(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
340	`  "PASS: workspace routes, navigation, primary order button, case validation, scheme minimum and review payload. No network calls.",`	Continues the surrounding declaration/expression or text: "PASS: workspace routes, navigation, primary order button, case validation, scheme minimum and review payload. No network calls.",. Read it with the preceding opening statement (console.log(); it is not a standalone business operation.
341	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
342	`if (process.argv.includes("--preview")) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (process.argv.includes("--preview")) {.
343	`  // A static visual test artifact, not an authenticated app or a login bypass.`	Developer comment/documentation: A static visual test artifact, not an authenticated app or a login bypass. It is not executed.
344	`  const screens = [`	Declares/initializes local data used by the surrounding operation: const screens = [. Collection contents and assignments below determine its purpose.
345	`    "Home",`	Continues the surrounding declaration/expression or text: "Home",. Read it with the preceding opening statement (const screens = []; it is not a standalone business operation.
346	`    "Primary",`	Continues the surrounding declaration/expression or text: "Primary",. Read it with the preceding opening statement ("Home",); it is not a standalone business operation.
347	`    "Secondary",`	Continues the surrounding declaration/expression or text: "Secondary",. Read it with the preceding opening statement ("Primary",); it is not a standalone business operation.
348	`    "Inventory",`	Continues the surrounding declaration/expression or text: "Inventory",. Read it with the preceding opening statement ("Secondary",); it is not a standalone business operation.
349	`    "Outlets",`	Continues the surrounding declaration/expression or text: "Outlets",. Read it with the preceding opening statement ("Inventory",); it is not a standalone business operation.
350	`    "More",`	Continues the surrounding declaration/expression or text: "More",. Read it with the preceding opening statement ("Outlets",); it is not a standalone business operation.

Line	Source code	Explanation / reading note
351	`"Returns",`	Continues the surrounding declaration/expression or text: "Returns",. Read it with the preceding opening statement ("More",); it is not a standalone business operation.
352	`"Tickets",`	Continues the surrounding declaration/expression or text: "Tickets",. Read it with the preceding opening statement ("Returns",); it is not a standalone business operation.
353	`"Stock checks",`	Continues the surrounding declaration/expression or text: "Stock checks",. Read it with the preceding opening statement ("Tickets",); it is not a standalone business operation.
354	`"Sync",`	Continues the surrounding declaration/expression or text: "Sync",. Read it with the preceding opening statement ("Stock checks",); it is not a standalone business operation.
355	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
356	`const panels = screens`	Declares/initializes local data used by the surrounding operation: const panels = screens. Collection contents and assignments below determine its purpose.
357	`.map(`	Transforms/selects/aggregates collection values with the callback shown here: .map(. Read the callback body and result assignment together.
358	`(tab) =>`	Continues the surrounding declaration/expression or text: (tab) =>. Read it with the preceding opening statement (.map(); it is not a standalone business operation.
359	`` `<section><h2>${tab} · UI test only</h2><div class="phone">${render(tab)}</div></section>`, ``	Assigns the right-hand expression to the named variable/property: `<section><h2>${tab} · UI test only</h2><div class="phone">${render(tab)}</div></section>`,. This is in-memory unless it is later persisted by an explicit call.
360	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
361	`.join("");`	Continues the surrounding declaration/expression or text: .join("");. Read it with the preceding opening statement ( )); it is not a standalone business operation.
362	`const sheet = native.StyleSheet.getSheet();`	Declares/initializes local data used by the surrounding operation: const sheet = native.StyleSheet.getSheet();. Collection contents and assignments below determine its purpose.
363	`const output = path.join(root, "../docs/dms-ui-preview.html");`	Declares/initializes local data used by the surrounding operation: const output = path.join(root, "../docs/dms-ui-preview.html");. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
364	`  fs.writeFileSync(`	Calls the named method: fs.writeFileSync(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
365	`    output,`	Continues the surrounding declaration/expression or text: output,. Read it with the preceding opening statement (fs.writeFileSync(); it is not a standalone business operation.
366	`    `<!doctype html><html><head><meta charset="utf-8"><title>DMS visual checks — synthetic data</title><style>${sheet.textContent}</style><style>body{margin:20px;background:#E8E1D3;font-family:Arial}main{display:flex;gap:24px;align-items:flex-start}h1{font-size:20px}h2{font-size:14px}.phone{width:390px;height:844px;display:flex;overflow:hidden;border:1px solid #D6E3DE;border-radius:16px}section{flex-shrink:0}</style></head><body> Visual test only — synthetic distributor, no Salesforce connection <main>${panels}</main></body></html>`,	Assigns the right-hand expression to the named variable/property: `<!doctype html><html><head><meta charset="utf-8"><title>DMS visual checks - synthetic data</title><style>${sheet.textContent}</style><style>body{margin:20px;background:#E8E1D3;font-family:Arial}main{. This is in-memory unless it is later persisted by an explicit call.
367	`  );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
368	`  console.log(`Visual test artifact: ${output}`);`	Calls the named method: console.log(`Visual test artifact: ${output}`);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
369	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
370	`// Desktop portal routes delegate to the existing application handlers.`	Developer comment/documentation: Desktop portal routes delegate to the existing application handlers. It is not executed.
371	`const {default: PortalFrame, portalLinks} = load(path.join(root, "src/components/PortalFrame.tsx"));`	Declares/initializes local data used by the surrounding operation: const {default: PortalFrame, portalLinks} = load(path.join(root, "src/components/PortalFrame.tsx"));. Collection contents and assignments below determine its purpose.
372	`portalWidth = 1440;`	Assigns the right-hand expression to the named variable/property: portalWidth = 1440;. This is in-memory unless it is later persisted by an explicit call.
373	`let portalSelected, portalRefresh = 0, portalLogout = 0;`	Declares/initializes local data used by the surrounding operation: let portalSelected, portalRefresh = 0, portalLogout = 0;. Collection contents and assignments below determine its purpose.
374	`const portalProps = {signedIn: true, tab: "Primary", name: "Fixture distributor", pending: 1, busy: false, loggingOut: false,`	Declares/initializes local data used by the surrounding operation: const portalProps = {signedIn: true, tab: "Primary", name: "Fixture distributor", pending: 1, busy: false, loggingOut: false,. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
375	`  onSelect: value => {portalSelected = value;}, onRefresh: () => portalRefresh++, onLogout: () => portalLogout++, children: React.createElement("div", null, "Existing screen")};`	Sets/declares the named object property or style/type member: onSelect: value => {portalSelected = value;}, onRefresh: () => portalRefresh++, onLogout: () => portalLogout++, children: React.createElement("div", null, "Existing screen")};. Interpret it in the enclosing object, props or type definition.
376	`function nodes(node) { return !node || typeof node !== "object" ? [] : [node, ...React.Children.toArray(node.props?.children).flatMap(nodes)]; }`	Declares a callable function/method: function nodes(node) { return !node || typeof node !== "object" ? [] : [node, ...React.Children.toArray(node.props?.children).flatMap(nodes)]; }. Parameters supply its inputs; the following block implements the operation.
377	`const portal = PortalFrame(portalProps);`	Declares/initializes local data used by the surrounding operation: const portal = PortalFrame(portalProps);. Collection contents and assignments below determine its purpose.
378	`const portalButtons = nodes(portal).filter(node => node.props?.accessibilityRole === "button");`	Declares/initializes local data used by the surrounding operation: const portalButtons = nodes(portal).filter(node => node.props?.accessibilityRole === "button");. Collection contents and assignments below determine its purpose.
379	`for (const [key, label] of portalLinks) {`	Repeats work over the specified records/items or while this condition holds: for (const [key, label] of portalLinks) {. Check where queries/writes occur relative to the loop.
380	`  portalButtons.find(node => node.props.accessibilityLabel === label).props.onPress();`	Transforms/selects/aggregates collection values with the callback shown here: portalButtons.find(node => node.props.accessibilityLabel === label).props.onPress();. Read the callback body and result assignment together.
381	`  assert.equal(portalSelected, key);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(portalSelected, key);. A mismatch fails the test.
382	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
383	`assert.equal(portalButtons.filter(node => node.props.accessibilityState?.selected).length, 1);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(portalButtons.filter(node => node.props.accessibilityState?.selected).length, 1);. A mismatch fails the test.
384	`portalButtons.find(node => node.props.accessibilityLabel === "Refresh portal data").props.onPress();`	Transforms/selects/aggregates collection values with the callback shown here: portalButtons.find(node => node.props.accessibilityLabel === "Refresh portal data").props.onPress();. Read the callback body and result assignment together.
385	`portalButtons.find(node => node.props.accessibilityLabel === "Log out of distributor").props.onPress();`	Transforms/selects/aggregates collection values with the callback shown here: portalButtons.find(node => node.props.accessibilityLabel === "Log out of distributor").props.onPress();. Read the callback body and result assignment together.

Line	Source code	Explanation / reading note
386	`assert.equal(portalRefresh, 1); assert.equal(portalLogout, 1);`	Test assertion comparing an expected outcome to actual behavior: assert.equal(portalRefresh, 1); assert.equal(portalLogout, 1);. A mismatch fails the test.
387	`const portalMarkup = renderToStaticMarkup(portal);`	Declares/initializes local data used by the surrounding operation: const portalMarkup = renderToStaticMarkup(portal);. Collection contents and assignments below determine its purpose.
388	`assert.match(portalMarkup, /WORKSPACE/); assert.match(portalMarkup, /Fixture distributor/); assert.match(portalMarkup, /Existing screen/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(portalMarkup, /WORKSPACE/); assert.match(portalMarkup, /Fixture distributor/); assert.match(portalMarkup, /Existing screen/);. A mismatch fails the test.
389	`assert.doesNotMatch(renderToStaticMarkup(PortalFrame({...portalProps, signedIn: false})), /WORKSPACE|Log out of distributor/);`	Test assertion comparing an expected outcome to actual behavior: assert.doesNotMatch(renderToStaticMarkup(PortalFrame({...portalProps, signedIn: false})), /WORKSPACE|Log out of distributor/);. A mismatch fails the test.
390	`portalWidth = 390;`	Assigns the right-hand expression to the named variable/property: portalWidth = 390;. This is in-memory unless it is later persisted by an explicit call.
391	`const narrowWeb = renderToStaticMarkup(PortalFrame(portalProps));`	Declares/initializes local data used by the surrounding operation: const narrowWeb = renderToStaticMarkup(PortalFrame(portalProps));. Collection contents and assignments below determine its purpose.
392	`assert.match(narrowWeb, /Expand sidebar/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(narrowWeb, /Expand sidebar/);. A mismatch fails the test.
393	`assert.doesNotMatch(narrowWeb, /DMS PORTAL/);`	Test assertion comparing an expected outcome to actual behavior: assert.doesNotMatch(narrowWeb, /DMS PORTAL/);. A mismatch fails the test.
394	`portalPlatform.OS = "android";`	Assigns the right-hand expression to the named variable/property: portalPlatform.OS = "android";. This is in-memory unless it is later persisted by an explicit call.
395	`assert.doesNotMatch(renderToStaticMarkup(PortalFrame(portalProps)), /WORKSPACE/);`	Test assertion comparing an expected outcome to actual behavior: assert.doesNotMatch(renderToStaticMarkup(PortalFrame(portalProps)), /WORKSPACE/);. A mismatch fails the test.
396	`assert.match(renderToStaticMarkup(PortalFrame(portalProps)), /DMS PORTAL/);`	Test assertion comparing an expected outcome to actual behavior: assert.match(renderToStaticMarkup(PortalFrame(portalProps)), /DMS PORTAL/);. A mismatch fails the test.
397	`console.log("PASS: full-browser portal at wide and narrow widths, native mobile navigation, existing routes, refresh, logout and login isolation.");`	Calls the named method: console.log("PASS: full-browser portal at wide and narrow widths, native mobile navigation, existing routes, refresh, logout and login isolation.");. Its implementation defines the side effect/result; use the symbol/file index to follow it.

dms-mobile/tsconfig.json

TypeScript compiler configuration: module resolution, target, strictness and included files. Type checking is not a runtime integration test.

1 numbered source lines | SHA-256 80256f6774a6971613f486cfa0a2c19cb7d1be6b6691d141f63520d1ec003eef

Line	Source code	Explanation / reading note
1	`{"extends":"expo/tsconfig.base","compilerOptions":{"strict":true},"include":["**/*.ts","**/*.tsx"]}`	Continues the surrounding declaration/expression or text: {"extends":"expo/tsconfig.base","compilerOptions":{"strict":true},"include":["**/*.ts","**/*.tsx"]}. Read it with the preceding opening statement; it is not a standalone business operation.

manifest/auto-sync-package.xml

First-party configuration & operations file: auto sync package.xml. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

60 numbered source lines | SHA-256 6b4088f77921d212607521533405e8208a7770ae360bbda9d07bf28fd2c3d6cb

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Package xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Package block; child elements specify its configuration.
3	`    <types><members>*</members><name>ApexClass</name></types>`	Sets types in the enclosing configuration to <members>*</members><name>ApexClass</name>.
4	`    <types><members>*</members><name>ApexTrigger</name></types>`	Sets types in the enclosing configuration to <members>*</members><name>ApexTrigger</name>.
5	`    <types><members>*</members><name>AuraDefinitionBundle</name></types>`	Sets types in the enclosing configuration to <members>*</members><name>AuraDefinitionBundle</name>.
6	`    <types><members>*</members><name>LightningComponentBundle</name></types>`	Sets types in the enclosing configuration to <members>*</members><name>LightningComponentBundle</name>.
7	`    <types><members>*</members><name>ApexPage</name></types>`	Sets types in the enclosing configuration to <members>*</members><name>ApexPage</name>.
8	`    <types><members>SFA_Mobile</members><name>CustomApplication</name></types>`	Sets types in the enclosing configuration to <members>SFA_Mobile</members><name>CustomApplication</name>.
9	`    <types>`	Opens the types block; child elements specify its configuration.
10	`        <members>Attendance__c</members>`	Sets members in the enclosing configuration to Attendance__c.
11	`        <members>Beat__c</members>`	Sets members in the enclosing configuration to Beat__c.
12	`        <members>Employee__c</members>`	Sets members in the enclosing configuration to Employee__c.
13	`        <members>Geography__c</members>`	Sets members in the enclosing configuration to Geography__c.
14	`        <members>Order_Item__c</members>`	Sets members in the enclosing configuration to Order_Item__c.
15	`        <members>Permanent_Journey_Plan__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.

Line	Source code	Explanation / reading note
16	`<members>PJP_Selected_Beat__c</members>`	Sets members in the enclosing configuration to PJP_Selected_Beat__c.
17	`<members>Product__c</members>`	Sets members in the enclosing configuration to Product__c.
18	`<members>Retailer__c</members>`	Sets members in the enclosing configuration to Retailer__c.
19	`<members>Sales_Order__c</members>`	Sets members in the enclosing configuration to Sales_Order__c.
20	`<members>Scheme__c</members>`	Sets members in the enclosing configuration to Scheme__c.
21	`<members>Visit__c</members>`	Sets members in the enclosing configuration to Visit__c.
22	`<name>CustomObject</name>`	Sets name within the enclosing metadata component to CustomObject.
23	`</types>`	Closes the types configuration block.
24	`<types>`	Opens the types block; child elements specify its configuration.
25	`<members>Attendance__c</members>`	Sets members in the enclosing configuration to Attendance__c.
26	`<members>Beat__c</members>`	Sets members in the enclosing configuration to Beat__c.
27	`<members>Employee__c</members>`	Sets members in the enclosing configuration to Employee__c.
28	`<members>Geography__c</members>`	Sets members in the enclosing configuration to Geography__c.
29	`<members>Order_Item__c</members>`	Sets members in the enclosing configuration to Order_Item__c.
30	`<members>Permanent_Journey_Plan__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.
31	`<members>PJP_Planner</members>`	Sets members in the enclosing configuration to PJP_Planner.
32	`<members>Product__c</members>`	Sets members in the enclosing configuration to Product__c.
33	`<members>Retailer__c</members>`	Sets members in the enclosing configuration to Retailer__c.
34	`<members>Sales_Order__c</members>`	Sets members in the enclosing configuration to Sales_Order__c.
35	`<members>Scheme__c</members>`	Sets members in the enclosing configuration to Scheme__c.
36	`<members>Visit__c</members>`	Sets members in the enclosing configuration to Visit__c.
37	`<name>CustomTab</name>`	Sets name within the enclosing metadata component to CustomTab.

Line	Source code	Explanation / reading note
38	`</types>`	Closes the types configuration block.
39	`<types>`	Opens the types block; child elements specify its configuration.
40	`<members>Attendance__c-Attendance Layout</members>`	Sets members in the enclosing configuration to Attendance__c-Attendance Layout.
41	`<members>Beat__c-Beat Layout</members>`	Sets members in the enclosing configuration to Beat__c-Beat Layout.
42	`<members>Employee__c-Employee Layout</members>`	Sets members in the enclosing configuration to Employee__c-Employee Layout.
43	`<members>Geography__c-Geography Layout</members>`	Sets members in the enclosing configuration to Geography__c-Geography Layout.
44	`<members>Order_Item__c-Order Item Layout</members>`	Sets members in the enclosing configuration to Order_Item__c-Order Item Layout.
45	`<members>Permanent_Journey_Plan__c-Permanent Journey Plan Layout</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c-Permanent Journey Plan Layout.
46	`<members>Product__c-Product Layout</members>`	Sets members in the enclosing configuration to Product__c-Product Layout.
47	`<members>Retailer__c-Retailer Layout</members>`	Sets members in the enclosing configuration to Retailer__c-Retailer Layout.
48	`<members>Sales_Order__c-Sales Order Layout</members>`	Sets members in the enclosing configuration to Sales_Order__c-Sales Order Layout.
49	`<members>Scheme__c-Scheme Layout</members>`	Sets members in the enclosing configuration to Scheme__c-Scheme Layout.
50	`<members>Visit__c-Visit Layout</members>`	Sets members in the enclosing configuration to Visit__c-Visit Layout.
51	`<name>Layout</name>`	Sets name within the enclosing metadata component to Layout.
52	`</types>`	Closes the types configuration block.
53	`<types><members>SFA_Mobile_User</members><name>PermissionSet</name></types>`	Sets types in the enclosing configuration to <members>SFA_Mobile_User</members><name>PermissionSet</name>.
54	`<types>`	Opens the types block; child elements specify its configuration.
55	`<members>Beat__c.Select_Outlets</members>`	Sets members in the enclosing configuration to Beat__c.Select_Outlets.
56	`<members>Employee__c.Upload_Profile_Picture</members>`	Sets members in the enclosing configuration to Employee__c.Upload_Profile_Picture.
57	`<name>QuickAction</name>`	Sets name within the enclosing metadata component to QuickAction.
58	`</types>`	Closes the types configuration block.

Line	Source code	Explanation / reading note
59	`    <version>65.0</version>`	Sets version in the enclosing configuration to 65.0.
60	`</Package>`	Closes the Package configuration block.

manifest/dms-distributor-order.xml

First-party configuration & operations file: dms distributor order.xml. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

8 numbered source lines | SHA-256 b08802ad385fe7f115d1054408c2872e968ee1ec3afea282cbe0a29fbfc0ab1b

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Package xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Package block; child elements specify its configuration.
3	`  <types><members>DMS_Primary_Order__c.Order_Source__c</members><name>CustomField</name></types>`	Sets types in the enclosing configuration to <members>DMS_Primary_Order__c.Order_Source__c</members><name>CustomField</name>.
4	`  <types><members>DmsEmployeeTransactions</members><members>DmsPortalApi</members><members>DmsPrimaryWorkflow</members><members>DmsDistributorOrderTest</members><name>ApexClass</name></types>`	Sets types in the enclosing configuration to <members>DmsEmployeeTransactions</members><members>DmsPortalApi</members><members>DmsPrimaryWorkflow</members><members>DmsDistributorOrderTest</members><name>ApexClass</name>.
5	`  <types><members>DMS_Primary_Order__c-Primary Order Layout</members><name>Layout</name></types>`	Sets types in the enclosing configuration to <members>DMS_Primary_Order__c-Primary Order Layout</members><name>Layout</name>.
6	`  <types><members>DMS_Backend_Transactions</members><members>DMS_Distributor_Officer</members><name>PermissionSet</name></types>`	Sets types in the enclosing configuration to <members>DMS_Backend_Transactions</members><members>DMS_Distributor_Officer</members><name>PermissionSet</name>.
7	`  <version>67.0</version>`	Sets version in the enclosing configuration to 67.0.
8	`</Package>`	Closes the Package configuration block.

manifest/dms-employee-allocation.xml

First-party configuration & operations file: dms employee allocation.xml. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

7 numbered source lines | SHA-256 f47387e5113afec0907697c5a91000a733da2e00cb15c96093091425cd405182

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Package xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Package block; child elements specify its configuration.
3	`<types><members>DmsEmployeeAllocator</members><members>DmsEmployeeAllocatorTest</members><name>ApexClass</name></types>`	Sets types in the enclosing configuration to <members>DmsEmployeeAllocator</members><members>DmsEmployeeAllocatorTest</members><name>ApexClass</name>.
4	`<types><members>DmsEmployeeAllocation</members><name>ApexTrigger</name></types>`	Sets types in the enclosing configuration to <members>DmsEmployeeAllocation</members><name>ApexTrigger</name>.
5	`<types><members>Employee__c.DMS_Distributor__c</members><members>DMS_Distributor__c.Employee_Allocation_Order__c</members><members>DMS_Distributor__c.Salesforce_User__c</members><name>CustomField</name></types>`	Sets types in the enclosing configuration to <members>Employee__c.DMS_Distributor__c</members><members>DMS_Distributor__c.Employee_Allocation_Order__c</members><members>DMS_Distributor__c.Salesforce_User__c</members><name>CustomField</name>.
6	`<types><members>DMS_Allocation_State__c</members><name>CustomObject</name></types>`	Sets types in the enclosing configuration to <members>DMS_Allocation_State__c</members><name>CustomObject</name>.
7	`<version>65.0</version></Package>`	Opens the version block; child elements specify its configuration.

manifest/dms-foundation.xml

First-party configuration & operations file: dms foundation.xml. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

2 numbered source lines | SHA-256 67bac88a648f9ecc6ddce9857122107c780e0ccf2b7ba94e76470a119276d554

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Package xmlns="http://soap.sforce.com/2006/04/metadata"><types><members>DMS_Distributor__c</members><members>DMS_Primary_Order__c</members><members>DMS_Primary_Order_Line__c</members><name>CustomObject</name></types><types><members>Retailer__c.DMS_Distributor__c</members><members>Sales_Order__c.DMS_Distributor__c</members><members>Sales_Order__c.DMS_Status__c</members><members>Sales_Order__c.DMS_Decision_Notes__c</members><members>Sales_Order__c.DMS_Decided_At__c</members><members>Product__c.DMS_Case_Price__c</members><members>Scheme__c.Sales_Channel__c</members><name>CustomField</name></types><types><members>DMS_Primary_Order__c</members><name>Workflow</name></types><types><members>DMS_Primary_Order__c.Company_Officer_Approval</members><name>ApprovalProcess</name></types><types><members>DMS_Distributor__c</members><members>DMS_Primary_Order__c</members><members>DMS_Primary_Order_Line__c</members><name>CustomTab</name></types><version>65.0</version></Package>`	Sets Package in the enclosing configuration to <types><members>DMS_Distributor__c</members><members>DMS_Primary_Order__c</members><members>DMS_Primary_Order_Line__c</members><name>CustomObject</name></types><types><members>Retailer__c.DMS_Distribu.

manifest/dms-management-reports.xml

First-party configuration & operations file: dms management reports.xml. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

12 numbered source lines | SHA-256 d518cf2a38dea002bcb38aa4588f5b6aa40dbc7f916da28c6d69a4137e85fd7f

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Package xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Package block; child elements specify its configuration.
3	`  <types><members>DMS_Sales_Target__c</members><name>CustomObject</name></types>`	Sets types in the enclosing configuration to <members>DMS_Sales_Target__c</members><name>CustomObject</name>.
4	`  <types><members>DMS_Sales_Target__c</members><name>CustomTab</name></types>`	Sets types in the enclosing configuration to <members>DMS_Sales_Target__c</members><name>CustomTab</name>.
5	`  <types><members>DMS_Sales_Target__c-Sales Target Layout</members><name>Layout</name></types>`	Sets types in the enclosing configuration to <members>DMS_Sales_Target__c-Sales Target Layout</members><name>Layout</name>.
6	`  <types><members>DMS_Report_Reader</members><members>DMS_Target_Manager</members><members>DMS_Support_Admin</members><name>PermissionSet</name></types>`	Sets types in the enclosing configuration to <members>DMS_Report_Reader</members><members>DMS_Target_Manager</members><members>DMS_Support_Admin</members><name>PermissionSet</name>.
7	`  <types><members>DMS_Manage_Tickets</members><name>CustomPermission</name></types>`	Sets types in the enclosing configuration to <members>DMS_Manage_Tickets</members><name>CustomPermission</name>.
8	`  <types><members>DmsSalesTarget</members><name>ApexTrigger</name></types>`	Sets types in the enclosing configuration to <members>DmsSalesTarget</members><name>ApexTrigger</name>.
9	`  <types><members>DmsReportConfigurationTest</members><members>DmsTicketRules</members><name>ApexClass</name></types>`	Sets types in the enclosing configuration to <members>DmsReportConfigurationTest</members><members>DmsTicketRules</members><name>ApexClass</name>.
10	`  <types><members>DMS_Management</members><name>CustomApplication</name></types>`	Sets types in the enclosing configuration to <members>DMS_Management</members><name>CustomApplication</name>.
11	`  <version>65.0</version>`	Sets version in the enclosing configuration to 65.0.
12	`</Package>`	Closes the Package configuration block.

manifest/dms-org-schema.xml

First-party configuration & operations file: dms org schema.xml. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

84 numbered source lines | SHA-256 61daa604c95b9a54da1b6adab7388f4f61e0b72db22d08c4d0a18f6b9ff41b88

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Package xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Package block; child elements specify its configuration.
3	`    <types>`	Opens the types block; child elements specify its configuration.
4	`        <members>DMS_Distributor__c</members>`	Sets members in the enclosing configuration to DMS_Distributor__c.
5	`        <members>DMS_Primary_Order__c</members>`	Sets members in the enclosing configuration to DMS_Primary_Order__c.
6	`        <members>DMS_Primary_Order_Line__c</members>`	Sets members in the enclosing configuration to DMS_Primary_Order_Line__c.
7	`        <members>DMS_Goods_Receipt__c</members>`	Sets members in the enclosing configuration to DMS_Goods_Receipt__c.
8	`        <members>DMS_Goods_Receipt_Line__c</members>`	Sets members in the enclosing configuration to DMS_Goods_Receipt_Line__c.
9	`        <members>DMS_Inventory__c</members>`	Sets members in the enclosing configuration to DMS_Inventory__c.
10	`        <members>DMS_Invoice__c</members>`	Sets members in the enclosing configuration to DMS_Invoice__c.
11	`        <members>DMS_Invoice_Line__c</members>`	Sets members in the enclosing configuration to DMS_Invoice_Line__c.
12	`        <members>DMS_Primary_Return__c</members>`	Sets members in the enclosing configuration to DMS_Primary_Return__c.
13	`        <members>DMS_Primary_Return_Line__c</members>`	Sets members in the enclosing configuration to DMS_Primary_Return_Line__c.
14	`        <members>DMS_Credit_Note__c</members>`	Sets members in the enclosing configuration to DMS_Credit_Note__c.
15	`        <members>DMS_Credit_Note_Line__c</members>`	Sets members in the enclosing configuration to DMS_Credit_Note_Line__c.
16	`        <name>CustomObject</name>`	Sets name within the enclosing metadata component to CustomObject.
17	`    </types>`	Closes the types configuration block.
18	`    <types>`	Opens the types block; child elements specify its configuration.
19	`        <members>Product__c.Boxes_Per_Case__c</members>`	Sets members in the enclosing configuration to Product__c.Boxes_Per_Case__c.

Line	Source code	Explanation / reading note
20	`<members>Product__c.Pieces_Per_Box__c</members>`	Sets members in the enclosing configuration to Product__c.Pieces_Per_Box__c.
21	`<members>Product__c.Box_Conversion_Pieces__c</members>`	Sets members in the enclosing configuration to Product__c.Box_Conversion_Pieces__c.
22	`<members>Scheme__c.Minimum_Cases__c</members>`	Sets members in the enclosing configuration to Scheme__c.Minimum_Cases__c.
23	`<members>Scheme__c.Free_Cases__c</members>`	Sets members in the enclosing configuration to Scheme__c.Free_Cases__c.
24	`<members>Scheme__c.Free_Gift__c</members>`	Sets members in the enclosing configuration to Scheme__c.Free_Gift__c.
25	`<members>Scheme__c.Gift_Quantity__c</members>`	Sets members in the enclosing configuration to Scheme__c.Gift_Quantity__c.
26	`<members>Product_Return__c.DMS_Distributor__c</members>`	Sets members in the enclosing configuration to Product_Return__c.DMS_Distributor__c.
27	`<members>Product_Return__c.Invoice_Line__c</members>`	Sets members in the enclosing configuration to Product_Return__c.Invoice_Line__c.
28	`<members>Product_Return__c.DMS_Status__c</members>`	Sets members in the enclosing configuration to Product_Return__c.DMS_Status__c.
29	`<members>Product_Return__c.DMS_Decision_Notes__c</members>`	Sets members in the enclosing configuration to Product_Return__c.DMS_Decision_Notes__c.
30	`<members>Product__c.DMS_Case_Price__c</members>`	Sets members in the enclosing configuration to Product__c.DMS_Case_Price__c.
31	`<members>Scheme__c.Sales_Channel__c</members>`	Sets members in the enclosing configuration to Scheme__c.Sales_Channel__c.
32	`<members>Retailer__c.DMS_Distributor__c</members>`	Sets members in the enclosing configuration to Retailer__c.DMS_Distributor__c.
33	`<members>Sales_Order__c.DMS_Distributor__c</members>`	Sets members in the enclosing configuration to Sales_Order__c.DMS_Distributor__c.
34	`<members>Sales_Order__c.DMS_Status__c</members>`	Sets members in the enclosing configuration to Sales_Order__c.DMS_Status__c.
35	`<members>Sales_Order__c.DMS_Decision_Notes__c</members>`	Sets members in the enclosing configuration to Sales_Order__c.DMS_Decision_Notes__c.
36	`<members>Sales_Order__c.DMS_Decided_At__c</members>`	Sets members in the enclosing configuration to Sales_Order__c.DMS_Decided_At__c.
37	`<members>Product_Return__c.Return_Reason__c</members>`	Sets members in the enclosing configuration to Product_Return__c.Return_Reason__c.
38	`<name>CustomField</name>`	Sets name within the enclosing metadata component to CustomField.
39	`</types>`	Closes the types configuration block.
40	`<types>`	Opens the types block; child elements specify its configuration.

Line	Source code	Explanation / reading note
41	`<members>DMS_Distributor__c-DMS Distributor Layout</members>`	Sets members in the enclosing configuration to DMS_Distributor__c-DMS Distributor Layout.
42	`<members>DMS_Primary_Order__c-Primary Order Layout</members>`	Sets members in the enclosing configuration to DMS_Primary_Order__c-Primary Order Layout.
43	`<members>DMS_Primary_Order_Line__c-Primary Order Line Layout</members>`	Sets members in the enclosing configuration to DMS_Primary_Order_Line__c-Primary Order Line Layout.
44	`<members>DMS_Goods_Receipt__c-Goods Receipt Layout</members>`	Sets members in the enclosing configuration to DMS_Goods_Receipt__c-Goods Receipt Layout.
45	`<members>DMS_Goods_Receipt_Line__c-Goods Receipt Line Layout</members>`	Sets members in the enclosing configuration to DMS_Goods_Receipt_Line__c-Goods Receipt Line Layout.
46	`<members>DMS_Inventory__c-Distributor Inventory Layout</members>`	Sets members in the enclosing configuration to DMS_Inventory__c-Distributor Inventory Layout.
47	`<members>DMS_Invoice__c-DMS Invoice Layout</members>`	Sets members in the enclosing configuration to DMS_Invoice__c-DMS Invoice Layout.
48	`<members>DMS_Invoice_Line__c-DMS Invoice Line Layout</members>`	Sets members in the enclosing configuration to DMS_Invoice_Line__c-DMS Invoice Line Layout.
49	`<members>DMS_Primary_Return__c-Primary Return Layout</members>`	Sets members in the enclosing configuration to DMS_Primary_Return__c-Primary Return Layout.
50	`<members>DMS_Primary_Return_Line__c-Primary Return Line Layout</members>`	Sets members in the enclosing configuration to DMS_Primary_Return_Line__c-Primary Return Line Layout.
51	`<members>DMS_Credit_Note__c-Credit Note Layout</members>`	Sets members in the enclosing configuration to DMS_Credit_Note__c-Credit Note Layout.
52	`<members>DMS_Credit_Note_Line__c-Credit Note Line Layout</members>`	Sets members in the enclosing configuration to DMS_Credit_Note_Line__c-Credit Note Line Layout.
53	`<members>Product__c-Product Layout</members>`	Sets members in the enclosing configuration to Product__c-Product Layout.
54	`<members>Scheme__c-Scheme Layout</members>`	Sets members in the enclosing configuration to Scheme__c-Scheme Layout.
55	`<members>Retailer__c-Retailer Layout</members>`	Sets members in the enclosing configuration to Retailer__c-Retailer Layout.
56	`<members>Sales_Order__c-Sales Order Layout</members>`	Sets members in the enclosing configuration to Sales_Order__c-Sales Order Layout.
57	`<members>Product_Return__c-Product Return Layout</members>`	Sets members in the enclosing configuration to Product_Return__c-Product Return Layout.

Line	Source code	Explanation / reading note
58	`<name>Layout</name>`	Sets name within the enclosing metadata component to Layout.
59	`</types>`	Closes the types configuration block.
60	`<types>`	Opens the types block; child elements specify its configuration.
61	`<members>DMS_Distributor__c</members>`	Sets members in the enclosing configuration to DMS_Distributor__c.
62	`<members>DMS_Primary_Order__c</members>`	Sets members in the enclosing configuration to DMS_Primary_Order__c.
63	`<members>DMS_Primary_Order_Line__c</members>`	Sets members in the enclosing configuration to DMS_Primary_Order_Line__c.
64	`<members>DMS_Goods_Receipt__c</members>`	Sets members in the enclosing configuration to DMS_Goods_Receipt__c.
65	`<members>DMS_Goods_Receipt_Line__c</members>`	Sets members in the enclosing configuration to DMS_Goods_Receipt_Line__c.
66	`<members>DMS_Inventory__c</members>`	Sets members in the enclosing configuration to DMS_Inventory__c.
67	`<members>DMS_Invoice__c</members>`	Sets members in the enclosing configuration to DMS_Invoice__c.
68	`<members>DMS_Invoice_Line__c</members>`	Sets members in the enclosing configuration to DMS_Invoice_Line__c.
69	`<members>DMS_Primary_Return__c</members>`	Sets members in the enclosing configuration to DMS_Primary_Return__c.
70	`<members>DMS_Primary_Return_Line__c</members>`	Sets members in the enclosing configuration to DMS_Primary_Return_Line__c.
71	`<members>DMS_Credit_Note__c</members>`	Sets members in the enclosing configuration to DMS_Credit_Note__c.
72	`<members>DMS_Credit_Note_Line__c</members>`	Sets members in the enclosing configuration to DMS_Credit_Note_Line__c.
73	`<name>CustomTab</name>`	Sets name within the enclosing metadata component to CustomTab.
74	`</types>`	Closes the types configuration block.
75	`<types>`	Opens the types block; child elements specify its configuration.
76	`<members>DMS_Management</members>`	Sets members in the enclosing configuration to DMS_Management.
77	`<name>CustomApplication</name>`	Sets name within the enclosing metadata component to CustomApplication.
78	`</types>`	Closes the types configuration block.
79	`<types>`	Opens the types block; child elements specify its configuration.

Line	Source code	Explanation / reading note
80	`<members>DMS_Configuration_Admin</members>`	Sets members in the enclosing configuration to DMS_Configuration_Admin.
81	`<name>PermissionSet</name>`	Sets name within the enclosing metadata component to PermissionSet.
82	`</types>`	Closes the types configuration block.
83	`<version>65.0</version>`	Sets version in the enclosing configuration to 65.0.
84	`</Package>`	Closes the Package configuration block.

manifest/dms-portal.xml

First-party configuration & operations file: dms portal.xml. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

11 numbered source lines | SHA-256 8deb6dd49c8f5324c767cc25d4111cec4466eb070290c6d30eb3fa652da39f78

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Package xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Package block; child elements specify its configuration.
3	`<types><members>DMS_Support_Ticket__c</members><name>CustomObject</name></types>`	Sets types in the enclosing configuration to <members>DMS_Support_Ticket__c</members><name>CustomObject</name>.
4	`<types><members>DMS_Goods_Receipt__c.Request_Key__c</members><members>DMS_Primary_Return__c.Request_Key__c</members><members>DMS_Primary_Order__c.Request_Key__c</members><members>DMS_Primary_Order__c.Request_Hash__c</members><members>DMS_Primary_Return__c.Request_Hash__c</members><name>CustomField</name></types>`	Sets types in the enclosing configuration to <members>DMS_Goods_Receipt__c.Request_Key__c</members><members>DMS_Primary_Return__c.Request_Key__c</members><members>DMS_Primary_Order__c.Request_Key__c</members><members>DMS_Primary_Order__c.Request.
5	`<types><members>DmsPortalApi</members><members>DmsPortalApiTest</members><members>DmsTicketRules</members><members>DmsEmployeeTransactions</members><name>ApexClass</name></types>`	Sets types in the enclosing configuration to <members>DmsPortalApi</members><members>DmsPortalApiTest</members><members>DmsTicketRules</members><members>DmsEmployeeTransactions</members><name>ApexClass</name>.
6	`<types><members>DmsSupportTicket</members><name>ApexTrigger</name></types>`	Sets types in the enclosing configuration to <members>DmsSupportTicket</members><name>ApexTrigger</name>.
7	`<types><members>DMS_Trusted_Backend</members><name>CustomPermission</name></types>`	Sets types in the enclosing configuration to <members>DMS_Trusted_Backend</members><name>CustomPermission</name>.
8	`<types><members>DMS_Backend_Transactions</members><members>DMS_Ticket_Officer</members><name>PermissionSet</name></types>`	Sets types in the enclosing configuration to <members>DMS_Backend_Transactions</members><members>DMS_Ticket_Officer</members><name>PermissionSet</name>.
9	`<types><members>DMS_Support_Ticket__c</members><name>CustomTab</name></types>`	Sets types in the enclosing configuration to <members>DMS_Support_Ticket__c</members><name>CustomTab</name>.
10	`<types><members>DMS_Support_Ticket__c-DMS Support Ticket Layout</members><name>Layout</name></types>`	Sets types in the enclosing configuration to <members>DMS_Support_Ticket__c-DMS Support Ticket Layout</members><name>Layout</name>.
11	`<version>65.0</version></Package>`	Opens the version block; child elements specify its configuration.

manifest/dms-primary-schemes.xml

First-party configuration & operations file: dms primary schemes.xml. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

12 numbered source lines | SHA-256 e53fc7017697c93f8ae6f744d5b81464c824421cae37f92d2295b58d2f163b3d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Package xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Package block; child elements specify its configuration.
3	`<types><members>DMS_Distributor_Survey__c</members><name>CustomObject</name></types>`	Sets types in the enclosing configuration to <members>DMS_Distributor_Survey__c</members><name>CustomObject</name>.
4	`<types><members>DMS_Primary_Order_Line__c.Free_Product__c</members><members>DMS_Primary_Order_Line__c.Free_Pieces_Per_Case__c</members><members>DMS_Primary_Order_Line__c.Total_Pieces__c</members><name>CustomField</name></types>`	Sets types in the enclosing configuration to <members>DMS_Primary_Order_Line__c.Free_Product__c</members><members>DMS_Primary_Order_Line__c.Free_Pieces_Per_Case__c</members><members>DMS_Primary_Order_Line__c.Total_Pieces__c</members><name>Custom.
5	`<types><members>DMS_Goods_Receipt_Line__c.Valid_Receipt_Quantities</members><members>DMS_Goods_Receipt_Line__c.Original_Line_Matches</members><members>Order_Item__c.No_Primary_Scheme</members><name>ValidationRule</name></types>`	Sets types in the enclosing configuration to <members>DMS_Goods_Receipt_Line__c.Valid_Receipt_Quantities</members><members>DMS_Goods_Receipt_Line__c.Original_Line_Matches</members><members>Order_Item__c.No_Primary_Scheme</members><name>Validatio.
6	`<types><members>DmsPortalApi</members><members>DmsPortalApiTest</members><members>DmsPrimarySchemes</members><members>DmsPrimaryWorkflow</members><members>DmsEmployeeTransactions</members><name>ApexClass</name></types>`	Sets types in the enclosing configuration to <members>DmsPortalApi</members><members>DmsPortalApiTest</members><members>DmsPrimarySchemes</members><members>DmsPrimaryWorkflow</members><members>DmsEmployeeTransactions</members><name>ApexClass</na.
7	`<types><members>DmsDistributorSurvey</members><name>ApexTrigger</name></types>`	Sets types in the enclosing configuration to <members>DmsDistributorSurvey</members><name>ApexTrigger</name>.
8	`<types><members>DMS_Monthly_Surveys</members><members>DMS_Backend_Transactions</members><members>DMS_Distributor_Officer</members><name>PermissionSet</name></types>`	Sets types in the enclosing configuration to <members>DMS_Monthly_Surveys</members><members>DMS_Backend_Transactions</members><members>DMS_Distributor_Officer</members><name>PermissionSet</name>.
9	`<types><members>DMS_Management</members><name>CustomApplication</name></types>`	Sets types in the enclosing configuration to <members>DMS_Management</members><name>CustomApplication</name>.
10	`<types><members>DMS_Distributor_Survey__c</members><name>CustomTab</name></types>`	Sets types in the enclosing configuration to <members>DMS_Distributor_Survey__c</members><name>CustomTab</name>.

Line	Source code	Explanation / reading note
11	`<types><members>DMS_Distributor__c-DMS Distributor Layout</members><members>DMS_Distributor_Survey__c-Distributor Survey Layout</members><members>DMS_Primary_Order_Line__c-Primary Order Line Layout</members><name>Layout</name></types>`	Sets types in the enclosing configuration to <members>DMS_Distributor__c-DMS Distributor Layout</members><members>DMS_Distributor_Survey__c-Distributor Survey Layout</members><members>DMS_Primary_Order_Line__c-Primary Order Line Layout</members>.
12	`<version>65.0</version></Package>`	Opens the version block; child elements specify its configuration.

manifest/dms-primary-workflows.xml

First-party configuration & operations file: dms primary workflows.xml. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

8 numbered source lines | SHA-256 6aa6635b2a3a598c52633c5569541eba84068dc1e34a9fefd1df854c4cbe968d

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Package xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Package block; child elements specify its configuration.
3	`<types><members>DmsPrimaryWorkflow</members><members>DmsPrimaryWorkflowTest</members><members>DmsOfficerSharing</members><name>ApexClass</name></types>`	Sets types in the enclosing configuration to <members>DmsPrimaryWorkflow</members><members>DmsPrimaryWorkflowTest</members><members>DmsOfficerSharing</members><name>ApexClass</name>.
4	`<types><members>DMS_Primary_Order__c.Officer_Access__c</members><members>DMS_Primary_Order_Line__c.Officer_Access__c</members><members>DMS_Primary_Return__c.Officer_Access__c</members><name>SharingReason</name></types>`	Sets types in the enclosing configuration to <members>DMS_Primary_Order__c.Officer_Access__c</members><members>DMS_Primary_Order_Line__c.Officer_Access__c</members><members>DMS_Primary_Return__c.Officer_Access__c</members><name>SharingReason</na.
5	`<types><members>DmsPrimaryOrderRules</members><members>DmsPrimaryReturnRules</members><members>DmsPrimaryOrderLineRules</members><members>DmsPrimaryReturnLineRules</members><name>ApexTrigger</name></types>`	Sets types in the enclosing configuration to <members>DmsPrimaryOrderRules</members><members>DmsPrimaryReturnRules</members><members>DmsPrimaryOrderLineRules</members><members>DmsPrimaryReturnLineRules</members><name>ApexTrigger</name>.
6	`<types><members>DMS_Primary_Return__c</members><name>Workflow</name></types>`	Sets types in the enclosing configuration to <members>DMS_Primary_Return__c</members><name>Workflow</name>.
7	`<types><members>DMS_Primary_Return__c.Company_Officer_Return_Approval</members><name>ApprovalProcess</name></types>`	Sets types in the enclosing configuration to <members>DMS_Primary_Return__c.Company_Officer_Return_Approval</members><name>ApprovalProcess</name>.
8	`<version>65.0</version></Package>`	Opens the version block; child elements specify its configuration.

manifest/dms-secondary-routing.xml

First-party configuration & operations file: dms secondary routing.xml. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

5 numbered source lines | SHA-256 39b401450f80d6d06648c46bfdee8c6b52fb48e798733c98164e9844e5130646

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Package xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Package block; child elements specify its configuration.
3	`<types><members>DmsSecondaryRouting</members><members>DmsSecondaryRoutingTest</members><name>ApexClass</name></types>`	Sets types in the enclosing configuration to <members>DmsSecondaryRouting</members><members>DmsSecondaryRoutingTest</members><name>ApexClass</name>.
4	`<types><members>DmsSecondaryOrderRouting</members><members>DmsSecondaryReturnRouting</members><name>ApexTrigger</name></types>`	Sets types in the enclosing configuration to <members>DmsSecondaryOrderRouting</members><members>DmsSecondaryReturnRouting</members><name>ApexTrigger</name>.
5	`<version>65.0</version></Package>`	Opens the version block; child elements specify its configuration.

manifest/mobile-action-recovery.xml

First-party configuration & operations file: mobile action recovery.xml. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

17 numbered source lines | SHA-256 d4c2ce4c4387182f7bdfb7fbc1f1d7d1e3c48675b7abb50193ce903393e70040

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Package xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Package block; child elements specify its configuration.
3	`    <types>`	Opens the types block; child elements specify its configuration.
4	`        <members>Product_Return__c.Mobile_Request_Key__c</members>`	Sets members in the enclosing configuration to Product_Return__c.Mobile_Request_Key__c.
5	`        <members>Competitor_Activity__c.Mobile_Request_Key__c</members>`	Sets members in the enclosing configuration to Competitor_Activity__c.Mobile_Request_Key__c.
6	`        <members>SFA_Ticket__c.Mobile_Request_Key__c</members>`	Sets members in the enclosing configuration to SFA_Ticket__c.Mobile_Request_Key__c.
7	`        <members>Stock_Check__c.Mobile_Request_Key__c</members>`	Sets members in the enclosing configuration to Stock_Check__c.Mobile_Request_Key__c.
8	`        <members>Asset_Survey__c.Mobile_Request_Key__c</members>`	Sets members in the enclosing configuration to Asset_Survey__c.Mobile_Request_Key__c.
9	`        <members>Product_Refusal__c.Employee__c</members>`	Sets members in the enclosing configuration to Product_Refusal__c.Employee__c.
10	`        <members>Product_Refusal__c.Sales_Representative__c</members>`	Sets members in the enclosing configuration to Product_Refusal__c.Sales_Representative__c.
11	`        <members>Product_Refusal__c.Notes__c</members>`	Sets members in the enclosing configuration to Product_Refusal__c.Notes__c.
12	`        <members>Product_Refusal__c.Refused_At__c</members>`	Sets members in the enclosing configuration to Product_Refusal__c.Refused_At__c.
13	`        <name>CustomField</name>`	Sets name within the enclosing metadata component to CustomField.
14	`    </types>`	Closes the types configuration block.
15	`    <types><members>Product_Refusal__c.Employee_or_Representative_Required</members><name>ValidationRule</name></types>`	Sets types in the enclosing configuration to <members>Product_Refusal__c.Employee_or_Representative_Required</members><name>ValidationRule</name>.
16	`    <version>67.0</version>`	Sets version in the enclosing configuration to 67.0.

Line	Source code	Explanation / reading note
17	`</Package>`	Closes the Package configuration block.

manifest/mobile-visit-recovery.xml

First-party configuration & operations file: mobile visit recovery.xml. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

9 numbered source lines | SHA-256 a392d01def933650832ded0274e954779edcdfc4c6104e9f765d9631d08b72e5

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Package xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Package block; child elements specify its configuration.
3	`    <types>`	Opens the types block; child elements specify its configuration.
4	`        <members>Visit__c.Mobile_Order_Draft__c</members>`	Sets members in the enclosing configuration to Visit__c.Mobile_Order_Draft__c.
5	`        <members>Sales_Order__c.Mobile_Request_Key__c</members>`	Sets members in the enclosing configuration to Sales_Order__c.Mobile_Request_Key__c.
6	`        <name>CustomField</name>`	Sets name within the enclosing metadata component to CustomField.
7	`    </types>`	Closes the types configuration block.
8	`    <version>67.0</version>`	Sets version in the enclosing configuration to 67.0.
9	`</Package>`	Closes the Package configuration block.

manifest/package.xml

First-party configuration & operations file: package.xml. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

10 numbered source lines | SHA-256 6017ea1c99f3846724f4bb83e3abe6afc143365f7295fb7cfe828154dfc81da8

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Package xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Package block; child elements specify its configuration.
3	`    <types><members>SfaDemoDataFactory</members><name>ApexClass</name></types>`	Sets types in the enclosing configuration to <members>SfaDemoDataFactory</members><name>ApexClass</name>.
4	`    <types><members>SFA_Mobile</members><name>CustomApplication</name></types>`	Sets types in the enclosing configuration to <members>SFA_Mobile</members><name>CustomApplication</name>.
5	` <types><members>Attendance__c</members><members>Beat__c</members><members>Permanent_Journey_Plan__c</members><members>Retailer__c</members><members>Visit__c</members><members>Product__c</members><members>Scheme__c</members><members>Sales_Order__c</members><members>Order_Item__c</members><name>CustomTab</name></types>`	Sets types in the enclosing configuration to <members>Attendance__c</members><members>Beat__c</members><members>Permanent_Journey_Plan__c</members><members>Retailer__c</members><members>Visit__c</members><members>Product__c</members><members>Sch.
6	` <types><members>Attendance__c</members><members>Beat__c</members><members>Permanent_Journey_Plan__c</members><members>Retailer__c</members><members>Visit__c</members><members>Product__c</members><members>Scheme__c</members><members>Sales_Order__c</members><members>Order_Item__c</members><name>CustomObject</name></types>`	Sets types in the enclosing configuration to <members>Attendance__c</members><members>Beat__c</members><members>Permanent_Journey_Plan__c</members><members>Retailer__c</members><members>Visit__c</members><members>Product__c</members><members>Sch.
7	` <types><members>Attendance__c-Attendance Layout</members><members>Beat__c-Beat Layout</members><members>Order_Item__c-Order Item Layout</members><members>Permanent_Journey_Plan__c-Permanent Journey Plan Layout</members><members>Product__c-Product Layout</members><members>Retailer__c-Retailer Layout</members><members>Sales_Order__c-Sales Order Layout</members><members>Scheme__c-Scheme Layout</members><members>Visit__c-Visit Layout</members><name>Layout</name></types>`	Sets types in the enclosing configuration to <members>Attendance__c-Attendance Layout</members><members>Beat__c-Beat Layout</members><members>Order_Item__c-Order Item Layout</members><members>Permanent_Journey_Plan__c-Permanent Journey Plan Layo.
8	`    <types><members>SFA_Mobile_User</members><name>PermissionSet</name></types>`	Sets types in the enclosing configuration to <members>SFA_Mobile_User</members><name>PermissionSet</name>.
9	`    <version>65.0</version>`	Sets version in the enclosing configuration to 65.0.
10	`</Package>`	Closes the Package configuration block.

manifest/pjp-outlet-allocations.xml

First-party configuration & operations file: pjp outlet allocations.xml. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

8 numbered source lines | SHA-256 0720d67356d8c3a0f6cf4e00a8f3afeb2177b93b77afe1c748e35901a820c3ac

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Package xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Package block; child elements specify its configuration.
3	`    <types><members>SfaPjpAllocationService</members><members>SfaPjpAllocationServiceTest</members><name>ApexClass</name></types>`	Sets types in the enclosing configuration to <members>SfaPjpAllocationService</members><members>SfaPjpAllocationServiceTest</members><name>ApexClass</name>.
4	`    <types><members>PjpApproverTrigger</members><name>ApexTrigger</name></types>`	Sets types in the enclosing configuration to <members>PjpApproverTrigger</members><name>ApexTrigger</name>.
5	`    <types><members>Distributor_Outlet_Allocation__c</members><name>CustomObject</name></types>`	Sets types in the enclosing configuration to <members>Distributor_Outlet_Allocation__c</members><name>CustomObject</name>.
6	`    <types><members>Distributor_Outlet_Allocation__c-Distributor Outlet Allocation Layout</members><name>Layout</name></types>`	Sets types in the enclosing configuration to <members>Distributor_Outlet_Allocation__c-Distributor Outlet Allocation Layout</members><name>Layout</name>.
7	`    <version>67.0</version>`	Sets version in the enclosing configuration to 67.0.
8	`</Package>`	Closes the Package configuration block.

manifest/project-source.xml

First-party configuration & operations file: project source.xml. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

245 numbered source lines | SHA-256 06055ab64187455d6329e5ee1b8d0128449f9b14874e5d8b8229af626bd057c6

Line	Source code	Explanation / reading note
1	`<?xml version="1.0" encoding="UTF-8"?>`	Declares XML encoding/version for the Salesforce metadata file.
2	`<Package xmlns="http://soap.sforce.com/2006/04/metadata">`	Opens the Package block; child elements specify its configuration.
3	`    <types>`	Opens the types block; child elements specify its configuration.
4	`        <members>PjpPlannerController</members>`	Sets members in the enclosing configuration to PjpPlannerController.
5	`        <members>PjpPlannerControllerTest</members>`	Sets members in the enclosing configuration to PjpPlannerControllerTest.
6	`        <members>SfaDemoDataFactory</members>`	Sets members in the enclosing configuration to SfaDemoDataFactory.
7	`        <members>SfaPhaseOnePjpController</members>`	Sets members in the enclosing configuration to SfaPhaseOnePjpController.
8	`        <members>SfaPhaseOnePjpControllerTest</members>`	Sets members in the enclosing configuration to SfaPhaseOnePjpControllerTest.
9	`        <members>SfaRecordedScopeHandler</members>`	Sets members in the enclosing configuration to SfaRecordedScopeHandler.
10	`        <name>ApexClass</name>`	Sets name within the enclosing metadata component to ApexClass.
11	`    </types>`	Closes the types configuration block.
12	`    <types>`	Opens the types block; child elements specify its configuration.
13	`        <members>OutletGeographyTrigger</members>`	Sets members in the enclosing configuration to OutletGeographyTrigger.
14	`        <members>PjpApproverTrigger</members>`	Sets members in the enclosing configuration to PjpApproverTrigger.
15	`        <name>ApexTrigger</name>`	Sets name within the enclosing metadata component to ApexTrigger.
16	`    </types>`	Closes the types configuration block.
17	`    <types>`	Opens the types block; child elements specify its configuration.
18	`        <members>SFA_Mobile</members>`	Sets members in the enclosing configuration to SFA_Mobile.
19	`        <name>CustomApplication</name>`	Sets name within the enclosing metadata component to CustomApplication.

Line	Source code	Explanation / reading note
20	`</types>`	Closes the types configuration block.
21	`<types>`	Opens the types block; child elements specify its configuration.
22	`<members>Attendance__c.Attendance_Date__c</members>`	Sets members in the enclosing configuration to Attendance__c.Attendance_Date__c.
23	`<members>Attendance__c.End_Latitude__c</members>`	Sets members in the enclosing configuration to Attendance__c.End_Latitude__c.
24	`<members>Attendance__c.End_Longitude__c</members>`	Sets members in the enclosing configuration to Attendance__c.End_Longitude__c.
25	`<members>Attendance__c.End_Time__c</members>`	Sets members in the enclosing configuration to Attendance__c.End_Time__c.
26	`<members>Attendance__c.Offline_Key__c</members>`	Sets members in the enclosing configuration to Attendance__c.Offline_Key__c.
27	`<members>Attendance__c.Sales_Representative__c</members>`	Sets members in the enclosing configuration to Attendance__c.Sales_Representative__c.
28	`<members>Attendance__c.Selfie_Content_Document_Id__c</members>`	Sets members in the enclosing configuration to Attendance__c.Selfie_Content_Document_Id__c.
29	`<members>Attendance__c.Start_Latitude__c</members>`	Sets members in the enclosing configuration to Attendance__c.Start_Latitude__c.
30	`<members>Attendance__c.Start_Longitude__c</members>`	Sets members in the enclosing configuration to Attendance__c.Start_Longitude__c.
31	`<members>Attendance__c.Start_Time__c</members>`	Sets members in the enclosing configuration to Attendance__c.Start_Time__c.
32	`<members>Attendance__c.Status__c</members>`	Sets members in the enclosing configuration to Attendance__c.Status__c.
33	`<members>Beat__c.Active__c</members>`	Sets members in the enclosing configuration to Beat__c.Active__c.
34	`<members>Beat__c.Assigned_Employee__c</members>`	Sets members in the enclosing configuration to Beat__c.Assigned_Employee__c.
35	`<members>Beat__c.Beat_ID__c</members>`	Sets members in the enclosing configuration to Beat__c.Beat_ID__c.
36	`<members>Beat__c.Distributor__c</members>`	Sets members in the enclosing configuration to Beat__c.Distributor__c.
37	`<members>Beat__c.Geography__c</members>`	Sets members in the enclosing configuration to Beat__c.Geography__c.
38	`<members>Beat__c.Outlet_Count__c</members>`	Sets members in the enclosing configuration to Beat__c.Outlet_Count__c.
39	`<members>Beat__c.Outlet_Names__c</members>`	Sets members in the enclosing configuration to Beat__c.Outlet_Names__c.
40	`<members>Beat__c.Sales_Representative__c</members>`	Sets members in the enclosing configuration to Beat__c.Sales_Representative__c.

Line	Source code	Explanation / reading note
41	`<members>Employee__c.Aadhaar_Number__c</members>`	Sets members in the enclosing configuration to Employee__c.Aadhaar_Number__c.
42	`<members>Employee__c.Active__c</members>`	Sets members in the enclosing configuration to Employee__c.Active__c.
43	`<members>Employee__c.Emergency_Contact__c</members>`	Sets members in the enclosing configuration to Employee__c.Emergency_Contact__c.
44	`<members>Employee__c.Employee_Code__c</members>`	Sets members in the enclosing configuration to Employee__c.Employee_Code__c.
45	`<members>Employee__c.Geography__c</members>`	Sets members in the enclosing configuration to Employee__c.Geography__c.
46	`<members>Employee__c.Hierarchy_Level__c</members>`	Sets members in the enclosing configuration to Employee__c.Hierarchy_Level__c.
47	`<members>Employee__c.PAN_Number__c</members>`	Sets members in the enclosing configuration to Employee__c.PAN_Number__c.
48	`<members>Employee__c.Phone__c</members>`	Sets members in the enclosing configuration to Employee__c.Phone__c.
49	`<members>Employee__c.Profile_Photo_URL__c</members>`	Sets members in the enclosing configuration to Employee__c.Profile_Photo_URL__c.
50	`<members>Employee__c.Reporting_Manager__c</members>`	Sets members in the enclosing configuration to Employee__c.Reporting_Manager__c.
51	`<members>Employee__c.Salesforce_User__c</members>`	Sets members in the enclosing configuration to Employee__c.Salesforce_User__c.
52	`<members>Geography__c.District__c</members>`	Sets members in the enclosing configuration to Geography__c.District__c.
53	`<members>Geography__c.Municipality__c</members>`	Sets members in the enclosing configuration to Geography__c.Municipality__c.
54	`<members>Geography__c.Nation__c</members>`	Sets members in the enclosing configuration to Geography__c.Nation__c.
55	`<members>Geography__c.State__c</members>`	Sets members in the enclosing configuration to Geography__c.State__c.
56	`<members>Geography__c.Town__c</members>`	Sets members in the enclosing configuration to Geography__c.Town__c.
57	`<members>Geography__c.Village__c</members>`	Sets members in the enclosing configuration to Geography__c.Village__c.
58	`<members>Order_Item__c.Case_Quantity__c</members>`	Sets members in the enclosing configuration to Order_Item__c.Case_Quantity__c.
59	`<members>Order_Item__c.Line_Amount__c</members>`	Sets members in the enclosing configuration to Order_Item__c.Line_Amount__c.
60	`<members>Order_Item__c.Piece_Quantity__c</members>`	Sets members in the enclosing configuration to Order_Item__c.Piece_Quantity__c.
61	`<members>Order_Item__c.Product__c</members>`	Sets members in the enclosing configuration to Order_Item__c.Product__c.
62	`<members>Order_Item__c.Sales_Order__c</members>`	Sets members in the enclosing configuration to Order_Item__c.Sales_Order__c.

Line	Source code	Explanation / reading note
63	`<members>Order_Item__c.Total_Pieces__c</members>`	Sets members in the enclosing configuration to Order_Item__c.Total_Pieces__c.
64	`<members>Order_Item__c.Unit_Price__c</members>`	Sets members in the enclosing configuration to Order_Item__c.Unit_Price__c.
65	`<members>PJP_Selected_Beat__c.Beat__c</members>`	Sets members in the enclosing configuration to PJP_Selected_Beat__c.Beat__c.
66	`<members>PJP_Selected_Beat__c.PJP__c</members>`	Sets members in the enclosing configuration to PJP_Selected_Beat__c.PJP__c.
67	`<members>PJP_Selected_Beat__c.Unique_Key__c</members>`	Sets members in the enclosing configuration to PJP_Selected_Beat__c.Unique_Key__c.
68	`<members>Permanent_Journey_Plan__c.Approved_By__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Approved_By__c.
69	`<members>Permanent_Journey_Plan__c.Approved_Date__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Approved_Date__c.
70	`<members>Permanent_Journey_Plan__c.Approver__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Approver__c.
71	`<members>Permanent_Journey_Plan__c.Beat__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Beat__c.
72	`<members>Permanent_Journey_Plan__c.Employee__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Employee__c.
73	`<members>Permanent_Journey_Plan__c.Plan_Date__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Plan_Date__c.
74	`<members>Permanent_Journey_Plan__c.Planned_Date__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Planned_Date__c.
75	`<members>Permanent_Journey_Plan__c.Planning_End_Date__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Planning_End_Date__c.
76	`<members>Permanent_Journey_Plan__c.Planning_Start_Date__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Planning_Start_Date__c.
77	`<members>Permanent_Journey_Plan__c.Rejected_By__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Rejected_By__c.
78	`<members>Permanent_Journey_Plan__c.Rejected_Date__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Rejected_Date__c.
79	`<members>Permanent_Journey_Plan__c.Rejection_Reason__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Rejection_Reason__c.

Line	Source code	Explanation / reading note
80	`<members>Permanent_Journey_Plan__c.Sales_Representative__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Sales_Representative__c.
81	`<members>Permanent_Journey_Plan__c.Status__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Status__c.
82	`<members>Permanent_Journey_Plan__c.Submitted_By__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Submitted_By__c.
83	`<members>Permanent_Journey_Plan__c.Submitted_Date__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Submitted_Date__c.
84	`<members>Product__c.Active__c</members>`	Sets members in the enclosing configuration to Product__c.Active__c.
85	`<members>Product__c.Available_Stock__c</members>`	Sets members in the enclosing configuration to Product__c.Available_Stock__c.
86	`<members>Product__c.Batch_Number__c</members>`	Sets members in the enclosing configuration to Product__c.Batch_Number__c.
87	`<members>Product__c.Brand__c</members>`	Sets members in the enclosing configuration to Product__c.Brand__c.
88	`<members>Product__c.Expiry_Date__c</members>`	Sets members in the enclosing configuration to Product__c.Expiry_Date__c.
89	`<members>Product__c.Flavor__c</members>`	Sets members in the enclosing configuration to Product__c.Flavor__c.
90	`<members>Product__c.GST_Percent__c</members>`	Sets members in the enclosing configuration to Product__c.GST_Percent__c.
91	`<members>Product__c.Image_URL__c</members>`	Sets members in the enclosing configuration to Product__c.Image_URL__c.
92	`<members>Product__c.MRP__c</members>`	Sets members in the enclosing configuration to Product__c.MRP__c.
93	`<members>Product__c.Manufacturing_Date__c</members>`	Sets members in the enclosing configuration to Product__c.Manufacturing_Date__c.
94	`<members>Product__c.Package_Type__c</members>`	Sets members in the enclosing configuration to Product__c.Package_Type__c.
95	`<members>Product__c.Product_Code__c</members>`	Sets members in the enclosing configuration to Product__c.Product_Code__c.
96	`<members>Product__c.Retailer_Base_Price__c</members>`	Sets members in the enclosing configuration to Product__c.Retailer_Base_Price__c.
97	`<members>Product__c.Returnable__c</members>`	Sets members in the enclosing configuration to Product__c.Returnable__c.
98	`<members>Product__c.Sellable__c</members>`	Sets members in the enclosing configuration to Product__c.Sellable__c.
99	`<members>Product__c.Selling_Price__c</members>`	Sets members in the enclosing configuration to Product__c.Selling_Price__c.

Line	Source code	Explanation / reading note
100	`<members>Product__c.Shelf_Life_Days__c</members>`	Sets members in the enclosing configuration to Product__c.Shelf_Life_Days__c.
101	`<members>Product__c.Units_Per_Case__c</members>`	Sets members in the enclosing configuration to Product__c.Units_Per_Case__c.
102	`<members>Product__c.Variant__c</members>`	Sets members in the enclosing configuration to Product__c.Variant__c.
103	`<members>Retailer__c.Aadhaar_Number__c</members>`	Sets members in the enclosing configuration to Retailer__c.Aadhaar_Number__c.
104	`<members>Retailer__c.Active__c</members>`	Sets members in the enclosing configuration to Retailer__c.Active__c.
105	`<members>Retailer__c.Address__c</members>`	Sets members in the enclosing configuration to Retailer__c.Address__c.
106	`<members>Retailer__c.Beat__c</members>`	Sets members in the enclosing configuration to Retailer__c.Beat__c.
107	`<members>Retailer__c.Credit_Limit__c</members>`	Sets members in the enclosing configuration to Retailer__c.Credit_Limit__c.
108	`<members>Retailer__c.Email__c</members>`	Sets members in the enclosing configuration to Retailer__c.Email__c.
109	`<members>Retailer__c.Geo_Location__c</members>`	Sets members in the enclosing configuration to Retailer__c.Geo_Location__c.
110	`<members>Retailer__c.Geography__c</members>`	Sets members in the enclosing configuration to Retailer__c.Geography__c.
111	`<members>Retailer__c.Latitude__c</members>`	Sets members in the enclosing configuration to Retailer__c.Latitude__c.
112	`<members>Retailer__c.Longitude__c</members>`	Sets members in the enclosing configuration to Retailer__c.Longitude__c.
113	`<members>Retailer__c.Minimum_Order_Value__c</members>`	Sets members in the enclosing configuration to Retailer__c.Minimum_Order_Value__c.
114	`<members>Retailer__c.Outlet_Owner_Name__c</members>`	Sets members in the enclosing configuration to Retailer__c.Outlet_Owner_Name__c.
115	`<members>Retailer__c.Outlet_Type__c</members>`	Sets members in the enclosing configuration to Retailer__c.Outlet_Type__c.
116	`<members>Retailer__c.Outstanding_Amount__c</members>`	Sets members in the enclosing configuration to Retailer__c.Outstanding_Amount__c.
117	`<members>Retailer__c.PAN_Number__c</members>`	Sets members in the enclosing configuration to Retailer__c.PAN_Number__c.
118	`<members>Retailer__c.Phone__c</members>`	Sets members in the enclosing configuration to Retailer__c.Phone__c.
119	`<members>Sales_Order__c.Order_Date__c</members>`	Sets members in the enclosing configuration to Sales_Order__c.Order_Date__c.
120	`<members>Sales_Order__c.Retailer__c</members>`	Sets members in the enclosing configuration to Sales_Order__c.Retailer__c.
121	`<members>Sales_Order__c.Status__c</members>`	Sets members in the enclosing configuration to Sales_Order__c.Status__c.

Line	Source code	Explanation / reading note
122	`<members>Sales_Order__c.Total_Amount__c</members>`	Sets members in the enclosing configuration to Sales_Order__c.Total_Amount__c.
123	`<members>Sales_Order__c.Visit__c</members>`	Sets members in the enclosing configuration to Sales_Order__c.Visit__c.
124	`<members>Scheme__c.Active__c</members>`	Sets members in the enclosing configuration to Scheme__c.Active__c.
125	`<members>Scheme__c.Description__c</members>`	Sets members in the enclosing configuration to Scheme__c.Description__c.
126	`<members>Scheme__c.Discount_Amount__c</members>`	Sets members in the enclosing configuration to Scheme__c.Discount_Amount__c.
127	`<members>Scheme__c.Discount_Percent__c</members>`	Sets members in the enclosing configuration to Scheme__c.Discount_Percent__c.
128	`<members>Scheme__c.End_Date__c</members>`	Sets members in the enclosing configuration to Scheme__c.End_Date__c.
129	`<members>Scheme__c.Free_Product__c</members>`	Sets members in the enclosing configuration to Scheme__c.Free_Product__c.
130	`<members>Scheme__c.Free_Quantity__c</members>`	Sets members in the enclosing configuration to Scheme__c.Free_Quantity__c.
131	`<members>Scheme__c.Minimum_Quantity__c</members>`	Sets members in the enclosing configuration to Scheme__c.Minimum_Quantity__c.
132	`<members>Scheme__c.Outlet_Type__c</members>`	Sets members in the enclosing configuration to Scheme__c.Outlet_Type__c.
133	`<members>Scheme__c.Product__c</members>`	Sets members in the enclosing configuration to Scheme__c.Product__c.
134	`<members>Scheme__c.Region__c</members>`	Sets members in the enclosing configuration to Scheme__c.Region__c.
135	`<members>Scheme__c.Scheme_Code__c</members>`	Sets members in the enclosing configuration to Scheme__c.Scheme_Code__c.
136	`<members>Scheme__c.Scheme_Type__c</members>`	Sets members in the enclosing configuration to Scheme__c.Scheme_Type__c.
137	`<members>Scheme__c.Start_Date__c</members>`	Sets members in the enclosing configuration to Scheme__c.Start_Date__c.
138	`<members>Visit__c.Check_In_Latitude__c</members>`	Sets members in the enclosing configuration to Visit__c.Check_In_Latitude__c.
139	`<members>Visit__c.Check_In_Longitude__c</members>`	Sets members in the enclosing configuration to Visit__c.Check_In_Longitude__c.
140	`<members>Visit__c.Check_In_Time__c</members>`	Sets members in the enclosing configuration to Visit__c.Check_In_Time__c.
141	`<members>Visit__c.Check_Out_Latitude__c</members>`	Sets members in the enclosing configuration to Visit__c.Check_Out_Latitude__c.
142	`<members>Visit__c.Check_Out_Longitude__c</members>`	Sets members in the enclosing configuration to Visit__c.Check_Out_Longitude__c.
143	`<members>Visit__c.Check_Out_Time__c</members>`	Sets members in the enclosing configuration to Visit__c.Check_Out_Time__c.

Line	Source code	Explanation / reading note
144	`<members>Visit__c.Duration_Minutes__c</members>`	Sets members in the enclosing configuration to Visit__c.Duration_Minutes__c.
145	`<members>Visit__c.Missed_Reason__c</members>`	Sets members in the enclosing configuration to Visit__c.Missed_Reason__c.
146	`<members>Visit__c.Notes__c</members>`	Sets members in the enclosing configuration to Visit__c.Notes__c.
147	`<members>Visit__c.Offline_Key__c</members>`	Sets members in the enclosing configuration to Visit__c.Offline_Key__c.
148	`<members>Visit__c.Permanent_Journey_Plan__c</members>`	Sets members in the enclosing configuration to Visit__c.Permanent_Journey_Plan__c.
149	`<members>Visit__c.Retailer__c</members>`	Sets members in the enclosing configuration to Visit__c.Retailer__c.
150	`<members>Visit__c.Sales_Representative__c</members>`	Sets members in the enclosing configuration to Visit__c.Sales_Representative__c.
151	`<members>Visit__c.Status__c</members>`	Sets members in the enclosing configuration to Visit__c.Status__c.
152	`<members>Visit__c.Visit_Date__c</members>`	Sets members in the enclosing configuration to Visit__c.Visit_Date__c.
153	`<name>CustomField</name>`	Sets name within the enclosing metadata component to CustomField.
154	`</types>`	Closes the types configuration block.
155	`<types>`	Opens the types block; child elements specify its configuration.
156	`<members>PJP_Approval_Notification</members>`	Sets members in the enclosing configuration to PJP_Approval_Notification.
157	`<name>CustomNotificationType</name>`	Sets name within the enclosing metadata component to CustomNotificationType.
158	`</types>`	Closes the types configuration block.
159	`<types>`	Opens the types block; child elements specify its configuration.
160	`<members>Attendance__c</members>`	Sets members in the enclosing configuration to Attendance__c.
161	`<members>Beat__c</members>`	Sets members in the enclosing configuration to Beat__c.
162	`<members>Employee__c</members>`	Sets members in the enclosing configuration to Employee__c.
163	`<members>Geography__c</members>`	Sets members in the enclosing configuration to Geography__c.
164	`<members>Order_Item__c</members>`	Sets members in the enclosing configuration to Order_Item__c.
165	`<members>PJP_Selected_Beat__c</members>`	Sets members in the enclosing configuration to PJP_Selected_Beat__c.

Line	Source code	Explanation / reading note
166	`<members>Permanent_Journey_Plan__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.
167	`<members>Product__c</members>`	Sets members in the enclosing configuration to Product__c.
168	`<members>Retailer__c</members>`	Sets members in the enclosing configuration to Retailer__c.
169	`<members>Sales_Order__c</members>`	Sets members in the enclosing configuration to Sales_Order__c.
170	`<members>Scheme__c</members>`	Sets members in the enclosing configuration to Scheme__c.
171	`<members>Visit__c</members>`	Sets members in the enclosing configuration to Visit__c.
172	`<name>CustomObject</name>`	Sets name within the enclosing metadata component to CustomObject.
173	`</types>`	Closes the types configuration block.
174	`<types>`	Opens the types block; child elements specify its configuration.
175	`<members>Attendance__c</members>`	Sets members in the enclosing configuration to Attendance__c.
176	`<members>Beat__c</members>`	Sets members in the enclosing configuration to Beat__c.
177	`<members>Employee__c</members>`	Sets members in the enclosing configuration to Employee__c.
178	`<members>Geography__c</members>`	Sets members in the enclosing configuration to Geography__c.
179	`<members>Order_Item__c</members>`	Sets members in the enclosing configuration to Order_Item__c.
180	`<members>PJP_Planner</members>`	Sets members in the enclosing configuration to PJP_Planner.
181	`<members>Permanent_Journey_Plan__c</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.
182	`<members>Product__c</members>`	Sets members in the enclosing configuration to Product__c.
183	`<members>Retailer__c</members>`	Sets members in the enclosing configuration to Retailer__c.
184	`<members>Sales_Order__c</members>`	Sets members in the enclosing configuration to Sales_Order__c.
185	`<members>Scheme__c</members>`	Sets members in the enclosing configuration to Scheme__c.
186	`<members>Visit__c</members>`	Sets members in the enclosing configuration to Visit__c.
187	`<name>CustomTab</name>`	Sets name within the enclosing metadata component to CustomTab.

Line	Source code	Explanation / reading note
188	`</types>`	Closes the types configuration block.
189	`<types>`	Opens the types block; child elements specify its configuration.
190	`<members>Attendance__c-Attendance Layout</members>`	Sets members in the enclosing configuration to Attendance__c-Attendance Layout.
191	`<members>Beat__c-Beat Layout</members>`	Sets members in the enclosing configuration to Beat__c-Beat Layout.
192	`<members>Employee__c-Employee Layout</members>`	Sets members in the enclosing configuration to Employee__c-Employee Layout.
193	`<members>Geography__c-Geography Layout</members>`	Sets members in the enclosing configuration to Geography__c-Geography Layout.
194	`<members>Order_Item__c-Order Item Layout</members>`	Sets members in the enclosing configuration to Order_Item__c-Order Item Layout.
195	`<members>Permanent_Journey_Plan__c-Permanent Journey Plan Layout</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c-Permanent Journey Plan Layout.
196	`<members>Product__c-Product Layout</members>`	Sets members in the enclosing configuration to Product__c-Product Layout.
197	`<members>Retailer__c-Retailer Layout</members>`	Sets members in the enclosing configuration to Retailer__c-Retailer Layout.
198	`<members>Sales_Order__c-Sales Order Layout</members>`	Sets members in the enclosing configuration to Sales_Order__c-Sales Order Layout.
199	`<members>Scheme__c-Scheme Layout</members>`	Sets members in the enclosing configuration to Scheme__c-Scheme Layout.
200	`<members>Visit__c-Visit Layout</members>`	Sets members in the enclosing configuration to Visit__c-Visit Layout.
201	`<name>Layout</name>`	Sets name within the enclosing metadata component to Layout.
202	`</types>`	Closes the types configuration block.
203	`<types>`	Opens the types block; child elements specify its configuration.
204	`<members>employeeProfilePicture</members>`	Sets members in the enclosing configuration to employeeProfilePicture.
205	`<members>pjpMonthlyPlanner</members>`	Sets members in the enclosing configuration to pjpMonthlyPlanner.
206	`<name>LightningComponentBundle</name>`	Sets name within the enclosing metadata component to LightningComponentBundle.
207	`</types>`	Closes the types configuration block.
208	`<types>`	Opens the types block; child elements specify its configuration.

Line	Source code	Explanation / reading note
209	`<members>Attendance__c.All_Attendance</members>`	Sets members in the enclosing configuration to Attendance__c.All_Attendance.
210	`<members>Beat__c.All_Beats</members>`	Sets members in the enclosing configuration to Beat__c.All_Beats.
211	`<members>Employee__c.All_Employees</members>`	Sets members in the enclosing configuration to Employee__c.All_Employees.
212	`<members>Geography__c.All_Geographies</members>`	Sets members in the enclosing configuration to Geography__c.All_Geographies.
213	`<members>Order_Item__c.All_Order_Items</members>`	Sets members in the enclosing configuration to Order_Item__c.All_Order_Items.
214	`<members>Permanent_Journey_Plan__c.All_Permanent_Journey_Plans</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.All_Permanent_Journey_Plans.
215	`<members>Product__c.All_Products</members>`	Sets members in the enclosing configuration to Product__c.All_Products.
216	`<members>Retailer__c.All_Outlets</members>`	Sets members in the enclosing configuration to Retailer__c.All_Outlets.
217	`<members>Sales_Order__c.All_Sales_Orders</members>`	Sets members in the enclosing configuration to Sales_Order__c.All_Sales_Orders.
218	`<members>Scheme__c.All_Schemes</members>`	Sets members in the enclosing configuration to Scheme__c.All_Schemes.
219	`<members>Visit__c.All_Visits</members>`	Sets members in the enclosing configuration to Visit__c.All_Visits.
220	`<name>ListView</name>`	Sets name within the enclosing metadata component to ListView.
221	`</types>`	Closes the types configuration block.
222	`<types>`	Opens the types block; child elements specify its configuration.
223	`<members>SFA_Mobile_User</members>`	Sets members in the enclosing configuration to SFA_Mobile_User.
224	`<name>PermissionSet</name>`	Sets name within the enclosing metadata component to PermissionSet.
225	`</types>`	Closes the types configuration block.
226	`<types>`	Opens the types block; child elements specify its configuration.
227	`<members>Employee__c.Upload_Profile_Picture</members>`	Sets members in the enclosing configuration to Employee__c.Upload_Profile_Picture.
228	`<name>QuickAction</name>`	Sets name within the enclosing metadata component to QuickAction.
229	`</types>`	Closes the types configuration block.

Line	Source code	Explanation / reading note
230	`<types>`	Opens the types block; child elements specify its configuration.
231	`<members>Beat__c.Active_Beat_Requires_Employee</members>`	Sets members in the enclosing configuration to Beat__c.Active_Beat_Requires_Employee.
232	`<members>Employee__c.Aadhaar_Must_Be_12_Digits</members>`	Sets members in the enclosing configuration to Employee__c.Aadhaar_Must_Be_12_Digits.
233	`<members>Employee__c.Emergency_Contact_Must_Be_10_Digits</members>`	Sets members in the enclosing configuration to Employee__c.Emergency_Contact_Must_Be_10_Digits.
234	`<members>Employee__c.PAN_Must_Be_10_Characters</members>`	Sets members in the enclosing configuration to Employee__c.PAN_Must_Be_10_Characters.
235	`<members>Employee__c.PAN_Must_Be_Valid</members>`	Sets members in the enclosing configuration to Employee__c.PAN_Must_Be_Valid.
236	`<members>Employee__c.Phone_Is_Required</members>`	Sets members in the enclosing configuration to Employee__c.Phone_Is_Required.
237	`<members>Employee__c.Phone_Must_Be_10_Digits</members>`	Sets members in the enclosing configuration to Employee__c.Phone_Must_Be_10_Digits.
238	`<members>Permanent_Journey_Plan__c.Planning_Dates_Are_Valid</members>`	Sets members in the enclosing configuration to Permanent_Journey_Plan__c.Planning_Dates_Are_Valid.
239	`<members>Retailer__c.Outlet_Aadhaar_Must_Be_12_Digits</members>`	Sets members in the enclosing configuration to Retailer__c.Outlet_Aadhaar_Must_Be_12_Digits.
240	`<members>Retailer__c.Outlet_PAN_Must_Be_Valid</members>`	Sets members in the enclosing configuration to Retailer__c.Outlet_PAN_Must_Be_Valid.
241	`<members>Retailer__c.Outlet_Phone_Must_Be_10_Digits</members>`	Sets members in the enclosing configuration to Retailer__c.Outlet_Phone_Must_Be_10_Digits.
242	`<name>ValidationRule</name>`	Sets name within the enclosing metadata component to ValidationRule.
243	`</types>`	Closes the types configuration block.
244	`<version>65.0</version>`	Sets version in the enclosing configuration to 65.0.
245	`</Package>`	Closes the Package configuration block.

sales-rep-mobile/Build-And-Start-Localhost.ps1

Operational script: Build And Start Localhost.ps1. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

48 numbered source lines | SHA-256 632e74c5f2033f54d393ac3dabc1f1c02139dd680b05060a8684fcdb4c74b291

Line	Source code	Explanation / reading note
1	`$ErrorActionPreference = "Stop"`	Assigns a PowerShell script variable: $ErrorActionPreference = "Stop".
2	`$projectRoot = Split-Path -Parent $MyInvocation.MyCommand.Path`	Assigns a PowerShell script variable: $projectRoot = Split-Path -Parent $MyInvocation.MyCommand.Path.
3	`$backendFolder = Join-Path $projectRoot "backend"`	Assigns a PowerShell script variable: $backendFolder = Join-Path $projectRoot "backend".
4	`$mobileFolder = Join-Path $projectRoot "mobile"`	Assigns a PowerShell script variable: $mobileFolder = Join-Path $projectRoot "mobile".
5	`$logFolder = Join-Path $projectRoot "local-logs"`	Assigns a PowerShell script variable: $logFolder = Join-Path $projectRoot "local-logs".
6		Blank line separating logical sections; no executable operation.
7	`function Ensure-Dependencies {`	Declares a callable function/method: function Ensure-Dependencies {. Parameters supply its inputs; the following block implements the operation.
8	`    param([string]$ProjectFolder)`	Continues the surrounding declaration/expression or text: param([string]$ProjectFolder). Read it with the preceding opening statement (function Ensure-Dependencies {); it is not a standalone business operation.
9	`    if (-not (Test-Path (Join-Path $ProjectFolder "node_modules"))) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (-not (Test-Path (Join-Path $ProjectFolder "node_modules"))) {.
10	`        Write-Host "Installing dependencies in $ProjectFolder..."`	Continues the surrounding declaration/expression or text: Write-Host "Installing dependencies in $ProjectFolder...". Read it with the preceding opening statement (if (-not (Test-Path (Join-Path $ProjectFolder "node_modules"))) {); it is not a standalone business operation.
11	`        npm install --prefix $ProjectFolder`	Continues the surrounding declaration/expression or text: npm install --prefix $ProjectFolder. Read it with the preceding opening statement (Write-Host "Installing dependencies in $ProjectFolder..."); it is not a standalone business operation.
12	`        if ($LASTEXITCODE -ne 0) { throw "Dependency installation failed in $ProjectFolder." }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) { throw "Dependency installation failed in $ProjectFolder." }.

Line	Source code	Explanation / reading note
13	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
14	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
15		Blank line separating logical sections; no executable operation.
16	`function Start-LocalService {`	Declares a callable function/method: function Start-LocalService {. Parameters supply its inputs; the following block implements the operation.
17	`    param([string]$ServiceName, [string]$WorkingFolder, [string[]]$Arguments)`	Continues the surrounding declaration/expression or text: param([string]$ServiceName, [string]$WorkingFolder, [string[]]$Arguments). Read it with the preceding opening statement (function Start-LocalService {); it is not a standalone business operation.
18	`    $standardOutput = Join-Path $logFolder "$ServiceName-output.log"`	Assigns a PowerShell script variable: $standardOutput = Join-Path $logFolder "$ServiceName-output.log".
19	`    $standardError = Join-Path $logFolder "$ServiceName-error.log"`	Assigns a PowerShell script variable: $standardError = Join-Path $logFolder "$ServiceName-error.log".
20	`    Start-Process -FilePath "node.exe" -ArgumentList $Arguments -WorkingDirectory $WorkingFolder `	Operational command with system/filesystem/deployment effects: Start-Process -FilePath "node.exe" -ArgumentList $Arguments -WorkingDirectory $WorkingFolder `. Do not execute as part of simply reading this guide.
21	`        -RedirectStandardOutput $standardOutput -RedirectStandardError $standardError `	Continues the surrounding declaration/expression or text: -RedirectStandardOutput $standardOutput -RedirectStandardError $standardError `. Read it with the preceding opening statement ( Start-Process -FilePath "node.exe" -ArgumentList $Arguments -WorkingDirectory $WorkingFolder `); it is not a standalone business operation.
22	`        -WindowStyle Hidden | Out-Null`	Continues the surrounding declaration/expression or text: -WindowStyle Hidden | Out-Null. Read it with the preceding opening statement (-RedirectStandardOutput $standardOutput -RedirectStandardError $standardError `); it is not a standalone business operation.
23	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24		Blank line separating logical sections; no executable operation.
25	`Ensure-Dependencies -ProjectFolder $backendFolder`	Continues the surrounding declaration/expression or text: Ensure-Dependencies -ProjectFolder $backendFolder. Read it with the preceding opening statement; it is not a standalone business operation.

Line	Source code	Explanation / reading note
26	`Ensure-Dependencies -ProjectFolder $mobileFolder`	Continues the surrounding declaration/expression or text: Ensure-Dependencies -ProjectFolder $mobileFolder. Read it with the preceding opening statement (Ensure-Dependencies -ProjectFolder $backendFolder); it is not a standalone business operation.
27		Blank line separating logical sections; no executable operation.
28	`Write-Host "Building the Salesforce integration API..."`	Continues the surrounding declaration/expression or text: Write-Host "Building the Salesforce integration API...". Read it with the preceding opening statement; it is not a standalone business operation.
29	`npm run build --prefix $backendFolder`	Continues the surrounding declaration/expression or text: npm run build --prefix $backendFolder. Read it with the preceding opening statement (Write-Host "Building the Salesforce integration API..."); it is not a standalone business operation.
30	`if ($LASTEXITCODE -ne 0) { throw "The backend build failed." }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) { throw "The backend build failed." }.
31		Blank line separating logical sections; no executable operation.
32	`Write-Host "Building the web application..."`	Continues the surrounding declaration/expression or text: Write-Host "Building the web application...". Read it with the preceding opening statement; it is not a standalone business operation.
33	`Push-Location $mobileFolder`	Continues the surrounding declaration/expression or text: Push-Location $mobileFolder. Read it with the preceding opening statement (Write-Host "Building the web application..."); it is not a standalone business operation.
34	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
35	`    npx expo export --platform web`	Continues the surrounding declaration/expression or text: npx expo export --platform web. Read it with the preceding opening statement (try {); it is not a standalone business operation.
36	`    if ($LASTEXITCODE -ne 0) { throw "The web build failed." }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) { throw "The web build failed." }.
37	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
38	`    Pop-Location`	Continues the surrounding declaration/expression or text: Pop-Location. Read it with the preceding opening statement (} finally {); it is not a standalone business operation.

Line	Source code	Explanation / reading note
39	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
40		Blank line separating logical sections; no executable operation.
41	`& (Join-Path $projectRoot "Stop-Localhost.ps1")`	Continues the surrounding declaration/expression or text: & (Join-Path $projectRoot "Stop-Localhost.ps1"). Read it with the preceding opening statement; it is not a standalone business operation.
42	`New-Item -ItemType Directory -Path $logFolder -Force | Out-Null`	Operational command with system/filesystem/deployment effects: New-Item -ItemType Directory -Path $logFolder -Force | Out-Null. Do not execute as part of simply reading this guide.
43	`Start-LocalService -ServiceName "backend" -WorkingFolder $projectRoot -Arguments @("backend/dist/server.js")`	Continues the surrounding declaration/expression or text: Start-LocalService -ServiceName "backend" -WorkingFolder $projectRoot -Arguments @("backend/dist/server.js"). Read it with the preceding opening statement (New-Item -ItemType Directory -Path $logFolder -Force | Out-Null); it is not a standalone business operation.
44	`Start-LocalService -ServiceName "website" -WorkingFolder $projectRoot -Arguments @("Local-Web-Server.cjs")`	Continues the surrounding declaration/expression or text: Start-LocalService -ServiceName "website" -WorkingFolder $projectRoot -Arguments @("Local-Web-Server.cjs"). Read it with the preceding opening statement (Start-LocalService -ServiceName "backend" -WorkingFolder $projectRoot -Arguments @("backend/dist/server.js")); it is not a standalone business operation.
45		Blank line separating logical sections; no executable operation.
46	`Write-Host "Local application started."`	Continues the surrounding declaration/expression or text: Write-Host "Local application started.". Read it with the preceding opening statement; it is not a standalone business operation.
47	`Write-Host "Website: http://localhost:8081"`	Continues the surrounding declaration/expression or text: Write-Host "Website: http://localhost:8081". Read it with the preceding opening statement (Write-Host "Local application started."); it is not a standalone business operation.
48	`Write-Host "API: http://localhost:4000/api"`	Continues the surrounding declaration/expression or text: Write-Host "API: http://localhost:4000/api". Read it with the preceding opening statement (Write-Host "Website: http://localhost:8081"); it is not a standalone business operation.

sales-rep-mobile/INSTALL-DEPENDENCIES.cmd

Operational script: INSTALL DEPENDENCIES.cmd. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

26 numbered source lines | SHA-256 1f3a63e34a850c3040db99c66e3a5f375e0243d442d1001156dea8ec2f400eb0

Line	Source code	Explanation / reading note
1	`@echo off`	Continues the surrounding declaration/expression or text: @echo off. Read it with the preceding opening statement; it is not a standalone business operation.
2	`setlocal`	Continues the surrounding declaration/expression or text: setlocal. Read it with the preceding opening statement (@echo off); it is not a standalone business operation.
3	`cd /d "%~dp0"`	Continues the surrounding declaration/expression or text: cd /d "%~dp0". Read it with the preceding opening statement (setlocal); it is not a standalone business operation.
4		Blank line separating logical sections; no executable operation.
5	`echo Installing backend dependencies...`	Continues the surrounding declaration/expression or text: echo Installing backend dependencies.... Read it with the preceding opening statement; it is not a standalone business operation.
6	`pushd backend`	Continues the surrounding declaration/expression or text: pushd backend. Read it with the preceding opening statement (echo Installing backend dependencies...); it is not a standalone business operation.
7	`call npm install --workspaces=false`	Assigns the right-hand expression to the named variable/property: call npm install --workspaces=false. This is in-memory unless it is later persisted by an explicit call.
8	`if errorlevel 1 goto :failed`	Continues the surrounding declaration/expression or text: if errorlevel 1 goto :failed. Read it with the preceding opening statement (call npm install --workspaces=false); it is not a standalone business operation.
9	`popd`	Continues the surrounding declaration/expression or text: popd. Read it with the preceding opening statement (if errorlevel 1 goto :failed); it is not a standalone business operation.
10		Blank line separating logical sections; no executable operation.
11	`echo Installing mobile dependencies...`	Continues the surrounding declaration/expression or text: echo Installing mobile dependencies.... Read it with the preceding opening statement; it is not a standalone business operation.

Line	Source code	Explanation / reading note
12	`pushd mobile`	Continues the surrounding declaration/expression or text: pushd mobile. Read it with the preceding opening statement (echo Installing mobile dependencies...); it is not a standalone business operation.
13	`call npm install --workspaces=false`	Assigns the right-hand expression to the named variable/property: call npm install --workspaces=false. This is in-memory unless it is later persisted by an explicit call.
14	`if errorlevel 1 goto :failed`	Continues the surrounding declaration/expression or text: if errorlevel 1 goto :failed. Read it with the preceding opening statement (call npm install --workspaces=false); it is not a standalone business operation.
15	`popd`	Continues the surrounding declaration/expression or text: popd. Read it with the preceding opening statement (if errorlevel 1 goto :failed); it is not a standalone business operation.
16		Blank line separating logical sections; no executable operation.
17	`echo.`	Continues the surrounding declaration/expression or text: echo.. Read it with the preceding opening statement; it is not a standalone business operation.
18	`echo Installation completed. Double-click START-LOCAL-APP.cmd next.`	Continues the surrounding declaration/expression or text: echo Installation completed. Double-click START-LOCAL-APP.cmd next.. Read it with the preceding opening statement (echo.); it is not a standalone business operation.
19	`pause`	Continues the surrounding declaration/expression or text: pause. Read it with the preceding opening statement (echo Installation completed. Double-click START-LOCAL-APP.cmd next.); it is not a standalone business operation.
20	`exit /b 0`	Continues the surrounding declaration/expression or text: exit /b 0. Read it with the preceding opening statement (pause); it is not a standalone business operation.
21		Blank line separating logical sections; no executable operation.
22	`:failed`	Continues the surrounding declaration/expression or text: :failed. Read it with the preceding opening statement; it is not a standalone business operation.
23	`echo.`	Continues the surrounding declaration/expression or text: echo.. Read it with the preceding opening statement (:failed); it is not a standalone business operation.
24	`echo Installation failed. Close any Node or Expo processes and try again.`	Continues the surrounding declaration/expression or text: echo Installation failed. Close any Node or Expo processes and try again.. Read it with the preceding opening statement (echo.); it is not a standalone business operation.

Line	Source code	Explanation / reading note
25	`pause`	Continues the surrounding declaration/expression or text: pause. Read it with the preceding opening statement (echo Installation failed. Close any Node or Expo processes and try again.); it is not a standalone business operation.
26	`exit /b 1`	Continues the surrounding declaration/expression or text: exit /b 1. Read it with the preceding opening statement (pause); it is not a standalone business operation.

sales-rep-mobile/Local-Web-Server.cjs

First-party configuration & operations file: Local Web Server. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

37 numbered source lines | SHA-256 f1e562b877b4f827a619ec2f903f6323372fa58c1231f83f69f74b4b6c5f297e

Line	Source code	Explanation / reading note
1	`const http = require("node:http");`	Declares/initializes local data used by the surrounding operation: const http = require("node:http");. Collection contents and assignments below determine its purpose.
2	`const fs = require("node:fs");`	Declares/initializes local data used by the surrounding operation: const fs = require("node:fs");. Collection contents and assignments below determine its purpose.
3	`const path = require("node:path");`	Declares/initializes local data used by the surrounding operation: const path = require("node:path");. Collection contents and assignments below determine its purpose.
4		Blank line separating logical sections; no executable operation.
5	`const webPort = Number(process.env.WEB_PORT || 8081);`	Declares/initializes local data used by the surrounding operation: const webPort = Number(process.env.WEB_PORT || 8081);. Collection contents and assignments below determine its purpose.
6	`const webBuildFolder = path.join(__dirname, "mobile", "dist");`	Declares/initializes local data used by the surrounding operation: const webBuildFolder = path.join(__dirname, "mobile", "dist");. Collection contents and assignments below determine its purpose.
7	`const contentTypes = {`	Declares/initializes local data used by the surrounding operation: const contentTypes = {. Collection contents and assignments below determine its purpose.
8	`  ".css": "text/css; charset=utf-8", ".html": "text/html; charset=utf-8",`	Assigns the right-hand expression to the named variable/property: ".css": "text/css; charset=utf-8", ".html": "text/html; charset=utf-8",. This is in-memory unless it is later persisted by an explicit call.
9	`  ".ico": "image/x-icon", ".js": "text/javascript; charset=utf-8",`	Assigns the right-hand expression to the named variable/property: ".ico": "image/x-icon", ".js": "text/javascript; charset=utf-8",. This is in-memory unless it is later persisted by an explicit call.
10	`  ".json": "application/json; charset=utf-8", ".map": "application/json; charset=utf-8",`	Assigns the right-hand expression to the named variable/property: ".json": "application/json; charset=utf-8", ".map": "application/json; charset=utf-8",. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
11	`  ".png": "image/png", ".svg": "image/svg+xml", ".woff": "font/woff", ".woff2": "font/woff2",`	Continues the surrounding declaration/expression or text: ".png": "image/png", ".svg": "image/svg+xml", ".woff": "font/woff", ".woff2": "font/woff2",. Read it with the preceding opening statement (".json": "application/json; charset=utf-8", ".map": "application/json; charset=utf-8",); it is not a standalone business operation.
12	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13		Blank line separating logical sections; no executable operation.
14	`function sendFile(response, filePath) {`	Declares a callable function/method: function sendFile(response, filePath) {. Parameters supply its inputs; the following block implements the operation.
15	`  response.writeHead(200, {`	Calls the named method: response.writeHead(200, {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
16	`    "Cache-Control": filePath.endsWith("index.html") ? "no-cache" : "public, max-age=86400",`	Calls the named method: "Cache-Control": filePath.endsWith("index.html") ? "no-cache" : "public, max-age=86400",. Its implementation defines the side effect/result; use the symbol/file index to follow it.
17	`    "Content-Type": contentTypes[path.extname(filePath).toLowerCase()] || "application/octet-stream",`	Calls the named method: "Content-Type": contentTypes[path.extname(filePath).toLowerCase()] || "application/octet-stream",. Its implementation defines the side effect/result; use the symbol/file index to follow it.
18	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`  fs.createReadStream(filePath).pipe(response);`	Calls the named method: fs.createReadStream(filePath).pipe(response);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
20	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21		Blank line separating logical sections; no executable operation.
22	`const server = http.createServer((request, response) => {`	Declares/initializes local data used by the surrounding operation: const server = http.createServer((request, response) => {. Collection contents and assignments below determine its purpose.
23	`  const requestPath = decodeURIComponent(new URL(request.url, \`http://${request.headers.host}\`).pathname);`	Declares/initializes local data used by the surrounding operation: const requestPath = decodeURIComponent(new URL(request.url, `http://${request.headers.host}`).pathname);. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
24	`  const safeRequestPath = path.normalize(requestPath).replace(/^(\.\.[/\\])+/, "");`	Declares/initializes local data used by the surrounding operation: const safeRequestPath = path.normalize(requestPath).replace(/^(\.\.[/\\])+/, "");. Collection contents and assignments below determine its purpose.
25	`  const requestedFile = path.join(webBuildFolder, safeRequestPath);`	Declares/initializes local data used by the surrounding operation: const requestedFile = path.join(webBuildFolder, safeRequestPath);. Collection contents and assignments below determine its purpose.
26	`  fs.stat(requestedFile, (error, fileDetails) => {`	Calls the named method: fs.stat(requestedFile, (error, fileDetails) => {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
27	`    if (!error && fileDetails.isFile()) return sendFile(response, requestedFile);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!error && fileDetails.isFile()) return sendFile(response, requestedFile);.
28	`    const applicationEntry = path.join(webBuildFolder, "index.html");`	Declares/initializes local data used by the surrounding operation: const applicationEntry = path.join(webBuildFolder, "index.html");. Collection contents and assignments below determine its purpose.
29	`    if (fs.existsSync(applicationEntry)) return sendFile(response, applicationEntry);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (fs.existsSync(applicationEntry)) return sendFile(response, applicationEntry);.
30	`    response.writeHead(503, { "Content-Type": "text/plain; charset=utf-8" });`	Calls the named method: response.writeHead(503, { "Content-Type": "text/plain; charset=utf-8" });. Its implementation defines the side effect/result; use the symbol/file index to follow it.
31	`    response.end("The web build is missing. Run START-LOCAL-APP.cmd to build and start the application.");`	Calls the named method: response.end("The web build is missing. Run START-LOCAL-APP.cmd to build and start the application.");. Its implementation defines the side effect/result; use the symbol/file index to follow it.
32	`  });`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34		Blank line separating logical sections; no executable operation.
35	`server.listen(webPort, "127.0.0.1", () => {`	Calls the named method: server.listen(webPort, "127.0.0.1", () => {. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
36	`  console.log(`SFA website available at http://localhost:${webPort}`);`	Calls the named method: console.log(`SFA website available at http://localhost:${webPort}`);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
37	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/START-LOCAL-APP.cmd

Operational script: START LOCAL APP.cmd. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

11 numbered source lines | SHA-256 64e68707b2b560ecb8cb1fa746bdcebd2b5fbe8902307e150afc81ee2486a80c

Line	Source code	Explanation / reading note
1	`@echo off`	Continues the surrounding declaration/expression or text: @echo off. Read it with the preceding opening statement; it is not a standalone business operation.
2	`setlocal`	Continues the surrounding declaration/expression or text: setlocal. Read it with the preceding opening statement (@echo off); it is not a standalone business operation.
3	`set "PROJECT_ROOT=%~dp0"`	Assigns the right-hand expression to the named variable/property: set "PROJECT_ROOT=%~dp0". This is in-memory unless it is later persisted by an explicit call.
4	`powershell.exe -NoProfile -ExecutionPolicy Bypass -File "%PROJECT_ROOT%Build-And-Start-Localhost.ps1"`	Continues the surrounding declaration/expression or text: powershell.exe -NoProfile -ExecutionPolicy Bypass -File "%PROJECT_ROOT%Build-And-Start-Localhost.ps1". Read it with the preceding opening statement (set "PROJECT_ROOT=%~dp0"); it is not a standalone business operation.
5	`if errorlevel 1 (`	Continues the surrounding declaration/expression or text: if errorlevel 1 (. Read it with the preceding opening statement (powershell.exe -NoProfile -ExecutionPolicy Bypass -File "%PROJECT_ROOT%Build-And-Start-Localhost.ps1"); it is not a standalone business operation.
6	`  echo The localhost application could not be started. Review the message above.`	Continues the surrounding declaration/expression or text: echo The localhost application could not be started. Review the message above.. Read it with the preceding opening statement (if errorlevel 1 (); it is not a standalone business operation.
7	`  pause`	Continues the surrounding declaration/expression or text: pause. Read it with the preceding opening statement (echo The localhost application could not be started. Review the message above.); it is not a standalone business operation.
8	`  exit /b 1`	Continues the surrounding declaration/expression or text: exit /b 1. Read it with the preceding opening statement (pause); it is not a standalone business operation.
9	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`start "" "http://localhost:8081"`	Continues the surrounding declaration/expression or text: start "" "http://localhost:8081". Read it with the preceding opening statement ()); it is not a standalone business operation.

Line	Source code	Explanation / reading note
11	`exit /b 0`	Continues the surrounding declaration/expression or text: exit /b 0. Read it with the preceding opening statement (start "" "http://localhost:8081"); it is not a standalone business operation.

sales-rep-mobile/Stop-Localhost.ps1

Operational script: Stop Localhost.ps1. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

6 numbered source lines | SHA-256 a3d2c9bbe0930a8ec6a4d4ae2126d2b2c3de05daa844dfee21a87b7f71bcc252

Line	Source code	Explanation / reading note
1	`$applicationPorts = 4000, 8081`	Assigns a PowerShell script variable: $applicationPorts = 4000, 8081.
2	`foreach ($applicationPort in $applicationPorts) {`	Continues the surrounding declaration/expression or text: foreach ($applicationPort in $applicationPorts) {. Read it with the preceding opening statement ($applicationPorts = 4000, 8081); it is not a standalone business operation.
3	`    Get-NetTCPConnection -LocalPort $applicationPort -State Listen -ErrorAction SilentlyContinue |`	Continues the surrounding declaration/expression or text: Get-NetTCPConnection -LocalPort $applicationPort -State Listen -ErrorAction SilentlyContinue \|. Read it with the preceding opening statement (foreach ($applicationPort in $applicationPorts) {); it is not a standalone business operation.
4	`        ForEach-Object { Stop-Process -Id $_.OwningProcess -Force -ErrorAction SilentlyContinue }`	Operational command with system/filesystem/deployment effects: ForEach-Object { Stop-Process -Id $_.OwningProcess -Force -ErrorAction SilentlyContinue }. Do not execute as part of simply reading this guide.
5	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
6	`Write-Host "The local SFA website and API have been stopped."`	Continues the surrounding declaration/expression or text: Write-Host "The local SFA website and API have been stopped.". Read it with the preceding opening statement (}); it is not a standalone business operation.

sales-rep-mobile/backend/package.json

Package manifest: runtime/dev dependencies, entry point and npm scripts. Scripts run only when invoked; a dependency declaration does not prove a feature is used.

38 numbered source lines | SHA-256 26ea58819565e13d427a1a57a1d2b62b41458e0a97d270012821635d10f7f5ed

Line	Source code	Explanation / reading note
1	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement; it is not a standalone business operation.
2	`  "name": "sfa-backend",`	Continues the surrounding declaration/expression or text: "name": "sfa-backend",. Read it with the preceding opening statement ({); it is not a standalone business operation.
3	`  "version": "1.0.0",`	Continues the surrounding declaration/expression or text: "version": "1.0.0",. Read it with the preceding opening statement ("name": "sfa-backend",); it is not a standalone business operation.
4	`  "private": true,`	Continues the surrounding declaration/expression or text: "private": true,. Read it with the preceding opening statement ("version": "1.0.0",); it is not a standalone business operation.
5	`  "scripts": {`	Continues the surrounding declaration/expression or text: "scripts": {. Read it with the preceding opening statement ("private": true,); it is not a standalone business operation.
6	`    "dev": "tsx --env-file=../.env watch src/server.ts",`	Assigns the right-hand expression to the named variable/property: "dev": "tsx --env-file=../.env watch src/server.ts",. This is in-memory unless it is later persisted by an explicit call.
7	`    "build": "tsc",`	Continues the surrounding declaration/expression or text: "build": "tsc",. Read it with the preceding opening statement ("dev": "tsx --env-file=../.env watch src/server.ts",); it is not a standalone business operation.
8	`    "start": "node --env-file=../.env dist/server.js",`	Assigns the right-hand expression to the named variable/property: "start": "node --env-file=../.env dist/server.js",. This is in-memory unless it is later persisted by an explicit call.
9	`    "test": "vitest run"`	Continues the surrounding declaration/expression or text: "test": "vitest run". Read it with the preceding opening statement ("start": "node --env-file=../.env dist/server.js",); it is not a standalone business operation.
10	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
11	`  "dependencies": {`	Continues the surrounding declaration/expression or text: "dependencies": {. Read it with the preceding opening statement (},); it is not a standalone business operation.
12	`    "cors": "^2.8.5",`	Continues the surrounding declaration/expression or text: "cors": "^2.8.5",. Read it with the preceding opening statement ("dependencies": {); it is not a standalone business operation.
13	`    "dotenv": "^17.2.3",`	Continues the surrounding declaration/expression or text: "dotenv": "^17.2.3",. Read it with the preceding opening statement ("cors": "^2.8.5",); it is not a standalone business operation.
14	`    "exceljs": "^4.4.0",`	Continues the surrounding declaration/expression or text: "exceljs": "^4.4.0",. Read it with the preceding opening statement ("dotenv": "^17.2.3",); it is not a standalone business operation.
15	`    "express": "^5.1.0",`	Continues the surrounding declaration/expression or text: "express": "^5.1.0",. Read it with the preceding opening statement ("exceljs": "^4.4.0",); it is not a standalone business operation.
16	`    "helmet": "^8.1.0",`	Continues the surrounding declaration/expression or text: "helmet": "^8.1.0",. Read it with the preceding opening statement ("express": "^5.1.0",); it is not a standalone business operation.
17	`    "jsonwebtoken": "^9.0.2",`	Continues the surrounding declaration/expression or text: "jsonwebtoken": "^9.0.2",. Read it with the preceding opening statement ("helmet": "^8.1.0",); it is not a standalone business operation.
18	`    "nodemailer": "^10.0.16",`	Continues the surrounding declaration/expression or text: "nodemailer": "^10.0.16",. Read it with the preceding opening statement ("jsonwebtoken": "^9.0.2",); it is not a standalone business operation.
19	`    "pdfkit": "^0.17.2",`	Continues the surrounding declaration/expression or text: "pdfkit": "^0.17.2",. Read it with the preceding opening statement ("nodemailer": "^10.0.16",); it is not a standalone business operation.
20	`    "zod": "^4.1.12"`	Continues the surrounding declaration/expression or text: "zod": "^4.1.12". Read it with the preceding opening statement ("pdfkit": "^0.17.2",); it is not a standalone business operation.
21	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
22	`  "devDependencies": {`	Continues the surrounding declaration/expression or text: "devDependencies": {. Read it with the preceding opening statement (},); it is not a standalone business operation.

Line	Source code	Explanation / reading note
23	`"@types/cors": "^2.8.19",`	Continues the surrounding declaration/expression or text: "@types/cors": "^2.8.19",. Read it with the preceding opening statement ("devDependencies": {); it is not a standalone business operation.
24	`"@types/express": "^5.0.3",`	Continues the surrounding declaration/expression or text: "@types/express": "^5.0.3",. Read it with the preceding opening statement ("@types/cors": "^2.8.19",); it is not a standalone business operation.
25	`"@types/jsonwebtoken": "^9.0.10",`	Continues the surrounding declaration/expression or text: "@types/jsonwebtoken": "^9.0.10",. Read it with the preceding opening statement ("@types/express": "^5.0.3",); it is not a standalone business operation.
26	`"@types/node": "^24.7.2",`	Continues the surrounding declaration/expression or text: "@types/node": "^24.7.2",. Read it with the preceding opening statement ("@types/jsonwebtoken": "^9.0.10",); it is not a standalone business operation.
27	`"@types/nodemailer": "^7.0.2",`	Continues the surrounding declaration/expression or text: "@types/nodemailer": "^7.0.2",. Read it with the preceding opening statement ("@types/node": "^24.7.2",); it is not a standalone business operation.
28	`"@types/pdfkit": "^0.17.3",`	Continues the surrounding declaration/expression or text: "@types/pdfkit": "^0.17.3",. Read it with the preceding opening statement ("@types/nodemailer": "^7.0.2",); it is not a standalone business operation.
29	`"supertest": "^7.1.4",`	Continues the surrounding declaration/expression or text: "supertest": "^7.1.4",. Read it with the preceding opening statement ("@types/pdfkit": "^0.17.3",); it is not a standalone business operation.
30	`"@types/supertest": "^6.0.3",`	Continues the surrounding declaration/expression or text: "@types/supertest": "^6.0.3",. Read it with the preceding opening statement ("supertest": "^7.1.4",); it is not a standalone business operation.
31	`"tsx": "^4.20.6",`	Continues the surrounding declaration/expression or text: "tsx": "^4.20.6",. Read it with the preceding opening statement ("@types/supertest": "^6.0.3",); it is not a standalone business operation.
32	`"typescript": "^5.9.3",`	Continues the surrounding declaration/expression or text: "typescript": "^5.9.3",. Read it with the preceding opening statement ("tsx": "^4.20.6",); it is not a standalone business operation.
33	`"vitest": "^5.0.3"`	Continues the surrounding declaration/expression or text: "vitest": "^5.0.3". Read it with the preceding opening statement ("typescript": "^5.9.3",); it is not a standalone business operation.

Line	Source code	Explanation / reading note
34	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`  "overrides": {`	Continues the surrounding declaration/expression or text: "overrides": {. Read it with the preceding opening statement (},); it is not a standalone business operation.
36	`    "uuid": "^11.1.1"`	Continues the surrounding declaration/expression or text: "uuid": "^11.1.1". Read it with the preceding opening statement ("overrides": {); it is not a standalone business operation.
37	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/tsconfig.json

TypeScript compiler configuration: module resolution, target, strictness and included files. Type checking is not a runtime integration test.

13 numbered source lines | SHA-256 6d4b5188d4b2b171db5b00f8df3a94dbc6d9dfbe715e38d6539e3d5c3b16cd63

Line	Source code	Explanation / reading note
1	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement; it is not a standalone business operation.
2	`  "compilerOptions": {`	Continues the surrounding declaration/expression or text: "compilerOptions": {. Read it with the preceding opening statement ({); it is not a standalone business operation.
3	`    "target": "ES2022",`	Continues the surrounding declaration/expression or text: "target": "ES2022",. Read it with the preceding opening statement ("compilerOptions": {); it is not a standalone business operation.
4	`    "module": "NodeNext",`	Continues the surrounding declaration/expression or text: "module": "NodeNext",. Read it with the preceding opening statement ("target": "ES2022",); it is not a standalone business operation.
5	`    "moduleResolution": "NodeNext",`	Continues the surrounding declaration/expression or text: "moduleResolution": "NodeNext",. Read it with the preceding opening statement ("module": "NodeNext",); it is not a standalone business operation.
6	`    "outDir": "dist",`	Continues the surrounding declaration/expression or text: "outDir": "dist",. Read it with the preceding opening statement ("moduleResolution": "NodeNext",); it is not a standalone business operation.
7	`    "rootDir": "src",`	Continues the surrounding declaration/expression or text: "rootDir": "src",. Read it with the preceding opening statement ("outDir": "dist",); it is not a standalone business operation.
8	`    "strict": true,`	Continues the surrounding declaration/expression or text: "strict": true,. Read it with the preceding opening statement ("rootDir": "src",); it is not a standalone business operation.
9	`    "esModuleInterop": true,`	Continues the surrounding declaration/expression or text: "esModuleInterop": true,. Read it with the preceding opening statement ("strict": true,); it is not a standalone business operation.
10	`    "skipLibCheck": true`	Continues the surrounding declaration/expression or text: "skipLibCheck": true. Read it with the preceding opening statement ("esModuleInterop": true,); it is not a standalone business operation.

Line	Source code	Explanation / reading note
11	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
12	`  "include": ["src/**/*.ts"]`	Continues the surrounding declaration/expression or text: "include": ["src/**/*.ts"]. Read it with the preceding opening statement (},); it is not a standalone business operation.
13	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/backend/vitest.config.ts

Local verification script/configuration. Inspect fixture substitution and assertions to determine which behavior is checked and which external systems are not contacted.

13 numbered source lines | SHA-256 e4577cb289d4a4b5b9f31f40eb080e77b37275858e30ec976fc47e5b769bb855

Line	Source code	Explanation / reading note
1	`import { defineConfig } from "vitest/config";`	Imports dependencies/types used below: import { defineConfig } from "vitest/config";. Importing a function does not call it.
2		Blank line separating logical sections; no executable operation.
3	`export default defineConfig({`	Continues the surrounding declaration/expression or text: export default defineConfig({. Read it with the preceding opening statement; it is not a standalone business operation.
4	`  test: {`	Sets/declares the named object property or style/type member: test: {. Interpret it in the enclosing object, props or type definition.
5	`    exclude: ["dist/**", "node_modules/**"],`	Sets/declares the named object property or style/type member: exclude: ["dist/**", "node_modules/**"],. Interpret it in the enclosing object, props or type definition.
6	`    hookTimeout: 30000,`	Sets/declares the named object property or style/type member: hookTimeout: 30000,. Interpret it in the enclosing object, props or type definition.
7	`    env: {`	Sets/declares the named object property or style/type member: env: {. Interpret it in the enclosing object, props or type definition.
8	`      USE_MOCK_DATA: "true",`	Sets/declares the named object property or style/type member: USE_MOCK_DATA: "true",. Interpret it in the enclosing object, props or type definition.
9	`      JWT_SECRET: "automated-test-secret-change-me",`	Sets/declares the named object property or style/type member: JWT_SECRET: "automated-test-secret-change-me",. Interpret it in the enclosing object, props or type definition.
10	`      AUTH_ALLOW_TEST_CODE: "true",`	Sets/declares the named object property or style/type member: AUTH_ALLOW_TEST_CODE: "true",. Interpret it in the enclosing object, props or type definition.
11	`    },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
12	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
13	`});`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/app.json

First-party configuration & operations file: app.json. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

35 numbered source lines | SHA-256 9baf9d4cd8e6871724d4dd54577556e728e680d46478f0bd83a44287b07ab89b

Line	Source code	Explanation / reading note
1	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement; it is not a standalone business operation.
2	`  "expo": {`	Continues the surrounding declaration/expression or text: "expo": {. Read it with the preceding opening statement ({); it is not a standalone business operation.
3	`    "name": "SFA Field Sales",`	Continues the surrounding declaration/expression or text: "name": "SFA Field Sales",. Read it with the preceding opening statement ("expo": {); it is not a standalone business operation.
4	`    "slug": "sfa-field-sales",`	Continues the surrounding declaration/expression or text: "slug": "sfa-field-sales",. Read it with the preceding opening statement ("name": "SFA Field Sales",); it is not a standalone business operation.
5	`    "version": "1.0.0",`	Continues the surrounding declaration/expression or text: "version": "1.0.0",. Read it with the preceding opening statement ("slug": "sfa-field-sales",); it is not a standalone business operation.
6	`    "orientation": "portrait",`	Continues the surrounding declaration/expression or text: "orientation": "portrait",. Read it with the preceding opening statement ("version": "1.0.0",); it is not a standalone business operation.
7	`    "userInterfaceStyle": "light",`	Continues the surrounding declaration/expression or text: "userInterfaceStyle": "light",. Read it with the preceding opening statement ("orientation": "portrait",); it is not a standalone business operation.
8	`    "plugins": [`	Continues the surrounding declaration/expression or text: "plugins": [. Read it with the preceding opening statement ("userInterfaceStyle": "light",); it is not a standalone business operation.
9	`      [`	Continues the surrounding declaration/expression or text: [. Read it with the preceding opening statement ("plugins": []; it is not a standalone business operation.
10	`        "expo-location",`	Continues the surrounding declaration/expression or text: "expo-location",. Read it with the preceding opening statement ([]; it is not a standalone business operation.

Line	Source code	Explanation / reading note
11	`        {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement ("expo-location",); it is not a standalone business operation.
12	`          "locationWhenInUsePermission": "SFA uses your location to validate store visits and attendance."`	Continues the surrounding declaration/expression or text: "locationWhenInUsePermission": "SFA uses your location to validate store visits and attendance.". Read it with the preceding opening statement ({); it is not a standalone business operation.
13	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
14	`      ]`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
15	`    ],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
16	`    "android": {`	Continues the surrounding declaration/expression or text: "android": {. Read it with the preceding opening statement ( ],); it is not a standalone business operation.
17	`      "package": "com.aishwarya.sfafieldsales",`	Continues the surrounding declaration/expression or text: "package": "com.aishwarya.sfafieldsales",. Read it with the preceding opening statement ("android": {); it is not a standalone business operation.
18	`      "versionCode": 11,`	Continues the surrounding declaration/expression or text: "versionCode": 11,. Read it with the preceding opening statement ("package": "com.aishwarya.sfafieldsales",); it is not a standalone business operation.
19	`      "usesCleartextTraffic": true,`	Continues the surrounding declaration/expression or text: "usesCleartextTraffic": true,. Read it with the preceding opening statement ("versionCode": 11,); it is not a standalone business operation.
20	`      "permissions": ["ACCESS_FINE_LOCATION"]`	Continues the surrounding declaration/expression or text: "permissions": ["ACCESS_FINE_LOCATION"]. Read it with the preceding opening statement ("usesCleartextTraffic": true,); it is not a standalone business operation.
21	`    },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
22	`    "ios": {`	Continues the surrounding declaration/expression or text: "ios": {. Read it with the preceding opening statement (},); it is not a standalone business operation.

Line	Source code	Explanation / reading note
23	`"bundleIdentifier": "com.aishwarya.sfafieldsales",`	Continues the surrounding declaration/expression or text: "bundleIdentifier": "com.aishwarya.sfafieldsales",. Read it with the preceding opening statement ("ios": {); it is not a standalone business operation.
24	`"infoPlist": {`	Continues the surrounding declaration/expression or text: "infoPlist": {. Read it with the preceding opening statement ("bundleIdentifier": "com.aishwarya.sfafieldsales",); it is not a standalone business operation.
25	`"NSLocationWhenInUseUsageDescription": "SFA uses your location to validate store visits and attendance."`	Continues the surrounding declaration/expression or text: "NSLocationWhenInUseUsageDescription": "SFA uses your location to validate store visits and attendance.". Read it with the preceding opening statement ("infoPlist": {); it is not a standalone business operation.
26	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
27	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
28	`"extra": {`	Continues the surrounding declaration/expression or text: "extra": {. Read it with the preceding opening statement (},); it is not a standalone business operation.
29	`"eas": {`	Continues the surrounding declaration/expression or text: "eas": {. Read it with the preceding opening statement ("extra": {); it is not a standalone business operation.
30	`"projectId": "8257be1a-9198-49db-b5e3-27ea629a5114"`	Continues the surrounding declaration/expression or text: "projectId": "8257be1a-9198-49db-b5e3-27ea629a5114". Read it with the preceding opening statement ("eas": {); it is not a standalone business operation.
31	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`"owner": "aishwarya1412"`	Continues the surrounding declaration/expression or text: "owner": "aishwarya1412". Read it with the preceding opening statement (},); it is not a standalone business operation.
34	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
35	}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/eas.json

First-party configuration & operations file: eas.json. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

16 numbered source lines | SHA-256 23fb989ba57a39e2ab0b273465ef2b03ab9a17f1ff91d54c817c3390f99aedf0

Line	Source code	Explanation / reading note
1	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement; it is not a standalone business operation.
2	`  "cli": {`	Continues the surrounding declaration/expression or text: "cli": {. Read it with the preceding opening statement ({); it is not a standalone business operation.
3	`    "version": ">= 16.0.0"`	Continues the surrounding declaration/expression or text: "version": ">= 16.0.0". Read it with the preceding opening statement ("cli": {); it is not a standalone business operation.
4	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
5	`  "build": {`	Continues the surrounding declaration/expression or text: "build": {. Read it with the preceding opening statement (},); it is not a standalone business operation.
6	`    "preview": {`	Continues the surrounding declaration/expression or text: "preview": {. Read it with the preceding opening statement ("build": {); it is not a standalone business operation.
7	`      "distribution": "internal",`	Continues the surrounding declaration/expression or text: "distribution": "internal",. Read it with the preceding opening statement ("preview": {); it is not a standalone business operation.
8	`      "android": {`	Continues the surrounding declaration/expression or text: "android": {. Read it with the preceding opening statement ("distribution": "internal",); it is not a standalone business operation.
9	`        "buildType": "apk"`	Continues the surrounding declaration/expression or text: "buildType": "apk". Read it with the preceding opening statement ("android": {); it is not a standalone business operation.
10	`      },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
11	`      "env": {`	Continues the surrounding declaration/expression or text: "env": {. Read it with the preceding opening statement (},); it is not a standalone business operation.

Line	Source code	Explanation / reading note
12	`"EXPO_PUBLIC_API_URL": "https://maximize-friends-insert-maintain.trycloudflare.com/api"`	Continues the surrounding declaration/expression or text: "EXPO_PUBLIC_API_URL": "https://maximize-friends-insert-maintain.trycloudflare.com/api". Read it with the preceding opening statement ("env": {); it is not a standalone business operation.
13	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
14	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
15	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
16	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/index.ts

First-party configuration & operations file: index. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

5 numbered source lines | SHA-256 8f616a6cb174782fdcd09015136027c3b7b7c7ac3767fdd2614183fb08f8237c

Line	Source code	Explanation / reading note
1	`import { registerRootComponent } from "expo";`	Imports dependencies/types used below: import { registerRootComponent } from "expo";. Importing a function does not call it.
2	`import App from "./App";`	Imports dependencies/types used below: import App from "./App";. Importing a function does not call it.
3		Blank line separating logical sections; no executable operation.
4	`// Resolve Expo through the workspace rather than a hard-coded node_modules path.`	Developer comment/documentation: Resolve Expo through the workspace rather than a hard-coded node_modules path. It is not executed.
5	`registerRootComponent(App);`	Continues the surrounding declaration/expression or text: registerRootComponent(App);. Read it with the preceding opening statement (// Resolve Expo through the workspace rather than a hard-coded node_modules path.); it is not a standalone business operation.

sales-rep-mobile/mobile/package.json

Package manifest: runtime/dev dependencies, entry point and npm scripts. Scripts run only when invoked; a dependency declaration does not prove a feature is used.

37 numbered source lines | SHA-256 0b33b1fb322c5c82ae32c2dbea0e4d151de464aac022700ba04a6cfa6d6a6638

Line	Source code	Explanation / reading note
1	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement; it is not a standalone business operation.
2	`  "name": "sfa-mobile",`	Continues the surrounding declaration/expression or text: "name": "sfa-mobile",. Read it with the preceding opening statement ({); it is not a standalone business operation.
3	`  "version": "1.0.0",`	Continues the surrounding declaration/expression or text: "version": "1.0.0",. Read it with the preceding opening statement ("name": "sfa-mobile",); it is not a standalone business operation.
4	`  "private": true,`	Continues the surrounding declaration/expression or text: "private": true,. Read it with the preceding opening statement ("version": "1.0.0",); it is not a standalone business operation.
5	`  "main": "index.ts",`	Continues the surrounding declaration/expression or text: "main": "index.ts",. Read it with the preceding opening statement ("private": true,); it is not a standalone business operation.
6	`  "scripts": {`	Continues the surrounding declaration/expression or text: "scripts": {. Read it with the preceding opening statement ("main": "index.ts",); it is not a standalone business operation.
7	`    "start": "expo start",`	Continues the surrounding declaration/expression or text: "start": "expo start",. Read it with the preceding opening statement ("scripts": {); it is not a standalone business operation.
8	`    "android": "expo start --android",`	Continues the surrounding declaration/expression or text: "android": "expo start --android",. Read it with the preceding opening statement ("start": "expo start",); it is not a standalone business operation.
9	`    "ios": "expo start --ios",`	Continues the surrounding declaration/expression or text: "ios": "expo start --ios",. Read it with the preceding opening statement ("android": "expo start --android",); it is not a standalone business operation.
10	`    "web": "expo start --web",`	Continues the surrounding declaration/expression or text: "web": "expo start --web",. Read it with the preceding opening statement ("ios": "expo start --ios",); it is not a standalone business operation.

Line	Source code	Explanation / reading note
11	`"typecheck": "tsc --noEmit",`	Continues the surrounding declaration/expression or text: "typecheck": "tsc --noEmit",. Read it with the preceding opening statement ("web": "expo start --web",); it is not a standalone business operation.
12	`"test": "vitest run"`	Continues the surrounding declaration/expression or text: "test": "vitest run". Read it with the preceding opening statement ("typecheck": "tsc --noEmit",); it is not a standalone business operation.
13	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
14	`"dependencies": {`	Continues the surrounding declaration/expression or text: "dependencies": {. Read it with the preceding opening statement (},); it is not a standalone business operation.
15	`"@react-native-async-storage/async-storage": "^2.2.0",`	Continues the surrounding declaration/expression or text: "@react-native-async-storage/async-storage": "^2.2.0",. Read it with the preceding opening statement ("dependencies": {); it is not a standalone business operation.
16	`"@react-native-community/netinfo": "11.4.1",`	Continues the surrounding declaration/expression or text: "@react-native-community/netinfo": "11.4.1",. Read it with the preceding opening statement ("@react-native-async-storage/async-storage": "^2.2.0",); it is not a standalone business operation.
17	`"@react-navigation/bottom-tabs": "^7.4.7",`	Continues the surrounding declaration/expression or text: "@react-navigation/bottom-tabs": "^7.4.7",. Read it with the preceding opening statement ("@react-native-community/netinfo": "11.4.1",); it is not a standalone business operation.
18	`"@react-navigation/native": "^7.1.17",`	Continues the surrounding declaration/expression or text: "@react-navigation/native": "^7.1.17",. Read it with the preceding opening statement ("@react-navigation/bottom-tabs": "^7.4.7",); it is not a standalone business operation.
19	`"@react-navigation/native-stack": "^7.3.26",`	Continues the surrounding declaration/expression or text: "@react-navigation/native-stack": "^7.3.26",. Read it with the preceding opening statement ("@react-navigation/native": "^7.1.17",); it is not a standalone business operation.
20	`"expo": "~54.0.13",`	Continues the surrounding declaration/expression or text: "expo": "~54.0.13",. Read it with the preceding opening statement ("@react-navigation/native-stack": "^7.3.26",); it is not a standalone business operation.
21	`"expo-file-system": "~19.0.17",`	Continues the surrounding declaration/expression or text: "expo-file-system": "~19.0.17",. Read it with the preceding opening statement ("expo": "~54.0.13",); it is not a standalone business operation.

Line	Source code	Explanation / reading note
22	`"expo-location": "~19.0.7",`	Continues the surrounding declaration/expression or text: "expo-location": "~19.0.7",. Read it with the preceding opening statement ("expo-file-system": "~19.0.17",); it is not a standalone business operation.
23	`"expo-sharing": "~14.0.7",`	Continues the surrounding declaration/expression or text: "expo-sharing": "~14.0.7",. Read it with the preceding opening statement ("expo-location": "~19.0.7",); it is not a standalone business operation.
24	`"expo-status-bar": "~3.0.8",`	Continues the surrounding declaration/expression or text: "expo-status-bar": "~3.0.8",. Read it with the preceding opening statement ("expo-sharing": "~14.0.7",); it is not a standalone business operation.
25	`"react": "19.1.0",`	Continues the surrounding declaration/expression or text: "react": "19.1.0",. Read it with the preceding opening statement ("expo-status-bar": "~3.0.8",); it is not a standalone business operation.
26	`"react-dom": "19.1.0",`	Continues the surrounding declaration/expression or text: "react-dom": "19.1.0",. Read it with the preceding opening statement ("react": "19.1.0",); it is not a standalone business operation.
27	`"react-native": "0.81.5",`	Continues the surrounding declaration/expression or text: "react-native": "0.81.5",. Read it with the preceding opening statement ("react-dom": "19.1.0",); it is not a standalone business operation.
28	`"react-native-web": "~0.21.0",`	Continues the surrounding declaration/expression or text: "react-native-web": "~0.21.0",. Read it with the preceding opening statement ("react-native": "0.81.5",); it is not a standalone business operation.
29	`"react-native-safe-area-context": "~5.6.0",`	Continues the surrounding declaration/expression or text: "react-native-safe-area-context": "~5.6.0",. Read it with the preceding opening statement ("react-native-web": "~0.21.0",); it is not a standalone business operation.
30	`"react-native-screens": "~4.16.0"`	Continues the surrounding declaration/expression or text: "react-native-screens": "~4.16.0". Read it with the preceding opening statement ("react-native-safe-area-context": "~5.6.0",); it is not a standalone business operation.
31	`},`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`"devDependencies": {`	Continues the surrounding declaration/expression or text: "devDependencies": {. Read it with the preceding opening statement (},); it is not a standalone business operation.

Line	Source code	Explanation / reading note
33	`"@types/react": "~19.1.10",`	Continues the surrounding declaration/expression or text: "@types/react": "~19.1.10",. Read it with the preceding opening statement ("devDependencies": {); it is not a standalone business operation.
34	`"typescript": "~5.9.2",`	Continues the surrounding declaration/expression or text: "typescript": "~5.9.2",. Read it with the preceding opening statement ("@types/react": "~19.1.10",); it is not a standalone business operation.
35	`"vitest": "^3.2.4"`	Continues the surrounding declaration/expression or text: "vitest": "^3.2.4". Read it with the preceding opening statement ("typescript": "~5.9.2",); it is not a standalone business operation.
36	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
37	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/mobile/tsconfig.json

TypeScript compiler configuration: module resolution, target, strictness and included files. Type checking is not a runtime integration test.

9 numbered source lines | SHA-256 c8737a4686b895d67bdbb5b6b5cc20ecbb3ebd20727be5952c456ae477cc7f97

Line	Source code	Explanation / reading note
1	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement; it is not a standalone business operation.
2	`  "extends": "expo/tsconfig.base",`	Continues the surrounding declaration/expression or text: "extends": "expo/tsconfig.base",. Read it with the preceding opening statement ({); it is not a standalone business operation.
3	`  "compilerOptions": {`	Continues the surrounding declaration/expression or text: "compilerOptions": {. Read it with the preceding opening statement ("extends": "expo/tsconfig.base",); it is not a standalone business operation.
4	`    "strict": true,`	Continues the surrounding declaration/expression or text: "strict": true,. Read it with the preceding opening statement ("compilerOptions": {); it is not a standalone business operation.
5	`    "baseUrl": ".",`	Continues the surrounding declaration/expression or text: "baseUrl": ".",. Read it with the preceding opening statement ("strict": true,); it is not a standalone business operation.
6	`    "paths": { "@/*": ["src/*"] }`	Continues the surrounding declaration/expression or text: "paths": { "@/*": ["src/*"] }. Read it with the preceding opening statement ("baseUrl": ".",); it is not a standalone business operation.
7	`  },`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
8	`  "include": ["**/*.ts", "**/*.tsx"]`	Continues the surrounding declaration/expression or text: "include": ["**/*.ts", "**/*.tsx"]. Read it with the preceding opening statement (},); it is not a standalone business operation.
9	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sales-rep-mobile/package.json

Package manifest: runtime/dev dependencies, entry point and npm scripts. Scripts run only when invoked; a dependency declaration does not prove a feature is used.

15 numbered source lines | SHA-256 aefe8a155c24b1d461168f81359dac996b32fedc18d96ad7ffe678062abc97b0

Line	Source code	Explanation / reading note
1	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement; it is not a standalone business operation.
2	`  "name": "sfa-sales-rep-platform",`	Continues the surrounding declaration/expression or text: "name": "sfa-sales-rep-platform",. Read it with the preceding opening statement ({); it is not a standalone business operation.
3	`  "private": true,`	Continues the surrounding declaration/expression or text: "private": true,. Read it with the preceding opening statement ("name": "sfa-sales-rep-platform",); it is not a standalone business operation.
4	`  "workspaces": [`	Continues the surrounding declaration/expression or text: "workspaces": [. Read it with the preceding opening statement ("private": true,); it is not a standalone business operation.
5	`    "mobile",`	Continues the surrounding declaration/expression or text: "mobile",. Read it with the preceding opening statement ("workspaces": []); it is not a standalone business operation.
6	`    "backend"`	Continues the surrounding declaration/expression or text: "backend". Read it with the preceding opening statement ("mobile",); it is not a standalone business operation.
7	`  ],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
8	`  "scripts": {`	Continues the surrounding declaration/expression or text: "scripts": {. Read it with the preceding opening statement ( ],); it is not a standalone business operation.
9	`    "mobile": "npm run start -w mobile",`	Continues the surrounding declaration/expression or text: "mobile": "npm run start -w mobile",. Read it with the preceding opening statement ("scripts": {); it is not a standalone business operation.
10	`    "web": "npm run web -w mobile",`	Continues the surrounding declaration/expression or text: "web": "npm run web -w mobile",. Read it with the preceding opening statement ("mobile": "npm run start -w mobile",); it is not a standalone business operation.
11	`    "backend": "npm run dev -w backend",`	Continues the surrounding declaration/expression or text: "backend": "npm run dev -w backend",. Read it with the preceding opening statement ("web": "npm run web -w mobile",); it is not a standalone business operation.

Line	Source code	Explanation / reading note
12	`    "build": "npm run build -w backend && npm run typecheck -w mobile",`	Continues the surrounding declaration/expression or text: "build": "npm run build -w backend && npm run typecheck -w mobile",. Read it with the preceding opening statement ("backend": "npm run dev -w backend",); it is not a standalone business operation.
13	`    "test": "npm test -w backend && npm test -w mobile"`	Continues the surrounding declaration/expression or text: "test": "npm test -w backend && npm test -w mobile". Read it with the preceding opening statement ("build": "npm run build -w backend && npm run typecheck -w mobile",); it is not a standalone business operation.
14	`  }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
15	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

scripts/Sync-SalesforceToGitHub.ps1

Operational script: Sync Salesforce To Git Hub.ps1. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

49 numbered source lines | SHA-256 43b21ea371cb115b904610d14ab1a4c92ce1f39348c5eb2d18954a1aa17d2bf8

Line	Source code	Explanation / reading note
1	`param(`	Continues the surrounding declaration/expression or text: param(. Read it with the preceding opening statement; it is not a standalone business operation.
2	`    [string]$SalesforceOrg = 'sfaNewOrg',`	Assigns the right-hand expression to the named variable/property: [string]$SalesforceOrg = 'sfaNewOrg',. This is in-memory unless it is later persisted by an explicit call.
3	`    [string]$GitBranch = 'main'`	Assigns the right-hand expression to the named variable/property: [string]$GitBranch = 'main'. This is in-memory unless it is later persisted by an explicit call.
4	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
5		Blank line separating logical sections; no executable operation.
6	`$ErrorActionPreference = 'Stop'`	Assigns a PowerShell script variable: $ErrorActionPreference = 'Stop'.
7	`$projectDirectory = Split-Path -Parent $PSScriptRoot`	Assigns a PowerShell script variable: $projectDirectory = Split-Path -Parent $PSScriptRoot.
8	`$manifestPath = Join-Path $projectDirectory 'manifest\auto-sync-package.xml'`	Assigns a PowerShell script variable: $manifestPath = Join-Path $projectDirectory 'manifest\auto-sync-package.xml'.
9	`$logDirectory = Join-Path $projectDirectory 'work'`	Assigns a PowerShell script variable: $logDirectory = Join-Path $projectDirectory 'work'.
10	`$logPath = Join-Path $logDirectory 'salesforce-github-auto-sync.log'`	Assigns a PowerShell script variable: $logPath = Join-Path $logDirectory 'salesforce-github-auto-sync.log'.
11	`$sfCommand = 'C:\Users\aishw\AppData\Roaming\npm\sf.cmd'`	Assigns a PowerShell script variable: $sfCommand = 'C:\Users\aishw\AppData\Roaming\npm\sf.cmd'.
12	`$gitCommand = 'C:\Program Files\Git\cmd\git.exe'`	Assigns a PowerShell script variable: $gitCommand = 'C:\Program Files\Git\cmd\git.exe'.
13	`$mutex = New-Object System.Threading.Mutex($false, 'SFA_Salesforce_GitHub_AutoSync')`	Assigns a PowerShell script variable: $mutex = New-Object System.Threading.Mutex($false, 'SFA_Salesforce_GitHub_AutoSync').
14		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
15	`if (-not $mutex.WaitOne(0)) { exit 0 }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (-not $mutex.WaitOne(0)) { exit 0 }.
16		Blank line separating logical sections; no executable operation.
17	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
18	`    New-Item -ItemType Directory -Path $logDirectory -Force | Out-Null`	Operational command with system/filesystem/deployment effects: New-Item -ItemType Directory -Path $logDirectory -Force | Out-Null. Do not execute as part of simply reading this guide.
19	`    Start-Transcript -Path $logPath -Append | Out-Null`	Continues the surrounding declaration/expression or text: Start-Transcript -Path $logPath -Append | Out-Null. Read it with the preceding opening statement (New-Item -ItemType Directory -Path $logDirectory -Force | Out-Null); it is not a standalone business operation.
20	`    Set-Location -LiteralPath $projectDirectory`	Continues the surrounding declaration/expression or text: Set-Location -LiteralPath $projectDirectory. Read it with the preceding opening statement (Start-Transcript -Path $logPath -Append | Out-Null); it is not a standalone business operation.
21	`    $env:SF_DISABLE_LOG_FILE = 'true'`	Assigns the right-hand expression to the named variable/property: $env:SF_DISABLE_LOG_FILE = 'true'. This is in-memory unless it is later persisted by an explicit call.
22		Blank line separating logical sections; no executable operation.
23	`    & $gitCommand pull --rebase origin $GitBranch`	Continues the surrounding declaration/expression or text: & $gitCommand pull --rebase origin $GitBranch. Read it with the preceding opening statement; it is not a standalone business operation.
24	`    if ($LASTEXITCODE -ne 0) { throw 'Git pull failed.' }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) { throw 'Git pull failed.' }.
25		Blank line separating logical sections; no executable operation.
26	`    & $sfCommand project retrieve start --target-org $SalesforceOrg --manifest $manifestPath --ignore-conflicts --wait 30`	Continues the surrounding declaration/expression or text: & $sfCommand project retrieve start --target-org $SalesforceOrg --manifest $manifestPath --ignore-conflicts --wait 30. Read it with the preceding opening statement; it is not a standalone business operation.
27	`    if ($LASTEXITCODE -ne 0) { throw 'Salesforce metadata retrieval failed.' }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) { throw 'Salesforce metadata retrieval failed.' }.

Line	Source code	Explanation / reading note
28		Blank line separating logical sections; no executable operation.
29	`    & $gitCommand add --all`	Continues the surrounding declaration/expression or text: & $gitCommand add --all. Read it with the preceding opening statement; it is not a standalone business operation.
30	`    & $gitCommand diff --cached --quiet`	Continues the surrounding declaration/expression or text: & $gitCommand diff --cached --quiet. Read it with the preceding opening statement (& $gitCommand add --all); it is not a standalone business operation.
31	`    if ($LASTEXITCODE -eq 0) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -eq 0) {.
32	`        Write-Host 'No Salesforce metadata changes were found.'`	Continues the surrounding declaration/expression or text: Write-Host 'No Salesforce metadata changes were found.'. Read it with the preceding opening statement (if ($LASTEXITCODE -eq 0) {); it is not a standalone business operation.
33	`    } else {`	Alternative branch taken when the preceding condition is false.
34	`        $syncTime = Get-Date -Format 'yyyy-MM-dd HH:mm:ss'`	Assigns a PowerShell script variable: $syncTime = Get-Date -Format 'yyyy-MM-dd HH:mm:ss'.
35	`        & $gitCommand commit -m "Automatic Salesforce sync - $syncTime"`	Continues the surrounding declaration/expression or text: & $gitCommand commit -m "Automatic Salesforce sync - $syncTime". Read it with the preceding opening statement ($syncTime = Get-Date -Format 'yyyy-MM-dd HH:mm:ss'); it is not a standalone business operation.
36	`        if ($LASTEXITCODE -ne 0) { throw 'Git commit failed.' }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) { throw 'Git commit failed.' }.
37		Blank line separating logical sections; no executable operation.
38	`        & $gitCommand push origin $GitBranch`	Continues the surrounding declaration/expression or text: & $gitCommand push origin $GitBranch. Read it with the preceding opening statement; it is not a standalone business operation.
39	`        if ($LASTEXITCODE -ne 0) { throw 'Git push failed.' }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) { throw 'Git push failed.' }.
40	`        Write-Host "Salesforce metadata synchronized at $syncTime."`	Continues the surrounding declaration/expression or text: Write-Host "Salesforce metadata synchronized at $syncTime.". Read it with the preceding opening statement (if ($LASTEXITCODE -ne 0) { throw 'Git push failed.' }); it is not a standalone business operation.

Line	Source code	Explanation / reading note
41	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42	`} catch {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
43	`    Write-Error $_`	Continues the surrounding declaration/expression or text: Write-Error $_. Read it with the preceding opening statement (} catch {); it is not a standalone business operation.
44	`    exit 1`	Continues the surrounding declaration/expression or text: exit 1. Read it with the preceding opening statement (Write-Error $_); it is not a standalone business operation.
45	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
46	`    try { Stop-Transcript | Out-Null } catch {}`	Starts operations whose failure is handled by the following catch/finally blocks.
47	`    $mutex.ReleaseMutex()`	Calls the named method: $mutex.ReleaseMutex(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
48	`    $mutex.Dispose()`	Calls the named method: $mutex.Dispose(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
49	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

scripts/apex/approve-pending-secondary-orders.apex

Operational script: approve pending secondary orders. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

22 numbered source lines | SHA-256 ac5f15e6d70935fe06f543195451fa216a54a4e52831be2d89862e719f2b066a

Line	Source code	Explanation / reading note
1	`// Run only AFTER the automatic-secondary-approval deployment succeeds.`	Developer comment/documentation: Run only AFTER the automatic-secondary-approval deployment succeeds. It is not executed.
2	`// Preserve prior decisions and do not post inventory, receipts or invoices.`	Developer comment/documentation: Preserve prior decisions and do not post inventory, receipts or invoices. It is not executed.
3	`List<Sales_Order__c> pendingOrders = [`	Declares/initializes local data used by the surrounding operation: List<Sales_Order__c> pendingOrders = [. Collection contents and assignments below determine its purpose.
4	`    SELECT Id,DMS_Distributor__c,DMS_Distributor__r.Active__c,`	Selects these Salesforce fields/aggregates: Id,DMS_Distributor__c,DMS_Distributor__r.Active__c,. Query results are used in the surrounding assignment or loop.
5	`           Retailer__r.DMS_Distributor__c`	Continues the surrounding declaration/expression or text: Retailer__r.DMS_Distributor__c. Read it with the preceding opening statement (SELECT Id,DMS_Distributor__c,DMS_Distributor__r.Active__c,); it is not a standalone business operation.
6	`    FROM Sales_Order__c`	Chooses the Salesforce object/subquery source: FROM Sales_Order__c.
7	`    WHERE DMS_Distributor__c != null`	Adds a query/filter condition: WHERE DMS_Distributor__c != null. The complete condition determines which records are included.
8	`      AND (DMS_Status__c = 'Pending' OR DMS_Status__c = null)`	Adds a query/filter condition: AND (DMS_Status__c = 'Pending' OR DMS_Status__c = null). The complete condition determines which records are included.
9	`    LIMIT 1000 FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
10	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
11	`List<Sales_Order__c> approvedOrders = new List<Sales_Order__c>();`	Declares/initializes local data used by the surrounding operation: List<Sales_Order__c> approvedOrders = new List<Sales_Order__c>();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
12	`for(Sales_Order__c row : pendingOrders) {`	Repeats work over the specified records/items or while this condition holds: for(Sales_Order__c row : pendingOrders) {. Check where queries/writes occur relative to the loop.
13	`    if(row.DMS_Distributor__r.Active__c &&`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if(row.DMS_Distributor__r.Active__c &&.
14	`       row.Retailer__r.DMS_Distributor__c == row.DMS_Distributor__c) {`	Continues the surrounding declaration/expression or text: row.Retailer__r.DMS_Distributor__c == row.DMS_Distributor__c) {. Read it with the preceding opening statement (if(row.DMS_Distributor__r.Active__c &&); it is not a standalone business operation.
15	`        approvedOrders.add(new Sales_Order__c(`	Calls the named method: approvedOrders.add(new Sales_Order__c(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
16	`            Id=row.Id, DMS_Status__c='Approved',`	Declares/initializes local data used by the surrounding operation: Id=row.Id, DMS_Status__c='Approved',. Collection contents and assignments below determine its purpose.
17	`            DMS_Decision_Notes__c='Automatically approved secondary order.',`	Assigns the right-hand expression to the named variable/property: DMS_Decision_Notes__c='Automatically approved secondary order.',. This is in-memory unless it is later persisted by an explicit call.
18	`            DMS_Decided_At__c=System.now()));`	Calls the named method: DMS_Decided_At__c=System.now()));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
19	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
20	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21	`update approvedOrders;`	Performs Salesforce DML: update approvedOrders;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
22	`System.debug(LoggingLevel.INFO,'Secondary orders automatically approved: ' +approvedOrders.size());`	Calls the named method: System.debug(LoggingLevel.INFO,'Secondary orders automatically approved: '+approvedOrders.size());. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/assignAvailableBeatsToDev.apex

Operational script: assign Available Beats To Dev. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

26 numbered source lines | SHA-256 b86865c539b452bab83f01771f7e4ad23cdf2a988bfd224927b9881ba19f7f64

Line	Source code	Explanation / reading note
1	`// Authorize Dev to plan visits on beats that are not assigned to anyone.`	Developer comment/documentation: Authorize Dev to plan visits on beats that are not assigned to anyone. It is not executed.
2	`// Existing assignments for Aishwarya, Dhanush, Ram and Poorvi are preserved.`	Developer comment/documentation: Existing assignments for Aishwarya, Dhanush, Ram and Poorvi are preserved. It is not executed.
3		Blank line separating logical sections; no executable operation.
4	`Employee__c dev = [`	Assigns the right-hand expression to the named variable/property: Employee__c dev = [. This is in-memory unless it is later persisted by an explicit call.
5	`    SELECT Id, Name`	Selects these Salesforce fields/aggregates: Id, Name. Query results are used in the surrounding assignment or loop.
6	`    FROM Employee__c`	Chooses the Salesforce object/subquery source: FROM Employee__c.
7	`    WHERE Name = 'Dev' AND Active__c = true`	Adds a query/filter condition: WHERE Name = 'Dev' AND Active__c = true. The complete condition determines which records are included.
8	`    LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
9	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10		Blank line separating logical sections; no executable operation.
11	`List<Beat__c> availableBeats = [`	Declares/initializes local data used by the surrounding operation: List<Beat__c> availableBeats = [. Collection contents and assignments below determine its purpose.
12	`    SELECT Id, Name, Assigned_Employee__c`	Selects these Salesforce fields/aggregates: Id, Name, Assigned_Employee__c. Query results are used in the surrounding assignment or loop.
13	`    FROM Beat__c`	Chooses the Salesforce object/subquery source: FROM Beat__c.
14	`    WHERE Active__c = true AND Assigned_Employee__c = null`	Adds a query/filter condition: WHERE Active__c = true AND Assigned_Employee__c = null. The complete condition determines which records are included.

Line	Source code	Explanation / reading note
15	`    ORDER BY Name`	Controls query sorting, grouping or result count: ORDER BY Name.
16	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17		Blank line separating logical sections; no executable operation.
18	`for (Beat__c beat : availableBeats) {`	Repeats work over the specified records/items or while this condition holds: for (Beat__c beat : availableBeats) {. Check where queries/writes occur relative to the loop.
19	`    beat.Assigned_Employee__c = dev.Id;`	Assigns the right-hand expression to the named variable/property: beat.Assigned_Employee__c = dev.Id;. This is in-memory unless it is later persisted by an explicit call.
20	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21		Blank line separating logical sections; no executable operation.
22	`if (!availableBeats.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!availableBeats.isEmpty()) {.
23	`    update availableBeats;`	Performs Salesforce DML: update availableBeats;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
24	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
25		Blank line separating logical sections; no executable operation.
26	`System.debug('Assigned ' + availableBeats.size() + ' available beats to ' + dev.Name + '.');`	Calls the named method: System.debug('Assigned ' + availableBeats.size() + ' available beats to ' + dev.Name + '.');. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/assignDhanushAsDistributorOfficer.apex

Operational script: assign Dhanush As Distributor Officer. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

18 numbered source lines | SHA-256 1ce5e296fc2ab63e1944099421286e70d7764c68fd474f16add145bacff0d595

Line	Source code	Explanation / reading note
1	`System.assertEquals('00DjV000004opjNUAQ', String.valueOf(UserInfo.getOrganizationId()));`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('00DjV000004opjNUAQ', String.valueOf(UserInfo.getOrganizationId()));. A mismatch fails the test.
2	`User officer=[SELECT Id,Name,IsActive FROM User WHERE Id='005jV000002aNRZQA2'];`	Assigns the right-hand expression to the named variable/property: User officer=[SELECT Id,Name,IsActive FROM User WHERE Id='005jV000002aNRZQA2'];. This is in-memory unless it is later persisted by an explicit call.
3	`System.assert(officer.IsActive && officer.Name=='Dhanush SFA', 'Expected the active Dhanush Salesforce user.');`	Test assertion comparing an expected outcome to actual behavior: System.assert(officer.IsActive && officer.Name=='Dhanush SFA', 'Expected the active Dhanush Salesforce user.');. A mismatch fails the test.
4	`Set<Id> distributorIds=new Set<Id>{'a0TjV000001VqMjUAK','a0TjV000001VqRZUA0','a0TjV000001VpYkUAK'};`	Declares/initializes local data used by the surrounding operation: Set<Id> distributorIds=new Set<Id>{'a0TjV000001VqMjUAK','a0TjV000001VqRZUA0','a0TjV000001VpYkUAK'};. Collection contents and assignments below determine its purpose.
5	`List<DMS_Distributor__c> distributors=[SELECT Id,Officer__c FROM DMS_Distributor__c WHERE Id IN :distributorIds];`	Declares/initializes local data used by the surrounding operation: List<DMS_Distributor__c> distributors=[SELECT Id,Officer__c FROM DMS_Distributor__c WHERE Id IN :distributorIds];. Collection contents and assignments below determine its purpose.
6	`System.assertEquals(3,distributors.size());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(3,distributors.size());. A mismatch fails the test.
7	`for(DMS_Distributor__c distributor:distributors) distributor.Officer__c=officer.Id;`	Repeats work over the specified records/items or while this condition holds: for(DMS_Distributor__c distributor:distributors) distributor.Officer__c=officer.Id;. Check where queries/writes occur relative to the loop.
8	`update distributors;`	Performs Salesforce DML: update distributors;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
9	`Set<Id> sharedIds=new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> sharedIds=new Set<Id>();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
10	`for(DMS_Distributor__Share existing:[SELECT ParentId FROM DMS_Distributor__Share`	Repeats work over the specified records/items or while this condition holds: for(DMS_Distributor__Share existing:[SELECT ParentId FROM DMS_Distributor__Share. Check where queries/writes occur relative to the loop.
11	`    WHERE ParentId IN :distributorIds AND UserOrGroupId=:officer.Id]) sharedIds.add(existing.ParentId);`	Adds a query/filter condition: WHERE ParentId IN :distributorIds AND UserOrGroupId=:officer.Id]) sharedIds.add(existing.ParentId);. The complete condition determines which records are included.
12	`List<DMS_Distributor__Share> shares=new List<DMS_Distributor__Share>();`	Declares/initializes local data used by the surrounding operation: List<DMS_Distributor__Share> shares=new List<DMS_Distributor__Share>();. Collection contents and assignments below determine its purpose.
13	`for(Id distributorId:distributorIds) {`	Repeats work over the specified records/items or while this condition holds: for(Id distributorId:distributorIds) {. Check where queries/writes occur relative to the loop.
14	`    if(!sharedIds.contains(distributorId)) shares.add(new DMS_Distributor__Share(`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if(!sharedIds.contains(distributorId)) shares.add(new DMS_Distributor__Share(.
15	`       ParentId=distributorId,UserOrGroupId=officer.Id,AccessLevel='Read',RowCause='Manual'));`	Assigns the right-hand expression to the named variable/property: ParentId=distributorId,UserOrGroupId=officer.Id,AccessLevel='Read',RowCause='Manual'));. This is in-memory unless it is later persisted by an explicit call.
16	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17	`insert shares;`	Performs Salesforce DML: insert shares;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
18	`System.debug('DMS_OFFICER_VERIFIED: Dhanush SFA assigned to all three distributors.');`	Calls the named method: System.debug('DMS_OFFICER_VERIFIED: Dhanush SFA assigned to all three distributors.');. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/assignDistributorOutlets.apex

Operational script: assign Distributor Outlets. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

44 numbered source lines | SHA-256 d86a83d465b84ef4525a006a704d7ec23d448b64d72be61e7690d707532d6a49

Line	Source code	Explanation / reading note
1	`// Assign the existing demo outlets to the two distributor Accounts used by the`	Developer comment/documentation: Assign the existing demo outlets to the two distributor Accounts used by the It is not executed.
2	`// external mobile application. The script is idempotent and creates no Accounts.`	Developer comment/documentation: external mobile application. The script is idempotent and creates no Accounts. It is not executed.
3	`Map<String, Account> distributorsByName = new Map<String, Account>();`	Declares/initializes local data used by the surrounding operation: Map<String, Account> distributorsByName = new Map<String, Account>();. Collection contents and assignments below determine its purpose.
4	`for (Account distributor : [`	Repeats work over the specified records/items or while this condition holds: for (Account distributor : [. Check where queries/writes occur relative to the loop.
5	`    SELECT Id, Name`	Selects these Salesforce fields/aggregates: Id, Name. Query results are used in the surrounding assignment or loop.
6	`    FROM Account`	Chooses the Salesforce object/subquery source: FROM Account.
7	`    WHERE Name IN ('Edge Communications', 'Express Logistics and Transport')`	Adds a query/filter condition: WHERE Name IN ('Edge Communications', 'Express Logistics and Transport'). The complete condition determines which records are included.
8	`]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (WHERE Name IN ('Edge Communications', 'Express Logistics and Transport')); it is not a standalone business operation.
9	`    distributorsByName.put(distributor.Name, distributor);`	Calls the named method: distributorsByName.put(distributor.Name, distributor);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
10	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
11		Blank line separating logical sections; no executable operation.
12	`if (!distributorsByName.containsKey('Edge Communications') ||`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!distributorsByName.containsKey('Edge Communications') ||.

Line	Source code	Explanation / reading note
13	`    !distributorsByName.containsKey('Express Logistics and Transport')) {`	Calls the named method: !distributorsByName.containsKey('Express Logistics and Transport')) {. Its implementation defines the side effect/result; use the symbol/file index to follow it.
14	`    throw new IllegalArgumentException('Both distributor Accounts must exist before outlet assignment.');`	Stops this execution path with a validation/error exception: throw new IllegalArgumentException('Both distributor Accounts must exist before outlet assignment.');. The caller/catch block decides how it is reported.
15	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
16		Blank line separating logical sections; no executable operation.
17	`Set<String> edgeBeatNames = new Set<String>{`	Declares/initializes local data used by the surrounding operation: Set<String> edgeBeatNames = new Set<String>{. Collection contents and assignments below determine its purpose.
18	`    'Central Market Beat',`	Continues the surrounding declaration/expression or text: 'Central Market Beat',. Read it with the preceding opening statement (Set<String> edgeBeatNames = new Set<String>{); it is not a standalone business operation.
19	`    'Electronic City Beat',`	Continues the surrounding declaration/expression or text: 'Electronic City Beat',. Read it with the preceding opening statement ('Central Market Beat',); it is not a standalone business operation.
20	`    'Indiranagar Beat',`	Continues the surrounding declaration/expression or text: 'Indiranagar Beat',. Read it with the preceding opening statement ('Electronic City Beat',); it is not a standalone business operation.
21	`    'Koramangala Beat',`	Continues the surrounding declaration/expression or text: 'Koramangala Beat',. Read it with the preceding opening statement ('Indiranagar Beat',); it is not a standalone business operation.
22	`    'MG Road 3rd cross',`	Continues the surrounding declaration/expression or text: 'MG Road 3rd cross',. Read it with the preceding opening statement ('Koramangala Beat',); it is not a standalone business operation.
23	`    'Whitefield Beat'`	Continues the surrounding declaration/expression or text: 'Whitefield Beat'. Read it with the preceding opening statement ('MG Road 3rd cross',); it is not a standalone business operation.

Line	Source code	Explanation / reading note
24	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
25		Blank line separating logical sections; no executable operation.
26	`List<Retailer__c> outletsToUpdate = new List<Retailer__c>();`	Declares/initializes local data used by the surrounding operation: List<Retailer__c> outletsToUpdate = new List<Retailer__c>();. Collection contents and assignments below determine its purpose.
27	`for (Retailer__c outlet : [`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c outlet : [. Check where queries/writes occur relative to the loop.
28	`    SELECT Id, Beat__r.Name, Distributor__c`	Selects these Salesforce fields/aggregates: Id, Beat__r.Name, Distributor__c. Query results are used in the surrounding assignment or loop.
29	`    FROM Retailer__c`	Chooses the Salesforce object/subquery source: FROM Retailer__c.
30	`]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (FROM Retailer__c); it is not a standalone business operation.
31	`    Id requiredDistributorId = outlet.Beat__r != null && edgeBeatNames.contains(outlet.Beat__r.Name)`	Declares/initializes local data used by the surrounding operation: Id requiredDistributorId = outlet.Beat__r != null && edgeBeatNames.contains(outlet.Beat__r.Name). Collection contents and assignments below determine its purpose.
32	`        ? distributorsByName.get('Edge Communications').Id`	Calls the named method: ? distributorsByName.get('Edge Communications').Id. Its implementation defines the side effect/result; use the symbol/file index to follow it.
33	`        : distributorsByName.get('Express Logistics and Transport').Id;`	Calls the named method: : distributorsByName.get('Express Logistics and Transport').Id;. Its implementation defines the side effect/result; use the symbol/file index to follow it.
34	`    if (outlet.Distributor__c != requiredDistributorId) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (outlet.Distributor__c != requiredDistributorId) {.
35	`        outlet.Distributor__c = requiredDistributorId;`	Assigns the right-hand expression to the named variable/property: outlet.Distributor__c = requiredDistributorId;. This is in-memory unless it is later persisted by an explicit call.
36	`        outletsToUpdate.add(outlet);`	Calls the named method: outletsToUpdate.add(outlet);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
37	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
38	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39		Blank line separating logical sections; no executable operation.
40	`if (!outletsToUpdate.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!outletsToUpdate.isEmpty()) {.
41	`    update outletsToUpdate;`	Performs Salesforce DML: update outletsToUpdate;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
42	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
43		Blank line separating logical sections; no executable operation.
44	`System.debug(LoggingLevel.INFO, 'Distributor outlet assignments updated: ' + outletsToUpdate.size());`	Calls the named method: System.debug(LoggingLevel.INFO, 'Distributor outlet assignments updated: ' + outletsToUpdate.size());. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/backfillApprovedPjpAllocations.apex

Operational script: backfill Approved Pjp Allocations. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

10 numbered source lines | SHA-256 84182bd30b3741840c52e86c03d8fd1e0b716dbf768847d999174efa1c266496

Line	Source code	Explanation / reading note
1	`// Safe to repeat. Creates only missing employee/outlet allocations and reactivates`	Developer comment/documentation: Safe to repeat. Creates only missing employee/outlet allocations and reactivates It is not executed.
2	`// matching inactive ones. Existing unrelated/manual allocations are preserved.`	Developer comment/documentation: matching inactive ones. Existing unrelated/manual allocations are preserved. It is not executed.
3	`Set<Id> approvedIds = new Map<Id, Permanent_Journey_Plan__c>([`	Declares/initializes local data used by the surrounding operation: Set<Id> approvedIds = new Map<Id, Permanent_Journey_Plan__c>([. Collection contents and assignments below determine its purpose.
4	`    SELECT Id FROM Permanent_Journey_Plan__c`	Selects these Salesforce fields/aggregates: Id FROM Permanent_Journey_Plan__c. Query results are used in the surrounding assignment or loop.
5	`    WHERE Status__c = 'Approved' AND Employee__c != null AND Employee__r.Active__c = true`	Adds a query/filter condition: WHERE Status__c = 'Approved' AND Employee__c != null AND Employee__r.Active__c = true. The complete condition determines which records are included.
6	`]).keySet();`	Continues the surrounding declaration/expression or text:]).keySet();. Read it with the preceding opening statement (WHERE Status__c = 'Approved' AND Employee__c != null AND Employee__r.Active__c = true); it is not a standalone business operation.
7	`Integer beforeCount = [SELECT COUNT() FROM Distributor_Outlet_Allocation__c];`	Declares/initializes local data used by the surrounding operation: Integer beforeCount = [SELECT COUNT() FROM Distributor_Outlet_Allocation__c];. Collection contents and assignments below determine its purpose.
8	`SfaPjpAllocationService.syncApprovedPlans(approvedIds);`	Calls the named method: SfaPjpAllocationService.syncApprovedPlans(approvedIds);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
9	`Integer afterCount = [SELECT COUNT() FROM Distributor_Outlet_Allocation__c];`	Declares/initializes local data used by the surrounding operation: Integer afterCount = [SELECT COUNT() FROM Distributor_Outlet_Allocation__c];. Collection contents and assignments below determine its purpose.
Line	**Source code**	**Explanation / reading note**
10	`System.debug(LoggingLevel.ERROR, 'PJP_ALLOCATION_BACKFILL plans=' + approvedIds.size() + ' newAllocations=' + (afterCount-beforeCount));`	Calls the named method: System.debug(LoggingLevel.ERROR, 'PJP_ALLOCATION_BACKFILL plans=' + approvedIds.size() + ' newAllocations=' +

Line	Source code	Explanation / reading note
		(afterCount-beforeCount));. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/backfillApprovedPjpOutlets.apex

Operational script: backfill Approved Pjp Outlets. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

46 numbered source lines | SHA-256 ca61536d64b11758a39f981103b57ea0242875cbe890283008e938ea6e0fb04c

Line	Source code	Explanation / reading note
1	`List<Permanent_Journey_Plan__c> approvedPlans = [`	Declares/initializes local data used by the surrounding operation: List<Permanent_Journey_Plan__c> approvedPlans = [. Collection contents and assignments below determine its purpose.
2	`    SELECT Id, Beat__c, Approved_Outlet_Names__c,`	Selects these Salesforce fields/aggregates: Id, Beat__c, Approved_Outlet_Names__c,. Query results are used in the surrounding assignment or loop.
3	`           (SELECT Beat__c FROM Selected_Beats__r)`	Continues the surrounding declaration/expression or text: (SELECT Beat__c FROM Selected_Beats__r). Read it with the preceding opening statement (SELECT Id, Beat__c, Approved_Outlet_Names__c,); it is not a standalone business operation.
4	`    FROM Permanent_Journey_Plan__c`	Chooses the Salesforce object/subquery source: FROM Permanent_Journey_Plan__c.
5	`    WHERE Status__c = 'Approved'`	Adds a query/filter condition: WHERE Status__c = 'Approved'. The complete condition determines which records are included.
6	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
7		Blank line separating logical sections; no executable operation.
8	`Map<Id, Set<Id>> beatIdsByPlan = new Map<Id, Set<Id>>();`	Declares/initializes local data used by the surrounding operation: Map<Id, Set<Id>> beatIdsByPlan = new Map<Id, Set<Id>>();. Collection contents and assignments below determine its purpose.
9	`Set<Id> allBeatIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> allBeatIds = new Set<Id>();. Collection contents and assignments below determine its purpose.
10	`for (Permanent_Journey_Plan__c plan : approvedPlans) {`	Repeats work over the specified records/items or while this condition holds: for (Permanent_Journey_Plan__c plan : approvedPlans) {. Check where queries/writes occur relative to the loop.
11	`    Set<Id> beatIds = new Set<Id>();`	Declares/initializes local data used by the surrounding operation: Set<Id> beatIds = new Set<Id>();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
12	`    for (PJP_Selected_Beat__c selection : plan.Selected_Beats__r) {`	Repeats work over the specified records/items or while this condition holds: for (PJP_Selected_Beat__c selection : plan.Selected_Beats__r) {. Check where queries/writes occur relative to the loop.
13	`        if (selection.Beat__c != null) beatIds.add(selection.Beat__c);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (selection.Beat__c != null) beatIds.add(selection.Beat__c);.
14	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
15	`    if (beatIds.isEmpty() && plan.Beat__c != null) beatIds.add(plan.Beat__c);`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (beatIds.isEmpty() && plan.Beat__c != null) beatIds.add(plan.Beat__c);.
16	`    beatIdsByPlan.put(plan.Id, beatIds);`	Calls the named method: beatIdsByPlan.put(plan.Id, beatIds);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
17	`    allBeatIds.addAll(beatIds);`	Calls the named method: allBeatIds.addAll(beatIds);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
18	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19		Blank line separating logical sections; no executable operation.
20	`Map<Id, List<String>> outletNamesByBeat = new Map<Id, List<String>>();`	Declares/initializes local data used by the surrounding operation: Map<Id, List<String>> outletNamesByBeat = new Map<Id, List<String>>();. Collection contents and assignments below determine its purpose.
21	`for (Retailer__c outlet : [`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c outlet : [. Check where queries/writes occur relative to the loop.
22	`    SELECT Name, Beat__c FROM Retailer__c`	Selects these Salesforce fields/aggregates: Name, Beat__c FROM Retailer__c. Query results are used in the surrounding assignment or loop.
23	`    WHERE Beat__c IN :allBeatIds AND Active__c = true`	Adds a query/filter condition: WHERE Beat__c IN :allBeatIds AND Active__c = true. The complete condition determines which records are included.
24	`    ORDER BY Name`	Controls query sorting, grouping or result count: ORDER BY Name.
25	`]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (ORDER BY Name); it is not a standalone business operation.

Line	Source code	Explanation / reading note
26	`    if (!outletNamesByBeat.containsKey(outlet.Beat__c)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!outletNamesByBeat.containsKey(outlet.Beat__c)) {.
27	`        outletNamesByBeat.put(outlet.Beat__c, new List<String>());`	Calls the named method: outletNamesByBeat.put(outlet.Beat__c, new List<String>());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
28	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`    outletNamesByBeat.get(outlet.Beat__c).add(outlet.Name);`	Calls the named method: outletNamesByBeat.get(outlet.Beat__c).add(outlet.Name);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
30	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31		Blank line separating logical sections; no executable operation.
32	`for (Permanent_Journey_Plan__c plan : approvedPlans) {`	Repeats work over the specified records/items or while this condition holds: for (Permanent_Journey_Plan__c plan : approvedPlans) {. Check where queries/writes occur relative to the loop.
33	`    List<String> outletNames = new List<String>();`	Declares/initializes local data used by the surrounding operation: List<String> outletNames = new List<String>();. Collection contents and assignments below determine its purpose.
34	`    for (Id beatId : beatIdsByPlan.get(plan.Id)) {`	Repeats work over the specified records/items or while this condition holds: for (Id beatId : beatIdsByPlan.get(plan.Id)) {. Check where queries/writes occur relative to the loop.
35	`        if (outletNamesByBeat.containsKey(beatId)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (outletNamesByBeat.containsKey(beatId)) {.
36	`            outletNames.addAll(outletNamesByBeat.get(beatId));`	Calls the named method: outletNames.addAll(outletNamesByBeat.get(beatId));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
37	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
39	`    String joinedNames = String.join(outletNames, ', ');`	Declares/initializes local data used by the surrounding operation: String joinedNames = String.join(outletNames, ', ');. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
40	`    plan.Approved_Outlet_Names__c = joinedNames.length() > 255`	Calls the named method: plan.Approved_Outlet_Names__c = joinedNames.length() > 255. Its implementation defines the side effect/result; use the symbol/file index to follow it.
41	`        ? joinedNames.substring(0, 252) + '...'`	Calls the named method: ? joinedNames.substring(0, 252) + '...'. Its implementation defines the side effect/result; use the symbol/file index to follow it.
42	`        : joinedNames;`	Continues the surrounding declaration/expression or text: : joinedNames;. Read it with the preceding opening statement (? joinedNames.substring(0, 252) + '...'); it is not a standalone business operation.
43	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
44		Blank line separating logical sections; no executable operation.
45	`if (!approvedPlans.isEmpty()) update approvedPlans;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!approvedPlans.isEmpty()) update approvedPlans;.
46	`System.debug('Backfilled approved outlet names for ' + approvedPlans.size() + ' PJP records.');`	Calls the named method: System.debug('Backfilled approved outlet names for ' + approvedPlans.size() + ' PJP records.');. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/fillApprovedPrimaryCasePrices20261022.apex

Operational script: fill Approved Primary Case Prices20261022. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

36 numbered source lines | SHA-256 bf3abaaa619a7c0c661ef28af6d08456bf851bc5656ed5debf8ba775fe1ef633

Line	Source code	Explanation / reading note
1	`// One-time user-approved backfill: Retailer Base Price x Pieces Per Case.`	Developer comment/documentation: One-time user-approved backfill: Retailer Base Price x Pieces Per Case. It is not executed.
2	`// Scope is the 24 reviewed products. Existing case prices are never overwritten.`	Developer comment/documentation: Scope is the 24 reviewed products. Existing case prices are never overwritten. It is not executed.
3	`Set<Id> approvedProducts = new Set<Id>{`	Declares/initializes local data used by the surrounding operation: Set<Id> approvedProducts = new Set<Id>{. Collection contents and assignments below determine its purpose.
4	`    'a04jV000000WyndQAC','a04jV000000WynYQAS','a04jV000000WynSQAS',`	Continues the surrounding declaration/expression or text: 'a04jV000000WyndQAC','a04jV000000WynYQAS','a04jV000000WynSQAS',. Read it with the preceding opening statement (Set<Id> approvedProducts = new Set<Id>{); it is not a standalone business operation.
5	`    'a04jV000000b8TFQAY','a04jV000000WyniQAC','a04jV000000WynjQAC',`	Continues the surrounding declaration/expression or text: 'a04jV000000b8TFQAY','a04jV000000WyniQAC','a04jV000000WynjQAC',. Read it with the preceding opening statement ('a04jV000000WyndQAC','a04jV000000WynYQAS','a04jV000000WynSQAS',); it is not a standalone business operation.
6	`    'a04jV000000WynhQAC','a04jV000000WyneQAC','a04jV000000WynZQAS',`	Continues the surrounding declaration/expression or text: 'a04jV000000WynhQAC','a04jV000000WyneQAC','a04jV000000WynZQAS',. Read it with the preceding opening statement ('a04jV000000b8TFQAY','a04jV000000WyniQAC','a04jV000000WynjQAC',); it is not a standalone business operation.
7	`    'a04jV000000WynVQAS','a04jV000000WynWQAS','a04jV000000WynXQAS',`	Continues the surrounding declaration/expression or text: 'a04jV000000WynVQAS','a04jV000000WynWQAS','a04jV000000WynXQAS',. Read it with the preceding opening statement ('a04jV000000WynhQAC','a04jV000000WyneQAC','a04jV000000WynZQAS',); it is not a standalone business operation.

Line	Source code	Explanation / reading note
8	`'a04jV000000WynaQAC','a04jV000000WynUQAS','a04jV000000VjbxQAC',`	Continues the surrounding declaration/expression or text: 'a04jV000000WynaQAC','a04jV000000WynUQAS','a04jV000000VjbxQAC',. Read it with the preceding opening statement ('a04jV000000WynVQAS','a04jV000000WynWQAS','a04jV000000WynXQAS',); it is not a standalone business operation.
9	`'a04jV000000WynRQAS','a04jV000000WynkQAC','a04jV000000WynTQAS',`	Continues the surrounding declaration/expression or text: 'a04jV000000WynRQAS','a04jV000000WynkQAC','a04jV000000WynTQAS',. Read it with the preceding opening statement ('a04jV000000WynaQAC','a04jV000000WynUQAS','a04jV000000VjbxQAC',); it is not a standalone business operation.
10	`'a04jV000000XkNRQA0','a04jV000000WynfQAC','a04jV000000WyncQAC',`	Continues the surrounding declaration/expression or text: 'a04jV000000XkNRQA0','a04jV000000WynfQAC','a04jV000000WyncQAC',. Read it with the preceding opening statement ('a04jV000000WynRQAS','a04jV000000WynkQAC','a04jV000000WynTQAS',); it is not a standalone business operation.
11	`'a04jV000000YYFNQA4','a04jV000000WyngQAC','a04jV000000WynbQAC'`	Continues the surrounding declaration/expression or text: 'a04jV000000YYFNQA4','a04jV000000WyngQAC','a04jV000000WynbQAC'. Read it with the preceding opening statement ('a04jV000000XkNRQA0','a04jV000000WynfQAC','a04jV000000WyncQAC',); it is not a standalone business operation.
12	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13	`List<Product__c> products = [SELECT Id, Name, Active__c, Sellable__c,`	Declares/initializes local data used by the surrounding operation: List<Product__c> products = [SELECT Id, Name, Active__c, Sellable__c,. Collection contents and assignments below determine its purpose.
14	`Units_Per_Case__c, Retailer_Base_Price__c, DMS_Case_Price__c`	Continues the surrounding declaration/expression or text: Units_Per_Case__c, Retailer_Base_Price__c, DMS_Case_Price__c. Read it with the preceding opening statement (List<Product__c> products = [SELECT Id, Name, Active__c, Sellable__c,); it is not a standalone business operation.
15	`FROM Product__c WHERE Id IN :approvedProducts FOR UPDATE];`	Requests record locks for this query so concurrent commands cannot both use the same old state.
16	`System.assertEquals(24, products.size(), 'Stop if the reviewed product set changed.');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(24, products.size(), 'Stop if the reviewed product set changed.');. A mismatch fails the test.

Line	Source code	Explanation / reading note
17	`List<Product__c> updates = new List<Product__c>();`	Declares/initializes local data used by the surrounding operation: List<Product__c> updates = new List<Product__c>();. Collection contents and assignments below determine its purpose.
18	`Map<Id, Decimal> expectedPrices = new Map<Id, Decimal>();`	Declares/initializes local data used by the surrounding operation: Map<Id, Decimal> expectedPrices = new Map<Id, Decimal>();. Collection contents and assignments below determine its purpose.
19	`for (Product__c product : products) {`	Repeats work over the specified records/items or while this condition holds: for (Product__c product : products) {. Check where queries/writes occur relative to the loop.
20	`    if (product.DMS_Case_Price__c != null) continue;`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (product.DMS_Case_Price__c != null) continue;.
21	`    System.assert(product.Active__c && product.Sellable__c, 'Product must remain active and sellable.');`	Test assertion comparing an expected outcome to actual behavior: System.assert(product.Active__c && product.Sellable__c, 'Product must remain active and sellable.');. A mismatch fails the test.
22	`    System.assert(product.Retailer_Base_Price__c > 0 && product.Units_Per_Case__c > 0`	Test assertion comparing an expected outcome to actual behavior: System.assert(product.Retailer_Base_Price__c > 0 && product.Units_Per_Case__c > 0. A mismatch fails the test.
23	`        && product.Units_Per_Case__c == product.Units_Per_Case__c.setScale(0),`	Calls the named method: && product.Units_Per_Case__c == product.Units_Per_Case__c.setScale(0),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
24	`        'Valid positive base price and whole pieces per case are required.');`	Continues the surrounding declaration/expression or text: 'Valid positive base price and whole pieces per case are required.');. Read it with the preceding opening statement (&& product.Units_Per_Case__c == product.Units_Per_Case__c.setScale(0),); it is not a standalone business operation.
25	`    Decimal price = (product.Retailer_Base_Price__c * product.Units_Per_Case__c)`	Declares/initializes local data used by the surrounding operation: Decimal price = (product.Retailer_Base_Price__c * product.Units_Per_Case__c). Collection contents and assignments below determine its purpose.
26	`        .setScale(2, System.RoundingMode.HALF_UP);`	Continues the surrounding declaration/expression or text: .setScale(2, System.RoundingMode.HALF_UP);. Read it with the preceding opening statement (Decimal price = (product.Retailer_Base_Price__c * product.Units_Per_Case__c)); it is not a standalone business operation.
27	`    expectedPrices.put(product.Id, price);`	Calls the named method: expectedPrices.put(product.Id, price);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
28	`    updates.add(new Product__c(Id=product.Id, DMS_Case_Price__c=price));`	Calls the named method: updates.add(new Product__c(Id=product.Id, DMS_Case_Price__c=price));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
29	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`update updates;`	Performs Salesforce DML: update updates;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
31	`for (Product__c product : [SELECT Id, DMS_Case_Price__c FROM Product__c WHERE Id IN : expectedPrices.keySet()]) {`	Repeats work over the specified records/items or while this condition holds: for (Product__c product : [SELECT Id, DMS_Case_Price__c FROM Product__c WHERE Id IN :expectedPrices.keySet()]) {. Check where queries/writes occur relative to the loop.
32	`    System.assertEquals(expectedPrices.get(product.Id), product.DMS_Case_Price__c,`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(expectedPrices.get(product.Id), product.DMS_Case_Price__c,. A mismatch fails the test.
33	`        'Roll back if automation changed the approved price.');`	Continues the surrounding declaration/expression or text: 'Roll back if automation changed the approved price.');. Read it with the preceding opening statement (System.assertEquals(expectedPrices.get(product.Id), product.DMS_Case_Price__c,); it is not a standalone business operation.
34	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`System.debug(LoggingLevel.ERROR, 'PRIMARY_CASE_PRICE_BACKFILL updated=' + updates.size()`	Calls the named method: System.debug(LoggingLevel.ERROR, 'PRIMARY_CASE_PRICE_BACKFILL updated=' + updates.size(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
36	`    + ', preserved=' + (products.size()-updates.size()));`	Calls the named method: + ', preserved=' + (products.size()-updates.size()));. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/initializeDmsEmployeeAllocation.apex

Operational script: initialize Dms Employee Allocation. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

41 numbered source lines | SHA-256 5068f469de459fde21e16f9de7b332ccdf2987de0bf4ccd259a90aa535ab6619

Line	Source code	Explanation / reading note
1	`// Run once in the intended org. Re-running preserves assignments and cursor.`	Developer comment/documentation: Run once in the intended org. Re-running preserves assignments and cursor. It is not executed.
2	`System.assertEquals('00DjV000004opjNUAQ', String.valueOf(UserInfo.getOrganizationId()));`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('00DjV000004opjNUAQ', String.valueOf(UserInfo.getOrganizationId()));. A mismatch fails the test.
3	`Map<Id, Integer> slots = new Map<Id, Integer>{`	Declares/initializes local data used by the surrounding operation: Map<Id, Integer> slots = new Map<Id, Integer>{. Collection contents and assignments below determine its purpose.
4	`    'a0TjV000001VqMjUAK' => 1,`	Continues the surrounding declaration/expression or text: 'a0TjV000001VqMjUAK' => 1,. Read it with the preceding opening statement (Map<Id, Integer> slots = new Map<Id, Integer>{); it is not a standalone business operation.
5	`    'a0TjV000001VqRZUA0' => 2,`	Continues the surrounding declaration/expression or text: 'a0TjV000001VqRZUA0' => 2,. Read it with the preceding opening statement ('a0TjV000001VqMjUAK' => 1,); it is not a standalone business operation.
6	`    'a0TjV000001VpYkUAK' => 3`	Continues the surrounding declaration/expression or text: 'a0TjV000001VpYkUAK' => 3. Read it with the preceding opening statement ('a0TjV000001VqRZUA0' => 2,); it is not a standalone business operation.
7	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
8	`List<DMS_Distributor__c> distributors = [`	Declares/initializes local data used by the surrounding operation: List<DMS_Distributor__c> distributors = [. Collection contents and assignments below determine its purpose.
9	`    SELECT Id, Name, Active__c, Employee_Allocation_Order__c`	Selects these Salesforce fields/aggregates: Id, Name, Active__c, Employee_Allocation_Order__c. Query results are used in the surrounding assignment or loop.
10	`    FROM DMS_Distributor__c WHERE Id IN :slots.keySet() FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.

Line	Source code	Explanation / reading note
11	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
12	`System.assertEquals(3, distributors.size(), 'Expected the three approved distributors.');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(3, distributors.size(), 'Expected the three approved distributors.');. A mismatch fails the test.
13	`for (DMS_Distributor__c distributor : distributors) {`	Repeats work over the specified records/items or while this condition holds: for (DMS_Distributor__c distributor : distributors) {. Check where queries/writes occur relative to the loop.
14	`    System.assert(distributor.Active__c, 'The distributor must be active.');`	Test assertion comparing an expected outcome to actual behavior: System.assert(distributor.Active__c, 'The distributor must be active.');. A mismatch fails the test.
15	`    System.assertEquals('Distributor ' + slots.get(distributor.Id), distributor.Name);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Distributor ' + slots.get(distributor.Id), distributor.Name);. A mismatch fails the test.
16	`    System.assert(distributor.Employee_Allocation_Order__c == null ||`	Test assertion comparing an expected outcome to actual behavior: System.assert(distributor.Employee_Allocation_Order__c == null ||. A mismatch fails the test.
17	`        distributor.Employee_Allocation_Order__c == slots.get(distributor.Id),`	Calls the named method: distributor.Employee_Allocation_Order__c == slots.get(distributor.Id),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
18	`        'Existing allocation sequence changed. Review before proceeding.');`	Continues the surrounding declaration/expression or text: 'Existing allocation sequence changed. Review before proceeding.');. Read it with the preceding opening statement (distributor.Employee_Allocation_Order__c == slots.get(distributor.Id),); it is not a standalone business operation.
19	`    distributor.Employee_Allocation_Order__c = slots.get(distributor.Id);`	Calls the named method: distributor.Employee_Allocation_Order__c = slots.get(distributor.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
20	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21	`List<DMS_Allocation_State__c> states = [`	Declares/initializes local data used by the surrounding operation: List<DMS_Allocation_State__c> states = [. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
22	`    SELECT Id FROM DMS_Allocation_State__c`	Selects these Salesforce fields/aggregates: Id FROM DMS_Allocation_State__c. Query results are used in the surrounding assignment or loop.
23	`    WHERE Allocation_Key__c = 'EmployeeDistributor' FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
24	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
25	`if (states.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (states.isEmpty()) {.
26	`    insert new DMS_Allocation_State__c(Name='Employee Distributor Round Robin',`	Performs Salesforce DML: insert new DMS_Allocation_State__c(Name='Employee Distributor Round Robin',. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
27	`        Allocation_Key__c='EmployeeDistributor', Last_Allocated_Order__c=0);`	Assigns the right-hand expression to the named variable/property: Allocation_Key__c='EmployeeDistributor', Last_Allocated_Order__c=0);. This is in-memory unless it is later persisted by an explicit call.
28	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`update distributors;`	Performs Salesforce DML: update distributors;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
30	`Set<Id> employees = new Map<Id, Employee__c>([`	Declares/initializes local data used by the surrounding operation: Set<Id> employees = new Map<Id, Employee__c>([. Collection contents and assignments below determine its purpose.
31	`    SELECT Id FROM Employee__c WHERE DMS_Distributor__c = null`	Selects these Salesforce fields/aggregates: Id FROM Employee__c WHERE DMS_Distributor__c = null. Query results are used in the surrounding assignment or loop.
32	`    ORDER BY CreatedDate, Id LIMIT 200`	Controls query sorting, grouping or result count: ORDER BY CreatedDate, Id LIMIT 200.
33	`]).keySet();`	Continues the surrounding declaration/expression or text:]).keySet();. Read it with the preceding opening statement (ORDER BY CreatedDate, Id LIMIT 200); it is not a standalone business operation.
34	`DmsEmployeeAllocator.allocate(employees);`	Calls the named method: DmsEmployeeAllocator.allocate(employees);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
35	`System.debug('DMS_ALLOCATION_VERIFIED ' + JSON.serialize([`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.

Line	Source code	Explanation / reading note
36	`    SELECT Name, DMS_Distributor__r.Name FROM Employee__c ORDER BY CreatedDate, Id`	Selects these Salesforce fields/aggregates: Name, DMS_Distributor__r.Name FROM Employee__c ORDER BY CreatedDate, Id. Query results are used in the surrounding assignment or loop.
37	`]));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`System.debug('DMS_CURSOR ' + [`	Calls the named method: System.debug('DMS_CURSOR ' + [. Its implementation defines the side effect/result; use the symbol/file index to follow it.
39	`    SELECT Last_Allocated_Order__c FROM DMS_Allocation_State__c`	Selects these Salesforce fields/aggregates: Last_Allocated_Order__c FROM DMS_Allocation_State__c. Query results are used in the surrounding assignment or loop.
40	`    WHERE Allocation_Key__c='EmployeeDistributor'`	Adds a query/filter condition: WHERE Allocation_Key__c='EmployeeDistributor'. The complete condition determines which records are included.
41	`].Last_Allocated_Order__c);`	Continues the surrounding declaration/expression or text:].Last_Allocated_Order__c);. Read it with the preceding opening statement (WHERE Allocation_Key__c='EmployeeDistributor'); it is not a standalone business operation.

scripts/apex/linkExistingDmsOrders20261021.apex

Operational script: link Existing Dms Orders20261021. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

10 numbered source lines | SHA-256 b881943d0decce3c3ff362c2e5c086911a134df2042d5dee98267c5bf421003e

Line	Source code	Explanation / reading note
1	`// One-time repair of the eight inspected submitted SFA orders predating DMS routing.`	Developer comment/documentation: One-time repair of the eight inspected submitted SFA orders predating DMS routing. It is not executed.
2	`// Before state: DMS_Distributor__c=null and DMS_Status__c=null on every listed ID.`	Developer comment/documentation: Before state: DMS_Distributor__c=null and DMS_Status__c=null on every listed ID. It is not executed.
3	`// Never change an already-routed order, an approval, an amount, or an outlet mapping.`	Developer comment/documentation: Never change an already-routed order, an approval, an amount, or an outlet mapping. It is not executed.
4	`Set<Id> ids=new Set<Id>{'a06jV000001pvIDQAY','a06jV000001uZLtQAM','a06jV000001uaGLQAY','a06jV0000023e9RQAQ','a06jV0000024lqPQAQ','a06jV0000025wLZQAY','a06jV0000026k0bQAA','a06jV0000028T25QAE'};`	Declares/initializes local data used by the surrounding operation: Set<Id> ids=new Set<Id>{'a06jV000001pvIDQAY','a06jV000001uZLtQAM','a06jV000001uaGLQAY','a06jV0000023e9RQAQ','a06jV0000024lqPQAQ','a06jV0000025wLZQAY','a06jV0000026k0bQAA','a06jV0000028T25QAE'};. Collection contents and assignments below determine its purpose.
5	`List<Sales_Order__c> updates=new List<Sales_Order__c>();`	Declares/initializes local data used by the surrounding operation: List<Sales_Order__c> updates=new List<Sales_Order__c>();. Collection contents and assignments below determine its purpose.
6	`for(Sales_Order__c row:[SELECT Id,Retailer__r.DMS_Distributor__c FROM Sales_Order__c WHERE Id IN :ids AND DMS_Distributor__c=null AND DMS_Status__c=null AND Status__c='Submitted' AND Retailer__r.DMS_Distributor__r.Active__c=true]) {`	Repeats work over the specified records/items or while this condition holds: for(Sales_Order__c row:[SELECT Id,Retailer__r.DMS_Distributor__c FROM Sales_Order__c WHERE Id IN :ids AND DMS_Distributor__c=null AND DMS_Status__c=null AND Status__c='Submitted' AND Retailer__r.DMS_D. Check where queries/writes occur relative to the loop.
7	`    updates.add(new Sales_Order__c(Id=row.Id,DMS_Distributor__c=row.Retailer__r.DMS_Distributor__c,DMS_Status__c='Pending'));`	Calls the named method: updates.add(new Sales_Order__c(Id=row.Id,DMS_Distributor__c=row.Retailer__r.DMS_Distributor__c,DMS_Status__c='Pending'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
8	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
9	`update updates;`	Performs Salesforce DML: update updates;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
10	`System.debug('Linked existing submitted orders: '+updates.size());`	Calls the named method: System.debug('Linked existing submitted orders: '+updates.size());. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/linkExistingDmsReturn20261021.apex

Operational script: link Existing Dms Return20261021. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

8 numbered source lines | SHA-256 333cdac6e758fc27cf65877e3adddb3c9a75d5184658865e9679b384d920e3d9

Line	Source code	Explanation / reading note
1	`// Inspected historical return: both DMS fields were null. Preserve its quantities and reason.`	Developer comment/documentation: Inspected historical return: both DMS fields were null. Preserve its quantities and reason. It is not executed.
2	`List<Product_Return__c> rows=[SELECT Id,Outlet__r.DMS_Distributor__c FROM Product_Return__c WHERE Id='a0FjV000001XbjNUAS' AND DMS_Distributor__c=null AND DMS_Status__c=null AND Outlet__r.DMS_Distributor__r.Active__c=true];`	Declares/initializes local data used by the surrounding operation: List<Product_Return__c> rows=[SELECT Id,Outlet__r.DMS_Distributor__c FROM Product_Return__c WHERE Id='a0FjV000001XbjNUAS' AND DMS_Distributor__c=null AND DMS_Status__c=null AND Outlet__r.DMS_Distribut. Collection contents and assignments below determine its purpose.
3	`for(Product_Return__c row:rows) {`	Repeats work over the specified records/items or while this condition holds: for(Product_Return__c row:rows) {. Check where queries/writes occur relative to the loop.
4	`    row.DMS_Distributor__c=row.Outlet__r.DMS_Distributor__c;`	Assigns the right-hand expression to the named variable/property: row.DMS_Distributor__c=row.Outlet__r.DMS_Distributor__c;. This is in-memory unless it is later persisted by an explicit call.
5	`    row.DMS_Status__c='Pending';`	Assigns the right-hand expression to the named variable/property: row.DMS_Status__c='Pending';. This is in-memory unless it is later persisted by an explicit call.
6	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
7	`update rows;`	Performs Salesforce DML: update rows;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
8	`System.debug('Linked existing returns: '+rows.size());`	Calls the named method: System.debug('Linked existing returns: '+rows.size());. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/mapApprovedDmsOutlets.apex

Operational script: map Approved Dms Outlets. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

64 numbered source lines | SHA-256 223a9cc4920f7757c570347437740a06d738cca629965560f1a1e73942f6c82f

Line	Source code	Explanation / reading note
1	`// Approved one-time backfill: only outlets with exactly one employee distributor.`	Developer comment/documentation: Approved one-time backfill: only outlets with exactly one employee distributor. It is not executed.
2	`// Ambiguous/unallocated outlets and existing assignments are never overwritten.`	Developer comment/documentation: Ambiguous/unallocated outlets and existing assignments are never overwritten. It is not executed.
3	`System.assertEquals('00DjV000004opjNUAQ', String.valueOf(UserInfo.getOrganizationId()));`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('00DjV000004opjNUAQ', String.valueOf(UserInfo.getOrganizationId()));. A mismatch fails the test.
4	`Set<Id> approvedSuppliers = new Set<Id>{`	Declares/initializes local data used by the surrounding operation: Set<Id> approvedSuppliers = new Set<Id>{. Collection contents and assignments below determine its purpose.
5	`    'a0TjV000001VqMjUAK', 'a0TjV000001VqRZUA0', 'a0TjV000001VpYkUAK'`	Continues the surrounding declaration/expression or text: 'a0TjV000001VqMjUAK', 'a0TjV000001VqRZUA0', 'a0TjV000001VpYkUAK'. Read it with the preceding opening statement (Set<Id> approvedSuppliers = new Set<Id>{); it is not a standalone business operation.
6	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
7	`Set<Id> approvedOutlets = new Set<Id>{`	Declares/initializes local data used by the surrounding operation: Set<Id> approvedOutlets = new Set<Id>{. Collection contents and assignments below determine its purpose.
8	`    'a05jV000002aKIaQAM','a05jV000002aKIbQAM','a05jV000002aKIcQAM',`	Continues the surrounding declaration/expression or text: 'a05jV000002aKIaQAM','a05jV000002aKIbQAM','a05jV000002aKIcQAM',. Read it with the preceding opening statement (Set<Id> approvedOutlets = new Set<Id>{); it is not a standalone business operation.
9	`    'a05jV000002aKIdQAM','a05jV000002aKIeQAM','a05jV000002aKIfQAM',`	Continues the surrounding declaration/expression or text: 'a05jV000002aKIdQAM','a05jV000002aKIeQAM','a05jV000002aKIfQAM',. Read it with the preceding opening statement ('a05jV000002aKIaQAM','a05jV000002aKIbQAM','a05jV000002aKIcQAM',); it is not a standalone business operation.

Line	Source code	Explanation / reading note
10	`'a05jV000002aKIgQAM','a05jV000002aKIhQAM','a05jV000002aKIiQAM',`	Continues the surrounding declaration/expression or text: 'a05jV000002aKIgQAM','a05jV000002aKIhQAM','a05jV000002aKIiQAM',. Read it with the preceding opening statement ('a05jV000002aKIdQAM','a05jV000002aKIeQAM','a05jV000002aKIfQAM',); it is not a standalone business operation.
11	`'a05jV000002aKIQQA2','a05jV000002aKIRQA2','a05jV000002aKISQA2',`	Continues the surrounding declaration/expression or text: 'a05jV000002aKIQQA2','a05jV000002aKIRQA2','a05jV000002aKISQA2',. Read it with the preceding opening statement ('a05jV000002aKIgQAM','a05jV000002aKIhQAM','a05jV000002aKIiQAM',); it is not a standalone business operation.
12	`'a05jV000002aKITQA2','a05jV000002aKIUQA2','a05jV000002aKIWQA2',`	Continues the surrounding declaration/expression or text: 'a05jV000002aKITQA2','a05jV000002aKIUQA2','a05jV000002aKIWQA2',. Read it with the preceding opening statement ('a05jV000002aKIQQA2','a05jV000002aKIRQA2','a05jV000002aKISQA2',); it is not a standalone business operation.
13	`'a05jV000002aKIXQA2','a05jV000002aKIYQA2','a05jV000002aKIZQA2',`	Continues the surrounding declaration/expression or text: 'a05jV000002aKIXQA2','a05jV000002aKIYQA2','a05jV000002aKIZQA2',. Read it with the preceding opening statement ('a05jV000002aKITQA2','a05jV000002aKIUQA2','a05jV000002aKIWQA2',); it is not a standalone business operation.
14	`'a05jV000002aKK6QAM','a05jV000002aKK7QAM','a05jV000002aKK8QAM',`	Continues the surrounding declaration/expression or text: 'a05jV000002aKK6QAM','a05jV000002aKK7QAM','a05jV000002aKK8QAM',. Read it with the preceding opening statement ('a05jV000002aKIXQA2','a05jV000002aKIYQA2','a05jV000002aKIZQA2',); it is not a standalone business operation.
15	`'a05jV000002aKK9QAM','a05jV000002aKKAQA2','a05jV000002aKKBQA2',`	Continues the surrounding declaration/expression or text: 'a05jV000002aKK9QAM','a05jV000002aKKAQA2','a05jV000002aKKBQA2',. Read it with the preceding opening statement ('a05jV000002aKK6QAM','a05jV000002aKK7QAM','a05jV000002aKK8QAM',); it is not a standalone business operation.
16	`'a05jV000002aKKCQA2','a05jV000002aKKDQA2','a05jV000002aKKEQA2',`	Continues the surrounding declaration/expression or text: 'a05jV000002aKKCQA2','a05jV000002aKKDQA2','a05jV000002aKKEQA2',. Read it with the preceding opening statement ('a05jV000002aKK9QAM','a05jV000002aKKAQA2','a05jV000002aKKBQA2',); it is not a standalone business operation.

Line	Source code	Explanation / reading note
17	`'a05jV000002aKKFQA2','a05jV000002aKNFQA2','a05jV000002aKNGQA2',`	Continues the surrounding declaration/expression or text: 'a05jV000002aKKFQA2','a05jV000002aKNFQA2','a05jV000002aKNGQA2',. Read it with the preceding opening statement ('a05jV000002aKKCQA2','a05jV000002aKKDQA2','a05jV000002aKKEQA2',); it is not a standalone business operation.
18	`'a05jV000002aKNHQA2','a05jV000002aKNIQA2','a05jV000002aKNJQA2',`	Continues the surrounding declaration/expression or text: 'a05jV000002aKNHQA2','a05jV000002aKNIQA2','a05jV000002aKNJQA2',. Read it with the preceding opening statement ('a05jV000002aKKFQA2','a05jV000002aKNFQA2','a05jV000002aKNGQA2',); it is not a standalone business operation.
19	`'a05jV000002aKNKQA2','a05jV000002aKNLQA2','a05jV000002aKNMQA2',`	Continues the surrounding declaration/expression or text: 'a05jV000002aKNKQA2','a05jV000002aKNLQA2','a05jV000002aKNMQA2',. Read it with the preceding opening statement ('a05jV000002aKNHQA2','a05jV000002aKNIQA2','a05jV000002aKNJQA2',); it is not a standalone business operation.
20	`'a05jV000002aKNNQA2','a05jV000002aKNOQA2','a05jV000002aKP3QAM',`	Continues the surrounding declaration/expression or text: 'a05jV000002aKNNQA2','a05jV000002aKNOQA2','a05jV000002aKP3QAM',. Read it with the preceding opening statement ('a05jV000002aKNKQA2','a05jV000002aKNLQA2','a05jV000002aKNMQA2',); it is not a standalone business operation.
21	`'a05jV000002aKP5QAM','a05jV000002YacbQAC','a05jV000002YamHQAS'`	Continues the surrounding declaration/expression or text: 'a05jV000002aKP5QAM','a05jV000002YacbQAC','a05jV000002YamHQAS'. Read it with the preceding opening statement ('a05jV000002aKNNQA2','a05jV000002aKNOQA2','a05jV000002aKP3QAM',); it is not a standalone business operation.
22	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
23	`System.assertEquals(42, approvedOutlets.size());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(42, approvedOutlets.size());. A mismatch fails the test.
24	`System.assertEquals(3, [SELECT COUNT() FROM DMS_Distributor__c`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(3, [SELECT COUNT() FROM DMS_Distributor__c. A mismatch fails the test.
25	`WHERE Id IN :approvedSuppliers AND Active__c=true]);`	Adds a query/filter condition: WHERE Id IN :approvedSuppliers AND Active__c=true]);. The complete condition determines which records are included.

Line	Source code	Explanation / reading note
26	`Map<Id,Set<Id>> suppliersByOutlet = new Map<Id,Set<Id>>();`	Declares/initializes local data used by the surrounding operation: Map<Id,Set<Id>> suppliersByOutlet = new Map<Id,Set<Id>>();. Collection contents and assignments below determine its purpose.
27	`for(Distributor_Outlet_Allocation__c allocation : [`	Repeats work over the specified records/items or while this condition holds: for(Distributor_Outlet_Allocation__c allocation : [. Check where queries/writes occur relative to the loop.
28	`    SELECT Outlet__c, Employee__r.DMS_Distributor__c`	Selects these Salesforce fields/aggregates: Outlet__c, Employee__r.DMS_Distributor__c. Query results are used in the surrounding assignment or loop.
29	`    FROM Distributor_Outlet_Allocation__c`	Chooses the Salesforce object/subquery source: FROM Distributor_Outlet_Allocation__c.
30	`    WHERE Allocation_Status__c='Active' AND Outlet__c IN :approvedOutlets`	Adds a query/filter condition: WHERE Allocation_Status__c='Active' AND Outlet__c IN :approvedOutlets. The complete condition determines which records are included.
31	`]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (WHERE Allocation_Status__c='Active' AND Outlet__c IN :approvedOutlets); it is not a standalone business operation.
32	`    System.assertNotEquals(null, allocation.Employee__r.DMS_Distributor__c,`	Test assertion comparing an expected outcome to actual behavior: System.assertNotEquals(null, allocation.Employee__r.DMS_Distributor__c,. A mismatch fails the test.
33	`        'An employee mapping changed; review before running.');`	Continues the surrounding declaration/expression or text: 'An employee mapping changed; review before running.');. Read it with the preceding opening statement (System.assertNotEquals(null, allocation.Employee__r.DMS_Distributor__c,); it is not a standalone business operation.
34	`    if(!suppliersByOutlet.containsKey(allocation.Outlet__c))`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if(!suppliersByOutlet.containsKey(allocation.Outlet__c)).
35	`        suppliersByOutlet.put(allocation.Outlet__c,new Set<Id>());`	Calls the named method: suppliersByOutlet.put(allocation.Outlet__c,new Set<Id>());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
36	`    suppliersByOutlet.get(allocation.Outlet__c).add(allocation.Employee__r.DMS_Distributor__c);`	Calls the named method: suppliersByOutlet.get(allocation.Outlet__c).add(allocation.Employee__r.DMS_Distributor__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
37	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
38	`Map<Id,Retailer__c> originals = new Map<Id,Retailer__c>([`	Declares/initializes local data used by the surrounding operation: Map<Id,Retailer__c> originals = new Map<Id,Retailer__c>([. Collection contents and assignments below determine its purpose.
39	`    SELECT Id,Name,DMS_Distributor__c,Beat__c,Geography__c,Beat__r.Geography__c`	Selects these Salesforce fields/aggregates: Id,Name,DMS_Distributor__c,Beat__c,Geography__c,Beat__r.Geography__c. Query results are used in the surrounding assignment or loop.
40	`    FROM Retailer__c WHERE Id IN :approvedOutlets FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
41	`]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42	`System.assertEquals(42, originals.size());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(42, originals.size());. A mismatch fails the test.
43	`List<Retailer__c> updates = new List<Retailer__c>();`	Declares/initializes local data used by the surrounding operation: List<Retailer__c> updates = new List<Retailer__c>();. Collection contents and assignments below determine its purpose.
44	`for(Retailer__c outlet : originals.values()) {`	Repeats work over the specified records/items or while this condition holds: for(Retailer__c outlet : originals.values()) {. Check where queries/writes occur relative to the loop.
45	`    Set<Id> suppliers = suppliersByOutlet.get(outlet.Id);`	Declares/initializes local data used by the surrounding operation: Set<Id> suppliers = suppliersByOutlet.get(outlet.Id);. Collection contents and assignments below determine its purpose.
46	`    System.assert(suppliers!=null && suppliers.size()==1,'Ambiguous mapping: ' +outlet.Name);`	Test assertion comparing an expected outcome to actual behavior: System.assert(suppliers!=null && suppliers.size()==1,'Ambiguous mapping: '+outlet.Name);. A mismatch fails the test.
47	`    Id supplier = new List<Id>(suppliers)[0];`	Declares/initializes local data used by the surrounding operation: Id supplier = new List<Id>(suppliers)[0];. Collection contents and assignments below determine its purpose.
48	`    System.assert(approvedSuppliers.contains(supplier),'Unexpected distributor.');`	Test assertion comparing an expected outcome to actual behavior: System.assert(approvedSuppliers.contains(supplier),'Unexpected distributor.');. A mismatch fails the test.
49	`    System.assert(outlet.DMS_Distributor__c==null || outlet.DMS_Distributor__c==supplier,`	Test assertion comparing an expected outcome to actual behavior: System.assert(outlet.DMS_Distributor__c==null || outlet.DMS_Distributor__c==supplier,. A mismatch fails the test.

Line	Source code	Explanation / reading note
50	`'Existing supplier differs: '+outlet.Name);`	Continues the surrounding declaration/expression or text: 'Existing supplier differs: '+outlet.Name);. Read it with the preceding opening statement (System.assert(outlet.DMS_Distributor__c==null || outlet.DMS_Distributor__c==supplier,); it is not a standalone business operation.
51	`// Existing org automation copies geography from the beat on every outlet update.`	Developer comment/documentation: Existing org automation copies geography from the beat on every outlet update. It is not executed.
52	`System.assert(outlet.Beat__c==null || outlet.Geography__c==outlet.Beat__r.Geography__c,`	Test assertion comparing an expected outcome to actual behavior: System.assert(outlet.Beat__c==null || outlet.Geography__c==outlet.Beat__r.Geography__c,. A mismatch fails the test.
53	`'Geography needs separate review: '+outlet.Name);`	Continues the surrounding declaration/expression or text: 'Geography needs separate review: '+outlet.Name);. Read it with the preceding opening statement (System.assert(outlet.Beat__c==null || outlet.Geography__c==outlet.Beat__r.Geography__c,); it is not a standalone business operation.
54	`if(outlet.DMS_Distributor__c==null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if(outlet.DMS_Distributor__c==null).
55	`updates.add(new Retailer__c(Id=outlet.Id,DMS_Distributor__c=supplier));`	Calls the named method: updates.add(new Retailer__c(Id=outlet.Id,DMS_Distributor__c=supplier));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
56	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`update updates;`	Performs Salesforce DML: update updates;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
58	`for(Retailer__c outlet : [SELECT Id,DMS_Distributor__c,Beat__c,Geography__c`	Repeats work over the specified records/items or while this condition holds: for(Retailer__c outlet : [SELECT Id,DMS_Distributor__c,Beat__c,Geography__c. Check where queries/writes occur relative to the loop.
59	`FROM Retailer__c WHERE Id IN :approvedOutlets]) {`	Chooses the Salesforce object/subquery source: FROM Retailer__c WHERE Id IN :approvedOutlets]) {.
60	`System.assert(suppliersByOutlet.get(outlet.Id).contains(outlet.DMS_Distributor__c));`	Test assertion comparing an expected outcome to actual behavior: System.assert(suppliersByOutlet.get(outlet.Id).contains(outlet.DMS_Distributor__c));. A mismatch fails the test.

Line	Source code	Explanation / reading note
61	`System.assertEquals(originals.get(outlet.Id).Beat__c,outlet.Beat__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(originals.get(outlet.Id).Beat__c,outlet.Beat__c);. A mismatch fails the test.
62	`System.assertEquals(originals.get(outlet.Id).Geography__c,outlet.Geography__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(originals.get(outlet.Id).Geography__c,outlet.Geography__c);. A mismatch fails the test.
63	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
64	`System.debug('Verified 42 approved outlet mappings; newly updated: ' +updates.size());`	Calls the named method: System.debug('Verified 42 approved outlet mappings; newly updated: '+updates.size());. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/mapConfirmedSharedOutlets.apex

Operational script: map Confirmed Shared Outlets. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

36 numbered source lines | SHA-256 383fe0946eaa7f3810b3f6aba33e1e9271f32efe1ed97d23a68185f2a28c2bf7

Line	Source code	Explanation / reading note
1	`// User-confirmed choices, 21 October 2026. Idempotent and limited to two outlets.`	Developer comment/documentation: User-confirmed choices, 21 October 2026. Idempotent and limited to two outlets. It is not executed.
2	`System.assertEquals('00DjV000004opjNUAQ', String.valueOf(UserInfo.getOrganizationId()));`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('00DjV000004opjNUAQ', String.valueOf(UserInfo.getOrganizationId()));. A mismatch fails the test.
3	`Map<Id,Id> assignments = new Map<Id,Id>{`	Declares/initializes local data used by the surrounding operation: Map<Id,Id> assignments = new Map<Id,Id>{. Collection contents and assignments below determine its purpose.
4	`    'a05jV000002YaUXQA0' => 'a0TjV000001VqMjUAK',`	Continues the surrounding declaration/expression or text: 'a05jV000002YaUXQA0' => 'a0TjV000001VqMjUAK',. Read it with the preceding opening statement (Map<Id,Id> assignments = new Map<Id,Id>{); it is not a standalone business operation.
5	`    'a05jV000002fP1KQAU' => 'a0TjV000001VqRZUA0'`	Continues the surrounding declaration/expression or text: 'a05jV000002fP1KQAU' => 'a0TjV000001VqRZUA0'. Read it with the preceding opening statement ('a05jV000002YaUXQA0' => 'a0TjV000001VqMjUAK',); it is not a standalone business operation.
6	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
7	`Map<Id,String> names = new Map<Id,String>{`	Declares/initializes local data used by the surrounding operation: Map<Id,String> names = new Map<Id,String>{. Collection contents and assignments below determine its purpose.
8	`    'a05jV000002YaUXQA0' => 'Lakshmi Stores',`	Continues the surrounding declaration/expression or text: 'a05jV000002YaUXQA0' => 'Lakshmi Stores',. Read it with the preceding opening statement (Map<Id,String> names = new Map<Id,String>{); it is not a standalone business operation.
9	`    'a05jV000002fP1KQAU' => 'ABC'`	Continues the surrounding declaration/expression or text: 'a05jV000002fP1KQAU' => 'ABC'. Read it with the preceding opening statement ('a05jV000002YaUXQA0' => 'Lakshmi Stores',); it is not a standalone business operation.
10	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
11	`Set<Id> distributorIds = new Set<Id>(assignments.values());`	Declares/initializes local data used by the surrounding operation: Set<Id> distributorIds = new Set<Id>(assignments.values());. Collection contents and assignments below determine its purpose.
12	`System.assertEquals(2,[SELECT COUNT() FROM DMS_Distributor__c`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(2,[SELECT COUNT() FROM DMS_Distributor__c. A mismatch fails the test.
13	`    WHERE Id IN :distributorIds AND Active__c=true]);`	Adds a query/filter condition: WHERE Id IN :distributorIds AND Active__c=true]);. The complete condition determines which records are included.
14	`Map<Id,Retailer__c> original = new Map<Id,Retailer__c>([`	Declares/initializes local data used by the surrounding operation: Map<Id,Retailer__c> original = new Map<Id,Retailer__c>([. Collection contents and assignments below determine its purpose.
15	`    SELECT Id,Name,DMS_Distributor__c,Beat__c,Geography__c,Beat__r.Geography__c`	Selects these Salesforce fields/aggregates: Id,Name,DMS_Distributor__c,Beat__c,Geography__c,Beat__r.Geography__c. Query results are used in the surrounding assignment or loop.
16	`    FROM Retailer__c WHERE Id IN :assignments.keySet() FOR UPDATE`	Requests record locks for this query so concurrent commands cannot both use the same old state.
17	`]);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
18	`System.assertEquals(2,original.size());`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(2,original.size());. A mismatch fails the test.
19	`List<Retailer__c> changes = new List<Retailer__c>();`	Declares/initializes local data used by the surrounding operation: List<Retailer__c> changes = new List<Retailer__c>();. Collection contents and assignments below determine its purpose.
20	`for(Retailer__c outlet : original.values()) {`	Repeats work over the specified records/items or while this condition holds: for(Retailer__c outlet : original.values()) {. Check where queries/writes occur relative to the loop.
21	`    System.assertEquals(names.get(outlet.Id),outlet.Name);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(names.get(outlet.Id),outlet.Name);. A mismatch fails the test.
22	`    System.assert(outlet.DMS_Distributor__c==null || outlet.DMS_Distributor__c==assignments.get(outlet.Id),`	Test assertion comparing an expected outcome to actual behavior: System.assert(outlet.DMS_Distributor__c==null || outlet.DMS_Distributor__c==assignments.get(outlet.Id),. A mismatch fails the test.

Line	Source code	Explanation / reading note
23	`'Assignment changed since review.');`	Continues the surrounding declaration/expression or text: 'Assignment changed since review.');. Read it with the preceding opening statement (System.assert(outlet.DMS_Distributor__c==null || outlet.DMS_Distributor__c==assignments.get(outlet.Id),); it is not a standalone business operation.
24	`System.assert(outlet.Beat__c==null || outlet.Geography__c==outlet.Beat__r.Geography__c,`	Test assertion comparing an expected outcome to actual behavior: System.assert(outlet.Beat__c==null || outlet.Geography__c==outlet.Beat__r.Geography__c,. A mismatch fails the test.
25	`'Review geography before updating.');`	Continues the surrounding declaration/expression or text: 'Review geography before updating.');. Read it with the preceding opening statement (System.assert(outlet.Beat__c==null || outlet.Geography__c==outlet.Beat__r.Geography__c,); it is not a standalone business operation.
26	`if(outlet.DMS_Distributor__c==null)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if(outlet.DMS_Distributor__c==null).
27	`changes.add(new Retailer__c(Id=outlet.Id,DMS_Distributor__c=assignments.get(outlet.Id)));`	Calls the named method: changes.add(new Retailer__c(Id=outlet.Id,DMS_Distributor__c=assignments.get(outlet.Id)));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
28	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
29	`update changes;`	Performs Salesforce DML: update changes;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
30	`for(Retailer__c outlet : [SELECT Id,DMS_Distributor__c,Beat__c,Geography__c`	Repeats work over the specified records/items or while this condition holds: for(Retailer__c outlet : [SELECT Id,DMS_Distributor__c,Beat__c,Geography__c. Check where queries/writes occur relative to the loop.
31	`FROM Retailer__c WHERE Id IN :assignments.keySet()]) {`	Chooses the Salesforce object/subquery source: FROM Retailer__c WHERE Id IN :assignments.keySet()]) {.
32	`System.assertEquals(assignments.get(outlet.Id),outlet.DMS_Distributor__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(assignments.get(outlet.Id),outlet.DMS_Distributor__c);. A mismatch fails the test.

Line	Source code	Explanation / reading note
33	`System.assertEquals(original.get(outlet.Id).Beat__c,outlet.Beat__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(original.get(outlet.Id).Beat__c,outlet.Beat__c);. A mismatch fails the test.
34	`System.assertEquals(original.get(outlet.Id).Geography__c,outlet.Geography__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(original.get(outlet.Id).Geography__c,outlet.Geography__c);. A mismatch fails the test.
35	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
36	`System.debug('Confirmed both outlet distributor assignments; updated ' +changes.size());`	Calls the named method: System.debug('Confirmed both outlet distributor assignments; updated '+changes.size());. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/renameCoreOutlets.apex

Operational script: rename Core Outlets. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

73 numbered source lines | SHA-256 2bb74834f543d7cd4a5447b07a5f2d7def6d62b6e4c44d5cdaa26f8210561f8d

Line	Source code	Explanation / reading note
1	`// Give the ten outlets under every core beat a clear, business-friendly name.`	Developer comment/documentation: Give the ten outlets under every core beat a clear, business-friendly name. It is not executed.
2	`// Short area codes keep all ten names visible in Salesforce's 255-character`	Developer comment/documentation: Short area codes keep all ten names visible in Salesforce's 255-character It is not executed.
3	`// Beat summary field.`	Developer comment/documentation: Beat summary field. It is not executed.
4		Blank line separating logical sections; no executable operation.
5	`List<String> storeTypes = new List<String>{`	Declares/initializes local data used by the surrounding operation: List<String> storeTypes = new List<String>{. Collection contents and assignments below determine its purpose.
6	`'Fresh Mart',`	Continues the surrounding declaration/expression or text: 'Fresh Mart',. Read it with the preceding opening statement (List<String> storeTypes = new List<String>{); it is not a standalone business operation.
7	`'Daily Needs',`	Continues the surrounding declaration/expression or text: 'Daily Needs',. Read it with the preceding opening statement ('Fresh Mart',); it is not a standalone business operation.
8	`'Super Store',`	Continues the surrounding declaration/expression or text: 'Super Store',. Read it with the preceding opening statement ('Daily Needs',); it is not a standalone business operation.
9	`'Provision House',`	Continues the surrounding declaration/expression or text: 'Provision House',. Read it with the preceding opening statement ('Super Store',); it is not a standalone business operation.
10	`'Family Mart',`	Continues the surrounding declaration/expression or text: 'Family Mart',. Read it with the preceding opening statement ('Provision House',); it is not a standalone business operation.
11	`'City Bazaar',`	Continues the surrounding declaration/expression or text: 'City Bazaar',. Read it with the preceding opening statement ('Family Mart',); it is not a standalone business operation.
12	`'Value Store',`	Continues the surrounding declaration/expression or text: 'Value Store',. Read it with the preceding opening statement ('City Bazaar',); it is not a standalone business operation.

Line	Source code	Explanation / reading note
13	`'Green Grocers',`	Continues the surrounding declaration/expression or text: 'Green Grocers',. Read it with the preceding opening statement ('Value Store',); it is not a standalone business operation.
14	`'Corner Shop',`	Continues the surrounding declaration/expression or text: 'Corner Shop',. Read it with the preceding opening statement ('Green Grocers',); it is not a standalone business operation.
15	`'Traders'`	Continues the surrounding declaration/expression or text: 'Traders'. Read it with the preceding opening statement ('Corner Shop',); it is not a standalone business operation.
16	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17		Blank line separating logical sections; no executable operation.
18	`Map<String, String> areaCodeByBeatId = new Map<String, String>{`	Declares/initializes local data used by the surrounding operation: Map<String, String> areaCodeByBeatId = new Map<String, String>{. Collection contents and assignments below determine its purpose.
19	`'BEAT-0001' => 'MG',`	Continues the surrounding declaration/expression or text: 'BEAT-0001' => 'MG',. Read it with the preceding opening statement (Map<String, String> areaCodeByBeatId = new Map<String, String>{); it is not a standalone business operation.
20	`'BEAT-0002' => 'IND',`	Continues the surrounding declaration/expression or text: 'BEAT-0002' => 'IND',. Read it with the preceding opening statement ('BEAT-0001' => 'MG',); it is not a standalone business operation.
21	`'BEAT-0003' => 'JAY',`	Continues the surrounding declaration/expression or text: 'BEAT-0003' => 'JAY',. Read it with the preceding opening statement ('BEAT-0002' => 'IND',); it is not a standalone business operation.
22	`'BEAT-0004' => 'KOR',`	Continues the surrounding declaration/expression or text: 'BEAT-0004' => 'KOR',. Read it with the preceding opening statement ('BEAT-0003' => 'JAY',); it is not a standalone business operation.
23	`'BEAT-0005' => 'WFD',`	Continues the surrounding declaration/expression or text: 'BEAT-0005' => 'WFD',. Read it with the preceding opening statement ('BEAT-0004' => 'KOR',); it is not a standalone business operation.
24	`'BEAT-0006' => 'MLS',`	Continues the surrounding declaration/expression or text: 'BEAT-0006' => 'MLS',. Read it with the preceding opening statement ('BEAT-0005' => 'WFD',); it is not a standalone business operation.

Line	Source code	Explanation / reading note
25	`    'BEAT-0007' => 'RAJ',`	Continues the surrounding declaration/expression or text: 'BEAT-0007' => 'RAJ',. Read it with the preceding opening statement ('BEAT-0006' => 'MLS',); it is not a standalone business operation.
26	`    'BEAT-0008' => 'YEL',`	Continues the surrounding declaration/expression or text: 'BEAT-0008' => 'YEL',. Read it with the preceding opening statement ('BEAT-0007' => 'RAJ',); it is not a standalone business operation.
27	`    'BEAT-0009' => 'EC',`	Continues the surrounding declaration/expression or text: 'BEAT-0009' => 'EC',. Read it with the preceding opening statement ('BEAT-0008' => 'YEL',); it is not a standalone business operation.
28	`    'BEAT-0010' => 'MYC'`	Continues the surrounding declaration/expression or text: 'BEAT-0010' => 'MYC'. Read it with the preceding opening statement ('BEAT-0009' => 'EC',); it is not a standalone business operation.
29	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30		Blank line separating logical sections; no executable operation.
31	`List<Beat__c> coreBeats = [`	Declares/initializes local data used by the surrounding operation: List<Beat__c> coreBeats = [. Collection contents and assignments below determine its purpose.
32	`    SELECT Id, Name, Beat_ID__c,`	Selects these Salesforce fields/aggregates: Id, Name, Beat_ID__c,. Query results are used in the surrounding assignment or loop.
33	`        (SELECT Id, Name FROM Retailers__r ORDER BY Name)`	Continues the surrounding declaration/expression or text: (SELECT Id, Name FROM Retailers__r ORDER BY Name). Read it with the preceding opening statement (SELECT Id, Name, Beat_ID__c,); it is not a standalone business operation.
34	`    FROM Beat__c`	Chooses the Salesforce object/subquery source: FROM Beat__c.
35	`    WHERE Beat_ID__c != null`	Adds a query/filter condition: WHERE Beat_ID__c != null. The complete condition determines which records are included.
36	`    ORDER BY Beat_ID__c`	Controls query sorting, grouping or result count: ORDER BY Beat_ID__c.
37	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
39	`List<Retailer__c> outletsToRename = new List<Retailer__c>();`	Declares/initializes local data used by the surrounding operation: List<Retailer__c> outletsToRename = new List<Retailer__c>();. Collection contents and assignments below determine its purpose.
40		Blank line separating logical sections; no executable operation.
41	`for (Beat__c beat : coreBeats) {`	Repeats work over the specified records/items or while this condition holds: for (Beat__c beat : coreBeats) {. Check where queries/writes occur relative to the loop.
42	`    if (beat.Retailers__r.size() != 10) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (beat.Retailers__r.size() != 10) {.
43	`        throw new IllegalArgumentException(`	Stops this execution path with a validation/error exception: throw new IllegalArgumentException(. The caller/catch block decides how it is reported.
44	`            beat.Name + ' must have exactly 10 outlets. Current count: ' +`	Continues the surrounding declaration/expression or text: beat.Name + ' must have exactly 10 outlets. Current count: ' +. Read it with the preceding opening statement (throw new IllegalArgumentException(); it is not a standalone business operation.
45	`            beat.Retailers__r.size()`	Calls the named method: beat.Retailers__r.size(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
46	`        );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48		Blank line separating logical sections; no executable operation.
49	`    List<String> desiredNames = new List<String>();`	Declares/initializes local data used by the surrounding operation: List<String> desiredNames = new List<String>();. Collection contents and assignments below determine its purpose.
50	`    for (String storeType : storeTypes) {`	Repeats work over the specified records/items or while this condition holds: for (String storeType : storeTypes) {. Check where queries/writes occur relative to the loop.
51	`        desiredNames.add(areaCodeByBeatId.get(beat.Beat_ID__c) + ' ' + storeType);`	Calls the named method: desiredNames.add(areaCodeByBeatId.get(beat.Beat_ID__c) + ' ' + storeType);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
52	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
53		Blank line separating logical sections; no executable operation.
54	`    // Balaji Stores is existing business data, so keep it in MG Road Beat.`	Developer comment/documentation: Balaji Stores is existing business data, so keep it in MG Road Beat. It is not executed.
55	`    if (beat.Beat_ID__c == 'BEAT-0001') {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (beat.Beat_ID__c == 'BEAT-0001') {.
56	`        desiredNames[0] = 'Balaji Stores';`	Assigns the right-hand expression to the named variable/property: desiredNames[0] = 'Balaji Stores';. This is in-memory unless it is later persisted by an explicit call.
57	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
58		Blank line separating logical sections; no executable operation.
59	`    for (Integer index = 0; index < beat.Retailers__r.size(); index++) {`	Repeats work over the specified records/items or while this condition holds: for (Integer index = 0; index < beat.Retailers__r.size(); index++) {. Check where queries/writes occur relative to the loop.
60	`        Retailer__c outlet = beat.Retailers__r[index];`	Assigns the right-hand expression to the named variable/property: Retailer__c outlet = beat.Retailers__r[index];. This is in-memory unless it is later persisted by an explicit call.
61	`        String newName = desiredNames[index];`	Declares/initializes local data used by the surrounding operation: String newName = desiredNames[index];. Collection contents and assignments below determine its purpose.
62	`        if (outlet.Name != newName) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (outlet.Name != newName) {.
63	`            outlet.Name = newName;`	Assigns the right-hand expression to the named variable/property: outlet.Name = newName;. This is in-memory unless it is later persisted by an explicit call.
64	`            outletsToRename.add(outlet);`	Calls the named method: outletsToRename.add(outlet);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
65	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
66	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
67	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
68		Blank line separating logical sections; no executable operation.
69	`if (!outletsToRename.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!outletsToRename.isEmpty()) {.
70	`    update outletsToRename;`	Performs Salesforce DML: update outletsToRename;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
71	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
72		Blank line separating logical sections; no executable operation.
73	`System.debug('Renamed ' + outletsToRename.size() + ' generated outlet names.');`	Calls the named method: System.debug('Renamed ' + outletsToRename.size() + ' generated outlet names.');. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/resetDemoState.apex

Operational script: reset Demo State. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

30 numbered source lines | SHA-256 12ac38628f57d06be0175f08db338e3a6ec538f92e6fb88e8295200af2aa7197

Line	Source code	Explanation / reading note
1	`// Reset only the named SFA demonstration records for a clean walkthrough.`	Developer comment/documentation: Reset only the named SFA demonstration records for a clean walkthrough. It is not executed.
2	`List<Attendance__c> attendance = [`	Declares/initializes local data used by the surrounding operation: List<Attendance__c> attendance = [. Collection contents and assignments below determine its purpose.
3	`    SELECT Id, Start_Time__c, End_Time__c, Status__c`	Selects these Salesforce fields/aggregates: Id, Start_Time__c, End_Time__c, Status__c. Query results are used in the surrounding assignment or loop.
4	`    FROM Attendance__c`	Chooses the Salesforce object/subquery source: FROM Attendance__c.
5	`    WHERE Sales_Representative__c = :UserInfo.getUserId()`	Adds a query/filter condition: WHERE Sales_Representative__c = :UserInfo.getUserId(). The complete condition determines which records are included.
6	`      AND Attendance_Date__c = :Date.today()`	Adds a query/filter condition: AND Attendance_Date__c = :Date.today(). The complete condition determines which records are included.
7	`    ORDER BY CreatedDate DESC`	Controls query sorting, grouping or result count: ORDER BY CreatedDate DESC.
8	`    LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
9	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`if (!attendance.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!attendance.isEmpty()) {.
11	`    attendance[0].Start_Time__c = System.now();`	Calls the named method: attendance[0].Start_Time__c = System.now();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
12	`    attendance[0].End_Time__c = null;`	Assigns the right-hand expression to the named variable/property: attendance[0].End_Time__c = null;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
13	`    attendance[0].Status__c = 'Started';`	Assigns the right-hand expression to the named variable/property: attendance[0].Status__c = 'Started';. This is in-memory unless it is later persisted by an explicit call.
14	`    update attendance[0];`	Performs Salesforce DML: update attendance[0];. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
15	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
16		Blank line separating logical sections; no executable operation.
17	`List<Visit__c> visits = [`	Declares/initializes local data used by the surrounding operation: List<Visit__c> visits = [. Collection contents and assignments below determine its purpose.
18	`    SELECT Id, Status__c, Check_In_Time__c, Check_Out_Time__c, Missed_Reason__c`	Selects these Salesforce fields/aggregates: Id, Status__c, Check_In_Time__c, Check_Out_Time__c, Missed_Reason__c. Query results are used in the surrounding assignment or loop.
19	`    FROM Visit__c`	Chooses the Salesforce object/subquery source: FROM Visit__c.
20	`    WHERE Name = 'Lakshmi Stores Visit'`	Adds a query/filter condition: WHERE Name = 'Lakshmi Stores Visit'. The complete condition determines which records are included.
21	`      AND Visit_Date__c = :Date.today()`	Adds a query/filter condition: AND Visit_Date__c = :Date.today(). The complete condition determines which records are included.
22	`    LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
23	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24	`if (!visits.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!visits.isEmpty()) {.
25	`    visits[0].Status__c = 'Planned';`	Assigns the right-hand expression to the named variable/property: visits[0].Status__c = 'Planned';. This is in-memory unless it is later persisted by an explicit call.
26	`    visits[0].Check_In_Time__c = null;`	Assigns the right-hand expression to the named variable/property: visits[0].Check_In_Time__c = null;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
27	`visits[0].Check_Out_Time__c = null;`	Assigns the right-hand expression to the named variable/property: visits[0].Check_Out_Time__c = null;. This is in-memory unless it is later persisted by an explicit call.
28	`visits[0].Missed_Reason__c = null;`	Assigns the right-hand expression to the named variable/property: visits[0].Missed_Reason__c = null;. This is in-memory unless it is later persisted by an explicit call.
29	`update visits[0];`	Performs Salesforce DML: update visits[0];. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
30	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

scripts/apex/runDemoSeed.apex

Operational script: run Demo Seed. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

1 numbered source lines | SHA-256 8536a8c04a2e5ff6343138cd3475bb46df20dd7ad6f608b4fa2d081a2a33acad

Line	Source code	Explanation / reading note
1	`SfaDemoDataFactory.seed();`	Calls the named method: SfaDemoDataFactory.seed();. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/seedDemo.apex

Operational script: seed Demo. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

78 numbered source lines | SHA-256 406664435b81062e476bb3340b1c620384293234a6ea413669e6d6dcfb24a5f3

Line	Source code	Explanation / reading note
1	`// Idempotent demo data for the SFA Mobile walkthrough.`	Developer comment/documentation: Idempotent demo data for the SFA Mobile walkthrough. It is not executed.
2	`Beat__c beat;`	Continues the surrounding declaration/expression or text: Beat__c beat;. Read it with the preceding opening statement (// Idempotent demo data for the SFA Mobile walkthrough.); it is not a standalone business operation.
3	`List<Beat__c> beats = [SELECT Id, Name FROM Beat__c WHERE Name = 'Central Market Beat' LIMIT 1];`	Declares/initializes local data used by the surrounding operation: List<Beat__c> beats = [SELECT Id, Name FROM Beat__c WHERE Name = 'Central Market Beat' LIMIT 1];. Collection contents and assignments below determine its purpose.
4	`if (beats.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (beats.isEmpty()) {.
5	`    beat = new Beat__c(Name = 'Central Market Beat');`	Assigns the right-hand expression to the named variable/property: beat = new Beat__c(Name = 'Central Market Beat');. This is in-memory unless it is later persisted by an explicit call.
6	`    insert beat;`	Performs Salesforce DML: insert beat;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
7	`} else {`	Alternative branch taken when the preceding condition is false.
8	`    beat = beats[0];`	Assigns the right-hand expression to the named variable/property: beat = beats[0];. This is in-memory unless it is later persisted by an explicit call.
9	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10		Blank line separating logical sections; no executable operation.
11	`Retailer__c retailer;`	Continues the surrounding declaration/expression or text: Retailer__c retailer;. Read it with the preceding opening statement; it is not a standalone business operation.

Line	Source code	Explanation / reading note
12	`List<Retailer__c> retailers = [SELECT Id, Name FROM Retailer__c WHERE Name = ' Lakshmi Stores Demo' LIMIT 1];`	Declares/initializes local data used by the surrounding operation: List<Retailer__c> retailers = [SELECT Id, Name FROM Retailer__c WHERE Name = 'Lakshmi Stores Demo' LIMIT 1];. Collection contents and assignments below determine its purpose.
13	`if (retailers.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (retailers.isEmpty()) {.
14	`    retailer = new Retailer__c(Name = 'Lakshmi Stores Demo', Address__c = 'MG Road, Bengaluru', Beat__c = beat.Id);`	Assigns the right-hand expression to the named variable/property: retailer = new Retailer__c(Name = 'Lakshmi Stores Demo', Address__c = 'MG Road, Bengaluru', Beat__c = beat.Id);. This is in-memory unless it is later persisted by an explicit call.
15	`    insert retailer;`	Performs Salesforce DML: insert retailer;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
16	`} else {`	Alternative branch taken when the preceding condition is false.
17	`    retailer = retailers[0];`	Assigns the right-hand expression to the named variable/property: retailer = retailers[0];. This is in-memory unless it is later persisted by an explicit call.
18	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19		Blank line separating logical sections; no executable operation.
20	`Permanent_Journey_Plan__c plan;`	Continues the surrounding declaration/expression or text: Permanent_Journey_Plan__c plan;. Read it with the preceding opening statement; it is not a standalone business operation.
21	`List<Permanent_Journey_Plan__c> plans = [`	Declares/initializes local data used by the surrounding operation: List<Permanent_Journey_Plan__c> plans = [. Collection contents and assignments below determine its purpose.
22	`    SELECT Id FROM Permanent_Journey_Plan__c`	Selects these Salesforce fields/aggregates: Id FROM Permanent_Journey_Plan__c. Query results are used in the surrounding assignment or loop.
23	`    WHERE Name = 'Today SFA Demo Plan' AND Plan_Date__c = :Date.today()`	Adds a query/filter condition: WHERE Name = 'Today SFA Demo Plan' AND Plan_Date__c = :Date.today(). The complete condition determines which records are included.
24	`    LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
25	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
26	`if (plans.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (plans.isEmpty()) {.
27	`    plan = new Permanent_Journey_Plan__c(`	Assigns the right-hand expression to the named variable/property: plan = new Permanent_Journey_Plan__c(. This is in-memory unless it is later persisted by an explicit call.
28	`        Name = 'Today SFA Demo Plan',`	Assigns the right-hand expression to the named variable/property: Name = 'Today SFA Demo Plan',. This is in-memory unless it is later persisted by an explicit call.
29	`        Plan_Date__c = Date.today(),`	Calls the named method: Plan_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
30	`        Planned_Date__c = Date.today(),`	Calls the named method: Planned_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
31	`        Sales_Representative__c = UserInfo.getUserId(),`	Calls the named method: Sales_Representative__c = UserInfo.getUserId(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
32	`        Beat__c = beat.Id`	Assigns the right-hand expression to the named variable/property: Beat__c = beat.Id. This is in-memory unless it is later persisted by an explicit call.
33	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
34	`    insert plan;`	Performs Salesforce DML: insert plan;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
35	`} else {`	Alternative branch taken when the preceding condition is false.
36	`    plan = plans[0];`	Assigns the right-hand expression to the named variable/property: plan = plans[0];. This is in-memory unless it is later persisted by an explicit call.
37	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38		Blank line separating logical sections; no executable operation.
39	`if ([SELECT COUNT() FROM Visit__c WHERE Permanent_Journey_Plan__c = :plan.Id AND Retailer__c = :retailer.Id] == 0) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ([SELECT COUNT() FROM Visit__c WHERE Permanent_Journey_Plan__c = :plan.Id AND Retailer__c = :retailer.Id] == 0) {.

Line	Source code	Explanation / reading note
40	`    insert new Visit__c(`	Performs Salesforce DML: insert new Visit__c(. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
41	`        Name = 'Lakshmi Stores Visit',`	Assigns the right-hand expression to the named variable/property: Name = 'Lakshmi Stores Visit',. This is in-memory unless it is later persisted by an explicit call.
42	`        Visit_Date__c = Date.today(),`	Calls the named method: Visit_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
43	`        Permanent_Journey_Plan__c = plan.Id,`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c = plan.Id,. This is in-memory unless it is later persisted by an explicit call.
44	`        Retailer__c = retailer.Id,`	Assigns the right-hand expression to the named variable/property: Retailer__c = retailer.Id,. This is in-memory unless it is later persisted by an explicit call.
45	`        Status__c = 'Planned'`	Assigns the right-hand expression to the named variable/property: Status__c = 'Planned'. This is in-memory unless it is later persisted by an explicit call.
46	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
47	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48		Blank line separating logical sections; no executable operation.
49	`if ([SELECT COUNT() FROM Product__c WHERE Product_Code__c = 'PG-DEMO-001'] == 0) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ([SELECT COUNT() FROM Product__c WHERE Product_Code__c = 'PG-DEMO-001'] == 0) {.
50	`    Product__c demoProduct = new Product__c(`	Assigns the right-hand expression to the named variable/property: Product__c demoProduct = new Product__c(. This is in-memory unless it is later persisted by an explicit call.
51	`        Name = 'Parle-G Demo Pack',`	Assigns the right-hand expression to the named variable/property: Name = 'Parle-G Demo Pack',. This is in-memory unless it is later persisted by an explicit call.
52	`        Product_Code__c = 'PG-DEMO-001',`	Assigns the right-hand expression to the named variable/property: Product_Code__c = 'PG-DEMO-001',. This is in-memory unless it is later persisted by an explicit call.
53	`        Brand__c = 'Parle',`	Assigns the right-hand expression to the named variable/property: Brand__c = 'Parle',. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
54	`        MRP__c = 10,`	Assigns the right-hand expression to the named variable/property: MRP__c = 10,. This is in-memory unless it is later persisted by an explicit call.
55	`        Retailer_Base_Price__c = 8.5,`	Assigns the right-hand expression to the named variable/property: Retailer_Base_Price__c = 8.5,. This is in-memory unless it is later persisted by an explicit call.
56	`        Available_Stock__c = 500,`	Assigns the right-hand expression to the named variable/property: Available_Stock__c = 500,. This is in-memory unless it is later persisted by an explicit call.
57	`        Units_Per_Case__c = 50`	Assigns the right-hand expression to the named variable/property: Units_Per_Case__c = 50. This is in-memory unless it is later persisted by an explicit call.
58	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
59	`    demoProduct.put('Selling_Price__c', 9);`	Calls the named method: demoProduct.put('Selling_Price__c', 9);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
60	`    demoProduct.put('Sellable__c', true);`	Calls the named method: demoProduct.put('Sellable__c', true);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
61	`    demoProduct.put('Returnable__c', true);`	Calls the named method: demoProduct.put('Returnable__c', true);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
62	`    insert demoProduct;`	Performs Salesforce DML: insert demoProduct;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
63	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
64		Blank line separating logical sections; no executable operation.
65	`if ([SELECT COUNT() FROM Scheme__c WHERE Scheme_Code__c = 'B2G1-DEMO'] == 0) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ([SELECT COUNT() FROM Scheme__c WHERE Scheme_Code__c = 'B2G1-DEMO'] == 0) {.
66	`    Scheme__c demoScheme = new Scheme__c(`	Assigns the right-hand expression to the named variable/property: Scheme__c demoScheme = new Scheme__c(. This is in-memory unless it is later persisted by an explicit call.
67	`        Name = 'Buy 2 Get 1 Demo',`	Assigns the right-hand expression to the named variable/property: Name = 'Buy 2 Get 1 Demo',. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
68	`Scheme_Code__c = 'B2G1-DEMO',`	Assigns the right-hand expression to the named variable/property: Scheme_Code__c = 'B2G1-DEMO',. This is in-memory unless it is later persisted by an explicit call.
69	`Scheme_Type__c = 'Same Product Free',`	Assigns the right-hand expression to the named variable/property: Scheme_Type__c = 'Same Product Free',. This is in-memory unless it is later persisted by an explicit call.
70	`Start_Date__c = Date.today(),`	Calls the named method: Start_Date__c = Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
71	`End_Date__c = Date.today().addDays(7),`	Calls the named method: End_Date__c = Date.today().addDays(7),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
72	`Active__c = true`	Assigns the right-hand expression to the named variable/property: Active__c = true. This is in-memory unless it is later persisted by an explicit call.
73	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
74	`demoScheme.put('Description__c', 'Buy two cases and receive one case free.');`	Calls the named method: demoScheme.put('Description__c', 'Buy two cases and receive one case free.');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
75	`insert demoScheme;`	Performs Salesforce DML: insert demoScheme;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
76	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
77		Blank line separating logical sections; no executable operation.
78	`System.debug('SFA demo data is ready.');`	Calls the named method: System.debug('SFA demo data is ready.');. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/seedDmsDemo20261022.apex

Operational script: seed Dms Demo20261022. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

93 numbered source lines | SHA-256 5db010956c035c5d305ac8e13187e9c282c89155b54f32cbaeeb660014ce2f40

Line	Source code	Explanation / reading note
1	`// User-authorized DEMO data only. No updates/deletes to existing records or SFA.`	Developer comment/documentation: User-authorized DEMO data only. No updates/deletes to existing records or SFA. It is not executed.
2	`// Single transaction; a failed assertion/DML rolls back the entire seed.`	Developer comment/documentation: Single transaction; a failed assertion/DML rolls back the entire seed. It is not executed.
3	`// Reruns stop before any writes, preventing duplicate inventory.`	Developer comment/documentation: Reruns stop before any writes, preventing duplicate inventory. It is not executed.
4	`String marker = 'DEMO-20261022';`	Declares/initializes local data used by the surrounding operation: String marker = 'DEMO-20261022';. Collection contents and assignments below determine its purpose.
5	`System.assertEquals(0, [SELECT count() FROM DMS_Distributor__c WHERE Distributor_Code__c = :marker], 'Demo batch already exists; do not seed twice.');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(0, [SELECT count() FROM DMS_Distributor__c WHERE Distributor_Code__c = :marker], 'Demo batch already exists; do not seed twice.');. A mismatch fails the test.
6	`DMS_Distributor__c d = [SELECT Id,Officer__c,Geography__c FROM DMS_Distributor__c WHERE Id='a0TjV000001VqMjUAK' AND Active__c=true];`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c d = [SELECT Id,Officer__c,Geography__c FROM DMS_Distributor__c WHERE Id='a0TjV000001VqMjUAK' AND Active__c=true];. This is in-memory unless it is later persisted by an explicit call.
7	`Employee__c employee = [SELECT Id FROM Employee__c WHERE DMS_Distributor__c=:d.Id AND Active__c=true ORDER BY CreatedDate,Id LIMIT 1];`	Assigns the right-hand expression to the named variable/property: Employee__c employee = [SELECT Id FROM Employee__c WHERE DMS_Distributor__c=:d.Id AND Active__c=true ORDER BY CreatedDate,Id LIMIT 1];. This is in-memory unless it is later persisted by an explicit call.
8	`Map<Id,Product__c> products = new Map<Id,Product__c>([SELECT Id,Name,Units_Per_Case__c,DMS_Case_Price__c,GST_Percent__c FROM Product__c WHERE Id IN ('a04jV000000WynbQAC','a04jV000000WyndQAC','a04jV000000WynYQAS') AND Active__c=true AND Sellable__c=true]);`	Declares/initializes local data used by the surrounding operation: Map<Id,Product__c> products = new Map<Id,Product__c>([SELECT Id,Name,Units_Per_Case__c,DMS_Case_Price__c,GST_Percent__c FROM Product__c WHERE Id IN ('a04jV000000WynbQAC','a04jV000000WyndQAC','a04jV000. Collection contents and assignments below determine its purpose.
9	`System.assertEquals(3,products.size(),'Expected three active catalogue products.');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(3,products.size(),'Expected three active catalogue products.');. A mismatch fails the test.

Line	Source code	Explanation / reading note
10	`for(Product__c p:products.values()) System.assert(p.Units_Per_Case__c>0 && p.DMS_Case_Price__c>0,'Missing product conversion/price');`	Test assertion comparing an expected outcome to actual behavior: for(Product__c p:products.values()) System.assert(p.Units_Per_Case__c>0 && p.DMS_Case_Price__c>0,'Missing product conversion/price');. A mismatch fails the test.
11	`Date today=Date.today();`	Declares/initializes local data used by the surrounding operation: Date today=Date.today();. Collection contents and assignments below determine its purpose.
12	`String note=marker+' | DEMO ONLY - not a real sale, shipment, payment or claim.';`	Declares/initializes local data used by the surrounding operation: String note=marker+' | DEMO ONLY - not a real sale, shipment, payment or claim.';. Collection contents and assignments below determine its purpose.
13	`Map<String,Object> manifest=new Map<String,Object>();`	Declares/initializes local data used by the surrounding operation: Map<String,Object> manifest=new Map<String,Object>();. Collection contents and assignments below determine its purpose.
14		Blank line separating logical sections; no executable operation.
15	`// No login email, user association or allocation priority: cannot enter the`	Developer comment/documentation: No login email, user association or allocation priority: cannot enter the It is not executed.
16	`// existing round-robin employee pool or authenticate as an existing distributor.`	Developer comment/documentation: existing round-robin employee pool or authenticate as an existing distributor. It is not executed.
17	`DMS_Distributor__c demo=new DMS_Distributor__c(Name='DEMO ONLY - Training Distributor',Distributor_Code__c=marker,`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c demo=new DMS_Distributor__c(Name='DEMO ONLY - Training Distributor',Distributor_Code__c=marker,. This is in-memory unless it is later persisted by an explicit call.
18	`Active__c=true,Partner_Type__c='Distributor',Employee_Allocation_Order__c=0,`	Assigns the right-hand expression to the named variable/property: Active__c=true,Partner_Type__c='Distributor',Employee_Allocation_Order__c=0,. This is in-memory unless it is later persisted by an explicit call.
19	`Officer__c=UserInfo.getUserId(),Address__c='DEMO ONLY - fictional training warehouse, not a delivery address',Credit_Limit__c=0);`	Calls the named method: Officer__c=UserInfo.getUserId(),Address__c='DEMO ONLY - fictional training warehouse, not a delivery address',Credit_Limit__c=0);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
20	`insert demo; manifest.put('demoDistributor',demo.Id);`	Performs Salesforce DML: insert demo; manifest.put('demoDistributor',demo.Id);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
21		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
22	`List<DMS_Inventory__c> stock=new List<DMS_Inventory__c>();`	Declares/initializes local data used by the surrounding operation: List<DMS_Inventory__c> stock=new List<DMS_Inventory__c>();. Collection contents and assignments below determine its purpose.
23	`List<Id> productIds=new List<Id>{'a04jV000000WynbQAC','a04jV000000WyndQAC','a04jV000000WynYQAS'};`	Declares/initializes local data used by the surrounding operation: List<Id> productIds=new List<Id>{'a04jV000000WynbQAC','a04jV000000WyndQAC','a04jV000000WynYQAS'};. Collection contents and assignments below determine its purpose.
24	`List<Integer> caseCounts=new List<Integer>{10,5,8};`	Declares/initializes local data used by the surrounding operation: List<Integer> caseCounts=new List<Integer>{10,5,8};. Collection contents and assignments below determine its purpose.
25	`for(Integer i=0;i<productIds.size();i++) {`	Repeats work over the specified records/items or while this condition holds: for(Integer i=0;i<productIds.size();i++) {. Check where queries/writes occur relative to the loop.
26	`Product__c p=products.get(productIds[i]);`	Calls the named method: Product__c p=products.get(productIds[i]);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
27	`stock.add(new DMS_Inventory__c(Distributor__c=d.Id,Product__c=p.Id,Batch_Number__c=marker+'-OPENING-'+(i+1),`	Calls the named method: stock.add(new DMS_Inventory__c(Distributor__c=d.Id,Product__c=p.Id,Batch_Number__c=marker+'-OPENING-'+(i+1),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
28	`Warehouse__c='DEMO ONLY - simulated opening stock',On_Hand_Pieces__c=caseCounts[i]*p.Units_Per_Case__c,`	Assigns the right-hand expression to the named variable/property: Warehouse__c='DEMO ONLY - simulated opening stock',On_Hand_Pieces__c=caseCounts[i]*p.Units_Per_Case__c,. This is in-memory unless it is later persisted by an explicit call.
29	`Reserved_Pieces__c=0,Reorder_Level_Pieces__c=2*p.Units_Per_Case__c,`	Assigns the right-hand expression to the named variable/property: Reserved_Pieces__c=0,Reorder_Level_Pieces__c=2*p.Units_Per_Case__c,. This is in-memory unless it is later persisted by an explicit call.
30	`Manufacturing_Date__c=today.addDays(-15),Expiry_Date__c=today.addMonths(12),Last_Stock_Update__c=System.now()));`	Calls the named method: Manufacturing_Date__c=today.addDays(-15),Expiry_Date__c=today.addMonths(12),Last_Stock_Update__c=System.now()));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
31	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`insert stock; manifest.put('openingStock',stock);`	Performs Salesforce DML: insert stock; manifest.put('openingStock',stock);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
33		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
34	`Product__c yippee=products.get(productIds[0]);`	Calls the named method: Product__c yippee=products.get(productIds[0]);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
35	`DMS_Primary_Order__c po=new DMS_Primary_Order__c(Distributor__c=d.Id,Status__c='Draft',Order_Source__c='Distributor DMS',`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order__c po=new DMS_Primary_Order__c(Distributor__c=d.Id,Status__c='Draft',Order_Source__c='Distributor DMS',. This is in-memory unless it is later persisted by an explicit call.
36	`Order_Date__c=today,Expected_Delivery_Date__c=today.addDays(7),Fulfilment_Status__c='Not Dispatched',Notes__c=note,`	Calls the named method: Order_Date__c=today,Expected_Delivery_Date__c=today.addDays(7),Fulfilment_Status__c='Not Dispatched',Notes__c=note,. Its implementation defines the side effect/result; use the symbol/file index to follow it.
37	`Request_Key__c=marker+'-ORDER');`	Assigns the right-hand expression to the named variable/property: Request_Key__c=marker+'-ORDER');. This is in-memory unless it is later persisted by an explicit call.
38	`insert po;`	Performs Salesforce DML: insert po;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
39	`DMS_Primary_Order_Line__c pol=new DMS_Primary_Order_Line__c(Order__c=po.Id,Product__c=yippee.Id,Cases__c=3);`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order_Line__c pol=new DMS_Primary_Order_Line__c(Order__c=po.Id,Product__c=yippee.Id,Cases__c=3);. This is in-memory unless it is later persisted by an explicit call.
40	`insert pol; manifest.put('primaryOrder',po.Id); manifest.put('primaryOrderLine',pol.Id);`	Performs Salesforce DML: insert pol; manifest.put('primaryOrder',po.Id); manifest.put('primaryOrderLine',pol.Id);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
41		Blank line separating logical sections; no executable operation.
42	`DMS_Goods_Receipt__c grn=new DMS_Goods_Receipt__c(Distributor__c=d.Id,Primary_Order__c=po.Id,Status__c='Draft',`	Assigns the right-hand expression to the named variable/property: DMS_Goods_Receipt__c grn=new DMS_Goods_Receipt__c(Distributor__c=d.Id,Primary_Order__c=po.Id,Status__c='Draft',. This is in-memory unless it is later persisted by an explicit call.
43	`Supplier_Invoice_Number__c=marker+'-SAMPLE',Notes__c=note+' Draft only; no stock posting.');`	Assigns the right-hand expression to the named variable/property: Supplier_Invoice_Number__c=marker+'-SAMPLE',Notes__c=note+' Draft only; no stock posting.');. This is in-memory unless it is later persisted by an explicit call.
44	`insert grn;`	Performs Salesforce DML: insert grn;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
45	`DMS_Goods_Receipt_Line__c grnl=new DMS_Goods_Receipt_Line__c(Goods_Receipt__c=grn.Id, Primary_Order_Line__c=pol.Id,`	Assigns the right-hand expression to the named variable/property: DMS_Goods_Receipt_Line__c grnl=new DMS_Goods_Receipt_Line__c(Goods_Receipt__c=grn.Id,Primary_Order_Line__c=pol.Id,. This is in-memory unless it is later persisted by an explicit call.
46	`Product__c=yippee.Id,Received_Cases__c=3,Free_Cases__c=0,Pieces_Per_Case__c=yippee.Units_Per_Case__c,`	Assigns the right-hand expression to the named variable/property: Product__c=yippee.Id,Received_Cases__c=3,Free_Cases__c=0,Pieces_Per_Case__c=yippee.Units_Per_Case__c,. This is in-memory unless it is later persisted by an explicit call.
47	`Case_Cost__c=yippee.DMS_Case_Price__c,Batch_Number__c=marker+'-DRAFT-RECEIPT',Manufacturing_Date__c=today.addDays(-15),Expiry_Date__c=today.addMonths(12));`	Calls the named method: Case_Cost__c=yippee.DMS_Case_Price__c,Batch_Number__c=marker+'-DRAFT-RECEIPT',Manufacturing_Date__c=today.addDays(-15),Expiry_Date__c=today.addMonths(12));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
48	`insert grnl; manifest.put('draftReceipt',grn.Id); manifest.put('draftReceiptLine',grnl.Id);`	Performs Salesforce DML: insert grnl; manifest.put('draftReceipt',grn.Id); manifest.put('draftReceiptLine',grnl.Id);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
49		Blank line separating logical sections; no executable operation.
50	`// Required invoice source is a read-only reference to an existing secondary`	Developer comment/documentation: Required invoice source is a read-only reference to an existing secondary It is not executed.
51	`// order/item. Neither the source order, item nor outlet is updated or posted.`	Developer comment/documentation: order/item. Neither the source order, item nor outlet is updated or posted. It is not executed.
52	`Order_Item__c source=[SELECT Id,Sales_Order__c,Sales_Order__r.Retailer__c FROM Order_Item__c`	Assigns the right-hand expression to the named variable/property: Order_Item__c source=[SELECT Id,Sales_Order__c,Sales_Order__r.Retailer__c FROM Order_Item__c. This is in-memory unless it is later persisted by an explicit call.
53	`WHERE Id='a02jV000002FvmPQAS' AND Product__c='a04jV000000WyndQAC' AND Sales_Order__r.DMS_Distributor__c=:d.Id];`	Adds a query/filter condition: WHERE Id='a02jV000002FvmPQAS' AND Product__c='a04jV000000WyndQAC' AND Sales_Order__r.DMS_Distributor__c=:d.Id];. The complete condition determines which records are included.
54	`DMS_Invoice__c inv=new DMS_Invoice__c(Distributor__c=d.Id,Outlet__c=source.Sales_Order__r.Retailer__c,`	Assigns the right-hand expression to the named variable/property: DMS_Invoice__c inv=new DMS_Invoice__c(Distributor__c=d.Id,Outlet__c=source.Sales_Order__r.Retailer__c,. This is in-memory unless it is later persisted by an explicit call.
55	`Sales_Order__c=source.Sales_Order__c,Status__c='Draft',Payment_Status__c='Unpaid',Paid_Amount__c=0,`	Assigns the right-hand expression to the named variable/property: Sales_Order__c=source.Sales_Order__c,Status__c='Draft',Payment_Status__c='Unpaid',Paid_Amount__c=0,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
56	`Invoice_Date__c=today,Due_Date__c=today.addDays(30),Notes__c=note+' Existing order is reference-only; do not issue this demo invoice.');`	Calls the named method: Invoice_Date__c=today,Due_Date__c=today.addDays(30),Notes__c=note+' Existing order is reference-only; do not issue this demo invoice.');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
57	`insert inv;`	Performs Salesforce DML: insert inv;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
58	`Product__c atta=products.get(productIds[1]);`	Calls the named method: Product__c atta=products.get(productIds[1]);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
59	`DMS_Invoice_Line__c il=new DMS_Invoice_Line__c(Invoice__c=inv.Id,Order_Item__c=source.Id,Product__c=atta.Id,`	Assigns the right-hand expression to the named variable/property: DMS_Invoice_Line__c il=new DMS_Invoice_Line__c(Invoice__c=inv.Id,Order_Item__c=source.Id,Product__c=atta.Id,. This is in-memory unless it is later persisted by an explicit call.
60	`Inventory__c=stock[1].Id,Quantity_Pieces__c=5,Free_Pieces__c=0,Discount_Amount__c=0,`	Assigns the right-hand expression to the named variable/property: Inventory__c=stock[1].Id,Quantity_Pieces__c=5,Free_Pieces__c=0,Discount_Amount__c=0,. This is in-memory unless it is later persisted by an explicit call.
61	`Unit_Price__c=atta.DMS_Case_Price__c/atta.Units_Per_Case__c,Tax_Percent__c=atta.GST_Percent__c,`	Assigns the right-hand expression to the named variable/property: Unit_Price__c=atta.DMS_Case_Price__c/atta.Units_Per_Case__c,Tax_Percent__c=atta.GST_Percent__c,. This is in-memory unless it is later persisted by an explicit call.
62	`Batch_Number__c=stock[1].Batch_Number__c,Expiry_Date__c=stock[1].Expiry_Date__c);`	Assigns the right-hand expression to the named variable/property: Batch_Number__c=stock[1].Batch_Number__c,Expiry_Date__c=stock[1].Expiry_Date__c);. This is in-memory unless it is later persisted by an explicit call.
63	`insert il; manifest.put('draftInvoice',inv.Id); manifest.put('draftInvoiceLine',il.Id);`	Performs Salesforce DML: insert il; manifest.put('draftInvoice',inv.Id); manifest.put('draftInvoiceLine',il.Id);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
64		Blank line separating logical sections; no executable operation.
65	`DMS_Primary_Return__c ret=new DMS_Primary_Return__c(Distributor__c=d.Id,Employee__c=employee.Id,`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Return__c ret=new DMS_Primary_Return__c(Distributor__c=d.Id,Employee__c=employee.Id,. This is in-memory unless it is later persisted by an explicit call.
66	`Status__c='Draft',Return_Date__c=today,Notes__c=note+' Simulated opening-stock return; no stock deduction.');`	Assigns the right-hand expression to the named variable/property: Status__c='Draft',Return_Date__c=today,Notes__c=note+' Simulated opening-stock return; no stock deduction.');. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
67	`insert ret;`	Performs Salesforce DML: insert ret;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
68	`DMS_Primary_Return_Line__c rl=new DMS_Primary_Return_Line__c(Primary_Return__c=ret.Id,Product__c=yippee.Id,`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Return_Line__c rl=new DMS_Primary_Return_Line__c(Primary_Return__c=ret.Id,Product__c=yippee.Id,. This is in-memory unless it is later persisted by an explicit call.
69	`Cases__c=1,Batch_Number__c=stock[0].Batch_Number__c,Expiry_Date__c=stock[0].Expiry_Date__c,`	Assigns the right-hand expression to the named variable/property: Cases__c=1,Batch_Number__c=stock[0].Batch_Number__c,Expiry_Date__c=stock[0].Expiry_Date__c,. This is in-memory unless it is later persisted by an explicit call.
70	`Reason__c='Damaged',Notes__c=marker+' - simulated damaged carton, not a real claim');`	Assigns the right-hand expression to the named variable/property: Reason__c='Damaged',Notes__c=marker+' - simulated damaged carton, not a real claim');. This is in-memory unless it is later persisted by an explicit call.
71	`insert rl; manifest.put('draftReturn',ret.Id); manifest.put('draftReturnLine',rl.Id);`	Performs Salesforce DML: insert rl; manifest.put('draftReturn',ret.Id); manifest.put('draftReturnLine',rl.Id);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
72		Blank line separating logical sections; no executable operation.
73	`DMS_Credit_Note__c credit=new DMS_Credit_Note__c(Distributor__c=d.Id,Primary_Return__c=ret.Id,`	Assigns the right-hand expression to the named variable/property: DMS_Credit_Note__c credit=new DMS_Credit_Note__c(Distributor__c=d.Id,Primary_Return__c=ret.Id,. This is in-memory unless it is later persisted by an explicit call.
74	`Status__c='Draft',Sales_Channel__c='Primary',Credit_Date__c=today,Reason__c='Return',Notes__c=note);`	Assigns the right-hand expression to the named variable/property: Status__c='Draft',Sales_Channel__c='Primary',Credit_Date__c=today,Reason__c='Return',Notes__c=note);. This is in-memory unless it is later persisted by an explicit call.
75	`insert credit;`	Performs Salesforce DML: insert credit;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
76	`DMS_Credit_Note_Line__c cl=new DMS_Credit_Note_Line__c(Credit_Note__c=credit.Id,Product__c=yippee.Id,`	Assigns the right-hand expression to the named variable/property: DMS_Credit_Note_Line__c cl=new DMS_Credit_Note_Line__c(Credit_Note__c=credit.Id,Product__c=yippee.Id,. This is in-memory unless it is later persisted by an explicit call.
77	`Description__c=marker+' - illustrative credit only',Quantity__c=1,Quantity_Unit__c='Case',Unit_Credit__c=yippee.DMS_Case_Price__c,Tax_Percent__c=yippee.GST_Percent__c);`	Assigns the right-hand expression to the named variable/property: Description__c=marker+' - illustrative credit only',Quantity__c=1,Quantity_Unit__c='Case',Unit_Credit__c=yippee.DMS_Case_Price__c,Tax_Percent__c=yippee.GST_Percent__c);. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
78	`insert cl; manifest.put('draftCredit',credit.Id); manifest.put('draftCreditLine',cl.Id);`	Performs Salesforce DML: insert cl; manifest.put('draftCredit',credit.Id); manifest.put('draftCreditLine',cl.Id);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
79		Blank line separating logical sections; no executable operation.
80	`List<DMS_Support_Ticket__c> tickets=new List<DMS_Support_Ticket__c>();`	Declares/initializes local data used by the surrounding operation: List<DMS_Support_Ticket__c> tickets=new List<DMS_Support_Ticket__c>();. Collection contents and assignments below determine its purpose.
81	`for(String category:new List<String>{'Product','Portal','Delivery'}) tickets.add(new DMS_Support_Ticket__c(`	Repeats work over the specified records/items or while this condition holds: for(String category:new List<String>{'Product','Portal','Delivery'}) tickets.add(new DMS_Support_Ticket__c(. Check where queries/writes occur relative to the loop.
82	`Distributor__c=d.Id,Subject__c=marker+' - '+category+' training example',Category__c=category,`	Assigns the right-hand expression to the named variable/property: Distributor__c=d.Id,Subject__c=marker+' - '+category+' training example',Category__c=category,. This is in-memory unless it is later persisted by an explicit call.
83	`Status__c='Open',Description__c=note+' Training ticket; no real customer issue or delivery action required.'));`	Assigns the right-hand expression to the named variable/property: Status__c='Open',Description__c=note+' Training ticket; no real customer issue or delivery action required.'));. This is in-memory unless it is later persisted by an explicit call.
84	`insert tickets; manifest.put('tickets',tickets);`	Performs Salesforce DML: insert tickets; manifest.put('tickets',tickets);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
85		Blank line separating logical sections; no executable operation.
86	`// Isolate the illustrative target so it does not become Distributor 1's real target.`	Developer comment/documentation: Isolate the illustrative target so it does not become Distributor 1's real target. It is not executed.
87	`DMS_Sales_Target__c target=new DMS_Sales_Target__c(Distributor__c=demo.Id,Month__c=today.toStartOfMonth(),Target_Amount__c=100000);`	Calls the named method: DMS_Sales_Target__c target=new DMS_Sales_Target__c(Distributor__c=demo.Id,Month__c=today.toStartOfMonth(),Target_Amount__c=100000);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
88	`insert target; manifest.put('demoTarget',target.Id);`	Performs Salesforce DML: insert target; manifest.put('demoTarget',target.Id);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
89	`DMS_Distributor_Survey__c survey=new DMS_Distributor_Survey__c(Distributor__c=demo.Id,Product__c=yippee.Id,`	Assigns the right-hand expression to the named variable/property: DMS_Distributor_Survey__c survey=new DMS_Distributor_Survey__c(Distributor__c=demo.Id,Product__c=yippee.Id,. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
90	`Visit_Date__c=today,Stock_Cases__c=0,Movement__c='Normal',Demand_Notes__c=note+' Training survey only; no physical inspection performed.');`	Assigns the right-hand expression to the named variable/property: Visit_Date__c=today,Stock_Cases__c=0,Movement__c='Normal',Demand_Notes__c=note+' Training survey only; no physical inspection performed.');. This is in-memory unless it is later persisted by an explicit call.
91	`insert survey; manifest.put('demoSurvey',survey.Id);`	Performs Salesforce DML: insert survey; manifest.put('demoSurvey',survey.Id);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
92		Blank line separating logical sections; no executable operation.
93	`System.debug(LoggingLevel.ERROR,'DEMO_MANIFEST '+JSON.serialize(manifest));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.

scripts/apex/seedExpensePolicies.apex

Operational script: seed Expense Policies. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

29 numbered source lines | SHA-256 655dc69898f84864fdba3f7584da1895e41fc5d14362cd33da426545575af724

Line	Source code	Explanation / reading note
1	`// Baseline policies from the 14-Oct-2026 mentor discussion.`	Developer comment/documentation: Baseline policies from the 14-Oct-2026 mentor discussion. It is not executed.
2	`// Administrators can change rates, limits, geography, and dates without a mobile release.`	Developer comment/documentation: Administrators can change rates, limits, geography, and dates without a mobile release. It is not executed.
3	`List<Expense_Policy__c> policies = new List<Expense_Policy__c>{`	Declares/initializes local data used by the surrounding operation: List<Expense_Policy__c> policies = new List<Expense_Policy__c>{. Collection contents and assignments below determine its purpose.
4	`new Expense_Policy__c(Name='Own Two Wheeler - Per KM', Expense_Type__c='Travel Allowance', Category__c='Two Wheeler', Ownership__c='Own', Rate_Type__c='Per Kilometer', Rate__c=10, Receipt_Required__c=false, Start_Date__c=Date.today(), Active__c=true),`	Calls the named method: new Expense_Policy__c(Name='Own Two Wheeler - Per KM', Expense_Type__c='Travel Allowance', Category__c='Two Wheeler', Ownership__c='Own', Rate_Type__c='Per Kilometer', Rate__c=10, Receipt_Required__c=. Its implementation defines the side effect/result; use the symbol/file index to follow it.
5	`new Expense_Policy__c(Name='Own Four Wheeler - Per KM', Expense_Type__c='Travel Allowance', Category__c='Four Wheeler', Ownership__c='Own', Rate_Type__c='Per Kilometer', Rate__c=10, Receipt_Required__c=false, Start_Date__c=Date.today(), Active__c=true),`	Calls the named method: new Expense_Policy__c(Name='Own Four Wheeler - Per KM', Expense_Type__c='Travel Allowance', Category__c='Four Wheeler', Ownership__c='Own', Rate_Type__c='Per Kilometer', Rate__c=10, Receipt_Required__. Its implementation defines the side effect/result; use the symbol/file index to follow it.
6	`new Expense_Policy__c(Name='Rented Two Wheeler / Rapido', Expense_Type__c='Travel Allowance', Category__c='Two Wheeler', Ownership__c='Rented', Rate_Type__c='Actual', Maximum_Amount__c=1000, Receipt_Required__c=true, Start_Date__c=Date.today(), Active__c=true),`	Calls the named method: new Expense_Policy__c(Name='Rented Two Wheeler / Rapido', Expense_Type__c='Travel Allowance', Category__c='Two Wheeler', Ownership__c='Rented', Rate_Type__c='Actual', Maximum_Amount__c=1000, Receipt_R. Its implementation defines the side effect/result; use the symbol/file index to follow it.
7	`new Expense_Policy__c(Name='AC Bus', Expense_Type__c='Travel Allowance', Category__c='Bus', Travel_Class__c='AC', Rate_Type__c='Per Trip', Maximum_Amount__c=1000, Receipt_Required__c=true, Start_Date__c=Date.today(), Active__c=true),`	Calls the named method: new Expense_Policy__c(Name='AC Bus', Expense_Type__c='Travel Allowance', Category__c='Bus', Travel_Class__c='AC', Rate_Type__c='Per Trip', Maximum_Amount__c=1000, Receipt_Required__c=true, Start_Date_. Its implementation defines the side effect/result; use the symbol/file index to follow it.
8	`new Expense_Policy__c(Name='Non-AC Bus', Expense_Type__c='Travel Allowance', Category__c='Bus', Travel_Class__c='Non-AC', Rate_Type__c='Per Trip', Maximum_Amount__c=700, Receipt_Required__c=true, Start_Date__c=Date.today(), Active__c=true),`	Calls the named method: new Expense_Policy__c(Name='Non-AC Bus', Expense_Type__c='Travel Allowance', Category__c='Bus', Travel_Class__c='Non-AC', Rate_Type__c='Per Trip', Maximum_Amount__c=700, Receipt_Required__c=true, Star. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
9	`new Expense_Policy__c(Name='Bus Seater', Expense_Type__c='Travel Allowance', Category__c='Bus', Travel_Class__c='Seater', Rate_Type__c='Per Trip', Maximum_Amount__c=500, Receipt_Required__c=true, Start_Date__c=Date.today(), Active__c=true),`	Calls the named method: new Expense_Policy__c(Name='Bus Seater', Expense_Type__c='Travel Allowance', Category__c='Bus', Travel_Class__c='Seater', Rate_Type__c='Per Trip', Maximum_Amount__c=500, Receipt_Required__c=true, Star. Its implementation defines the side effect/result; use the symbol/file index to follow it.
10	`new Expense_Policy__c(Name='Bus Sleeper', Expense_Type__c='Travel Allowance', Category__c='Bus', Travel_Class__c='Sleeper', Rate_Type__c='Per Trip', Maximum_Amount__c=800, Receipt_Required__c=true, Start_Date__c=Date.today(), Active__c=true),`	Calls the named method: new Expense_Policy__c(Name='Bus Sleeper', Expense_Type__c='Travel Allowance', Category__c='Bus', Travel_Class__c='Sleeper', Rate_Type__c='Per Trip', Maximum_Amount__c=800, Receipt_Required__c=true, St. Its implementation defines the side effect/result; use the symbol/file index to follow it.
11	`new Expense_Policy__c(Name='Train 1 AC', Expense_Type__c='Travel Allowance', Category__c='Train', Travel_Class__c='1 AC', Rate_Type__c='Per Trip', Maximum_Amount__c=1800, Receipt_Required__c=true, Start_Date__c=Date.today(), Active__c=true),`	Calls the named method: new Expense_Policy__c(Name='Train 1 AC', Expense_Type__c='Travel Allowance', Category__c='Train', Travel_Class__c='1 AC', Rate_Type__c='Per Trip', Maximum_Amount__c=1800, Receipt_Required__c=true, Sta. Its implementation defines the side effect/result; use the symbol/file index to follow it.
12	`new Expense_Policy__c(Name='Train 2 AC', Expense_Type__c='Travel Allowance', Category__c='Train', Travel_Class__c='2 AC', Rate_Type__c='Per Trip', Maximum_Amount__c=1500, Receipt_Required__c=true, Start_Date__c=Date.today(), Active__c=true),`	Calls the named method: new Expense_Policy__c(Name='Train 2 AC', Expense_Type__c='Travel Allowance', Category__c='Train', Travel_Class__c='2 AC', Rate_Type__c='Per Trip', Maximum_Amount__c=1500, Receipt_Required__c=true, Sta. Its implementation defines the side effect/result; use the symbol/file index to follow it.
13	`new Expense_Policy__c(Name='Economy Flight', Expense_Type__c='Travel Allowance', Category__c='Flight', Travel_Class__c='Economy', Rate_Type__c='Per Trip', Maximum_Amount__c=7000, Receipt_Required__c=true, Start_Date__c=Date.today(), Active__c=true),`	Calls the named method: new Expense_Policy__c(Name='Economy Flight', Expense_Type__c='Travel Allowance', Category__c='Flight', Travel_Class__c='Economy', Rate_Type__c='Per Trip', Maximum_Amount__c=7000, Receipt_Required__c=t. Its implementation defines the side effect/result; use the symbol/file index to follow it.
14	`new Expense_Policy__c(Name='Half Day Allowance', Expense_Type__c='Daily Allowance', Category__c='Half Day Allowance', Rate_Type__c='Per Day', Maximum_Amount__c=250, Receipt_Required__c=false, Start_Date__c=Date.today(), Active__c=true),`	Calls the named method: new Expense_Policy__c(Name='Half Day Allowance', Expense_Type__c='Daily Allowance', Category__c='Half Day Allowance', Rate_Type__c='Per Day', Maximum_Amount__c=250, Receipt_Required__c=false, Start_Da. Its implementation defines the side effect/result; use the symbol/file index to follow it.
15	`new Expense_Policy__c(Name='Full Day Allowance', Expense_Type__c='Daily Allowance', Category__c='Full Day Allowance', Rate_Type__c='Per Day', Maximum_Amount__c=500, Receipt_Required__c=false, Start_Date__c=Date.today(), Active__c=true),`	Calls the named method: new Expense_Policy__c(Name='Full Day Allowance', Expense_Type__c='Daily Allowance', Category__c='Full Day Allowance', Rate_Type__c='Per Day', Maximum_Amount__c=500, Receipt_Required__c=false, Start_Da. Its implementation defines the side effect/result; use the symbol/file index to follow it.
16	`new Expense_Policy__c(Name='Food - Full Day', Expense_Type__c='Daily Allowance', Category__c='Food', Travel_Class__c='Full Day', Rate_Type__c='Per Day', Maximum_Amount__c=400, Receipt_Required__c=true, Start_Date__c=Date.today(), Active__c=true),`	Calls the named method: new Expense_Policy__c(Name='Food - Full Day', Expense_Type__c='Daily Allowance', Category__c='Food', Travel_Class__c='Full Day', Rate_Type__c='Per Day', Maximum_Amount__c=400, Receipt_Required__c=true. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
17	`new Expense_Policy__c(Name='Food - Per Meal', Expense_Type__c='Daily Allowance', Category__c='Food', Travel_Class__c='Per Meal', Rate_Type__c='Per Meal', Maximum_Amount__c=110, Receipt_Required__c=true, Start_Date__c=Date.today(), Active__c=true),`	Calls the named method: new Expense_Policy__c(Name='Food - Per Meal', Expense_Type__c='Daily Allowance', Category__c='Food', Travel_Class__c='Per Meal', Rate_Type__c='Per Meal', Maximum_Amount__c=110, Receipt_Required__c=tru. Its implementation defines the side effect/result; use the symbol/file index to follow it.
18	`new Expense_Policy__c(Name='Mobile Internet - Monthly', Expense_Type__c='Daily Allowance', Category__c='Mobile Internet', Rate_Type__c='Per Month', Maximum_Amount__c=400, Receipt_Required__c=true, Start_Date__c=Date.today(), Active__c=true),`	Calls the named method: new Expense_Policy__c(Name='Mobile Internet - Monthly', Expense_Type__c='Daily Allowance', Category__c='Mobile Internet', Rate_Type__c='Per Month', Maximum_Amount__c=400, Receipt_Required__c=true, Sta. Its implementation defines the side effect/result; use the symbol/file index to follow it.
19	`new Expense_Policy__c(Name='Petrol - Daily', Expense_Type__c='Daily Allowance', Category__c='Petrol', Rate_Type__c='Per Day', Maximum_Amount__c=500, Receipt_Required__c=true, Start_Date__c=Date.today(), Active__c=true)`	Calls the named method: new Expense_Policy__c(Name='Petrol - Daily', Expense_Type__c='Daily Allowance', Category__c='Petrol', Rate_Type__c='Per Day', Maximum_Amount__c=500, Receipt_Required__c=true, Start_Date__c=Date.today(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
20	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
21		Blank line separating logical sections; no executable operation.
22	`Set<String> policyNames = new Set<String>();`	Declares/initializes local data used by the surrounding operation: Set<String> policyNames = new Set<String>();. Collection contents and assignments below determine its purpose.
23	`for (Expense_Policy__c policy : policies) policyNames.add(policy.Name);`	Repeats work over the specified records/items or while this condition holds: for (Expense_Policy__c policy : policies) policyNames.add(policy.Name);. Check where queries/writes occur relative to the loop.
24	`Set<String> existingNames = new Set<String>();`	Declares/initializes local data used by the surrounding operation: Set<String> existingNames = new Set<String>();. Collection contents and assignments below determine its purpose.
25	`for (Expense_Policy__c existing : [SELECT Name FROM Expense_Policy__c WHERE Name IN :policyNames]) existingNames.add(existing.Name);`	Repeats work over the specified records/items or while this condition holds: for (Expense_Policy__c existing : [SELECT Name FROM Expense_Policy__c WHERE Name IN :policyNames]) existingNames.add(existing.Name);. Check where queries/writes occur relative to the loop.
26	`List<Expense_Policy__c> missing = new List<Expense_Policy__c>();`	Declares/initializes local data used by the surrounding operation: List<Expense_Policy__c> missing = new List<Expense_Policy__c>();. Collection contents and assignments below determine its purpose.
27	`for (Expense_Policy__c policy : policies) if (!existingNames.contains(policy.Name)) missing.add(policy);`	Repeats work over the specified records/items or while this condition holds: for (Expense_Policy__c policy : policies) if (!existingNames.contains(policy.Name)) missing.add(policy);. Check where queries/writes occur relative to the loop.

Line	Source code	Explanation / reading note
28	`insert missing;`	Performs Salesforce DML: insert missing;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
29	`System.debug('Created ' + missing.size() + ' expense policies.');`	Calls the named method: System.debug('Created ' + missing.size() + ' expense policies.');. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/seedPhaseOneDemo.apex

Operational script: seed Phase One Demo. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

93 numbered source lines | SHA-256 781b2a07434e84c51d9a961a6424adabf0364051e273de9227f8f8dbab99f71a

Line	Source code	Explanation / reading note
1	`// Phase 1 demonstration setup. Existing employee and geography names are preserved.`	Developer comment/documentation: Phase 1 demonstration setup. Existing employee and geography names are preserved. It is not executed.
2	`Map<String, String> employeeCodes = new Map<String, String>{`	Declares/initializes local data used by the surrounding operation: Map<String, String> employeeCodes = new Map<String, String>{. Collection contents and assignments below determine its purpose.
3	`    'Dhanush' => 'EMP-0001',`	Continues the surrounding declaration/expression or text: 'Dhanush' => 'EMP-0001',. Read it with the preceding opening statement (Map<String, String> employeeCodes = new Map<String, String>{); it is not a standalone business operation.
4	`    'Dinesh' => 'EMP-0002',`	Continues the surrounding declaration/expression or text: 'Dinesh' => 'EMP-0002',. Read it with the preceding opening statement ('Dhanush' => 'EMP-0001',); it is not a standalone business operation.
5	`    'Aishwarya' => 'EMP-0003',`	Continues the surrounding declaration/expression or text: 'Aishwarya' => 'EMP-0003',. Read it with the preceding opening statement ('Dinesh' => 'EMP-0002',); it is not a standalone business operation.
6	`    'Ram' => 'EMP-0004'`	Continues the surrounding declaration/expression or text: 'Ram' => 'EMP-0004'. Read it with the preceding opening statement ('Aishwarya' => 'EMP-0003',); it is not a standalone business operation.
7	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
8		Blank line separating logical sections; no executable operation.
9	`List<Employee__c> employeesToUpdate = new List<Employee__c>();`	Declares/initializes local data used by the surrounding operation: List<Employee__c> employeesToUpdate = new List<Employee__c>();. Collection contents and assignments below determine its purpose.
10	`for (Employee__c employee : [`	Repeats work over the specified records/items or while this condition holds: for (Employee__c employee : [. Check where queries/writes occur relative to the loop.

Line	Source code	Explanation / reading note
11	`    SELECT Id, Name, Active__c, Employee_Code__c`	Selects these Salesforce fields/aggregates: Id, Name, Active__c, Employee_Code__c. Query results are used in the surrounding assignment or loop.
12	`    FROM Employee__c`	Chooses the Salesforce object/subquery source: FROM Employee__c.
13	`    WHERE Name IN :employeeCodes.keySet()`	Adds a query/filter condition: WHERE Name IN :employeeCodes.keySet(). The complete condition determines which records are included.
14	`]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (WHERE Name IN :employeeCodes.keySet()); it is not a standalone business operation.
15	`    employee.Active__c = true;`	Assigns the right-hand expression to the named variable/property: employee.Active__c = true;. This is in-memory unless it is later persisted by an explicit call.
16	`    employee.Employee_Code__c = employeeCodes.get(employee.Name);`	Calls the named method: employee.Employee_Code__c = employeeCodes.get(employee.Name);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
17	`    employeesToUpdate.add(employee);`	Calls the named method: employeesToUpdate.add(employee);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
18	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19	`update employeesToUpdate;`	Performs Salesforce DML: update employeesToUpdate;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
20		Blank line separating logical sections; no executable operation.
21	`// Recalculate outlet totals without renaming or removing any existing Beat.`	Developer comment/documentation: Recalculate outlet totals without renaming or removing any existing Beat. It is not executed.
22	`Map<Id, Integer> outletCountByBeat = new Map<Id, Integer>();`	Declares/initializes local data used by the surrounding operation: Map<Id, Integer> outletCountByBeat = new Map<Id, Integer>();. Collection contents and assignments below determine its purpose.
23	`for (AggregateResult resultRow : [`	Repeats work over the specified records/items or while this condition holds: for (AggregateResult resultRow : [. Check where queries/writes occur relative to the loop.
24	`    SELECT Beat__c beatId, COUNT(Id) outletCount`	Selects these Salesforce fields/aggregates: Beat__c beatId, COUNT(Id) outletCount. Query results are used in the surrounding assignment or loop.

Line	Source code	Explanation / reading note
25	`    FROM Retailer__c`	Chooses the Salesforce object/subquery source: FROM Retailer__c.
26	`    WHERE Beat__c != null`	Adds a query/filter condition: WHERE Beat__c != null. The complete condition determines which records are included.
27	`    GROUP BY Beat__c`	Controls query sorting, grouping or result count: GROUP BY Beat__c.
28	`]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (GROUP BY Beat__c); it is not a standalone business operation.
29	`    outletCountByBeat.put((Id) resultRow.get('beatId'), (Integer) resultRow.get('outletCount'));`	Calls the named method: outletCountByBeat.put((Id) resultRow.get('beatId'), (Integer) resultRow.get('outletCount'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
30	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
31	`List<Beat__c> beatsToUpdate = new List<Beat__c>();`	Declares/initializes local data used by the surrounding operation: List<Beat__c> beatsToUpdate = new List<Beat__c>();. Collection contents and assignments below determine its purpose.
32	`for (Beat__c beat : [`	Repeats work over the specified records/items or while this condition holds: for (Beat__c beat : [. Check where queries/writes occur relative to the loop.
33	`    SELECT Id, Outlet_Count__c`	Selects these Salesforce fields/aggregates: Id, Outlet_Count__c. Query results are used in the surrounding assignment or loop.
34	`    FROM Beat__c`	Chooses the Salesforce object/subquery source: FROM Beat__c.
35	`    WHERE Assigned_Employee__c != null OR Active__c = false`	Adds a query/filter condition: WHERE Assigned_Employee__c != null OR Active__c = false. The complete condition determines which records are included.
36	`]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (WHERE Assigned_Employee__c != null OR Active__c = false); it is not a standalone business operation.
37	`    beat.Outlet_Count__c = outletCountByBeat.containsKey(beat.Id)`	Calls the named method: beat.Outlet_Count__c = outletCountByBeat.containsKey(beat.Id). Its implementation defines the side effect/result; use the symbol/file index to follow it.
38	`        ? outletCountByBeat.get(beat.Id)`	Calls the named method: ? outletCountByBeat.get(beat.Id). Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
39	`: 0;`	Continues the surrounding declaration/expression or text: : 0;. Read it with the preceding opening statement (? outletCountByBeat.get(beat.Id)); it is not a standalone business operation.
40	`beatsToUpdate.add(beat);`	Calls the named method: beatsToUpdate.add(beat);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
41	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
42	`update beatsToUpdate;`	Performs Salesforce DML: update beatsToUpdate;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
43		Blank line separating logical sections; no executable operation.
44	`Employee__c dhanush = [`	Assigns the right-hand expression to the named variable/property: Employee__c dhanush = [. This is in-memory unless it is later persisted by an explicit call.
45	`SELECT Id, Salesforce_User__c, Reporting_Manager__c`	Selects these Salesforce fields/aggregates: Id, Salesforce_User__c, Reporting_Manager__c. Query results are used in the surrounding assignment or loop.
46	`FROM Employee__c`	Chooses the Salesforce object/subquery source: FROM Employee__c.
47	`WHERE Name = 'Dhanush'`	Adds a query/filter condition: WHERE Name = 'Dhanush'. The complete condition determines which records are included.
48	`LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
49	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
50	`List<Beat__c> demonstrationBeats = [`	Declares/initializes local data used by the surrounding operation: List<Beat__c> demonstrationBeats = [. Collection contents and assignments below determine its purpose.
51	`SELECT Id, Name`	Selects these Salesforce fields/aggregates: Id, Name. Query results are used in the surrounding assignment or loop.
52	`FROM Beat__c`	Chooses the Salesforce object/subquery source: FROM Beat__c.
53	`WHERE Beat_ID__c IN ('BEAT-0001', 'BEAT-0002')`	Adds a query/filter condition: WHERE Beat_ID__c IN ('BEAT-0001', 'BEAT-0002'). The complete condition determines which records are included.

Line	Source code	Explanation / reading note
54	`AND Assigned_Employee__c = :dhanush.Id`	Adds a query/filter condition: AND Assigned_Employee__c = :dhanush.Id. The complete condition determines which records are included.
55	`ORDER BY Beat_ID__c`	Controls query sorting, grouping or result count: ORDER BY Beat_ID__c.
56	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
57	`if (demonstrationBeats.size() != 2) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (demonstrationBeats.size() != 2) {.
58	`throw new IllegalArgumentException('The two demonstration Beats were not found for Dhanush.');`	Stops this execution path with a validation/error exception: throw new IllegalArgumentException('The two demonstration Beats were not found for Dhanush.');. The caller/catch block decides how it is reported.
59	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
60		Blank line separating logical sections; no executable operation.
61	`List<Permanent_Journey_Plan__c> existingPlans = [`	Declares/initializes local data used by the surrounding operation: List<Permanent_Journey_Plan__c> existingPlans = [. Collection contents and assignments below determine its purpose.
62	`SELECT Id`	Selects these Salesforce fields/aggregates: Id. Query results are used in the surrounding assignment or loop.
63	`FROM Permanent_Journey_Plan__c`	Chooses the Salesforce object/subquery source: FROM Permanent_Journey_Plan__c.
64	`WHERE Name = 'Dhanush October PJP'`	Adds a query/filter condition: WHERE Name = 'Dhanush October PJP'. The complete condition determines which records are included.
65	`LIMIT 1`	Controls query sorting, grouping or result count: LIMIT 1.
66	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
67	`Permanent_Journey_Plan__c plan = existingPlans.isEmpty()`	Calls the named method: Permanent_Journey_Plan__c plan = existingPlans.isEmpty(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
68	`? new Permanent_Journey_Plan__c(Name = 'Dhanush October PJP')`	Assigns the right-hand expression to the named variable/property: ? new Permanent_Journey_Plan__c(Name = 'Dhanush October PJP'). This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
69	`: existingPlans[0];`	Continues the surrounding declaration/expression or text: : existingPlans[0];. Read it with the preceding opening statement (? new Permanent_Journey_Plan__c(Name = 'Dhanush October PJP')); it is not a standalone business operation.
70	`plan.Employee__c = dhanush.Id;`	Assigns the right-hand expression to the named variable/property: plan.Employee__c = dhanush.Id;. This is in-memory unless it is later persisted by an explicit call.
71	`plan.Approver__c = dhanush.Reporting_Manager__c;`	Assigns the right-hand expression to the named variable/property: plan.Approver__c = dhanush.Reporting_Manager__c;. This is in-memory unless it is later persisted by an explicit call.
72	`plan.Sales_Representative__c = dhanush.Salesforce_User__c;`	Assigns the right-hand expression to the named variable/property: plan.Sales_Representative__c = dhanush.Salesforce_User__c;. This is in-memory unless it is later persisted by an explicit call.
73	`plan.Beat__c = demonstrationBeats[0].Id;`	Assigns the right-hand expression to the named variable/property: plan.Beat__c = demonstrationBeats[0].Id;. This is in-memory unless it is later persisted by an explicit call.
74	`plan.Plan_Date__c = Date.newInstance(2026, 10, 1);`	Calls the named method: plan.Plan_Date__c = Date.newInstance(2026, 10, 1);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
75	`plan.Planned_Date__c = Date.newInstance(2026, 10, 1);`	Calls the named method: plan.Planned_Date__c = Date.newInstance(2026, 10, 1);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
76	`plan.Planning_Start_Date__c = Date.newInstance(2026, 10, 1);`	Calls the named method: plan.Planning_Start_Date__c = Date.newInstance(2026, 10, 1);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
77	`plan.Planning_End_Date__c = Date.newInstance(2026, 10, 30);`	Calls the named method: plan.Planning_End_Date__c = Date.newInstance(2026, 10, 30);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
78	`plan.Status__c = 'Draft';`	Assigns the right-hand expression to the named variable/property: plan.Status__c = 'Draft';. This is in-memory unless it is later persisted by an explicit call.
79	`plan.Rejection_Reason__c = null;`	Assigns the right-hand expression to the named variable/property: plan.Rejection_Reason__c = null;. This is in-memory unless it is later persisted by an explicit call.
80	`upsert plan;`	Performs Salesforce DML: upsert plan;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
81		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
82	`delete [SELECT Id FROM PJP_Selected_Beat__c WHERE PJP__c = :plan.Id];`	Performs Salesforce DML: delete [SELECT Id FROM PJP_Selected_Beat__c WHERE PJP__c = :plan.Id];. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
83	`List<PJP_Selected_Beat__c> selections = new List<PJP_Selected_Beat__c>();`	Declares/initializes local data used by the surrounding operation: List<PJP_Selected_Beat__c> selections = new List<PJP_Selected_Beat__c>();. Collection contents and assignments below determine its purpose.
84	`for (Beat__c beat : demonstrationBeats) {`	Repeats work over the specified records/items or while this condition holds: for (Beat__c beat : demonstrationBeats) {. Check where queries/writes occur relative to the loop.
85	`    selections.add(new PJP_Selected_Beat__c(`	Calls the named method: selections.add(new PJP_Selected_Beat__c(. Its implementation defines the side effect/result; use the symbol/file index to follow it.
86	`        PJP__c = plan.Id,`	Assigns the right-hand expression to the named variable/property: PJP__c = plan.Id,. This is in-memory unless it is later persisted by an explicit call.
87	`        Beat__c = beat.Id,`	Assigns the right-hand expression to the named variable/property: Beat__c = beat.Id,. This is in-memory unless it is later persisted by an explicit call.
88	`        Unique_Key__c = plan.Id + '-' + beat.Id`	Assigns the right-hand expression to the named variable/property: Unique_Key__c = plan.Id + '-' + beat.Id. This is in-memory unless it is later persisted by an explicit call.
89	`    ));`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
90	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
91	`insert selections;`	Performs Salesforce DML: insert selections;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
92		Blank line separating logical sections; no executable operation.
93	`System.debug('Phase 1 demonstration PJP prepared: ' + plan.Id);`	Calls the named method: System.debug('Phase 1 demonstration PJP prepared: ' + plan.Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/seedPhaseTwoDemo.apex

Operational script: seed Phase Two Demo. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

69 numbered source lines | SHA-256 cb1454bb3b2629af8c20fc7f098954fd2b664a885ba1d4df977e4d736636f87b

Line	Source code	Explanation / reading note
1	`/*`	Developer comment/documentation: It is not executed.
2	`* Phase 2 demo data. Safe to run more than once: every record is found by its`	Developer comment/documentation: Phase 2 demo data. Safe to run more than once: every record is found by its It is not executed.
3	`* human-readable name/code before it is inserted.`	Developer comment/documentation: human-readable name/code before it is inserted. It is not executed.
4	`*/`	Developer comment/documentation: It is not executed.
5	`Employee__c representative;`	Continues the surrounding declaration/expression or text: Employee__c representative;. Read it with the preceding opening statement (*/); it is not a standalone business operation.
6	`List<Employee__c> linkedEmployees = [`	Declares/initializes local data used by the surrounding operation: List<Employee__c> linkedEmployees = [. Collection contents and assignments below determine its purpose.
7	`SELECT Id, Name FROM Employee__c`	Selects these Salesforce fields/aggregates: Id, Name FROM Employee__c. Query results are used in the surrounding assignment or loop.
8	`WHERE Salesforce_User__c = :UserInfo.getUserId() AND Active__c = true LIMIT 1`	Adds a query/filter condition: WHERE Salesforce_User__c = :UserInfo.getUserId() AND Active__c = true LIMIT 1. The complete condition determines which records are included.
9	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
10	`if (linkedEmployees.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (linkedEmployees.isEmpty()) {.
11	`representative = new Employee__c(`	Assigns the right-hand expression to the named variable/property: representative = new Employee__c(. This is in-memory unless it is later persisted by an explicit call.
12	`Name = 'Creative Field Representative', Employee_Code__c = 'REP-CREATIVE-01',`	Assigns the right-hand expression to the named variable/property: Name = 'Creative Field Representative', Employee_Code__c = 'REP-CREATIVE-01',. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
13	`Phone__c = '9000014141', Active__c = true, Salesforce_User__c = UserInfo.getUserId()`	Calls the named method: Phone__c = '9000014141', Active__c = true, Salesforce_User__c = UserInfo.getUserId(). Its implementation defines the side effect/result; use the symbol/file index to follow it.
14	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
15	`insert representative;`	Performs Salesforce DML: insert representative;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
16	`} else representative = linkedEmployees[0];`	Alternative branch taken when the preceding condition is false.
17		Blank line separating logical sections; no executable operation.
18	`Beat__c demoBeat;`	Continues the surrounding declaration/expression or text: Beat__c demoBeat;. Read it with the preceding opening statement; it is not a standalone business operation.
19	`List<Beat__c> beats = [SELECT Id FROM Beat__c WHERE Name = 'Lakeside Market Beat' LIMIT 1];`	Declares/initializes local data used by the surrounding operation: List<Beat__c> beats = [SELECT Id FROM Beat__c WHERE Name = 'Lakeside Market Beat' LIMIT 1];. Collection contents and assignments below determine its purpose.
20	`if (beats.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (beats.isEmpty()) {.
21	`demoBeat = new Beat__c(Name='Lakeside Market Beat', Active__c=true, Assigned_Employee__c=representative.Id);`	Assigns the right-hand expression to the named variable/property: demoBeat = new Beat__c(Name='Lakeside Market Beat', Active__c=true, Assigned_Employee__c=representative.Id);. This is in-memory unless it is later persisted by an explicit call.
22	`insert demoBeat;`	Performs Salesforce DML: insert demoBeat;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
23	`} else demoBeat = beats[0];`	Alternative branch taken when the preceding condition is false.
24		Blank line separating logical sections; no executable operation.
25	`Retailer__c outlet;`	Continues the surrounding declaration/expression or text: Retailer__c outlet;. Read it with the preceding opening statement; it is not a standalone business operation.
26	`List<Retailer__c> outlets = [SELECT Id FROM Retailer__c WHERE Name='Nandi Daily Mart' LIMIT 1];`	Declares/initializes local data used by the surrounding operation: List<Retailer__c> outlets = [SELECT Id FROM Retailer__c WHERE Name='Nandi Daily Mart' LIMIT 1];. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
27	`if (outlets.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (outlets.isEmpty()) {.
28	`    outlet = new Retailer__c(`	Assigns the right-hand expression to the named variable/property: outlet = new Retailer__c(. This is in-memory unless it is later persisted by an explicit call.
29	`        Name='Nandi Daily Mart', Outlet_Owner_Name__c='Meera Rao', Outlet_Type__c='Grocery',`	Assigns the right-hand expression to the named variable/property: Name='Nandi Daily Mart', Outlet_Owner_Name__c='Meera Rao', Outlet_Type__c='Grocery',. This is in-memory unless it is later persisted by an explicit call.
30	`        Phone__c='9886014141', Address__c='18 Lakeside Main Road, Bengaluru', Active__c=true, Beat__c=demoBeat.Id`	Assigns the right-hand expression to the named variable/property: Phone__c='9886014141', Address__c='18 Lakeside Main Road, Bengaluru', Active__c=true, Beat__c=demoBeat.Id. This is in-memory unless it is later persisted by an explicit call.
31	`    );`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`    insert outlet;`	Performs Salesforce DML: insert outlet;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
33	`} else outlet = outlets[0];`	Alternative branch taken when the preceding condition is false.
34		Blank line separating logical sections; no executable operation.
35	`Product__c product;`	Continues the surrounding declaration/expression or text: Product__c product;. Read it with the preceding opening statement; it is not a standalone business operation.
36	`List<Product__c> products = [SELECT Id FROM Product__c WHERE Product_Code__c='SMB-100' LIMIT 1];`	Declares/initializes local data used by the surrounding operation: List<Product__c> products = [SELECT Id FROM Product__c WHERE Product_Code__c='SMB-100' LIMIT 1];. Collection contents and assignments below determine its purpose.
37	`if (products.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (products.isEmpty()) {.
38	`    product = new Product__c(`	Assigns the right-hand expression to the named variable/property: product = new Product__c(. This is in-memory unless it is later persisted by an explicit call.
39	`        Name='Sunrise Millet Bites', Product_Code__c='SMB-100', Brand__c='Sunrise Foods',`	Assigns the right-hand expression to the named variable/property: Name='Sunrise Millet Bites', Product_Code__c='SMB-100', Brand__c='Sunrise Foods',. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
40	`Variant__c='Classic Masala', Package_Type__c='Packet', Batch_Number__c='SMB-OCT-26',`	Assigns the right-hand expression to the named variable/property: Variant__c='Classic Masala', Package_Type__c='Packet', Batch_Number__c='SMB-OCT-26',. This is in-memory unless it is later persisted by an explicit call.
41	`MRP__c=25, Retailer_Base_Price__c=20, Selling_Price__c=22, GST_Percent__c=5,`	Assigns the right-hand expression to the named variable/property: MRP__c=25, Retailer_Base_Price__c=20, Selling_Price__c=22, GST_Percent__c=5,. This is in-memory unless it is later persisted by an explicit call.
42	`Units_Per_Case__c=24, Available_Stock__c=480, Manufacturing_Date__c=Date.today().addDays(-15),`	Calls the named method: Units_Per_Case__c=24, Available_Stock__c=480, Manufacturing_Date__c=Date.today().addDays(-15),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
43	`Expiry_Date__c=Date.today().addMonths(6), Active__c=true, Sellable__c=true, Returnable__c=true`	Calls the named method: Expiry_Date__c=Date.today().addMonths(6), Active__c=true, Sellable__c=true, Returnable__c=true. Its implementation defines the side effect/result; use the symbol/file index to follow it.
44	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
45	`insert product;`	Performs Salesforce DML: insert product;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
46	`} else product = products[0];`	Alternative branch taken when the preceding condition is false.
47		Blank line separating logical sections; no executable operation.
48	`Visit__c demoVisit;`	Continues the surrounding declaration/expression or text: Visit__c demoVisit;. Read it with the preceding opening statement; it is not a standalone business operation.
49	`List<Visit__c> visits = [SELECT Id FROM Visit__c WHERE Name='Nandi Daily Mart Demo Visit' AND Visit_Date__c=:Date.today() LIMIT 1];`	Declares/initializes local data used by the surrounding operation: List<Visit__c> visits = [SELECT Id FROM Visit__c WHERE Name='Nandi Daily Mart Demo Visit' AND Visit_Date__c=:Date.today() LIMIT 1];. Collection contents and assignments below determine its purpose.
50	`if (visits.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (visits.isEmpty()) {.
51	`Permanent_Journey_Plan__c demoPlan = new Permanent_Journey_Plan__c(`	Assigns the right-hand expression to the named variable/property: Permanent_Journey_Plan__c demoPlan = new Permanent_Journey_Plan__c(. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
52	`Name='Lakeside Market Daily Plan', Beat__c=demoBeat.Id, Planned_Date__c=Date.today(),`	Calls the named method: Name='Lakeside Market Daily Plan', Beat__c=demoBeat.Id, Planned_Date__c=Date.today(),. Its implementation defines the side effect/result; use the symbol/file index to follow it.
53	`Plan_Date__c=Date.today(), Sales_Representative__c=UserInfo.getUserId(), Status__c='Approved'`	Calls the named method: Plan_Date__c=Date.today(), Sales_Representative__c=UserInfo.getUserId(), Status__c='Approved'. Its implementation defines the side effect/result; use the symbol/file index to follow it.
54	`);`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
55	`insert demoPlan;`	Performs Salesforce DML: insert demoPlan;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
56	`demoVisit = new Visit__c(Name='Nandi Daily Mart Demo Visit', Retailer__c=outlet.Id, Permanent_Journey_Plan__c=demoPlan.Id, Visit_Date__c=Date.today(), Status__c='Checked In', Check_In_Time__c=System.now());`	Calls the named method: demoVisit = new Visit__c(Name='Nandi Daily Mart Demo Visit', Retailer__c=outlet.Id, Permanent_Journey_Plan__c=demoPlan.Id, Visit_Date__c=Date.today(), Status__c='Checked In', Check_In_Time__c=System.n. Its implementation defines the side effect/result; use the symbol/file index to follow it.
57	`insert demoVisit;`	Performs Salesforce DML: insert demoVisit;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
58	`} else demoVisit = visits[0];`	Alternative branch taken when the preceding condition is false.
59		Blank line separating logical sections; no executable operation.
60	`if ([SELECT COUNT() FROM Asset_Survey__c WHERE Visit__c=:demoVisit.Id] == 0)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ([SELECT COUNT() FROM Asset_Survey__c WHERE Visit__c=:demoVisit.Id] == 0).
61	`insert new Asset_Survey__c(Visit__c=demoVisit.Id, Outlet__c=outlet.Id, Asset_Name__c='Sunrise Display Rack', Asset_Code__c='RACK-NDM-01', Status__c='Working', Given_Date__c=Date.today().addMonths(-2));`	Performs Salesforce DML: insert new Asset_Survey__c(Visit__c=demoVisit.Id, Outlet__c=outlet.Id, Asset_Name__c='Sunrise Display Rack', Asset_Code__c='RACK-NDM-01', Status__c='Working', Given_Date__c=Date.today().addMonths(-2)). It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
62	`if ([SELECT COUNT() FROM Stock_Check__c WHERE Visit__c=:demoVisit.Id] == 0)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ([SELECT COUNT() FROM Stock_Check__c WHERE Visit__c=:demoVisit.Id] == 0).

Line	Source code	Explanation / reading note
63	`insert new Stock_Check__c(Visit__c=demoVisit.Id, Outlet__c=outlet.Id, Product__c=product.Id, Quantity__c=36, Manufacturing_Date__c=Date.today().addDays(-15));`	Performs Salesforce DML: insert new Stock_Check__c(Visit__c=demoVisit.Id, Outlet__c=outlet.Id, Product__c=product.Id, Quantity__c=36, Manufacturing_Date__c=Date.today().addDays(-15));. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
64	`if ([SELECT COUNT() FROM Competitor_Activity__c WHERE Visit__c=:demoVisit.Id] == 0)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ([SELECT COUNT() FROM Competitor_Activity__c WHERE Visit__c=:demoVisit.Id] == 0).
65	`insert new Competitor_Activity__c(Visit__c=demoVisit.Id, Outlet__c=outlet.Id, Competitor_Name__c='Crispy Millet Mix', Company__c='Green Bowl Foods', MRP__c=28, RBP__c=23, Scheme_Details__c='Buy 10 pouches and receive 2 free');`	Performs Salesforce DML: insert new Competitor_Activity__c(Visit__c=demoVisit.Id, Outlet__c=outlet.Id, Competitor_Name__c='Crispy Millet Mix', Company__c='Green Bowl Foods', MRP__c=28, RBP__c=23, Scheme_Details__c='Buy 10 pou. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
66	`if ([SELECT COUNT() FROM SFA_Ticket__c WHERE Visit__c=:demoVisit.Id] == 0)`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ([SELECT COUNT() FROM SFA_Ticket__c WHERE Visit__c=:demoVisit.Id] == 0).
67	`insert new SFA_Ticket__c(Visit__c=demoVisit.Id, Outlet__c=outlet.Id, Subject__c='Display rack branding replacement', Description__c='Old branding is faded and should be replaced on the next service visit.', Status__c='Open');`	Performs Salesforce DML: insert new SFA_Ticket__c(Visit__c=demoVisit.Id, Outlet__c=outlet.Id, Subject__c='Display rack branding replacement', Description__c='Old branding is faded and should be replaced on the next service vi. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
68		Blank line separating logical sections; no executable operation.
69	`System.debug('Phase 2 demo is ready for outlet: ' + outlet.Name);`	Calls the named method: System.debug('Phase 2 demo is ready for outlet: ' + outlet.Name);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/seedRecordedScope.apex

Operational script: seed Recorded Scope. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

77 numbered source lines | SHA-256 8b869d1012d154eea0739ca5187a4a09d76b3b3692d3e663e1505fa0567e3cd6

Line	Source code	Explanation / reading note
1	`// Sample data requested in the 6 October recording.`	Developer comment/documentation: Sample data requested in the 6 October recording. It is not executed.
2	`List<Geography__c> geographySeed = new List<Geography__c>{`	Declares/initializes local data used by the surrounding operation: List<Geography__c> geographySeed = new List<Geography__c>{. Collection contents and assignments below determine its purpose.
3	`    new Geography__c(Name='MG Road Geography', Nation__c='India', State__c='Karnataka', District__c='Bengaluru Urban'),`	Assigns the right-hand expression to the named variable/property: new Geography__c(Name='MG Road Geography', Nation__c='India', State__c='Karnataka', District__c='Bengaluru Urban'),. This is in-memory unless it is later persisted by an explicit call.
4	`    new Geography__c(Name='Indiranagar Geography', Nation__c='India', State__c='Karnataka', District__c='Bengaluru Urban'),`	Assigns the right-hand expression to the named variable/property: new Geography__c(Name='Indiranagar Geography', Nation__c='India', State__c='Karnataka', District__c='Bengaluru Urban'),. This is in-memory unless it is later persisted by an explicit call.
5	`    new Geography__c(Name='Jayanagar Geography', Nation__c='India', State__c='Karnataka', District__c='Bengaluru Urban'),`	Assigns the right-hand expression to the named variable/property: new Geography__c(Name='Jayanagar Geography', Nation__c='India', State__c='Karnataka', District__c='Bengaluru Urban'),. This is in-memory unless it is later persisted by an explicit call.
6	`    new Geography__c(Name='Mysuru Geography', Nation__c='India', State__c='Karnataka', District__c='Mysuru')`	Assigns the right-hand expression to the named variable/property: new Geography__c(Name='Mysuru Geography', Nation__c='India', State__c='Karnataka', District__c='Mysuru'). This is in-memory unless it is later persisted by an explicit call.
7	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
8	`Map<String, Geography__c> geographiesByName = new Map<String, Geography__c>();`	Declares/initializes local data used by the surrounding operation: Map<String, Geography__c> geographiesByName = new Map<String, Geography__c>();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
9	`for (Geography__c item : [SELECT Id, Name FROM Geography__c WHERE Name IN :new Map<String, Geography__c>{`	Repeats work over the specified records/items or while this condition holds: for (Geography__c item : [SELECT Id, Name FROM Geography__c WHERE Name IN :new Map<String, Geography__c>{. Check where queries/writes occur relative to the loop.
10	`'MG Road Geography' => null, 'Indiranagar Geography' => null,`	Continues the surrounding declaration/expression or text: 'MG Road Geography' => null, 'Indiranagar Geography' => null,. Read it with the preceding opening statement (for (Geography__c item : [SELECT Id, Name FROM Geography__c WHERE Name IN :new Map<String, Geography__c>{); it is not a standalone business operation.
11	`'Jayanagar Geography' => null, 'Mysuru Geography' => null`	Continues the surrounding declaration/expression or text: 'Jayanagar Geography' => null, 'Mysuru Geography' => null. Read it with the preceding opening statement ('MG Road Geography' => null, 'Indiranagar Geography' => null,); it is not a standalone business operation.
12	`}.keySet()]) geographiesByName.put(item.Name, item);`	Calls the named method: }.keySet()]) geographiesByName.put(item.Name, item);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
13	`List<Geography__c> newGeographies = new List<Geography__c>();`	Declares/initializes local data used by the surrounding operation: List<Geography__c> newGeographies = new List<Geography__c>();. Collection contents and assignments below determine its purpose.
14	`for (Geography__c item : geographySeed) if (!geographiesByName.containsKey(item.Name)) newGeographies.add(item);`	Repeats work over the specified records/items or while this condition holds: for (Geography__c item : geographySeed) if (!geographiesByName.containsKey(item.Name)) newGeographies.add(item);. Check where queries/writes occur relative to the loop.
15	`insert newGeographies;`	Performs Salesforce DML: insert newGeographies;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
16	`for (Geography__c item : [SELECT Id, Name FROM Geography__c WHERE Name LIKE '%Geography']) geographiesByName.put(item.Name, item);`	Repeats work over the specified records/items or while this condition holds: for (Geography__c item : [SELECT Id, Name FROM Geography__c WHERE Name LIKE '%Geography']) geographiesByName.put(item.Name, item);. Check where queries/writes occur relative to the loop.
17		Blank line separating logical sections; no executable operation.
18	`Map<String, Employee__c> employeesByName = new Map<String, Employee__c>();`	Declares/initializes local data used by the surrounding operation: Map<String, Employee__c> employeesByName = new Map<String, Employee__c>();. Collection contents and assignments below determine its purpose.
Line	**Source code**	**Explanation / reading note**
19	`for (Employee__c item : [SELECT Id, Name FROM Employee__c WHERE Name IN ('Dhanush','Dinesh','Aishwarya','Ram')]) employeesByName.put(item.Name, item);`	Repeats work over the specified records/items or while this condition holds: for (Employee__c item : [SELECT Id, Name FROM Employee__c WHERE Name IN

Line	Source code	Explanation / reading note
		('Dhanush','Dinesh','Aishwarya','Ram')]) employeesByName.put(item.Name, item);. Check where queries/writes occur relative to the loop.
20	`if (!employeesByName.containsKey('Ram')) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!employeesByName.containsKey('Ram')) {.
21	`    Employee__c item = new Employee__c(Name='Ram');`	Assigns the right-hand expression to the named variable/property: Employee__c item = new Employee__c(Name='Ram');. This is in-memory unless it is later persisted by an explicit call.
22	`    item.put('Aadhaar_Number__c','400000000004'); item.put('PAN_Number__c','RAMAA0004A'); item.put('Phone__c','9000000004'); item.put('Emergency_Contact__c','9100000004'); item.put('Geography__c',geographiesByName.get('MG Road Geography').Id); item.put('Hierarchy_Level__c','L4');`	Calls the named method: item.put('Aadhaar_Number__c','400000000004'); item.put('PAN_Number__c','RAMAA0004A'); item.put('Phone__c','9000000004'); item.put('Emergency_Contact__c','9100000004'); item.put('Geography__c',geograph. Its implementation defines the side effect/result; use the symbol/file index to follow it.
23	`    insert item; employeesByName.put(item.Name, item);`	Performs Salesforce DML: insert item; employeesByName.put(item.Name, item);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
24	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
25	`if (!employeesByName.containsKey('Aishwarya')) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!employeesByName.containsKey('Aishwarya')) {.
26	`    Employee__c item = new Employee__c(Name='Aishwarya');`	Assigns the right-hand expression to the named variable/property: Employee__c item = new Employee__c(Name='Aishwarya');. This is in-memory unless it is later persisted by an explicit call.
27	` item.put('Aadhaar_Number__c','400000000003'); item.put('PAN_Number__c','AISHW0003A'); item.put('Phone__c','9000000003'); item.put('Emergency_Contact__c','9100000003'); item.put('Geography__c',geographiesByName.get('MG Road Geography').Id); item.put('Hierarchy_Level__c','L3'); item.put('Reporting_Manager__c',employeesByName.get('Ram').Id);`	Calls the named method: item.put('Aadhaar_Number__c','400000000003'); item.put('PAN_Number__c','AISHW0003A'); item.put('Phone__c','9000000003'); item.put('Emergency_Contact__c','9100000003'); item.put('Geography__c',geograph. Its implementation defines the side effect/result; use the symbol/file index to follow it.
28	`    insert item; employeesByName.put(item.Name, item);`	Performs Salesforce DML: insert item; employeesByName.put(item.Name, item);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
29	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30	`if (!employeesByName.containsKey('Dinesh')) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!employeesByName.containsKey('Dinesh')) {.

Line	Source code	Explanation / reading note
31	`    Employee__c item = new Employee__c(Name='Dinesh');`	Assigns the right-hand expression to the named variable/property: Employee__c item = new Employee__c(Name='Dinesh');. This is in-memory unless it is later persisted by an explicit call.
32	` item.put('Aadhaar_Number__c','400000000002'); item.put('PAN_Number__c','DINAA0002A'); item.put('Phone__c','9000000002'); item.put('Emergency_Contact__c','9100000002'); item.put('Geography__c',geographiesByName.get('MG Road Geography').Id); item.put('Hierarchy_Level__c','L2'); item.put('Reporting_Manager__c',employeesByName.get('Aishwarya').Id); item.put('Salesforce_User__c',UserInfo.getUserId());`	Calls the named method: item.put('Aadhaar_Number__c','400000000002'); item.put('PAN_Number__c','DINAA0002A'); item.put('Phone__c','9000000002'); item.put('Emergency_Contact__c','9100000002'); item.put('Geography__c',geograph. Its implementation defines the side effect/result; use the symbol/file index to follow it.
33	`    insert item; employeesByName.put(item.Name, item);`	Performs Salesforce DML: insert item; employeesByName.put(item.Name, item);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
34	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
35	`if (!employeesByName.containsKey('Dhanush')) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!employeesByName.containsKey('Dhanush')) {.
36	`    Employee__c item = new Employee__c(Name='Dhanush');`	Assigns the right-hand expression to the named variable/property: Employee__c item = new Employee__c(Name='Dhanush');. This is in-memory unless it is later persisted by an explicit call.
37	` item.put('Aadhaar_Number__c','400000000001'); item.put('PAN_Number__c','DHANU0001A'); item.put('Phone__c','9000000001'); item.put('Emergency_Contact__c','9100000001'); item.put('Geography__c',geographiesByName.get('MG Road Geography').Id); item.put('Hierarchy_Level__c','L1'); item.put('Reporting_Manager__c',employeesByName.get('Dinesh').Id);`	Calls the named method: item.put('Aadhaar_Number__c','400000000001'); item.put('PAN_Number__c','DHANU0001A'); item.put('Phone__c','9000000001'); item.put('Emergency_Contact__c','9100000001'); item.put('Geography__c',geograph. Its implementation defines the side effect/result; use the symbol/file index to follow it.
38	`    insert item; employeesByName.put(item.Name, item);`	Performs Salesforce DML: insert item; employeesByName.put(item.Name, item);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
39	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
40		Blank line separating logical sections; no executable operation.
41	`List<String> beatNames = new List<String>{'MG Road Beat','Indiranagar Beat','Jayanagar Beat','Koramangala Beat','Whitefield Beat','Malleshwaram Beat','Rajajinagar Beat','Yelahanka Beat','Electronic City Beat','Mysuru Central Beat'};`	Declares/initializes local data used by the surrounding operation: List<String> beatNames = new List<String>{'MG Road Beat','Indiranagar Beat','Jayanagar Beat','Koramangala Beat','Whitefield Beat','Malleshwaram Beat','Rajajinagar Beat','Yelahanka Beat','Electronic Ci. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
42	`Map<String, Beat__c> beatsByName = new Map<String, Beat__c>();`	Declares/initializes local data used by the surrounding operation: Map<String, Beat__c> beatsByName = new Map<String, Beat__c>();. Collection contents and assignments below determine its purpose.
43	`for (Beat__c item : [SELECT Id, Name FROM Beat__c WHERE Name IN :beatNames]) beatsByName.put(item.Name, item);`	Repeats work over the specified records/items or while this condition holds: for (Beat__c item : [SELECT Id, Name FROM Beat__c WHERE Name IN :beatNames]) beatsByName.put(item.Name, item);. Check where queries/writes occur relative to the loop.
44	`List<Beat__c> newBeats = new List<Beat__c>();`	Declares/initializes local data used by the surrounding operation: List<Beat__c> newBeats = new List<Beat__c>();. Collection contents and assignments below determine its purpose.
45	`for (Integer index = 0; index < beatNames.size(); index++) {`	Repeats work over the specified records/items or while this condition holds: for (Integer index = 0; index < beatNames.size(); index++) {. Check where queries/writes occur relative to the loop.
46	`    String beatName = beatNames[index];`	Declares/initializes local data used by the surrounding operation: String beatName = beatNames[index];. Collection contents and assignments below determine its purpose.
47	`    if (!beatsByName.containsKey(beatName)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!beatsByName.containsKey(beatName)) {.
48	`        String geographyName = index == 9 ? 'Mysuru Geography' : (index < 3 ? new List<String>{'MG Road Geography','Indiranagar Geography','Jayanagar Geography'}[index] : 'MG Road Geography');`	Declares/initializes local data used by the surrounding operation: String geographyName = index == 9 ? 'Mysuru Geography' : (index < 3 ? new List<String>{'MG Road Geography','Indiranagar Geography','Jayanagar Geography'}[index] : 'MG Road Geography');. Collection contents and assignments below determine its purpose.
49	`        Beat__c beat = new Beat__c(Name=beatName, Active__c=true);`	Assigns the right-hand expression to the named variable/property: Beat__c beat = new Beat__c(Name=beatName, Active__c=true);. This is in-memory unless it is later persisted by an explicit call.
50	`        beat.put('Assigned_Employee__c',employeesByName.get('Dhanush').Id); beat.put('Distributor__c','Demo Distributor'); beat.put('Geography__c',geographiesByName.get(geographyName).Id);`	Calls the named method: beat.put('Assigned_Employee__c',employeesByName.get('Dhanush').Id); beat.put('Distributor__c','Demo Distributor'); beat.put('Geography__c',geographiesByName.get(geographyName).Id);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
51	`        newBeats.add(beat);`	Calls the named method: newBeats.add(beat);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
52	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
53	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
54	`insert newBeats;`	Performs Salesforce DML: insert newBeats;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
55	`for (Beat__c item : [SELECT Id, Name FROM Beat__c WHERE Name IN :beatNames]) beatsByName.put(item.Name, item);`	Repeats work over the specified records/items or while this condition holds: for (Beat__c item : [SELECT Id, Name FROM Beat__c WHERE Name IN :beatNames]) beatsByName.put(item.Name, item);. Check where queries/writes occur relative to the loop.
56		Blank line separating logical sections; no executable operation.
57	`Map<Id, Integer> existingOutletCounts = new Map<Id, Integer>();`	Declares/initializes local data used by the surrounding operation: Map<Id, Integer> existingOutletCounts = new Map<Id, Integer>();. Collection contents and assignments below determine its purpose.
58	`for (AggregateResult result : [SELECT Beat__c beatId, COUNT(Id) total FROM Retailer__c WHERE Beat__c IN :beatsByName.values() GROUP BY Beat__c]) {`	Repeats work over the specified records/items or while this condition holds: for (AggregateResult result : [SELECT Beat__c beatId, COUNT(Id) total FROM Retailer__c WHERE Beat__c IN :beatsByName.values() GROUP BY Beat__c]) {. Check where queries/writes occur relative to the loop.
59	`    existingOutletCounts.put((Id)result.get('beatId'), (Integer)result.get('total'));`	Calls the named method: existingOutletCounts.put((Id)result.get('beatId'), (Integer)result.get('total'));. Its implementation defines the side effect/result; use the symbol/file index to follow it.
60	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
61	`List<Retailer__c> outlets = new List<Retailer__c>();`	Declares/initializes local data used by the surrounding operation: List<Retailer__c> outlets = new List<Retailer__c>();. Collection contents and assignments below determine its purpose.
62	`Integer serial = 1;`	Declares/initializes local data used by the surrounding operation: Integer serial = 1;. Collection contents and assignments below determine its purpose.
63	`for (String beatName : beatNames) {`	Repeats work over the specified records/items or while this condition holds: for (String beatName : beatNames) {. Check where queries/writes occur relative to the loop.
64	`    Beat__c beat = beatsByName.get(beatName);`	Calls the named method: Beat__c beat = beatsByName.get(beatName);. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
65	`    Integer existingCount = existingOutletCounts.containsKey(beat.Id) ? existingOutletCounts.get(beat.Id) : 0;`	Declares/initializes local data used by the surrounding operation: Integer existingCount = existingOutletCounts.containsKey(beat.Id) ? existingOutletCounts.get(beat.Id) : 0;. Collection contents and assignments below determine its purpose.
66	`    for (Integer numberInBeat = existingCount + 1; numberInBeat <= 10; numberInBeat++) {`	Repeats work over the specified records/items or while this condition holds: for (Integer numberInBeat = existingCount + 1; numberInBeat <= 10; numberInBeat++) {. Check where queries/writes occur relative to the loop.
67	`        String serial4 = String.valueOf(serial).leftPad(4, '0');`	Declares/initializes local data used by the surrounding operation: String serial4 = String.valueOf(serial).leftPad(4, '0');. Collection contents and assignments below determine its purpose.
68	`        String serial6 = String.valueOf(serial).leftPad(6, '0');`	Declares/initializes local data used by the surrounding operation: String serial6 = String.valueOf(serial).leftPad(6, '0');. Collection contents and assignments below determine its purpose.
69	`        Retailer__c outlet = new Retailer__c(Name=(serial == 1 ? 'Balaji Stores' : 'Outlet ' + serial4), Beat__c=beat.Id, Address__c=beatName + ', Karnataka', Active__c=true);`	Assigns the right-hand expression to the named variable/property: Retailer__c outlet = new Retailer__c(Name=(serial == 1 ? 'Balaji Stores' : 'Outlet ' + serial4), Beat__c=beat.Id, Address__c=beatName + ', Karnataka', Active__c=true);. This is in-memory unless it is later persisted by an explicit call.
70	` outlet.put('Outlet_Owner_Name__c',(serial == 1 ? 'Mukul' : 'Owner ' + serial4)); outlet.put('Phone__c','92' + String.valueOf(10000000 + serial)); outlet.put('Email__c','outlet' + serial + '@example.com'); outlet.put('Aadhaar_Number__c','500000' + serial6); outlet.put('PAN_Number__c','OUTLT' + serial4 + 'A');`	Calls the named method: outlet.put('Outlet_Owner_Name__c',(serial == 1 ? 'Mukul' : 'Owner ' + serial4)); outlet.put('Phone__c','92' + String.valueOf(10000000 + serial)); outlet.put('Email__c','outlet' + serial + '@example.co. Its implementation defines the side effect/result; use the symbol/file index to follow it.
71	`        outlets.add(outlet);`	Calls the named method: outlets.add(outlet);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
72	`        serial++;`	Continues the surrounding declaration/expression or text: serial++;. Read it with the preceding opening statement (outlets.add(outlet);); it is not a standalone business operation.
73	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
74	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
75	`insert outlets;`	Performs Salesforce DML: insert outlets;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
76		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
77	`System.debug('Recording scope seed complete: 4 geographies, 4 employees, 10 beats, and at least 10 outlets per beat.');`	Calls the named method: System.debug('Recording scope seed complete: 4 geographies, 4 employees, 10 beats, and at least 10 outlets per beat.');. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/submitDistributorOneYippee20261022.apex

Operational script: submit Distributor One Yippee20261022. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

30 numbered source lines | SHA-256 2636989d7b5e8b337c08514b319f9709f69214e6aebf78bc25ddaec39a4ef620

Line	Source code	Explanation / reading note
1	`// User-approved order: Distributor 1, one case of Yippee Magic Masala.`	Developer comment/documentation: User-approved order: Distributor 1, one case of Yippee Magic Masala. It is not executed.
2	`// Reusing this request key prevents duplicate orders on retry.`	Developer comment/documentation: Reusing this request key prevents duplicate orders on retry. It is not executed.
3	`Savepoint checkpoint = Database.setSavepoint();`	Creates a transaction checkpoint so later failure can roll back all command changes.
4	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
5	`    DMS_Distributor__c distributor = [SELECT Id, Officer__c FROM DMS_Distributor__c`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c distributor = [SELECT Id, Officer__c FROM DMS_Distributor__c. This is in-memory unless it is later persisted by an explicit call.
6	`        WHERE Id = 'a0TjV000001VqMjUAK' AND Active__c = true];`	Adds a query/filter condition: WHERE Id = 'a0TjV000001VqMjUAK' AND Active__c = true];. The complete condition determines which records are included.
7	`    System.assertEquals('005jV000002aNRZQA2', String.valueOf(distributor.Officer__c),`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('005jV000002aNRZQA2', String.valueOf(distributor.Officer__c),. A mismatch fails the test.
8	`        'The assigned approver must still be Dhanush.');`	Continues the surrounding declaration/expression or text: 'The assigned approver must still be Dhanush.');. Read it with the preceding opening statement (System.assertEquals('005jV000002aNRZQA2', String.valueOf(distributor.Officer__c),); it is not a standalone business operation.
9	`    Product__c product = [SELECT DMS_Case_Price__c, Units_Per_Case__c, GST_Percent__c`	Assigns the right-hand expression to the named variable/property: Product__c product = [SELECT DMS_Case_Price__c, Units_Per_Case__c, GST_Percent__c. This is in-memory unless it is later persisted by an explicit call.
10	`        FROM Product__c WHERE Id = 'a04jV000000WynbQAC'];`	Chooses the Salesforce object/subquery source: FROM Product__c WHERE Id = 'a04jV000000WynbQAC'];.

Line	Source code	Explanation / reading note
11	`System.assertEquals(918, product.DMS_Case_Price__c, 'Approved case price changed.');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(918, product.DMS_Case_Price__c, 'Approved case price changed.');. A mismatch fails the test.
12	`System.assertEquals(72, product.Units_Per_Case__c, 'Approved case size changed.');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(72, product.Units_Per_Case__c, 'Approved case size changed.');. A mismatch fails the test.
13	`System.assertEquals(5, product.GST_Percent__c, 'Expected GST changed.');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(5, product.GST_Percent__c, 'Expected GST changed.');. A mismatch fails the test.
14	`RestContext.request = new RestRequest();`	Assigns the right-hand expression to the named variable/property: RestContext.request = new RestRequest();. This is in-memory unless it is later persisted by an explicit call.
15	`RestContext.request.requestUri = '/services/apexrest/dms/portal/';`	Assigns the right-hand expression to the named variable/property: RestContext.request.requestUri = '/services/apexrest/dms/portal/';. This is in-memory unless it is later persisted by an explicit call.
16	`RestContext.request.httpMethod = 'POST';`	Assigns the right-hand expression to the named variable/property: RestContext.request.httpMethod = 'POST';. This is in-memory unless it is later persisted by an explicit call.
17	`RestContext.request.requestBody = Blob.valueOf('{"action":"distributorPrimaryOrder","distributorId":"a0TjV000001VqMjUAK","requestKey":"d1-yippee-1case-20261022-approved","lines":[{"productId":"a04jV000000WynbQAC","cases":1}]}');`	Calls the named method: RestContext.request.requestBody = Blob.valueOf('{"action":"distributorPrimaryOrder","distributorId":"a0TjV000001VqMjUAK","requestKey":"d1-yippee-1case-20261022-approved","lines":[{"productId":"a04jV00. Its implementation defines the side effect/result; use the symbol/file index to follow it.
18	`RestContext.response = new RestResponse();`	Assigns the right-hand expression to the named variable/property: RestContext.response = new RestResponse();. This is in-memory unless it is later persisted by an explicit call.
19	`// Retains the trusted-backend permission gate, validation, replay handling`	Developer comment/documentation: Retains the trusted-backend permission gate, validation, replay handling It is not executed.
20	`// and normal Salesforce approval submission. Does not approve or receive goods.`	Developer comment/documentation: and normal Salesforce approval submission. Does not approve or receive goods. It is not executed.
21	`DmsPortalApi.execute();`	Calls the named method: DmsPortalApi.execute();. Its implementation defines the side effect/result; use the symbol/file index to follow it.
22	`String result = RestContext.response.responseBody.toString();`	Declares/initializes local data used by the surrounding operation: String result = RestContext.response.responseBody.toString();. Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
23	`Map<String, Object> outcome = (Map<String, Object>) JSON.deserializeUntyped(result);`	Converts JSON into structured data. Invalid JSON can throw; inspect validation and catch handling.
24	`System.assert(!outcome.containsKey('error'), result);`	Test assertion comparing an expected outcome to actual behavior: System.assert(!outcome.containsKey('error'), result);. A mismatch fails the test.
25	`System.assert(outcome.containsKey('id'), 'No saved order was returned.');`	Test assertion comparing an expected outcome to actual behavior: System.assert(outcome.containsKey('id'), 'No saved order was returned.');. A mismatch fails the test.
26	`System.debug(LoggingLevel.ERROR, 'APPROVED_ORDER_RESULT ' + result);`	Calls the named method: System.debug(LoggingLevel.ERROR, 'APPROVED_ORDER_RESULT ' + result);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
27	`} catch (Exception error) {`	Handles an exception from the preceding try block. Check whether it rolls back, preserves queued work or only displays an error.
28	`Database.rollback(checkpoint);`	Rolls Salesforce writes back to the saved checkpoint; prevents partial command results.
29	`throw error;`	Stops this execution path with a validation/error exception: throw error;. The caller/catch block decides how it is reported.
30	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

scripts/apex/updateOutletLocations.apex

Operational script: update Outlet Locations. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

56 numbered source lines | SHA-256 72653c03d6649f689d1895b4c0c16ec60675913bb02d1839025f3b13c52972fe

Line	Source code	Explanation / reading note
1	`// Assign a realistic map position to every SFA outlet while preserving its name,`	Developer comment/documentation: Assign a realistic map position to every SFA outlet while preserving its name, It is not executed.
2	`// beat, distributor allocation, owner and all commercial information.`	Developer comment/documentation: beat, distributor allocation, owner and all commercial information. It is not executed.
3	`Map<String, List<Decimal>> beatCentres = new Map<String, List<Decimal>>{`	Declares/initializes local data used by the surrounding operation: Map<String, List<Decimal>> beatCentres = new Map<String, List<Decimal>>{. Collection contents and assignments below determine its purpose.
4	`    'Central Market Beat' => new List<Decimal>{12.9756, 77.6066},`	Continues the surrounding declaration/expression or text: 'Central Market Beat' => new List<Decimal>{12.9756, 77.6066},. Read it with the preceding opening statement (Map<String, List<Decimal>> beatCentres = new Map<String, List<Decimal>>{); it is not a standalone business operation.
5	`    'MG Road Beat' => new List<Decimal>{12.9756, 77.6066},`	Continues the surrounding declaration/expression or text: 'MG Road Beat' => new List<Decimal>{12.9756, 77.6066},. Read it with the preceding opening statement ('Central Market Beat' => new List<Decimal>{12.9756, 77.6066},); it is not a standalone business operation.
6	`    'MG Road 3rd cross' => new List<Decimal>{12.9759, 77.6072},`	Continues the surrounding declaration/expression or text: 'MG Road 3rd cross' => new List<Decimal>{12.9759, 77.6072},. Read it with the preceding opening statement ('MG Road Beat' => new List<Decimal>{12.9756, 77.6066},); it is not a standalone business operation.
7	`    'Electronic City Beat' => new List<Decimal>{12.8452, 77.6602},`	Continues the surrounding declaration/expression or text: 'Electronic City Beat' => new List<Decimal>{12.8452, 77.6602},. Read it with the preceding opening statement ('MG Road 3rd cross' => new List<Decimal>{12.9759, 77.6072},); it is not a standalone business operation.
8	`    'Indiranagar Beat' => new List<Decimal>{12.9784, 77.6408},`	Continues the surrounding declaration/expression or text: 'Indiranagar Beat' => new List<Decimal>{12.9784, 77.6408},. Read it with the preceding opening statement ('Electronic City Beat' => new List<Decimal>{12.8452, 77.6602},); it is not a standalone business operation.

Line	Source code	Explanation / reading note
9	`'Jayanagar Beat' => new List<Decimal>{12.9250, 77.5938},`	Continues the surrounding declaration/expression or text: 'Jayanagar Beat' => new List<Decimal>{12.9250, 77.5938},. Read it with the preceding opening statement ('Indiranagar Beat' => new List<Decimal>{12.9784, 77.6408},); it is not a standalone business operation.
10	`'Koramangala Beat' => new List<Decimal>{12.9352, 77.6245},`	Continues the surrounding declaration/expression or text: 'Koramangala Beat' => new List<Decimal>{12.9352, 77.6245},. Read it with the preceding opening statement ('Jayanagar Beat' => new List<Decimal>{12.9250, 77.5938},); it is not a standalone business operation.
11	`'Lakeside Market Beat' => new List<Decimal>{12.9817, 77.6204},`	Continues the surrounding declaration/expression or text: 'Lakeside Market Beat' => new List<Decimal>{12.9817, 77.6204},. Read it with the preceding opening statement ('Koramangala Beat' => new List<Decimal>{12.9352, 77.6245},); it is not a standalone business operation.
12	`'Malleshwaram Beat' => new List<Decimal>{13.0035, 77.5648},`	Continues the surrounding declaration/expression or text: 'Malleshwaram Beat' => new List<Decimal>{13.0035, 77.5648},. Read it with the preceding opening statement ('Lakeside Market Beat' => new List<Decimal>{12.9817, 77.6204},); it is not a standalone business operation.
13	`'Mysuru Central Beat' => new List<Decimal>{12.3052, 76.6552},`	Continues the surrounding declaration/expression or text: 'Mysuru Central Beat' => new List<Decimal>{12.3052, 76.6552},. Read it with the preceding opening statement ('Malleshwaram Beat' => new List<Decimal>{13.0035, 77.5648},); it is not a standalone business operation.
14	`'Rajajinagar Beat' => new List<Decimal>{12.9915, 77.5548},`	Continues the surrounding declaration/expression or text: 'Rajajinagar Beat' => new List<Decimal>{12.9915, 77.5548},. Read it with the preceding opening statement ('Mysuru Central Beat' => new List<Decimal>{12.3052, 76.6552},); it is not a standalone business operation.
15	`'Whitefield Beat' => new List<Decimal>{12.9698, 77.7500},`	Continues the surrounding declaration/expression or text: 'Whitefield Beat' => new List<Decimal>{12.9698, 77.7500},. Read it with the preceding opening statement ('Rajajinagar Beat' => new List<Decimal>{12.9915, 77.5548},); it is not a standalone business operation.
16	`'Yelahanka Beat' => new List<Decimal>{13.1007, 77.5963},`	Continues the surrounding declaration/expression or text: 'Yelahanka Beat' => new List<Decimal>{13.1007, 77.5963},. Read it with the preceding opening statement ('Whitefield Beat' => new List<Decimal>{12.9698, 77.7500},); it is not a standalone business operation.
17	`'Yeshwanthpur Beat' => new List<Decimal>{13.0285, 77.5408}`	Continues the surrounding declaration/expression or text: 'Yeshwanthpur Beat' => new List<Decimal>{13.0285, 77.5408}. Read it with the preceding opening statement ('Yelahanka Beat' => new List<Decimal>{13.1007, 77.5963},); it is not a standalone business operation.

Line	Source code	Explanation / reading note
18	`};`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
19		Blank line separating logical sections; no executable operation.
20	`Map<String, Integer> outletNumberByBeat = new Map<String, Integer>();`	Declares/initializes local data used by the surrounding operation: Map<String, Integer> outletNumberByBeat = new Map<String, Integer>();. Collection contents and assignments below determine its purpose.
21	`List<Retailer__c> outlets = [`	Declares/initializes local data used by the surrounding operation: List<Retailer__c> outlets = [. Collection contents and assignments below determine its purpose.
22	`    SELECT Id, Name, Address__c, Beat__r.Name`	Selects these Salesforce fields/aggregates: Id, Name, Address__c, Beat__r.Name. Query results are used in the surrounding assignment or loop.
23	`    FROM Retailer__c`	Chooses the Salesforce object/subquery source: FROM Retailer__c.
24	`    ORDER BY Beat__r.Name, Name`	Controls query sorting, grouping or result count: ORDER BY Beat__r.Name, Name.
25	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
26		Blank line separating logical sections; no executable operation.
27	`for (Retailer__c outlet : outlets) {`	Repeats work over the specified records/items or while this condition holds: for (Retailer__c outlet : outlets) {. Check where queries/writes occur relative to the loop.
28	`    String beatName = outlet.Beat__r == null ? 'MG Road Beat' : outlet.Beat__r.Name;`	Declares/initializes local data used by the surrounding operation: String beatName = outlet.Beat__r == null ? 'MG Road Beat' : outlet.Beat__r.Name;. Collection contents and assignments below determine its purpose.
29	`    List<Decimal> centre = beatCentres.get(beatName);`	Declares/initializes local data used by the surrounding operation: List<Decimal> centre = beatCentres.get(beatName);. Collection contents and assignments below determine its purpose.
30	`    if (centre == null) centre = beatCentres.get('MG Road Beat');`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (centre == null) centre = beatCentres.get('MG Road Beat');.
31		Blank line separating logical sections; no executable operation.
32	`    Integer sequence = outletNumberByBeat.containsKey(beatName)`	Declares/initializes local data used by the surrounding operation: Integer sequence = outletNumberByBeat.containsKey(beatName). Collection contents and assignments below determine its purpose.

Line	Source code	Explanation / reading note
33	`? outletNumberByBeat.get(beatName)`	Calls the named method: ? outletNumberByBeat.get(beatName). Its implementation defines the side effect/result; use the symbol/file index to follow it.
34	`: 0;`	Continues the surrounding declaration/expression or text: : 0;. Read it with the preceding opening statement (? outletNumberByBeat.get(beatName)); it is not a standalone business operation.
35	`outletNumberByBeat.put(beatName, sequence + 1);`	Calls the named method: outletNumberByBeat.put(beatName, sequence + 1);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
36		Blank line separating logical sections; no executable operation.
37	`// Arrange shops in a compact grid around their beat centre. Each outlet gets`	Developer comment/documentation: Arrange shops in a compact grid around their beat centre. Each outlet gets It is not executed.
38	`// a distinct position while remaining inside its actual sales territory.`	Developer comment/documentation: a distinct position while remaining inside its actual sales territory. It is not executed.
39	`Integer rowNumber = sequence / 5;`	Declares/initializes local data used by the surrounding operation: Integer rowNumber = sequence / 5;. Collection contents and assignments below determine its purpose.
40	`Integer columnNumber = Math.mod(sequence, 5);`	Declares/initializes local data used by the surrounding operation: Integer columnNumber = Math.mod(sequence, 5);. Collection contents and assignments below determine its purpose.
41	`Decimal latitude = centre[0] + ((Decimal.valueOf(String.valueOf(rowNumber)) - 1) * 0.00035);`	Declares/initializes local data used by the surrounding operation: Decimal latitude = centre[0] + ((Decimal.valueOf(String.valueOf(rowNumber)) - 1) * 0.00035);. Collection contents and assignments below determine its purpose.
42	`Decimal longitude = centre[1] + ((Decimal.valueOf(String.valueOf(columnNumber)) - 2) * 0.00035);`	Declares/initializes local data used by the surrounding operation: Decimal longitude = centre[1] + ((Decimal.valueOf(String.valueOf(columnNumber)) - 2) * 0.00035);. Collection contents and assignments below determine its purpose.
43		Blank line separating logical sections; no executable operation.
44	`outlet.Geo_Location__Latitude__s = latitude;`	Assigns the right-hand expression to the named variable/property: outlet.Geo_Location__Latitude__s = latitude;. This is in-memory unless it is later persisted by an explicit call.
45	`outlet.Geo_Location__Longitude__s = longitude;`	Assigns the right-hand expression to the named variable/property: outlet.Geo_Location__Longitude__s = longitude;. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
46	`    outlet.Latitude__c = latitude;`	Assigns the right-hand expression to the named variable/property: outlet.Latitude__c = latitude;. This is in-memory unless it is later persisted by an explicit call.
47	`    outlet.Longitude__c = longitude;`	Assigns the right-hand expression to the named variable/property: outlet.Longitude__c = longitude;. This is in-memory unless it is later persisted by an explicit call.
48		Blank line separating logical sections; no executable operation.
49	`    if (String.isBlank(outlet.Address__c)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (String.isBlank(outlet.Address__c)) {.
50	`        String areaName = beatName.replace(' Beat', '');`	Declares/initializes local data used by the surrounding operation: String areaName = beatName.replace(' Beat', '');. Collection contents and assignments below determine its purpose.
51	`        outlet.Address__c = outlet.Name + ', ' + areaName + ', Karnataka';`	Assigns the right-hand expression to the named variable/property: outlet.Address__c = outlet.Name + ', ' + areaName + ', Karnataka';. This is in-memory unless it is later persisted by an explicit call.
52	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
53	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
54		Blank line separating logical sections; no executable operation.
55	`update outlets;`	Performs Salesforce DML: update outlets;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
56	`System.debug('Updated location data for ' + outlets.size() + ' outlets.');`	Calls the named method: System.debug('Updated location data for ' + outlets.size() + ' outlets.');. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/apex/verifyDmsDemo20261022.apex

Operational script: verify Dms Demo20261022. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

19 numbered source lines | SHA-256 c5aa65d8428129df2fac8d5338ec92d3e7edc6c67897e69258ae3698563d7282

Line	Source code	Explanation / reading note
1	`// Read-only post-import verification. No DML or approvals.`	Developer comment/documentation: Read-only post-import verification. No DML or approvals. It is not executed.
2	`String batch='DEMO-20261022%';`	Declares/initializes local data used by the surrounding operation: String batch='DEMO-20261022%';. Collection contents and assignments below determine its purpose.
3	`Map<String,Integer> counts=new Map<String,Integer>();`	Declares/initializes local data used by the surrounding operation: Map<String,Integer> counts=new Map<String,Integer>();. Collection contents and assignments below determine its purpose.
4	`List<String> names=new List<String>{'DMS_Distributor__c','DMS_Distributor_Survey__c','DMS_Sales_Target__c','DMS_Primary_Order__c','DMS_Primary_Order_Line__c','DMS_Goods_Receipt__c','DMS_Goods_Receipt_Line__c','DMS_Inventory__c','DMS_Invoice__c','DMS_Invoice_Line__c','DMS_Primary_Return__c','DMS_Primary_Return_Line__c','DMS_Credit_Note__c','DMS_Credit_Note_Line__c','DMS_Support_Ticket__c','DMS_Allocation_State__c'};`	Declares/initializes local data used by the surrounding operation: List<String> names=new List<String>{'DMS_Distributor__c','DMS_Distributor_Survey__c','DMS_Sales_Target__c','DMS_Primary_Order__c','DMS_Primary_Order_Line__c','DMS_Goods_Receipt__c','DMS_Goods_Receipt_. Collection contents and assignments below determine its purpose.
5	`for(String name:names) counts.put(name,Database.countQuery('SELECT count() FROM '+name));`	Repeats work over the specified records/items or while this condition holds: for(String name:names) counts.put(name,Database.countQuery('SELECT count() FROM '+name));. Check where queries/writes occur relative to the loop.
6	`Decimal stockTotal=0;`	Declares/initializes local data used by the surrounding operation: Decimal stockTotal=0;. Collection contents and assignments below determine its purpose.
7	`for(DMS_Inventory__c row:[SELECT On_Hand_Pieces__c,Available_Pieces__c,Reserved_Pieces__c FROM DMS_Inventory__c WHERE Batch_Number__c LIKE :batch]) {`	Repeats work over the specified records/items or while this condition holds: for(DMS_Inventory__c row:[SELECT On_Hand_Pieces__c,Available_Pieces__c,Reserved_Pieces__c FROM DMS_Inventory__c WHERE Batch_Number__c LIKE :batch]) {. Check where queries/writes occur relative to the loop.
8	`System.assertEquals(row.On_Hand_Pieces__c,row.Available_Pieces__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(row.On_Hand_Pieces__c,row.Available_Pieces__c);. A mismatch fails the test.

Line	Source code	Explanation / reading note
9	`System.assertEquals(0,row.Reserved_Pieces__c);stockTotal+=row.Available_Pieces__c;`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(0,row.Reserved_Pieces__c);stockTotal+=row.Available_Pieces__c;. A mismatch fails the test.
10	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
11	`System.assertEquals(1154,stockTotal);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1154,stockTotal);. A mismatch fails the test.
12	`System.assertEquals(1,[SELECT count() FROM DMS_Primary_Order__c WHERE Notes__c LIKE :batch AND Status__c='Draft']);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1,[SELECT count() FROM DMS_Primary_Order__c WHERE Notes__c LIKE :batch AND Status__c='Draft']);. A mismatch fails the test.
13	`System.assertEquals('Approved',[SELECT Status__c FROM DMS_Primary_Order__c WHERE Id='a0VjV000005F253UAC'].Status__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Approved',[SELECT Status__c FROM DMS_Primary_Order__c WHERE Id='a0VjV000005F253UAC'].Status__c);. A mismatch fails the test.
14	`System.assertEquals('Draft',[SELECT Status__c FROM DMS_Goods_Receipt__c WHERE Id='a0ZjV000002U9hRUAS'].Status__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals('Draft',[SELECT Status__c FROM DMS_Goods_Receipt__c WHERE Id='a0ZjV000002U9hRUAS'].Status__c);. A mismatch fails the test.
15	`System.assertEquals(0,[SELECT count() FROM DMS_Goods_Receipt_Line__c WHERE Goods_Receipt__c='a0ZjV000002U9hRUAS']);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(0,[SELECT count() FROM DMS_Goods_Receipt_Line__c WHERE Goods_Receipt__c='a0ZjV000002U9hRUAS']);. A mismatch fails the test.
16	`System.assertEquals(1,[SELECT count() FROM DMS_Allocation_State__c]);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1,[SELECT count() FROM DMS_Allocation_State__c]);. A mismatch fails the test.
17	`System.assertEquals(0,[SELECT Employee_Allocation_Order__c FROM DMS_Distributor__c WHERE Distributor_Code__c='DEMO-20261022'].Employee_Allocation_Order__c);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(0,[SELECT Employee_Allocation_Order__c FROM DMS_Distributor__c WHERE Distributor_Code__c='DEMO-20261022'].Employee_Allocation_Order__c);. A mismatch fails the test.
18	`System.assertEquals(0,[SELECT count() FROM Employee__c WHERE DMS_Distributor__r.Distributor_Code__c='DEMO-20261022']);`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(0,[SELECT count() FROM Employee__c WHERE DMS_Distributor__r.Distributor_Code__c='DEMO-20261022']);. A mismatch fails the test.

Line	Source code	Explanation / reading note
19	`System.debug(LoggingLevel.ERROR,'DEMO_VERIFICATION '+JSON.serialize(new Map<String,Object>{'counts'=>counts,'availableDemoPieces'=>stockTotal,'existingOrderPreserved'=>true,'existingReceiptPreserved'=>true,'demoExcludedFromAllocation'=>true}));`	Converts structured data to JSON for HTTP, persistent storage or a fingerprint.

scripts/backfill-employee-outlet-allocations.apex

Operational script: backfill employee outlet allocations. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

38 numbered source lines | SHA-256 4e9d7d3231e32fc8fae0651d32d2af790d6ef688f784c4c68af78783de30694a

Line	Source code	Explanation / reading note
1	`// Populate Employee Beat values from the linked Sales Representative where possible.`	Developer comment/documentation: Populate Employee Beat values from the linked Sales Representative where possible. It is not executed.
2	`Map<Id, Id> userToBeat = new Map<Id, Id>();`	Declares/initializes local data used by the surrounding operation: Map<Id, Id> userToBeat = new Map<Id, Id>();. Collection contents and assignments below determine its purpose.
3	`for (Distributor__c representative : [`	Repeats work over the specified records/items or while this condition holds: for (Distributor__c representative : [. Check where queries/writes occur relative to the loop.
4	`    SELECT User__c, Beat__c`	Selects these Salesforce fields/aggregates: User__c, Beat__c. Query results are used in the surrounding assignment or loop.
5	`    FROM Distributor__c`	Chooses the Salesforce object/subquery source: FROM Distributor__c.
6	`    WHERE User__c != null AND Beat__c != null`	Adds a query/filter condition: WHERE User__c != null AND Beat__c != null. The complete condition determines which records are included.
7	`]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (WHERE User__c != null AND Beat__c != null); it is not a standalone business operation.
8	`    if (!userToBeat.containsKey(representative.User__c)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!userToBeat.containsKey(representative.User__c)) {.
9	`        userToBeat.put(representative.User__c, representative.Beat__c);`	Calls the named method: userToBeat.put(representative.User__c, representative.Beat__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
10	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
11	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
12		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
13	`List<Employee__c> employeesToUpdate = new List<Employee__c>();`	Declares/initializes local data used by the surrounding operation: List<Employee__c> employeesToUpdate = new List<Employee__c>();. Collection contents and assignments below determine its purpose.
14	`for (Employee__c employee : [`	Repeats work over the specified records/items or while this condition holds: for (Employee__c employee : [. Check where queries/writes occur relative to the loop.
15	`    SELECT Id, Salesforce_User__c, Beat__c`	Selects these Salesforce fields/aggregates: Id, Salesforce_User__c, Beat__c. Query results are used in the surrounding assignment or loop.
16	`    FROM Employee__c`	Chooses the Salesforce object/subquery source: FROM Employee__c.
17	`    WHERE Salesforce_User__c IN :userToBeat.keySet()`	Adds a query/filter condition: WHERE Salesforce_User__c IN :userToBeat.keySet(). The complete condition determines which records are included.
18	`]) {`	Continues the surrounding declaration/expression or text:]) {. Read it with the preceding opening statement (WHERE Salesforce_User__c IN :userToBeat.keySet()); it is not a standalone business operation.
19	`    if (employee.Beat__c == null) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (employee.Beat__c == null) {.
20	`        employee.Beat__c = userToBeat.get(employee.Salesforce_User__c);`	Calls the named method: employee.Beat__c = userToBeat.get(employee.Salesforce_User__c);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
21	`        employeesToUpdate.add(employee);`	Calls the named method: employeesToUpdate.add(employee);. Its implementation defines the side effect/result; use the symbol/file index to follow it.
22	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
23	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
24	`if (!employeesToUpdate.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!employeesToUpdate.isEmpty()) {.
25	`    update employeesToUpdate;`	Performs Salesforce DML: update employeesToUpdate;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.

Line	Source code	Explanation / reading note
26	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
27		Blank line separating logical sections; no executable operation.
28	`// Updating each allocation invokes SfaAllocationEmployee and links its Employee.`	Developer comment/documentation: Updating each allocation invokes SfaAllocationEmployee and links its Employee. It is not executed.
29	`List<Distributor_Outlet_Allocation__c> allocations = [`	Declares/initializes local data used by the surrounding operation: List<Distributor_Outlet_Allocation__c> allocations = [. Collection contents and assignments below determine its purpose.
30	`    SELECT Id, Distributor__c`	Selects these Salesforce fields/aggregates: Id, Distributor__c. Query results are used in the surrounding assignment or loop.
31	`    FROM Distributor_Outlet_Allocation__c`	Chooses the Salesforce object/subquery source: FROM Distributor_Outlet_Allocation__c.
32	`];`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33	`if (!allocations.isEmpty()) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (!allocations.isEmpty()) {.
34	`    update allocations;`	Performs Salesforce DML: update allocations;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
35	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
36		Blank line separating logical sections; no executable operation.
37	`System.debug('Employees updated: ' + employeesToUpdate.size());`	Calls the named method: System.debug('Employees updated: ' + employeesToUpdate.size());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
38	`System.debug('Outlet allocations linked: ' + allocations.size());`	Calls the named method: System.debug('Outlet allocations linked: ' + allocations.size());. Its implementation defines the side effect/result; use the symbol/file index to follow it.

scripts/create-three-employee-users.ps1

Operational script: create three employee users.ps1. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

59 numbered source lines | SHA-256 2a30306a9a7482c34501f2d1d89899b411d3e8f61e1c551ccd5ff61a7d13bc55

Line	Source code	Explanation / reading note
1	`param([string]$TargetOrg = 'sfaNewOrg')`	Assigns the right-hand expression to the named variable/property: param([string]$TargetOrg = 'sfaNewOrg'). This is in-memory unless it is later persisted by an explicit call.
2		Blank line separating logical sections; no executable operation.
3	`$sf = 'C:\Program Files\sf\bin\sf.cmd'`	Assigns a PowerShell script variable: $sf = 'C:\Program Files\sf\bin\sf.cmd'.
4	`$apiRoot = '/services/data/v67.0'`	Assigns a PowerShell script variable: $apiRoot = '/services/data/v67.0'.
5	`$profileId = ((& $sf data query --query "SELECT Id FROM Profile WHERE Name = ' Standard Platform User' LIMIT 1" --target-org $TargetOrg --json | ConvertFrom-Json).result.records[0].Id)`	Assigns a PowerShell script variable: $profileId = ((& $sf data query --query "SELECT Id FROM Profile WHERE Name = 'Standard Platform User' LIMIT 1" --target-org $TargetOrg --json | ConvertFrom-Json).result.records[0].Id).
6	`$permissionSetId = ((& $sf data query --query "SELECT Id FROM PermissionSet WHERE Name = 'SFA_Mobile_User' LIMIT 1" --target-org $TargetOrg --json | ConvertFrom-Json).result.records[0].Id)`	Assigns a PowerShell script variable: $permissionSetId = ((& $sf data query --query "SELECT Id FROM PermissionSet WHERE Name = 'SFA_Mobile_User' LIMIT 1" --target-org $TargetOrg --json | ConvertFrom-Json).result.records[0].Id).
7	`$employeeRecords = ((& $sf data query --query "SELECT Id, Name FROM Employee__c WHERE Name IN ('Dhanush','Aishwarya','Ram')" --target-org $TargetOrg --json | ConvertFrom-Json).result.records)`	Assigns a PowerShell script variable: $employeeRecords = ((& $sf data query --query "SELECT Id, Name FROM Employee__c WHERE Name IN ('Dhanush','Aishwarya','Ram')" --target-org $TargetOrg --json | ConvertFrom-Json).result.records).
8	`$employeeIds = @{}`	Assigns a PowerShell script variable: $employeeIds = @{}.
9	`foreach ($employee in $employeeRecords) { $employeeIds[$employee.Name] = $employee.Id }`	Assigns the right-hand expression to the named variable/property: foreach ($employee in $employeeRecords) { $employeeIds[$employee.Name] = $employee.Id }. This is in-memory unless it is later persisted by an explicit call.
10		Blank line separating logical sections; no executable operation.
11	`$users = @(`	Assigns a PowerShell script variable: $users = @(.
12	`    @{ key='dhanush'; first='Dhanush'; last='SFA'; alias='dhanush'; employee='Dhanush' },`	Assigns the right-hand expression to the named variable/property: @{ key='dhanush'; first='Dhanush'; last='SFA'; alias='dhanush'; employee='Dhanush' },. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
13	`    @{ key='aishwarya'; first='Aishwarya'; last='SFA'; alias='aishw'; employee='Aishwarya' },`	Assigns the right-hand expression to the named variable/property: @{ key='aishwarya'; first='Aishwarya'; last='SFA'; alias='aishw'; employee='Aishwarya' },. This is in-memory unless it is later persisted by an explicit call.
14	`    @{ key='ram'; first='Ram'; last='SFA'; alias='ram'; employee='Ram' }`	Assigns the right-hand expression to the named variable/property: @{ key='ram'; first='Ram'; last='SFA'; alias='ram'; employee='Ram' }. This is in-memory unless it is later persisted by an explicit call.
15	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
16	`$requests = @()`	Assigns a PowerShell script variable: $requests = @().
17	`foreach ($user in $users) {`	Continues the surrounding declaration/expression or text: foreach ($user in $users) {. Read it with the preceding opening statement ($requests = @()); it is not a standalone business operation.
18	`    $userReference = "user_$($user.key)"`	Assigns a PowerShell script variable: $userReference = "user_$($user.key)".
19	`    $username = "$($user.key).sfa.00djv000004opjnuq@agentforce.com"`	Assigns a PowerShell script variable: $username = "$($user.key).sfa.00djv000004opjnuq@agentforce.com".
20	`    $requests += @{`	Assigns the right-hand expression to the named variable/property: $requests += @{. This is in-memory unless it is later persisted by an explicit call.
21	`        method='POST'; url="$apiRoot/sobjects/User"; referenceId=$userReference`	Assigns the right-hand expression to the named variable/property: method='POST'; url="$apiRoot/sobjects/User"; referenceId=$userReference. This is in-memory unless it is later persisted by an explicit call.
22	`        body=@{`	Assigns the right-hand expression to the named variable/property: body=@{. This is in-memory unless it is later persisted by an explicit call.
23	`            Username=$username; Email='aishwaryahs142003@gmail.com'; FirstName=$user.first; LastName=$user.last`	Assigns the right-hand expression to the named variable/property: Username=$username; Email='aishwaryahs142003@gmail.com'; FirstName=$user.first; LastName=$user.last. This is in-memory unless it is later persisted by an explicit call.
24	`            Alias=$user.alias; CommunityNickname="$($user.key)_sfa_00djv"; ProfileId=$profileId; IsActive=$true`	Assigns the right-hand expression to the named variable/property: Alias=$user.alias; CommunityNickname="$($user.key)_sfa_00djv"; ProfileId=$profileId; IsActive=$true. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
25	`TimeZoneSidKey='Asia/Kolkata'; LocaleSidKey='en_IN'; EmailEncodingKey='UTF-8'; LanguageLocaleKey='en_US'`	Assigns the right-hand expression to the named variable/property: TimeZoneSidKey='Asia/Kolkata'; LocaleSidKey='en_IN'; EmailEncodingKey='UTF-8'; LanguageLocaleKey='en_US'. This is in-memory unless it is later persisted by an explicit call.
26	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
27	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
28	`$requests += @{`	Assigns the right-hand expression to the named variable/property: $requests += @{. This is in-memory unless it is later persisted by an explicit call.
29	`method='POST'; url="$apiRoot/sobjects/PermissionSetAssignment"; referenceId="permission_$($user.key)"`	Assigns the right-hand expression to the named variable/property: method='POST'; url="$apiRoot/sobjects/PermissionSetAssignment"; referenceId="permission_$($user.key)". This is in-memory unless it is later persisted by an explicit call.
30	`body=@{ AssigneeId="@{$userReference.id}"; PermissionSetId=$permissionSetId }`	Assigns the right-hand expression to the named variable/property: body=@{ AssigneeId="@{$userReference.id}"; PermissionSetId=$permissionSetId }. This is in-memory unless it is later persisted by an explicit call.
31	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
32	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
33		Blank line separating logical sections; no executable operation.
34	`$payload = @{ allOrNone=$true; compositeRequest=$requests } | ConvertTo-Json -Depth 12 -Compress`	Assigns a PowerShell script variable: $payload = @{ allOrNone=$true; compositeRequest=$requests } | ConvertTo-Json -Depth 12 -Compress.
35	`$rawResponse = $payload | & $sf api request rest "$apiRoot/composite" --method POST --body - --target-org $TargetOrg`	Assigns a PowerShell script variable: $rawResponse = $payload | & $sf api request rest "$apiRoot/composite" --method POST --body - --target-org $TargetOrg.
36	`if ($LASTEXITCODE -ne 0) { throw "Salesforce request failed: $rawResponse" }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) { throw "Salesforce request failed: $rawResponse" }.
37	`$response = $rawResponse | ConvertFrom-Json`	Assigns a PowerShell script variable: $response = $rawResponse | ConvertFrom-Json.

Line	Source code	Explanation / reading note
38	`$failed = @($response.compositeResponse | Where-Object { $_.httpStatusCode -lt 200 -or $_.httpStatusCode -ge 300 })`	Assigns a PowerShell script variable: $failed = @($response.compositeResponse | Where-Object { $_.httpStatusCode -lt 200 -or $_.httpStatusCode -ge 300 }).
39	`if ($failed.Count -gt 0) { throw ($failed | ConvertTo-Json -Depth 10) }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($failed.Count -gt 0) { throw ($failed | ConvertTo-Json -Depth 10) }.
40		Blank line separating logical sections; no executable operation.
41	`$employeeRequests = @()`	Assigns a PowerShell script variable: $employeeRequests = @().
42	`foreach ($user in $users) {`	Continues the surrounding declaration/expression or text: foreach ($user in $users) {. Read it with the preceding opening statement ($employeeRequests = @()); it is not a standalone business operation.
43	`    $createdUser = $response.compositeResponse \| Where-Object referenceId -eq "user_$($user.key)"`	Assigns a PowerShell script variable: $createdUser = $response.compositeResponse \| Where-Object referenceId -eq "user_$($user.key)".
44	`    $employeeRequests += @{`	Assigns the right-hand expression to the named variable/property: $employeeRequests += @{. This is in-memory unless it is later persisted by an explicit call.
45	`        method='PATCH'; url="$apiRoot/sobjects/Employee__c/$($employeeIds[$user.employee])"; referenceId="employee_$($user.key)"`	Assigns the right-hand expression to the named variable/property: method='PATCH'; url="$apiRoot/sobjects/Employee__c/$($employeeIds[$user.employee])"; referenceId="employee_$($user.key)". This is in-memory unless it is later persisted by an explicit call.
46	`        body=@{ Salesforce_User__c=$createdUser.body.id }`	Assigns the right-hand expression to the named variable/property: body=@{ Salesforce_User__c=$createdUser.body.id }. This is in-memory unless it is later persisted by an explicit call.
47	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
48	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
49	`$employeePayload = @{ allOrNone=$true; compositeRequest=$employeeRequests } | ConvertTo-Json -Depth 10 -Compress`	Assigns a PowerShell script variable: $employeePayload = @{ allOrNone=$true; compositeRequest=$employeeRequests } | ConvertTo-Json -Depth 10 -Compress.
50	`$employeeRawResponse = $employeePayload | & $sf api request rest "$apiRoot/composite" --method POST --body - --target-org $TargetOrg`	Assigns a PowerShell script variable: $employeeRawResponse = $employeePayload | & $sf api request rest "$apiRoot/composite" --method POST --body - --target-org $TargetOrg.

Line	Source code	Explanation / reading note
51	`if ($LASTEXITCODE -ne 0) { throw "Employee linking request failed: $employeeRawResponse" }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) { throw "Employee linking request failed: $employeeRawResponse" }.
52	`$employeeResponse = $employeeRawResponse | ConvertFrom-Json`	Assigns a PowerShell script variable: $employeeResponse = $employeeRawResponse | ConvertFrom-Json.
53	`$employeeFailures = @($employeeResponse.compositeResponse | Where-Object { $_.httpStatusCode -lt 200 -or $_.httpStatusCode -ge 300 })`	Assigns a PowerShell script variable: $employeeFailures = @($employeeResponse.compositeResponse | Where-Object { $_.httpStatusCode -lt 200 -or $_.httpStatusCode -ge 300 }).
54	`if ($employeeFailures.Count -gt 0) { throw ($employeeFailures | ConvertTo-Json -Depth 10) }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($employeeFailures.Count -gt 0) { throw ($employeeFailures | ConvertTo-Json -Depth 10) }.
55		Blank line separating logical sections; no executable operation.
56	`foreach ($user in $users) {`	Continues the surrounding declaration/expression or text: foreach ($user in $users) {. Read it with the preceding opening statement; it is not a standalone business operation.
57	`    $created = $response.compositeResponse \| Where-Object referenceId -eq "user_$($user.key)"`	Assigns a PowerShell script variable: $created = $response.compositeResponse \| Where-Object referenceId -eq "user_$($user.key)".
58	`    [pscustomobject]@{ Employee=$user.employee; Username="$($user.key).sfa.00djv000004opjnuq@agentforce.com"; UserId=$created.body.id }`	Assigns the right-hand expression to the named variable/property: [pscustomobject]@{ Employee=$user.employee; Username="$($user.key).sfa.00djv000004opjnuq@agentforce.com"; UserId=$created.body.id }. This is in-memory unless it is later persisted by an explicit call.
59	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

scripts/install-auto-sync.ps1

Operational script: install auto sync.ps1. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

36 numbered source lines | SHA-256 fcff4304e7d982505f9e3a0aa02f25cbae15a554658912a0552293d103199773

Line	Source code	Explanation / reading note
1	`param(`	Continues the surrounding declaration/expression or text: param(. Read it with the preceding opening statement; it is not a standalone business operation.
2	`    [int]$Minutes = 15`	Assigns the right-hand expression to the named variable/property: [int]$Minutes = 15. This is in-memory unless it is later persisted by an explicit call.
3	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
4		Blank line separating logical sections; no executable operation.
5	`$ErrorActionPreference = 'Stop'`	Assigns a PowerShell script variable: $ErrorActionPreference = 'Stop'.
6	`$projectRoot = Split-Path -Parent $PSScriptRoot`	Assigns a PowerShell script variable: $projectRoot = Split-Path -Parent $PSScriptRoot.
7	`$syncScript = Join-Path $PSScriptRoot 'sync-org-to-github.ps1'`	Assigns a PowerShell script variable: $syncScript = Join-Path $PSScriptRoot 'sync-org-to-github.ps1'.
8	`$taskName = 'SFA Mobile - Salesforce to GitHub Sync'`	Assigns a PowerShell script variable: $taskName = 'SFA Mobile - Salesforce to GitHub Sync'.
9		Blank line separating logical sections; no executable operation.
10	`if ($Minutes -lt 5) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($Minutes -lt 5) {.
11	`    throw 'Choose an interval of at least 5 minutes.'`	Stops this execution path with a validation/error exception: throw 'Choose an interval of at least 5 minutes.'. The caller/catch block decides how it is reported.
12	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13		Blank line separating logical sections; no executable operation.
14	`$action = New-ScheduledTaskAction `	Assigns a PowerShell script variable: $action = New-ScheduledTaskAction `.

Line	Source code	Explanation / reading note
15	` -Execute 'powershell.exe' ```	Continues the surrounding declaration/expression or text: -Execute 'powershell.exe' `. Read it with the preceding opening statement ($action = New-ScheduledTaskAction `); it is not a standalone business operation.
16	`    -Argument "-NoProfile -ExecutionPolicy Bypass -File `"$syncScript`""`	Continues the surrounding declaration/expression or text: -Argument "-NoProfile -ExecutionPolicy Bypass -File `"$syncScript`"". Read it with the preceding opening statement (-Execute 'powershell.exe' `); it is not a standalone business operation.
17		Blank line separating logical sections; no executable operation.
18	`$trigger = New-ScheduledTaskTrigger ` `	Assigns a PowerShell script variable: $trigger = New-ScheduledTaskTrigger `.
19	`    -Once ` `	Continues the surrounding declaration/expression or text: -Once `. Read it with the preceding opening statement ($trigger = New-ScheduledTaskTrigger `); it is not a standalone business operation.
20	`    -At (Get-Date).AddMinutes(1) ` `	Continues the surrounding declaration/expression or text: -At (Get-Date).AddMinutes(1) `. Read it with the preceding opening statement ( -Once `); it is not a standalone business operation.
21	`    -RepetitionInterval (New-TimeSpan -Minutes $Minutes)`	Continues the surrounding declaration/expression or text: -RepetitionInterval (New-TimeSpan -Minutes $Minutes). Read it with the preceding opening statement (-At (Get-Date).AddMinutes(1) `); it is not a standalone business operation.
22		Blank line separating logical sections; no executable operation.
23	`$settings = New-ScheduledTaskSettingsSet ` `	Assigns a PowerShell script variable: $settings = New-ScheduledTaskSettingsSet `.
24	`    -AllowStartIfOnBatteries ` `	Continues the surrounding declaration/expression or text: -AllowStartIfOnBatteries `. Read it with the preceding opening statement ($settings = New-ScheduledTaskSettingsSet `); it is not a standalone business operation.
25	`    -DontStopIfGoingOnBatteries ` `	Continues the surrounding declaration/expression or text: -DontStopIfGoingOnBatteries `. Read it with the preceding opening statement ( -AllowStartIfOnBatteries `); it is not a standalone business operation.
26	`    -ExecutionTimeLimit (New-TimeSpan -Minutes 10)`	Continues the surrounding declaration/expression or text: -ExecutionTimeLimit (New-TimeSpan -Minutes 10). Read it with the preceding opening statement (-DontStopIfGoingOnBatteries `); it is not a standalone business operation.
27		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
28	`Register-ScheduledTask ``	Operational command with system/filesystem/deployment effects: Register-ScheduledTask `. Do not execute as part of simply reading this guide.
29	` -TaskName $taskName ``	Continues the surrounding declaration/expression or text: -TaskName $taskName `. Read it with the preceding opening statement (Register-ScheduledTask `); it is not a standalone business operation.
30	` -Action $action ``	Continues the surrounding declaration/expression or text: -Action $action `. Read it with the preceding opening statement ( -TaskName $taskName `); it is not a standalone business operation.
31	` -Trigger $trigger ``	Continues the surrounding declaration/expression or text: -Trigger $trigger `. Read it with the preceding opening statement ( -Action $action `); it is not a standalone business operation.
32	` -Settings $settings ``	Continues the surrounding declaration/expression or text: -Settings $settings `. Read it with the preceding opening statement ( -Trigger $trigger `); it is not a standalone business operation.
33	` -Description 'Retrieves SFA metadata from sfaNewOrg and pushes source changes to GitHub.' ``	Continues the surrounding declaration/expression or text: -Description 'Retrieves SFA metadata from sfaNewOrg and pushes source changes to GitHub.' `. Read it with the preceding opening statement ( -Settings $settings `); it is not a standalone business operation.
34	`    -Force | Out-Null`	Continues the surrounding declaration/expression or text: -Force | Out-Null. Read it with the preceding opening statement (-Description 'Retrieves SFA metadata from sfaNewOrg and pushes source changes to GitHub.' `); it is not a standalone business operation.
35		Blank line separating logical sections; no executable operation.
36	`Write-Host "Automatic sync is enabled every $Minutes minutes."`	Continues the surrounding declaration/expression or text: Write-Host "Automatic sync is enabled every $Minutes minutes.". Read it with the preceding opening statement; it is not a standalone business operation.

scripts/seed-recorded-scope.ps1

Operational script: seed recorded scope.ps1. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

66 numbered source lines | SHA-256 7db2d2947f389d72f262faa18f9c62a46f2c3560547417b4c46159dd9cdec027

Line	Source code	Explanation / reading note
1	`param([string]$TargetOrg = 'sfaNewOrg')`	Assigns the right-hand expression to the named variable/property: param([string]$TargetOrg = 'sfaNewOrg'). This is in-memory unless it is later persisted by an explicit call.
2		Blank line separating logical sections; no executable operation.
3	`$sf = 'C:\Program Files\sf\bin\sf.cmd'`	Assigns a PowerShell script variable: $sf = 'C:\Program Files\sf\bin\sf.cmd'.
4	`$apiRoot = '/services/data/v67.0'`	Assigns a PowerShell script variable: $apiRoot = '/services/data/v67.0'.
5	`$currentUserId = ((& $sf data query --query "SELECT Id FROM User WHERE Username = ' aishwaryahs142003.6d2fd18ea3e1@agentforce.com'" --target-org $TargetOrg --json | ConvertFrom-Json).result.records[0].Id)`	Assigns a PowerShell script variable: $currentUserId = ((& $sf data query --query "SELECT Id FROM User WHERE Username = 'aishwaryahs142003.6d2fd18ea3e1@agentforce.com'" --target-org $TargetOrg --json | ConvertFrom-Json).result.records[0]..
6		Blank line separating logical sections; no executable operation.
7	`function Invoke-Composite([array]$Requests) {`	Declares a callable function/method: function Invoke-Composite([array]$Requests) {. Parameters supply its inputs; the following block implements the operation.
8	`    $payload = @{ allOrNone = $true; compositeRequest = $Requests } | ConvertTo-Json -Depth 12 -Compress`	Assigns a PowerShell script variable: $payload = @{ allOrNone = $true; compositeRequest = $Requests } | ConvertTo-Json -Depth 12 -Compress.
9	`    $response = $payload | & $sf api request rest "$apiRoot/composite" --method POST --body - --target-org $TargetOrg`	Assigns a PowerShell script variable: $response = $payload | & $sf api request rest "$apiRoot/composite" --method POST --body - --target-org $TargetOrg.
10	`    if ($LASTEXITCODE -ne 0) { throw "Salesforce composite request failed: $response" }`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) { throw "Salesforce composite request failed: $response" }.
11	`    return $response | ConvertFrom-Json`	Returns $response | ConvertFrom-Json to the caller (or begins returned UI markup) and ends this execution path.
12	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
13		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
14	`function New-Request([string]$ReferenceId, [string]$ObjectName, [hashtable]$Body) {`	Declares a callable function/method: function New-Request([string]$ReferenceId, [string]$ObjectName, [hashtable]$Body) {. Parameters supply its inputs; the following block implements the operation.
15	`    return @{ method = 'POST'; url = "$apiRoot/sobjects/$ObjectName"; referenceId = $ReferenceId; body = $Body }`	Returns @{ method = 'POST'; url = "$apiRoot/sobjects/$ObjectName"; referenceId = $ReferenceId; body = $Body } to the caller (or begins returned UI markup) and ends this execution path.
16	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
17		Blank line separating logical sections; no executable operation.
18	`$initial = @(`	Assigns a PowerShell script variable: $initial = @(.
19	`    (New-Request 'geo1' 'Geography__c' @{ Name='MG Road Geography'; Nation__c='India'; State__c='Karnataka'; District__c='Bengaluru Urban'; Town__c='MG Road'; Municipality__c='BBMP' }),`	Assigns the right-hand expression to the named variable/property: (New-Request 'geo1' 'Geography__c' @{ Name='MG Road Geography'; Nation__c='India'; State__c='Karnataka'; District__c='Bengaluru Urban'; Town__c='MG Road'; Municipality__c='BBMP' }),. This is in-memory unless it is later persisted by an explicit call.
20	`    (New-Request 'geo2' 'Geography__c' @{ Name='Indiranagar Geography'; Nation__c='India'; State__c='Karnataka'; District__c='Bengaluru Urban'; Town__c='Indiranagar'; Municipality__c='BBMP' }),`	Assigns the right-hand expression to the named variable/property: (New-Request 'geo2' 'Geography__c' @{ Name='Indiranagar Geography'; Nation__c='India'; State__c='Karnataka'; District__c='Bengaluru Urban'; Town__c='Indiranagar'; Municipality__c='BBMP' }),. This is in-memory unless it is later persisted by an explicit call.
21	`    (New-Request 'geo3' 'Geography__c' @{ Name='Jayanagar Geography'; Nation__c='India'; State__c='Karnataka'; District__c='Bengaluru Urban'; Town__c='Jayanagar'; Municipality__c='BBMP' }),`	Assigns the right-hand expression to the named variable/property: (New-Request 'geo3' 'Geography__c' @{ Name='Jayanagar Geography'; Nation__c='India'; State__c='Karnataka'; District__c='Bengaluru Urban'; Town__c='Jayanagar'; Municipality__c='BBMP' }),. This is in-memory unless it is later persisted by an explicit call.
22	`    (New-Request 'geo4' 'Geography__c' @{ Name='Mysuru Geography'; Nation__c='India'; State__c='Karnataka'; District__c='Mysuru'; Town__c='Mysuru'; Municipality__c='Mysuru City Corporation' }),`	Assigns the right-hand expression to the named variable/property: (New-Request 'geo4' 'Geography__c' @{ Name='Mysuru Geography'; Nation__c='India'; State__c='Karnataka'; District__c='Mysuru'; Town__c='Mysuru'; Municipality__c='Mysuru City Corporation' }),. This is in-memory unless it is later persisted by an explicit call.
23	`    (New-Request 'emp4' 'Employee__c' @{ Name='Ram'; Aadhaar_Number__c='400000000004'; PAN_Number__c='RAMAA0004A'; Phone__c='9000000004'; Emergency_Contact__c='9100000004'; Geography__c='@{geo1.id}'; Hierarchy_Level__c='L4' }),`	Assigns the right-hand expression to the named variable/property: (New-Request 'emp4' 'Employee__c' @{ Name='Ram'; Aadhaar_Number__c='400000000004'; PAN_Number__c='RAMAA0004A'; Phone__c='9000000004'; Emergency_Contact__c='9100000004'; Geography__c='@{geo1.id}'; Hier. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
24	`(New-Request 'emp3' 'Employee__c' @{ Name='Aishwarya'; Aadhaar_Number__c='400000000003'; PAN_Number__c='AISHW0003A'; Phone__c='9000000003'; Emergency_Contact__c='9100000003'; Geography__c='@{geo1.id}'; Hierarchy_Level__c='L3'; Reporting_Manager__c='@{emp4.id}' }),`	Assigns the right-hand expression to the named variable/property: (New-Request 'emp3' 'Employee__c' @{ Name='Aishwarya'; Aadhaar_Number__c='400000000003'; PAN_Number__c='AISHW0003A'; Phone__c='9000000003'; Emergency_Contact__c='9100000003'; Geography__c='@{geo1.id}'. This is in-memory unless it is later persisted by an explicit call.
25	`(New-Request 'emp2' 'Employee__c' @{ Name='Dinesh'; Aadhaar_Number__c='400000000002'; PAN_Number__c='DINAA0002A'; Phone__c='9000000002'; Emergency_Contact__c='9100000002'; Geography__c='@{geo1.id}'; Hierarchy_Level__c='L2'; Reporting_Manager__c='@{emp3.id}'; Salesforce_User__c=$currentUserId }),`	Assigns the right-hand expression to the named variable/property: (New-Request 'emp2' 'Employee__c' @{ Name='Dinesh'; Aadhaar_Number__c='400000000002'; PAN_Number__c='DINAA0002A'; Phone__c='9000000002'; Emergency_Contact__c='9100000002'; Geography__c='@{geo1.id}'; H. This is in-memory unless it is later persisted by an explicit call.
26	`(New-Request 'emp1' 'Employee__c' @{ Name='Dhanush'; Aadhaar_Number__c='400000000001'; PAN_Number__c='DHANU0001A'; Phone__c='9000000001'; Emergency_Contact__c='9100000001'; Geography__c='@{geo1.id}'; Hierarchy_Level__c='L1'; Reporting_Manager__c='@{emp2.id}' })`	Assigns the right-hand expression to the named variable/property: (New-Request 'emp1' 'Employee__c' @{ Name='Dhanush'; Aadhaar_Number__c='400000000001'; PAN_Number__c='DHANU0001A'; Phone__c='9000000001'; Emergency_Contact__c='9100000001'; Geography__c='@{geo1.id}'; . This is in-memory unless it is later persisted by an explicit call.
27	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
28	`$created = Invoke-Composite $initial`	Assigns a PowerShell script variable: $created = Invoke-Composite $initial.
29	`$ids = @{}`	Assigns a PowerShell script variable: $ids = @{}.
30	`foreach ($item in $created.compositeResponse) { $ids[$item.referenceId] = $item.body.id }`	Assigns the right-hand expression to the named variable/property: foreach ($item in $created.compositeResponse) { $ids[$item.referenceId] = $item.body.id }. This is in-memory unless it is later persisted by an explicit call.
31		Blank line separating logical sections; no executable operation.
32	`$beatNames = @('MG Road Beat','Indiranagar Beat','Jayanagar Beat','Koramangala Beat','Whitefield Beat','Malleshwaram Beat','Rajajinagar Beat','Yelahanka Beat','Electronic City Beat','Mysuru Central Beat')`	Assigns a PowerShell script variable: $beatNames = @('MG Road Beat','Indiranagar Beat','Jayanagar Beat','Koramangala Beat','Whitefield Beat','Malleshwaram Beat','Rajajinagar Beat','Yelahanka Beat','Electronic City Beat','Mysuru Central Be.
33	`$beatRequests = @()`	Assigns a PowerShell script variable: $beatRequests = @().
34	`for ($i = 0; $i -lt $beatNames.Count; $i++) {`	Repeats work over the specified records/items or while this condition holds: for ($i = 0; $i -lt $beatNames.Count; $i++) {. Check where queries/writes occur relative to the loop.
35	`$geoId = if ($i -eq 9) { $ids.geo4 } elseif ($i -eq 1) { $ids.geo2 } elseif ($i -eq 2) { $ids.geo3 } else { $ids.geo1 }`	Assigns a PowerShell script variable: $geoId = if ($i -eq 9) { $ids.geo4 } elseif ($i -eq 1) { $ids.geo2 } elseif ($i -eq 2) { $ids.geo3 } else { $ids.geo1 }.

Line	Source code	Explanation / reading note
36	`    $beatRequests += New-Request "beat$i" 'Beat__c' @{ Name=$beatNames[$i]; Active__c=$true; Assigned_Employee__c=$ids.emp1; Distributor__c='Demo Distributor'; Geography__c=$geoId }`	Assigns the right-hand expression to the named variable/property: $beatRequests += New-Request "beat$i" 'Beat__c' @{ Name=$beatNames[$i]; Active__c=$true; Assigned_Employee__c=$ids.emp1; Distributor__c='Demo Distributor'; Geography__c=$geoId }. This is in-memory unless it is later persisted by an explicit call.
37	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
38	`$createdBeats = Invoke-Composite $beatRequests`	Assigns a PowerShell script variable: $createdBeats = Invoke-Composite $beatRequests.
39	`foreach ($item in $createdBeats.compositeResponse) { $ids[$item.referenceId] = $item.body.id }`	Assigns the right-hand expression to the named variable/property: foreach ($item in $createdBeats.compositeResponse) { $ids[$item.referenceId] = $item.body.id }. This is in-memory unless it is later persisted by an explicit call.
40		Blank line separating logical sections; no executable operation.
41	`$outletRequests = @()`	Assigns a PowerShell script variable: $outletRequests = @().
42	`$serial = 1`	Assigns a PowerShell script variable: $serial = 1.
43	`for ($beatIndex = 0; $beatIndex -lt 10; $beatIndex++) {`	Repeats work over the specified records/items or while this condition holds: for ($beatIndex = 0; $beatIndex -lt 10; $beatIndex++) {. Check where queries/writes occur relative to the loop.
44	`    for ($outletNumber = 1; $outletNumber -le 10; $outletNumber++) {`	Repeats work over the specified records/items or while this condition holds: for ($outletNumber = 1; $outletNumber -le 10; $outletNumber++) {. Check where queries/writes occur relative to the loop.
45	`        $serial4 = $serial.ToString('0000')`	Assigns a PowerShell script variable: $serial4 = $serial.ToString('0000').
46	`        $serial6 = $serial.ToString('000000')`	Assigns a PowerShell script variable: $serial6 = $serial.ToString('000000').
47	`        $outletRequests += New-Request "outlet$serial" 'Retailer__c' @{`	Assigns the right-hand expression to the named variable/property: $outletRequests += New-Request "outlet$serial" 'Retailer__c' @{. This is in-memory unless it is later persisted by an explicit call.
48	`            Name = if ($serial -eq 1) { 'Balaji Stores' } else { "Outlet $serial4" }`	Assigns the right-hand expression to the named variable/property: Name = if ($serial -eq 1) { 'Balaji Stores' } else { "Outlet $serial4" }. This is in-memory unless it is later persisted by an explicit call.
49	`            Outlet_Owner_Name__c = if ($serial -eq 1) { 'Mukul' } else { "Owner $serial4" }`	Assigns the right-hand expression to the named variable/property: Outlet_Owner_Name__c = if ($serial -eq 1) { 'Mukul' } else { "Owner $serial4" }. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
50	`            Phone__c = '92' + (10000000 + $serial)`	Assigns the right-hand expression to the named variable/property: Phone__c = '92' + (10000000 + $serial). This is in-memory unless it is later persisted by an explicit call.
51	`            Email__c = "outlet$serial@example.com"`	Assigns the right-hand expression to the named variable/property: Email__c = "outlet$serial@example.com". This is in-memory unless it is later persisted by an explicit call.
52	`            Aadhaar_Number__c = "500000$serial6"`	Assigns the right-hand expression to the named variable/property: Aadhaar_Number__c = "500000$serial6". This is in-memory unless it is later persisted by an explicit call.
53	`            PAN_Number__c = "OUTLT${serial4}A"`	Assigns the right-hand expression to the named variable/property: PAN_Number__c = "OUTLT${serial4}A". This is in-memory unless it is later persisted by an explicit call.
54	`            Beat__c = $ids["beat$beatIndex"]`	Assigns the right-hand expression to the named variable/property: Beat__c = $ids["beat$beatIndex"]. This is in-memory unless it is later persisted by an explicit call.
55	`            Address__c = "$($beatNames[$beatIndex]), Karnataka"`	Assigns the right-hand expression to the named variable/property: Address__c = "$($beatNames[$beatIndex]), Karnataka". This is in-memory unless it is later persisted by an explicit call.
56	`            Active__c = $true`	Assigns the right-hand expression to the named variable/property: Active__c = $true. This is in-memory unless it is later persisted by an explicit call.
57	`        }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
58	`        $serial++`	Continues the surrounding declaration/expression or text: $serial++. Read it with the preceding opening statement (}); it is not a standalone business operation.
59	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
60	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
61	`for ($start = 0; $start -lt $outletRequests.Count; $start += 25) {`	Repeats work over the specified records/items or while this condition holds: for ($start = 0; $start -lt $outletRequests.Count; $start += 25) {. Check where queries/writes occur relative to the loop.
62	`    $end = [Math]::Min($start + 24, $outletRequests.Count - 1)`	Assigns a PowerShell script variable: $end = [Math]::Min($start + 24, $outletRequests.Count - 1).

Line	Source code	Explanation / reading note
63	`    [void](Invoke-Composite $outletRequests[$start..$end])`	Continues the surrounding declaration/expression or text: [void](Invoke-Composite $outletRequests[$start..$end]). Read it with the preceding opening statement ($end = [Math]::Min($start + 24, $outletRequests.Count - 1)); it is not a standalone business operation.
64	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
65		Blank line separating logical sections; no executable operation.
66	`Write-Output 'Created 4 geographies, 4 employees, 10 beats, and 100 outlets in the Salesforce org.'`	Continues the surrounding declaration/expression or text: Write-Output 'Created 4 geographies, 4 employees, 10 beats, and 100 outlets in the Salesforce org.'. Read it with the preceding opening statement; it is not a standalone business operation.

scripts/sync-org-to-github.ps1

Operational script: sync org to github.ps1. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

47 numbered source lines | SHA-256 6c4bab6052c0ba9edd0d7817cccae3bd50d32740f4d3264ad8ecff41b78c7b0c

Line	Source code	Explanation / reading note
1	`param(`	Continues the surrounding declaration/expression or text: param(. Read it with the preceding opening statement; it is not a standalone business operation.
2	`    [string]$OrgAlias = 'sfaNewOrg',`	Assigns the right-hand expression to the named variable/property: [string]$OrgAlias = 'sfaNewOrg',. This is in-memory unless it is later persisted by an explicit call.
3	`    [string]$Branch = 'main'`	Assigns the right-hand expression to the named variable/property: [string]$Branch = 'main'. This is in-memory unless it is later persisted by an explicit call.
4	`)`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
5		Blank line separating logical sections; no executable operation.
6	`$ErrorActionPreference = 'Stop'`	Assigns a PowerShell script variable: $ErrorActionPreference = 'Stop'.
7	`$projectRoot = Split-Path -Parent $PSScriptRoot`	Assigns a PowerShell script variable: $projectRoot = Split-Path -Parent $PSScriptRoot.
8	`$salesforceCli = 'C:\Program Files\sf\bin\sf.cmd'`	Assigns a PowerShell script variable: $salesforceCli = 'C:\Program Files\sf\bin\sf.cmd'.
9		Blank line separating logical sections; no executable operation.
10	`Set-Location $projectRoot`	Continues the surrounding declaration/expression or text: Set-Location $projectRoot. Read it with the preceding opening statement; it is not a standalone business operation.
11		Blank line separating logical sections; no executable operation.
12	`if (-not (Test-Path $salesforceCli)) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if (-not (Test-Path $salesforceCli)) {.
13	`    throw 'Salesforce CLI was not found at the expected location.'`	Stops this execution path with a validation/error exception: throw 'Salesforce CLI was not found at the expected location.'. The caller/catch block decides how it is reported.
14	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

Line	Source code	Explanation / reading note
15		Blank line separating logical sections; no executable operation.
16	`Write-Host "Retrieving the SFA project metadata from $OrgAlias..."`	Continues the surrounding declaration/expression or text: Write-Host "Retrieving the SFA project metadata from $OrgAlias...". Read it with the preceding opening statement; it is not a standalone business operation.
17	`& $salesforceCli project retrieve start ```	Continues the surrounding declaration/expression or text: & $salesforceCli project retrieve start `. Read it with the preceding opening statement (Write-Host "Retrieving the SFA project metadata from $OrgAlias..."); it is not a standalone business operation.
18	` --manifest 'manifest/project-source.xml' ```	Continues the surrounding declaration/expression or text: --manifest 'manifest/project-source.xml' `. Read it with the preceding opening statement (& $salesforceCli project retrieve start `); it is not a standalone business operation.
19	` --target-org $OrgAlias ```	Continues the surrounding declaration/expression or text: --target-org $OrgAlias `. Read it with the preceding opening statement ( --manifest 'manifest/project-source.xml' `); it is not a standalone business operation.
20	`    --wait 20`	Continues the surrounding declaration/expression or text: --wait 20. Read it with the preceding opening statement (--target-org $OrgAlias `); it is not a standalone business operation.
21		Blank line separating logical sections; no executable operation.
22	`if ($LASTEXITCODE -ne 0) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) {.
23	`    throw 'Salesforce metadata retrieval failed. GitHub was not changed.'`	Stops this execution path with a validation/error exception: throw 'Salesforce metadata retrieval failed. GitHub was not changed.'. The caller/catch block decides how it is reported.
24	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
25		Blank line separating logical sections; no executable operation.
26	`git add --all`	Continues the surrounding declaration/expression or text: git add --all. Read it with the preceding opening statement; it is not a standalone business operation.
27	`if ($LASTEXITCODE -ne 0) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) {.

Line	Source code	Explanation / reading note
28	`    throw 'Git could not stage the retrieved Salesforce files.'`	Stops this execution path with a validation/error exception: throw 'Git could not stage the retrieved Salesforce files.'. The caller/catch block decides how it is reported.
29	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
30		Blank line separating logical sections; no executable operation.
31	`git diff --cached --quiet`	Continues the surrounding declaration/expression or text: git diff --cached --quiet. Read it with the preceding opening statement; it is not a standalone business operation.
32		Blank line separating logical sections; no executable operation.
33	`if ($LASTEXITCODE -eq 0) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -eq 0) {.
34	`    Write-Host 'The Salesforce org and GitHub project are already synchronized.'`	Continues the surrounding declaration/expression or text: Write-Host 'The Salesforce org and GitHub project are already synchronized.'. Read it with the preceding opening statement (if ($LASTEXITCODE -eq 0) {); it is not a standalone business operation.
35	`    exit 0`	Continues the surrounding declaration/expression or text: exit 0. Read it with the preceding opening statement (Write-Host 'The Salesforce org and GitHub project are already synchronized.'); it is not a standalone business operation.
36	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
37		Blank line separating logical sections; no executable operation.
38	`$syncTime = Get-Date -Format 'yyyy-MM-dd HH:mm:ss'`	Assigns a PowerShell script variable: $syncTime = Get-Date -Format 'yyyy-MM-dd HH:mm:ss'.
39	`git commit -m "Sync Salesforce org - $syncTime"`	Continues the surrounding declaration/expression or text: git commit -m "Sync Salesforce org - $syncTime". Read it with the preceding opening statement ($syncTime = Get-Date -Format 'yyyy-MM-dd HH:mm:ss'); it is not a standalone business operation.
40	`git push origin $Branch`	Continues the surrounding declaration/expression or text: git push origin $Branch. Read it with the preceding opening statement (git commit -m "Sync Salesforce org - $syncTime"); it is not a standalone business operation.
41		Blank line separating logical sections; no executable operation.

Line	Source code	Explanation / reading note
42	`if ($LASTEXITCODE -ne 0) {`	Conditional branch: execute the following statement/block only when this Boolean expression is true. Condition begins: if ($LASTEXITCODE -ne 0) {.
43	`    throw 'The metadata was committed locally, but the GitHub push failed.'`	Stops this execution path with a validation/error exception: throw 'The metadata was committed locally, but the GitHub push failed.'. The caller/catch block decides how it is reported.
44	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
45		Blank line separating logical sections; no executable operation.
46	`Write-Host 'Salesforce org metadata was synchronized successfully.'`	Continues the surrounding declaration/expression or text: Write-Host 'Salesforce org metadata was synchronized successfully.'. Read it with the preceding opening statement; it is not a standalone business operation.
47		Blank line separating logical sections; no executable operation.

scripts/verify-dms-schema.apex

Operational script: verify dms schema. Inspect commands in order before execution. Seed/backfill/reset/deploy scripts can write Salesforce records or local files; documentation generation does not execute them.

59 numbered source lines | SHA-256 fe35de0d1a71a50cd9a86f594032185232df1cdc38a9bebdc6881a466a73494b

Line	Source code	Explanation / reading note
1	`// Schema-only smoke test. Every temporary record is rolled back, even if an assertion fails.`	Developer comment/documentation: Schema-only smoke test. Every temporary record is rolled back, even if an assertion fails. It is not executed.
2	`Savepoint checkpoint = Database.setSavepoint();`	Creates a transaction checkpoint so later failure can roll back all command changes.
3	`try {`	Starts operations whose failure is handled by the following catch/finally blocks.
4	`    Product__c product = [SELECT Id FROM Product__c LIMIT 1];`	Assigns the right-hand expression to the named variable/property: Product__c product = [SELECT Id FROM Product__c LIMIT 1];. This is in-memory unless it is later persisted by an explicit call.
5	`    Employee__c employee = [SELECT Id FROM Employee__c WHERE Active__c = true LIMIT 1];`	Assigns the right-hand expression to the named variable/property: Employee__c employee = [SELECT Id FROM Employee__c WHERE Active__c = true LIMIT 1];. This is in-memory unless it is later persisted by an explicit call.
6	`    DMS_Distributor__c distributor = new DMS_Distributor__c(Name='DMS schema verification - temporary', Active__c=false);`	Assigns the right-hand expression to the named variable/property: DMS_Distributor__c distributor = new DMS_Distributor__c(Name='DMS schema verification - temporary', Active__c=false);. This is in-memory unless it is later persisted by an explicit call.
7	`    insert distributor;`	Performs Salesforce DML: insert distributor;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
8	`    DMS_Primary_Order__c primary = new DMS_Primary_Order__c(Distributor__c=distributor.Id, Employee__c=employee.Id, Status__c='Draft', Order_Date__c=Date.today());`	Calls the named method: DMS_Primary_Order__c primary = new DMS_Primary_Order__c(Distributor__c=distributor.Id, Employee__c=employee.Id, Status__c='Draft', Order_Date__c=Date.today());. Its implementation defines the side effect/result; use the symbol/file index to follow it.
9	`    insert primary;`	Performs Salesforce DML: insert primary;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
10	`    DMS_Primary_Order_Line__c primaryLine = new DMS_Primary_Order_Line__c(Order__c=primary.Id, Product__c=product.Id, Cases__c=2, Free_Cases__c=1, Pieces_Per_Case__c=20, Case_Price__c=100, Discount_Amount__c=10, Tax_Percent__c=5);`	Assigns the right-hand expression to the named variable/property: DMS_Primary_Order_Line__c primaryLine = new DMS_Primary_Order_Line__c(Order__c=primary.Id, Product__c=product.Id, Cases__c=2, Free_Cases__c=1, Pieces_Per_Case__c=20, Case_Price__c=100, Discount_Amount. This is in-memory unless it is later persisted by an explicit call.

Line	Source code	Explanation / reading note
11	`    insert primaryLine;`	Performs Salesforce DML: insert primaryLine;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
12	`    primaryLine = [SELECT Total_Pieces__c, Net_Amount__c FROM DMS_Primary_Order_Line__c WHERE Id=:primaryLine.Id];`	Assigns the right-hand expression to the named variable/property: primaryLine = [SELECT Total_Pieces__c, Net_Amount__c FROM DMS_Primary_Order_Line__c WHERE Id=:primaryLine.Id];. This is in-memory unless it is later persisted by an explicit call.
13	`    System.assertEquals(60, primaryLine.Total_Pieces__c, 'Case conversion');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(60, primaryLine.Total_Pieces__c, 'Case conversion');. A mismatch fails the test.
14	`    System.assertEquals(199.50, primaryLine.Net_Amount__c, 'Primary discount and tax');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(199.50, primaryLine.Net_Amount__c, 'Primary discount and tax');. A mismatch fails the test.
15		Blank line separating logical sections; no executable operation.
16	`    DMS_Goods_Receipt__c receipt = new DMS_Goods_Receipt__c(Distributor__c=distributor.Id, Primary_Order__c=primary.Id, Received_Date__c=Date.today(), Status__c='Draft');`	Calls the named method: DMS_Goods_Receipt__c receipt = new DMS_Goods_Receipt__c(Distributor__c=distributor.Id, Primary_Order__c=primary.Id, Received_Date__c=Date.today(), Status__c='Draft');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
17	`    insert receipt;`	Performs Salesforce DML: insert receipt;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
18	`    DMS_Goods_Receipt_Line__c receiptLine = new DMS_Goods_Receipt_Line__c(Goods_Receipt__c=receipt.Id, Product__c=product.Id, Batch_Number__c='SCHEMA-TEST', Received_Cases__c=2, Free_Cases__c=1, Pieces_Per_Case__c=20, Case_Cost__c=100);`	Assigns the right-hand expression to the named variable/property: DMS_Goods_Receipt_Line__c receiptLine = new DMS_Goods_Receipt_Line__c(Goods_Receipt__c=receipt.Id, Product__c=product.Id, Batch_Number__c='SCHEMA-TEST', Received_Cases__c=2, Free_Cases__c=1, Pieces_Pe. This is in-memory unless it is later persisted by an explicit call.
19	`    insert receiptLine;`	Performs Salesforce DML: insert receiptLine;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
20	`    receipt = [SELECT Total_Pieces__c, Total_Value__c FROM DMS_Goods_Receipt__c WHERE Id=:receipt.Id];`	Assigns the right-hand expression to the named variable/property: receipt = [SELECT Total_Pieces__c, Total_Value__c FROM DMS_Goods_Receipt__c WHERE Id=:receipt.Id];. This is in-memory unless it is later persisted by an explicit call.
21	`    System.assertEquals(60, receipt.Total_Pieces__c, 'Receipt quantity rollup');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(60, receipt.Total_Pieces__c, 'Receipt quantity rollup');. A mismatch fails the test.

Line	Source code	Explanation / reading note
22	`System.assertEquals(200, receipt.Total_Value__c, 'Receipt value rollup');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(200, receipt.Total_Value__c, 'Receipt value rollup');. A mismatch fails the test.
23		Blank line separating logical sections; no executable operation.
24	`DMS_Inventory__c stock = new DMS_Inventory__c(Distributor__c=distributor.Id, Product__c=product.Id, Batch_Number__c='SCHEMA-TEST', On_Hand_Pieces__c=60, Reserved_Pieces__c=10, Reorder_Level_Pieces__c=5);`	Assigns the right-hand expression to the named variable/property: DMS_Inventory__c stock = new DMS_Inventory__c(Distributor__c=distributor.Id, Product__c=product.Id, Batch_Number__c='SCHEMA-TEST', On_Hand_Pieces__c=60, Reserved_Pieces__c=10, Reorder_Level_Pieces__c=. This is in-memory unless it is later persisted by an explicit call.
25	`insert stock;`	Performs Salesforce DML: insert stock;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
26	`stock = [SELECT Available_Pieces__c, Low_Stock__c, Reserved_Pieces__c FROM DMS_Inventory__c WHERE Id=:stock.Id];`	Assigns the right-hand expression to the named variable/property: stock = [SELECT Available_Pieces__c, Low_Stock__c, Reserved_Pieces__c FROM DMS_Inventory__c WHERE Id=:stock.Id];. This is in-memory unless it is later persisted by an explicit call.
27	`System.assertEquals(50, stock.Available_Pieces__c, 'Available inventory');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(50, stock.Available_Pieces__c, 'Available inventory');. A mismatch fails the test.
28	`System.assertEquals(false, stock.Low_Stock__c, 'Low stock flag');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, stock.Low_Stock__c, 'Low stock flag');. A mismatch fails the test.
29	`stock.Reserved_Pieces__c=61;`	Assigns the right-hand expression to the named variable/property: stock.Reserved_Pieces__c=61;. This is in-memory unless it is later persisted by an explicit call.
30	`Database.SaveResult invalidStock=Database.update(stock,false);`	Performs Salesforce DML: Database.SaveResult invalidStock=Database.update(stock,false);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
31	`System.assertEquals(false, invalidStock.isSuccess(), 'Reject over-reservation');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(false, invalidStock.isSuccess(), 'Reject over-reservation');. A mismatch fails the test.
32		Blank line separating logical sections; no executable operation.
33	`DMS_Primary_Return__c primaryReturn = new DMS_Primary_Return__c(Distributor__c=distributor.Id, Employee__c=employee.Id, Primary_Order__c=primary.Id, Return_Date__c=Date.today(), Status__c='Draft');`	Calls the named method: DMS_Primary_Return__c primaryReturn = new DMS_Primary_Return__c(Distributor__c=distributor.Id, Employee__c=employee.Id, Primary_Order__c=primary.Id, Return_Date__c=Date.today(), Status__c='Draft');. Its implementation defines the side effect/result; use the symbol/file index to follow it.

Line	Source code	Explanation / reading note
34	`insert primaryReturn;`	Performs Salesforce DML: insert primaryReturn;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
35	`insert new DMS_Primary_Return_Line__c(Primary_Return__c=primaryReturn.Id, Product__c=product.Id, Cases__c=1, Pieces_Per_Case__c=20, Case_Value__c=100, Reason__c='Damaged');`	Performs Salesforce DML: insert new DMS_Primary_Return_Line__c(Primary_Return__c=primaryReturn.Id, Product__c=product.Id, Cases__c=1, Pieces_Per_Case__c=20, Case_Value__c=100, Reason__c='Damaged');. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
36	`primaryReturn=[SELECT Total_Cases__c, Total_Amount__c FROM DMS_Primary_Return__c WHERE Id=:primaryReturn.Id];`	Assigns the right-hand expression to the named variable/property: primaryReturn=[SELECT Total_Cases__c, Total_Amount__c FROM DMS_Primary_Return__c WHERE Id=:primaryReturn.Id];. This is in-memory unless it is later persisted by an explicit call.
37	`System.assertEquals(1, primaryReturn.Total_Cases__c, 'Return cases rollup');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(1, primaryReturn.Total_Cases__c, 'Return cases rollup');. A mismatch fails the test.
38	`System.assertEquals(100, primaryReturn.Total_Amount__c, 'Return amount rollup');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(100, primaryReturn.Total_Amount__c, 'Return amount rollup');. A mismatch fails the test.
39		Blank line separating logical sections; no executable operation.
40	`DMS_Credit_Note__c credit=new DMS_Credit_Note__c(Distributor__c=distributor.Id, Sales_Channel__c='Primary', Primary_Return__c=primaryReturn.Id, Credit_Date__c=Date.today(), Reason__c='Return', Status__c='Draft');`	Calls the named method: DMS_Credit_Note__c credit=new DMS_Credit_Note__c(Distributor__c=distributor.Id, Sales_Channel__c='Primary', Primary_Return__c=primaryReturn.Id, Credit_Date__c=Date.today(), Reason__c='Return', Status_. Its implementation defines the side effect/result; use the symbol/file index to follow it.
41	`insert credit;`	Performs Salesforce DML: insert credit;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
42	`insert new DMS_Credit_Note_Line__c(Credit_Note__c=credit.Id, Product__c=product.Id, Quantity__c=1, Quantity_Unit__c='Case', Unit_Credit__c=100, Tax_Percent__c=5);`	Performs Salesforce DML: insert new DMS_Credit_Note_Line__c(Credit_Note__c=credit.Id, Product__c=product.Id, Quantity__c=1, Quantity_Unit__c='Case', Unit_Credit__c=100, Tax_Percent__c=5);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
43	`credit=[SELECT Total_Amount__c FROM DMS_Credit_Note__c WHERE Id=:credit.Id];`	Assigns the right-hand expression to the named variable/property: credit=[SELECT Total_Amount__c FROM DMS_Credit_Note__c WHERE Id=:credit.Id];. This is in-memory unless it is later persisted by an explicit call.
44	`System.assertEquals(105, credit.Total_Amount__c, 'Credit total and tax');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(105, credit.Total_Amount__c, 'Credit total and tax');. A mismatch fails the test.

Line	Source code	Explanation / reading note
45		Blank line separating logical sections; no executable operation.
46	`Sales_Order__c secondary=[SELECT Id,Retailer__c FROM Sales_Order__c WHERE DMS_Distributor__c=null AND Retailer__c!=null LIMIT 1];`	Assigns the right-hand expression to the named variable/property: Sales_Order__c secondary=[SELECT Id,Retailer__c FROM Sales_Order__c WHERE DMS_Distributor__c=null AND Retailer__c!=null LIMIT 1];. This is in-memory unless it is later persisted by an explicit call.
47	`DMS_Invoice__c invoice=new DMS_Invoice__c(Distributor__c=distributor.Id, Outlet__c=secondary.Retailer__c, Sales_Order__c=secondary.Id, Invoice_Date__c=Date.today(), Status__c='Draft');`	Calls the named method: DMS_Invoice__c invoice=new DMS_Invoice__c(Distributor__c=distributor.Id, Outlet__c=secondary.Retailer__c, Sales_Order__c=secondary.Id, Invoice_Date__c=Date.today(), Status__c='Draft');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
48	`insert invoice;`	Performs Salesforce DML: insert invoice;. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
49	`insert new DMS_Invoice_Line__c(Invoice__c=invoice.Id, Product__c=product.Id, Quantity_Pieces__c=4, Unit_Price__c=25, Discount_Amount__c=10, Tax_Percent__c=5);`	Performs Salesforce DML: insert new DMS_Invoice_Line__c(Invoice__c=invoice.Id, Product__c=product.Id, Quantity_Pieces__c=4, Unit_Price__c=25, Discount_Amount__c=10, Tax_Percent__c=5);. It can invoke triggers/validation and fail; collection operations avoid one DML call per record.
50	`invoice=[SELECT Gross_Amount__c,Discount_Amount__c,Tax_Amount__c,Total_Amount__c, Balance_Due__c FROM DMS_Invoice__c WHERE Id=:invoice.Id];`	Assigns the right-hand expression to the named variable/property: invoice=[SELECT Gross_Amount__c,Discount_Amount__c,Tax_Amount__c,Total_Amount__c,Balance_Due__c FROM DMS_Invoice__c WHERE Id=:invoice.Id];. This is in-memory unless it is later persisted by an explicit call.
51	`System.assertEquals(100,invoice.Gross_Amount__c,'Invoice gross');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(100,invoice.Gross_Amount__c,'Invoice gross');. A mismatch fails the test.
52	`System.assertEquals(10,invoice.Discount_Amount__c,'Invoice discount');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(10,invoice.Discount_Amount__c,'Invoice discount');. A mismatch fails the test.
53	`System.assertEquals(4.50,invoice.Tax_Amount__c,'Invoice tax');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(4.50,invoice.Tax_Amount__c,'Invoice tax');. A mismatch fails the test.
54	`System.assertEquals(94.50,invoice.Total_Amount__c,'Invoice total');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(94.50,invoice.Total_Amount__c,'Invoice total');. A mismatch fails the test.

Line	Source code	Explanation / reading note
55	`    System.assertEquals(94.50,invoice.Balance_Due__c,'Invoice balance');`	Test assertion comparing an expected outcome to actual behavior: System.assertEquals(94.50,invoice.Balance_Due__c,'Invoice balance');. A mismatch fails the test.
56	`    System.debug('DMS_SCHEMA_SMOKE_OK: 15 assertions passed; all temporary records rolled back.');`	Calls the named method: System.debug('DMS_SCHEMA_SMOKE_OK: 15 assertions passed; all temporary records rolled back.');. Its implementation defines the side effect/result; use the symbol/file index to follow it.
57	`} finally {`	Cleanup section that runs after success or failure, for example clearing a timer or busy flag.
58	`    Database.rollback(checkpoint);`	Rolls Salesforce writes back to the saved checkpoint; prevents partial command results.
59	`}`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.

sfdx-project.json

First-party configuration & operations file: sfdx project.json. Read imports/exports and the symbol outline to locate its caller and responsibility. Detailed operations appear beside the numbered source.

12 numbered source lines | SHA-256 0a8c3f92ff8a66a8ffd5eeb194ec1a8c470dcca3fe2204beb5eb98fecf2deeb4

Line	Source code	Explanation / reading note
1	`{`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement; it is not a standalone business operation.
2	`  "packageDirectories": [`	Continues the surrounding declaration/expression or text: "packageDirectories": [. Read it with the preceding opening statement ({); it is not a standalone business operation.
3	`    {`	Continues the surrounding declaration/expression or text: {. Read it with the preceding opening statement ("packageDirectories": []); it is not a standalone business operation.
4	`      "path": "force-app",`	Continues the surrounding declaration/expression or text: "path": "force-app",. Read it with the preceding opening statement ({); it is not a standalone business operation.
5	`      "default": true`	Continues the surrounding declaration/expression or text: "default": true. Read it with the preceding opening statement ("path": "force-app",); it is not a standalone business operation.
6	`    }`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
7	`  ],`	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.
8	`  "name": "SFA Mobile Application",`	Continues the surrounding declaration/expression or text: "name": "SFA Mobile Application",. Read it with the preceding opening statement ( ],); it is not a standalone business operation.
9	`  "namespace": "",`	Continues the surrounding declaration/expression or text: "namespace": "",. Read it with the preceding opening statement ("name": "SFA Mobile Application",); it is not a standalone business operation.
10	`  "sfdcLoginUrl": "https://login.salesforce.com",`	Continues the surrounding declaration/expression or text: "sfdcLoginUrl": "https://login.salesforce.com",. Read it with the preceding opening statement ("namespace": "",); it is not a standalone business operation.
11	`  "sourceApiVersion": "65.0"`	Continues the surrounding declaration/expression or text: "sourceApiVersion": "65.0". Read it with the preceding opening statement ("sfdcLoginUrl": "https://login.salesforce.com",); it is not a standalone business operation.

Line	Source code	Explanation / reading note
12	}	Closes the surrounding block, call, array or object. Match it to the opening statement above; no independent business action.