

## MAD Experiment 5

**Aim :** To apply navigation, routing and gestures in Flutter App.

### Theory :

Flutter Navigation and Routing :

Navigation and routing are some of the core concepts of all mobile application, which allows the user to move between different pages. We know that every mobile application contains several screens for displaying different types of information. For example, an app can have a screen that contains various products. When the user taps on that product, immediately it will display detailed information about that product.

In Flutter, the screens and pages are known as routes, and these routes are just a widget. In Android, a route is similar to an Activity, whereas, in iOS, it is equivalent to a ViewController. In any mobile app, navigating to different pages defines the workflow of the application, and the way to handle the navigation is known as routing. Flutter provides a basic routing class `MaterialPageRoute` and two methods `Navigator.push()` and `Navigator.pop()` that shows how to navigate between two routes. The following steps are required to start navigation in your application.

Step 1: First, you need to create two routes.

Step 2: Then, navigate to one route from another route by using the `Navigator.push()` method.

Step 3: Finally, navigate to the first route by using the `Navigator.pop()` method.

### Gestures :

Gestures are used to interact with an application. It is generally used in touch-based devices to physically interact with the application. It can be as simple as a single tap on the screen to a more complex physical interaction like swiping in a specific direction to scrolling down an application. It is heavily used in gaming and more or less every application requires it to function as devices turn more touch-based than ever. In this article, we will discuss them in detail.

Some widely used gestures are mentioned here :

- Tap: Touching the surface of the device with the fingertip for a small duration of time period and finally releasing the fingertip.
- Double Tap: Tapping twice in a short time.
- Drag: Touching the surface of the device with the fingertip and then moving the fingertip in a steadily and finally releasing the fingertip.
- Flick: Similar to dragging, but doing it in a speedier way.
- Pinch: Pinching the surface of the device using two fingers.
- Zoom: Opposite of pinching.
- Panning: Touching the device surface with the fingertip and moving it in the desired direction without releasing the fingertip.

The GestureDetector widget in flutter is used to detect physical interaction with the application on the UI. If a widget is supposed to experience a gesture, it is kept inside the GestureDetector widget. The same widget catches the gesture and returns the appropriate action or response.

### **Below is the list of gestures and their corresponding events :**

Tap

- onTapDown
- onTapUp
- onTap
- onTapCancel Double tap
- onDoubleTap Long press
- onLongPress Vertical drag
- onVerticalDragStart
- onVerticalDragUpdate
- onVerticalDragEnd Horizontal drag
- onHorizontalDragStart
- onHorizontalDragUpdate
- onHorizontalDragEnd Pan
- onPanStart
- onPanUpdate
- onPanEnd

### **Code:**

```
class Dashboard extends StatelessWidget {
  const Dashboard({Key? key}) : super(key: key);

  @override
  Widget build(BuildContext context) {
    return Scaffold(
      appBar: AppBar(
        title: const Text('Wedding Planner Dashboard'),
        backgroundColor: Colors.purple[100],
      ),
      body: Padding(
        padding: const EdgeInsets.all(16.0),
        child: Column(
          crossAxisAlignment: CrossAxisAlignment.stretch,
          children: <Widget>[
```

```
// Logo
Padding(
  padding: const EdgeInsets.symmetric(vertical: 20.0),
  child: Image.asset(
    'wed_img.png',
    height: 150,
    width: 150,
  ),
),
// Cards
buildCard(
  context,
  title: 'Manage Events',
  icon: Icons.calendar_today,
  onTap: () {
    // Navigate to event management page
  },
),
const SizedBox(height: 10),
buildCard(
  context,
  title: 'Venues',
  icon: Icons.location_on,
  onTap: () {
    // Navigate to venues page
    Navigator.push(
      context,
      MaterialPageRoute(builder: (context) => const
VenuesPage()),
    );
  },
),
const SizedBox(height: 10),
buildCard(
  context,
  title: 'Catering',
  icon: Icons.restaurant,
  onTap: () {
    // Navigate to catering page
    Navigator.push(
```

```
        context,
        MaterialPageRoute(builder: (context) => const
CateringPage()),
      );
    },
  ),
  const SizedBox(height: 10),
  buildCard(
    context,
    title: 'Invitation',
    icon: Icons.mail,
    onTap: () {
      // Navigate to invitation types page
      Navigator.push(
        context,
        MaterialPageRoute(
          builder: (context) => const InvitationPage()),
      );
    },
  ),
],
),
),
);
}

Widget buildCard(BuildContext context,
  {required String title,
  required IconData icon,
  required VoidCallback onTap}) {
  return InkWell(
    onTap: onTap,
    child: Card(
      elevation: 4,
      shape: RoundedRectangleBorder(borderRadius:
BorderRadius.circular(10)),
      child: Padding(
        padding: const EdgeInsets.all(16.0),
        child: Row(
          children: [
```

```
        Icon(icon,
            size: 32, color: const Color.fromARGB(255, 207, 133,
220)),
        const SizedBox(width: 20),
        Text(
            title,
            style:
                const TextStyle(fontSize: 20, fontWeight:
FontWeight.bold),
        ),
        const Spacer(),
        const Icon(Icons.arrow_forward),
    ],
),
),
),
);
}
}

class VenuesPage extends StatelessWidget {
    const VenuesPage({super.key});

    @override
    Widget build(BuildContext context) {
        return Scaffold(
            appBar: AppBar(
                title: const Text('Venues'),
                backgroundColor: Colors.purple[100],
            ),
            body: Padding(
                padding: const EdgeInsets.all(16.0),
                child: Column(
                    crossAxisAlignment: CrossAxisAlignment.stretch,
                    children: <Widget>[
                        const Text(
                            'Choose Venue Type:',
                            style: TextStyle(fontSize: 18, fontWeight: FontWeight.bold),
                        ),
                        const SizedBox(height: 20),
```

```
        buildOptionCard(
          context,
          title: 'Destination Wedding',
          imageUrl: 'destination_wedding.jpg',
        ),
        const SizedBox(height: 10),
        buildOptionCard(
          context,
          title: 'Intimate Wedding',
          imageUrl: 'intimate_wedding.jpg',
        ),
        const SizedBox(height: 10),
        buildOptionCard(
          context,
          title: 'Banquet Wedding',
          imageUrl: 'banquet_wedding.jpg',
        ),
      ],
    ),
  ),
);
}

Widget buildOptionCard(BuildContext context,
  {required String title, required String imageUrl}) {
  return InkWell(
    onTap: () {
      // Handle option selection here
    },
    child: Card(
      elevation: 4,
      shape: RoundedRectangleBorder(borderRadius:
BorderRadius.circular(10)),
      child: Padding(
        padding: const EdgeInsets.all(16.0),
        child: Column(
          crossAxisAlignment: CrossAxisAlignment.start,
          children: [
            Image.asset(
              imageUrl,
```

```
        height: 150,
        width: double.infinity,
        fit: BoxFit.cover,
      ),
      const SizedBox(height: 10),
      Text(
        title,
        style:
          const TextStyle(fontSize: 16, fontWeight:
FontWeight.bold),
      ),
    ],
  ),
),
),
);
}
}

class CateringPage extends StatelessWidget {
  const CateringPage({super.key});

  @override
  Widget build(BuildContext context) {
    return Scaffold(
      appBar: AppBar(
        title: const Text('Catering'),
        backgroundColor: Colors.purple[100],
      ),
      body: Padding(
        padding: const EdgeInsets.all(16.0),
        child: Column(
          crossAxisAlignment: CrossAxisAlignment.stretch,
          children: <Widget>[
            const Text(
              'Choose Catering Type:',
              style: TextStyle(fontSize: 18, fontWeight: FontWeight.bold),
            ),
            const SizedBox(height: 20),
            buildOptionCard(
```

```
        context,
        title: 'Buffet Catering',
        imageUrl: 'buffet_catering.jpg',
      ),
      const SizedBox(height: 10),
      buildOptionCard(
        context,
        title: 'Plated Catering',
        imageUrl: 'plated_catering.jpg',
      ),
      const SizedBox(height: 10),
      buildOptionCard(
        context,
        title: 'Family Style Catering',
        imageUrl: 'family_style_catering.jpg',
      ),
    ],
  ),
),
);
}

Widget buildOptionCard(BuildContext context,
  {required String title, required String imageUrl}) {
  return InkWell(
    onTap: () {
      // Handle option selection here
    },
    child: Card(
      elevation: 4,
      shape: RoundedRectangleBorder(borderRadius:
BorderRadius.circular(10)),
      child: Padding(
        padding: const EdgeInsets.all(16.0),
        child: Column(
          crossAxisAlignment: CrossAxisAlignment.start,
          children: [
            Image.asset(
              imageUrl,
              height: 150,
```



```
        width: double.infinity,
        fit: BoxFit.cover,
      ),
      const SizedBox(height: 10),
      Text(
        title,
        style:
          const TextStyle(fontSize: 16, fontWeight:
FontWeight.bold),
      ),
    ],
  ),
),
),
);
}
}

class InvitationPage extends StatelessWidget {
  const InvitationPage({super.key});

  @override
  Widget build(BuildContext context) {
    return Scaffold(
      appBar: AppBar(
        title: const Text('Invitation Types'),
        backgroundColor: Colors.purple[100],
      ),
      body: Padding(
        padding: const EdgeInsets.all(16.0),
        child: Column(
          crossAxisAlignment: CrossAxisAlignment.stretch,
          children: <Widget>[
            const Text(
              'Choose Invitation Type:',
              style: TextStyle(fontSize: 18, fontWeight: FontWeight.bold),
            ),
            const SizedBox(height: 20),
            buildOptionCard(
              context,
```

```
        title: 'Digital Invitation',
        imageUrl: 'digital_invitation.jpg',
    ),
    const SizedBox(height: 10),
    buildOptionCard(
        context,
        title: 'Traditional Invitation',
        imageUrl: 'traditional_invitation.jpg',
    ),
    const SizedBox(height: 10),
    buildOptionCard(
        context,
        title: 'Customized Invitation',
        imageUrl: 'customized_invitation.jpg',
    ),
],
),
),
);
}
```

# Wedding Planner Dashboard

DEBUG



Manage Events



Venues




Catering



Invitation



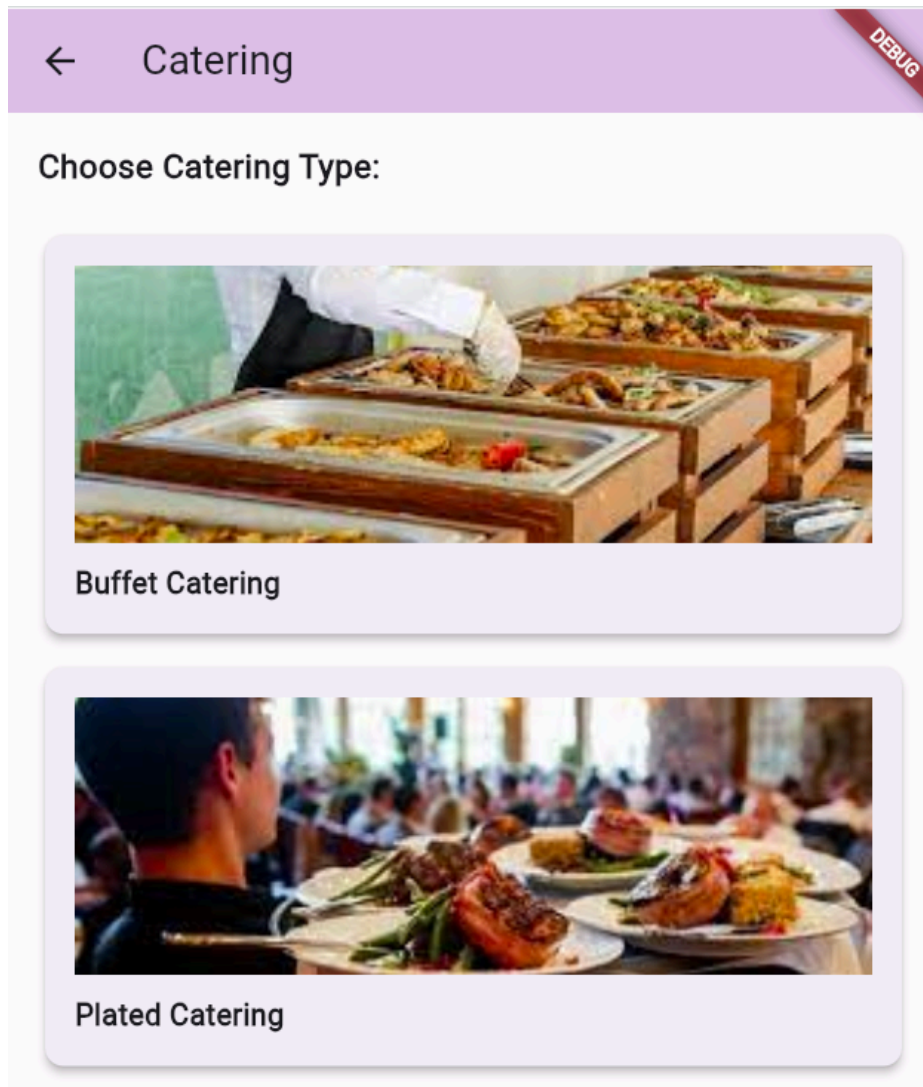

## Conclusion:

We have understood the concept of gestures, their use and implemented it in our flutter app as a search bar. Also, we created two pages and routed them in our app and further enabled navigation. The flow is smooth for our app.