
Fabric Library Variables

Migrating Fabric Data Factory pipelines across deployment environments (Dev → Test → Prod) required manual updates to workspace IDs, Lakehouse references, and connection parameters via the UI, creating risks of misconfiguration and deployment delays.

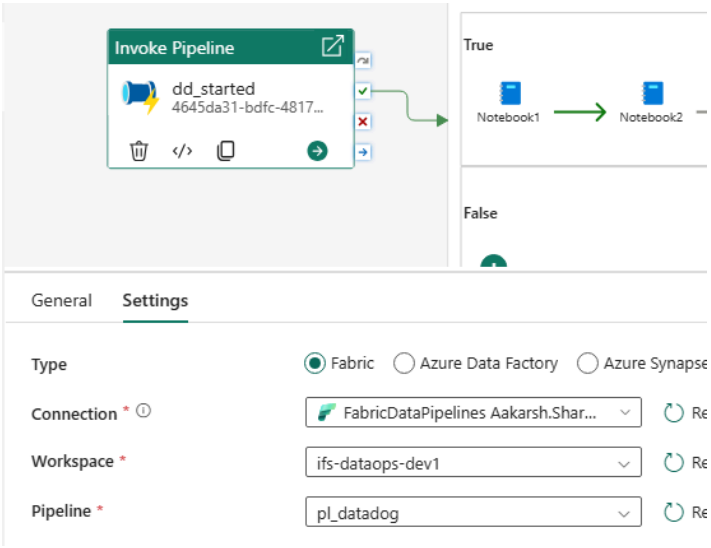


Example: Workspace and Pipeline name above is UI selected and hardcoded

Pipeline activities contained hardcoded UI bindings rather than dynamic parameters. Furthermore, requiring dedicated DevOps resource code for standard deployments was unsustainable across all project teams.

Implementation

Implemented dynamic environment configuration by utilizing **Library Variables**

All target workspace, Lakehouse, and connection parameters are dynamically resolved at runtime based on the target environment, enabling standard CI/CD pipelines to execute without manual intervention or specialized DevOps coding.

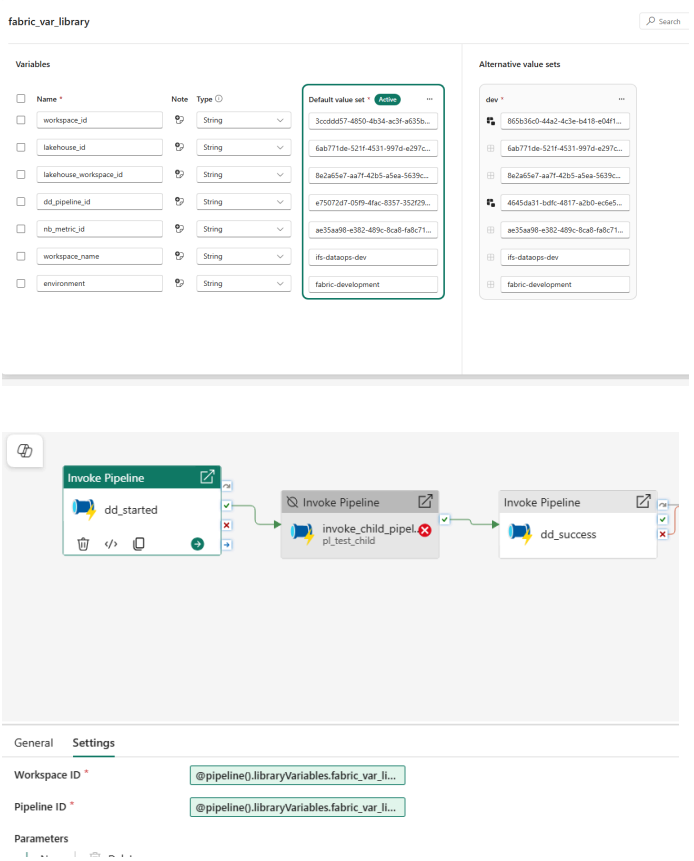

Example :Per Environment we have to select the environment set (Default Set/Dev) and it will activate those variable values as in screenshot