



1.

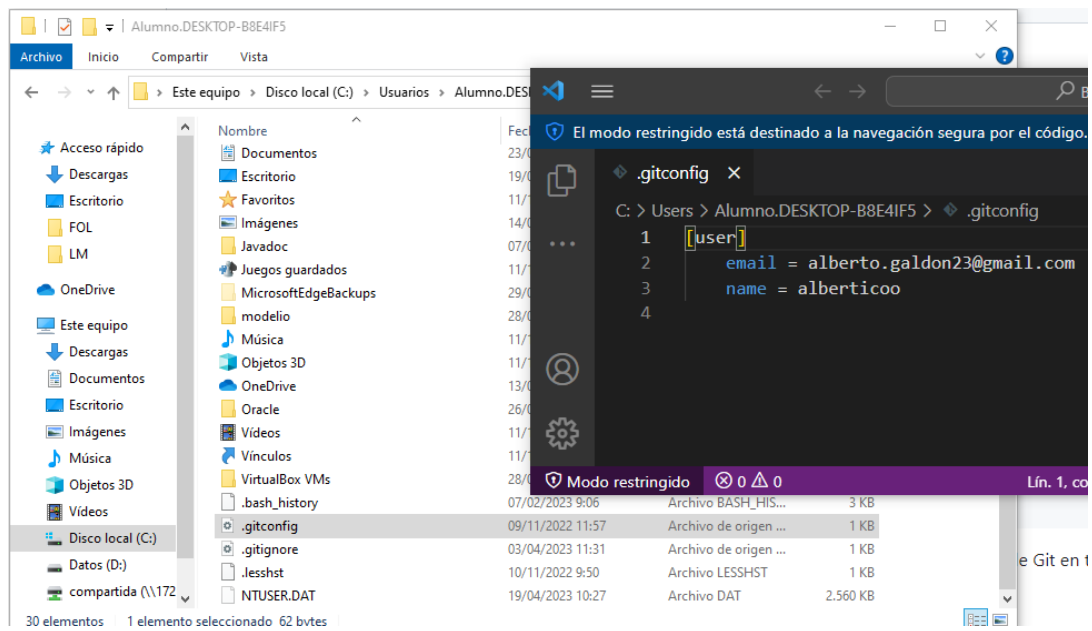

2.

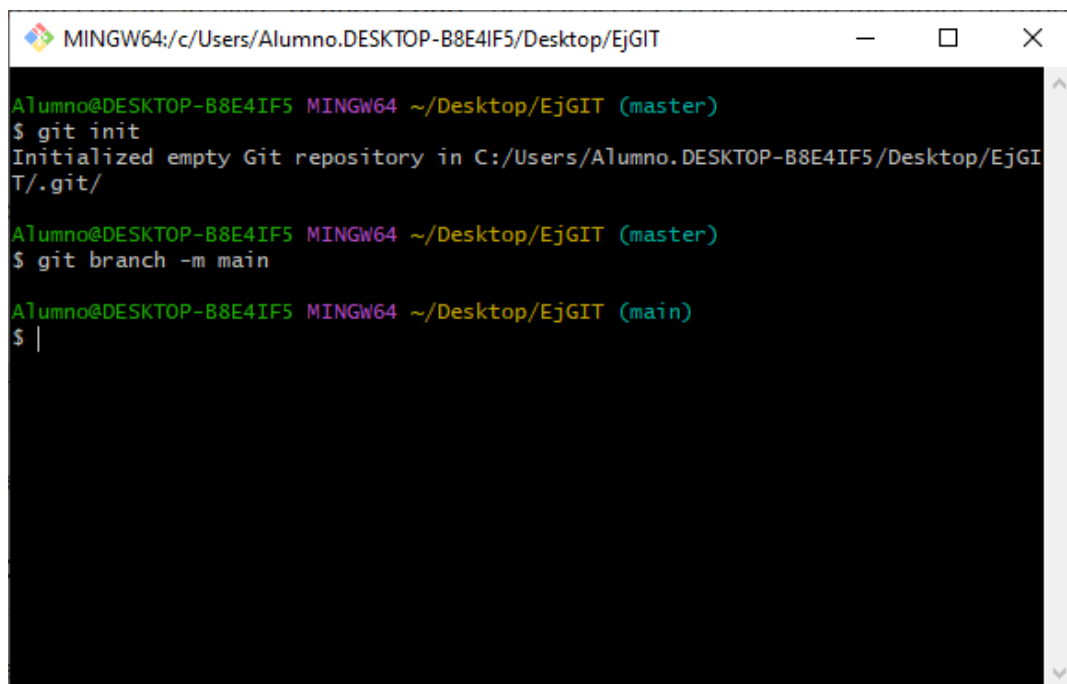

3.

```
MINGW64:/c:/Users/Alumno.DESKTOP-B8E4IF5/Desktop/EjGIT
Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT (main)
$ git log
commit a418a913055c136421afc7618ef6c204a41f73ab (HEAD -> main)
Author: albertico <alberto.galdon23@gmail.com>
Date: Wed Apr 19 11:43:35 2023 +0200

    Mi tercer commit

commit 3c40e980e3864834909b3c5035a0a2644343c9f2
Author: albertico <alberto.galdon23@gmail.com>
Date: Wed Apr 19 11:40:20 2023 +0200

    Mi segundo commit

commit ccfaef55f550296d60242d847729f1797f7ad9dc
Author: albertico <alberto.galdon23@gmail.com>
Date: Wed Apr 19 11:39:00 2023 +0200

    Mi primer commit

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT (main)
$ git log --graph
* commit a418a913055c136421afc7618ef6c204a41f73ab (HEAD -> main)
  | Author: albertico <alberto.galdon23@gmail.com>
  | Date: Wed Apr 19 11:43:35 2023 +0200
  |
  |     Mi tercer commit
  |
  * commit 3c40e980e3864834909b3c5035a0a2644343c9f2
    | Author: albertico <alberto.galdon23@gmail.com>
    | Date: Wed Apr 19 11:40:20 2023 +0200
    |
    |     Mi segundo commit
    |
    * commit ccfaef55f550296d60242d847729f1797f7ad9dc
      | Author: albertico <alberto.galdon23@gmail.com>
      | Date: Wed Apr 19 11:39:00 2023 +0200
      |
      |     Mi primer commit

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT (main)
$ git log --oneline
a418a91 (HEAD -> main) Mi tercer commit
3c40e98 Mi segundo commit
ccfaef5 Mi primer commit

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT (main)
$
```

4.

```
MINGW64:/c:/Users/Alumno.DESKTOP-B8E4IF5/Desktop/E...
Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT (main)
$ git config --global alias.tree "log --oneline"

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT (main)
$ git tree
a418a91 (HEAD -> main) Mi tercer commit
3c40e98 Mi segundo commit
ccfaef5 Mi primer commit

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT (main)
$ |
```

5.

EjGIT

Nombre	Fecha de modificación	Tipo	Tamaño
.git	19/04/2023 11:53	Carpeta de archivos	
.gitignore	19/04/2023 11:53	Archivo de origen ...	1 KB
fichero_1.php	19/04/2023 11:42	Archivo de origen ...	1 KB
fichero_2.php	19/04/2023 11:39	Archivo de origen ...	0 KB
fichero_3.php	19/04/2023 11:51	Archivo de origen ...	0 KB

```
Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT (main)
$ git status
On branch main
Untracked files:
  (use "git add <file>..." to include in what will be committed)
        .gitignore

nothing added to commit but untracked files present (use "git add"
to track)

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT (main)
$
```

6.

```
Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT (main)
$ git diff
diff --git a/fichero_1.php b/fichero_1.php
index 50f4a6a..4cb0ead 100644
--- a/fichero_1.php
+++ b/fichero_1.php
@@ -1,2 @@
-Voy a sacar un 10
\ No newline at end of file
+<?php
+echo "Hola, esto es una prueba de git diff"
\ No newline at end of file

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT (main)
$ |
```

7.

```
MINGW64/c/Users/Alumno.DESKTOP-B8E4IF5/Desktop/EjGIT
ccfaef5 Mi primer commit

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT (main)
$ git checkout ccfaef5
Note: switching to 'ccfaef5'.

You are in 'detached HEAD' state. You can look around, make experi-
mental changes and commit them, and you can discard any commits you make
in this state without impacting any branches by switching back to a branch
.

If you want to create a new branch to retain commits you create, y
ou may do so (now or later) by using -c with the switch command. Example:

    git switch -c <new-branch-name>

Or undo this operation with:

    git switch -

Turn off this advice by setting config variable advice.detachedhea
d to false

HEAD is now at ccfaef5 Mi primer commit

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT ((ccfaef5...))
$ git log --all
commit 4c348a0992b9f7565d503d90c6c47f8081b8f994 (main)
Author: alberticoo <alberto.galdon23@gmail.com>
Date: Wed Apr 19 11:55:24 2023 +0200

    Mi cuarto commit (gitignore)

commit a418a913055c136421afc7618ef6c204a41f73ab
Author: alberticoo <alberto.galdon23@gmail.com>
Date: Wed Apr 19 11:43:35 2023 +0200

    Mi tercer commit

commit 3c40e980e3864834909b3c5035a0a2644343c9f2
Author: alberticoo <alberto.galdon23@gmail.com>
Date: Wed Apr 19 11:40:20 2023 +0200

...skipping...
commit 4c348a0992b9f7565d503d90c6c47f8081b8f994 (main)
Author: alberticoo <alberto.galdon23@gmail.com>
Date: Wed Apr 19 11:55:24 2023 +0200

    Mi cuarto commit (gitignore)

commit a418a913055c136421afc7618ef6c204a41f73ab
Author: alberticoo <alberto.galdon23@gmail.com>
Date: Wed Apr 19 11:43:35 2023 +0200

    Mi tercer commit

commit 3c40e980e3864834909b3c5035a0a2644343c9f2
Author: alberticoo <alberto.galdon23@gmail.com>
Date: Wed Apr 19 11:40:20 2023 +0200

    Mi segundo commit

commit ccfaef55f50296d60242d847729f1797f7ad9dc (HEAD)
Author: alberticoo <alberto.galdon23@gmail.com>
Date: Wed Apr 19 11:39:00 2023 +0200

    Mi primer commit

~
```

8.

```
MINGW64/c/Users/Alumno.DESKTOP-B8E4IF5/Desktop/EjGIT
Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT ((22c966a...))
$ git checkout 4c348a0
Warning: you are leaving 1 commit behind, not connected to
any of your branches:

    22c966a Commit borrar

If you want to keep it by creating a new branch, this may be a goo
d time to do so with:

    git branch <new-branch-name> 22c966a

HEAD is now at 4c348a0 Mi cuarto commit (gitignore)

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT ((4c348a0...))
$ git checkout main
Switched to branch 'main'

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT (main)
$ git log --oneline
4c348a0 (HEAD -> main) HEAD@{0}: checkout: moving from 22c966a to 4c348a0
a418a91 Mi tercer commit
3c40e98 Mi segundo commit
ccfaef5 Mi primer commit

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT (main)
$ git reflog
4c348a0 (HEAD -> main) HEAD@{0}: checkout: moving from 4c348a0992b9f7565d503d90c6c47f8081b8f994 to main
4c348a0 (HEAD -> main) HEAD@{1}: checkout: moving from 22c966ac1258be4123b4e86e98a4ca4304eb0cab to 4c348a0
22c966a HEAD@{2}: commit: Commit borrar
4c348a0 (HEAD -> main) HEAD@{3}: checkout: moving from main to 4c348a0
4c348a0 (HEAD -> main) HEAD@{4}: reset: moving to 4c348a0992b9f7565d503d90c6c47f8081b8f994
4c348a0 (HEAD -> main) HEAD@{5}: checkout: moving from 4c348a0992b9f7565d503d90c6c47f8081b8f994 to main
4c348a0 (HEAD -> main) HEAD@{6}: checkout: moving from ccfaef55f50296d60242d847729f1797f7ad9dc to 4c348a0992b9f7565d503d90c6c47f8081b8f994
ccfaef5 HEAD@{7}: checkout: moving from main to ccfaef5
4c348a0 (HEAD -> main) HEAD@{8}: commit: Mi cuarto commit (gitignore)
a418a91 HEAD@{9}: commit: Mi tercer commit
3c40e98 HEAD@{10}: commit: Mi segundo commit
ccfaef5 HEAD@{11}: commit (initial): Mi primer commit

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT (main)
$
```

9.

```
MINGW64:/c/Users/Alumno.DESKTOP-B8E4IF5/Deskt...
Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT ((clase_1))
$ git tree
a418a91 (HEAD, tag: clase_1) Mi tercer commit
3c40e98 Mi segundo commit
ccfaef5 Mi primer commit

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT ((clase_1))
$ git log --all --oneline
22c966a (main) Commit borrar
4c348a0 Mi cuarto commit (gitignore)
a418a91 (HEAD, tag: clase_1) Mi tercer commit
3c40e98 Mi segundo commit
ccfaef5 Mi primer commit

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT ((clase_1))
$
```

10.

```
MINGW64:/c/Users/Alumno.DESKTOP-B8E4IF5/Deskt...
main
Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT ((clase_1))
$ git branch login

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT ((clase_1))
$ git switch login
Switched to branch 'login'
M      fichero_1.php

Alumno@DESKTOP-B8E4IF5 MINGW64 ~/Desktop/EjGIT (login)
$
```