



## one-hot state encodings

|               |                            |
|---------------|----------------------------|
| Rubik 3x3     | $S=54,  V =6$              |
| 24-puzzle     | $S=25,  V =25$             |
| maze          | $S=225,  V =4$             |
| Sokoban       | $S=64,  V =7$              |
| pendulum      | $S=3 \text{ feats},  V =-$ |
| 2048          | $S=16,  V =12$             |
| Hanoi         | $S=10,  V =3$              |
| POMDP maze    | $S=225,  V =5$             |
| Lights Out    | $S=25,  V =2$              |
| Mountain Car  | $S=3 \text{ feats},  V =-$ |
| Peg Solitaire | $S=49,  V =3$              |

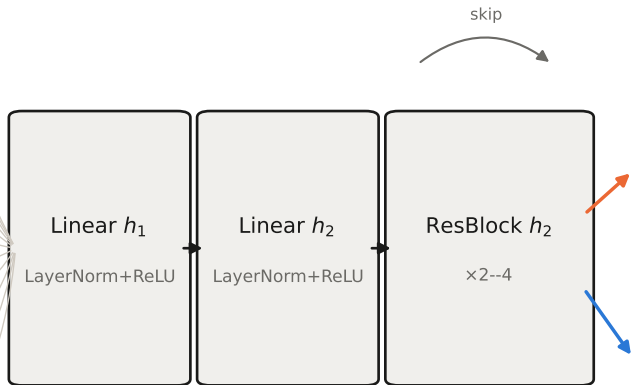

denoiser head:  $p_\theta(a|s)$   
(real Sokoban pass)



value head:  $V_\theta(s)$

scalar cost-to-go

*identical backbone across all domains and both objectives — only input width, head, and loss change*