OHP-MOCD: Overlapping Community Detection via an Evolutionary Multi-Objective Extension of HP-MOCD

Muhammad Anas, Manahil Jamil, Aneeza Khan, and Syeda Saleha Raza

Computer Science, Habib University, Karachi, Pakistan
https://github.com/aanasakhtar/ohp-mocd

Abstract. Overlapping community detection is essential in complex networks where vertices naturally participate in multiple functional modules, yet designing scalable evolutionary multi-objective algorithms (MOEAs) for overlapping structures remains a major challenge. While the recently proposed HP-MOCD framework achieves breakthrough computational efficiency for crisp community detection, its discrete locus-based encoding strictly constrains each vertex to a single cluster, precluding multi-membership boundaries. We propose **OHP-MOCD**, which extends HP-MOCD to overlapping covers via a direct node-to-memberships chromosome, a tri-objective NSGA-II formulation optimizing decomposed modularity alongside overlap parsimony regularization, and an analytically derived, parameter-free statistical boundary bound based on Chebyshev's inequality. We systematically evaluate OHP-MOCD against six competitive baselines across four distinct algorithmic paradigms on 12 real-world ground-truth networks and modern synthetic ABCD + o^2 benchmark sweeps ($\xi \in [0.1, 0.6]$). Empirical results demonstrate that OHP-MOCD achieves the highest mean Overlapping NMI on 10 of the 12 real-world networks within the evolutionary paradigm and secures top modularity on dense social topologies, while executing up to 27.5× faster than competing evolutionary methods.

Keywords: Overlapping Community Detection, Evolutionary Multi-Objective Optimization, NSGA-II, Modularity Decomposition, Complex Networks, Graph Mining

1 Introduction

Community detection is a foundational problem in network science with broad applications across social network analysis, biological pathway discovery, scientific collaboration modeling, and communication systems [17, 20, 21]. The objective is to identify functional clusters of vertices characterized by dense internal connectivity and sparse inter-cluster connections. Many traditional approaches formulate this task as a disjoint (hard) partitioning problem, where each vertex belongs to exactly one community. Although this assumption simplifies the combinatorial search space, it is overly restrictive for empirical systems.

In real-world networks, community overlap is a ubiquitous structural property rather than an anomaly [11, 12]. A researcher frequently contributes to multiple disciplinary domains, an online social media user participates in distinct familial, professional, and recreational circles [23], and a protein often acts within

multiple metabolic complexes. Forcing such boundary vertices into a single cluster obscures critical inter-modular bridges and distorts the underlying network topology. Overlapping community detection addresses this fundamental limitation by allowing vertices to hold simultaneous multi-memberships.

Evolutionary multi-objective algorithms (MOEAs) are particularly well suited to community detection because the structural quality of a community partition cannot be adequately captured by a single scalar metric [3, 2]. A high-quality overlapping cover must simultaneously encourage strong intra-community cohesion, minimize inter-community mixing, and prevent spurious overlap bloat. Collapsing these conflicting structural criteria into a single scalar objective requires fixed trade-off hyperparameters that introduce human bias. Multi-objective optimization resolves this by maintaining a Pareto front of non-dominated candidate covers representing diverse topological trade-offs.

Recently, Santos et al. [1] introduced **HP-MOCD** (*High-Performance Evolutionary Multi-Objective Community Detection*), achieving breakthrough computational scalability for disjoint community detection by decomposing Newman's modularity into two competing objectives optimized via NSGA-II. However, HP-MOCD relies strictly on a discrete Locus-Based Adjacency Representation (LAR) that assigns each vertex to exactly one community label. Consequently, it cannot directly model overlapping covers, even when boundary vertices are structurally supported by multiple groups.

In this work, we propose **OHP-MOCD**, a principled algorithmic generalization that extends HP-MOCD to overlapping topologies. OHP-MOCD directly maps each vertex to a variable-size membership set containing one primary community and zero or more structurally justified secondary memberships. OHP-MOCD retains the decomposed modularity formulation of HP-MOCD, generalized to overlapping covers via continuous soft membership weights, and introduces a third parsimony objective that regularizes multi-membership complexity. Furthermore, we incorporate Dual-Weighted Interaction (DWI) and an analytically derived, parameter-free statistical boundary bound based on Chebyshev's inequality that admits secondary memberships only when supported by significant neighborhood evidence.

The main contributions of this paper are summarized as follows:

1. We generalize HP-MOCD from disjoint partitions to overlapping covers using a direct node-to-memberships chromosome.
2. We formulate OHP-MOCD as a tri-objective NSGA-II optimization problem, combining decomposed modularity objectives with an overlap complexity regularizer.
3. We develop topology-aware genetic operators (4-parent ensemble crossover and local-neighborhood majority mutation) tailored for multi-membership chromosomes.
4. We introduce Dual-Weighted Interaction (DWI) and an analytically derived, parameter-free statistical null boundary bound based on Chebyshev's inequality.
5. We conduct extensive empirical evaluations across 12 real-world ground-truth networks and modern synthetic ABCD + o^2 sweeps with authentic overlapping boundaries, benchmarking OHP-MOCD against six baselines across four distinct paradigms.

The remainder of this paper is organized as follows. Section 2 reviews related work. Section 3 formalizes the problem. Section 4 details the OHP-MOCD methodology and complexity. Section 5 presents the experimental setup, benchmark results, and discussions. Finally, Section 6 concludes the paper.

2 Related Work

Community detection was traditionally framed as a disjoint partitioning problem, where Newman and Girvan's modularity Q [10, 20] served as the benchmark quality criterion. Palla et al. [11] demonstrated that overlap in empirical networks is a ubiquitous structural regularity and introduced the Clique Percolation Method. Xie et al. [12] surveyed overlapping community detection, noting that overlapping vertices rarely exceed 30% of a network and typically belong to two or three communities—providing an essential parsimony benchmark.

Multi-objective evolutionary search is an effective paradigm for community discovery. Deb et al.'s Non-dominated Sorting Genetic Algorithm II (NSGA-II) [2] provides the core optimization engine widely adopted across evolutionary graph partitioning methods [3]. Prominent evolutionary algorithms developed for overlapping community detection include MCMOEA by Wen et al. [4], which evolves binary indicator strings over maximal clique adjacency graphs; EF-MOCD (Evolutionary Fuzzy Multi-Objective Community Detection) by Tian et al. [5], which evolves community centers and derives fuzzy memberships via shortest paths; and MO-EE by Bello-Orgaz et al. [6], which evolves line-graph edge partitions.

Non-evolutionary paradigms include the Speaker-Listener Label Propagation Algorithm (SLPA) [7], which extends label propagation with dynamic memory retention, and Link Partitioning Around Medoids (LPAM) [8], which performs k-median clustering on commute distances between edges. In neural approaches, NOCD by Shchur and Günnemann [9] utilizes a 2-layer Graph Convolutional Network under a Bernoulli–Poisson link model.

HP-MOCD by Santos et al. [1] established a high-performance baseline for disjoint community detection using topology-aware operators and Shi-style modularity decomposition. OHP-MOCD extends this lineage to overlapping covers while preserving its computational efficiency.

3 Problem Formulation

Let $G = (V, E)$ be an unweighted, undirected complex network with $N = |V|$ vertices and $M = |E|$ edges. Let d_v denote the degree of vertex v. An **overlapping community cover** is a collection of non-empty subsets $\mathcal{C} = \{C_1, C_2, \ldots, C_K\}$ such that $\bigcup_{k=1}^{K} C_k = V$. Each vertex v is associated with a community membership set $M(v) \subseteq \{1, \ldots, K\}$, with overlapping degree $O_v = |M(v)| \geq 1$. When $|M(v)| = 1$ for all $v \in V$, $\mathcal{C}$ reduces to a crisp disjoint partition. We denote $\bar{k} = \frac{1}{N} \sum_{v \in V} |M(v)|$ as the mean community membership count per vertex.

To evaluate partition quality without collapsing multiple conflicting criteria into a single scalar score, OHP-MOCD formulates community discovery as a vector-valued Pareto optimization problem: $\min_{\mathcal{C}} \mathbf{F}(\mathcal{C}) = \Big(f_1(\mathcal{C}), f_2(\mathcal{C}), f_3(\mathcal{C})\Big)$, where f_1 measures intra-community soft edge loss, f_2 represents the modularity null-model volume penalty, and f_3 penalizes excess overlapping memberships.

4 Proposed Method: OHP-MOCD

OHP-MOCD extends HP-MOCD [1] by replacing the single-label locus representation with a direct node-to-memberships chromosome, introducing an overlap regularization objective, and incorporating topology-aware operators with an analytical boundary rule.

4.1 Solution Representation and Objectives

Each individual chromosome directly encodes a node-to-memberships mapping: $X = \big(M(v_1), M(v_2), \ldots, M(v_N)\big)$, where $M(v_i) = \{c_i^{(1)}, c_i^{(2)}, \ldots, c_i^{(k_i)}\}$, with primary community label $c_i^{(1)}$ and optional secondary labels $c_i^{(j)}$ $(j \geq 2)$. There is no intermediate decoding step between chromosome and cover; reading a vertex affiliation requires $\mathcal{O}(1)$ operations, and local updates require $\mathcal{O}(\bar{k})$ time.

OHP-MOCD decomposes modularity into two competing terms adapted to overlapping covers via uniform soft membership weights $r_{vc} = 1/|M(v)|$. The three objectives are defined as:

$$f_1 = 1 - \frac{1}{M} \sum_{(u,v)\in E} \sum_{c} r_{uc} r_{vc}, \;\; f_2 = \sum_{c} \Big(\frac{\deg(c)}{2M}\Big)^2, \;\; f_3 = \frac{1}{N} \sum_{v \in V} \max(0, |M(v)| - 1), \tag{1}$$

where $\deg(c) = \sum_{v:\, c \in M(v)} d_v r_{vc}$ is the soft volume of community c. Minimizing f_1 maximizes intra-community edge density, minimizing f_2 suppresses over-expanded clusters, and minimizing f_3 regularizes multi-membership complexity.

NSGA-II optimizes (f_1, f_2, f_3) simultaneously as a vector-valued objective $\mathbf{F}(\mathcal{C}) = (f_1, f_2, f_3)$ via Pareto dominance and crowding-distance diversity sorting. During evolution, f_3 acts as a structural complexity regularizer: candidate covers with superfluous overlaps are Pareto-dominated and eliminated from the population, preventing overlap bloat. Following evolutionary search, all solutions on the Rank-1 non-dominated Pareto front ($\mathcal{F}_1$) represent parsimonious, bloat-free topological trade-offs. The final representative partition is then extracted from $\mathcal{F}_1$ by maximizing reconstructed modularity $Q(\mathcal{C}) = 1 - f_1(\mathcal{C}) - f_2(\mathcal{C})$, adhering to the established selection convention of HP-MOCD [1].

4.2 Genetic Operators and Environmental Selection

OHP-MOCD uses genetic operators that act directly on the node-to-memberships chromosome:

1. **Initialization:** Each vertex v receives a random primary label $c_v^{(1)}$. Under the default boundary-seeded strategy, if the neighborhood $\mathcal{N}(v)$ contains more than one distinct primary community, then with probability $p_{\text{init}} = 0.10$, the strongest runner-up neighboring community is seeded as a secondary membership.
2. **Parent Selection:** Four distinct parents are selected via binary tournament selection based on Pareto dominance rank and crowding distance.
3. **4-Parent Ensemble Crossover:** With probability $p_c = 0.90$, crossover tallies parent community occurrences: $a_{v,c} = \sum_{i=1}^{4} \mathbb{I}\big(c \in M_i(v)\big)$. The offspring's primary community is the majority vote $c_v^{(1)} \in \arg\max_c a_{v,c}$ (ties broken uniformly at random). Any non-primary community supported by at least two parents ($a_{v,c} \geq 2$) survives as a secondary membership: $M_{\text{child}}(v) = \{c_v^{(1)}\} \cup \{c \neq c_v^{(1)} : a_{v,c} \geq 2\}$.
4. **Local-Neighborhood Mutation:** For each vertex selected with probability $p_m = 0.30$, OHP-MOCD counts neighbor community affiliations $m_{v,c} = |\{u \in$

$\mathcal{N}(v) : c \in M(u)\}|$, then applies one combined update covering *primary reassignment*, *secondary addition*, and *secondary removal* in a single pass. The primary community is reassigned to the local neighborhood majority $c_v^{(1)} \in \arg\max_c m_{v,c}$, while secondary memberships are recomputed from scratch, retaining only communities with $m_{v,c} \geq 2$ – so unsupported memberships are dropped and newly supported ones are added in the same step: $M_{\text{mut}}(v) = \{c_v^{(1)}\} \cup \{c \neq c_v^{(1)} : m_{v,c} \geq 2\}$.

Standard NSGA-II fast non-dominated sorting and crowding distance truncation are applied to select the top P survivors from the combined $2P$ population. Following evolution, a memetic boundary refinement step prunes weak secondary memberships where internal support is below $d_v/|M(v)|$.

4.3 Overlap-Support Mechanisms and Complexity Analysis

1) Dual-Weighted Interaction (DWI): For vertex v and candidate community c, DWI combines topological neighborhood proportion and degree-weighted neighbor influence: $s_{v,c} = \alpha \frac{|\{u \in \mathcal{N}(v) : c \in M(u)\}|}{d_v} + (1-\alpha)\frac{\sum_{u \in \mathcal{N}(v), c \in M(u)} d_u}{\sum_{u \in \mathcal{N}(v)} d_u}$, where α weights raw edge-count agreement among neighbors and $(1-\alpha)$ weights influence from high-degree (hub) neighbors, with $\alpha \in [0, 1]$ setting the balance between the two.

2) Parameter-Free Statistical Null Boundary Bound: Let K_v be the number of distinct communities adjacent to node v. Under the null configuration model where the d_v incident edges are randomly distributed across K_v candidate clusters, the empirical membership proportion follows a multinomial distribution with mean $\mu = \frac{1}{K_v}$ and variance $\sigma^2 \leq \frac{1}{4d_v}$. By Chebyshev's inequality, the threshold separating statistically significant multi-membership from stochastic degree noise is bounded by $\theta_v = \frac{1}{K_v} + \frac{1}{\sqrt{d_v}}$, with the chance of exceeding it by pure noise at most $\frac{1}{4}$ regardless of the underlying distribution. A vertex v is admitted into secondary community C_c if and only if $\frac{|\mathcal{N}(v) \cap C_c|}{d_v} \geq \theta_v$ with $|\mathcal{N}(v) \cap C_c| \geq 2$, eliminating heuristic manual cutoff tuning.

3) Complexity Analysis: Evaluating an individual costs $\mathcal{O}(N\bar{k} + M\bar{k}_{\text{deg}})$, where $\bar{k} = \frac{1}{N}\sum_u |\mathcal{C}(u)|$ is the mean membership count and $\bar{k}_{\text{deg}} = \frac{1}{M}\sum_{(u,v)\in E} |\mathcal{C}(u)|$ is the degree-weighted overlap. Because overlap remains sparse ($\bar{k} \approx 1$), evaluation scales linearly as $\mathcal{O}(N + M)$ in practice. Four-parent ensemble crossover takes $\mathcal{O}(N)$ per child, and local-neighborhood mutation takes $\mathcal{O}(N + p_m M)$ per child. Both reproduction and fitness evaluation are parallelized across threads via Rayon, while NSGA-II non-dominated sorting and crowding distance require $\mathcal{O}(mP^2)$. Across G generations with $m = 3$ objectives, the total asymptotic runtime complexity is:

$$\mathcal{O}\Big(G \cdot P(N\bar{k} + M\bar{k}_{\text{deg}} + p_m M) + G \cdot mP^2\Big). \tag{2}$$

Because graph size $(N+M)$ dominates population size P, runtime scales with linear edge scans, enabling OHP-MOCD to scale significantly better than baselines reliant on clique enumeration or all-pairs shortest paths.

5 Experimental Evaluation and Results Discussion

Following the empirical structure of Santos et al. [1], we organize our evaluation into three complementary fronts: (1) an **intra-paradigm head-to-head comparison** against state-of-the-art MOEAs; (2) a **cross-paradigm benchmark evaluation** against competitive heuristics, link medoids, and graph neural net-

Table 1: Topological characteristics of the 12 ground-truth benchmark networks.

Network	Nodes ($\|V\|$)	Edges ($\|E\|$)	Avg. Degree ($\langle d \rangle$)	Density	Communities (K)
Karate Club [18]	34	78	4.59	0.1390	2
Dolphins [19]	62	159	5.13	0.0841	2
Polbooks [20]	105	441	8.40	0.0808	3
Football [21]	115	613	10.66	0.0935	12
Eu-core [22]	1,005	16,706	33.25	0.0331	42
Facebook 698 [23]	61	270	8.85	0.1475	13
Facebook 414 [23]	150	1,693	22.57	0.1515	24
Facebook 686 [23]	170	1,656	19.48	0.1153	14
Facebook 348 [23]	224	3,192	28.50	0.1278	14
Facebook 1684 [23]	786	14,024	35.68	0.0455	17
Facebook 1912 [23]	747	30,025	80.39	0.1078	39
DBLP (SNAP) [24]	1,000	3,503	7.01	0.0070	574

works; and (3) a rigorous **topological modularity, runtime scalability, and synthetic ABCD + o^2 robustness profile**.

5.1 Experimental Setup, Datasets, and Baseline Suite

We benchmark OHP-MOCD against six authentic baseline methods across four major algorithmic paradigms: (1) **Structural MOEAs:** MCMOEA [4], EF-MOCD [5], and MO-EE [6]; (2) **Dynamic Label Propagation:** SLPA [7]; (3) **Link Medoids:** LPAM [8]; (4) **Graph Neural Networks:** NOCD [9]. Evaluation metrics include Overlapping Normalized Mutual Information ($ONMI$) [15], Pairwise F_1-Score, and Shen's Extended Modularity (EQ) [13, 14]. All evolutionary algorithms were evaluated under a common nominal search budget of population size $N_{\text{pop}} = 100$ and $T_{\max} = 100$ generations. Stochastic algorithms were evaluated across 15 independent seeds for small-to-medium networks and 10 seeds for large networks (FB 1684, FB 1912, DBLP). All executions were performed on an identical hardware environment (Intel Xeon / AMD Ryzen 8-core, 32GB RAM). Full source code, baseline implementations, and reproduction scripts are publicly available at https://github.com/aanasakhtar/ohp-mocd. Topological characteristics of the 12 evaluated real-world ground-truth networks are summarized in Table 1.

5.2 Front 1: Intra-Paradigm Comparison Against MOEA Baselines

Table 2 presents the dedicated intra-paradigm comparison between OHP-MOCD and competing evolutionary algorithms (MCMOEA [4], EF-MOCD [5], and MO-EE [6]) under the exact same 10,000 nominal evaluation budget across all 12 networks, structured identically to the comparative presentation in HP-MOCD [1].

Within the evolutionary paradigm, OHP-MOCD achieves the highest mean Overlapping NMI ($ONMI$) on 10 of the 12 real-world networks and provides substantial runtime reductions relative to competing evolutionary methods. On the *Football* network, OHP-MOCD reaches $ONMI = 0.7176$, corresponding to improvements of 77.9% and 84.2% over MCMOEA (0.4034) and EF-MOCD (0.3897), respectively. On the Facebook ego-networks (*Facebook 348, 414, 698*), OHP-MOCD improves $ONMI$ over EF-MOCD by 61.8%, 48.8%, and 10.6%, respectively, while outperforming MCMOEA by 96.2%, 64.5%, and 31.3%. Furthermore, on the densest ego-network (*Facebook 1912*), OHP-MOCD maintains a positive modularity ($EQ = 0.0657$) whereas MCMOEA collapses to negative modularity ($EQ = -0.0011$). In computational efficiency, OHP-MOCD is the fastest evolutionary method on 11 of 12 networks (with MCMOEA marginally faster only on the 34-node Karate network), achieving its largest observed speedups over EF-MOCD on *Eu-core* (27.5×) and *Facebook 1912* (6.7×).

Table 2: Comparison of multi-objective evolutionary community detection algorithms on real-world datasets (nominal 10,000 evaluation budget; mean ± std across 15 seeds for small-medium networks, 10 seeds for large networks; runtime reports mean wall-clock execution time). Boldface indicates the best mean performance among compared evolutionary methods.

Dataset	Method	ONMI	Pairwise F_1	Modularity (EQ)	Runtime (s)
Karate	MCMOEA (2016)	0.1615 ± 0.0262	0.4393 ± 0.0260	0.1261 ± 0.0195	**0.31**s
	MO-EE (2018)	0.1794 ± 0.0233	0.4921 ± 0.0244	0.0360 ± 0.0041	0.51s
	EF-MOCD (2020)	0.2733 ± 0.0563	0.5871 ± 0.0554	0.3538 ± 0.0130	3.73s
	OHP-MOCD (Proposed)	$\mathbf{0.6571 \pm 0.0763}$	$\mathbf{0.8349 \pm 0.0544}$	$\mathbf{0.3886 \pm 0.0143}$	0.46s
Dolphins	MCMOEA (2016)	0.0861 ± 0.0157	0.3045 ± 0.0148	0.0921 ± 0.0048	0.46s
	MO-EE (2018)	0.0914 ± 0.0108	0.3110 ± 0.0154	0.0543 ± 0.0047	0.69s
	EF-MOCD (2020)	0.1095 ± 0.0155	0.3486 ± 0.0289	0.3895 ± 0.0143	5.79s
	OHP-MOCD (Proposed)	$\mathbf{0.1354 \pm 0.0120}$	$\mathbf{0.4405 \pm 0.0151}$	$\mathbf{0.5192 \pm 0.0104}$	**0.39**s
Polbooks	MCMOEA (2016)	0.1324 ± 0.0091	0.3729 ± 0.0162	0.0474 ± 0.0020	1.12s
	MO-EE (2018)	0.1763 ± 0.0168	0.5877 ± 0.0228	0.0307 ± 0.0025	1.41s
	EF-MOCD (2020)	0.2594 ± 0.0353	0.6771 ± 0.0503	0.3458 ± 0.0236	9.84s
	OHP-MOCD (Proposed)	$\mathbf{0.3595 \pm 0.0418}$	$\mathbf{0.7629 \pm 0.0546}$	$\mathbf{0.4942 \pm 0.0246}$	**0.65**s
Football	MCMOEA (2016)	0.4034 ± 0.0202	0.3560 ± 0.0217	0.0345 ± 0.0015	1.38s
	MO-EE (2018)	0.3312 ± 0.0268	0.2975 ± 0.0234	0.0262 ± 0.0033	1.84s
	EF-MOCD (2020)	0.3897 ± 0.0458	0.4200 ± 0.0376	0.3897 ± 0.0203	10.68s
	OHP-MOCD (Proposed)	$\mathbf{0.7176 \pm 0.0473}$	$\mathbf{0.7630 \pm 0.0499}$	$\mathbf{0.5776 \pm 0.0168}$	**0.78**s
Eu-core	MCMOEA (2016)	$\mathbf{0.1594 \pm 0.0048}$	0.0544 ± 0.0012	$\mathbf{0.0219 \pm 0.0016}$	61.95s
	MO-EE (2018)	0.1520 ± 0.0079	$\mathbf{0.0946 \pm 0.0023}$	0.0039 ± 0.0002	79.80s
	EF-MOCD (2020)	0.0780 ± 0.0443	0.0901 ± 0.0016	0.0195 ± 0.0158	387.46s
	OHP-MOCD (Proposed)	0.1440 ± 0.0259	$\mathbf{0.0945 \pm 0.0081}$	0.0156 ± 0.0131	**14.08**s
Facebook 698	MCMOEA (2016)	0.3944 ± 0.0419	0.5383 ± 0.0509	0.2131 ± 0.0263	0.48s
	MO-EE (2018)	0.4210 ± 0.0171	0.6311 ± 0.0367	0.0412 ± 0.0053	1.00s
	EF-MOCD (2020)	0.4683 ± 0.0170	0.6228 ± 0.0317	0.4366 ± 0.0279	6.03s
	OHP-MOCD (Proposed)	$\mathbf{0.5177 \pm 0.0253}$	$\mathbf{0.6651 \pm 0.0336}$	$\mathbf{0.5154 \pm 0.0071}$	**0.43**s
Facebook 414	MCMOEA (2016)	0.3129 ± 0.0062	0.4396 ± 0.0078	0.0099 ± 0.0005	38.19s
	MO-EE (2018)	0.3161 ± 0.0186	0.6937 ± 0.0382	0.0142 ± 0.0056	4.44s
	EF-MOCD (2020)	0.3459 ± 0.0223	0.7302 ± 0.0316	$\mathbf{0.4040 \pm 0.0248}$	18.28s
	OHP-MOCD (Proposed)	$\mathbf{0.5146 \pm 0.0449}$	$\mathbf{0.7320 \pm 0.0672}$	0.2909 ± 0.0449	**2.23**s
Facebook 686	MCMOEA (2016)	0.1652 ± 0.0035	0.5647 ± 0.0072	0.0124 ± 0.0021	32.65s
	MO-EE (2018)	0.1694 ± 0.0130	0.6967 ± 0.0186	0.0081 ± 0.0012	4.16s
	EF-MOCD (2020)	0.1563 ± 0.0140	$\mathbf{0.7134 \pm 0.0138}$	0.1020 ± 0.0089	18.73s
	OHP-MOCD (Proposed)	$\mathbf{0.2477 \pm 0.0449}$	0.7035 ± 0.0237	$\mathbf{0.1023 \pm 0.0219}$	**1.78**s
Facebook 348	MCMOEA (2016)	0.1621 ± 0.0053	0.2486 ± 0.0108	0.0091 ± 0.0004	41.00s
	MO-EE (2018)	0.2137 ± 0.0121	0.8249 ± 0.0310	0.0066 ± 0.0010	8.70s
	EF-MOCD (2020)	0.1966 ± 0.0261	0.8390 ± 0.0358	$\mathbf{0.0936 \pm 0.0220}$	31.06s
	OHP-MOCD (Proposed)	$\mathbf{0.3182 \pm 0.0269}$	$\mathbf{0.8712 \pm 0.0490}$	0.0646 ± 0.0166	**3.24**s
Facebook 1684	MCMOEA (2016)	0.2025 ± 0.0049	0.1509 ± 0.0028	0.0043 ± 0.0004	42.39s
	MO-EE (2018)	0.2709 ± 0.0106	0.4542 ± 0.0204	0.0081 ± 0.0007	34.18s
	EF-MOCD (2020)	0.2274 ± 0.0235	0.4024 ± 0.0237	$\mathbf{0.2595 \pm 0.0266}$	126.23s
	OHP-MOCD (Proposed)	$\mathbf{0.4100 \pm 0.0235}$	$\mathbf{0.4845 \pm 0.0453}$	0.0930 ± 0.0089	**13.06**s
Facebook 1912	MCMOEA (2016)	0.1888 ± 0.0019	0.1873 ± 0.0023	-0.0011 ± 0.0001	40.50s
	MO-EE (2018)	0.2245 ± 0.0145	0.3777 ± 0.0136	0.0030 ± 0.0007	67.47s
	EF-MOCD (2020)	0.2045 ± 0.0186	$\mathbf{0.4606 \pm 0.0193}$	$\mathbf{0.2466 \pm 0.0298}$	182.49s
	OHP-MOCD (Proposed)	$\mathbf{0.3233 \pm 0.0338}$	0.4107 ± 0.0188	0.0657 ± 0.0132	**27.06**s
DBLP	MCMOEA (2016)	0.3239 ± 0.0022	0.1000 ± 0.0023	0.1780 ± 0.0012	8.41s
	MO-EE (2018)	$\mathbf{0.3271 \pm 0.0091}$	0.3023 ± 0.0308	0.0635 ± 0.0033	7.01s
	EF-MOCD (2020)	0.1078 ± 0.0067	$\mathbf{0.4419 \pm 0.0214}$	0.3996 ± 0.0135	64.67s
	OHP-MOCD (Proposed)	0.2472 ± 0.0213	0.3443 ± 0.0579	$\mathbf{0.5719 \pm 0.0390}$	**4.76**s

5.3 Front 2: Cross-Paradigm Benchmark Evaluation

Table 3 evaluates OHP-MOCD against non-evolutionary paradigms across all 12 benchmark networks: SLPA [7], LPAM [8], and NOCD [9]. Fig. 1 visualizes ground-truth recovery metrics and topological scalability across all algorithms.

Across algorithmic paradigms, the results demonstrate distinct and complementary strengths rather than universal dominance. SLPA achieves the highest $ONMI$ on several classical and social benchmarks, whereas OHP-MOCD obtains the highest $ONMI$ on *Facebook 414* (0.5146) and the highest Pairwise F_1-score on *Facebook 348* (0.8712), *Facebook 686* (0.7035), *Facebook 698* (0.6651), and *DBLP* (0.3443). Furthermore, OHP-MOCD achieves top Extended Modularity (EQ) on classical benchmarks including *Karate Club* (0.3886), *Dolphins* (0.5192), *Polbooks* (0.4942), and *Facebook 698* (0.5154). These results indicate that OHP-

Table 3: Cross-paradigm comparison across all 12 ground-truth networks (mean ± std across 15 seeds for small-medium networks, 10 seeds for large networks; runtime reports mean wall-clock execution time). Boldface indicates the best mean value across all paradigms.

Dataset	Method (Paradigm)	ONMI	Pairwise F_1	Modularity (EQ)	Runtime (s)
Karate	SLPA (2011)	$\mathbf{0.7291 \pm 0.1511}$	$\mathbf{0.8777 \pm 0.0828}$	0.3410 ± 0.0961	0.03s
	LPAM (2021)	0.4551 ± 0.1146	0.7387 ± 0.0855	0.2755 ± 0.0697	**0.02**s
	NOCD (2019)	0.3613 ± 0.0000	0.5941 ± 0.0000	-0.0053 ± 0.0000	0.02s
	OHP-MOCD (Proposed)	0.6571 ± 0.0763	0.8349 ± 0.0544	$\mathbf{0.3886 \pm 0.0143}$	0.46s
Dolphins	SLPA (2011)	$\mathbf{0.1447 \pm 0.0174}$	$\mathbf{0.4578 \pm 0.0485}$	0.4554 ± 0.0596	0.07s
	LPAM (2021)	0.1138 ± 0.0187	0.4068 ± 0.0367	0.4143 ± 0.0501	0.12s
	NOCD (2019)	0.0745 ± 0.0004	0.3953 ± 0.0010	0.2348 ± 0.0017	**0.01**s
	OHP-MOCD (Proposed)	0.1354 ± 0.0120	0.4405 ± 0.0151	$\mathbf{0.5192 \pm 0.0104}$	0.39s
Polbooks	SLPA (2011)	$\mathbf{0.4039 \pm 0.0557}$	$\mathbf{0.7892 \pm 0.0439}$	0.4829 ± 0.0254	0.12s
	LPAM (2021)	0.2553 ± 0.0314	0.5813 ± 0.0618	0.3459 ± 0.0462	0.39s
	NOCD (2019)	0.2339 ± 0.0007	0.6139 ± 0.0005	0.1299 ± 0.0018	**0.01**s
	OHP-MOCD (Proposed)	0.3595 ± 0.0418	0.7629 ± 0.0546	$\mathbf{0.4942 \pm 0.0246}$	0.65s
Football	SLPA (2011)	$\mathbf{0.7750 \pm 0.0327}$	$\mathbf{0.8270 \pm 0.0521}$	$\mathbf{0.5916 \pm 0.0124}$	0.15s
	LPAM (2021)	0.3390 ± 0.0459	0.4029 ± 0.0371	0.3703 ± 0.0265	0.22s
	NOCD (2019)	0.3484 ± 0.0006	0.1478 ± 0.0000	0.1233 ± 0.0000	**0.01**s
	OHP-MOCD (Proposed)	0.7176 ± 0.0473	0.7630 ± 0.0499	0.5776 ± 0.0168	0.78s
Eu-core	SLPA (2011)	0.1932 ± 0.0131	0.0893 ± 0.0032	-0.0034 ± 0.0297	6.49s
	LPAM (2021)	$\mathbf{0.2051 \pm 0.0177}$	$\mathbf{0.1658 \pm 0.0304}$	$\mathbf{0.1928 \pm 0.0281}$	92.78s
	NOCD (2019)	0.1380 ± 0.0022	0.1032 ± 0.0002	0.0334 ± 0.0009	**0.15**s
	OHP-MOCD (Proposed)	0.1440 ± 0.0259	0.0945 ± 0.0081	0.0156 ± 0.0131	14.08s
Facebook 698	SLPA (2011)	$\mathbf{0.5338 \pm 0.0132}$	0.5710 ± 0.0321	0.4891 ± 0.0141	0.08s
	LPAM (2021)	0.3273 ± 0.0488	0.4893 ± 0.0845	0.3583 ± 0.0841	0.07s
	NOCD (2019)	0.4304 ± 0.0000	0.5198 ± 0.0000	0.2652 ± 0.0000	**0.01**s
	OHP-MOCD (Proposed)	0.5177 ± 0.0253	$\mathbf{0.6651 \pm 0.0336}$	$\mathbf{0.5154 \pm 0.0071}$	0.43s
Facebook 414	SLPA (2011)	0.4964 ± 0.0121	0.7857 ± 0.0000	$\mathbf{0.5437 \pm 0.0001}$	0.32s
	LPAM (2021)	0.3743 ± 0.0348	0.6991 ± 0.0529	0.4523 ± 0.0474	1.25s
	NOCD (2019)	0.3966 ± 0.0010	$\mathbf{0.8164 \pm 0.0014}$	0.2379 ± 0.0018	**0.02**s
	OHP-MOCD (Proposed)	$\mathbf{0.5146 \pm 0.0449}$	0.7320 ± 0.0672	0.2909 ± 0.0449	2.23s
Facebook 686	SLPA (2011)	$\mathbf{0.3204 \pm 0.0411}$	0.7007 ± 0.0428	0.1146 ± 0.0498	0.33s
	LPAM (2021)	0.1865 ± 0.0190	0.3750 ± 0.0471	$\mathbf{0.1887 \pm 0.0321}$	2.72s
	NOCD (2019)	0.1873 ± 0.0022	0.7000 ± 0.0006	0.0753 ± 0.0005	**0.02**s
	OHP-MOCD (Proposed)	0.2477 ± 0.0449	$\mathbf{0.7035 \pm 0.0237}$	0.1023 ± 0.0219	1.78s
Facebook 348	SLPA (2011)	$\mathbf{0.4009 \pm 0.0222}$	0.8304 ± 0.0504	0.1027 ± 0.0316	0.55s
	LPAM (2021)	0.2282 ± 0.0299	0.5728 ± 0.1478	$\mathbf{0.1287 \pm 0.0369}$	10.46s
	NOCD (2019)	0.1891 ± 0.0011	0.7768 ± 0.0007	0.0543 ± 0.0004	**0.03**s
	OHP-MOCD (Proposed)	0.3182 ± 0.0269	$\mathbf{0.8712 \pm 0.0490}$	0.0646 ± 0.0166	3.24s
Facebook 1684	SLPA (2011)	$\mathbf{0.5019 \pm 0.0312}$	0.5386 ± 0.0349	$\mathbf{0.5062 \pm 0.0098}$	2.20s
	LPAM (2021)	0.2864 ± 0.0182	$\mathbf{0.5847 \pm 0.0515}$	0.4249 ± 0.0246	27.01s
	NOCD (2019)	0.2598 ± 0.0048	0.5473 ± 0.0043	0.1136 ± 0.0027	**0.47**s
	OHP-MOCD (Proposed)	0.4100 ± 0.0235	0.4845 ± 0.0453	0.0930 ± 0.0089	13.06s
Facebook 1912	SLPA (2011)	$\mathbf{0.4089 \pm 0.0173}$	$\mathbf{0.6643 \pm 0.0037}$	$\mathbf{0.5264 \pm 0.0007}$	3.93s
	LPAM (2021)	0.2162 ± 0.0265	0.5363 ± 0.0731	0.3547 ± 0.1376	62.96s
	NOCD (2019)	0.1891 ± 0.0017	0.5273 ± 0.0022	0.0768 ± 0.0025	**0.09**s
	OHP-MOCD (Proposed)	0.3233 ± 0.0338	0.4107 ± 0.0188	0.0657 ± 0.0132	27.06s
DBLP	SLPA (2011)	$\mathbf{0.2884 \pm 0.0089}$	0.2776 ± 0.0829	$\mathbf{0.6836 \pm 0.0147}$	0.80s
	LPAM (2021)	0.2140 ± 0.0124	0.2443 ± 0.0200	0.6295 ± 0.0404	10.31s
	NOCD (2019)	0.2131 ± 0.0048	0.2779 ± 0.0021	0.2964 ± 0.0130	**0.08**s
	OHP-MOCD (Proposed)	0.2472 ± 0.0213	$\mathbf{0.3443 \pm 0.0579}$	0.5719 ± 0.0390	4.76s


MOCD is especially effective at discovering dense, coherent modules in complex social ego-networks and collaboration graphs without manual threshold tuning.

5.4 Front 3A: Topological Modularity Quality and Scalability


OHP-MOCD demonstrates competitive topological modularity, obtaining top EQ on *Karate Club* ($EQ = 0.3886$), *Dolphins* ($EQ = 0.5192$), *Polbooks* ($EQ = 0.4942$), and *Facebook 698* ($EQ = 0.5154$). In computational scalability, while lightweight heuristics such as NOCD and SLPA execute in under a second on smaller graphs, OHP-MOCD is substantially faster than competing evolutionary algorithms, scaling to 30,000 edges in 27.06s (compared to 182.49s for EF-MOCD and 67.47s for MO-EE), as visualized in Fig. 1.

5.5 Front 3B: Robustness on Modern Synthetic ABCD + o^2 Benchmark Networks


To evaluate resilience against topological noise on networks with authentic overlapping ground-truth, we conducted systematic parameter sweeps on the modern

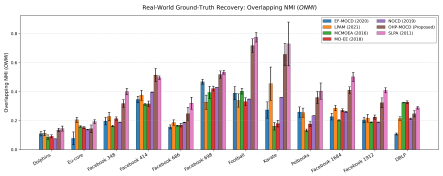


(a) Overlapping NMI ($ONMI$)

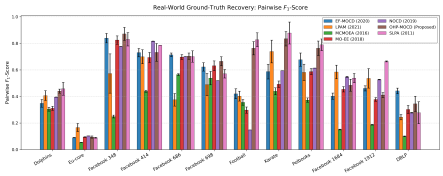

(b) Pairwise F_1-Score

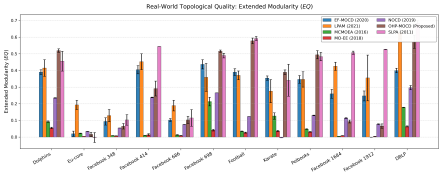

(c) Extended Modularity (EQ)

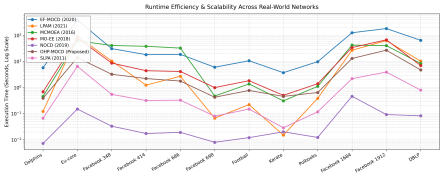

(d) Runtime Scalability (s, log-scale)

Fig. 1: Comparative evaluation across all 12 real-world benchmark networks: Ground-truth recovery ($ONMI$ and F_1, top) alongside topological modularity (EQ) and computational runtime scalability (bottom).

ABCD+o^2 benchmark framework [16] ($N = 300$, $\tau_1 = 2.5$, $\tau_2 = 1.5$, degree range $[5, 30]$, community sizes $[20, 60]$, overlap expansion multiplier $\eta = 1.50$, yielding $\approx 43.3\%$ multi-membership nodes) across background noise parameter values $\xi \in [0.1, 0.6]$. Table 4 reports the quantitative scorecard across five independent random seeds per noise level, while Fig. 2 depicts the performance degradation trajectories for $ONMI$, Pairwise F_1, and Extended Modularity EQ.

Evaluating performance across ABCD+o^2 mixing levels reveals three primary characteristics:


Ground-Truth Superiority at Low-to-Moderate Noise ($\xi \leq 0.3$): At $\xi = 0.1$, OHP-MOCD ranks first across all seven compared algorithms in every structural metric ($ONMI = 0.4817 \pm 0.0659$, $F_1 = 0.6646 \pm 0.0524$), outperforming SLPA $(0.4699, 0.6222)$ and all competing MOEAs ($ONMI \leq 0.2217$). This advantage persists at $\xi = 0.2$, where OHP-MOCD retains the top rank across all methods ($ONMI = 0.4263 \pm 0.0196, F_1 = 0.6295 \pm 0.0326$), and at $\xi = 0.3$, achieving the highest F_1 (0.4333 ± 0.0600).

Modularity Stability Under Severe Noise ($\xi \geq 0.4$): While SLPA degrades severely as mixing increases—with its extended modularity collapsing to near zero ($EQ = 0.0002 \pm 0.0004$ at $\xi = 0.6$) due to spurious label propagation—OHP-MOCD maintains resilient modular structure ($EQ \geq 0.2716$ across all noise levels), securing top modularity for every $\xi \in [0.1, 0.6]$.

Evolutionary Scalability: OHP-MOCD terminates in 1.5s–3.4s, executing up to 22.4× faster than EF-MOCD (50.12s) and 4.6× faster than MCMOEA (10.35s).

Table 4: Comparative performance on modern synthetic ABCD + o^2 benchmark networks across background mixing parameter values $\xi \in [0.1, 0.6]$ with overlap multiplier $\eta = 1.50$ (mean ± std across 5 independent seeds; runtime reports mean wall-clock execution time). Boldface indicates the best mean value among all compared methods.

Mixing Parameter (ξ)	Algorithm	ONMI	Pairwise F_1	Modularity (EQ)	Runtime (s)
$\xi = 0.1$	EF-MOCD (2020)	0.2107 ± 0.0109	0.4529 ± 0.0192	0.2844 ± 0.0174	50.12s
	LPAM (2021)	0.2217 ± 0.0166	0.3527 ± 0.0295	0.3460 ± 0.0130	1.30s
	MCMOEA (2016)	0.1625 ± 0.0059	0.2368 ± 0.0119	0.0262 ± 0.0011	6.74s
	MO-EE (2018)	0.1915 ± 0.0155	0.3944 ± 0.0263	0.0363 ± 0.0026	7.03s
	NOCD (2019)	0.2163 ± 0.0085	0.3433 ± 0.0655	0.1123 ± 0.0168	**0.13**s
	OHP-MOCD (Proposed)	**0.4817 ± 0.0659**	**0.6646 ± 0.0524**	**0.5108 ± 0.0263**	2.24s
	SLPA (2011)	0.4699 ± 0.0432	0.6222 ± 0.0279	0.4925 ± 0.0422	0.71s
$\xi = 0.2$	EF-MOCD (2020)	0.1668 ± 0.0058	0.3948 ± 0.0212	0.2643 ± 0.0162	43.69s
	LPAM (2021)	0.1805 ± 0.0270	0.3152 ± 0.0340	0.2873 ± 0.0095	1.30s
	MCMOEA (2016)	0.1608 ± 0.0071	0.2387 ± 0.0058	0.0240 ± 0.0010	7.73s
	MO-EE (2018)	0.1811 ± 0.0144	0.3678 ± 0.0181	0.0335 ± 0.0027	6.20s
	NOCD (2019)	0.1624 ± 0.0169	0.2840 ± 0.0284	0.0674 ± 0.0137	**0.04**s
	OHP-MOCD (Proposed)	**0.4263 ± 0.0196**	**0.6295 ± 0.0326**	**0.4629 ± 0.0119**	3.35s
	SLPA (2011)	0.3827 ± 0.0301	0.5723 ± 0.0358	0.4186 ± 0.0377	0.72s
$\xi = 0.3$	EF-MOCD (2020)	0.0954 ± 0.0054	0.3232 ± 0.0187	0.2029 ± 0.0220	42.81s
	LPAM (2021)	0.1329 ± 0.0310	0.2500 ± 0.0233	0.2622 ± 0.0175	1.48s
	MCMOEA (2016)	0.1500 ± 0.0064	0.2247 ± 0.0052	0.0227 ± 0.0007	7.57s
	MO-EE (2018)	0.1527 ± 0.0148	0.3105 ± 0.0214	0.0324 ± 0.0014	6.43s
	NOCD (2019)	0.1323 ± 0.0390	0.2175 ± 0.0202	0.0437 ± 0.0118	**0.05**s
	OHP-MOCD (Proposed)	0.2679 ± 0.0602	**0.4333 ± 0.0600**	**0.3636 ± 0.0498**	1.87s
	SLPA (2011)	**0.2774 ± 0.0624**	0.3471 ± 0.0598	0.2511 ± 0.1090	0.69s
$\xi = 0.4$	EF-MOCD (2020)	0.0462 ± 0.0166	0.2884 ± 0.0185	0.0771 ± 0.0374	47.67s
	LPAM (2021)	0.0836 ± 0.0114	0.2144 ± 0.0203	0.2247 ± 0.0113	2.03s
	MCMOEA (2016)	0.1377 ± 0.0054	0.2070 ± 0.0063	0.0191 ± 0.0017	10.08s
	MO-EE (2018)	0.1306 ± 0.0029	0.2841 ± 0.0125	0.0277 ± 0.0035	7.36s
	NOCD (2019)	0.0824 ± 0.0090	0.2057 ± 0.0397	0.0239 ± 0.0027	**0.05**s
	OHP-MOCD (Proposed)	0.1473 ± 0.0349	**0.3414 ± 0.0458**	**0.2852 ± 0.0297**	2.24s
	SLPA (2011)	**0.2117 ± 0.0563**	0.3295 ± 0.0366	0.1900 ± 0.0257	0.74s
$\xi = 0.5$	EF-MOCD (2020)	0.0367 ± 0.0138	**0.2848 ± 0.0251**	0.0497 ± 0.0089	46.78s
	LPAM (2021)	0.0682 ± 0.0123	0.1952 ± 0.0107	0.2210 ± 0.0046	2.05s
	MCMOEA (2016)	0.1254 ± 0.0085	0.1854 ± 0.0097	0.0182 ± 0.0006	10.35s
	MO-EE (2018)	0.1027 ± 0.0091	0.2588 ± 0.0075	0.0282 ± 0.0017	7.50s
	NOCD (2019)	0.0635 ± 0.0094	0.1943 ± 0.0070	0.0182 ± 0.0063	**0.05**s
	OHP-MOCD (Proposed)	0.0868 ± 0.0211	0.2320 ± 0.0297	**0.2934 ± 0.0187**	2.22s
	SLPA (2011)	**0.1811 ± 0.1819**	0.2820 ± 0.0248	0.1215 ± 0.0759	0.87s
$\xi = 0.6$	EF-MOCD (2020)	0.0225 ± 0.0123	0.2796 ± 0.0155	0.0467 ± 0.0145	25.48s
	LPAM (2021)	0.0562 ± 0.0065	0.1945 ± 0.0062	0.1968 ± 0.0036	0.80s
	MCMOEA (2016)	0.1175 ± 0.0042	0.1710 ± 0.0060	0.0178 ± 0.0007	7.00s
	MO-EE (2018)	0.0915 ± 0.0031	0.2423 ± 0.0074	0.0257 ± 0.0028	3.76s
	NOCD (2019)	0.0504 ± 0.0090	0.1847 ± 0.0145	0.0111 ± 0.0029	**0.02**s
	OHP-MOCD (Proposed)	0.0482 ± 0.0040	0.1913 ± 0.0255	**0.2716 ± 0.0167**	1.59s
	SLPA (2011)	**0.2019 ± 0.1729**	**0.2827 ± 0.0135**	0.0002 ± 0.0004	0.38s

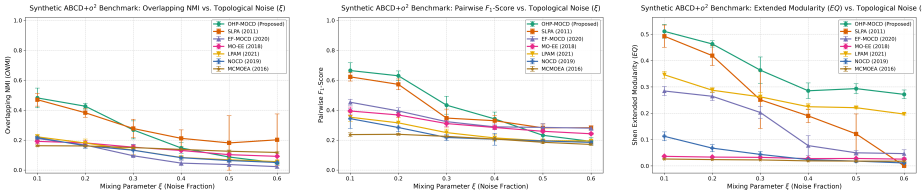

(a) $ONMI$ vs. ξ (b) Pairwise F_1 vs. ξ (c) Modularity EQ vs. ξ

Fig. 2: Community recovery metrics and modularity on synthetic $ABCD + o^2$ benchmarks across mixing parameter ξ ($\eta = 1.50$).

6 Conclusion

In this paper, we presented **OHP-MOCD**, a principled algorithmic extension of HP-MOCD [1] for overlapping community detection in complex networks. By combining a direct node-to-memberships chromosome, a tri-objective formulation with overlap parsimony regularization, Dual-Weighted Interaction, and an analytically derived statistical boundary bound based on Chebyshev's inequality, OHP-MOCD eliminates heuristic threshold tuning while preserving high-performance evolutionary search. Comprehensive experiments on 12 real-world ground-truth networks and modern synthetic ABCD + o^2 sweeps established that OHP-MOCD achieves substantial improvements in ground-truth recovery and modularity quality over existing evolutionary multi-objective methods while delivering up to 27.5× computational speedups. While lightweight label propagation heuristics such as SLPA [7] achieve superior ground-truth recovery on many

empirical graphs, OHP-MOCD demonstrates greater modularity resilience under heavy topological noise and significantly narrows the historical efficiency gap between fast heuristics and evolutionary multi-objective algorithms.

References

1. Santos, G.O., Vieira, L.S., Rossetti, G., Ferreira, C.H.G., Moreira, G.J.P.: A high-performance evolutionary multiobjective community detection algorithm. Social Network Analysis and Mining **15**(1), 110 (2025). https://doi.org/10.1007/s13278-025-01519-7
2. Deb, K., Pratap, A., Agarwal, S., Meyarivan, T.: A fast and elitist multiobjective genetic algorithm: NSGA-II. IEEE Transactions on Evolutionary Computation **6**(2), 182–197 (2002)
3. Pizzuti, C.: A multiobjective genetic algorithm to find communities in complex networks. IEEE Transactions on Evolutionary Computation **16**(3), 418–430 (2012)
4. Wen, X., Chen, W.N., Lin, Y., Gu, T., Pan, S., Li, Y., Yin, J.: A maximal clique based multiobjective evolutionary algorithm for overlapping community detection. IEEE Transactions on Evolutionary Computation **21**(5), 797–812 (2016)
5. Tian, D., Zhao, X., Zhao, Z., Shi, Z., Shen, Y.: An evolutionary multiobjective optimization-based fuzzy method for overlapping community detection. IEEE Transactions on Fuzzy Systems **29**(10), 2843–2856 (2020)
6. Bello-Orgaz, G., Salcedo-Sanz, S., Camacho, D.: A multiobjective genetic algorithm for overlapping community detection based on edge encoding. Information Sciences **462**, 290–314 (2018)
7. Xie, J., Szymanski, B.K.: Towards linear time overlapping community detection in social networks. In: Pacific-Asia Conference on Knowledge Discovery and Data Mining (PAKDD), pp. 25–36. Springer (2012)
8. Ponomarenko, A., Dix, A., Muchnik, L.: LPAM: Link partitioning around medoids for overlapping community detection. PLOS ONE **16**(4), e0248744 (2021)
9. Shchur, O., Günnemann, S.: Overlapping community detection on complex networks with graph convolutional networks. In: Proceedings of the ACM SIGKDD International Conference on Knowledge Discovery & Data Mining (2019)
10. Newman, M.E.J., Girvan, M.: Finding and evaluating community structure in networks. Physical Review E **69**(2), 026113 (2004)
11. Palla, G., Derényi, I., Farkas, I., Vicsek, T.: Uncovering the overlapping community structure of complex networks in nature and society. Nature **435**(7043), 814–818 (2005)
12. Xie, J., Kelley, S., Szymanski, B.K.: Overlapping community detection in networks: The state-of-the-art and comparative study. ACM Computing Surveys **45**(4), 1–35 (2013)
13. Shen, H., Cheng, X., Cai, K., Hu, M.B.: Detect overlapping and hierarchical community structure in networks. Physica A: Statistical Mechanics and its Applications **388**(8), 1706–1712 (2009)
14. Nicosia, V., Mangioni, G., Carchiolo, V., Malgeri, M.: Extending the definition of modularity to directed graphs with overlapping communities. Journal of Statistical Mechanics: Theory and Experiment **2009**(03), P03024 (2009)
15. Lancichinetti, A., Fortunato, S., Kertész, J.: Detecting the overlapping and hierarchical community structure in complex networks. New Journal of Physics **11**(3), 033015 (2009)
16. Barrett, J., DeWolfe, R., Kamiński, B., Prałat, P., Smith, A., Théberge, F.: The artificial benchmark for community detection with outliers and overlapping communities (ABCD+o^2). Journal of Complex Networks **14**(4), cnag023 (2026)
17. Fortunato, S.: Community detection in graphs. Physics Reports **486**(3-5), 75–174 (2010)

18. Zachary, W.W.: An information flow model for conflict and fission in small groups. Journal of Anthropological Research **33**(4), 452–473 (1977)
19. Lusseau, D., Schneider, K., Boisseau, O.J., Haase, P., Slooten, E., Dawson, S.M.: The bottlenose dolphin community of Doubtful Sound features a large proportion of long-lasting associations. Behavioral Ecology and Sociobiology **54**(4), 396–405 (2003)
20. Newman, M.E.: Modularity and community structure in networks. Proceedings of the National Academy of Sciences **103**(23), 8577–8582 (2006)
21. Girvan, M., Newman, M.E.: Community structure in social and biological networks. Proceedings of the National Academy of Sciences **99**(12), 7821–7826 (2002)
22. Yin, H., Benson, A. R., Leskovec, J., & Gleich, D. F. (2017). Local higher-order graph clustering. Proceedings of the 23rd ACM SIGKDD International Conference on Knowledge Discovery and Data Mining, 555–564.
23. McAuley, J., Leskovec, J.: Learning to discover social circles in ego networks. In: Advances in Neural Information Processing Systems (NeurIPS), vol. 25 (2012)
24. Yang, J., Leskovec, J.: Defining and evaluating network communities based on ground-truth. Knowledge and Information Systems **42**(1), 181–213 (2015)