



# Computer Graphics I

## Project Manual

---

**Aanchal Sharma**

Aanchal\_Sharma@Student.Uml.Edu



# INDEX

Topic	Page No.
<b>Abstract</b>	2
<b>Introduction</b>	2
<b>Analysis and Design</b>	3
Week 1	1
Week 2	4
Week 3	5
Week 4	8
Week 5	14
Week 6	18
<b>Conclusion</b>	22
<b>References</b>	23

Aanchal Sharma

AANCHAL\_SHARMA@STUDENT.UML.EDU

## Introduction

The project will employ the use of WebGL which is a JavaScript API for rendering interactive 2D and 3D graphics within any compatible web browser without the use of plug-ins. WebGL is integrated completely into all the web standards of the browser, allowing GPU-accelerated usage of physics and image processing and effects as part of the web page canvas. WebGL elements can be mixed with other HTML elements and composited with other parts of the page or page background. Due to this reason I am choosing to work with it. The project will be able to render user defined images in 3D and also provide the ability to

- Transform the object
- View the object from multiple views
- Transform the lighting and shadowing of the object
- Generate different projection of the object
- Change the perspective projection vanishing points
- Create texture/bump/environmental mappings of the object

## Requirement:

All you need is to open a Web Brower and a computer to view the following html pages.

# Analysis and Design


## Week 1:

Please refer:

[http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject\\_v1/finalProject.html](http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject_v1/finalProject.html)

I created the full working model of front and side view of my dream house.


### Front View:

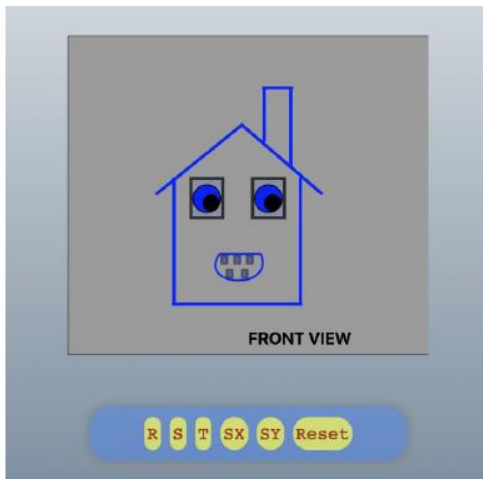

Select R to rotate the view; S for scaling, T for translation; SX for Skewing X-axis; SY for Y-axis Skew and Reset to enter the state representing the natural state.

### Side View:

Select R to rotate the view; S for scaling, T for translation; SX for Skewing X-axis; SY for Y-axis Skew and Reset to enter the state representing the natural state.

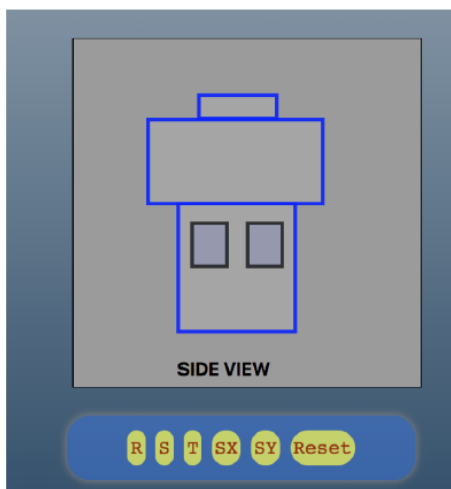


I have svgs in html for the front view of my dream house and rear view of my dream house. I have some global parameters to perform translation, rotation, scaling, and shearing. Everytime the function is called, it uses to jquery and the css function is used to display the effects. I also have a reset option.

## **Week 2:**

Please refer:

[http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject\\_v2/2dTransformations.html](http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject_v2/2dTransformations.html).

### **Top View:**

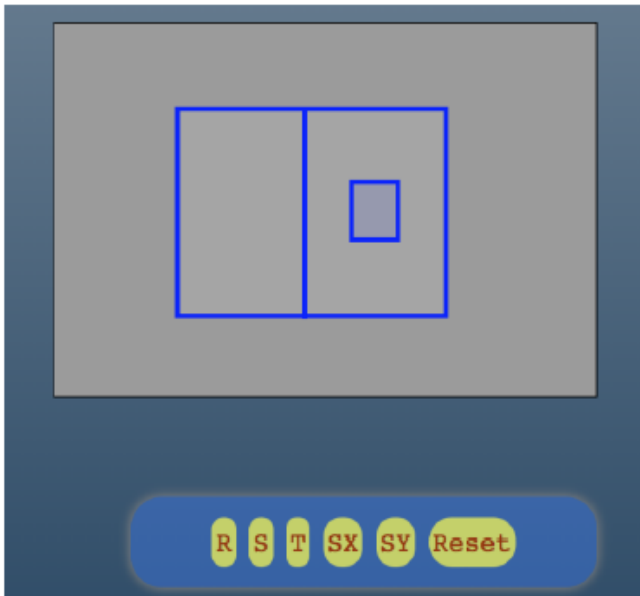


I created the full working model of top view of my dream house. Select R to rotate the view; S for scaling, T for translation; SX for Skewing X-axis; SY for Y-axis Skew and Reset to enter the state representing the natural state.

### **Planar geometric projections:**

I also added a html page to display various planar geometric projections for a cube which we studied in class. In order to view, please refer:


[http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject\\_v2/projections.html](http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject_v2/projections.html)

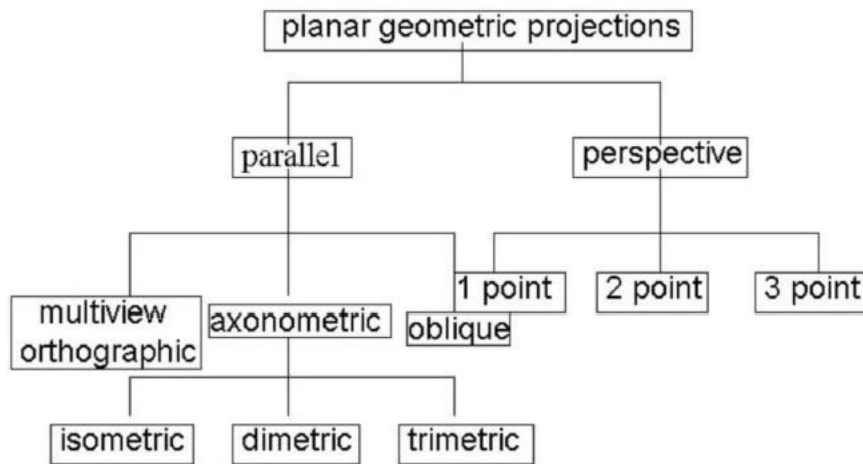


I added the top view of my dream house and the various projections of a cube.  
 2dTransformations.html deals with all the 2 Dimensional Transformations of dream house and  
 Projections.html has the various Geometric Projections of cube.

### Week 3:

1) I created a 3D Transformation of a cube. For that please refer [3dCube.html](#) file




[3dCube.html](#)



[3DMouse.html](#)

2) I created a 3D Transformation of an object. The transformation changes with the mouse pointer. To view please open the [3DMouse.html](#) file

3) Created a floating object for a hut. To view please refer [3DFloatingHouse.html](#) file

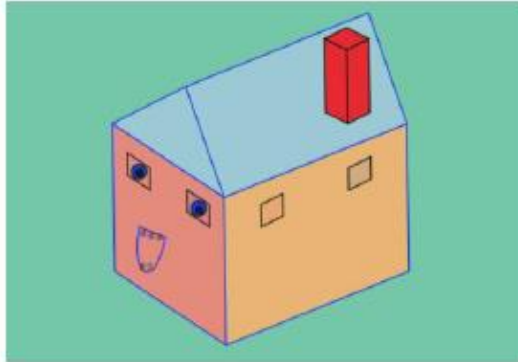

`3DFloatingHouse.html`

4) Implemented 3D View of a room. The view changes with the movement of mouse. To view please refer [room.html](#) file. This is a 3D conversion application.

Some of the 3D conversion properties are:

1. Transform
2. Transform-origin
3. Perspective
4. Perspective-origin
5. Transform-style
6. Backface-visibility

The initial view looks something like:



`room.html`

This is nothing but a room's wall.

Click anywhere on the wall/screen and you will be redirected inside the room.



The inside view of the room



## **Week 4:**

This week I implanted three pages using Three JS. All the JavaScript files used are present in js/ folder. Apart from this, I used audio tag to provide some nice background music to both the pages.

### **Page1: Periodic Table**

The Tags used in creation of this webpage are: HTML5, javascript, canvas, three.js, animation, colors. The script files used here are:

- three.js
- tween.min.js
- TrackballControls.js
- CSS3DRenderer.js

All the periodic tables are saved in a variable called table. And with the help x, y and z axis I'm displaying the periodic elements with different div's. Further, I used vector variables for displaying the data in table, sphere, helix and grid form. Check out the online demo at [http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject\\_v4/periodicTable.html](http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject_v4/periodicTable.html)

H																	He
Li	Be											B	C	N	O	F	Ne
Na	Mg											Al	Si	P	S	Cl	Ar
K	Ca	Sc	Ti	V	Cr	Mn	Fe	Co	Ni	Cu	Zn	Ga	Ge	As	Se	Br	Kr
Rb	Sr	Y	Zr	Nb	Mo	Tc	Ru	Rh	Pd	Ag	Cd	In	Sn	Sb	Te	I	Xe
Cs	Ba		Hf	Ta	W	Re	Os	Ir	Pt	Au	Hg	Tl	Pb	Bi	Po	At	Rn
Fr	Ra		Rf	Db	Sg	Bh	Hs	Mt	Ds	Rg	Cn	Nh	Fl	Mc	Lv	Ts	Og
La	Ce	Pr	Nd	Pm	Sm	Eu	Gd	Tb	Dy	Ho	Er	Tm	Yb	Lu			
Ac	Th	Pa	U	Np	Pu	Am	Cm	Bk	Cf	Es	Fm	Md	No	Lr			


TABLE

SPHERE


HELIX

GRID


Table View

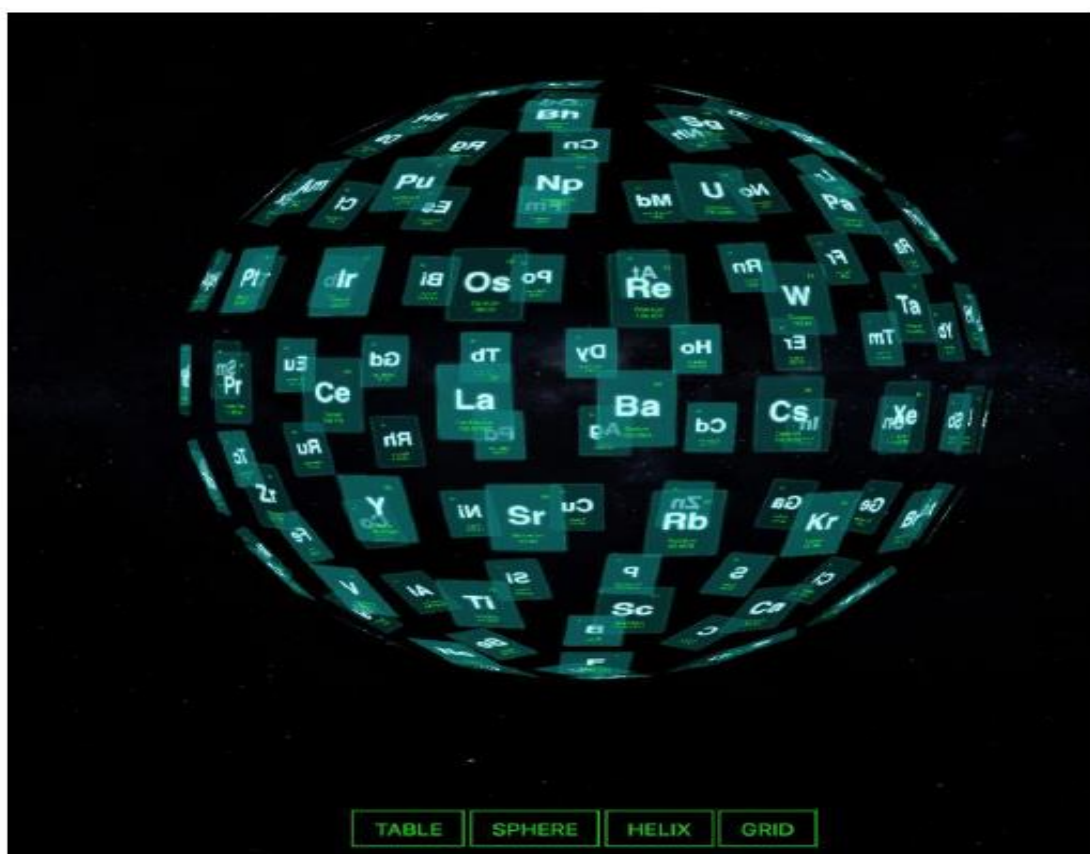

Sphere View

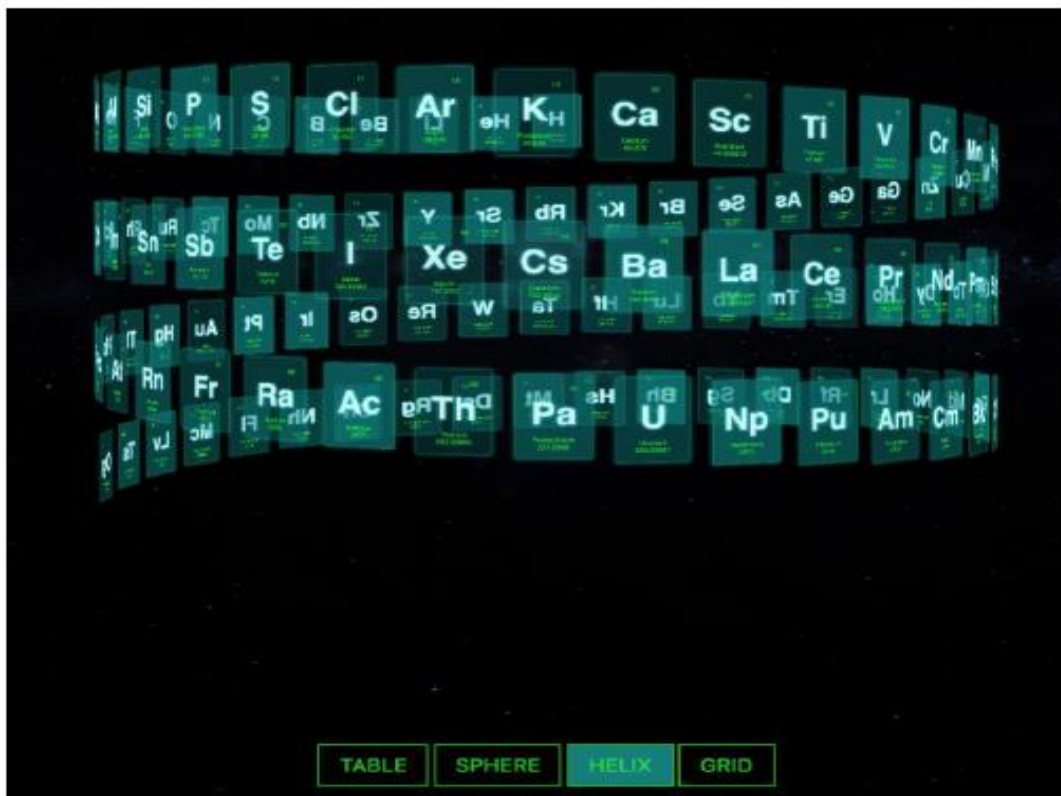

Helix View

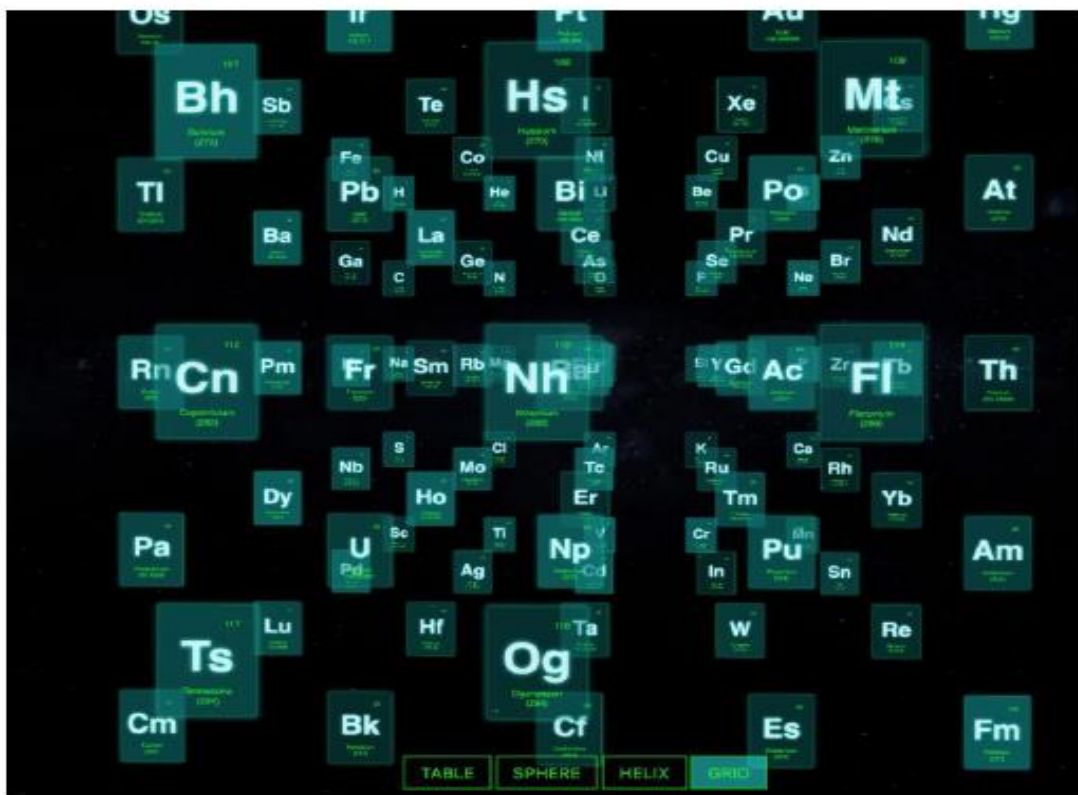

Grid View

## **Page 2: 3D Animation Lines for animated background color**

The Tags used in creation of this webpage are: HTML5, javascript, canvas, three.js, animation, colors. I'm using three.min.js as main JavaScript Library. For Visualization, 3d-lines-animation.js file is used. And then for frequent animated background color, color.js file is used. The Background color keeps changing and 3D Lines can be explored by dragging the mouse onto them. Check out the online demo at [http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject\\_v4/3DAnimationLines.html](http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject_v4/3DAnimationLines.html).


The script is fully configurable (colors, lines, opacities, perspectives).



3DAnimationLines.html

## **Page 3: Basic Camera Movement using three.js and WebGL**

The JS file used for the understanding of the Basics of Camera Movement is Detector.js and three.min.js files. The Tags used in creation of this webpage are: HTML5, javascript, canvas, three.js, animation, camera. I gave the drop-down at the top right to switch between tilt, pan, zoom, pedestal, dolly and truck/track.

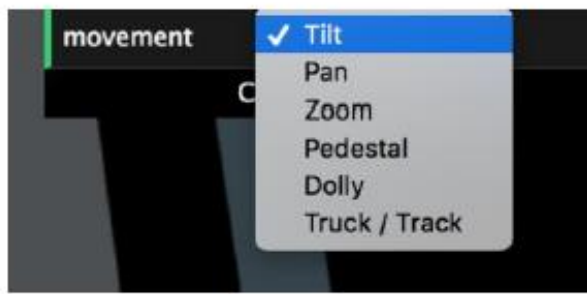


Movement DropDown

For Demo, please click:


[http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject\\_v4/cameraMovements.html](http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject_v4/cameraMovements.html)

Often times with real-time graphics demos and "creative coding" apps we default to a fixed camera, an orbiting camera, or an interactive Maya-style camera (orbit, pan and zoom or dolly with the mouse). This is a demo of some of the basic camera movements I learn and use in film. My background is not in film, but I think we can learn a lot from film when we work on our virtual worlds and experiences.

I did this because I felt that, everyone should know the difference between zoom and dolly and the visual difference that makes in-camera.

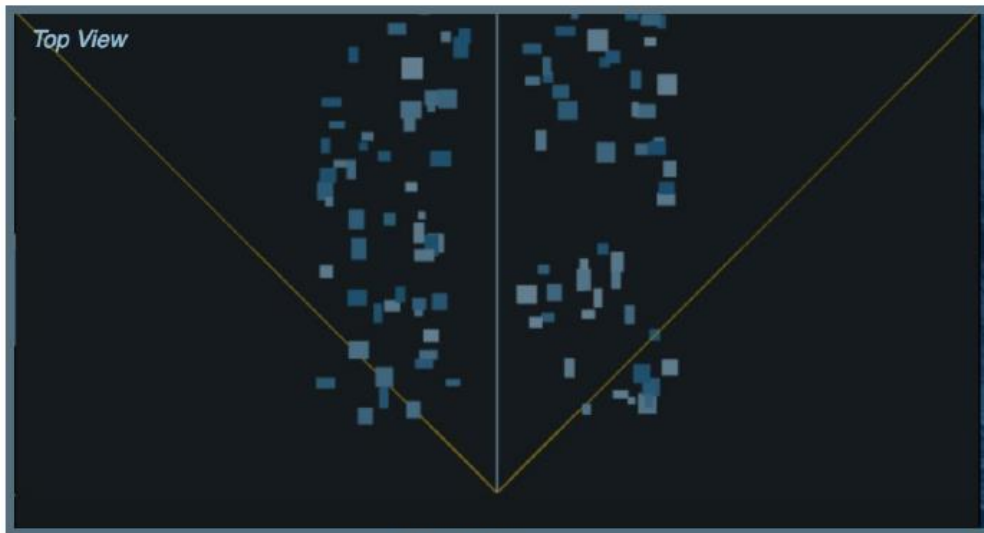

Top View

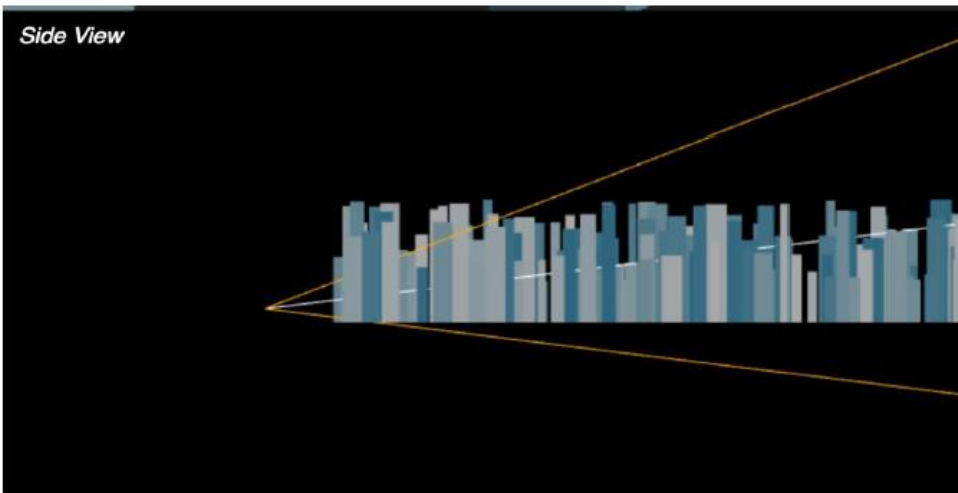


Side View

## Week 5:

This Week I implemented the following Pages:

### Page 1: Texture Mapping

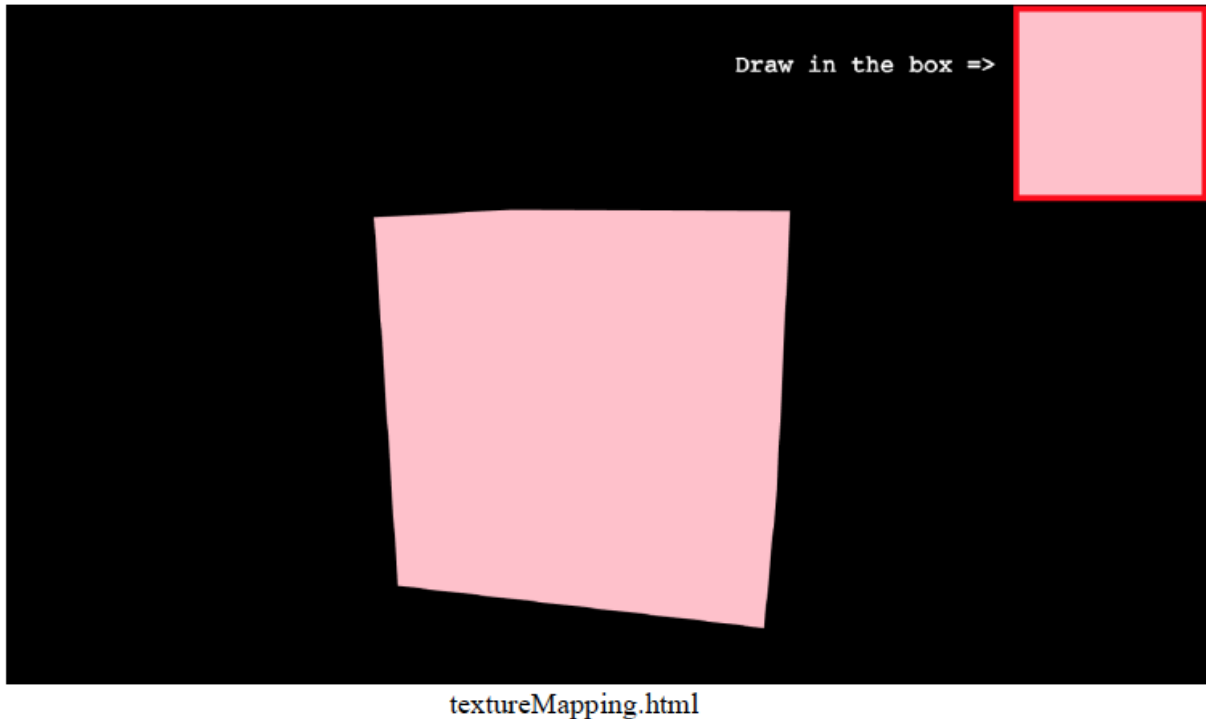

I am using Detector JS for this. I am drawing the picture on canvas and later the picture is reflected on to the sides of the cube. Check out the online demo at [http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject\\_v5/textureMapping.html](http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject_v5/textureMapping.html)

The required script files are:

```
<script src="js/three.js"></script>  
<script src="js/Detector.js"></script>
```


### Page 2: Shadow Mapping

I created two light bulbs, one cylinder, one pyramid, one cube and one sphere. The sphere, pyramid and light bulbs are static, they don't change their position. Whereas the cylinder and cube moves. And the shadow can be seen on the surface. Check out the online demo at [http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject\\_v5/shadowMapping.html](http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject_v5/shadowMapping.html)

The required script files are:

```
<script src="js/three.js"></script>
```

```
<script src="js/ShadowMesh.js"></script>
```

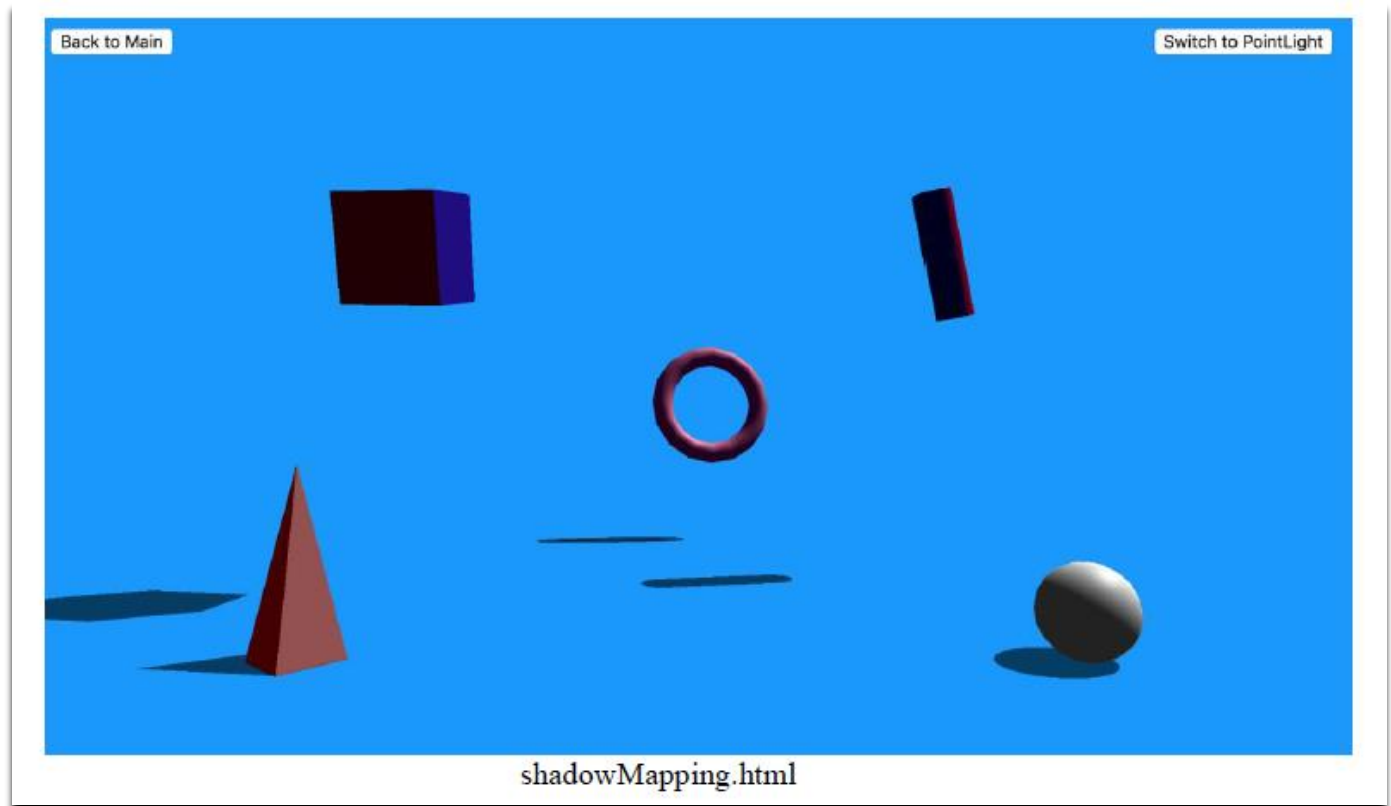

### **Page 3: pa2.html**

In order to get familiar with lighting which is also fundamental to creating any scene, using WebGL, this is the best page to visit. In this assignment, I'm writing some code to help me understand on how the lighting equations work. Check out the online demo at [http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject\\_v5/pa2.html](http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject_v5/pa2.html)

The required script files are:


```
<script src="js/gl-matrix-min.js"></script> - utility functions for operating matrices
```

```
<script src="js/trackball-rotator.js"></script> - utility functions for rotating the scene using the cursor
```

```
<script src="js/model.js"></script> - file describing the models in IFS format
```


```
<script src="js/pa2.js"></script> - functions used to draw the scene.
```



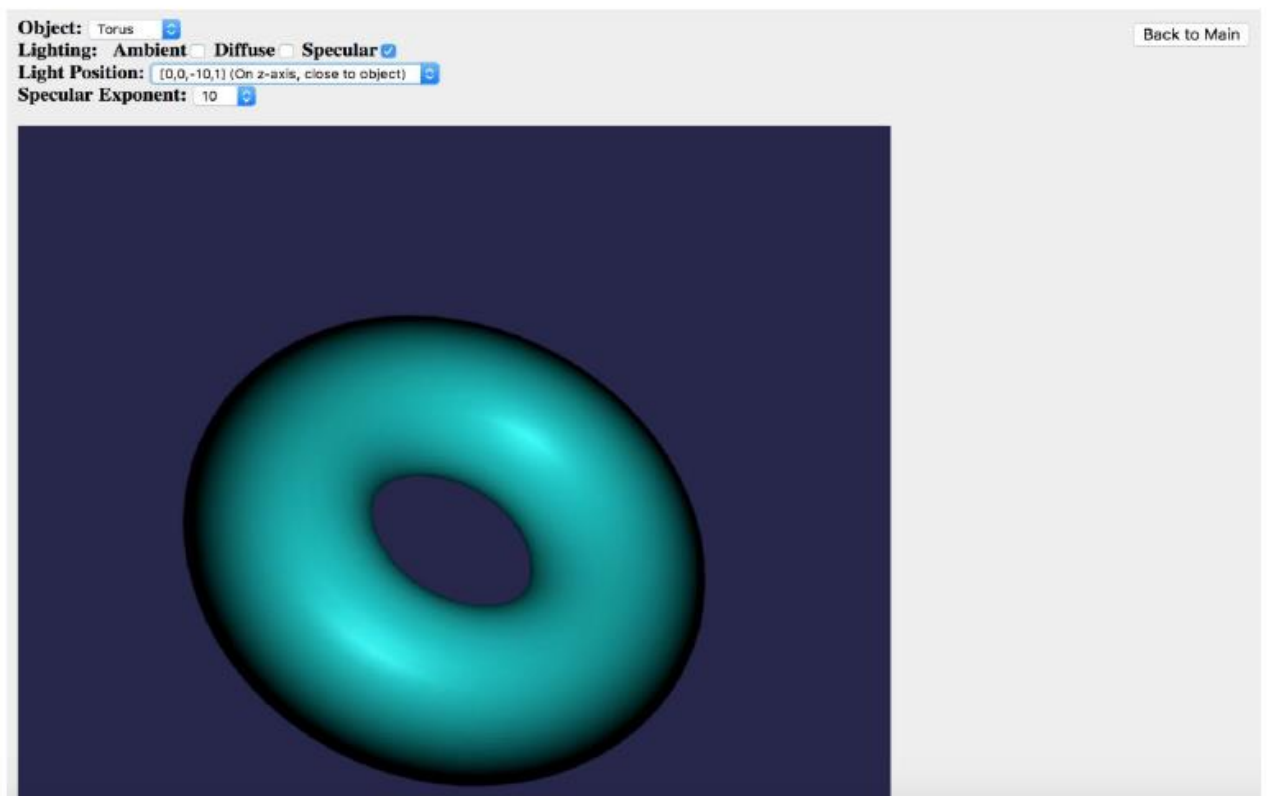





Torus with ambient and diffuse lighting.

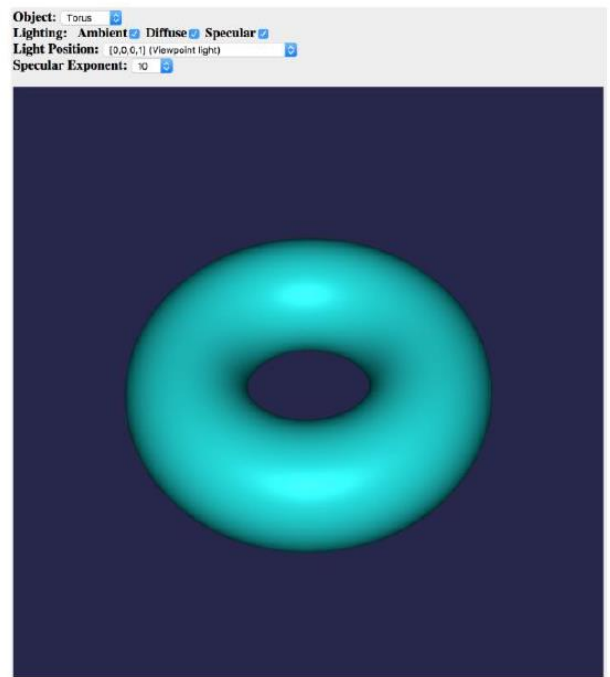

Torus with ambient and diffuse and specular lighting.

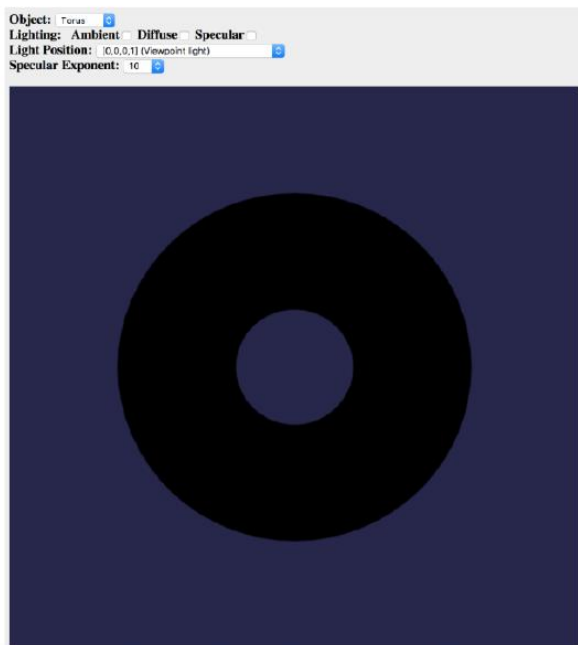

There is no light. Hence you see a black torus

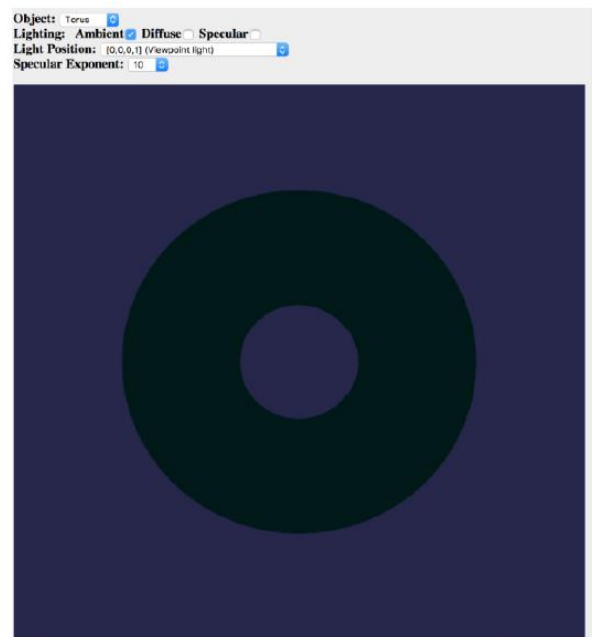


Torus with only ambient light. Cyan colored torus is seen.

## Page 4: BatMan.html

This is for extra credit. I hope you enjoy it! Check out the online demo at [http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject\\_v5/batman.html](http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject_v5/batman.html)

The required script files are:

```
<script type="text/javascript" src="js/three.js"></script>
<script type="text/javascript" src="js/stats.js"></script>
<script type="text/javascript" src="js/dat.gui.js"></script>
<script type="text/javascript" src="js/d3-threeD.js"></script>
<script type="text/javascript" src="js/OrbitControls.js"></script>
```

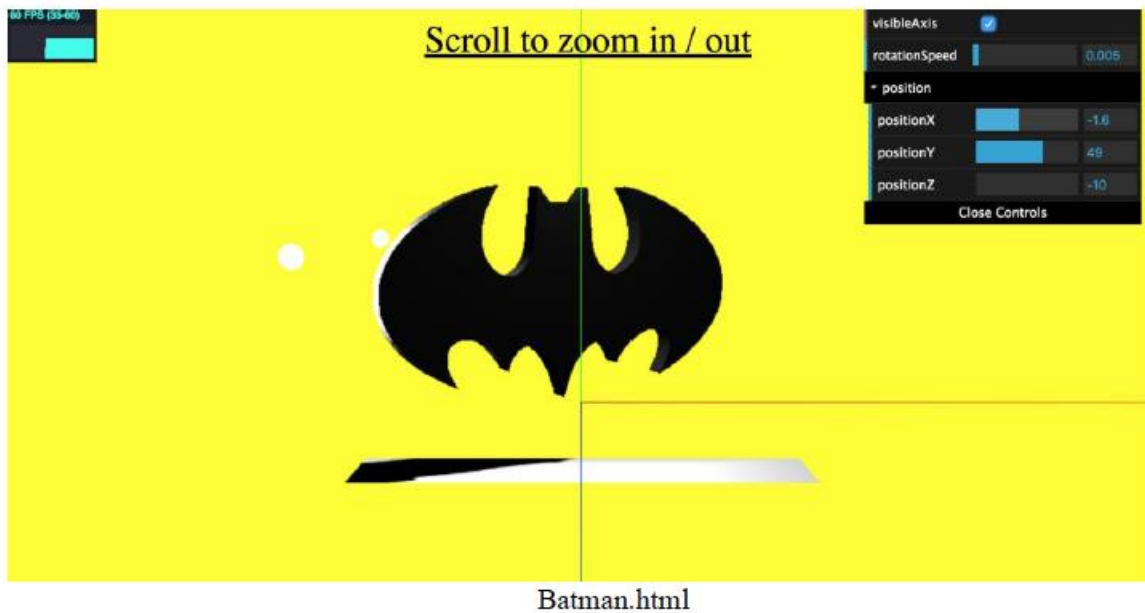

**Note:** WebGL runs within the browser, so is independent of the operating and window systems. You may finish the assignment using any operating system you like, e.g. Windows, OSX or Linux. Programming language: The assignment will be implemented in JavaScript.

## **Week 6:**


I created a graphics city. I gave different options like different camera views, shadowing effect, etc. to explore more. All the objects are creating using JS. There are few buildings, an add banner, pyramid, sphere like body, light pillars, people and cars. Check the online demo: [http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject\\_v6/](http://www.cs.uml.edu/~asharma/427546s2018/finalProject/finalProject_v6/)

This is where we load the objects for the world. All my code for the objects is placed in *ExampleObjects* folder in the JavaScript file. I've added the comments in the JavaScript files for the better understanding of the flow of code. But in general, when the **indexGraphicsCity.html** is loaded, all the objects are loaded by itself. As all these objects are called in the onload function.

The concepts implemented are creation of the objects, 3D Transformation of different objects, lightening of the objects, shadowing of the objects, viewing the object from different modes(camera) and mapping.

Below is the attached screenshot of my city:

### Come, Let's explore My Smart Graphics City!

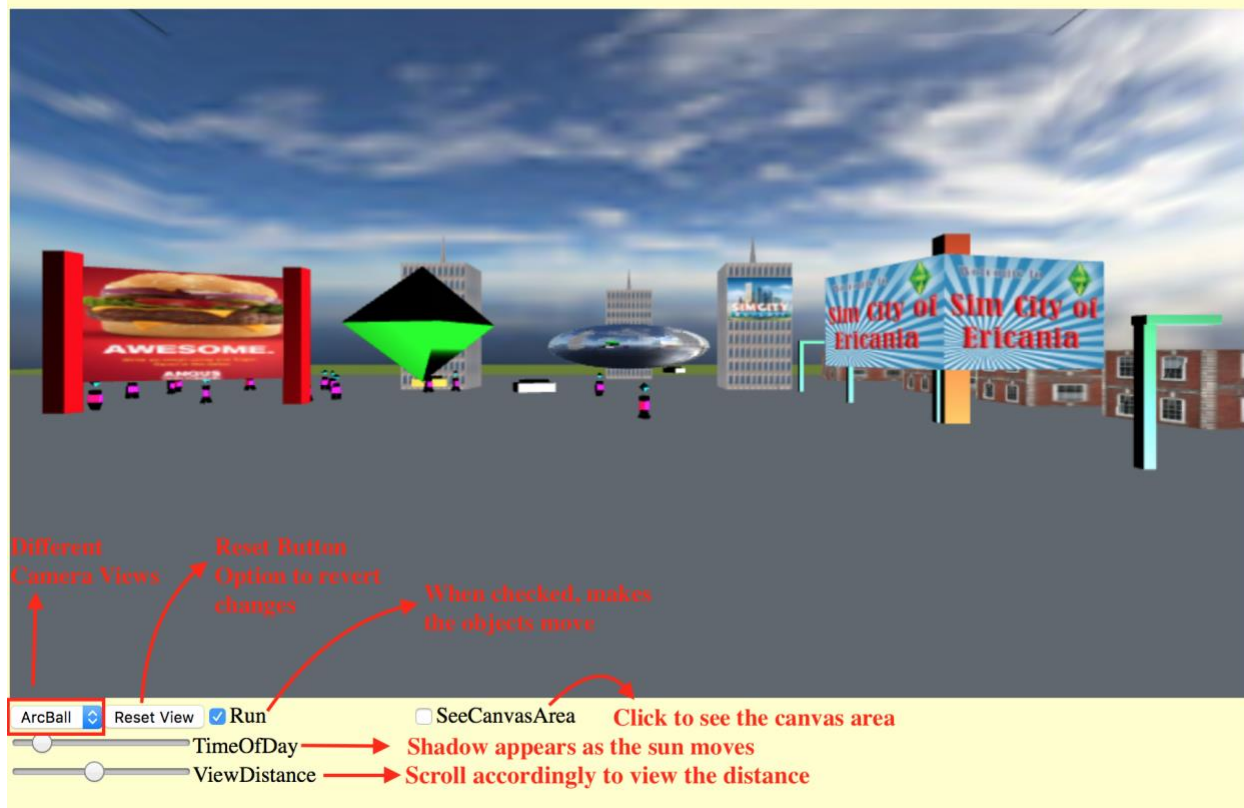


The first step was to set up a canvas and context. The attributes are set as follows:

```
// set up the canvas and context
var canvas = document.createElement("canvas");
canvas.setAttribute("width",900);
canvas.setAttribute("height",500);
document.body.appendChild(canvas);


document.body.style.backgroundColor = "rgb(255, 255, 0, 0.4)";
```

You can see the total canvas area by clicking at the “SeeCanvasArea” checkbox.

### Come, Let's explore My Smart Graphics City!

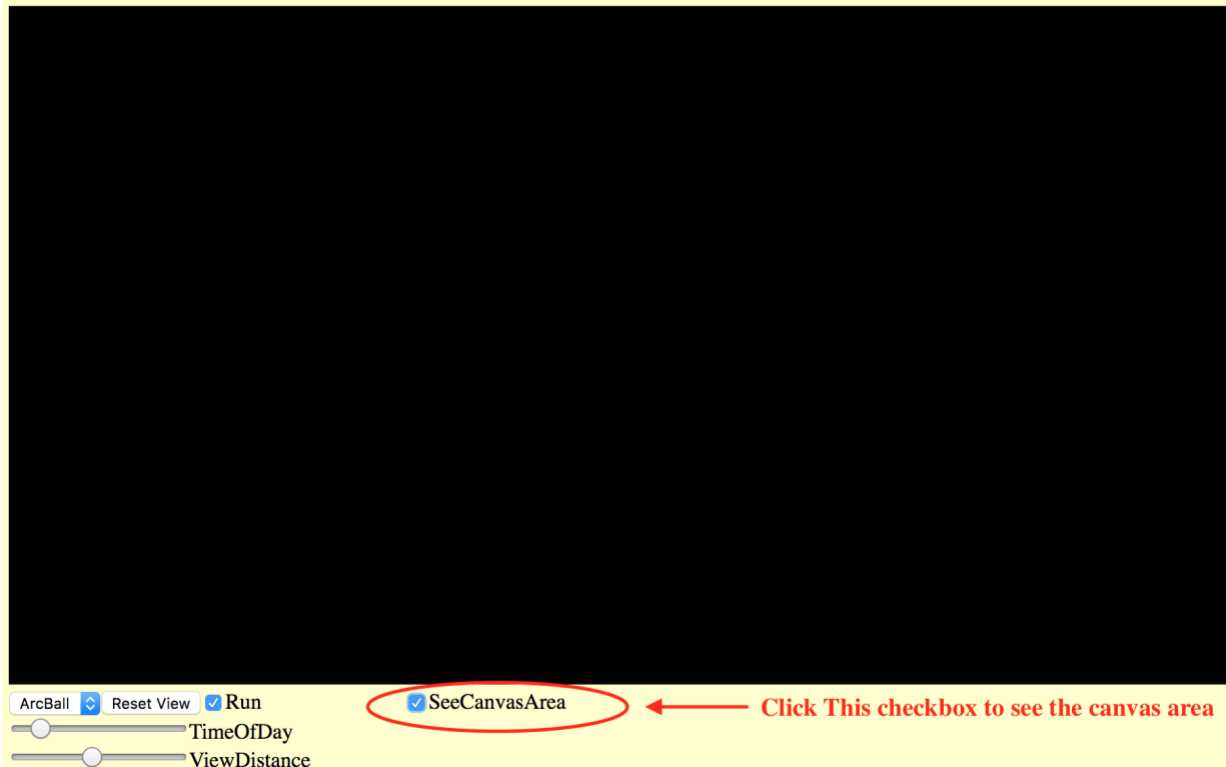

**Camera Mode:** I gave a switch to explore the city using two camera modes i.e. ArcBall View and Drive View. Below are the screenshots of different views. Here, I am giving only two views as I found only these two views which go in sync with the requirement. In case you want to explore more about the camera views, please refer the [Week 4 submission](#).




Camera Views

**Reset Button:** the reset button is provided to bring back the page to original form.


**Time of the day:** It basically involves the sun movement. Sun is treated as a source of light and shadows are casted accordingly.

**View Distance:** This slider also provides a camera view to view the city from distance. You may adjust the slider accordingly.

The concept of shadowing and lightening is implemented using the Time of the day feature. Whereas the camera mode is used in ArcBall and Drive View and then View Distance.

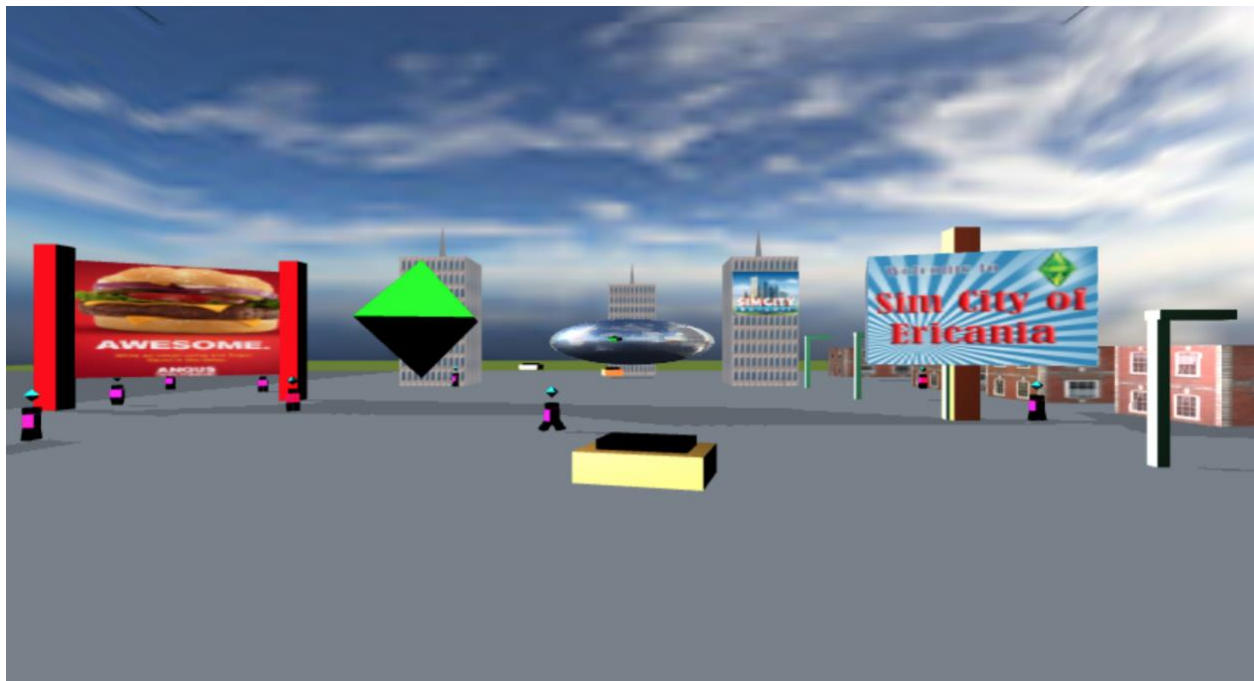

ArcBall View

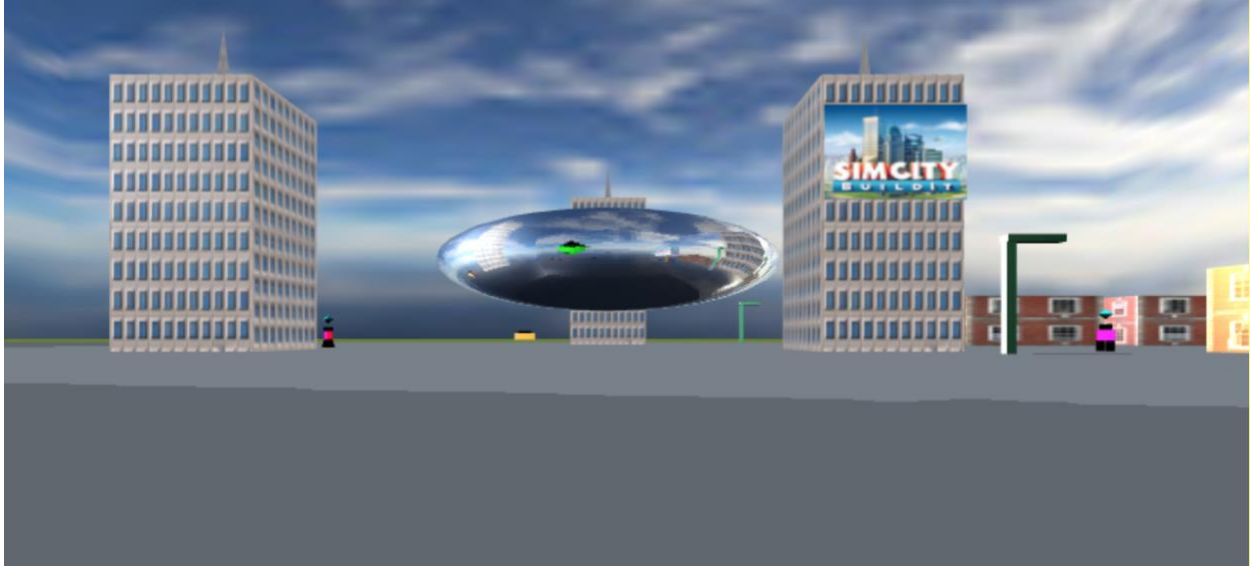

Drive View

## Conclusion:

I was able to implement all the features listed in class. For Week 1, I was successfully able to model, transform object (in this case, it was a house) by applying 3D (Translate/Rotate/Scale/SHear) transformations to the object. For Week 2, I was able to generate different projection of the object. For Week 3, I worked on 3 D transformations with and without mouse controls. In addition, I created a panorama room view to get introduced with cameras. For Week 4, I explored Three.js and implemented multiple 3 D objects and viewed them from different views. Also, implemented a separate page for the better understanding of the camera. For Week 5, I tried my hands-on mapping. I was able to create texture, bump and environmental mappings of the object. Also used the concept of shadowing and lightening in my project. In Week 6, I submitted the final version of the project where I was successfully able to implement all the above features and crated a graphics city.

Further, I wanted to learn more about augmented and virtual reality but due to time constraint, I was not able to implanted.

## References:

1) WebGL tutorial:

[http://learningwebgl.com/blog/?page\\_id=1217](http://learningwebgl.com/blog/?page_id=1217)

2) JavaScript:

<https://developer.mozilla.org/en-US/docs/Web/JavaScript>

3) JS style guide:

<https://google.github.io/styleguide/javascriptguide.xml?showone=Comments#Comments>

4) WebGL Shaders and GLSL (GL Shading Language):

<https://webglfundamentals.org/webgl/lessons/webgl-shaders-and-glsl.html>

5) Three JS:

<https://threejs.org/examples/>

6) Creating city:

<http://www.glue.ie/creating-a-digital-city/>