DESCRIPTIVE ANALYTICS

ZOMATO ORDERS

ORDERS • CUSTOMER PREFERENCES • RESTAURANT PERFORMANCE

PROJECT REPORT

ACADEMIC SESSION

Student	Aanya Gupta
Roll Number	1250258002
Course	Bachelor of Computer Applications (BCA) — DS & AI
Subject	Descriptive Analytics
Dataset	Synthetic ZOMATO Orders Dataset
Analysis Period	1 July 2026 – 30 July 2026

DATA-DRIVEN FOOD-DELIVERY INSIGHTS

Academic disclaimer: All transaction-level findings are generated from a synthetic dataset for educational purposes. They are not official Zomato sales, customer, revenue, market-share, or restaurant-performance statistics.

Keywords

Keywords: Most Ordered Restaurants, Daily Order Trend, Peak Order Hours, Cuisine Category Popularity, Customer Ratings, City-wise Orders, App vs Website Orders, Customer Age Preferences, Meal Type Preference, Dish Preference, Discount vs Orders, Cancellation Behaviour.

Analytical Scope

The report focuses on food-delivery orders and customer behaviour. The analytical approach follows the sample report by presenting the figure context, observation, business insight and measurable KPIs for each major topic, while replacing the original subject completely with ZOMATO orders.

How This Would Work at Real Scale

At real scale, a food-delivery analytics system could combine authorized order data from restaurant partners and delivery operations with menu, customer-service and cancellation information. The descriptive framework used in this project could then be updated daily or in near real time.

Scope of This Report's Data

This report's simulated data covers 9 Indian cities — Mumbai, Delhi, Hyderabad, Bengaluru, Pune, Jaipur, Kolkata, Chandigarh and Lucknow — over a 30-day time frame from 1 July 2026 to 30 July 2026. At real scale, this same regional and time-based structure would extend to every city a platform operates in, tracked continuously rather than over a fixed 30-day window.

Delivery-Fleet Management

Monitor restaurant, meal-type and cuisine demand to reduce delivery delays and idle delivery-partner capacity. Zone-level and city-level availability can be compared with actual demand so that delivery-partner allocation can be prioritized.

Restaurant Partner Planning

Identify cuisines and restaurant partners with consistently strong demand. New restaurant onboarding can be compared with existing restaurants using orders, revenue, ratings and cancellation rates.

Regional Planning

Compare validated city and state demand to decide where delivery-partner density should be increased. Local demand can be combined with cuisine and meal-type preferences to improve restaurant onboarding.

Marketing & Promotions

Evaluate campaigns by comparing orders, revenue and customer response before, during and after promotional periods. Discount effectiveness should be measured with profitability rather than volume alone.

Customer Experience

Combine ratings, reviews and cancellation reasons to identify possible issues with taste, packaging, delivery time or order accuracy.

App & Website Ordering

Use customer ordering and browsing behaviour to improve restaurant recommendations, search ranking, restaurant visibility and app merchandising.

Management Dashboards

Create dashboards showing KPIs such as revenue, orders, average rating, cancellation rate, category contribution and channel performance so managers can monitor changes quickly.

Business Insight

A real-time analytics system would allow the platform to move from simple historical reporting toward continuous decision support. High-demand restaurants could be prioritized faster, weak-performing partners could be reviewed earlier, and regional or channel differences could be addressed before they become larger operational problems.

Note on Data

This report uses a synthetic ZOMATO orders dataset created specifically for academic descriptive analytics. It is not a company-owned or officially published Zomato transaction database.

I have taken data from 1 July 2026 to 30 July 2026, covering a simulated 30-day period, across 9 Indian cities — Mumbai, Delhi, Hyderabad, Bengaluru, Pune, Jaipur, Kolkata, Chandigarh and Lucknow. The dataset contains 150 order records and includes restaurant information, customer attributes, pricing, discounts, order quantities, revenue, location, channel, payment method and order status.

The dataset contains multiple simulated restaurants, cuisines and Indian locations so that the project can demonstrate restaurant-level, customer-level, regional and channel-level analysis. Because the records are synthetic, the resulting values should be used to demonstrate the analytical process rather than to make claims about actual company performance.

Dataset Variables

Order_ID — Unique order identifier
Restaurant_Name — Restaurant name used for restaurant ranking
Cuisine_Category — Cuisine category such as Indian, Chinese, Italian, Mexican, Continental and Desserts
Meal_Type — Meal-time segment used for segmentation
Price — Listed item price
Discount — Discount percentage applied to the listed price
Final_Price — Price after discount
Orders — Number of orders represented by a transaction
Revenue — Final_Price multiplied by Orders
Customer_Age — Simulated customer age
Customer_Rating — Simulated rating from 1 to 5
Order_Date — Date of simulated order
City — Simulated market location
Order_Channel — App or Website
Payment_Method — Payment mode
Order_Status — Delivered or Cancelled

Objectives


The main purpose of this descriptive analytics project is to understand the simulated order performance and customer preferences associated with ZOMATO. The project converts raw order records into understandable charts, summary measures and business insights by answering the following questions:

- Which ZOMATO restaurants received the most orders?
- How did daily order activity change over the 30-day period?
- What were the peak order hours?
- Which cuisine categories were most popular?
- What were the average customer ratings by cuisine?
- Which cities generated the most orders?
- How did App and Website orders compare?
- Which customer age group ordered the most?
- Which meal type was most in demand?
- Which dishes were most popular?
- How did orders vary across discount ranges?
- What was the cancellation rate across cuisines?

1. Most Ordered Zomato Restaurants

Figure Description

The figure presents the ranking of ZOMATO restaurants according to total simulated Orders during the 30-day analysis period. The X-axis represents the individual restaurants, while the Y-axis represents the total number of orders. The bars allow direct comparison between the highest-demand restaurants and restaurants with comparatively lower orders. The visualization is useful for identifying restaurant partners that may require greater delivery attention.

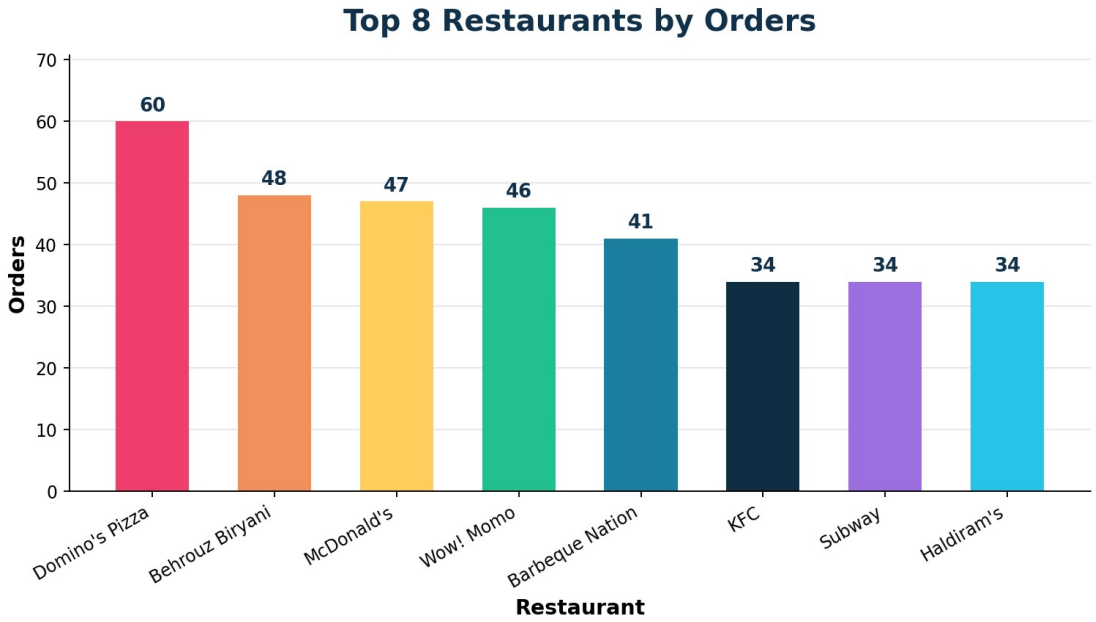

KPI

- Best-performing restaurant: Domino's Pizza — 60 orders
- Second-highest restaurant: Behrouz Biryani — 48 orders
- Third-highest restaurant: McDonald's — 47 orders
- Total simulated orders: 440

Observation

The graph indicates that Domino's Pizza recorded the highest number of simulated orders. Behrouz Biryani and McDonald's also showed strong demand, while the lower-ranked restaurants generated comparatively fewer orders. The difference between the leading restaurants and the remaining restaurants suggests that customer demand is not evenly distributed across the complete restaurant panel. This creates a clear restaurant-performance hierarchy that can be used for further analysis.

Business Insight

High-performing restaurants should receive priority in delivery-partner allocation, app visibility and featured placement. Featured restaurants can be supported with promotional campaigns when appropriate, while lower-performing restaurants should be reviewed for price, menu positioning, delivery time, customer

ratings and listing placement. In a real operating environment, restaurant-level demand would also be combined with commission margin and delivery-fleet availability before making final decisions.


Additional Interpretation

Restaurant rankings alone do not explain why a restaurant performs well. A stronger analysis would combine order demand with price, discount, rating, cancellation rate, delivery time and cuisine.

2. Daily Order Trend

Figure Description

The figure shows the Daily Order Trend of simulated Zomato orders over the 30-day analysis period from 1 July 2026 to 30 July 2026. The X-axis represents the Order_Date and the Y-axis represents total Orders for each day. Each point represents the aggregated orders placed on that date, and the connected line shows how order activity changed across the month. The chart helps identify order peaks, lower-volume days and general fluctuations in daily demand.

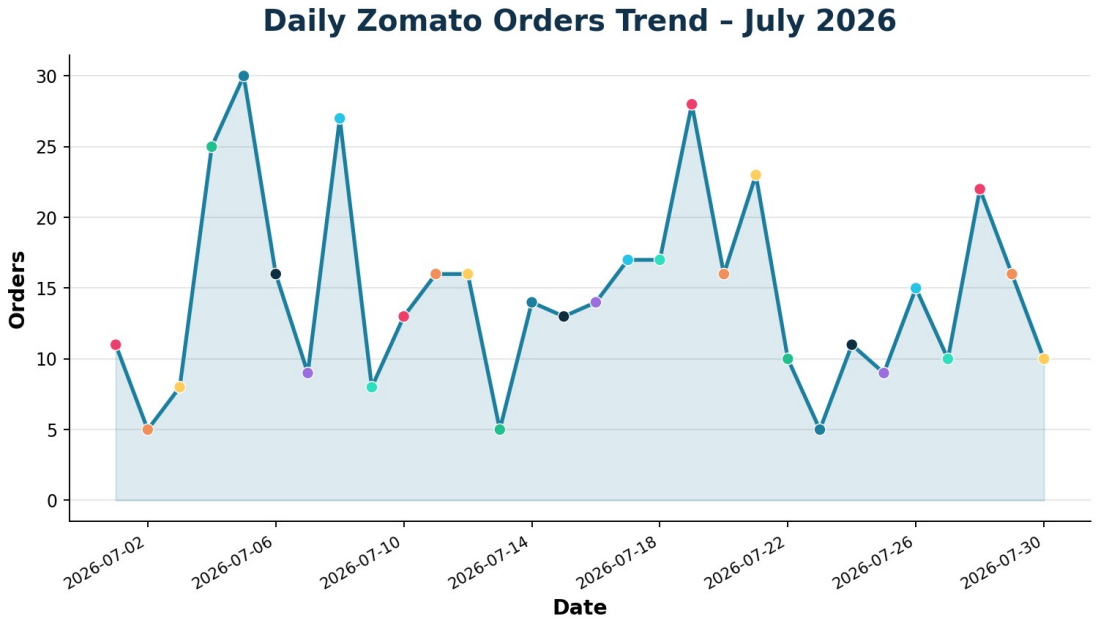

KPI

- Average daily orders: 15
- Highest-orders date: 2026-07-05 — 30 orders
- Lowest-orders date: 2026-07-02 — 5 orders

Observation

The graph shows noticeable fluctuations in daily orders rather than a perfectly constant pattern. The highest simulated activity occurred on 2026-07-05, while 2026-07-02 recorded the lowest value. Other peaks and dips appear across the month, indicating that daily order activity changes over time. In real operational data, such changes could be associated with weekends, promotions, restaurant availability, salary cycles, holidays or other external factors.

Business Insight

Identifying high-order days can help the platform prepare delivery-fleet capacity and schedule marketing campaigns more effectively. Additional delivery partners can be positioned before expected high-demand periods, while promotional activity can be timed to increase traffic during strategically important dates. Daily monitoring can also help identify unusual drops that may indicate restaurant outages, technical problems or weaker customer demand.


Additional Interpretation

The 30-day synthetic period demonstrates the analytical method but should not be interpreted as evidence of actual seasonal behaviour.

3. Peak Order Hours

Figure Description

The figure presents the distribution of simulated Orders by Order_Hour. The X-axis represents the hour of ordering and the Y-axis represents total orders placed during that hour. Comparing hourly activity makes it possible to identify the periods when customers are most active. This type of analysis is useful for delivery-fleet scheduling, promotional scheduling, customer support and operational planning.

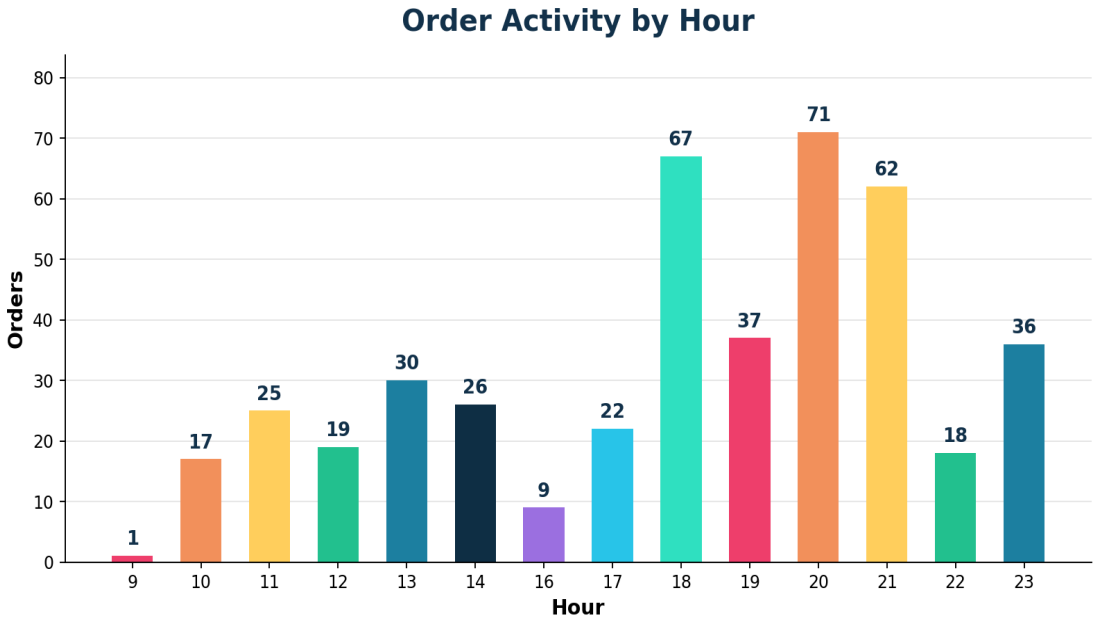

KPI

- Peak order hour: 20:00
- Orders placed at peak hour: 71
- Lowest order hour: 9:00 — 1 order

Observation

The graph indicates that order activity varies by time of day. The highest simulated activity is concentrated around 20:00 (dinner time), while 9:00 records the lowest activity. The pattern suggests that customer ordering behaviour is stronger during selected hours rather than being evenly distributed across the day.

Business Insight

Validated peak-hour information can help the platform schedule delivery-partner availability, push notifications and customer-support resources when customers are most active. The app can highlight selected restaurants before peak periods, while order-processing and delivery teams can prepare for increased activity. Real order-footfall data could similarly support delivery-fleet staffing.


Additional Interpretation

Peak-hour analysis is descriptive; it identifies when activity occurs but does not by itself explain the reason for that activity.

4. Cuisine Category Popularity

Figure Description

The figure compares simulated orders across major cuisine categories including Indian, Chinese, Italian, Mexican, Continental and Desserts. The X-axis represents categories and the Y-axis represents total Orders. The chart shows which categories contributed larger or smaller portions of total Zomato demand during the simulated period.

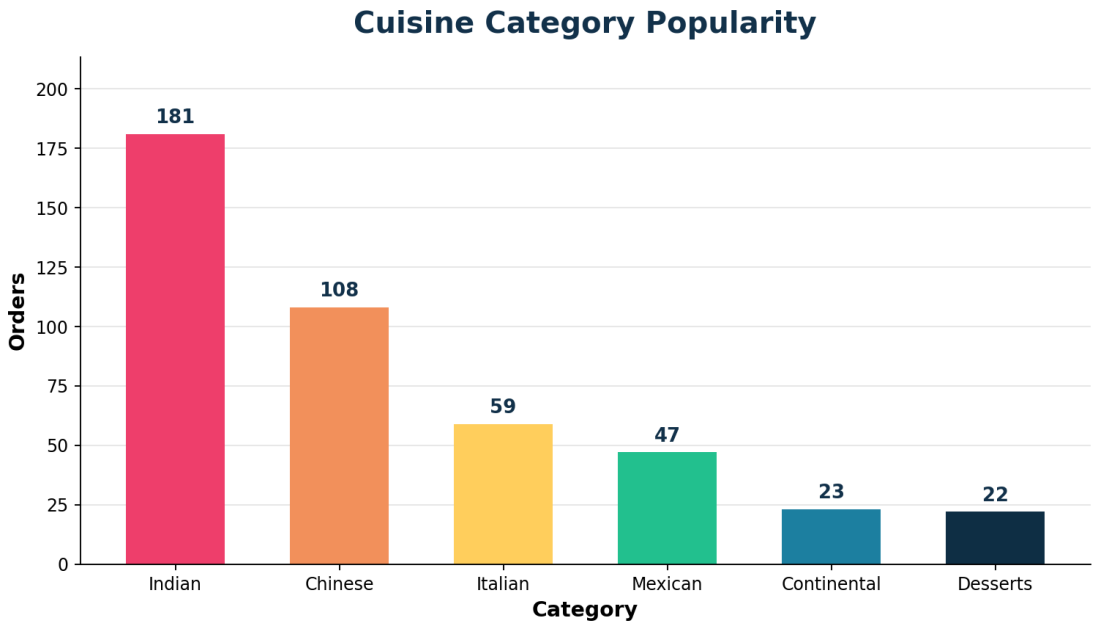

KPI

- Best-selling category: Indian — 181 orders
- Second-highest category: Chinese — 108 orders
- Total categories analysed: 6

Observation

Indian is the leading simulated cuisine category, followed by Chinese and other categories. The variation between categories indicates that customer demand differs according to cuisine type. Categories with stronger orders contribute a larger share of total orders and may represent higher customer interest within this synthetic dataset.

Business Insight

Popular cuisine categories should receive greater restaurant-partner onboarding and app visibility. Lower-performing categories can be examined for pricing, menu variety, availability and promotional effectiveness. Category-level decisions should also consider revenue and margin because a category with fewer orders may still be commercially valuable if its average order value or commission is higher.


Additional Interpretation

Category popularity is a descriptive measure and should be combined with profitability, cancellation rates and delivery-partner availability for real business decisions.

5. Customer Ratings

Figure Description

The figure presents the Average Customer Rating by cuisine category. The X-axis represents the categories and the Y-axis represents average rating on a 1–5 scale. The purpose is to compare customer satisfaction across cuisine groups and identify categories with relatively stronger or weaker ratings.

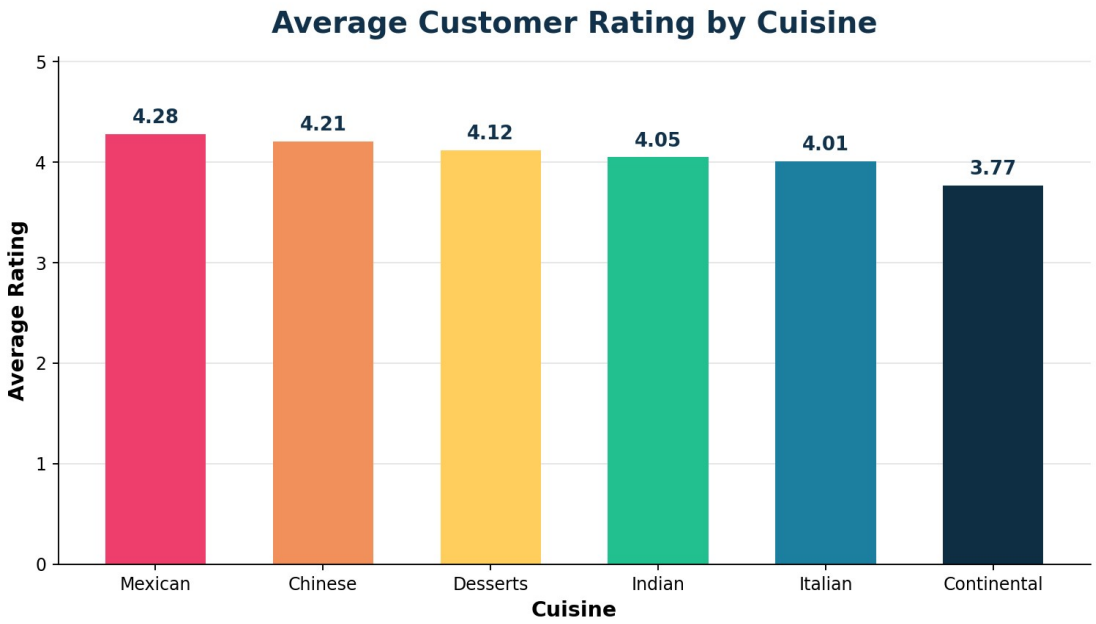

KPI

- Highest-rated category: Mexican — 4.28/5
- Lowest-rated category: Continental — 3.77/5
- Overall average rating: 4.09/5

Observation

The ratings show differences between cuisine categories. Mexican has the highest simulated average rating of 4.28, while Continental has the lowest average at 3.77. The differences can help identify categories that appear to provide stronger customer satisfaction in the academic dataset.

Business Insight

Highly rated categories can be highlighted in restaurant recommendations and app merchandising. Categories with lower ratings should be investigated through review comments and cancellation reasons to identify possible concerns related to taste, packaging, delivery time or portion expectations. Improving menu information may also help set customer expectations.


Additional Interpretation

Ratings in this project are synthetic and should not be presented as official Zomato customer-review statistics.

6. City-wise Orders

Figure Description

The figure compares simulated Orders across the Indian cities represented in the dataset. The X-axis represents cities and the Y-axis represents total orders. The chart is intended to show regional concentration of demand and identify markets that contribute comparatively larger or smaller order volumes.

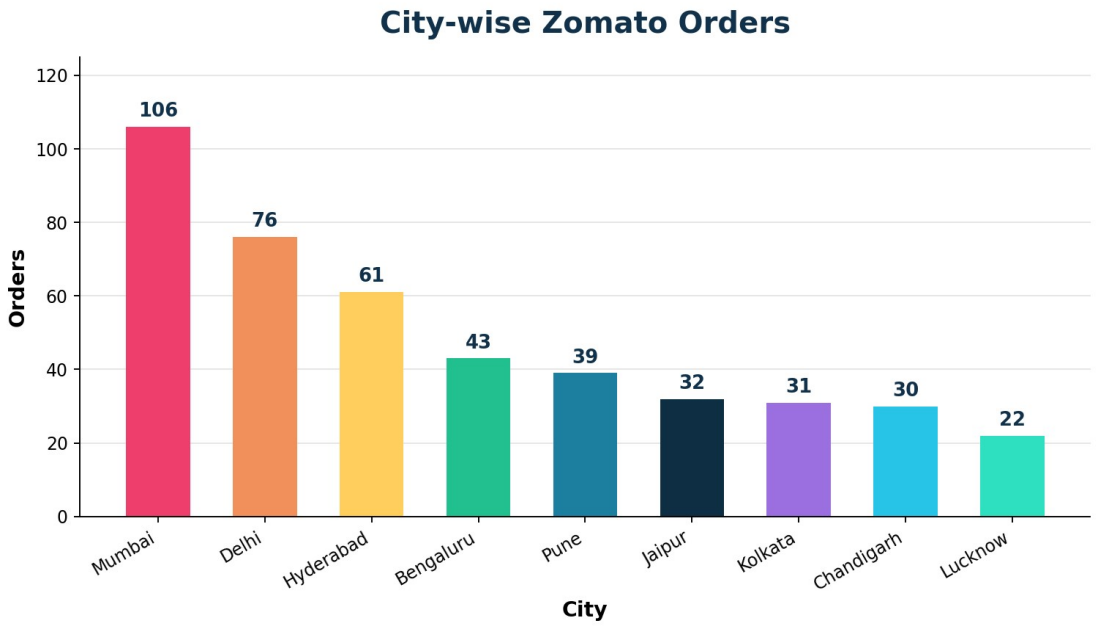

KPI

- Highest-orders city: Mumbai — 106 orders
- Second-highest city: Delhi — 76 orders
- Cities represented: 9

Observation

The graph indicates that Mumbai contributes the highest simulated order volume, followed by Delhi and other cities. Other cities show comparatively smaller order volumes. The variation suggests that customer demand is geographically uneven within the synthetic records.

Business Insight

High-performing cities could receive greater delivery-partner density and targeted promotional campaigns when supported by real order evidence. Cuisine and meal-type preferences can be analysed within each city to improve local restaurant onboarding. Regional delivery planning can also reduce the risk of delayed deliveries in stronger markets.


Additional Interpretation

These results are synthetic and must not be interpreted as official Zomato city-wise or state-wise order data.

7. App vs Website Orders

Figure Description

The figure compares order performance across the simulated App and Website channels. The analysis considers both Orders and Revenue so that channel contribution is not judged only by transaction volume. Comparing channels helps identify where customers are ordering and where additional merchandising or operational attention may be useful.

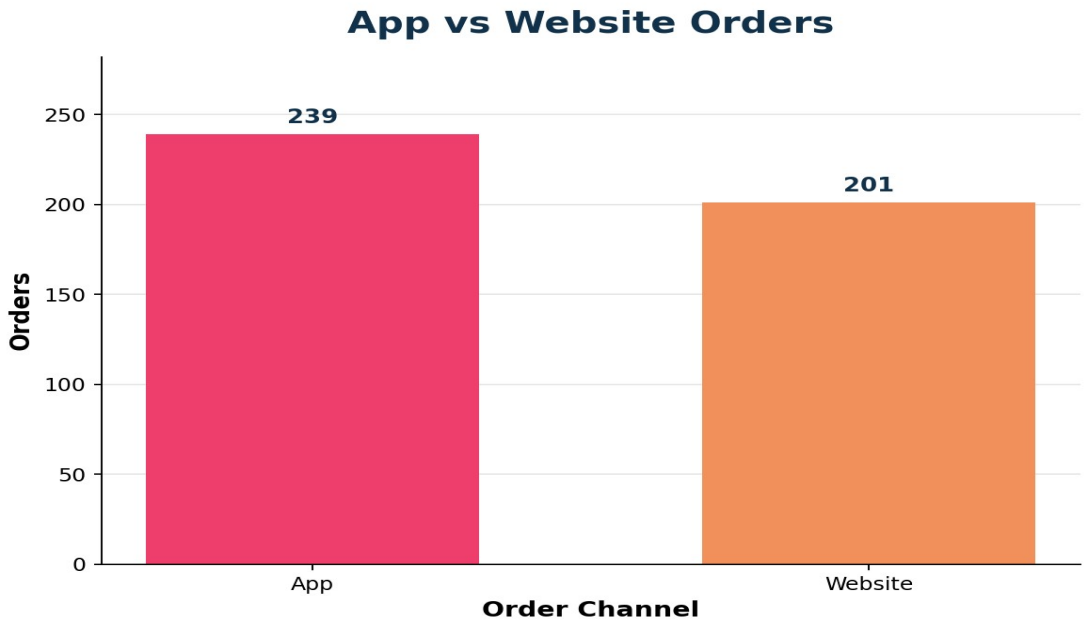

KPI

- Leading channel by orders: App — 239 orders
- Website revenue: Rs. 11,078.0
- Total channel revenue: Rs. 24,729.5

Observation

The channel comparison shows differences between App and Website activity. The App contributes the larger number of simulated orders. The revenue comparison provides an additional view because a channel may generate fewer orders but still contribute substantial revenue depending on order value and restaurant mix.

Business Insight

Channel performance can guide marketing allocation, app-development priority and customer-experience improvements. Strong app demand can justify stronger push-notification merchandising and availability, while website demand can support desktop-ordering features and promotions. A unified inventory view can help avoid promoting restaurants on the app while the website faces slower fulfilment.


Additional Interpretation

Channel results may be affected by the synthetic sampling design and should be validated with actual order and margin data.

8. Customer Age Preferences

Figure Description

The figure presents simulated Zomato orders across five customer age groups: Under 18, 18–24, 25–34, 35–44 and 45+. The X-axis represents the age group and the Y-axis represents total Orders. Age segmentation provides a simple view of which customer segments contribute more order volume.

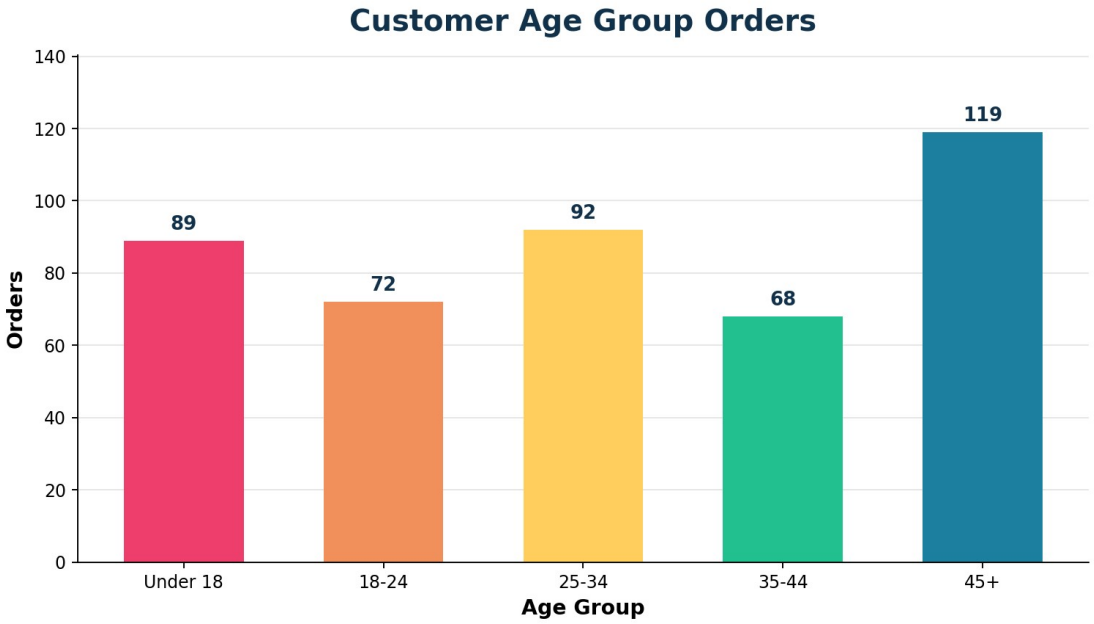

KPI

- Highest-volume age group: 45+ — 119 orders
- Lowest-volume age group: 35-44 — 68 orders
- Age groups analysed: 5

Observation

The age-group comparison shows that 45+ contributes the highest simulated order volume. Other groups contribute different levels of demand, indicating that order volume is not equally distributed across all age segments.

Business Insight

The strongest age segment can be used as a starting point for targeted campaigns, restaurant recommendations and communication. However, the platform should avoid ignoring smaller segments; targeted offers and suitable meal-type assortments can help improve engagement across customer groups.


Additional Interpretation

Age-group results are simulated and do not represent official Zomato customer demographics.

9. Meal Type Preference

Figure Description

The figure presents total simulated Orders by meal type. The X-axis represents available meal-time segments and the Y-axis represents the number of orders. Meal-type analysis is important for food delivery because restaurant availability by meal-time directly affects whether a customer can complete an order.

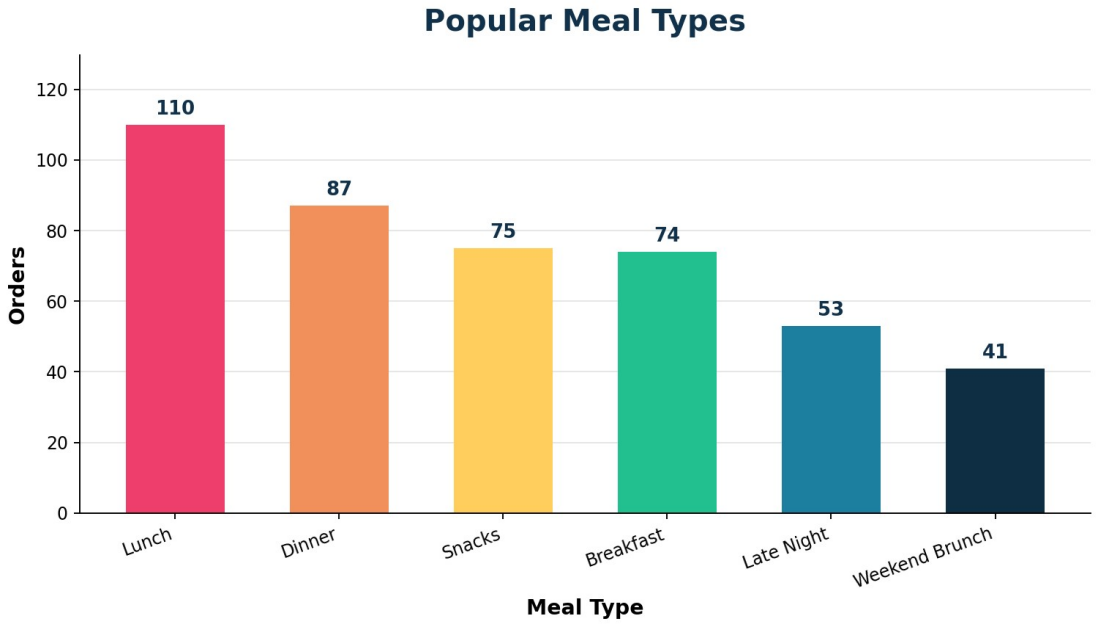

KPI

- Most demanded meal type: Lunch — 110 orders
- Second-most demanded meal type: Dinner — 87 orders
- Meal types analysed: 6

Observation

Lunch records the highest simulated demand, while other meal types contribute different levels of orders. The chart highlights the relative demand distribution across meal-time segments and can help identify segments that require greater attention.

Business Insight

Popular meal-time segments should be supported with sufficient restaurant-partner and delivery-fleet availability to reduce delayed orders. Real operators can combine meal-type demand with restaurant, city and cuisine to determine exactly where additional delivery capacity is required. Quick-service lunch orders and larger family dinner orders may need different fulfilment strategies.


Additional Interpretation

Meal-type demand should be measured over longer real periods and adjusted for restaurant availability before being used for delivery-fleet planning.

10. Dish / Cuisine Preference

Figure Description

The figure compares simulated Zomato orders across the top individual dishes in the dataset. The X-axis represents dish and the Y-axis represents Orders. The chart provides a simple view of dish preference within the academic dataset.

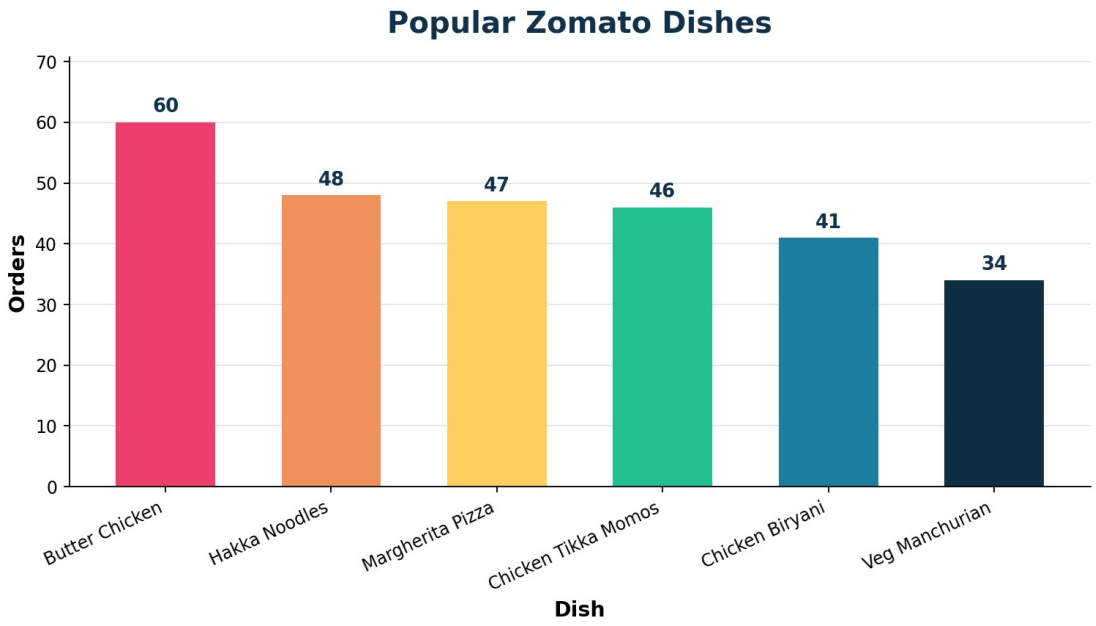

KPI

- Most popular dish: Butter Chicken — 60 orders
- Second-most popular dish: Hakka Noodles — 48 orders
- Dishes analysed: top 6

Observation

Butter Chicken is the most ordered simulated dish, followed by Hakka Noodles. The difference in orders between dishes indicates that customers do not show equal demand for every dish option.

Business Insight

Popular dishes can receive greater app visibility and featured placement. Lower-demand dishes can be promoted selectively or evaluated for regional or seasonal positioning. Dish preferences can also be combined with meal type and cuisine to identify high-demand menu items.

Additional Interpretation

Dish popularity is synthetic and does not represent actual Zomato market preference.

11. Discount vs Orders

Figure Description

The figure compares observed orders across discount levels/ranges. The analysis is designed to determine whether higher-discount records are associated with different order volumes. The chart should be interpreted carefully because many factors other than discount can influence orders, including restaurant popularity, price, availability and customer demand.



KPI

- Average discount: 9.7%
- Highest discount observed: 25%
- Total simulated revenue: Rs. 24,729.5

Observation

Order volume differs across discount ranges in the synthetic records. Some promotional levels show stronger observed order volumes, but this pattern alone cannot prove that discounting caused the additional orders. Restaurant popularity and other factors may be influencing both variables.

Business Insight

Discount decisions should be evaluated using orders, revenue and commission margin together. The platform can use promotions strategically for selected restaurants, off-peak demand stimulation or new-restaurant onboarding rather than applying high discounts universally. The objective should be profitable incremental demand, not simply higher order volume.


Additional Interpretation

The relationship shown is descriptive association, not a causal experiment.

12. Cancellation Behaviour

Figure Description

The figure compares the percentage of simulated orders marked as cancelled across cuisine categories. The X-axis represents categories and the Y-axis represents the cancellation rate. Cancellation analysis is useful because high cancellation levels may indicate the need to investigate delivery delay, order accuracy, restaurant availability or wait-time issues.

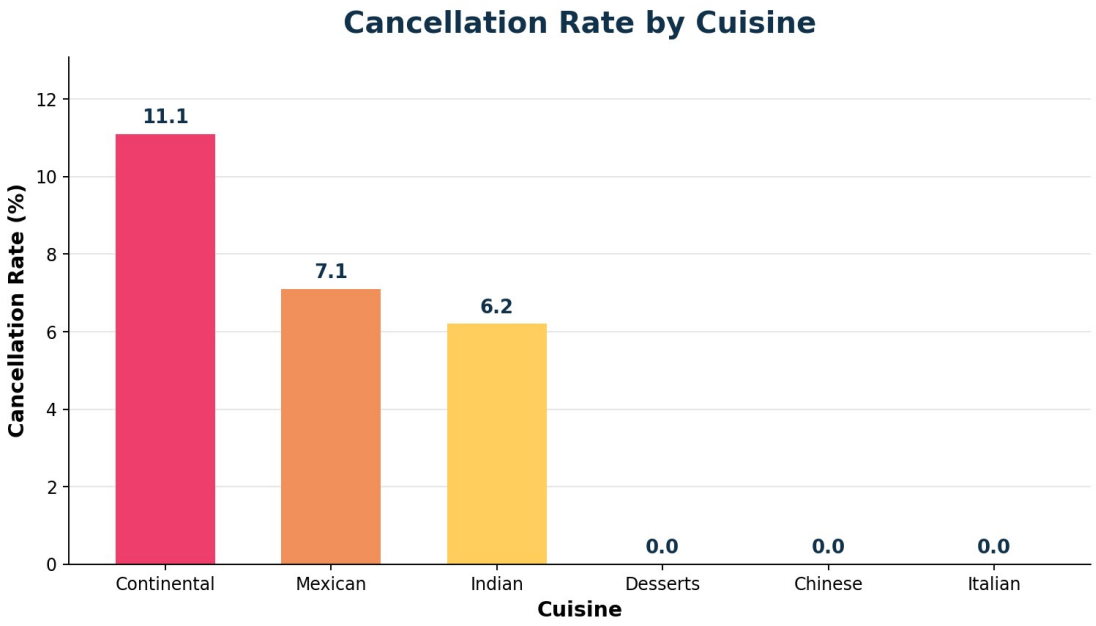

KPI

- Overall simulated cancellation rate: 4.0%
- Highest-cancellation category: Continental — 11.1%
- Lowest-cancellation category: Italian — 0.0%

Observation

The overall simulated cancellation rate is 4.0%. Continental has the highest category cancellation rate, while Italian has the lowest. The difference indicates that cancellation behaviour varies by cuisine within the synthetic records.

Business Insight

Cuisines with higher cancellation rates should be investigated using cancellation reasons, delivery time and restaurant feedback. Better order-time estimation, clearer availability information, restaurant-readiness checks and improved expectation-setting may reduce avoidable cancellations. Cancellation analysis can therefore support both customer experience and cost control.

Additional Interpretation

A higher cancellation rate does not automatically mean that a restaurant or cuisine is poor; the reason for the cancellation must be examined.

Summary of Key Metrics

The following KPI table consolidates the main results of the synthetic dataset into a single management-style view. These metrics provide a quick summary while the preceding sections provide the detailed analytical explanation.

Objective	Key Metric	Result
Restaurant performance	Best-selling restaurant	Domino's Pizza
Restaurant performance	Best-selling restaurant orders	60
Daily orders	Average daily orders	15
Daily orders	Highest-orders date	2026-07-05
Peak hours	Peak order hour	20:00
Category	Best-selling category	Indian
Ratings	Highest-rated category	Mexican (4.28/5)
Regional	Highest-orders city	Mumbai
Channel	Best channel by orders	App
Customer	Largest age group	45+
Meal type	Most popular meal type	Lunch
Dish	Most popular dish	Butter Chicken
Revenue	Total simulated revenue	Rs. 24,729.5
Order volume	Total orders	440
Customer experience	Overall average rating	4.09/5
Cancellations	Overall cancellation rate	4.0%

KPI Interpretation

The KPI summary shows that restaurant demand, customer satisfaction, geography, channel performance and cancellation behaviour can all be measured from order-level data. In a real operating environment, these measures could be placed on a dashboard and monitored regularly to identify changes in demand and support faster decisions.

Important Academic Limitation

Every value in this KPI table is calculated from the synthetic dataset. It must not be presented as official Zomato sales or customer statistics.

Next Steps: Descriptive → Predictive Analytics

The descriptive analysis performed in this project provides a foundation for future predictive analytics. Descriptive analytics answers questions such as which restaurant received the most orders, which cuisine was popular and which channel generated more orders. Predictive analytics can then use historical patterns to estimate what may happen next.

Possible Predictive Applications

- Forecast future Zomato orders by restaurant, cuisine and city using historical order patterns.
- Predict demand for specific meal types and dishes to improve delivery-fleet planning.
- Identify restaurants likely to become high-demand partners before capacity shortages occur.
- Predict customers who are likely to order again and support personalized offers.
- Estimate which orders have a higher probability of being cancelled.
- Optimize delivery-partner allocation across zones, cities and peak hours.
- Recommend restaurants based on previous orders, cuisine preferences, meal types and dish choices.
- Estimate expected orders under different promotional or discount scenarios.

Example Business Scenario

If real data repeatedly showed strong demand for Domino's Pizza in a particular city and meal time, a predictive model could estimate future demand for that restaurant-meal-city combination. Delivery-partner capacity could then be positioned before demand occurs rather than only after wait times begin to increase.

Business Insight

Moving from descriptive to predictive analytics can help a food-delivery platform become more proactive. Instead of only reporting past orders, the business could forecast demand, anticipate cancellations, personalize recommendations and optimize delivery-fleet allocation. This could improve efficiency and reduce avoidable delays and idle capacity.

Requirement for Real Implementation

Predictive models require larger, validated datasets, appropriate features, model evaluation and responsible handling of customer information. The current synthetic dataset is suitable for demonstrating descriptive analysis but is not sufficient to train a reliable production forecasting model.

References

1. Zomato Official Website. https://www.zomato.com/

2. Zomato Official product and brand information.

3. Python Documentation. https://docs.python.org/

4. Pandas Documentation. https://pandas.pydata.org/docs/

5. Matplotlib Documentation. https://matplotlib.org/stable/

6. Kaggle — dataset and analytics resources. https://www.kaggle.com/

7. Microsoft Excel documentation and spreadsheet analysis resources.

Dataset Citation

Synthetic ZOMATO Orders Dataset (150 order records), generated for academic descriptive analytics purposes using simulated food-delivery orders, customer preferences, restaurant attributes, Indian market locations and realistic delivery-platform-style variables.

Source-use Note

Official brand sources are used only for general brand/product context. All transaction-level orders, customer, revenue, rating, cancellation and KPI results in this report are generated from the synthetic academic dataset.

Appendix

Appendix A — Sample of Synthetic Dataset

Restaurant_ID	Restaurant_Name	Cuisine	Meal_Type	Price	Discount	Orders	Revenue	City	Channel
ZM-R02	Behrouz Biryani	Indian	Regular	220	20	4	704.0	Chandigarh	App
ZM-R02	Behrouz Biryani	Indian	Half	150	25	4	450.0	Hyderabad	Website
ZM-R04	Barbeque Nation	Continental	Family Meal	550	5	4	2090.0	Delhi	Website
ZM-R01	Domino's Pizza	Italian	Medium	400	15	2	680.0	Mumbai	Website
ZM-R04	Barbeque Nation	Continental	Regular	400	5	2	760.0	Lucknow	App
ZM-R05	Subway	Continental	Regular	400	0	5	2000.0	Chandigarh	App
ZM-R07	Wow! Momo	Chinese	Small	100	0	3	300.0	Chandigarh	App
ZM-R07	Wow! Momo	Chinese	Regular	150	0	2	300.0	Delhi	Website
ZM-R12	Domino's Pizza	Italian	Regular	400	10	2	720.0	Lucknow	Website
ZM-R01	Domino's Pizza	Italian	Regular	400	10	4	1440.0	Bengaluru	Website

Appendix B — Python / Pandas Data Preparation

```
import pandas as pd
df = pd.read_csv('zomato_synthetic_150.csv')
df.drop_duplicates(inplace=True)
df['Order_Date'] = pd.to_datetime(df['Order_Date'])
df['Final_Price'] = df['Price'] * (1 - df['Discount']/100)
df['Revenue'] = df['Final_Price'] * df['Orders']
df['Age_Group'] = pd.cut(df['Customer_Age'], [0,17,24,34,44,100], labels=['Under
18','18-24','25-34','35-44','45+'])
```

Appendix C — KPI Calculation Examples

```
Total Orders = df['Orders'].sum()
Total Revenue = df['Revenue'].sum()
Average Rating = df['Customer_Rating'].mean()
Best Restaurant = df.groupby('Restaurant_Name')['Orders'].sum().idxmax()
Best Category = df.groupby('Cuisine_Category')['Orders'].sum().idxmax()
Best City = df.groupby('City')['Orders'].sum().idxmax()
Cancellation Rate = (df['Order_Status'].eq('Cancelled').mean()) * 100
```

Appendix D — Visualization Examples

```
import matplotlib.pyplot as plt
restaurant_orders = df.groupby('Restaurant_Name')
['Orders'].sum().sort_values(ascending=False)
restaurant_orders.head(8).plot(kind='bar')
plt.title("Top Zomato Restaurants by Orders")
plt.xlabel('Restaurant'); plt.ylabel('Orders'); plt.show()
```

Appendix E — Supporting Analysis Tables

Supporting tables can be generated from the same dataset using Pandas groupby operations for restaurant, category, city, channel, age group, meal type, dish, discount and order status. These tables can be exported to Excel for further academic verification.

Appendix F — Academic Limitation

The dataset is synthetic and therefore cannot represent actual Zomato orders, customers, revenue, market share or official restaurant performance. The purpose of the appendix is to make the analysis reproducible and demonstrate the use of Python, Pandas and Matplotlib in a descriptive analytics workflow.