

Create Application

The screenshot shows a REST client interface with a POST request to `http://localhost:8000/api/applications`. The request body is a JSON object with the following fields:

```
{  "companyName": "Google",  "jobRole": "Software Engineer Intern",  "location": "Bangalore",  "salary": 45000,  "status": "Applied"}
```

The response body shows the created application with the following fields:

```
{  "companyName": "Google",  "jobRole": "Software Engineer Intern",  "location": "Bangalore",  "salary": 45000,  "status": "Applied",  "_id": "6a36c7c6f8079e7da26cfb28",  "applicationDate": "2026-06-20T17:03:02.959Z",  "createdAt": "2026-06-20T17:03:02.964Z",  "updatedAt": "2026-06-20T17:03:02.964Z",  "__v": 0}
```


```
_id: ObjectId('6a36c7c6f8079e7da26cfb28')
companyName : "Google"
jobRole : "Software Engineer Intern"
location : "Bangalore"
salary : 45000
status : "Applied"
applicationDate : 2026-06-20T17:03:02.959+00:00
createdAt : 2026-06-20T17:03:02.964+00:00
updatedAt : 2026-06-20T17:03:02.964+00:00
__v : 0
```

Get All Applications

The screenshot shows a REST client interface with a GET request to `http://localhost:8000/api/applications`. The response is displayed in JSON format, showing a list of three application records. Each record contains fields for `_id`, `companyName`, `jobRole`, `location`, `salary`, `status`, `applicationDate`, `__v`, `createdAt`, and `updatedAt`.

```
1  {
2    "_id": "6a36c3c042ad252a032f75e7",
3    "companyName": "Oracle",
4    "jobRole": "Software Engineer Intern",
5    "location": "India",
6    "salary": 38248,
7    "status": "Shortlisted",
8    "applicationDate": "2026-06-20T16:45:52.654Z",
9    "__v": 0,
10   "createdAt": "2026-06-20T16:45:52.659Z",
11   "updatedAt": "2026-06-20T16:45:52.659Z"
12 },
13 {
14   "_id": "6a36c3c042ad252a032f75e8",
15   "companyName": "Microsoft",
16   "jobRole": "Software Engineer Intern",
17   "location": "India",
18   "salary": 54946,
19   "status": "Selected",
20   "applicationDate": "2026-06-20T16:45:52.655Z",
21   "__v": 0,
22   "createdAt": "2026-06-20T16:45:52.660Z",
23   "updatedAt": "2026-06-20T16:45:52.660Z"
24 },
25 {
26   "_id": "6a36c3c042ad252a032f75e9",
27   "companyName": "Microsoft",
28   "jobRole": "Software Engineer Intern",
29   "location": "India",
30   "salary": 51152,
31   "status": "Selected",
32   "applicationDate": "2026-06-20T16:45:52.655Z",
33   "__v": 0,
34   "createdAt": "2026-06-20T16:45:52.660Z",
35   "updatedAt": "2026-06-20T16:45:52.660Z"
36 },
37 }
38 }
```

Get Application By ID

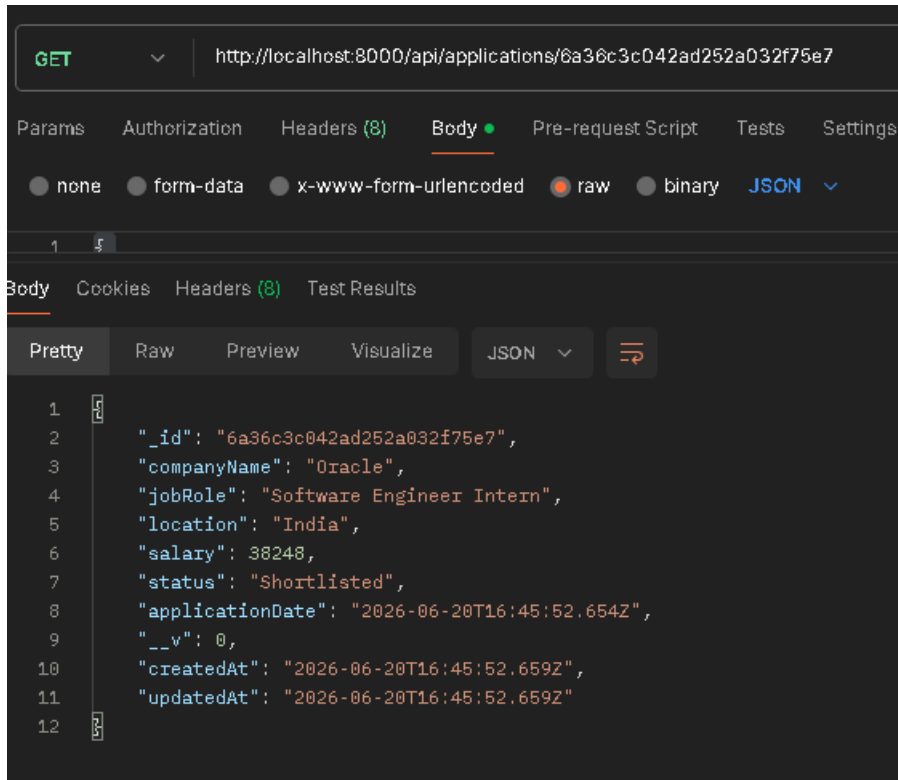

GET ⌵ http://localhost:8000/api/applications/6a36c3c042ad252a032f75e7

Params Authorization Headers (8) **Body** Pre-request Script Tests Settings

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary JSON ⌵


1 ⌵

Body Cookies Headers (8) Test Results

Pretty Raw Preview Visualize JSON ⌵ ↻

```
1 {
2   "_id": "6a36c3c042ad252a032f75e7",
3   "companyName": "Oracle",
4   "jobRole": "Software Engineer Intern",
5   "location": "India",
6   "salary": 38248,
7   "status": "Shortlisted",
8   "applicationDate": "2026-06-20T16:45:52.654Z",
9   "__v": 0,
10  "createdAt": "2026-06-20T16:45:52.659Z",
11  "updatedAt": "2026-06-20T16:45:52.659Z"
12 }
```

Search Google

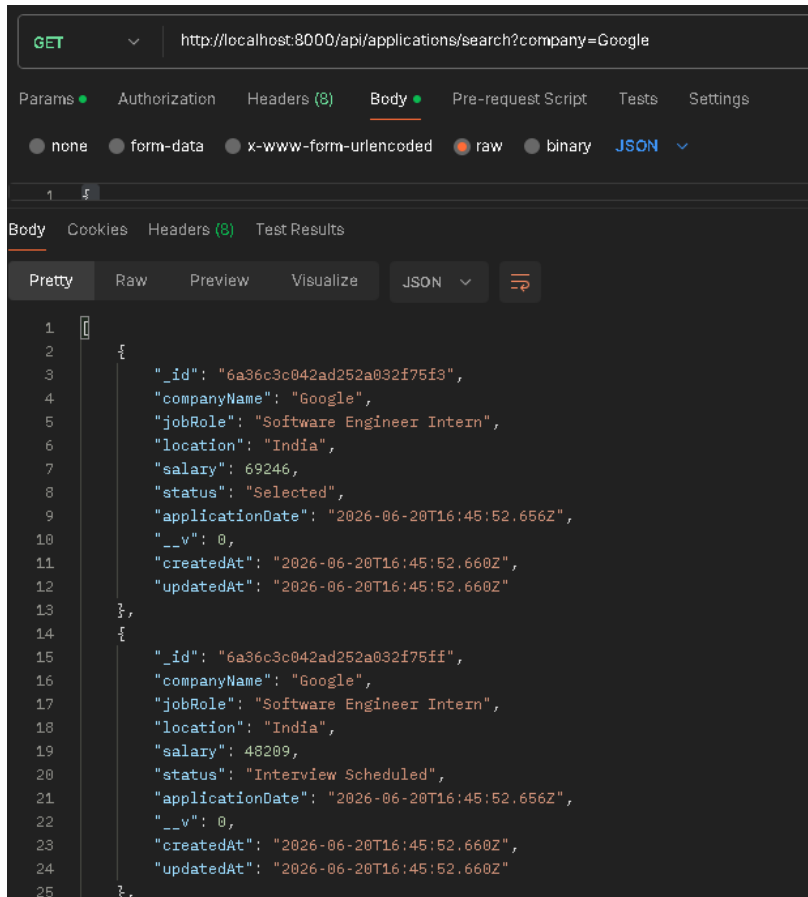

GET ⌵ http://localhost:8000/api/applications/search?company=Google

Params ● Authorization Headers (8) **Body** ● Pre-request Script Tests Settings

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary JSON ⌵


1 ⌵

Body Cookies Headers (8) Test Results

Pretty Raw Preview Visualize JSON ⌵ ↻

```
1 {
2   {
3     "_id": "6a36c3c042ad252a032f75f3",
4     "companyName": "Google",
5     "jobRole": "Software Engineer Intern",
6     "location": "India",
7     "salary": 69246,
8     "status": "Selected",
9     "applicationDate": "2026-06-20T16:45:52.656Z",
10    "__v": 0,
11    "createdAt": "2026-06-20T16:45:52.660Z",
12    "updatedAt": "2026-06-20T16:45:52.660Z"
13  },
14  {
15    "_id": "6a36c3c042ad252a032f75ff",
16    "companyName": "Google",
17    "jobRole": "Software Engineer Intern",
18    "location": "India",
19    "salary": 48209,
20    "status": "Interview Scheduled",
21    "applicationDate": "2026-06-20T16:45:52.656Z",
22    "__v": 0,
23    "createdAt": "2026-06-20T16:45:52.660Z",
24    "updatedAt": "2026-06-20T16:45:52.660Z"
25  }
26 }
```

Search Microsoft

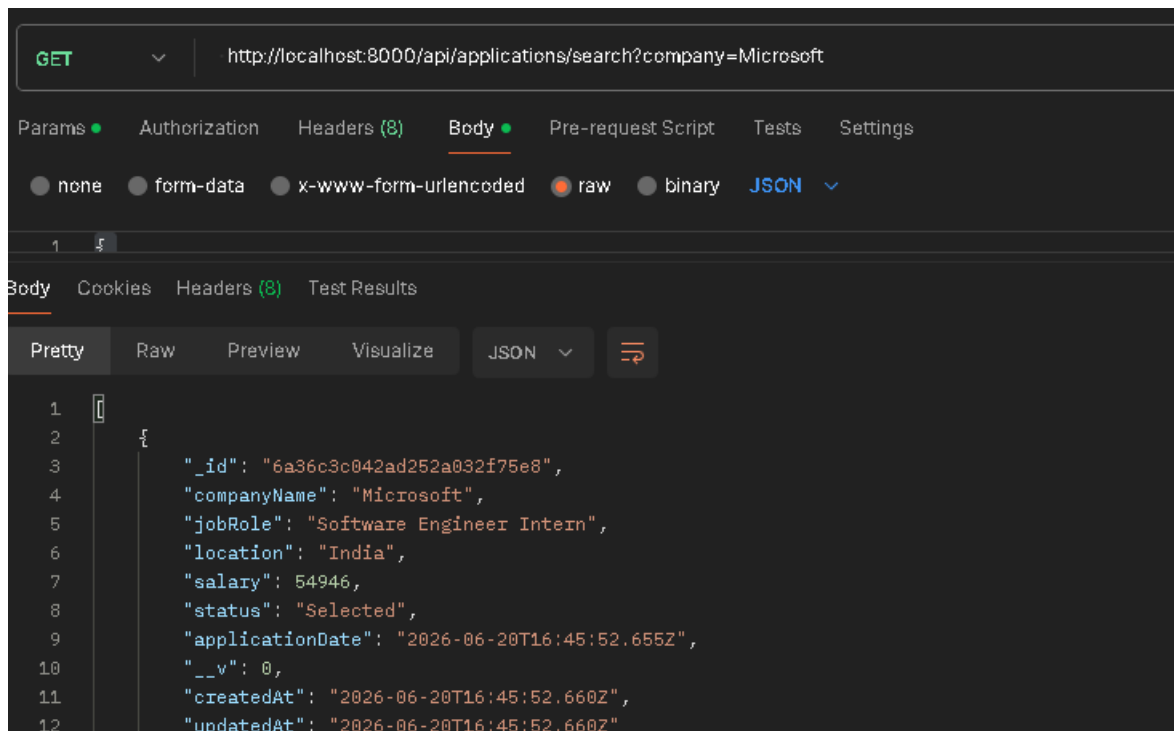

GET ▼ http://localhost:8000/api/applications/search?company=Microsoft

Params ● Authorization Headers (8) Body ● Pre-request Script Tests Settings

● none ● form-data ● x-www-form-urlencoded ● raw ● binary JSON ▼


1 \$

Body Cookies Headers (8) Test Results

Pretty Raw Preview Visualize JSON ▼ ⇌

```
1 {
2   "_id": "6a36c3c042ad252a032f75e8",
3   "companyName": "Microsoft",
4   "jobRole": "Software Engineer Intern",
5   "location": "India",
6   "salary": 54946,
7   "status": "Selected",
8   "applicationDate": "2026-06-20T16:45:52.655Z",
9   "__v": 0,
10  "createdAt": "2026-06-20T16:45:52.660Z",
11  "updatedAt": "2026-06-20T16:45:52.660Z"
```

Filter Applied

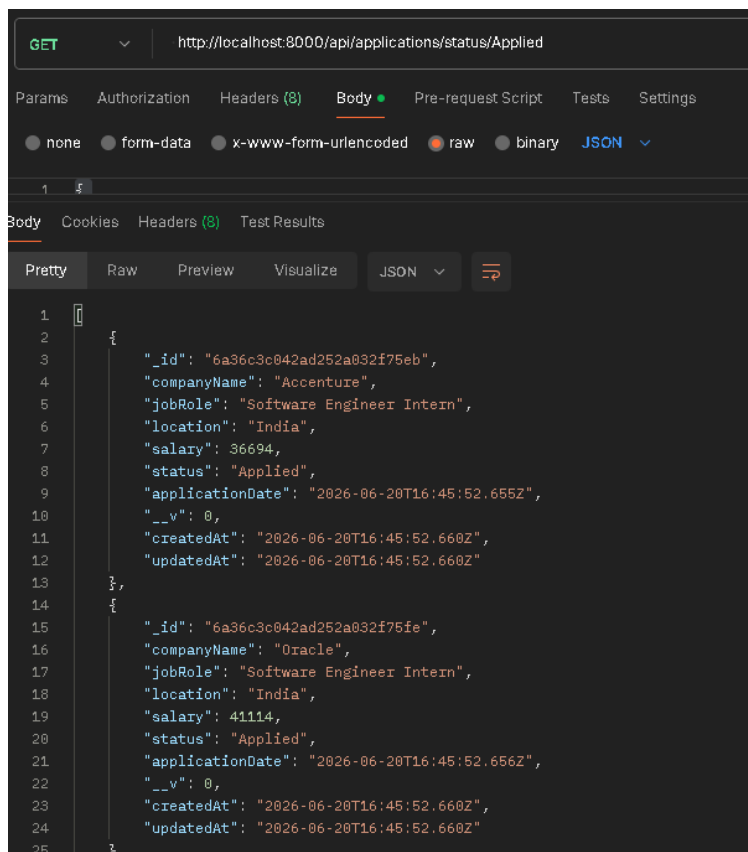

GET ▼ http://localhost:8000/api/applications/status/Applied

Params Authorization Headers (8) Body ● Pre-request Script Tests Settings

● none ● form-data ● x-www-form-urlencoded ● raw ● binary JSON ▼


1 \$

Body Cookies Headers (8) Test Results

Pretty Raw Preview Visualize JSON ▼ ⇌

```
1 {
2   "_id": "6a36c3c042ad252a032f75eb",
3   "companyName": "Accenture",
4   "jobRole": "Software Engineer Intern",
5   "location": "India",
6   "salary": 36694,
7   "status": "Applied",
8   "applicationDate": "2026-06-20T16:45:52.655Z",
9   "__v": 0,
10  "createdAt": "2026-06-20T16:45:52.660Z",
11  "updatedAt": "2026-06-20T16:45:52.660Z"
12 },
13 {
14   "_id": "6a36c3c042ad252a032f75fe",
15   "companyName": "Oracle",
16   "jobRole": "Software Engineer Intern",
17   "location": "India",
18   "salary": 41114,
19   "status": "Applied",
20   "applicationDate": "2026-06-20T16:45:52.656Z",
21   "__v": 0,
22   "createdAt": "2026-06-20T16:45:52.660Z",
23   "updatedAt": "2026-06-20T16:45:52.660Z"
24 }
25 }
```

Filter Shortlisted

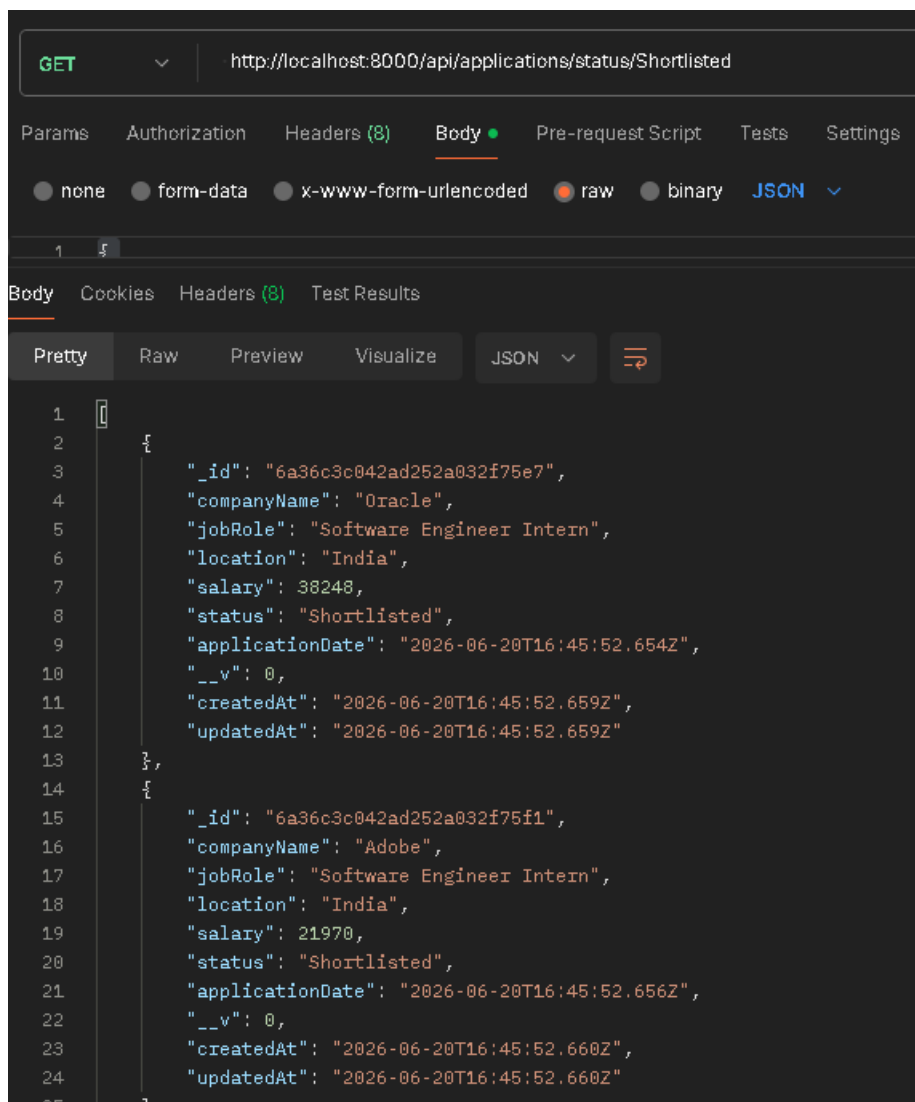

GET <http://localhost:8000/api/applications/status/Shortlisted>

Params Authorization Headers (8) **Body** Pre-request Script Tests Settings

none form-data x-www-form-urlencoded raw binary **JSON**

Body Cookies Headers (8) Test Results

Pretty Raw Preview Visualize JSON

```
1 {
2   {
3     "_id": "6a36c3c042ad252a032f75e7",
4     "companyName": "Oracle",
5     "jobRole": "Software Engineer Intern",
6     "location": "India",
7     "salary": 38248,
8     "status": "Shortlisted",
9     "applicationDate": "2026-06-20T16:45:52.654Z",
10    "__v": 0,
11    "createdAt": "2026-06-20T16:45:52.659Z",
12    "updatedAt": "2026-06-20T16:45:52.659Z"
13  },
14  {
15    "_id": "6a36c3c042ad252a032f75f1",
16    "companyName": "Adobe",
17    "jobRole": "Software Engineer Intern",
18    "location": "India",
19    "salary": 21970,
20    "status": "Shortlisted",
21    "applicationDate": "2026-06-20T16:45:52.656Z",
22    "__v": 0,
23    "createdAt": "2026-06-20T16:45:52.660Z",
24    "updatedAt": "2026-06-20T16:45:52.660Z"
25  }
```

```
▶ {
  _id: ObjectId('6a36c3c042ad252a032f75e7')
  companyName: "Oracle"
  jobRole: "Software Engineer Intern"
  location: "India"
  salary: 38248
  status: "Shortlisted"
  applicationDate: 2026-06-20T16:45:52.654+00:00
  __v: 0
  createdAt: 2026-06-20T16:45:52.659+00:00
  updatedAt: 2026-06-20T16:45:52.659+00:00
}
```

Filter Interview Scheduled

The screenshot shows a REST client interface with the following details:

- Method:** GET
- URL:** `http://localhost:8000/api/applications/status/Interview%20Scheduled`
- Body Type:** JSON
- Response Body:** A JSON array containing two objects, each representing an interview application.

```
1  [
2    {
3      "_id": "6a36c3c042ad252a032f75ed",
4      "companyName": "Oracle",
5      "jobRole": "Software Engineer Intern",
6      "location": "India",
7      "salary": 61584,
8      "status": "Interview Scheduled",
9      "applicationDate": "2026-06-20T16:45:52.655Z",
10     "__v": 0,
11     "createdAt": "2026-06-20T16:45:52.660Z",
12     "updatedAt": "2026-06-20T16:45:52.660Z"
13   },
14   {
15     "_id": "6a36c3c042ad252a032f75f5",
16     "companyName": "Infosys",
17     "jobRole": "Software Engineer Intern",
18     "location": "India",
19     "salary": 59211,
20     "status": "Interview Scheduled",
21     "applicationDate": "2026-06-20T16:45:52.656Z",
22     "__v": 0,
23     "createdAt": "2026-06-20T16:45:52.660Z",
24     "updatedAt": "2026-06-20T16:45:52.660Z"
25   },
26 ]
```

Update Application

The screenshot displays a REST client interface with a PUT request to `http://localhost:8000/api/applications/6a36c3c042ad252a032f75ea`. The request body is a JSON object with the `status` field set to `"Shortlisted"`. The response is a JSON object containing application details, with the `status` field highlighted in green.

Request:

```
PUT http://localhost:8000/api/applications/6a36c3c042ad252a032f75ea
{
  "status": "Shortlisted"
}
```

Response:

```
{
  "_id": "6a36c3c042ad252a032f75ea",
  "companyName": "Google",
  "jobRole": "Software Engineer Intern",
  "location": "Bangalore",
  "salary": 45000,
  "status": "Shortlisted",
  "applicationDate": "2026-06-20T16:45:52.655Z",
  "__v": 0,
  "createdAt": "2026-06-20T16:45:52.660Z",
  "updatedAt": "2026-06-20T17:15:13.762Z"
}
```

Formatted Response:

```
{
  _id: ObjectId('6a36c3c042ad252a032f75ea')
  companyName: "Google"
  jobRole: "Software Engineer Intern"
  location: "Bangalore"
  salary: 45000
  status: "Shortlisted"
  applicationDate: 2026-06-20T16:45:52.655+00:00
  __v: 0
  createdAt: 2026-06-20T16:45:52.660+00:00
  updatedAt: 2026-06-20T17:15:13.762+00:00
}
```

Delete Application

The screenshot shows a REST client interface with a DELETE request to `http://localhost:8000/api/applications/6a36c3c042ad252a032f75ea`. The response is a JSON object with a message.

Request:

- Method: DELETE
- URL: `http://localhost:8000/api/applications/6a36c3c042ad252a032f75ea`
- Body: (Empty)

Response:

```
{  "message": "Application deleted"}
```

Analytics Total

The screenshot shows a REST client interface with a GET request to `http://localhost:8000/api/analytics/total`. The response is a JSON object with the total number of applications.

Request:

- Method: GET
- URL: `http://localhost:8000/api/analytics/total`
- Body: (Empty)

Response:

```
{  "totalApplications": 50}
```


Analytics Status Stats

The screenshot shows a REST client interface with a GET request to `http://localhost:8000/api/analytics/status-stats`. The response body is displayed in a JSON format, showing a list of status statistics.

```
1 {
2   {
3     "_id": "Rejected",
4     "count": 12
5   },
6   {
7     "_id": "Interview Scheduled",
8     "count": 11
9   },
10  {
11    "_id": "Selected",
12    "count": 9
13  },
14  {
15    "_id": "Shortlisted",
16    "count": 9
17  },
18  {
19    "_id": "Applied",
20    "count": 9
21  }
22 }
```

Analytics Company Stats

GET http://localhost:8000/api/analytics/company-stats

Params Authorization Headers (6) Body Pre-request Script Tests Settings

☐ none ☐ form-data ☐ x-www-form-urlencoded ☒ raw ☐ binary JSON ▾


1

Body Cookies Headers (8) Test Results


Pretty Raw Preview Visualize JSON ▾ 

```
1 [
2   {
3     "_id": "Oracle",
4     "count": 9
5   },
6   {
7     "_id": "Google",
8     "count": 7
9   },
10  {
11    "_id": "Adobe",
12    "count": 6
13  },
14  {
15    "_id": "Microsoft",
16    "count": 6
17  },
18  {
19    "_id": "Accenture",
20    "count": 5
21  },
22  {
23    "_id": "Infosys",
24    "count": 5
25  },
26  {
27    "_id": "Amazon",
28    "count": 4
29  },
30  {
31    "_id": "PayPal",
32    "count": 4
33  },
34  {
35    "_id": "TCS",
36    "count": 3
37  },
38 ]
```


Analytics Average Salary

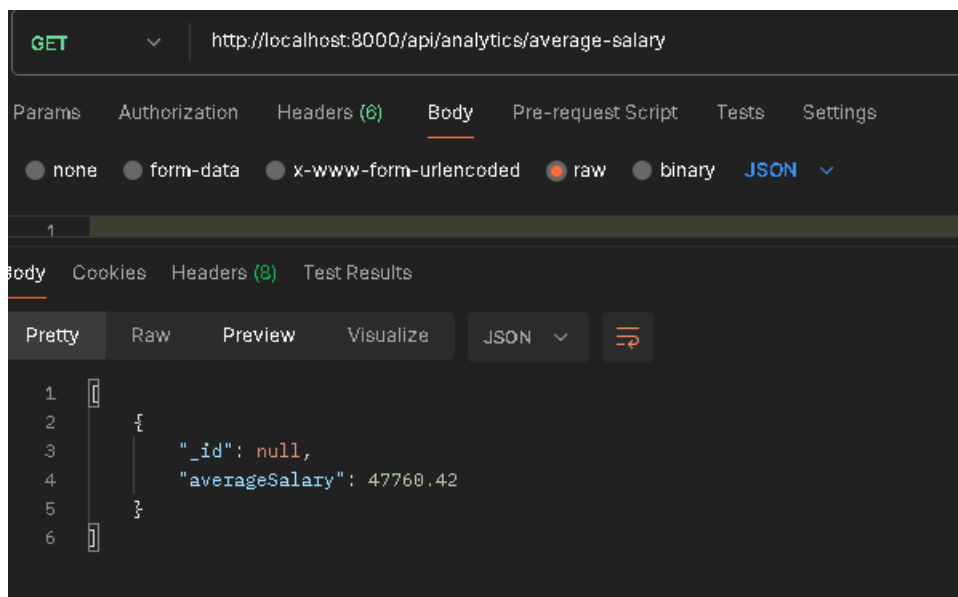

Analytics Monthly Trends

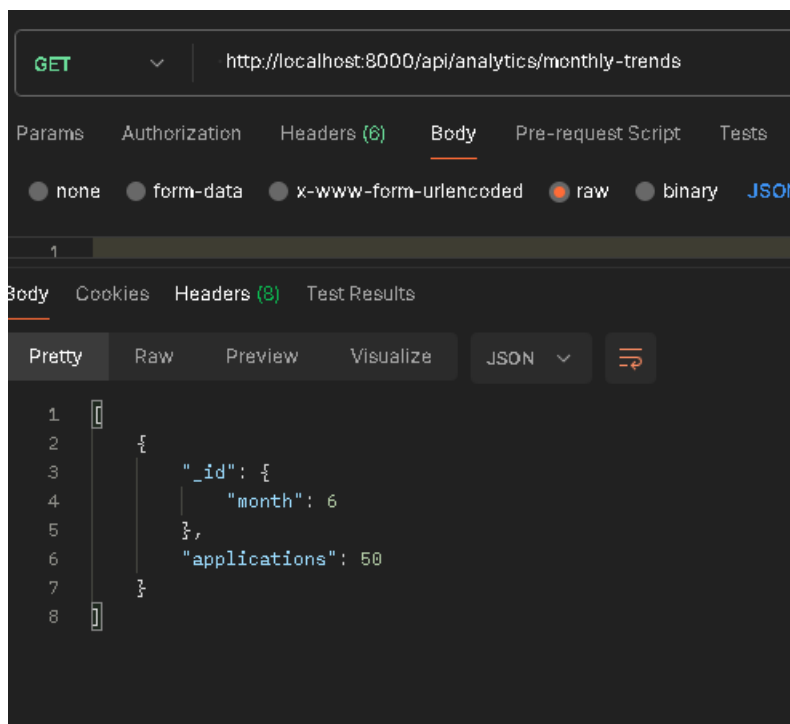

Root Endpoint

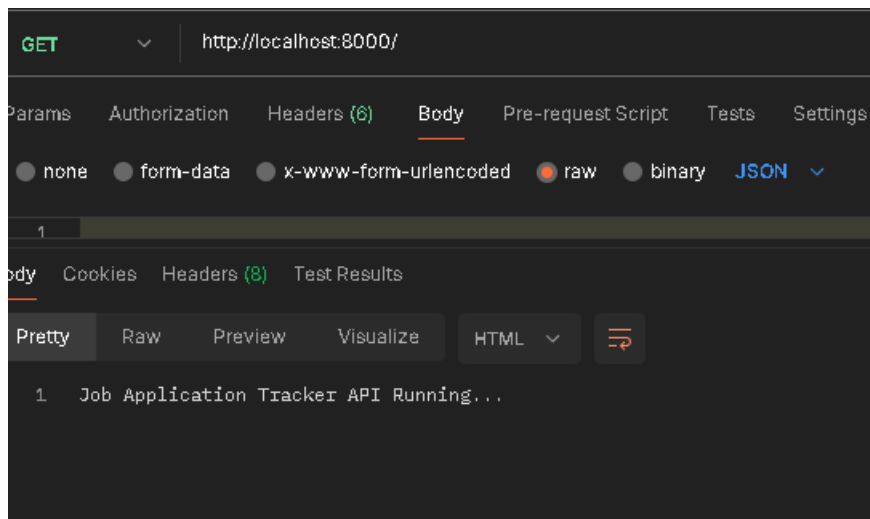

Swagger UI

 **Swagger**
Powered by SMARTBEAR

Job Application Tracker API

1.0.0 OAS 3.0

Backend API for managing and tracking job applications using Node.js, Express.js and MongoDB

Servers

http://localhost:8000

Applications

GET

/api/applications

Get all applications

POST

/api/applications

Create a new application

GET

/api/applications/{id}

Get application by ID

PUT

/api/applications/{id}

Update application

DELETE

/api/applications/{id}

Delete application

GET

/api/applications/search

Search by company name

GET

/api/applications/status/{status}

Filter applications by status

Analytics

GET

/api/analytics/total

Get total applications

GET

/api/analytics/status-stats

Status statistics

GET

/api/analytics/company-stats

Company statistics

GET

/api/analytics/average-salary

Average salary analytics

GET

/api/analytics/monthly-trends

Monthly application trends

Mongo Database Collection

The screenshot displays the MongoDB Compass web interface. On the left sidebar, under 'CONNECTIONS (5)', the 'Project1' database is expanded, showing a collection named 'applications' under the 'jobApplicationTracker' namespace. The main panel shows the 'applications' collection with 51 documents. The 'Documents' tab is active, displaying a list of documents. Each document represents a job application with fields like location, salary, status, applicationDate, and createdAt/updatedAt timestamps.

Project1 > jobApplicationTracker > applications

Documents (51) Aggregations Schema Indexes (2)

Type a query: { field: 'value' } or [Generate query](#)

ADD DATA **BULK** **EXPORT DATA** **EXPORT**

```
{
  "location": "India",
  "salary": 41861,
  "status": "Interview Scheduled",
  "applicationDate": "2026-06-20T16:45:52.657+00:00",
  "__v": 0,
  "createdAt": "2026-06-20T16:45:52.661+00:00",
  "updatedAt": "2026-06-20T16:45:52.661+00:00"
}
```

```
{
  "_id": ObjectId('6a36c3c042ad252a032f7617'),
  "companyName": "Adobe",
  "jobRole": "Software Engineer Intern",
  "location": "India",
  "salary": 48324,
  "status": "Applied",
  "applicationDate": "2026-06-20T16:45:52.657+00:00",
  "__v": 0,
  "createdAt": "2026-06-20T16:45:52.661+00:00",
  "updatedAt": "2026-06-20T16:45:52.661+00:00"
}
```

```
{
  "_id": ObjectId('6a36c3c042ad252a032f7618'),
  "companyName": "Oracle",
  "jobRole": "Software Engineer Intern",
  "location": "India",
  "salary": 63711,
  "status": "Applied",
  "applicationDate": "2026-06-20T16:45:52.657+00:00",
  "__v": 0,
  "createdAt": "2026-06-20T16:45:52.661+00:00",
  "updatedAt": "2026-06-20T16:45:52.661+00:00"
}
```

```
{
  "_id": ObjectId('6a36c7c6f8079e7da26cfb28'),
  "companyName": "Google",
  "jobRole": "Software Engineer Intern",
  "location": "Bangalore",
  "salary": 45000,
  "status": "Applied",
  "applicationDate": "2026-06-20T17:03:02.959+00:00",
  "createdAt": "2026-06-20T17:03:02.964+00:00",
  "updatedAt": "2026-06-20T17:03:02.964+00:00",
  "__v": 0
}
```