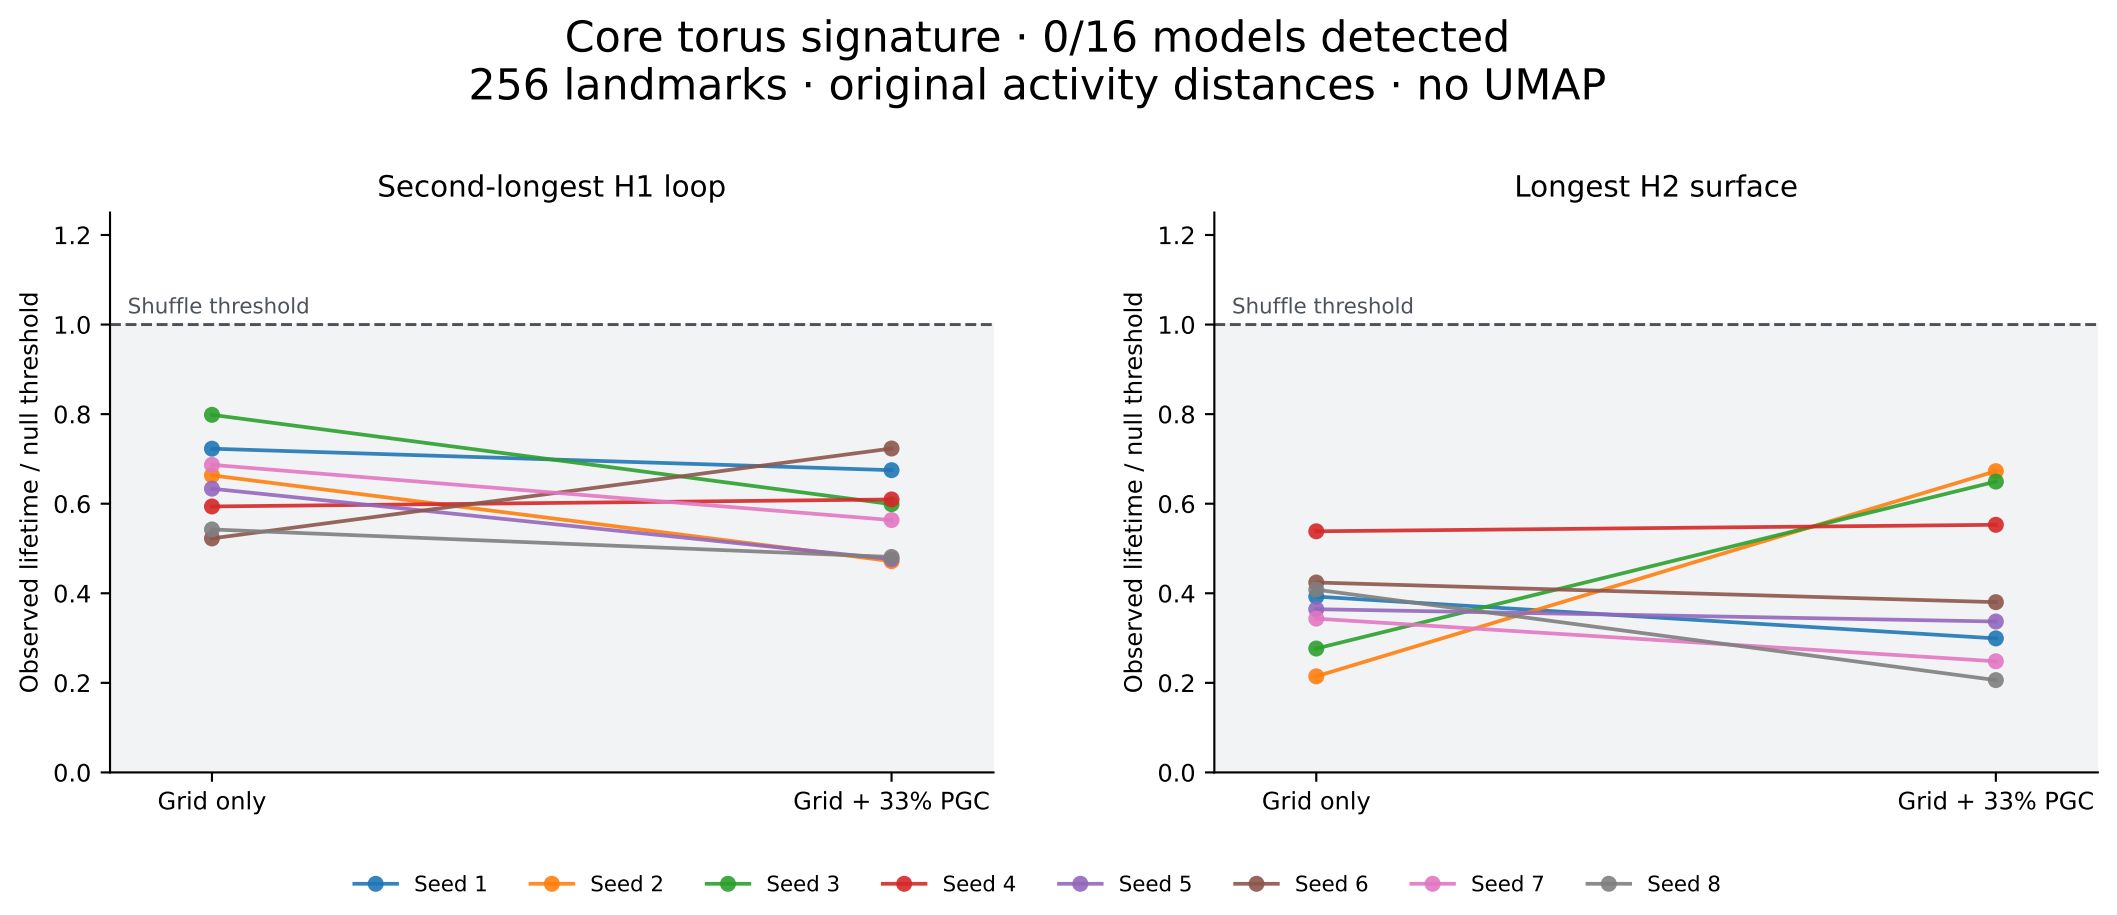
Core torus signature · 0/16 models detected
256 landmarks · original activity distances · no UMAP
Second-longest H1 loop
Longest H2 surface
Observed lifetime / null threshold
Shuffle threshold
1.2
1.0
0.8
0.6
0.4
0.2
0.0
Grid only
Grid + 33% PGC
Seed 1
Seed 2
Seed 3
Seed 4
Seed 5
Seed 6
Seed 7
Seed 8
A core signature requires two strong H1 loops and one strong H2 surface to coexist with Betti counts (1, 2, 1).
Per-model exploratory thresholds from independent circular neuron shifts; persistence refers to distance scale, not elapsed time.