

ENTITY-RELATIONSHIP MODEL



Overview of Database Design

11

□ Conceptual design:

- What are the *entities* and *relationships* in the enterprise?
- What information about these entities and relationships should we store in the database?
- What are the *integrity constraints* or *business rules* that hold?

Purpose of E/R Model

12

- The Entity/Relationship (E/R) model allows us to sketch database schema designs.
 - ▣ Includes some constraints
- Schema designs are pictures called *entity-relationship diagrams*.
- **Later:** convert E/R designs to relational DB designs.

Framework for E/R

13

- Design is a necessity.
- Management know they want a database, but they don't know what they want in it.
- Sketching the key components is an efficient way to develop a working database.

Entity Sets

14

- *Entity* = “thing” or object.
- *Entity set* = collection of similar entities.
 - ▣ Similar to a class in object-oriented languages.
- *Attribute* = property of an entity set.
 - ▣ Attributes are simple values, e.g. integers or character strings, not structs, sets, etc.
 - ▣ Each attribute has a *domain*.


E/R Diagrams

15

- In an entity-relationship diagram:
 - ▣ Entity set = rectangle.
 - ▣ Attribute = oval, with a line to the rectangle representing its entity set.
 - ▣ Notation varies: some textbooks represents attributes within the (entity) rectangle

Example

16

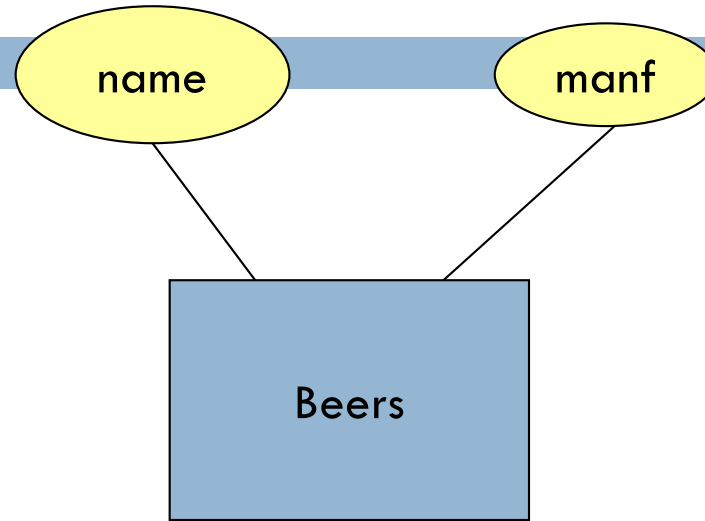

- Entity set **Beers** has two attributes, **name** and **manf** (manufacturer).
- Each **Beers** entity has values for these two attributes, e.g. (Bud, Anheuser-Busch)


Relationships

17

- A **relationship** connects two or more entity sets.
- It is represented by a diamond, with lines to each of the entity sets involved.

Example: Relationships

18

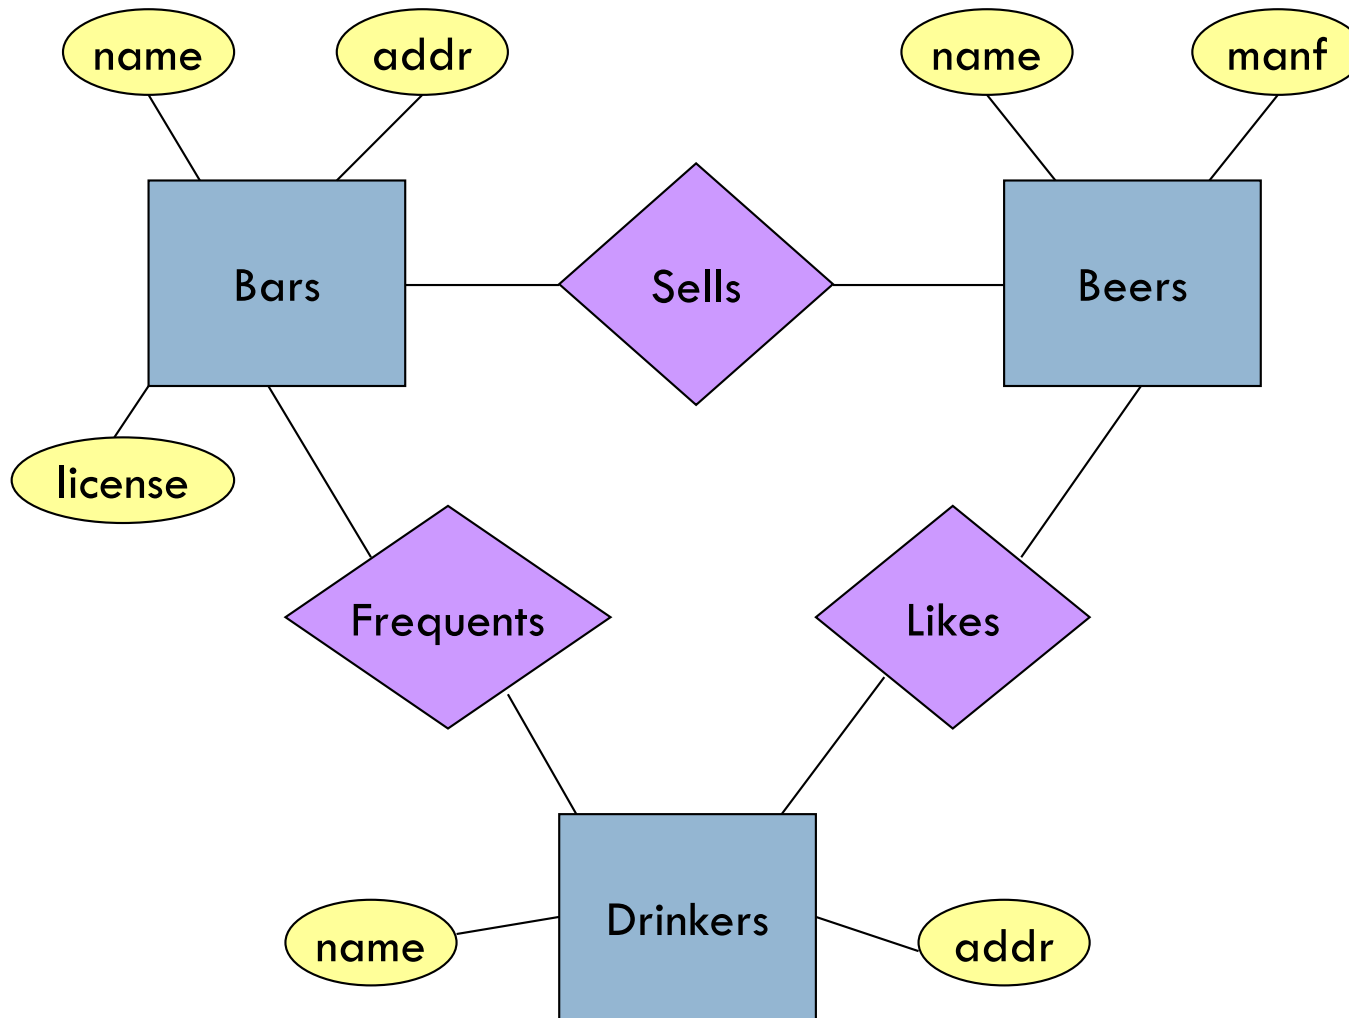

Bars sell some beers.

Drinkers like some beers.

Drinkers frequent some bars.

Relationship Set

19

- The current “value” of an entity set is the set of entities that belong to it.
 - **Example:** the set of all bars in our database.
- The “value” of a relationship is a *relationship set*, a set of tuples with one component for each related entity set.

Example: Relationship Set

20

- For the relationship **Sells**, we might have a relationship set like:

Bar	Beer
Joe's Bar	Bud
Joe's Bar	Miller
Sue's Bar	Bud
Sue's Bar	Pete's Ale
Sue's Bar	Bud Lite


Multiway Relationships

21

- Sometimes, we need a relationship that connects more than two entity sets.
- Suppose that drinkers will only drink certain beers at certain bars.
 - ▣ Our three binary relationships **Likes**, **Sells**, and **Frequents** do not allow us to make this distinction.
 - ▣ But a 3-way relationship would.

Example: 3-Way Relationship

22

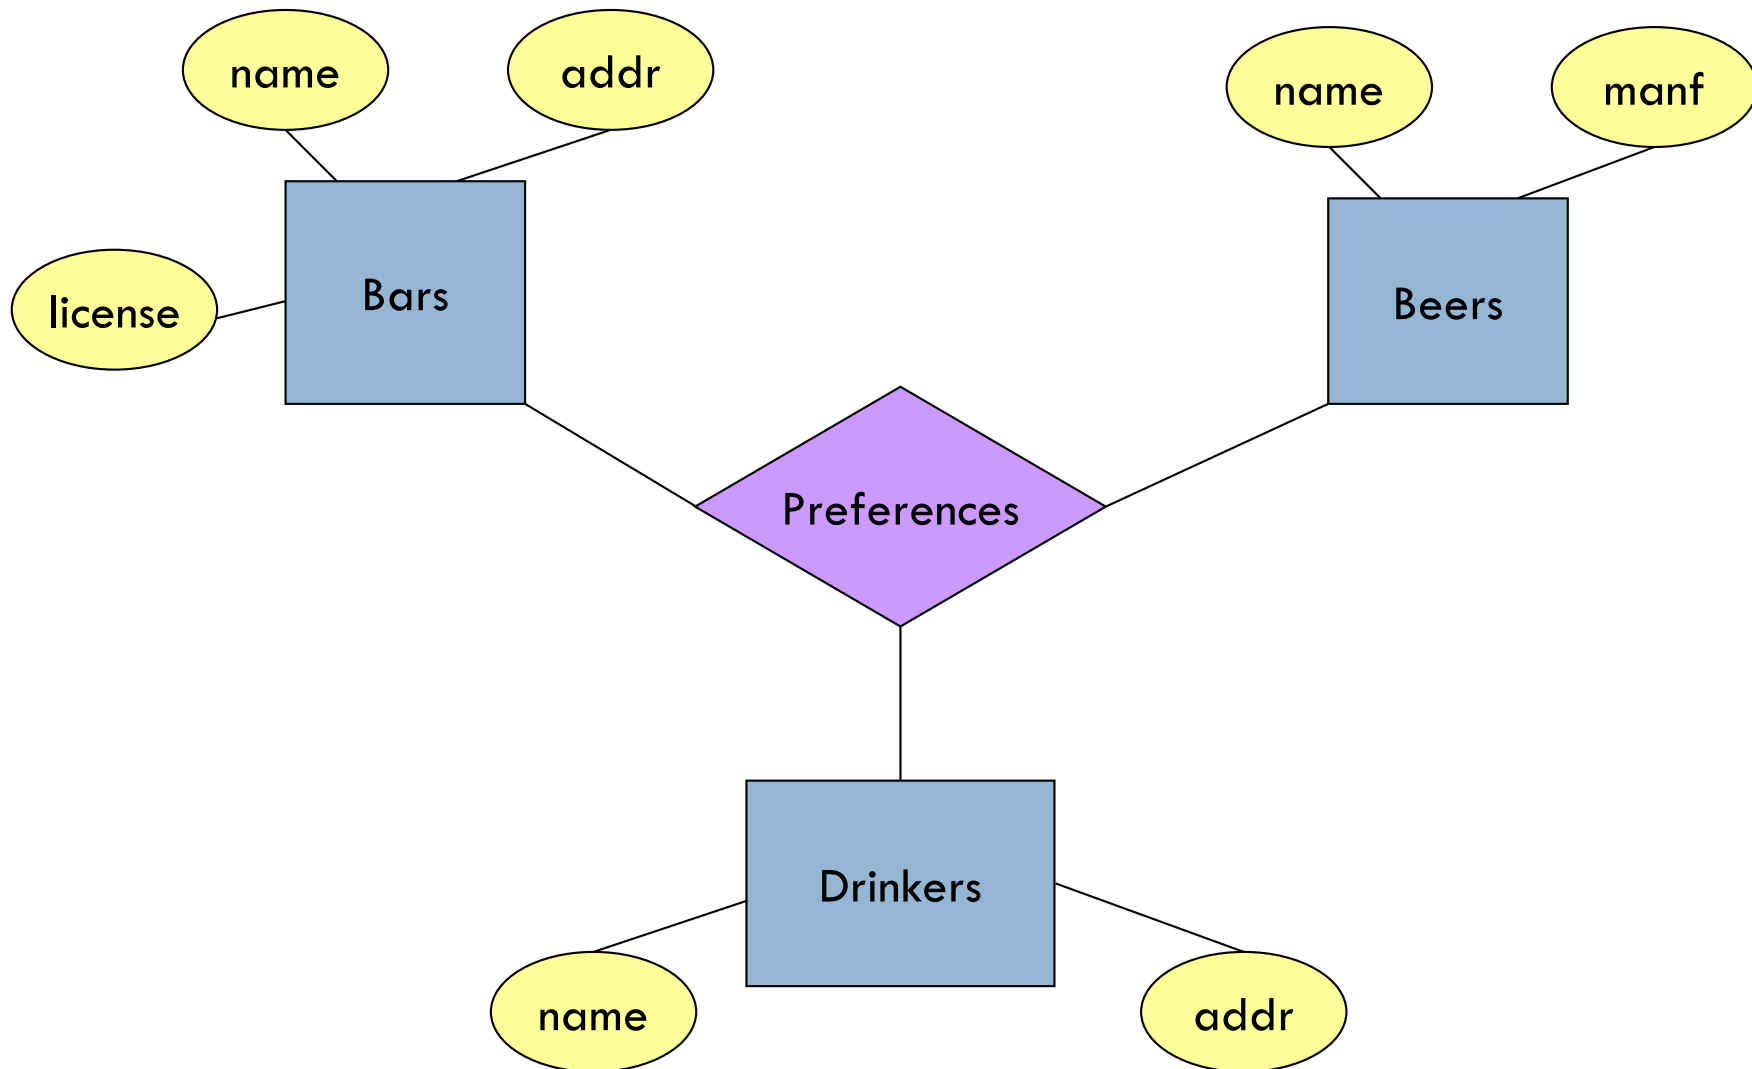

A Typical Relationship Set

23

Bar	Drinker	Beer
Joe's Bar	Ann	Miller
Sue's Bar	Ann	Bud
Sue's Bar	Ann	Pete's Ale
Joe's Bar	Bob	Bud
Joe's Bar	Bob	Miller
Joe's Bar	Cal	Miller
Sue's Bar	Cal	Bud Lite


Many-Many Relationships

24

- Focus: **binary** relationships, such as **Sells** between **Bars** and **Beers**.
- In a **many-many relationship**, an entity of either set can be connected to many entities of the other set.
 - ▣ E.g., a bar sells many beers; a beer is sold by many bars.

In Pictures:

25

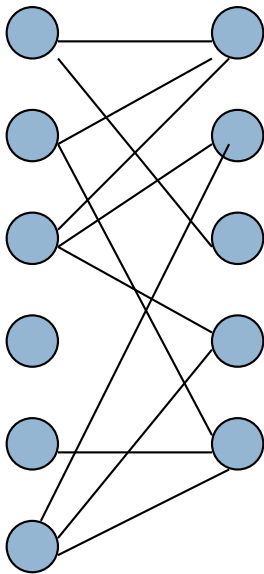

many-many

Note: each line is an instance of the binary relationship


Many-One Relationships

26



- Some binary relationships are *many -one* from one entity set to another.
- Each entity of the first set is connected to at most one entity of the second set.
- But an entity of the second set can be connected to zero, one, or many entities of the first set.

In Pictures:

27

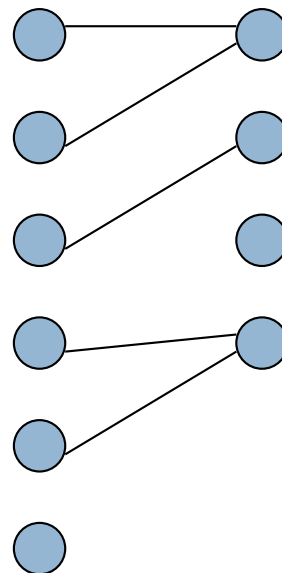

many-one



(Partial) Function on entity set

Example: Many-One Relationship

28

- **Favourite**, from **Drinkers** to **Beers** is many-one.
- A drinker has at most one favourite beer.
- But a beer can be the favorite of any number of drinkers, including zero.

