

National University of Singapore

TIC1002—Introduction to Computing and Programming II

Semester 2, 2017/2018

Time allowed: 2 hours

-
1. Please write your Student Number only. Do not write your name.
 2. The assessment paper contains **SIX (6) questions** and comprises **TWENTY (20) pages** including this cover page.
 3. Weightage of questions is given in square brackets. The maximum attainable score is 100.
 4. This is a **OPEN** book assessment. However, no electronic devices are allowed.
 5. Five additional minutes of reading time will be given before the start of the assessment. You may read the paper but are not allowed to write anything during this time.
 6. Write all your answers in the space provided in this booklet.
 7. You are allowed to write with pencils, as long as it is legible.
 8. **Please write your student number below.**

STUDENT NO:

A								
---	--	--	--	--	--	--	--	--

(This portion is for the examiner's use only)

Question	Marks	Remarks
Q1	/ 20	
Q2	/ 15	
Q3	/ 12	
Q4	/ 12	
Q5	/ 24	
Q6	/ 17	
Total	/ 100	

This page is intentionally left blank.

It may be used as scratch paper.

Question 1: C Expressions [20 marks]

There are several parts to this question which are to be answered independently and separately. Each part consists of a fragment of C code. Write the **exact output** produced by the code in **the answer box**. If an error occurs, or it enters an infinite loop, state and explain why.

You may show workings **outside the answer box** in the space beside the code. Partial marks may be awarded for workings if the final answer is wrong.

Assume that all appropriate preprocessor directives e.g., `#include <stdio.h>`, etc. have already been defined.

A. `char s[11] = "unpuzzling";` [5 marks]

```
for (int i = 0; i < 10; i++) {  
    switch (s[i]) {  
        case 'u':  
            i++;  
        case 'z':  
            s[i-1] = s[i+1];  
            break;  
        case 'n':  
            s[i] = s[i+1];  
    }  
}  
printf("%s", s);
```

B. `int a[11] = {0, 1, 2, 3, 4, 5, 4, 3, 2, 1, 0};` [5 marks]

```
for (int i = 0; i < 10; i++) {  
    int x = i;  
    for (int k = i; k < 10; k++) {  
        if (a[k] > a[x]) {  
            x = k;  
        }  
    }  
    printf("%d", a[x]);  
}
```

C. typedef struct a {

[5 marks]

```
    int x;  
    int y;  
    char s[10];  
    struct a *a;  
} a;  
  
a x = {2, 5, "Carpe ", NULL};  
a y = {1, 3, "Diem!", &x};  
x.a = &y;  
printf("%c,%c,%c",  
        y.s[x.a->a->x],  
        x.s[y.a->y],  
        x.a->s[y.a->a->x]);
```

D. int f(int x, int y) {

[5 marks]

```
    if (x % y) {  
        return x+y;  
    } else if (x > y) {  
        return f(x-y, y*2) + x;  
    } else {  
        return f(x+1, y-x) + y;  
    }  
}
```

```
int main() {  
    int x = 7;  
    int y = 2;  
    printf("%d", f(x, y));  
}
```

Question 2: Arithmetic Progression Sum [15 marks]

In the course, we discussed a simple example of *Arithmetic Progression* (AP) where the successive item differs by 1, e.g. 1, 2, 3, ..., 49, 50. The progression can be generalized to start from any number a_1 with a difference ("skip"), d , of any positive number, e.g. 3, 5, 7, 9 is a AP with $a_1 = 3$ and a skip of $d = 2$ between each term.

The n th term of an AP can be obtained from the formula $a_n = a_1 + (n - 1)d$. Given the number of terms in the progression, we can easily find out the last term. For example, $a_4 = 3 + (4 - 1) \times 2 = 3 + 6 = 9$.

Similarly, we can generalized the sum of Arithmetic Progression as: $S = \sum_{i=1}^n a_i = \frac{n(a_1 + a_n)}{2}$. For example, the sum of 3, 5, 7, 9 = $\frac{4(3+9)}{2} = 24$.

Suppose we have written a function `void print_ap_table(int start, int row, int col);` to print out a **Table of AP sum**. The row number (1, ..., `row`) represents the *skip*, i.e. row 1 has skip of 1, row 2 has skip of 2 etc. The column number (1, ..., `col`) indicates the number of terms in the AP, i.e. column 1 is the sum of 1 term in the AP, column 2 is the sum of 2 terms in the AP, etc.

Below is a sample output for `print_ap_table(3, 4, 5)`:

	1	2	3	4	5
1	3	7	12	18	25
2	3	8	15	24	35
3	3	9	18	30	45
4	3	10	21	36	55

A few examples to explain the output:

- Row 1, column 4: AP is 3, 4, 5, 6 as the start term is 3, skip is 1, number of terms is 4. The sum is $3 + 4 + 5 + 6 = 18$.
- Row 3, column 5: AP is 3, 6, 9, 12, 15, sum is 45.
- Row 4, column 2: AP is 3, 7, sum is 10.

The function `print_ap_table()` is mostly completed as follows:

```

1 void print_ap_table(int start, int num_row, int num_col)
2 {
3     for (int row = 1; row <= num_row; row++) {
4         for (int col = 1; col <= num_col; col++) {
5             printf("%d\t", ap_sum(...)); //Point A
6         }
7         printf("\n");
8     }
9
10 }
```

The only missing piece of information is the function

`int ap_sum(int start, int terms, int skip);` which takes:

- `start`: The first term, i.e. a_1
- `terms`: The number of terms in the AP.
- `skip`: The difference between successive term in the AP.

This function then returns the sum of the specified AP.

A. Complete the function call to `ap_sum()` at *Point A* by filling in the appropriate arguments. [2 marks]

```
ap_sum(                                     );
```

B. Give an iterative implementation of the `ap_sum()` function: [4 marks]

```
int ap_sum( int start, int terms, int skip)
{

}
}
```

C. Give an recursive implementation of the `ap_sum()` function: [4 marks]

```
int ap_sum( int start, int terms, int skip)
{

}

}
```

D. Give an implementation of the `ap_sum()` function with better time complexity than the iterative version: [4 marks]

```
int ap_sum( int start, int terms, int skip)
{

}

}
```

E. Time complexity for the above code is: [1 mark]

Question 3: Sorting Algorithm Properties [12 marks]

For each of the following questions, you are given an original array of structures and a **working** sorting algorithm with certain property. Give the resultant array after the sorting algorithm is applied on the original array. If there are multiple answers, you should choose one that **demonstrates** the sorting property of the algorithm. For example, if the algorithm is **unstable**, you should give an answer that highlight the "instability".

A. A **stable** sorting algorithm that sorts according to the **number**. [3 marks]

Input:

{9, 'Z'}	{5, 'W'}	{1, 'Z'}	{3, 'L'}	{5, 'Z'}	{8, 'E'}	{5, 'A'}
----------	----------	----------	----------	----------	----------	----------

Output:

--	--	--	--	--	--	--

B. A **stable** sorting algorithm that sorts according to the **character**. [3 marks]

Input:

{9, 'Z'}	{5, 'W'}	{1, 'Z'}	{3, 'L'}	{5, 'Z'}	{8, 'E'}	{5, 'A'}
----------	----------	----------	----------	----------	----------	----------

Output:

--	--	--	--	--	--	--

C. A **unstable** sorting algorithm that sorts according to the **number**. [3 marks]

Input:

{9, 'Z'}	{5, 'W'}	{1, 'Z'}	{3, 'L'}	{5, 'Z'}	{8, 'E'}	{5, 'A'}
----------	----------	----------	----------	----------	----------	----------

Output:

--	--	--	--	--	--	--

D. A **unstable** sorting algorithm that sorts according to the **character**. [3 marks]

Input:

{9, 'Z'}	{5, 'W'}	{1, 'Z'}	{3, 'L'}	{5, 'Z'}	{8, 'E'}	{5, 'A'}
----------	----------	----------	----------	----------	----------	----------

Output:

--	--	--	--	--	--	--

Question 4: Binary Search with Duplicates [12 marks]

The **binary search** implementation discussed in this course does not handle **duplicate** values in the sorted array. We will look at a simple way to handle such cases.

Firstly, let us modify the the binary search function so that it returns two values (startIndex, endIndex) to indicate the starting and ending indices of the target value. If the target value cannot be found, then both indices are set to -1 .

Since C/C++ does not allow more than one return value, we will use two **pass-by-pointer** parameters instead. Below is a partially completed implementation:

```

1 void binarySearch( int a[], int N, int X, int *startIndex, int *endIdx) {
2
3     int mid, low = 0, high = N-1;
4     *startIndex = -1;
5     *endIdx = -1;
6
7     while ( (low <= high) && (*startIndex == -1) ) {
8         mid = (low + high) / 2;
9         if ( a[mid] == X ) {
10             *startIndex = mid; // Modified: partially completed
11             *endIdx = mid;    //
12         } else if ( a[mid] < X ) {
13             low = mid + 1;
14         } else {
15             high = mid - 1;
16         }
17     }
18 }
```

A. Give the indices `startIndex` and `endIdx` for the following test case based on the partially completed code above:

a[]	N	X	startIndex = ?	endIdx = ?
1, 3, 5, 7, 9, 9, 9, 11	8	9		

[2 marks]

B. Give the indices `startIndex` and `endIdx` for the following test case based on the partially completed code above:

a[]	N	X	startIndex = ?	endIdx = ?
1, 3, 5, 7, 9, 9, 9, 11	8	6		

[2 marks]

C. Provide an implementation to give the correct `startIdx` and `endIdx`. You are only allowed to add code at the indicated location below: [6 marks]

```
void binarySearch( int a[], int N, int X, int* startIdx, int* endIdx)
{
```

```
    int mid, low = 0, high = N-1;
    *startIdx = -1;
    *endIdx = -1;
```

```
    while ( (low <= high) && (*startIdx == -1) ) {
        mid = (low + high) / 2;
        if ( a[mid] == X ) {
```

```
            // fill in your code here
```


```
        } else if ( a[mid] < X ) {
            low = mid + 1;
        } else {
            high = mid - 1;
        }
    }
}
```

D. What is the worst case time complexity of this new implementation? [2 marks]


Question 5: Heaps [24 marks]

For the purpose of this question, a heap is a binary tree that satisfies this property: **the value of a node is smaller or equal to the values of all its children**. (More specifically this is a *minimum binary heap*. It is slightly different from the binary search tree we discussed in class.)

Some examples of valid heaps:

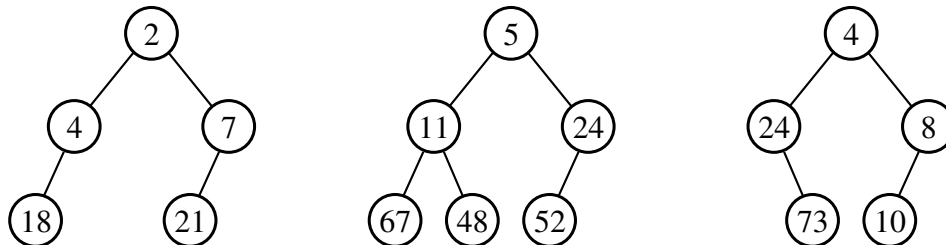

Here are some examples of invalid heaps, with the offending node highlighted:

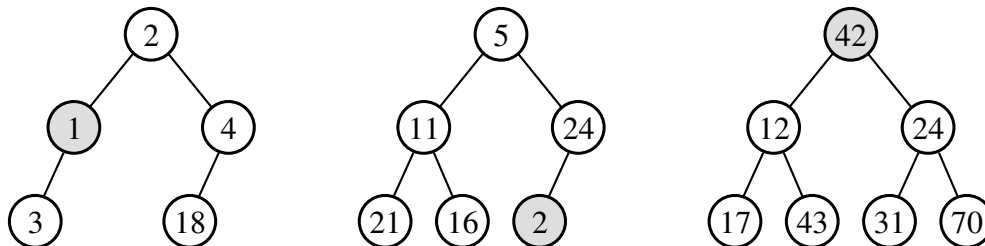

A node in the heap is implemented as a **struct** as follow:

```

typedef struct node {
    int value;           // contains the value of the node
    struct node *left;   // the left child, NULL if none
    struct node *right;  // the right child, NULL if none
    struct node *parent; // the parent, NULL if none, i.e. the root
} Node;
  
```

A. Given the properties of this heap ADT, suggest a scenario where this ADT would be useful. [2 marks]


}

Hint: The structure of the heap is preserved after swapping.


}

D. To add a new value into a heap, we first create a new node and attach it as a new left to the bottom of the heap. Next, to make it a valid heap, we compare the value of the new node with its parent. If the new node is smaller than the parent, we swap them. This “bubbling up” continues until the new node finds a place which makes the heap valid.


Example:




Original heap



8 added to the bottom



Swap with parent



Swap again. Done!

Implement the function `bubble_up` which takes as input, the **newly added node** to a valid heap, and performs the swapping needed to make the heap valid. Assume that the new node has been attached to the bottom of the heap.

You may reuse the function `swap` that you defined earlier.

[6 marks]

```

void bubble_up(                                     ) {
  }
  
```


Question 6: The Last Jedi [17 marks]

For this question, we will be working with C++. Consider the following code:

```
1 #include <iostream>
2 #include <string>
3 #include <set>
4 using namespace std;
5
6 class ForceUser {
7 private:
8     string name;
9 protected:
10    set<string> _powers;
11 public:
12    ForceUser(string name) { this->name = name; };
13
14    virtual string get_name() { return name; };
15
16    void activate(string power) {
17        if (_powers.count(power) == 0)
18            cout << get_name() << " does not know force " << power << endl;
19        else
20            cout << get_name() << " performs force " << power << endl;
21    }
22 }; // ForceUser
23
24
25 class Jedi : public ForceUser {
26 public:
27    Jedi(string name) : ForceUser(name) {
28        _powers = {"jump", "heal", "mind trick"};
29    }
30 }; // Jedi
31
32
33 class Sith : public ForceUser {
34 public:
35    Sith(string name) : ForceUser(name) {
36        _powers = {"jump", "lightning", "choke"};
37    }
38
39    string get_name() {
40        return "Darth " + ForceUser::get_name();
41    }
42 }; // Sith
```

A. What will be the output when following statements are compiled and run? [2 marks]

```
Jedi rei("Rei");  
rei.activate("jump");
```

```
Sith vader("Vader");  
vader.activate("mind trick");
```

B. Explain what the **virtual** keyword at line 15 does, and state how it will affect the output of part A if the **virtual** keyword was removed. [3 marks]

C. Suppose Rei learns a new power. Since `rei._powers` is a set, we can use its method `insert` to append a new item into the vector by writing the following code:

```
rei._powers.insert("lift");
```

However, the code fails to compile with an error: Apparently, we can fix it by defining a new public method in the `Jedi` class between lines 30 and 31 as follow:

```
void add_power(string power) {  
    _powers.insert(power);  
}
```

Explain the reason for the problem and why it now works with this new addition. [2 marks]

Rei tries out this method by doing this:

```
ForceUser luke = Jedi("Luke");  
luke.add_power("lift");
```

Explain why does this fail even after the new method is added? [2 marks]

Explain the implications of adding this line to the `ForceUser` class (at line 16):

```
virtual void add_power(string power) = 0;
```

[2 marks]

D. It turns out that Siths are known by their alias rather than their real names. We can modify the constructor to take in a name and alias, and have their real names shown only when passing a `true` into `get_name`, like so:

```
Sith emperor("Sidious", "Palpatine");
emperor.activate("choke");
cout << emperor.get_name() << endl;
cout << emperor.get_name(true) << endl;
```

produces the output:

```
Darth Sidious performs force choke
Darth Sidious
Palpatine
```

State the modifications that has to be done solely to class `Sith` to support this change. You do not need to rewrite all the code, just provide snippets of the modifications. [6 marks]

—END OF QUESTIONS—

Scratch Paper

Scratch Paper

— END OF PAPER —