


Learn backward. Predict forward.

one shared network, trained by both tasks

Forward (→):
forecast the season
from what came before

Backward (←):
reconstruct the known season
from what came after

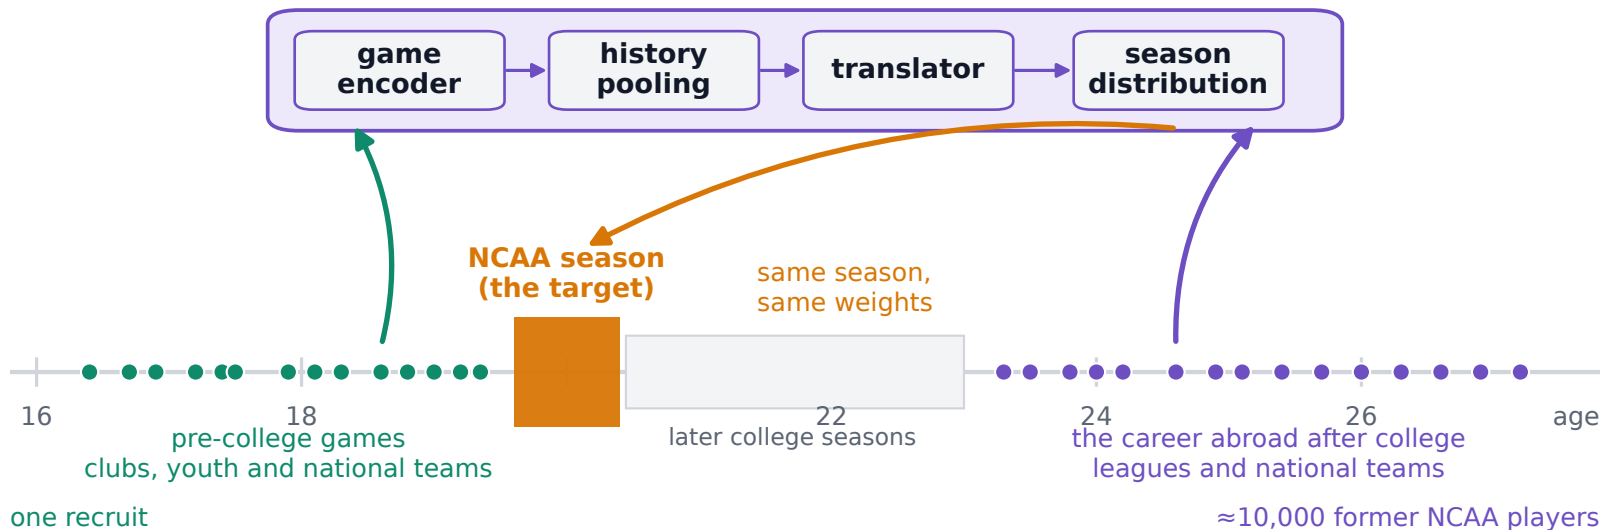

Model Evaluation

comparison of the model with and without post-NCAA data

every row is out of sample: its models are trained only on seasons before the one scored

Held-Out Seasons


2021-22 · n = 105
trained through 2019-20

2022-23 · n = 124
trained through 2020-21

Out-of-Time Test Season

2025-26 · n = 307
trained through 2023-24

no change

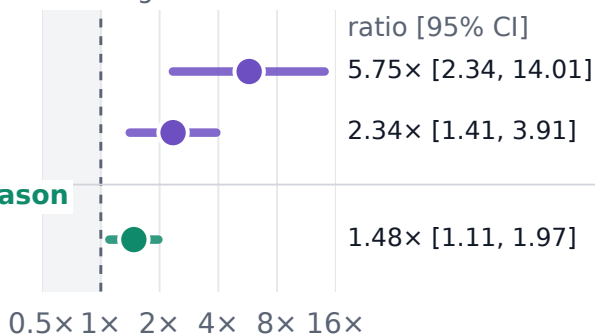

ratio [95% CI]

5.75× [2.34, 14.01]

2.34× [1.41, 3.91]

1.48× [1.11, 1.97]

0.5× 1× 2× 4× 8× 16×

times more probable the actual seasons were with the post-NCAA data

geometric mean over players, log scale; 1× = no change

CRPS by statistic, 2025-26 test season

