

HW2

Aaron


1/26/2018

Exercise1

```
## Load the library
library(ggplot2)
## Activate the mpg data.frame provided by ggplot2
data(mpg)
## New versions of ggplot provide a tibble and have all character variables, while ## older were data f
## to show how most data.frames treat character variables.
mpg <- as.data.frame(mpg)
mpg$manufacturer <- factor(mpg$manufacturer)
```

1. Inspect the structure of mpg data.frame. Note the kind of data provided.

You can also embed plots, for example:

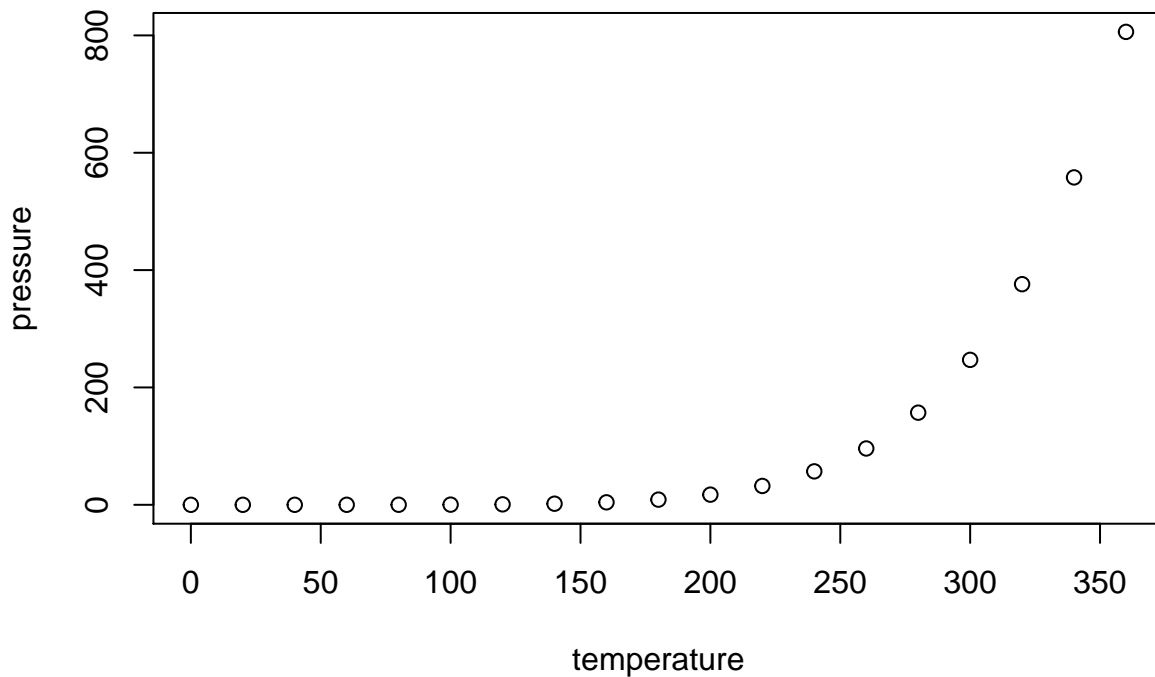

Note that the `echo = FALSE` parameter was added to the code chunk to prevent printing of the R code that generated the plot.