


FTP server configuration

Login to the server



Need to take the back up of the server

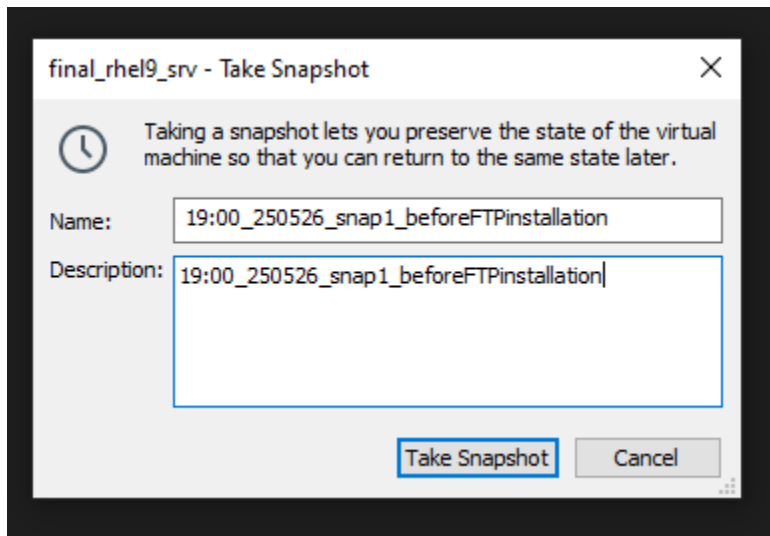

We will set the IP

```
2: ens160: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc
    link/ether 00:0c:29:20:03:25 brd ff:ff:ff:ff:ff:ff
    altname enp3s0
    inet 192.168.0.100/24 brd 192.168.0.255 scope global nop
        valid_lft forever preferred_lft forever
    inet6 2409:40c2:105c:706d:7dee:3676:9e3c:b1cc/64 scope g
        valid_lft 7190sec preferred_lft 7190sec
    inet6 fe80::c9ba:4209:5651:7a87/64 scope link noprefixro
        valid_lft forever preferred_lft forever
```

Set the Hostname

```
[root@final-rhel9srv ~]# hostnamectl set-hostname ftpsrv.radical.com
[root@final-rhel9srv ~]# hostname
ftpsrv.radical.com
```

Now we will configure local DNS

```
[root@final-rhel9srv ~]# cat /etc/hosts
127.0.0.1    localhost localhost.localdomain localhost4 localhost6
::1         localhost localhost.localdomain localhost6 localhost4
192.168.0.100  ftpsrv.radical.com      ftpsrv
```

We will configure file based repo

```
[root@final-rhel9srv ~]# yum repolist
Updating Subscription Management repositories.
Unable to read consumer identity

This system is not registered with an entitlement server. You can
register.

repo id                                repo name
local-AppStream                        this is local AppStream repository
local-BaseOS                           this is local baseos repository
[root@final-rhel9srv ~]#
```

For FTP we need a package called vsftpd

```
[root@final-rhel9srv ~]# yum info vsftpd.x86_64
Updating Subscription Management repositories.
Unable to read consumer identity

This system is not registered with an entitlement
register.

Last metadata expiration check: 0:00:12 ago on Mon
Available Packages
Name           : vsftpd
Version        : 3.0.5
Release        : 4.el9
Architecture   : x86_64
Size           : 172 k
Source         : vsftpd-3.0.5-4.el9.src.rpm
```

```

-----
Installing:
  vsftpd                x86_64                3.0.5-4.el9

Transaction Summary
-----
Install 1 Package

Total size: 172 k

```

Now we will check the configuration file

```

[root@final-rhel9srv ~]# rpm -qc vsftpd.x86_64
/etc/logrotate.d/vsftpd
/etc/pam.d/vsftpd
/etc/vsftpd/ftpusers
/etc/vsftpd/user_list
/etc/vsftpd/vsftpd.conf
[root@final-rhel9srv ~]#

```

First we will take a backup of this configuration file

```

[root@final-rhel9srv ~]# cp /etc/vsftpd/vsftpd.conf /tmp/vsftpd.conf.bkp

/etc/vsftpd/vsftpd.conf
[root@final-rhel9srv ~]# vi /etc/vsftpd/vsftpd.conf

```

We need to make anonymous_enable=yes for FTP to work

```

#anonymous_enable=NO
anonymous_enable=YES
#

```

Now we will check configuration file is correct or not

```

[root@final-rhel9srv ~]# vsftpd /etc/vsftpd/vsftpd.conf
[root@final-rhel9srv ~]#

```

We need to enable the service

```
[root@ftpsrv ~]# systemctl status vsftpd
○ vsftpd.service - Vsftpd ftp daemon
   Loaded: loaded (/usr/lib/systemd/system/vsftpd.service; vendor preset: disabled)
   Active: inactive (dead)

[root@ftpsrv ~]# systemctl start vsftpd
[root@ftpsrv ~]# systemctl status vsftpd
● vsftpd.service - Vsftpd ftp daemon
   Loaded: loaded (/usr/lib/systemd/system/vsftpd.service; vendor preset: disabled)
   Active: active (running) since Mon 2026-05-25 12:00:00 UTC; 1min ago
   Process: 2773 ExecStart=/usr/sbin/vsftpd /etc/vsftpd.conf (code=exited, status=0/SUCCESS)
  Main PID: 2774 (vsftpd)
     Tasks: 1 (limit: 10818)
    Memory: 900.0K
         CPU: 9ms
    CGroup: /system.slice/vsftpd.service
           └─2774 /usr/sbin/vsftpd /etc/vsftpd.conf
```

We will check port is up or not

```
[root@ftpsrv ~]# netstat -antlpu | grep ftp
tcp6          0          0 :::21       :::*        LISTENING
```

We will make the service persistent

```

[root@ftpsrv ~]# systemctl enable --now vsftpd
Created symlink /etc/systemd/system/multi-user.target.wants/vsftpd.service.
[root@ftpsrv ~]# systemctl status vsftpd
● vsftpd.service - Vsftpd ftp daemon
   Loaded: loaded (/usr/lib/systemd/system/vsftpd.service; enabled;
   Active: active (running) since Mon 2026-05-25 19:19:33 IST; 5h 34
 Main PID: 2774 (vsftpd)
    Tasks: 1 (limit: 10818)
   Memory: 892.0K
      CPU: 9ms
   CGroup: /system.slice/vsftpd.service
           └─2774 /usr/sbin/vsftpd /etc/vsftpd/vsftpd.conf

```

We will disable selinux & firewall

```

[root@ftpsrv ~]# getenforce
Enforcing
[root@ftpsrv ~]# setenforce 0
[root@ftpsrv ~]# getenforce
Permissive
[root@ftpsrv ~]# systemctl stop firewalld.service
[root@ftpsrv ~]# systemctl status firewalld.service
○ firewalld.service - firewalld - dynamic firewall da
   Loaded: loaded (/usr/lib/systemd/system/firewall
   Active: inactive (dead) since Tue 2026-05-26 00:
 Duration: 5h 37min 8.151s
    Docs: man:firewalld(1)
   Process: 795 ExecStart=/usr/sbin/firewalld --nofo
 Main PID: 795 (code=exited, status=0/SUCCESS)
      CPU: 1.963s

```

We will do remote testing for that we need a package called as lftp which is used to do client side ftp

```
[root@final_rhel8_srv ~]# yum search lftp
Updating Subscription Management repositories.
Unable to read consumer identity

This system is not registered with an entitlement
Last metadata expiration check: 0:10:01 ago on T
===== Name Exa
lftp.i686 : A sophisticated file transfer progr
lftp.x86_64 : A sophisticated file transfer pro
===== Name & Sum
lftp-scripts.noarch : Scripts for lftp
[root@final_rhel8_srv ~]# yum info lftp.x86_64
```

```
[root@final_rhel8_srv ~]# yum install -y lftp.x86_64
Updating Subscription Management repositories.
Unable to read consumer identity

This system is not registered with an entitlement server.

Last metadata expiration check: 0:10:25 ago on Tue 26 May
Dependencies resolved.
=====
Package                Architecture          Version
=====
Installing:
lftp                    x86_64                4.8.4-2.el8

Transaction Summary
=====
Install 1 Package
```

Now lets take a FTP session from client

```
[root@final_rhel8_srv ~]# lftp 192.168.0.100
lftp 192.168.0.100:~> ls
drwxr-xr-x    2 0          0          6 Feb 14  2023 pub
lftp 192.168.0.100:~/>
```

From server side pub some data in /var/ftp/pub location

```
[root@ftpsrv ~]# cd /var/ftp/pub/
[root@ftpsrv pub]# ls
[root@ftpsrv pub]# touch ftpfiles{1..5}
[root@ftpsrv pub]#
```

Now lets check from client side we are able to see the data or not

```
lftp 192.168.0.100:/> cd pub
lftp 192.168.0.100:/pub> ls
-rw-r--r-- 1 0 0 0 May 25 19:37 ftpfiles1
-rw-r--r-- 1 0 0 0 May 25 19:37 ftpfiles2
-rw-r--r-- 1 0 0 0 May 25 19:37 ftpfiles3
-rw-r--r-- 1 0 0 0 May 25 19:37 ftpfiles4
-rw-r--r-- 1 0 0 0 May 25 19:37 ftpfiles5
lftp 192.168.0.100:/pub>
```

From server side lets enable ftp service from firewall

```
[root@ftpsrv pub]# systemctl start firewalld.service
[root@ftpsrv pub]# firewall-cmd --permanent --add-service=ftp
success
[root@ftpsrv pub]# firewall-cmd --reload
success
[root@ftpsrv pub]# firewall-cmd --list-all
public (active)
  target: default
  icmp-block-inversion: no
  interfaces: ens160
  sources:
  services: cockpit dhcpv6-client ftp ssh
  ports:
  protocols:
  forward: yes
```

Lets test from remote site again

```
[root@final_rhel8_srv ~]# lftp 192.168.0.100
lftp 192.168.0.100:~> ls
drwxr-xr-x    2 0          0          159 May 25 19:45 pub
lftp 192.168.0.100:/> cd pub
lftp 192.168.0.100:/pub> ls
-rw-r--r--    1 0          0          0 May 25 19:37 ftpfiles1
-rw-r--r--    1 0          0          0 May 25 19:37 ftpfiles2
-rw-r--r--    1 0          0          0 May 25 19:37 ftpfiles3
-rw-r--r--    1 0          0          0 May 25 19:37 ftpfiles4
-rw-r--r--    1 0          0          0 May 25 19:37 ftpfiles5
-rw-r--r--    1 0          0          0 May 25 19:45 ftpfiles6
-rw-r--r--    1 0          0          0 May 25 19:45 ftpfiles7
-rw-r--r--    1 0          0          0 May 25 19:45 ftpfiles8
-rw-r--r--    1 0          0          0 May 25 19:45 ftpfiles9
lftp 192.168.0.100:/pub> █
```

Now a user called ronny logged in using ftp

```
[root@final_rhel8_srv ~]# lftp ronny@192.168.0.100
Password:
lftp ronny@192.168.0.100:~> ls
lftp ronny@192.168.0.100:~> cd /var/ftp/pub
cd ok, cwd=/var/ftp/pub
lftp ronny@192.168.0.100:/var/ftp/pub> ls
-rw-r--r--    1 0          0          0 May 25 19:37 ftpfiles1
-rw-r--r--    1 0          0          0 May 25 19:37 ftpfiles2
-rw-r--r--    1 0          0          0 May 25 19:37 ftpfiles3
-rw-r--r--    1 0          0          0 May 25 19:37 ftpfiles4
-rw-r--r--    1 0          0          0 May 25 19:37 ftpfiles5
-rw-r--r--    1 0          0          0 May 25 19:45 ftpfiles6
-rw-r--r--    1 0          0          0 May 25 19:45 ftpfiles7
-rw-r--r--    1 0          0          0 May 25 19:45 ftpfiles8
-rw-r--r--    1 0          0          0 May 25 19:45 ftpfiles9
lftp ronny@192.168.0.100:/var/ftp/pub>
```

Ronny is able to see all the files under /var/ftp/pub now we want to block ronny from accessing FTP for that we will check again the config files

```
[root@ftpsrv pub]# rpm -qc vsftpd
/etc/logrotate.d/vsftpd
/etc/pam.d/vsftpd
/etc/vsftpd/ftpusers
/etc/vsftpd/user_list
/etc/vsftpd/vsftpd.conf
[root@ftpsrv pub]#
```

```
[root@ftpsrv pub]# cat /etc/vsftpd/ftpusers
# Users that are not allowed to login via ftp
root
bin
daemon
adm
lp
sync
shutdown
halt
```

So we will make the entry of ronny in this file

```
operator
games
nobody
ronny
~
```

So lets restart the ftp services

```
[root@ftpsrv pub]# vi /etc/vsftpd/ftpusers
[root@ftpsrv pub]# systemctl restart vsftpd
[root@ftpsrv pub]#
```

Now again lets take a ftp session

```
[root@final_rhel8_srv ~]# lftp ronny@192.168.0.100
Password:
lftp ronny@192.168.0.100:~> ls
ls: Login failed: 530 Login incorrect.
lftp ronny@192.168.0.100:~> 
```

Login failed due to entry in /etc/vsftpd/ftpusers file.