


React Hands-On Exercises

Exercise – 1:

```
JS App.js X
src > JS App.js > ...
  1  import logo from './logo.svg';
  2  import './App.css';
  3
  4  function App() {
  5    return (
  6      <h1>Welcome the first session of React</h1>
  7    );
  8  }
  9
 10  export default App;
 11
```

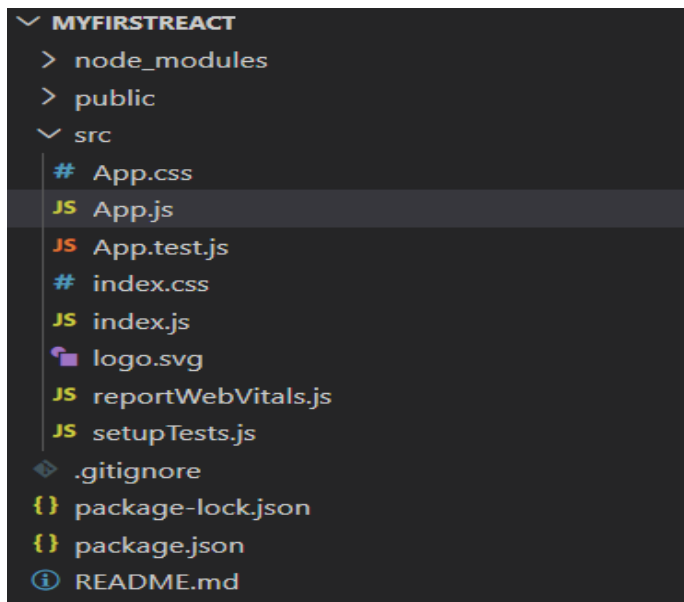

Exercise – 2:

JS About.js X

src > Components > JS About.js > ...

```
1 import React, {Component} from 'react';
2 class About extends Component{
3     render(){
4         return(
5             <div>
6                 <h3>Welcome to the About Page of Student Management Portal</h3>
7             </div>
8         );
9     }
10 }
11 export default About;
```

JS Contact.js X

src > Components > JS Contact.js > ...


```
1 import React, {Component} from 'react';
2 class Contact extends Component{
3     render(){
4         return(
5             <div>
6                 <h3>Welcome to the Contact Page of Student Management Portal</h3>
7             </div>
8         );
9     }
10 }
11 export default Contact;
```

JS Home.js X

src > Components > JS Home.js > ...

```
1 import React, {Component} from 'react';
2 class Home extends Component{
3     render(){
4         return(
5             <div>
6                 <h3>Welcome to the Home Page of Student Management Portal</h3>
7             </div>
8         );
9     }
10 }
11 export default Home;
```

```
JS App.js ×
src > JS App.js > ...
 1  import logo from './logo.svg';
 2  import './App.css';
 3  import Home from './Components/Home';
 4  import About from './Components/About';
 5  import Contact from './Components/Contact';
 6
 7  function App() {
 8    return (
 9      <div className="container">
10        <Home/>
11        <About/>
12        <Contact/>
13      </div>
14    );
15  }
16
17  export default App;
18
```

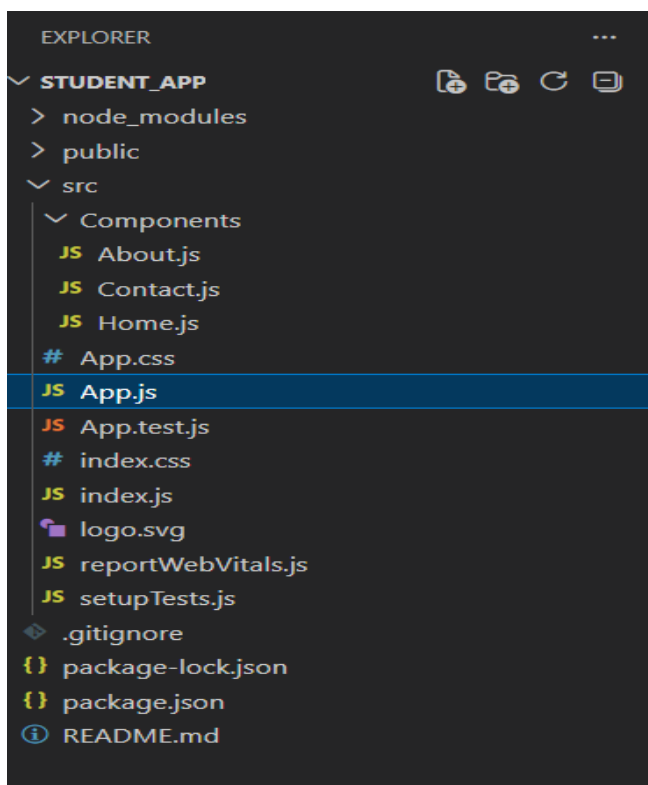

React – 3:


JS CalculateScore.js X

src > Components > JS CalculateScore.js > ...

```
1  import './StyleSheets/mystyle.css'
2  const percentToDecimal=(decimal)=>{
3    return (decimal.toFixed(2)+'%')
4  }
5  const calcScore=(total, goal)=>{
6    return percentToDecimal(total/goal)
7  }
8  export const CalculateScore = ({Name,School, total, goal})=>{
9    <div className="formatstyle">
10      <h1><font color="Brown">Student Details:</font></h1>
11      <div className="Name">
12        <b><span> Name: </span></b>
13        <span>{Name}</span>
14      </div>
15      <div className="School">
16        <b><span> School: </span></b>
17        <span>{School}</span>
18      </div>
19      <div className="Total">
20        <b><span> Total: </span></b>
21        <span>{total}</span>
22        <span>Marks</span>
23      </div>
24      <div className="Score">
25        <b><span> Score: </span></b>
26        <span>
27          {calcScore(
28            total,
29            goal
30          )}
31        </span>
32      </div>
33    </div>
34  )
```

```
# mystyle.css X
src > Components > Stylesheets > # mystyle.css > 🔍 .Name
1  .Name
2  {
3      font-weight:300;
4      color:blue;
5  }
6  .School
7  {
8      color:crimson;
9  }
10 .Total
11 {
12     color:darkmagenta;
13 }
14 .formatstyle
15 {
16     text-align:center;
17     font-size:large;
18 }
19 .Score
20 {
21     color:forestgreen;
22 }
```

```
JS App.js X
src > JS App.js > ...
1  import logo from './logo.svg';
2  import './App.css';
3  import {CalculateScore} from '../src/Components/CalculateScore';
4  function App() {
5      return (
6          <div>
7              <CalculateScore Name={"Steeve"}
8                  School={"DNV Public School"}
9                  total={284}
10                 goal={3}
11             />
12         </div>
13     )
14 }
15
16 export default App;
17
```

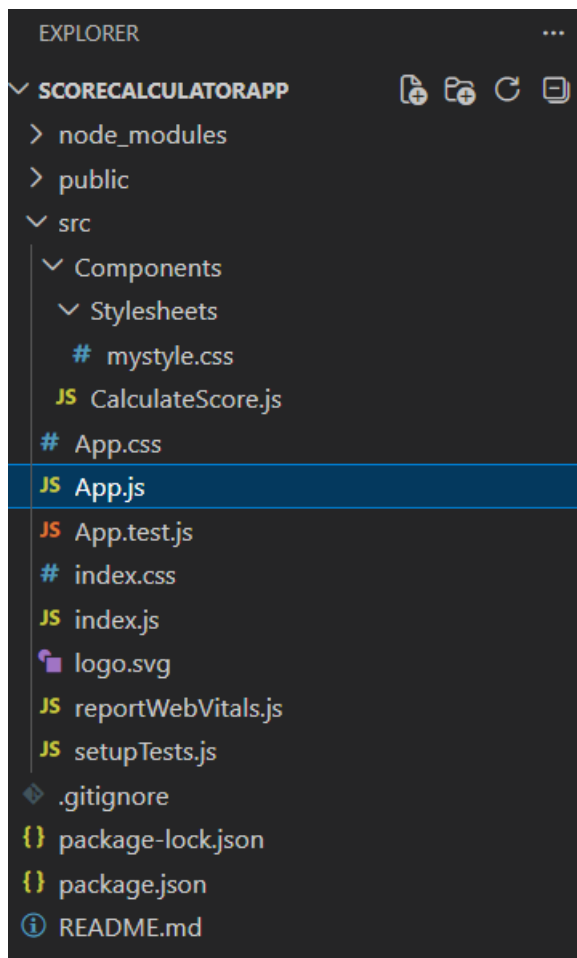

React – 4:


JS Post.js X

src > JS Post.js > ...

```
1  import React from 'react';
2  class Post{
3    constructor(id, title, body){
4      this.id=id;
5      this.title=title;
6      this.body=body;
7    }
8  }
9
10 class Posts extends React.Component{
11   constructor(props){
12     super(props);
13     this.state={
14       posts: []
15     };
16   }
17   loadPosts(){
18     fetch('https://jsonplaceholder.typicode.com/posts')
19     .then(response => response.json())
20     .then(data => {
21       this.setState({ posts: data});
22     })
23     .catch(error => {
24       console.error("Error fetching posts:", error);
25     })
26   }
27   componentDidMount(){
28     this.loadPosts();
29   }
30   render(){
31     return(
32       <div>
33         {this.state.posts.map(post=>(
34           <div key={post.id}>
35             <h2>{post.title}</h2>
36             <p>{post.body}</p>
37           </div>
```

```
render(){
  return(
    <div>
      {this.state.posts.map(post=>(
        <div key={post.id}>
          <h2>{post.title}</h2>
          <p>{post.body}</p>
        </div>
      ))}
    </div>
  );
}
componentDidCatch(error, info){
  alert("An error occurred: " + error.message);
}
}

export default Posts;
```

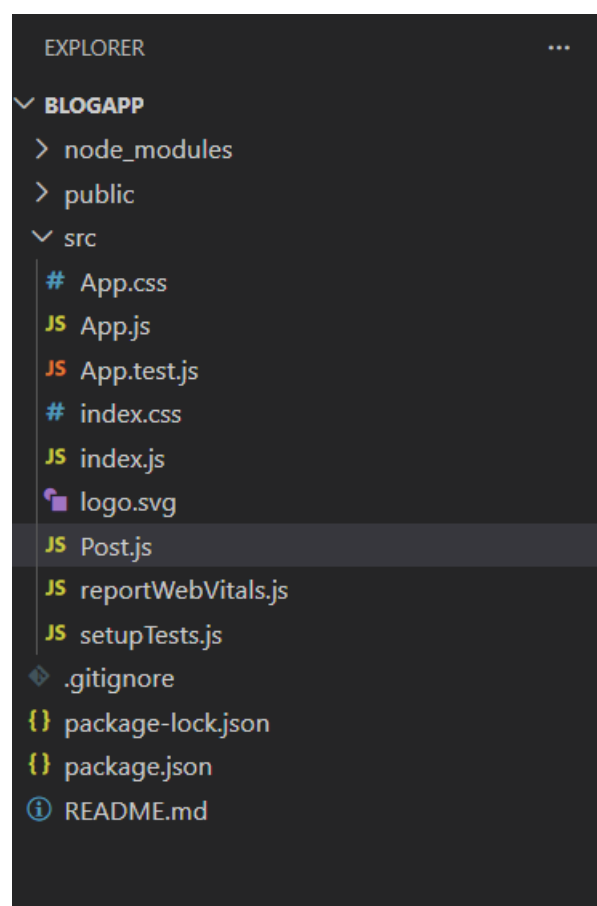

React – 5:


```

JS Cohort.js X
src > JS Cohort.js > Cohort
1  class Cohort {
2      constructor(cohortCode,
3          startDate,
4          technology,
5          trainerName,
6          coachName,
7          currentStatus) {
8          this.cohortCode = cohortCode;
9          this.coachName = coachName;
10         this.trainerName = trainerName;
11         this.technology = technology;
12         this.startDate = startDate;
13         this.currentStatus = currentStatus;
14     }
15 }
16 const CohortsData =[
17     new Cohort('INTADMDF10','22-Feb-2022', '.NET FSD', 'Jojo Jose','Aathma', 'Scheduled'),
18     new Cohort('ADM21JF014','10-Sep-2021', 'Java FSD', 'Elisa Smith','Apoorv', 'Ongoing'),
19     new Cohort('CDBJF21025','24-Dec-2021', 'Java FSD', 'John Doe','Aathma', 'Ongoing'),
20     new Cohort('INTADMJF12','22-Feb-2022', 'Java FSD', 'To Be Assigned','Ibrahim', 'Scheduled'),
21     new Cohort('CDE22JF011','24-Dec-2021', 'Java FSD', 'Emma Swan','Apoorv', 'Ongoing'),
22     new Cohort('INTADMDF09','22-Feb-2022', 'Dataware Housing', 'Babjee Rao','Aathma', 'Scheduled'),
23     new Cohort('ADM22DF001','10-Sep-2021', '.NET FSD', 'Marie Curie','Ibrahim', 'Ongoing'),
24 ];
25 export {Cohort, CohortsData};

```

```


# CohortDetails.module.css X
src > # CohortDetails.module.css > .box
1  .box {
2      width: 300px;
3      display: inline-block;
4      margin: 10px;
5      padding: 10px 20px;
6      border: 1px solid black;
7      border-radius: 10px;
8  }
9
10 dt {
11     font-weight: 500;
12 }

```


JS CohortDetails.js X

src > JS CohortDetails.js > ...

```
1  import styles from './CohortDetails.module.css';
2
3  function CohortDetails(props) {
4
5      const cohort = props.cohort;
6
7      const headingStyle = {
8          color: cohort.currentStatus === "Ongoing" ? "green" : "blue"
9      };
10
11     return (
12         <div className={styles.box}>
13
14             <h3 style={headingStyle}>
15                 {cohort.cohortCode}
16             </h3>
17
18             <dl>
19
20                 <dt>Technology</dt>
21                 <dd>{cohort.technology}</dd>
22
23                 <dt>Started On</dt>
24                 <dd>{cohort.startDate}</dd>
25
26                 <dt>Current Status</dt>
27                 <dd>{cohort.currentStatus}</dd>
28
29                 <dt>Coach</dt>
30                 <dd>{cohort.coachName}</dd>
31
32                 <dt>Trainer</dt>
33                 <dd>{cohort.trainerName}</dd>
34
35             </dl>
```

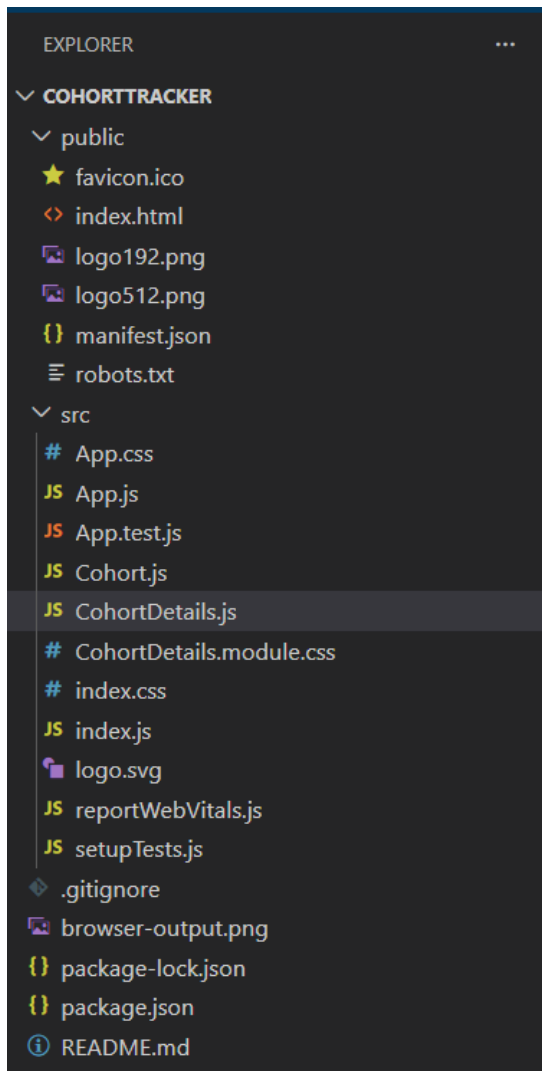

Output:

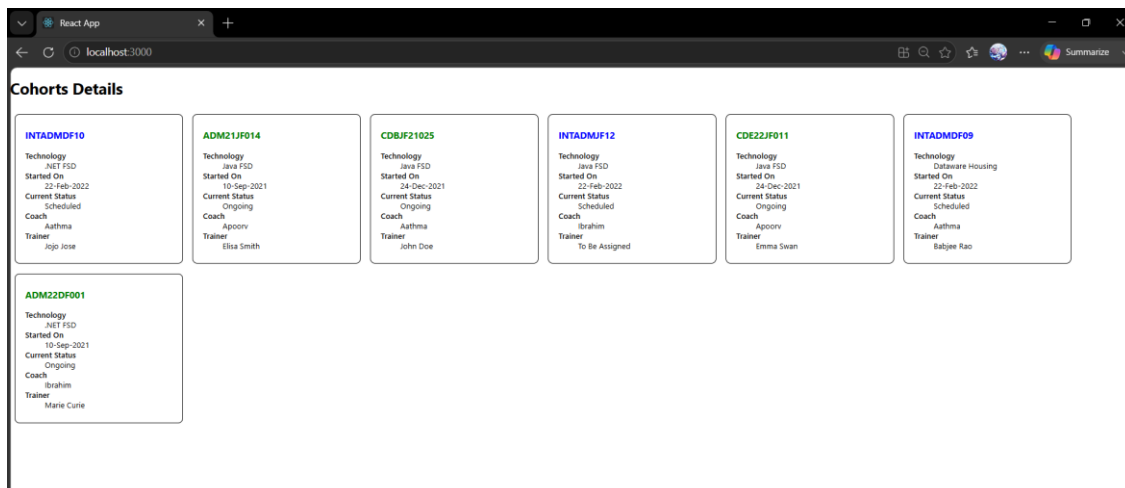

React – 9:

JS IndianPlayers.js X

src > JS IndianPlayers.js > ...

```
1  import React from "react";
2
3  const IndianTeam = [
4    "Sachin",
5    "Dhoni",
6    "Virat",
7    "Rohit",
8    "Yuvraj",
9    "Raina"
10 ];
11
12 export function OddPlayers([first, , third, , fifth]) {
13   return (
14     <div>
15       <ul>
16         <li>First : {first}</li>
17         <li>Third : {third}</li>
18         <li>Fifth : {fifth}</li>
19       </ul>
20     </div>
21   );
22 }
23
24 export function EvenPlayers([, second, , fourth, , sixth]) {
25   return (
26     <div>
27       <ul>
28         <li>Second : {second}</li>
29         <li>Fourth : {fourth}</li>
30         <li>Sixth : {sixth}</li>
31       </ul>
32     </div>
33   );
34 }
35
```

JS IndianPlayers.js X

src > JS IndianPlayers.js > ...

```
35
36   const T20Players = [
37     "First Player",
38     "Second Player",
39     "Third Player"
40   ];
41
42   const RanjiPlayers = [
43     "Fourth Player",
44     "Fifth Player",
45     "Sixth Player"
46   ];
47
48   export const IndianPlayers = [
49     ...T20Players,
50     ...RanjiPlayers
51   ];
52
53   export function ListofIndianPlayers() {
54     return (
55       <div>
56         <ul>
57           {IndianPlayers.map((player, index) => (
58             <li key={index}>Mr. {player}</li>
59           ))}
60         </ul>
61       </div>
62     );
63   }
64
65   export { IndianTeam };
```

JS ListofPlayers.js X

src > JS ListofPlayers.js > ...

```
1  import React from "react";
2
3  const players = [
4    { name: "Jack", score: 50 },
5    { name: "Michael", score: 70 },
6    { name: "John", score: 40 },
7    { name: "Ann", score: 61 },
8    { name: "Elisabeth", score: 61 },
9    { name: "Sachin", score: 95 },
10   { name: "Dhoni", score: 100 },
11   { name: "Virat", score: 84 },
12   { name: "Jadeja", score: 64 },
13   { name: "Raina", score: 75 },
14   { name: "Rohit", score: 80 }
15 ];
16
17 export function ListofPlayers() {
18   return (
19     <div>
20       <h1>List of Players</h1>
21
22       <ul>
23         {players.map((item, index) => (
24           <li key={index}>
25             Mr. {item.name} <span>{item.score}</span>
26           </li>
27         ))}
28       </ul>
29     </div>
30   );
31 }
32
33 export function Scorebelow70() {
34   const players70 = players.filter(player => player.score <= 70);
```

```
35
36   return (
37     <div>
38       <h1>List of Players having Scores Less than 70</h1>
39
40       <ul>
41         {players70.map((item, index) => (
42           <li key={index}>
43             Mr. {item.name} <span>{item.score}</span>
44           </li>
45         ))}
46       </ul>
47     </div>
48   );
49 }
```

JS App.js X


src > JS App.js > ...

```
1  import "../App.css";
2
3  import { ListofPlayers, Scorebelow70 } from "../ListofPlayers";
4
5  import {
6    OddPlayers,
7    EvenPlayers,
8    ListofIndianPlayers,
9    IndianTeam
10 } from "../IndianPlayers";
11
12 function App() {
13
14   const flag = false;
15
16   if (flag === true) {
17
18     return (
19       <div>
20
21         <h1>List of Players</h1>
22
23         <ListofPlayers />
24
25         <hr />
26
27         <Scorebelow70 />
28
29       </div>
30     );
31
32   } else {
33
34     return (
35
```



JS App.js X

src > JS App.js > ...

```
12  function App() {
35
36      <div>
37
38          <h1>Indian Team</h1>
39
40          <h2>Odd Players</h2>
41
42          {OddPlayers(IndianTeam)}
43
44          <hr />
45
46          <h2>Even Players</h2>
47
48          {EvenPlayers(IndianTeam)}
49
50          <hr />
51
52          <h2>List of Indian Players Merged</h2>
53
54          <ListofIndianPlayers />
55
56      </div>
57
58  );
59
60  }
61
62  }
63
64  export default App;
```

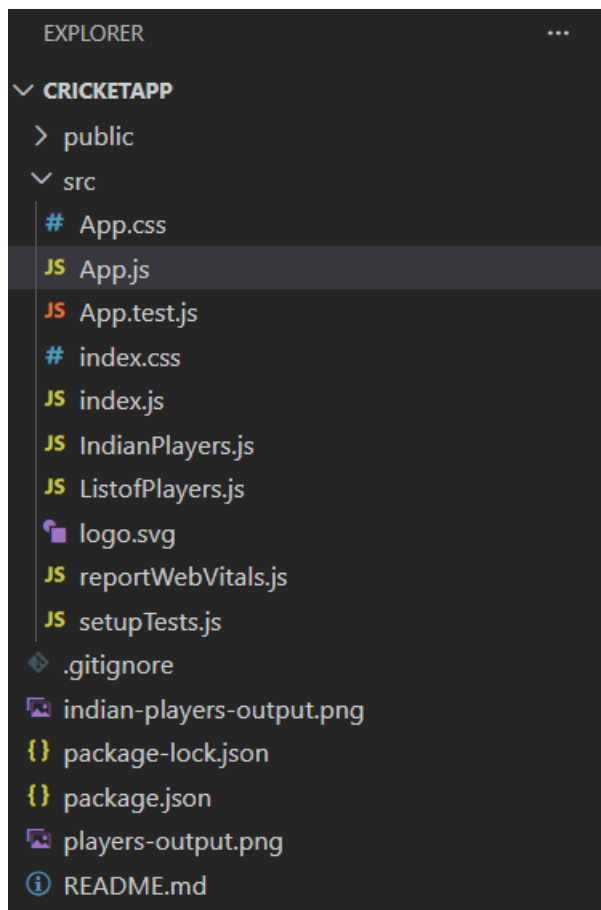Output:

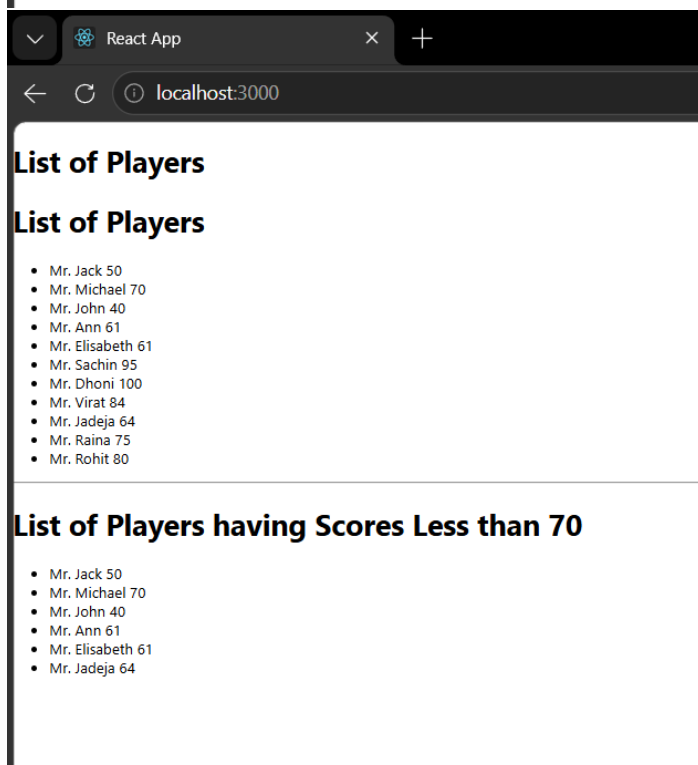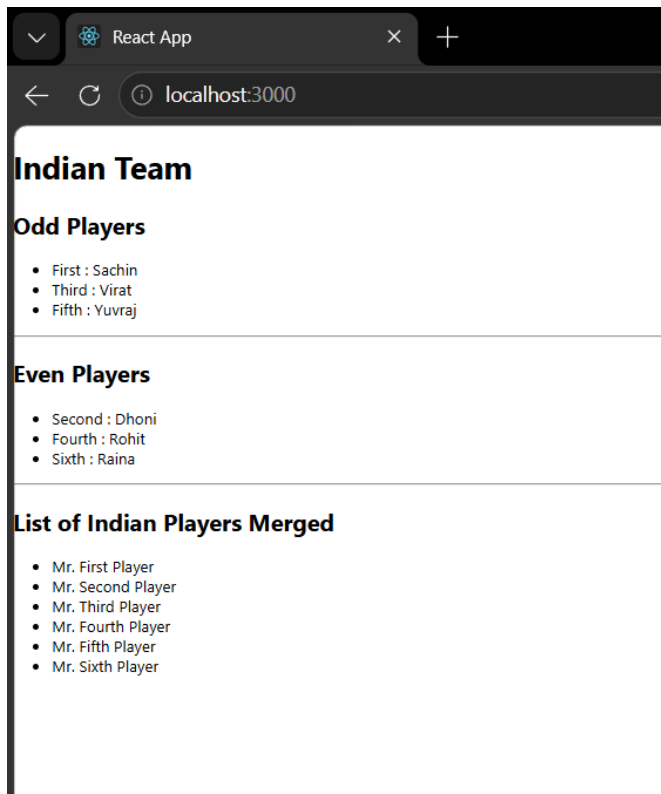


React – 10:

```
JS App.js ×
src > JS App.js > ...
1 import officeImage from "../office.jpg";
2 import "../App.css";
3
4 function App() {
5
6   const officeDetails = {
7     Name: "DBS",
8     Rent: 50000,
9     Address: "Chennai"
10  };
11
12  const officeList = [
13    {
14      Name: "DBS",
15      Rent: 50000,
16      Address: "Chennai"
17    },
18    {
19      Name: "Regus",
20      Rent: 70000,
21      Address: "Bangalore"
22    },
23    {
24      Name: "SmartWorks",
25      Rent: 55000,
26      Address: "Hyderabad"
27    }
28  ];
29
30  return (
31    <div style={{ marginLeft: "40px" }}>
32      <h1>Office Space, at Affordable Range</h1>
33    </div>
34  );
}
```


```
JS App.js X
src > JS App.js > ...
4 function App() {
34
35   <img
36     src={officeImage}
37     alt="Office Space"
38     width="25%"
39     height="25%"
40   />
41
42   <h2>Name: {officeDetails.Name}</h2>
43
44   <h3
45     style={{
46       color: officeDetails.Rent <= 60000 ? "red" : "green"
47     }}
48   >
49     Rent: Rs. {officeDetails.Rent}
50   </h3>
51
52   <h3>Address: {officeDetails.Address}</h3>
53
54   <hr />
55
56   <h2>Office Space List</h2>
57
58   {officeList.map((item, index) => (
59     <div key={index}>
60
61       <h3>Name: {item.Name}</h3>
62
63       <h3
64         style={{
65           color: item.Rent <= 60000 ? "red" : "green"
66         }}
67
```

```
JS App.js X
src > JS App.js > ...
4 function App() {
58   {officeList.map((item, index) => (
67     >
68       Rent: Rs. {item.Rent}
69     </h3>
70
71     <h3>Address: {item.Address}</h3>
72
73     <hr />
74
75     </div>
76   )]}
77
78   </div>
79 );
80 }
81
82 export default App;
```


```
# index.css  X
src > # index.css > body
1  body {
2    margin: 0;
3    font-family: -apple-system, BlinkMacSystemFont, 'Segoe UI', 'Roboto', 'Oxygen',
4    'Ubuntu', 'Cantarell', 'Fira Sans', 'Droid Sans', 'Helvetica Neue',
5    sans-serif;
6    -webkit-font-smoothing: antialiased;
7    -moz-osx-font-smoothing: grayscale;
8  }
9
10 code {
11   font-family: source-code-pro, Menlo, Monaco, Consolas, 'Courier New',
12   monospace;
13 }
14
```

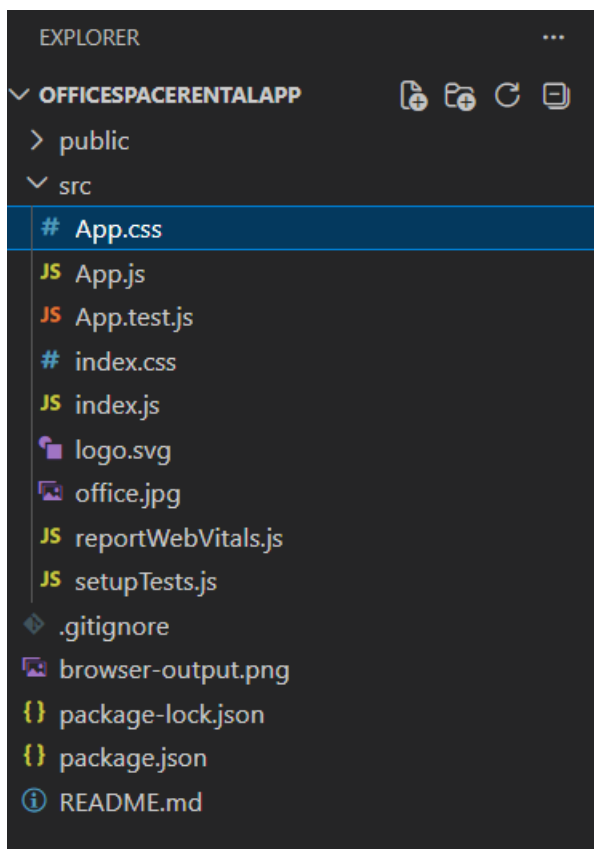

Output:

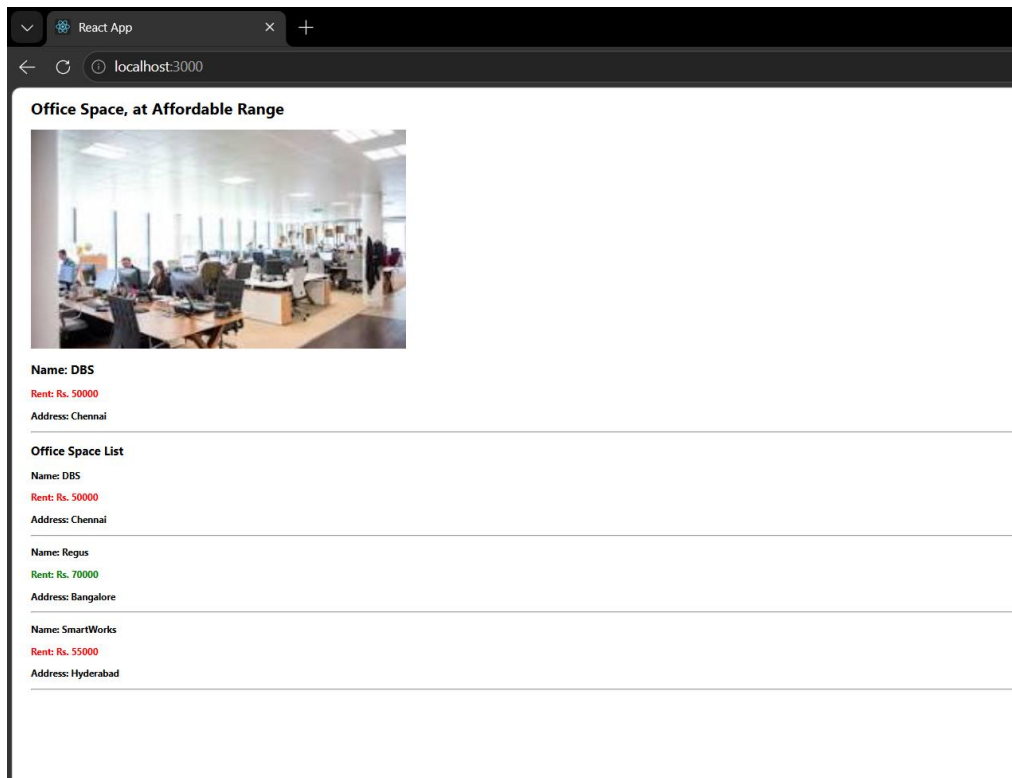

React – 11:

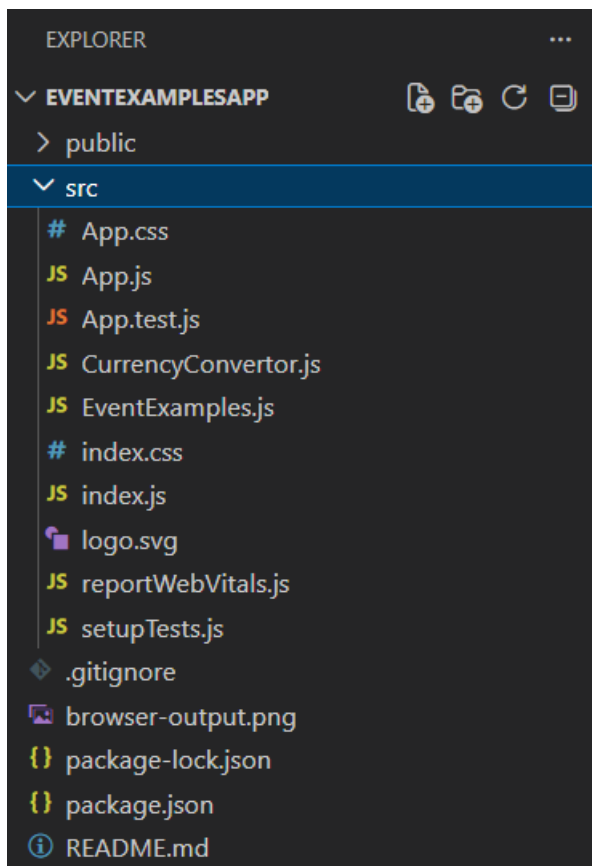

JS App.js X

src > JS App.js > ...

```
1  import './App.css';
2  import EventExamples from './EventExamples';
3  import CurrencyConvertor from './CurrencyConvertor';
4
5  function App() {
6
7      return (
8
9          <div style={{ margin: "20px" }}>
10
11              <EventExamples />
12
13              <br />
14
15              <CurrencyConvertor />
16
17          </div>
18
19      );
20
21  }
22
23  export default App;
```

```
JS CurrencyConvector.js X
src > JS CurrencyConvector.js > ...
1  import React, { useState } from "react";
2
3  function CurrencyConvector() {
4
5      const [amount, setAmount] = useState("");
6      const [currency, setCurrency] = useState("");
7
8      const handleSubmit = (e) => {
9
10         e.preventDefault();
11
12         const euro = (parseFloat(amount) / 90).toFixed(2);
13
14         alert("Converting to Euro Amount is " + euro);
15     };
16
17     return (
18         <div>
19             <h1 style={{ color: "green" }}>
20                 Currency Converter!!!
21             </h1>
22
23             <form onSubmit={handleSubmit}>
24
25                 <label>Amount</label>
26
27                 <input
28                     type="number"
29                     value={amount}
30                     onChange={(e) => setAmount(e.target.value)}
31                 />
32             </form>
33         </div>
34     );
35 }
```


JS CurrencyConvertor.js X

src > JS CurrencyConvertor.js > ...

```
3  function CurrencyConvertor() {
35
36      <br /><br />
37
38      <label>Currency</label>
39
40      <input
41          type="text"
42          value={currency}
43          onChange={(e) => setCurrency(e.target.value)}
44      />
45
46      <br /><br />
47
48      <button type="submit">
49          Submit
50      </button>
51
52      </form>
53
54      </div>
55
56  );
57
58  }
59
60  export default CurrencyConvertor;
```

JS EventExamples.js X

src > JS EventExamples.js > ...

```
1  import React, { useState } from "react";
2
3  function EventExamples() {
4
5      const [count, setCount] = useState(0);
6
7      const increment = () => {
8          setCount(count + 1);
9      };
10
11     const decrement = () => {
12         setCount(count - 1);
13     };
14
15     const sayHello = () => {
16         alert("Hello! Have a nice day.");
17     };
18
19     const increase = () => {
20         increment();
21         sayHello();
22     };
23
24     const sayWelcome = (message) => {
25         alert(message);
26     };
27
28     const handleClick = () => {
29         alert("I was clicked");
30     };
31
32     return (
33         <div>
```

JS EventExamples.js X

src > JS EventExamples.js > ...

```
3  function EventExamples() {
34
35      <h2>{count}</h2>
36
37      <button onClick={increase}>Increment</button>
38
39      <br /><br />
40
41      <button onClick={decrement}>Decrement</button>
42
43      <br /><br />
44
45      <button onClick={() => sayWelcome("Welcome")}>
46      |   Say Welcome
47      </button>
48
49      <br /><br />
50
51      <button onClick={handleClick}>
52      |   Click on me
53      </button>
54
55      </div>
56  );
57  }
58
59  export default EventExamples;
```

```

# App.css  X
src > # App.css > .App
1  .App {
2    text-align: center;
3  }
4
5  .App-logo {
6    height: 40vmin;
7    pointer-events: none;
8  }
9
10 @media (prefers-reduced-motion: no-preference) {
11   .App-logo {
12     animation: App-logo-spin infinite 20s linear;
13   }
14 }
15
16 .App-header {
17   background-color: #282c34;
18   min-height: 100vh;
19   display: flex;
20   flex-direction: column;
21   align-items: center;
22   justify-content: center;
23   font-size: calc(10px + 2vmin);
24   color: white;
25 }
26
27 .App-link {
28   color: #61dafb;
29 }
30
31 @keyframes App-logo-spin {
32   from {
33     transform: rotate(0deg);
34   }
35   to {


```

```


35   to {
36     transform: rotate(360deg);
37   }
38 }
39

```

Output:

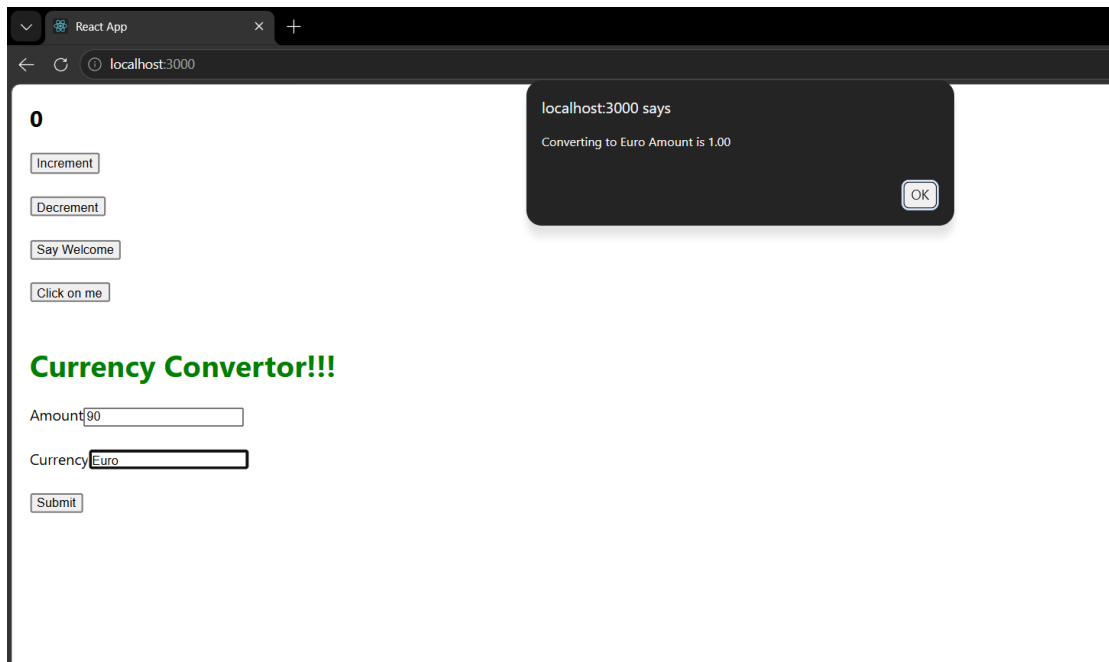

React – 12:

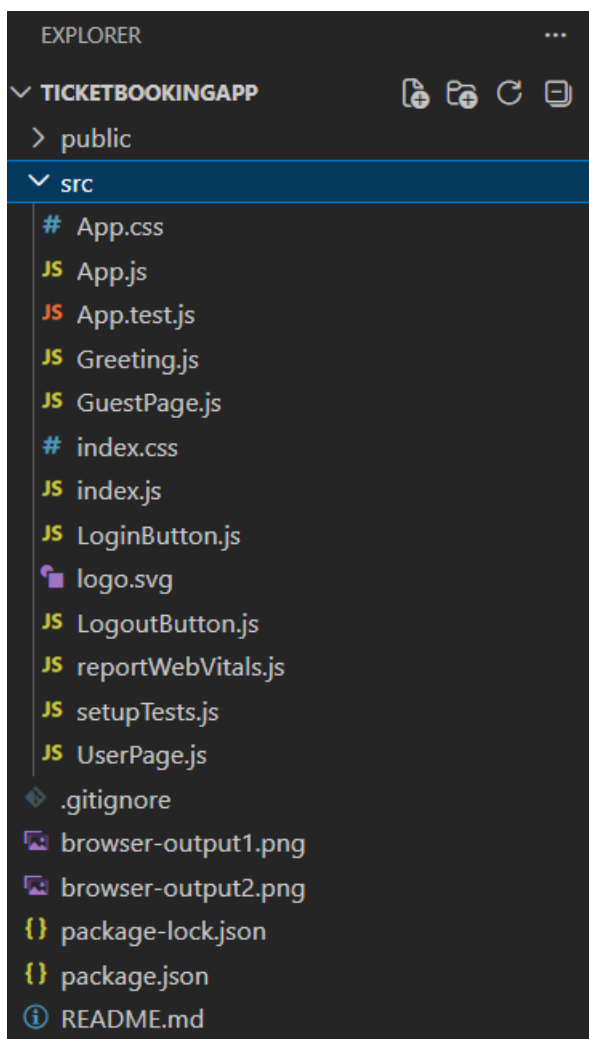

```
# App.css  X
src > # App.css > .App
1  .App {
2    text-align: center;
3  }
4
5  .App-logo {
6    height: 40vmin;
7    pointer-events: none;
8  }
9
10 @media (prefers-reduced-motion: no-preference) {
11   .App-logo {
12     animation: App-logo-spin infinite 20s linear;
13   }
14 }
15
16 .App-header {
17   background-color: #282c34;
18   min-height: 100vh;
19   display: flex;
20   flex-direction: column;
21   align-items: center;
22   justify-content: center;
23   font-size: calc(10px + 2vmin);
24   color: white;
25 }
26
27 .App-link {
28   color: #61dafb;
29 }
30
```

```
26
27 .App-link {
28   color: #61dafb;
29 }
30
31 @keyframes App-logo-spin {
32   from {
33     transform: rotate(0deg);
34   }
35   to {
36     transform: rotate(360deg);
37   }
38 }
39
```

```

JS App.js X
src > JS App.js > ...
1  import React, { useState } from "react";
2  import "./App.css";
3
4  import Greeting from "./Greeting";
5  import LoginButton from "./LoginButton";
6  import LogoutButton from "./LogoutButton";
7
8  function App() {
9
10     const [isLoggedIn, setIsLoggedIn] = useState(false);
11
12     const handleLoginClick = () => {
13       |   setIsLoggedIn(true);
14     };
15
16     const handleLogoutClick = () => {
17       |   setIsLoggedIn(false);
18     };
19
20     let button;
21
22     if (isLoggedIn) {
23       |
24       button = <LogoutButton onClick={handleLogoutClick} />;
25     } else {
26       |
27       button = <LoginButton onClick={handleLoginClick} />;
28     }
29   }
30 }

```

```

31
32   return (
33     <div style={{ margin: "50px" }}>
34       <Greeting isLoggedIn={isLoggedIn} />
35       <br />
36       {button}
37     </div>
38   );
39
40 }
41
42 export default App;

```

JS Greeting.js X

src > JS Greeting.js > ...

```
1 import React from "react";
2 import GuestPage from "../GuestPage";
3 import UserPage from "../UserPage";
4
5 function Greeting(props) {
6
7     const isLoggedIn = props.isLoggedIn;
8
9     if (isLoggedIn) {
10
11         return <UserPage />;
12
13     }
14
15     return <GuestPage />;
16
17 }
18
19 export default Greeting;
```

JS GuestPage.js X

src > JS GuestPage.js > ...

```
1 import React from "react";
2
3 function GuestPage() {
4
5     return (
6         <div>
7             <h1>Please sign up.</h1>
8         </div>
9     );
10
11 }
12
13
14
15 export default GuestPage;
```


JS LoginButton.js X

src > JS LoginButton.js > ...



```
1  import React from "react";
2
3  function LoginButton(props) {
4
5      return (
6
7          <button onClick={props.onClick}>
8              |   Login
9              </button>
10
11      );
12
13  }
14
15  export default LoginButton;
```

JS LogoutButton.js X


src > JS LogoutButton.js > ...

```
1  import React from "react";
2
3  function LogoutButton(props) {
4
5      return (
6
7          <button onClick={props.onClick}>
8              |   Logout
9              </button>
10
11      );
12
13  }
14
15  export default LogoutButton;
```

Output:

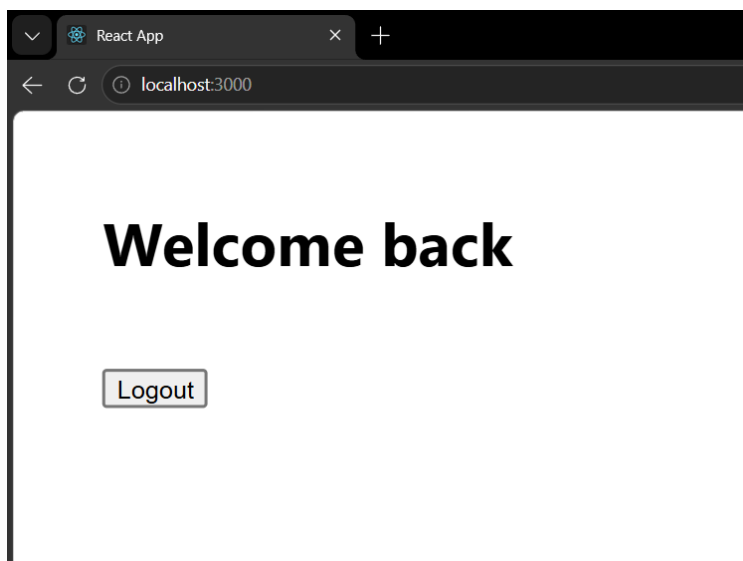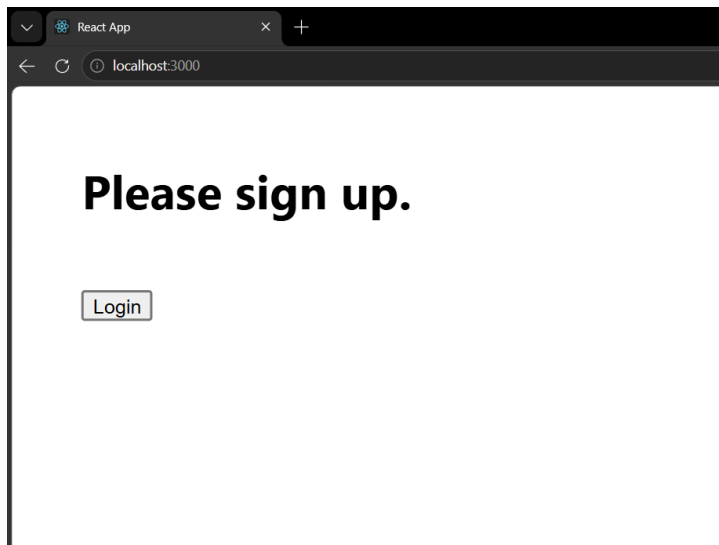

React – 13:

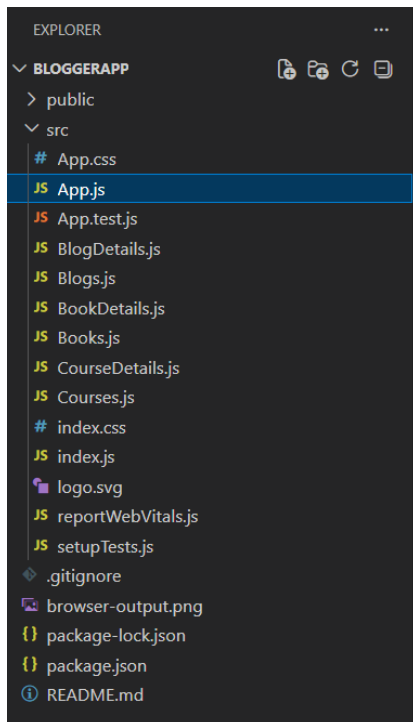

```
JS App.js X
src > JS App.js > ...
1  import "../App.css";
2
3  import BookDetails from "../BookDetails";
4  import BlogDetails from "../BlogDetails";
5  import CourseDetails from "../CourseDetails";
6
7  function App() {
8
9      const showBooks = true;
10     const showBlogs = true;
11     const showCourses = true;
12
13     return (
14         <div
15             style={{
16                 display: "flex",
17                 justifyContent: "space-around",
18                 marginTop: "40px"
19             }}
20         >
21
22             {showCourses && <CourseDetails />}
23
24             {showBooks && <BookDetails />}
25
26             {showBlogs && <BlogDetails />}
27
28         </div>
29     );
30
31 }
32
33
34
35 export default App;
```

```

JS BlogDetails.js X
src > JS BlogDetails.js > ...
1  import React from 'react';
2  import { blogs } from './Blogs';
3
4  function BlogDetails() {
5
6      return (
7
8          <div>
9
10             <h1>Blog Details</h1>
11
12             {
13
14                 blogs.map((blog) => (
15
16                     <div key={blog.id}>
17
18                         <h3>{blog.title}</h3>
19
20                         <h5>{blog.author}</h5>
21
22                         <p>{blog.content}</p>
23
24                     </div>
25
26                 ))
27
28             }
29
30         </div>
31
32     );
33
34 }
35
36 export default BlogDetails;

```

```

JS Blogs.js X
src > JS Blogs.js > ...
1  export const blogs = [
2      {
3          id: 1,
4          title: "React Learning",
5          author: "Stephen Biz",
6          content: "Welcome to learning React!"
7      },
8      {
9          id: 2,
10         title: "Installation",
11         author: "Schwedenier",
12         content: "You can install React from npm."
13     }
14 ];

```

JS BookDetails.js X

src > JS BookDetails.js > ...

```
1 import React from "react";
2 import { books } from "../Books";
3
4 function BookDetails() {
5
6     return (
7
8         <div>
9
10             <h1>Book Details</h1>
11
12             {
13
14                 books.map((book) => (
15
16                     <div key={book.id}>
17
18                         <h3>{book.bname}</h3>
19
20                         <h4>{book.price}</h4>
21
22                     </div>
23
24                 ))
25
26             }
27
28         </div>
29
30     );
31
32 }
33
34 export default BookDetails;
```

JS Books.js X


src > JS Books.js > ...

```
1 export const books = [
2     { id: 101, bname: "Master React", price: 670 },
3     { id: 102, bname: "Deep Dive into Angular 11", price: 800 },
4     { id: 103, bname: "Mongo Essentials", price: 450 }
5 ];
```

```
JS CourseDetails.js X
src > JS CourseDetails.js > ...
1  import React from "react";
2  import { courses } from "../Courses";
3
4  function CourseDetails() {
5
6      return (
7
8          <div>
9
10             <h1>Course Details</h1>
11
12             {
13
14                 courses.map((course) => (
15
16                     <div key={course.id}>
17
18                         <h3>{course.cname}</h3>
19
20                         <p>{course.date}</p>
21
22                     </div>
23
24                 ))
25
26             }
27
28         </div>
29
30     );
31
32 }
33
34 export default CourseDetails;
```

```
JS Courses.js X
src > JS Courses.js > ...
1  export const courses = [
2      {
3          id: 1,
4          cname: "Angular",
5          date: "4/5/2021"
6      },
7      {
8          id: 2,
9          cname: "React",
10         date: "6/3/2021"
11     }
12 ];
```

Output:

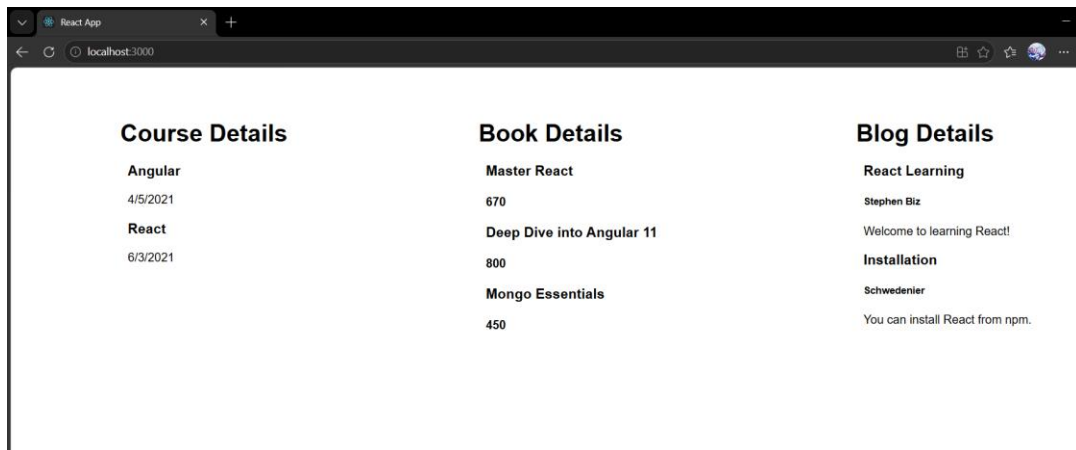

Course Details

Angular

4/5/2021

React

6/3/2021

Book Details

Master React

670

Deep Dive into Angular 11

800

Mongo Essentials

450

Blog Details

React Learning

Stephen Biz

Welcome to learning React!

Installation

Schwedenier

You can install React from npm.