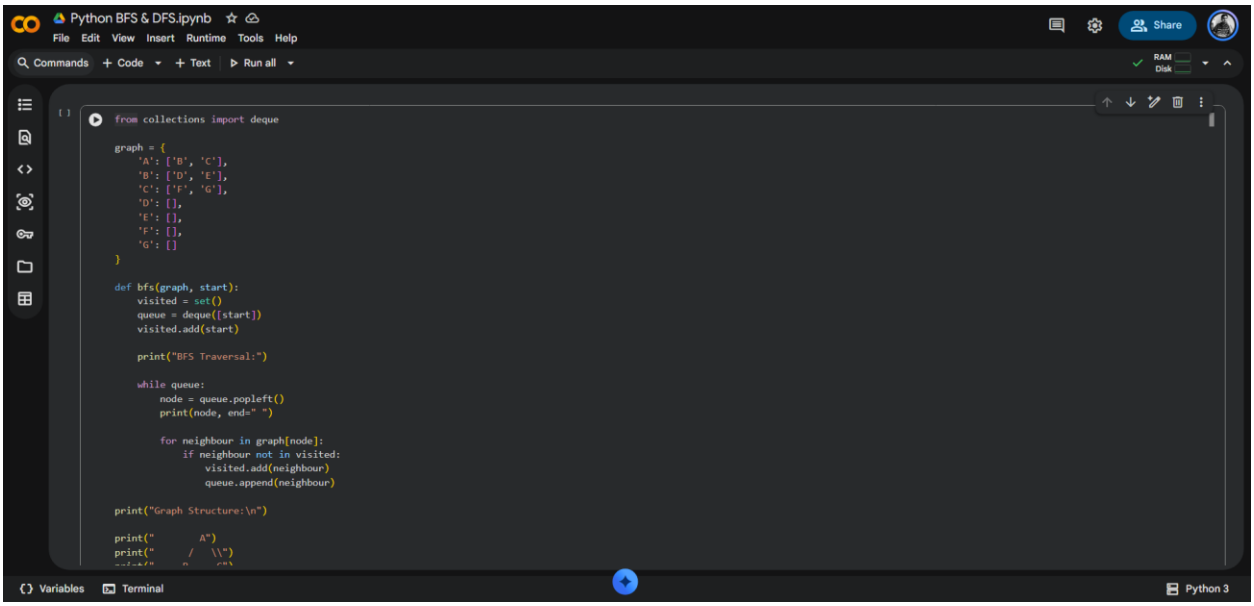
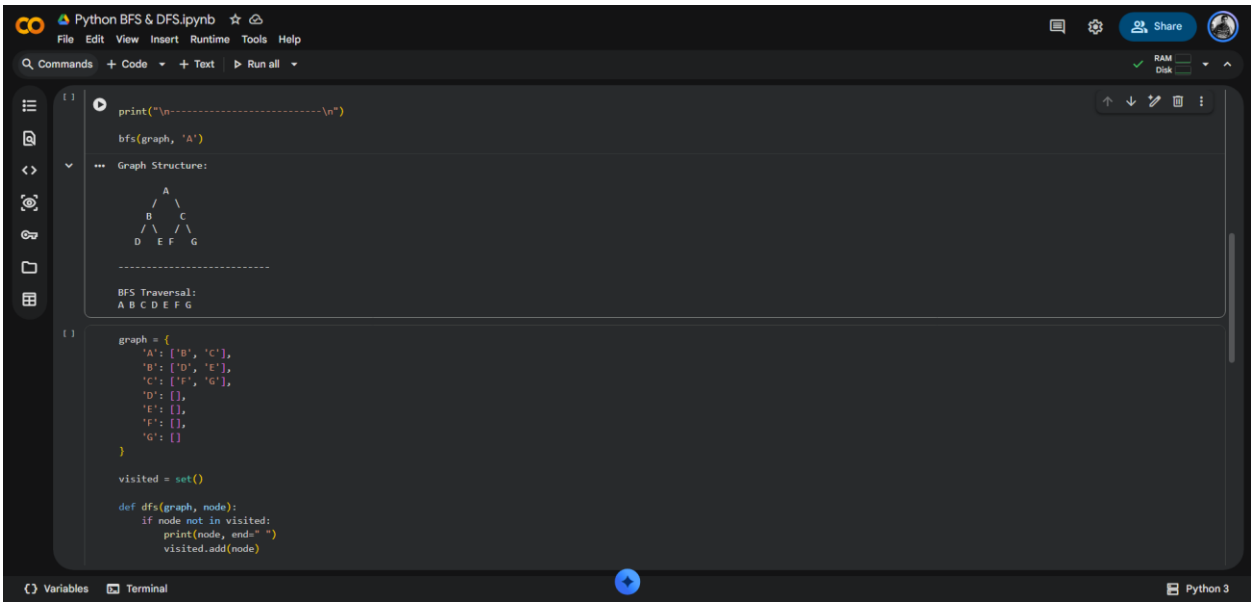
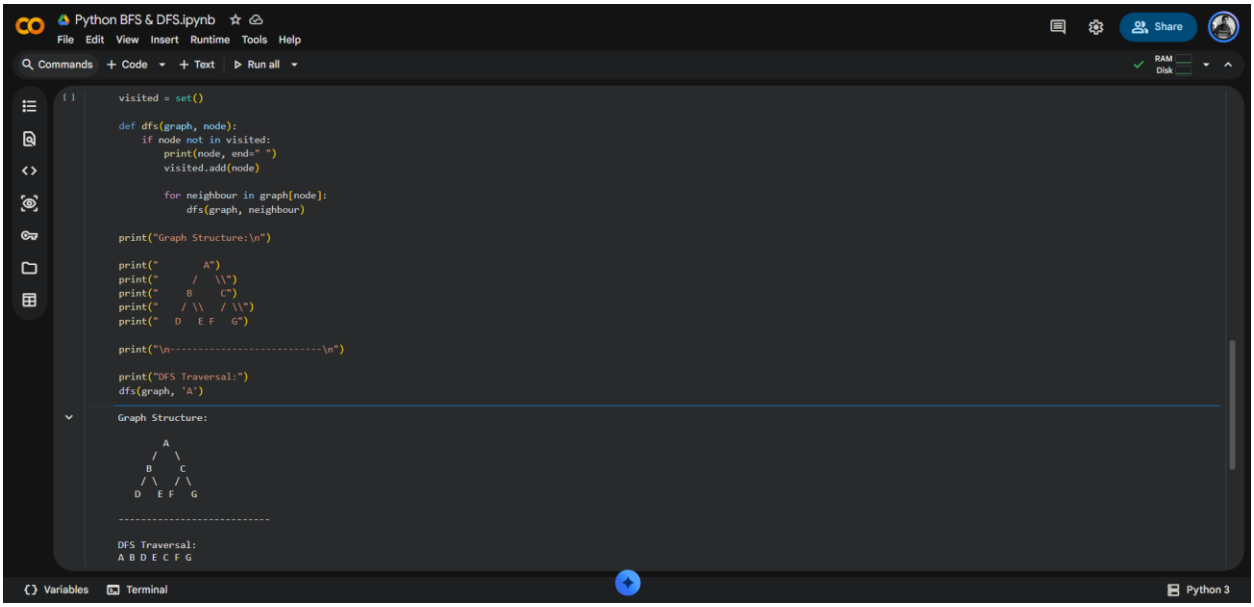
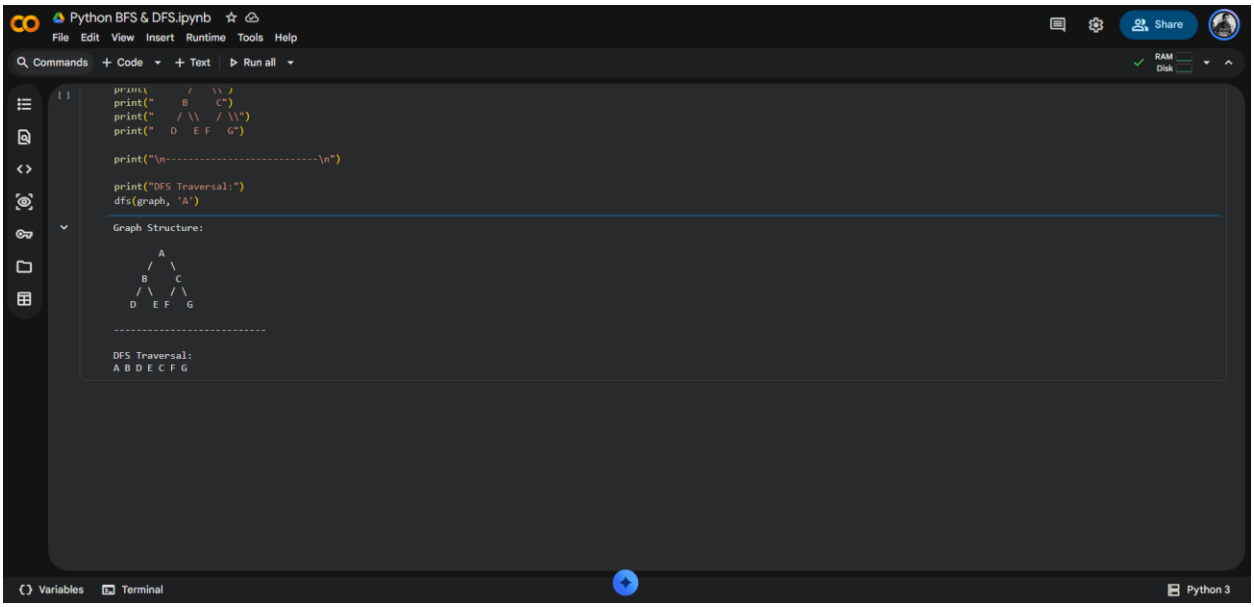

Python BFS & DFS.ipynb
File Edit View Insert Runtime Tools Help
Share
Commands + Code + Text Run all
RAM
Disk
from collections import deque
graph = {
'A': ['B', 'C'],
'B': ['D', 'E'],
'C': ['F', 'G'],
'D': [],
'E': [],
'F': [],
'G': []
}
def bfs(graph, start):
visited = set()
queue = deque([start])
visited.add(start)
print("BFS Traversal:")
while queue:
node = queue.popleft()
print(node, end=" ")
for neighbour in graph[node]:
if neighbour not in visited:
visited.add(neighbour)
queue.append(neighbour)
print("Graph Structure:\n")
print(" A")
print(" / \\")
Variables
Terminal
Python 3


Python BFS & DFS.ipynb
File Edit View Insert Runtime Tools Help
Share
Commands + Code + Text Run all
RAM
Disk
print("\n--------------------------\n")
bfs(graph, 'A')
Graph Structure:
A
/ \
B C
/ \ / \
D E F G

BFS Traversal:
A B C D E F G
graph = {
'A': ['B', 'C'],
'B': ['D', 'E'],
'C': ['F', 'G'],
'D': [],
'E': [],
'F': [],
'G': []
}
visited = set()
def dfs(graph, node):
if node not in visited:
print(node, end=" ")
visited.add(node)
Variables
Terminal
Python 3


Python BFS & DFS.ipynb
File Edit View Insert Runtime Tools Help
Share
Commands + Code + Text Run all
RAM
Disk
visited = set()
def dfs(graph, node):
if node not in visited:
print(node, end=" ")
visited.add(node)
for neighbour in graph[node]:
dfs(graph, neighbour)
print("Graph Structure:\n")
print(" A")
print(" / \\")
print(" B C")
print(" / \\ / \\")
print(" D E F G")
print("\n-------------------------\n")
print("DFS Traversal:")
dfs(graph, 'A')
Graph Structure:
A
/ \
B C
/ \ / \
D E F G

DFS Traversal:
A B D E C F G
Variables
Terminal
Python 3


Python BFS & DFS.ipynb
File Edit View Insert Runtime Tools Help
Share
Commands + Code + Text Run all
RAM
Disk
print(" B C")
print(" / \\ / \\")
print(" D E F G")
print("\n-------------------------\n")
print("DFS Traversal:")
dfs(graph, 'A')
Graph Structure:
A
/ \
B C
/ \ / \
D E F G

DFS Traversal:
A B D E C F G
Variables
Terminal
Python 3