jupyter Seaborn Assignment 5 Last Checkpoint: 2 days ago

File Edit View Run Kernel Settings Help Trust

Code JupyterLab Python 3 (ipykernel)


[2]:
```
import seaborn as sns

sns.set_theme(style="whitegrid")

df = sns.load_dataset("titanic")
```


[3]:
```
sns.scatterplot(data=df, x="age", y="fare", hue="sex")
```

[3]: <Axes: xlabel='age', ylabel='fare'>

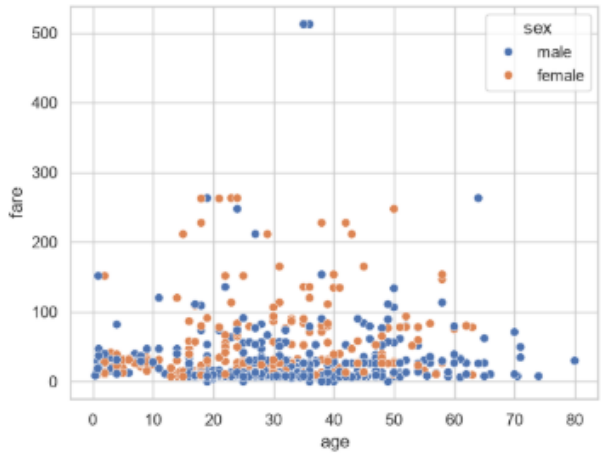

[4]:
```
sns.lineplot(data=df, x="pclass", y="fare", hue="sex")
```

[4]: <Axes: xlabel='pclass', ylabel='fare'>

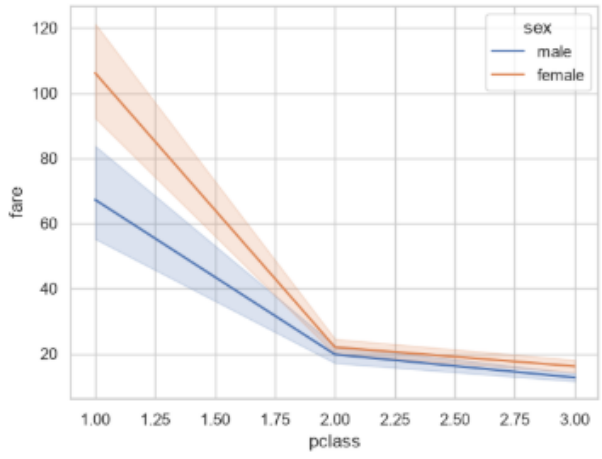


[5]:
```
sns.histplot(data=df, x="age", bins=20)
```

jupyter Seaborn Assignment 5 Last Checkpoint: 2 days ago

File Edit View Run Kernel Settings Help


Code

JupyterLab Python 3 (ipykernel)

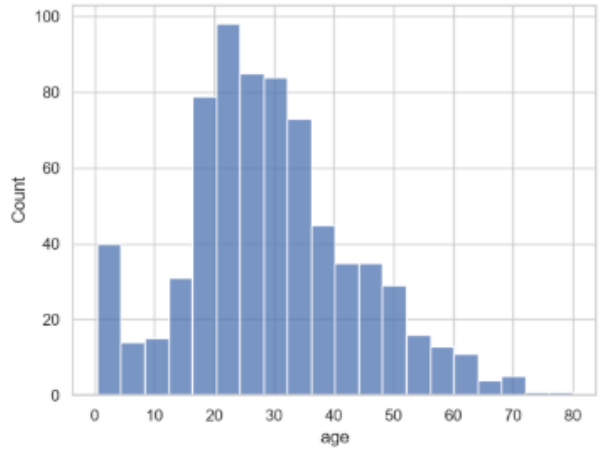


[6]:
```
sns.kdeplot(data=df, x="age", hue="sex")
```

[6]: <Axes: xlabel='age', ylabel='Density'>

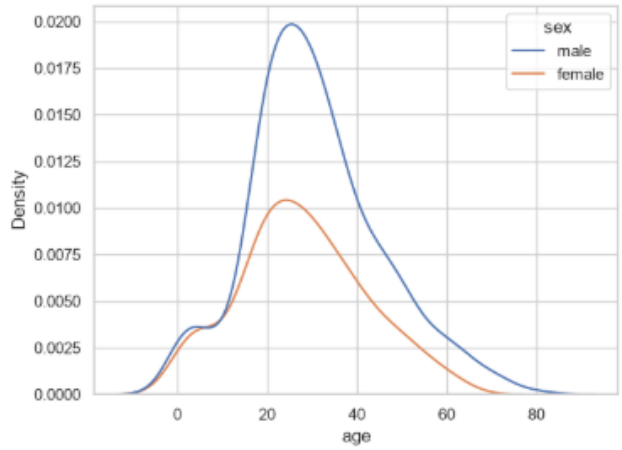

[7]:
```
sns.displot(data=df, x="age", kde=True)
```

[7]: <seaborn.axisgrid.FacetGrid at 0x16542312980>

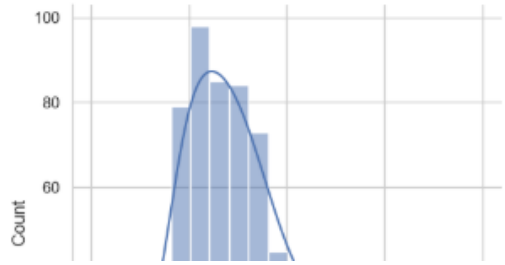


jupyter Seaborn Assignment 5 Last Checkpoint: 2 days ago

File Edit View Run Kernel Settings Help

Code


JupyterLab Python 3 (ipykernel)

[7]:
```
<seaborn.axisgrid.FacetGrid at 0x16542312980>
```

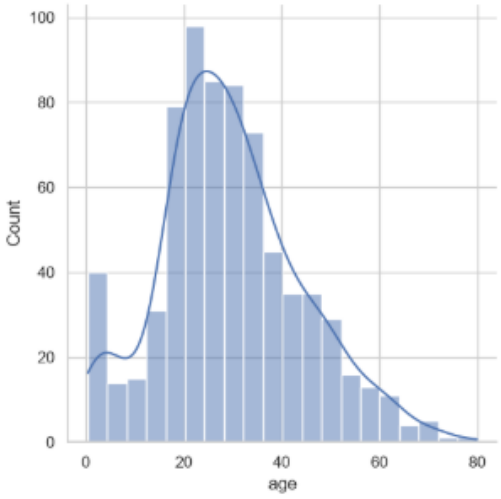


[8]:
```
sns.countplot(data=df, x="class")
```

[8]:
```
<Axes: xlabel='class', ylabel='count'>
```

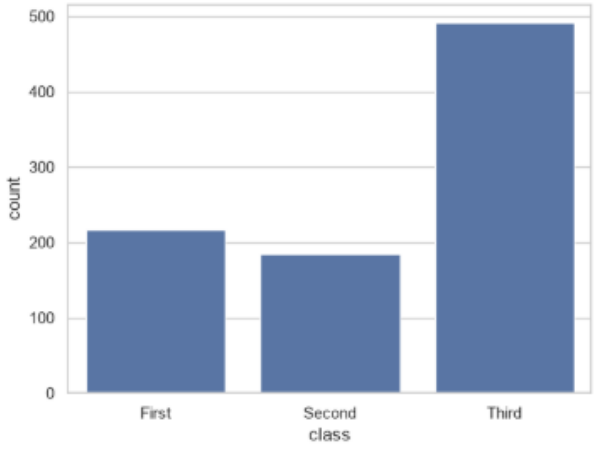

[9]:
```
sns.barplot(data=df, x="sex", y="survived")
```

[9]:
```
<Axes: xlabel='sex', ylabel='survived'>
```

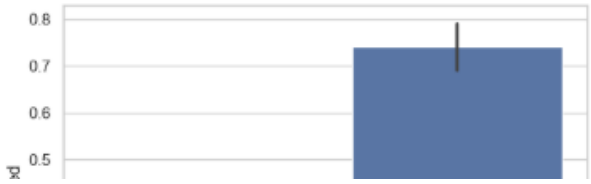


jupyter Seaborn Assignment 5 Last Checkpoint: 2 days ago

File Edit View Run Kernel Settings Help

Code


JupyterLab Python 3 (ipykernel)

[7]:
```
<seaborn.axisgrid.FacetGrid at 0x16542312980>
```

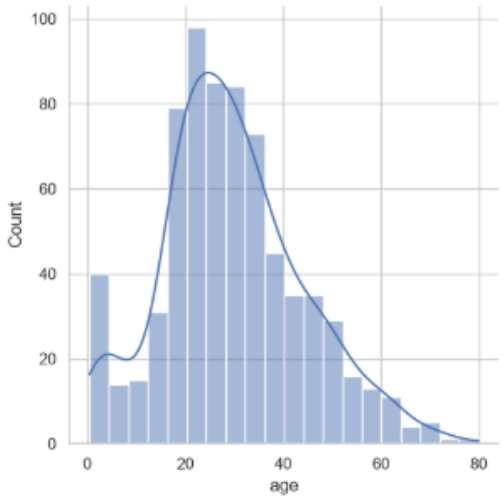

[8]:
```
sns.countplot(data=df, x="class")
```

[8]:
```
<Axes: xlabel='class', ylabel='count'>
```

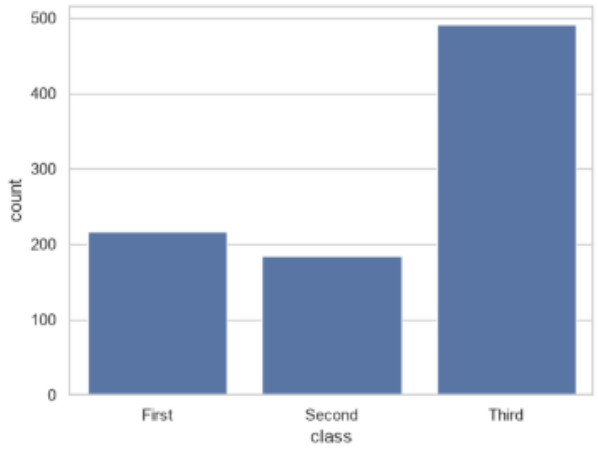

[9]:
```
sns.barplot(data=df, x="sex", y="survived")
```

[9]:
```
<Axes: xlabel='sex', ylabel='survived'>
```

