

Date Planner


Byte ourDust

Nimra Sami, Alejandro Penaloza, Arturo Serdan

Title: Plan a Date

Actor(s): Two users (User One and User Two)

Purpose: Successful Date Suggestio

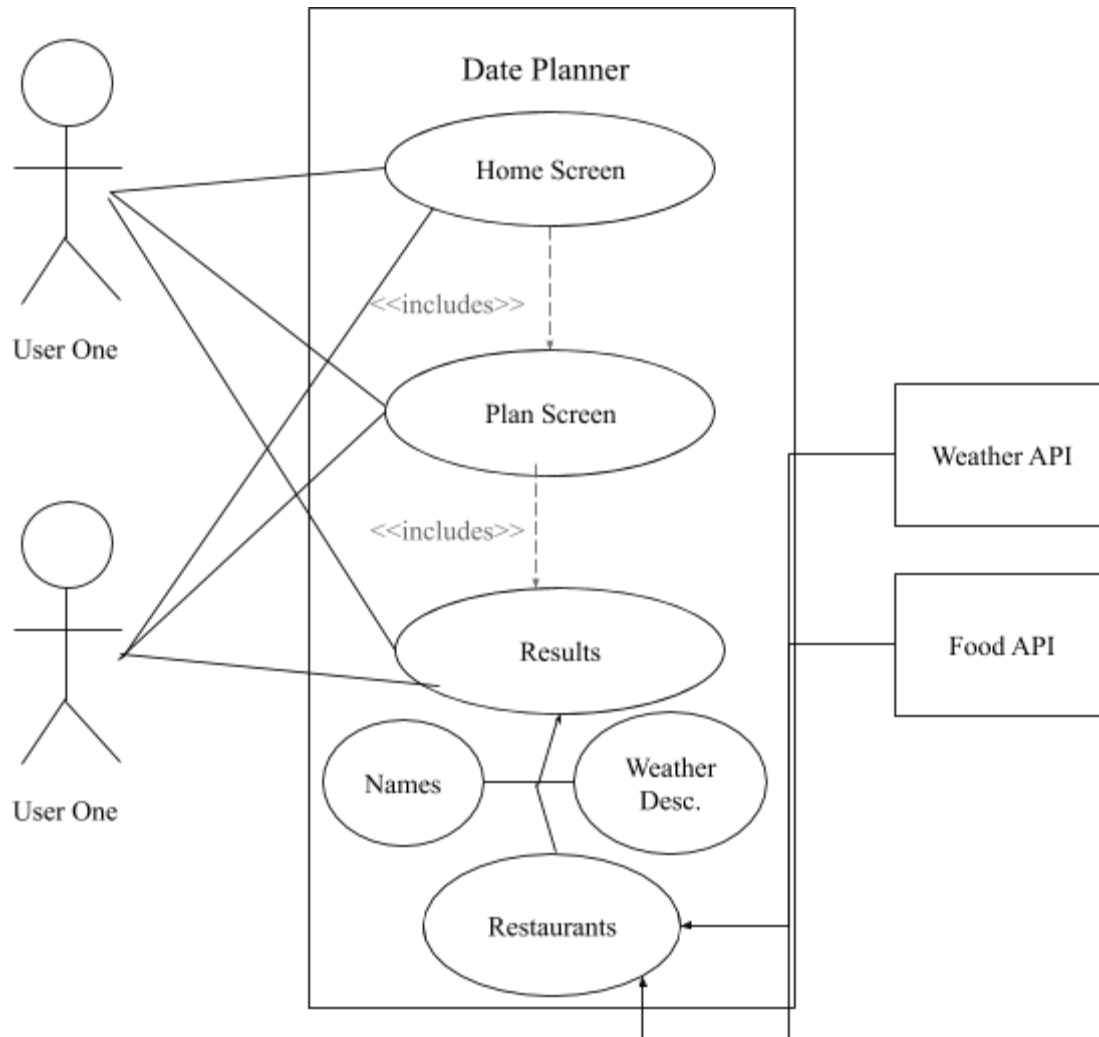

Scenario

Pre-Condition(s):

Both users start the application and they are currently on the homepage. Both of the users are available and sure of what they are in the mood for.

Procedure:

Click the “Plan a Date” button
User one and user two fill in the requirements
Click the results button for results


Post-Condition(s):

User one and user two both are satisfied with their results.

Title: Plan a Date

Actor(s): Two users (User One and User Two)

Purpose: Unsuccessful Date Suggestion

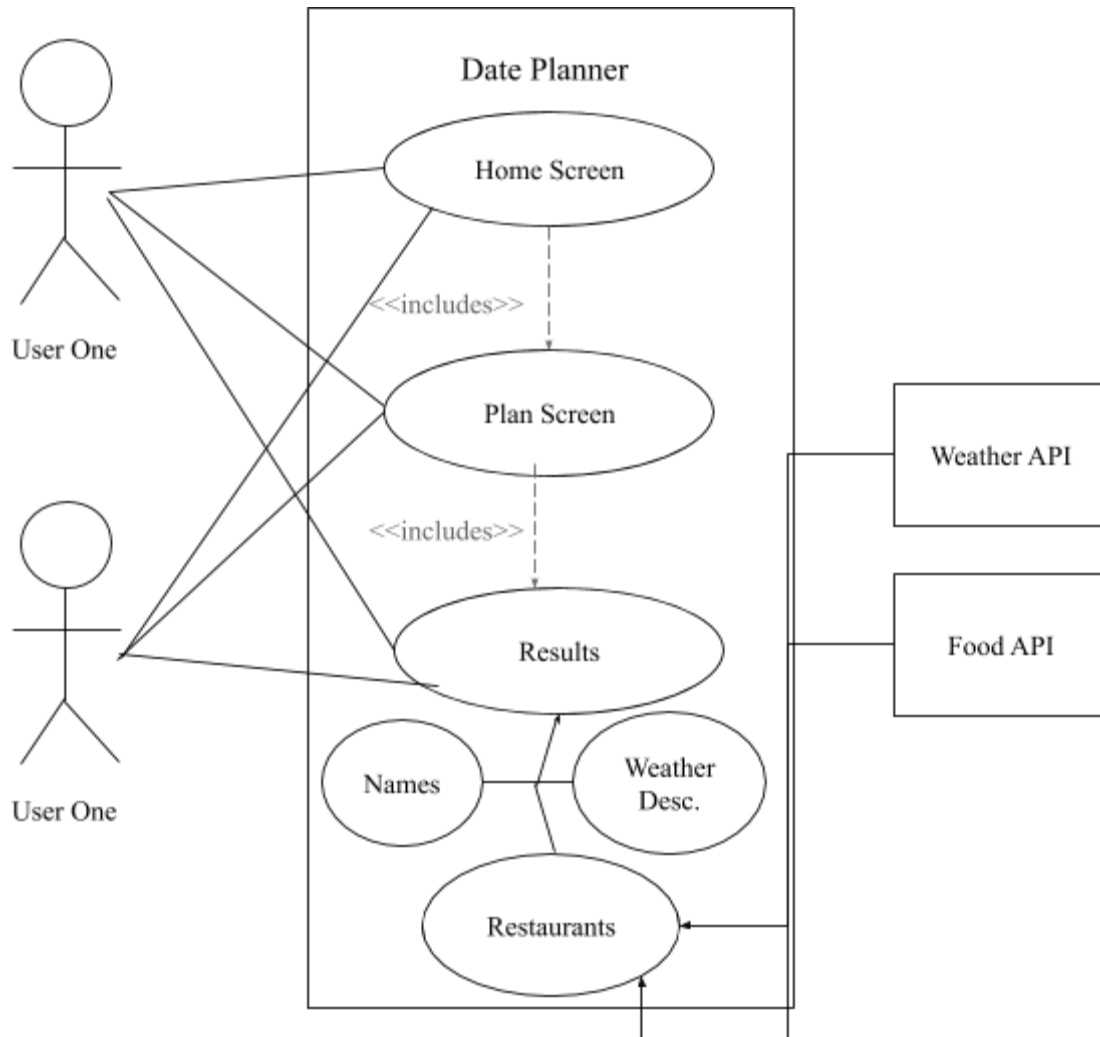

Scenario

Pre-Condition(s):

Both users start the application and they are currently on the homepage. Both of the users are available, user one knows what they are in mood for while user two is not sure.

Procedure:

Click the “Plan a Date” button
User one fills in the requirements
User one clicks the results button without user two’s inputs

Post-Condition(s):

Error message
Users have to start over