


presented by Tanishk Raghav





INRODUCTION

Hello, I am Tanishk Raghav currently pursuing my Btech degree in Computer Science. In this project I have utilised SQL queries to solve questions based on pizza sales.




RETRIEVE THE TOTAL NUMBER OF ORDERS PLACED

```
SELECT

COUNT(order_id) AS total_orders

FROM

orders;
```

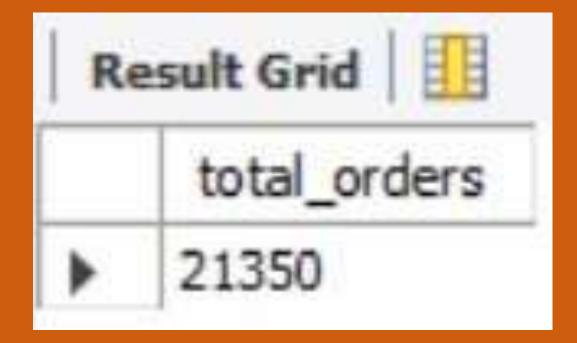

CALCULATE THE TOTAL REVENUE GENERATED FROM PIZZA SALES



IDENTIFY THE HIGHEST-PRICED PIZZA



IDENTIFY THE MOST COMMON PIZZA SIZE ORDERED

	size	order_count
•	L	18526
	M	15385
	S	14137
	XL	544
	XXL	28

JOIN THE NECESSARY TABLES TO FIND THE TOTAL QUANTITY OF EACH PIZZA CATEGORY ORDERED

```
pizza_types.category,
    SUM(orders_details.quantity) AS quantity

FROM

pizza_types
    JOIN

pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
    JOIN

orders_details ON orders_details.pizza_id = pizzas.pizza_id

GROUP BY pizza_types.category

ORDER BY quantity DESC;
```

R	esult Grid	File
	category	quantity
١	Classic	14888
	Supreme	11987
	Veggie	11649
	Chicken	11050


DETERMINE THE DISTRIBUTION OF ORDERS BY HOUR OF THE DAY

```
SELECT
   HOUR(order_time) AS hour, COUNT(order_id) AS order_count
FROM
   orders
GROUP BY HOUR(order_time);
```

Result Grid		
	hour	order_count
٠	11	1231
	12	2520
	13	2455
	14	1472
	15	1468
	16	1920
	17	2336
	18	2399
	19	2009
	20	1642
	21	1198
	22	663
	23	28
	10	8
	9	1

JOIN RELEVANT TABLES TO FIND THE CATEGORY-WISE DISTRIBUTION OF PIZZAS

```
category, COUNT(name)
FROM
pizza_types
GROUP BY category;
```

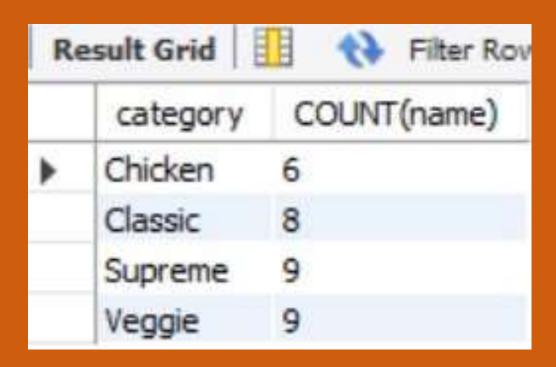

GROUP THE ORDERS BY DATE AND CALCULATE THE AVERAGE NUMBER OF PIZZAS ORDERED PER DAY

```
AVG(quantity)

FROM

(SELECT


orders.order_date, SUM(orders_details.quantity) AS quantity

FROM

orders

JOIN orders_details ON orders.order_id = orders_details.order_id

GROUP BY orders.order_date) AS order_quantity;
```

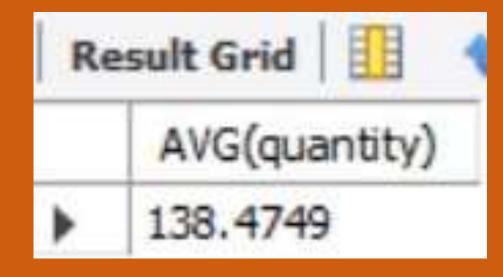

DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE

```
SELECT
    pizza_types.name,
    SUM(orders_details.quantity * pizzas.price) AS revenue
FROM
   pizza_types
        JOIN
   pizzas ON pizzas.pizza_type_id = pizza_types.pizza_type_id
        JOIN
    orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.name
ORDER BY revenue DESC
LIMIT 3;
```

R	esult Grid 1	WS:
	name	revenue
•	The Thai Chicken Pizza	43434.25
	The Barbecue Chicken Pizza	42768
	The California Chicken Pizza	41409.5

CALCULATE THE PERCENTAGE CONTRIBUTION OF EACH PIZZA TYPE TO TOTAL REVENUE

```
SELECT
   pizza_types.category,
   ROUND(SUM(orders_details.quantity * pizzas.price) / (SELECT
                   ROUND(SUM(orders_details.quantity * pizzas.price),
                               2) AS total_sales
                FROM
                   orders_details
                        JOIN
                    pizzas ON pizzas.pizza_id = orders_details.pizza_id) * 100,
           2) AS revenue
FROM
   pizza_types
       JOIN
   pizzas ON pizza_types.pizza_type_id = pizzas.pizza_type_id
       JOIN
   orders_details ON orders_details.pizza_id = pizzas.pizza_id
GROUP BY pizza_types.category
ORDER BY revenue DESC;
```

R	esult Grid	1 () Fi
	category	revenue
١	Classic	26.91
	Supreme	25.46
	Chicken	23.96
	Veggie	23.68

ANALYZE THE CUMULATIVE REVENUE GENERATED OVER TIME

```
select order date,
sum(revenue) over(order by order_date) as cum_revenue
from
(select orders.order date,
sum(orders_details.quantity * pizzas.price) as revenue
from orders_details join pizzas
on orders_details.pizza_id = pizzas.pizza_id
join orders
on orders.order id = orders_details.order_id
group by orders.order date) as sales;
```

Re	Result Grid		
	order_date	cum_revenue	
•	2015-01-01	2713.8500000000004	
	2015-01-02	5445.75	
	2015-01-03	8108.15	
	2015-01-04	9863.6	
	2015-01-05	11929.55	
	2015-01-06	14358.5	
	2015-01-07	16560.7	
	2015-01-08	19399.05	
	2015-01-09	21526.4	
	2015-01-10	23990.350000000002	

DETERMINE THE TOP 3 MOST ORDERED PIZZA TYPES BASED ON REVENUE FOR EACH PIZZA CATEGORY


```
select name, revenue from
(select category, name, revenue,
rank() over(partition by category order by revenue desc) as rn
from
(select pizza_types.category, pizza_types.name,
sum((orders_details.quantity) * pizzas.price) as revenue
from pizza_types join pizzas
on pizza_types.pizza_type_id = pizzas.pizza_type_id
join orders details
on orders_details.pizza_id = pizzas.pizza_id
group by pizza_types.category, pizza_types.name) as a) as b
where rn <= 3;
```

R	Result Grid		
	name	revenue	
٠	The Thai Chicken Pizza	43434.25	
	The Barbecue Chicken Pizza	42768	
	The California Chicken Pizza	41409.5	
	The Classic Deluxe Pizza	38180.5	
	The Hawaiian Pizza	32273.25	
	The Pepperoni Pizza	30161.75	
	The Spicy Italian Pizza	34831.25	
	The Italian Supreme Pizza	33476.75	
	The Sicilian Pizza	30940.5	
	The Four Cheese Pizza	32265 70000000065	

+91 7983157353







Thank you for your attention to our sales report presentation. If you have uestions or would like to discuss the findings in more detail, please don't hesitate to reach out to our sales team. W ppreciate your continued support and partnership.