


Internal object structure of simple_chat

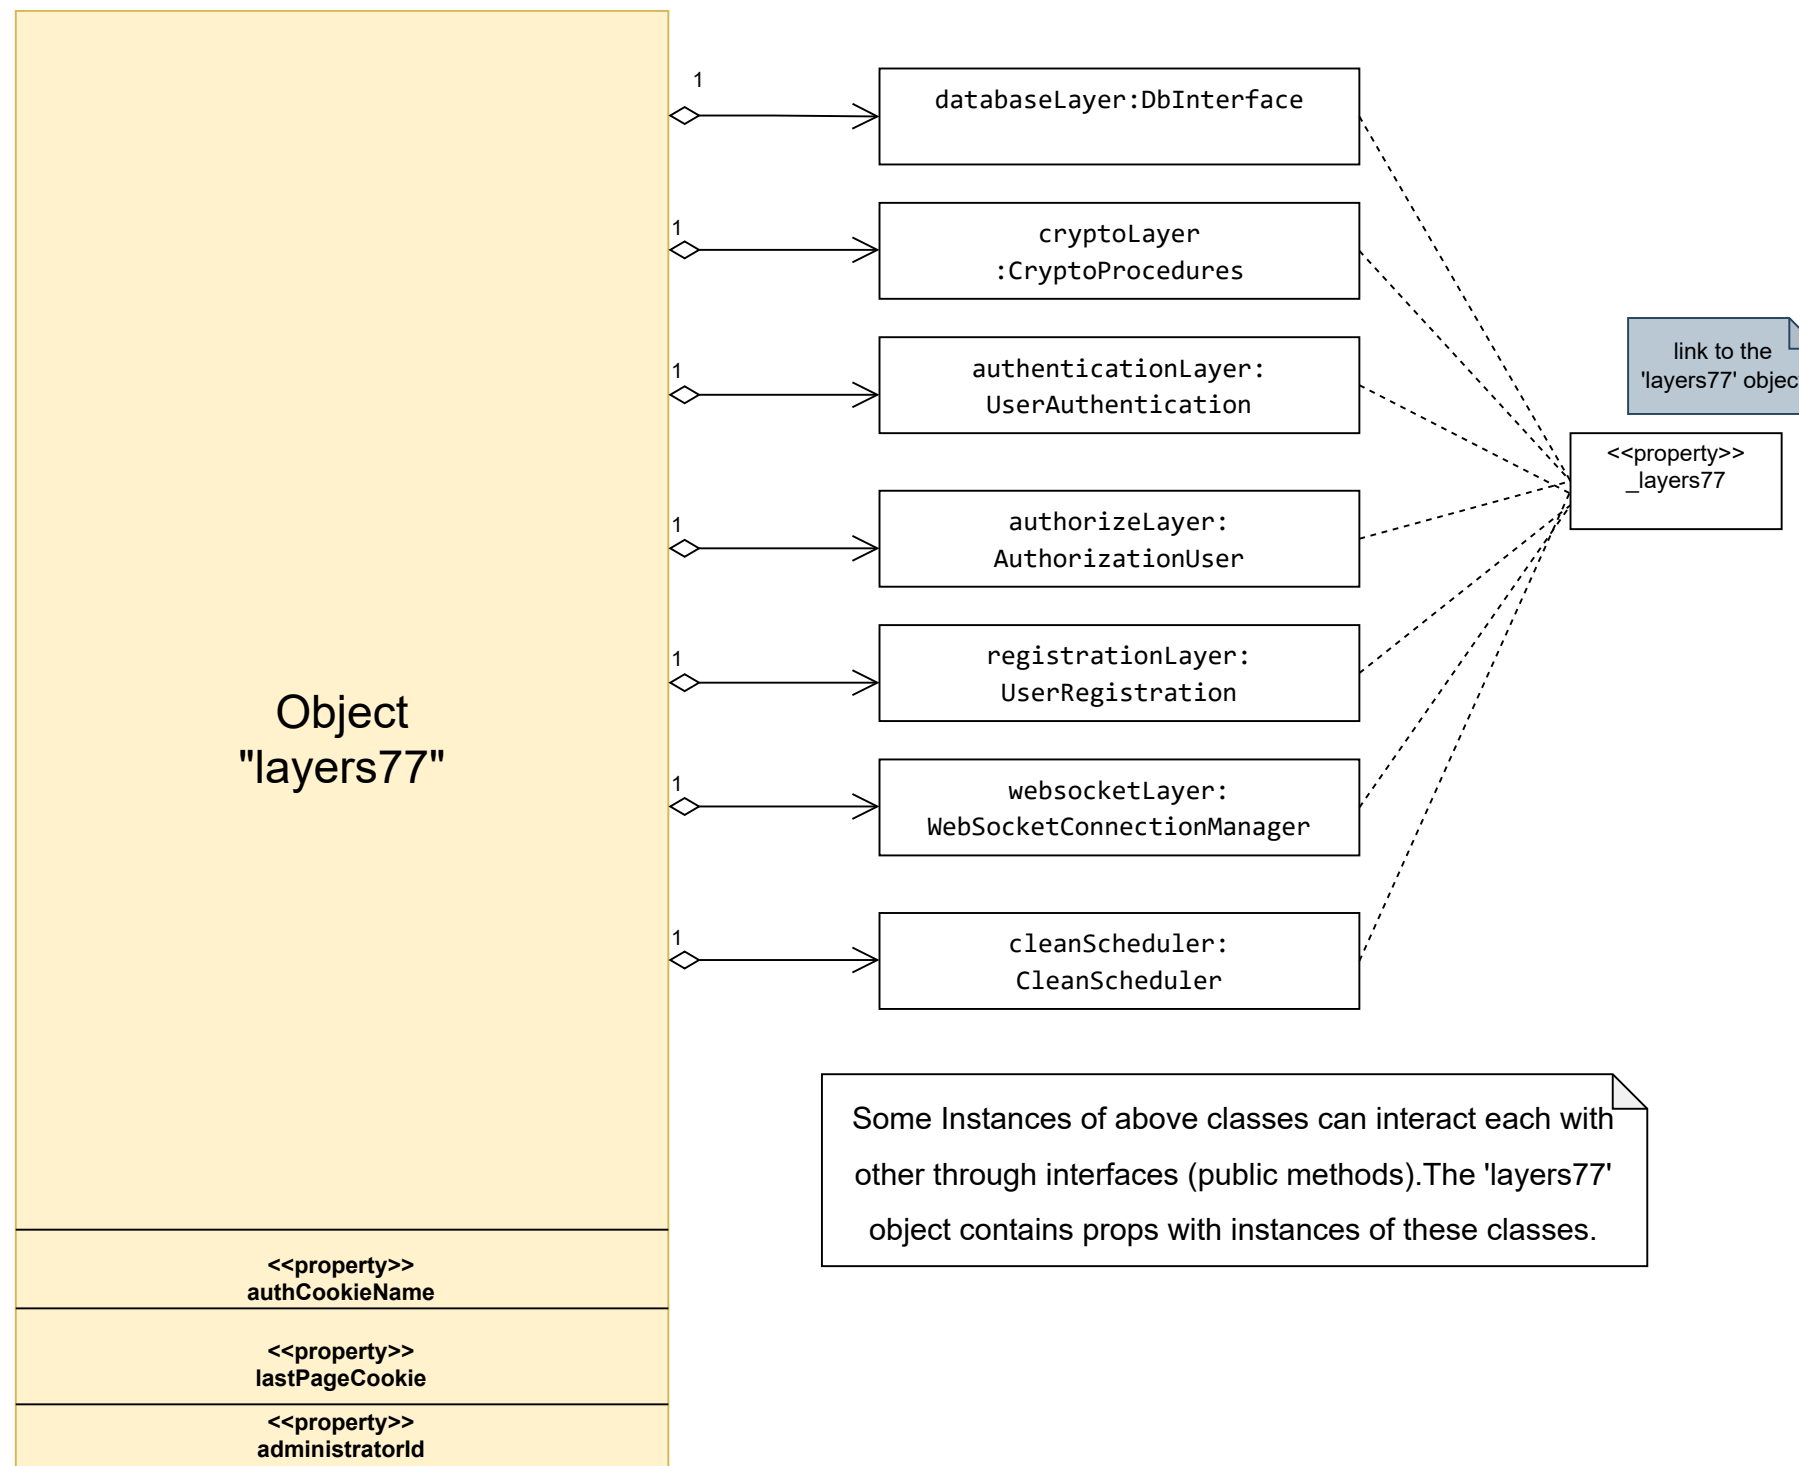

When a database connection has been established successfully - the object 'layers77' has been initialized instances of classes. There calls constructors of the classes.

Some Instances of above classes can interact each with other through interfaces (public methods).The 'layers77' object contains props with instances of these classes.