NBIN - COMPASS PLATFORM

Unified Access Management

UAR / UAM visual specification pack
Sequence diagrams, mind maps, conceptual and technical layouts for the PRD and feature onboarding plan

---

Prepared from the handover transcript and seven source flow documents - October 14, 2026 - Working draft

Sources: New version of definitions - Manage integration - Manage Features - Manage Requests - Manage Firm Users - Monitor requests - Process Request

ORIENTATION

How to read this pack

Teal marks the business catalogue and NBIN-internal processing, amber marks firm-side and provisioning-layer concerns, grey marks neutral structure, examples, and terminal states. Solid arrows are actions; dashed arrows are returns, notifications, or data served by reference. Each source document gets its own segmented flow in part B.

Source document	What it specifies	Primary persona
New version of definitions	Taxonomy: platform, business service, module, feature, function; dual catalogue model	Product administrators
Manage integration	Integration registry: auth/authz sources, function-to-assignment mapping, Compass anchor	Product team
Manage Features	Feature types, capability reference data, access-level packaging, catalogue consumers	Product team
Manage Requests	Create / update / deactivate forms, RR-IA data access, firm resource filtering	Security steward
Manage Firm Users	User dashboard, lifecycle states, auth status icons, status-gated actions	Security steward
Monitor requests	Request tracking, cancel rules, one-time credential copy flow	Security steward
Process Request	Intake, fulfilment, per-system credential logic, outcome statuses	ID admin (SSA)

PART A - CONCEPTUAL MODEL

Platform taxonomy mind map

The catalogue is organised around one spine - business service to module to feature to function - with delivery, access, and consumption concerns hanging off the same platform definition. Functions are the only permissioned unit; everything above them is organisation.

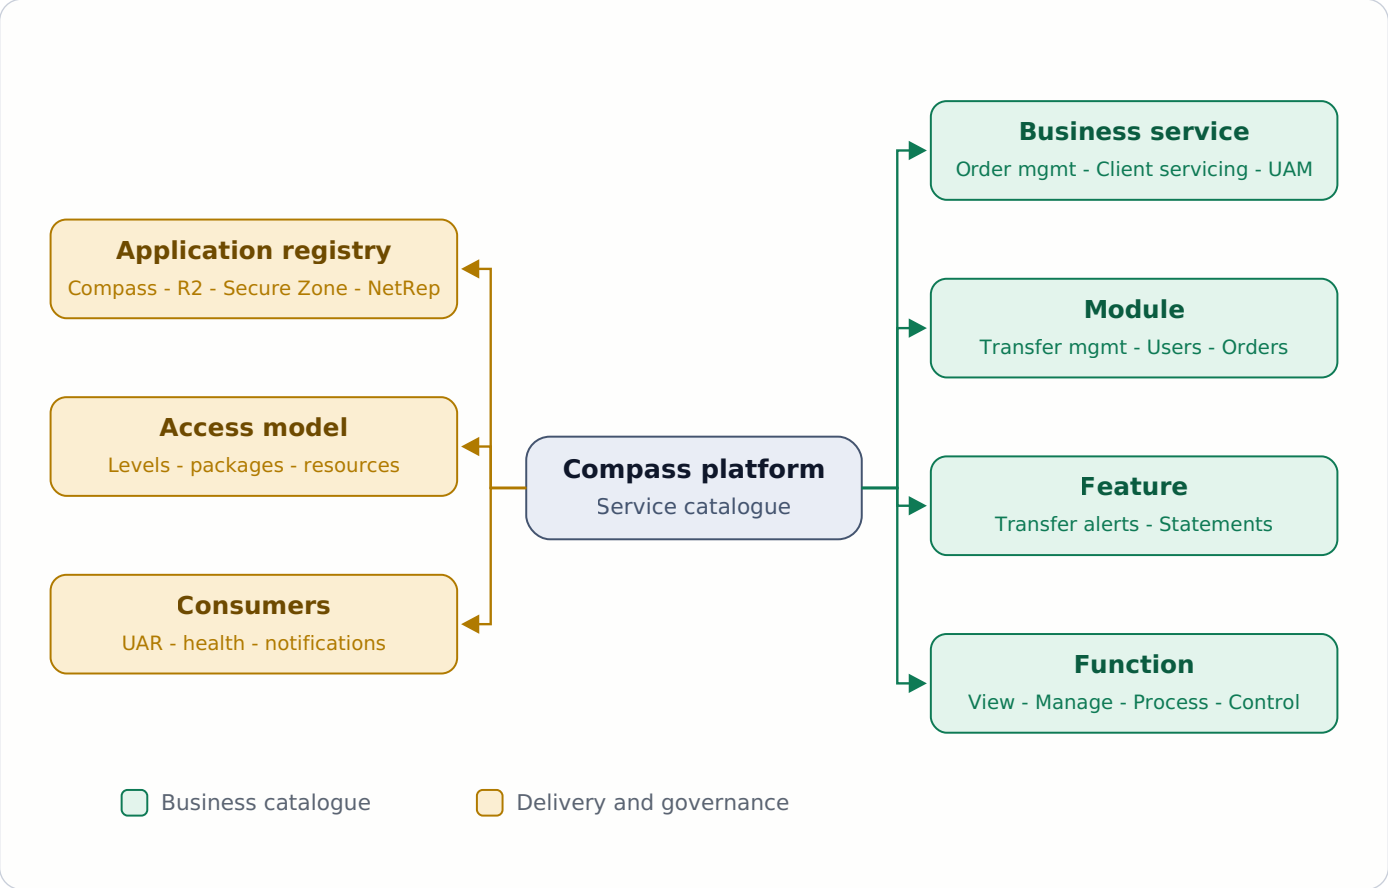


Figure 1 - Platform service catalogue - taxonomy mind map

PART A - CONCEPTUAL MODEL

Dual model: business catalogue vs application registry

The definitions document separates what users can access from where it is delivered and authorised. The integration registry is the bridge: it maps platform functions to the role, group, permission, entitlement, or licence each application actually uses.

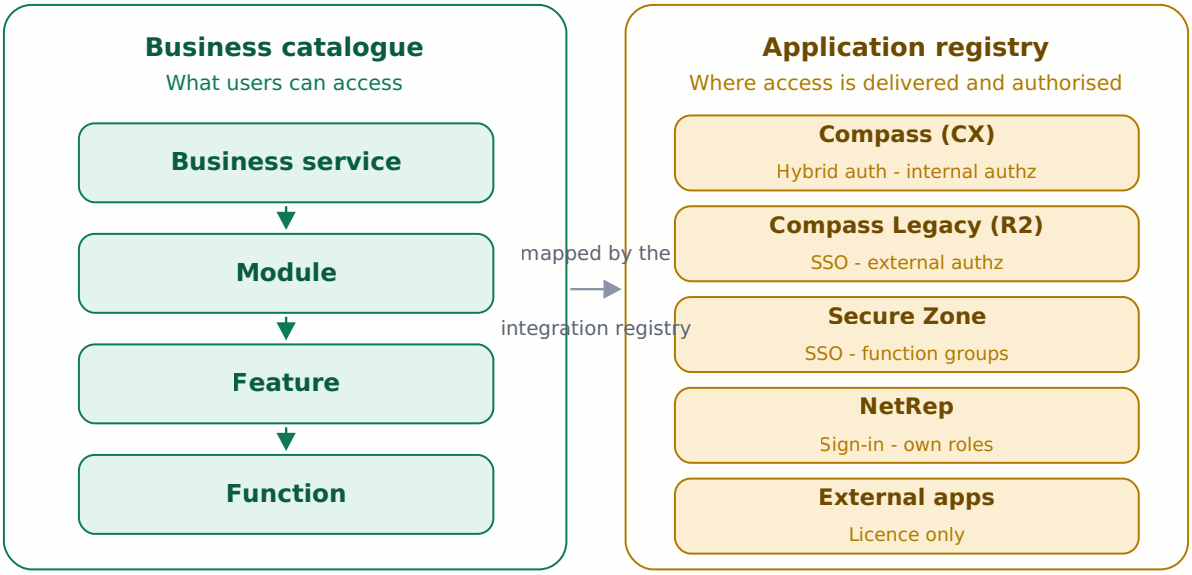


Figure 2 - Business catalogue and application registry, bridged by the integration registry

Layer	Question it answers	Change rate	Maintained where
Capability / business service	What business domain?	Low	Reference data (content API)
Feature	What offering?	Medium	Platform page in FUM
Module	What workflow entry point?	Low	Feature of type module
Access level	How much access?	-	Feature management packaging
Function	What exact action?	High	Platform page, linked to resource
Resource	What does FUM assign?	-	FUM resource API
Access right + instruction	What does each system get?	-	Integration registry (PCR)

Concept-to-permission translation

Every steward selection travels this ladder. The top five rungs are business vocabulary; the bottom two are the provisioning reality - the FUM resource that gets assigned and the per-system instruction (with any required parameter) that fulfils it.

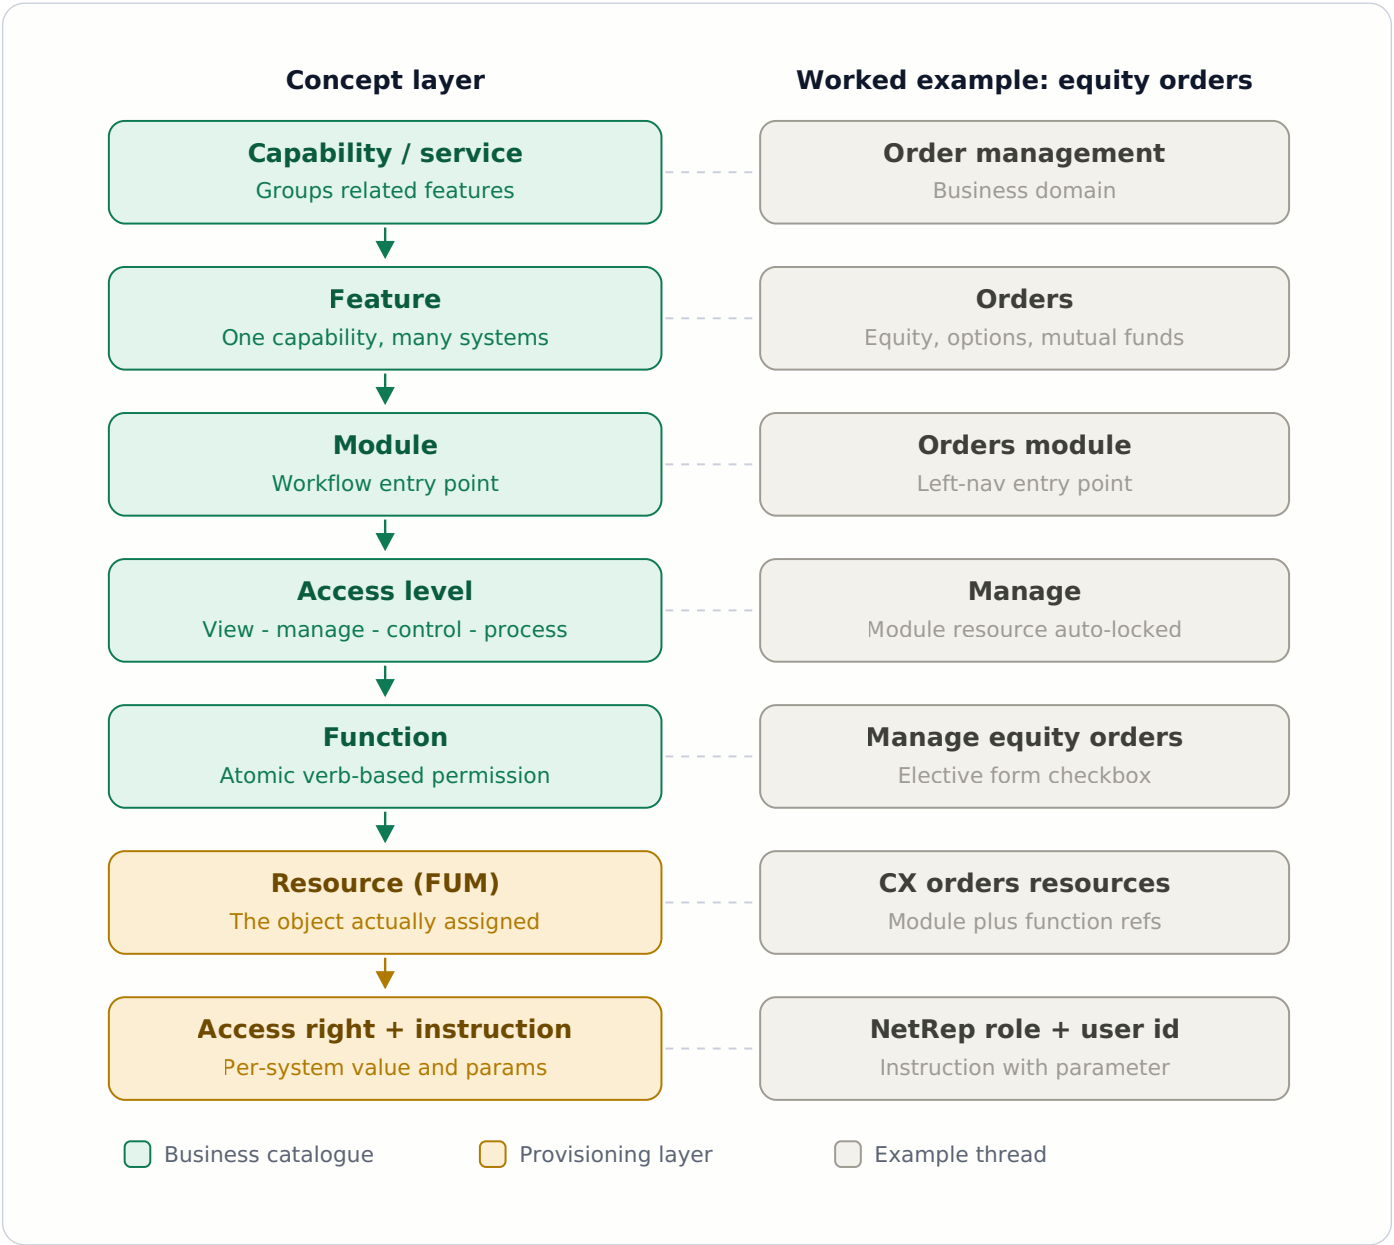


Figure 3 - Concept-to-permission ladder with the equity-orders worked example

Document map

The seven source documents partition the scope cleanly: one defines the language, two define the catalogue side, three define the steward side, and one defines internal fulfilment.

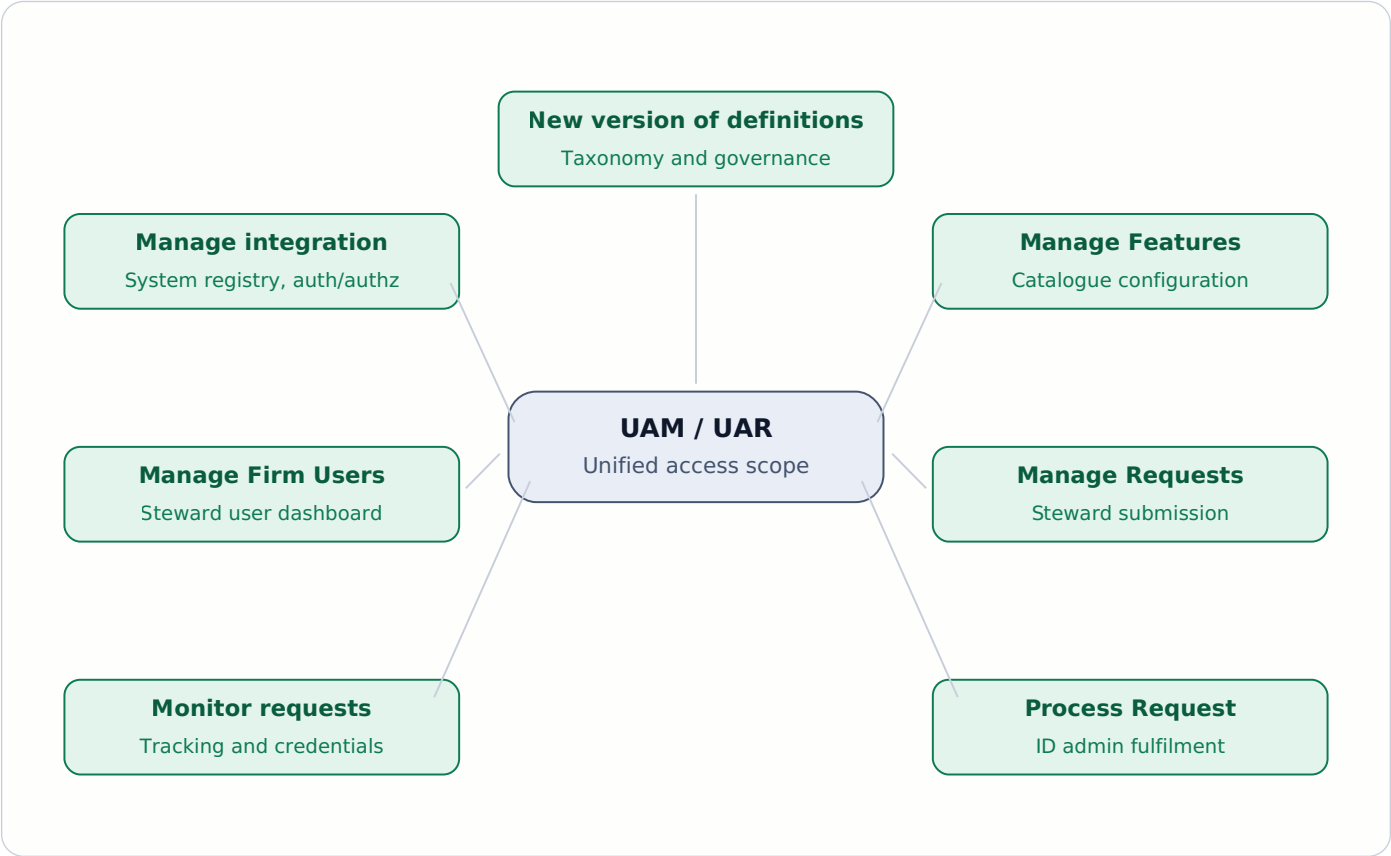


Figure 4 - Source documents positioned around the UAM / UAR scope

PART B - PER-DOCUMENT FLOWS

New version of definitions - governance pyramid

The definitions document fixes the change-frequency contract: business services and modules stay stable for years, features evolve, functions churn. Naming and governance therefore attach to the stable layers, while permissions live in the volatile one.

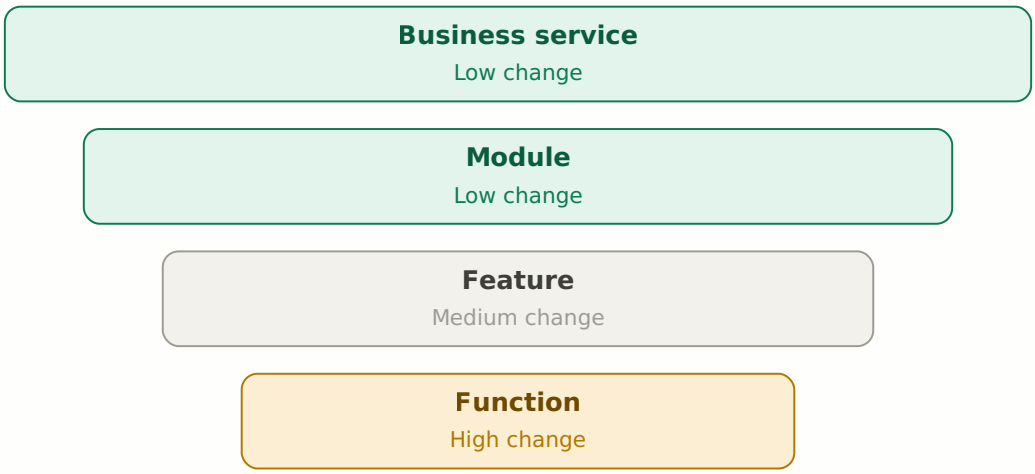


Figure 5 - Change-frequency pyramid from the definitions document

PART B - PER-DOCUMENT FLOWS

Manage integration - system registration

Registering a system captures where authentication and authorisation live, then maps platform functions to the assignment type and value that system expects. Those mappings become the fulfilment instructions later.

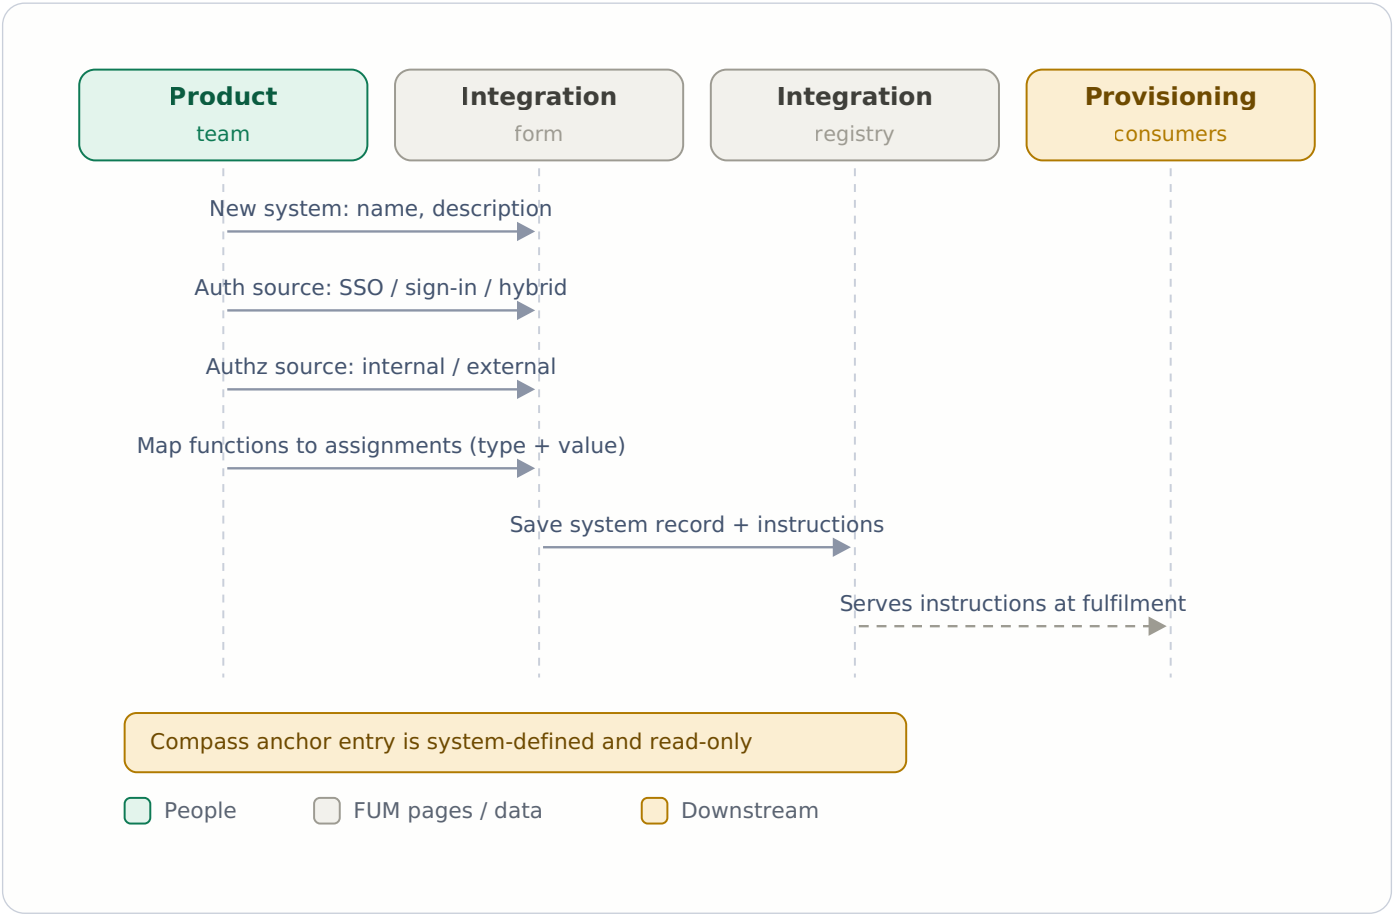


Figure 6 - Manage integration - registering a system and its assignment mappings

PART B - PER-DOCUMENT FLOWS

Manage Features - catalogue configuration

Features appear automatically once created on the platform page; configuration classifies them, attaches delivery systems, packages the access levels, and activates them for the three consumers.

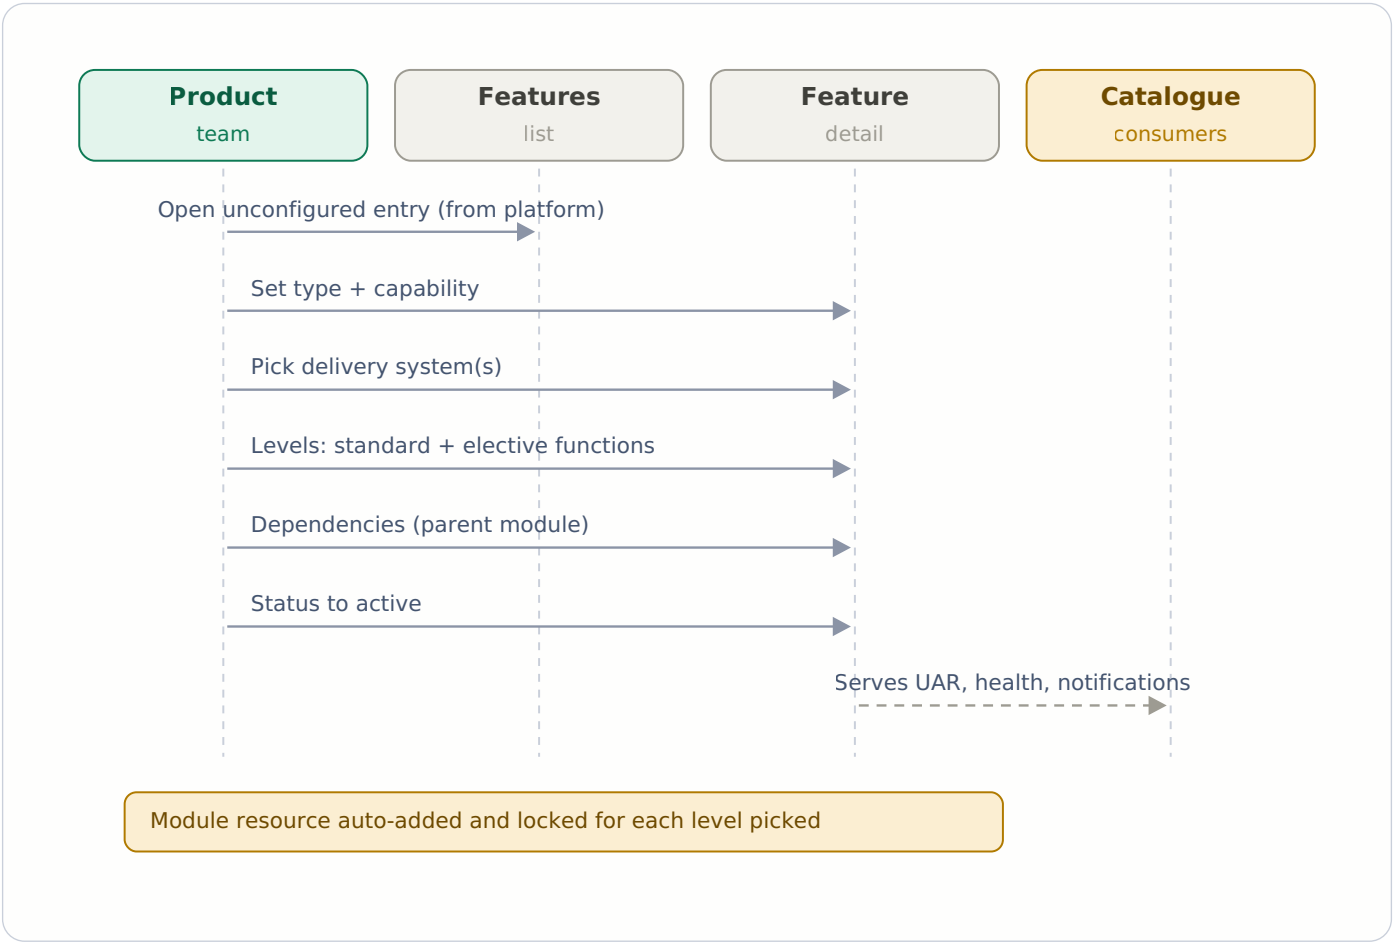


Figure 7 - Manage Features - configuring a feature end to end



Figure 8 - Feature lifecycle statuses

PART B - PER-DOCUMENT FLOWS

Manage Requests - steward submission

The request form renders only what the firm is licensed for: modules the firm lacks disappear, functions not individually assigned disappear, and empty capabilities are hidden entirely.

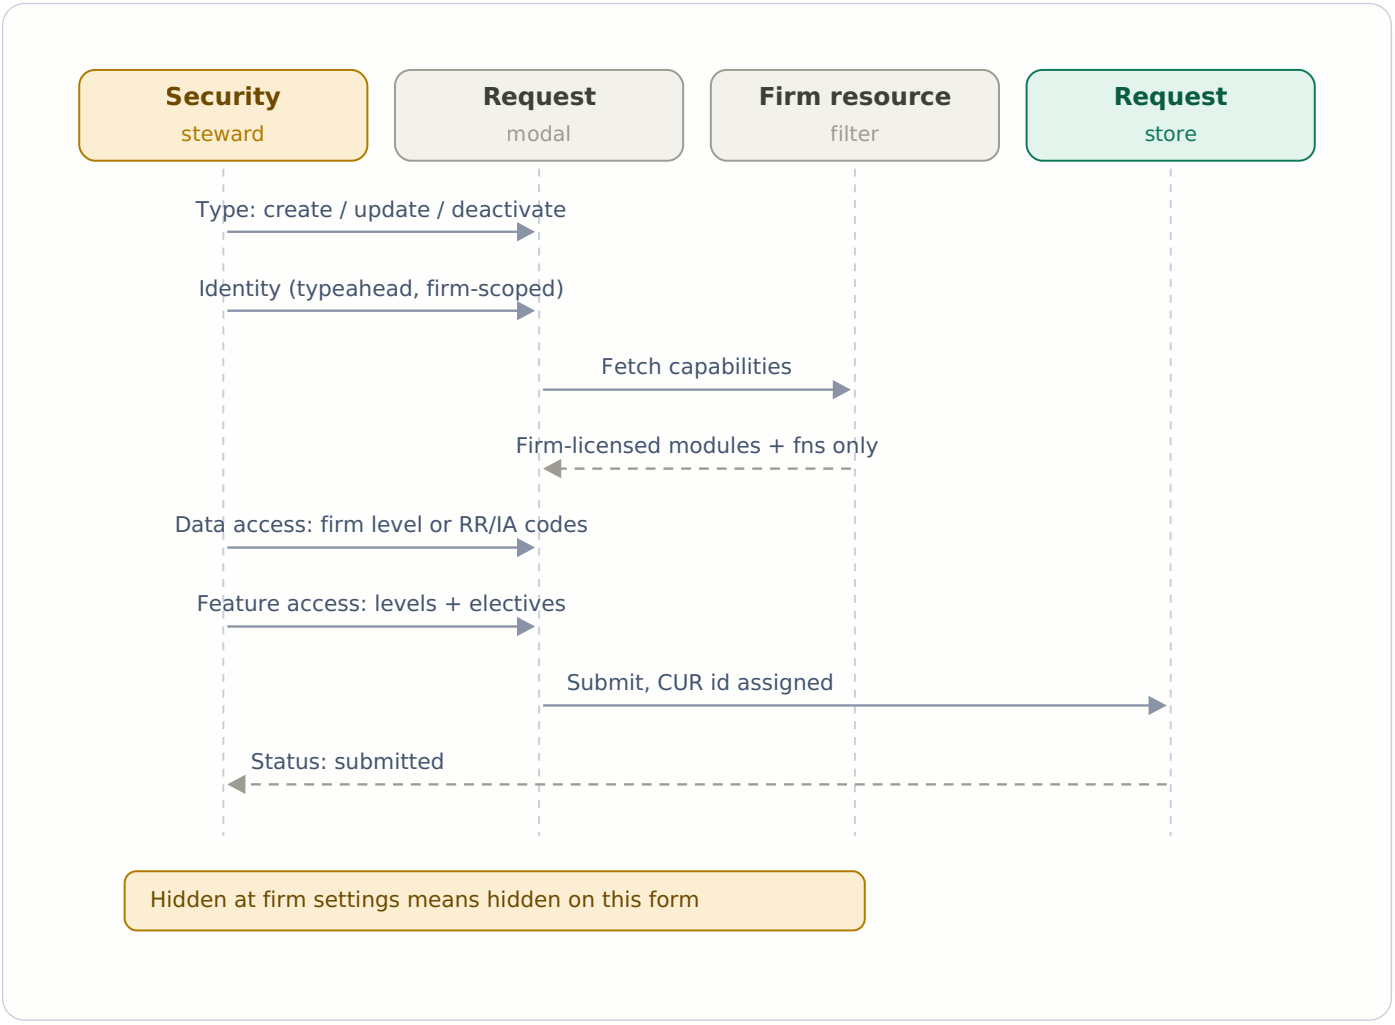


Figure 9 - Manage Requests - create / update / deactivate submission

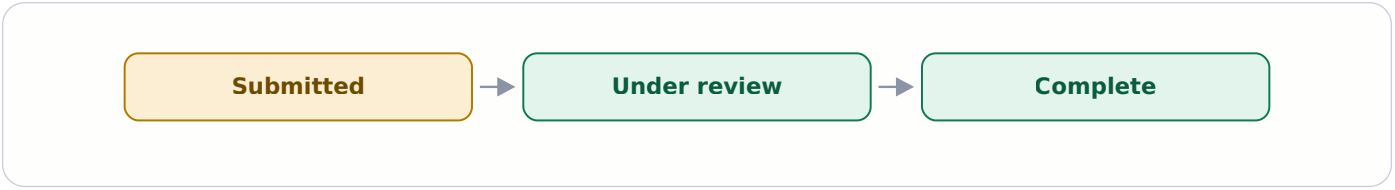


Figure 10 - Happy-path request states (cancel and reject branch off the first two)

PART B - PER-DOCUMENT FLOWS

Manage Firm Users - user lifecycle

The dashboard is the steward’s starting point; every action it offers is gated by the state machine below, which is why update requests are blocked on inactive accounts and reactivation forces a fresh access review.

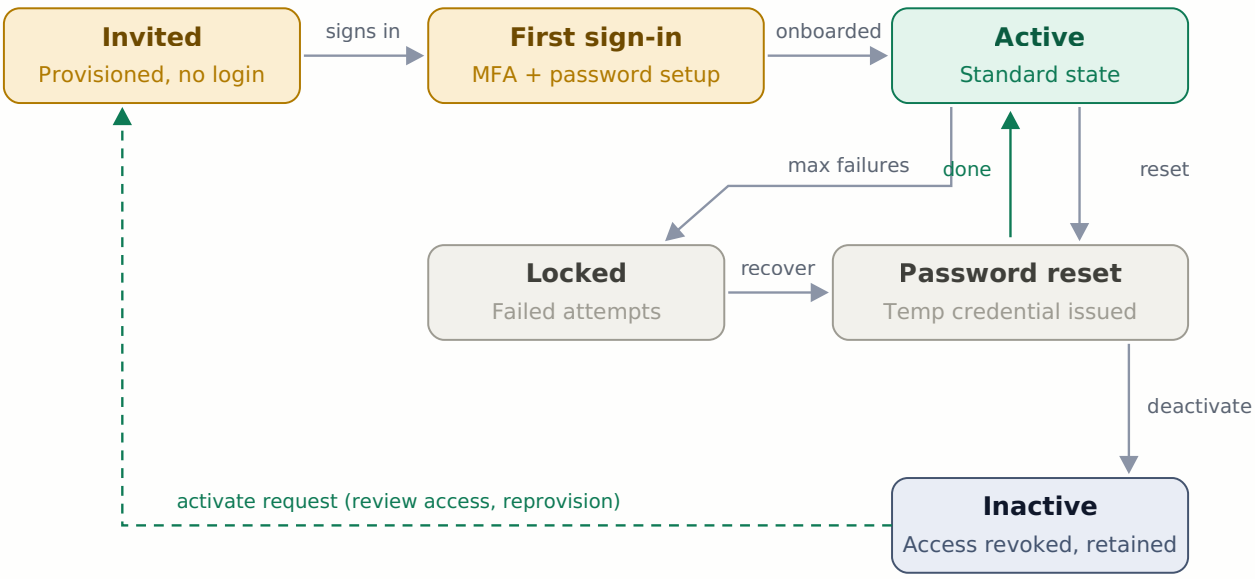


Figure 11 - Compass user lifecycle state machine

State	Entry condition	Available actions
Invited	Create request completed, credentials issued	Resend credentials, reset password, deactivate
First sign-in	Temporary credentials used	Complete MFA, set permanent password
Active	Onboarding done, unlock, or reactivation	Update, reset password, reset MFA, deactivate
Locked	Failed attempts or security event	Reset password, reset MFA, deactivate
Password reset	Steward or support initiated	Complete reset, resend temp credentials, deactivate
Inactive	Approved deactivation completed	Activate only (profile edits blocked)

PART B - PER-DOCUMENT FLOWS

Process Request - ID admin fulfilment

Fulfilment is a diff: compare current assignments per system with requested ones. New access in a sign-in system means create a login and vault the credential; zero remaining functions in a system means deactivate the user there.

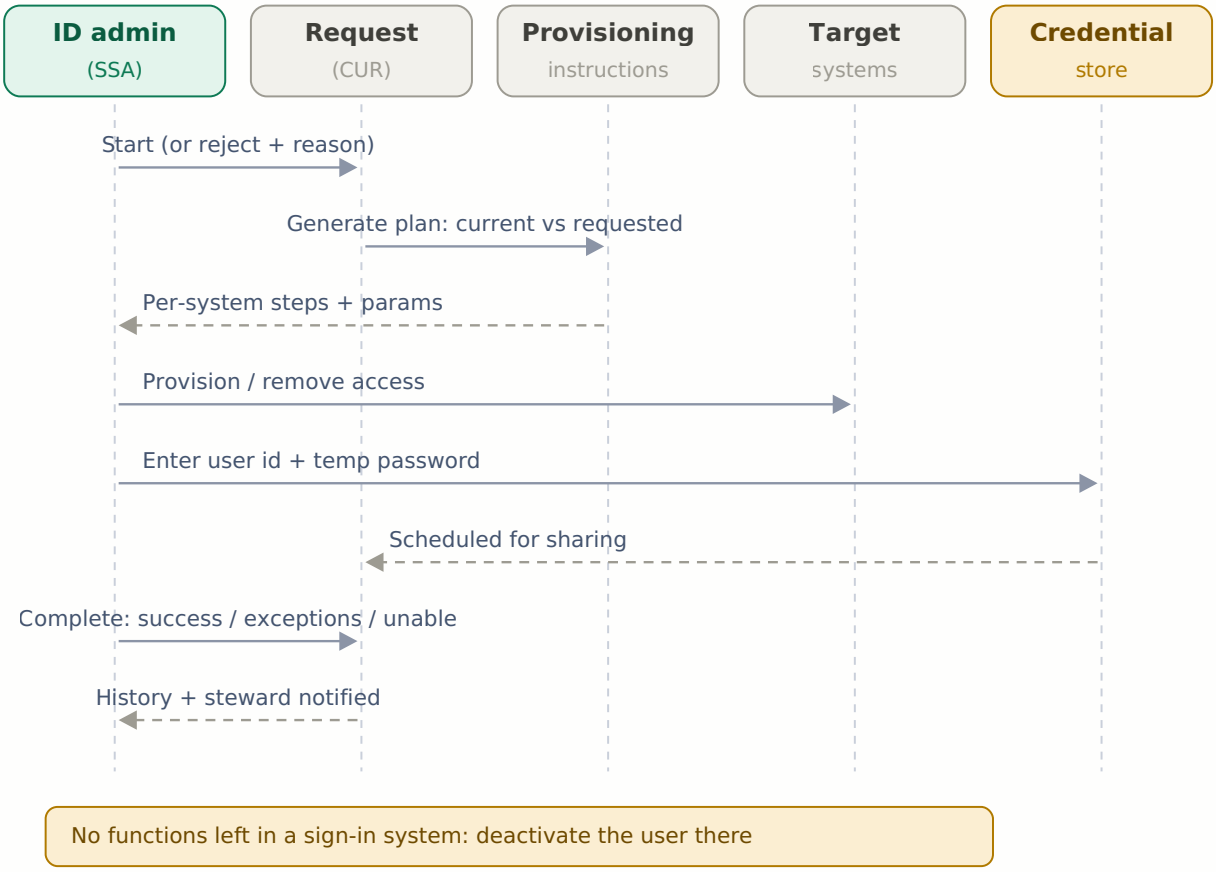


Figure 12 - Process Request - intake, fulfilment, credentials and completion

Monitor requests - tracking and credential handoff

Stewards track status and SLA from one board, can cancel only while submitted, and receive credentials through a copy-once flow: the temporary password is decrypted for a single clipboard write, then permanently deleted.

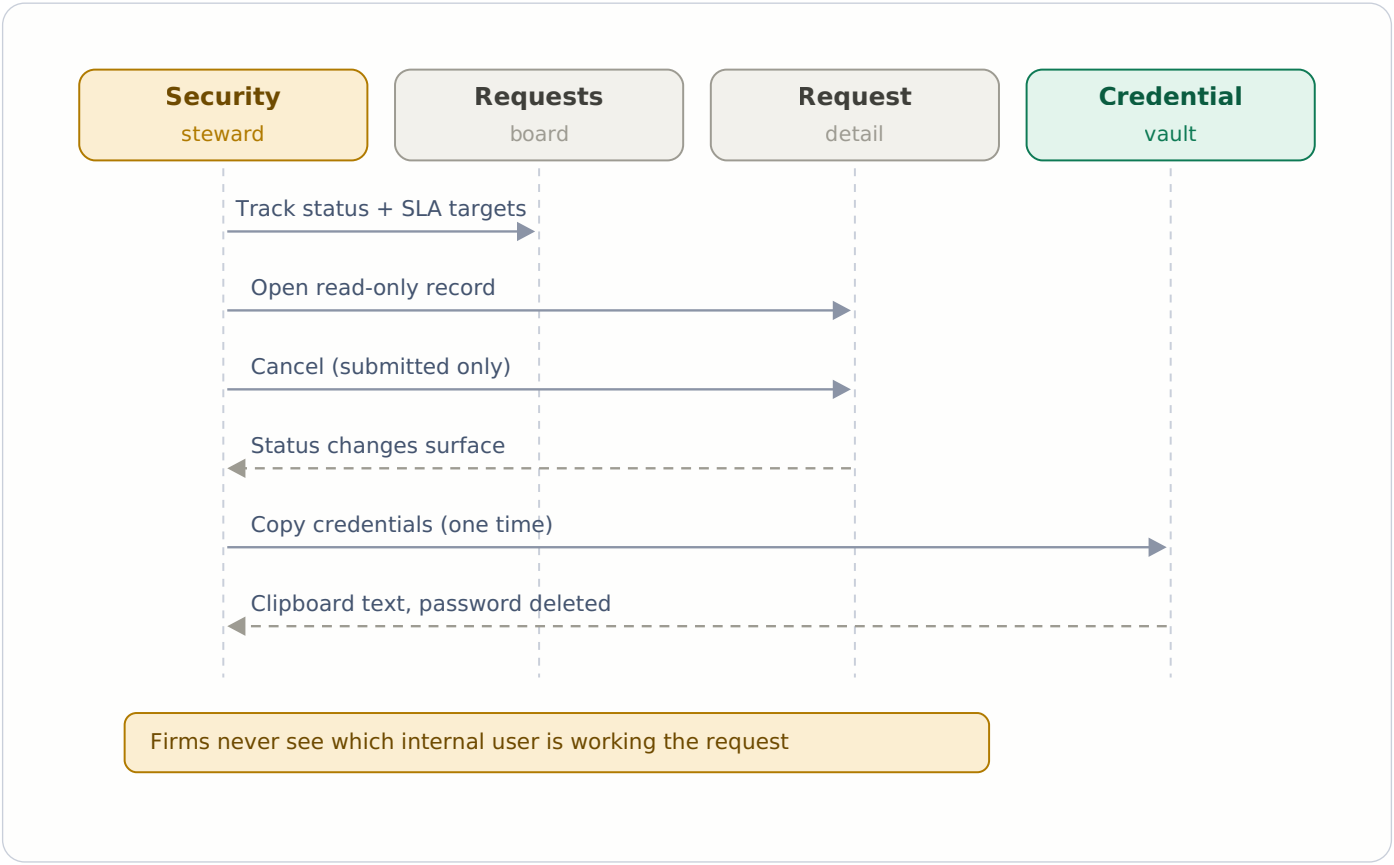


Figure 13 - Monitor requests - steward tracking and one-time credential copy



Figure 14 - Copy-once credential sequence (validate, decrypt, write, delete, link)

PART C - TECHNICAL LAYOUT

Architecture

Three layers on one database server: FUM pages author the catalogue, PCR holds it in a new schema, PAM consumes it to render requests and generate provisioning plans. Target systems are reached by ID admin following instructions in v1 - no direct push.

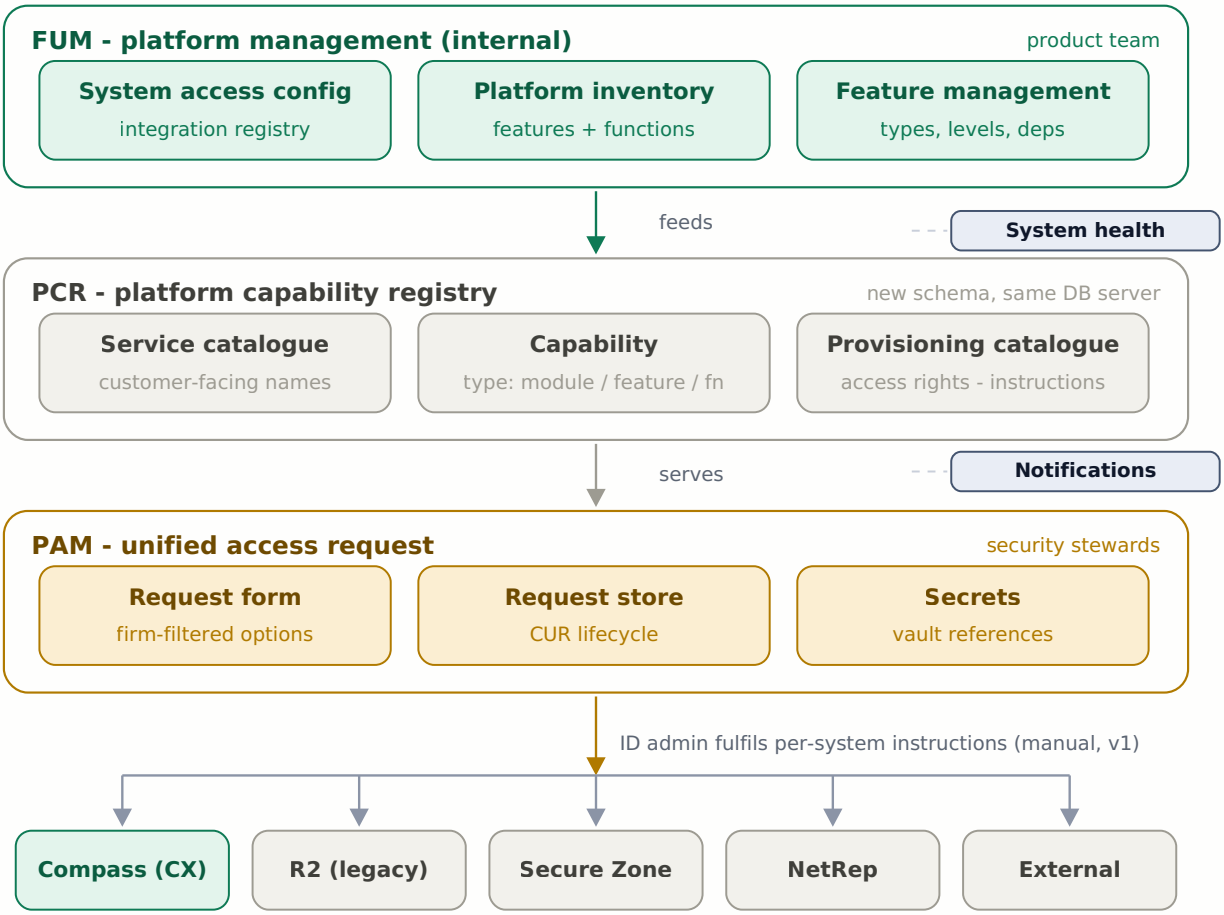


Figure 15 - FUM, PCR and PAM layers over the target-system estate

PART C - TECHNICAL LAYOUT

PCR conceptual data model

All tables are new. The deliberate simplification: one typed capability instead of separate module / feature / function tables, and one generic access right instead of system-specific permission shapes. Instructions carry optional required parameters whose values land on the request.

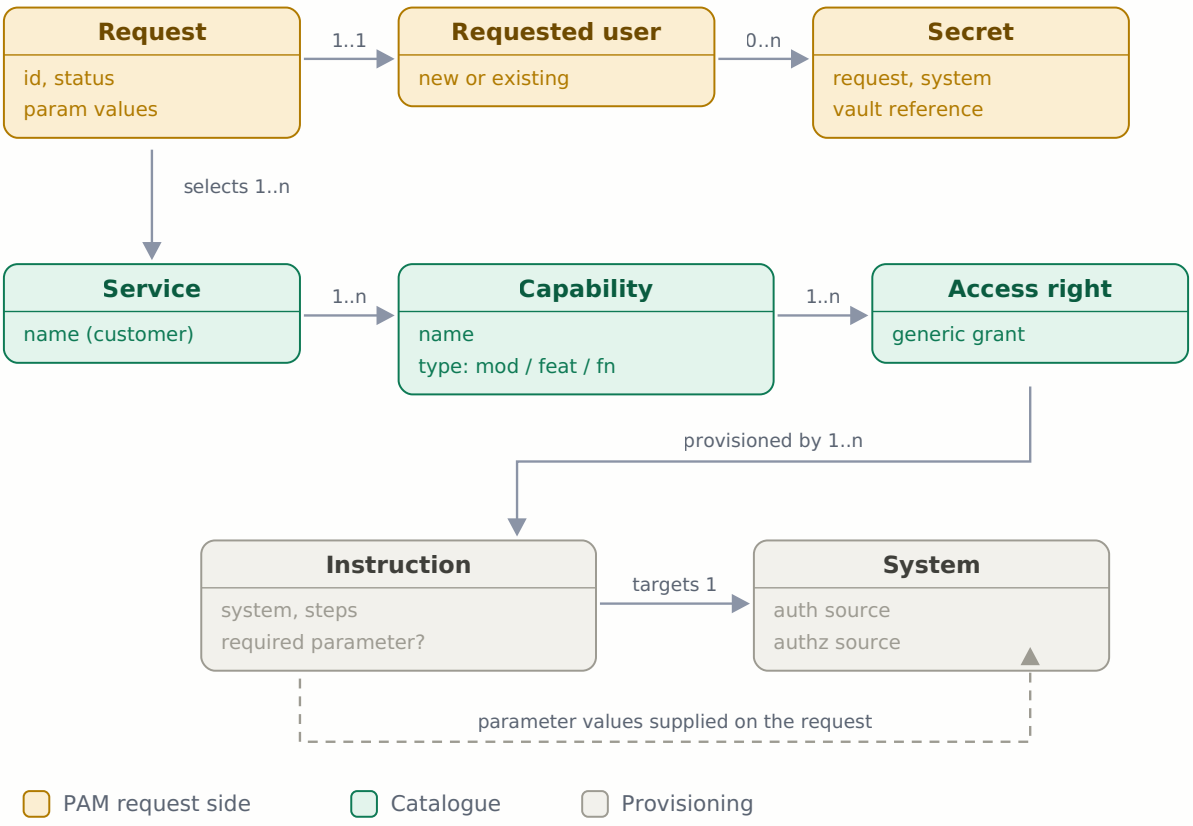


Figure 16 - PCR conceptual entities and relationships (new schema, same server as FUM)

PART C - TECHNICAL LAYOUT

Personas vs systems

Only ID admin touches every system directly - exactly why the instruction catalogue exists. End users meet most systems through SSO; NetRep and true external apps keep independent logins, which is where secrets and attestation reconciliation come from.



Figure 17 - Personas vs systems interaction matrix

Product configuration sequence

Build order confirmed in the handover: manage integration first, because feature management references it. The platform page is the single create point; everything downstream is selection by reference.

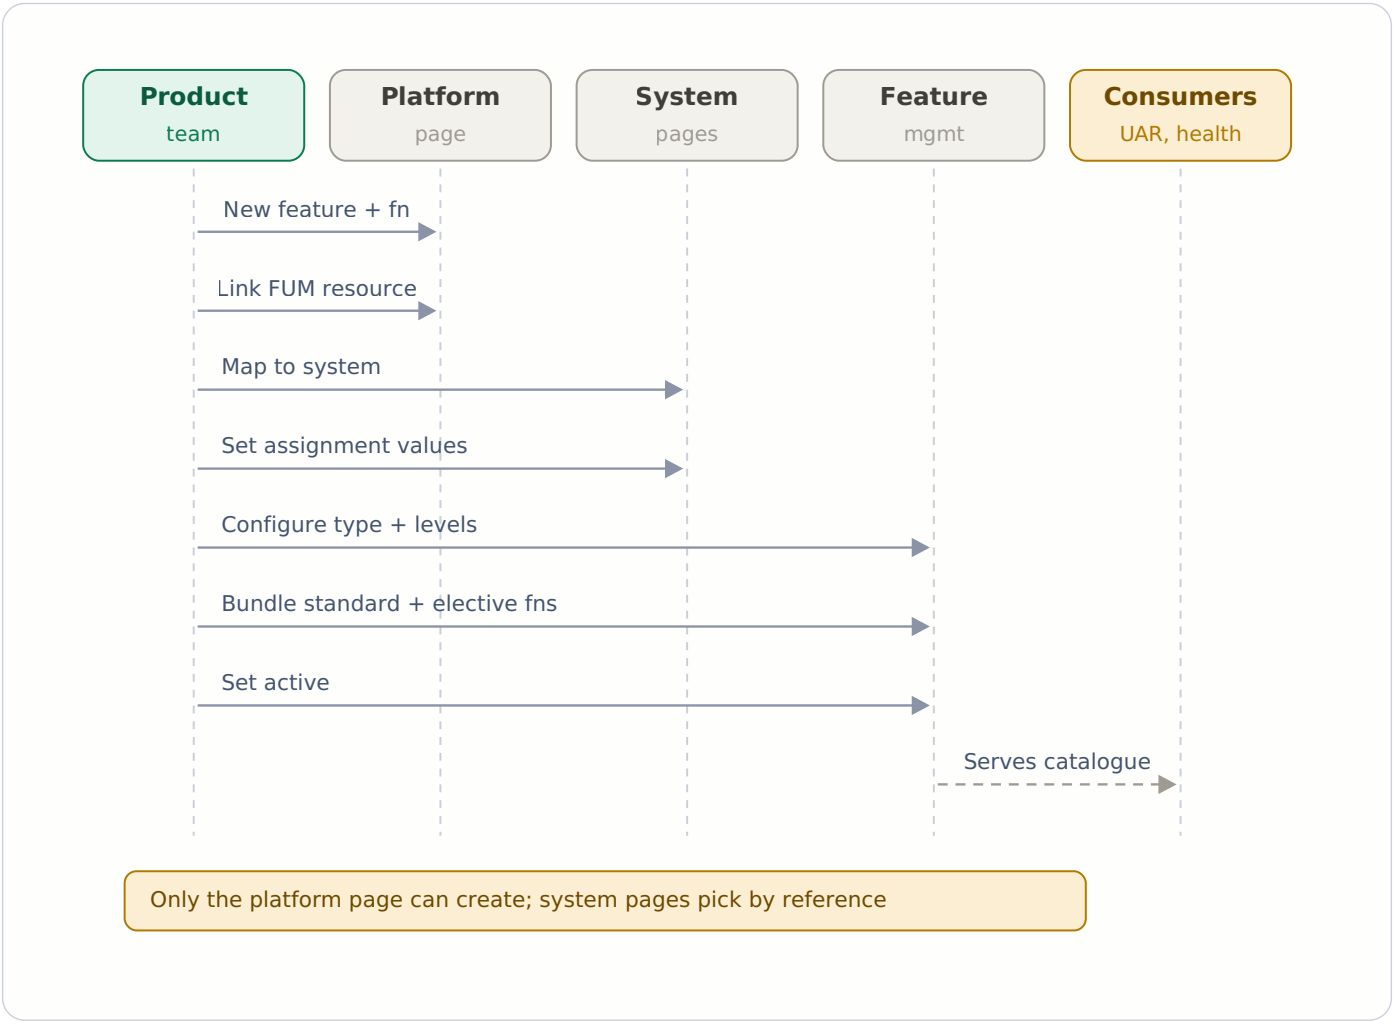


Figure 18 - Product configuration - from platform entry to a served catalogue

PART D - END-TO-END

Security steward requests access

PCR does more than serve options: it resolves which instructions carry required parameters (which firm, NetRep user id) so the form collects them before submission, not during fulfilment.

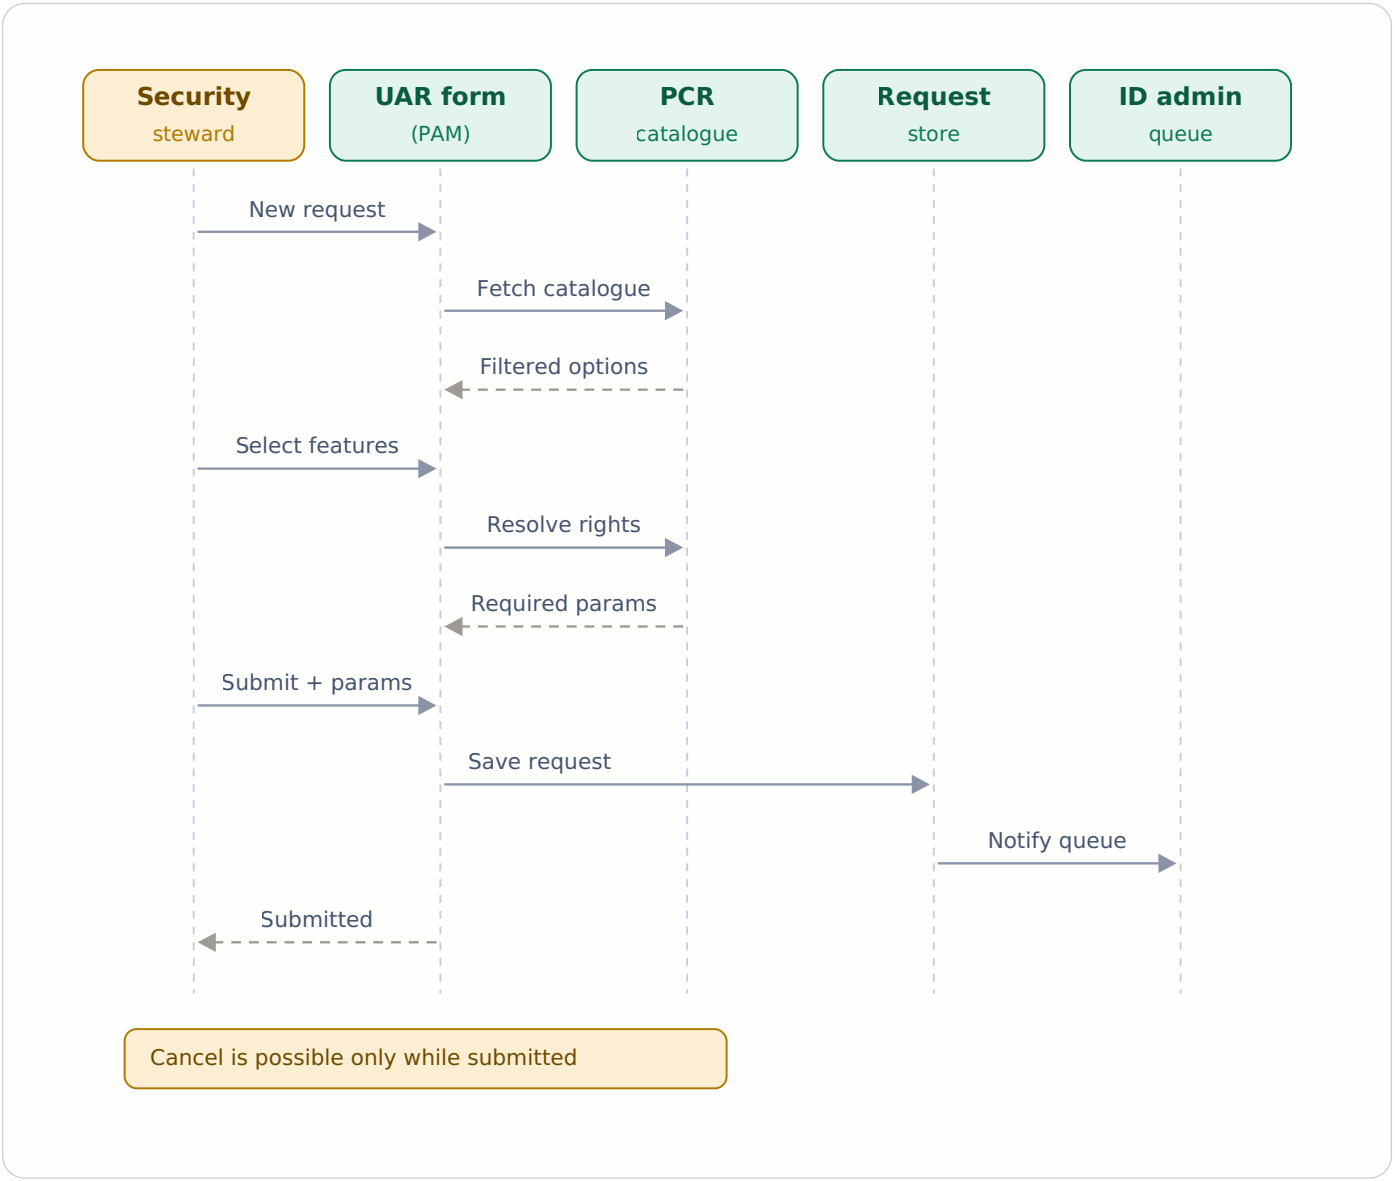


Figure 19 - Steward request sequence through PAM and PCR

PART D - END-TO-END

Persona swimlane

Everything the steward can pick exists because the product team registered it; everything ID admin does is driven by the generated plan; credentials close the loop back to the firm.

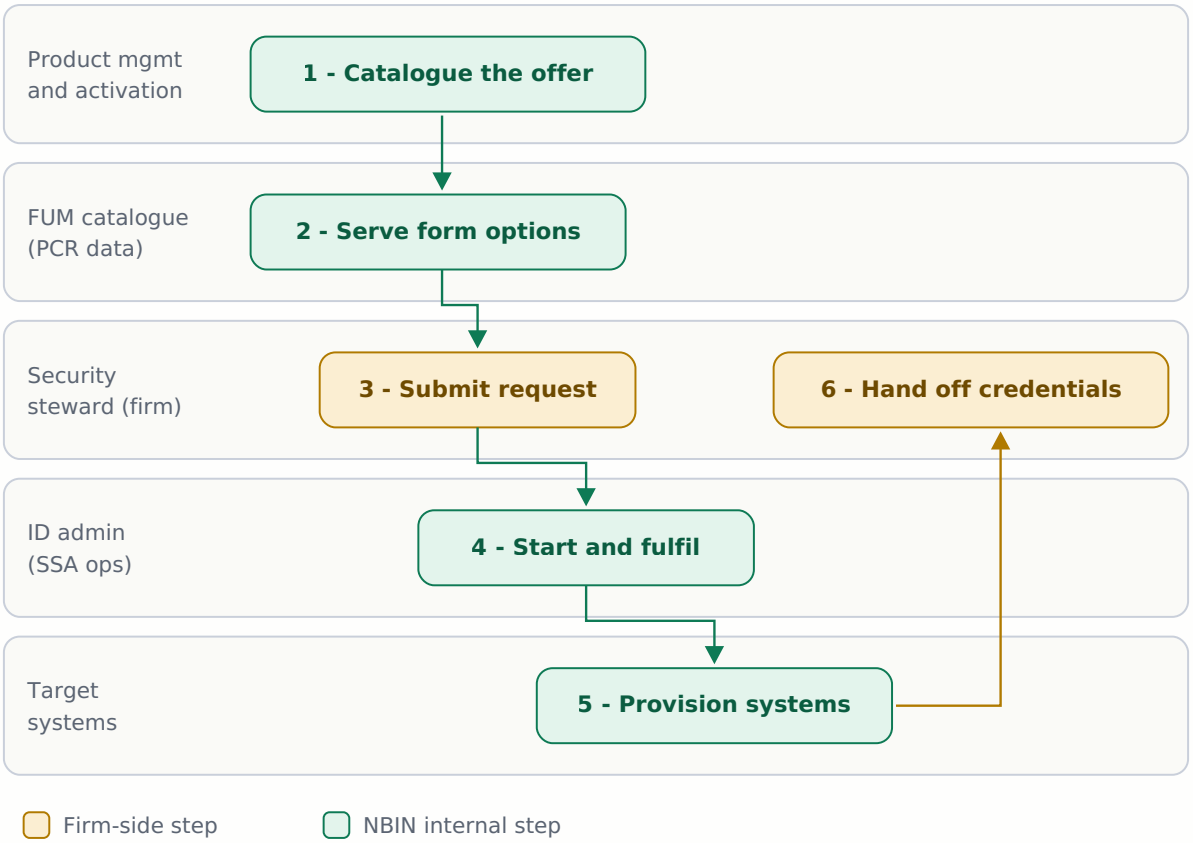


Figure 20 - Persona swimlane - catalogue to credentials

PART D - END-TO-END

Unified access request - full workflow

The complete lifecycle with its two terminal exits, the per-system fan-out during fulfilment, and the firm-side close-out: outcome, one-time credential handoff, and the user moving from invited to active.

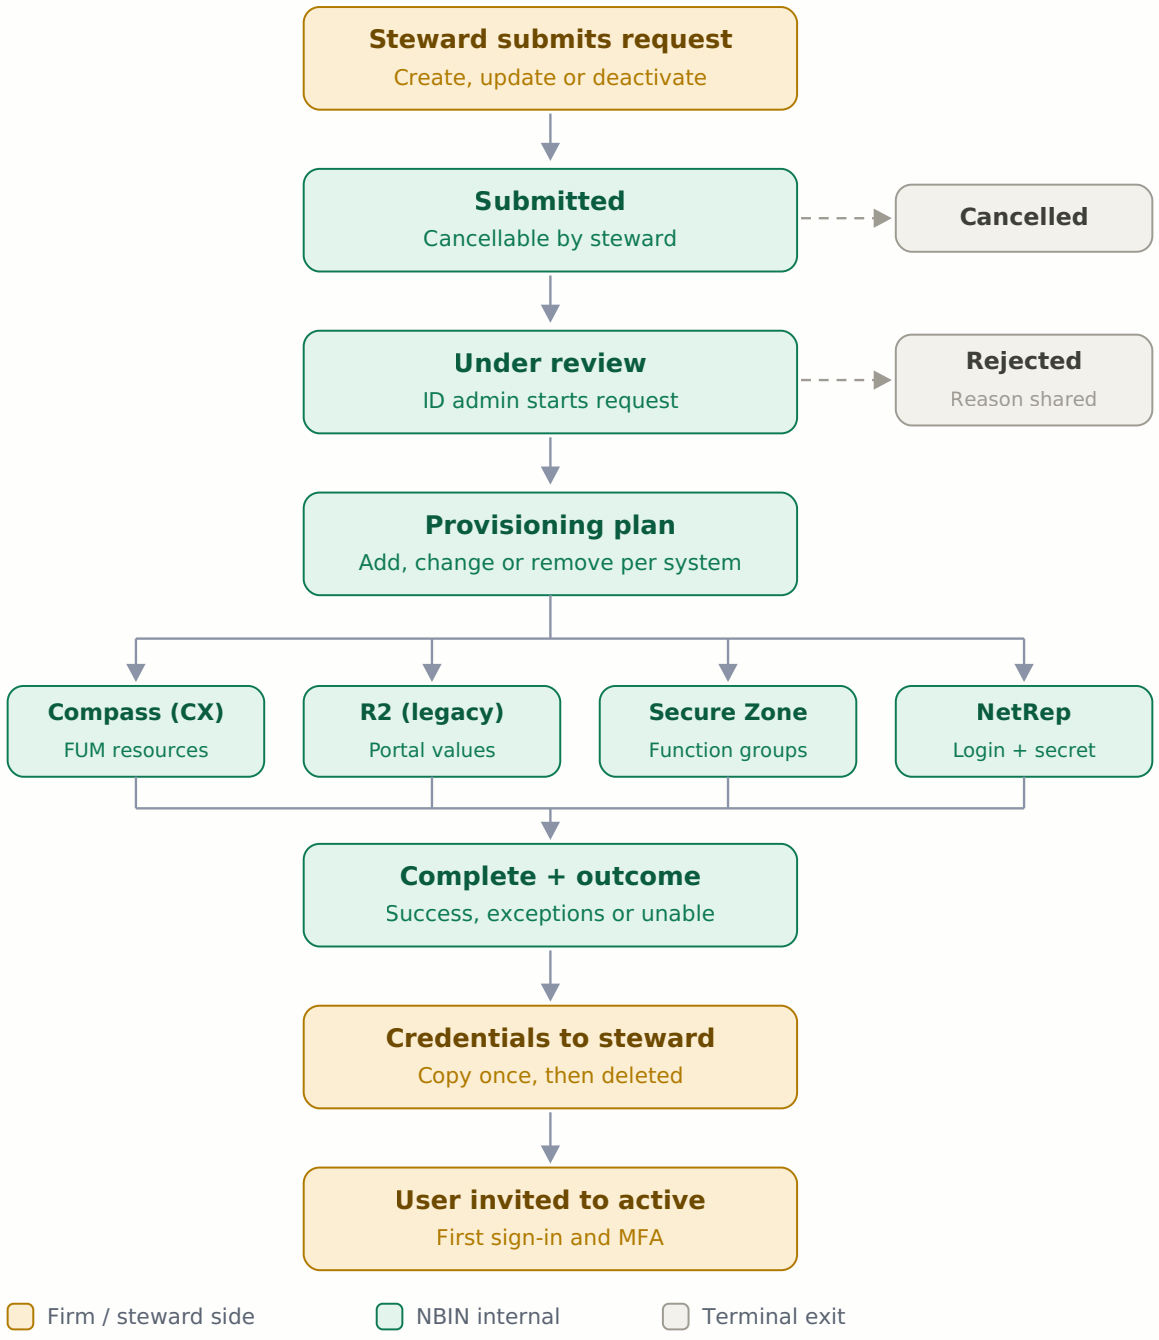


Figure 21 - End-to-end unified access request workflow

PART E - OPEN ITEMS

Gaps to resolve before build lock

Carried forward from cross-checking the seven documents and the handover; each is small, and all are cheaper to settle now than during the engineering estimate.

- **Status model drift** - Monitor flow lists an *Information required* status that the formal lifecycle (submitting, submitted, cancelled, under review, rejected, complete) does not contain.
- **Naming drift** - platform page says business service, Feature Management says capability, PCR collapses module / feature / function into a typed capability. One published glossary mapping is needed.
- **Deactivated vs inactive** are used interchangeably across the user-flow documents.
- **Manual fulfilment in v1** - ID admin follows generated instructions; SLA response and resolution columns will be measuring human throughput.
- **Attestation dependency** - reconciliation of external-system access hinges on the NetRep user-id parameter captured at request time.
- **Timeline tension** - a November 15 production target was floated against an architect estimate closer to six months; the detailed data-model walkthrough was deferred.