March ACR

Nick Lauerman 23 April 2019

Contents

LII	braries	1
Dε	ata	2
	Variables used	2
	Read Data In	2
	Format the Data	2
	Convert to Factor	2
	Convert to Dates	2
	Structure of The Data	2
M	etrics	3
	Select Data	3
	Counts	3
	Data Changes (CR) Request Approved	3
	Data Change Request Disapproved	3
	Implementation and Effectivity (IE) Approved	3
	IE Disapproved	4
	First pass acceptance	4
	CR	4
	IE	4
	Total Process	4
	Number by Application	4
	Opened	4
	Completed	4
	Total	4
	Time to Complete A Data Change	5
	Number of Days That Currently Open CR Have Been Pending	7
$\mathbf{L}^{ ext{i}}$	ibraries	
lil	brary(lubridate)	
## ##	Attaching package: 'lubridate'	
## ##	The following object is masked from 'package:base':	
##	data	

Data

Variables used

```
month <- "Mar"
year <- 2019
```

Read Data In

The data is a CSV file that is created by saving the ACR tab of the FPA Excel Workbook.

Format the Data

Convert to Factor

```
ACR$SQA <- as.factor(ACR$SQA)

ACR$Application <- as.factor(ACR$Application)

ACR$CRApproved <- as.factor(ACR$CRApproved)

ACR$IEApproved <- as.factor(ACR$IEApproved)

levels(ACR$IEApproved)[1] <- NA

ACR$Reason <- as.factor(ACR$Reason)

levels(ACR$Reason)[1] <- NA
```

Convert to Dates

```
ACR$CRDate <- as.Date(ACR$CRDate, format = "%d-%b-%y")

ACR$IEDate<- as.Date(ACR$IEDate, format = "%d-%b-%y")

ACR$CRmonth <- lubridate::month(ACR$CRDate, label = TRUE)

ACR$CRyear <- lubridate::year(ACR$CRDate)

ACR$IEmonth <- lubridate::month(ACR$IEDate, label = TRUE)

ACR$IEyear <- lubridate::year(ACR$IEDate, label = TRUE)
```

Structure of The Data

```
str(ACR)
## 'data.frame': 421 obs. of 14 variables:
## $ SQA : Factor w/ 6 levels "Beilah","Liz",..: 3 3 3 6 6 2 2 3 3 6 ...
## $ Application: Factor w/ 21 levels "","ADDCOM","AFMS",..: 6 6 6 10 10 10 10 6 3 10 ...
```

```
: chr "CSIT0824" "CSIT07991" "CSIT08209" "17-23207" ...
##
   $ CRDate
                 : Date, format: "2016-08-15" "2016-11-30" ...
## $ CRApproved : Factor w/ 4 levels "","A","A-FP",...: 2 2 2 3 3 3 3 2 2 3 ...
                 : chr "CSIT0824" "CSIT07991" "CSIT08209" "17-29297" ...
## $ IENumber
##
   $ IEDate
                 : Date, format: "2018-10-08" "2018-10-08" ...
## $ IEApproved : Factor w/ 3 levels "A", "A-FP", "D": 1 1 1 2 2 2 2 1 2 2 ...
                 : Factor w/ 7 levels "Inaccurate information",..: NA ...
  $ Reason
                 : chr "" "Cancellation" "" "I&E by Nick" ...
## $ Comments
##
   $ CRmonth
                 : Ord.factor w/ 12 levels "Jan"<"Feb"<"Mar"<..: 8 11 3 8 8 8 8 10 12 4 ...
## $ CRyear
                 : num 2016 2016 2017 2017 2017 ...
                 : Ord.factor w/ 12 levels "Jan"<"Feb"<"Mar"<..: 10 10 10 1 1 1 1 1 10 1 1 ...
## $ IEmonth
                 : num 2018 2018 2018 2019 2019 ...
## $ IEyear
```

Metrics

Select Data

Data is selected first for the Month and Year of interest. The selection is based on boththe CR and I&E dates. This selection is used as a master dataframe. Two additional dataframes are prduced the first of the approval of the CR in the month and the second for the approval of the I&E in the month.

Counts

[1] 48

Data Changes (CR) Request Approved

Data Change Request Disapproved

Implementation and Effectivity (IE) Approved

```
## [1] 57
```

IE Disapproved

First pass acceptance

\mathbf{CR}

IE

[1] 93.33333

Total Process

This is the number of data changes that had both the CR and IE approved on first pass.

[1] 49.48454

Number by Application

Opened

Completed


Total

Time to Complete A Data Change

This is the interval between CR approval and IE approval


```
# select from work all that had approved IE for the month
work.all <- subset(work,</pre>
                   subset = (IEApproved == "A" | IEApproved == "A-FP"))
# need to figure out a way to make this unique and selected the correct record
# compute interval
work.all$Interval <- as.numeric(work.all$IEDate - work.all$CRDate)</pre>
# results
nrow(work.all)
## [1] 57
summary(work.all$Interval)
##
      Min. 1st Qu. Median
                              Mean 3rd Qu.
                                              Max.
##
      2.00
           16.00
                    36.00
                             53.04 69.00 318.00
sd(work.all$Interval)
## [1] 60.62
table(work.all$Interval)
##
             7
                 8
##
                   11 12
                           13
                                15
                                    16 18
                                            22
                                                24
                                                    25
                                                        29
                                                             30
                                                                 31
                                                                     32
                                                                         36
##
         2
             2
                 1
                     2
                         1
                             2
                                 3
                                     1
                                         1
                                             2
                                                              2
                                                                  2
                                                                      1
                                                                          3
     1
                                                 1
                                                      1
                                                         1
    37
       38 39 41 42 44 51
                                52
                                    68
                                        69
                                            72
                                                78
                                                    79
                                                        92
                                                             98 100 105 108
##
    2
         1
           1
                 1
                     2
                         3
                             1
                                 1
                                     1
                                         1
                                             1
                                                 1
                                                      1
                                                          1
                                                              1
                                                                  1
## 115 119 316 318
     2
         1
             1
quantile(work.all$Interval)
     0% 25% 50% 75% 100%
      2
##
          16
               36
                    69 318
hist(work.all$Interval,
    breaks = 20,
    main = "Histogram of Days to Complete A Change Request",
    xlab = "Day to Complete")
```

istogram of Days to Complete A Change Re

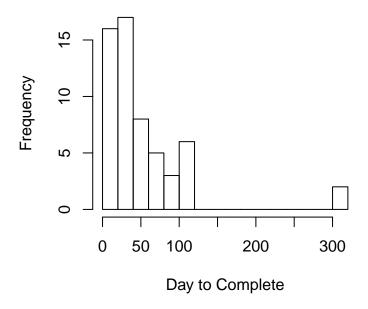


```
boxplot(work.all$Interval,
    main = "Box Plot of Days to Complete")
```

Box Plot of Days to Complete



```
boxplot(work.all$Interval,
    main = "Box Plot of Days to Complete With Outliers Removed",
```

x Plot of Days to Complete With Outliers Re




Number of Days That Currently Open CR Have Been Pending

```
# selected records that have approved CR but no IE
work.open <- subset(ACR,</pre>
                    subset = (CRApproved == "A-FP" | CRApproved == "A") &
                         is.na(IEApproved))
# compute days open
work.open$daysOpen <- as.numeric(as.Date("31-Mar-19", format = "%d-%b-%y") -</pre>
                                       work.open$CRDate)
# Results
nrow(work.open)
## [1] 88
summary(work.open$daysOpen)
##
      Min. 1st Qu. Median
                              Mean 3rd Qu.
                                               Max.
      2.00
             18.75
                     39.00
                              49.08
                                      70.00 178.00
##
sd(work.open$daysOpen)
## [1] 40.66494
quantile(work.open$daysOpen)
       0%
             25%
                    50%
                            75%
                                  100%
     2.00 18.75 39.00 70.00 178.00
##
```


```
hist(work.open$daysOpen,
    breaks = 20,
    main = "Histogram of Days Request Open With No IE",
    xlab = "Day to Complete")
```

Histogram of Days Request Open With No

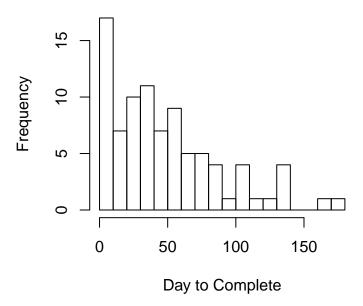

```
boxplot(work.open$daysOpen,
    main = "Box Plot of Days Request Open With No IE")
```

Box Plot of Days Request Open With No



```
boxplot(work.open$daysOpen,
    main = "Box Plot of Days Request Open With No IE With Outliers Removed",
    outline = FALSE)
```

of Days Request Open With No IE With Outl

