



Make Fiori Search Actually Find Things – SADL, HANA Fuzzy Search & native SQL

Stephan Heinberg
Juni 23, 2026

ABAP Conf 2024 Speech - Challenges & Friends

Stephan Heinberg

Product Owner, Team Lead & Solution Architect



Unternehmen: University of Zurich
Webseite: <https://uzh.ch/>
Position: Product Owner
Biografie: Product Owner, Team Lead & Solution Architect bei Universität Zürich | University of Zurich
Twitter:
LinkedIn: <https://www.linkedin.com/in/stephan-heinberg/>
Tags: Keynote ABAP Cloud Best practice S/4HANA RAP Flori Elements

Vorträge

Keynote: Modernizing an R/3 Solution with ABAP Cloud - Light and Shadow Keynote ABAP Cloud Best practice S/4HANA RAP Flori Elements

Challenges	Your Friend
#1: CDS Complexity	The HANA Query Optimizer
#2: HANA Bugs & SAP Bubble Mentality	HANA LOCALE Bug Fix
#3: Technology Uncertainty	André Fischer
#4: HANA Performance & High CPU Load	The HANA Hex Engine
#5: HANA Text Search	???

Source: https://www.youtube.com/watch?v=ot8vls_FXGA

Challenge #5: HANA Text Search: Our Customers want ‘CONTAINS’ Not ‘Fuzzy’

Search

🔍

Semester:

Fa24

Object abbreviation:

oec

offered:

Yes

Studienmodule (138)

Semester	Object ID	Object abbreviation	Objekt Titel	Category
Fa24	50019707	03SMBOEC9047	Tutorat Corporate Finance	Tutorat (0222)
Fa24	50300624	03SMBOEC9025	Tutorat in Mathematik I (Assessment)	Tutorat (0222)
Fa24	50300685	03SMBOEC9021	Tutorat in Mikroökonomik I	Tutorat (0222)
Fa24	50354095	03SMBOECBA18	Bachelorarbeit in Wirtschaftswissenschaften (Bachelor's Thesis)	Bachelor Paper / B.

oec

✕

🔍

Semester:

Fa24

Object abbreviation:

offered:

Yes

Studienmodule (18)

Semester	Object ID	Object abbreviation	Objekt Titel	Category
Fa24	50804071	03SMBA_IOE	Bachelorarbeit Informatik und Ökonomik (Bachelor's Thesis Computing and Economics)	Bachelor Paper / B.
Fa24	50804195	03SMBA_OEC	Bachelorarbeit Wirtschaftswissenschaften (Bachelor's Thesis)	Bachelor Paper / B.
Fa24	50804196	03SMMA_OEC	Masterarbeit Wirtschaftswissenschaften (Master's Thesis)	Master Paper / MA-
Fa24	50840778	03SMDOEC0718	Microeconomic Foundations of Economics of Education (S)	Doktorandensemin

@Search.fuzzinessThreshold: 0.8 – 1.0

Modulbuchungstyp:

Primäre Disziplin:

fina

Disziplin	Disziplin (Bezeich.)
3021	Finance
3730	Banking and Finance
7256	**Inaktiv** (Theorie und Geschichte des Films)
8163	Versicherungs- und Finanzmathematik

Alle Elemente anzeigen



Object abbreviation:

Object name:

Go Adapt Filters

Module (4,648)

Object type	Object ID	Language ...	Object abbreviation	Object name	
SM	50018319	EN	04SM50FAN102	Klin. Untersuchungskurs Bewegungsapp.	>
SM	50018694	EN	07SMCHE207	CHE 207 Spectroscopy	>
SM	50018697	EN	07SMCHE211	CHE 211 Practical course in Phys. Chem.	>
SM	50018713	EN	07SMCHE205	CHE 205 Physical Chemistry I	>
SM	50018734	EN	07SMCHE304	CHE 304 Organic Chemistry III	>
SM	50019061	EN	04SM03CHE102	Lecture General Chemistry for Medicine	>
SM	50019260	EN	07SMCHE303	CHE 303 Inorganic Chemistry III	>
SM	50019261	EN	07SMCHE323	CHE 323 Reaction Mechanisms + Kinetics	>
SM	50019264	EN	07SMCHE325	CHE 325 Solid State and Materials Chem.	>
SM	50020513	EN	05SMW004	Functional Foot Trimming in Cattle	>
SM	50020536	EN	05SMFWB109	Diagnostic Cytology	>
SM	50022298	EN	02SMSV_WSSTR	Tax Law (WS)	>
SM	50025938	EN	07SMPHY113	PHY 113 Mechanical Workshop I	>
SM	50025941	EN	07SMPHY123	PHY 123 Mechanical workshop II	>
SM	50026006	EN	07SMMAT201	MAT 201 Study and Prac. Un. Analysis III	>
SM	50026008	EN	07SMMAT203	MAT 203 Study and Prac. Un. Algebra I	>

HANA's Three Architectural Roots



MaxDB

SAP's classic relational DBMS

PERSISTENCE LAYER

- Disk persistence, logging & savepoints
- Durable storage, backup & recovery

Origin SAP's own RDBMS lineage: Adabas D → SAP DB → MaxDB. Answers “what happens when the power goes off?”



P*TIME

In-memory relational OLTP engine

ROW STORE (OLTP)

- High-throughput in-memory row store
- Transactional write processing (MVCC, OLTP SQL)

Origin Acquired 2005 (Transact In Memory, Menlo Park). Row-based — not column-based.



TREX

Text Retrieval & information EXtraction

COLUMN STORE + SEARCH

- In-memory, column-oriented store
- Text engine: full-text indexing, linguistic & fuzzy search

Origin Developed in-house at SAP (started 1996, SAP/DFKI). Column engine reached HANA via the BWA/BIA accelerator.

Sources: Färber et al., “The SAP HANA Database – An Architecture Overview”; SAP HANA history (TREX / P*TIME / MaxDB).

From Odata \$search to HANA fuzzy search

1

Fiori Elements list report or Freestyle UI5

Fiori Design: A search is a means of accessing information quickly.



2

OData query option

\$search = term (Part of OData Standard)



3

SADL engine Reads @Search annotations from CDS View

Searchable elements + threshold (@Search.fuzzinessThreshold: 0.80)



4

SADL engine generates HANA native SQL

cl_sadl_sql_statement



5

HANA fuzzy search

SELECT ... CONTAINS(... FUZZY(...))

LAYERS



Consumption

What the client sends



ABAP runtime

SADL + CDS translate it to SQL



Database

HANA matches, filters and ranks



Search



Object abbreviation:

Object name:



Go

Adapt Filters

Module (4,648)



Object type	Object ID	Language ...	Object abbreviation	Object name	
SM	50018319	EN	04SM50FAN102	Klin. Untersuchungskurs Bewegungsapp.	>
SM	50018694	EN	07SMCHE207	CHE 207 Spectroscopy	>
SM	50018697	EN	07SMCHE211	CHE 211 Practical course in Phys. Chem.	>
SM	50018713	EN	07SMCHE205	CHE 205 Physical Chemistry I	>
SM	50018734	EN	07SMCHE304	CHE 304 Organic Chemistry III	>
SM	50019061	EN	04SM03CHE102	Lecture General Chemistry for Medicine	>
SM	50019260	EN	07SMCHE303	CHE 303 Inorganic Chemistry III	>
SM	50019261	EN	07SMCHE323	CHE 323 Reaction Mechanisms + Kinetics	>
SM	50019264	EN	07SMCHE325	CHE 325 Solid State and Materials Chem.	>
SM	50020513	EN	05SMW004	Functional Foot Trimming in Cattle	>
SM	50020536	EN	05SMFWB109	Diagnostic Cytology	>
SM	50022298	EN	02SMSV_WSSTR	Tax Law (WS)	>
SM	50025938	EN	07SMPHY113	PHY 113 Mechanical Workshop I	>
SM	50025941	EN	07SMPHY123	PHY 123 Mechanical workshop II	>
SM	50026006	EN	07SMMAT201	MAT 201 Study and Prac. Un. Analysis III	>
SM	50026008	EN	07SMMAT203	MAT 203 Study and Prac. Un. Algebra I	>

Module (4,648)

Object type	Object ID	Language ...	Object abbreviation	Object name	
SM	50018319	EN	04SM50FAN102	Klin. Untersuchungskurs Bewegungsapp.	>
SM	50018694	EN	07SMCHE207	CHE 207 Spectroscopy	>
SM	50018697	EN	07SMCHE211	CHE 211 Practical course in Phys. Chem.	>
SM	50018713	EN	07SMCHE205	CHE 205 Physical Chemistry I	>
SM	50018734	EN	07SMCHE304	CHE 304 Organic Chemistry III	>
SM	50019061	EN	04SM03CHE102	Lecture General Chemistry for Medicine	>
SM	50019260	EN	07SMCHE303	CHE 303 Inorganic Chemistry III	>
SM	50019261	EN	07SMCHE323	CHE 323 Reaction Mechanisms + Kinetics	>
SM	50019264	EN	07SMCHE325	CHE 325 Solid State and Materials Chem.	>
SM	50020513	EN	05SMW004	Functional Foot Trimming in Cattle	>
SM	50020536	EN	05SMFWB109	Diagnostic Cytology	>
SM	50022298	EN	02SMSV_WSSTR	Tax Law (WS)	>
SM	50025938	EN	07SMPHY113	PHY 113 Mechanical Workshop I	>
SM	50025941	EN	07SMPHY123	PHY 123 Mechanical workshop II	>
SM	50026006	EN	07SMMAT201	MAT 201 Study and Prac. Un. Analysis III	>
SM	50026008	EN	07SMMAT203	MAT 203 Study and Prac. Un. Algebra I	>

„oec“ Search – Same SQL Statement as „math“

1 result instead of minimum 21.

What is wrong?

```
SELECT
/* CDS access control applied */
/* Contains Native SQL */
"ENDDATE" "ENDDATE" , "LANGUAGE" "LANGUAGE" , "OBJECTABBREVIATION"
"OBJECTABBREVIATION" , "OBJECTID" "OBJECTID" , "OBJECTNAMETEXT"
"OBJECTNAMETEXT" , "OBJECTTYPE" "OBJECTTYPE" , "PLANNINGSTATUS"
"PLANNINGSTATUS" , "PLANVERSION" "PLANVERSION" , "RECORDNO" "RECORDNO" ,
"STARTDATE" "STARTDATE"
FROM
"ZC_OBJECT_KEYDATE" "ZC_OBJECT_KEYDATE"
WHERE
"MANDT" = '701' AND CONTAINS( ( "OBJECTABBREVIATION" , "OBJECTNAMETEXT" )
, 'oec' , FUZZY( ( '0.80' , 'similarCalculationMode=search' ) , ( '0.80' ,
'similarCalculationMode=search' ) ) ,FULLTEXT(OFF) )
ORDER BY
"ZC_OBJECT_KEYDATE" . "PLANVERSION" , "ZC_OBJECT_KEYDATE" . "OBJECTTYPE" ,
"ZC_OBJECT_KEYDATE" . "OBJECTID" , "ZC_OBJECT_KEYDATE" . "PLANNINGSTATUS"
, "ZC_OBJECT_KEYDATE" . "STARTDATE" , "ZC_OBJECT_KEYDATE" . "ENDDATE" ,
"ZC_OBJECT_KEYDATE" . "LANGUAGE" , "ZC_OBJECT_KEYDATE" . "RECORDNO"
LIMIT 200
WITH PARAMETERS( 'LOCALE' = 'EN' )
```

A lot of uncertainty with HANA Search via SADL/CDS



GREMIENIMPULSANTNEWSVERANSTALTUNGENVORTEILEACADEMYPARTNERANGEBOTE

Suchen

CHATIN

DASHBOARDRESSORT: TECHNOLOGIEGREMIUM: AK PLATTFORMEN & BETRIEBGREMIUM: AG HANA

THEMA: HANA FUZZY-SEARCH LIEFERT FRAGWÜRDIGE ERGEBNISSE - WAS TUN?

MENÜ

Zurück zu HANA

HANA Fuzzy-Search liefert fragwürdige Ergebnisse - was tun?

Hi zusammen,

wir haben einen Fiori Elements List Report (SAP Cloud ERP private, 2023 - HANA 2.00.079.08) und kämpfen ein wenig mit den Ergebnissen, die uns durch die HANA Fuzzy Search einzelner Selektionsfelder präsentiert werden. Es geht also um die Vorschlagslisten im Selektionsfeld (nicht um das Ergebnis des List Reports).

Erste Frage vorweg:
Gibt es eine Möglichkeit den HANA-Algorithmus irgendwie nachvollziehen zu können, der über die Search-Annotationen angetriggert wird? Debuggen wäre ideal, aber falls das nicht geht, zumindest sowas wie ein PlanViz oder eine Alternative, um die Ergebnisse zumindest verstehen zu können? Mir ist hier nichts bekannt, ich kenne lediglich die Möglichkeit "mir dem Fuzziness-Parameter ein wenig rumzuspielen" (was mir nicht wirklich hilft, wie im folgenden beschrieben).

Konkrete Unklarheiten:
a) Anzahl gefundener Treffer: Es scheint als seien die Treffer wenig zuverlässig. Die Fuzziness 1.0 ist zu restriktiv, bei Werte knapp unter 1.0 können wir die Treffer nicht nachvollziehen. An einem neutralen Beispiel erklärt: Die Wertetabelle enthält 100 Einträge, davon enthalten 8 den String "Bier". Suchen ich nun nach "Bier" finde ich z.B. 4 Treffer, 3 davon enthalten "Bier", ein Treffer enthält "Bie" - die anderen 5 "Bier" bleiben unerkannt. Suchen ich nach "Bie" ähnliches Phänomen. Der User kann sich nicht darauf verlassen. In unserem Fall ist das ein No-Go, da wir eine Drop-Down im Selektions-Feld haben (mit angebundener Suche) und dadurch ein valider Wert gar nicht gefunden und ausgewählt werden kann. Dreht man die Fuzziness runter, z.B. auf 0.9 werden wiederum deutlich zu viele Treffer gefunden und zudem tritt Unklarheit b) auf:
b) Sortierung: Wie es scheint, sind die Ergebnisse nicht nach "Treffgenauigkeit bzw. 'Abstand' zum Suchbegriff" sortiert und ich kenne auch keine Möglichkeit dies zu beeinflussen. Für mich sieht es so aus, als würde der Algorithmus lediglich prüfen "Treffer ja/nein?" und die Ergebnisse dann unsortiert nach außen geben. Als User würde ich erwarten, dass sehr

Thema

HANA Fuzzy-Search liefert fragwürdige Ergebnisse - was tun?

Erstellt

Zuletzt bearbeitet

12.02.2026 - 11:27

13.03.2026 - 09:24

Autor:in



Sebastian Freiling Huber (msg systems ag)

Link

<https://api.dsagnet.de/api/re/CTZYsgWLZLQ?x>

SAP HANA Search Developer Guide

SAP HANA Search Developer Guide

Version: 2.0 SPS 08

English

Provide feedback on our search

Search through this document

Search Scope More

PDF Favorite Share

Table of Contents

SAP HANA Search Developer Guide

Defining the Persistency and Indexing

Creating Search Models

Accessing Data Using Full-Text Search

Full-Text Search with OData

Federated Full-Text Search with Built-In Procedure sys.esh_search()

Full-Text Search with SQL

Search Queries with CONTAINS

EXACT Search

LINGUISTIC Search

FUZZY Search

Supported Database Objects and SQL Types

Syntax

The CONTAINS() Predicate

Fuzzy Score

Option similarCalculationMode

Option similarCalculationMode flexible

Option spellCheckFactor

Option interScriptMatching

Option fuzzySubstringMatch

Available Fuzzy Search Options

Fuzzy Search - Options for All Column Types

Fuzzy Search on String Columns

Fuzzy Search on Text Columns

Multi-Token Search on Text Columns

FUZZY Search

Fuzzy Search is a fast and fault-tolerant search feature for SAP HANA. A fuzzy search returns records even if the search term contains additional or missing characters or other types of spelling errors.

Note

We advise you to read through the Enabling Search section in the *SAP HANA Developer Guide* before working with this reference. This provides you with information about how to create a full-text index, which is a prerequisite for fuzzy search in SAP HANA.

About this Reference

In this complete reference, you can find all the documentation that you need to use the SAP HANA fuzzy search function in your development projects.

You can learn about the basic concepts of the *CONTAINS()* predicate and the *SCORE()* function. In data type-specific chapters, you can find information about the parameters specific for a certain data type, for the data types string or text for example. Further chapters deal with language specifics, for Chinese for example, and offer support information, such as monitoring, tracing and sizing.

The reference also contains lots of information about using search rules. These are used to separate search queries from the code for easier modification or replacement. A tutorial is provided so that you can practice directly on the search rule feature.

Fuzzy Search in a Nutshell

The term "fault-tolerant search" means that a database query returns records even if the search term (the user input) contains additional or missing characters, or other types of spelling error.

Fuzzy search can be used in various applications, for example:

Fault-tolerant search in text columns (html or pdf for example): Search for documents on 'Driethanolamyn' and find all documents that contain the term 'Triethanolamine'.

https://help.sap.com/docs/SAP_HANA_PLATFORM/691cb949c1034198800afde3e5be6570/cc602780bb5710148aa2bf6cab3c015b.html

University of Zurich

2026-06-23 | 11

HANA fuzzy search Syntax vs. SADL with CDS

● Reachable via CDS annotation ● Emitted, but hardcoded / fixed ● Not reachable via CDS / SADL

Reachable via CDS annotation → emitted by SADL

●

@Search.defaultSearchElement

→ CONTAINS(column list)

●

@Search.fuzzinessThreshold

→ FUZZY(n) — the fuzzy score

●

@Search.ranking

→ WEIGHT() per column

●

@Consumption.ranked

→ ORDER BY SCORE() DESC

●

@Search.termMappingListID

→ termMappingListId

Emitted, but locked to internal enums / fixed values

●

similarCalculationMode

search · typeAhead

●

searchMode

alphanum · identifier · text

●

minSearchLength

fixed literal = 1

Not reachable via CDS / SADL — the score-tuning search options

● spellCheckFactor

● interScriptMatching

● fuzzySubstringMatch

● andThreshold

● andSymmetric

● considerNonMatchTokens

● bestMatchingTokenWeight

● excessTokenWeight

● abbreviationSimilarity

● minTextScore

● phraseCheckFactor

● composeWords

● decomposeWords

● compoundWordWeight

● stopwordsTable / ListId

● unmatchedStopwordScore

● textSearch

● maxDateDistance

● scoreFunction (+Decay...)

● returnAll

● emptyScore / Null

Sources: SAP HANA Search Developer Guide (2.0 SPS 08) · CDS Search & Consumption annotations · cl_sadl_sql_statement.

similarCalculationMode subStringSearch (introduced 2013 with HANA 1 SPS 07)

✓ FUZZY Search

Supported Database Objects and SQL Types

Syntax

- The CONTAINS() Predicate
- Fuzzy Score
- Available Fuzzy Search Options
- Fuzzy Search - Options for All Column Types

✓ Fuzzy Search on String Columns

Option searchMode

Alphanumeric Search

➤ Identifiers

Speeding Up the Fuzzy Search with the Fuzzy Search Index

✓ Substring-Optimized Fuzzy Search on String Columns

Score Calculation

Score Calculation

`search` is a `similarCalculationMode` that is suitable for performing a substring-optimized fuzzy search on string columns. However, it also has the following shortcomings:

- Based on the algorithm, it finds longer texts that are not similar in a human sense with a particularly good score.
- This also impairs the sorting of the result set.

To overcome these issues, a new type of `similarCalculationMode` has been introduced, known as the `subStringSearch`. Search option `scm=substringsearch` returns all rows containing the search input. Very long search strings are truncated after 100 characters. A fault tolerance of up to 8 typographical errors for long search strings limits the result list.

See also the example listed in the topic under Related Links.

Source: [Substring-Optimized Fuzzy Search on String Columns](#) | SAP Help Portal



Standard



Search I

Object abbreviation:

Object name:

Go

Adapt Filters

Module (4,648)

Object type	Object ID	Language ...	Object abbreviation	Object name	
SM	50018319	EN	04SM50FAN102	Klin. Untersuchungskurs Bewegungsapp.	>
SM	50018694	EN	07SMCHE207	CHE 207 Spectroscopy	>
SM	50018697	EN	07SMCHE211	CHE 211 Practical course in Phys. Chem.	>
SM	50018713	EN	07SMCHE205	CHE 205 Physical Chemistry I	>
SM	50018734	EN	07SMCHE304	CHE 304 Organic Chemistry III	>
SM	50019061	EN	04SM03CHE102	Lecture General Chemistry for Medicine	>
SM	50019260	EN	07SMCHE303	CHE 303 Inorganic Chemistry III	>
SM	50019261	EN	07SMCHE323	CHE 323 Reaction Mechanisms + Kinetics	>
SM	50019264	EN	07SMCHE325	CHE 325 Solid State and Materials Chem.	>
SM	50020513	EN	05SMW004	Functional Foot Trimming in Cattle	>
SM	50020536	EN	05SMFWB109	Diagnostic Cytology	>
SM	50022298	EN	02SMSV_WSSTR	Tax Law (WS)	>
SM	50025938	EN	07SMPHY113	PHY 113 Mechanical Workshop I	>
SM	50025941	EN	07SMPHY123	PHY 123 Mechanical workshop II	>
SM	50026006	EN	07SMMAT201	MAT 201 Study and Prac. Un. Analysis III	>
SM	50026008	EN	07SMMAT203	MAT 203 Study and Prac. Un. Algebra I	>

Modification: Search with substringsearch works for us, now for 1.5 years

Details for Selected SQL Trace Record

```
SELECT
/* CDS access control applied */
/* Contains Native SQL */
"ENDDATE" "ENDDATE" , "LANGUAGE" "LANGUAGE" , "OBJECTABBREVIATION"
"OBJECTABBREVIATION" , "OBJECTID" "OBJECTID" , "OBJECTNAMETEXT"
"OBJECTNAMETEXT" , "OBJECTTYPE" "OBJECTTYPE" , "PLANNINGSTATUS"
"PLANNINGSTATUS" , "PLANVERSION" "PLANVERSION" , "RECORDNO" "RECORDNO" ,
"STARTDATE" "STARTDATE" , SCORE( ) "%SADL_RANKED_SCORE_ALIAS"
FROM
"ZC_OBJECT_KEYDATE" "ZC_OBJECT_KEYDATE"
WHERE
"MANDT" = '701' AND CONTAINS( ( "OBJECTABBREVIATION" , "OBJECTNAMETEXT" )
, 'oec' , FUZZY( ( '0.80' , 'similarCalculationMode=substringsearch' ) , (
'0.80' , 'similarCalculationMode=substringsearch' ) ) )
ORDER BY
"%SADL_RANKED_SCORE_ALIAS" DESC , "ZC_OBJECT_KEYDATE" . "PLANVERSION" ,
"ZC_OBJECT_KEYDATE" . "OBJECTTYPE" , "ZC_OBJECT_KEYDATE" . "OBJECTID" ,
"ZC_OBJECT_KEYDATE" . "PLANNINGSTATUS" , "ZC_OBJECT_KEYDATE" . "STARTDATE"
, "ZC_OBJECT_KEYDATE" . "ENDDATE" , "ZC_OBJECT_KEYDATE" . "LANGUAGE" ,
"ZC_OBJECT_KEYDATE" . "RECORDNO"
LIMIT 200
WITH PARAMETERS( 'LOCALE' = 'EN' )
```

But a modification should not be a long-term solution.

Customer Improvement Request

SAP BTP ABAP Environment

Make SADL Search great so that users can find what they searched for

Request ID: 354101, Category: ABAP RESTful Application Programming

Vote:

♥ Voted

Status: Acknowledged

Submitted on: Aug 11, 2025

Author: [Stephan Heinberg](#)

Follow:

Changed on: Nov 10, 2025

Coach: [Andre Fischer](#)

- DETAILS
- ATTACHMENTS (2)
- COMMENTS (2)
- VOTES (96)
- RELATED REQUESTS
- PEOPLE
- ACTIVITY LOG

Description:

In a Fiori Element the SADL Search is used. However, SADL Search uses hard-coded a HANA search algorithm, that HANA itself classifies as “it finds longer texts that are not similar in a human sense with a particularly good score”

Indeed, that is the case, that our users laugh at the incorrect search results and stop using Fiori Search. They switch to filtering with an asterisk (*math*).

What is the opportunity/problem the request will address?

SADL hard-coded the similarCalculationMode "search." However, HANA Search recommends using the similarCalculationMode "substringSearch" for searching character-like fields.

The request is to make it possible to utilize similarCalculationMode “substringsearch. This can be done, for example, via a new @Search annotation.

This would enable users to find parts of text in material descriptions, etc.



<https://influence.sap.com/sap/ino/#/idea/354101>

SADL vs. Enterprise Search



List Report / Object Page apps · RAP services



SADL engine

- Maps requests → data source, no coding
- \$filter · \$orderby · \$expand · paging
- Query pushdown to HANA



Global search field in the Launchpad shell bar



Enterprise Search

- Freestyle / fuzzy text search
- Ranking · suggestions · navigation
- HANA FUZZY() / CONTAINS underneath



CDS Views · Core Data Services foundation (with DCL authorization)

Enterprise Search (ABAP ESH) uses a separate framework in addition to SADL. In 2023, they switched to **Substringsearch**, even with a downport:

3305540 - Downport of search semantic TEXTUAL_WITOUT_FTX with search mode "Substringsearch" in Releases SAP_BASIS 753 and 754

HANA 2 vs. HANA Cloud deviation: Fulltext vs. Fuzzy Search Index

SAP HANA Cloud, SAP HANA Database Search Developer Guide

> Creating Search Models

✓ Accessing Data Using Search

> Federated Search with Built-In Procedure
sys.esh_search()

✓ Search with SQL

> Search Queries with CONTAINS

EXACT Search

✓ FUZZY Search

Supported Database Objects and SQL
Types

Syntax

Fuzzy Search Indexes

✓ Fuzzy Text Search

Fuzzy Text Indexes

Processing a Search

Score Calculation

Initial Characters

Soft AND

Symmetric AND

Check for Phrases

Minimal Text Score

Term Mappings/Synonyms

Compounds

Migrating From Fulltext Indexes

Migrating From Fulltext Indexes

In HANA 2.0 Fulltext indexes can be used to execute a fulltext search.

HANA Cloud fulltext indexes are not available anymore. Fuzzy search indexes with search mode text (short: fuzzy text indexes) can be used as a replacement.

When migrating an application from HANA 2.0 with fulltext indexes to HANA Cloud with fuzzy text indexes, some differences have to be considered.

SQL Syntax for Index Creation

Fulltext indexes are created using the *CREATE FULLTEXT INDEX* statement with a large set of options, while fuzzy text indexes are created using the *CREATE FUZZY SEARCH INDEX* statement, without any options except the search mode.

```
-- HANA 2.0: create fulltext index
CREATE FULLTEXT INDEX fulltextindex1 ON tab1(txt) FAST PREPROCESS ON SEARCH ONLY OFF SYNC;

-- HANA Cloud: create fuzzy text index
CREATE FUZZY SEARCH INDEX textindex1 ON tab1(txt) SEARCH MODE TEXT;
```

Source: <https://help.sap.com/docs/hana-cloud-database/sap-hana-cloud-sap-hana-database-search-developer-guide/migrating-from-fulltext-indexes>

The return of Any(DB)?

How does SADL handle the different SQL Syntax

CL_SADL_SQL_STATEMENT->APPEND_FUZZY_SEARCH_OPTIONS (S/4 2025 FPS1)

```
...
IF  lv_search_mode_option IS INITIAL
AND cl_sadl_dev_prototypes=>search_mode_text( )
AND cl_sadl_sql_query_engine=>is_hana_cloud( )
AND is_element-fulltext_index = abap_true.
    lv_search_mode_option = `searchMode=text`.
ENDIF.

CASE is_element-similar_calculation_mode.
    WHEN if_sadl_query_engine_types=>co_similar_calculation_mode-search.
        DATA(lv_similar_calculation_mode) = `similarCalculationMode=search`.
    WHEN if_sadl_query_engine_types=>co_similar_calculation_mode-type_ahead.
        lv_similar_calculation_mode = `similarCalculationMode=typeAhead`.
ENDCASE.

lv_fuzzy_search_options = lv_search_mode_option && lv_similar_calculation_mode.
```

ABAP SQL support of (new) HANA SEARCH capabilities for S/4 2027

Table of Contents

- ▼ ABAP Platform - Roadmap Information
 - SAP S/4HANA Cloud Public Edition Roadmap Information
 - SAP BTP ABAP environment Roadmap Information
 - SAP S/4HANA and SAP S/4HANA Cloud Private Edition Roadmap Information
- ▼ ABAP Cloud Roadmap Information
 - UI Services
 - Integration Services
 - AI
 - Implementation
 - Reuse Services and Libraries
 - Built-In Qualities

ABAP SQL

ASQL support of new HANA SEARCH capabilities

Planned Release: |SAP BTP ABAP environment 2702| |SAP S/4HANA Cloud Public Edition 2702| |SAP S/4HANA 2027| |SAP S/4HANA Cloud Private Edition 2027|

In many scenarios an exact or **fuzzy** search on texts/strings or numeric scoring on numeric types on relational data is required. Examples are the OData Search ("SADL Search") or Enterprise Search. For those scenarios, HANA offers optimized SQL functionality with the `SCORE()`-Function and `COLLATION`-support (for language-based sorting)

To support those scenarios with best possible ABAP Cloud qualities, ASQL will offer dedicated syntax for both the `SCORE()` function and the HANA Collations.

<https://help.sap.com/docs/abap-cross-product/roadmap-info/implementation?locale=en-US&q=Fuzzy>

Result Ranking: @Consumption.ranked


Result Ranking is the most important Feature in Fuzzy Search

Works with SADL Annotation: @Consumption.ranked

- Only work, if no explicit OData Sorting is applied
- No Fiori Elements visualization

Known Limitations

- Does not work with Draft -> RAP
 - Search must cover draft & active version, two queries
- Does not work where Full-text Index is involved

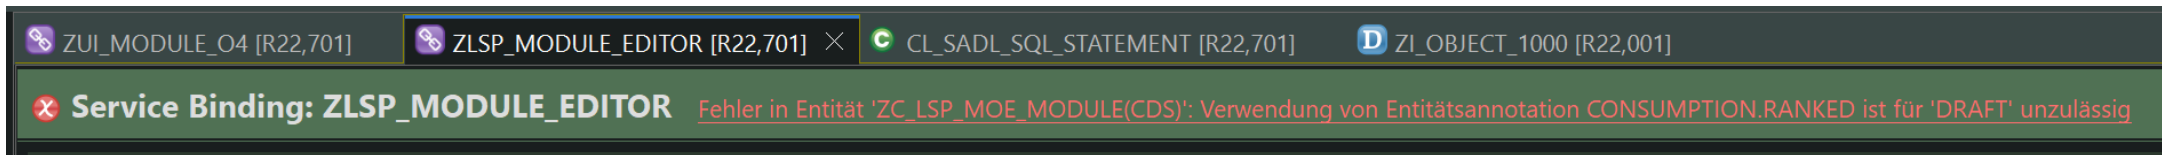

HANA searchMode=alphanumeric for SADL NUMC fields

SAP provided a fix this week that allows searches of NUMC fields without leading zeros:

3648692 - Process search on all NUMC fields with searchMode=alphanumeric - SAP for Me

At the moment, corrections are available for S/4 2023 and later versions.



Wish List for SADL & HANA Search

1. SADL: Make it possible to utilize SCM “substringsearch” or other Search algorithms or clarity about HANA Cloud `searchMode=text`.

— This can be done, for example, via a new @Search annotation.

2. Fiori Elements / SADL: Better ranking support for Search

— Visualization, Skip Sort & Draft Support

3. HANA: No SQL syntax deviations for HANA 2 and 4

— Also implement the same innovations regarding HANA search in both versions 2 and 4

4. HANA: Innovations to HANA, where millions of users benefit daily, like Fuzzy Search and not all these HANA side cars (Vector, Graph, Spatial and What-Not-Engine)

— No innovations in HANA 2 Search have been delivered for years.

— Performance improvements for search at scale: HANA Search is slow for bigger Fioris

— Maybe a new search mode: Full-text Part Search without Fuzzy in NVARCHAR



Universität
Zürich^{UZH}



Thank you!

