


AbarVa Knowledge Layer Architecture Visuals

Data room, knowledge fabric, context broker, model layer, and multi-agent flow

Snapshot after Enterprise Data Room, Broker, Persistence Mapper, and P0-P6 Phase Packs


1. Executive Architecture

The knowledge layer has four planes: data, knowledge, context, and agents/models. The broker is the northbound contract: agents ask for governed context instead of querying raw stores.

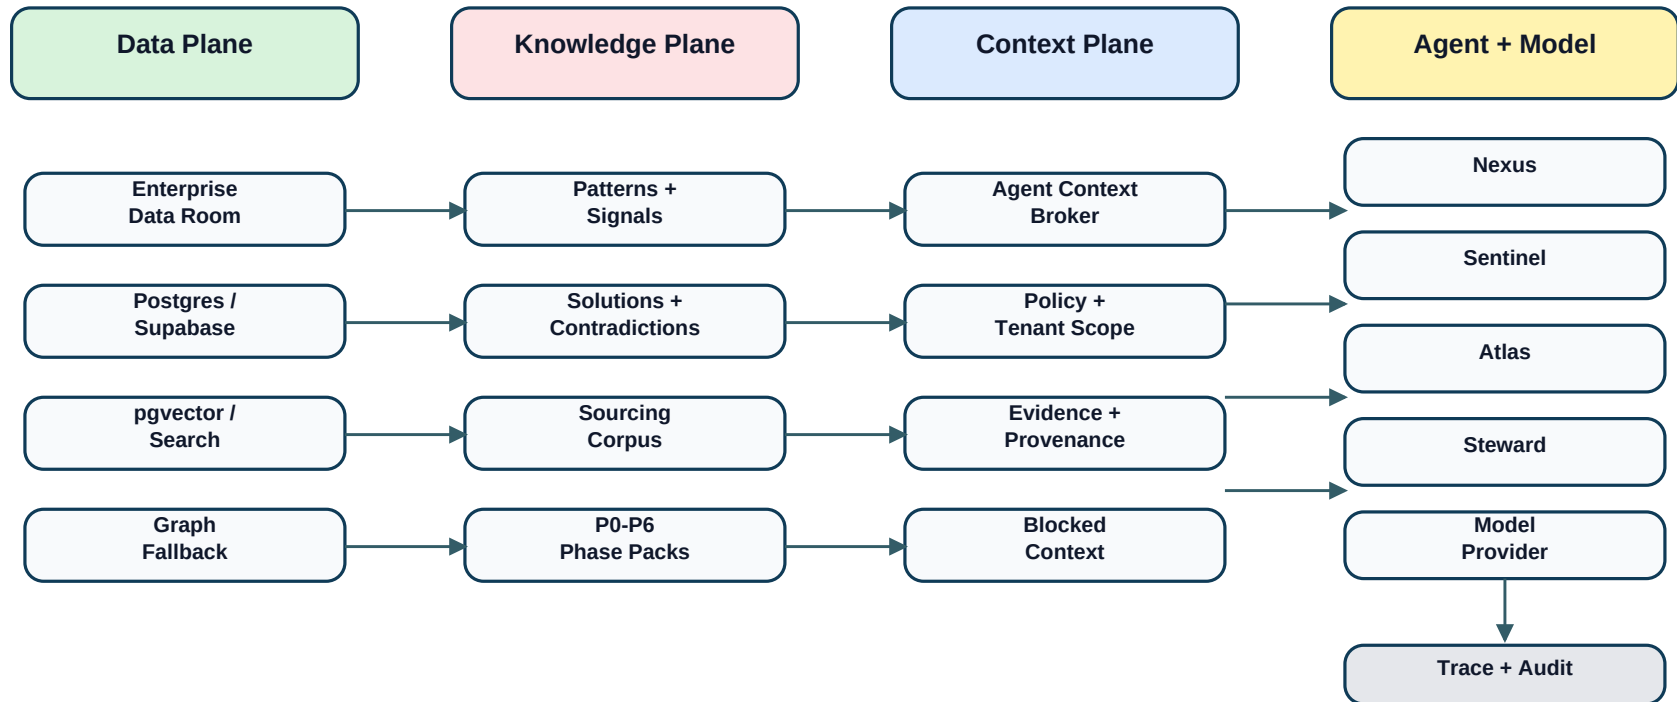


2. Tenant Data Shape

The Enterprise Data Room is the canonical tenant shape. Apex is rich today; Meridian and First Capital are partial/conflict-aware until canonical profile conflicts are resolved.

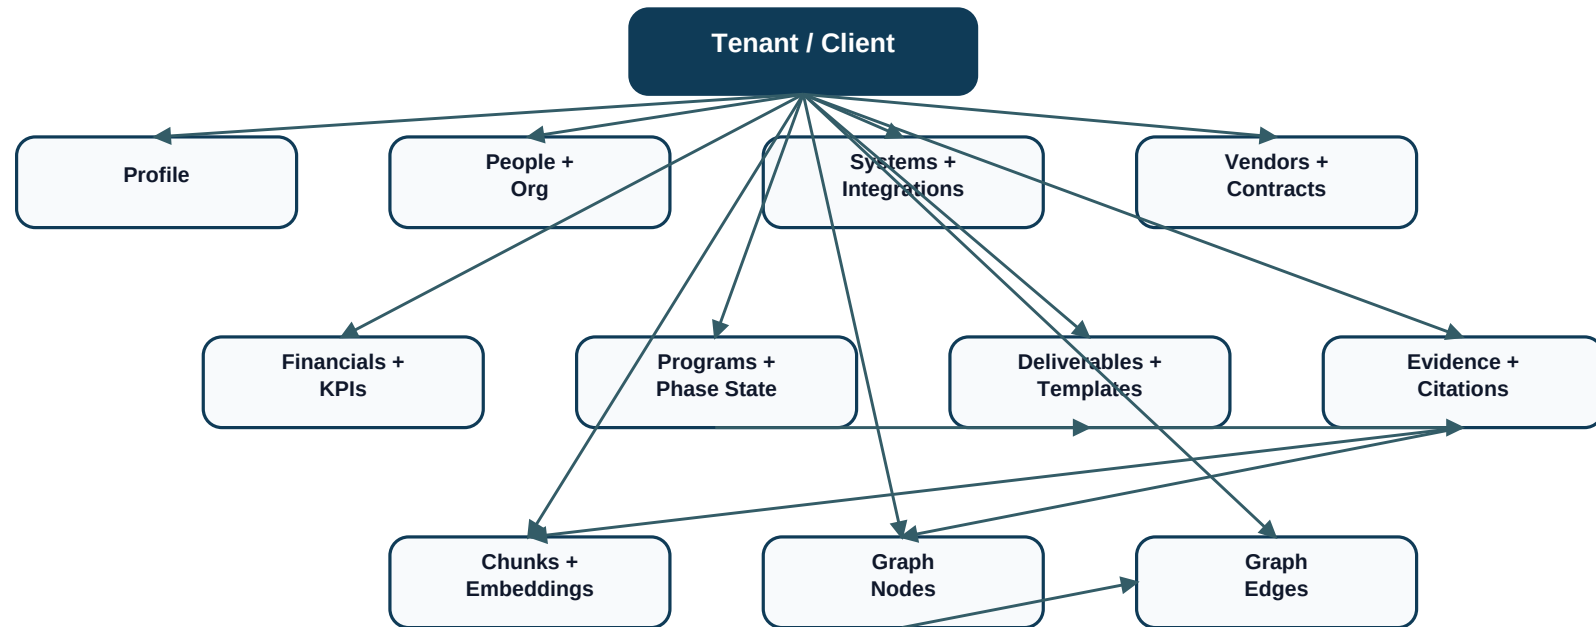

3. Context Assembly Flow

The context broker validates tenant scope, policy, approval state, and raw-context permissions before giving agents a bundle. It can return blocked context explicitly rather than fabricating data.

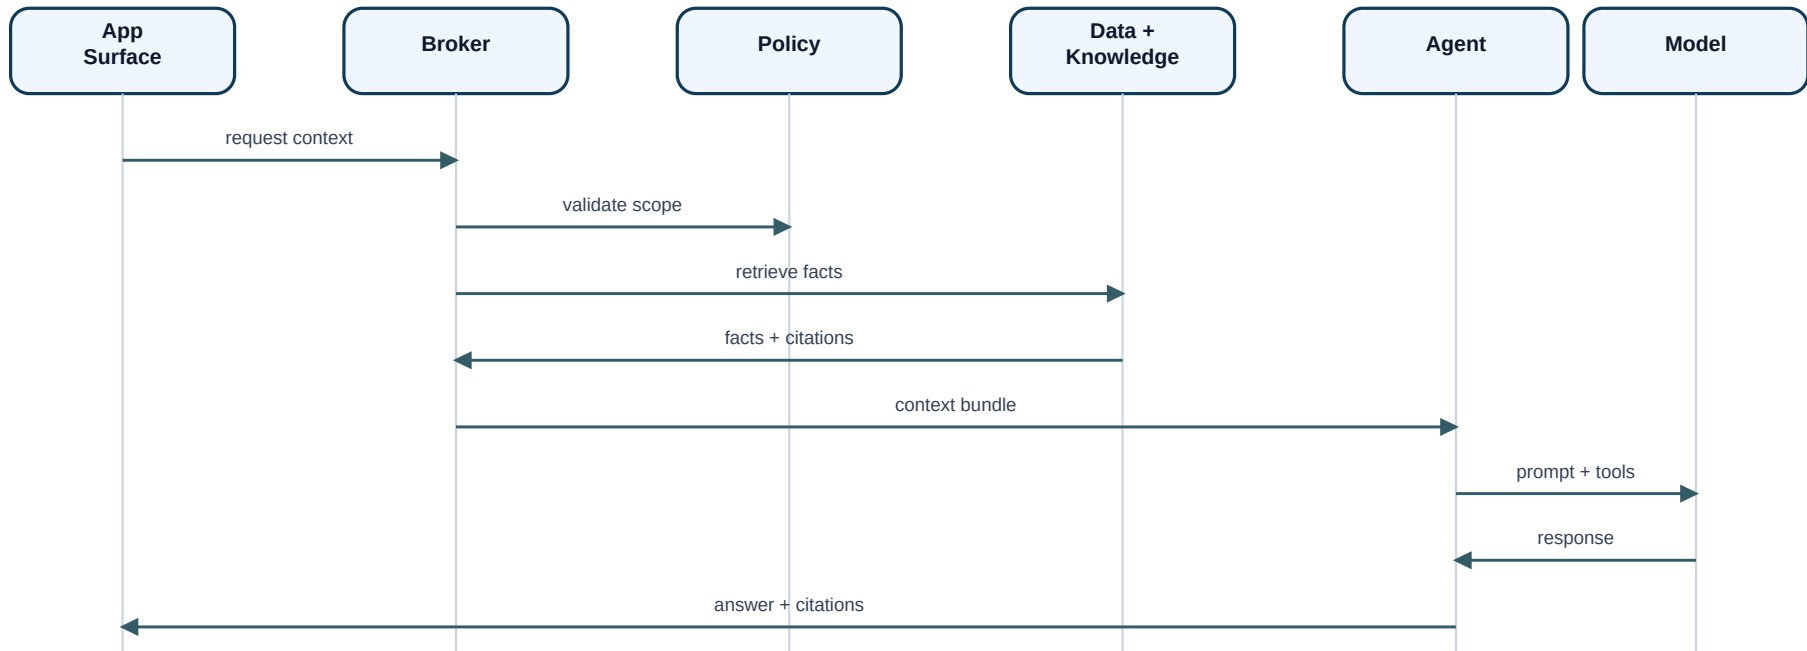

4. Multi-Agent Responsibilities

Agent	Primary question	Context received	Boundary
Nexus	What should the program do next?	Phase pack, program state, evidence, gate readiness	No direct raw-store reads
Sentinel	Is this evidence trustworthy?	Evidence rows, citations, graph candidates, contradictions	No invented sources
Atlas	What does value/portfolio show?	Financials, KPIs, systems, aggregate program context	No raw L4 by default
Steward	Is this governed and safe?	Policy, tenant scope, data classification, blocked items	No implicit exposure approvals

Important boundary: Phase Packs are static workflow doctrine; Enterprise Data Room is tenant evidence/facts; the broker combines them without letting app agents import seed files directly.

5. Build Order And Decisions

1. Add a read-only Programs adapter that calls the broker without changing write behavior.
2. Lock embedding default before DDL: recommended lab default is text-embedding-3-small at 1536 dimensions if Supabase pgvector is chosen.
3. Choose graph fallback naming and RLS policy before migrations.
4. Define tenant identity bridge: tenant_key and client_id must be explicit and consistent.
5. Add write-back event contract for generated artifacts and user edits.
6. Create real migrations only after dimensions, RLS, namespace convention, and delete/update propagation are locked.

Do not shortcut: do not let app agents import seed data directly, do not let agents query vector/graph/database stores directly, and do not treat phase packs as tenant data.