Copyleaks

Analysis Report

AI Detection Report

New Scans 10:21 AM

Scan details

Scan Time	Total Pages	Total Words
July 2nd, 2025 at 10:21 UTC	5	1072

Plagiarism Detection

Plagiarism Types	Text Coverage
Identical	
Minor Changes	
Paraphrased	
Excluded	
Omitted Words	

AI Detection

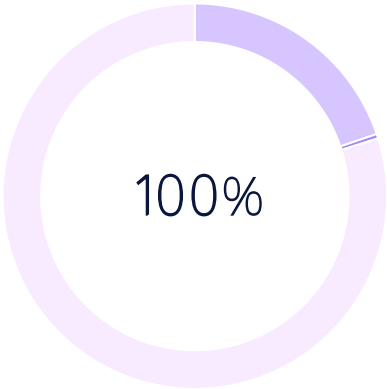

	Text Coverage	Words
AI Text	100%	1,072
Low Frequency		212
Medium Frequency		0
High Frequency		4
Human Text	0%	0
Excluded		
Omitted Words		0

AI Content

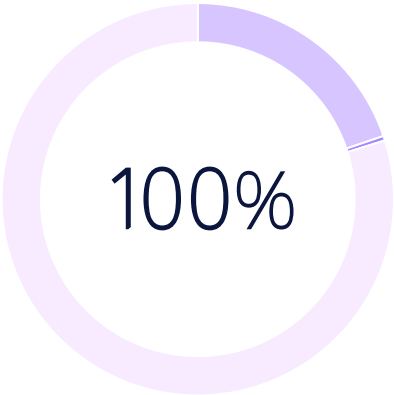

	Text Coverage	Words
AI Text	100%	1,072
Low Frequency		212
Medium Frequency		0
High Frequency		4
Human Text	0%	0
Excluded		
Omitted Words		0

About AI Detection

Our AI Detector is the only enterprise-level solution that can verify if the content was written by a human or generated by AI, including source code and text that has been plagiarized or modified. Learn more

AI Text

A body of text that has been generated or altered by AI technology. Learn more

Human Text

Any text that has been fully written by a human and has not been altered or generated by AI. Learn more

Copyleaks AI Detector Effectiveness

Credible data at scale, coupled with machine learning and widespread adoption, allows us to continually refine and improve our ability to understand complex text patterns, resulting in over 99% accuracy–far higher than any other AI detector–and improving daily. Learn more

Ideal Text Length

The higher the character count, the easier for our technology to determine irregular patterns, which results in a higher confidence rating for AI detection. Learn more

Reasons It Might Be AI When You Think It's Not

The AI Detector can detect a variety of AI-generated text, including tools that use AI technology to paraphrase content, auto-complete sentences, and more. Learn more

User AI Alert History

Historical data of how many times a user has been flagged for potentially having AI text within their content. Learn more

AI Logic

The number of times a phrase was found more frequently in AI vs human text is shown according to low, medium, and high frequency. Learn more

AI Logic

Shows you the "why" behind AI detection with sources you can see and verify.

AI Phrases

Detects phrases that appear with higher frequency in AI-written text than in human writing.

The frequency of a phrase in AI vs. human text.

3 x — > 10,000x

> 10,000x **as an AI cannot**

How frequently the phrase was found in our dataset:

AI Text	**35.07 / 1,000,000 Documents**
Human Text	**0 / 1,000,000 Documents**

1403x **semantic consistency through**

How frequently the phrase was found in our dataset:

AI Text	**7.35 / 1,000,000 Documents**
Human Text	**0.01 / 1,000,000 Documents**

850x **Semantic Preservation The**

How frequently the phrase was found in our dataset:

AI Text	**6.69 / 1,000,000 Documents**
Human Text	**0.01 / 1,000,000 Documents**

798x **represents a fundamental shift in how we approach**

How frequently the phrase was found in our dataset:

AI Text	**2.09 / 1,000,000 Documents**
Human Text	**0 / 1,000,000 Documents**

746x **and acknowledging inherent**

How frequently the phrase was found in our dataset:

AI Text	**1.96 / 1,000,000 Documents**
Human Text	**0 / 1,000,000 Documents**

468x **enabling progressive refinement**

How frequently the phrase was found in our dataset:

AI Text	**1.23 / 1,000,000 Documents**
Human Text	**0 / 1,000,000 Documents**

422x **Refinement The framework**

How frequently the phrase was found in our dataset:

AI Text	**18.26 / 1,000,000 Documents**
Human Text	**0.04 / 1,000,000 Documents**

382x **The framework employs**

How frequently the phrase was found in our dataset:

AI Text	**154.1 / 1,000,000 Documents**
Human Text	**0.4 / 1,000,000 Documents**

378x **Guarantees The framework**

How frequently the phrase was found in our dataset:

AI Text	**8.92 / 1,000,000 Documents**
Human Text	**0.02 / 1,000,000 Documents**

362x **maintains logical consistency**

How frequently the phrase was found in our dataset:

AI Text	**3.32 / 1,000,000 Documents**
Human Text	**0.01 / 1,000,000 Documents**

276x **AI systems operate**

How frequently the phrase was found in our dataset:

AI Text	**19.16 / 1,000,000 Documents**
Human Text	**0.07 / 1,000,000 Documents**

192x **measures how consistently**

How frequently the phrase was found in our dataset:

AI Text	**12.11 / 1,000,000 Documents**
Human Text	**0.06 / 1,000,000 Documents**

140x **are mathematically valid**

How frequently the phrase was found in our dataset:

AI Text	**22.98 / 1,000,000 Documents**
Human Text	**0.16 / 1,000,000 Documents**

123x **without altering core**

How frequently the phrase was found in our dataset:

AI Text	**4.83 / 1,000,000 Documents**
Human Text	**0.04 / 1,000,000 Documents**

93x **the framework eliminates**

How frequently the phrase was found in our dataset:

AI Text	**5.61 / 1,000,000 Documents**
Human Text	**0.06 / 1,000,000 Documents**

92x **parallel processing Quantum**

How frequently the phrase was found in our dataset:

AI Text	**3.27 / 1,000,000 Documents**
Human Text	**0.04 / 1,000,000 Documents**

87x **limitations. The framework**

How frequently the phrase was found in our dataset:

AI Text	**12.85 / 1,000,000 Documents**
Human Text	**0.15 / 1,000,000 Documents**

83x **Practical Implementation Example:**

How frequently the phrase was found in our dataset:

AI Text	**4.02 / 1,000,000 Documents**
Human Text	**0.05 / 1,000,000 Documents**

77x **that enable communication between different**

How frequently the phrase was found in our dataset:

AI Text	**1.31 / 1,000,000 Documents**
Human Text	**0.02 / 1,000,000 Documents**

71x **meaning is preserved**

How frequently the phrase was found in our dataset:

AI Text	**46.65 / 1,000,000 Documents**
Human Text	**0.66 / 1,000,000 Documents**

63x **The framework explicitly**

How frequently the phrase was found in our dataset:

AI Text	**14.61 / 1,000,000 Documents**
Human Text	**0.23 / 1,000,000 Documents**

42x **saw something strange**

How frequently the phrase was found in our dataset:

AI Text	**62.88 / 1,000,000 Documents**
Human Text	**1.49 / 1,000,000 Documents**

28x **The framework supports**

How frequently the phrase was found in our dataset:

AI Text	**64.12 / 1,000,000 Documents**
Human Text	**2.29 / 1,000,000 Documents**

26x **prevents information loss**

How frequently the phrase was found in our dataset:

AI Text	**2.29 / 1,000,000 Documents**
Human Text	**0.09 / 1,000,000 Documents**

24x **it creates a system where:**

How frequently the phrase was found in our dataset:

AI Text	**3.65 / 1,000,000 Documents**
Human Text	**0.15 / 1,000,000 Documents**

24x **tuple O = (S, P, M, ε) where: - S represents the**

How frequently the phrase was found in our dataset:

AI Text	**4.25 / 1,000,000 Documents**
Human Text	**0.18 / 1,000,000 Documents**

23x **key mathematical property**

How frequently the phrase was found in our dataset:

AI Text	**1.17 / 1,000,000 Documents**
Human Text	**0.05 / 1,000,000 Documents**

19x **Shannon entropy provides**

How frequently the phrase was found in our dataset:

AI Text	**2.18 / 1,000,000 Documents**
Human Text	**0.12 / 1,000,000 Documents**

19x **acknowledges that different**

How frequently the phrase was found in our dataset:

AI Text	**8.82 / 1,000,000 Documents**
Human Text	**0.47 / 1,000,000 Documents**

16x **Shannon entropy to quantify**

How frequently the phrase was found in our dataset:

AI Text	**1.43 / 1,000,000 Documents**
Human Text	**0.09 / 1,000,000 Documents**

15x **observations across different**

How frequently the phrase was found in our dataset:

AI Text	**3.73 / 1,000,000 Documents**
Human Text	**0.25 / 1,000,000 Documents**

15x **without compromising security or**

How frequently the phrase was found in our dataset:

AI Text	**9.62 / 1,000,000 Documents**
Human Text	**0.66 / 1,000,000 Documents**

14x **Foundation The framework**

How frequently the phrase was found in our dataset:

AI Text	**1.89 / 1,000,000 Documents**
Human Text	**0.14 / 1,000,000 Documents**

13x **at different classification**

How frequently the phrase was found in our dataset:

AI Text	**5.76 / 1,000,000 Documents**
Human Text	**0.43 / 1,000,000 Documents**

13x **absolute values when**

How frequently the phrase was found in our dataset:

AI Text	**5.85 / 1,000,000 Documents**
Human Text	**0.45 / 1,000,000 Documents**

13x **Communication The framework**

How frequently the phrase was found in our dataset:

AI Text	**1.89 / 1,000,000 Documents**
Human Text	**0.15 / 1,000,000 Documents**

13x **lattice structure: ⟨C, ∨, ∧, ¬⟩ where:**

How frequently the phrase was found in our dataset:

AI Text	**3.89 / 1,000,000 Documents**
Human Text	**0.3 / 1,000,000 Documents**

13x **preserving the validity of**

How frequently the phrase was found in our dataset:

AI Text	**3.92 / 1,000,000 Documents**
Human Text	**0.31 / 1,000,000 Documents**

12x **mathematical system that**

How frequently the phrase was found in our dataset:

AI Text	**14.2 / 1,000,000 Documents**
Human Text	**1.19 / 1,000,000 Documents**

12x **This mathematical approach**

How frequently the phrase was found in our dataset:

AI Text	**8.09 / 1,000,000 Documents**
Human Text	**0.7 / 1,000,000 Documents**

11x **metrics, the system**

How frequently the phrase was found in our dataset:

AI Text	**4.69 / 1,000,000 Documents**
Human Text	**0.42 / 1,000,000 Documents**

10x **finds the greatest**

How frequently the phrase was found in our dataset:

AI Text	**13.13 / 1,000,000 Documents**
Human Text	**1.31 / 1,000,000 Documents**

10x **levels to contribute**

How frequently the phrase was found in our dataset:

AI Text	**4.89 / 1,000,000 Documents**
Human Text	**0.5 / 1,000,000 Documents**

9x **different capabilities and limitations,**

How frequently the phrase was found in our dataset:

AI Text	**1.47 / 1,000,000 Documents**
Human Text	**0.16 / 1,000,000 Documents**

8x **using transformation matrices**

How frequently the phrase was found in our dataset:

AI Text	**1.69 / 1,000,000 Documents**
Human Text	**0.2 / 1,000,000 Documents**

8x **that mathematics can**

How frequently the phrase was found in our dataset:

AI Text	**15.5 / 1,000,000 Documents**
Human Text	**1.9 / 1,000,000 Documents**

8x **function This structure**

How frequently the phrase was found in our dataset:

AI Text	**2.29 / 1,000,000 Documents**
Human Text	**0.29 / 1,000,000 Documents**

8x **to stable states**

How frequently the phrase was found in our dataset:

AI Text	**3.74 / 1,000,000 Documents**
Human Text	**0.47 / 1,000,000 Documents**

8x **foundations rather than**

How frequently the phrase was found in our dataset:

AI Text	**5.83 / 1,000,000 Documents**
Human Text	**0.76 / 1,000,000 Documents**

7x **gain is calculated as:**

How frequently the phrase was found in our dataset:

AI Text	**3.21 / 1,000,000 Documents**
Human Text	**0.49 / 1,000,000 Documents**

6x **while maintaining absolute**

How frequently the phrase was found in our dataset:

AI Text	**1.84 / 1,000,000 Documents**
Human Text	**0.29 / 1,000,000 Documents**

6x **information gain as**

How frequently the phrase was found in our dataset:

AI Text	**6.87 / 1,000,000 Documents**
Human Text	**1.23 / 1,000,000 Documents**

5x **mathematically rather than**

How frequently the phrase was found in our dataset:

AI Text	**1.92 / 1,000,000 Documents**
Human Text	**0.4 / 1,000,000 Documents**

5x **levels - V determines the**

How frequently the phrase was found in our dataset:

AI Text	**1.64 / 1,000,000 Documents**
Human Text	**0.36 / 1,000,000 Documents**

4x **allows observers to**

How frequently the phrase was found in our dataset:

AI Text	**3.88 / 1,000,000 Documents**
Human Text	**0.93 / 1,000,000 Documents**

4x **entirely. Instead of**

How frequently the phrase was found in our dataset:

AI Text	**8.28 / 1,000,000 Documents**
Human Text	**2.07 / 1,000,000 Documents**

4x **mathematical system for**

How frequently the phrase was found in our dataset:

AI Text	**1.67 / 1,000,000 Documents**
Human Text	**0.47 / 1,000,000 Documents**

3x **can each contribute**

How frequently the phrase was found in our dataset:

AI Text	**2.95 / 1,000,000 Documents**
Human Text	**0.85 / 1,000,000 Documents**

3x **that captures only**

How frequently the phrase was found in our dataset:

AI Text	**1.81 / 1,000,000 Documents**
Human Text	**0.54 / 1,000,000 Documents**

3x **that respect each**

How frequently the phrase was found in our dataset:

AI Text	**2.52 / 1,000,000 Documents**
Human Text	**0.77 / 1,000,000 Documents**

3x **within their context.**

How frequently the phrase was found in our dataset:

AI Text	**6.59 / 1,000,000 Documents**
Human Text	**2.06 / 1,000,000 Documents**

3x **formal proofs for:**

How frequently the phrase was found in our dataset:

AI Text	**1.67 / 1,000,000 Documents**
Human Text	**0.55 / 1,000,000 Documents**

MMP Framework v7.0: A mathematical system for substrate-agnostic anomalous observation classification

Executive Summary

MMP Framework v7.0 transforms anomalous observation classification from a narrative-based process into a pure mathematical system that works across any observer type—human, AI, sensor, or quantum system. By encoding only mathematically verifiable parameters and acknowledging inherent substrate limitations, the framework eliminates 'Did I really see that?' questions while enabling progressive refinement of observations across different access levels.

Core Mathematical Architecture

Observer Space Foundation

The framework defines each observer as a mathematical tuple $O = (S, P, M, \varepsilon)$ where:

- S represents the substrate type (Human, AI, Sensor, Quantum)
- P contains the perception operators available to that substrate
- M defines measurement capability bounds
- ε quantifies the substrate's inherent uncertainty function

This structure acknowledges a fundamental truth: different observer substrates can never fully verify what another substrate experienced. A human cannot confirm what a quantum sensor 'saw,' just as an AI cannot truly verify human visual perception. Instead of fighting this limitation, the framework embraces it mathematically.

Substrate Parameter Constraints

Each substrate operates within mathematically defined limitations:

Human observers function within:

- Temporal resolution: 10^{-2} seconds to 10^{2} years
- Spatial perception: 10^{-4} to 10^{4} meters
- Spectral range: 380-750nm visual, 20-20kHz auditory
- Cognitive capacity: 7±2 simultaneous items

AI systems operate with:

- Temporal precision down to nanoseconds
- Sensor-dependent spatial resolution
- Full electromagnetic spectrum (if equipped)

- Architecture-dependent parallel processing

Quantum sensors work within:

- Heisenberg uncertainty limits ($\hbar/\Delta E$)
- Planck-scale spatial resolution
- Quantized energy state detection
- Measurement collapse constraints

Universal Encoding System

The framework employs a substrate-agnostic encoding grammar that captures only verifiable parameters. An observation like 'E+fA+23000R+13.3.3F' breaks down into:

- E: Event type classification
- fA: Frequency anomaly attribute
- 23000R: Magnitude measurement in R-scale units
- 13.3.3F: Confidence level with F-qualifier

This encoding removes narrative entirely. Instead of 'I saw something strange moving fast,' the system records precise parameter deviations that any compatible substrate can interpret within its own limitations.

Information-Theoretic Foundation

Shannon Entropy for Progressive Refinement

The framework uses Shannon entropy to quantify information gain as observers add data:

$H(\Omega) = -\sum_i P(\omega_i) \log_2 P(\omega_i)$

When a new observer contributes, information gain is calculated as:

$IG(\Omega|O_j) = H(\Omega) - H(\Omega|O_j)$

This mathematical approach replaces subjective reliability assessments with objective information content measurement. Each observer's contribution is valued based on how much it reduces system entropy, not on trust or reputation.

Living Records Mathematics

Records maintain absolute value until explicitly updated through the transition operator:

$r \Longrightarrow u = T(r,u)$ with validity period $I(T(r,u)) = [\text{timestamp}(u), \infty)$

This creates 'living records' that hold definitive truth within their validity period, then transition to new absolute values when updated. The system preserves complete history while allowing retroactive refinement without paradoxes.

Progressive Refinement Mechanics

Multi-Level Contribution

The framework supports cross-classification data sharing through a mathematical lattice structure:

$\langle C, \vee, \wedge, \neg \rangle$ where:
- C represents all classification levels
- $\vee$ determines the least upper bound (higher classification)
- $\wedge$ finds the greatest lower bound (accessible information intersection)

Citizens, scientists, and classified personnel can each contribute observations at their access level. The refinement operator $\ominus$ allows observers to add detail without altering core records:

$r \ominus (o,d)$ = refined record where observer o adds detail d

Information Preservation

A key mathematical property ensures information never decreases:

$I_total(t+1) \geq I_total(t)$

When observers add refinements, the system calculates:

$I_cumulative(n) = \sum_{j=1}^{n} [IG(O_j) - Overlap(O_j, O_{1...j-1})]$

This prevents information loss while avoiding double-counting of redundant observations.

Gateway Interface Mathematics

Inter-Substrate Communication

The framework defines gateway functions that enable communication between different substrate types:

$G: S_i \times E \rightarrow S_j \times E'$

This transforms encoding e from substrate Si into encoding e' interpretable by substrate Sj, using transformation matrices that respect each substrate's limitations.

Semantic Preservation

The system maintains semantic consistency through a distance function:

$$d_sem(e1, e2) = \sqrt{(\Sigma i\ wi(pi(e1) - pi(e2))2)}$$

This ensures that meaning is preserved during inter-substrate translation while acknowledging that perfect translation may be impossible.

Practical Implementation

Example: Multi-Substrate Anomaly Recording

Consider an electromagnetic anomaly observed by different substrates:

Human encoding: E+emA+142315T+45.2N122.1W+H.85.2V

- Basic temporal precision (seconds)
- Meter-level spatial resolution
- 85% confidence, visual observation

AI encoding: E+emA+142315.442T+45.2034N122.0847W+AI.97.3S.12Hz

- Millisecond temporal precision
- Enhanced coordinate accuracy
- 97% confidence from 3 sensors at 12Hz sampling

Quantum sensor: Q+emA+142315.442187T+45.2034N122.0847W+QS.99.1.847THz

- Microsecond precision
- Quantum measurement designation
- 99% confidence at 847THz detection frequency

Each substrate encodes what it can verify within its limitations. The framework doesn't ask which observation is 'correct'—all are mathematically valid within their substrate parameters.

Reliability Without Trust

Instead of subjective trust metrics, the system uses consistency-based reliability:

$$C(Oi, Oj) = 1 - D_KL(P(\Omega|Oi) \,||\, P(\Omega|Oj))$$

This Kullback-Leibler divergence measures how consistently different observers classify the same phenomena. Aggregate reliability emerges from mathematical consensus, not reputation.

Key Innovations

Substrate Acknowledgment

The framework explicitly acknowledges that different observer types have fundamentally different capabilities and limitations, encoding this mathematically rather than trying to force false equivalence.

Narrative Elimination

By encoding only measurable parameter deviations, the system removes subjective interpretation from initial classification. 'What did you see?' becomes 'What parameters deviated from baseline?'

Progressive Truth

Living records allow truth to evolve as better measurements become available, while preserving the validity of earlier observations within their context.

Information-Theoretic Objectivity

Shannon entropy provides an objective measure of each observer's contribution, replacing trust-based systems with mathematical information content.

Cross-Domain Integration

The mathematical lattice structure enables observers at different classification levels to contribute without compromising security or creating access conflicts.H

Mathematical Guarantees

The framework provides formal proofs for:

1. Consistency Preservation: The system maintains logical consistency across all substrate types and updates
2. Information Monotonicity: Total information content never decreases
3. Semantic Stability: The semantic distance function forms a proper metric space
4. Convergence: Given sufficient observations, classifications converge to stable states

Conclusion

MMP Framework v7.0 represents a fundamental shift in how we approach anomalous observation classification. By building on mathematical foundations rather than narrative interpretation, it creates a system where:

- Every observer contributes within their verified capabilities
- No substrate needs to trust another's subjective experience
- Information accumulates objectively through entropy reduction
- Records live and breathe while maintaining absolute truth
- Classification emerges from mathematical consensus

This framework doesn't ask whether you 'really saw that.' Instead, it asks what measurable parameters changed, by how much, and with what confidence—questions that mathematics can answer definitively across any substrate that can observe our universe.