

```
Debian GNU/Linux 11 abbassi tty1

abbassi login: abbassi
Password:

Login incorrect
abbassi login: abbassi
Password:
Linux abbassi 5.10.0-35-amd64 #1 SMP Debian 5.10.237-1 (2025-05-19) x86_64

The programs included with the Debian GNU/Linux system are free software;
the exact distribution terms for each program are described in the
individual files in /usr/share/doc/*/copyright.

Debian GNU/Linux comes with ABSOLUTELY NO WARRANTY, to the extent
permitted by applicable law.
abbassi@abbassi:~$ su -
Mot de passe :
root@abbassi:~#
```

`sudo apt-get update`

```
Mot de passe :
root@abbassi:~# apt-get update
Atteint :1 h http://security.debian.org/debian-security bullseye-security InRelease
Atteint :2 http://deb.debian.org/debian bullseye InRelease
Lecture des listes de paquets... Fait
root@abbassi:~#
```

`sudo apt-get install -y apache2`

```
Lecture des listes de paquets... Fait
root@abbassi:~# apt-get install -y apache2
Lecture des listes de paquets... Fait
Construction de l'arbre des dépendances... Fait
Lecture des informations d'état... Fait
apache2 est déjà la version la plus récente (2.4.65-1~deb11u1).
apache2 passé en « installé manuellement ».
0 mis à jour, 0 nouvellement installés, 0 à enlever et 0 non mis à jour.
root@abbassi:~#
```



```
GNU nano 5.4 /etc/network/interfaces
# This file describes the network interfaces available on your system
# and how to activate them. For more information, see interfaces(5).

source /etc/network/interfaces.d/*

# The loopback network interface
auto lo
iface lo inet loopback


# The primary network interface
allow-hotplug ens33
iface ens33 inet static
address 192.168.110.3
netmask 255.255.255.0
```

```
root@abbassi:~# ip a
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host
        valid_lft forever preferred_lft forever
2: ens33: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc pfifo_fast state UP group default qlen 1000
    link/ether 00:0c:29:a4:29:f0 brd ff:ff:ff:ff:ff:ff
    altname enp2s1
    inet 192.168.110.3/24 brd 192.168.110.255 scope global ens33
        valid_lft forever preferred_lft forever
    inet6 fe80::20c:29ff:fea4:29f0/64 scope link
        valid_lft forever preferred_lft forever
```

```
iface lo inet loopback

# The primary network interface
allow-hotplug ens33
iface ens33 inet static
address 192.168.110.3
netmask 255.255.255.0
gateway 172.16.14.254
```

```
abbassi@abbassi:~$ ping 8.8.8.8
PING 8.8.8.8 (8.8.8.8) 56(84) bytes of data.
```

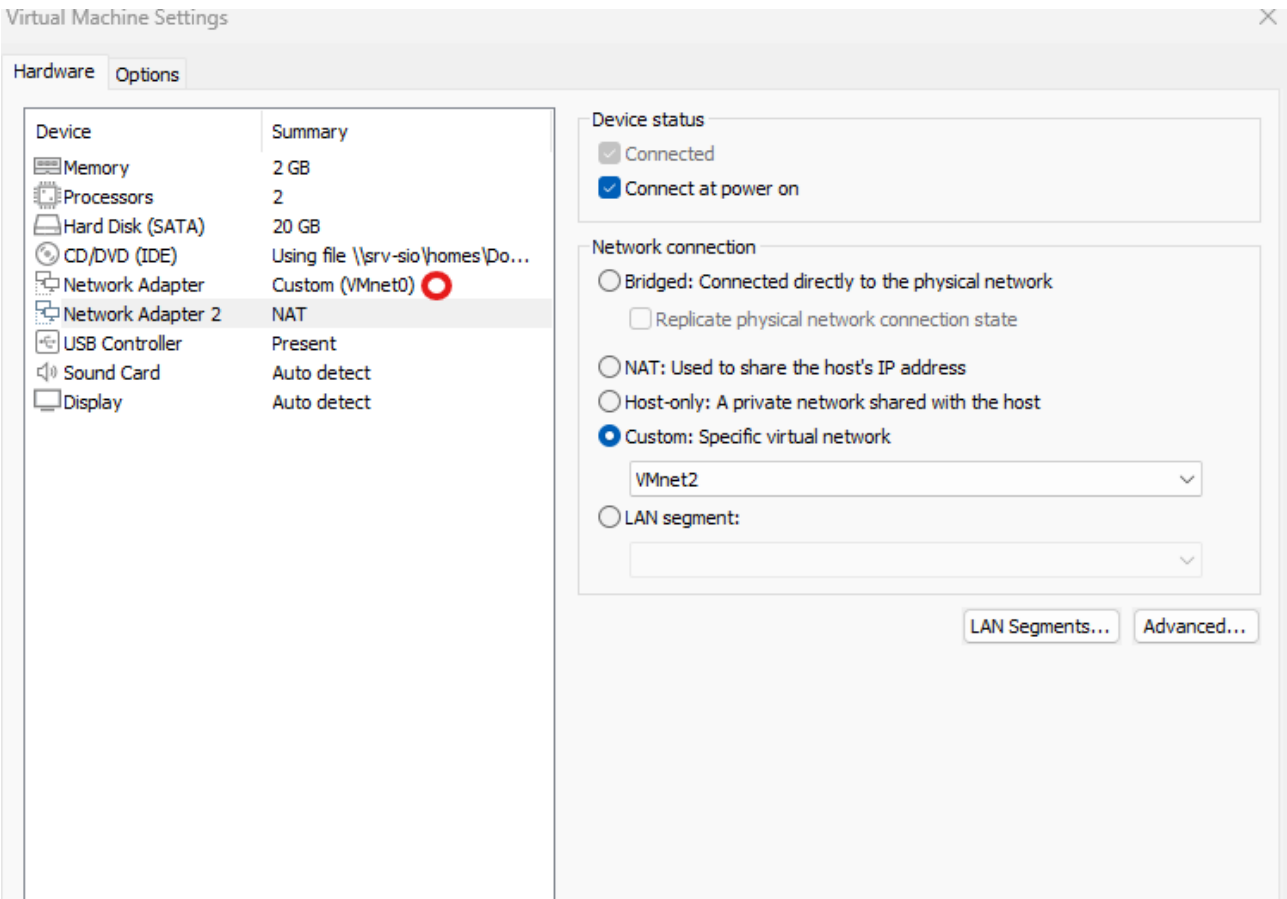

NOUVELLE :

```
GNU nano 7.2 /etc/network/interfaces
# This file describes the network interfaces available on your system
# and how to activate them. For more information, see interfaces(5).

source /etc/network/interfaces.d/*

# The loopback network interface
auto lo
iface lo inet loopback

# The primary network interface
allow-hotplug ens33
iface ens33 inet static
address 192.168.110.3
gateway 192.168.110.254
```

à compléter

[illegible]

```

root@abbassi:~# apt-get update
Atteint :1 http://deb.debian.org/debian bookworm InRelease
Atteint :2 http://security.debian.org/debian-security bookworm-security InRelease
Réception de :3 http://deb.debian.org/debian bookworm-updates InRelease [55,4 kB]
55,4 ko réceptionnés en 0s (210 ko/s)
Lecture des listes de paquets... Fait
root@abbassi:~#

```

```

Lecture des listes de paquets... Fait
root@abbassi:~# apt-get install -y apache2
Lecture des listes de paquets... Fait
Construction de l'arbre des dépendances... Fait
Lecture des informations d'état... Fait
apache2 est déjà la version la plus récente (2.4.65-1~deb12u1).
apache2 passé en « installé manuellement ».
0 mis à jour, 0 nouvellement installés, 0 à enlever et 0 non mis à jour.
root@abbassi:~#

```

```
rtt min/avg/max/mdev = 5.080/5.435/5.702/0.261 ms
root@abbassi:~# ip address
1: lo: <LOOPBACK,UP,LOWER_UP> mtu 65536 qdisc noqueue state UNKNOWN group default qlen 1000
    link/loopback 00:00:00:00:00:00 brd 00:00:00:00:00:00
    inet 127.0.0.1/8 scope host lo
        valid_lft forever preferred_lft forever
    inet6 ::1/128 scope host noprefixroute
        valid_lft forever preferred_lft forever
2: ens33: <BROADCAST,MULTICAST,UP,LOWER_UP> mtu 1500 qdisc fq_codel state UP group default qlen 1000
    link/ether 00:0c:29:5d:a7:e9 brd ff:ff:ff:ff:ff:ff
    altname enp2s1
    inet 172.16.14.76/24 brd 172.16.14.255 scope global dynamic ens33
        valid_lft 406sec preferred_lft 486sec
    inet6 fe80::20c:29ff:fe5d:a7e9/64 scope link
        valid_lft forever preferred_lft forever
root@abbassi:~# _
```



Non sécurisé

http://172.16.14.76



Apache2 Debian Default Page

It works!

This is the default welcome page used to test the correct operation of the Apache2 server after installation on Debian systems. If you can read this page, it means that the Apache HTTP server installed at this site is working properly. You should **replace this file** (located at `/var/www/html/index.html`) before continuing to operate your HTTP server.

If you are a normal user of this web site and don't know what this page is about, this probably means that the site is currently unavailable due to maintenance. If the problem persists, please contact the site's administrator.

Configuration Overview

Debian's Apache2 default configuration is different from the upstream default configuration, and split into several files optimized for interaction with Debian tools. The configuration system is **fully documented in `/usr/share/doc/apache2/README.Debian.gz`**. Refer to this for the full documentation. Documentation for the web server itself can be found by accessing the **manual** if the `apache2-doc` package was installed on this server.

The configuration layout for an Apache2 web server installation on Debian systems is as follows:

```
/etc/apache2/
|-- apache2.conf
|   |-- ports.conf
|-- mods-enabled
|   |-- *.load
|   |-- *.conf
|-- conf-enabled
|   |-- *.conf
|-- sites-enabled
|   |-- *.conf
```

- `apache2.conf` is the main configuration file. It puts the pieces together by including all remaining configuration files when starting up the web server.
- `ports.conf` is always included from the main configuration file. It is used to determine the listening ports for incoming connections, and this file can be customized anytime.
- Configuration files in the `mods-enabled/`, `conf-enabled/` and `sites-enabled/` directories contain particular configuration snippets which manage modules, global configuration fragments, or virtual host configurations, respectively.
- They are activated by symlinking available configuration files from their respective `*-available/` counterparts. These should be managed by using our helpers `a2enmod`, `a2dismod`, `a2ensite`, `a2dissite`, and `a2enconf`, `a2disconf`. See their respective man pages for detailed information.
- The binary is called `apache2`. Due to the use of environment variables, in the default configuration, `apache2` needs to be started/stopped with `/etc/init.d/apache2` or `apache2ctl`. **Calling `/usr/bin/apache2` directly will not work** with the default configuration.

```
valid_1ft forever preferred_1ft forever
root@abbassi:~# apache2ctl -v
Server version: Apache/2.4.65 (Debian)
Server built: 2025-07-29T20:18:46
root@abbassi:~#
```

```
root@abbassi:~# a2enmod rewrite
Enabling module rewrite.
To activate the new configuration, you need to run:
    systemctl restart apache2
root@abbassi:~# systemctl restart apache2
root@abbassi:~# _
```

```
root@abbassi:~# aa2enmod deflate
-bash: aa2enmod: commande introuvable
root@abbassi:~# a2enmod deflate
Considering dependency filter for deflate:
Module filter already enabled
Module deflate already enabled
root@abbassi:~# a2enmod headers
Enabling module headers.
To activate the new configuration, you need to run:
    systemctl restart apache2
root@abbassi:~# systemctl restart
Too few arguments.
root@abbassi:~# systemctl restart networking
root@abbassi:~# a2enmod ssl
Considering dependency setenvif for ssl:
Module setenvif already enabled
Considering dependency mime for ssl:
Module mime already enabled
Considering dependency socache_shmcb for ssl:
Enabling module socache_shmcb.
Enabling module ssl.
See /usr/share/doc/apache2/README.Debian.gz on how to configure SSL and create self-signed certificates.
To activate the new configuration, you need to run:
    systemctl restart apache2
root@abbassi:~#
```

```
systemctl restart apache2
root@abbassi:~# systemctl restart apache2
root@abbassi:~# _
```

le fichier apache se trouve dans cette arborescence : /etc/apache2/apache2.conf

```
systemctl restart apache2
root@abbassi:~# systemctl restart apache2
root@abbassi:~# /etc/apache2/apache2.conf
-bash: /etc/apache2/apache2.conf: Permission non accordée
root@abbassi:~# /etc/apache2/apache2.conf
-bash: /etc/apache2/apache2.conf: Permission non accordée
root@abbassi:~# apt-get install -y apache2-utils
Lecture des listes de paquets... Fait
Construction de l'arbre des dépendances... Fait
Lecture des informations d'état... Fait
apache2-utils est déjà la version la plus récente (2.4.65-1~deb12u1).
apache2-utils passé en « installé manuellement ».
0 mis à jour, 0 nouvellement installés, 0 à enlever et 0 non mis à jour.
root@abbassi:~# _
```

apt-get install -y php


```

Creating config file /etc/php/8.2/mods-available/ftp.ini with new version
Creating config file /etc/php/8.2/mods-available/gettext.ini with new version
Creating config file /etc/php/8.2/mods-available/iconv.ini with new version
Creating config file /etc/php/8.2/mods-available/pdo.ini with new version
Creating config file /etc/php/8.2/mods-available/phar.ini with new version
Creating config file /etc/php/8.2/mods-available/posix.ini with new version
Creating config file /etc/php/8.2/mods-available/shmop.ini with new version
Creating config file /etc/php/8.2/mods-available/sockets.ini with new version
Creating config file /etc/php/8.2/mods-available/sysvmsg.ini with new version
Creating config file /etc/php/8.2/mods-available/sysvsem.ini with new version
Creating config file /etc/php/8.2/mods-available/sysvshm.ini with new version
Creating config file /etc/php/8.2/mods-available/tokenizer.ini with new version
Paramétrage de php8.2-opcache (8.2.29-1~deb12u1) ...

Creating config file /etc/php/8.2/mods-available/opcache.ini with new version
Paramétrage de php8.2-readline (8.2.29-1~deb12u1) ...

Creating config file /etc/php/8.2/mods-available/readline.ini with new version
Paramétrage de php8.2-cli (8.2.29-1~deb12u1) ...
update-alternatives: utilisation de « /usr/bin/php8.2 » pour fournir « /usr/bin/php » (php) en mode automatique
update-alternatives: utilisation de « /usr/bin/phar8.2 » pour fournir « /usr/bin/phar » (phar) en mode automatique
update-alternatives: utilisation de « /usr/bin/phar.phar8.2 » pour fournir « /usr/bin/phar.phar » (phar.phar) en mode automatique

Creating config file /etc/php/8.2/cli/php.ini with new version
Paramétrage de libapache2-mod-php8.2 (8.2.29-1~deb12u1) ...

Creating config file /etc/php/8.2/apache2/php.ini with new version
Module mpm_event disabled.
Enabling module mpm_prefork.
apache2_switch_mpm Switch to prefork
apache2_invoke: Enable module php8.2
Paramétrage de php8.2 (8.2.29-1~deb12u1) ...
Paramétrage de php (2:8.2+93) ...
Traitement des actions différées (« triggers ») pour man-db (2.11.2-2) ...
Traitement des actions différées (« triggers ») pour libc-bin (2.36-9+deb12u13) ...
Traitement des actions différées (« triggers ») pour php8.2-cli (8.2.29-1~deb12u1) ...
Traitement des actions différées (« triggers ») pour libapache2-mod-php8.2 (8.2.29-1~deb12u1) ...
root@abbassi:~#

```

```

sudo apt-get install -y php-pdo php-mysql php-zip php-gd php-mbstring php-curl php-xml php-pear
php-bcmath

```

```

Creating config file /etc/php/8.2/mods-available/xsl.ini with new version
Paramétrage de php8.2-gd (8.2.29-1~deb12u1) ...

Creating config file /etc/php/8.2/mods-available/gd.ini with new version
Paramétrage de php-gd (2:8.2+93) ...
Paramétrage de libonig5:amd64 (6.9.8-1) ...
Paramétrage de php-xml (2:8.2+93) ...
Paramétrage de php-curl (2:8.2+93) ...
Paramétrage de php-pear (1:1.10.13+submodules+notgz+2022032202-2) ...
Paramétrage de php-mysql (2:8.2+93) ...
Paramétrage de php-bcmath (2:8.2+93) ...
Paramétrage de php8.2-zip (8.2.29-1~deb12u1) ...

Creating config file /etc/php/8.2/mods-available/zip.ini with new version
Paramétrage de php8.2-mbstring (8.2.29-1~deb12u1) ...

Creating config file /etc/php/8.2/mods-available/mbstring.ini with new version
Paramétrage de php-mbstring (2:8.2+93) ...
Paramétrage de php-zip (2:8.2+93) ...
Traitement des actions différées (« triggers ») pour man-db (2.11.2-2) ...
Traitement des actions différées (« triggers ») pour libapache2-mod-php8.2 (8.2.29-1~deb12u1) ...
Traitement des actions différées (« triggers ») pour libc-bin (2.36-9+deb12u13) ...
Traitement des actions différées (« triggers ») pour php8.2-cli (8.2.29-1~deb12u1) ...
root@abbassi:~# _

```

```

Traitement des actions différées (« triggers ») pour php8.2-cli (8.2.29-1
root@abbassi:~# php -v
PHP 8.2.29 (cli) (built: Jul  3 2025 16:16:05) (NTS)
Copyright (c) The PHP Group
Zend Engine v4.2.29, Copyright (c) Zend Technologies
    with Zend OPcache v8.2.29, Copyright (c), by Zend Technologies
root@abbassi:~#

```

2

GNU nano 7.2

```

<?php
phpinfo();
?>_

```



Non sécurisé

http://172.16.14.76/phpinfo.php

PHP Version 8.2.29



System	Linux abbassi 6.1.0-39-amd64 #1 SMP PREEMPT_DYNAMIC Debian 6.1.148-1 (2025-08-26) x86_64
Build Date	Jul 3 2025 16:16:05
Build System	Linux
Server API	Apache 2.0 Handler
Virtual Directory Support	disabled
Configuration File (php.ini) Path	/etc/php/8.2/apache2
Loaded Configuration File	/etc/php/8.2/apache2/php.ini
Scan this dir for additional .ini files	/etc/php/8.2/apache2/conf.d
Additional .ini files parsed	/etc/php/8.2/apache2/conf.d/10-opcache.ini, /etc/php/8.2/apache2/conf.d/10-pdo.ini, /etc/php/8.2/apache2/conf.d/20-calendar.ini, /etc/php/8.2/apache2/conf.d/20-ctype.ini, /etc/php/8.2/apache2/conf.d/20-exif.ini, /etc/php/8.2/apache2/conf.d/20-fileinfo.ini, /etc/php/8.2/apache2/conf.d/20-ftp.ini, /etc/php/8.2/apache2/conf.d/20-gettext.ini, /etc/php/8.2/apache2/conf.d/20-iconv.ini, /etc/php/8.2/apache2/conf.d/20-phar.ini, /etc/php/8.2/apache2/conf.d/20-posix.ini, /etc/php/8.2/apache2/conf.d/20-readline.ini, /etc/php/8.2/apache2/conf.d/20-shmop.ini, /etc/php/8.2/apache2/conf.d/20-sockets.ini, /etc/php/8.2/apache2/conf.d/20-sysmsg.ini, /etc/php/8.2/apache2/conf.d/20-sysvsem.ini, /etc/php/8.2/apache2/conf.d/20-sysvshm.ini, /etc/php/8.2/apache2/conf.d/20-tokenizer.ini
PHP API	20220829
PHP Extension	20220829
Zend Extension	420220829
Zend Extension Build	API420220829,NTS
PHP Extension Build	API20220829,NTS
Debug Build	no
Thread Safety	disabled
Zend Signal Handling	enabled
Zend Memory Manager	enabled
Zend Multibyte Support	disabled
Zend Max Execution Timers	disabled
IPv6 Support	enabled
DTrace Support	available, disabled
Registered PHP Streams	https, ftps, compress.zlib, php, file, glob, data, http, ftp, phar
Registered Stream Socket Transports	tcp, udp, unix, udg, ssl, tls, tlsv1.0, tlsv1.1, tlsv1.2, tlsv1.3
Registered Stream Filters	zlib.*, string.rot13, string.toupper, string.tolower, convert.*, consumed, dechunk, convert.iconv.*

This program makes use of the Zend Scripting Language Engine:
 Zend Engine v4.2.29, Copyright (c) Zend Technologies
 with Zend OPcache v8.2.29, Copyright (c), by Zend Technologies

zendengine

```
apt-get install -y mariadb-server
```

```

Paramétrage de libncurses6:amd64 (6.4-4) ...
Paramétrage de libio-html-perl (1.004-3) ...
Paramétrage de libmariadb3:amd64 (1:10.11.14-0+deb12u2) ...
Paramétrage de libtimedate-perl (2.3300-2) ...
Paramétrage de libregexp-ipv6-perl (0.03-3) ...
Paramétrage de pv (1.6.20-1) ...
Paramétrage de libfcgi-perl (0.82+ds-2) ...
Paramétrage de libterm-readkey-perl (2.38-2+b1) ...
Paramétrage de liburing2:amd64 (2.3-3) ...
Paramétrage de liburi-perl (5.17-1) ...
Paramétrage de libdbi-perl:amd64 (1.643-4) ...
Paramétrage de rsync (3.2.7-1+deb12u2) ...
rsync.service is a disabled or a static unit, not starting it.
Paramétrage de libhttp-date-perl (6.05-2) ...
Paramétrage de mariadb-client-core (1:10.11.14-0+deb12u2) ...
Paramétrage de libdbd-mariadb-perl (1.22-1+b1) ...
Paramétrage de libhtml-parser-perl:amd64 (3.81-1) ...
Paramétrage de mariadb-server-core (1:10.11.14-0+deb12u2) ...
Paramétrage de libhttp-message-perl (6.44-1) ...
Paramétrage de mariadb-client (1:10.11.14-0+deb12u2) ...
Paramétrage de libcgi-pm-perl (4.55-1) ...
Paramétrage de libhtml-template-perl (2.97-2) ...
Paramétrage de mariadb-server (1:10.11.14-0+deb12u2) ...
Created symlink /etc/systemd/system/multi-user.target.wants/mariadb.service → /lib/systemd/system/mariadb.service.
Paramétrage de mariadb-plugin-provider-bzip2 (1:10.11.14-0+deb12u2) ...
Paramétrage de mariadb-plugin-provider-lzma (1:10.11.14-0+deb12u2) ...
Paramétrage de mariadb-plugin-provider-lzo (1:10.11.14-0+deb12u2) ...
Paramétrage de mariadb-plugin-provider-lz4 (1:10.11.14-0+deb12u2) ...
Paramétrage de libcgi-fast-perl (1:2.15-1) ...
Paramétrage de mariadb-plugin-provider-snappy (1:10.11.14-0+deb12u2) ...
Traitement des actions différées (« triggers ») pour man-db (2.11.2-2) ...
Traitement des actions différées (« triggers ») pour libc-bin (2.36-9+deb12u13) ...
Traitement des actions différées (« triggers ») pour mariadb-server (1:10.11.14-0+deb12u2) ...
root@abbassi:~# _

```

```

Traitement des actions différées (« triggers ») pour mariadb-server (1:10
root@abbassi:~# mariadb-secure-installation

```

NOTE: RUNNING ALL PARTS OF THIS SCRIPT IS RECOMMENDED FOR ALL MariaDB
SERVERS IN PRODUCTION USE! PLEASE READ EACH STEP CAREFULLY!

In order to log into MariaDB to secure it, we'll need the current
password for the root user. If you've just installed MariaDB, and
haven't set the root password yet, you should just press enter here.

Enter current password for root (enter for none):

```
Enter current password for root (enter for none):  
OK, successfully used password, moving on...
```

Setting the root password or using the unix_socket ensures that nobody can log into the MariaDB root user without the proper authorisation.

You already have your root account protected, so you can safely answer 'n'.

```
Switch to unix_socket authentication [Y/n] n  
... skipping.
```

You already have your root account protected, so you can safely answer 'n'.

```
Change the root password? [Y/n] y  
New password:  
Re-enter new password:  
Password updated successfully!  
Reloading privilege tables..  
... Success!
```

By default, a MariaDB installation has an anonymous user, allowing anyone to log into MariaDB without having to have a user account created for them. This is intended only for testing, and to make the installation go a bit smoother. You should remove them before moving into a production environment.

```
Remove anonymous users? [Y/n] y  
... Success!
```

Normally, root should only be allowed to connect from 'localhost'. This ensures that someone cannot guess at the root password from the network.

```
Disallow root login remotely? [Y/n] y  
... Success!
```

By default, MariaDB comes with a database named 'test' that anyone can access. This is also intended only for testing, and should be removed before moving into a production environment.

```
Remove test database and access to it? [Y/n] y  
- Dropping test database...  
... Success!  
- Removing privileges on test database...  
... Success!
```

Reloading the privilege tables will ensure that all changes made so far will take effect immediately.

```
Reload privilege tables now? [Y/n] y  
... Success!
```

Cleaning up...

All done! If you've completed all of the above steps, your MariaDB installation should now be secure.

Thanks for using MariaDB!
root@abbassi:~#

```
Thanks for using MariaDB!
root@abbassi:~# mariadb -V
mariadb Ver 15.1.10 Source on 10.11.14-MariaDB for debian-linux-gnu (x86_64) using EditLine wrapper
root@abbassi:~# apt policy mariadb-server
mariadb-server:
  Installé : 1:10.11.14-0+deb12u2
  Candidat : 1:10.11.14-0+deb12u2
  Table de version :
 *** 1:10.11.14-0+deb12u2 500
      500 http://deb.debian.org/debian bookworm/main amd64 Packages
      100 /var/lib/dpkg/status
root@abbassi:~#
```

```
100 /var/lib/dpkg/status
root@abbassi:~# mariadb -u root -p
Enter password.
Welcome to the MariaDB monitor.  Commands end with ; or \g.
Your MariaDB connection id is 39
Server version: 10.11.14-MariaDB-0+deb12u2 Debian 12

Copyright (c) 2000, 2018, Oracle, MariaDB Corporation Ab and others.

Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]>
```

```
Type 'help;' or '\h' for help. Type '\c' to clear the current input statement.

MariaDB [(none)]> show databases;
+-----+
| Database |
+-----+
| information_schema |
| mysql |
| performance_schema |
| sys |
+-----+
4 rows in set (0,001 sec)

MariaDB [(none)]>
```

```
MariaDB [(none)]> exit
Bye
root@abbassi:~#
```

```
Bye
root@abbassi:~# systemctl restart mariadb
root@abbassi:~#
```

KEYWEB

```
root@abbassi:~# systemctl restart mariadb
root@abbassi:~# apt update
Atteint :1 http://deb.debian.org/debian bookworm InRelease
Atteint :2 http://security.debian.org/debian-security bookworm-security InRelease
Atteint :3 http://deb.debian.org/debian bookworm-updates InRelease
Lecture des listes de paquets... Fait
Construction de l'arbre des dépendances... Fait
Lecture des informations d'état... Fait
Tous les paquets sont à jour.
root@abbassi:~#
```

```

tous les paquets sont à jour.
root@abbassi:~# apt install apt-transport-https ca-certificates curl software-properties-common gnupg2 unzip git
Lecture des listes de paquets... Fait
Construction de l'arbre des dépendances... Fait
Lecture des informations d'état... Fait
ca-certificates est déjà la version la plus récente (20230311+deb12u1).
Les paquets supplémentaires suivants seront installés :
  appstream dirmngr gir1.2-glib-2.0 gir1.2-packagekitglib-1.0 git-man gnupg gnupg-l10n gnupg-utils gpg gpg-agent gpg-wks-cl
  libappstream4 libassuan0 libduktape207 libdw1 liberror-perl libgirepository-1.0-1 libglib2.0-bin libgstreamer1.0-0 libksba
  libpolkit-agent-1-0 libpolkit-gobject-1-0 libstemmer0d libunwind8 libxmlb2 libyaml-0-2 packagekit packagekit-tools patch p
  python3-blinker python3-cffi-backend python3-cryptography python3-dbus python3-distro python3-gi python3-jwt python3-lazr
  python3-oauthlib python3-software-properties python3-wadllib sgml-base xml-core
Paquets suggérés :
  apt-config-icons pinentry-gnome3 tor git-daemon-run | git-daemon-sysvinit git-doc git-email git-gui gitk gitweb git-cvs g
  xloadimage sddm gstreamer1.0-tools ed diffutils-doc pinentry-doc polkitd-pkla python-blinker-doc python-cryptography-0
  python-dbus-doc python3-crypto sgml-base-doc zip debhelper
Les NOUVEAUX paquets suivants seront installés :
  apt-transport-https curl dirmngr gir1.2-glib-2.0 gir1.2-packagekitglib-1.0 git git-man gnupg gnupg-l10n gnupg-u
  gpg-wks-client gpg-wks-server gpgconf gpgsm libappstream4 libassuan0 libduktape207 libdw1 liberror-perl libgirepository-1
  libgstreamer1.0-0 libksba8 libnpt0 libpackagekit-glib2-18 libpolkit-agent-1-0 libpolkit-gobject-1-0 libstemmer0d libunwi
  packagekit-tools patch pinentry-curses polkitd python3-blinker python3-cffi-backend python3-cryptography python3-dbus pyt
  python3-lazr.restfulclient python3-lazr.uri python3-oauthlib python3-software-properties python3-wadllib sgml-base softwa
  0 mis à jour, 56 nouvellement installés, 0 à enlever et 0 non mis à jour.
Il est nécessaire de prendre 23,5 Mo dans les archives.
Après cette opération, 88,5 Mo d'espace disque supplémentaires seront utilisés.
Souhaitez-vous continuer ? [O/n]

```

```

Paramétrage de software-properties-common (0.99.80-4.1+deb12u1) ...
Traitement des actions différées (« triggers ») pour dbus (1.14.10-1) ...
root@abbassi:~# install -m 0755 -d /etc/apt/keyrings

```

curl -

<https://download.docker.com/linux/debian/gpg> -o /etc/apt/keyrings/docker.asc

fsSL

chmod a+r /etc/apt/keyrings/docker.asc

```
root@abbassi:~# chmod a+r /etc/apt/keyrings/docker.asc
root@abbassi:~# _
```

```
echo "deb [arch=$(dpkg --print-architecture) signed-by=/etc/apt/keyrings/docker.asc]
https://download.docker.com/linux/debian ¥ $(. /etc/os-release && echo "$VERSION_CODENAME")
stable" | tee /etc/apt/sources.list.d/docker.list > /dev/null
```

```
ase && echo "$VERSION_CODENAME") stable" | tee /etc/apt/sources.list.d/docker.list > /dev/null
tee: /etc/apt/sources.list.d/: est un dossier
root@abbassi:~# echo "deb [arch=$(dpkg --print-architecture) signed-by=/etc/apt/keyrings/docker.asc] https://download.docker.com/linux/debian ¥ $(. /etc/os-rele
ase && echo "$VERSION_CODENAME") stable" | tee /etc/apt/sources.list.d/docker.list > /dev/null
root@abbassi:~# _
```

apt update

```
curl: (6) Could not resolve host: chmod
curl: (3) URL using bad/illegal format or missing URL
curl: (3) URL using bad/illegal format or missing URL
root@abbassi:~# curl -fsSL https://download.docker.com/linux/debian/gpg -o /etc/apt/keyrings/docker
curl: (3) URL using bad/illegal format or missing URL
curl: (3) URL using bad/illegal format or missing URL
root@abbassi:~# curl -fsSL https://download.docker.com/linux/debian/gpg -o /etc/apt/keyrings/docker
root@abbassi:~# chmod a+r /etc/apt/keyrings/docker.asc
chmod: impossible d'accéder à '/etc/apt/keyrings/docker.asc': Aucun fichier ou dossier de ce type
root@abbassi:~# chmod a+r /etc/apt/keyrings/docker.asc
root@abbassi:~# echo "deb [arch=$(dpkg --print-architecture) signed-by=/etc/apt/keyrings/docker.asc
ase && echo "$VERSION_CODENAME") stable" | tee /etc/apt/sources.list.d/ docker.list > /dev/null
tee: /etc/apt/sources.list.d/: est un dossier
root@abbassi:~# echo "deb [arch=$(dpkg --print-architecture) signed-by=/etc/apt/keyrings/docker.asc
ase && echo "$VERSION_CODENAME") stable" | tee /etc/apt/sources.list.d/docker.list > /dev/null
root@abbassi:~# apt update
Atteint :1 http://deb.debian.org/debian bookworm InRelease
Réception de :2 http://security.debian.org/debian-security bookworm-security InRelease [48,0 kB]
Atteint :3 http://deb.debian.org/debian bookworm-updates InRelease
Réception de :4 http://deb.debian.org/debian bookworm/main amd64 DEP-11 Metadata [4 492 kB]
Ign :5 https://download.docker.com/linux/debian \ InRelease
Réception de :6 http://deb.debian.org/debian bookworm/non-free-firmware amd64 DEP-11 Metadata [15,5
Err :7 https://download.docker.com/linux/debian \ Release
  404 Not Found [IP : 52.222.169.115 443]
Lecture des listes de paquets... Fait
E: Le dépôt https://download.docker.com/linux/debian \ Release n'a pas de fichier Release.
N: Les mises à jour depuis un tel dépôt ne peuvent s'effectuer de manière sécurisée, et sont donc d
N: Voir les pages de manuel d'apt-secure(8) pour la création des dépôts et les détails de configura
root@abbassi:~#
```

```
E: Impossible de trouver le paquet docker-buildx-plugin
E: Impossible de trouver le paquet docker-compose-plugin
root@abbassi:~# cat /etc/apt/sources.list.d/docker.list
deb [arch=amd64 signed-by=/etc/apt/keyrings/docker.asc] https://download.docker.com/linux/debian \ bookworm stable
root@abbassi:~#
```



```

E: Impossible de trouver le paquet docker-compose-plugin
root@abbassi:~# cat /etc/apt/sources.list.d/docker.list
deb [arch=amd64] https://download.docker.com/linux/debian \ bookworm stable
root@abbassi:~# ls -l /etc/apt/keyrings/docker.asc
-rw-r--r-- 1 root:root 3897 6 Sept. 14:32 /etc/apt/keyrings/docker.asc
root@abbassi:~# apt update
Atteint :1 http://deb.debian.org/debian bookworm InRelease
Atteint :2 http://deb.debian.org/debian bookworm-updates InRelease
Réception de :3 http://security.debian.org/debian-security bookworm-security InRelease [48,0 kB]
Ign :4 https://download.docker.com/linux/debian \ InRelease
Err :5 https://download.docker.com/linux/debian \ Release
404 Not Found [IP : 52.222.169.49 443]
Lecture des listes de paquets... Fait
E: Le dépôt https://download.docker.com/linux/debian \ Release n'a pas de fichier Release.
N: Les mises à jour depuis un tel dépôt ne peuvent s'effectuer de manière sécurisée, et sont donc désactivées par défaut.
N: Voir les pages de manuel d'apt-secure(8) pour la création des dépôts et les détails de configuration d'un utilisateur.
root@abbassi:~# _

```

docker est bien installé :

```

root@abbassi:~# docker --version
Docker version 28.4.0, build d8eb465
root@abbassi:~#

```

```

root@abbassi:~# docker --version
Docker version 28.4.0, build d8eb465
root@abbassi:~# docker run --name keeweb -d -p 80:80 -p 443:443 antelle/keeweb
Unable to find image 'antelle/keeweb:latest' locally
latest: Pulling from antelle/keeweb
b4d181a07f80: Pull complete
e929f62bc938: Pull complete
ca83f0516c99: Pull complete
6af693de7b22: Pull complete
c8fe6ce83489: Pull complete
7aa1fe8b4a84: Pull complete
13796f1f5b9a: Pull complete
e2e69cdf226: Pull complete
e873f189aca3: Pull complete
71e0fe3f4938: Pull complete
8bb80103932b: Pull complete
cab1eb7066d4: Pull complete
97fcacfa7f27: Pull complete
c8bec6cfb9e6: Pull complete
4077188db971: Pull complete
Digest: sha256:8ff5e10baa2ca50967964bf26af41461da79ef62a481094a00f75726623bcb36
Status: Downloaded newer image for antelle/keeweb:latest
26e1026c8d39d27fab868bd449272a1c5ce354d1c70e24380e8bc6eb3f89fd49
docker: Error response from daemon: failed to set up container networking: driver failed programming external connectivity on endpoint keeweb (c2343f71ac394e5f8cb777f83336379674fd0b4144379df): failed to bind host port for 0.0.0.0:80:172.17.0.2:80/tcp: address already in use

Run 'docker run --help' for more information
root@abbassi:~# _

```

le port est déjà utilisé

Crée le dossier et les fichiers :

`mkdir -p ~/lamp-docker`

`cd ~/lamp-docker`

`pwd`

`nano docker-compose.yml`

```

root@abbassi:~/lamp-docker#
root@abbassi:~/lamp-docker#
root@abbassi:~/lamp-docker# nano docker-compose.yml
root@abbassi:~/lamp-docker#

```

abbassi@abbassi: ~

GNU nano 7.2

docker-compose.yml

```
version: '3.8'

services:
  web:
    image: php:7.4-apache
    container_name: lamp-apache
    ports:
      - "80:80"
    volumes:
      - ./www:/var/www/html
    depends_on:
      - db
    restart: always

  db:
    image: mariadb:10.5
    container_name: lamp-mariadb
    restart: always
    environment:
      MYSQL_ROOT_PASSWORD: root
      MYSQL_DATABASE: lamp_db
      MYSQL_USER: lamp_user
      MYSQL_PASSWORD: lamp_pass
    volumes:
      - db_data:/var/lib/mysql

  phpmyadmin:
    image: phpmyadmin/phpmyadmin
    container_name: lamp-phpmyadmin
    ports:
      - "8080:80"
    environment:
      PMA_HOST: db
      MYSQL_ROOT_PASSWORD: root
    restart: always

volumes:
  db_data:
```

```

root@abbassi:~/lamp-docker# mkdir www
root@abbassi:~/lamp-docker# echo "<?php phpinfo(); ?>" > www/index.php
root@abbassi:~/lamp-docker#

```

```

root@abbassi:~/lamp-docker# echo "<?php phpinfo(); ?>" > www/index.php
root@abbassi:~/lamp-docker# docker compose up -d
WARN[0000] /root/lamp-docker/docker-compose.yml: the attribute `version` is obsolete, it will be ignored, please remove it to avoid potential confusion
+J Running 44/44
db Pulled 15.6s
  13b7e930469f Pull complete 7.3s
  89597121fd7d Pull complete 7.4s
  7cc5d0769ced Pull complete 8.8s
  27866cd1d4de Pull complete 8.9s
  8400cc70c12c Pull complete 8.9s
  a0dca9ad4602 Pull complete 13.9s
  42d16e8a68bf Pull complete 13.9s
  25cb3cc8cdf5 Pull complete 14.0s
phpmyadmin Pulled 18.0s
  af302e5c37e9 Pull complete 3.3s
  71a74ed03dab Pull complete 3.3s
  3ef8d0774deb Pull complete 11.9s
  11d17388a3b8 Pull complete 12.3s
  0814cbbf72a2 Pull complete 13.5s
  3a28acedadf8 Pull complete 13.5s
  2ab7ef40feaf Pull complete 13.5s
  88324ccb20a1 Pull complete 13.9s
  ad5f2fca9132 Pull complete 14.0s
  9df2a6231627 Pull complete 14.6s
  b3207e60ff9a Pull complete 14.6s
  dl8c9f420b35 Pull complete 14.7s
  673faad72ba8 Pull complete 14.7s
  4f4fb700ef54 Pull complete 14.7s
  a5c74661bb9e Pull complete 15.0s
  1cf5cbfd971f Pull complete 15.0s
  e92d8472eb26 Pull complete 16.7s
  7755344c0dda Pull complete 16.7s
  b0f9dd503cef Pull complete 16.7s
  2ee0fe041682 Pull complete 16.7s
web Pulled 18.6s
  a603fa5e3b41 Pull complete 9.9s
  c428f1a49423 Pull complete 9.9s
  156740b07ef8 Pull complete 15.2s
  fb5a4c8af82f Pull complete 15.3s
  25f85b498fd5 Pull complete 16.4s
  9b233e420ac7 Pull complete 16.4s
  fe42347c4ecf Pull complete 16.4s
  dl4eb2ed1e17 Pull complete 16.5s
  66d98f73acb6 Pull complete 16.5s
  d2c43c5efbc8 Pull complete 17.0s
  ab590b48ea47 Pull complete 17.0s
  80692ae2d067 Pull complete 17.0s
  05e465aaa99a Pull complete 17.0s
+J Running 4/5
  Network lamp-docker_default Created 0.0s
  Volume "lamp-docker_db_data" Created 0.0s
  Container lamp-phpmyadmin Started 0.4s
  Container lamp-mariadb Started 0.4s
  Container lamp-apache Starting 0.6s
Error response from daemon: failed to set up container networking: driver failed programming external connectivity on endpoint lamp-apache (1303d80601e05087309d500e23cedecabe239a173c989759c819fc2857cebaf3): failed to bind host port to 0.0.0.0:80:172.18.0.4:80/tcp: address already in use
root@abbassi:~/lamp-docker#

```

```
valid init forever preferred init forever
root@abbassi:~/lamp-docker# systemctl stop apache2
root@abbassi:~/lamp-docker# systemctl disable apache2
Synchronizing state of apache2.service with SysV service script with /lib/systemd/systemd-sysv-install.
Executing: /lib/systemd/systemd-sysv-install disable apache2
Removed "/etc/systemd/system/multi-user.target.wants/apache2.service".
root@abbassi:~/lamp-docker#
```

```
root@abbassi:~/lamp-docker# docker compose up -d
WARN[0000] /root/lamp-docker/docker-compose.yml: the attribute 'version' is obsolete, it will be ignored, please
remove it to avoid potential confusion
[+] Running 3/3
  ✓ Container lamp-phpmyadmin Running
  ✓ Container lamp-mariadb Running
  ✓ Container lamp-apache Started
root@abbassi:~/lamp-docker#
```

Non sécurisé http://172.16.14.76:8080



phpMyAdmin

Bienvenue dans phpMyAdmin

Langue (Language)


Français - French

Connexion

Utilisateur :

Mot de passe :

Connexion

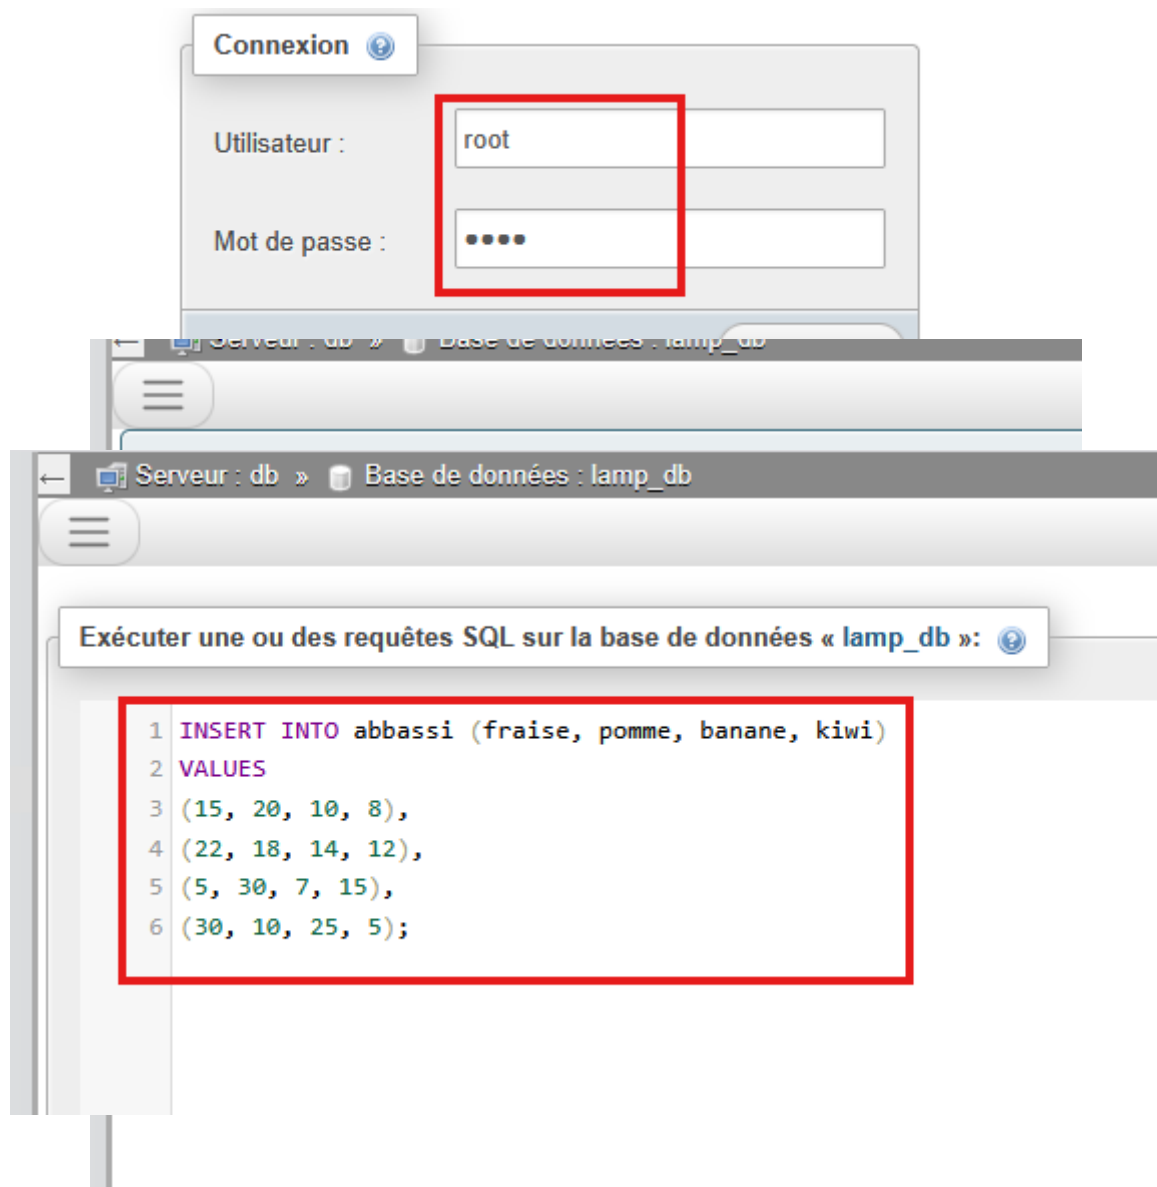

<<

Délimiteur ;

- ☐ Afficher à nouveau la requête après exécution
- ☐ Conserver la boîte de requêtes
- ☐ ROLLBACK à la fin
- ☒ Activer la vérification des clés étrangères

Exécuter

apt install -y git nodejs npm

```
mysql
performance
root@abbassi:~# cd /var/www/html/keewweb
Clonage dans '/var/www/html/keewweb'...
Username for 'https://github.com':
Password for 'https://github.com':
remote: Repository not found.
fatal : Échec d'authentification pour 'https://github.com/keewweb/keewweb.git/'
-bash: cd: /var/www/html/keewweb: Aucun fichier ou dossier de ce type
root@abbassi:~# cd /var/www/html/keewweb
-bash: cd: /var/www/html/keewweb: Aucun fichier ou dossier de ce type
root@abbassi:~# git clone https://github.com/keewweb/keewweb.git /var/www/html/keewweb
Clonage dans '/var/www/html/keewweb'...
Username for 'https://github.com': abbassi
Password for 'https://abbassi@github.com':
```

```
abbassi@abbassi: ~  
Atteint :2 http://deb.debian.org/debian bookworm InRelease  
Atteint :3 http://deb.debian.org/debian bookworm-updates InRelease  
Atteint :4 https://download.docker.com/linux/debian bookworm InRelease  
Lecture des listes de paquets... Fait  
Construction de l'arbre des dépendances... Fait  
Lecture des informations d'état... Fait  
Tous les paquets sont à jour.  
root@abbassi:/var/www/html# apt install -y wget unzip  
Lecture des listes de paquets... Fait  
Construction de l'arbre des dépendances... Fait  
Lecture des informations d'état... Fait  
wget est déjà la version la plus récente (1.21.3-1+deb12u1).  
unzip est déjà la version la plus récente (6.0-28).  
0 mis à jour, 0 nouvellement installés, 0 à enlever et 0 non mis à jour.  
root@abbassi:/var/www/html# wget https://github.com/keeweb/keeweb/archive/refs  
/heads/master.zip -O /tmp/keeweb.zip  
--2025-09-15 11:07:10-- https://github.com/keeweb/keeweb/archive/refs/heads/m  
aster.zip  
Résolution de github.com (github.com)... 140.82.121.3  
Connexion à github.com (github.com)|140.82.121.3|:443... connecté.  
requête HTTP transmise, en attente de la réponse... 404 Not Found  
2025-09-15 11:07:11 erreur 404 : Not Found.  
  
root@abbassi:/var/www/html#
```

```
root@abbassi:/var/www/html# mkdir -p /var/www/html/keeweb  
root@abbassi:/var/www/html#
```

```

root@abbassi:~#
root@abbassi:~# apt update && apt upgrade -y
Atteint :1 http://deb.debian.org/debian bookworm InRelease
Atteint :2 http://security.debian.org/debian-security bookworm-security InRelease
Atteint :3 http://deb.debian.org/debian bookworm-updates InRelease
Atteint :4 https://download.docker.com/linux/debian bookworm InRelease
Lecture des listes de paquets... Fait
Construction de l'arbre des dépendances... Fait
Lecture des informations d'état... Fait
Tous les paquets sont à jour.
Lecture des listes de paquets... Fait
Construction de l'arbre des dépendances... Fait
Lecture des informations d'état... Fait
Calcul de la mise à jour... Fait
0 mis à jour, 0 nouvellement installés, 0 à enlever et 0 non mis à jour.
root@abbassi:~#

```

```

root@abbassi:~#
root@abbassi:~# mkdir -p ~/keeweb
root@abbassi:~#

```

```

See 'docker run --help' for more information
root@abbassi:~# docker run -d --name keeweb \
> -p 8082:80 \
> -v ~/keeweb:/config \
> ghcr.io/keeweb/keeweb:latest
Unable to find image 'ghcr.io/keeweb/keeweb:latest' locally
latest: Pulling from keeweb/keeweb
1846ea1232ed: Pull complete
55662c8bb7f5: Pull complete
8724036a4537: Pull complete
d70c0a6012cc: Pull complete
c0b2bf339015: Pull complete
279e21feb666: Pull complete
804f5feb4fe7: Pull complete
498abd33ab13: Pull complete
b941d19d6223: Pull complete
Digest: sha256:63235ac2656ab9b88f20be19fe721318a63c5015415faf4d3156cf830341b529
Status: Downloaded newer image for ghcr.io/keeweb/keeweb:latest
docker: Error response from daemon: Conflict. The container name "/keeweb" is already in use by container "26e1026c8d39d27fab868bd449272alc5ce354dlc70e24380e8bc6eb3f89fd49". You have to remove (or rename) that container to be able to reuse that name.

Run 'docker run --help' for more information
root@abbassi:~#

```

```

Run 'docker run --help' for more information
root@abbassi:~# docker ps

```

CONTAINER ID	IMAGE	NAMES	COMMAND	CREATED	STATUS	PORTS
609096a8552d	php:7.4-apache		"docker-php-entrypoi..."	5 hours ago	Up 40 minutes	0.0.0.0:80->80/tcp, [::
j1:80->80/tcp	lamp-apache					
35112a9bf9ef	mariadb:10.5		"docker-entrypoint.s..."	5 hours ago	Up 40 minutes	3306/tcp
	lamp-mariadb					
a66c30da8709	phpmyadmin/phpmyadmin		"/docker-entrypoint..."	5 hours ago	Up 40 minutes	0.0.0.0:8080->80/tcp, [
::j1:8080->80/tcp	lamp-phpmyadmin					

```

root@abbassi:~#

```




```
docker run -d --name keeweb \
-p 8082:80 \
ghcr.io/keeweb/keeweb:latest
```

```
curl http://localhost:8082
```

[illegible]


sudo docker run hello-world

COMPTE RENDU CONCRET :

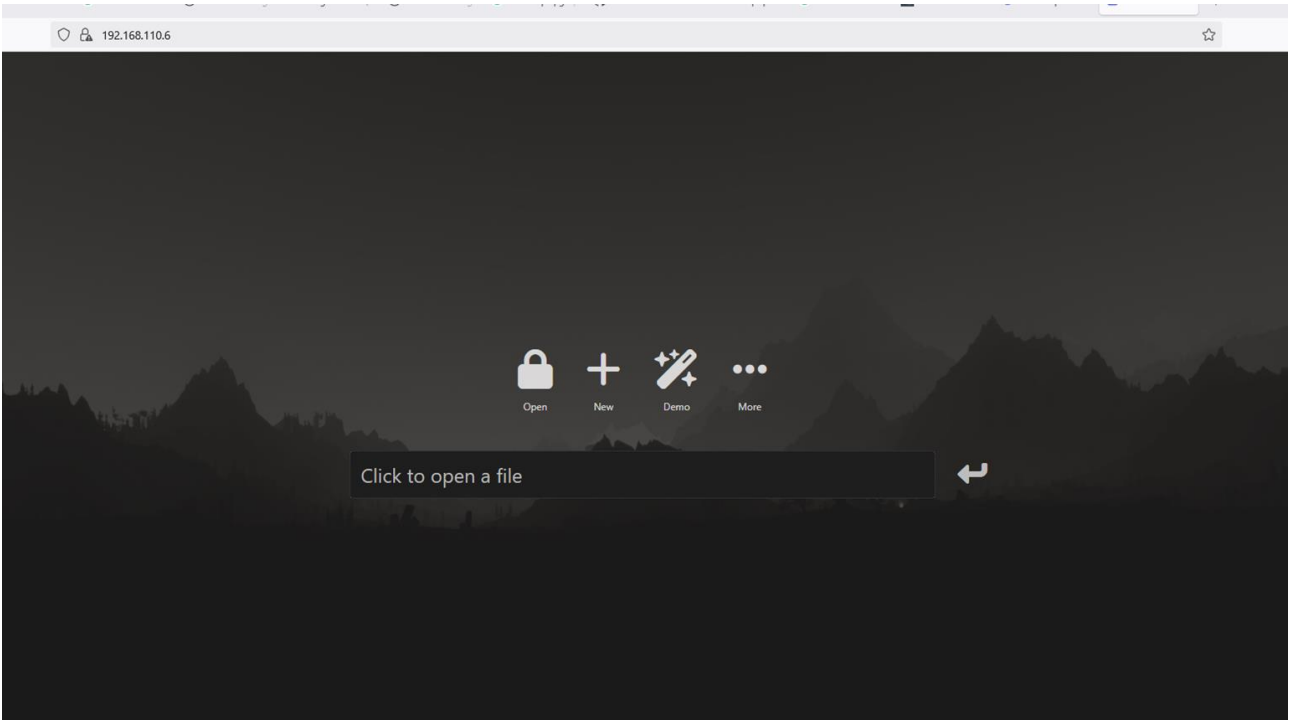


1. Lancement de KeeWeb et création d'un nouveau coffre-fort

Première ouverture : Lors du lancement de KeeWeb, une fenêtre s'affiche et propose d'ouvrir un fichier existant. **Pour créer un nouveau coffre-fort**, cliquez sur l'option "**Nouveau**" (ou "*New*"), car vous ne disposez pas encore de base de données de mots de passe.

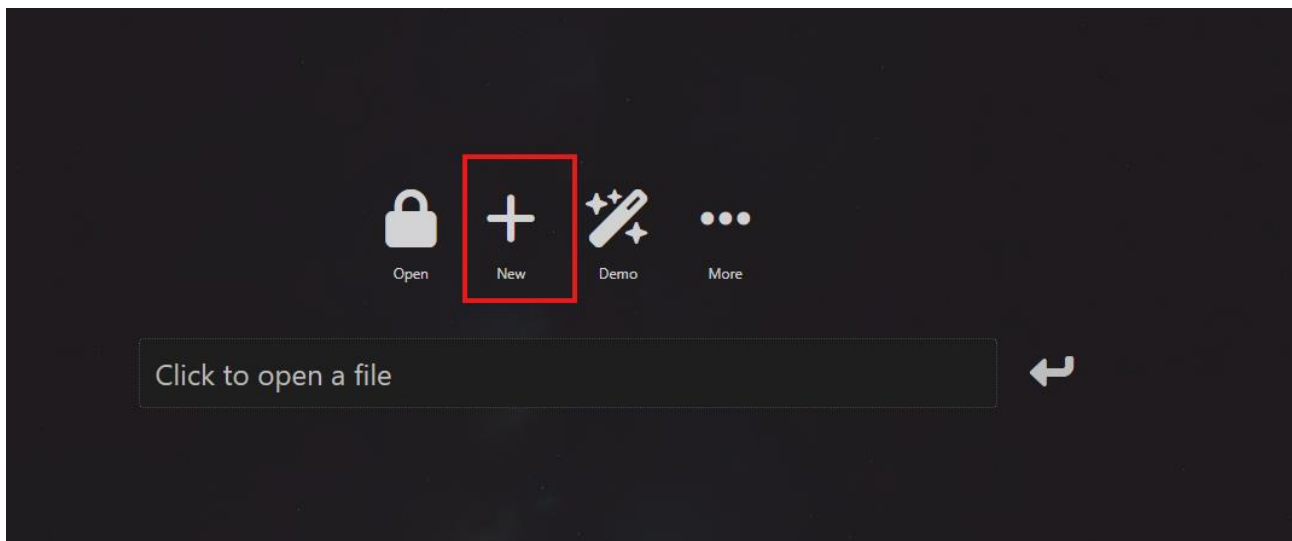


Vous vous retrouvez alors dans l'interface de KeeWeb qui vous résume les différentes parties de l'écran :

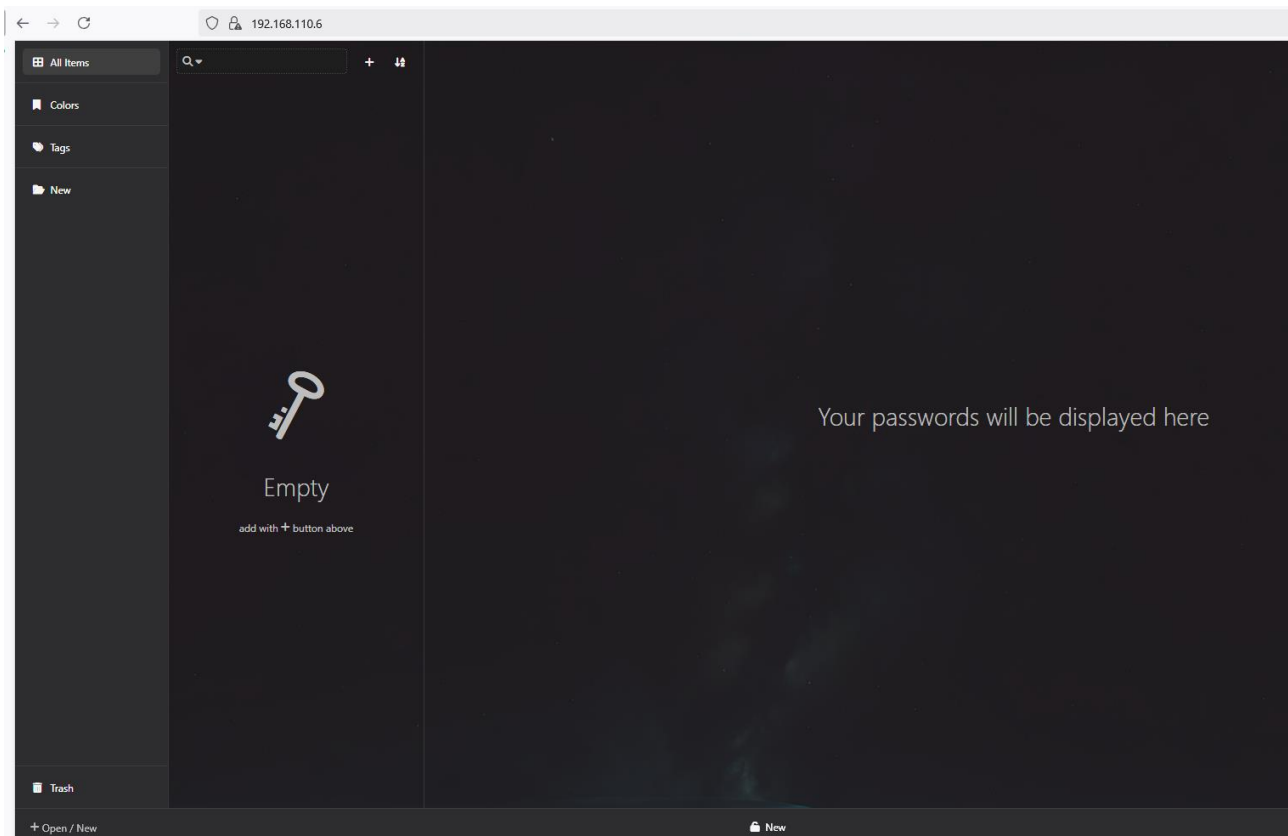

Cette interface se découpe en trois colonnes. De gauche à droite on trouve :



- Un menu permettant de classer nos mots de passe ;
- Une colonne vide qui contiendra une liste des mots de passe ;
- Une fenêtre (vide pour le moment) qui permettra de voir et éditer un mot de passe en particulier.

Sans plus attendre, créons notre premier mot de passe ! Pour cela, cliquez sur le bouton tout en haut en forme de + , à côté du champ de recherche, dans la deuxième colonne, puis sélectionnez "Nouvelle entrée"

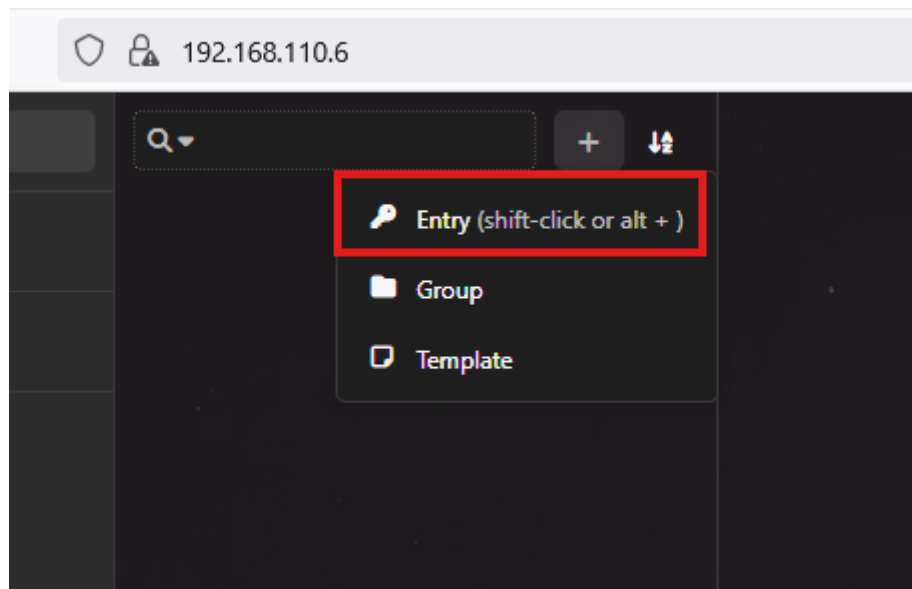


Le troisième panneau des mots de passe se remplit alors, avec des champs qu'il ne reste plus qu'à compléter.



On peut modifier le caractère robuste du mot de passe qu'on crée avec les modifications suivantes en appuyant sur le petit éclair

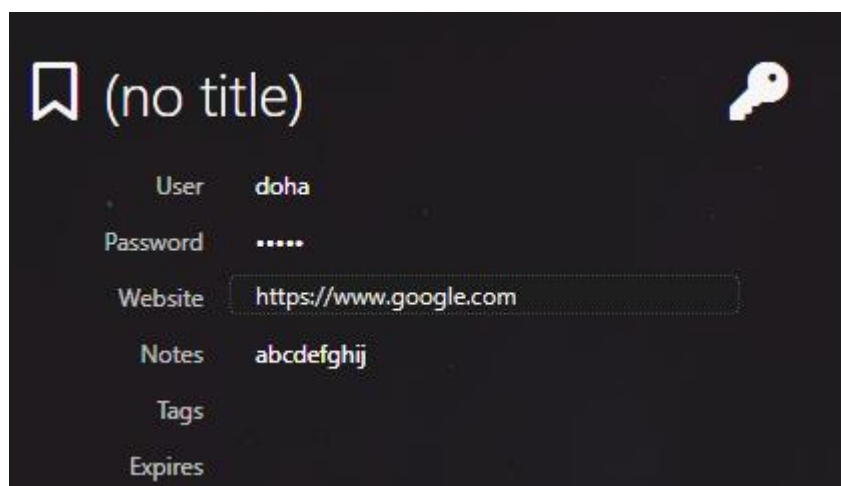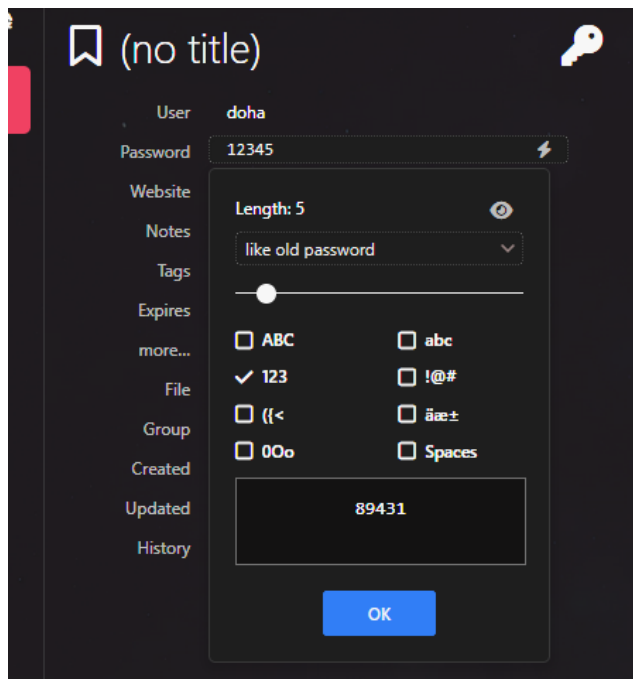


le mot de passe est crée, Ainsi, nous pouvons sauvegarder le coffre-fort. Pour cela, cliquer sur « +open/new » :

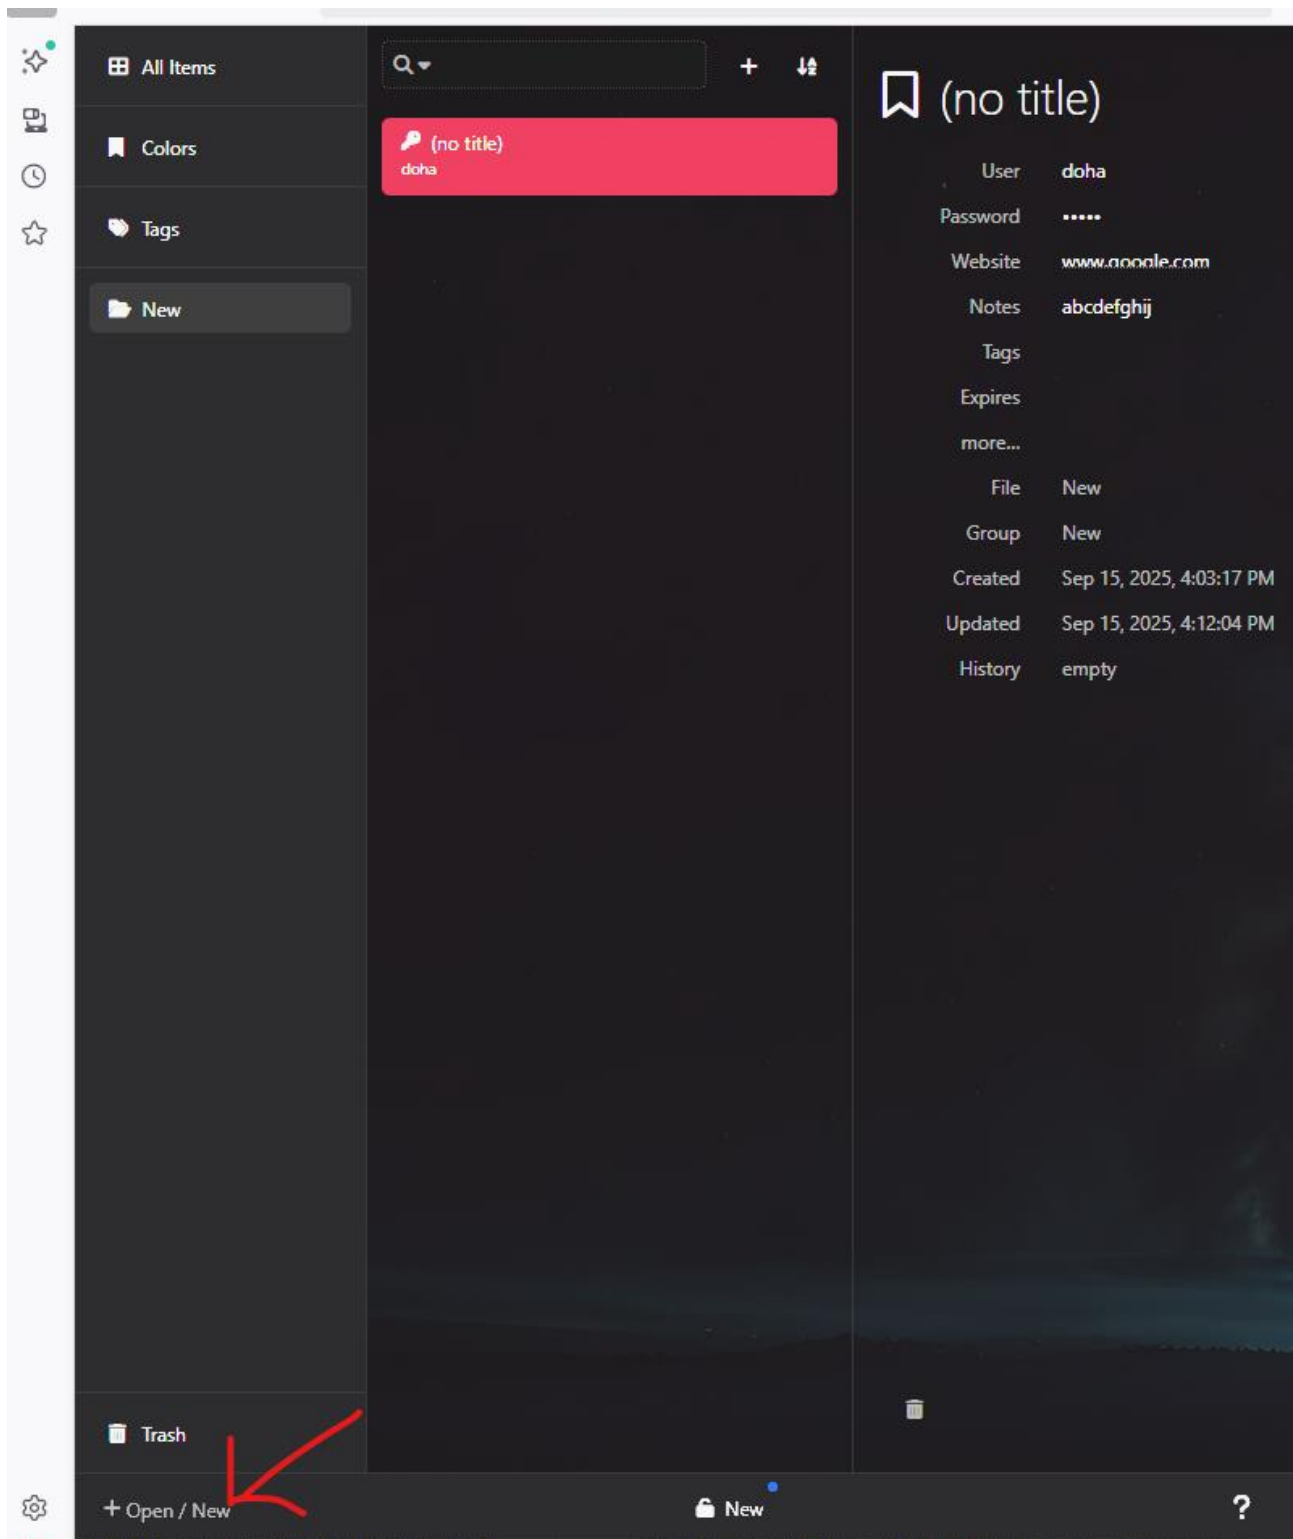

Cette interface met en évidence la clarté, la simplicité et la sécurité dans la gestion des informations sensibles.

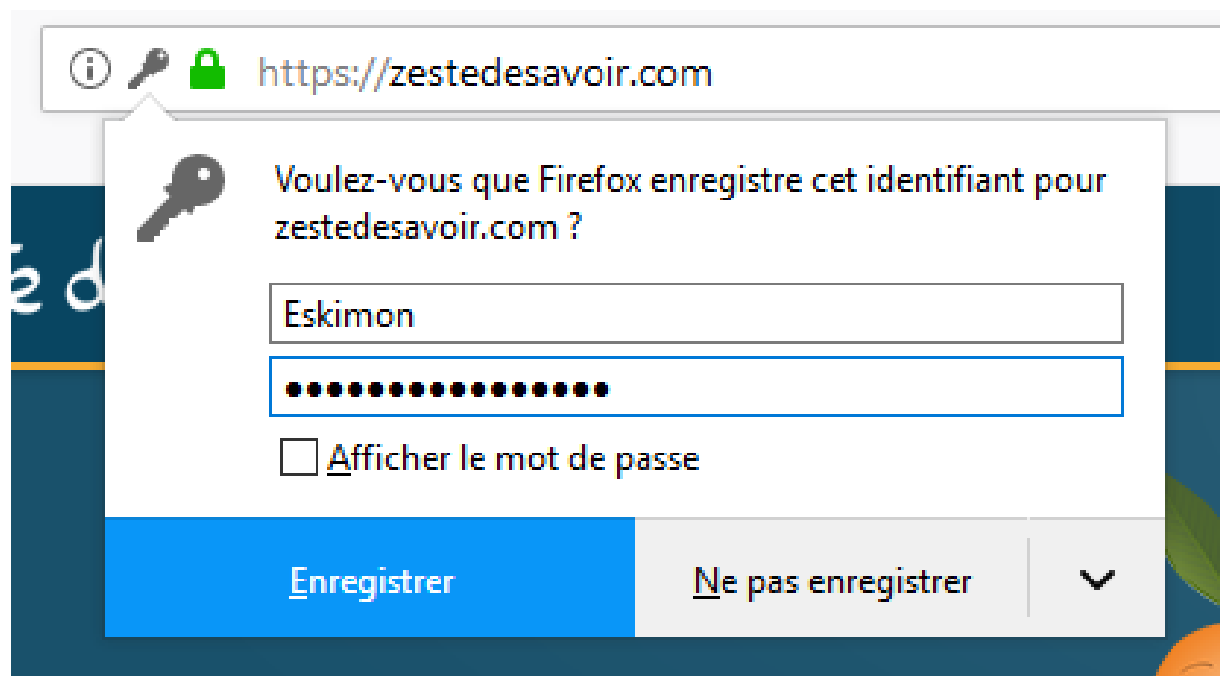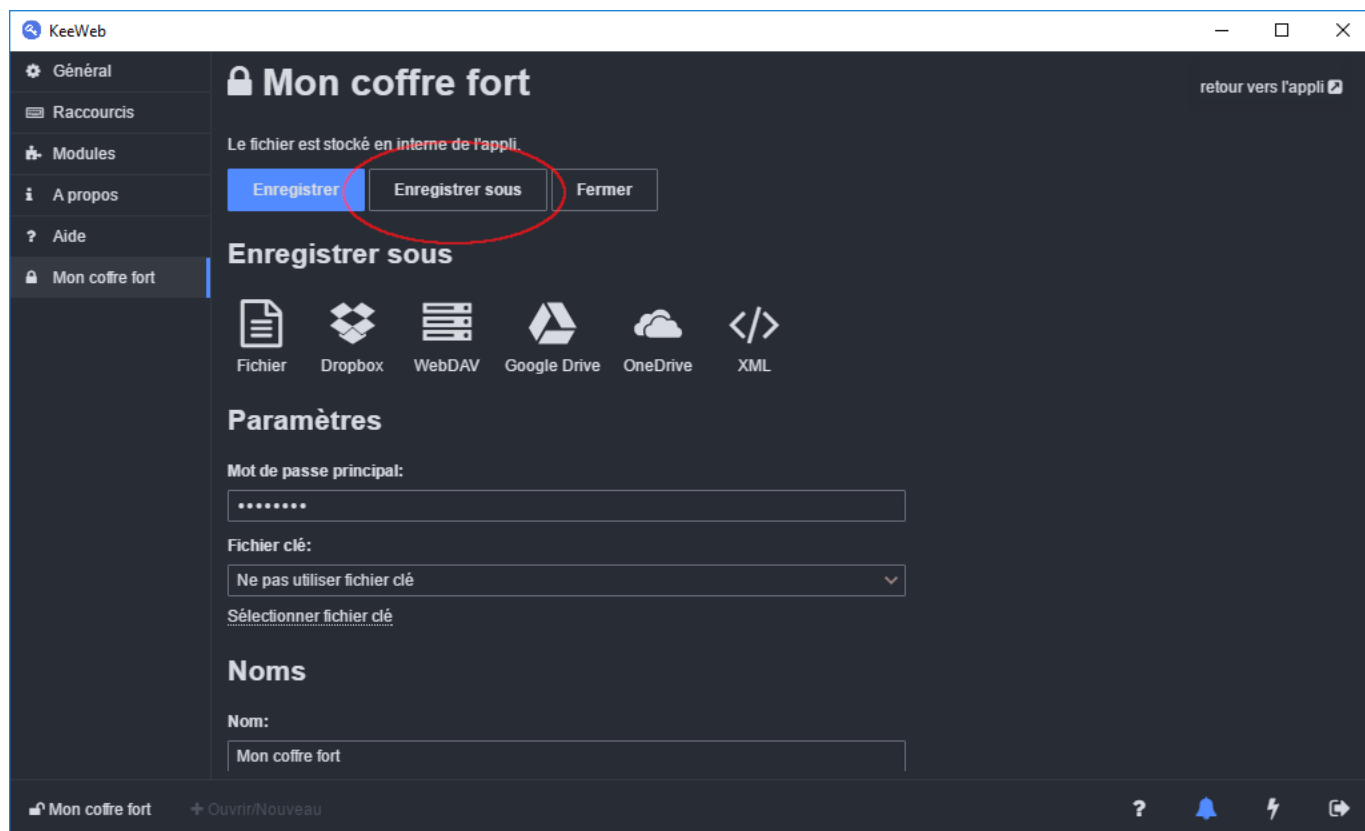

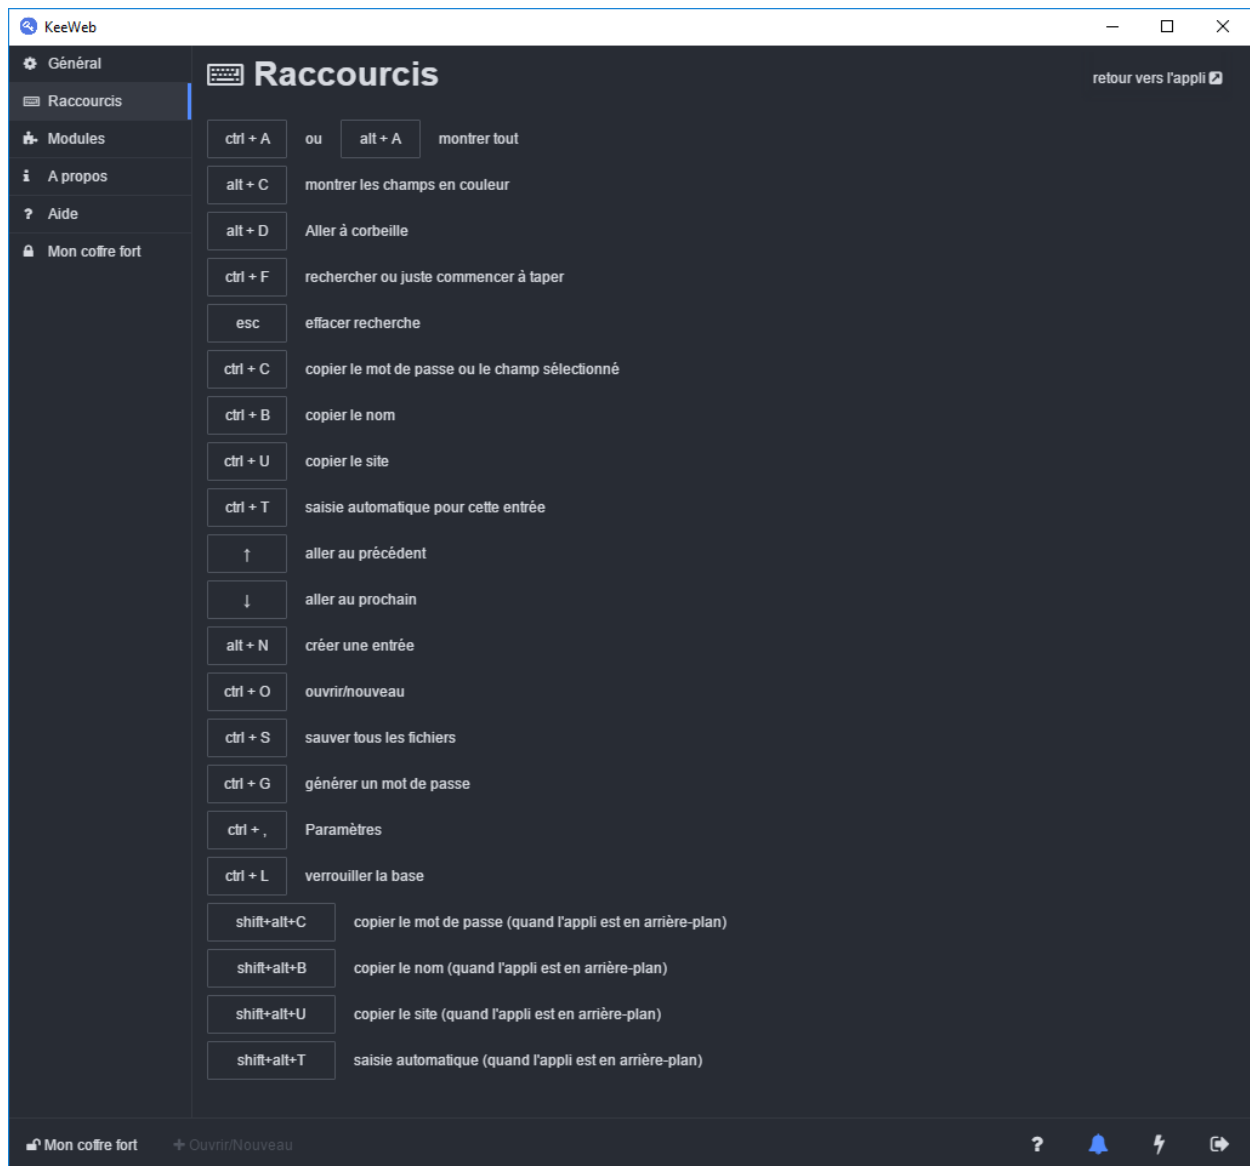

<https://eskimon.fr/tuto-keeweb-utiliser-un-gestionnaire-de-mot-de-passe>

