


①

# Docker

- In old days diff servers were used for diff apps.
- like one required dependency like linux while other app used window
- Container:- a method to package an app so it can be run, with its dependencies, isolated from other processes.
- Docker is not a container it only manages it.

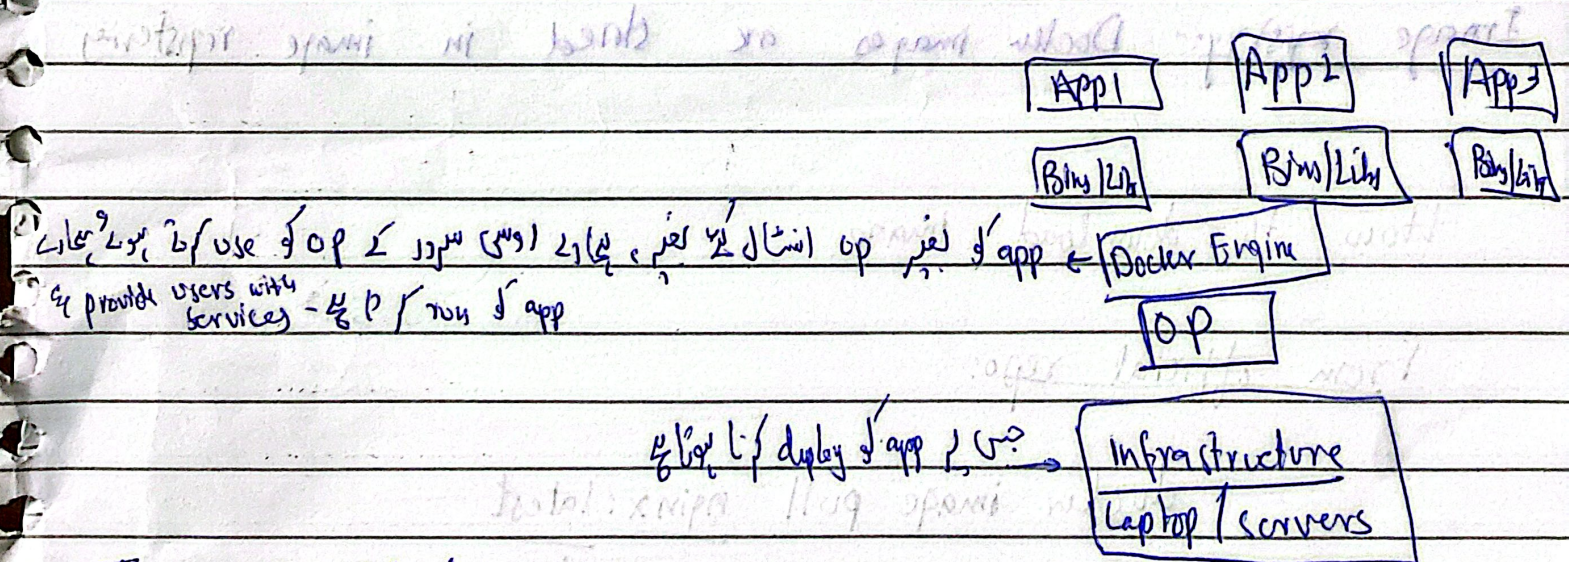

## Types of Containers :-

Linux container: enable program to be broken in <sup>smaller</sup> "pieces" known as Microservices

Batteries: - فیکر جو آپ کو پسند ہے اس کو نکال کے کئی باتریز کا استعمال کرنا چاہئے۔  
 اس کے ساتھ ہیرج کر کے استعمال کرنا چاہئے۔ Battery / feature دیکھ دیکھ کر اسے نکال لے  
 کئی دوسرے کے استعمال کرنا چاہئے۔







- List of image downloaded:-  
docker image ls  
or  
docker images

- Removing an image:-  
if any container is running on that image first you  
have to stop the container then delete the image

docker image rm alpine:latest



For server: 192.180:5016

IP address

local host: localhost:5016

⑥

Publishing Port:-

port  
internal & list

docker container run -d -p 5016:80 pingor/helloworld:latest

port no

Custom Container Manager

docker container run -d --name docker\_app

name