Appendices

Contents

| 1 | Appendix 1 - Storyboard | | | | | | |
|----------|--|--|--|--|--|--|--|
| 2 | Appendix 2 - Genre | | | | | | |
| 3 | Appendix 3 - Characters 1 | | | | | | |
| 4 | Appendix 4 - Levelling | | | | | | |
| 5 | Appendix 5 - RPG Plan | | | | | | |
| 6 | Appendix 6 - Items/Experience Plan | | | | | | |
| 7 | Appendix 7 - Sprites/Graphics 7.1 Characters 7.1.1 Professor Sinclair 7.1.2 Professor's Assistant 7.1.3 Military Commander 7.1.4 Soldier 7.1.5 Elite Soldier 7.1.6 Security Guard 7.2 Other | 19 19 19 19 19 19 19 19 | | | | | |
| | 7.2.1 Battle background | 19 19 20 | | | | | |
| 8 | Appendix 8 - Code | | | | | | |
| 9 | Appendix 9 - Code Documentation | 58 | | | | | |
| 10 | Appendix 10 - Project File | 120 | | | | | |

1 Appendix 1 - Storyboard

Storyboard

Wednesday, February 5, 2014 1:15 PM

First Draft of the Script, if you think it needs any changed then make some, make sure to save it as Draft 2 though so we can revise them all before actually finalizing the script.

ACT 1

Scene 1

Fade in from black into a high-tech science lab.

- "Was the implantation a success?", says Sinclair to Dr. Rogers
- "You tell me." says Rogers
- << the game UI boots up and loads >>
- "Good day, Professor. I am your Automated Tactical Heads-Up and Environment Navigation Aid - ATHENA. I will be assisting you in your research into nanotechnology. Connecting to facility security network...
- //"G'Day Professor am your Australian Tactical Heat-up Environmental Navi Aid ATHENA.\\
- "Is the AI fully operational?" Rogers
- "Everything seems to be working better than exp---" Sinclair
- //"em kinda..."- Sinclair\\
- //"al re-calibrate the system" Rogers\\
- "ALERT. UNAUTHORISED ACCESS IN SECTOR 7" ATHENA
- "What the ... get out of here!" Security
- << A soldier enters the room >>
- "Don't worry, sir! I can take 'em!" Security
- << security guard shoots a few shots at the soldier and is prompty mauled >>
- << The scientists run in two different directions >>
- <<Sinclair runs into a group of soldiers and is captured >>

Scene 2

Fade in from black into a locked storage closet.

- ATHENA: "Picking up radio chatter... Connecting to secure frequency..."
- //Soldier 1 WAKE UP!-rogers\\
- Soldier 1: "So, what are our orders sir?"
- Unknown voice: "Would you kindly access the central mainframe. Some security subsystem disconnected it automatically from the central network..."
- ATHENA: "If they gain access to my central mainframe, they will have full access to ARC Research designs and technologies."
- Sinclair: "ATHENA, can you unlock this door?"
- ATHENA: "Affirmative. Overriding door security... I suggest you find a weapon, Professor."
- <<Player is given control. Door opens.>>

Act 2

Scene 1

The player arrives at the central mainframe room. The door is locked

- //hate forgetting my keys sinclair\\
- ATHENA: "Attempting to override door security..."

- <<ALARM GOES OFF>>
- ATHENA: "This door uses time-based encryption technology... you will have to hold off enemy forces until I can break it..."
- << TIMER: 30 seconds. >>
- Unknown voice: "He's at the mainframe room. Would you kindly deal with him."
- ATHENA: "I cannot breach this security, Sinclair. You will have to manually override it in the Security room."

Scene 2

The player is inside the security room and overrides the door.

- Unknown voice: "Sinclair... you cannot stop me. You are an insignificant distraction. Would you kindly join me or be destroyed."
- ATHENA: "Detecting anomalous network traffic... automated defenses are coming online... and I can't disable them, Sinclair. Sorry."
- //Damn what use are you?- Sinclair\\
- Sinclair:" Its fine ATHENA, I better head back to the mainframe room anyway.

Scene 3

The player returns to the central mainframe room and his way forward is blocked by the military AT. CUE MINIBOSS FIGHT with epic music

- Cmdr. Kemp: "Sinclair... you cannot stop us. Your only hope is to cooperate. Help us improve the technology you built."
- Sinclair: "I built the technology to help humans, not to kill them."
- ATHENA: "Commander Kemp, you have endangered humanity. You must be stopped."
- //Stopped you will be Sinclair\\
- << AWESOME BATTLE SEQUENCE>>
- << Kemp is defeated, lies on the floor dead >>
- //Time to teabag Sinclair\\

Act 3

Scene 1

The Player enters the hall way leading to the Server room only to find the Cause of all this chaos.

- Unknown Voice: "So you are finally here Professor. I will forget all that has occurred here
 tonight with the deaths of all my men and what not, if You'd Kindly join my side to rule the
 world".
- ATHENA: "Sinclair will never join you!".
- Sinclair: "After all that has happened you really think I will join you?".
- //nobody ever wants to be on my side, even in TEAM fortress I am on my own- Unknown Voice\\
- //(cant think of anything)\\
- Unknown Voice: "You will Join me or you will perish! STOP HIM!!!".

Scene 2

The Player enters the Server Room only to get a surprise.

- Unknown Voice: "You are better than I gave you credit for Professor".
- Sinclair: "You have nowhere to go, just give yourself up!".
- ATHENA: "Sinclair doesn't he seem familiar?".
- Unknown Voice: "Trust a stupid AI to figure it out before our esteemed Professor Sinclair Rogey boy would be happy how clever she is".
- Sinclair: "GRR Shut it! You Murderer! YOU KILLED MY BEST FRIEND!".
- ATHENA: "Sinclair lis...".

- UV: "Hahah best friend looks like you really did not know much about him, now would you kindly die Professor Mikkel Sinclair".
- <<Unknown Voice turns around to >>
- Sinclair: "it can't be, how no...no NOOOOO".
- ATHENA: "Sinclair snap out of it we need to stop him".
- Rogers: "Stop me hahaha you cant stop me!".
- Sinclair: "Why, why did you do this why?".

<<without warning Rogers start attacking>>

<<epic battle sequence>>

Scene 3

After an epic battle Sinclair finally wins and before Rogers dies Sinclair talks

- Sinclair: "Why did you do this Adrian, we were friends we were going to make a difference".
- Rogers: "Haha can you not see what we have created Mikkel?".
- Sinclair: "Yes away to better humanity".
- Rogers: "You naïve fool haha * cough* what you have created are weapons, just look at what you have done, killed many men. Our creations that's all theu will do, destroy".
- Sinclair: "Yes they have destructive properties, but we have created many great ways to use it to better humanity, I can easily get rid of the weaponised parts".
- Rogers: "Haha *cough* after all this do you really think you can let go off all the power you
 have, and do you really think this humanity you believe in will take this new technology as a
 gift and use it for the better haha *cough* haha I will leave the decision up to you my old
 friend".
 - << Rogers passes on>>
- ATHENA: "Sinclair I am sorry for what you had to do".
- Sinclair: "its fine ATHENA it happened because the thought of power was over wellming for him".
- ATHENA: "What now".
 - <<Player has three choices>>

Good Choice

- Sinclair: "I am going to create a better Future for all of humanity, I will get rid of all weponised Augments and show the world that they can save many, but this will also mean that you will have to be deactivated ATHENA".
- ATHENA: "Professor I... Sinclair is was an honor known sir".

Bad Choice

- Sinclair: " Adrian was right these 'weapons' are too powerful to let Civilians get their hands on them".
- ATHENA: "Sinclair what do you mean?">
- Sinclair: "The power of Augments deserve to be used properly, their full Potential will never be reconnised if I don't use them to better our country, and I can by do that my allowing them to be used in the hands of the military!".
- ATHENA: "Sinclair you can't mean that".
- Sinclair: " ATHENA you were created to help me control the Augs and to listen to my every COMMAND!".
- ATHENA: "Yes Sir I understand...".

Neutral Choice

• Sinclair: "What have I done...?, I killed my Best Friend, I have killed so many people using my creations that were to be used to help better mankind".

- ATHENA:" And that's what you have done! Sinclair they would have used these Augmentations
 to kill millions of people, you stopped the bad guys so you can save mankind and help make it
 better".
- Sinclair: What are you talking about, my creations were never meant to be used this way!
 Adrian, o god Adrian he was right! These weapons are far too dangerous, what have I done!
 Science is used to help mankind and save life's, not to destroy it!!! O god what have I done".
- ATHENA: "PROFESSOR CALM DOWN! It's not your fault you've done what you had to do!".
- Sinclair:" No your wrong I cant let this kind of future happen it will destroy humanity instead of save it! I cant let my creations see the light of day I cant! Goodbye ATHENA...".

EPILOGUE

Good Choice

• After all the Chaos that Sinclair endured and caused, just to keep his creations from the military, made him realize that the Weaponised Augmentations were far too dangerous to be mass produced, even with the help of ATHENA managing everything. After a tough decision Sinclair decided to create the Augments to tailor around helping Humanity without weapons. This however did not prevent some causilties as many men who were just under orders, had to die just for the Great Professor to realize this, he also lost his dear companion and Friend ATHENA in the process, to help prevent the Augments to be used in a military manner.

Bad Choice

• After all the Chaos that Sinclair endured and caused, just to keep his creations from the military and the death of a Friend who made the wrong choices, the great Professor had came to a realization that his creations were created for the purpose he himself had used them, to cause death and destruction, he thought about it and controlling the military by letting them use his augments meant he could save many from the horrors of war and could help save the Soldiers that fought in them. Many thought his ideas were crazy and that he ruined his ideals of saving humanity. But the horrors of what occurred and with the help of his helper Athena, Sinclair changed and a more colder and darker Sinclair appeared, one who just wanted to save lives by causing death and destruction.

Neutral Choice

• After all the Chaos that Sinclair endured and caused, just to keep his creations from the military, It became too much for the poor Professor, he went into a state of shock over the carnage he had caused. He didn't understand how he could continue on known that his lifes work in making humanity better would cause death and destruction. Even ATHENA the AI he had come to love as a friend could not help him out of his shell. Without out a plan to continue he had decided on the only course of action he thought would help. He blew up the Facility and in the process killed himself and the lovely ATHENA.

If you were Sinclair would you have made different choices, would you have changed the outcome of what has happened?

2 Appendix 2 - Genre

Genre

Computing Project

Project Plan

Interactive Story / Hybrid RPG (To The Moon, Final Fantasy)

Platformer (Thomas Was Alone)

Puzzle (Bejeweled)

Turn-based Strategy (Civiliation 5)

Video Board Game (Monopoly)

Text-based game (Zork)

Shooter (Space Invaders)

Racing ()

On-Rails game ()

Tycoon (Rollercoaster Tycoon)

Tycoon - Money, buy/sell, market, customer, product (possibly custom), characters, competitors, possibly a goal/goals, locations

RPG - Story, loot, enemies, characters, levelling, stats, world map, towns, character design, level design, bosses,

Votes

Kieran - Hybrid RPG, Tycoon

Grant – Hybrid RPG, Turn-Based or Tycoon

Alastair – Top-down shooter, Tycoon game

Ideas

Game Development tycoon

Mafia/Crime Tycoon

Video/Comic Book Tycoon

Cinema Tycoon

Business Tycoon

Farming Tycoon

Dungeon-Based RPG

Science Fiction RPG

3 Appendix 3 - Characters

Characters

Wednesday, February 5, 2014

1:34 PM

| The Computer Al Assistant | ATHENA - Automated Tactical Heads-Up and Environment Navigation Aid | | |
|------------------------------|---|--|--|
| The protagonist | Mikkel Sinclair (Professor Sinclair) | | |
| The research assistant | Adrian Rogers (Dr. Rogers) | | |
| Military commander | Commander Ethan Kemp | | |
| Science facility | Augmentation Research Centre (ARC) | | |

4 Appendix 4 - Levelling

There are two main skill trees, Military and Humanity. The choices affect the overall ending depend on which traits they choose, there will be a total of 10 levels each with 2 different choices, one favouring humanity and the other Military. The ending of the game will reflect the skills chosen by the player. If the player chooses and equal number of both military and humanity then the game ending will be neutral.

Humanity Skills

- 1: Nano Basic Heal Heals 25% of health
- 2: Nano Heal Heals 50% of health
- 3: Nano Advanced Heal Heals 75% of health
- 4: Nano Basic Protect Damage is reduced by 25%
- 5: Nano Protect Damage is reduced by 50%
- 6: Nano Advanced Protect Damage is reduced by 75%
- 7: Basic Health node HP is increased by 25%
- 8: Health node HP is increased by 50%
- 9: Basic Nano capacity Increase Nano storage by 25%
- 10: Nano Sheild No damage for turn.

Weaponisation

- 1: Basic Damage Increase Damage is Increased by 25%
- 2: Damage Increase Damage is increased by 50%
- 3: Decimation Damage is increased by 75%
- 4: Basic Thick Skin Damage is reduced by 25%
- 5: Thick Skin Damage is reduced by 50%
- 6: Ballistic Skin Damage is reduced by 75%
- 7: Nano Drain Health is restored by 25% at the end of each battle
- 8: Advanced Nano Drain Health is restored by 50% at the end of each battle
- 9: Nano Pulse Cannon A laser with the Damage of 100
- 10: Kamehameha Instakill

5 Appendix 5 - RPG Plan

RPG Ideas

Wednesday, February 5, 2014 11:41 AM

Viewpoints

Side On From Above Perspective

World Design

One big dungeon

Story

Setting - Near Future (Deus Ex / Anarchy Online)

World

Different world.

Plot

Nano-Aug human - scientist that invented augmentations, wants to give people the augmentations to make the world better but the military try to steal it for weapons. The government-funded facility/project is attacked by the military, the scientist has to fight through the army and learn how to use his augmentations to fight. He has to fight though the facility. He has to choose whether to go the route of "weaponization" vs "humanity" and the game ending will reflect choices made. The game would have three endings based on the augmentation choices. "Good" or "for the benefit of humanity" ending where the augmentations benefit everyone as a whole, "bad" or the "military" ending, where the augmentations are designed for warfare, or "neutral", where the augmentation project is destroyed. The final boss is a research assistant who wants to keep the research for himself. (A God Am I applies).

6 Appendix 6 - Items/Experience Plan

Items – There will be very few items in the game mostly to refill health/nano. There will be a couple of Main Items relating to the story

| Key Items |
|--------------------------------|
| Server Room Key |
| ATHENA |
| Items |
| Potion – Heals 25% of HP |
| Mega-potion – Heals 50% of HP |
| Max-potion – Heals 100% HP |
| Nano-Potion – Refills 25% Nano |
| Mega-Nano – Refills 50% Nano |
| Max-Nano – Refills 100% Nano |
| |
| Experience |
| Soldier – 25EXP |
| Elite – 50EXP |
| Commander – 100EXP |
| BOSS 1 – 500EXP |
| Rodgers – 1000EXP |
| |
| Level EXP |
| Level 1 – 150 |
| Level 2 – 300 |
| Level 3 – 500 |
| Level 4 – 750 |
| Level 5 – 1000 |
| Level 6 - 1250 |
| Level 7 - 1500 |
| Level 8 - 1750 |
| Level 9 - 2000 |
| Level 10 - 2500 |

7 Appendix 7 - Sprites/Graphics

- 7.1 Characters
- 7.1.1 Professor Sinclair



7.1.2 Professor's Assistant



7.1.3 Military Commander



7.1.4 Soldier



7.1.5 Elite Soldier




7.1.6 Security Guard



- 7.2 Other
- 7.2.1 Battle background



7.2.2 Battle UI

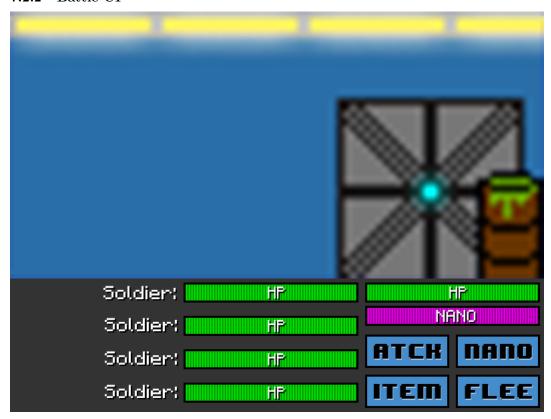

8 Appendix 8 - Code

Athena

Assembly Info

```
using System.Reflection;
using System.Runtime.CompilerServices;
using System.Runtime.InteropServices;
// General Information about an assembly is controlled through the following
// set of attributes. Change these attribute values to modify the information
// associated with an assembly.
[assembly: AssemblyTitle("Athena")]
[assembly: AssemblyProduct("Athena")]
[assembly: AssemblyConfiguration("")]
[assembly: AssemblyDescription("")]
[assembly: AssemblyCompany("")]
[assembly: AssemblyCopyright("Copyright @ 2014")]
[assembly: AssemblyTrademark("")]
[assembly: AssemblyCulture("")]
// Setting ComVisible to false makes the types in this assembly not visible
// to COM components. If you need to access a type in this assembly from
// COM, set the ComVisible attribute to true on that type.
[assembly: ComVisible(false)]
// The following GUID is for the ID of the typelib if this project is exposed to COM
[assembly: Guid("ef85f802-4875-4a87-92d1-e00ec9452bcc")]
// Version information for an assembly consists of the following four values:
//
//
        Major Version
        Minor Version
//
        Build Number
//
//
        Revision
//
// You can specify all the values or you can default the Build and Revision Numbers
// by using the '*' as shown below:
// [assembly: AssemblyVersion("1.0.*")]
[assembly: AssemblyVersion("1.0.0.0")]
[assembly: AssemblyFileVersion("1.0.0.0")]
```

Levels

```
?xml version="1.0" encoding="utf-8" ?>
<level tileset="pokemon" tilesize="25" rowlength="3">
    <sprite>paving.cells</sprite>
  </tile>
  <tile>
    <sprite>paving.cells</sprite>
  </tile>
  <tile>
    <sprite>black</sprite>
  </tile>
  <tile>
    <sprite>black</sprite>
  </tile>
</level>
UI Font
<?xml version="1.0" encoding="utf-8"?>
<!--
This file contains an xml description of a font, and will be read by the XNA
Framework Content Pipeline. Follow the comments to customize the appearance
of the font in your game, and to change the characters which are available to draw
with.
-->
<XnaContent xmlns:Graphics="Microsoft.Xna.Framework.Content.Pipeline.Graphics">
  <Asset Type="Graphics:FontDescription">
    Modify this string to change the font that will be imported.
    <FontName>Minecraftia</FontName>
    <!--
    Size is a float value, measured in points. Modify this value to change
    the size of the font.
    <Size>18</Size>
    Spacing is a float value, measured in pixels. Modify this value to change
    the amount of spacing in between characters.
    <Spacing>3</Spacing>
    UseKerning controls the layout of the font. If this value is true, kerning
information
    will be used when placing characters.
    <UseKerning>false</UseKerning>
    Style controls the style of the font. Valid entries are "Regular", "Bold",
"Italic"
    and "Bold, Italic", and are case sensitive.
    -->
```

```
<Style>Regular</Style>
    <!--
    If you uncomment this line, the default character will be substituted if you draw
    or measure text that contains characters which were not included in the font.
    <!-- <DefaultCharacter>*</DefaultCharacter> -->
    <!--
    CharacterRegions control what letters are available in the font. Every
    character from Start to End will be built and made available for drawing. The
    default range is from 32, (ASCII space), to 126, ('~'), covering the basic Latin
    character set. The characters are ordered according to the Unicode standard.
    See the documentation for more information.
    -->
    <CharacterRegions>
      <CharacterRegion>
        <Start>&#32;</Start>
        <End>&#126;</End>
      </CharacterRegion>
    </CharacterRegions>
  </Asset>
</XnaContent>
<u>Tileset</u>
<?xml version="1.0" encoding="utf-8" ?>
<tileset tilesize="25">
  <sprite>
    <name>black</name>
    <x>0</x>
    <y>0</y>
    <collides>false</collides>
  </sprite>
  <sprite>
```

<name>tile.diagonal</name>

<collides>false</collides>

<collides>false</collides>

<name>paving.cells</name>

<collides>false</collides>

<name>carpet.horizontal</name>

<x>1</x></y>

<x>2</x><y>0</y>

<x>2</x></y>

</sprite>
<sprite>

</sprite>

</sprite>

```
Debug
```

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
namespace Athena
{
    public static class Debug
        public static Modes Mode;
        public enum Modes { GAME, UI };
}
Game1
using System;
using System.Collections.Generic;
using System.Linq;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
using AthenaEngine.Framework;
using AthenaEngine.Framework.Gameplay;
using AthenaEngine.Framework.Interfaces;
using AthenaEngine.Framework.Primatives;
using AthenaEngine.Framework.Systems;
using AthenaEngine.Framework.UI;
namespace Athena
{
   /// <summary>
   /// This is the main type for your game
   /// </summary>
    public class Game1 : Microsoft.Xna.Framework.Game
        // TODO: Remove warning suppression once it's used.
        [System.Diagnostics.CodeAnalysis.SuppressMessage("Microsoft.Performance",
"CA1823:AvoidUnusedPrivateFields")]
        GraphicsDeviceManager graphics;
        SpriteBatch spriteBatch;
        ResourceManager<Texture2D> textureManager;
        ResourceManager<SpriteFont> fontManager;
        Level test;
        Camera2D Camera;
        Character Player;
        bool FirstRun = true;
        KeyboardState OldState;
        /// <summary>
```

/// The actual game class constructor.

```
/// </summary>
        public Game1()
            graphics = new GraphicsDeviceManager(this);
            Content.RootDirectory = "Content";
        }
        /// <summary>
        /// Allows the game to perform any initialization it needs to before starting
to run.
        /// This is where it can query for any required services and load any non-
graphic
        /// related content. Calling base.Initialize will enumerate through any
components
        /// and initialize them as well.
        /// </summary>
        protected override void Initialize()
            // TODO: Add your initialization logic here
            base.Initialize();
        public SpriteFont font;
        /// <summary>
        /// LoadContent will be called once per game and is the place to load
        /// all of your content.
        /// </summary>
        protected override void LoadContent()
        {
            // Create a new SpriteBatch, which can be used to draw textures.
            spriteBatch = new SpriteBatch(GraphicsDevice);
            textureManager = new ResourceManager<Texture2D>(this);
            fontManager = new ResourceManager<SpriteFont>(this);
            this.Camera = new Camera2D(this);
            textureManager.Add("blank", this.Content.Load<Texture2D>("blank"));
            textureManager.Add("pokemon", this.Content.Load<Texture2D>("pokemon-
tiles"));
            textureManager.Add("Boards", this.Content.Load<Texture2D>("Boards"));
            textureManager.Add("guy", this.Content.Load<Texture2D>("guy"));
            fontManager.Add("SpriteFont1",
this.Content.Load<SpriteFont>("SpriteFonts/UIFont"));
            test = new Level("level1", spriteBatch, textureManager);
            this.Player = new Character(new Vector2(75, 75), new Vector2(25, 25),
spriteBatch, textureManager.Get("guy"), test);
            // Player.SpriteColor = Color.Red;
            Camera.Focus = Player;
            Camera.Initialize();
        }
        /// <summary>
        /// UnloadContent will be called once per game and is the place to unload
        /// all content.
        /// </summary>
        protected override void UnloadContent()
        {
            // TODO: Unload any non ContentManager content here
        }
        /// <summary>
```

```
/// Allows the game to run logic such as updating the world,
/// checking for collisions, gathering input, and playing audio.
/// </summary>
/// <param name="gameTime">Provides a snapshot of timing values.</param>
protected override void Update(GameTime gameTime)
    KeyboardState State = Keyboard.GetState();
    if (FirstRun)
        if (State.IsKeyDown(Keys.W))
            Player.Move(Directions.UP);
        if (State.IsKeyDown(Keys.A))
            Player.Move(Directions.LEFT);
        if (State.IsKeyDown(Keys.S))
            Player.Move(Directions.DOWN);
        if (State.IsKeyDown(Keys.D))
        {
            Player.Move(Directions.RIGHT);
        }
        OldState = State;
        FirstRun = false;
    else if (OldState != State)
        if (State.IsKeyDown(Keys.W))
        {
            Player.Move(Directions.UP);
        if (State.IsKeyDown(Keys.A))
            Player.Move(Directions.LEFT);
        if (State.IsKeyDown(Keys.S))
            Player.Move(Directions.DOWN);
        if (State.IsKeyDown(Keys.D))
        {
            Player.Move(Directions.RIGHT);
        OldState = State;
    }
    else
    {
        // Do nothing.
    Camera.Update(gameTime);
    base.Update(gameTime);
}
/// <summary>
/// This is called when the game should draw itself.
```

```
/// </summary>
        /// <param name="gameTime">Provides a snapshot of timing values.</param>
        protected override void Draw(GameTime gameTime)
            Debug.Mode = Debug.Modes.GAME;
            GraphicsDevice.Clear(Microsoft.Xna.Framework.Color.CornflowerBlue);
            if (Debug.Mode == Debug.Modes.GAME)
                Camera.Focus = Player;
                spriteBatch.Begin(SpriteSortMode.Deferred, BlendState.AlphaBlend,
null, null, null, Camera.Transform);
                test.Draw();
                Player.Draw();
                spriteBatch.End();
            }
            else if (Debug.Mode == Debug.Modes.UI)
//
                  UIButton test = new UIButton(new Vector2(0, 0), new Vector2(50, 50),
spriteBatch, textureManager.Get("blank"));
                UI Test = new UI(spriteBatch, textureManager, fontManager);
                Test.AddButton(new Vector2(5, 5), "HI");
                Test.AddButton(new Vector2(50, 50), "ASK!");
                spriteBatch.Begin();
                // Test.Draw();
                // int x = 6;
                // int y = 105;
                // spriteBatch.Draw(textureManager.Get("pokemon"), new Rectangle(0, 0,
25, 25), new Rectangle((x - 1) * 25, (y - 1) * 25, 25, 25), Color.White);
                Player.Draw();
                test.Draw();
                spriteBatch.End();
            }
            base.Draw(gameTime);
       }
   }
}
```

Program

```
#region Using Statements
using System;
using System.Collections.Generic;
using System.Linq;
#endregion
namespace Athena
#if WINDOWS || LINUX
   /// <summary>
   /// The main class.
   /// </summary>
   public static class Program
        /// <summary>
        /// The main entry point for the application.
        /// </summary>
        [STAThread]
        static void Main()
            using (var game = new Game1())
                game.Run();
        }
#endif
```

Athena Engine

RPG

Inventory

```
using System;
using System.Collections.Generic;
using System.Linq;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
namespace AthenaEngine.Framework.Gameplay.RPG
       /// <summary>
      /// Inventory.
      /// </summary>
   class Inventory
        private List<ItemInstance> ItemList = new List<ItemInstance>();
        private int ItemCount;
```

```
/// <summary>
              /// Add the specified item and quantity.
              /// </summary>
              /// <param name='item'>
              /// Item.
              /// </param>
              /// <param name='quantity'>
              /// Quantity.
              /// </param>
        public void Add(Item item, int quantity)
            this.ItemList.Add(new ItemInstance(item, quantity));
        }
   }
}
Item
using System;
using System.Collections.Generic;
using System.Linq;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
namespace AthenaEngine.Framework.Gameplay.RPG
{
   /// <summary>
   /// A gameplay item can be held by a character.
   /// </summary>
   public class Item
        /// <summary>
        /// The name of the item
        /// </summary>
        public string Name {
            get { return this.Name; }
            private set { this.Name = value; }
        }
        /// <summary>
        /// Constructor for the item class
        /// </summary>
        /// <param name="name">Name of the item</param>
        public Item(string name)
            this.Name = name;
        }
   }
}
```

Item Instance

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
namespace AthenaEngine.Framework.Gameplay.RPG
    /// <summary>
    /// An item instance is a particular instance of an item.
    /// </summary>
    public class ItemInstance : Item
        private int Quantity;
        /// <summary>
        /// Constructor for the ItemInstance class.
        /// </summary>
        /// <param name="item">The actual item of which this is an instance</param>
        /// <param name="quantity">How many of that item are in this particular
instance?</param>
        public ItemInstance(Item item, int quantity) : base(item.Name)
            this.Quantity = quantity;
        }
   }
}
Character
using System;
using System.Collections.Generic;
using System.Linq;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
using AthenaEngine.Framework.Primatives;
using AthenaEngine.Framework.Interfaces;
namespace AthenaEngine.Framework.Gameplay
    /// <summary>
    /// A character class holds important detail about each character such as their
items, level, experience, skills, etc.
    /// </summary>
    public class Character : DrawableEntity, IFocusable
        private int Level;
        private int Experience;
        /// <summary>
        /// Constructor for the Character class
        /// </summary>
        /// <param name="position">The coordinates of the character</param>
        /// <param name="size">The size of the character</param>
```

```
/// <param name="spriteBatch">Which spritebatch will draw the
character</param>
        /// <param name="texture">What is the texture for the character</param>
        public Character(Vector2 position, Vector2 size, SpriteBatch spriteBatch,
Texture2D texture, Level level) : base(position, size, new Rectangle(0, 0, 25, 25),
spriteBatch, texture, level)
        }
   }
}
Level
using System;
using System.Collections.Generic;
using System.Linq;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
using AthenaEngine.Framework.Systems;
namespace AthenaEngine.Framework.Gameplay
    /// <summary>
    /// A Level object holds all details required to handle level drawing.
    /// </summary>
    public class Level
        public List<Tile> TileList;
        /// <summary>
        /// Object constructor for the Level class.
        /// </summary>
        /// <param name="levelName">The name of the level to load.</param>
        /// <param name="spriteBatch">The spritebatch to draw the level with.</param>
        /// <param name="resourceManager">The resourceManager handling the games'
textures.</param>
        public Level(string levelName, SpriteBatch spriteBatch,
ResourceManager<Texture2D> resourceManager)
            this.TileList = LevelLoaderXml.Load(levelName, this);
            foreach (Tile tile in TileList)
                tile.MakeDrawable(spriteBatch, resourceManager);
        }
        /// <summary>
        /// Draw the level.
        /// </summary>
        public void Draw()
        {
```

```
foreach (Tile tile in TileList)
                tile.Draw();
            }
       }
   }
}
Tile
using System;
using System.Collections.Generic;
using System.Linq;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
using System.Reflection;
using AthenaEngine.Framework.Primatives;
using AthenaEngine.Framework.Interfaces;
using AthenaEngine.Framework.Systems;
namespace AthenaEngine.Framework.Gameplay
    /// <summary>
   /// A tile is used to draw levels.
    /// </summary>
    public class Tile : CollidableEntity
        private bool Drawable;
        public bool Collides = false;
        private Texture2D Texture;
        public DrawableEntity Sprite;
        private string TileSet;
        private Rectangle SourceRectangle;
        private MethodInfo Trigger;
        public bool HasTrigger = false;
        /// <summary>
        /// Class constructor for a new Tile object.
        /// </summary>
        /// <param name="x">The X coordinate of the new tile.</param>
        /// <param name="y">The Y coordinate of the new tile.</param>
        public Tile(int x, int y, string TileSet, int xOffset, int yOffset, Level
level) : base(new Vector2(x, y), new Vector2(25, 25), level)
       {
            this.TileSet = TileSet;
            this.SourceRectangle = new Rectangle(xOffset, yOffset, 25, 25);
        }
        /// <summary>
        /// Make a tile drawable by giving it a texture and a spriteBatch.
        /// </summary>
        /// <param name="spriteBatch">The SpriteBatch to draw the tile with.</param>
        /// <param name="texture">The texture to draw the tile with.</param>
        public void MakeDrawable(SpriteBatch spriteBatch, ResourceManager<Texture2D>
resoureManager)
```

```
{
            this.Drawable = true;
            this.Texture = resoureManager.Get(TileSet);
            this.Sprite = new DrawableEntity(Position, Size, SourceRectangle,
spriteBatch, this.Texture, this.Level);
        }
        /// <summary>
        /// Draw the tile.
        /// </summary>
        public void Draw()
        {
            if (this.Drawable)
                this.Sprite.Draw();
        }
              /// <summary>
              /// Fires the trigger.
              /// </summary>
              /// <param name='args'>
              /// Arguments.
              /// </param>
        public void FireTrigger (object[] args)
        {
            if (this.HasTrigger)
            {
                Trigger.Invoke(null, args);
        }
              /// <summary>
              /// Adds the trigger.
              /// </summary>
              /// <param name='triggerName'>
              /// Trigger name.
              /// </param>
        public void AddTrigger(string triggerName)
        {
            Type type = typeof(Triggers);
            MethodInfo method = type.GetMethod(triggerName);
            this.Trigger = method;
            this.HasTrigger = true;
        }
   }
}
I Collidable
using System;
using System.Collections.Generic;
using System.Linq;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
```

using Microsoft.Xna.Framework.GamerServices;

```
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
using AthenaEngine.Framework.Primatives;
namespace AthenaEngine.Framework.Interfaces
       /// <summary>
      /// I collidable.
      /// </summary>
    interface ICollidable<T>
        bool CollidesWith(T type);
}
I Drawable
using System;
using System.Collections.Generic;
using System.Linq;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
namespace AthenaEngine.Framework.Interfaces
      /// <summary>
      /// I drawable.
      /// </summary>
    interface IDrawable
    {
              /// <summary>
              /// Draw this instance.
              /// </summary>
        void Draw();
   }
}
I Focusable
using System;
using System.Collections.Generic;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
namespace AthenaEngine.Framework.Interfaces
```

```
/// <summary>
       /// I focusable.
       /// </summary>
      public interface IFocusable
              /// <summary>
              /// Gets the position.
              /// </summary>
              /// <value>
              /// The position.
              /// </value>
              Vector2 Position { get; }
      }
}
I Moveable
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
namespace AthenaEngine.Framework.Interfaces
   interface IMoveable
    {
        bool Move(string direction);
        bool CanMove(string direction);
   }
}
Bounding Box 2D
using System;
using System.Collections.Generic;
using System.Linq;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
namespace AthenaEngine.Framework.Primatives
   /// <summary>
   /// BoundingBox2D is used for bounding boxes on 2D objects.
   /// </summary>
   public class BoundingBox2D : Entity, IEquatable<BoundingBox2D>
        protected Rectangle Bounds
            get
            {
                return this.Rectangle;
            }
```

```
set
            {
                this.Rectangle = value;
        }
        /// <summary>
        /// Constructor for BoundingBox2D
        /// </summary>
        /// <param name="min">x/y coordinates for the bounding box</param>
        /// <param name="max">width/height for the bounding box</param>
        public BoundingBox2D(Vector2 Position, Vector2 Size)
            base.Position = Position;
            base.Size = Size;
        }
        /// <summary>
        /// Check if the BoundingBox2D is equal to another BoundingBox2D
        /// </summary>
        /// <param name="otherBounds">The other BoundingBox2D to check
against.</param>
        /// <returns></returns>
        public bool Equals (BoundingBox2D otherBounds)
        {
            if (this.Bounds.Equals(otherBounds.Bounds))
            {
                return true;
            }
            else
            {
                return false;
        }
        /// <summary>
        /// Check to see if this BoundingBox2D collides with an other BoundingBox.
        /// </summary>
        /// <param name="otherBounds">The other BoundingBox2D to compare with.</param>
        /// <returns></returns>
        public bool CollidesWith(BoundingBox2D other)
        {
            bool Colliding = false;
            if (this.Equals(other))
                Colliding = true;
            if ((this.Bounds.Bottom < other.Bounds.Bottom) && (this.Bounds.Bottom >
other.Bounds.Top))
                Colliding = true;
            if ((this.Bounds.Top > other.Bounds.Top) && (this.Bounds.Top <</pre>
other.Bounds.Bottom))
            {
                Colliding = true;
            if ((this.Bounds.Left > other.Bounds.Left) && (this.Bounds.Left <
other.Bounds.Right))
                Colliding = true;
```

```
if ((this.Bounds.Right < other.Bounds.Right) && (this.Bounds.Right >
other.Bounds.Left))
            {
                Colliding = true;
            return Colliding;
        }
    }
}
Collidable Entity
using System;
using System.Collections.Generic;
using System.Linq;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
using AthenaEngine.Framework.Interfaces;
using AthenaEngine.Framework.Gameplay;
namespace AthenaEngine.Framework.Primatives
    /// <summary>
    /// The Entity class is used to store objects that have positions.
    /// </summary>
    public abstract class CollidableEntity : Entity
        protected BoundingBox2D Bounds
        {
            get
            {
                return new BoundingBox2D(Position, Size);
            }
            set
                if (this.Size.X < 0 || this.Size.Y < 0)</pre>
                {
                    throw new ArithmeticException("Object size is invalid, less than
0.");
                this.Position = new Vector2(value.X, value.Y);
                this.Size = new Vector2(value.Width, value.Height);
            }
        }
        public Level Level;
        /// <summary>
        /// Constructor for the CollidableEntity class.
        /// </summary>
        /// <param name="position">x/y coordinates of the entity.</param>
        /// <param name="size">width/height of the entity.</param>
        public CollidableEntity(Vector2 position, Vector2 size, Level level)
```

```
{
            this.Position = position;
            this.Size = size;
            this.Bounds = new BoundingBox2D(position, size);
            this.Level = level;
        }
        /// <summary>
        /// Check if the CollidableEntity collides with another CollidableEntity.
        /// </summary>
        /// <param name="entity">The entity to check against</param>
        /// <returns>Returns true if it does collide, otherwise false.</returns>
        public bool CollidesWith (CollidableEntity entity)
        {
            if (this.Bounds.CollidesWith(entity.Bounds))
                return true;
            }
            else
            {
                return false;
        }
              /// <summary>
              /// Determines whether this instance can move the specified direction.
              /// </summary>
              /// <returns>
              /// <c>true</c> if this instance can move the specified direction;
otherwise, <c>false</c>.
              /// </returns>
              /// <param name='direction'>
              /// If set to <c>true</c> direction.
              /// </param>
        public bool CanMove(int direction)
            BoundingBox2D NewPosition = new BoundingBox2D(new Vector2(this.Bounds.X,
this.Bounds.Y), new Vector2(this.Bounds.Width, this.Bounds.Height));
            switch (direction)
                case Directions.UP:
                    NewPosition.Y -= 25;
                    break;
                case Directions.DOWN:
                    NewPosition.Y += 25;
                    break;
                case Directions.LEFT:
                    NewPosition.X -= 25;
                case Directions.RIGHT:
                    NewPosition.X += 25;
                    break;
            foreach (Tile t in Level.TileList)
                if (t.Collides)
                    if (NewPosition.CollidesWith(t.Bounds))
                        return false;
                    }
```

```
else
                        // There wasn't.
                    }
                }
            }
            return true;
        }
              /// <summary>
              /// Move the specified direction.
              /// </summary>
              /// <param name='direction'>
              /// If set to <c>true</c> direction.
              /// </param>
        public bool Move(int direction)
            if (CanMove(direction))
            {
                base.Move(direction);
                foreach (Tile t in Level.TileList)
                    if ((t.X == this.X) && (t.Y == this.Y))
                    {
                        t.FireTrigger(null);
                    }
                }
                return true;
            }
            else
            {
                System.Console.WriteLine("Collision detected.");
                return false;
            }
        }
   }
}
```

Directions

```
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;

namespace AthenaEngine.Framework.Primatives
{
    public abstract class Directions
    {
        public const int LEFT = 0;
        public const int UP = 1;
        public const int RIGHT = 2;
        public const int DOWN = 3;
    }
}
```

Drawable Entity

```
using System;
using System.Collections.Generic;
using System.Linq;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
using AthenaEngine.Framework.Gameplay;
namespace AthenaEngine.Framework.Primatives
    /// <summary>
    /// This is an entity which can be drawn.
    /// </summary>
    public class DrawableEntity : CollidableEntity, Interfaces.IDrawable,
Interfaces.IFocusable
   {
        public Color SpriteColor;
        protected SpriteBatch SpriteController;
        protected Texture2D SpriteSheet;
        protected Rectangle SpriteSource;
        public Level level;
        /// <summary>
        /// This is the constructor for the DrawableEntity class.
        /// </summary>
        /// <param name="position">Where the DrawableEntity will start</param>
        /// <param name="size">The size in pixels of the DrawableEntity</param>
        /// <param name="spriteBatch">The SpriteBatch responsible for drawing the
entity</param>
        /// <param name="texture">The texture used to draw the entity</param>
        public DrawableEntity(Vector2 position, Vector2 size, Rectangle SpriteSource,
SpriteBatch spriteBatch, Texture2D tileset, Level level) : base(position, size, level)
        {
            this.SpriteSource = SpriteSource;
            this.SpriteColor = Color.White;
            this.SpriteSheet = tileset;
            this.Position = position;
            this.Size = size;
            this.SpriteController = spriteBatch;
        }
        /// <summary>
        /// This draws the DrawableEntity.
        /// </summary>
        public void Draw()
            this.SpriteController.Draw(this.SpriteSheet, this.Rectangle,
this.SpriteSource, this.SpriteColor);
        }
```

```
public Vector2 Position
            get
            {
                return base.Position;
            }
            set
            {
                base.Position = value;
        }
   }
}
Entity
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
using AthenaEngine.Framework.Primatives;
namespace AthenaEngine.Framework.Primatives
   /// <summary>
   /// The Entity class is the superclass for anything.
   /// </summary>
   public abstract class Entity
        protected Vector2 Position;
        protected Vector2 Size;
              /// <summary>
              /// Gets or sets the rectangle.
              /// </summary>
              /// <value>
              /// The rectangle.
              /// </value>
        protected Rectangle Rectangle
            get
                return new Rectangle(X, Y, Width, Height);
            }
            set
            {
                this.Position = new Vector2(value.X, value.Y);
                this.Size = new Vector2(value.Width, value.Height);
```

}

```
}
public int X
    get
        return (int) Position.X;
    }
   set
        Position.X = value;
}
public int Y
   get
    {
        return (int)Position.Y;
    }
   set
    {
        Position.Y = value;
}
public int Width
    get
    {
        return (int)Size.X;
    }
   set
    {
        Size.X = value;
public int Height
    get
    {
        return (int)Size.Y;
    }
   set
    {
        Size.Y = value;
}
protected void Move(int direction)
{
    switch (direction)
        case Directions.UP:
            this.Y -= 25;
            break;
        case Directions.DOWN:
            this.Y += 25;
            break;
        case Directions.LEFT:
            this.X -= 25;
            break;
        case Directions.RIGHT:
            this.X += 25;
```

```
break;
                default:
                    throw new InvalidOperationException("Invalid direction to move
in");
            }
        }
    }
}
Level Loader XML
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
using System.IO;
using System.Xml.Linq;
using System.Reflection;
using AthenaEngine.Framework.Gameplay;
namespace AthenaEngine.Framework.Systems
    /// <summary>
    /// the LevelLoader is used to load levels.
    /// </summary>
    public static class LevelLoaderXml
        public class Sprite
            public int X;
            public int Y;
            public string Name;
            public bool Collides;
            public Sprite(int x, int y, string name, bool collides)
                this.X = x;
                this.Y = y;
                this.Name = name;
                this.Collides = collides;
            }
        }
              /// <summary>
              /// Load the specified levelName and level.
              /// </summary>
              /// <param name='levelName'>
              /// Level name.
              /// </param>
              /// <param name='level'>
              /// Level.
              /// </param>
        public static List<Tile> Load (string levelName, Level level)
            List<Tile> LevelList = new List<Tile>();
            XDocument Document = XDocument.Load("Content/Levels/" + levelName +
"/tiles.xml");
            XElement Level = Document.Element("level");
            string Tileset = Level.Attribute("tileset").Value;
```

```
int RowLength = Int32.Parse(Level.Attribute("rowlength").Value);
            Dictionary<string, Sprite> SpriteList = LoadSpriteSet(Tileset);
            System.Console.WriteLine(Tileset);
            int TileSize = Int32.Parse(Level.Attribute("tilesize").Value);
            IEnumerable<XElement> Tiles = Level.Elements("tile");
            int Y = 0;
            int X = 0;
            foreach (XElement Tile in Tiles)
                string SpriteName = Tile.Element("sprite").Value;
                Sprite sprite = SpriteList[SpriteName];
                Tile newTile = new Tile(X * TileSize, Y * TileSize, Tileset, sprite.X,
sprite.Y, level);
                var Te = Tile.Elements();
                foreach(var Tee in Te)
                {
                    if (Tee.Name == "trigger")
                    {
                        newTile.AddTrigger(Tee.Value);
                }
                newTile.Collides = sprite.Collides;
                LevelList.Add(newTile);
                X++;
                if (X >= RowLength)
                {
                    Y++;
                    X = 0;
                }
            }
            return LevelList;
        }
              /// <summary>
              /// Loads the sprite set.
              /// </summary>
              /// <returns>
              /// The sprite set.
              /// </returns>
              /// <param name='spriteSet'>
              /// Sprite set.
              /// </param>
        public static Dictionary<string, Sprite> LoadSpriteSet (string spriteSet)
        {
            Dictionary<string, Sprite> SpriteList = new Dictionary<string, Sprite>();
            XDocument TileSet = XDocument.Load("Content/Tilesets/" + spriteSet +
".xml");
            XElement TileSetDeclaration = TileSet.Element("tileset");
            int TileSize =
Int32.Parse(TileSetDeclaration.Attribute("tilesize").Value);
            IEnumerable<XElement> Sprites = TileSetDeclaration.Elements("sprite");
```

```
foreach (XElement Sprite in Sprites)
                int x = Int32.Parse(Sprite.Element("x").Value) * TileSize;
                int y = Int32.Parse(Sprite.Element("y").Value) * TileSize;
                string name = Sprite.Element("name").Value;
                bool collides = Boolean.Parse(Sprite.Element("collides").Value);
                Sprite newSprite = new Sprite(x, y, name, collides);
                SpriteList.Add(name, newSprite);
            }
            return SpriteList;
        }
   }
}
Resource Manager
using System;
using System.Collections.Generic;
using System.Linq;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
namespace AthenaEngine.Framework.Systems
   /// <summary>
   /// The ResourceManager class manages resources on behalf of the game.
    /// </summary>
    /// <typeparam name="T">The type of resource to manage</typeparam>
      public class ResourceManager<T>
        private Game game;
        private Dictionary<String, T> Resources = new Dictionary<String, T>();
        /// <summary>
        /// Creates a new ResourceManager to manage resources for a game.
        /// </summary>
        /// <param name="game">The game to manage resources for.</param>
        public ResourceManager(Game game)
        {
            this.game = game;
        }
        /// <summary>
        /// Add a new resource to the resources list maintained by the
ResourceManager.
        /// </summary>
        /// <param name="key">The key to associate the resource with</param>
        /// <param name="resource">The resource associated with the key</param>
        /// <returns></returns>
        public T Add(string key, T resource)
        {
            this.Resources.Add(key, resource);
            return resource;
```

```
}
        /// <summary>
        /// Gets the resource stored associated with a key.
        /// </summary>
        /// <param name="key">The key to find the resource associated with.</param>
        /// <returns></returns>
        public T Get(string key)
        {
            return this.Resources[key];
        }
       }
}
Triggers
using System;
using System.Collections.Generic;
using System.Linq;
using System.Text;
namespace AthenaEngine.Framework.Systems
       /// <summary>
       /// Triggers.
       /// </summary>
    class Triggers
              /// <summary>
              \ensuremath{///} This was used to test
              /// </summary>
        public static void test ()
            System.Console.WriteLine("You stepped on a tile.");
        }
              /// <summary>
              /// Random encounter test
              /// </summary>
        public static void encounter()
        {
            Random Rng = new Random();
            int encounter = Rng.Next(1,20);
            if((encounter %4 == 0))
                Console.WriteLine("Random Encounter!");
        }
    }
}
UI
using System;
```

```
using System.Collections.Generic;
using System.Linq;
using System.Text;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
using AthenaEngine.Framework;
using AthenaEngine.Framework.Gameplay;
using AthenaEngine.Framework.Interfaces;
using AthenaEngine.Framework.Primatives;
using AthenaEngine.Framework.Systems;
namespace AthenaEngine.Framework.UI
       /// <summary>
      /// UI
       /// </summary>
    public class UI
        SpriteBatch SpriteBatch;
        ResourceManager<Texture2D> TextureManager;
        ResourceManager<SpriteFont> FontManager;
        public Level Level;
        /*
        public UIButton(Vector2 position, Vector2 size, SpriteBatch spriteBatch,
Texture2D texture) : base(position, size, spriteBatch, texture)
            this.SpriteColor = Color.White;
            this.SpriteTexture = texture;
            this.SpriteRectangle = new Rectangle((int)position.X, (int)position.Y,
(int)size.X, (int)size.Y);
            this.SpriteController = spriteBatch;
              /// <summary>
              /// Initializes a new instance of the <see
cref="AthenaEngine.Framework.UI.UI"/> class.
              /// </summary>
              /// <param name='spriteBatch'>
              /// Sprite batch.
              /// </param>
              /// <param name='textureManager'>
              /// Texture manager.
              /// </param>
              /// <param name='fontManager'>
/// Font manager.
              /// </param>
        public UI (SpriteBatch spriteBatch, ResourceManager<Texture2D> textureManager,
ResourceManager<SpriteFont> fontManager)
            this.SpriteBatch = spriteBatch;
            this.TextureManager = textureManager;
            this.FontManager = fontManager;
        }
```

```
/// <summary>
              /// The buttons.
              /// </summary>
        private List<UIButton> Buttons = new List<UIButton>();
              /// <summary>
              /// Adds the button.
              /// </summary>
              /// <param name='position'>
              /// Position.
              /// </param>
              /// <param name='label'>
              /// Label.
              /// </param>
        public void AddButton(Vector2 position, string label)
            // Buttons.Add(new UIButton(position, new Vector2(100, 40), SpriteBatch,
TextureManager.Get("blank")));
            Buttons.Add(new UIButton(new Rectangle((int)position.X, (int)position.Y,
100, 40), this.SpriteBatch, TextureManager.Get("blank"), Color.Orange, label,
FontManager.Get("SpriteFont1")));
        }
              /// <summary>
              /// Draw this instance.
              /// </summary>
        public void Draw ()
        {
            foreach (UIButton btn in Buttons)
            {
                btn.Draw();
        }
   }
}
```

UI Button

```
using System;
using System.Collections.Generic;
using System.Linq;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
using AthenaEngine.Framework;
using AthenaEngine.Framework.Gameplay;
using AthenaEngine.Framework.Interfaces;
using AthenaEngine.Framework.Primatives;
using AthenaEngine.Framework.Systems;
namespace AthenaEngine.Framework.UI
```

```
/// <summary>
       /// User interface button.
      /// </summary>
    public class UIButton
        private SpriteBatch Batch;
        private Texture2D Texture;
        private SpriteFont Font;
        private Color Color;
        private string Label;
        public Level Level;
        private Rectangle SpriteRect;
              /// <summary>
              /// Initializes a new instance of the <see
cref="AthenaEngine.Framework.UI.UIButton"/> class.
              /// </summary>
              /// <param name='rectangle'>
              /// Rectangle.
              /// </param>
              /// <param name='spriteBatch'>
              /// Sprite batch.
              /// </param>
              /// <param name='texture'>
              /// Texture.
              /// </param>
              /// <param name='color'>
              /// Color.
              /// </param>
              /// <param name='label'>
              /// Label.
              /// </param>
              /// <param name='font'>
              /// Font.
              /// </param>
        public UIButton (Rectangle rectangle, SpriteBatch spriteBatch, Texture2D
texture, Color color, string label, SpriteFont font)
            this.SpriteRect = rectangle;
            this.Batch = spriteBatch;
            this.Texture = texture;
            this.Color = color;
            this.Label = label;
            this.Font = font;
        }
              /// <summary>
              /// Draw this instance.
              /// </summary>
        public void Draw ()
            // DrawableEntity Base = new DrawableEntity(new Vector2(SpriteRect.X,
SpriteRect.Y), new Vector2(SpriteRect.Width, SpriteRect.Height), Batch, Texture,
Level);
            // DrawableEntity Stroke = new DrawableEntity(new Vector2(SpriteRect.X -

    SpriteRect.Y - 2), new Vector2(SpriteRect.Width + 4, SpriteRect.Height + 4), Batch,

Texture, Level);
            // Stroke.SpriteColor = Color.Black;
            // Base.SpriteColor = this.Color;
            // Stroke.Draw();
            // Base.Draw();
```

```
// int x = (int)SpriteRect.X + Font.MeasureString(Label).X / 2
            int X = SpriteRect.X + (SpriteRect.Width - (int)
Font.MeasureString(Label).X) / 2;
            int Y = SpriteRect.Y;
            Batch.DrawString(Font, Label, new Vector2(X, Y), Color.Black);
   }
}
Camera 2D
using System;
using System.Collections.Generic;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
using AthenaEngine.Framework.Interfaces;
namespace AthenaEngine.Framework
       /// <summary>
       /// Camera2D
      /// </summary>
      public class Camera2D : GameComponent
       {
              private Vector2 _position;
              protected float viewportHeight;
              protected float _viewportWidth;
              /// <summary>
              /// Initializes a new instance of the <see
cref="AthenaEngine.Framework.Camera2D"/> class.
              /// </summary>
              /// <param name='game'>
              /// Game.
              /// </param>
              public Camera2D (Game game) : base (game)
              }
              /// <summary>
              /// Gets or sets the position.
              /// </summary>
              /// <value>
              /// The position.
              /// </value>
              public Vector2 Position {
                     get { return _position; }
                     set { _position = value; }
              }
              public float Rotation { get; set; }
```

```
public Vector2 Origin { get; set; }
             public float Scale { get; set; }
             public Vector2 ScreenCenter { get; protected set; }
             public Matrix Transform { get; set; }
             public IFocusable Focus { get; set; }
             public float MoveSpeed { get; set; }
      /// <summary>
   /// Called when the GameComponent needs to be initialized.
   /// </summary>
   ///
   public override void Initialize()
        viewportWidth = Game.GraphicsDevice.Viewport.Width;
        _viewportHeight = Game.GraphicsDevice.Viewport.Height;
        ScreenCenter = new Vector2(_viewportWidth/2, _viewportHeight/2);
        Scale = 1;
       MoveSpeed = 1.25f;
       base.Initialize();
   }
             /// <summary>
             /// Update the specified gameTime.
             /// </summary>
             /// <param name='gameTime'>
             /// Game time.
             /// </param>
    public override void Update(GameTime gameTime)
        // Create the Transform used by any
        // spritebatch process
        Transform = Matrix.Identity*
                    Matrix.CreateTranslation(-Position.X, -Position.Y, 0)*
                    Matrix.CreateRotationZ(Rotation)*
                    Matrix.CreateTranslation(Origin.X, Origin.Y, 0)*
                    Matrix.CreateScale(new Vector3(Scale, Scale, Scale));
        Origin = ScreenCenter / Scale;
        // Move the Camera to the position that it needs to go
        var delta = (float) gameTime.ElapsedGameTime.TotalSeconds;
        _position.X += (Focus.Position.X - Position.X) * MoveSpeed * delta;
        _position.Y += (Focus.Position.Y - Position.Y) * MoveSpeed * delta;
        base.Update(gameTime);
   }
   /// <summary>
   /// Determines whether the target is in view given the specified position.
   /// This can be used to increase performance by not drawing objects
   /// directly in the viewport
   /// </summary>
   /// <param name="position">The position.</param>
   /// <param name="texture">The texture.</param>
   /// <returns>
   ///
           <c>true</c> if [is in view] [the specified position]; otherwise,
<c>false</c>.
   /// </returns>
   public bool IsInView(Vector2 position, Texture2D texture)
```

```
{
    // If the object is not within the horizontal bounds of the screen
    if ( (position.X + texture.Width) < (Position.X - Origin.X) || (position.X) >
(Position.X + Origin.X) )
        return false;

    // If the object is not within the vertical bounds of the screen
    if ((position.Y + texture.Height) < (Position.Y - Origin.Y) || (position.Y) >
(Position.Y + Origin.Y))
        return false;

    // In View
    return true;
}
```

Bounding Box 2D Test

```
using System;
using Microsoft.VisualStudio.TestTools.UnitTesting;
using System.Collections.Generic;
using System.Linq;
using Microsoft.Xna.Framework;
using Microsoft.Xna.Framework.Audio;
using Microsoft.Xna.Framework.Content;
using Microsoft.Xna.Framework.GamerServices;
using Microsoft.Xna.Framework.Graphics;
using Microsoft.Xna.Framework.Input;
using Microsoft.Xna.Framework.Media;
using AthenaEngine.Framework.Primatives;
namespace AthenaTest.Engine_Tests.Primatives_Testing
{
    [TestClass]
    public class BoundingBox2DTest
        [TestMethod]
        public void Equality_WithSameRectangle_IsEqual()
        {
            Vector2 FirstBoundingBox2D_XY = new Vector2(0, 0);
            Vector2 FirstBoundingBox2D_WidthHeight = new Vector2(100, 100);
            BoundingBox2D FirstBoundingBox2D = new
BoundingBox2D(FirstBoundingBox2D_XY, FirstBoundingBox2D_WidthHeight);
            BoundingBox2D SecondBoundingBox2D = FirstBoundingBox2D;
            bool BoxesEqual = FirstBoundingBox2D.Equals(SecondBoundingBox2D);
            Assert.AreEqual<bool>(BoxesEqual, true);
        }
        [TestMethod]
        public void Equality_WithIdenticalRectangle_IsEqual()
        {
            Vector2 FirstBoundingBox2D_XY = new Vector2(0, 0);
            Vector2 FirstBoundingBox2D_WidthHeight = new Vector2(100, 100);
```

```
BoundingBox2D FirstBoundingBox2D = new
BoundingBox2D(FirstBoundingBox2D_XY, FirstBoundingBox2D_WidthHeight);
            BoundingBox2D SecondBoundingBox2D = new
BoundingBox2D(FirstBoundingBox2D_XY, FirstBoundingBox2D_WidthHeight);
            bool BoxesEqual = FirstBoundingBox2D.Equals(SecondBoundingBox2D);
            Assert.AreEqual<bool>(BoxesEqual, true);
        }
        [TestMethod]
        public void Equality WithDifferentRectangle IsNotEqual()
            Vector2 FirstBoundingBox2D XY = new Vector2(0, 0);
            Vector2 FirstBoundingBox2D_WidthHeight = new Vector2(100, 100);
            Vector2 SecondBoundingBox2D XY = new Vector2(32, 15);
            Vector2 SecondBoundingBox2D WidthHeight = new Vector2(81, 542);
            BoundingBox2D FirstBoundingBox2D = new
BoundingBox2D(FirstBoundingBox2D XY, FirstBoundingBox2D WidthHeight);
            BoundingBox2D SecondBoundingBox2D = new
BoundingBox2D(SecondBoundingBox2D_XY, SecondBoundingBox2D_WidthHeight);
            bool BoxesEqual = FirstBoundingBox2D.Equals(SecondBoundingBox2D);
            Assert.AreEqual<bool>(BoxesEqual, false);
        }
        [TestMethod]
        public void Equality_WithItself_IsEqual()
            Vector2 FirstBoundingBox2D_XY = new Vector2(0, 0);
            Vector2 FirstBoundingBox2D_WidthHeight = new Vector2(100, 100);
            BoundingBox2D FirstBoundingBox2D = new
BoundingBox2D(FirstBoundingBox2D XY, FirstBoundingBox2D WidthHeight);
            bool BoxesEqual = FirstBoundingBox2D.Equals(FirstBoundingBox2D);
            Assert.AreEqual<bool>(BoxesEqual, true);
        }
        [TestMethod]
        public void Collisions_WithItself_IsTrue()
            Vector2 FirstBoundingBox2D XY = new Vector2(0, 0);
            Vector2 FirstBoundingBox2D WidthHeight = new Vector2(100, 100);
            BoundingBox2D FirstBoundingBox2D = new
BoundingBox2D(FirstBoundingBox2D XY, FirstBoundingBox2D WidthHeight);
            bool BoxesCollide = FirstBoundingBox2D.CollidesWith(FirstBoundingBox2D);
            Assert.AreEqual<bool>(BoxesCollide, true);
        }
        [TestMethod]
        public void Collisions WithTotallyDifferentRectangle IsNotTrue()
            Vector2 FirstBoundingBox2D XY = new Vector2(0, 0);
            Vector2 FirstBoundingBox2D WidthHeight = new Vector2(100, 100);
```

```
Vector2 SecondBoundingBox2D_XY = new Vector2(151, 214);
           Vector2 SecondBoundingBox2D_WidthHeight = new Vector2(81, 542);
            BoundingBox2D FirstBoundingBox2D = new
BoundingBox2D(FirstBoundingBox2D_XY, FirstBoundingBox2D_WidthHeight);
            BoundingBox2D SecondBoundingBox2D = new
BoundingBox2D(SecondBoundingBox2D_XY, SecondBoundingBox2D_WidthHeight);
           bool BoxesCollide = FirstBoundingBox2D.CollidesWith(SecondBoundingBox2D);
           Assert.AreEqual<bool>(BoxesCollide, false);
        }
        [TestMethod]
        public void Collisions_WithEnvelopedRectangle_IsTrue()
           Vector2 FirstBoundingBox2D XY = new Vector2(0, 0);
           Vector2 FirstBoundingBox2D WidthHeight = new Vector2(100, 100);
           Vector2 SecondBoundingBox2D XY = new Vector2(25, 25);
           Vector2 SecondBoundingBox2D_WidthHeight = new Vector2(25, 25);
            BoundingBox2D FirstBoundingBox2D = new
BoundingBox2D(FirstBoundingBox2D_XY, FirstBoundingBox2D_WidthHeight);
            BoundingBox2D SecondBoundingBox2D = new
BoundingBox2D(SecondBoundingBox2D_XY, SecondBoundingBox2D_WidthHeight);
           bool BoxesCollide = FirstBoundingBox2D.CollidesWith(SecondBoundingBox2D);
           Assert.AreEqual<bool>(BoxesCollide, true);
        }
        [TestMethod]
        public void Collisions_WithRectangleOnLeft_IsFalse()
           Vector2 FirstBoundingBox2D_XY = new Vector2(10, 10);
           Vector2 FirstBoundingBox2D WidthHeight = new Vector2(10, 10);
           Vector2 SecondBoundingBox2D XY = new Vector2(0, 10);
           Vector2 SecondBoundingBox2D_WidthHeight = new Vector2(10, 10);
            BoundingBox2D FirstBoundingBox2D = new
BoundingBox2D(FirstBoundingBox2D_XY, FirstBoundingBox2D_WidthHeight);
            BoundingBox2D SecondBoundingBox2D = new
BoundingBox2D(SecondBoundingBox2D XY, SecondBoundingBox2D WidthHeight);
           bool BoxesCollide = FirstBoundingBox2D.CollidesWith(SecondBoundingBox2D);
           Assert.AreEqual<bool>(BoxesCollide, false);
        }
        [TestMethod]
        public void Collisions_WithRectangleOnRight_IsFalse()
           Vector2 FirstBoundingBox2D_XY = new Vector2(10, 10);
           Vector2 FirstBoundingBox2D_WidthHeight = new Vector2(10, 10);
           Vector2 SecondBoundingBox2D XY = new Vector2(20, 10);
           Vector2 SecondBoundingBox2D WidthHeight = new Vector2(10, 10);
```

```
BoundingBox2D FirstBoundingBox2D = new
BoundingBox2D(FirstBoundingBox2D_XY, FirstBoundingBox2D_WidthHeight);
            BoundingBox2D SecondBoundingBox2D = new
BoundingBox2D(SecondBoundingBox2D_XY, SecondBoundingBox2D_WidthHeight);
            bool BoxesCollide = FirstBoundingBox2D.CollidesWith(SecondBoundingBox2D);
            Assert.AreEqual<bool>(BoxesCollide, false);
        }
        [TestMethod]
        public void Collisions WithRectangleOnTop IsFalse()
            Vector2 FirstBoundingBox2D XY = new Vector2(10, 10);
            Vector2 FirstBoundingBox2D WidthHeight = new Vector2(10, 10);
            Vector2 SecondBoundingBox2D XY = new Vector2(10, 0);
            Vector2 SecondBoundingBox2D WidthHeight = new Vector2(10, 10);
            BoundingBox2D FirstBoundingBox2D = new
BoundingBox2D(FirstBoundingBox2D XY, FirstBoundingBox2D WidthHeight);
            BoundingBox2D SecondBoundingBox2D = new
BoundingBox2D(SecondBoundingBox2D_XY, SecondBoundingBox2D_WidthHeight);
            bool BoxesCollide = FirstBoundingBox2D.CollidesWith(SecondBoundingBox2D);
            Assert.AreEqual<bool>(BoxesCollide, false);
        }
        [TestMethod]
        public void Collisions WithRectangleOnBottom IsFalse()
            Vector2 FirstBoundingBox2D XY = new Vector2(10, 10);
            Vector2 FirstBoundingBox2D_WidthHeight = new Vector2(10, 10);
            Vector2 SecondBoundingBox2D_XY = new Vector2(10, 20);
            Vector2 SecondBoundingBox2D WidthHeight = new Vector2(10, 10);
            BoundingBox2D FirstBoundingBox2D = new
BoundingBox2D(FirstBoundingBox2D_XY, FirstBoundingBox2D_WidthHeight);
            BoundingBox2D SecondBoundingBox2D = new
BoundingBox2D(SecondBoundingBox2D XY, SecondBoundingBox2D WidthHeight);
            bool BoxesCollide = FirstBoundingBox2D.CollidesWith(SecondBoundingBox2D);
            Assert.AreEqual<bool>(BoxesCollide, false);
        }
        [TestMethod]
        public void Collisions WithRectangleCollidingLeft IsTrue()
            Vector2 FirstBoundingBox2D XY = new Vector2(10, 10);
            Vector2 FirstBoundingBox2D WidthHeight = new Vector2(10, 10);
            Vector2 SecondBoundingBox2D_XY = new Vector2(1, 10);
            Vector2 SecondBoundingBox2D_WidthHeight = new Vector2(10, 10);
            BoundingBox2D FirstBoundingBox2D = new
BoundingBox2D(FirstBoundingBox2D XY, FirstBoundingBox2D WidthHeight);
            BoundingBox2D SecondBoundingBox2D = new
BoundingBox2D(SecondBoundingBox2D XY, SecondBoundingBox2D WidthHeight);
```

```
bool BoxesCollide = FirstBoundingBox2D.CollidesWith(SecondBoundingBox2D);
            Assert.AreEqual<bool>(BoxesCollide, true);
        }
        [TestMethod]
        public void Collisions_WithRectangleCollidingRight_IsTrue()
            Vector2 FirstBoundingBox2D XY = new Vector2(10, 10);
            Vector2 FirstBoundingBox2D WidthHeight = new Vector2(10, 10);
            Vector2 SecondBoundingBox2D XY = new Vector2(19, 10);
            Vector2 SecondBoundingBox2D_WidthHeight = new Vector2(10, 10);
            BoundingBox2D FirstBoundingBox2D = new
BoundingBox2D(FirstBoundingBox2D XY, FirstBoundingBox2D WidthHeight);
            BoundingBox2D SecondBoundingBox2D = new
BoundingBox2D(SecondBoundingBox2D XY, SecondBoundingBox2D WidthHeight);
            bool BoxesCollide = FirstBoundingBox2D.CollidesWith(SecondBoundingBox2D);
            Assert.AreEqual<bool>(BoxesCollide, true);
        }
        [TestMethod]
        public void Collisions_WithRectangleCollidingTop_IsTrue()
            Vector2 FirstBoundingBox2D_XY = new Vector2(10, 10);
            Vector2 FirstBoundingBox2D_WidthHeight = new Vector2(10, 10);
            Vector2 SecondBoundingBox2D XY = new Vector2(10, 1);
            Vector2 SecondBoundingBox2D WidthHeight = new Vector2(10, 10);
            BoundingBox2D FirstBoundingBox2D = new
BoundingBox2D(FirstBoundingBox2D_XY, FirstBoundingBox2D_WidthHeight);
            BoundingBox2D SecondBoundingBox2D = new
BoundingBox2D(SecondBoundingBox2D_XY, SecondBoundingBox2D_WidthHeight);
            bool BoxesCollide = FirstBoundingBox2D.CollidesWith(SecondBoundingBox2D);
            Assert.AreEqual<bool>(BoxesCollide, true);
        }
        [TestMethod]
        public void Collisions_WithRectangleCollidingBottom_IsTrue()
        {
            Vector2 FirstBoundingBox2D XY = new Vector2(10, 10);
            Vector2 FirstBoundingBox2D WidthHeight = new Vector2(10, 10);
            Vector2 SecondBoundingBox2D XY = new Vector2(10, 19);
            Vector2 SecondBoundingBox2D WidthHeight = new Vector2(10, 10);
            BoundingBox2D FirstBoundingBox2D = new
BoundingBox2D(FirstBoundingBox2D_XY, FirstBoundingBox2D_WidthHeight);
            BoundingBox2D SecondBoundingBox2D = new
BoundingBox2D(SecondBoundingBox2D_XY, SecondBoundingBox2D_WidthHeight);
            bool BoxesCollide = FirstBoundingBox2D.CollidesWith(SecondBoundingBox2D);
            Assert.AreEqual<bool>(BoxesCollide, true);
        }
   }
```

9 Appendix 9 - Code Documentation

Athena

Generated by Doxygen 1.8.3.1

Tue May 6 2014 12:11:10

Contents

| 1 | Nam | espace Index | 1 |
|---|-------|---|----|
| | 1.1 | Packages | 1 |
| 2 | Hiera | archical Index | 3 |
| | 2.1 | Class Hierarchy | 3 |
| 3 | Clas | s Index | 5 |
| | 3.1 | Class List | 5 |
| 4 | File | Index | 7 |
| | 4.1 | File List | 7 |
| 5 | Nam | nespace Documentation | 9 |
| | 5.1 | Package Athena | 9 |
| | 5.2 | Package AthenaEngine | 9 |
| | 5.3 | Package AthenaEngine.Framework | 9 |
| | 5.4 | Package AthenaEngine.Framework.Gameplay | 10 |
| | 5.5 | Package AthenaEngine.Framework.Gameplay.RPG | 10 |
| | 5.6 | Package AthenaEngine.Framework.Interfaces | 10 |
| | 5.7 | Package AthenaEngine.Framework.Primatives | 10 |
| | 5.8 | Package AthenaEngine.Framework.Systems | 11 |
| | 5.9 | Package AthenaEngine.Framework.UI | 11 |
| | 5.10 | Package AthenaTest | 11 |
| | 5.11 | Package AthenaTest.Engine_Tests | 11 |
| | 5.12 | Package AthenaTest.Engine_Tests.Primatives_Testing | 11 |
| 6 | Clas | es Documentation | 13 |
| | 6.1 | AthenaEngine.AthenaEngine Class Reference | 13 |
| | 6.2 | AthenaEngine.Framework.Primatives.BoundingBox2D Class Reference | 13 |
| | | 6.2.1 Detailed Description | 13 |
| | | 6.2.2 Constructor & Destructor Documentation | 14 |
| | | 6.2.2.1 BoundingBox2D | 14 |
| | | 6.2.3 Member Function Documentation | 14 |

ii CONTENTS

| | | 6.2.3.1 | CollidesWith | 4 |
|-----|--------|--------------------|---|----|
| | | 6.2.3.2 | Equals | 14 |
| | 6.2.4 | Property | Documentation | 14 |
| | | 6.2.4.1 | Bounds | 14 |
| 6.3 | Athena | Test.Engir | ne_Tests.Primatives_Testing.BoundingBox2DTest Class Reference | 14 |
| | 6.3.1 | Member | Function Documentation | 15 |
| | | 6.3.1.1 | Collisions_WithEnvelopedRectangle_IsTrue | 15 |
| | | 6.3.1.2 | Collisions_WithItself_IsTrue | 15 |
| | | 6.3.1.3 | Collisions_WithRectangleCollidingBottom_IsTrue | 15 |
| | | 6.3.1.4 | Collisions_WithRectangleCollidingLeft_IsTrue | 15 |
| | | 6.3.1.5 | Collisions_WithRectangleCollidingRight_IsTrue | 15 |
| | | 6.3.1.6 | Collisions_WithRectangleCollidingTop_IsTrue | 15 |
| | | 6.3.1.7 | Collisions_WithRectangleOnBottom_IsFalse | 15 |
| | | 6.3.1.8 | Collisions_WithRectangleOnLeft_IsFalse | 15 |
| | | 6.3.1.9 | Collisions_WithRectangleOnRight_IsFalse | 15 |
| | | 6.3.1.10 | Collisions_WithRectangleOnTop_IsFalse | 15 |
| | | 6.3.1.11 | Collisions_WithTotallyDifferentRectangle_IsNotTrue | 15 |
| | | 6.3.1.12 | Equality_WithDifferentRectangle_IsNotEqual | 15 |
| | | 6.3.1.13 | Equality_WithIdenticalRectangle_IsEqual | 15 |
| | | 6.3.1.14 | Equality_WithItself_IsEqual | 15 |
| | | 6.3.1.15 | Equality_WithSameRectangle_IsEqual | 15 |
| 6.4 | Athena | Engine.Fra | amework.Camera2D Class Reference | 16 |
| | 6.4.1 | Detailed | Description | 16 |
| | 6.4.2 | Construc | tor & Destructor Documentation | 16 |
| | | 6.4.2.1 | Camera2D | 16 |
| | 6.4.3 | Member | Function Documentation | 7 |
| | | 6.4.3.1 | Initialize | 17 |
| | | 6.4.3.2 | IsInView | 17 |
| | | 6.4.3.3 | Update | 17 |
| | 6.4.4 | Member | Data Documentation | 17 |
| | | 6.4.4.1 | _viewportHeight | 17 |
| | | 6.4.4.2 | _viewportWidth | 17 |
| | 6.4.5 | Property | Documentation | 17 |
| | | 6.4.5.1 | Focus | 17 |
| | | 6.4.5.2 | MoveSpeed | 17 |
| | | 6.4.5.3 | Origin | 17 |
| | | | | - |
| | | 6.4.5.4 | Position | 17 |
| | | 6.4.5.4 6.4.5.5 | | 17 |
| | | | Rotation | |

CONTENTS

| | | 6.4.5.8 Transform |
|-----|--------|--|
| 6.5 | Athena | aEngine.Framework.Gameplay.Character Class Reference |
| | 6.5.1 | Detailed Description |
| | 6.5.2 | Constructor & Destructor Documentation |
| | | 6.5.2.1 Character |
| 6.6 | Athena | Engine.Framework.Primatives.CollidableEntity Class Reference |
| | 6.6.1 | Detailed Description |
| | 6.6.2 | Constructor & Destructor Documentation |
| | | 6.6.2.1 CollidableEntity |
| | 6.6.3 | Member Function Documentation |
| | | 6.6.3.1 CanMove |
| | | 6.6.3.2 CollidesWith |
| | | 6.6.3.3 Move |
| | 6.6.4 | Member Data Documentation |
| | | 6.6.4.1 Level |
| | 6.6.5 | Property Documentation |
| | | 6.6.5.1 Bounds |
| 6.7 | Athena | aEngine.Framework.Primatives.Directions Class Reference |
| | 6.7.1 | Member Data Documentation |
| | | 6.7.1.1 DOWN |
| | | 6.7.1.2 LEFT |
| | | 6.7.1.3 RIGHT |
| | | 6.7.1.4 UP |
| 6.8 | Athena | a Engine. Framework. Primatives. Drawable Entity Class Reference |
| | 6.8.1 | Detailed Description |
| | 6.8.2 | Constructor & Destructor Documentation |
| | | 6.8.2.1 DrawableEntity |
| | 6.8.3 | Member Function Documentation |
| | | 6.8.3.1 Draw |
| | 6.8.4 | Member Data Documentation |
| | | 6.8.4.1 level |
| | | 6.8.4.2 SpriteColor |
| | | 6.8.4.3 SpriteController |
| | | 6.8.4.4 SpriteSheet |
| | | 6.8.4.5 SpriteSource |
| | 6.8.5 | Property Documentation |
| | | 6.8.5.1 Position |
| 6.9 | Athena | aEngine.Framework.Primatives.Entity Class Reference |
| | 6.9.1 | Detailed Description |
| | 6.9.2 | Member Function Documentation |

iv CONTENTS

| | | 6.9.2.1 Move | 23 |
|------|--------|---|----|
| | 6.9.3 | Member Data Documentation | 23 |
| | | 6.9.3.1 Position | 23 |
| | | 6.9.3.2 Size | 23 |
| | 6.9.4 | Property Documentation | 23 |
| | | 6.9.4.1 Height | 23 |
| | | 6.9.4.2 Rectangle | 23 |
| | | 6.9.4.3 Width | 24 |
| | | 6.9.4.4 X | 24 |
| | | 6.9.4.5 Y | 24 |
| 6.10 | Athena | .Game1 Class Reference | 24 |
| | 6.10.1 | Detailed Description | 24 |
| | 6.10.2 | Constructor & Destructor Documentation | 25 |
| | | 6.10.2.1 Game1 | 25 |
| | 6.10.3 | Member Function Documentation | 25 |
| | | 6.10.3.1 Draw | 25 |
| | | 6.10.3.2 Initialize | 25 |
| | | 6.10.3.3 LoadContent | 25 |
| | | 6.10.3.4 UnloadContent | 25 |
| | | 6.10.3.5 Update | 25 |
| | 6.10.4 | Member Data Documentation | 25 |
| | | | 25 |
| 6.11 | | | 25 |
| | | · | 26 |
| | 6.11.2 | Member Function Documentation | 26 |
| | | 6.11.2.1 CollidesWith | 26 |
| 6.12 | Athena | Engine.Framework.Interfaces.IDrawable Interface Reference | 26 |
| | 6.12.1 | Detailed Description | 26 |
| | 6.12.2 | Member Function Documentation | 26 |
| | | 6.12.2.1 Draw | 26 |
| 6.13 | | 3 | 27 |
| | 6.13.1 | Detailed Description | 27 |
| | 6.13.2 | Property Documentation | 27 |
| | | 6.13.2.1 Position | 27 |
| 6.14 | Athena | Engine.Framework.Interfaces.IMoveable Interface Reference | 27 |
| | 6.14.1 | Member Function Documentation | 27 |
| | | 6.14.1.1 CanMove | 27 |
| | | 6.14.1.2 Move | 27 |
| 6.15 | Athena | Engine.Framework.Gameplay.RPG.Inventory Class Reference | 28 |
| | | Detailed Description | 28 |

CONTENTS

| | 6.15.2 | Member Function Documentation | 28 |
|------|--------|---|----|
| | | 6.15.2.1 Add | 28 |
| 6.16 | Athena | Engine.Framework.Gameplay.RPG.Item Class Reference | 28 |
| | 6.16.1 | Detailed Description | 29 |
| | 6.16.2 | Constructor & Destructor Documentation | 29 |
| | | 6.16.2.1 Item | 29 |
| | 6.16.3 | Property Documentation | 29 |
| | | 6.16.3.1 Name | 29 |
| 6.17 | Athena | Engine.Framework.Gameplay.RPG.ItemInstance Class Reference | 29 |
| | 6.17.1 | Detailed Description | 29 |
| | 6.17.2 | Constructor & Destructor Documentation | 29 |
| | | 6.17.2.1 ItemInstance | 29 |
| 6.18 | Athena | Engine.Framework.Gameplay.Level Class Reference | 30 |
| | 6.18.1 | Detailed Description | 30 |
| | 6.18.2 | Constructor & Destructor Documentation | 30 |
| | | 6.18.2.1 Level | 30 |
| | 6.18.3 | Member Function Documentation | 30 |
| | | 6.18.3.1 Draw | 30 |
| | 6.18.4 | Member Data Documentation | 30 |
| | | 6.18.4.1 TileList | 31 |
| 6.19 | Athena | Engine.Framework.Systems.ResourceManager $<$ T $>$ Class Template Reference | 31 |
| | 6.19.1 | Detailed Description | 31 |
| | 6.19.2 | Constructor & Destructor Documentation | 31 |
| | | 6.19.2.1 ResourceManager | 31 |
| | 6.19.3 | Member Function Documentation | 31 |
| | | 6.19.3.1 Add | 31 |
| | | 6.19.3.2 Get | 32 |
| 6.20 | Athena | Engine.Framework.Systems.LevelLoaderXml.Sprite Class Reference | 32 |
| | 6.20.1 | Constructor & Destructor Documentation | 32 |
| | | 6.20.1.1 Sprite | 32 |
| | 6.20.2 | Member Data Documentation | 32 |
| | | 6.20.2.1 Collides | 32 |
| | | 6.20.2.2 Name | 32 |
| | | 6.20.2.3 X | 32 |
| | | 6.20.2.4 Y | 32 |
| 6.21 | Athena | Engine.Framework.Gameplay.Tile Class Reference | 32 |
| | 6.21.1 | Detailed Description | 33 |
| | 6.21.2 | Constructor & Destructor Documentation | 33 |
| | | 6.21.2.1 Tile | 33 |
| | 6.21.3 | Member Function Documentation | 33 |

vi CONTENTS

| | | 6.21.3.1 AddTrigger | 33 |
|---|--------|--|----|
| | | 6.21.3.2 Draw | 34 |
| | | 6.21.3.3 FireTrigger | 34 |
| | | 6.21.3.4 MakeDrawable | 34 |
| | | 6.21.4 Member Data Documentation | 34 |
| | | 6.21.4.1 Collides | 34 |
| | | 6.21.4.2 HasTrigger | 34 |
| | | 6.21.4.3 Sprite | 34 |
| | 6.22 | AthenaEngine.Framework.Systems.Triggers Class Reference | 34 |
| | | 6.22.1 Detailed Description | 35 |
| | | 6.22.2 Member Function Documentation | 35 |
| | | 6.22.2.1 encounter | 35 |
| | | 6.22.2.2 test | 35 |
| | 6.23 | AthenaEngine.Framework.UI.UI Class Reference | 35 |
| | | 6.23.1 Detailed Description | 35 |
| | | 6.23.2 Constructor & Destructor Documentation | 35 |
| | | 6.23.2.1 UI | 35 |
| | | 6.23.3 Member Function Documentation | 36 |
| | | 6.23.3.1 AddButton | 36 |
| | | 6.23.3.2 Draw | 36 |
| | | 6.23.4 Member Data Documentation | 36 |
| | | 6.23.4.1 Level | 36 |
| | 6.24 | AthenaEngine.Framework.UI.UIButton Class Reference | 36 |
| | | 6.24.1 Detailed Description | 36 |
| | | 6.24.2 Constructor & Destructor Documentation | 36 |
| | | 6.24.2.1 UIButton | 36 |
| | | 6.24.3 Member Function Documentation | 37 |
| | | 6.24.3.1 Draw | 37 |
| | | 6.24.4 Member Data Documentation | 37 |
| | | 6.24.4.1 Level | 37 |
| 7 | File I | Documentation Communication Co | 39 |
| | 7.1 | Athena/Athena/Debug.cs File Reference | 39 |
| | 7.2 | Athena/Athena/Game1.cs File Reference | 39 |
| | 7.3 | Athena/Athena/Program.cs File Reference | 39 |
| | 7.4 | Athena/Athena/Properties/AssemblyInfo.cs File Reference | 39 |
| | 7.5 | Athena/Athena/AthenaEngine/Properties/AssemblyInfo.cs File Reference | 39 |
| | 7.6 | Athena/Athena/Test/Properties/AssemblyInfo.cs File Reference | 39 |
| | 7.7 | Athena/Athena/AthenaEngine/AthenaEngine.cs File Reference | 40 |
| | 7.8 | Athena/Athena/AthenaEngine/Framework/Camera2D.cs File Reference | 40 |
| | | | |

CONTENTS

| 7.9 | Athena/Athena/AthenaEngine/Framework/Gameplay/Character.cs File Reference | 40 |
|------|---|----|
| 7.10 | Athena/Athena/AthenaEngine/Framework/Gameplay/Level.cs File Reference | 40 |
| 7.11 | Athena/Athena/AthenaEngine/Framework/Gameplay/RPG/Inventory.cs File Reference | 41 |
| 7.12 | Athena/Athena/AthenaEngine/Framework/Gameplay/RPG/Item.cs File Reference | 41 |
| 7.13 | Athena/Athena/AthenaEngine/Framework/Gameplay/RPG/ItemInstance.cs File Reference | 41 |
| 7.14 | Athena/Athena/AthenaEngine/Framework/Gameplay/Tile.cs File Reference | 41 |
| 7.15 | Athena/Athena/AthenaEngine/Framework/Interfaces/ICollidable.cs File Reference | 42 |
| 7.16 | Athena/Athena/AthenaEngine/Framework/Interfaces/IDrawable.cs File Reference | 42 |
| 7.17 | Athena/Athena/AthenaEngine/Framework/Interfaces/IFocusable.cs File Reference | 42 |
| 7.18 | Athena/Athena/AthenaEngine/Framework/Interfaces/IMoveable.cs File Reference | 42 |
| 7.19 | Athena/Athena/AthenaEngine/Framework/Primatives/BoundingBox2D.cs File Reference | 43 |
| 7.20 | Athena/Athena/AthenaEngine/Framework/Primatives/CollidableEntity.cs File Reference | 43 |
| 7.21 | Athena/Athena/AthenaEngine/Framework/Primatives/Directions.cs File Reference | 43 |
| 7.22 | Athena/Athena/AthenaEngine/Framework/Primatives/DrawableEntity.cs File Reference | 43 |
| 7.23 | Athena/Athena/AthenaEngine/Framework/Primatives/Entity.cs File Reference | 44 |
| 7.24 | Athena/Athena/AthenaEngine/Framework/Systems/LevelLoaderXml.cs File Reference | 44 |
| 7.25 | Athena/Athena/AthenaEngine/Framework/Systems/ResourceManager.cs File Reference | 44 |
| 7.26 | Athena/Athena/AthenaEngine/Framework/Systems/Triggers.cs File Reference | 44 |
| 7.27 | Athena/Athena/AthenaEngine/Framework/UI/UI.cs File Reference | 45 |
| 7.28 | Athena/Athena/AthenaEngine/Framework/UI/UIButton.cs File Reference | 45 |
| 7.29 | Athena/Athena/AthenaEngine/obj/Debug/TemporaryGeneratedFile_036C0B5B-1481-4323-8D20-8-F5ADCB23D92.cs File Reference | 45 |
| 7.30 | Athena/Athena/AthenaTest/obj/Debug/TemporaryGeneratedFile_036C0B5B-1481-4323-8D20-8F5-ADCB23D92.cs File Reference | 45 |
| 7.31 | Athena/Athena/AthenaEngine/obj/Debug/TemporaryGeneratedFile_5937a670-0e60-4077-877b-f7221da3dda1.cs File Reference | 45 |
| 7.32 | Athena/Athena/AthenaTest/obj/Debug/TemporaryGeneratedFile_5937a670-0e60-4077-877b-f7221da3dda1.cs File Reference | 45 |
| 7.33 | Athena/Athena/AthenaEngine/obj/Debug/TemporaryGeneratedFile_E7A71F73-0F8D-4B9B-B56E-8E70B10BC5D3.cs File Reference | 45 |
| 7.34 | Athena/Athena/AthenaTest/obj/Debug/TemporaryGeneratedFile_E7A71F73-0F8D-4B9B-B56E-8-E70B10BC5D3.cs File Reference | 45 |
| 7.35 | Athena/Athena/AthenaTest/Engine Tests/Primatives Testing/BoundingBox2DTest.cs File Reference | 45 |
| | | |

46

Index

Chapter 1

Namespace Index

1.1 Packages

Here are the packages with brief descriptions (if available):

| Athena |
|--|
| AthenaEngine |
| AthenaEngine.Framework |
| AthenaEngine.Framework.Gameplay |
| AthenaEngine.Framework.Gameplay.RPG |
| AthenaEngine.Framework.Interfaces |
| AthenaEngine.Framework.Primatives |
| AthenaEngine.Framework.Systems |
| AthenaEngine.Framework.UI |
| AthenaTest |
| AthenaTest.Engine_Tests |
| AthenaTest.Engine Tests.Primatives Testing |

2 Namespace Index

Chapter 2

Hierarchical Index

2.1 Class Hierarchy

This inheritance list is sorted roughly, but not completely, alphabetically:

| AthenaEngine.AthenaEngine | 13 |
|---|------|
| AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest | 14 |
| Athena Engine. Framework. Primatives. Directions | 20 |
| AthenaEngine.Framework.Primatives.Entity | 23 |
| AthenaEngine.Framework.Primatives.BoundingBox2D | . 13 |
| AthenaEngine.Framework.Primatives.CollidableEntity | . 19 |
| AthenaEngine.Framework.Gameplay.Tile | . 32 |
| AthenaEngine.Framework.Primatives.DrawableEntity | . 21 |
| AthenaEngine.Framework.Gameplay.Character | 18 |
| Game | |
| Athena.Game1 | . 24 |
| GameComponent | |
| AthenaEngine.Framework.Camera2D | |
| $A then a Engine. Framework. Interfaces. I Collidable < T > \dots \dots$ | 25 |
| Athena Engine. Framework. Interfaces. IDrawable | 26 |
| AthenaEngine.Framework.Primatives.DrawableEntity | . 21 |
| IEquatable < BoundingBox2D > | |
| AthenaEngine.Framework.Primatives.BoundingBox2D | . 13 |
| AthenaEngine.Framework.Interfaces.IFocusable | 27 |
| AthenaEngine.Framework.Gameplay.Character | . 18 |
| AthenaEngine.Framework.Primatives.DrawableEntity | . 21 |
| AthenaEngine.Framework.Interfaces.IMoveable | 27 |
| AthenaEngine.Framework.Gameplay.RPG.Inventory | 28 |
| Athena Engine. Framework. Gameplay. RPG. Item | 28 |
| AthenaEngine.Framework.Gameplay.RPG.ItemInstance | . 29 |
| AthenaEngine.Framework.Gameplay.Level | |
| $\label{thm:alternative} A the na Engine. Framework. Systems. Resource Manager < T > \dots \dots$ | 31 |
| AthenaEngine.Framework.Systems.LevelLoaderXml.Sprite | 32 |
| Athena Engine. Framework. Systems. Triggers | 34 |
| Athena Engine. Framework. Ul. Ul | 35 |
| AthenaEngine.Framework.UI.UIButton | 36 |
| | |

4 Hierarchical Index

Class Index

3.1 Class List

| Here are the classes, structs, unions and interfaces with brief descriptions: | |
|---|------|
| AthenaEngine.AthenaEngine | 13 |
| AthenaEngine.Framework.Primatives.BoundingBox2D | |
| BoundingBox2D is used for bounding boxes on 2D objects | 13 |
| AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest | 14 |
| Camera2D | 16 |
| AthenaEngine.Framework.Gameplay.Character | - 10 |
| A character class holds important detail about each character such as their items, level, experi- | |
| ence, skills, etc | 18 |
| AthenaEngine.Framework.Primatives.CollidableEntity | 10 |
| The Entity class is used to store objects that have positions. | 19 |
| AthenaEngine.Framework.Primatives.Directions | 20 |
| AthenaEngine.Framework.Primatives.DrawableEntity | 20 |
| This is an entity which can be drawn. | 21 |
| AthenaEngine.Framework.Primatives.Entity | _ |
| The Entity class is the superclass for anything. | 23 |
| Athena.Game1 | 20 |
| | 24 |
| This is the main type for your game | 24 |
| · | 25 |
| | 25 |
| AthenaEngine.Framework.Interfaces.IDrawable | 00 |
| I drawable. | 26 |
| AthenaEngine.Framework.Interfaces.IFocusable | 0- |
| I focusable. | 27 |
| AthenaEngine.Framework.Interfaces.IMoveable | 27 |
| AthenaEngine.Framework.Gameplay.RPG.Inventory | 0.0 |
| Inventory | 28 |
| AthenaEngine.Framework.Gameplay.RPG.Item | |
| A gameplay item can be held by a character. | 28 |
| AthenaEngine.Framework.Gameplay.RPG.ItemInstance | 0.0 |
| An item instance is a particular instance of an item. | 29 |
| AthenaEngine.Framework.Gameplay.Level | |
| A Level object holds all details required to handle level drawing. | 30 |
| AthenaEngine.Framework.Systems.ResourceManager< T > | |
| The ResourceManager class manages resources on behalf of the game | 31 |
| AthenaEngine.Framework.Systems.LevelLoaderXml.Sprite | 32 |
| AthenaEngine.Framework.Gameplay.Tile | |
| A tile is used to draw levels. | 32 |

| 3 | Class Index |
|---|-------------|
| | |

| AthenaEngine.Framework.Systems.Triggers | |
|---|------|
| Triggers. | . 34 |
| AthenaEngine.Framework.UI.UI | |
| UI | . 35 |
| AthenaEngine.Framework.UI.UIButton | |
| User interface button | 36 |

File Index

4.1 File List

| 11000 | : | 1:-+ | -4 - | 11 4:1 | مادان د | h.:- f | descrir | |
|-------|---|------|------|--------|---------|--------|---------|--|
| | | | | | | | | |

| Athena/Athena/Debug.cs |
|--|
| Athena/Athena/Game1.cs |
| Athena/Athena/Program.cs |
| Athena/Athena/Properties/AssemblyInfo.cs |
| Athena/Athena/Engine/AthenaEngine.cs |
| Athena/Athena/AthenaEngine/Framework/Camera2D.cs |
| Athena/Athena/AthenaEngine/Framework/Gameplay/Character.cs |
| Athena/Athena/AthenaEngine/Framework/Gameplay/Level.cs |
| Athena/Athena/AthenaEngine/Framework/Gameplay/Tile.cs |
| Athena/Athena/AthenaEngine/Framework/Gameplay/RPG/Inventory.cs |
| Athena/Athena/AthenaEngine/Framework/Gameplay/RPG/Item.cs |
| Athena/Athena/AthenaEngine/Framework/Gameplay/RPG/ItemInstance.cs |
| Athena/Athena/AthenaEngine/Framework/Interfaces/ICollidable.cs |
| Athena/Athena/AthenaEngine/Framework/Interfaces/IDrawable.cs |
| Athena/Athena/AthenaEngine/Framework/Interfaces/IFocusable.cs |
| Athena/Athena/AthenaEngine/Framework/Interfaces/IMoveable.cs |
| Athena/Athena/AthenaEngine/Framework/Primatives/BoundingBox2D.cs |
| Athena/Athena/AthenaEngine/Framework/Primatives/CollidableEntity.cs |
| Athena/Athena/AthenaEngine/Framework/Primatives/Directions.cs |
| Athena/Athena/AthenaEngine/Framework/Primatives/DrawableEntity.cs |
| Athena/Athena/AthenaEngine/Framework/Primatives/Entity.cs |
| Athena/Athena/AthenaEngine/Framework/Systems/LevelLoaderXml.cs |
| Athena/Athena/AthenaEngine/Framework/Systems/ResourceManager.cs |
| Athena/Athena/AthenaEngine/Framework/Systems/Triggers.cs |
| Athena/Athena/Engine/Framework/UI/UI.cs |
| Athena/Athena/Engine/Framework/UI/UIButton.cs |
| Athena/Athena/AthenaEngine/obj/Debug/TemporaryGeneratedFile_036C0B5B-1481-4323-8D20-8F5AD- |
| CB23D92.cs |
| $Athena/Athena/Athena Engine/obj/Debug/Temporary Generated File_5937a670-0e60-4077-877b-f7221da3dda100000000000000000000000000000000$ |
| cs |
| Athena/Athena/AthenaEngine/obj/Debug/TemporaryGeneratedFile_E7A71F73-0F8D-4B9B-B56E-8E70- |
| B10BC5D3.cs |
| Athena/Athena/AthenaEngine/Properties/AssemblyInfo.cs |
| Athena/Athena/Engine Tests/Primatives Testing/BoundingBox2DTest.cs |
| Athena/Athena/AthenaTest/obj/Debug/TemporaryGeneratedFile_036C0B5B-1481-4323-8D20-8F5ADC- |
| B23D92.cs |
| Athena/Athena/Test/obj/Debug/TemporaryGeneratedFile_5937a670-0e60-4077-877b-f7221da3dda1 |
| cs |

| F | ile Ind | les |
|---|----------|-----|
| , | 116 1110 | 16, |

| Athena/Athena/AthenaTest/obj/Debug/TemporaryGeneratedFile_E7A71F73-0F8D-4B9B-B56E-8E70B10- | |
|--|----|
| BC5D3.cs | 45 |
| Athena/Athena/Test/Properties/AssemblyInfo.cs | 39 |

Namespace Documentation

5.1 Package Athena

Classes

- · class Debug
- class Game1

This is the main type for your game

5.2 Package AthenaEngine

Namespaces

• package Framework

Classes

• class AthenaEngine

5.3 Package AthenaEngine.Framework

Namespaces

- · package Gameplay
- package Interfaces
- package Primatives
- package Systems
- package UI

Classes

• class Camera2D

Camera2D

5.4 Package Athena Engine. Framework. Gameplay

Namespaces

package RPG

Classes

· class Character

A character class holds important detail about each character such as their items, level, experience, skills, etc.

· class Level

A Level object holds all details required to handle level drawing.

· class Tile

A tile is used to draw levels.

5.5 Package AthenaEngine.Framework.Gameplay.RPG

Classes

· class Inventory

Inventory.

class Item

A gameplay item can be held by a character.

· class ItemInstance

An item instance is a particular instance of an item.

5.6 Package AthenaEngine.Framework.Interfaces

Classes

• interface | Collidable < T >

I collidable.

interface IDrawable

I drawable.

• interface IFocusable

I focusable.

• interface IMoveable

5.7 Package Athena Engine. Framework. Primatives

Classes

class BoundingBox2D

BoundingBox2D is used for bounding boxes on 2D objects.

· class CollidableEntity

The Entity class is used to store objects that have positions.

- class Directions
- class DrawableEntity

This is an entity which can be drawn.

· class Entity

The Entity class is the superclass for anything.

5.8 Package Athena Engine. Framework. Systems

Classes

· class LevelLoaderXml

the LevelLoader is used to load levels.

class ResourceManager< T >

The ResourceManager class manages resources on behalf of the game.

· class Triggers

Triggers.

5.9 Package AthenaEngine.Framework.UI

Classes

• class UI

UI

• class UIButton

User interface button.

5.10 Package AthenaTest

Namespaces

• package Engine_Tests

5.11 Package AthenaTest.Engine_Tests

Namespaces

• package Primatives_Testing

5.12 Package AthenaTest.Engine_Tests.Primatives_Testing

Classes

• class BoundingBox2DTest

| Namespace | D | |
|-----------|-------|----------|
| namespace | Docui | nemation |

Class Documentation

6.1 AthenaEngine.AthenaEngine Class Reference


The documentation for this class was generated from the following file:

• Athena/Athena/AthenaEngine/AthenaEngine.cs

6.2 AthenaEngine.Framework.Primatives.BoundingBox2D Class Reference

BoundingBox2D is used for bounding boxes on 2D objects.

Inheritance diagram for AthenaEngine.Framework.Primatives.BoundingBox2D:



Public Member Functions

• BoundingBox2D (Vector2 Position, Vector2 Size)

Constructor for BoundingBox2D

• bool Equals (BoundingBox2D otherBounds)

Check if the BoundingBox2D is equal to another BoundingBox2D

• bool CollidesWith (BoundingBox2D other)

Check to see if this BoundingBox2D collides with an other BoundingBox.

Properties

• Rectangle Bounds [get, set]

Additional Inherited Members

6.2.1 Detailed Description

BoundingBox2D is used for bounding boxes on 2D objects.

6.2.2 Constructor & Destructor Documentation

6.2.2.1 AthenaEngine.Framework.Primatives.BoundingBox2D.BoundingBox2D (Vector2 Position, Vector2 Size)

Constructor for BoundingBox2D

Parameters

| min | x/y coordinates for the bounding box |
|-----|--------------------------------------|
| max | width/height for the bounding box |

6.2.3 Member Function Documentation

6.2.3.1 bool AthenaEngine.Framework.Primatives.BoundingBox2D.CollidesWith (BoundingBox2D other)

Check to see if this BoundingBox2D collides with an other BoundingBox.

Parameters

| otherBounds | The other BoundingBox2D to compare with. |
|-------------|--|

Returns

6.2.3.2 bool AthenaEngine.Framework.Primatives.BoundingBox2D.Equals (BoundingBox2D otherBounds)

Check if the BoundingBox2D is equal to another BoundingBox2D

Parameters

| otherBounds | The other BoundingBox2D to check against. |
|-------------|---|
|-------------|---|

Returns

6.2.4 Property Documentation

6.2.4.1 Rectangle AthenaEngine.Framework.Primatives.BoundingBox2D.Bounds [get],[set],[protected]

The documentation for this class was generated from the following file:

• Athena/Athena/AthenaEngine/Framework/Primatives/BoundingBox2D.cs

6.3 AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest Class Reference

Public Member Functions

- void Equality_WithSameRectangle_IsEqual ()
- void Equality_WithIdenticalRectangle_IsEqual ()
- void Equality_WithDifferentRectangle_IsNotEqual ()
- void Equality_WithItself_IsEqual ()

- void Collisions_WithItself_IsTrue ()
- void Collisions_WithTotallyDifferentRectangle_IsNotTrue ()
- · void Collisions_WithEnvelopedRectangle_IsTrue ()
- void Collisions_WithRectangleOnLeft_IsFalse ()
- void Collisions WithRectangleOnRight IsFalse ()
- void Collisions_WithRectangleOnTop_IsFalse ()
- · void Collisions_WithRectangleOnBottom_IsFalse ()
- void Collisions_WithRectangleCollidingLeft_IsTrue ()
- void Collisions_WithRectangleCollidingRight_IsTrue ()
- void Collisions_WithRectangleCollidingTop_IsTrue ()
- void Collisions_WithRectangleCollidingBottom_IsTrue ()

6.3.1 Member Function Documentation

```
6.3.1.1
        void AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest.Collisions_WithEnvelopedRectangle_IsTrue ( )
6.3.1.2 void AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest.Collisions_WithItself_IsTrue ( )
6.3.1.3 void AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest.Collisions_WithRectangleCollidingBottom_IsTrue
        ( )
6.3.1.4 void AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest.Collisions_WithRectangleCollidingLeft_IsTrue (
       void AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest.Collisions_WithRectangleCollidingRight_IsTrue (
6.3.1.5
        void AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest.Collisions_WithRectangleCollidingTop_IsTrue( )
6.3.1.7
        void AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest.Collisions_WithRectangleOnBottom_IsFalse ( )
6.3.1.8 void AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest.Collisions_WithRectangleOnLeft_IsFalse ( )
6.3.1.9 void AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest.Collisions_WithRectangleOnRight_IsFalse ( )
6.3.1.10 void AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest.Collisions_WithRectangleOnTop_lsFalse ( )
6.3.1.11 void AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest.Collisions_WithTotallyDifferentRectangle_IsNot-
         True ( )
6.3.1.12
        void AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest.Equality_WithDifferentRectangle_IsNotEqual (
6.3.1.13 void AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest.Equality_WithIdenticalRectangle_IsEqual ( )
6.3.1.14 void AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest.Equality_WithItself_IsEqual ( )
6.3.1.15 void AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest.Equality_WithSameRectangle_IsEqual ( )
```


Athena/Athena/AthenaTest/Engine Tests/Primatives Testing/BoundingBox2DTest.cs

The documentation for this class was generated from the following file:

6.4 AthenaEngine.Framework.Camera2D Class Reference

Camera2D

Inheritance diagram for AthenaEngine.Framework.Camera2D:



Public Member Functions

• Camera2D (Game game)

Initializes a new instance of the AthenaEngine.Framework.Camera2D class.

• override void Initialize ()

Called when the GameComponent needs to be initialized.

• override void Update (GameTime gameTime)

Update the specified gameTime.

· bool IsInView (Vector2 position, Texture2D texture)

Determines whether the target is in view given the specified position. This can be used to increase performance by not drawing objects directly in the viewport

Protected Attributes

- · float viewportHeight
- · float _viewportWidth

Properties

```
• Vector2 Position [get, set]
```

Gets or sets the position.

- float Rotation [get, set]
- Vector2 Origin [get, set]
- float Scale [get, set]
- Vector2 ScreenCenter [get, set]
- Matrix Transform [get, set]
- IFocusable Focus [get, set]
- float MoveSpeed [get, set]

6.4.1 Detailed Description

Camera_{2D}

6.4.2 Constructor & Destructor Documentation

6.4.2.1 AthenaEngine.Framework.Camera2D.Camera2D (Game game)

Initializes a new instance of the AthenaEngine.Framework.Camera2D class.

Parameters

| | Como |
|--------|-------|
| Dame I | Game. |
| | |

6.4.3 Member Function Documentation

6.4.3.1 override void AthenaEngine.Framework.Camera2D.Initialize ()

Called when the GameComponent needs to be initialized.

6.4.3.2 bool AthenaEngine.Framework.Camera2D.IsInView (Vector2 position, Texture2D texture)

Determines whether the target is in view given the specified position. This can be used to increase performance by not drawing objects directly in the viewport

Parameters

| position | The position. |
|----------|---------------|
| texture | The texture. |

Returns

true if [is in view] [the specified position]; otherwise, false.

6.4.3.3 override void AthenaEngine.Framework.Camera2D.Update (GameTime gameTime)

Update the specified gameTime.

Parameters

| gameTime | Game time. |
|----------|------------|

6.4.4 Member Data Documentation

- **6.4.4.1 float AthenaEngine.Framework.Camera2D._viewportHeight** [protected]
- **6.4.4.2 float AthenaEngine.Framework.Camera2D._viewportWidth** [protected]
- 6.4.5 Property Documentation
- $\textbf{6.4.5.1} \quad \textbf{IFocusable Athena Engine. Framework. Camera 2D. Focus} \quad \texttt{[get], [set]}$
- **6.4.5.2 float AthenaEngine.Framework.Camera2D.MoveSpeed** [get], [set]
- **6.4.5.3 Vector2 AthenaEngine.Framework.Camera2D.Origin** [get], [set]
- $\textbf{6.4.5.4} \quad \textbf{Vector2 AthenaEngine.Framework.Camera2D.Position} \quad \texttt{[get], [set]}$

Gets or sets the position.

The position.

 $\textbf{6.4.5.5} \quad \textbf{float Athena Engine. Framework. Camera 2D. Rotation} \quad \texttt{[get], [set]}$


- 6.4.5.6 float AthenaEngine.Framework.Camera2D.Scale [get], [set]
- **6.4.5.7 Vector2 AthenaEngine.Framework.Camera2D.ScreenCenter** [get], [set]
- **6.4.5.8 Matrix AthenaEngine.Framework.Camera2D.Transform** [get], [set]

The documentation for this class was generated from the following file:

Athena/Athena/AthenaEngine/Framework/Camera2D.cs

6.5 AthenaEngine.Framework.Gameplay.Character Class Reference

A character class holds important detail about each character such as their items, level, experience, skills, etc. Inheritance diagram for AthenaEngine.Framework.Gameplay.Character:



Public Member Functions

Character (Vector2 position, Vector2 size, SpriteBatch spriteBatch, Texture2D texture, Level level)
 Constructor for the Character class

Additional Inherited Members

6.5.1 Detailed Description

A character class holds important detail about each character such as their items, level, experience, skills, etc.

6.5.2 Constructor & Destructor Documentation

6.5.2.1 AthenaEngine.Framework.Gameplay.Character.Character (Vector2 position, Vector2 size, SpriteBatch spriteBatch, Texture2D texture, Level level)

Constructor for the Character class

Parameters

| position | The coordinates of the character |
|-------------|---|
| size | The size of the character |
| spriteBatch | Which spritebatch will draw the character |
| texture | What is the texture for the character |


The documentation for this class was generated from the following file:

Athena/Athena/AthenaEngine/Framework/Gameplay/Character.cs

6.6 AthenaEngine.Framework.Primatives.CollidableEntity Class Reference

The Entity class is used to store objects that have positions.

Inheritance diagram for AthenaEngine.Framework.Primatives.CollidableEntity:

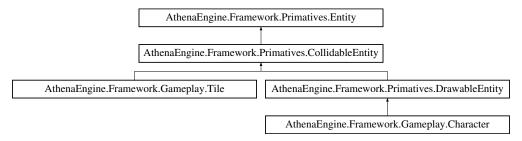

Public Member Functions

CollidableEntity (Vector2 position, Vector2 size, Level level)

Constructor for the CollidableEntity class.

bool CollidesWith (CollidableEntity entity)

Check if the CollidableEntity collides with another CollidableEntity.

• bool CanMove (int direction)

Determines whether this instance can move the specified direction.

bool Move (int direction)

Move the specified direction.

Public Attributes

Level Level

Properties

• BoundingBox2D Bounds [get, set]

Additional Inherited Members

6.6.1 Detailed Description

The Entity class is used to store objects that have positions.

6.6.2 Constructor & Destructor Documentation

6.6.2.1 AthenaEngine.Framework.Primatives.CollidableEntity.CollidableEntity (Vector2 position, Vector2 size, Level level)

Constructor for the CollidableEntity class.

Parameters

| position | x/y coordinates of the entity. |
|----------|--------------------------------|
| size | width/height of the entity. |

6.6.3 Member Function Documentation

6.6.3.1 bool AthenaEngine.Framework.Primatives.CollidableEntity.CanMove (int direction)

Determines whether this instance can move the specified direction.

Returns

true if this instance can move the specified direction; otherwise, false.

Parameters

| direction | If set to time direction. |
|-----------|---------------------------|

6.6.3.2 bool AthenaEngine.Framework.Primatives.CollidableEntity.CollidesWith (CollidableEntity entity)

Check if the CollidableEntity collides with another CollidableEntity.

Parameters

| entity | The entity to check against |
|--------|-----------------------------|

Returns

Returns true if it does collide, otherwise false.

6.6.3.3 bool AthenaEngine.Framework.Primatives.CollidableEntity.Move (int direction)

Move the specified direction.

Parameters

```
direction If set to true direction.
```

- 6.6.4 Member Data Documentation
- 6.6.4.1 Level AthenaEngine.Framework.Primatives.CollidableEntity.Level
- 6.6.5 Property Documentation
- **6.6.5.1 BoundingBox2D AthenaEngine.Framework.Primatives.CollidableEntity.Bounds** [get], [set], [protected]

The documentation for this class was generated from the following file:

• Athena/Athena/AthenaEngine/Framework/Primatives/CollidableEntity.cs

6.7 AthenaEngine.Framework.Primatives.Directions Class Reference

Public Attributes

• const int LEFT = 0

- const int UP = 1
- const int RIGHT = 2
- const int DOWN = 3

6.7.1 Member Data Documentation

- 6.7.1.1 const int AthenaEngine.Framework.Primatives.Directions.DOWN = 3
- 6.7.1.2 const int AthenaEngine.Framework.Primatives.Directions.LEFT = 0
- 6.7.1.3 const int AthenaEngine.Framework.Primatives.Directions.RIGHT = 2
- 6.7.1.4 const int AthenaEngine.Framework.Primatives.Directions.UP = 1


The documentation for this class was generated from the following file:

• Athena/Athena/AthenaEngine/Framework/Primatives/Directions.cs

6.8 AthenaEngine.Framework.Primatives.DrawableEntity Class Reference

This is an entity which can be drawn.

Inheritance diagram for AthenaEngine.Framework.Primatives.DrawableEntity:



Public Member Functions

DrawableEntity (Vector2 position, Vector2 size, Rectangle SpriteSource, SpriteBatch spriteBatch, Texture2D tileset, Level level)

This is the constructor for the DrawableEntity class.

· void Draw ()

This draws the DrawableEntity.

Public Attributes

- Color SpriteColor
- · Level level

Protected Attributes

- SpriteBatch SpriteController
- Texture2D SpriteSheet
- · Rectangle SpriteSource

Properties

Vector2 Position [get, set]

Additional Inherited Members

6.8.1 Detailed Description

This is an entity which can be drawn.

6.8.2 Constructor & Destructor Documentation

6.8.2.1 AthenaEngine.Framework.Primatives.DrawableEntity.DrawableEntity (Vector2 position, Vector2 size, Rectangle SpriteSource, SpriteBatch spriteBatch, Texture2D tileset, Level level)

This is the constructor for the DrawableEntity class.

Parameters

| position | Where the DrawableEntity will start |
|-------------|--|
| size | The size in pixels of the DrawableEntity |
| spriteBatch | The SpriteBatch responsible for drawing the entity |
| texture | The texture used to draw the entity |

6.8.3 Member Function Documentation

6.8.3.1 void AthenaEngine.Framework.Primatives.DrawableEntity.Draw ()

This draws the DrawableEntity.

Implements AthenaEngine.Framework.Interfaces.IDrawable.

- 6.8.4 Member Data Documentation
- 6.8.4.1 Level AthenaEngine.Framework.Primatives.DrawableEntity.level
- 6.8.4.2 Color AthenaEngine.Framework.Primatives.DrawableEntity.SpriteColor
- **6.8.4.3 SpriteBatch AthenaEngine.Framework.Primatives.DrawableEntity.SpriteController** [protected]
- **6.8.4.4 Texture2D AthenaEngine.Framework.Primatives.DrawableEntity.SpriteSheet** [protected]
- **6.8.4.5 Rectangle AthenaEngine.Framework.Primatives.DrawableEntity.SpriteSource** [protected]
- 6.8.5 Property Documentation
- **6.8.5.1 Vector2 AthenaEngine.Framework.Primatives.DrawableEntity.Position** [get], [set]


The documentation for this class was generated from the following file:

• Athena/Athena/AthenaEngine/Framework/Primatives/DrawableEntity.cs

6.9 AthenaEngine.Framework.Primatives.Entity Class Reference

The Entity class is the superclass for anything.

 $Inheritance\ diagram\ for\ Athena Engine. Framework. Primatives. Entity:$



Protected Member Functions

• void Move (int direction)

Protected Attributes

- Vector2 Position
- Vector2 Size

Properties

- Rectangle Rectangle [get, set]

 Gets or sets the rectangle.
- int X [get, set]
- int Y [get, set]
- int Width [get, set]
- int Height [get, set]

6.9.1 Detailed Description

The Entity class is the superclass for anything.

6.9.2 Member Function Documentation

- $\textbf{6.9.2.1} \quad \textbf{void AthenaEngine.Framework.Primatives.Entity.Move (int \textit{direction})} \quad \texttt{[protected]}$
- 6.9.3 Member Data Documentation
- **6.9.3.1 Vector2 AthenaEngine.Framework.Primatives.Entity.Position** [protected]
- **6.9.3.2 Vector2 Athena Engine. Framework. Primatives. Entity. Size** [protected]
- 6.9.4 Property Documentation
- **6.9.4.1** int AthenaEngine.Framework.Primatives.Entity.Height [get], [set]
- **6.9.4.2** Rectangle AthenaEngine.Framework.Primatives.Entity.Rectangle [get], [set], [protected]

Gets or sets the rectangle.

The rectangle.


- **6.9.4.3** int AthenaEngine.Framework.Primatives.Entity.Width [get], [set]
- **6.9.4.4** int AthenaEngine.Framework.Primatives.Entity.X [get], [set]
- **6.9.4.5** int AthenaEngine.Framework.Primatives.Entity.Y [get], [set]

The documentation for this class was generated from the following file:

Athena/Athena/AthenaEngine/Framework/Primatives/Entity.cs

6.10 Athena.Game1 Class Reference

This is the main type for your game Inheritance diagram for Athena.Game1:



Public Member Functions

Game1 ()

The actual game class constructor.

Public Attributes

SpriteFont font

Protected Member Functions

• override void Initialize ()

Allows the game to perform any initialization it needs to before starting to run. This is where it can query for any required services and load any non-graphic related content. Calling base.Initialize will enumerate through any components and initialize them as well.

• override void LoadContent ()

LoadContent will be called once per game and is the place to load all of your content.

override void UnloadContent ()

UnloadContent will be called once per game and is the place to unload all content.

• override void Update (GameTime gameTime)

Allows the game to run logic such as updating the world, checking for collisions, gathering input, and playing audio.

override void Draw (GameTime gameTime)

This is called when the game should draw itself.

6.10.1 Detailed Description

This is the main type for your game

6.10.2 Constructor & Destructor Documentation

6.10.2.1 Athena.Game1.Game1 ()

The actual game class constructor.

6.10.3 Member Function Documentation

6.10.3.1 override void Athena.Game1.Draw (GameTime gameTime) [protected]

This is called when the game should draw itself.

Parameters

gameTime Provides a snapshot of timing values.

6.10.3.2 override void Athena.Game1.Initialize() [protected]

Allows the game to perform any initialization it needs to before starting to run. This is where it can query for any required services and load any non-graphic related content. Calling base.Initialize will enumerate through any components and initialize them as well.

6.10.3.3 override void Athena.Game1.LoadContent() [protected]

LoadContent will be called once per game and is the place to load all of your content.

6.10.3.4 override void Athena.Game1.UnloadContent() [protected]

UnloadContent will be called once per game and is the place to unload all content.

6.10.3.5 override void Athena.Game1.Update (GameTime gameTime) [protected]

Allows the game to run logic such as updating the world, checking for collisions, gathering input, and playing audio.

Parameters

gameTime Provides a snapshot of timing values.

6.10.4 Member Data Documentation

6.10.4.1 SpriteFont Athena.Game1.font

The documentation for this class was generated from the following file:

• Athena/Athena/Athena/Game1.cs

6.11 AthenaEngine.Framework.Interfaces.ICollidable< T > Interface Template Reference

I collidable.

Public Member Functions

• bool CollidesWith (T type)

6.11.1 Detailed Description

I collidable.

6.11.2 Member Function Documentation

6.11.2.1 bool AthenaEngine.Framework.Interfaces.ICollidable < T >.CollidesWith (T type)


The documentation for this interface was generated from the following file:

• Athena/Athena/AthenaEngine/Framework/Interfaces/ICollidable.cs

6.12 AthenaEngine.Framework.Interfaces.IDrawable Interface Reference

I drawable.

Inheritance diagram for AthenaEngine.Framework.Interfaces.IDrawable:

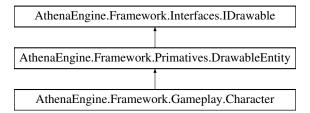

Public Member Functions

• void Draw ()

Draw this instance.

6.12.1 Detailed Description

I drawable.

6.12.2 Member Function Documentation

6.12.2.1 void AthenaEngine.Framework.Interfaces.IDrawable.Draw ()

Draw this instance.

Implemented in AthenaEngine.Framework.Primatives.DrawableEntity.


The documentation for this interface was generated from the following file:

• Athena/Athena/Engine/Framework/Interfaces/IDrawable.cs

6.13 AthenaEngine.Framework.Interfaces.IFocusable Interface Reference

I focusable.

Inheritance diagram for AthenaEngine.Framework.Interfaces.IFocusable:

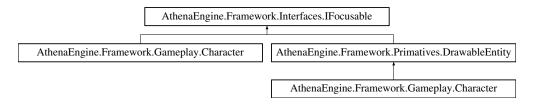

Properties

• Vector2 Position [get]

Gets the position.

6.13.1 Detailed Description

I focusable.

6.13.2 Property Documentation

6.13.2.1 Vector2 AthenaEngine.Framework.Interfaces.IFocusable.Position [get]

Gets the position.

The position.

The documentation for this interface was generated from the following file:

 $\bullet \ A then a / A then a Engine / Framework / Interfaces / IFocus able. cs$

6.14 AthenaEngine.Framework.Interfaces.IMoveable Interface Reference

Public Member Functions

- bool Move (string direction)
- bool CanMove (string direction)

6.14.1 Member Function Documentation

6.14.1.1 bool AthenaEngine.Framework.Interfaces.IMoveable.CanMove (string direction)

6.14.1.2 bool AthenaEngine.Framework.Interfaces.IMoveable.Move (string direction)

The documentation for this interface was generated from the following file:

• Athena/Athena/AthenaEngine/Framework/Interfaces/IMoveable.cs

6.15 AthenaEngine.Framework.Gameplay.RPG.Inventory Class Reference

Inventory.

Public Member Functions

void Add (Item item, int quantity)
 Add the specified item and quantity.

6.15.1 Detailed Description

Inventory.

6.15.2 Member Function Documentation

6.15.2.1 void AthenaEngine.Framework.Gameplay.RPG.Inventory.Add (Item item, int quantity)

Add the specified item and quantity.

Parameters

| | item | Item. |
|-----|--------|-----------|
| qua | antity | Quantity. |


The documentation for this class was generated from the following file:

Athena/Athena/AthenaEngine/Framework/Gameplay/RPG/Inventory.cs

6.16 AthenaEngine.Framework.Gameplay.RPG.Item Class Reference

A gameplay item can be held by a character.

 $Inheritance\ diagram\ for\ Athena Engine. Framework. Gameplay. RPG. Item:$



Public Member Functions

• Item (string name)

Constructor for the item class

Properties

• string Name [get, set]

The name of the item

6.16.1 Detailed Description

A gameplay item can be held by a character.

6.16.2 Constructor & Destructor Documentation

6.16.2.1 AthenaEngine.Framework.Gameplay.RPG.Item.Item (string name)

Constructor for the item class

Parameters

name Name of the item

6.16.3 Property Documentation

6.16.3.1 string AthenaEngine.Framework.Gameplay.RPG.Item.Name [get], [set]

The name of the item

The documentation for this class was generated from the following file:

• Athena/Athena/AthenaEngine/Framework/Gameplay/RPG/Item.cs

6.17 AthenaEngine.Framework.Gameplay.RPG.ItemInstance Class Reference

An item instance is a particular instance of an item.

Inheritance diagram for Athena Engine. Framework. Gameplay. RPG. ItemInstance:

AthenaEngine.Framework.Gameplay.RPG.Item

AthenaEngine.Framework.Gameplay.RPG.ItemInstance

Public Member Functions

• ItemInstance (Item item, int quantity)

Constructor for the ItemInstance class.

Additional Inherited Members

6.17.1 Detailed Description

An item instance is a particular instance of an item.

6.17.2 Constructor & Destructor Documentation

6.17.2.1 AthenaEngine.Framework.Gameplay.RPG.ItemInstance.ItemInstance (Item item, int quantity)

Constructor for the ItemInstance class.

Parameters

| item | The actual item of which this is an instance |
|----------|--|
| quantity | How many of that item are in this particular instance? |

The documentation for this class was generated from the following file:

• Athena/Athena/AthenaEngine/Framework/Gameplay/RPG/ItemInstance.cs

6.18 AthenaEngine.Framework.Gameplay.Level Class Reference

A Level object holds all details required to handle level drawing.

Public Member Functions

- Level (string levelName, SpriteBatch spriteBatch, ResourceManager< Texture2D > resourceManager)
 Object constructor for the Level class.
- void Draw ()

Draw the level.

Public Attributes

• List< Tile > TileList

6.18.1 Detailed Description

A Level object holds all details required to handle level drawing.

6.18.2 Constructor & Destructor Documentation

6.18.2.1 AthenaEngine.Framework.Gameplay.Level.Level (string *levelName*, SpriteBatch *spriteBatch*, ResourceManager < Texture2D > resourceManager)

Object constructor for the Level class.

Parameters

| levelName | The name of the level to load. |
|-------------|---|
| spriteBatch | The spritebatch to draw the level with. |
| resource- | The resourceManager handling the games' textures. |
| Manager | |

6.18.3 Member Function Documentation

6.18.3.1 void AthenaEngine.Framework.Gameplay.Level.Draw ()

Draw the level.

6.18.4 Member Data Documentation

6.18.4.1 List<Tile> AthenaEngine.Framework.Gameplay.Level.TileList

The documentation for this class was generated from the following file:

• Athena/Athena/AthenaEngine/Framework/Gameplay/Level.cs

6.19 AthenaEngine.Framework.Systems.ResourceManager < T > Class Template Reference

The ResourceManager class manages resources on behalf of the game.

Public Member Functions

• ResourceManager (Game game)

Creates a new ResourceManager to manage resources for a game.

• T Add (string key, T resource)

Add a new resource to the resources list maintained by the ResourceManager.

• T Get (string key)

Gets the resource stored associated with a key.

6.19.1 Detailed Description

The ResourceManager class manages resources on behalf of the game.

Template Parameters

| T The type of resource to manage | |
|----------------------------------|--|
|----------------------------------|--|

6.19.2 Constructor & Destructor Documentation

6.19.2.1 AthenaEngine.Framework.Systems.ResourceManager < T > .ResourceManager (Game game)

Creates a new ResourceManager to manage resources for a game.

Parameters

| game | The game to manage resources for. |
|------|-----------------------------------|

6.19.3 Member Function Documentation

6.19.3.1 T Athena Engine. Framework. Systems. Resource Manager < T > . Add (string key, T resource)

Add a new resource to the resources list maintained by the ResourceManager.

Parameters

| key | key The key to associate the resource with | |
|----------|--|--|
| resource | The resource associated with the key | |

Returns

6.19.3.2 T AthenaEngine.Framework.Systems.ResourceManager < T > .Get (string key)

Gets the resource stored associated with a key.

Parameters

| key | The key to find the resource associated with. |
|-----|---|
|-----|---|

Returns

The documentation for this class was generated from the following file:

• Athena/Athena/AthenaEngine/Framework/Systems/ResourceManager.cs

6.20 AthenaEngine.Framework.Systems.LevelLoaderXml.Sprite Class Reference

Public Member Functions

• Sprite (int x, int y, string name, bool collides)

Public Attributes

- int X
- int Y
- string Name
- bool Collides

6.20.1 Constructor & Destructor Documentation

- $6.20.1.1 \quad \text{AthenaEngine.Framework.Systems.LevelLoaderXml.Sprite.Sprite (} \text{ int } \textit{x, int } \textit{y, string } \textit{name, bool } \textit{collides } \text{)}$
- 6.20.2 Member Data Documentation
- 6.20.2.1 bool AthenaEngine.Framework.Systems.LevelLoaderXml.Sprite.Collides
- ${\bf 6.20.2.2} \quad string \ Athena Engine. Framework. Systems. Level Loader Xml. Sprite. Name$
- 6.20.2.3 int AthenaEngine.Framework.Systems.LevelLoaderXml.Sprite.X
- 6.20.2.4 int AthenaEngine.Framework.Systems.LevelLoaderXml.Sprite.Y


The documentation for this class was generated from the following file:

Athena/Athena/AthenaEngine/Framework/Systems/LevelLoaderXml.cs

6.21 AthenaEngine.Framework.Gameplay.Tile Class Reference

A tile is used to draw levels.

Inheritance diagram for AthenaEngine.Framework.Gameplay.Tile:

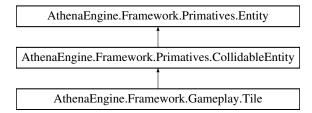

Public Member Functions

• Tile (int x, int y, string TileSet, int xOffset, int yOffset, Level level)

Class constructor for a new Tile object.

• void MakeDrawable (SpriteBatch spriteBatch, ResourceManager< Texture2D > resoureManager)

Make a tile drawable by giving it a texture and a spriteBatch.

• void Draw ()

Draw the tile.

• void FireTrigger (object[] args)

Fires the trigger.

• void AddTrigger (string triggerName)

Adds the trigger.

Public Attributes

- bool Collides = false
- DrawableEntity Sprite
- bool HasTrigger = false

Additional Inherited Members

6.21.1 Detailed Description

A tile is used to draw levels.

6.21.2 Constructor & Destructor Documentation

 $6.21.2.1 \quad \text{AthenaEngine.Framework.Gameplay.Tile.Tile (} \text{ int } \textit{x, int } \textit{y, string TileSet, int } \textit{xOffset, int } \textit{yOffset, Level level })$

Class constructor for a new Tile object.

Parameters

| X | The X coordinate of the new tile. |
|---|-----------------------------------|
| У | The Y coordinate of the new tile. |

6.21.3 Member Function Documentation

 $6.21.3.1 \quad \text{void Athena Engine. Framework. Gameplay. Tile. Add Trigger (\ \text{string } \textit{triggerName} \)}$

Adds the trigger.

Parameters

| triggerName | Trigger name. | | |
|-------------|---------------|--|--|

6.21.3.2 void AthenaEngine.Framework.Gameplay.Tile.Draw ()

Draw the tile.

6.21.3.3 void AthenaEngine.Framework.Gameplay.Tile.FireTrigger (object[] args)

Fires the trigger.

Parameters

| args | Arguments. | |
|------|------------|--|

6.21.3.4 void AthenaEngine.Framework.Gameplay.Tile.MakeDrawable (SpriteBatch spriteBatch, ResourceManager < Texture2D > resoureManager)

Make a tile drawable by giving it a texture and a spriteBatch.

Parameters

| spriteBatch | The SpriteBatch to draw the tile with. |
|-------------|--|
| texture | The texture to draw the tile with. |

6.21.4 Member Data Documentation

- 6.21.4.1 bool AthenaEngine.Framework.Gameplay.Tile.Collides = false
- 6.21.4.2 bool AthenaEngine.Framework.Gameplay.Tile.HasTrigger = false
- 6.21.4.3 DrawableEntity AthenaEngine.Framework.Gameplay.Tile.Sprite

The documentation for this class was generated from the following file:

• Athena/Athena/AthenaEngine/Framework/Gameplay/Tile.cs

6.22 AthenaEngine.Framework.Systems.Triggers Class Reference

Triggers.

Static Public Member Functions

• static void test ()

This was used to test

• static void encounter ()

Random encounter test

6.22.1 Detailed Description

Triggers.

6.22.2 Member Function Documentation

6.22.2.1 static void AthenaEngine.Framework.Systems.Triggers.encounter() [static]

Random encounter test

6.22.2.2 static void AthenaEngine.Framework.Systems.Triggers.test () [static]

This was used to test

The documentation for this class was generated from the following file:

• Athena/Athena/Engine/Framework/Systems/Triggers.cs

6.23 AthenaEngine.Framework.UI.UI Class Reference

UI

Public Member Functions

 UI (SpriteBatch spriteBatch, ResourceManager < Texture2D > textureManager, ResourceManager < Sprite-Font > fontManager)

Initializes a new instance of the AthenaEngine.Framework.UI.UI class.

void AddButton (Vector2 position, string label)

Adds the button.

• void Draw ()

Draw this instance.

Public Attributes

Level Level

6.23.1 Detailed Description

UI

6.23.2 Constructor & Destructor Documentation

6.23.2.1 AthenaEngine.Framework.UI.UI.UI (SpriteBatch spriteBatch, ResourceManager< Texture2D > textureManager, ResourceManager< SpriteFont > fontManager)

Initializes a new instance of the AthenaEngine.Framework.UI.UI class.

Parameters

| | spriteBatch | Sprite batch. |
|---|----------------|------------------|
| Ī | textureManager | Texture manager. |
| | fontManager | Font manager. |

6.23.3 Member Function Documentation

6.23.3.1 void AthenaEngine.Framework.UI.UI.AddButton (Vector2 position, string label)

Adds the button.

Parameters

| position | Position. |
|----------|-----------|
| label | Label. |

6.23.3.2 void AthenaEngine.Framework.UI.UI.Draw ()

Draw this instance.

6.23.4 Member Data Documentation

6.23.4.1 Level AthenaEngine.Framework.UI.UI.Level

The documentation for this class was generated from the following file:

· Athena/Athena/AthenaEngine/Framework/UI/UI.cs

6.24 AthenaEngine.Framework.UI.UIButton Class Reference

User interface button.

Public Member Functions

 UlButton (Rectangle rectangle, SpriteBatch spriteBatch, Texture2D texture, Color color, string label, Sprite-Font font)

Initializes a new instance of the AthenaEngine.Framework.UI.UIButton class.

• void Draw ()

Draw this instance.

Public Attributes

Level Level

6.24.1 Detailed Description

User interface button.

6.24.2 Constructor & Destructor Documentation

6.24.2.1 AthenaEngine.Framework.UI.UIButton.UIButton (Rectangle rectangle, SpriteBatch spriteBatch, Texture2D texture, Color color, string label, SpriteFont font)

Initializes a new instance of the AthenaEngine.Framework.UI.UIButton class.

Parameters

| | Rectangle. |
|-------------|---------------|
| spriteBatch | Sprite batch. |
| texture | Texture. |
| color | Color. |
| label | Label. |
| font | Font. |

6.24.3 Member Function Documentation

6.24.3.1 void AthenaEngine.Framework.UI.UIButton.Draw ()

Draw this instance.

6.24.4 Member Data Documentation

6.24.4.1 Level AthenaEngine.Framework.UI.UIButton.Level

The documentation for this class was generated from the following file:

• Athena/Athena/AthenaEngine/Framework/UI/UIButton.cs

File Documentation

| 7.1 | Athena/Athena | /Athena/Debug.cs | File Reference |
|-------|-------------------|------------------|----------------|
| / · · | Alliella/Alliella | Allicia Debuu.co | I HE HEIGHEIGE |

Classes

· class Athena. Debug

Namespaces

• package Athena

7.2 Athena/Athena/Athena/Game1.cs File Reference

Classes

· class Athena.Game1

This is the main type for your game

Namespaces

• package Athena

7.3 Athena/Athena/Program.cs File Reference

Namespaces

- package Athena
- 7.4 Athena/Athena/Athena/Properties/AssemblyInfo.cs File Reference
- 7.5 Athena/Athena/AthenaEngine/Properties/AssemblyInfo.cs File Reference
- 7.6 Athena/Athena/AthenaTest/Properties/AssemblyInfo.cs File Reference

7.7 Athena/Athena/AthenaEngine/AthenaEngine.cs File Reference

Classes

• class AthenaEngine.AthenaEngine

Namespaces

• package AthenaEngine

7.8 Athena/Athena/AthenaEngine/Framework/Camera2D.cs File Reference

Classes

class AthenaEngine.Framework.Camera2D
 Camera2D

Namespaces

• package AthenaEngine.Framework

7.9 Athena/Athena/Engine/Framework/Gameplay/Character.cs File Reference

Classes

· class AthenaEngine.Framework.Gameplay.Character

A character class holds important detail about each character such as their items, level, experience, skills, etc.

Namespaces

• package AthenaEngine.Framework.Gameplay

7.10 Athena/Athena/AthenaEngine/Framework/Gameplay/Level.cs File Reference

Classes

· class AthenaEngine.Framework.Gameplay.Level

A Level object holds all details required to handle level drawing.

Namespaces

· package AthenaEngine.Framework.Gameplay

7.11 Athena/Athena/AthenaEngine/Framework/Gameplay/RPG/Inventory.cs File Reference

Classes

class AthenaEngine.Framework.Gameplay.RPG.Inventory
 Inventory.

Namespaces

· package AthenaEngine.Framework.Gameplay.RPG

7.12 Athena/Athena/AthenaEngine/Framework/Gameplay/RPG/Item.cs File Reference

Classes

class AthenaEngine.Framework.Gameplay.RPG.Item
 A gameplay item can be held by a character.

Namespaces

· package AthenaEngine.Framework.Gameplay.RPG

7.13 Athena/Athena/Engine/Framework/Gameplay/RPG/ItemInstance.cs File Reference

Classes

class AthenaEngine.Framework.Gameplay.RPG.ItemInstance
 An item instance is a particular instance of an item.

Namespaces

• package AthenaEngine.Framework.Gameplay.RPG

7.14 Athena/Athena/AthenaEngine/Framework/Gameplay/Tile.cs File Reference

Classes

• class AthenaEngine.Framework.Gameplay.Tile

A tile is used to draw levels.

Namespaces

· package AthenaEngine.Framework.Gameplay

7.15 Athena/Athena/AthenaEngine/Framework/Interfaces/ICollidable.cs File Reference

Classes

interface AthenaEngine.Framework.Interfaces.ICollidable< T >
 I collidable.

Namespaces

• package AthenaEngine.Framework.Interfaces

7.16 Athena/Athena/AthenaEngine/Framework/Interfaces/IDrawable.cs File Reference

Classes

interface AthenaEngine.Framework.Interfaces.IDrawable
 I drawable.

Namespaces

• package AthenaEngine.Framework.Interfaces

7.17 Athena/Athena/Engine/Framework/Interfaces/IFocusable.cs File Reference

Classes

interface AthenaEngine.Framework.Interfaces.IFocusable
 I focusable.

Namespaces

• package AthenaEngine.Framework.Interfaces

7.18 Athena/Athena/AthenaEngine/Framework/Interfaces/IMoveable.cs File Reference

Classes

· interface AthenaEngine.Framework.Interfaces.IMoveable

Namespaces

• package AthenaEngine.Framework.Interfaces

7.19 Athena/Athena/Engine/Framework/Primatives/BoundingBox2D.cs File Reference

Classes

class AthenaEngine.Framework.Primatives.BoundingBox2D
 BoundingBox2D is used for bounding boxes on 2D objects.

Namespaces

· package AthenaEngine.Framework.Primatives

7.20 Athena/Athena/Engine/Framework/Primatives/CollidableEntity.cs File Reference

Classes

class AthenaEngine.Framework.Primatives.CollidableEntity

The Entity class is used to store objects that have positions.

Namespaces

package AthenaEngine.Framework.Primatives

7.21 Athena/Athena/Engine/Framework/Primatives/Directions.cs File Reference

Classes

· class AthenaEngine.Framework.Primatives.Directions

Namespaces

package AthenaEngine.Framework.Primatives

7.22 Athena/Athena/Engine/Framework/Primatives/DrawableEntity.cs File Reference

Classes

· class AthenaEngine.Framework.Primatives.DrawableEntity

This is an entity which can be drawn.

Namespaces

• package AthenaEngine.Framework.Primatives

7.23 Athena/Athena/Engine/Framework/Primatives/Entity.cs File Reference

Classes

· class AthenaEngine.Framework.Primatives.Entity

The Entity class is the superclass for anything.

Namespaces

• package AthenaEngine.Framework.Primatives

7.24 Athena/AthenaEngine/Framework/Systems/LevelLoaderXml.cs File Reference

Classes

· class AthenaEngine.Framework.Systems.LevelLoaderXml

the LevelLoader is used to load levels.

· class AthenaEngine.Framework.Systems.LevelLoaderXml.Sprite

Namespaces

· package AthenaEngine.Framework.Systems

7.25 Athena/Athena/Engine/Framework/Systems/ResourceManager.cs File Reference

Classes

- class Athena Engine.Framework.Systems.ResourceManager< T >

The ResourceManager class manages resources on behalf of the game.

Namespaces

· package AthenaEngine.Framework.Systems

7.26 Athena/Athena/AthenaEngine/Framework/Systems/Triggers.cs File Reference

Classes

class AthenaEngine.Framework.Systems.Triggers
 Triggers.

Namespaces

· package AthenaEngine.Framework.Systems

7.27 Athena/Athena/AthenaEngine/Framework/UI/UI.cs File Reference

Classes

• class AthenaEngine.Framework.UI.UI

UI

Namespaces

• package AthenaEngine.Framework.UI

7.28 Athena/Athena/AthenaEngine/Framework/UI/UIButton.cs File Reference

Classes

class AthenaEngine.Framework.UI.UIButton
 User interface button.

Namespaces

- package AthenaEngine.Framework.UI
- 7.29 Athena/Athena/AthenaEngine/obj/Debug/TemporaryGeneratedFile_036C0B5B-1481-4323-8D20-8F5ADCB23D92.cs File Reference
- 7.30 Athena/Athena/AthenaTest/obj/Debug/TemporaryGeneratedFile_036C0B5B-1481-4323-8D20-8F5ADCB23D92.cs File Reference
- 7.31 Athena/Athena/AthenaEngine/obj/Debug/TemporaryGeneratedFile_5937a670-0e60-4077-877b-f7221da3dda1.cs File Reference
- 7.32 Athena/Athena/AthenaTest/obj/Debug/TemporaryGeneratedFile_5937a670-0e60-4077-877b-f7221da3dda1.cs File Reference
- 7.33 Athena/Athena/Engine/obj/Debug/TemporaryGeneratedFile_E7A71F73-0F8D-4B9B-B56E-8E70B10BC5D3.cs File Reference
- 7.34 Athena/Athena/AthenaTest/obj/Debug/TemporaryGeneratedFile_E7A71F73-0F8D-4-B9B-B56E-8E70B10BC5D3.cs File Reference
- 7.35 Athena/Athena/Test/Engine Tests/Primatives Testing/BoundingBox2DTest.cs File Reference

Classes

• class AthenaTest.Engine_Tests.Primatives_Testing.BoundingBox2DTest

Namespaces

• package AthenaTest.Engine_Tests.Primatives_Testing

Index

| _viewportneignt | Athena/Athena/AthenaEngine/Framework/Primatives/- |
|---|--|
| AthenaEngine::Framework::Camera2D, 17 | DrawableEntity.cs, 43 |
| _viewportWidth | Athena/AthenaEngine/Framework/Primatives/- |
| AthenaEngine::Framework::Camera2D, 17 | Entity.cs, 44 |
| | Athena/Athena/Engine/Framework/Systems/- |
| Add | LevelLoaderXml.cs, 44 |
| AthenaEngine::Framework::Gameplay::RPG::- | Athena/Athena/Engine/Framework/Systems/- |
| Inventory, 28 | ResourceManager.cs, 44 |
| AthenaEngine::Framework::Systems::Resource- | Athena/Athena/AthenaEngine/Framework/Systems/- |
| Manager < T >, 31 | Triggers.cs, 44 |
| AddButton | Athena/AthenaEngine/Framework/UI/UI.cs, 45 |
| AthenaEngine::Framework::UI::UI, 36 | Athena/Athena/AthenaEngine/Framework/UI/UIButton |
| AddTrigger | cs, 45 |
| AthenaEngine::Framework::Gameplay::Tile, 33 | Athena/AthenaEngine/Properties/Assembly- |
| Athena, 9 | Info.cs, 39 |
| Athena.Game1, 24 | Athena/AthenaEngine/obj/Debug/Temporary- |
| | GeneratedFile 5937a670-0e60-4077-877b- |
| Athena/Athena/Athena/Compt. co. 39 | f7221da3dda1.cs, 45 |
| Athena/Athena/Athena/Game1.cs, 39 | Athena/Athena/AthenaTest/Engine Tests/Primatives |
| Athena/Athena/Athena/Program.cs, 39 | Testing/BoundingBox2DTest.cs, 45 |
| Athena/Athena/Athena/Properties/AssemblyInfo.cs, 39 | Athena/Athena/Est/Properties/AssemblyInfo.cs, |
| Athena/Athena/AthenaEngine/AthenaEngine.cs, 40 | 39 |
| Athena/AthenaEngine/Framework/Camera2D | Athena/AthenaTest/obj/Debug/Temporary- |
| cs, 40 | GeneratedFile_5937a670-0e60-4077-877b- |
| Athena/Athena/AthenaEngine/Framework/Gameplay/- | f7221da3dda1.cs, 45 |
| Character.cs, 40 | Athena::Game1 |
| Athena/Athena/AthenaEngine/Framework/Gameplay/- | Draw, 25 |
| Level.cs, 40 | font, 25 |
| Athena/Athena/AthenaEngine/Framework/Gameplay/R- | Game1, 25 |
| PG/Inventory.cs, 41 | Initialize, 25 |
| Athena/Athena/AthenaEngine/Framework/Gameplay/R- | LoadContent, 25 |
| PG/Item.cs, 41 | UnloadContent, 25 |
| Athena/Athena/AthenaEngine/Framework/Gameplay/R- | Update, 25 |
| PG/ItemInstance.cs, 41 | AthenaEngine, 9 |
| Athena/Athena/AthenaEngine/Framework/Gameplay/- | AthenaEngine. AthenaEngine, 13 |
| Tile.cs, 41 | AthenaEngine.Framework, 9 |
| Athena/Athena/AthenaEngine/Framework/Interfaces/I- | AthenaEngine.Framework.Camera2D, 16 |
| Collidable.cs, 42 | AthenaEngine.Framework.Gameplay, 10 |
| Athena/Athena/AthenaEngine/Framework/Interfaces/I- | |
| Drawable.cs, 42 | Athena Engine, Framework, Gameplay, Character, 18 |
| Athena/Athena/AthenaEngine/Framework/Interfaces/I- | Athena Engine Framework Gameplay Level, 30 |
| Focusable.cs, 42 | Athena Engine, Framework, Gameplay, RPG, 10 |
| Athena/Athena/AthenaEngine/Framework/Interfaces/I- | Athena Engine. Framework. Gameplay. RPG. Inventory, 28 |
| Moveable.cs, 42 | Athena Engine, Framework, Gameplay, RPG, Item, 28 |
| Athena/Athena/AthenaEngine/Framework/Primatives/- | AthenaEngine.Framework.Gameplay.RPG.ItemInstance, |
| BoundingBox2D.cs, 43 | 29 |
| Athena/Athena/AthenaEngine/Framework/Primatives/- | Athena Engine, Framework, Gameplay, Tile, 32 |
| CollidableEntity.cs, 43 | Athena Engine Framework Interfaces, 10 |
| Athena/Athena/AthenaEngine/Framework/Primatives/- | AthenaEngine.Framework.Interfaces.ICollidable< T >, |
| Directions.cs. 43 | 25 |

| AthenaEngine.Framework.Interfaces.IDrawable, 26 | Tile, 33 |
|---|---|
| AthenaEngine.Framework.Interfaces.IFocusable, 27 | AthenaEngine::Framework::Interfaces::ICollidable< T > |
| AthenaEngine.Framework.Interfaces.IMoveable, 27 | CollidesWith, 26 |
| AthenaEngine.Framework.Primatives, 10 | AthenaEngine::Framework::Interfaces::IDrawable |
| AthenaEngine.Framework.Primatives.BoundingBox2D, | Draw, 26 |
| 13 | AthenaEngine::Framework::Interfaces::IFocusable |
| AthenaEngine.Framework.Primatives.CollidableEntity, | Position, 27 |
| 19 | AthenaEngine::Framework::Interfaces::IMoveable |
| AthenaEngine.Framework.Primatives.Directions, 20 | CanMove, 27 |
| AthenaEngine.Framework.Primatives.DrawableEntity, | Move, 27 |
| 21 | AthenaEngine::Framework::Primatives::BoundingBox2D |
| AthenaEngine.Framework.Primatives.Entity, 23 | BoundingBox2D, 14 |
| AthenaEngine.Framework.Systems, 11 | Bounds, 14 |
| AthenaEngine.Framework.Systems, 11 AthenaEngine.Framework.Systems.LevelLoaderXml | • |
| | CollidesWith, 14 |
| Sprite, 32 | Equals, 14 |
| AthenaEngine.Framework.Systems.ResourceManager< | AthenaEngine::Framework::Primatives::CollidableEntity |
| T >, 31 | Bounds, 20 |
| AthenaEngine.Framework.Systems.Triggers, 34 | CanMove, 20 |
| AthenaEngine.Framework.UI, 11 | CollidableEntity, 19 |
| AthenaEngine.Framework.UI.UI, 35 | CollidesWith, 20 |
| AthenaEngine.Framework.UI.UIButton, 36 | Level, 20 |
| AthenaEngine::Framework::Camera2D | Move, 20 |
| _viewportHeight, 17 | AthenaEngine::Framework::Primatives::Directions |
| _viewportWidth, 17 | DOWN, 21 |
| Camera2D, 16 | LEFT, 21 |
| Focus, 17 | RIGHT, 21 |
| Initialize, 17 | UP, 21 |
| IsInView, 17 | AthenaEngine::Framework::Primatives::DrawableEntity |
| MoveSpeed, 17 | Draw, 22 |
| Origin, 17 | DrawableEntity, 22 |
| Position, 17 | level, 22 |
| Rotation, 17 | Position, 22 |
| Scale, 17 | SpriteColor, 22 |
| ScreenCenter, 18 | SpriteController, 22 |
| Transform, 18 | SpriteSheet, 22 |
| Update, 17 | SpriteSource, 22 |
| AthenaEngine::Framework::Gameplay::Character | · · · · · · · · · · · · · · · · · · · |
| Character, 18 | AthenaEngine::Framework::Primatives::Entity |
| | Height, 23 |
| AthenaEngine::Framework::Gameplay::Level | Move, 23 |
| Draw, 30 | Position, 23 |
| Level, 30 | Rectangle, 23 |
| TileList, 30 | Size, 23 |
| AthenaEngine::Framework::Gameplay::RPG::Inventory | Width, 23 |
| Add, 28 | X, 24 |
| AthenaEngine::Framework::Gameplay::RPG::Item | Y, 24 |
| Item, 29 | AthenaEngine::Framework::Systems::LevelLoaderXml- |
| Name, 29 | ::Sprite |
| AthenaEngine::Framework::Gameplay::RPG::Item- | Collides, 32 |
| Instance | Name, 32 |
| ItemInstance, 29 | Sprite, 32 |
| AthenaEngine::Framework::Gameplay::Tile | X, 32 |
| AddTrigger, 33 | Y, 32 |
| Collides, 34 | AthenaEngine::Framework::Systems::ResourceManager< |
| Draw, 34 | T > |
| FireTrigger, 34 | Add, 31 |
| Has Trigger, 34 | Get, 31 |
| MakeDrawable, 34 | ResourceManager, 31 |
| Sprite, 34 | AthenaEngine::Framework::Systems::Triggers |
| Opino, OT | Autonalingino ramoworkoystems mggers |

| encounter, 35 | Collisions_WithRectangleOnLeft_IsFalse |
|--|--|
| test, 35 | AthenaTest::Engine_Tests::Primatives_Testing::- |
| AthenaEngine::Framework::UI::UI | BoundingBox2DTest, 15 |
| AddButton, 36 | Collisions_WithRectangleOnRight_IsFalse |
| Draw, 36 | AthenaTest::Engine_Tests::Primatives_Testing::- |
| Level, 36 | BoundingBox2DTest, 15 |
| UI, 35 | Collisions_WithRectangleOnTop_IsFalse |
| AthenaEngine::Framework::UI::UIButton | AthenaTest::Engine_Tests::Primatives_Testing::- |
| Draw, 37 | BoundingBox2DTest, 15 |
| Level, 37 | |
| UIButton, 36 | DOWN |
| AthenaTest, 11 | AthenaEngine::Framework::Primatives::Directions |
| AthenaTest.Engine_Tests, 11 | 21 |
| AthenaTest.Engine_Tests.Primatives_Testing, 11 | Draw |
| AthenaTest.Engine_Tests.Primatives_Testing.Bounding- | Athena::Game1, 25 |
| Box2DTest, 14 | AthenaEngine::Framework::Gameplay::Level, 30 |
| | AthenaEngine::Framework::Gameplay::Tile, 34 |
| BoundingBox2D | AthenaEngine::Framework::Interfaces::IDrawable, |
| AthenaEngine::Framework::Primatives::Bounding- | 26 |
| Box2D, 14 | AthenaEngine::Framework::Primatives::Drawable- |
| Bounds | Entity, 22 |
| AthenaEngine::Framework::Primatives::Bounding- | AthenaEngine::Framework::UI::UI, 36 |
| Box2D, 14 | AthenaEngine::Framework::UI::UIButton, 37 |
| AthenaEngine::Framework::Primatives::Collidable- | DrawableEntity |
| Entity, 20 | AthenaEngine::Framework::Primatives::Drawable- |
| Camera2D | Entity, 22 |
| AthenaEngine::Framework::Camera2D, 16 | |
| CanMove | encounter |
| AthenaEngine::Framework::Interfaces::IMoveable, | AthenaEngine::Framework::Systems::Triggers, 35 |
| 27 | Equality_WithIdenticalRectangle_IsEqual |
| AthenaEngine::Framework::Primatives::Collidable- | AthenaTest::Engine_Tests::Primatives_Testing::- |
| Entity, 20 | BoundingBox2DTest, 15 |
| Character | Equality_WithItself_IsEqual |
| AthenaEngine::Framework::Gameplay::Character, | AthenaTest::Engine_Tests::Primatives_Testing::- BoundingBox2DTest, 15 |
| 18 | Equality_WithSameRectangle_IsEqual |
| CollidableEntity | AthenaTest::Engine_Tests::Primatives_Testing::- |
| AthenaEngine::Framework::Primatives::Collidable- | BoundingBox2DTest, 15 |
| Entity, 19 | |
| Collides | Equals AthenaEngine::Framework::Primatives::Bounding- |
| AthenaEngine::Framework::Gameplay::Tile, 34 | Box2D, 14 |
| AthenaEngine::Framework::Systems::LevelLoader- | DOX2D, 14 |
| Xml::Sprite, 32 | FireTrigger |
| CollidesWith | AthenaEngine::Framework::Gameplay::Tile, 34 |
| AthenaEngine::Framework::Interfaces::ICollidable< | Focus |
| T >, 26 | AthenaEngine::Framework::Camera2D, 17 |
| AthenaEngine::Framework::Primatives::Bounding- | font |
| Box2D, 14 | Athena::Game1, 25 |
| AthenaEngine::Framework::Primatives::Collidable- | , |
| Entity, 20 | Game1 |
| Collisions_WithEnvelopedRectangle_IsTrue | Athena::Game1, 25 |
| AthenaTest::Engine_Tests::Primatives_Testing::- | Get |
| BoundingBox2DTest, 15 | AthenaEngine::Framework::Systems::Resource- |
| Collisions_WithItself_IsTrue | Manager $< T >$, 31 |
| AthenaTest::Engine_Tests::Primatives_Testing::- | |
| BoundingBox2DTest, 15 | HasTrigger |
| Collisions_WithRectangleOnBottom_IsFalse | AthenaEngine::Framework::Gameplay::Tile, 34 |
| AthenaTest::Engine_Tests::Primatives_Testing::- | Height |
| BoundingBox2DTest, 15 | AthenaEngine::Framework::Primatives::Entity, 23 |
| | |

| Initialize | ResourceManager |
|--|--|
| Athena::Game1, 25 | AthenaEngine::Framework::Systems::Resource- |
| AthenaEngine::Framework::Camera2D, 17 | Manager $<$ T $>$, 31 |
| IsInView | Rotation |
| AthenaEngine::Framework::Camera2D, 17 | AthenaEngine::Framework::Camera2D, 17 |
| Item | OI- |
| AthenaEngine::Framework::Gameplay::RPG::Item, | Scale Athere Ferring of Francisco Review Compare OD 17 |
| 29 | AthenaEngine::Framework::Camera2D, 17 |
| ItemInstance | ScreenCenter Athena Engine :: Frame work: Camera 2D, 18 |
| AthenaEngine::Framework::Gameplay::RPG::Item- | AthenaEngine::Framework::Camera2D, 18 |
| Instance, 29 | Athene Engine :: Eramou erk :: Primative a :: Entity 22 |
| LEET | AthenaEngine::Framework::Primatives::Entity, 23 |
| Athona Engine :: Framework :: Primatives :: Directions | Sprite Athona Engine :: Eramowork:: Gamonlay:: Tile 24 |
| AthenaEngine::Framework::Primatives::Directions, | Athena Engine::Framework::Gameplay::Tile, 34 |
| | AthenaEngine::Framework::Systems::LevelLoader- |
| Athena Engine :: Eramowark:: Gamonlay:: Lavel 20 | Xml::Sprite, 32 SpriteColor |
| AthenaEngine::Framework::Gameplay::Level, 30 | • |
| AthenaEngine::Framework::Primatives::Collidable- Entity, 20 | AthenaEngine::Framework::Primatives::Drawable- |
| AthenaEngine::Framework::UI::UI, 36 | Entity, 22 SpriteController |
| AthenaEngine::Framework::UI::UIButton, 37 | · |
| level | AthenaEngine::Framework::Primatives::Drawable- Entity, 22 |
| AthenaEngine::Framework::Primatives::Drawable- | SpriteSheet |
| Entity, 22 | AthenaEngine::Framework::Primatives::Drawable- |
| LoadContent | Entity, 22 |
| Athena::Game1, 25 | SpriteSource |
| Attonadamer, 25 | AthenaEngine::Framework::Primatives::Drawable- |
| MakeDrawable | Entity, 22 |
| AthenaEngine::Framework::Gameplay::Tile, 34 | Littly, 22 |
| Move | test |
| AthenaEngine::Framework::Interfaces::IMoveable, | AthenaEngine::Framework::Systems::Triggers, 35 |
| 27 | Tile |
| AthenaEngine::Framework::Primatives::Collidable- | AthenaEngine::Framework::Gameplay::Tile, 33 |
| Entity, 20 | TileList |
| AthenaEngine::Framework::Primatives::Entity, 23 | AthenaEngine::Framework::Gameplay::Level, 30 |
| MoveSpeed | Transform |
| AthenaEngine::Framework::Camera2D, 17 | AthenaEngine::Framework::Camera2D, 18 |
| Name | 111 |
| Name Athere Freine v Freme ever to v Companie v PRC vitem | Athene Feering of Francisco Market Had H. 25 |
| AthenaEngine::Framework::Gameplay::RPG::Item, | AthenaEngine::Framework::UI::UI, 35 |
| 29 | UIButton |
| AthenaEngine::Framework::Systems::LevelLoader- | AthenaEngine::Framework::UI::UIButton, 36 UP |
| Xml::Sprite, 32 | AthenaEngine::Framework::Primatives::Directions, |
| Origin | 21 |
| AthenaEngine::Framework::Camera2D, 17 | UnloadContent |
| 3 | Athena::Game1, 25 |
| Position | Update |
| AthenaEngine::Framework::Camera2D, 17 | Athena::Game1, 25 |
| AthenaEngine::Framework::Interfaces::IFocusable, | AthenaEngine::Framework::Camera2D, 17 |
| 27 | 7 talona Engine ramoventoameraEb, 17 |
| AthenaEngine::Framework::Primatives::Drawable- | Width |
| Entity, 22 | AthenaEngine::Framework::Primatives::Entity, 23 |
| AthenaEngine::Framework::Primatives::Entity, 23 | |
| DIOLIT | X |
| Athere Engine u Francoure viv. Prime tive ou Directions | AthenaEngine::Framework::Primatives::Entity, 24 |
| AthenaEngine::Framework::Primatives::Directions, | AthenaEngine::Framework::Systems::LevelLoader- |
| 21 Postando | Xml::Sprite, 32 |
| Rectangle AthenaEngine::Framework::Primatives::Entity, 23 | Υ |
| Autonatingine rameworkr iiiialivestiilly, 25 | I and the second |


AthenaEngine::Framework::Primatives::Entity, 24
AthenaEngine::Framework::Systems::LevelLoaderXml::Sprite, 32


Generated on Tue May 6 2014 12:11:07 for Athena by Doxygen

10 Appendix 10 - Project File

| 1 | 0 | WBS | Task Name | Duration | Start | Finish | Predecessors | Feb '14 26 02 | |
|----|----------|-------|-----------------------------------|----------------|--------------|--------------------|--------------|--------------------|-------------|
| 1 | • | 1 | Planning | 21 days | Wed 05/02/14 | Wed 05/03/14 | | 26 02 | 09 16 23 |
| 2 | √ | 1.1 | Plan Genre/Setting | 0.25 days | Wed 05/02/14 | Wed 05/02/14 | | - 10 | 00% |
| 3 | √ | 1.2 | Plan Gameplay | 0.25 days | Wed 05/02/14 | Wed 05/02/14 | 2 | *1 | 00% |
| 4 | | 1.3 | Plan Level Design | 0.5 days | Wed 05/02/14 | Wed 05/02/14 | 3 | <u>≭</u> 5 | 0% |
| 5 | ✓ | 1.4 | Plan Story | 0.5 days | Wed 12/02/14 | Wed 12/02/14 | 4 | | 100% |
| 6 | √ | 1.5 | Design Characters | 0.25 days | Wed 12/02/14 | Wed 12/02/14 | 5 | | 100% |
| 7 | | 1.6 | Create Class Diagram | 1 day | Wed 12/02/14 | Wed 19/02/14 | 6 | | 0% |
| 8 | | 1.7 | Create Collision Diagram | 0.25 days | Wed 19/02/14 | Wed 19/02/14 | 7 | | *0 % |
| 9 | √ | 1.8 | Select Language/Framework | 0.25 days | Wed 26/02/14 | Wed 26/02/14 | 8 | | * |
| 10 | | 1.9 | Plan UI | 0.25 days | Wed 26/02/14 | Wed 26/02/14 | 9 | | F |
| 11 | | 1.10 | Plan Sounds | 0.25 days | Wed 26/02/14 | Wed 26/02/14 | 10 | | 1 |
| 12 | √ | 1.11 | Plan RPG Elements | 0.25 days | Wed 26/02/14 | Wed 26/02/14 | 11 | | 7 |
| 13 | | 1.12 | Write Pseudocode | 1 day | Wed 05/03/14 | Wed 05/03/14 | 12 | | |
| 14 | | 2 | Implementation | 122 days | Thu 06/03/14 | Fri 22/08/14 | 13 | | |
| 15 | | 2.1 | Design Levels | 3 days | Wed 12/03/14 | Wed 26/03/14 | 4 | | |
| 16 | | 2.2 | Program Game Engine | 66 days | Wed 12/03/14 | Wed 11/06/14 | 3,8,9,13,7 | | |
| 17 | | 2.2.1 | Program Movement Logic | 1 day | Wed 12/03/14 | Wed 12/03/14 | | | |
| 18 | | 2.2.2 | Program RPG Elements | 2 days | Wed 02/04/14 | Wed 09/04/14 | 12,4,15 | | |
| 19 | | 2.2.3 | Program Collision Detection | 2 days | Wed 12/03/14 | Wed 19/03/14 | | | |
| 20 | | 2.2.4 | Program Graphics Handling | 2 days | Wed 12/03/14 | Wed 19/03/14 | | | |
| 21 | | 2.2.5 | Program Story Handling | 4 days | Wed 16/04/14 | Wed 07/05/14 | 5,17,18 | | |
| 22 | | 2.2.6 | Program Handling Of Sprite Sheets | 1 day | Wed 14/05/14 | Wed 14/05/14 | 21 | | |
| | | | Critical | Manual Task | | Baseline Milestone | → | External Tasks | |
| | | | Critical Split | Start-only | С | | • | External Milestone | • ♦ |
| | | | Critical Progress | Finish-only | 3 | Summary Progress | | Inactive Task | |
| | | | Task | Duration-only | _ | Summary | | Inactive Milestone | |
| | | | Split | Baseline | | Manual Summary | | Inactive Summary | |
| | | | Task Progress | Baseline Split | | Project Summary | | Deadline | + |

| _ | WBS | Task Name | Duration | Start | Finish | Predecessors | Feb '1 | 4 |
|----|--------|-------------------------------|----------------|--------------|----------------------|--------------|-------------------|------|
| 0 | | | | | | | 26 02 | |
| 23 | 2.2.7 | Program Level Handling | 4 days | Wed 21/05/14 | Wed 11/06/14 | 4,22 | | |
| 24 | 2.2.8 | Integrate Random Encounters | 2 days | Wed 21/05/14 | Wed 28/05/14 | 22 | | |
| 25 | 2.2.9 | Program Fighting | 2 days | Wed 21/05/14 | Wed 28/05/14 | 22 | | |
| 26 | 2.2.10 | Program Sounds Handling | 2 days | Wed 21/05/14 | Wed 28/05/14 | 22 | | |
| 27 | 2.3 | Create Sounds | 36 days | Wed 18/06/14 | Wed 06/08/14 | 11,16 | | |
| 28 | 2.3.1 | Create Voice Acting | 4 days | Wed 18/06/14 | Wed 09/07/14 | 36 | | |
| 29 | 2.3.2 | Create Battle Sounds | 4 days | Wed 18/06/14 | Wed 09/07/14 | | | |
| 30 | 2.3.3 | Create Environment Sounds | 4 days | Wed 18/06/14 | Wed 09/07/14 | | | |
| 31 | 2.3.4 | Create Background Music | 8 days | Wed 18/06/14 | Wed 06/08/14 | | | |
| 32 | 2.4 | Design Sprites | 6 days | Wed 13/08/14 | Wed 20/08/14 | 11,16,27 | | |
| 33 | 2.4.1 | Create Environment Sprites | 2 days | Wed 13/08/14 | Wed 20/08/14 | 4 | | |
| 34 | 2.4.2 | Create UI | 2 days | Wed 13/08/14 | Wed 20/08/14 | 3 | | |
| 35 | 2.4.3 | Create Character Sprites | 2 days | Wed 13/08/14 | Wed 20/08/14 | 6 | | |
| 36 | 2.5 | Write Game Script | 2 days | Thu 06/03/14 | Fri 07/03/14 | 5 | | |
| 37 | 2.6 | Combine Game Elements | 2 days | Thu 21/08/14 | Fri 22/08/14 | 16,27,32,15 | | |
| 38 | 3 | Evaluation | 1 day | Mon 25/08/14 | Mon 25/08/14 | 14 | | |
| 39 | 3.1 | Individual Critical Appraisal | 1 day | Mon 25/08/14 | Mon 25/08/14 | | | |
| 40 | 4 | Project Hand In | 0 days | Fri 05/09/14 | Fri 05/09/14 | 38 | | |
| | | Critical | Manual Task | | Baseline Milestone < | > | External Tasks | |
| | | Critical Split | Start-only | Е | Milestone | • | External Mileston | ne ♦ |
| | | Critical Progress | Finish-only | 3 | Summary Progress | | Inactive Task | |
| | | Task | Duration-only | _ | Summary | | Inactive Milestor | ne 🗘 |
| | | Split | ŕ | | Manual Summary | | Inactive Summa | |
| | | Task Progress | Baseline Split | | Project Summary | | Deadline | ıy |

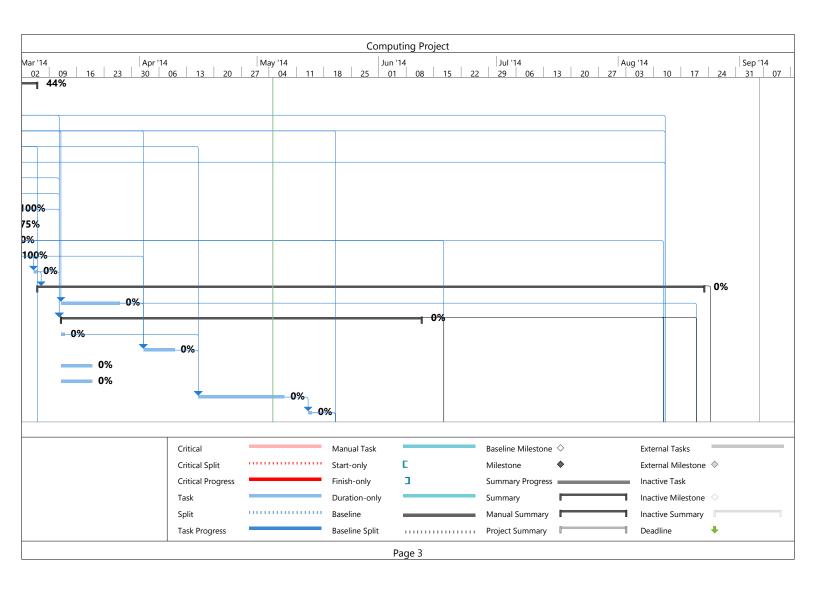

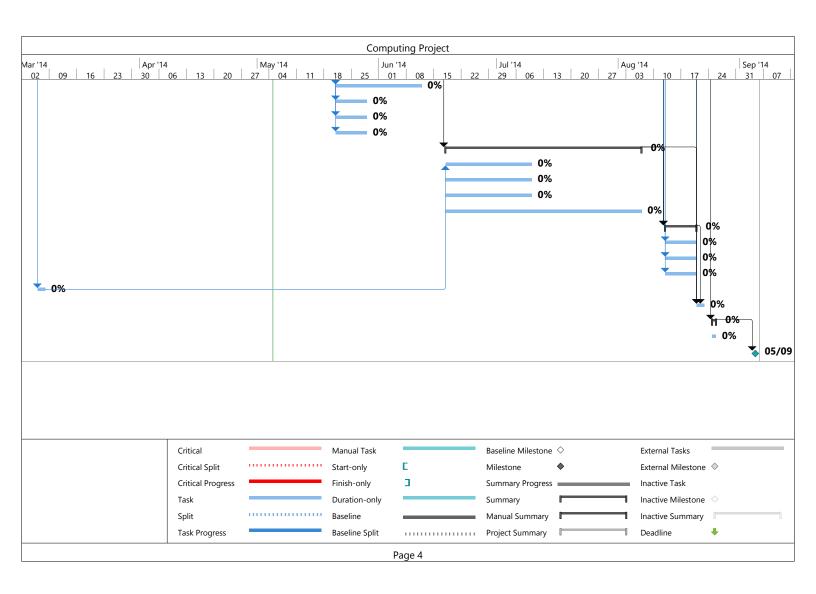

;