


View / FE



Render

HTML

Client side






Fetch

Server side

HTML (data ...)

<h1> Judul : { data-judul } </h1>

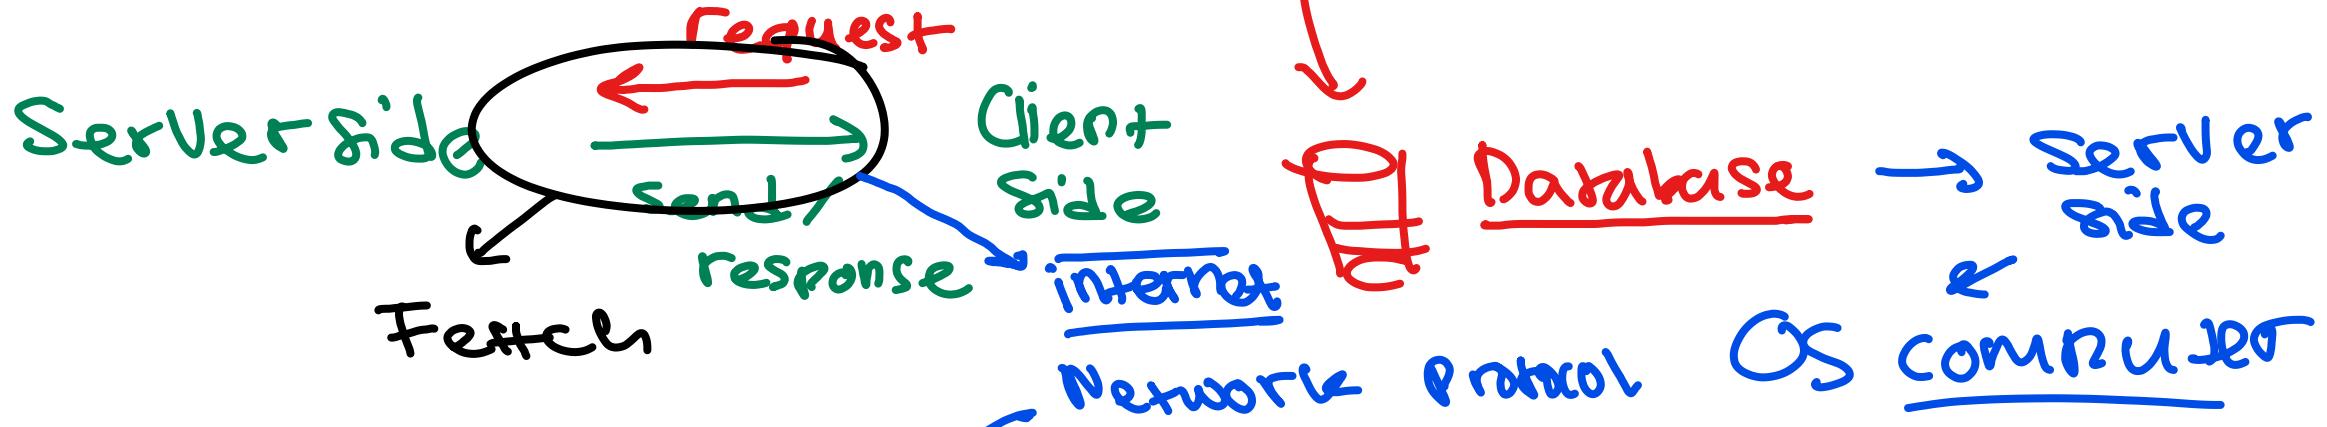

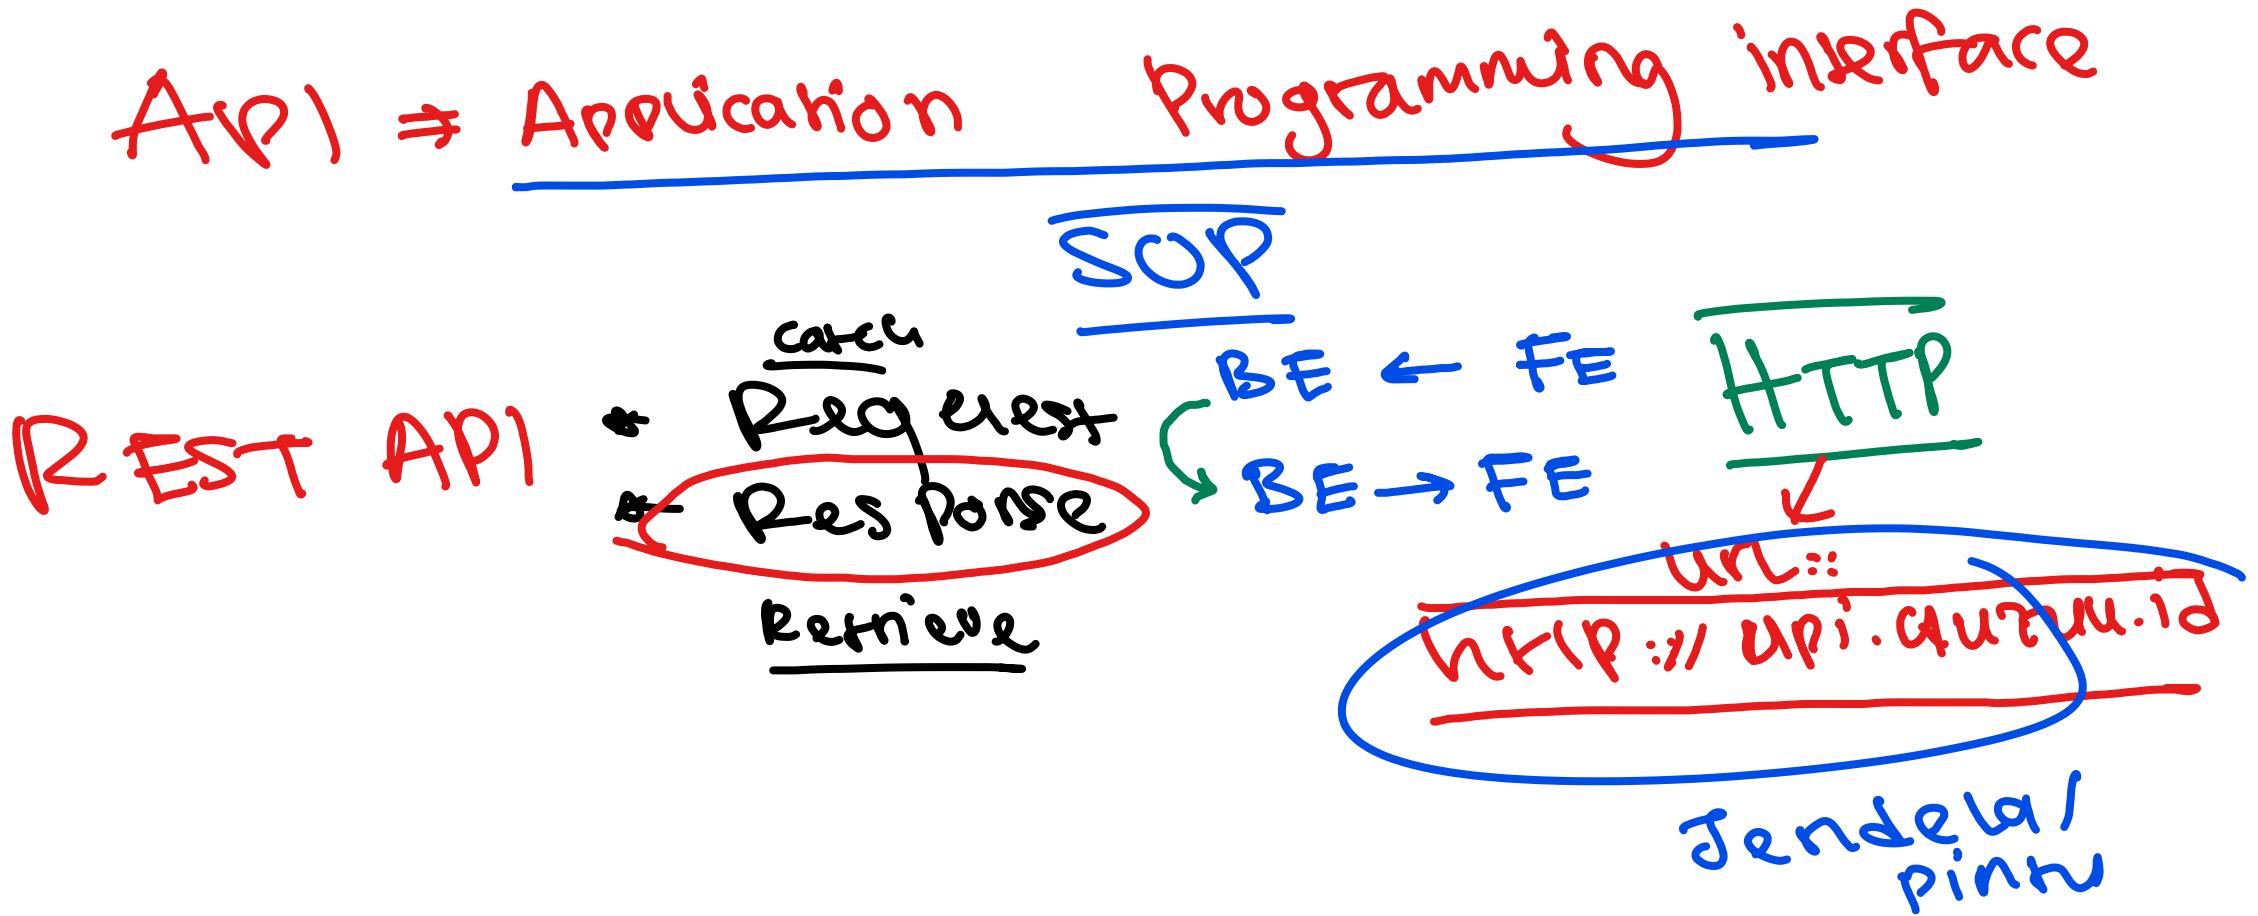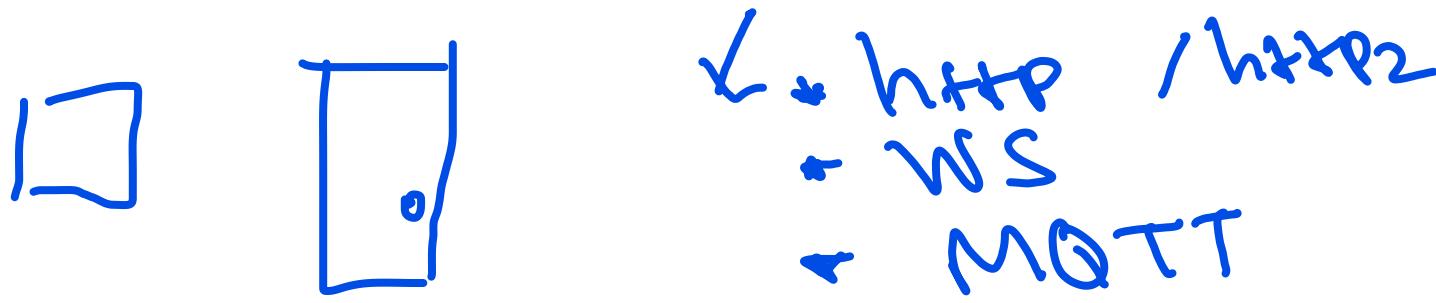


Request \Rightarrow

- * GET \Rightarrow Retrieve url ? Param = ...
- * POST \Rightarrow hidden query parameter
urlQuery


Kaggie.com ? username = imdi foo


- * PUT \Rightarrow Edit
- * DELETE \Rightarrow hapus

Routing \Rightarrow

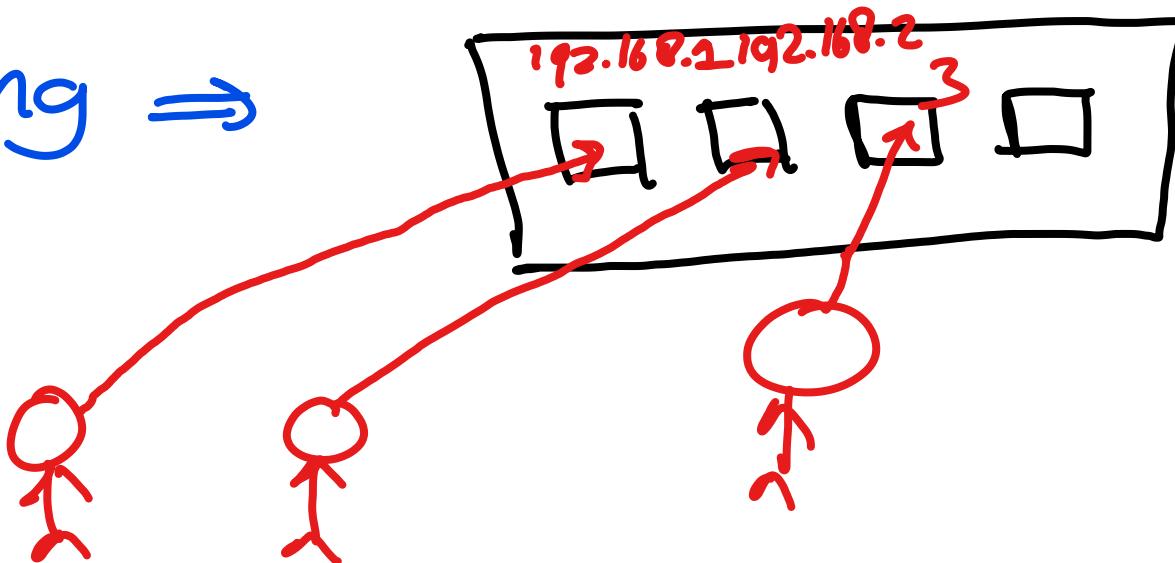


Rouser

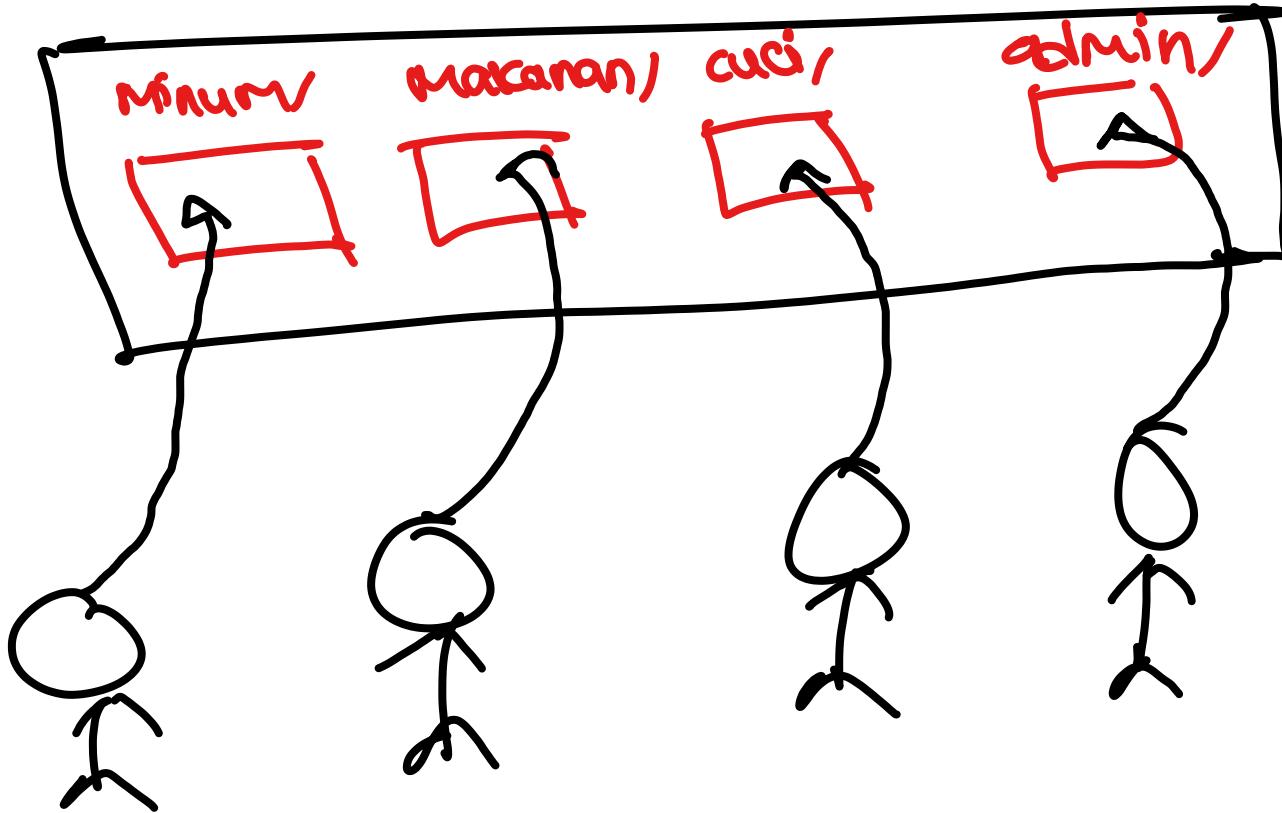

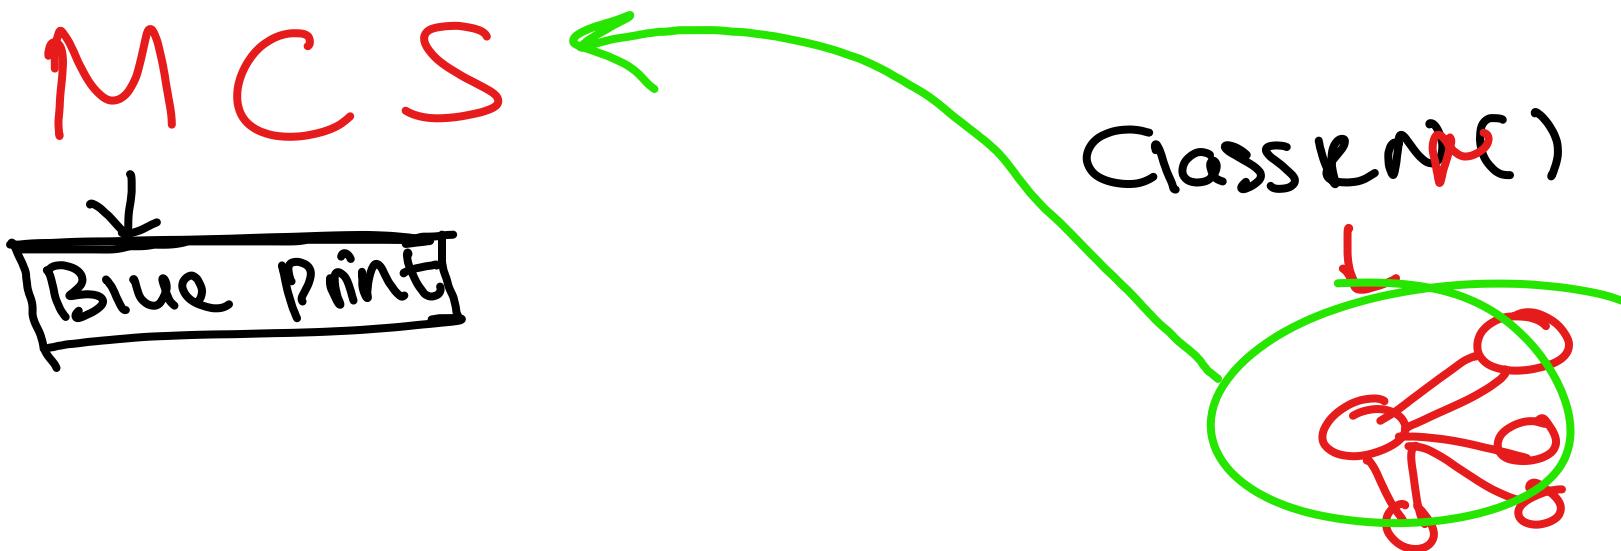

Abstraksi

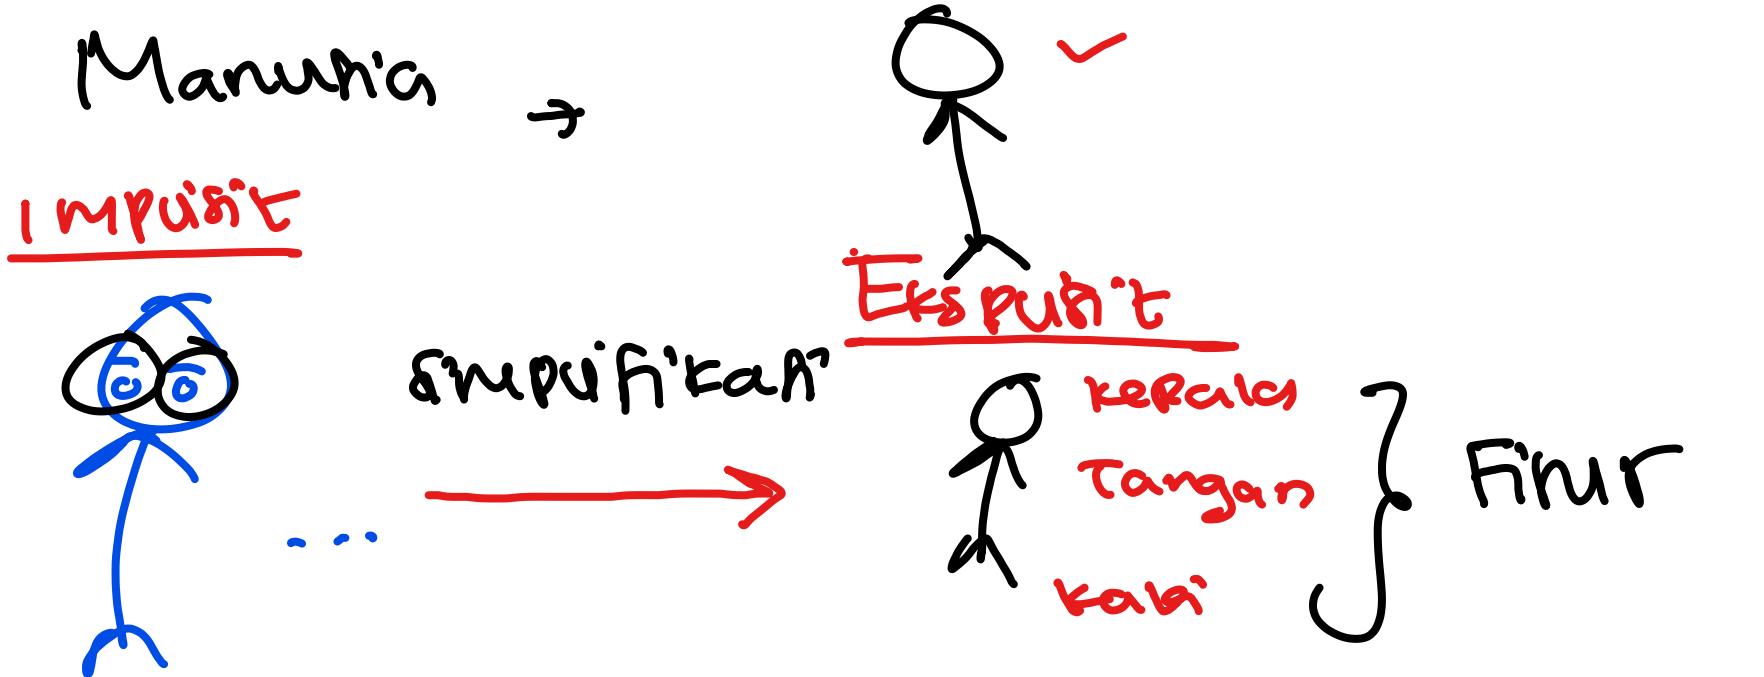

Object / instance ⇒ Struct < attribut Method

Mobil →

- * Merk 5.
- * Tahun int attribut
- * Tipe Medins

DiposAccount := Account{

Username: "dipo",

Password: "1234",

city
}

func (a Account) changePassword(newPassword string) {
 a.Password = newPassword
}

DiposAC . changePass

Pass by reference

